

# 1 TEST REPORT

## 1.1 System test configuration

### 1.1.1 Justification

The GemCore410-EMV is a modular, very compact coupler. It offers the simplest means of integrated an EMV certified smart card reader into different types of electronic devices.

The system was configured for testing in a typical fashion (as a customer would normally use it). A typical smart card was introduced in the GemCore410-EMV reader, which was itself connected to a personal computer with the RS232 link. It has been tested with a Dell Latitude Personal computer laptop.

### 1.1.2 EUT Exercise software

The EUT exercise program (TESTCEM2000.exe) used during radiated and conducted testing was designed to exercise the GemCore410-EMV reader in a manner similar to a typical use .

### 1.1.3 Special accessories

The cable used to connect the GemCore410-EMV reader to the Com and PS2 keyboard ports of the Personal Computer is shielded.


The smart card used in the GemPC433 is a ISO 7816 type (Smart card GEMPLUS MPCK-3DES)

Figure #1, shows the installation of the GemCore410-EMV. All interfaces cables used for compliance testing are shielded as normally supplied. All these cables are normally recommended to be used with the Personal Computer.

### 1.1.4 Equipment modifications

No equipment modification has been necessary during testing to achieve compliance to Class B levels. The unit tested was representative to a production unit.

### 1.1.5 Configuration of tested system

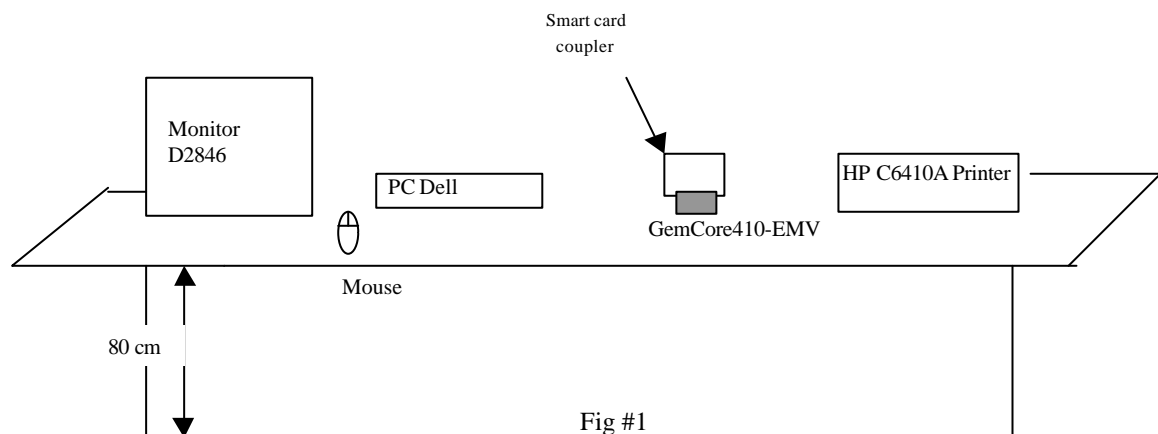

## 1.2 Conducted emission data

### 1.2.1 Test procedure

The product has been tested according to ANSI C63.4-1992, CISPR22-1993/A1:1995/A2:1996 and EN55022:1994/A1:1995/A2:1997.

The product has been tested with 110V / 60Hz power line voltage and compared to the CISPR22 Class B limits. Measurement bandwidth was 9kHz from 150 kHz to 30 MHz.

Measurement was initially made with an HP-8591EM Spectrum Analyzer in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement with the Rohde & Schwarz ESH3 receiver for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

The Peak data are shown on the following plots. Quasi-Peak and Average measurements are detailed in a table with frequencies and levels measured.

Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.

Test equipment :


HP 8591EM Spectrum Analyzer

Rhode & Schwarz ESH3 Receiver

EMCO 3810/2SH LISN N°1


TELEMETER NNB-2/16L LISN N°2

## 1.2.2 Neutral conducted emission data

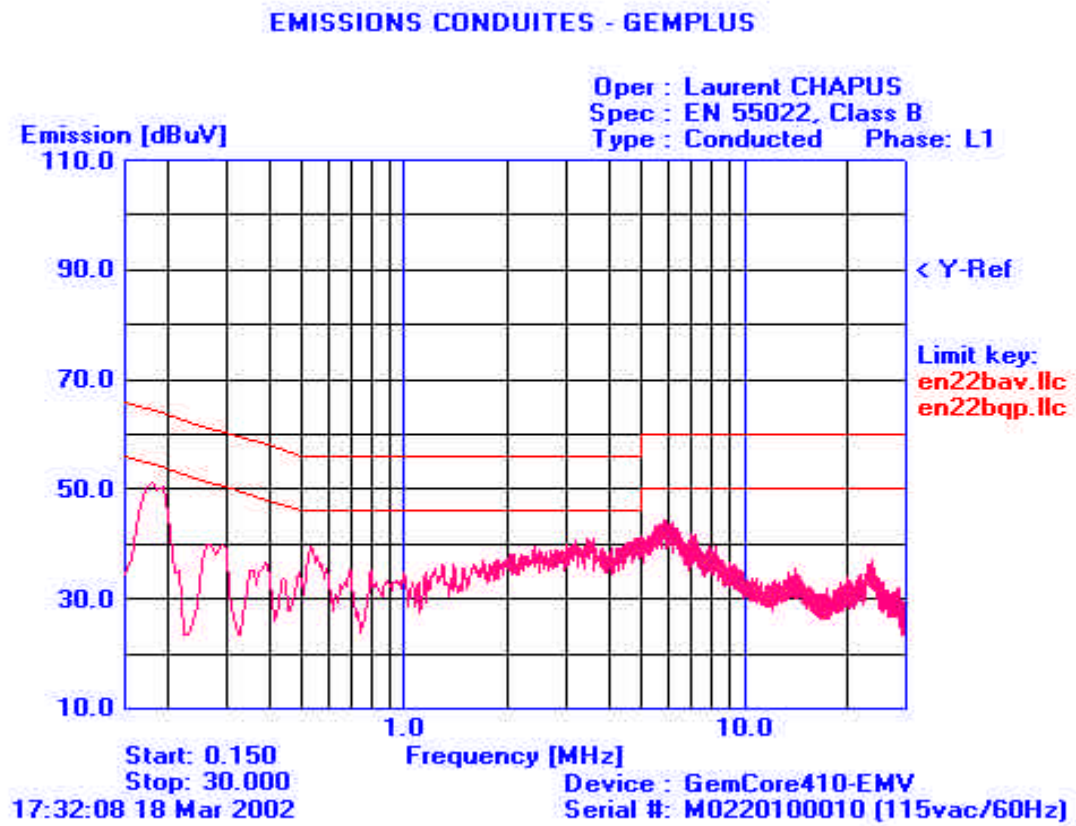

Num.	Freq. [MHz]	Peak [dBuV]	Q-Peak [dBuV]	QP limit [dBuV]	QP delta [dB]	Average [dBuV]	AVG Limit [dBuV]	AVG Delta [dB]
1	0.180	51.58	49.34	64.5	-15.16	37.45	54.5	-17.05
2	4.990	41.60	38.68	56.0	-17.32	34.60	46.0	-11.40

## 1.2.3 Line conducted emission data

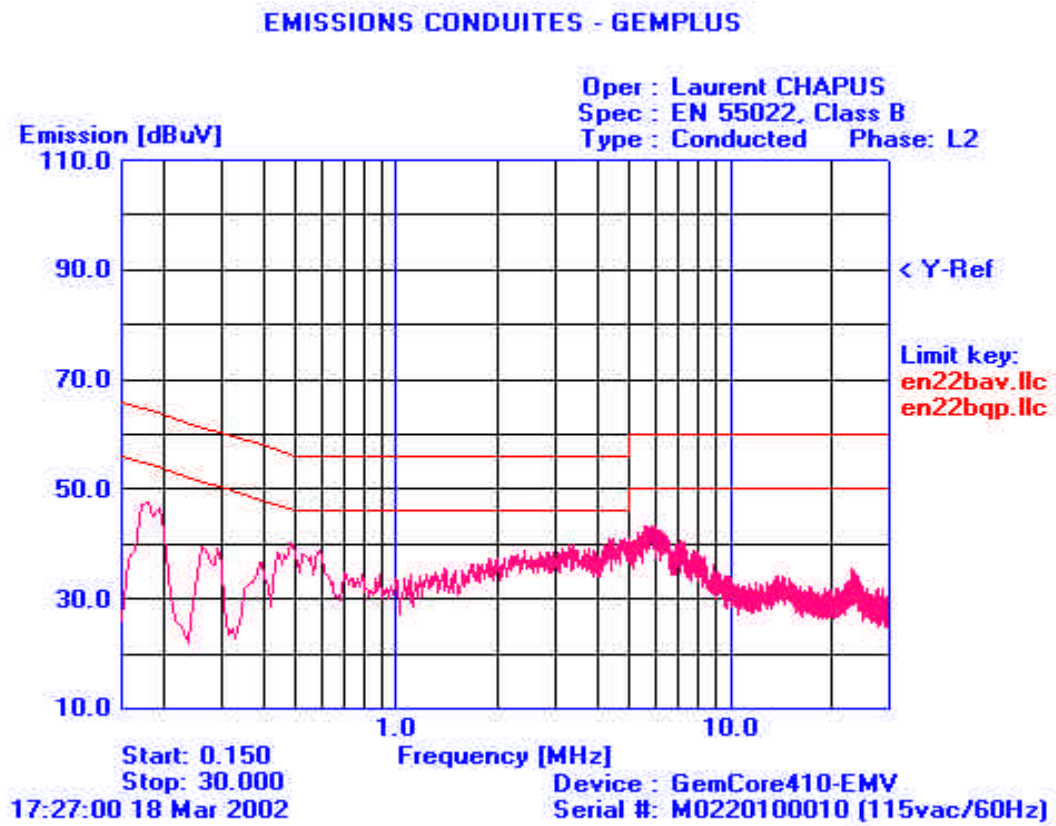

Num.	Freq. [MHz]	Peak [dBμV]	Q-Peak [dBμV]	QP limit [dBμV]	QP delta [dB]	Average [dBμV]	AVG Limit [dBμV]	AVG Delta [dB]
1	0.180	52.52	47.14	64.5	-17.36	38.51	54.5	-16.0
2	0.490	39.72	37.64	56.1	-18.46	33.58	46.1	-12.52
3	4.790	41.57	38.29	56.0	-17.71	34.54	46.0	-11.46

## 1.3 Radiated emission data

### 1.3.1 Test Procedure

The product has been tested according to ANSI C63.4-1992, CISPR22-1993/A1:1995/A2:1996 and EN55022:1994/A1:1995/A2:1997.

The product has been tested with 230V / 50Hz power line voltage, at a distance of 10 meters from the antenna and compared to the CISPR 22 Class B limits. Measurement bandwidth was 120 kHz from 30 MHz to 1 GHz. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range.

Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.


**Test Equipment:** HP-8574A E.M.I Receiver

(HP-8568B Analyzer + HP-85650 Quasi-Peak adapter + HP-85685A RF Preselector).

EMCO 3104C Biconical Antenna & EMCO 3146 Log Periodic Antenna

EMCO-1050, 6 meters height antenna mast & EMCO-1060, 3 meters diameter Turntable.

## 1.3.2 Radiated emission data

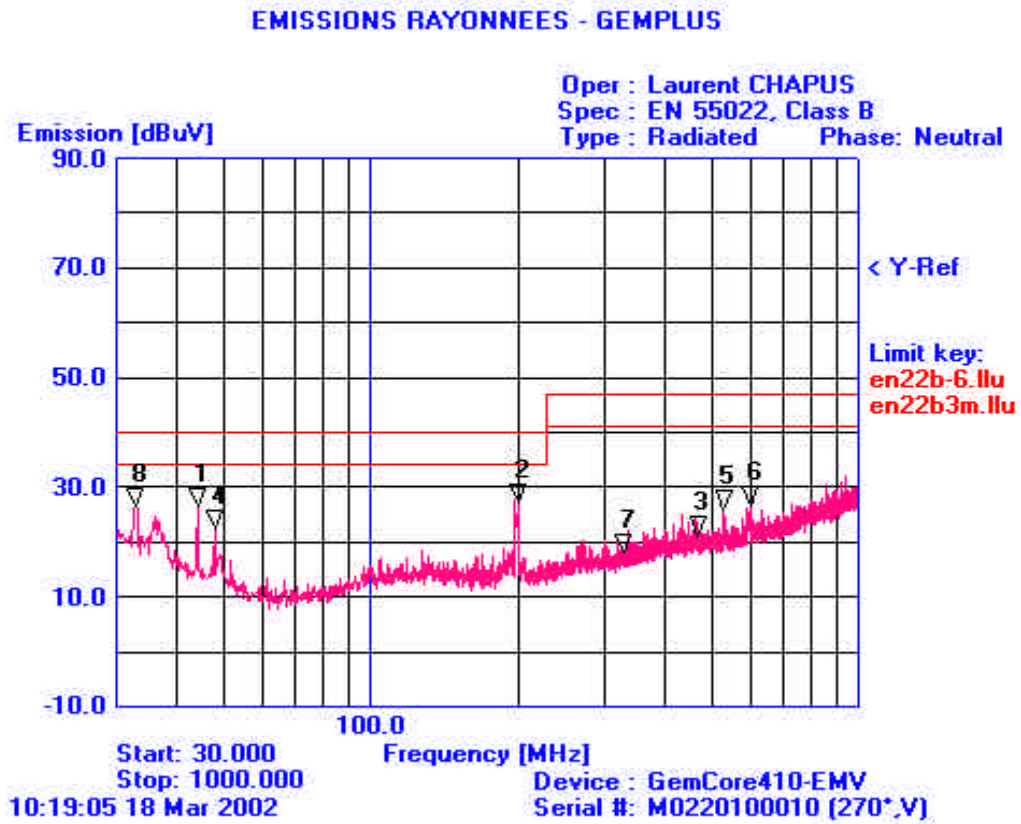

Graph example - 30-1000MHz

## Final result 30-1000 MHz

Frequency (MHz)	QPeak Limit (dBuV/m)	QPeak (dBuV/m)	QPeak-Lmt (dB)	Angle (deg)	Pol	Hgt (cm)	Tot Corr (dB)	Comments
32.941	30.0	24.1	-5.9	126	V	104	12.5	
44.261	30.0	26.2	-3.8	94	V	108	11.6	
47.929	30.0	24.2	-5.8	63	V	102	11.8	
58.978	30.0	24.9	-5.1	76	V	108	11.4	
197.006	30.0	27.0	-3.0	13	V	136	19.8	
328.315	37.0	24.9	-12.1	96	H	263	18.1	
528.053	37.0	27.7	-9.3	4	H	189	22.1	
599.231	37.0	29.1	-7.9	228	H	109	23.8	

### 1.3.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow :

$$FS = RA + AF + CF - AG$$

Where      FS = Field Strength  
               RA = Receiver Amplitude  
               AF = Antenna Factor  
               CF = Cable Factor  
               AG = Amplifier Gain

Assume a receiver reading of 52.5dB $\mu$ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 is added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB $\mu$ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$