

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)



## Test Report

Product Name: VHF RADIO

FCC ID: MMA80151

Applicant:

**MIDLAND RADIO CORPORATION  
1120 CLAY STREET  
KANSAS CITY, MO 64116**

**Date Receipt: JANUARY 29, 2004**

**Date Tested: FEBRUARY 4, 2004**

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M|MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

COVER SHEET

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** MIDLAND RADIO CORPORATION

**FCC ID:** MMA80151

## TABLE OF CONTENTS LIST

### TEST REPORT:

|                 |   |
|-----------------|---|
| PAGE 1.....     | GENERAL INFORMATION & TECHNICAL DESCRIPTION     |
| PAGE 2.....     | TECHNICAL DESCRIPTION                           |
|                 | RF POWER OUTPUT                                 |
| PAGE 3.....     | MODULATION CHARACTERISTICS                      |
|                 | AUDIO FREQUENCY RESPONSE                        |
| PAGE 4.....     | MODULATION LIMITING                             |
| PAGE 5.....     | AUDIO LOW PASS FILTER                           |
| PAGE 6.....     | OCCUPIED BANDWIDTH                              |
| PAGE 7.....     | OCCUPIED BANDWIDTH PLOT                         |
| PAGE 8.....     | SPURIOUS EMISSIONS AT ANTENNA TERMINALS         |
| PAGE 9.....     | METHOD OF MEASURING SPURIOUS EMISSIONS          |
|                 | AT ANTENNA TERMINALS                            |
| PAGE 10-12..... | FIELD STRENGTH OF SPURIOUS EMISSIONS            |
| PAGE 13.....    | METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS |
| PAGE 14.....    | FREQUENCY STABILITY                             |
| PAGE 15-16..... | TRANSIENT FREQUENCY STABILITY                   |
| PAGE 17-18..... | TRANSIENT FREQUENCY RESPONSE GRAPHS             |
| PAGE 19-22..... | LIST OF TEST EQUIPMENT                          |

### EXHIBITS CONTAINING:

BLOCK DIAGRAM  
SCHEMATIC  
PARTS LIST  
USERS MANUAL  
LABEL SAMPLE  
LABEL LOCATION  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
TUNING PROCEDURE  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPH

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

TABLE OF CONTENTS

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## GENERAL INFORMATION REQUIRED

2.1033(c)(1)(2) MIDLAND RADIO CORPORATION will sell the  
FCC ID: MMA80151 VHF transceiver in quantity,  
for use under FCC RULES PART 22 & 90.

2.1033(c) **TECHNICAL DESCRIPTION**  
2.1033 (3) User Manual, see the exhibits.

2.1033 (4) Type of Emission: 10K6F3E For 25 kHz

For 25KHz

$$B_n = 2M + 2DK$$

$$M = 3,000 \text{ Bits per second}$$

$$D = 2.3 \text{ kHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3K) + 2(2.3K)(1) = 6.0k + 4.6k = 10.6k$$

ALLOWED AUTHORIZED BANDWIDTH = 20.00 kHz.

90.209 (b)(5)

2.1033 (6) Frequency Range: 148 - 174 MHz

(7) Power Range and Controls: There are NO user Power  
controls.

(8) Maximum Output Power Rating:  
0.5 Watts, into a 50 ohm resistive load.

(9) DC Voltages and Current into Final Amplifier:

POWER INPUT

$$\text{INPUT POWER - HIGH: } (7.2V)(1.64A) = 11.81 \text{ Watts}$$

$$\text{INPUT POWER - LOW: } (7.2V)(0.74A) = 5.33 \text{ Watts}$$

(10) Tune-up procedure. The tune-up procedure is given in  
the exhibits.

(11) Complete Circuit Diagrams: The circuit diagram and  
the block diagram are included in the exhibits.

(12) Function of each electron tube or semiconductor device  
or other active circuit device are in the exhibits.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M|MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

- (13) Instruction book. The instruction manual is included in the exhibits.
- (14) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.
- 2.1033(c) (15) A photograph or drawing of the equipment is included in the exhibits.
- 2.1033(c) (16) Photographs of the equipment of sufficient clarity to reveal equipment construction and layout and label location are shown in the exhibits.
- 2.1033(c) (17) Digital Modulation is not allowed.
- 2.1033(c) (18) data required for 2.1046 to 2.1057 See Below
- 2.1046(a) **RF power output.**  
RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2 VDC, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER:           HIGH - 6 Watts Conducted  
                                  LOW - 1.4 Watts Conducted

## METHOD OF MEASURING RF POWER OUTPUT

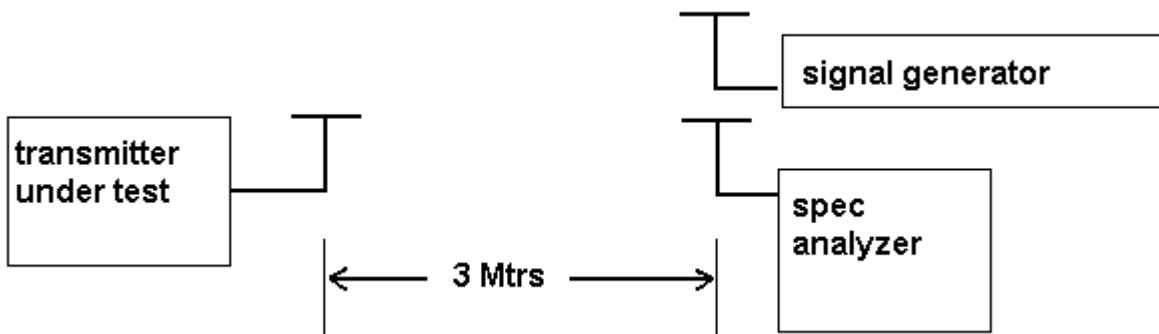

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

Page 2 of 22

# TIMCO ENGINEERING INC.


849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1047(a)(b) **Modulation characteristics:**

## **AUDIO FREQUENCY RESPONSE**

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown below. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

## Audio Frequency Response

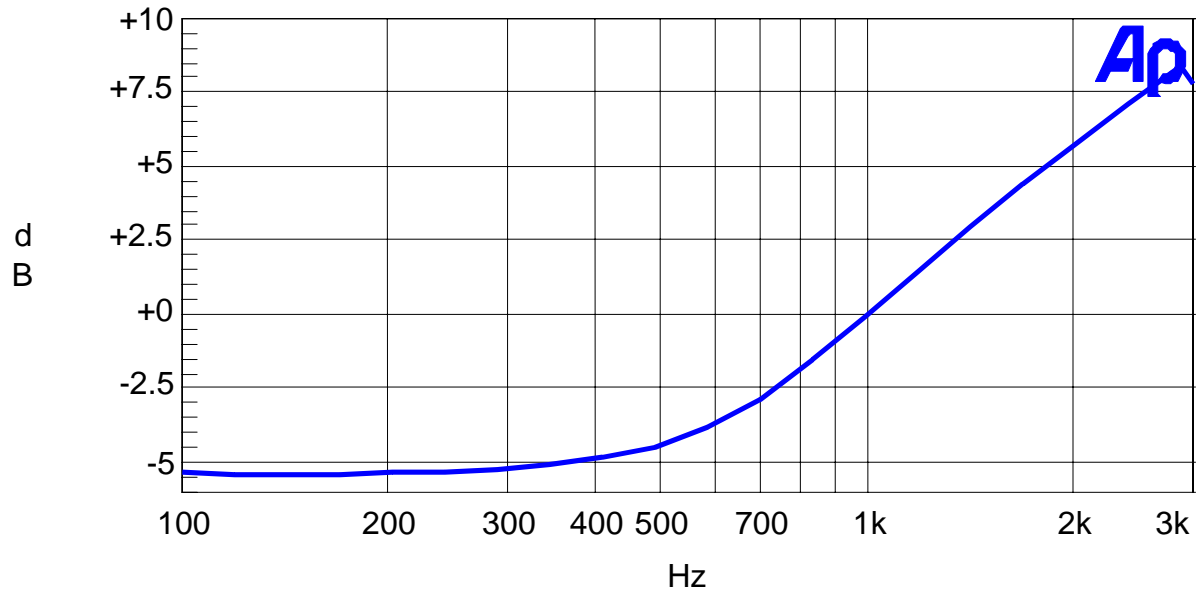

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45  
 Newberry, Florida 32669  
<http://www.timcoengr.com>  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1047(b)

## Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Modulation Limiting Plots:  
 2.5KHz (Green), 1.0KHz (Blue), and 300Hz (Yellow)

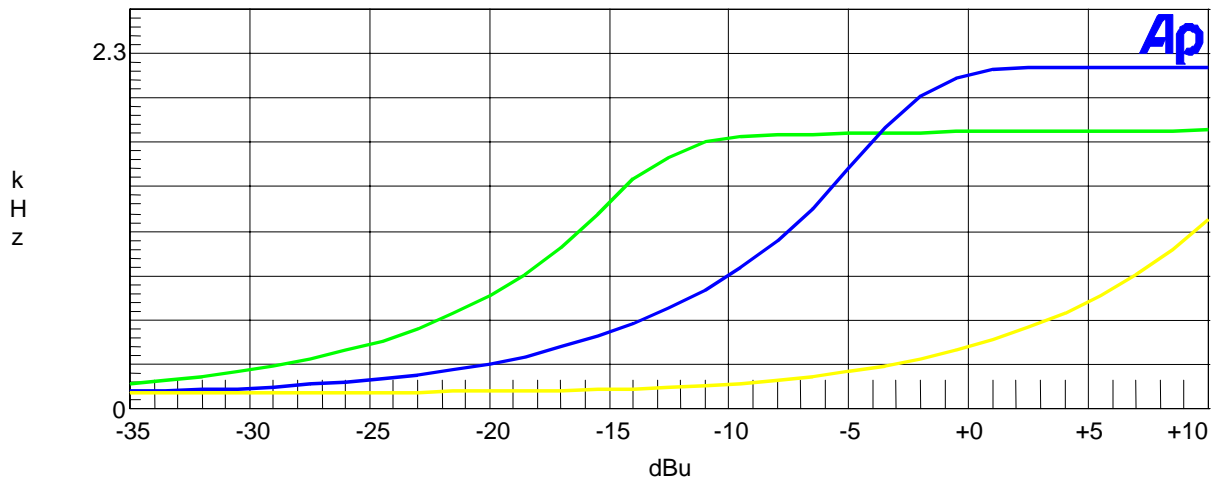

| Color  | Line Style | Thick | Data         | Axis |
|--------|------------|-------|--------------|------|
| Green  | Solid      | 2     | Anlr.Level A | Left |
| Blue   | Solid      | 2     | Anlr.Level A | Left |
| Yellow | Solid      | 2     | Anlr.Level A | Left |

modulation limiting.at1


# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Post Limiter Filter

The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60 \log (f/3)$  greater than the attenuation at 1kHz. See the plot below.

## Audio Low Pass Filter

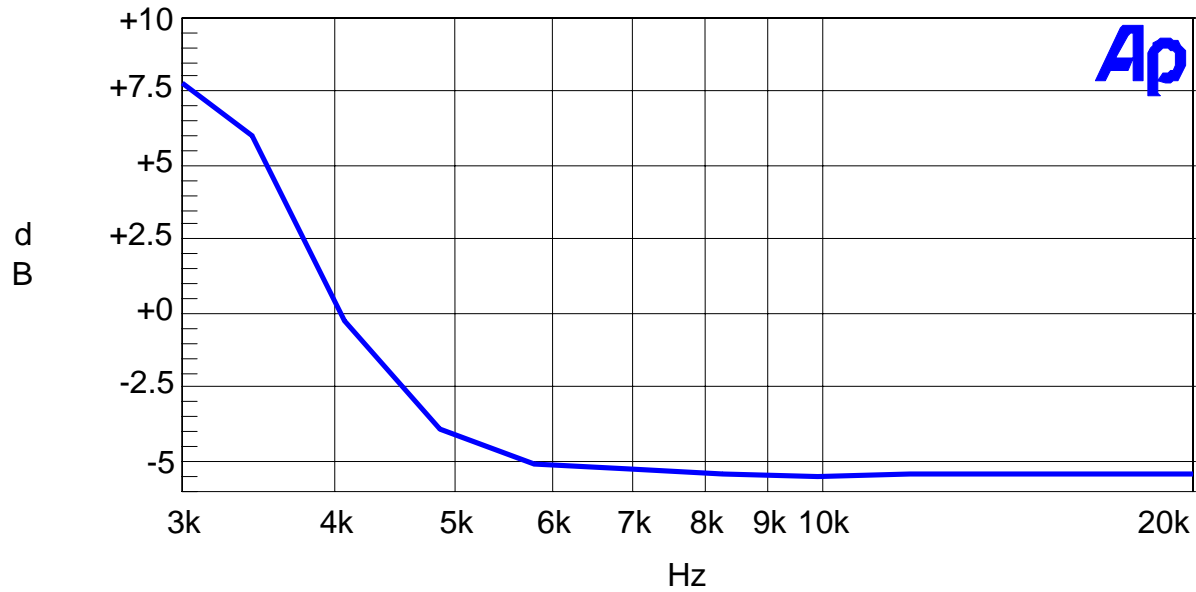

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M|MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1049(c) EMISSION BANDWIDTH:  
90.210(b)


Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25 dB and from 100 to 250% the sidebands must be attenuated by at least 35 dB. Beyond 250% the sidebands must be attenuated by at least  $43 + \log_{10}(TP)$ . The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the un-modulated carrier at the top of the screen. The test procedure diagram follows. See the occupied bandwidth plot on the next page.

Radiotelephone transmitter with modulation limiter:

Test procedure diagram

## OCCUPIED BANDWIDTH MEASUREMENT

Occupied BW Test Equipment Setup

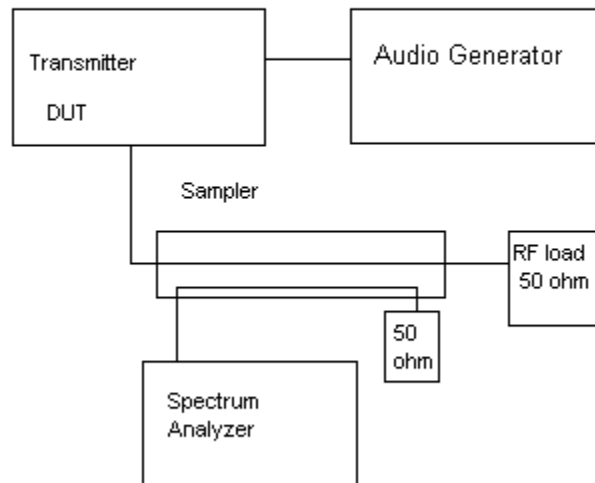

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc



# TIMCO ENGINEERING INC.


849 NW State Road 45  
 Newberry, Florida 32669  
<http://www.timcoengr.com>  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## OCCUPIED BANDWIDTH

### NOTES:

MIDLAND RADIO CORPORATION - FCC ID: MMA80151  
 OCCUPIED BANDWIDTH PLOT

### FCC 90.210 Mask D

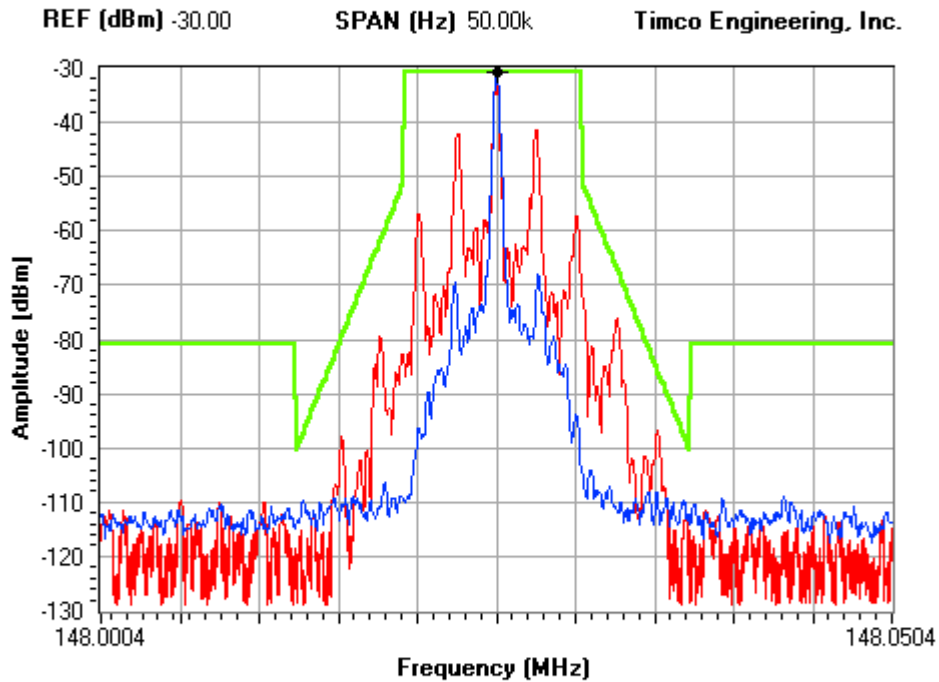

|                                       |            |                 |      |         |         |                                     |                                     |                                     |
|---------------------------------------|------------|-----------------|------|---------|---------|-------------------------------------|-------------------------------------|-------------------------------------|
| <b>RBW</b>                            | <b>VBW</b> | <b>ST (sec)</b> | Peak | 148.025 | -30.90  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 100 Hz                                | 100 kHz    | 1               | MKR2 | 148.025 | -98.20  | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| <b>Center Frequency (Hz)</b> 148.025M |            |                 | MKR3 | 148.000 | -112.70 | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| <b>Marker Delta (Hz)</b> 0.00         |            |                 | HwMK | 23.076  | 6.27    | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
<http://www.timcoengr.com>  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1051 Spurious emissions at antenna terminals (conducted):  
 Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

$43 + 10\log(1.4) = 44.5$

$43 + 10\log(6) = 50.8$

| TF<br>LOW POWER | EF      | dB below<br>carrier | TF<br>HIGH POWER | EF      | dB below<br>carrier |
|-----------------|---------|---------------------|------------------|---------|---------------------|
| 148.03          | 148.03  | 0.0                 | 148.03           | 148.03  | 0.0                 |
|                 | 296.06  | 68.2                |                  | 296.06  | 61.7                |
|                 | 444.09  | 98.3                |                  | 444.09  | 94.7                |
|                 | 592.12  | 97.4                |                  | 592.12  | 88.0                |
|                 | 740.15  | 96.2                |                  | 740.15  | 89.7                |
|                 | 888.18  | 98.0                |                  | 888.18  | 93.0                |
|                 | 1036.21 | 86.5                |                  | 1036.21 | 76.5                |
|                 | 1184.24 | 77.7                |                  | 1184.24 | 72.8                |
|                 | 1332.27 | 83.3                |                  | 1332.27 | 84.4                |
|                 | 1480.30 | 100.3               |                  | 1480.30 | 95.8                |
| 168.03          | 168.03  | 0.0                 | 168.03           | 168.03  | 0.0                 |
|                 | 336.06  | 80.8                |                  | 336.06  | 77.3                |
|                 | 504.09  | 96.0                |                  | 504.09  | 91.8                |
|                 | 672.12  | 89.4                |                  | 672.12  | 84.6                |
|                 | 840.15  | 90.4                |                  | 840.15  | 85.6                |
|                 | 1008.18 | 89.9                |                  | 1008.18 | 89.1                |
|                 | 1176.21 | 70.9                |                  | 1176.21 | 59.6                |
|                 | 1344.24 | 86.4                |                  | 1344.24 | 79.4                |
|                 | 1512.27 | 99.8                |                  | 1512.27 | 94.1                |
|                 | 1680.30 | 101.2               |                  | 1680.30 | 95.9                |
| 173.98          | 173.98  | 0.0                 | 173.98           | 173.98  | 0.0                 |
|                 | 347.96  | 83.3                |                  | 347.96  | 82.0                |
|                 | 521.94  | 94.3                |                  | 521.94  | 89.5                |
|                 | 695.92  | 97.4                |                  | 695.92  | 86.7                |
|                 | 869.90  | 89.9                |                  | 869.90  | 85.5                |
|                 | 1043.88 | 87.1                |                  | 1043.88 | 83.4                |
|                 | 1217.86 | 72.4                |                  | 1217.86 | 65.4                |
|                 | 1391.84 | 87.1                |                  | 1391.84 | 71.0                |
|                 | 1565.82 | 101.2               |                  | 1565.82 | 88.1                |
|                 | 1739.80 | 100.5               |                  | 1739.80 | 97.4                |


APPLICANT: MIDLAND RADIO CORPORATION  
 FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Method of Measuring Conducted Spurious Emissions

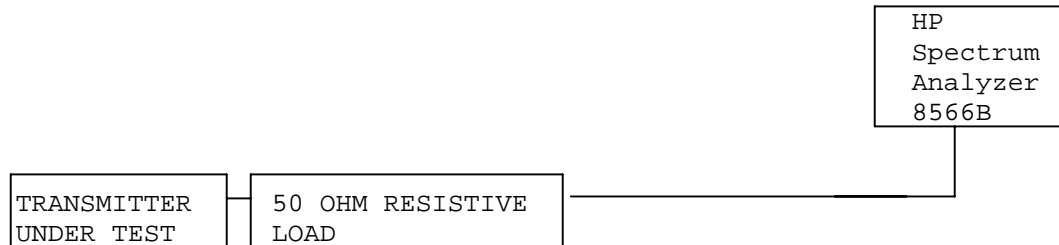

**METHOD OF MEASUREMENT:** The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a preselector filter of the spectrum analyzer. The spectrum was scanned from 400 kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M|MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
 http://www.timcoengr.com  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1053 **Field strength of spurious emissions:**

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (148.025 MHz)

**REQUIREMENTS:** Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

$$43 + 10\log(1.4) = 44.5 \text{ dB}$$

$$43 + 10\log(6) = 50.8 \text{ dB}$$

**HIGH:**

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 148.03                 | H             | 36.10                        | 0              | 0                          | 0                      |
| 296.05                 | V             | -44.90                       | 0              | -1.31                      | 82.31                  |
| 444.08                 | H             | -44.80                       | 0              | -0.45                      | 81.35                  |
| 592.10                 | H             | -44.20                       | 0              | -0.45                      | 80.75                  |
| 740.13                 | V             | -39.10                       | 0              | -0.39                      | 75.59                  |
| 888.15                 | H             | -48.50                       | 0              | -0.64                      | 85.24                  |
| 1036.18                | V             | -49.60                       | 1.01           | 3.09                       | 83.62                  |
| 1184.20                | V             | -35.90                       | 1.04           | 3.69                       | 69.35                  |
| 1332.23                | V             | -36.90                       | 1.07           | 4.28                       | 69.79                  |
| 1480.25                | H             | -46.80                       | 1.1            | 4.87                       | 79.13                  |

**LOW:**

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 148.03                 | H             | 29.80                        | 0              | 0                          | 0                      |
| 296.05                 | H             | -46.80                       | 0              | -1.31                      | 77.91                  |
| 444.08                 | H             | -50.20                       | 0              | -0.45                      | 80.45                  |
| 592.10                 | H             | -42.90                       | 0              | -0.45                      | 73.15                  |
| 740.13                 | V             | -36.60                       | 0              | -0.39                      | 66.79                  |
| 888.15                 | V             | -48.00                       | 0              | -0.64                      | 78.44                  |
| 1036.18                | V             | -51.00                       | 1.01           | 3.09                       | 78.72                  |
| 1184.20                | V             | -36.30                       | 1.04           | 3.69                       | 63.45                  |
| 1332.23                | V             | -36.90                       | 1.07           | 4.28                       | 63.49                  |
| 1480.25                | H             | -47.30                       | 1.1            | 4.87                       | 73.33                  |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
 http://www.timcoengr.com  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1053 **Field strength of spurious emissions:**

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (168.025 MHz)

**REQUIREMENTS:** Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

$$43 + 10\log(1.4) = 44.5 \text{ dB}$$

$$43 + 10\log(6) = 50.8 \text{ dB}$$

**HIGH:**

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 168.03                 | H             | 35.90                        | 0              | 0                          | 0                      |
| 336.05                 | V             | -42.10                       | 0              | -1.15                      | 79.15                  |
| 504.08                 | V             | -47.90                       | 0              | -0.63                      | 84.43                  |
| 672.10                 | V             | -39.60                       | 0              | 0.03                       | 75.47                  |
| 840.13                 | V             | -29.20                       | 0              | -0.829                     | 65.929                 |
| 1008.15                | V             | -49.80                       | 1              | 2.98                       | 83.72                  |
| 1176.18                | V             | -33.10                       | 1.04           | 3.65                       | 66.39                  |
| 1344.20                | V             | -37.10                       | 1.07           | 4.33                       | 69.74                  |
| 1512.23                | H             | -44.00                       | 1.1            | 4.96                       | 76.04                  |
| 1680.25                | H             | -35.20                       | 1.14           | 5.09                       | 67.15                  |

**LOW:**

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 168.03                 | H             | 29.60                        | 0              | 0                          | 0                      |
| 336.05                 | V             | -49.80                       | 0              | -1.15                      | 80.55                  |
| 504.08                 | V             | -46.90                       | 0              | -0.63                      | 77.13                  |
| 672.10                 | V             | -37.40                       | 0              | 0.03                       | 66.97                  |
| 840.13                 | V             | -28.90                       | 0              | -0.829                     | 59.329                 |
| 1008.15                | V             | -49.20                       | 1              | 2.98                       | 76.82                  |
| 1176.18                | V             | -33.70                       | 1.04           | 3.65                       | 60.69                  |
| 1344.20                | V             | -33.40                       | 1.07           | 4.33                       | 59.74                  |
| 1512.23                | V             | -49.70                       | 1.1            | 4.96                       | 75.44                  |
| 1680.25                | H             | -35.40                       | 1.14           | 5.09                       | 61.05                  |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
 http://www.timcoengr.com  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1053 **Field strength of spurious emissions:**

**NAME OF TEST:** RADIATED SPURIOUS EMISSIONS (173.975 MHz)

**REQUIREMENTS:** Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

$$43 + 10\log(1.4) = 44.5 \text{ dB}$$

$$43 + 10\log(6) = 50.8 \text{ dB}$$

**HIGH:**

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 173.98                 | H             | 36.20                        | 0              | 0                          | 0                      |
| 347.95                 | V             | -39.40                       | 0              | -1.15                      | 76.75                  |
| 521.93                 | H             | -49.10                       | 0              | -0.56                      | 85.86                  |
| 695.90                 | V             | -33.30                       | 0              | 0.13                       | 69.37                  |
| 869.88                 | V             | -35.10                       | 0              | -0.79                      | 72.09                  |
| 1043.85                | V             | -49.00                       | 1.01           | 3.13                       | 83.08                  |
| 1217.83                | V             | -31.30                       | 1.04           | 3.82                       | 64.72                  |
| 1391.80                | H             | -47.00                       | 1.08           | 4.51                       | 79.77                  |
| 1565.78                | V             | -46.70                       | 1.11           | 4.51                       | 79.5                   |
| 1739.75                | H             | -37.20                       | 1.15           | 5.14                       | 69.41                  |

**LOW:**

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 173.98                 | H             | 29.70                        | 0              | 0                          | 0                      |
| 347.95                 | V             | -51.30                       | 0              | -1.15                      | 82.15                  |
| 521.93                 | V             | -50.00                       | 0              | -0.56                      | 80.26                  |
| 695.90                 | V             | -36.80                       | 0              | 0.13                       | 66.37                  |
| 869.88                 | V             | -33.50                       | 0              | -0.79                      | 63.99                  |
| 1043.85                | V             | -47.30                       | 1.01           | 3.13                       | 74.88                  |
| 1217.83                | V             | -30.90                       | 1.04           | 3.82                       | 57.82                  |
| 1391.80                | H             | -46.60                       | 1.08           | 4.51                       | 72.87                  |
| 1565.78                | V             | -46.10                       | 1.11           | 4.51                       | 72.4                   |
| 1739.75                | H             | -34.70                       | 1.15           | 5.14                       | 60.41                  |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Method of Measuring Radiated Spurious Emissions

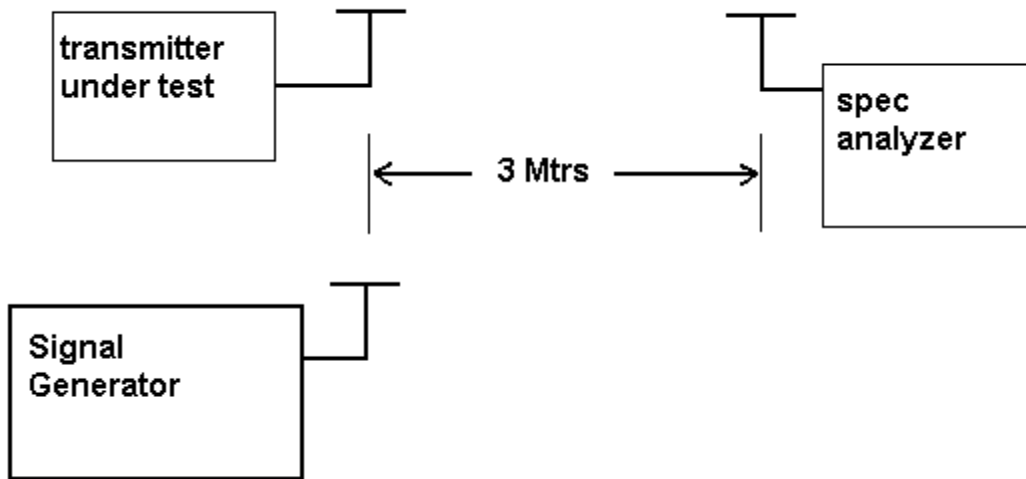

**METHOD OF MEASUREMENTS:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1055 Frequency stability:  
90.213(a)(1)

Temperature and voltage tests were performed to verify that the frequency remains within the .0020%, 20-ppm specification limit. The EUT was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50° C.

Readings were also taken at minus 15% of the battery voltage of 7.2 VDC, which we estimate to be the battery endpoint.

## MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 155.025 130 MHz

| <u>TEMPERATURE_°C</u> | <u>FREQUENCY_MHz</u> | <u>PPM</u> |
|-----------------------|----------------------|------------|
| REFERENCE_____        | 155.025 130          | 0.00       |
| -30_____              | 155.025 16           | 0.19       |
| -20_____              | 155.025 150          | 0.13       |
| -10_____              | 155.025 218          | 0.57       |
| 0_____                | 155.025 203          | 0.47       |
| +10_____              | 155.025 186          | 0.36       |
| +20_____              | 155.025 176          | 0.30       |
| +30_____              | 155.025 141          | 0.07       |
| +40_____              | 155.025 097          | -0.21      |
| +50_____              | 155.025 075          | -0.35      |

| <u>BATT</u> | <u>%BATT. DATA</u> | <u>VOLTS</u> | <u>BATT. PPM</u> |
|-------------|--------------------|--------------|------------------|
| -15%        | 155.025 177        | 6.12         | 0.30             |

**RESULTS OF MEASUREMENTS:** The test results indicates that the EUT meets the requirements.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc



# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
 http://www.timcoengr.com  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

2.1055(a)(1) Frequency stability:  
 90.214 Transient Frequency Behavior

**REQUIREMENTS:** Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals | Maximum frequency difference | All Equipment |             |
|----------------|------------------------------|---------------|-------------|
|                |                              | 150-174 MHz   | 421-512 MHz |

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

|         |           |         |         |
|---------|-----------|---------|---------|
| $t_1^4$ | ±25.0 kHz | 5.0 mS  | 10.0 mS |
| $t_2$   | ±12.5 kHz | 20.0 mS | 25.0 mS |
| $t_3^4$ | ±25.0 kHz | 5.0 mS  | 10.0 mS |

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

|         |           |         |         |
|---------|-----------|---------|---------|
| $t_1^4$ | ±12.5 kHz | 5.0 mS  | 10.0 mS |
| $t_2$   | ±6.25 kHz | 20.0 mS | 25.0 mS |
| $t_3^4$ | ±12.5 kHz | 5.0 mS  | 10.0 mS |

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

|         |            |         |         |
|---------|------------|---------|---------|
| $t_1^4$ | ±6.25 kHz  | 5.0 mS  | 10.0 mS |
| $t_2$   | ±3.125 kHz | 20.0 mS | 25.0 mS |
| $t_3^4$ | ±6.25 kHz  | 5.0 mS  | 10.0 mS |

# TIMCO ENGINEERING INC.

849 NW State Road 45


Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**TEST PROCEEDURE:** TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

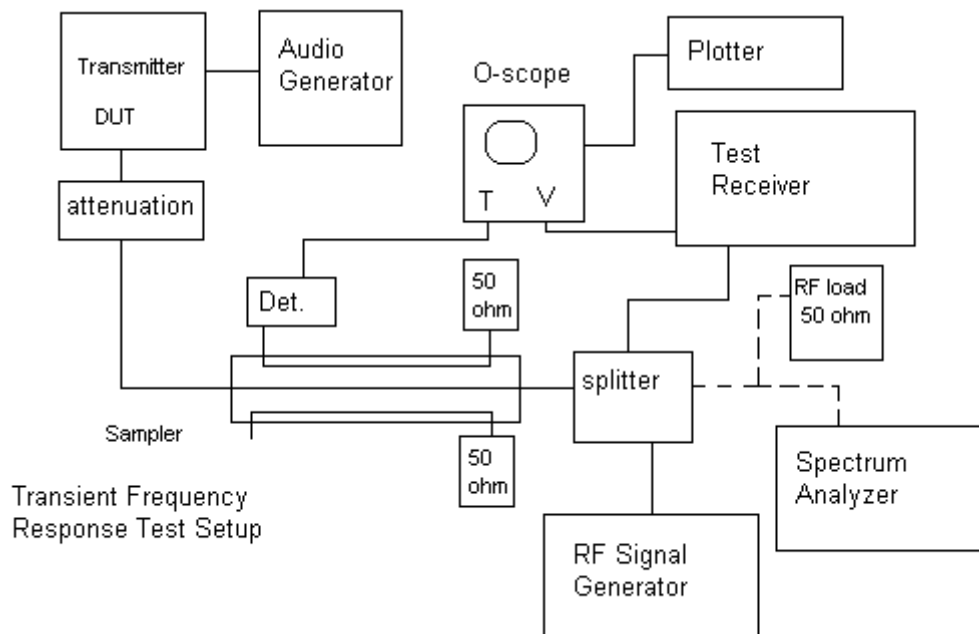

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TRANSIENT FREQUENCY RESPONSE 12.5K - LEFT

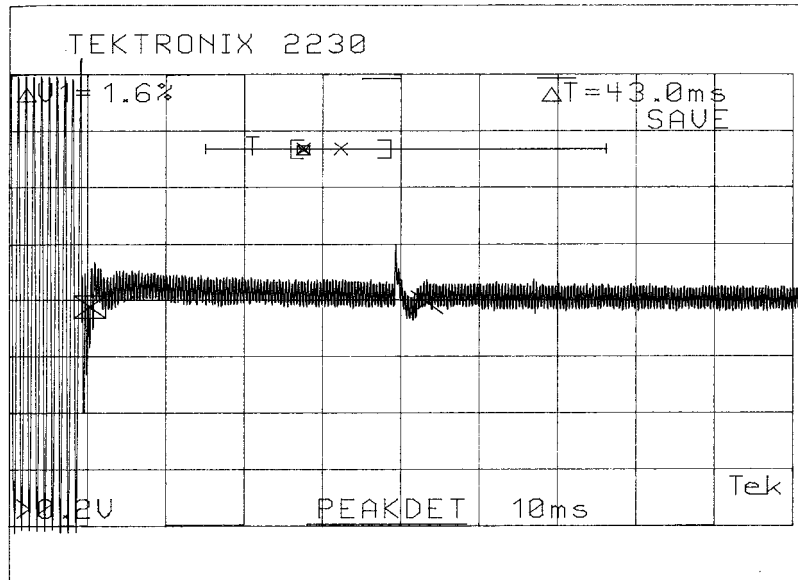

RIGHT

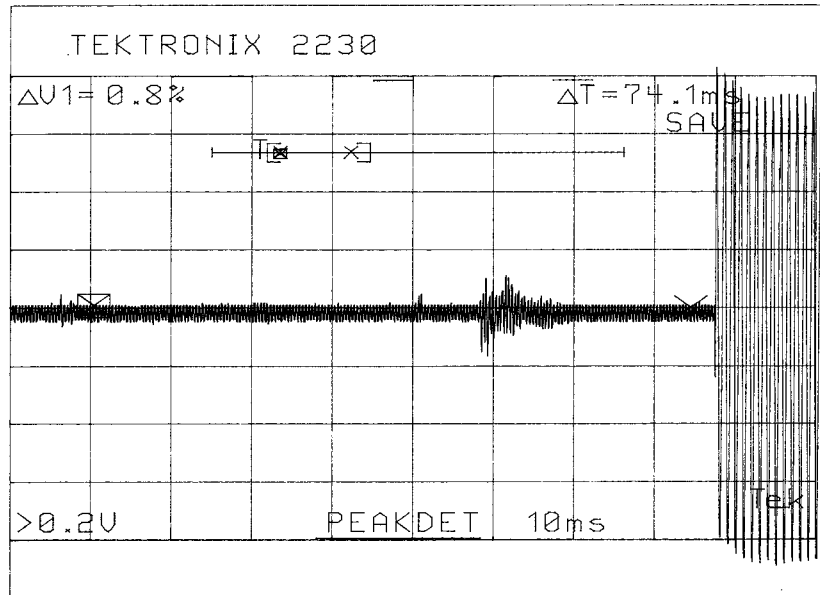

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TRANSIENT FREQUENCY RESPONSE 25K - LEFT

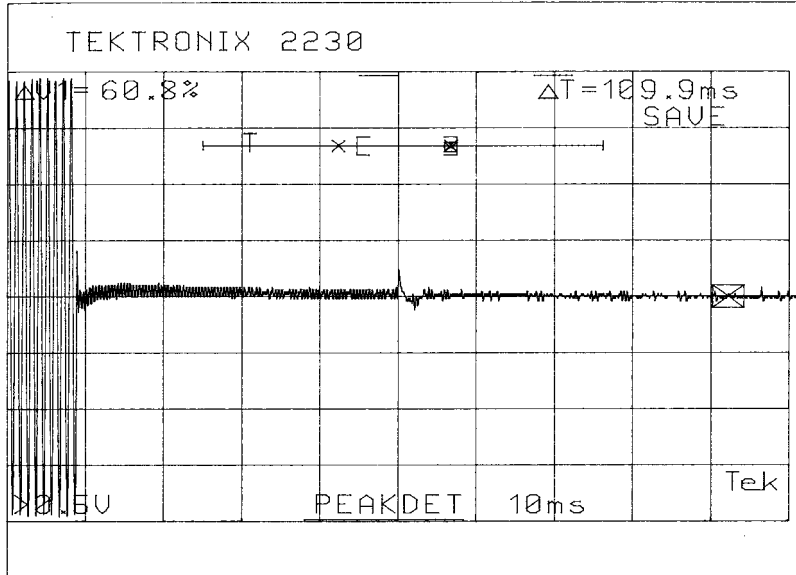

RIGHT

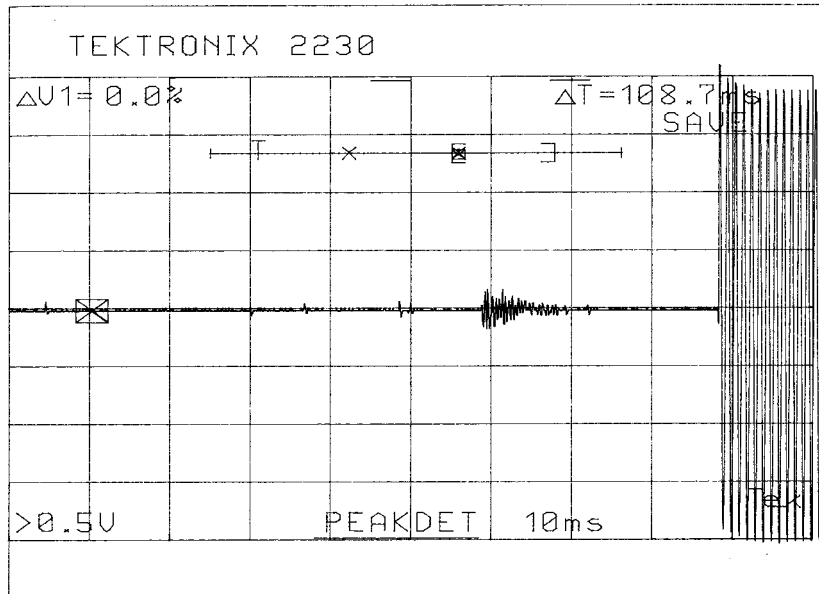

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
 http://www.timcoengr.com  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## EMC Equipment List

|   | DEVICE  | MFGR            | MODEL         | SERNO                    | CAL/CHAR DATE  | DUE DATE or STATUS |
|---|---|-----------------|---------------|--------------------------|----------------|--------------------|
| X | 3-Meter OATS                                  | TEI             | N/A           | N/A                      | Listed 1/13/03 | 1/13/06            |
|   | 3/10-Meter OATS                               | TEI             | N/A           | N/A                      | Listed 3/26/01 | 3/26/04            |
|   | Receiver, Beige Tower Spectrum Analyzer       | HP              | 8566B Opt 462 | 3138A07786<br>3144A20661 | CAL 8/31/01    | 8/31/03            |
|   | RF Preselector                                | HP              | 85685A        | 3221A01400               | CAL 8/31/01    | 8/31/03            |
|   | Quasi-Peak Adapter                            | HP              | 85650A        | 3303A01690               | CAL 8/31/01    | 8/31/03            |
| X | Receiver, Blue Tower Spectrum Analyzer        | HP              | 8568B         | 2928A04729<br>2848A18049 | CAL 4/15/03    | 4/15/05            |
| X | RF Preselector                                | HP              | 85685A        | 2926A00983               | CAL 4/15/03    | 4/15/05            |
| X | Quasi-Peak Adapter                            | HP              | 85650A        | 2811A01279               | CAL 4/15/03    | 4/15/05            |
|   | Receiver, Silver/Grey Tower Spectrum Analyzer | HP              | 8566B Opt 462 | 3552A22064<br>3638A08608 | CAL 10/14/02   | 10/14/04           |
|   | RF Preselector                                | HP              | 85685A        | 2620A00294               | CAL 10/14/02   | 10/14/04           |
|   | Quasi-Peak Adapter                            | HP              | 85650A        | 3303A01844               | CAL 10/14/02   | 10/14/04           |
|   | Preamplifier                                  | HP              | 8449B         | 3008A01075               | CHAR 1/28/02   | 1/28/04            |
| X | Biconnical Antenna                            | Electro-Metrics | BIA-25        | 1171                     | CAL 4/26/01    | 4/26/03            |
|   | Biconnical Antenna                            | Eaton           | 94455-1       | 1096                     | CAL 10/1/01    | 10/1/03            |
|   | Biconnical Antenna                            | Eaton           | 94455-1       | 1057                     | CAL 3/18/03    | 3/18/05            |
|   | BiconiLog Antenna                             | EMCO            | 3143          | 9409-1043                |                |                    |
| X | Log-Periodic Antenna                          | Electro-Metrics | LPA-25        | 1122                     | CAL 10/2/01    | 10/2/03            |
|   | Log-Periodic Antenna                          | Electro-Metrics | EM-6950       | 632                      | CHAR 10/15/01  | 10/15/03           |
|   | Log-Periodic Antenna                          | Electro-Metrics | LPA-30        | 409                      | CAL 3/4/03     | 3/4/05             |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

| DEVICE                             | MFGR                        | MODEL      | SERNO      | CAL/CHAR DATE    | DUE DATE or STATUS |
|------------------------------------|-----------------------------|------------|------------|------------------|--------------------|
| Dipole Antenna Kit                 | Electro-Metrics             | TDA-30/1-4 | 152        | CAL<br>3/21/01   | 3/21/04            |
| Dipole Antenna Kit                 | Electro-Metrics             | TDA-30/1-4 | 153        | CAL<br>9/26/02   | 9/26/05            |
| Double-Ridged Horn Antenna         | Electro-Metrics             | RGA-180    | 2319       | CAL<br>2/17/03   | 2/17/05            |
| Horn Antenna                       | Electro-Metrics             | EM-6961    | 6246       | CAL<br>3/31/03   | 3/31/05            |
| Horn Antenna                       | ATM                         | 19-443-6R  | None       | No Cal Required  |                    |
| Passive Loop Antenna               | EMC Test Systems            | EMCO 6512  | 9706-1211  | CHAR<br>7/10/01  | 7/10/03            |
| Line Impedance Stabilization . . . | Electro-Metrics             | ANS-25/2   | 2604       | CAL<br>10/9/01   | 10/9/03            |
| Line Impedance Stabilization . . . | Electro-Metrics             | EM-7820    | 2682       | CAL<br>3/12/03   | 3/12/05            |
| Termaline Wattmeter                | Bird Electronic Corporation | 611        | 16405      | CAL<br>5/25/99   | 5/25/01            |
| Termaline Wattmeter                | Bird Electronic Corporation | 6104       | 1926       | CHAR<br>12/12/01 | 12/12/03           |
| Oscilloscope                       | Tektronix                   | 2230       | 300572     | CHAR<br>2/1/01   | 2/1/03             |
| System One                         | Audio Precision             | System One | SYS1-45868 | CHAR<br>4/25/02  | 4/25/04            |
| Temperature Chamber                | Tenney Engineering          | TTRC       | 11717-7    | CHAR<br>1/22/02  | 1/22/04            |
| AC Voltmeter                       | HP                          | 400FL      | 2213A14499 | CAL<br>10/9/01   | 10/9/03            |
| AC Voltmeter                       | HP                          | 400FL      | 2213A14261 | CHAR<br>10/15/01 | 10/15/03           |
| AC Voltmeter                       | HP                          | 400FL      | 2213A14728 | CHAR<br>10/15/01 | 10/15/03           |
| X Digital Multimeter               | Fluke                       | 77         | 35053830   | CHAR<br>1/8/02   | 1/8/04             |
| Digital Multimeter                 | Fluke                       | 77         | 43850817   | CHAR<br>1/8/02   | 1/8/04             |
| Digital Multimeter                 | HP                          | E2377A     | 2927J05849 | CHAR<br>1/8/02   | 1/8/04             |
| Multimeter                         | Fluke                       | FLUKE-77-3 | 79510405   | CHAR<br>9/26/01  | 9/26/03            |
| Peak Power Meter                   | HP                          | 8900C      | 2131A00545 | CHAR<br>1/26/01  | 1/26/03            |
| Power Meter                        | HP                          | 432A       | 1141A07655 | CAL<br>4/15/03   | 4/15/05            |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

|   | DEVICE                 | MFGR                 | MODEL                | SERNO        | CAL/CHAR DATE   | DUE DATE or STATUS |
|---|------------------------|----------------------|----------------------|--------------|-----------------|--------------------|
|   | Power Meter And Sensor | Bird                 | 4421-107<br>4022     | 0166<br>0218 | CAL<br>4/16/03  | 4/16/05            |
|   | Power Sensor           | HP                   | 478A                 | 72129        | CAL<br>4/15/03  | 4/15/05            |
|   | Digital Thermometer    | Fluke                | 2166A                | 42032        | CAL<br>1/16/02  | 1/16/04            |
|   | Thermometer            | Traulsen             | SK-128               |              | CHAR<br>1/22/02 | 1/22/04            |
|   | Thermometer            | Extech               | 4028                 | 14871-2      | CAL<br>3/7/03   | 3/7/05             |
| X | Hygro-Thermometer      | Extech               | 445703               | 0602         | CAL<br>10/4/02  | 10/4/04            |
|   | Frequency Counter      | HP                   | 5352B                | 2632A00165   | CAL<br>11/28/01 | 11/28/03           |
|   | Frequency Counter      | HP                   | 5385A                | 2730A03025   | CAL<br>3/7/03   | 3/7/05             |
|   | Power Sensor           | Agilent Technologies | 84811A               | 2551A02705   | CHAR<br>1/26/01 | 1/26/03            |
|   | Service Monitor        | IFR                  | FM/AM 500A           | 5182         | CAL<br>11/22/00 | 11/22/02           |
|   | Comm. Serv. Monitor    | IFR                  | FM/AM 1200S          | 6593         | CAL<br>5/12/02  | 5/12/04            |
|   | Signal Generator       | HP                   | 8640B                | 2308A21464   | CAL<br>2/15/02  | 2/15/04            |
|   | Sweep Generator        | Wiltron              | 6648                 | 101009       | CAL<br>4/15/03  | 4/15/05            |
|   | Sweep Generator        | Wiltron              | 6669M                | 007005       | CAL<br>3/3/03   | 3/3/05             |
|   | Modulation Analyzer    | HP                   | 8901A                | 3435A06868   | CAL<br>9/5/01   | 9/5/03             |
|   | Modulation Meter       | Boonton              | 8220                 | 10901AB      | CAL<br>4/15/03  | 4/15/05            |
|   | Near Field Probe       | HP                   | HP11940A             | 2650A02748   | CHAR<br>2/1/01  | 2/1/03             |
|   | BandReject Filter      | Lorch Microwave      | 5BR4-2400/<br>60-N   | Z1           | CHAR<br>3/2/01  | 3/2/03             |
|   | BandReject Filter      | Lorch Microwave      | 6BR6-2442/<br>300-N  | Z1           | CHAR<br>3/2/01  | 3/2/03             |
|   | BandReject Filter      | Lorch Microwave      | 5BR4-10525/<br>900-S | Z1           | CHAR<br>3/2/01  | 3/2/03             |
|   | High Pass Filter       | Microlab             | HA-10N               |              | CHAR<br>10/4/01 | 10/4/03            |
|   | High Pass Filter       | Microlab             | HA-20N               |              | CHAR<br>2/7/03  | 2/7/05             |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

| DEVICE               | MFGR                | MODEL         | SERNO      | CAL/CHAR DATE   | DUE DATE or STATUS |
|----------------------|---------------------|---------------|------------|-----------------|--------------------|
| Audio Oscillator     | HP                  | 653A          | 832-00260  | CHAR<br>3/1/01  | 3/1/03             |
| Frequency Counter    | HP                  | 5382A         | 1620A03535 | CHAR<br>3/2/01  | 3/2/03             |
| Frequency Counter    | HP                  | 5385A         | 3242A07460 | CAL<br>3/7/03   | 3/7/05             |
| Preamplifier         | HP                  | 8449B-H02     | 3008A00372 | CHAR<br>3/4/01  | 3/4/03             |
| Amplifier            | HP                  | 11975A        | 2738A01969 | CHAR<br>3/1/01  | 3/1/03             |
| Egg Timer            | Unk                 |               |            | CHAR<br>8/31/01 | 8/31/03            |
| Measuring Tape, 20M  | Kraftixx            | 0631-20       |            | CHAR<br>2/1/02  | 2/1/04             |
| Measuring Tape, 7.5M | Kraftixx            | 7.5M PROF1    |            | 2/1/02          | 2/1/04             |
| Coaxial Cable #51    | Insulated Wire Inc. | NPS 2251-2880 | Timco #51  | CHAR<br>1/23/02 | 1/23/04            |
| Coaxial Cable #64    | Semflex Inc.        | 60637         | Timco #64  | CHAR<br>1/24/02 | 1/24/04            |
| Coaxial Cable #65    | General Cable Co.   | E9917 RG233/U | Timco #65  | CHAR<br>1/23/02 | 1/23/04            |
| Coaxial Cable #106   | Unknown             | Unknown       | Timco #106 | CHAR<br>1/23/02 | 1/23/04            |

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA80151

REPORT #: M\MidlandRadio\_MMA\96AUT4\96AUT4TestReport.doc