



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 90

### TEST REPORT

|                      |  |
|----------------------|--|
| APPLICANT            | MIDLAND RADIO CORPORATION  |
|                      | 5900 PARRETTA DRIVE  |
|                      | KANSAS CITY MISSOURI 64120 USA   |
| FCC ID               | MMA918100R   |
| MODEL NUMBER         | 91-8100R   |
| PRODUCT DESCRIPTION  | BASE STATION   |
| DATE SAMPLE RECEIVED | 7/7/2009   |
| DATE TESTED          | 7/29/2009  |
| TESTED BY            | Joe Scoglio  |
| APPROVED BY          | Mario de Aranzeta  |
| TIMCO REPORT NO.     | 1538AUT9TestReport.doc   |
| TEST RESULTS         | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL |

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





## TABLE OF CONTENTS

|  |    |
|--|----|
| GENERAL REMARKS.....                                     | 3  |
| GENERAL INFORMATION.....                                 | 4  |
| EQUIPMENT LIST.....                                      | 5  |
| TEST PROCEDURE .....                                     | 6  |
| RF POWER OUTPUT .....                                    | 7  |
| MODULATION CHARACTERISTICS.....                          | 8  |
| VOICE MODULATED COMMUNICATION EQUIPMENT .....            | 10 |
| OTHER MODULATION CHARACTERISTICS .....                   | 13 |
| OCCUPIED BANDWIDTH.....                                  | 14 |
| OCCUPIED BANDWIDTH PLOTS.....                            | 16 |
| SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)..... | 19 |
| FIELD STRENGTH OF SPURIOUS EMISSIONS.....                | 22 |
| FREQUENCY STABILITY.....                                 | 24 |
| FREQUENCY STABILITY(cont'd).....                         | 25 |
| ADJACENT CHANNEL POWER .....                             | 27 |

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## **GENERAL REMARKS**

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### **Summary**

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

### **Attestations**

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669



### **Authorized Signatory Name:**

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date:** 8/17/2009

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## GENERAL INFORMATION

### DUT Specification

|                                |  |
|--------------------------------|--|
| <b>DUT Description</b>         | BASE STATION   |
| <b>FCC ID</b>                  | MMA918100R   |
| <b>Model Number</b>            | 91-8100R   |
| <b>Operating Frequency</b>     | 851 - 870 MHz  |
| <b>Type of Emission</b>        | 16K0F3E,F1D,F2D/11K0F3E,F1D,F2D  |
| <b>Modulation</b>              | FM,CQPSK   |
| <b>DUT Power Source</b>        | <input type="checkbox"/> 110-120Vac/50- 60Hz                           |
|                                | <input checked="" type="checkbox"/> DC Power 24V                       |
|                                | <input type="checkbox"/> Battery Operated Exclusively                  |
| <b>Test Item</b>               | <input type="checkbox"/> Prototype                                     |
|                                | <input checked="" type="checkbox"/> Pre-Production                     |
|                                | <input type="checkbox"/> Production                                    |
| <b>Type of Equipment</b>       | <input checked="" type="checkbox"/> Fixed                              |
|                                | <input type="checkbox"/> Mobile  |
|                                | <input type="checkbox"/> Portable                                      |
| <b>Test Conditions</b>         | The temperature was 26°C with a relative humidity of 50%.              |
| <b>Modification to the DUT</b> | None   |
| <b>Test Exercise</b>           | The DUT was placed in continuous transmit mode.                        |
| <b>Applicable Standards</b>    | ANSI/TIA 603-C:2004, FCC CFR 47 Part 90                                |
| <b>Test Facility</b>           | Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. |

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc



## EQUIPMENT LIST

| Device                                | Manufacturer       | Model         | Serial Number            | Cal/Char Date  | Due Date |
|---------------------------------------|--------------------|---------------|--------------------------|----------------|----------|
| 3/10-Meter OATS                       | TEI                | N/A           | N/A                      | Listed 3/20/07 | 3/19/10  |
| 3-Meter OATS                          | TEI                | N/A           | N/A                      | Listed 2/5/09  | 2/5/12   |
| 3-Meter Semi-Anechoic Chamber         | Panashield         | N/A           | N/A                      | Listed 5/11/07 | 5/11/10  |
| AC Voltmeter                          | HP                 | 400FL         | 2213A14499               | CAL 3/23/09    | 3/23/11  |
| Analyzer Tan Tower Quasi-Peak Adapter | HP                 | 85650A        | 3303A01690               | CAL 11/30/07   | 11/30/09 |
| Analyzer Tan Tower RF Preselector     | HP                 | 85685A        | 3221A01400               | CAL 11/30/07   | 11/30/09 |
| Analyzer Tan Tower Spectrum Analyzer  | HP                 | 8566B Opt 462 | 3138A07786<br>3144A20661 | CAL 11/30/07   | 11/30/09 |
| Analyzer Tan Tower Preamplifier       | HP                 | 8449B-H02     | 3008A00372               | CAL 11/30/07   | 11/30/09 |
| Hygro-Thermometer                     | Extech             | 445703        | 0602                     | CAL 11/15/07   | 11/15/09 |
| Measuring Tape-7.5M                   | Kraftixx           | 7.5M PROFI    |                          | CHAR 11/13/07  | 11/13/09 |
| Digital Multimeter                    | Fluke              | FLUKE-77-3    | 79510405                 | CAL 5/18/09    | 5/18/11  |
| System One                            | Audio Precision    | System One    | SYS1-45868               | CHAR 2/27/08   | 2/27/10  |
| Temperature Chamber                   | Tenney Engineering | TTRC          | 11717-7                  | CHAR 4/25/08   | 4/25/10  |

Applicant: MIDLAND RADIO CORP.

FCC ID: MMA918100R

Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc



## TEST PROCEDURE

**Power Line Conducted Interference:** The procedure used was ANSI/TIA 603-C:2004, using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**Bandwidth 20 dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

**Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.

**Antenna Conducted Emissions:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

**Radiation Interference:** The test procedure used was ANSI/TIA 603-C:2004, using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum ANSI/TIA 603-C:2004, receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc


## RF POWER OUTPUT

**Rule Part No.:** Part 2.1046(a), Part 90

### Test Requirements:

**Method of Measurement:** RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

### Test Setup Diagram:

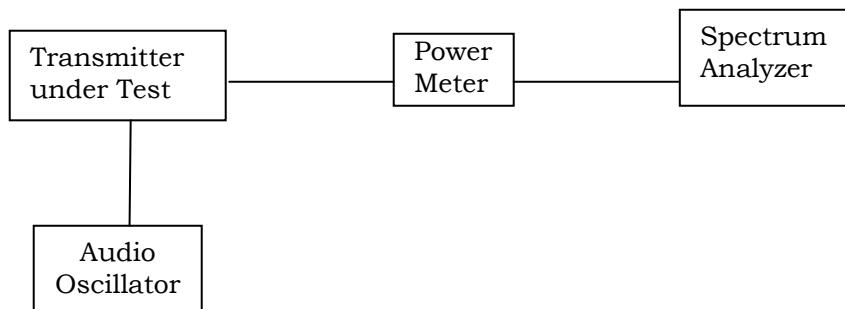

### Test Data:

OUTPUT POWER: HIGH – 100.00 Watts  
LOW - 25.00 Watts

### Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER:  $(24.0V)(7.0A) = 168$  Watts  
FOR HIGH POWER SETTING INPUT POWER:  $(24.0V)(10.9A) = 262$  Watts

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## MODULATION CHARACTERISTICS

**Rule Part No.:** Part 2.1047(a)(b)


**Test Requirements:**

**Method of Measurement:**

*Audio frequency response*


The audio frequency response was measured in accordance with ANSI/TIA 603-C:2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

**AUDIO FREQUENCY RESPONSE PLOT**  
**Narrow**

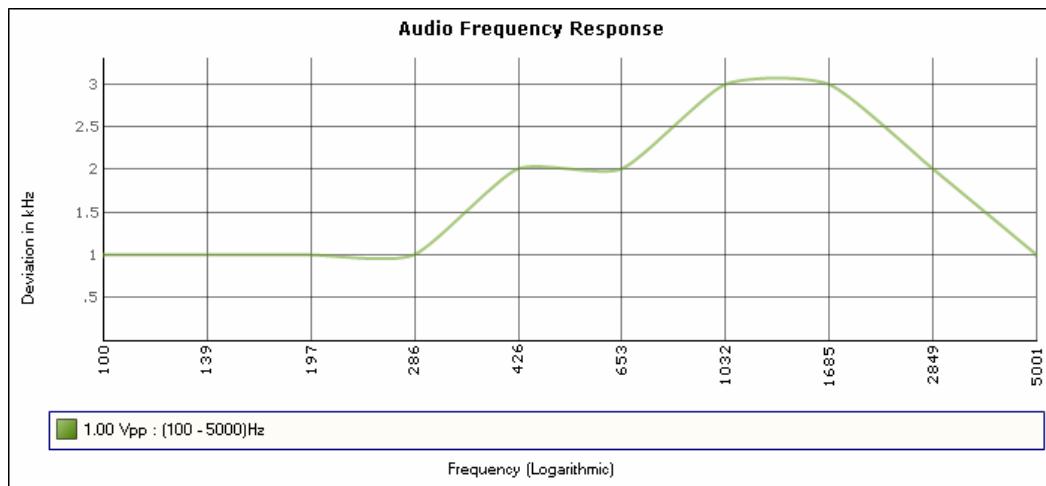

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

**AUDIO FREQUENCY RESPONSE PLOT**  
**Wide**

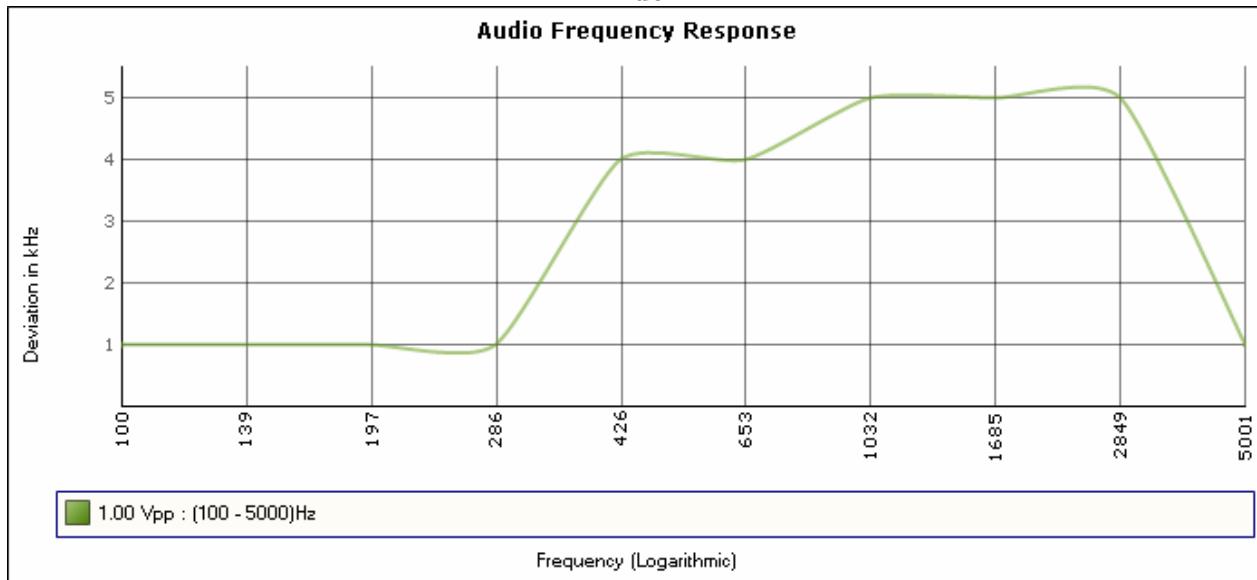


Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc


## VOICE MODULATED COMMUNICATION EQUIPMENT

**Part 2.1047(a):** For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

### AUDIO LOW PASS FILTER (narrow).

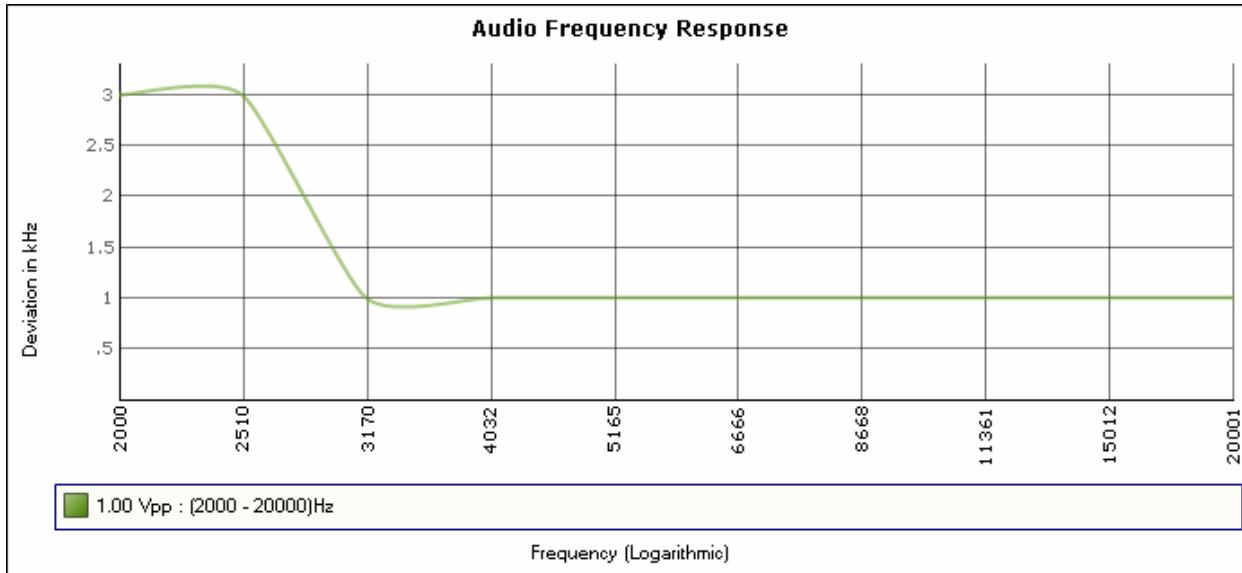

### AUDIO LOW PASS FILTER (wide).

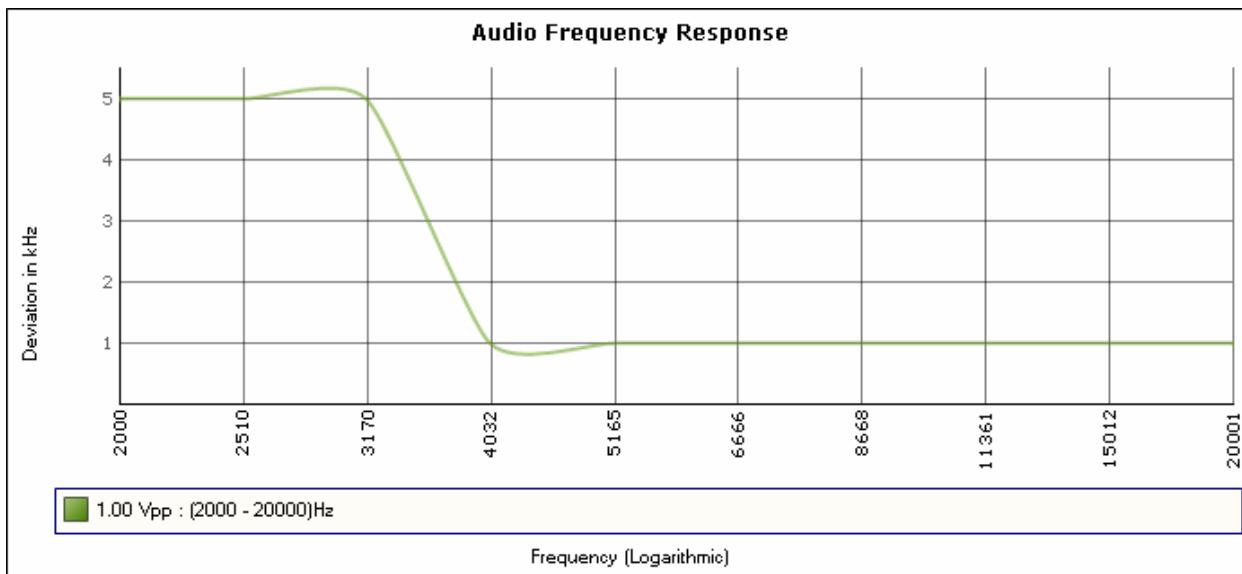

Applicant: MIDLAND RADIO CORP.

FCC ID: MMA918100R

Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## AUDIO INPUT VERSUS MODULATION


**Rule Part No.:** Part 2.1047(b) & 90

### Test Requirements:

**Method of Measurement:** **Modulation cannot exceed 100%,** The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.


### Test data:

Modulation Limiting Plot (12.5 kHz)

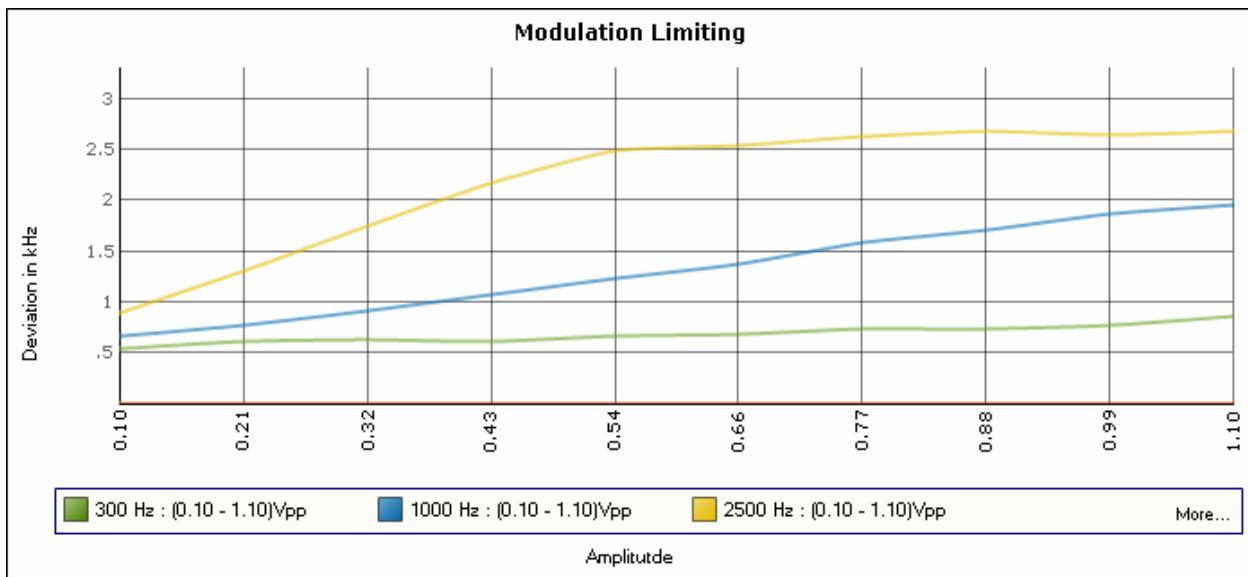

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

Modulation Limiting Plot (25.0 kHz)

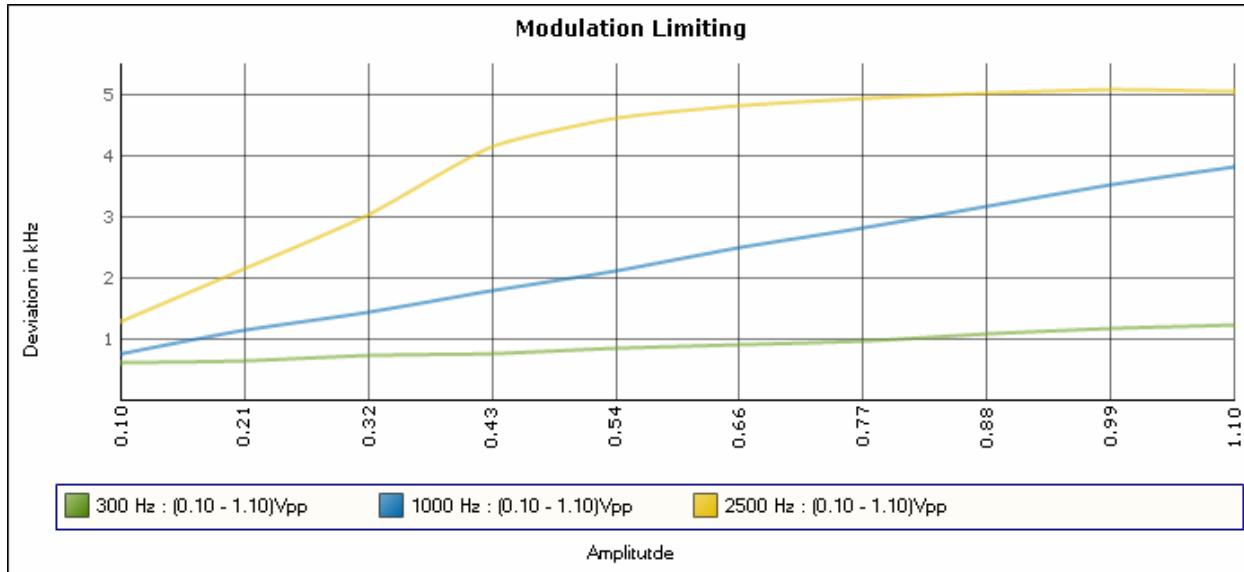

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc



## OTHER MODULATION CHARACTERISTICS

### **Part 2.1033(c)**

**Part 2.1033(c) (4)** Type of Emission:

**Part 90.209**

**Part 2.1033(c) (4)** Type of Emission: 11K2F3E

**Part 90.209**

**Part 90.207**  $B_n = 2M + 2DK$

M = 2000

D = 3000

K=1

$$B_n = 2(3000) + 2(2000) = 10 \text{ k}$$

**Part 2.1033(c) (4)** Type of Emission: 16K0F3E

**Part 90.209**

**Part 90.207**  $B_n = 2M + 2DK$

M = 3000

D = 4200

K=1

$$B_n = 2(3000) + 2(4200) = 14.4 \text{ k}$$

11K2F1D, 11K2F2D, 11K2F1E

16K0F1D, 16K0F2D, 16K0F1E

The radio is capable of CQPSK modulation described in APCO 25 or P-25.

Applicant: MIDLAND RADIO CORP.

FCC ID: MMA918100R

Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## OCCUPIED BANDWIDTH

### **Part 2.1049(c) EMISSION BANDWIDTH: Part 90.210(b) 25kHz Channel Spacing**

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least  $43 + 10\log(P)$  dB.

### **Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter**

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10 kHz: At least  $83 \log(fd/5)$  dB; (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least  $29 \log(fd/11)$  dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least  $43 + 10 \log(Po)$  dB.

### **Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.**

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(fd - 2.88)$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least  $50 + 10\log(P)$  dB or 70 dB, whichever is the lesser attenuation.

### **Part 90.210(e) Emission Mask E - 6.25 kHz channel BW equipment.**

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(fd - 3.0)$  dB or  $55 + 10 \log(P)$  or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10\log(P)$  dB or 65 dB, whichever is the lesser attenuation.


Applicant: MIDLAND RADIO CORP.

FCC ID: MMA918100R

Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

**Method of Measurement: ANSI/TIA 603-C: 2004**

**Test Setup Diagram:**

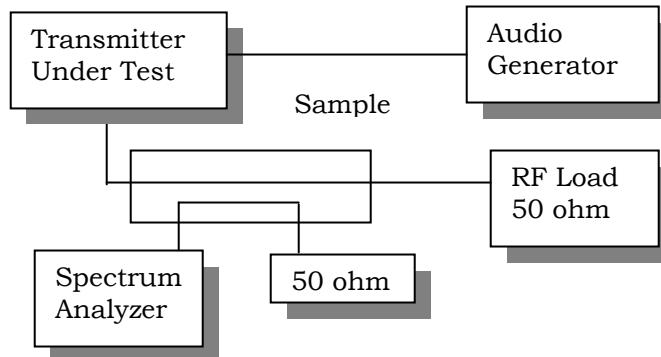

**Test Data:** See the plots below


Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

**OCCUPIED BANDWIDTH PLOTS**

Part 90.210(b) 12.5 kHz Channel Spacing (digital)

**NOTES:**


 MIDLAND RADIO CORPORATION - FCC ID: MMA918100R  
 OCCUPIED BANDWIDTH PLOT

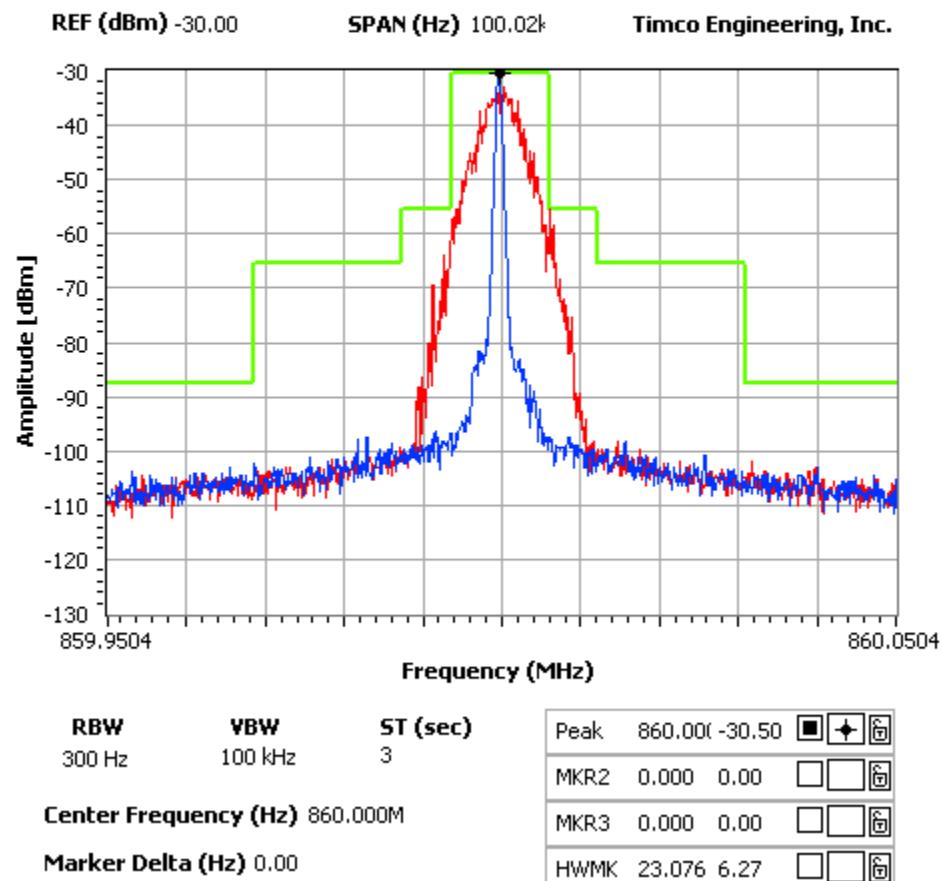**FCC 90.210 Mask B**


Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

Occupied BW plot 25 kHz


**NOTES:**

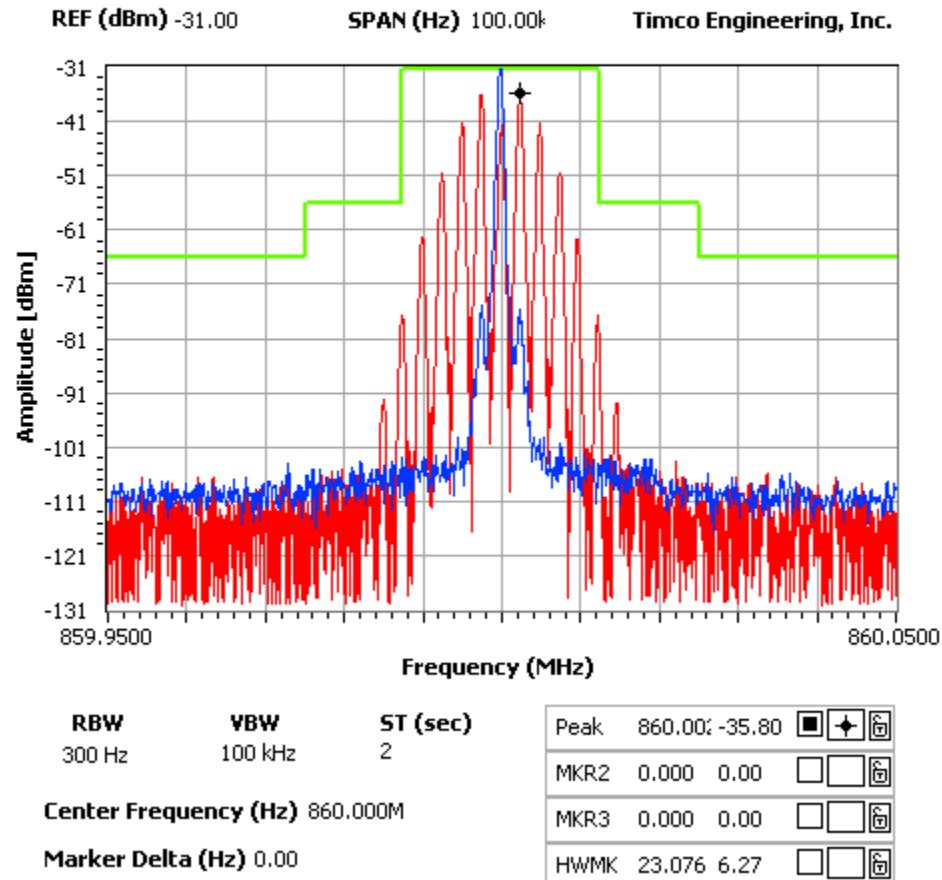 Occupied Bandwidth  
 Wide


Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

Part 90.210(d) Emission Mask D - 12.5 kHz channel

**NOTES:**

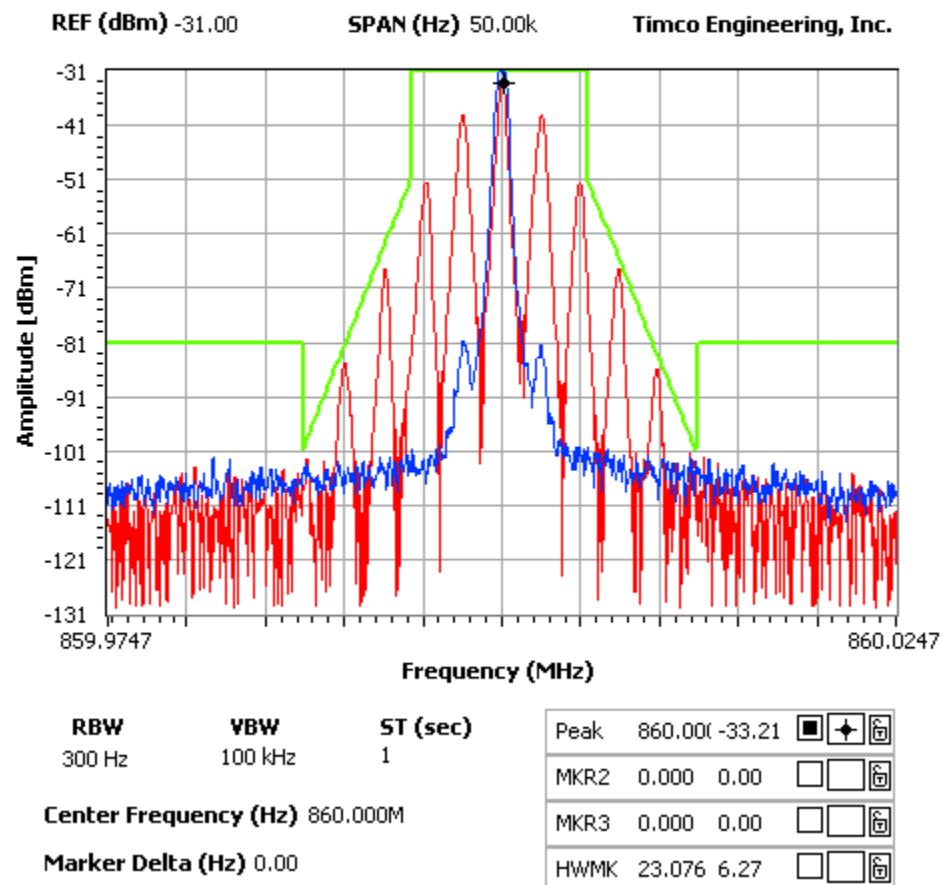 Occupied Bandwidth  
 Narrow


Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc



## SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

**Rule Part No.:** Part 2.1051(a)

**Requirements:** 25kHz Channel Spacing =  $43 + 10\log(OP) = \text{dBc}$   
12.5kHz Channel Spacing =  $50 + 10\log(OP) = \text{dBc}$

**Method of Measurement:** The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

**Test Data:** High power:  $50 + 10\log(100.00) = 70.00 \text{ dBc}$   
Low power:  $50 + 10\log(25.00) = 64.00 \text{ dBc}$

| TF<br><b>HIGH POWER</b> | EF   | <b>dB below<br/>carrier</b> |  | TF<br><b>LOW POWER</b> | EF   | <b>dB below<br/>carrier</b> |
|-------------------------|------|-----------------------------|--|------------------------|------|-----------------------------|
| 851                     | 851  | 0                           |  | 851                    | 851  | 0                           |
|                         | 1702 | 78.6                        |  |                        | 1702 | 74.2                        |
|                         | 2553 | 105.7                       |  |                        | 2553 | 106.6                       |
|                         | 3404 | 101.4                       |  |                        | 3404 | 108.7                       |
|                         | 4255 | 120.4                       |  |                        | 4255 | 122.7                       |
|                         | 5106 | 116.8                       |  |                        | 5106 | 125.7                       |
|                         | 5957 | 120.3                       |  |                        | 5957 | 116.7                       |
|                         | 6808 | 113.7                       |  |                        | 6808 | 121.8                       |
|                         | 7659 | 108.1                       |  |                        | 7659 | 103                         |
|                         | 8510 | 103.1                       |  |                        | 8510 | 106.2                       |

| TF<br><b>HIGH POWER</b> | EF   | <b>dB below<br/>carrier</b> |  | TF<br><b>LOW POWER</b> | EF   | <b>dB below<br/>carrier</b> |
|-------------------------|------|-----------------------------|--|------------------------|------|-----------------------------|
| 860                     | 860  | 0                           |  | 860                    | 860  | 0                           |
|                         | 1720 | 84.9                        |  |                        | 1720 | 78.2                        |
|                         | 2580 | 103.5                       |  |                        | 2580 | 112.2                       |
|                         | 3440 | 124                         |  |                        | 3440 | 119.9                       |
|                         | 4300 | 115.6                       |  |                        | 4300 | 114.9                       |
|                         | 5160 | 125.1                       |  |                        | 5160 | 118.6                       |
|                         | 6020 | 126.7                       |  |                        | 6020 | 123.8                       |
|                         | 6880 | 125.3                       |  |                        | 6880 | 126.9                       |
|                         | 7740 | 110                         |  |                        | 7740 | 106.7                       |
|                         | 8600 | 102.6                       |  |                        | 8600 | 106.1                       |


Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

**TEST DATA CONTD.**

| <b>TF<br/>HIGH POWER</b> | <b>EF</b> | <b>dB below<br/>carrier</b> |  | <b>TF<br/>LOW POWER</b> | <b>EF</b> | <b>dB below<br/>carrier</b> |
|--------------------------|-----------|-----------------------------|--|-------------------------|-----------|-----------------------------|
| 870                      | 870       | 0                           |  | 870                     | 870       | 0                           |
|                          | 1740      | 85.5                        |  |                         | 1740      | 76.7                        |
|                          | 2610      | 94.1                        |  |                         | 2610      | 102.6                       |
|                          | 3480      | 115.7                       |  |                         | 3480      | 121.2                       |
|                          | 4350      | 115.5                       |  |                         | 4350      | 124.8                       |
|                          | 5220      | 96.9                        |  |                         | 5220      | 108.3                       |
|                          | 6090      | 116.3                       |  |                         | 6090      | 122.5                       |
|                          | 6960      | 117.7                       |  |                         | 6960      | 124.6                       |
|                          | 7830      | 111                         |  |                         | 7830      | 107.8                       |
|                          | 8700      | 109.7                       |  |                         | 8700      | 114.5                       |

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

### **Method of Measuring Conducted Spurious Emissions**

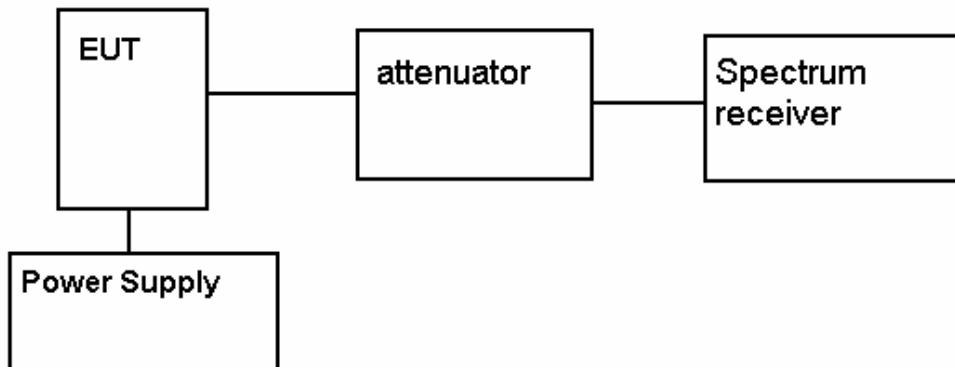

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc


## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rule Parts. No.:** Part 2.1053

**Requirements:** 25kHz Channel Spacing =  $43 + 10\log(OP) = \text{dBc}$   
 12.5kHz Channel Spacing =  $50 + 10\log(OP) = \text{dBc}$

**METHOD OF MEASUREMENT:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

### Test Setup Diagram:

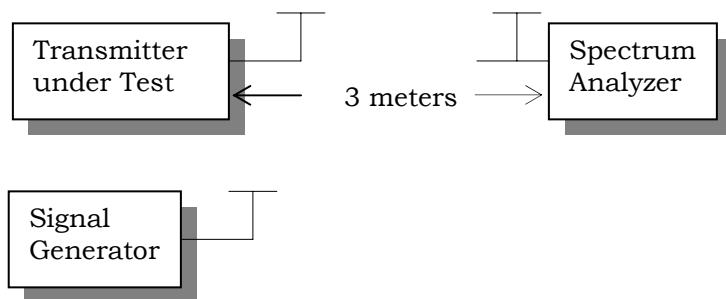

### Test Data:

High power:  $50 + 10\log(100.00) = 70.00 \text{ dBc}$

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 851.00                 | V             | 0                      |
| 1702.00                | H             | 79.12                  |
| 2553.00                | V             | 85.49                  |
| 3404.00                | H             | 90.35                  |
| 4255.00                | H             | 92.66                  |
| 5106.00                | H             | 90.68                  |
| 5957.00                | H             | 82.22                  |
| 6808.00                | H             | 81.02                  |
| 7659.00                | H             | 94.37                  |
| 8510.00                | H             | 90.45                  |

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 860.00                 | V             | 0                      |
| 1720.00                | H             | 81.06                  |
| 2580.00                | V             | 77.37                  |
| 3440.00                | H             | 85.02                  |
| 4300.00                | H             | 86.84                  |
| 5160.00                | H             | 93.68                  |
| 6020.00                | H             | 81.12                  |
| 6880.00                | H             | 88.32                  |
| 7740.00                | H             | 83.27                  |
| 8600.00                | H             | 93.35                  |

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 870.00                 | V             | 0                      |
| 1740.00                | V             | 75.25                  |
| 2610.00                | V             | 76.65                  |
| 3480.00                | H             | 82.39                  |
| 4350.00                | H             | 80.57                  |
| 5220.00                | H             | 90.72                  |
| 6090.00                | H             | 79.07                  |
| 6960.00                | H             | 78.46                  |
| 7830.00                | H             | 88.24                  |
| 8700.00                | H             | 88.76                  |

Applicant: MIDLAND RADIO CORP.

FCC ID: MMA918100R

Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc



Low power:  $50+10\log(25.00) = 64.00$  dBc

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 851.00                 | V             | 0                      |
| 1702.00                | V             | 73.72                  |
| 2553.00                | V             | 93.39                  |
| 3440.00                | V             | 89.95                  |
| 4300.00                | H             | 88.06                  |
| 5160.00                | H             | 87.78                  |
| 6020.00                | H             | 77.82                  |
| 6880.00                | H             | 89.12                  |
| 7740.00                | H             | 80.97                  |
| 8600.00                | H             | 92.25                  |

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 860.00                 | V             | 0                      |
| 1720.00                | V             | 71.36                  |
| 2580.00                | V             | 86.87                  |
| 3440.00                | H             | 86.12                  |
| 4300.00                | H             | 84.04                  |
| 5160.00                | H             | 92.58                  |
| 6020.00                | H             | 78.22                  |
| 6880.00                | H             | 88.12                  |
| 7740.00                | H             | 81.57                  |
| 8600.00                | H             | 85.65                  |

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 870.00                 | V             | 0                      |
| 1740.00                | V             | 69.55                  |
| 2610.00                | V             | 84.75                  |
| 3480.00                | V             | 85.19                  |
| 4350.00                | H             | 82.17                  |
| 5220.00                | H             | 92.82                  |
| 6090.00                | H             | 78.77                  |
| 6960.00                | H             | 84.06                  |
| 7830.00                | H             | 88.54                  |
| 8700.00                | H             | 86.86                  |

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## FREQUENCY STABILITY

**Rule Parts. No.:** Part 2.1055, Part 90.213

**Requirements:** Temperature range requirements: -30 to +50° C.  
 Voltage Variation +, -15%  
 ±2.5 PPM

**Method of Measurements:** ANSI/TIA 603-C: 2004.

**Test Data:** (

| Assigned Frequency (Ref. Frequency) (MHz) |                 | 860.000070                |
|---|-----------------|---------------------------|
| Temperature (°C)                          | Frequency (MHz) | Frequency Stability (PPM) |
| -30                                       | 860.000067      | 0.12                      |
| -20                                       | 859.999813      | -0.18                     |
| -10                                       | 859.99989       | -0.09                     |
| 0   | 860.000070      | 0.12                      |
| +10                                       | 860.000097      | 0.15                      |
| +20                                       | 859.999962      | -0.01                     |
| +30                                       | 859.999723      | -0.28                     |
| +40                                       | 859.999694      | -0.32                     |
| +50                                       | 859.999689      | -0.32                     |

| Assigned Frequency (Ref. Frequency) (MHz) |                 |                           |
|---|-----------------|---------------------------|
| % Battery                                 | Frequency (MHz) | Frequency Stability (PPM) |
| -15%                                      | 859.999967      | 0.0                       |
| 0   | 859.999968      |                           |
| +15%                                      | 859.999959      | -0.01                     |

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

## FREQUENCY STABILITY(cont'd)

### Part 90.214 Transient Frequency Behavior

**REQUIREMENTS:** Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals | Maximum frequency difference | All Equipment |             |
|----------------|------------------------------|---------------|-------------|
|                |                              | 150-174 MHz   | 421-512 MHz |
|                |                              |               |             |

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

|         |                |         |         |
|---------|----------------|---------|---------|
| $t_1^4$ | $\pm 25.0$ kHz | 5.0 ms  | 10.0 ms |
| $t_2$   | $\pm 12.5$ kHz | 20.0 ms | 25.0 ms |
| $t_3^4$ | $\pm 25.0$ kHz | 5.0 ms  | 10.0 ms |

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

|         |                |         |         |
|---------|----------------|---------|---------|
| $t_1^4$ | $\pm 12.5$ kHz | 5.0 ms  | 10.0 ms |
| $t_2$   | $\pm 6.25$ kHz | 20.0 ms | 25.0 ms |
| $t_3^4$ | $\pm 12.5$ kHz | 5.0 ms  | 10.0 ms |


Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

|         |                 |         |         |
|---------|-----------------|---------|---------|
| $t_1^4$ | $\pm 6.25$ kHz  | 5.0 ms  | 10.0 ms |
| $t_2$   | $\pm 3.125$ kHz | 20.0 ms | 25.0 ms |
| $t_3^4$ | $\pm 6.25$ kHz  | 5.0 ms  | 10.0 ms |

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc

**TEST PROCEDURE:** ANSI/TIA 603-C:2004, the levels were set as follows:

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above, the transient frequency behavior was observed and recorded.

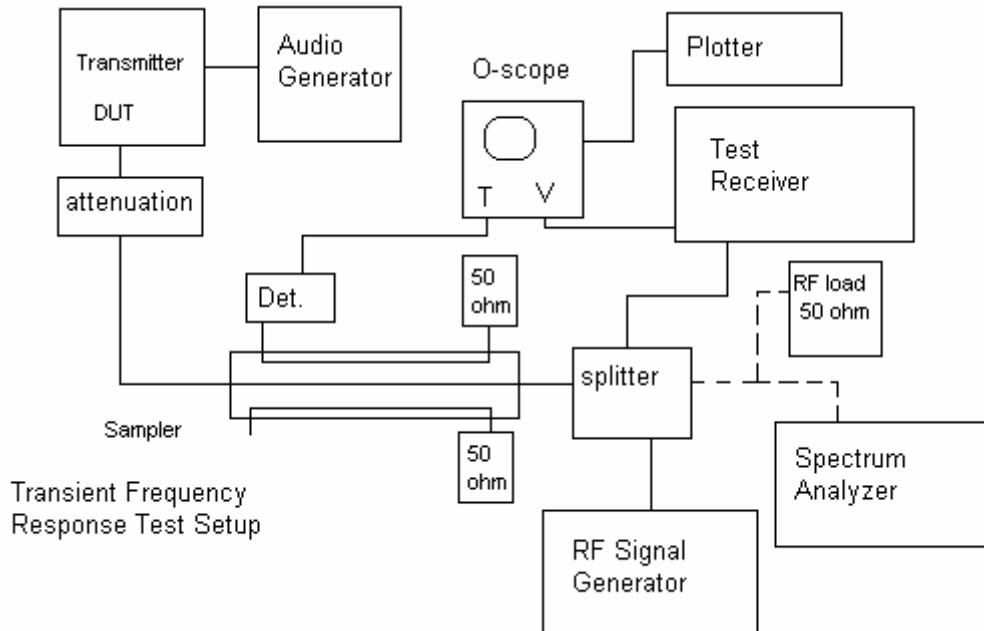

Applicant: MIDLAND RADIO CORP.  
 FCC ID: MMA918100R  
 Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc



## **ADJACENT CHANNEL POWER**

**Rule Part No.:** FCC Part 90.543

**Requirements:** Transmitters designed to operate in 769–775 MHz and 799–805 MHz frequency bands must meet the emission limitations in paragraphs (a) through (d) of this section. Transmitters operating in 763–768 MHz and 793–798 MHz bands must meet the emission limitations in (e) of this section.

**Test Data:**

Not applicable to this device.

Applicant: MIDLAND RADIO CORP.  
FCC ID: MMA918100R  
Report: Y:\M\MidlandRadio\_MMA\1538AUT9\1538AUT9TestReport.doc