

---

# FCC Part 90& Part 22 Rules Test Report

---

Report No.: AGC09350191001FE10

**FCC ID** : MMABR200P  
**PRODUCT DESIGNATION** : Handheld UHF Transceiver  
**BRAND NAME** : Midland  
**MODEL NAME** : BR200  
**APPLICANT** : Midland Radio Corporation  
**DATE OF ISSUE** : Nov. 05, 2019  
**STANDARD(S)** : FCC Part 90 Rules  
: FCC Part 22 Rules  
**REPORT VERSION** : V 1.0

## Attestation of *Global Compliance (Shenzhen) Co., Ltd*

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 05, 2019	Valid	Initial Release

## TABLE OF CONTENTS

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1 PRODUCT DESCRIPTION.....	6
2.2 RELATED SUBMITTAL(S) / GRANT (S).....	9
2.3 TEST METHODOLOGY .....	9
2.4 TEST FACILITY .....	9
2.5 SPECIAL ACCESSORIES .....	9
2.6 EQUIPMENT MODIFICATIONS .....	9
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
3.1 EUT CONFIGURATION.....	10
3.2 EUT EXERCISE .....	10
3.3 GENERAL TECHNICAL REQUIREMENTS.....	10
3.4 CONFIGURATION OF TESTED SYSTEM .....	11
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>5. DESCRIPTION OF TEST MODES.....</b>	<b>14</b>
<b>6. FREQUENCY TOLERANCE.....</b>	<b>15</b>
6.1 PROVISIONS APPLICABLE.....	15
6.2 MEASUREMENT PROCEDURE .....	15
6.3 TEST SETUP BLOCK DIAGRAM.....	16
6.4 TEST RESULTS .....	17
<b>7. EMISSION BANDWIDTH.....</b>	<b>19</b>
7.1 PROVISIONS APPLICABLE.....	19
7.2 MEASUREMENT PROCEDURE .....	19
7.3 TEST SETUP BLOCK DIAGRAM.....	19
7.4 MEASUREMENT RESULT .....	21
<b>8. UNWANTED RADIATION .....</b>	<b>23</b>
8.1 PROVISIONS APPLICABLE.....	23
8.2 MEASUREMENT PROCEDURE .....	23
8.3 TEST SETUP BLOCK DIAGRAM.....	24
8.4 MEASUREMENT RESULTS:.....	25
8.5 EMISSION MASK PLOT.....	26
<b>9. MODULATION CHARACTERISTICS .....</b>	<b>35</b>
9.1 PROVISIONS APPLICABLE.....	35
9.2 MEASUREMENT METHOD .....	35
9.3 MEASUREMENT RESULT .....	36

<b>10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER) PEAK POWER .....</b>	<b>39</b>
10.1 PROVISIONS APPLICABLE .....	39
10.2 TEST PROCEDURE .....	39
10.3 TEST CONFIGURATION .....	39
10.4 TEST RESULT .....	41
10.5 CONDUCT SPURIOUS PLOT .....	43
<b>11. TRANSMITTER FREQUENCY BEHAVIOR .....</b>	<b>47</b>
11.1 PROVISIONS APPLICABLE .....	47
11.2 TEST METHOD .....	47
11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR .....	48
11.4 MEASURE RESULT .....	49
<b>12. AUDIO LOW PASS FILTER RESPONSE .....</b>	<b>50</b>
12.1. TEST LIMITS .....	50
12.2. METHOD OF MEASUREMENTS .....	50
<b>APPENDIX I: PHOTOGRAPHS OF SETUP .....</b>	<b>52</b>
<b>APPENDIX II PHOTOGRAPHS OF EUT .....</b>	<b>53</b>

**1. VERIFICATION OF COMPLIANCE**

<b>Applicant:</b>	Midland Radio Corporation
<b>Address</b>	5900 Parretta Drive Kansas City, Missouri 64120-2134 United States
<b>Manufacturer:</b>	Midland Radio Corporation
<b>Address</b>	5900 Parretta Drive Kansas City, Missouri 64120-2134 United States
<b>Factory</b>	Guangdong Samzuk Technology Development Co.,Ltd
<b>Address</b>	#6 Technology Road,Heyuan,China
<b>Product Designation:</b>	Handheld UHF Transceiver
<b>Brand Name:</b>	Midland
<b>Test Model</b>	BR200
<b>Date of Test:</b>	Oct. 30, 2019~Nov. 05, 2019

**WE HEREBY CERTIFY THAT:**

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E (2016). The sample tested as described in this report is in compliance with the FCC Rules Part 90 and FCC Rules Part 22 requirements.The test results of this report relate only to the tested sample identified in this report.

Prepared By Calvin Liu  
Calvin Liu  
(Project Engineer) Nov. 05, 2019

Reviewed By Max Zhang  
Max Zhang  
(Reviewer) Nov. 05, 2019

Approved By Forrest Lei  
Forrest Lei  
Authorized Officer Nov. 05, 2019

## 2. GENERAL INFORMATION

### 2.1 PRODUCT DESCRIPTION

The EUT is a **Handheld UHF Transceiver** designed for voice/data communication. It is designed by way of utilizing the FM/4FSK modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice
Hardware Version	BR200-V1.0
Software Version	1.0
Modulation	FM
Emission Type	11K0F3E
Emission Bandwidth	Analog: 10.253KHz(2W-12.5 KHz)
Peak Frequency Deviation	1.52KHz
Audio Frequency Response	7.33dB
Maximum Transmitter Power	Analog: 32.95dBm(2W-12.5 KHz)
Output power Modification	2W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Data Rate	12.5KHz(Channel Spacing)
Antenna Designation	Detachable
Antenna Gain	1.5dBi
Power Supply	DC 3.7V,1750mAh (by battery) charging for DC4.2V
Limiting Voltage	DC 3.15V-4.26V
Operation Frequency Range and Channel	Frequency Range:450 MHz to 470 MHz (UHF) Channel Separation: 12.5KHz(Analog)
	Bottom Channel: 450.025MHz Middle Channel: 454.025MHz High Channel: 469.975MHz
Frequency Tolerance	1.081ppm

Frequency Range (MHz)	Rated Transmit Power(W)(Conducted)	Transmit Mode/Emission Designator
450-470	2W	11K0F3E(Analog Voice;NB)

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz)
1	1-2	450.025
2		
3	3-4	460.025
4		
5	5-6	469.975
6		

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

**For FM Mode (ChannelSpacing:12.5kHz)**

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0F3E$$

portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.



## 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **MMABR200P**, filing to comply with Part 2, Part 22, and Part 90 of the Federal Communication Commission rules.

## 2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E (2016).

## 2.4 TEST FACILITY

<b>Test Site</b>	Attestation of Global Compliance (Shenzhen) Co., Ltd
<b>Location</b>	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
<b>Designation Number</b>	CN1259
<b>FCC Test Firm Registration Number</b>	975832
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## 2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

## 2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

### **3. SYSTEM TEST CONFIGURATION**

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### **3.3 GENERAL TECHNICAL REQUIREMENTS**

For FCC Part 90 & Part 22 requirements:

- (1). Section 90.205 & 22.565: RF Output Power
- (2). Section 90.207: Modulation Characteristic
- (3). Section 90.209 & 22.359: Occupied Bandwidth
- (4). Section 90.210 & 22.359: Emission Mask
- (5). Section 90.213 & 22.355: Frequency Tolerance
- (6). Section 90.214: Transient Frequency Behavior

**3.4 CONFIGURATION OF TESTED SYSTEM**

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	Handheld UHF Transceiver	BR200	FCC ID: MMABR200P	EUT
2	Desktop charger	N/A	DC 4.2V, 500mA	Accessory
3	Adapter	BAB200	Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5V 1000mA	Accessory
4	Battery	BAB200	DC 3.7V 1750mAh	Accessory
5	Back clip	N/A	N/A	Accessory

#### 4. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description Of Test</b>	<b>Result</b>
§90.205 & 22.565	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209& 22.359	Occupied Bandwidth	Compliant
§90.210& 22.359	Emission Mask	Compliant
§90.213& 22.355	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant

**LIST OF EQUIPMENTS USED**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal. Date</b>	<b>Cal. Due</b>
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun.11 , 2020
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep.15, 2021
preamplifier	ChengYi	EMC184045SE	980508	Oct.29, 2019	Oct 28, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 12, 2019	Jun.11 , 2020
HORN ANTENNA	EM	EM-AH-10180	/	Mar.01, 2018	Feb.29, 2020
SIGNAL GENERATOR	AGILENT	E4421B	122501288	May. 13, 2019	May. 12, 2020
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 12, 2019	Jun.11 , 2020
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 09, 2019	Jan. 08, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.24, 2019	Sep.23, 2020
Modulation Domain Analyzer	HP	53310A	3121A02467	Oct.29, 2019	Oct 28, 2020
Small environmental tester	ESPEC	SH-242	--	Feb. 25, 2019	Feb. 24, 2020
RF Communication Test Set	HP	8920B	--	Jun. 12, 2019	Jun.11 , 2020
Attenuator	Weinachel Corp	58-30-33	ML030	Jun. 12, 2019	Jun.11 , 2020
Vector Analyzer	Agilent	E4440A	--	Feb. 27, 2019	Feb. 26, 2020
RF Cable	R&S	1#	--	Each time	N/A
RF Cable	R&S	2#	--	Each time	N/A

## 5. DESCRIPTION OF TEST MODES

### RF TEST MODES

The EUT (**Handheld UHF Transceiver**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

#### Analog:

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

**Note:** Only the result of the worst case was recorded in the report.

## **6. FREQUENCY TOLERANCE**

### **6.1 PROVISIONS APPLICABLE**

- a). According to FCC §2.1055, § 22.355 and §90.213, the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.
- d). According to FCC Part 22 Section 22.355, Frequency error must be kept within plus or minus 5ppm.

### **6.2 MEASUREMENT PROCEDURE**


#### **6.2.1 Frequency stability versus environmental temperature**

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-30^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

#### **6.2.2 Frequency stability versus input voltage**

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environment chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. The EUT shall be powered by DC 3.7V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 6.3 TEST SETUP BLOCK DIAGRAM

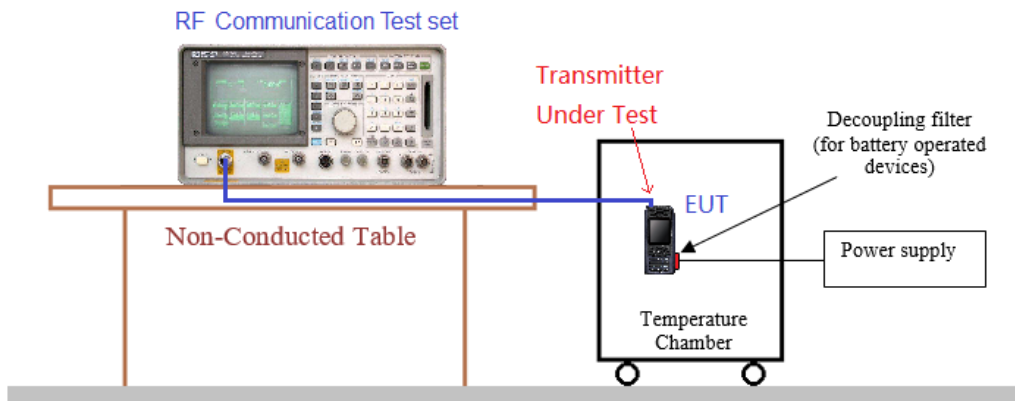



**6.4 TEST RESULTS****FCC PART 90:****UHF:****Analog:****(1) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-2W-12.5KHz**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		450.025MHz	454.025MHz	469.975MHz	
50	DC 3.70V	0.913	0.653	0.671	2.5
40	DC 3.70V	0.594	0.969	0.767	
30	DC 3.70V	0.889	1.013	0.936	
20	DC 3.70V	0.981	1.033	0.925	
10	DC 3.70V	0.731	0.971	0.795	
0	DC 3.70V	0.556	0.836	0.533	
-10	DC 3.70V	0.728	0.717	0.816	
-20	DC 3.70V	0.513	0.700	0.756	
-30	DC 3.70V	0.575	0.803	0.956	
Result	Pass				

**(2) Frequency stability versus input voltage (Battery endpoint is 3.15V) -2W-12.5KHz**

Environment Temperature(°C)	Power Supply (V)	Reference Frequency			Limit: ppm
		450.025MHz	454.025MHz	469.975MHz	
50	DC 3.15V	0.970	0.619	0.800	2.5
40	DC 3.15V	0.710	0.745	0.621	
30	DC 3.15V	0.489	0.360	0.774	
20	DC 3.15V	0.458	0.874	0.494	
10	DC 3.15V	0.434	0.624	0.471	
0	DC 3.15V	0.655	0.515	0.640	
-10	DC 3.15V	0.580	0.356	0.434	
-20	DC 3.15V	0.936	0.362	0.434	
-30	DC 3.15V	0.970	0.619	0.800	
Result	Pass				

**FCC PART 22:**

**UHF:**

**Analog:**

(1) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-**2W-12.5KHz**

Environment Temperature(°C)	Power (V)	Reference Frequency 454.025MHz	Limit: ppm
50	DC 3.70V	0.731	5
40	DC 3.70V	0.518	
30	DC 3.70V	0.651	
20	DC 3.70V	0.621	
10	DC 3.70V	1.081	
0	DC 3.70V	0.905	
-10	DC 3.70V	1.031	
-20	DC 3.70V	0.634	
-30	DC 3.70V	0.745	
Result	Pass		

(2) Frequency stability versus input voltage (Battery endpoint is 3.15V) -**2W-12.5KHz**

Environment Temperature(°C)	Power (V)	Reference Frequency 454.025MHz	Limit: ppm
50	DC 3.15V	0.799	5
40	DC 3.15V	0.455	
30	DC 3.15V	0.318	
20	DC 3.15V	0.743	
10	DC 3.15V	0.969	
0	DC 3.15V	0.589	
-10	DC 3.15V	0.537	
-20	DC 3.15V	0.429	
-30	DC 3.15V	0.371	
Result	Pass		

## 7. EMISSION BANDWIDTH

### 7.1 PROVISIONS APPLICABLE

FCC Part 90 & FCC Part 22:

The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.


### 7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 3). Set SPA Center Frequency = fundamental frequency, RBW=100Hz.VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.



### 7.3 TEST SETUP BLOCK DIAGRAM

Radiation method:


#### Radiated Below 1GHz

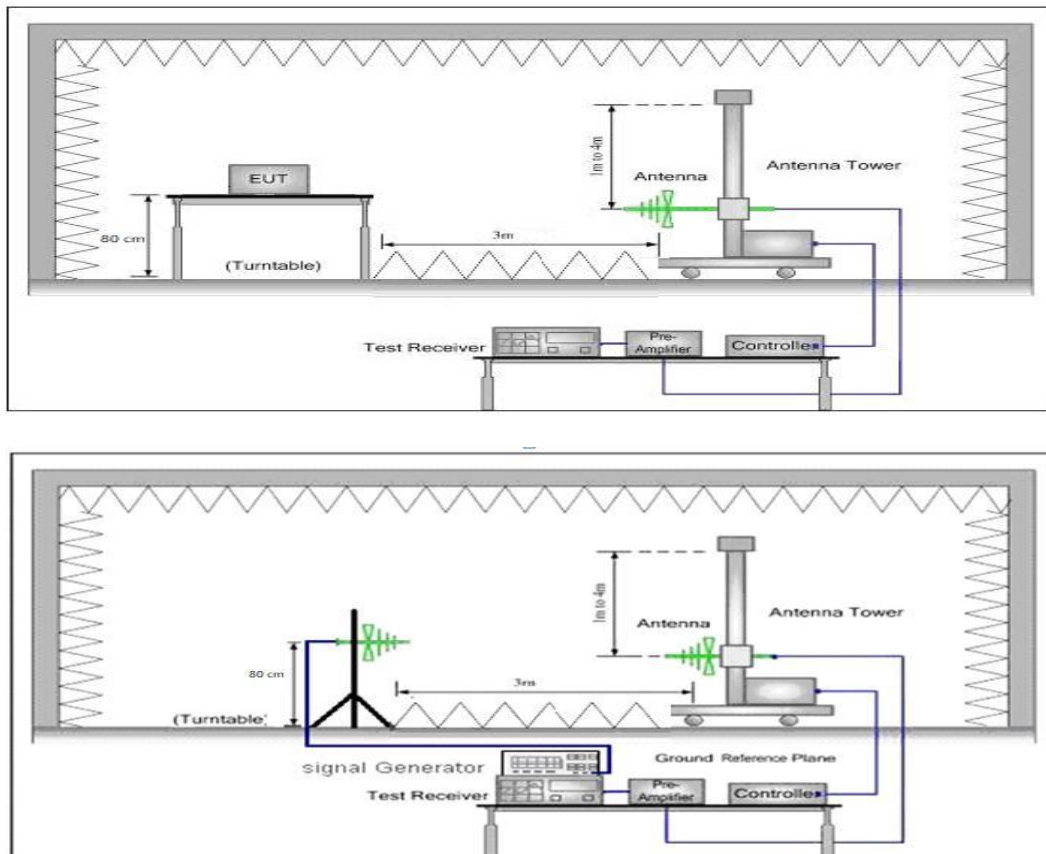

### Radiated Above 1 GHz

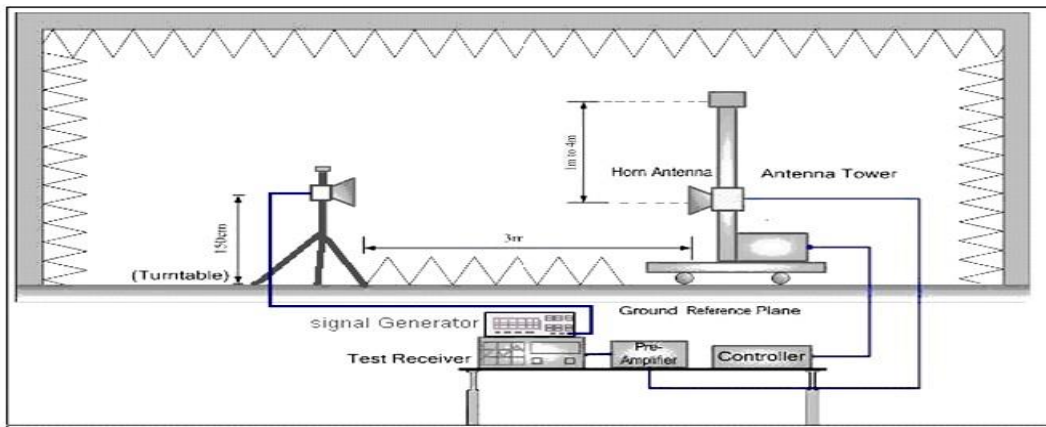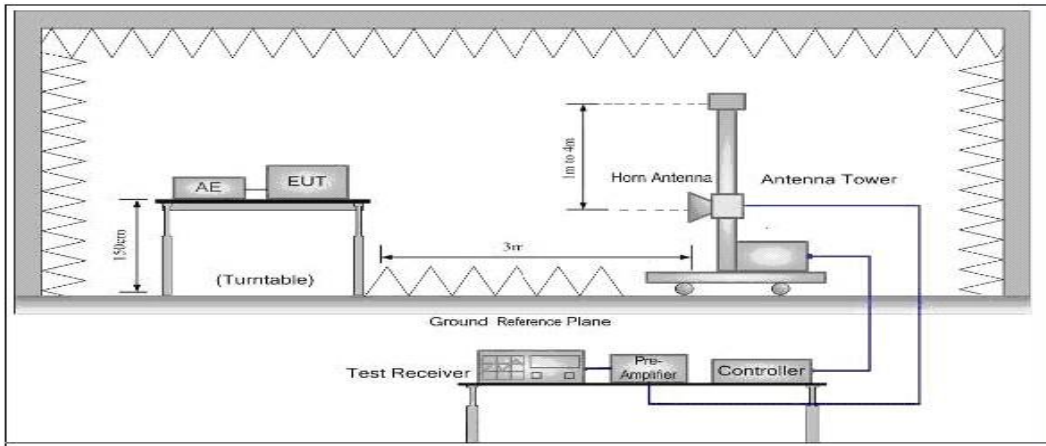

### Conduction method:

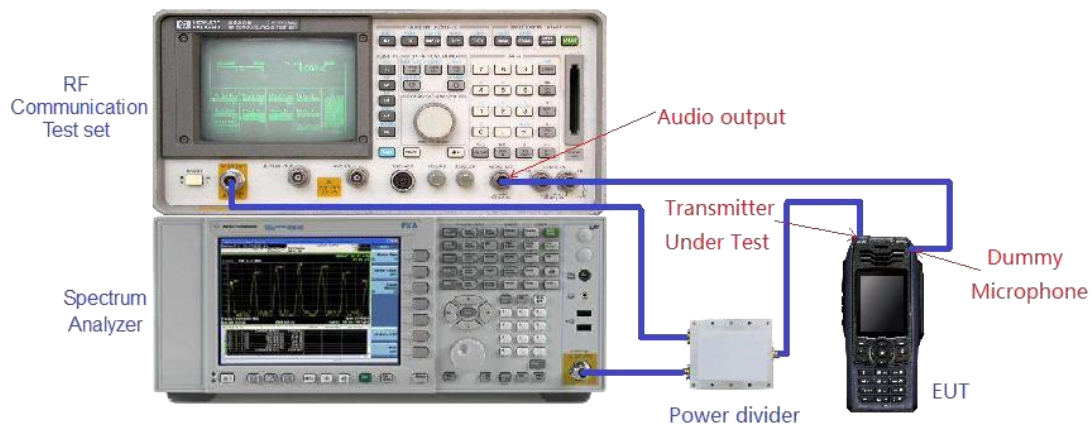


**7.4 MEASUREMENT RESULT**


**UHF:**  
**Analog:**

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
450.025MHz	10.253 KHz	11.25 KHz	Pass
454.025MHz	10.243 KHz	11.25 KHz	Pass
469.975MHz	10.207 KHz	11.25 KHz	Pass


**Occupied bandwidth of Bottom Channel (450.025MHz)-2W**

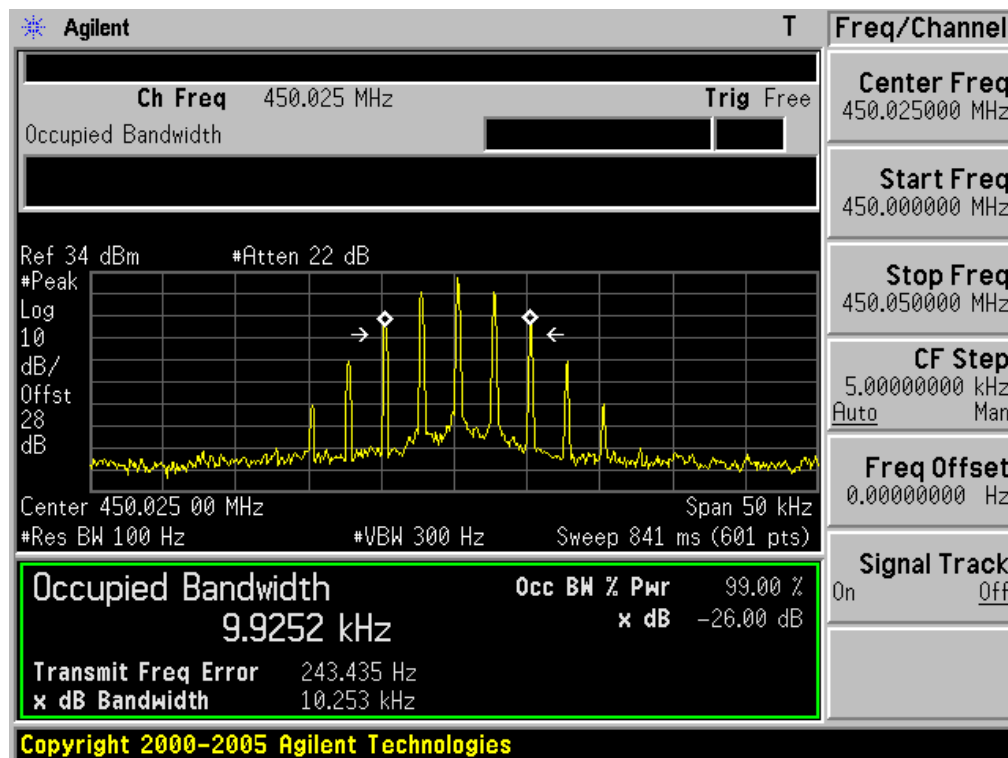

**Occupied bandwidth of Middle Channel (454.025MHz)-2W**

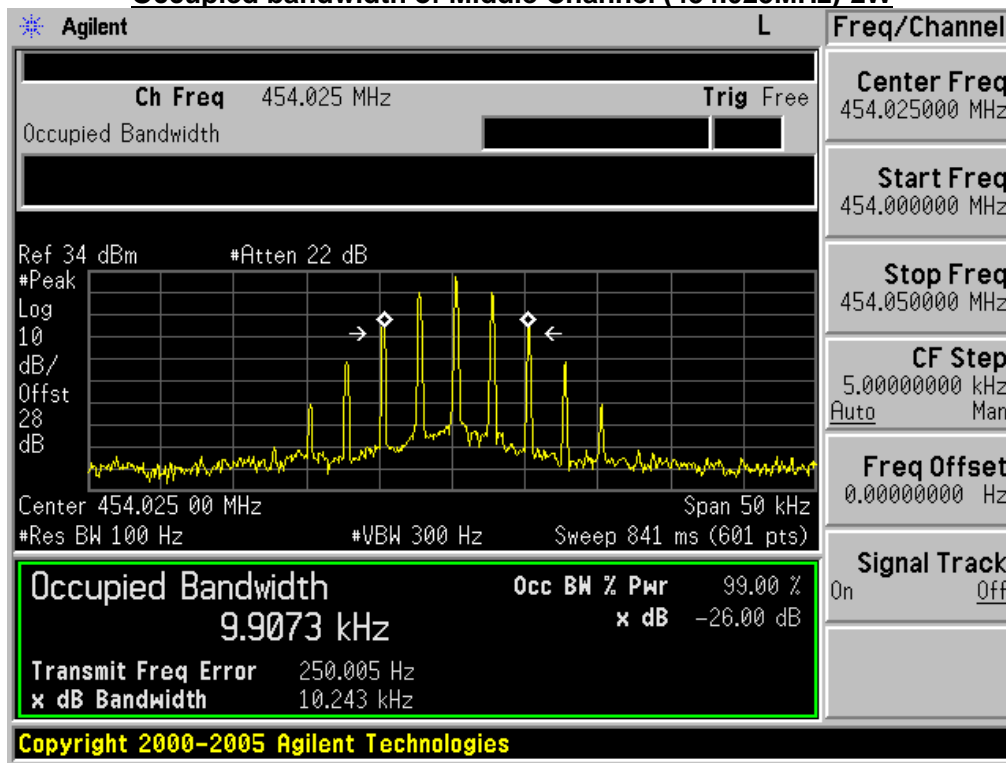

**Occupied bandwidth of Top Channel (469.975MHz)-2W**

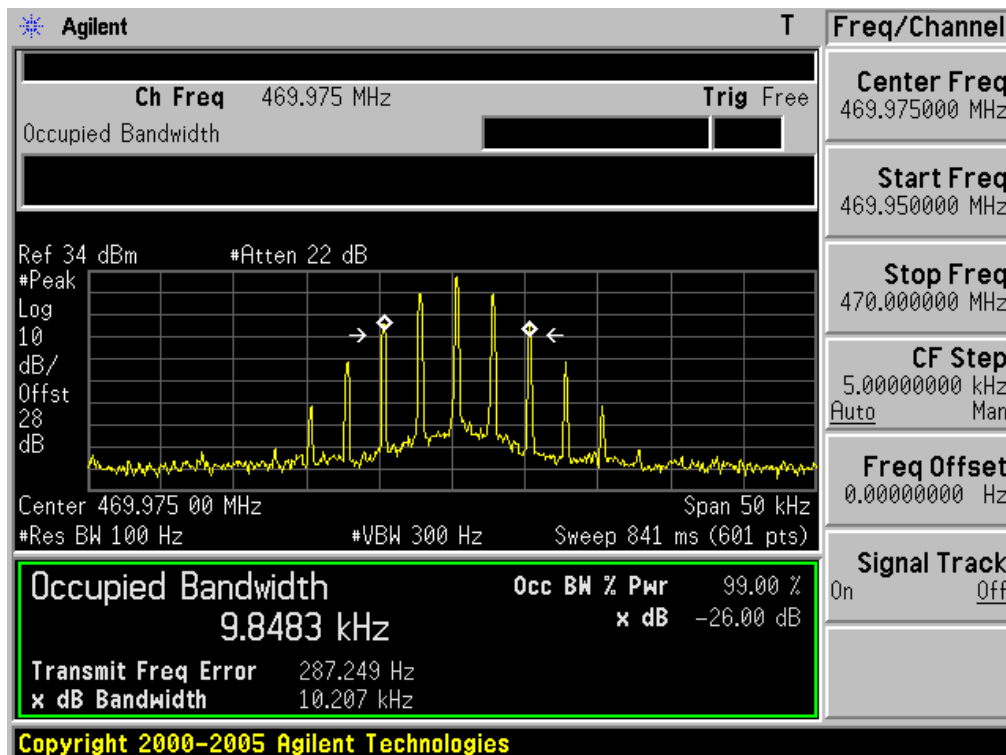

## 7. UNWANTED RADIATION

### 8.1 PROVISIONS APPLICABLE

According to FCC §2.1049, §22.359 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

Emission Mask D -for 12.5 KHz Channel Separation:

- (1). On any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 KHz removed from  $f_0$ : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in KHz)  $f_0$  of more than 5.625 KHz but no more than 12.5 KHz: At least  $7.27(f_d - 2.88 \text{ KHz})$  dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in KHz)  $f_0$  of more than 12.5 KHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is lesser attenuation.

According to FCC §22.359:

- (a) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 8.2 MEASUREMENT PROCEDURE



- (1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

### 8.3 TEST SETUP BLOCK DIAGRAM


#### SUBSTITUTION METHOD: (Radiated Emissions)

Radiation method:


#### Radiated Below 1GHz

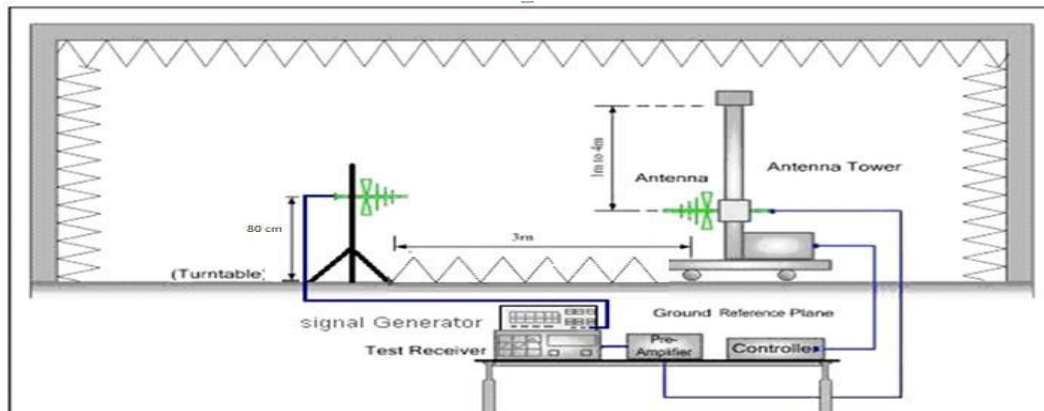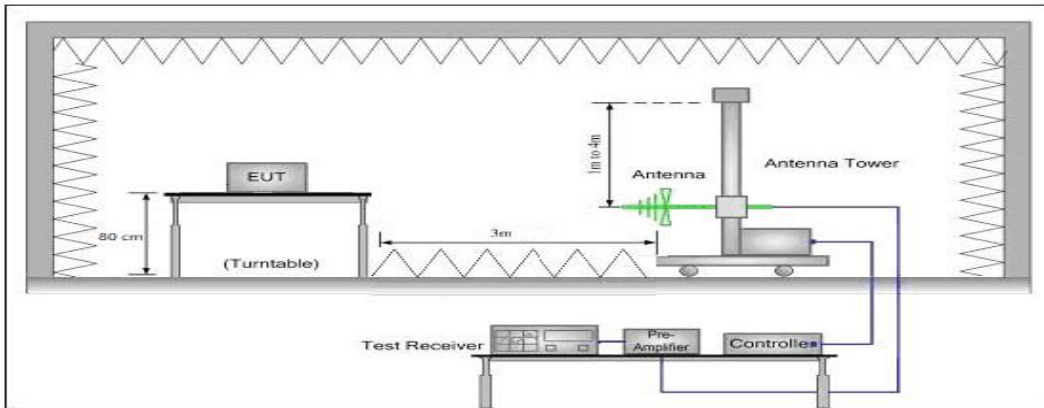

#### Radiated Above 1 GHz

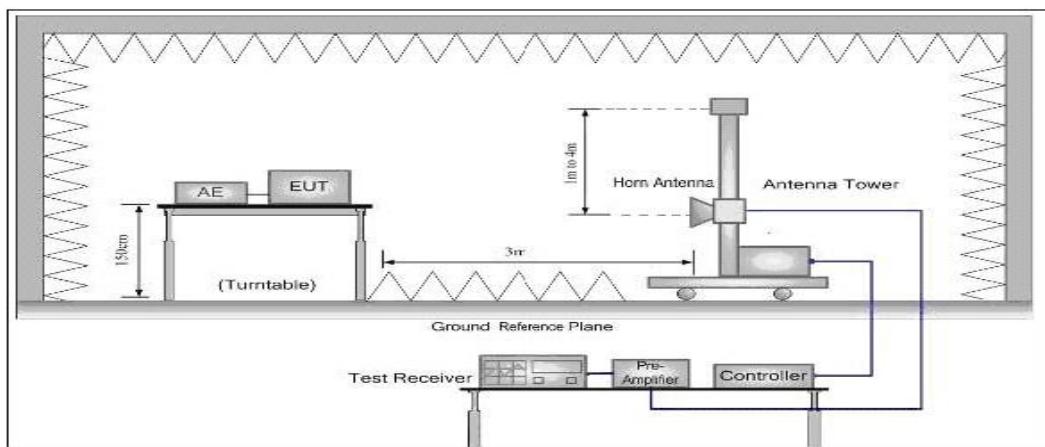



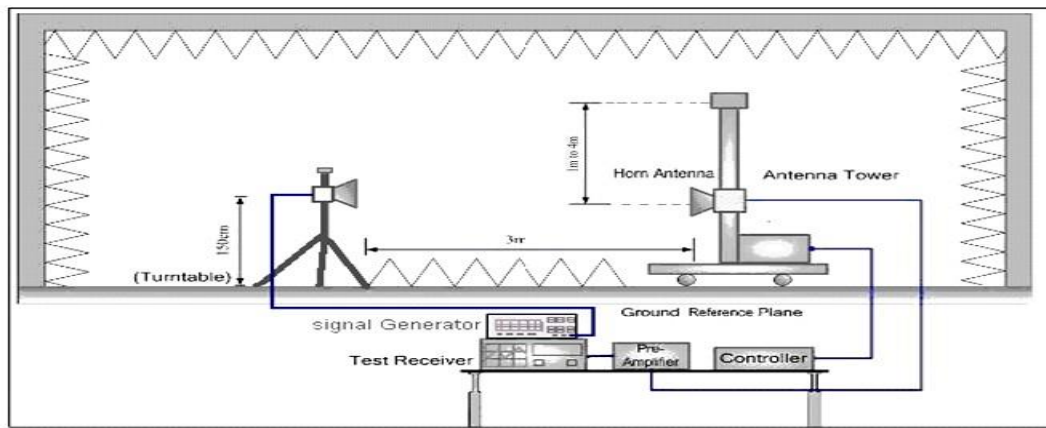

## 8.4 MEASUREMENT RESULTS:

### Applicable Standard

FCC §2.1053, §22.359 and §90.210

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency ( $f_d$  in KHz) for of more than 12.5 KHz: at least  $50+10 \log(P)$  dB or 70 dB, whichever is lesser attenuation.

### Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.

### Limit: FCC PART 90:


At least  $50+10 \log (P) = 50+10 \log (2) = 53.01$  (dB)—2W 33.01-53.01=-20 dBm

### FCC PART 22:

At least  $43+10 \log (P) = 43+10 \log (2) = 46.01$  (dB)—2W 33.01-46.01=-13 dBm

**UHF:**

**Measurement Result for 12.5 KHz Channel Separation @ 450.025MHz-2W-Horizontal**

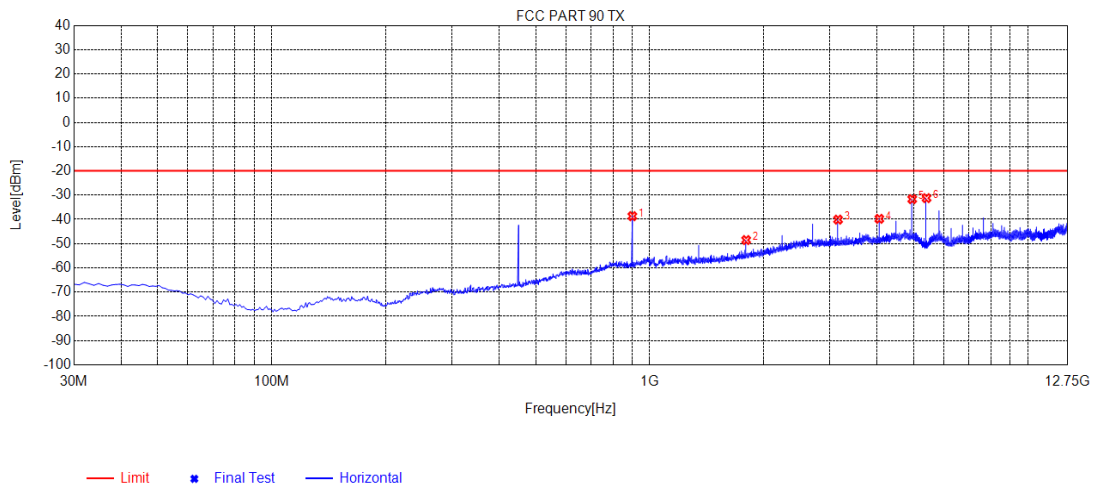


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	900.0900	-81.62	-38.68	-20.00	18.68	42.94	24	Horizontal
2	1800.2550	-47.56	-48.52	-20.00	28.52	-0.96	343	Horizontal
3	3150.4650	-45.65	-40.09	-20.00	20.09	5.56	343	Horizontal
4	4050.6051	-47.70	-39.77	-20.00	19.77	7.93	351	Horizontal
5	4950.7451	-41.36	-31.65	-20.00	11.65	9.71	70	Horizontal
6	5400.8151	-41.11	-31.23	-20.00	11.23	9.88	314	Horizontal

**Note:**

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level

**Measurement Result for 12.5 KHz Channel Separation @ 450.025MHz-2W-Vertical**

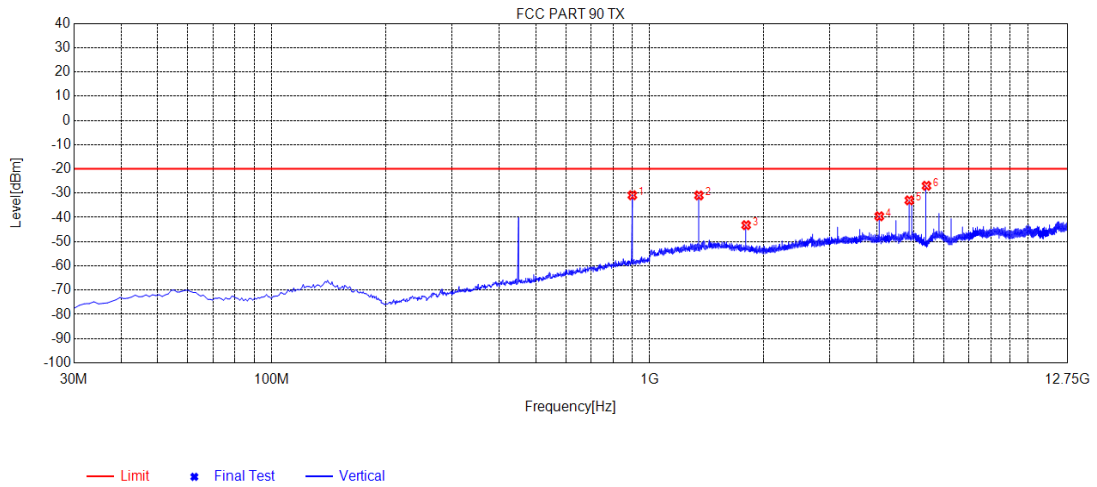


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	900.0900	-74.17	-30.86	-20.00	10.86	43.31	9	Vertical
2	1350.1850	-32.12	-30.95	-20.00	10.95	1.17	9	Vertical
3	1800.2550	-44.32	-43.21	-20.00	23.21	1.11	9	Vertical
4	4050.6051	-46.92	-39.55	-20.00	19.55	7.37	17	Vertical
5	4863.7864	-41.64	-32.97	-20.00	12.97	8.67	178	Vertical
6	5400.8151	-36.82	-26.97	-20.00	6.97	9.85	46	Vertical

**Note:**

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level

**Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz-2W-Horizontal**

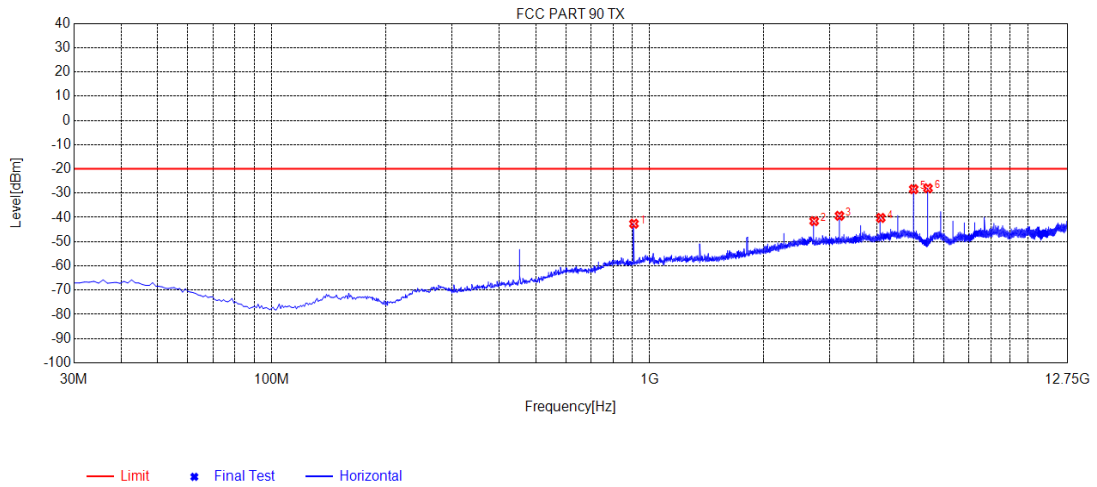


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	908.8200	-85.75	-42.62	-20.00	22.62	43.13	275	Horizontal
2	2723.8974	-46.35	-41.53	-20.00	21.53	4.82	341	Horizontal
3	3178.6679	-44.96	-39.35	-20.00	19.35	5.61	13	Horizontal
4	4087.0337	-48.27	-40.22	-20.00	20.22	8.05	5	Horizontal
5	4994.2244	-38.09	-28.35	-20.00	8.35	9.74	32	Horizontal
6	5448.9949	-37.89	-27.99	-20.00	7.99	9.90	32	Horizontal

**Note:**

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level
4. In this case, Part 22 (-13 dBm) is less than the limit of Part 90 (-20 dBm), so we do not need to test Part 22, which meets the spurious limits of PART 90+22.

**Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz-2W-Vertical**

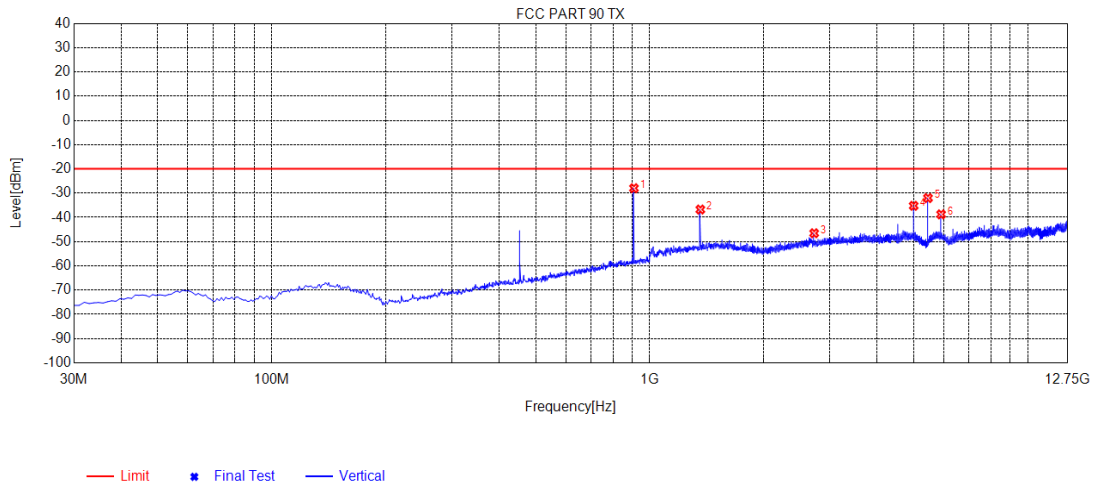


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	908.8200	-71.36	-27.96	-20.00	7.96	43.40	1	Vertical
2	1361.9362	-38.00	-36.76	-20.00	16.76	1.24	9	Vertical
3	2723.8974	-50.84	-46.54	-20.00	26.54	4.30	270	Vertical
4	4994.2244	-44.11	-35.22	-20.00	15.22	8.89	9	Vertical
5	5448.9949	-41.99	-32.03	-20.00	12.03	9.96	9	Vertical
6	5902.5903	-49.52	-38.76	-20.00	18.76	10.76	17	Vertical

**Note:**

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level
4. In this case, Part 22 (-13 dBm) is less than the limit of Part 90 (-20 dBm), so we do not need to test Part 22, which meets the spurious limits of PART 90+22.

**Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz-2W-Horizontal**

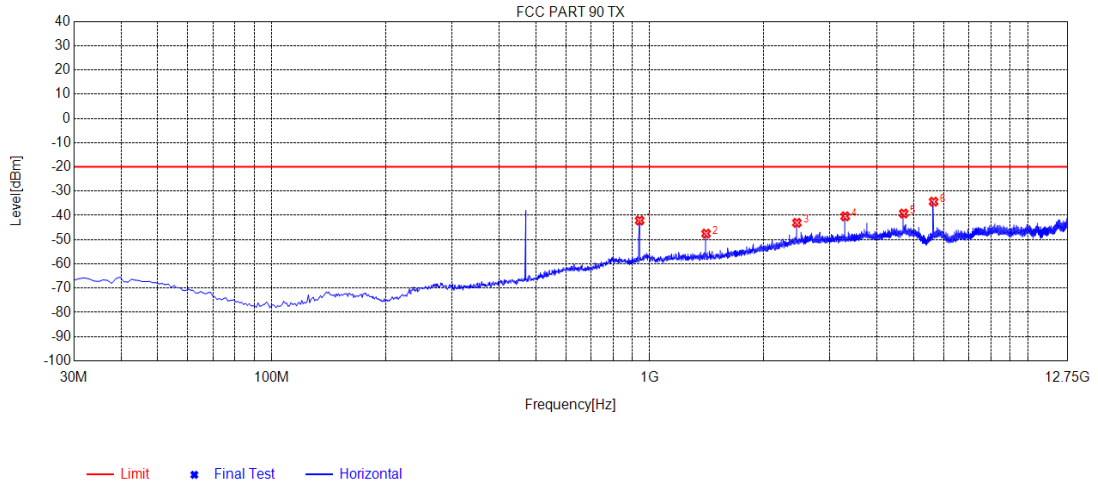


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	940.8300	-85.95	-42.12	-20.00	22.12	43.83	162	Horizontal
2	1410.1160	-44.13	-47.53	-20.00	27.53	-3.40	313	Horizontal
3	2452.4452	-47.14	-43.07	-20.00	23.07	4.07	57	Horizontal
4	3290.3040	-46.21	-40.40	-20.00	20.40	5.81	11	Horizontal
5	4699.2699	-48.81	-39.23	-20.00	19.23	9.58	38	Horizontal
6	5639.3639	-44.51	-34.34	-20.00	14.34	10.17	29	Horizontal

**Note:**

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level

**Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz-2W -Vertical**

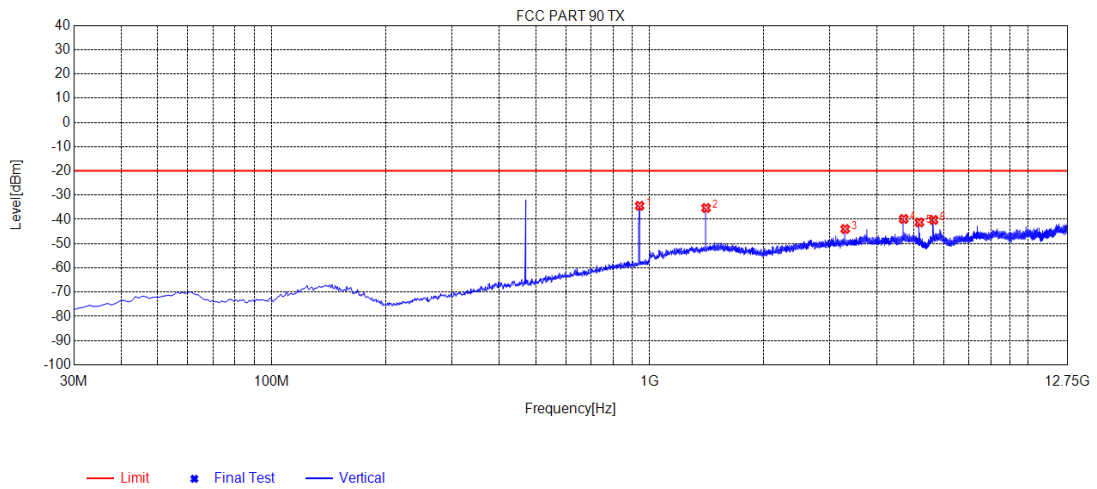

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	940.8300	-78.14	-34.41	-20.00	14.41	43.73	9	Vertical
2	1410.1160	-36.87	-35.31	-20.00	15.31	1.56	26	Vertical
3	3290.3040	-49.67	-43.97	-20.00	23.97	5.70	336	Vertical
4	4700.4450	-48.23	-39.83	-20.00	19.83	8.40	1	Vertical
5	5170.4920	-50.55	-41.25	-20.00	21.25	9.30	1	Vertical
6	5639.3639	-50.55	-40.23	-20.00	20.23	10.32	9	Vertical

**Note:**

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level

### **8.5 EMISSION MASK PLOT**


The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.




UHF:  
 Analog:


**The Worst Emission Mask D for (450.025 MHz) of 12.5 KHz channel Separation (2W)**

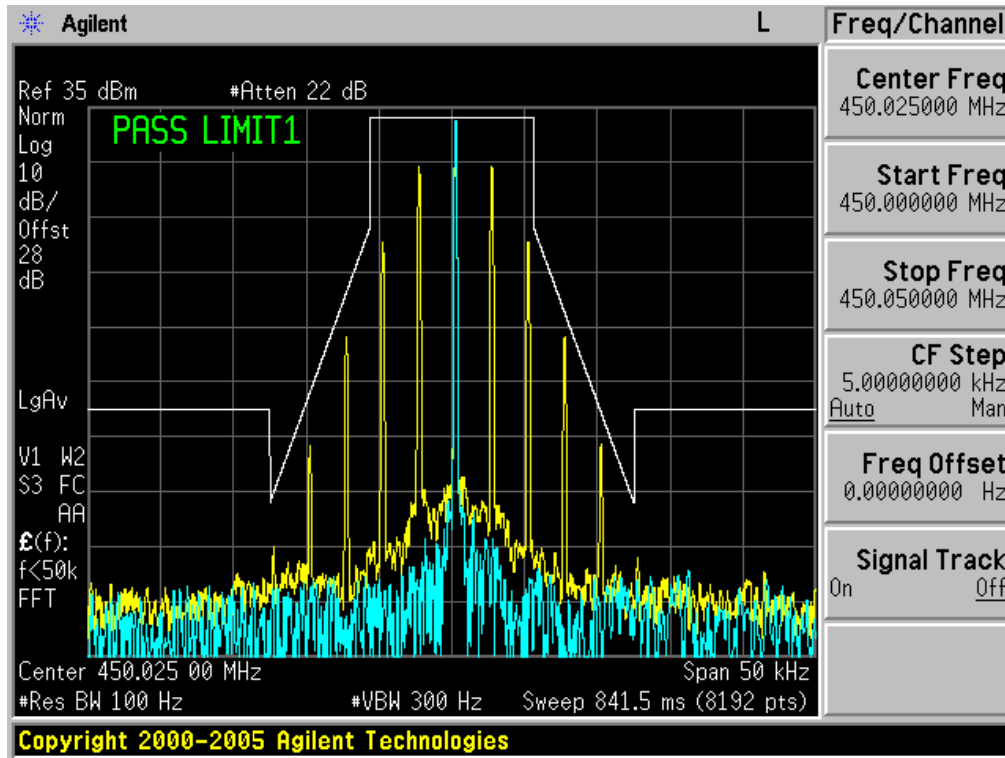


**The Worst Emission Mask D for (454.025 MHz) of 12.5 KHz channel Separation (2W)**

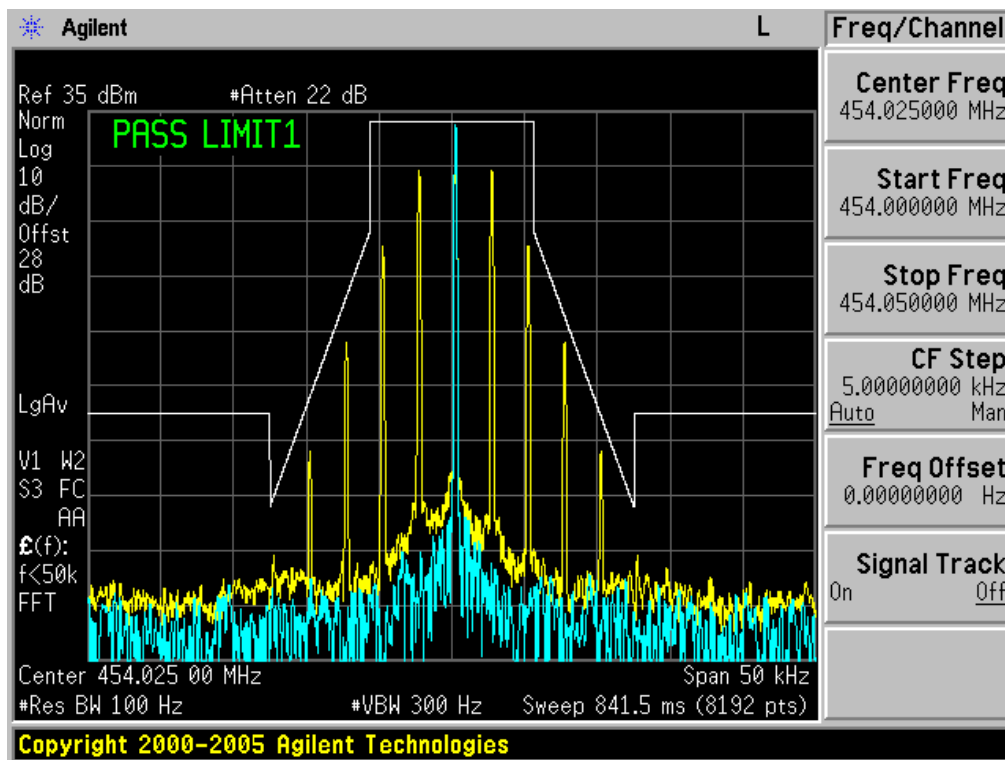

**The Worst Emission Mask D for (469.975 MHz) of 12.5 KHz channel Separation (2W)**

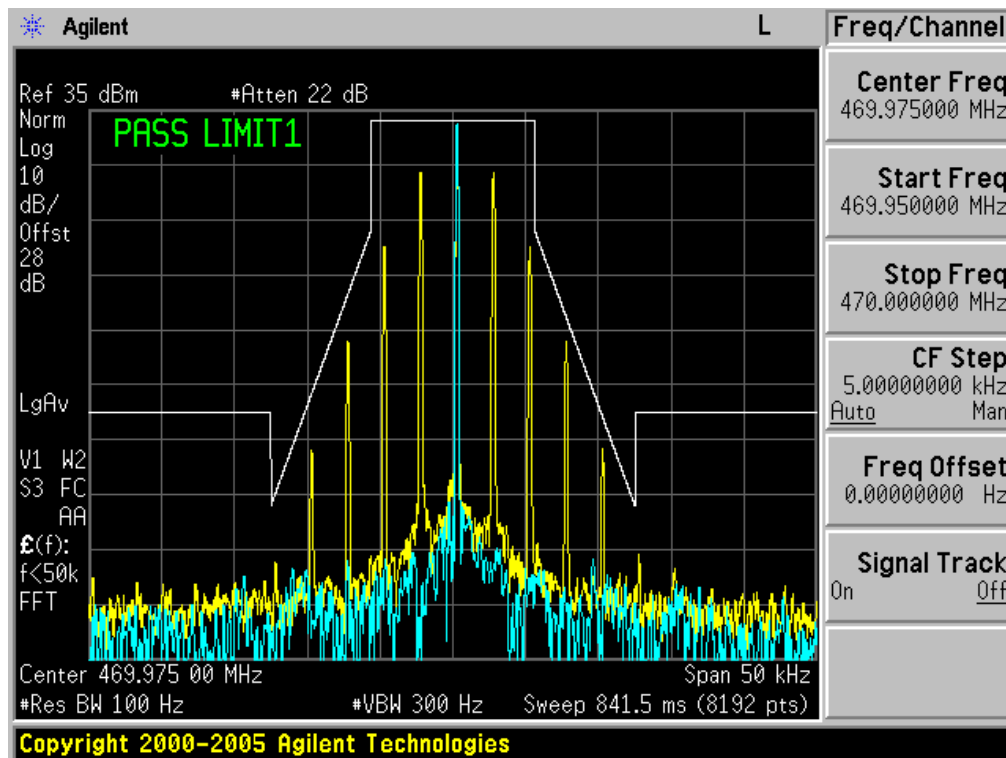

**The Worst Emission Mask § 22.359 for (454.025 MHz) of 12.5 KHz channel Separation (2W)**

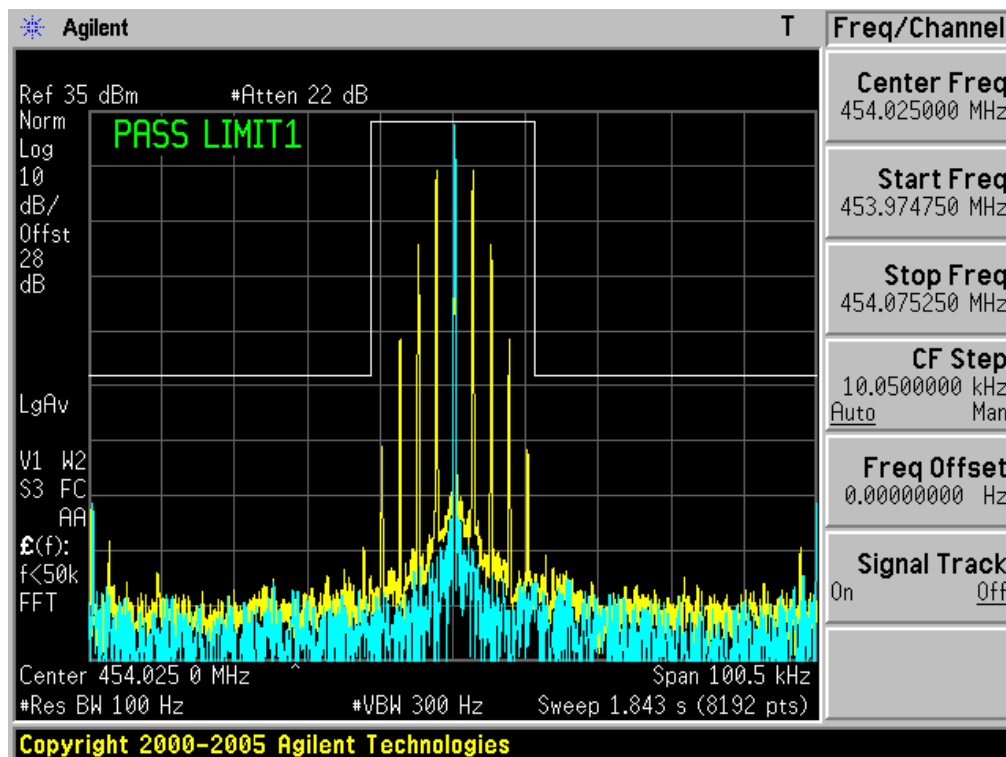

## 9. MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §90.207, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.


### 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response =  $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 KHz reference})$ .

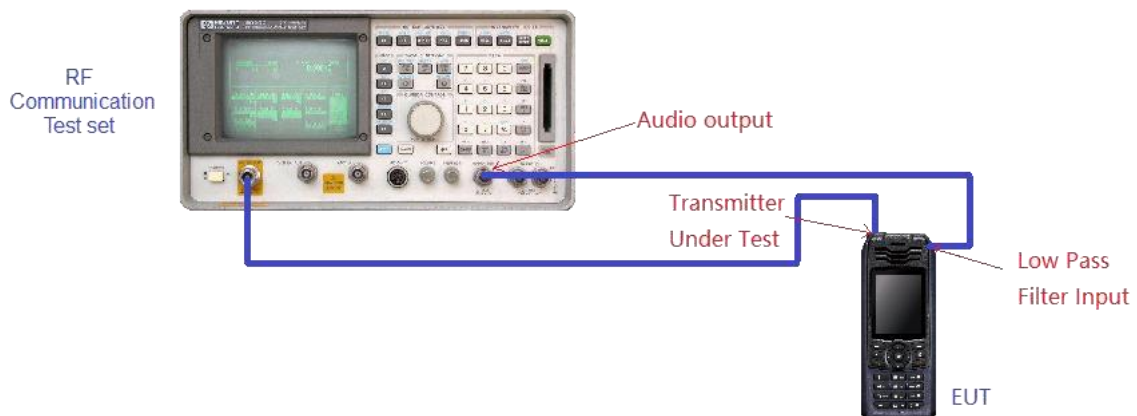

**9.3 MEASUREMENT RESULT**

**UHF:**


**Analog:**

**TEST RESULT TS FOR 2W**

**(A). MODULATION LIMIT:**

**Bottom Channel @ 12.5 KHz Channel Separations**

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.19	0.32	0.45	0.57
-15	0.26	0.43	0.59	0.75
-10	0.38	0.58	0.75	0.88
-5	0.56	0.73	0.88	0.99
0	0.68	0.93	1.03	1.21
+5	0.85	1.01	1.19	1.35
+10	0.99	1.19	1.25	1.51
+15	1.03	1.27	1.41	1.52
+20	1.05	1.31	1.40	1.47

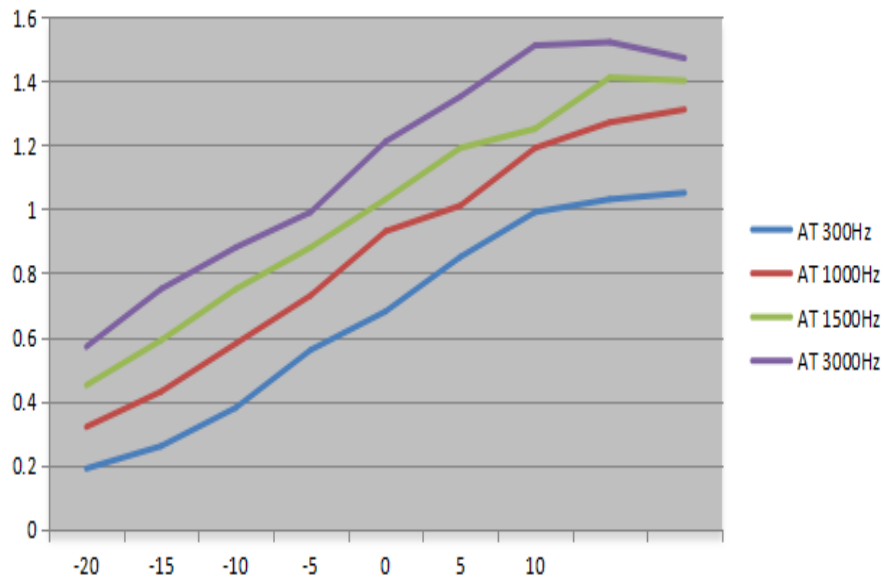


Note: All the modes had been tested, but only the worst data recorded in the report.

**(B). AUDIO FREQUENCY RESPONSE:****Bottom Channel @ 12.5 KHz Channel Separations**

<b>Frequency (Hz)</b>	<b>Deviation (KHz)</b>	<b>Audio Frequency Response(dB)</b>
100	--	--
200	--	--
300	0.19	-12.49
400	0.24	-10.46
500	0.39	-6.24
600	0.47	-4.62
700	0.56	-3.10
800	0.59	-2.64
900	0.68	-1.41
1000	0.81	0.11
1200	0.85	0.53
1400	0.99	1.85
1600	1.27	4.01
1800	1.32	4.35
2000	1.34	4.48
2400	1.38	4.74
2500	1.67	6.39
2800	1.72	6.65
3000	1.86	7.33
3200	1.55	5.74
3600	1.41	4.92
4000	1.05	2.36
4500	0.64	-1.94
5000	0.57	-2.94
5500	0.33	-7.69
6000	0.24	-10.46
6500	0.15	-14.54
7000	0.06	-22.50
7500	0.04	-26.02
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

### Frequency Response of High Channel **12.5 KHz Channel Separations**

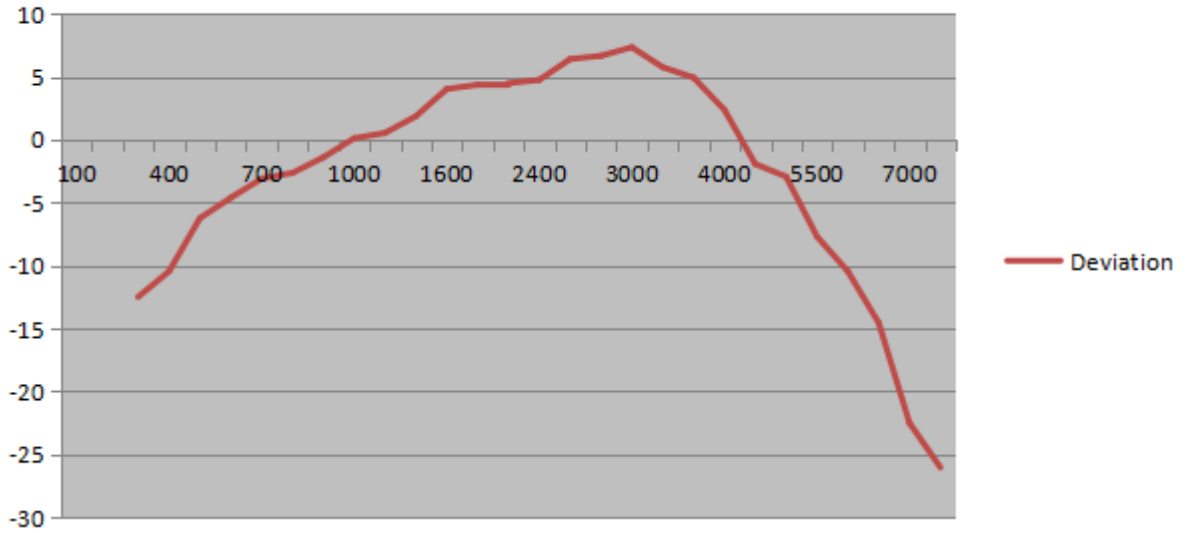

Note: All the modes had been tested, but only the worst data recorded in the report.

## 8. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER) PEAK POWER

### 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 § 22.565 and §90.205: Maximum ERP is dependent upon the station’s antenna HAAT and required service area.

### 10.2 TEST PROCEDURE

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.


In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

$$\text{EIRP} = \text{“Read Value”} + \text{Measured substitution value} + 2.15.$$


### 10.3 TEST CONFIGURATION


#### Conducted Output Power:

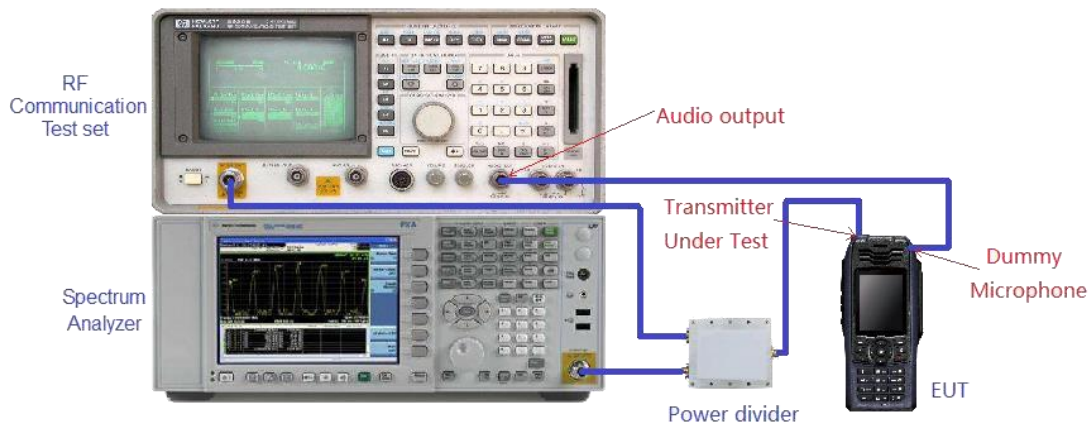



#### Effective Radiated Power

##### Radiated Below 1GHz

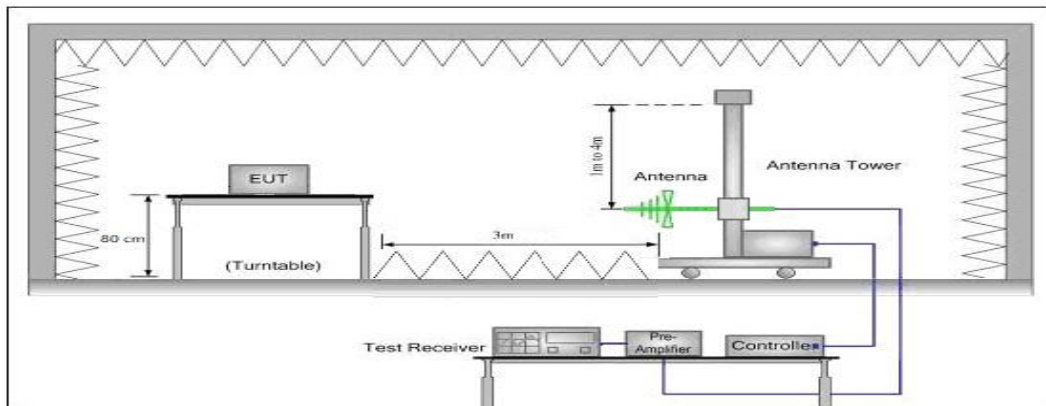

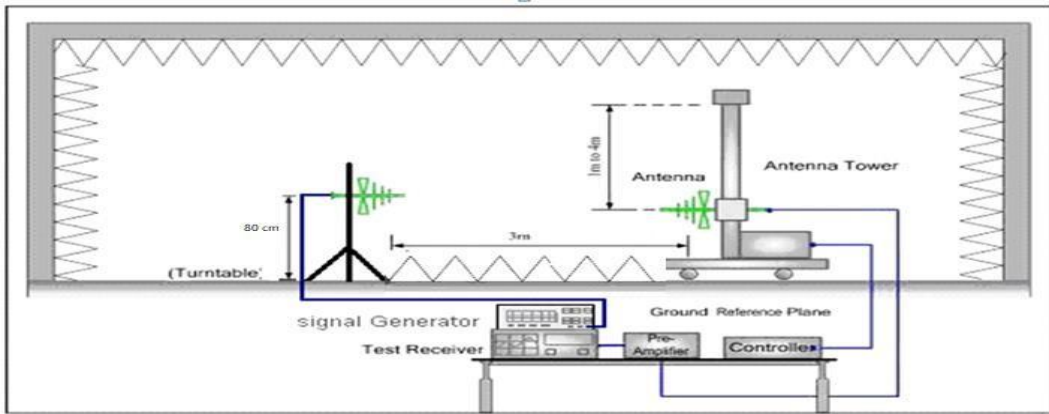

### Radiated Above 1 GHz

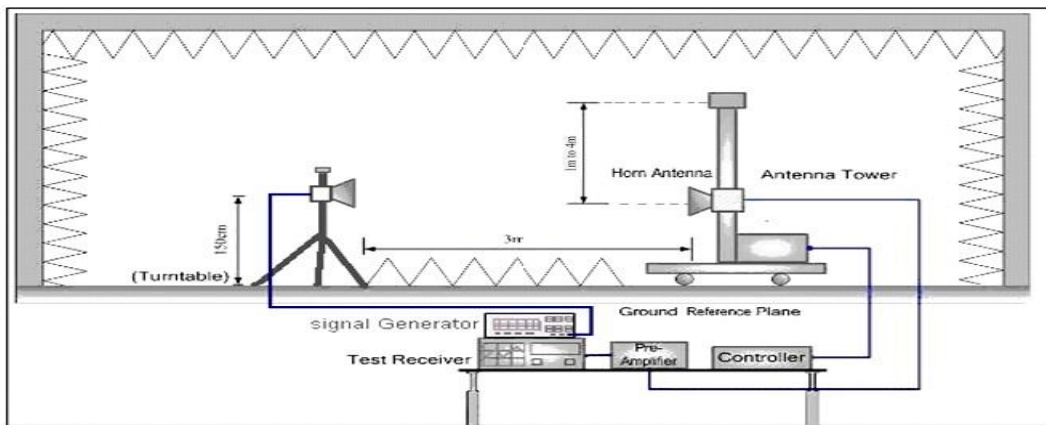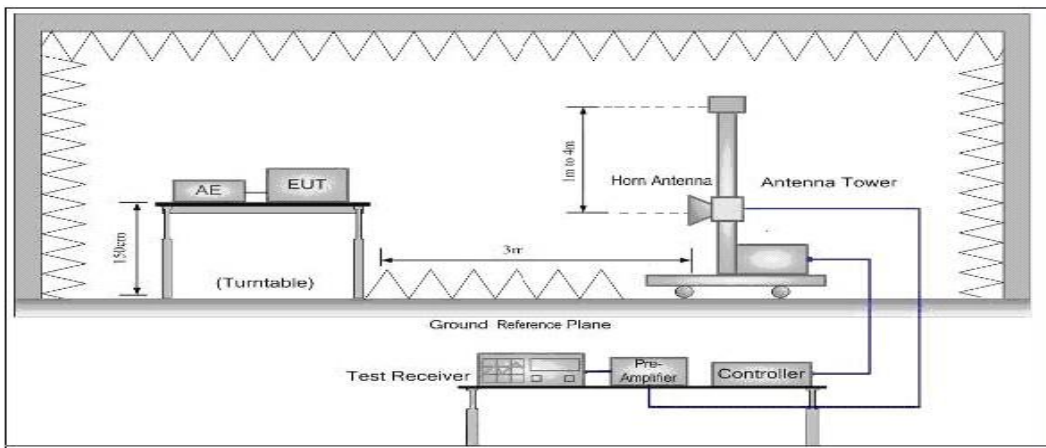



#### 10.4 TEST RESULT

The maximum Conducted Power (CP) for UHF is  
Analog: 2W for 12.5 KHz Channel Separation UHF  
Calculation Formula:  $CP = R + A + L$

Note:

- CP: The final Conducted Power
- R : The reading value from spectrum analyzer
- A : The attenuation value of the used attenuator
- L : The loss of all connection cables

UHF:

Analog:

<b>Conducted Power Measurement Results-2W</b>		
<b>Channel Separation</b>	<b>Channel</b>	<b>Measurement Result (dBm)</b>
		<b>For 33.01dBm(2W)</b>
12.5 KHz	Bottom(450.025MHz)	32.95
	Middle(454.025MHz)	32.89
	Top (469.975MHz )	32.91

<b>Radiated Power Measurement Results-2W</b>		
<b>Channel Separation</b>	<b>Channel</b>	<b>Measurement Result (dBm)</b>
		<b>For 33.01dBm(2W)</b>
12.5 KHz	Bottom(450.025MHz)	32.88
	Middle(454.025MHz)	32.82
	Top (469.975MHz )	32.87


10.5 CONDUCT SPURIOUS PLOT

FCC PART 90:


UHF:

Analog:


**Conducted Spurious Emission (worst) @ 450.025MHz With 12.5 KHz Channel Separation-2W**  
30MHz-1GHz

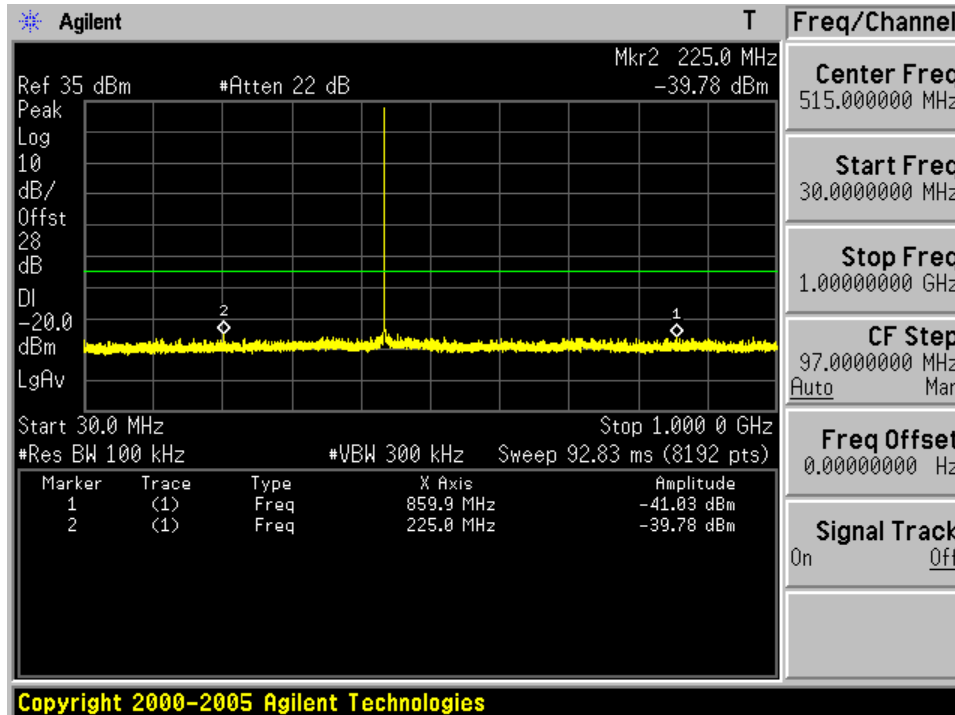


**Conduct Spurious Emission (worst) @ 450.025MHz With 12.5 KHz Channel Separation-2W**  
1GHz-12.75GHz

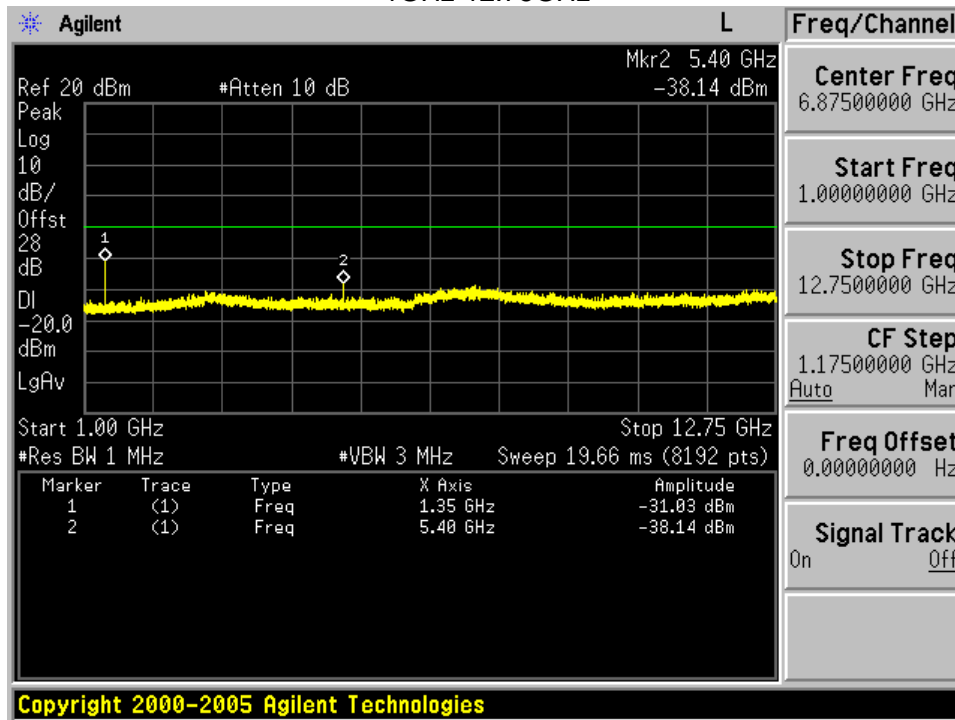


**Conducted Spurious Emission (worst) @ 454.025MHz With 12.5 KHz Channel Separation-2W**  
30MHz-1GHz

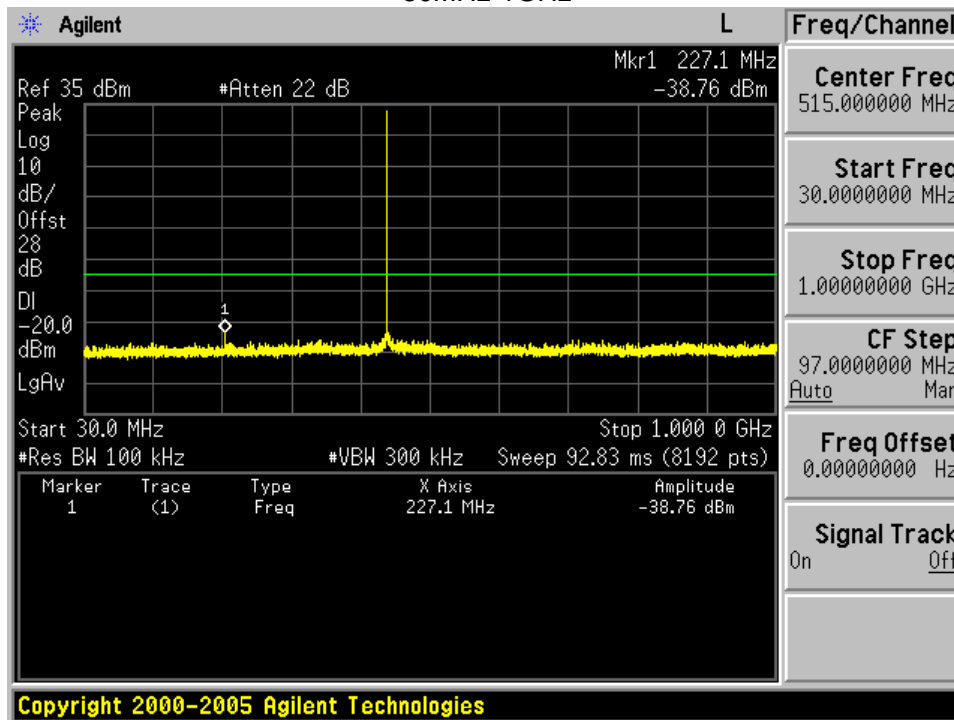


**Conduct Spurious Emission (worst) @ 454.025MHz With 12.5 KHz Channel Separation-2W**  
1GHz-12.75GHz

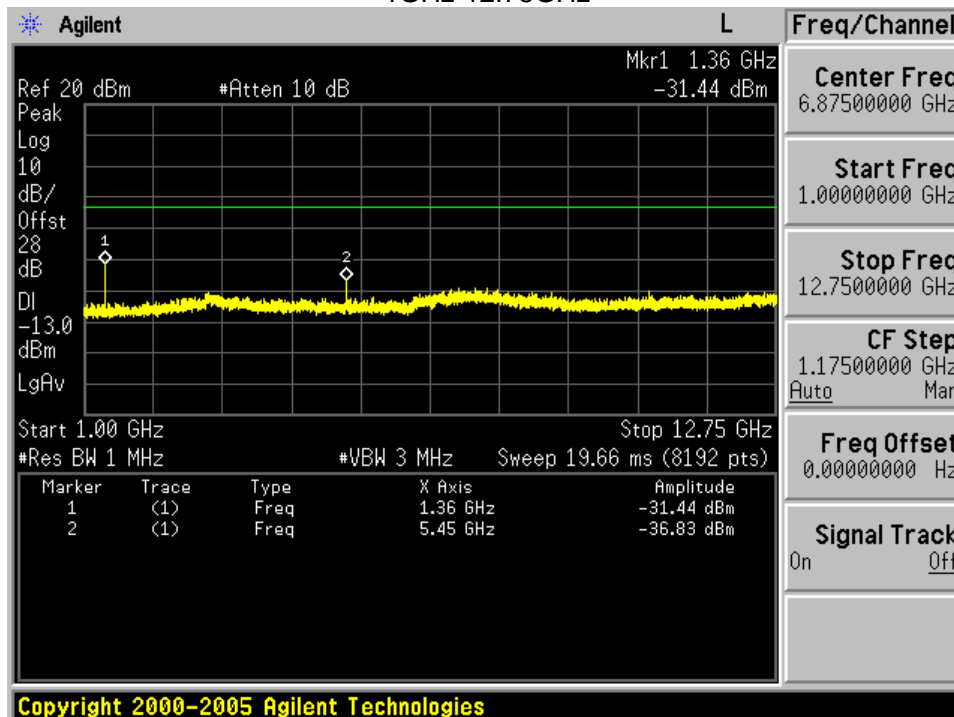

**Conducted Spurious Emission (worst) @ 469.975MHz With 12.5 KHz Channel Separation-2W**  
30MHz-1GHz

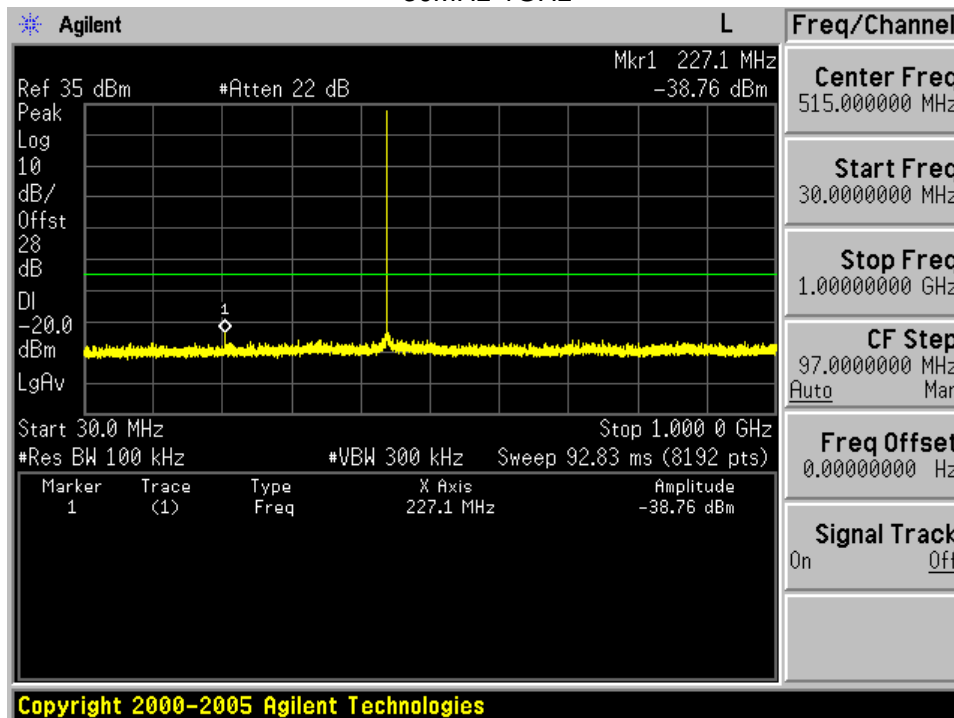


**Conduct Spurious Emission (worst) @ 469.975MHz With 12.5 KHz Channel Separation-2W**  
1GHz-12.75GHz

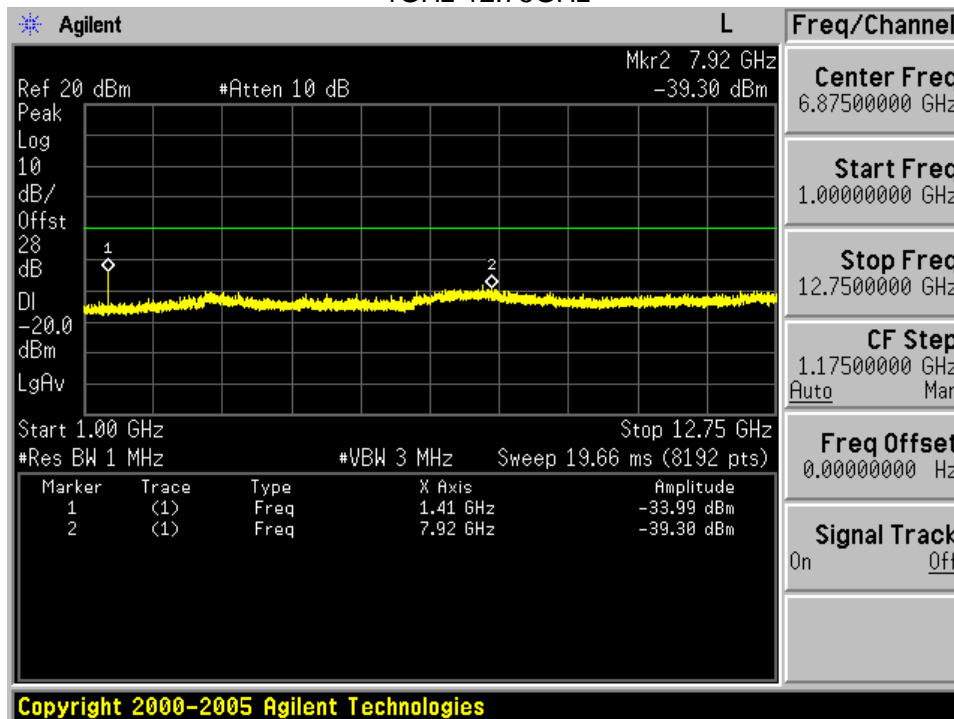

Note: All the test frequencies was tested, but only the worst data be recorded in this part.


FCC PART 22:  
 UHF:  
 Analog:

**Conducted Spurious Emission (worst) @ 454.025MHz With 12.5 KHz Channel Separation-2W**  
 30MHz-1GHz

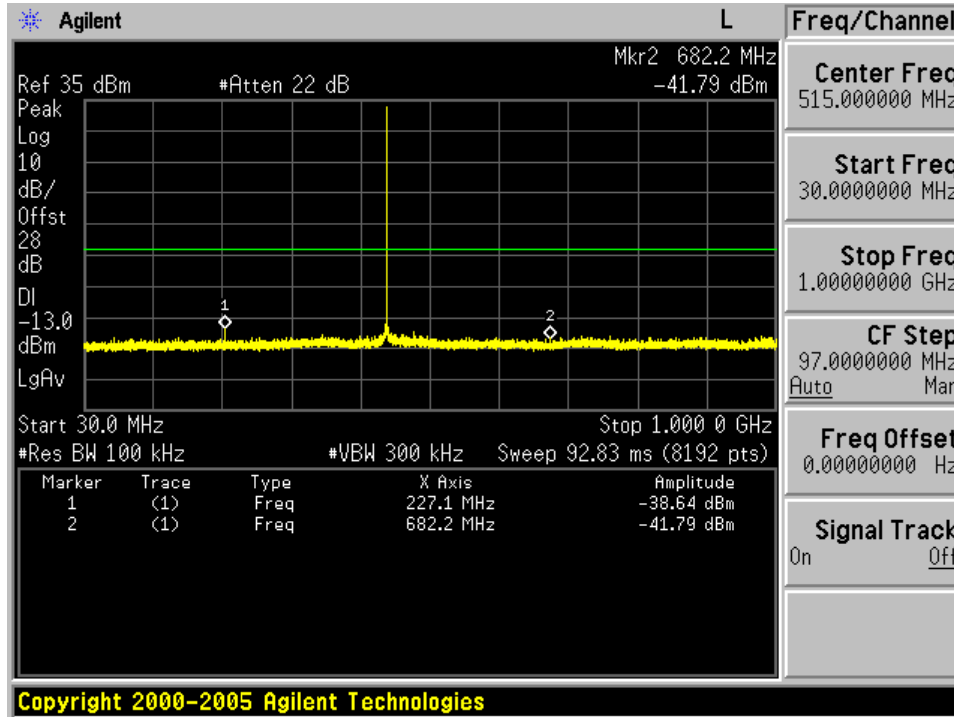

Copyright 2000-2005 Agilent Technologies

**Conduct Spurious Emission (worst) @ 454.025MHz With 12.5 KHz Channel Separation-2W**  
 1GHz-12.75GHz

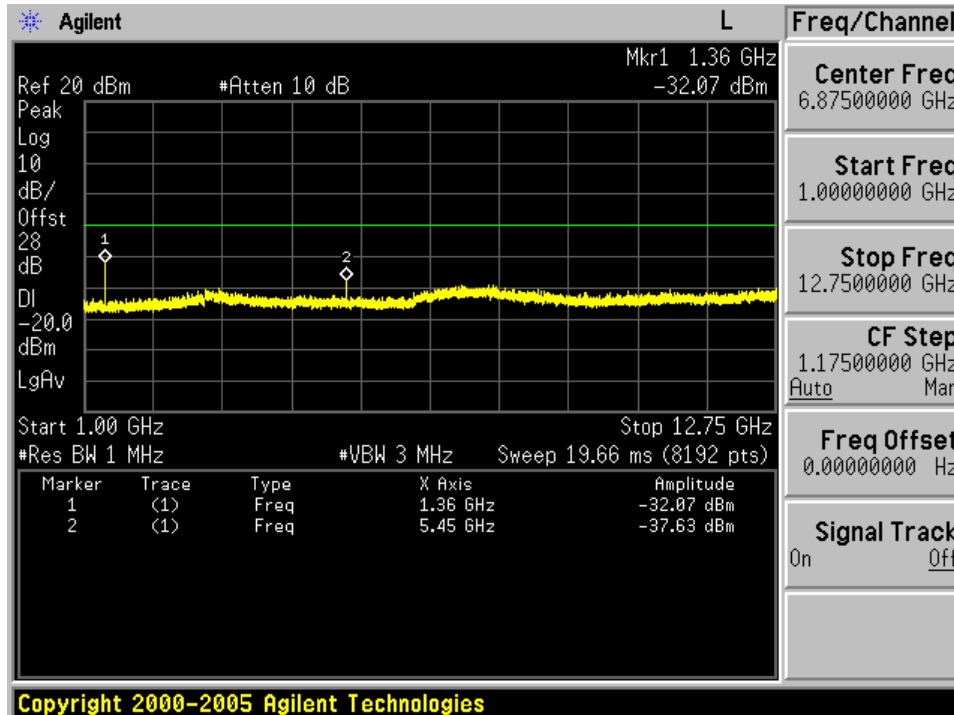

Copyright 2000-2005 Agilent Technologies

## 11. TRANSMITTER FREQUENCY BEHAVIOR

### 11.1 PROVISIONS APPLICABLE

FCC §90.214

Time intervals <sup>1, 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t <sub>1</sub> <sup>4</sup> .....	± 25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub> .....	± 12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> .....	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t <sub>1</sub> <sup>4</sup> .....	± 12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub> .....	± 6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> .....	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t <sub>1</sub> <sup>4</sup> .....	± 6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub> .....	± 3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> .....	± 6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup> t<sub>on</sub> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### 11.2 TEST METHOD

TIA/EIA-603 2.2.19.3

### 11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


**t<sub>on</sub>**: The switch-on instant t<sub>on</sub> of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

**t<sub>1</sub>**: period of time starting at t<sub>on</sub> and finishing according to above 11.1

**t<sub>2</sub>**: period of time starting at the end of t<sub>1</sub> and finishing according to above 11.1

**t<sub>off</sub>**: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

**t<sub>3</sub>**: period of time that finishing at t<sub>off</sub> and starting according to above 11.1

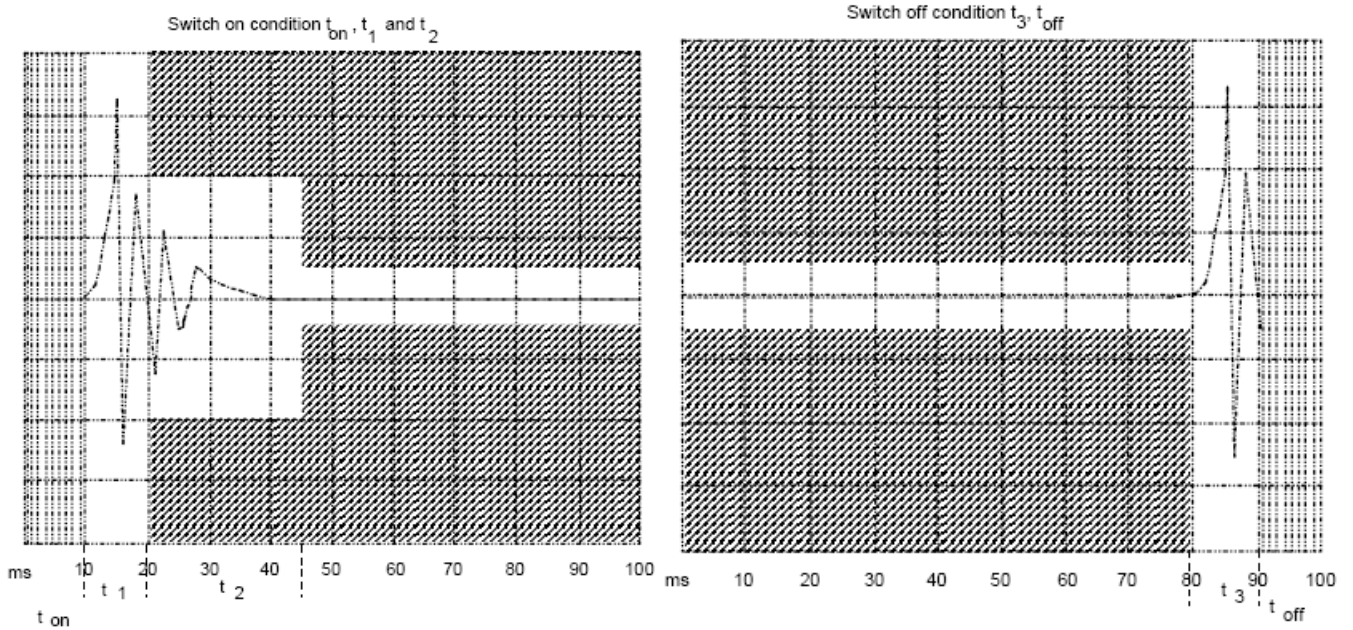





### 11.4 MEASURE RESULT

UHF:

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--Off to On

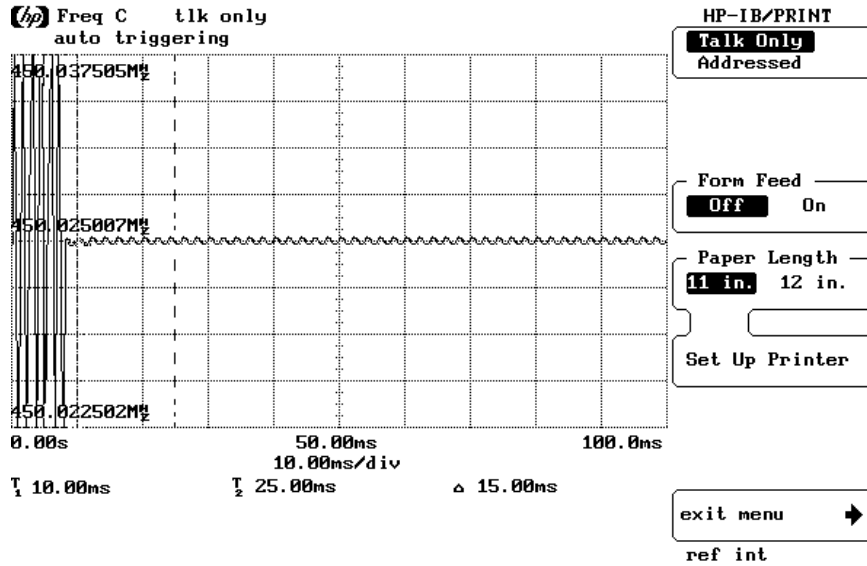

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--On to Off

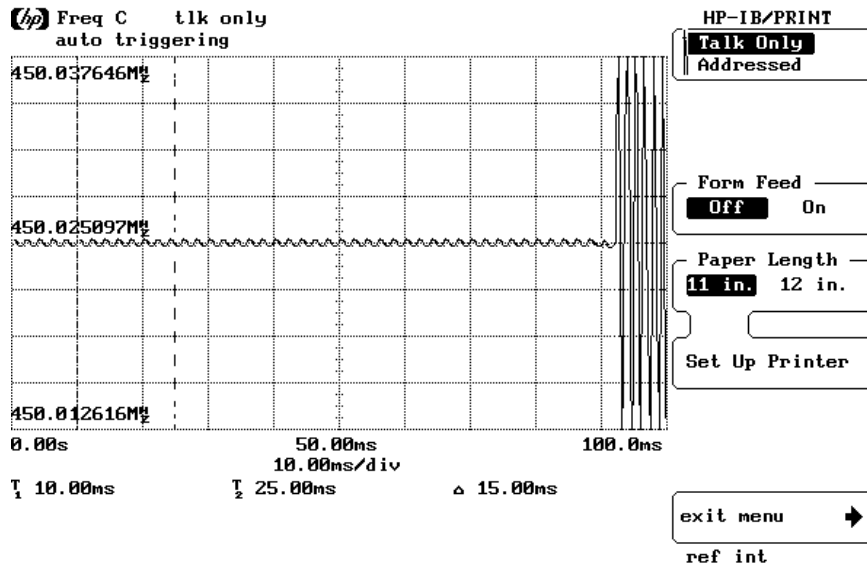

## 9. AUDIO LOW PASS FILTER RESPONSE

### 12.1. TEST LIMITS


**2.1047(a):** Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

**90.242(b)(8):** Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 – 20 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz
20 – 30 KHz	50dB

### 12.2. METHOD OF MEASUREMENTS

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

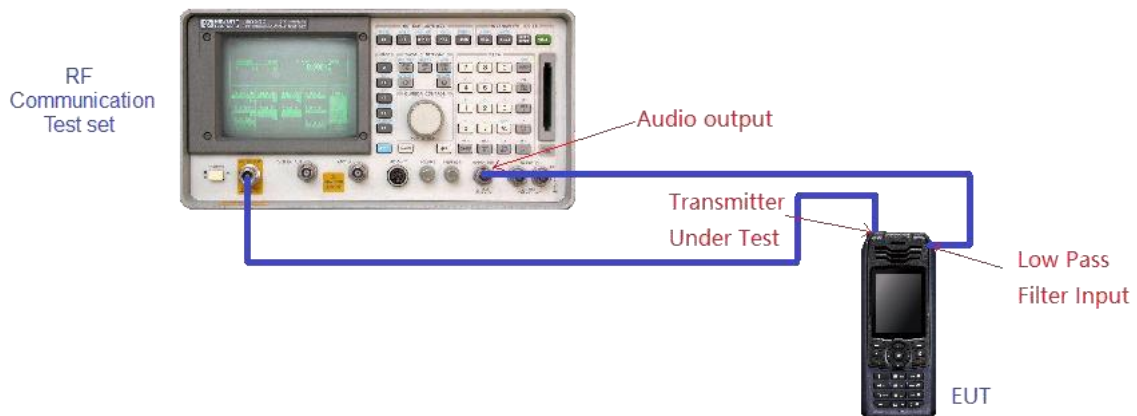


**12.3.MEASURE RESULT**


Analog:

**12.5 KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION STATES (TEST RESULT FOR UHF)-2W**


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1	0	/
3	-1.58	0.00
4	-8.15	-5.00
5	-12.02	-8.87
6	-15.19	-12.04
7	-17.87	-14.72
8	-20.19	-17.04
9	-22.23	-19.08
10	-24.07	-20.92
15	-31.15	-28.00
20	-31.15	-28.00
30	-31.15	-28.00
50	-31.15	-28.00
70	-31.15	-28.00

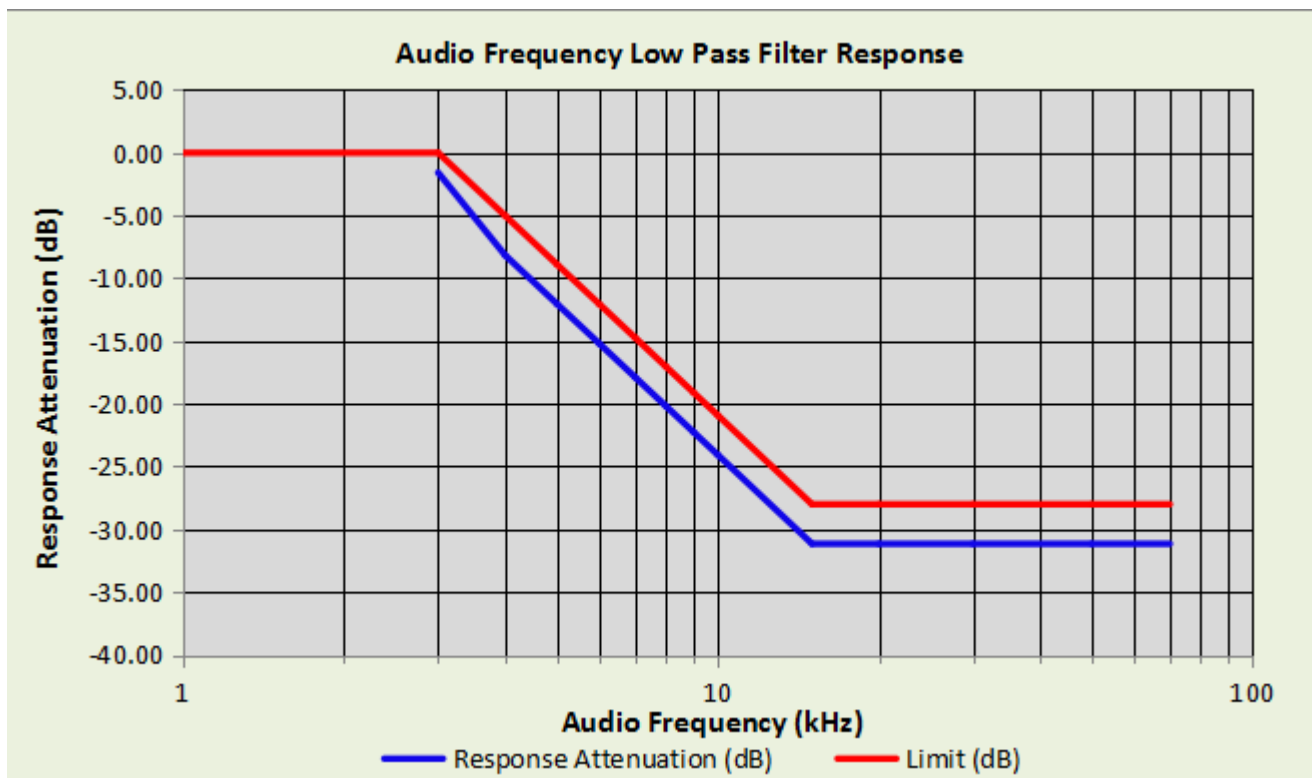

**APPENDIX I: PHOTOGRAPHS OF SETUP**  
**RADIATED EMISSION TEST SETUP**

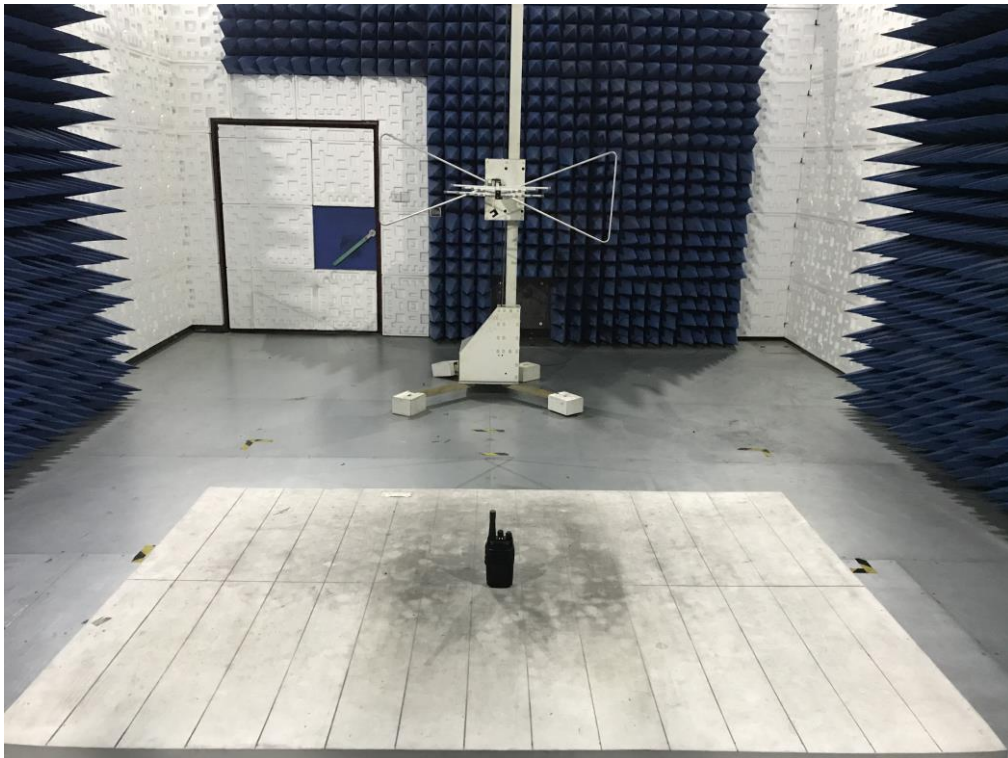

### CONDUCTED TEST SETUP

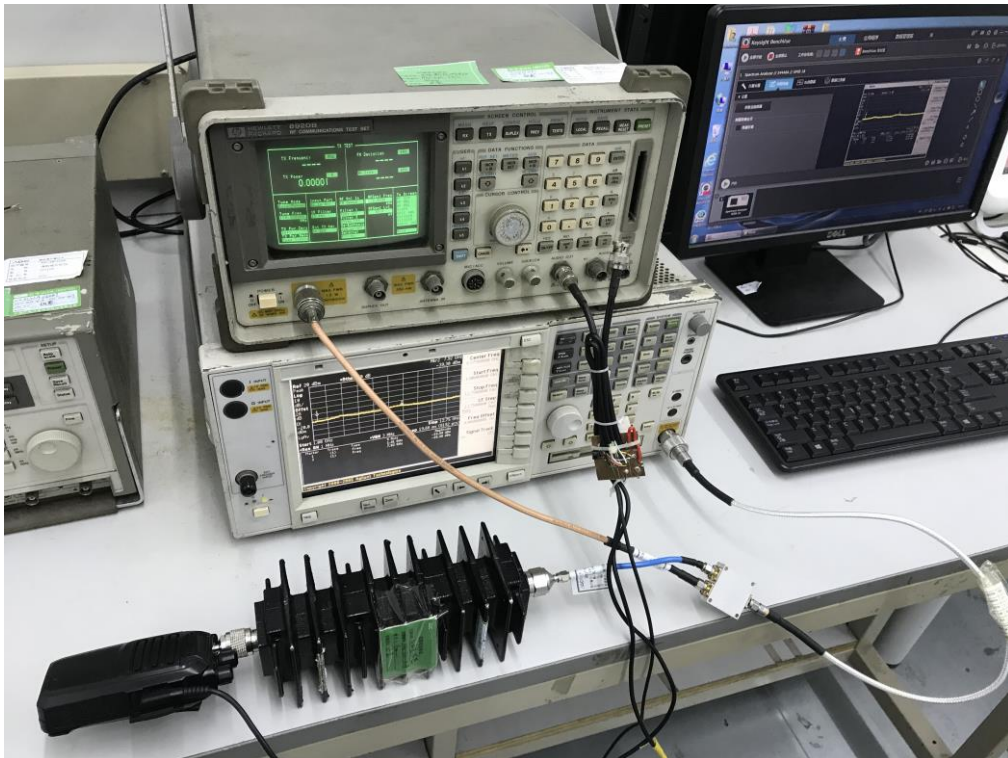

## APPENDIX II PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT





RIGHT VIEW OF EUT




OPEN VIEW-1 OF EUT




OPEN VIEW-2 OF EUT




OPEN VIEW-3 OF EUT

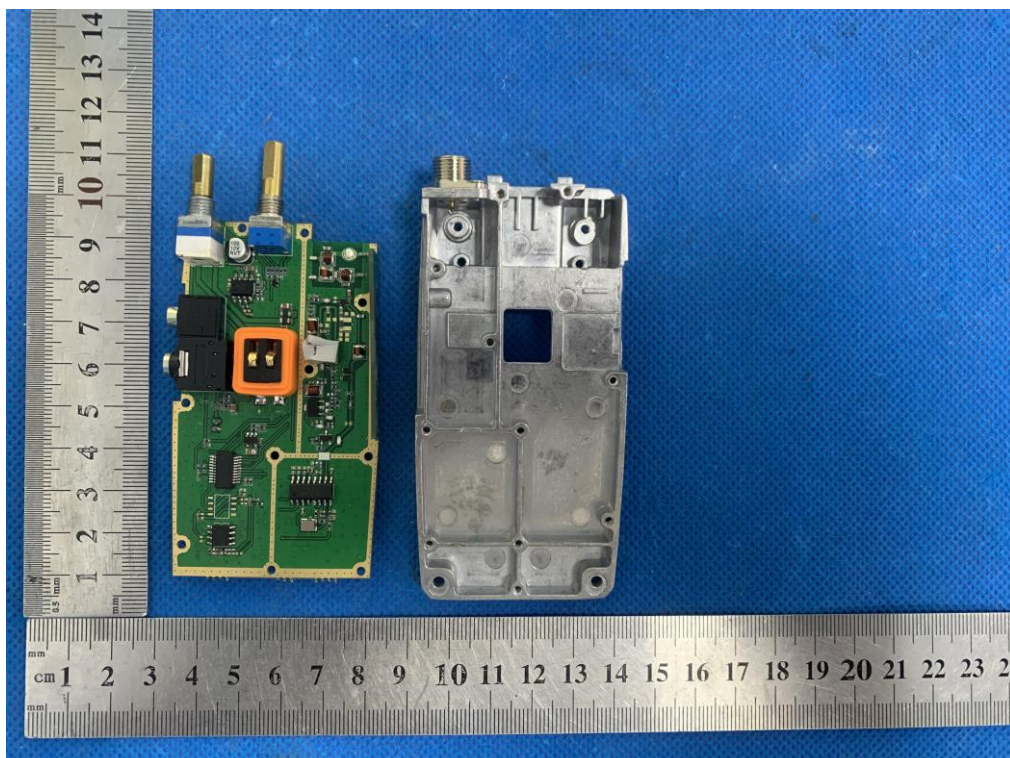


INTERNAL VIEW-1 OF EUT

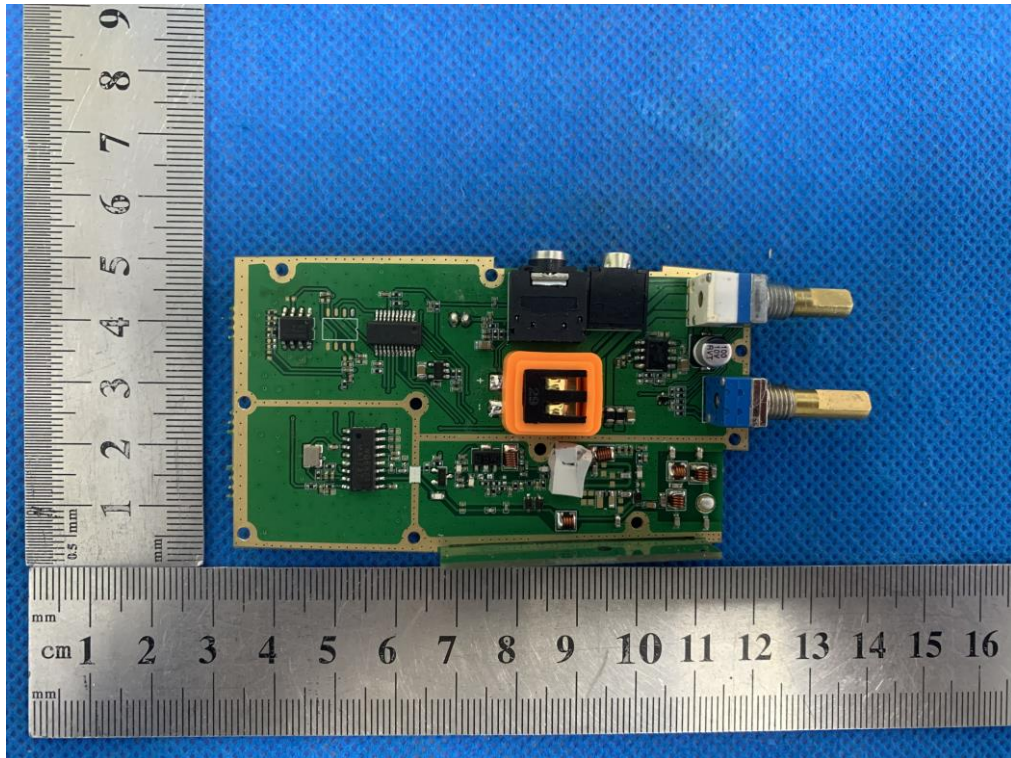


INTERNAL VIEW-2 OF EUT

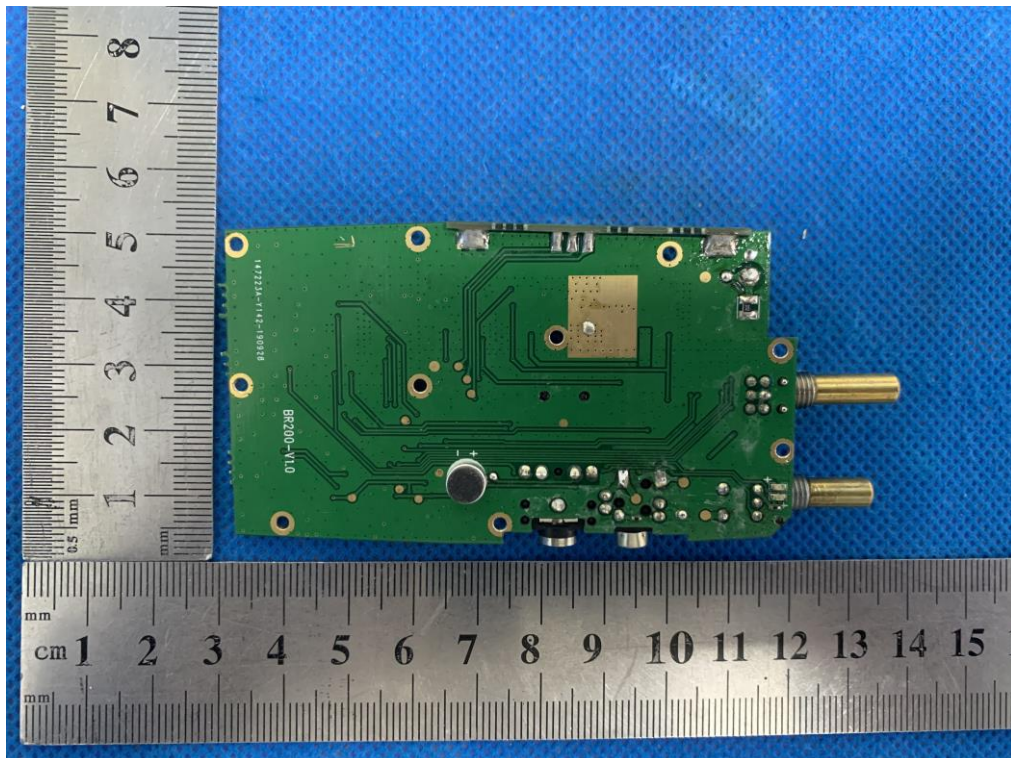


INTERNAL VIEW-3 OF EUT

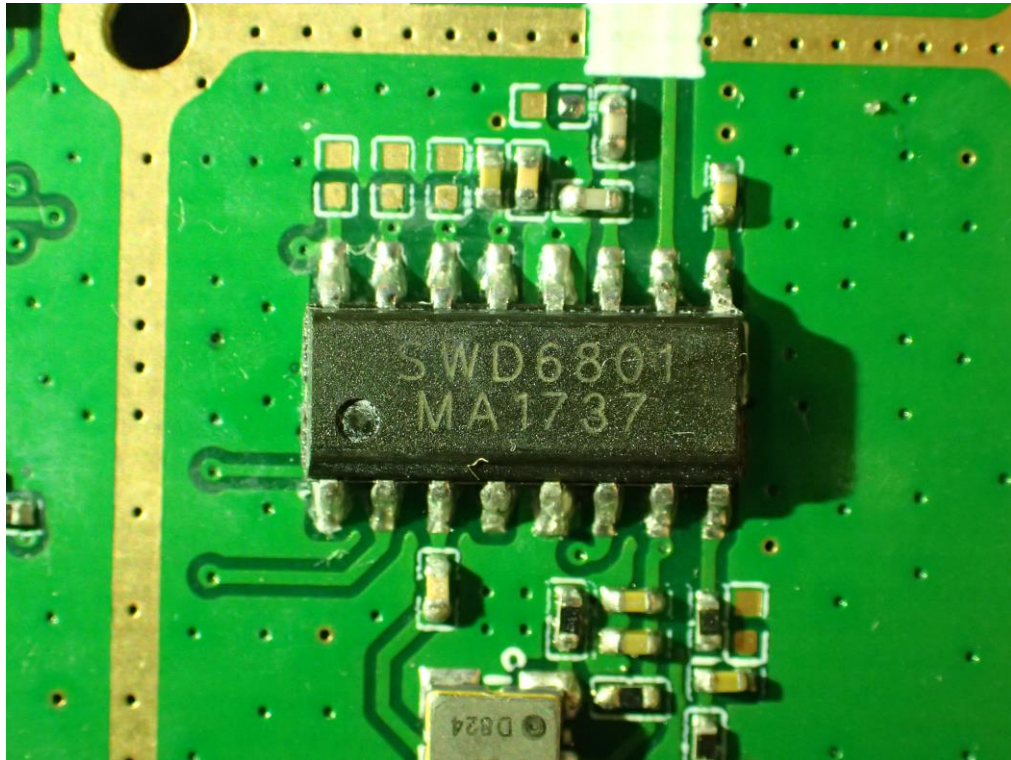

INTERNAL VIEW-4 OF EUT

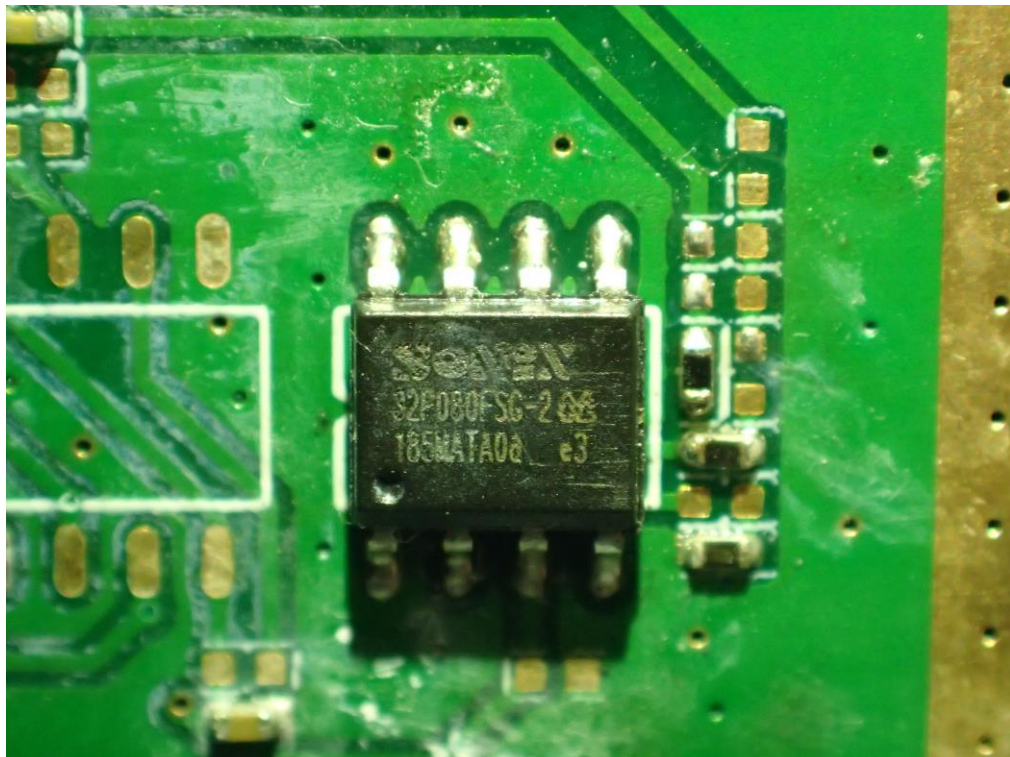

INTERNAL VIEW-5 OF EUT

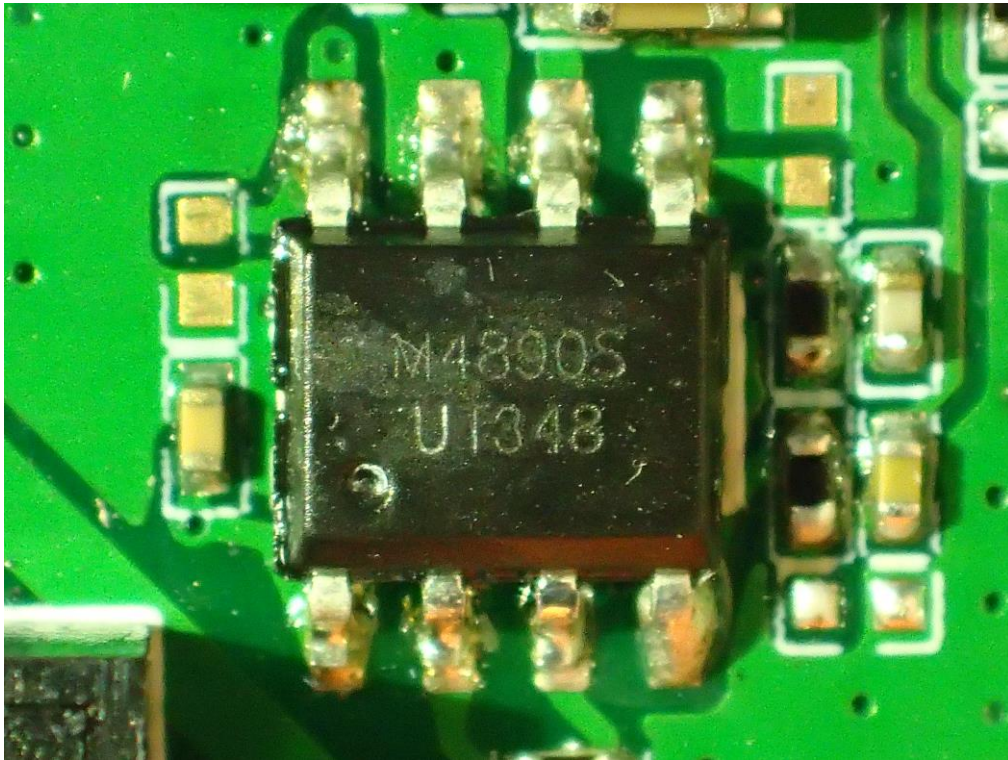

----END OF REPORT----