

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email thrukang@kornet.net



## Test Report

Product Name: GMRS/FRS Combination

MODEL NO:GXT500

FCC ID:MMAGXT500

### Applicant:

Midland Radio Corporation.

1120 Clay St. North Kansan City,

MO 64116

Date Receipt:19/JAN/2005

Date Tested: 26/JAN/2005

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

## TABLE OF CONTENTS LIST

APPLICANT: Midland Radio Corporation.  
FCC ID :MMAGXT500

### TEST REPORT

PAGE 1..... GENERAL INFORMATION & TECHNICAL DESCRIPTION  
PAGE 2..... TECHNICAL DESCRIPTION & RF POWER OUTPUT  
PAGE 3..... MOD. CHARACTERISTICS & AUDIO FREQUENCY RESPONSE GRAPH  
PAGE 4..... MODULATION LIMITING GRAPH - 300 Hz  
PAGE 5..... MODULATION LIMITING GRAPH - 1000 Hz & 2500 Hz  
PAGE 6..... AUDIO LOW PASS FILTER GRAPH  
PAGE 7..... OCCUPIED BANDWIDTH  
PAGE 8..... OCCUPIED BANDWIDTH PLOT  
PAGE 9..... SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
PAGE 10..... UNWANTED RADIATION - GMRS  
PAGE 11..... UNWANTED RADIATION - FRS  
PAGE 12..... METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 13..... FREQUENCY STABILITY  
PAGE 14....LIST OF EMC TEST EQUIPMENT

### EXHIBITS CONTAINING:

EXHIBIT 1.... FCC ID LABEL SAMPLES  
EXHIBIT 2.... LABEL LOCATION  
EXHIBIT 3.... EXTERNAL PHOTOGRAPHS  
EXHIBIT 4.... INTERNAL PHOTOGRAPHS  
EXHIBIT 5.... BLOCK DIAGRAM  
EXHIBIT 6.... SCHMATIC  
EXHIBIT 7.... USER'S MANUAL  
EXHIBIT 8.... THEORY OF OPERATION  
EXHIBIT 9.... ALIGNMENT PROCEDURE  
EXHIBIT 10... PARTS LIST  
EXHIBIT 11... TEST SET UP PHOTO

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

## GENERAL INFORMATION REQUIRED FOR CERTIFICATION

2.1033 (c) (1) (2) MidLand Radio Corporation. will manufacture  
the FCCID: MMAGXT500 GMRS/FRS COMBINATION TRANSCEIVER  
in quantity, for use under FCC RULES PART 95.  
MidLand Radio Corporation.  
1120 Clay St.  
North Kansas City, MO 64116

2.1033 (c) TECHNICAL DESCRIPTION

2.1033 (c) (3) Instruction book. A draft copy of the instruction  
manual is included as EXHIBIT 7.

2.1033 (c) (4) Type of Emission : 10K5F3E  
95.631

Bn = 2M + 2DK  
M = 3000  
D = 2.25k  
Bn = 2(3000) + 2(2250) = 10.5k  
GMRS Frequency Range : 20.0kHz

2.1033 (c) (5) GMRS Frequency Range:  
95.621

|              |              |
|--------------|--------------|
| 1. 462.5500  | 13. 462.7000 |
| 2. 462.5625  | 14. 462.7125 |
| 3. 462.5750  | 15. 462.7250 |
| 4. 462.5875  | 16. 467.5500 |
| 5. 462.6000  | 17. 467.5750 |
| 6. 462.6125  | 18. 467.6000 |
| 7. 462.6250  | 19. 467.6250 |
| 8. 462.6375  | 20. 467.6500 |
| 9. 462.6500  | 21. 467.6750 |
| 10. 462.6625 | 22. 467.7000 |
| 11. 462.6750 | 23. 467.7250 |
| 12. 462.6875 |              |

FRS Authorized Bandwidth: 12.5kHz

2.1033(c)(5) FRS Frequency Range:  
95.627

|             |                  |
|-------------|------------------|
| 1. 462.5625 | 8. 467.5625      |
| 2. 462.5875 | 9. 467.5875      |
| 3. 462.6125 | 10. 467.6125     |
| 4. 462.6375 | 11. 467.6375     |
| 5. 462.6625 | 12. 467.6625     |
| 6. 462.6875 | 13. 467.6875     |
| 7. 462.7125 | 14. 467.7125 MHz |

2.10311c)(6)(7) RF power is measured by the substitution method as  
2.1046(a) outlined in TIA/EIA - 603. With a nominal battery  
voltage of 7.5 V, and the transmitter properly  
adjusted the RF output measures:  
power supply : Roket batteries (1.5VDC) 4

GMRS (HIGH) - 1.515Watts  
GMRS (LOW) - 0.347 Watts  
FRS - 0.354 Watts

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 1 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

2.1033(c)(6)(7) FRS Power Output shall not exceed 0.50 Watts effective

95.639 radiated power. There can be no provisions for

95.649 Increasing the power or varying the power.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:  
FINAL AMPLIFIER ONLY

FOR GMRS HIGH POWER SETTING INPUT POWER: (6V)(1.64A)=9.84 Watts

FOR GMRS LOW POWER SETTING INPUT POWER: (6V)(0.440A)=2.64 Watts

FOR FRS POWER SETTING INPUT POWER: (6V)(0.470A)=2.82 Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included as EXHIBIT # 9.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 6 of this report. The block diagrams are included as EXHIBIT 5 of this report.


2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 3-4.

2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

2.1046(a) RF power output. The test procedure used was TIA/EIA-603.

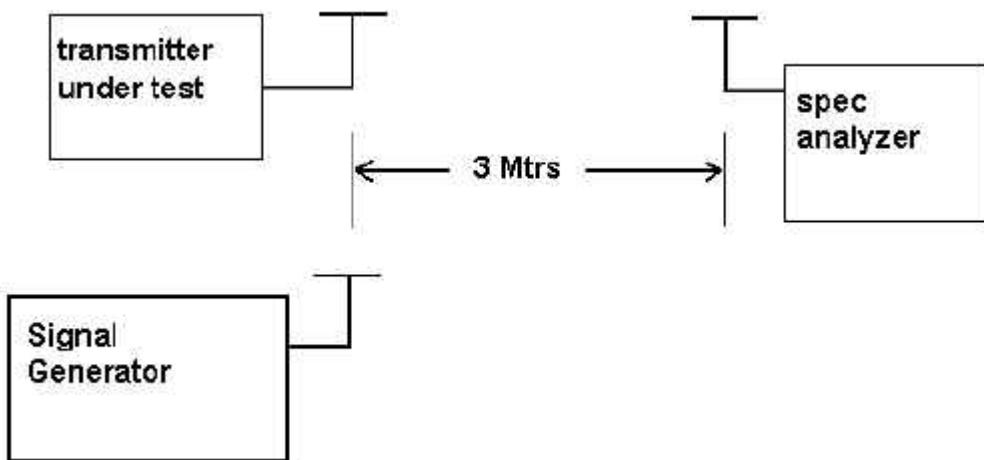

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 2 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA


81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

## 2.1047 (a) (b) Modulation characteristics :

### AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone Circuit and into the microphone connector. The Input required to produce 30 percent modulation Level was measured. See plot below.

AUDIO FREQUENCY RESPONSE PLOT GOES HERE

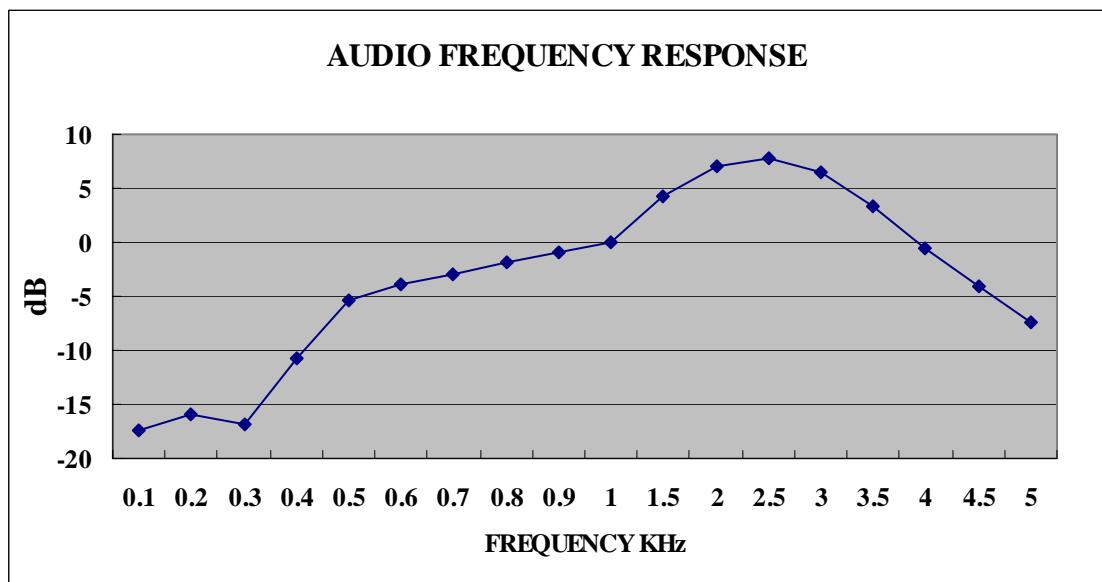

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 3 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

2.1047 (b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See Pages 6 and 7 of report.

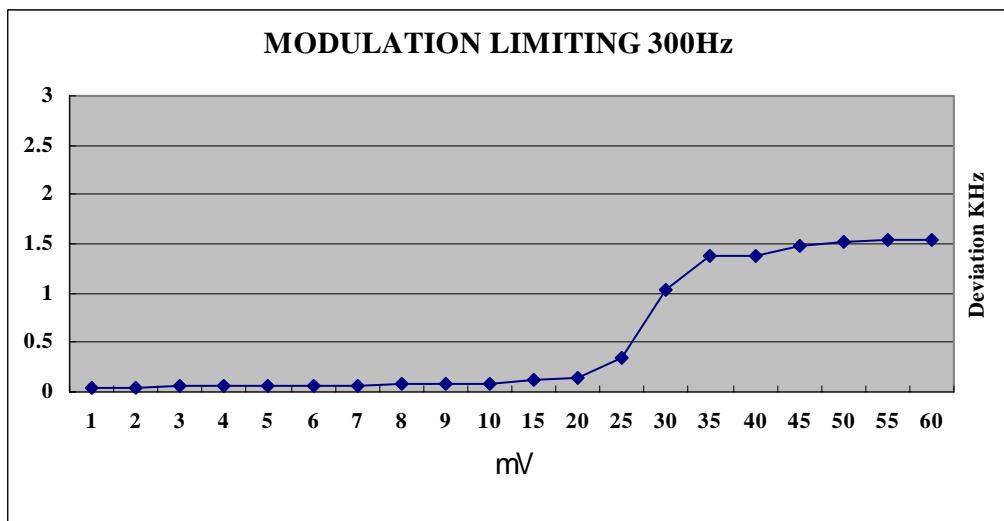

APPLICANT : Midland Radio Corporation.



FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 4 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

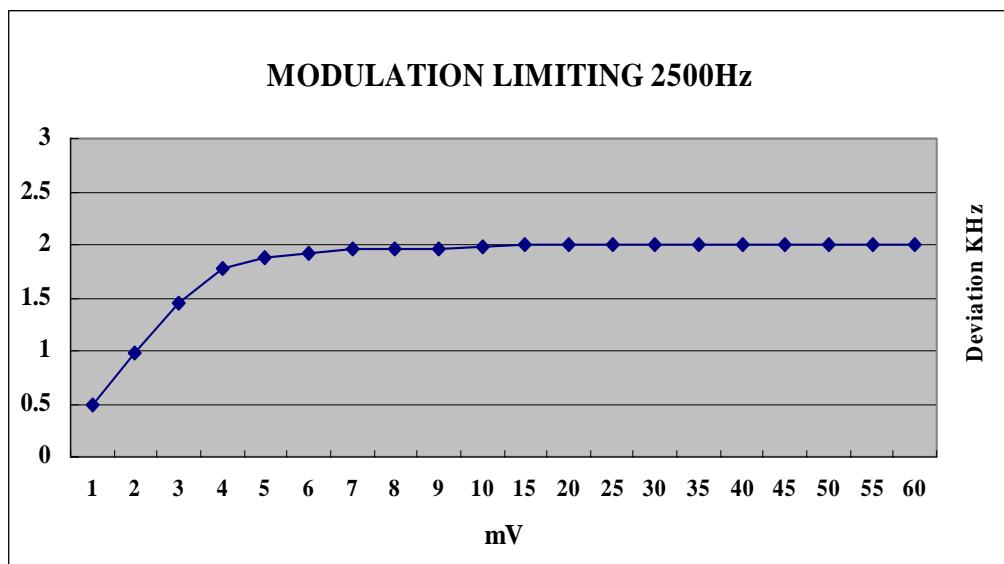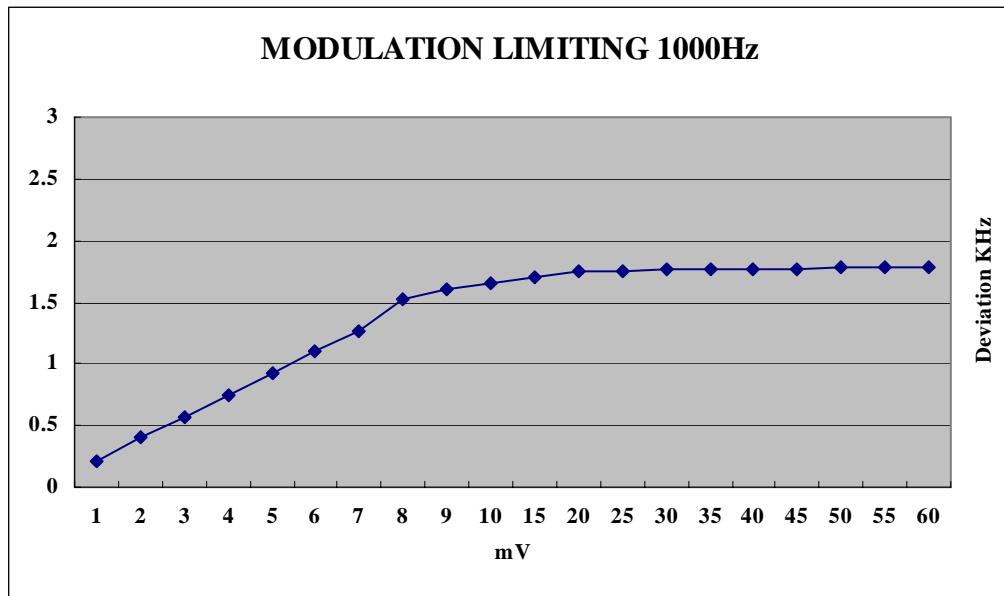


# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

## AUDIO LOW PASS FILTER GRAPH

95.637

Post Limiter Filter Each GMRS transmitter, except a Mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1KHz. See below.

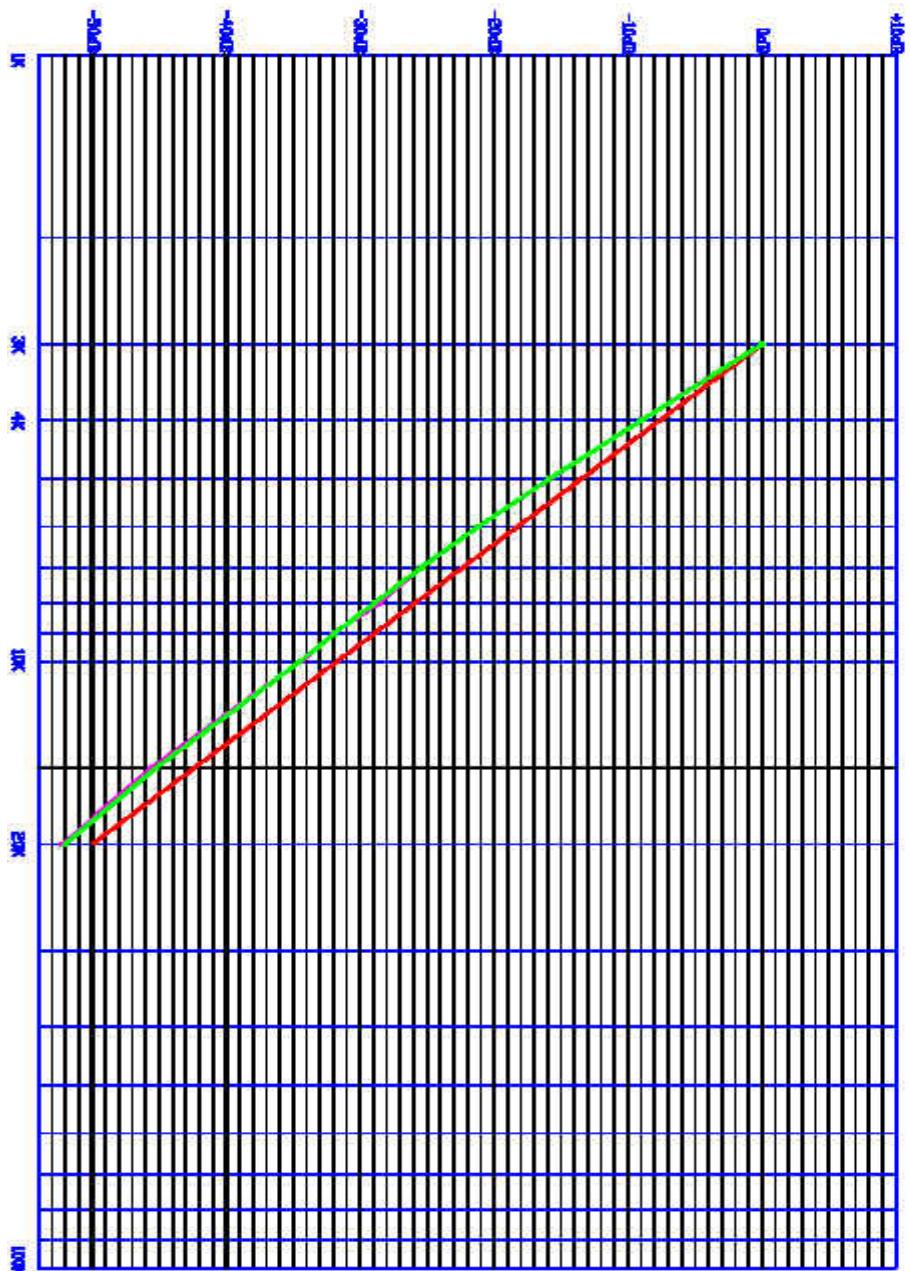

# THRULab & Engineering.


RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

2.1049 Occupied bandwidth :

95.635 (b) (1) (3) (7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least  $43 + \log_{10}(TP)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See plots on the next 1 pages.


Occupied BW Test Equipment Setup

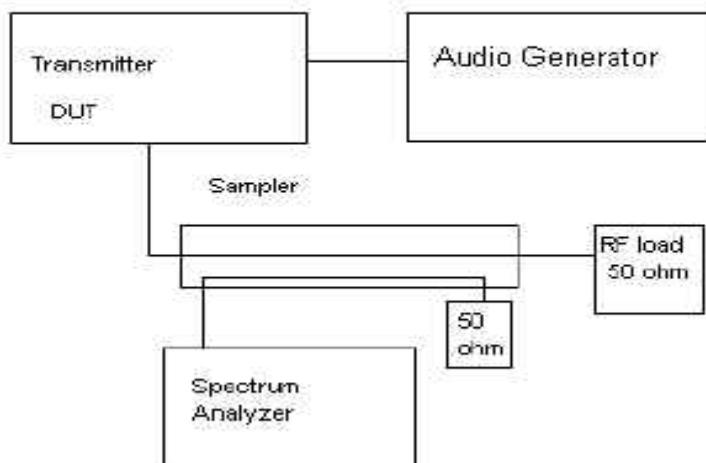


# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

1ch

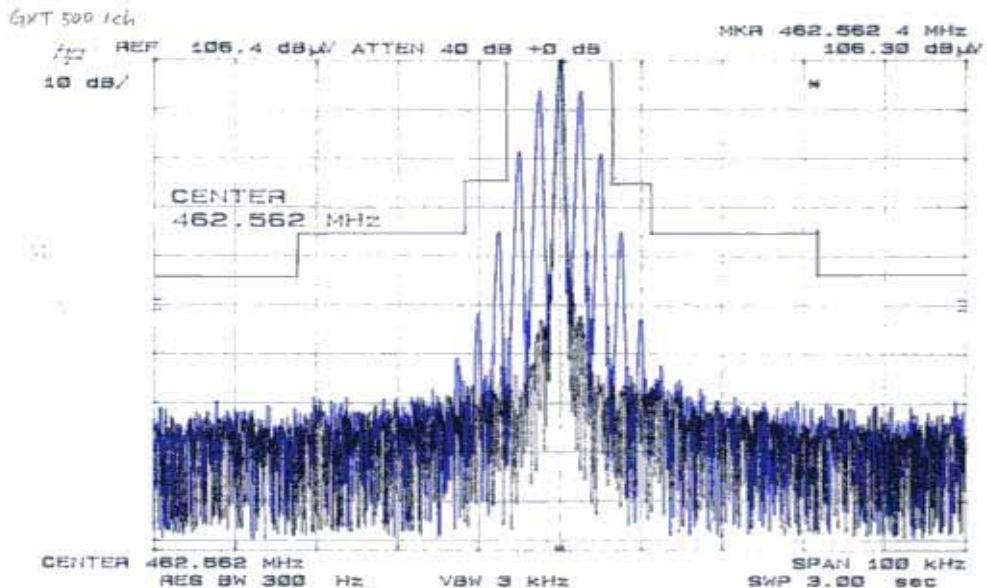

11ch

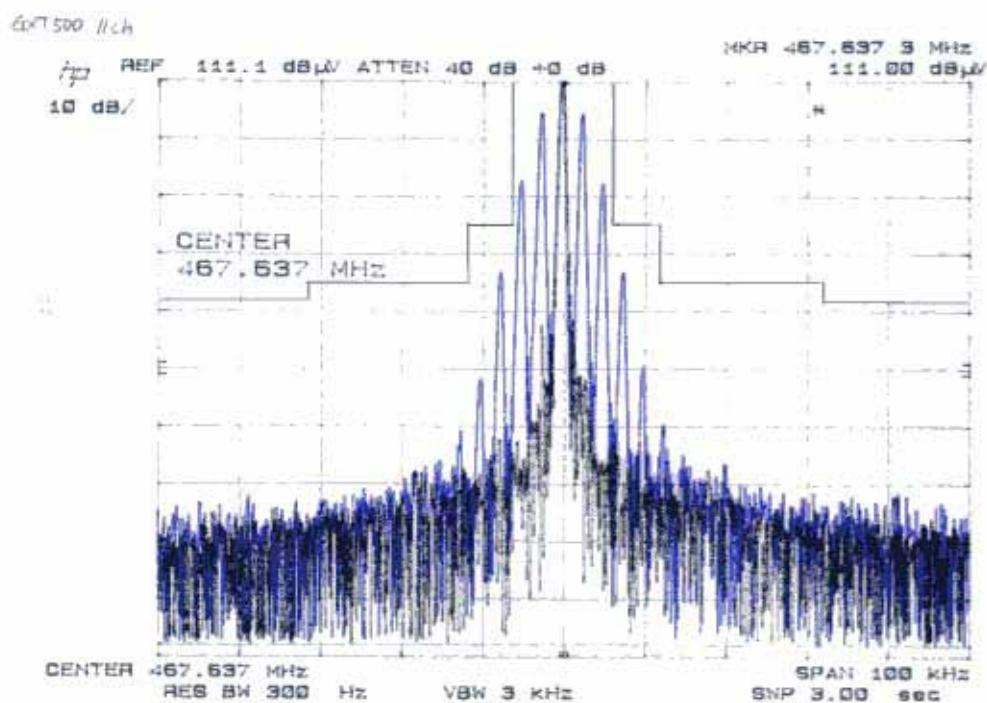

APPLICANT : Midland Radio Corporation.  
FCC ID : MMAGXT500  
REPORT :THRU-501004  
Pages: 8 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

2.1051 Spurious emissions at antenna terminals (conducted) :

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIS/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was the fundamental.

spurious Emission at  
antenna Terminals

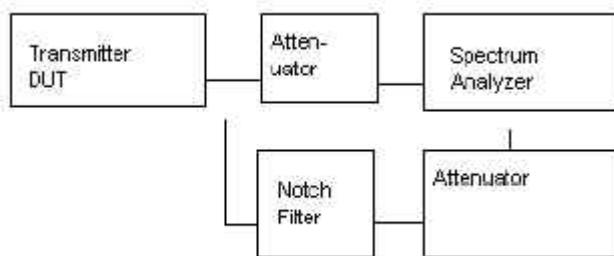

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

2.1051 Not Applicable, no antenna terminal allowed.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 9 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

2.1053 UNWANTED RADIATION  
95.635 (b) (7)

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10<sup>th</sup> harmonic of The fundamental. This test was conducted per ANSI C63.4 - 1992

**REQUIREMENTS: GMRS (HIGH) :  $43 + 10\log(1.515) = 44.80412\text{dB}$**   
**(LOW) :  $43 + 10\log(0.347) = 38.40329\text{dB}$**

| Emission Frequency | ATTN dBc | Margin dB | Emission Frequency | ATTN dBc | Margin dB |
|--------------------|----------|-----------|--------------------|----------|-----------|
| 462.56             | 0.00     | 0.00      | 462.56             | 0.00     | 0.00      |
| 925.13             | 55.46    | 10.65     | 925.13             | 54.76    | 16.35     |
| 1387.69            | 60.40    | 15.60     | 1387.69            | 61.20    | 22.80     |
| 1850.25            | 67.87    | 23.06     | 1850.25            | 71.27    | 32.86     |
| 2312.81            | 60.45    | 15.65     | 2312.81            | 60.05    | 21.65     |
| 2775.38            | 67.87    | 23.07     | 2775.38            | 62.57    | 24.17     |
| 3237.94            | 56.80    | 11.99     | 3237.94            | 62.60    | 24.19     |
| 3700.50            | 57.06    | 12.26     | 3700.50            | 51.26    | 12.86     |
| 4163.06            | 63.49    | 18.68     | 4163.06            | 60.19    | 21.78     |
| 4625.63            | 65.11    | 20.31     | 4625.63            | 58.71    | 20.31     |

**METHOD OF MEASUREMENT :** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at RM302, BOKJO B/D 29-15, CHONGPA3-DONG YONGSAN-GU, SEOUL, KOREA.

## THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

## YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1053  
95.635 (b) (7)

## UNWANTED RADIATION:

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10<sup>th</sup> harmonic of The fundamental. This test was conducted per ANSI C63.4 - 1992

REQUIREMENTS: FRS: 43 + 10log(0.354) = 38.49003dB

| Test Data :        | FRS      |           |
|--------------------|----------|-----------|
|                    |          |           |
| Emission Frequency | ATTN dBc | Margin dB |
| 467.64             | 0.00     | 0.00      |
| 935.28             | 55.47    | 16.98     |
| 1402.91            | 58.86    | 20.37     |
| 1870.55            | 67.55    | 29.06     |
| 2338.19            | 58.91    | 20.42     |
| 2805.83            | 62.33    | 23.84     |
| 3273.46            | 62.25    | 23.76     |
| 3741.10            | 51.92    | 13.43     |
| 4208.74            | 59.73    | 21.24     |
| 4676.38            | 58.52    | 20.03     |

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at RM302, BOKJO B/D 29-15, CHONGPA3-DONG YONGSAN-GU, SEOUL, KOREA.

APPLICANT: Midland Radio Corporation.

FCC ID : MMAGXT500

REC ID: MMAGX1500  
REPORT THRU: 501004

REPORT THREE  
Pages: 11 of 16


# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

Method of Measuring Radiated Spurious Emissions

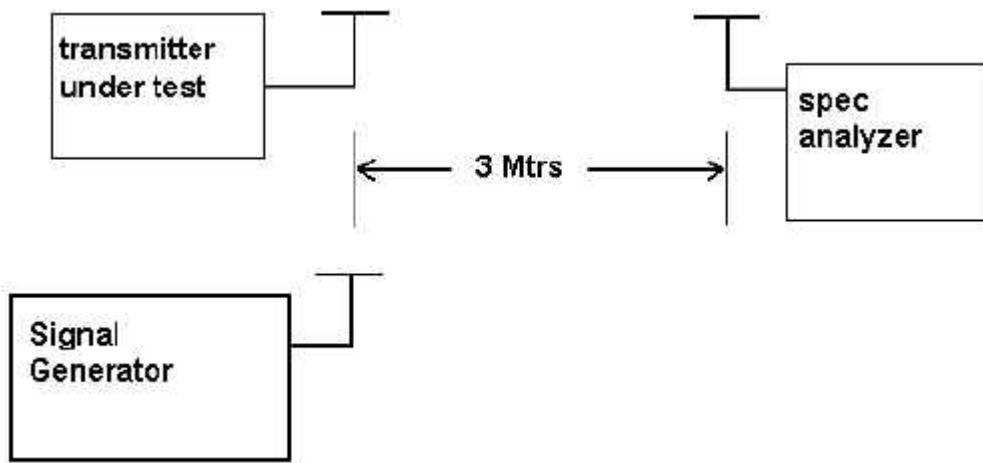

Equipment placed 80 cm above ground  
on a rotatable platform.  
\* Appropriate antenna raised from 1 to 4 M.

APPLICANT : Midland Radio Corporation.  
FCC ID : MMAGXT500  
REPORT :THRU-501004  
Pages: 12 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

2.1055 Frequency stability

95.621 (b)

Temperature and voltage tests were performed to verify that The frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows : The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to - 30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Reading were also taken at battery end point 6 V/dc

## MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency) : 462.5625

| TEMPERATURE                    | FREQUENCY(MHz) | ppm   | LIMIT(ppm) |
|--------------------------------|----------------|-------|------------|
| REFERENCE                      | 462.5625       | 0     |            |
| -30                            | 462.56246      | -0.09 | 5.0        |
| -20                            | 462.56279      | 0.63  | 2.5        |
| -10                            | 462.56324      | 1.60  | 2.5        |
| 0                              | 462.56315      | 1.41  | 2.5        |
| 10                             | 462.56294      | 0.95  | 2.5        |
| 20                             | 462.56244      | -0.13 | 2.5        |
| 30                             | 462.56214      | -0.78 | 2.5        |
| 40                             | 462.56198      | -1.12 | 2.5        |
| 50                             | 462.56221      | -0.63 | 2.5        |
| BATT voltage variation<br>+15% | 462.56301      | 1.10  | 2.5        |
| BATT voltage variation<br>-15% | 462.56284      | 0.74  | 2.5        |

Note: This EUT meets the frequency stability requirement for a FRS: +/-2.5ppm over temp range of -20 degrees C to + 50 degrees C. It also meets the GMRS frequency stability requirements : +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 13 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG  
YONGSAN-GU, SEOUL, KOREA  
81221095059F81221095056 email [thrukang@kornet.net](mailto:thrukang@kornet.net)

## EMC Equipment List

| DEVICE               | MODEL        | MFGR            | SERNO          | DUE.CAL     |
|----------------------|--------------|-----------------|----------------|-------------|
| EMI Test Receiver    | ESVS 10      | Rohde & Schwarz | 830489/001     | 2005.04.07. |
| Spectrum Analyzer    | 8566B        | Hewlett Packard | 2311A02394     | 2005.04.07. |
| Spectrum Display     | 85662A       | Hewlett Packard | 2542A12429     | 2005.04.07. |
| Quasi-Peak Adapter   | 85650A       | Hewlett Packard | 2521A00887     | 2005.04.07. |
| RF Preselector       | 85685A       | Hewlett Packard | 2648A00504     | 2005.04.07. |
| Pre-Amplifier        | 8449B        | Hewlett Packard | 3008A00375     | 2005.04.07. |
| Pre-Amplifier        | 8447F        | Hewlett Packard | 3113A05367     | 2005.04.07. |
| Spectrum Monitor     | EZM          | Rohde & Schwarz | 862304/007     | 2005.04.07. |
| Bico-Antenna         | 94455-1      | Eaton           | 977            | 2005.03.17. |
| Log-Periodic Antenna | 3146         | EMCO            | 2051           | 2005.03.17. |
| Dipole Antenna       | TDA25/1/2    | Electro Metrics | 176/200/200    | 2005.03.17. |
| Horn Antenna         | SAS-571      | A.H Systems     | 414            | 2005.03.17. |
| Spectrum Analyzer    | R3261C       | Advantest       | 71720189       | 2005.04.07. |
| LISN                 | KNW-242      | Kyoritsu        | 8-923-2        | 2004.07.17. |
| LISN                 | 8012-50-R-24 | Solar           | 8379121        | 2004.07.17. |
| Loop Ant             | 6507         | EMCO            | 1435           | 2004.10.06. |
| Signal Generator     | SMS          | Rohde & Schwarz | 872165/100     | 2005.04.07. |
| Modulation Analyzer  | 8901B        | Hewlett Packard | 3438A05094     | 2005.04.07. |
| Frequency Counter    | CMC251       | Tektronic       | CMC-251TW52489 | 2005.04.07. |
| Modulation Analyzer  | HP 8901B     | Hewlett Packard | -              | 2005.07.05  |
| Audio Generator      | Ken AG203    | Kenwood         | -              | 2005.07.05  |
| AC Volt Meter        | Ldr LMV-182  | Leader          | -              | 2005.07.05  |

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT500

REPORT :THRU-501004

Pages: 14 of 16