

THRU Lab & Engineering.

**477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do,469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net**

THRU

Test Report

Product Name: GMRS/FRS Combination

MODEL NO:GXT750

FCC ID:MMAGXT750

Applicant:

**Midland Radio Corporation.
5900 Parretta Drive, Kansas City,
MO64120**

Date Receipt:11/16/2006

Date Tested: 01/23/2007

Cover Sheet

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

TABLE OF CONTENTS LIST

APPLICANT: Midland Radio Corporation.

FCC ID :MMAGXT750

TEST REPORT

PAGE 1..... GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2..... TECHNICAL DESCRIPTION & RF POWER OUTPUT
PAGE 3..... MOD. CHARACTERISTICS & AUDIO FREQUENCY RESPONSE GRAPH
PAGE 4..... MODULATION LIMITING GRAPH - 300 Hz & 1000
PAGE 5..... MODULATION LIMITING GRAPH - 2500 Hz & 3000 Hz
PAGE 6..... AUDIO LOW PASS FILTER GRAPH
PAGE 7..... OCCUPIED BANDWIDTH
PAGE 8..... OCCUPIED BANDWIDTH PLOT
PAGE 9..... SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 10..... UNWANTED RADIATION - GMRS
PAGE 11..... UNWANTED RADIATION - FRS
PAGE 12..... METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 13..... FREQUENCY STABILITY
PAGE 14-15LIST OF EMC TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1..... FCC ID LABEL SAMPLES
EXHIBIT 2..... LABEL LOCATION
EXHIBIT 3..... EXTERNAL PHOTOGRAPHS
EXHIBIT 4..... INTERNAL PHOTOGRAPHS
EXHIBIT 5..... BLOCK DIAGRAM
EXHIBIT 6..... SCHMATICCS
EXHIBIT 7..... USER'S MANUAL
EXHIBIT 8..... THEORY OF OPERATION
EXHIBIT 9..... ALIGNMENT PROCEDURE
EXHIBIT 10... PARTS LIST
EXHIBIT 11... TEST SET UP PHOTO

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

GENERAL INFORMATION REQUIRED FOR CERTIFICATION

2.1033 (c) (1) (2) MidLand Radio Corporation. will manufacture
the FCCID: MMAGXT750 GMRS/FRS COMBINATION TRANSCEIVER
in quantity, for use under FCC RULES PART 95A&B.
MidLand Radio Corporation.
5900 Parretta Drive,
Kansas City, MO64120

2.1033 (c) TECHNICAL DESCRIPTION

2.1033 (c) (3) Instruction book. A draft copy of the instruction
manual is included as EXHIBIT 7.

2.1033 (c) (4) Type of Emission : 10K9F3E
95.631

Bn = 2M + 2DK
M = 3000
D = 2.25k
Bn = 2(3000) + 2(2450) = 10.9k

GMRS Authorized Bandwidth : 20.0kHz

2.1033 (c) (5) GMRS Frequency Range: 1. 462.5500 13. 462.7000
95.621 2. 462.5625 14. 462.7125
3. 462.5750 15. 462.7250
4. 462.5875 16. 467.5500
5. 462.6000 17. 467.5750
6. 462.6125 18. 467.6000
7. 462.6250 19. 467.6250
8. 462.6375 20. 467.6500
9. 462.6500 21. 467.6750
10. 462.6625 22. 467.7000
11. 462.6750 23. 467.7250
12. 462.6875

FRS Authorized Bandwidth: 12.5kHz

2.1033(c)(5) FRS Frequency Range: 1. 462.5625 8. 467.5625
95.627 2. 462.5875 9. 467.5875
3. 462.6125 10. 467.6125
4. 462.6375 11. 467.6375
5. 462.6625 12. 467.6625
6. 462.6875 13. 467.6875
7. 462.7125 14. 467.7125 MHz

2.10311c)(6)(7) RF power is measured by the substitution method as
2.1046(a) outlined in TIA/EIA - 603. With a Rechargeable battery
voltage of 6 V, and the transmitter properly
adjusted the RF output measures:
power supply : BATT-5R Rechargeable battery (6VDC)

GMRS (HIGH) - 1.6369 Watts
GMRS (LOW) - 0.3837 Watts
FRS - 0.2447 Watts

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT750
REPORT : THRU-701002
Pages: 1 of 15

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1033(c)(6)(7) FRS Power Output shall not exceed 0.50 Watts effective

95.639 radiated power. There can be no provisions for

95.649 Increasing the power or varying the power.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
FINAL AMPLIFIER ONLY

FOR GMRS HIGH POWER SETTING INPUT POWER: (6V)(0.63A)=3.78 Watts

FOR GMRS LOW POWER SETTING INPUT POWER: (6V)(0.16A)=0.96 Watts

FOR FRS POWER SETTING INPUT POWER: (6V)(0.16A)=0.96 Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included as EXHIBIT # 9.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 6 of this report. The block diagrams are included as EXHIBIT 5 of this report.


2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 3-4.

2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

2.1046(a) RF power output. The test procedure used was TIA/EIA-603.

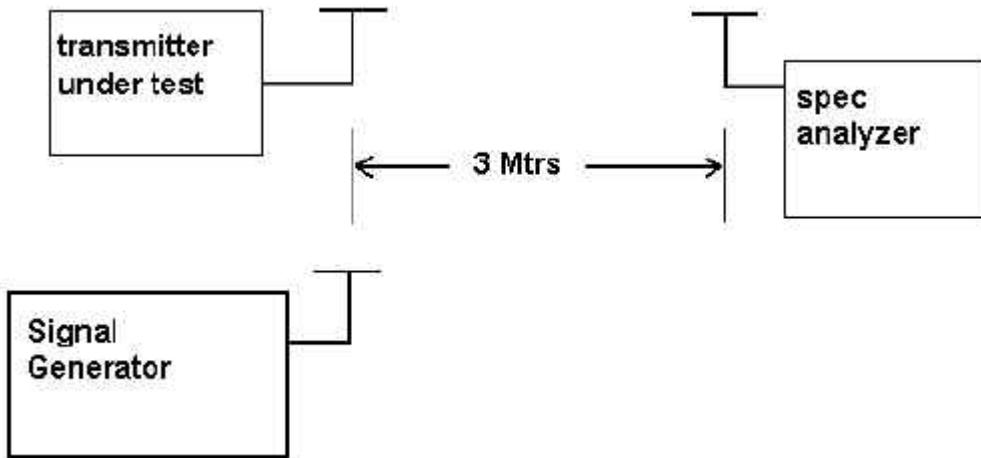

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT750

REPORT : THRU-701002

Pages: 2 of 15

THRU Lab & Engineering.


477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1047 (a) (b) Modulation characteristics :

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone Circuit and into the microphone connector. The Input required to produce 30 percent modulation Level was measured. See plot below.

AUDIO FREQUENCY RESPONSE PLOT GOES HERE

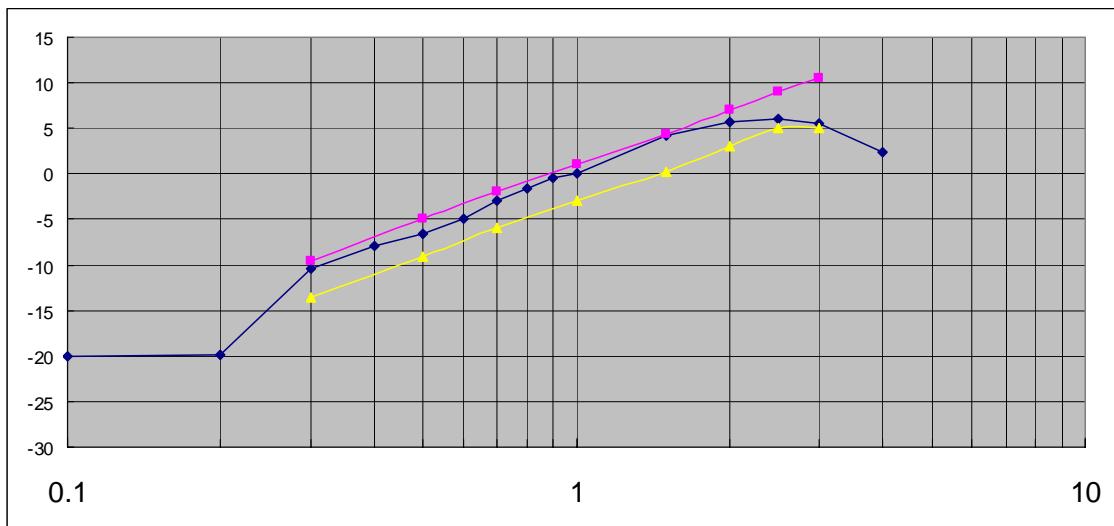



THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1047 (b)



Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See Pages 6 and 7 of report.

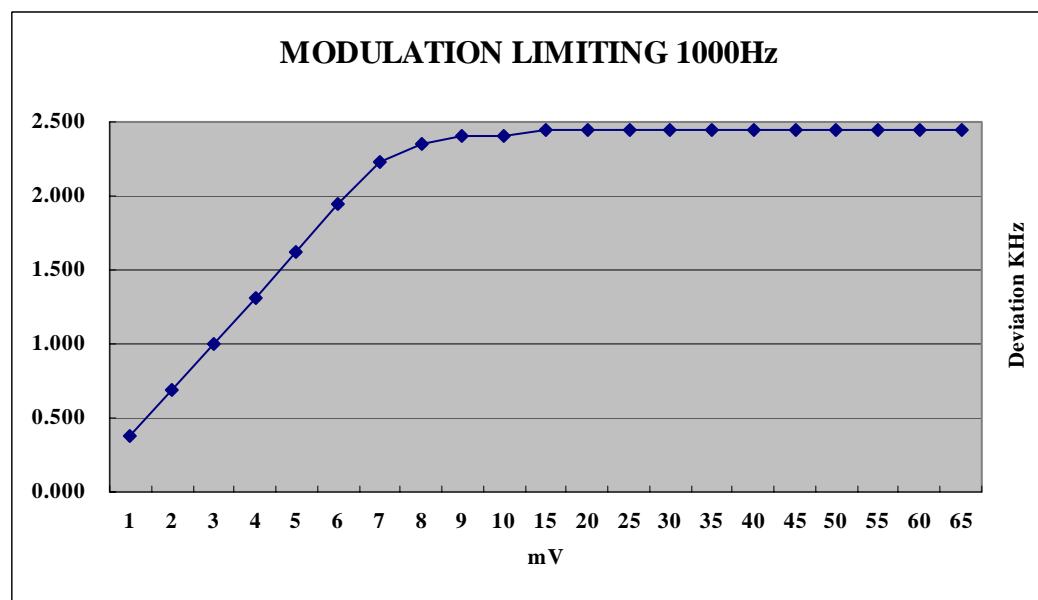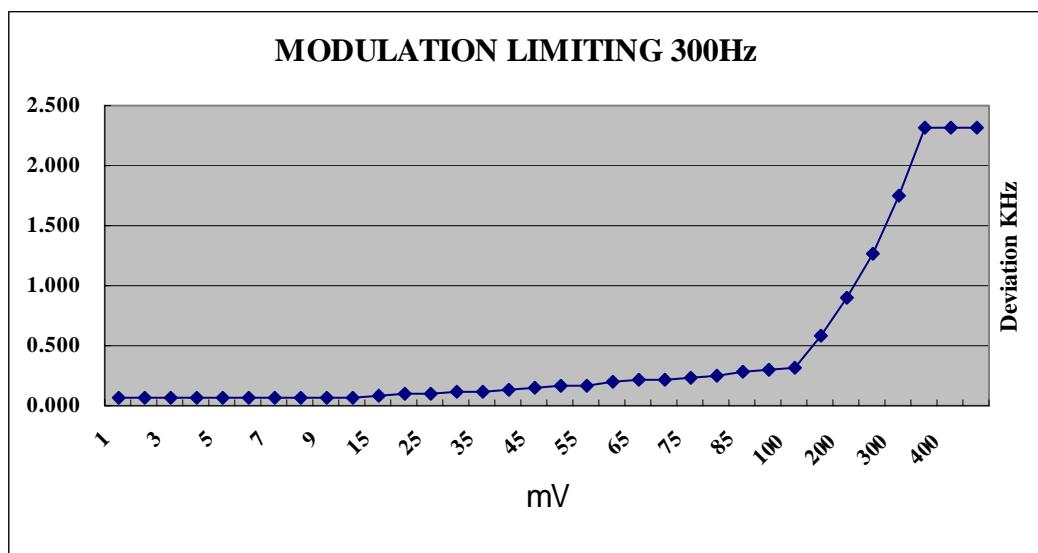

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

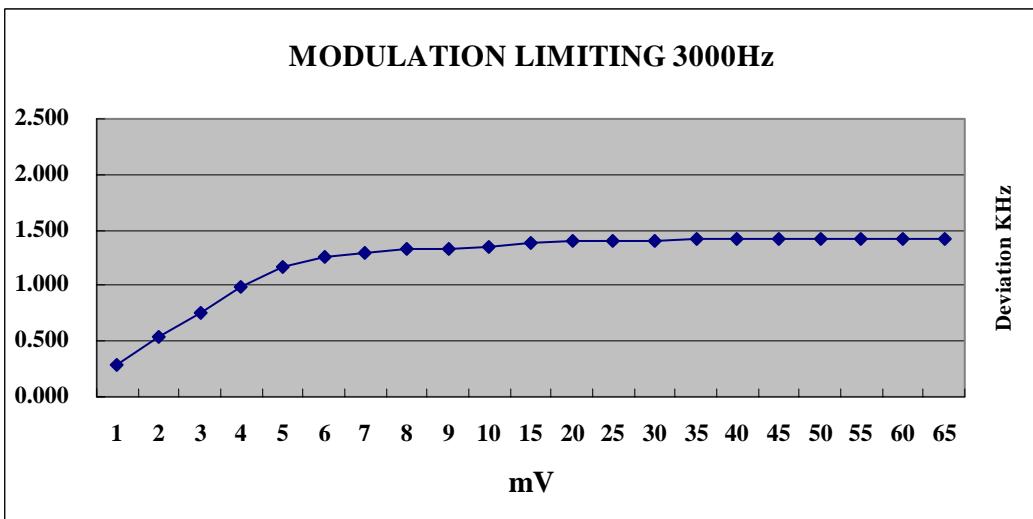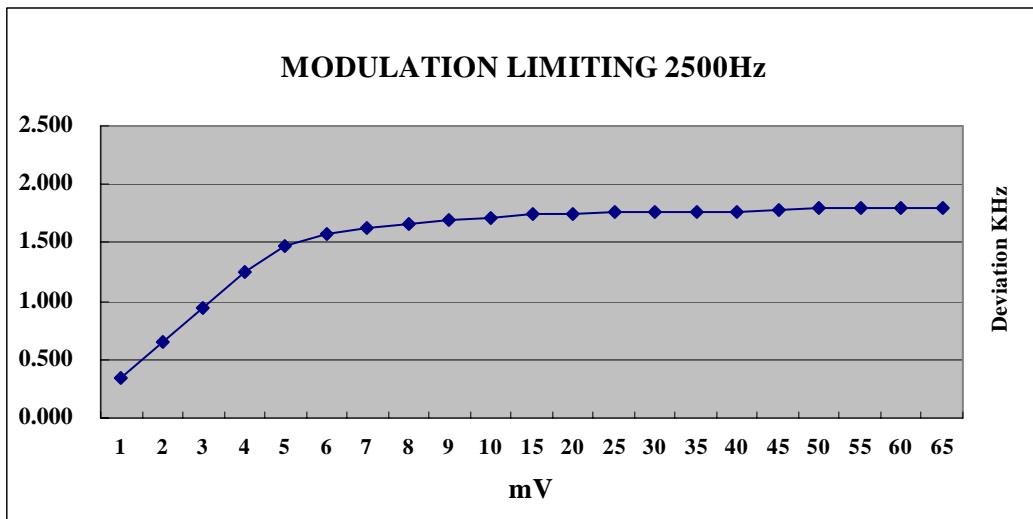


THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

AUDIO LOW PASS FILTER GRAPH

95.637

Post Limiter Filter Each GMRS transmitter, except a Mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See below.

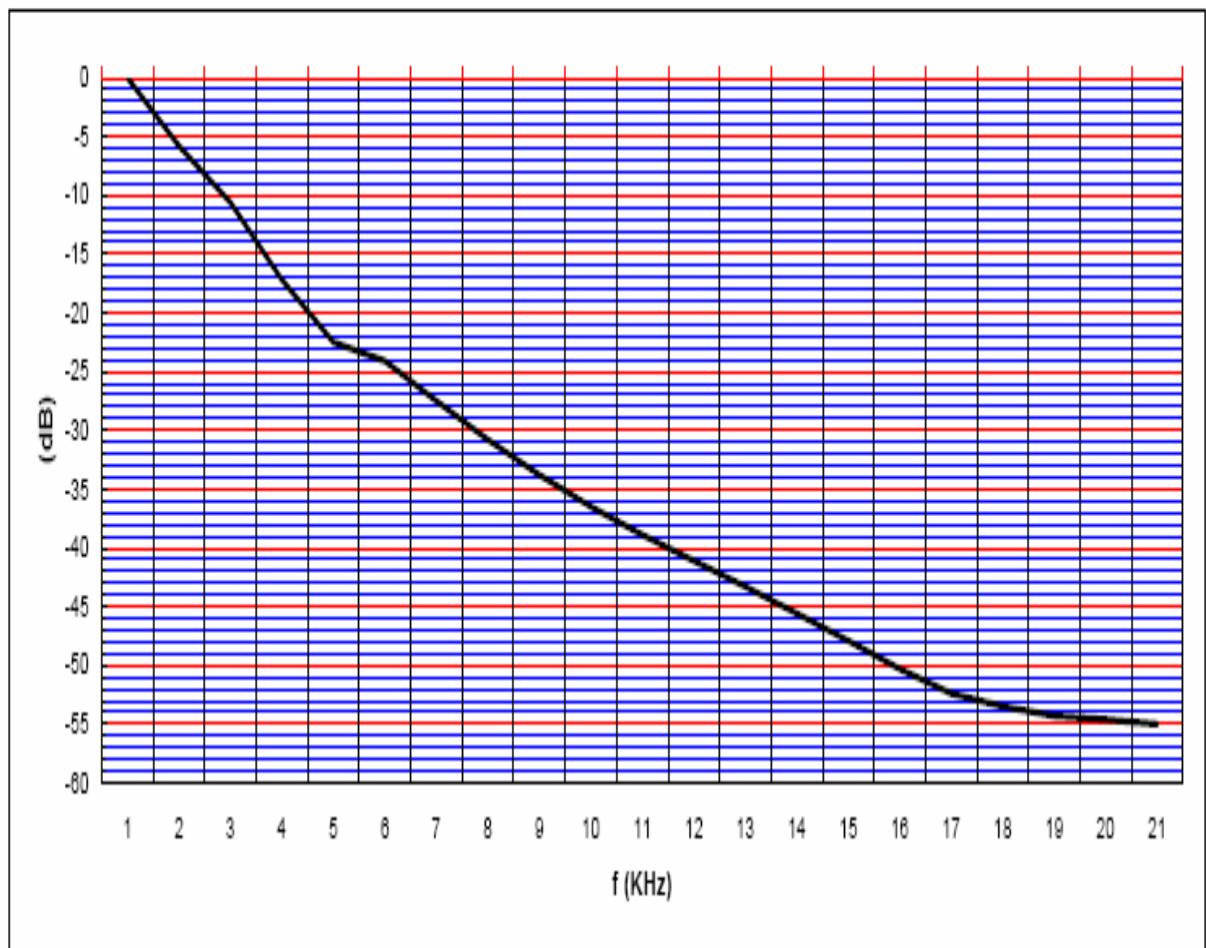

THRU Lab & Engineering.


477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1049 Occupied bandwidth :

95.635 (b) (1) (3) (7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least $43 + \log_{10}(TP)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See plots on the next 1 pages.


Occupied BW Test Equipment Setup

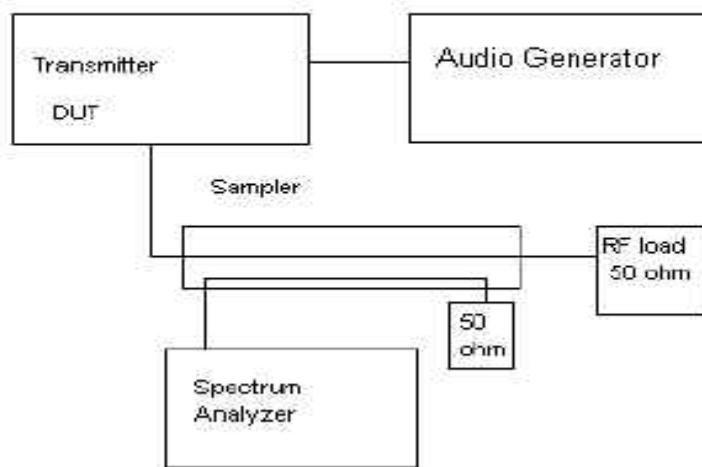


THRU Lab & Engineering.

477-6, Hager-Ri, Yaju-Up, Yaju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

22ch

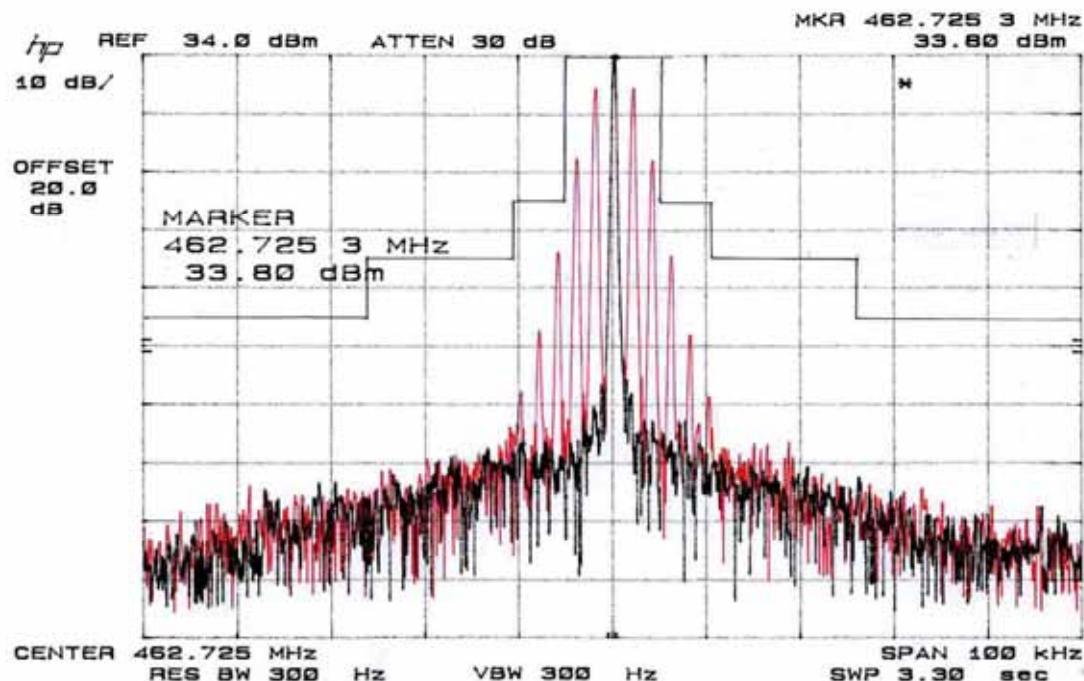

8ch

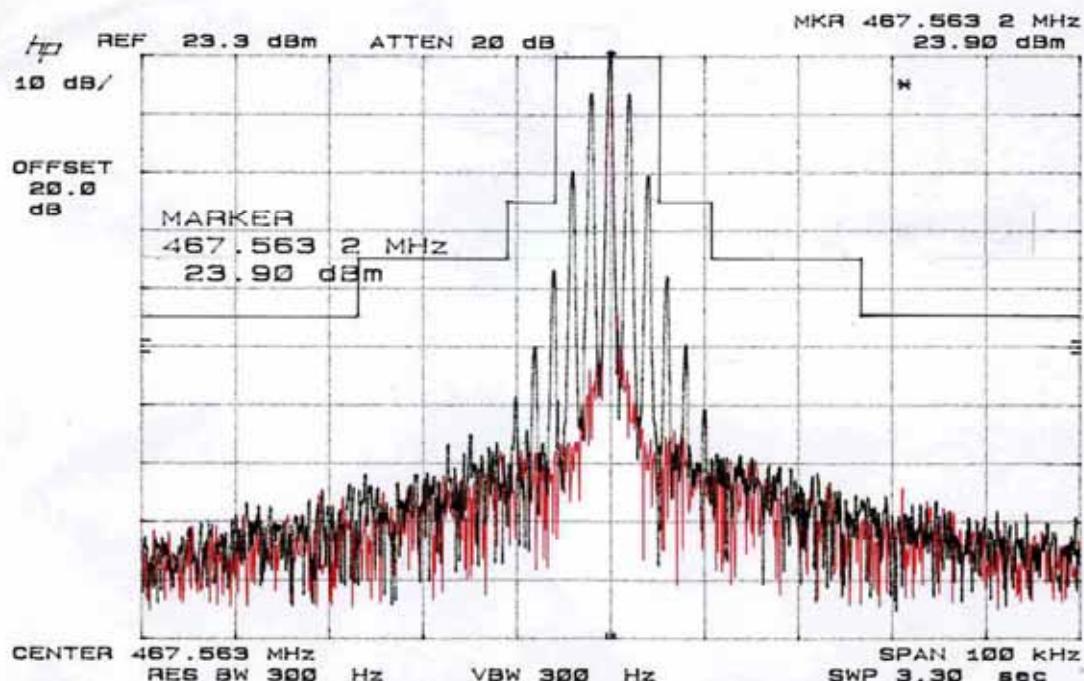

APPLICANT : Midland Radio Corporation.
FCC ID : MMAGXT750
REPORT : THRU-701002
Pages: 8 of 15

THRU Lab & Engineering.


477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092 F820318835169 email thrukang@kornet.net

2.1051

Spurious emissions at antenna terminals (conducted) :

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIS/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was the fundamental.

spurious Emission at
antenna Terminals

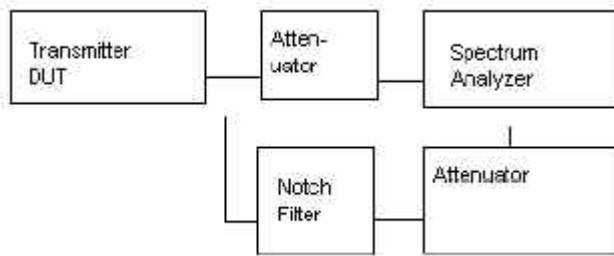

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

2.1051 Not Applicable, no antenna terminal allowed.

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1053
95.635 (b) (7)

UNWANTED RADIATION

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10th harmonic of The fundamental. This test was conducted per ANSI C63.4 - 2003.

REQUIREMENTS: GMRS (HIGH): 43 + 10log(1.6369) =45.14dB

(LOW) : 43 + 10log(0.3837) = 38.84dB

GMRS-High				GMRS-Low			
frequency	dBc	Margin	dBm	frequency	dBc	Margin	dBm
462.5500	0	0	0	462.5500	0	0	0
925.1000	53.72	8.58	-21.58	925.1000	44.42	5.58	-18.58
1387.6500	55.13	9.99	-22.99	1387.6500	59.13	20.29	-33.29
1850.2000	55.57	10.43	-23.43	1850.2000	58.67	19.83	-32.83
2312.7500	57.75	12.61	-25.61	2312.7500	55.45	16.61	-29.61
2775.3000	61.79	16.65	-29.65	2775.3000	57.29	18.45	-31.45
3237.8500	53.67	8.53	-21.53	3237.8500	50.97	12.13	-25.13
3700.4000	62.73	17.59	-30.59	3700.4000	56.13	17.29	-30.29
4162.9500	62.93	17.79	-30.79	4162.9500	56.83	17.99	-30.99
4625.5000	59.53	14.39	-27.39	4625.5000	53.63	14.79	-27.79

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at 477-6, Hager-Ri, Yoju-Up, Yoju-Gun, Kyunggi-Do, 469-803, Korea

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1053
95.635 (b) (7)

UNWANTED RADIATION:

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10th harmonic of The fundamental. This test was conducted per ANSI C63.4 - 2003.

REQUIREMENTS: FRS: 43 + 10log(0.2447) = 36.89dB


FRS			
frequency	dBc	Margin	dBm
467.5625	0	0	0
935.1250	40.47	3.58	-16.58
1402.6875	57.21	20.32	-33.32
1870.2500	50.05	13.16	-26.16
2337.8125	55.23	18.34	-31.34
2805.3750	55.28	18.39	-31.39
3272.9375	49.04	12.15	-25.15
3740.5000	55.91	19.02	-32.02
4208.0625	55.24	18.35	-31.35
4675.6250	51.88	14.99	-28.00

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at 477-6, Hager-Ri, Yoju-Up, Yoju-Gun, Kyunggi-Do, 469-803, Korea

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092 F820318835169 email thrukang@kornet.net

Method of Measuring Radiated Spurious Emissions

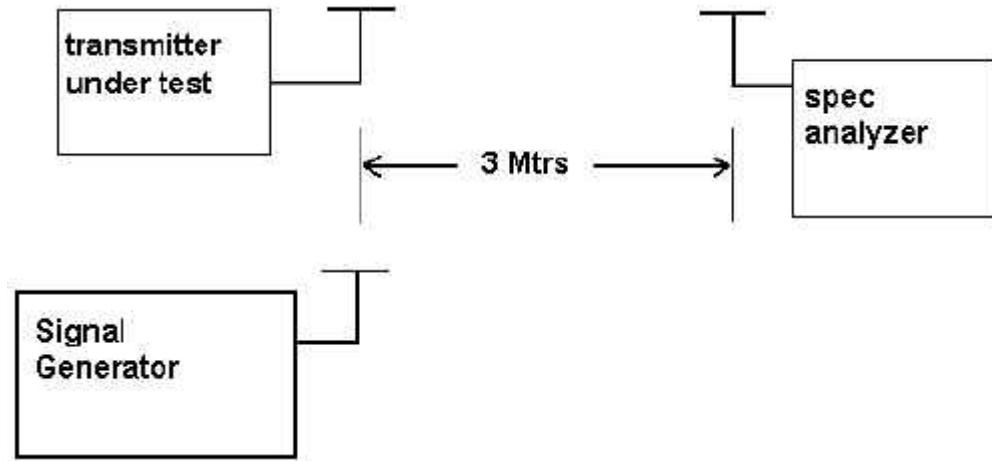

Equipment placed 80 cm above ground
on a rotatable platform.
* Appropriate antenna raised from 1 to 4 M.

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

2.1055 Frequency stability
95.621 (b)

Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows : The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to - 30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Reading were also taken at the end point of the battery voltage of 6 V/dc

MEASUREMENT DATA:

REFERENCE VOTAGE (VDC)	6.0	REFERENCE FREQUENCY (MHz)	462.57500
TEMPERATURE	FREQUENCY (MHz)	PPM	LIMIT(ppm)
-30	462.57520	0.43	5.0
-20	462.57597	2.10	2.5
-10	462.57569	1.49	2.5
0	462.57526	0.56	2.5
10	462.57531	0.67	2.5
20	462.57517	0.37	2.5
30	462.57557	1.23	2.5
40	462.57535	0.76	2.5
50	462.57560	1.30	2.5
+15% Battery : 6.9V	462.57549	1.06	2.5
-15% Battery : 5.1V	462.57566	1.43	2.5

Note: This EUT meets the frequency stability requirement for a FRS: +/-2.5ppm over temp range of -20 degrees C to + 50 degrees C. It also meets the GMRS frequency stability requirements : +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
Kyunggi-Do, 469-803, Korea
T820318835092F820318835169 email thrukang@kornet.net

TEST Equipment List

No	Description	Manufacturer	Model No.	Serial No.	Due Cal.
1	Test Receiver	Rohde & Schwarz	ESVS10	830489/001	2007.04.23
2	Test Receiver	Rohde & Schwarz	ESHS 10	825832/014	2007.08.25
3	Test Receiver	Rohde & Schwarz	ESVS 10	826008/014	2006.05.24
4	Spectrum Analyzer	Hewlett Packard	8566B	2311A02394	2007.06.17
5	Spectrum Display	Hewlett Packard	85662A	2542A12429	2007.06.17
6	Quasi-peak Adapter	Hewlett Packard	85650A	2521A00887	2007.06.17
7	RF Preselector	Hewlett Packard	85685A	2648A00504	2007.06.17
8	Preamplifier	Hewlett Packard	8449B	3008A00375	2007.04.23
9	Preamplifier	Hewlett Packard	8447F	3113A05367	2007.05.09
10	Preamplifier	Hewlett Packard	8447F	2805A02570	2005.12.12
11	Preamplifier	A.H. Systems	PAM-0118	164	2007.04.01
12	Biconical Antenna	Eaton Corp.	94455-1	0977	2007.04.01
13	Biconical Antenna	EMCO	3104C	9111-2468	2006.06.07
14	Log Periodic Antenna	EMCO	3146	2051	2007.05.11
15	Log Periodic Antenna	EMCO	3146	8901-2320	2006.03.28
16	Horn Antenna	A.H. Systems	SAS-571	414	2007.03.17
17	Horn Antenna	A.H. Systems	SAS-571	781	2006.01.07
18	Loop Antenna	Rohde & Schwarz	HFH2-Z2.335.4711.52	826532/006	2007.01.31
19	Dipole Antenna	Rohde & Schwarz	VHAP	574	2007.12.12
20	Dipole Antenna	Rohde & Schwarz	VHAP	575	2007.12.12
21	Dipole Antenna	Rohde & Schwarz	UHAP	546	2007.12.12
22	Dipole Antenna	Rohde & Schwarz	UHAP	547	2007.12.12

APPLICANT : Midland Radio Corporation.

FCC ID : MMAGXT750

REPORT : THRU-701002

Pages: 14 of 15

THRU Lab & Engineering.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun
 Kyunggi-Do, 469-803, Korea
 T820318835092F820318835169 email thrukang@kornet.net

23	Signal Generator	Rohde & Schwarz	SMS	872165/100	2006.04.23
24	Signal Generator	Rohde & Schwarz	SMX	825459/030	2007.06.15
25	Spectrum Monitor	Rohde & Schwarz	EZM	862304/007	None
26	Panorama Monitor	Rohde & Schwarz	EPN	883707/207	None
27	Spectrum Analyzer	Advantest Corp.	R3261C	61720208	2007.06.05
28	Spectrum Analyzer	Hewlett Packard	8591A	3205A02641	2007.12.12
29	LISN	EMCO	3825/2	9111-1912	2007.12.12
30	LISN	Solar	8012-50-R-24	8379121	2007.04.25
31	LISN	Kyoritsu	KNW-242	8-923-2	2007.05.28
32	Plotter	Hewlett Packard	7475A	2210A02802	None
33	Modulation Analyzer	Hewlett Packard	8901B	3438A05094	2007.05.19
34	Waveform Generator	Hewlett Packard	33120A	US34001190	2007.05.23
35	Audio analyzer	Hewlett Packard	8903B	3011A12915	2007.05.23
36	Universal counter	Hewlett Packard	5343A	3020A02978	2007.05.23
37	Frequency Counter	Tektronic	CMC251	TW52489	2007.04.23
38	Temperature & Humidity Chamber	TABAI EZPEC CORP.	MC711P	112000492	2006.08.27
39	Antenna Mast	EMCO	1070-3	9109-1617	None
40	Turn Table	EMCO	1080-1,2	9203-1762	None
41	Positioning Controller	EMCO	1090	9111-1054	
42	Antenna Power Supply	Rohde & Schwarz	HZ-9	920127	None
43	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	881052	None
44	Coaxial Take-up Reel	EMCO	100817	9109-1684	None