
材质: 105g铜版纸 尺寸: 100\*110mm 印刷颜色: Pantone Cool Gray 9C+4C 装订方式: 骑马钉



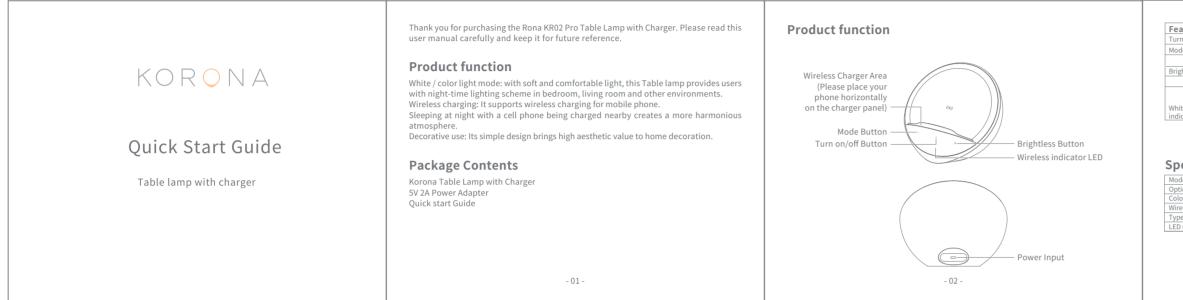

Action	Functions
Short Press	Turn on/off the lamp
Short Press	Switch white mode, color mode and night mode when light on
Long Press	White mode:adjust color temperature , Color mode:adjust color
Short Press	1%10% 25% 50% 75% 100%,6 levels of brightness cycle adjustment
Long Press	Adjust light brightless at white mode and color mode
Fully charged	Lights off
Standby	Lights off
Charging	Light on
	Short Press Short Press Long Press Short Press Long Press Fully charged Standby

## **Specifications**

odel	KR02P
otics	300lm, W & RGB
olor mode	Touch control
ireless Output	5W
pe-c Input	5V 2A
D rated power	3W

- 03 -

## Installation

- 1. Please plug the adapter into the socket;
- 2. Plug the dc jack into the lamp;
- 3. The lamp light on when it works well;

## APP Control

1. Download 'VeSync' APP;

Method 1: Search and download 'VeSync' in the APP Store(IOS) Search and download 'VeSync' in the Google Play(Android) Method 2:

Scan the QR code below to download the 'VeSync' APP



- 04 -

t to which the receiver is connected. consult the dealer or an experienced radio/TV technician for help. Caution: Any changes or modifications not expressly approved	
the party responsible for compliance could void the user's hority to operate this equipment.	
s equipment complies with FCC radiation exposure limits set th for an uncontrolled environment. End users must follow the cific operating instructions for satisfying RF exposure compliance. maintain compliance with FCC RF exposure compliance uirements, please follow operation instructions as documented his manual. This transmitter must not be co-located or operating in junction with any other antenna or transmitter. The availability some specific channels and/or operational frequency bands are untry dependent and are firmware programmed at the factory to tch the intended destination. The firmware setting is not essible by the end user.	
Exposure Information s equipment complies with FCC radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and rated with minimum distance 20cm between the radiator and your body.	
- 07 -	- 08 -