

## FCC Test Report (PART 24)

**Report No.:** RF200601E06-6

**FCC ID:** MQT-AT100R3

**Test Model:** xCL\_AT-100-R3-18U

**Received Date:** June 01, 2020

**Test Date:** July 10 to 19, 2020

**Issued Date:** July 07, 2020

**Applicant:** XAC AUTOMATION CORP.

**Address:** 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL  
PARK,HSINCHU,TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Test Site and Instruments .....	7
<b>3 General Information</b> .....	<b>9</b>
3.1 General Description of EUT .....	9
3.2 Configuration of System under Test .....	12
3.2.1 Description of Support Units .....	13
3.3 Test Mode Applicability and Tested Channel Detail .....	14
3.4 EUT Operating Conditions .....	15
3.5 General Description of Applied Standards and references .....	16
<b>4 Test Types and Results</b> .....	<b>17</b>
4.1 Output Power Measurement .....	17
4.1.1 Limits of Output Power Measurement .....	17
4.1.2 Test Procedures .....	17
4.1.3 Test Setup .....	17
4.1.4 Test Results .....	18
4.2 Modulation Characteristics Measurement .....	23
4.2.1 Limits of Modulation Characteristics .....	23
4.2.2 Test Procedure .....	23
4.2.3 Test Setup .....	23
4.2.4 Test Results .....	24
4.3 Frequency Stability Measurement .....	25
4.3.1 Limits of Frequency Stability Measurement .....	25
4.3.2 Test Procedure .....	25
4.3.3 Test Setup .....	25
4.3.4 Test Results .....	26
4.4 Occupied Bandwidth Measurement .....	28
4.4.1 Test Procedure .....	28
4.4.2 Test Setup .....	28
4.4.3 Test Result (-26dB Bandwidth) .....	29
4.4.4 Test Result (Occupied Bandwidth) .....	32
4.5 Band Edge Measurement .....	35
4.5.1 Limits of Band Edge Measurement .....	35
4.5.2 Test Setup .....	35
4.5.3 Test Procedures .....	35
4.5.4 Test Results .....	36
4.6 Peak to Average Ratio .....	43
4.5.1 Limits of Peak to Average Ratio Measurement .....	43
4.5.2 Test Setup .....	43
4.5.3 Test Procedures .....	43
4.5.4 Test Results .....	44
4.7 Conducted Spurious Emissions .....	47
4.7.1 Limits of Conducted Spurious Emissions Measurement .....	47
4.7.2 Test Setup .....	47
4.7.3 Test Procedure .....	47
4.7.4 Test Results .....	48
4.8 Radiated Emission Measurement .....	69
4.8.1 Limits of Radiated Emission Measurement .....	69
4.8.2 Test Procedure .....	69
4.8.3 Deviation from Test Standard .....	69
4.8.4 Test Setup .....	70

4.8.5 Test Results .....	71
<b>5 Pictures of Test Arrangements.....</b>	<b>113</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>114</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200601E06-6	Original release.	July 07, 2020

## 1 Certificate of Conformity

**Product:** Terminal

**Brand:** XAC

**Test Model:** xCL\_AT-100-R3-18U


**Sample Status:** ENGINEERING SAMPLE

**Applicant:** XAC AUTOMATION CORP.

**Test Date:** July 10 to 19, 2020

**Standards:** FCC Part 24 Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  \_\_\_\_\_, **Date:** July 07, 2020  
Claire Kuan / Specialist

**Approved by :**  \_\_\_\_\_, **Date:** July 07, 2020  
Clark Lin / Technical Manager

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropically Radiated Power	PASS	Meet the requirement of limit.
2.1046 24.232(d)	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1047	Modulation characteristics	PASS	Meet the requirement
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -27.44 dB at 3704.8 MHz & 3815.2 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

## 2.2 Test Site and Instruments

### For radiated spurious emissions test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: July 15 to 18, 2020

**For WCDMA other test items:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 10, 2020	Feb. 09, 2021
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 10, 2020	Feb. 09, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- Note:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: July 19, 2020

**For LTE other test items:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 10, 2020	Feb. 09, 2021
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 10, 2020	Feb. 09, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- Note:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: July 10, 2020



### 3 General Information

#### 3.1 General Description of EUT

Product	Terminal	
Brand	XAC	
Test Model	xCL_AT-100-R3-18U	
Status of EUT	ENGINEERING SAMPLE	
Power Supply Rating	Refer to note	
Modulation Type	WCDMA, HSDPA, HSUPA	BPSK
	LTE Band 2	QPSK, 16QAM
Operating Frequency	WCDMA, HSDPA, HSUPA	1852.4 MHz ~ 1907.6 MHz
	LTE Band 2	1850.7 MHz ~ 1909.3 MHz
Max. EIRP Power	WCDMA B2	23.41 dBm
	LTE Band 2 (Channel Bandwidth 1.4MHz)	23.77 dBm
	LTE Band 2 (Channel Bandwidth 3MHz)	23.78 dBm
	LTE Band 2 (Channel Bandwidth 5MHz)	23.77 dBm
	LTE Band 2 (Channel Bandwidth 10MHz)	23.70 dBm
	LTE Band 2 (Channel Bandwidth 15MHz)	23.75 dBm
	LTE Band 2 (Channel Bandwidth 20MHz)	23.80 dBm
Emission Designator	WCDMA B2	4M17F9W
	LTE Band 2 (Channel Bandwidth 1.4MHz)	QPSK: 1M08G7D 16QAM: 1M08D7W
	LTE Band 2 (Channel Bandwidth 3MHz)	QPSK: 2M69G7D 16QAM: 2M68D7W
	LTE Band 2 (Channel Bandwidth 5MHz)	QPSK: 4M49G7D 16QAM: 4M48D7W
	LTE Band 2 (Channel Bandwidth 10MHz)	QPSK: 8M96G7D 16QAM: 8M96D7W
	LTE Band 2 (Channel Bandwidth 15MHz)	QPSK: 13M4G7D 16QAM: 13M5D7W
	LTE Band 2 (Channel Bandwidth 20MHz)	QPSK: 17M9G7D 16QAM: 17M9D7W
Antenna Type	Refer to Note	
Antenna Connector	Refer to Note	
Accessory Device	Battery (option) x1	
Data Cable Supplied	NA	

Note:

1. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN(2.4GHz + 5GHz) + Bluetooth	WWAN(LTE + WCDMA)	NFC

2. Simultaneously transmission condition.

Condition	Technology	
1	WWAN	NFC
2	WWAN	Bluetooth
3	WLAN 2.4GHz	NFC
4	WLAN 5GHz	NFC
5	Bluetooth	NFC

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied power adapter and battery as following table:

Adapter (Only test not for sale)		
Brand	Model	Specification
MASS POWER	NBS10B050200VUU	AC Input: 100-240Vac, 0.3A, 50-60Hz DC Output: 5Vdc, 2A
Battery (Option)		
Brand	Model	Specification
Shenzhen Rishengzhi Electronics Technology Co., Ltd.	J625	3.7V, 3000mAh, 11.1Wh

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type
NFC	Main	XAC	RTOS	13	13.56MHz	wire	None
Wi-Fi BT	Main	AWAN	AYF6P-100002	2.31	2.4~2.4835GHz	PIFA	i-pex(MHF)
				2.99	5.15~5.85GHz		
LTE	Main(B2) TX	AWAN	AXF6P-100013	1.19	1850 MHz to 1910 MHz	PIFA	i-pex(MHF)
	Main(B4) TX			2.67	1710 MHz to 1755 MHz		
	Main(B12) TX			0.82	699 MHz to 715 MHz		
	Main(B2) RX			2.35	1930 MHz to 1990 MHz		i-pex(MHF)
	Main(B4) RX			2.05	2110 MHz to 2155 MHz		
	Main(B12) RX			2.45	729 MHz to 745 MHz		
LTE	Aux(B2) RX	AWAN	AXF6P-100005	2.54	1930 MHz to 1990 MHz	PIFA	i-pex(MHF)
	Aux(B4) RX			-0.26	2110 MHz to 2155 MHz		
	Aux(B12) RX			-1.21	729 MHz to 746 MHz		
WCDMA	Main(B2) TX	AWAN	AXF6P-100013	1.19	1850 MHz to 1910 MHz	PIFA	i-pex(MHF)
	Main(B5) TX			0.12	824 MHz to 849 MHz		
	Main(B2) RX			2.35	1930 MHz to 1990 MHz		i-pex(MHF)
	Main(B5) RX			2.62	869 MHz to 894 MHz		
WCDMA	Aux(B2) RX	AWAN	AXF6P-100005	2.54	1930 MHz to 1990 MHz	PIFA	i-pex(MHF)
	Aux(B5) RX			1.19	869 MHz to 894 MHz		


5. The EUT was pre-tested for radiated test under following test modes:

Pre-test Mode	Power
Mode A	Power from Battery
Mode B	Power from Adapter

From the above modes, the worst radiated test was found in **Mode B**.


6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
7. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

### 3.2 Configuration of System under Test

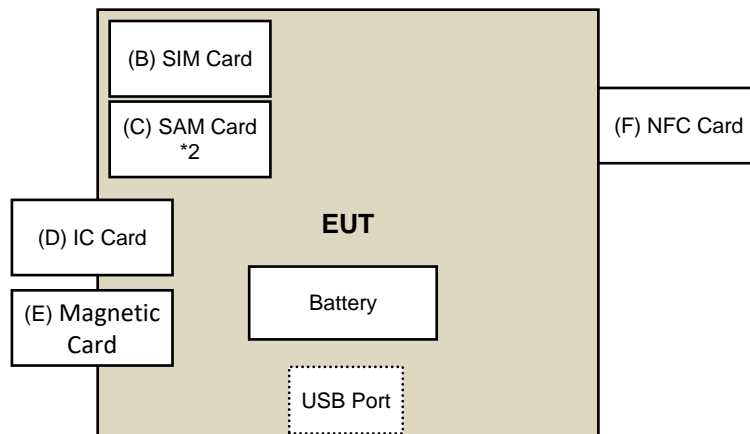

Under Table

Remote Site



### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB Adapter	MASS POWER	NBS10B050200VUU	NA	NA	Supplied by client
B.	SIM Card	Keysight	NA	NA	NA	Provided by Lab
C.	SAM Card *2	XAC	NA	NA	NA	Supplied by client
D.	IC Card	XAC	NA	NA	NA	Supplied by client
E.	Magnetic Card	XAC	NA	NA	NA	Supplied by client
F.	NFC Card	XAC	NA	NA	NA	Supplied by client
G.	Simulator	Anritsu	MT8820C	6201127458	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Type C to USB Cable	1	1.2	Yes	0	Supplied by client

### 3.3 Test Mode Applicability and Tested Channel Detail

#### WCDMA B2

Test Item	Available Channel	Tested Channel	Mode
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
Frequency Stability	9262 to 9538	9400	WCDMA
Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
Band Edge	9262 to 9538	9262, 9538	WCDMA
Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
Radiated Emission Below 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA
Radiated Emission Above 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

#### LTE Band 2

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
EIRP	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	1RB / 0 RB offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	1RB / 0 RB offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	1RB / 0 RB offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	1RB / 0 RB offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	1RB / 0 RB offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	1RB / 0 RB offset
Frequency Stability	18607 to 19193	18900	1.4MHz	QPSK	-
	18615 to 19185	18900	3MHz	QPSK	-
	18625 to 19175	18900	5MHz	QPSK	-
	18650 to 19150	18900	10MHz	QPSK	-
	18675 to 19125	18900	15MHz	QPSK	-
	18700 to 19100	18900	20MHz	QPSK	-
Occupied Bandwidth	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	Full RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	Full RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	Full RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	Full RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	Full RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	Full RB
Peak to Average Ratio	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	Full RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	Full RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	Full RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	Full RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	Full RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	Full RB

Band Edge	18607 to 19193	18607	1.4MHz	QPSK	1 RB / 0 RB Offset
		19193			1 RB / 5 RB Offset
		18607, 19193			6 RB / 0 RB Offset
	18615 to 19185	18615	3MHz	QPSK	1 RB / 0 RB Offset
		19185			1 RB / 14 RB Offset
		18615, 19185			15 RB / 0 RB Offset
	18625 to 19175	18625,	5MHz	QPSK	1 RB / 0 RB Offset
		19175			1 RB / 24 RB Offset
		18625, 19175			25 RB / 0 RB Offset
	18650 to 19150	18650	10MHz	QPSK	1 RB / 0 RB Offset
		19150			1 RB / 49 RB Offset
		18650, 19150			50 RB / 0 RB Offset
	18675 to 19125	18675,	15MHz	QPSK	1 RB / 0 RB Offset
		19125			1 RB / 74 RB Offset
		18675, 19125			75 RB / 0 RB Offset
	18700 to 19100	18700.	20MHz	QPSK	1 RB / 0 RB Offset
		19100			1 RB / 99 RB Offset
		18700. 19100			100 RB / 0 RB Offset
Conducted Emission	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset

**NOTE:**

All supported modulation types were evaluated. The Worst case of QPSK was selected. Therefore, the Band Edge, Frequency Stability, Condcudeted Emission and Radiated Emission were presented under QPSK mode only.

**Test Condition:**

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	23deg. C, 62%RH	120Vac, 60Hz	Allen Chuang
Frequency Stability	23deg. C, 62%RH	120Vac, 60Hz	Allen Chuang
Occupied Bandwidth	23deg. C, 62%RH	120Vac, 60Hz	Allen Chuang
Band Edge	23deg. C, 62%RH	120Vac, 60Hz	Allen Chuang
Peak to Average Ratio	23deg. C, 62%RH	120Vac, 60Hz	Allen Chuang
Condcudeted Emission	23deg. C, 62%RH	120Vac, 60Hz	Allen Chuang
Radiated Emission Below 1GHz	25deg. C, 75%RH	120Vac, 60Hz	Nelson Teng
Radiated Emission Above 1GHz	25deg. C, 75%RH	120Vac, 60Hz	Nelson Teng

**3.4 EUT Operating Conditions**

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24 Subpart E**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

All test items have been performed and recorded as per the above standards.

**References Test Guidance :**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

All test items have been performed as a reference to the above KDB test guidance.



## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures


##### Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA/LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and difference RB size/ RB offset for difference bandwidth record the power level shown on power meter.

##### EIRP Measurement:

- a.  $EIRP = \text{Conducted Output power level} + \text{Antenna gain}$ .

#### 4.1.3 Test Setup

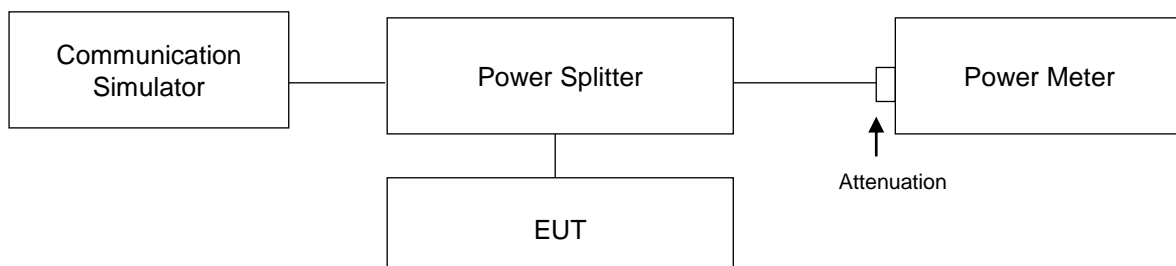

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

### CONDUCTED OUTPUT POWER (dBm)

#### WCDMA B2

Band	WCDMA B2		
	Channel	9262	9400
Frequency (MHz)	1852.4	1880.0	1907.6
RMC	22.22	22.09	22.08
HSDPA Subtest-1	21.90	21.91	21.93
HSDPA Subtest-2	22.01	22.03	22.05
HSDPA Subtest-3	21.52	21.55	21.58
HSDPA Subtest-4	21.51	21.56	21.58
HSUPA Subtest-1	21.80	21.78	21.81
HSUPA Subtest-2	20.07	20.07	20.06
HSUPA Subtest-3	20.94	20.93	20.94
HSUPA Subtest-4	20.48	20.45	20.47
HSUPA Subtest-5	22.0	21.9	22.0

### LTE Band 2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH		
			18607	18900	19193		18607	18900	19193		
			1850.7	1880	1909.3		1850.7	1880	1909.3		
			MHz	MHz	MHz						
2 / 1.4M	1	0	22.21	22.58	22.42	0	21.52	21.86	21.76	1	
	1	2	22.04	22.41	22.20	0	21.50	21.81	21.74	1	
	1	5	21.97	22.29	22.23	0	21.41	21.84	21.63	1	
	3	0	20.91	21.31	21.14	0	19.98	20.30	20.21	1	
	3	1	20.86	21.22	21.12	0	19.80	20.17	20.04	1	
	3	3	20.88	21.28	21.18	0	19.75	20.17	19.96	1	
	6	0	21.01	21.34	21.17	1	19.90	20.22	20.06	2	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH		
			18615	18900	19185		18615	18900	19185		
			1851.5	1880	1908.5		1851.5	1880	1908.5		
			MHz	MHz	MHz						
2 / 3M	1	0	22.24	22.59	22.46	0	21.57	21.88	21.80	1	
	1	7	21.96	22.36	22.28	0	21.45	21.80	21.70	1	
	1	14	21.97	22.35	22.24	0	21.41	21.81	21.63	1	
	8	0	20.96	21.25	21.19	1	19.98	20.31	20.13	2	
	8	3	20.81	21.24	21.11	1	19.87	20.24	20.10	2	
	8	7	20.88	21.26	21.18	1	19.83	20.14	19.97	2	
	15	0	21.01	21.29	21.23	1	19.91	20.23	20.05	2	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH		
			18625	18900	19175		18625	18900	19175		
			1852.5	1880	1907.5		1852.5	1880	1907.5		
			MHz	MHz	MHz						
2 / 5M	1	0	22.25	22.58	22.39	0	21.54	21.91	21.79	1	
	1	12	21.99	22.38	22.25	0	21.46	21.82	21.74	1	
	1	24	21.95	22.37	22.18	0	21.48	21.84	21.65	1	
	12	0	20.95	21.34	21.12	1	19.97	20.32	20.21	2	
	12	6	20.89	21.18	21.03	1	19.88	20.17	20.11	2	
	12	13	20.91	21.27	21.11	1	19.80	20.19	19.98	2	
	25	0	20.99	21.29	21.15	1	19.84	20.28	20.05	2	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18650	18900	19150		18650	18900	19150	
			1855	1880	1905		1855	1880	1905	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 10M	1	0	22.22	22.51	22.44	0	21.58	21.95	21.82	1
	1	24	21.95	22.39	22.27	0	21.49	21.82	21.70	1
	1	49	21.97	22.34	22.24	0	21.47	21.85	21.68	1
	25	0	20.96	21.33	21.13	1	19.98	20.35	20.22	2
	25	12	20.86	21.16	21.05	1	19.86	20.20	20.10	2
	25	25	20.90	21.24	21.18	1	19.83	20.20	20.04	2
	50	0	20.95	21.36	21.19	1	19.84	20.21	20.11	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18675	18900	19125		18675	18900	19125	
			1857.5	1880	1902.5		1857.5	1880	1902.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 15M	1	0	22.17	22.56	22.41	0	21.57	21.87	21.76	1
	1	37	22.00	22.39	22.27	0	21.46	21.79	21.65	1
	1	74	21.94	22.28	22.21	0	21.43	21.83	21.67	1
	36	0	20.89	21.30	21.14	1	19.97	20.28	20.16	2
	36	19	20.82	21.22	21.02	1	19.88	20.21	20.04	2
	36	39	20.94	21.29	21.11	1	19.75	20.14	19.99	2
	75	0	21.00	21.32	21.20	1	19.83	20.21	20.06	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18700	18900	19100		18700	18900	19100	
			1860	1880	1900		1860	1880	1900	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 20M	1	0	22.25	22.61	22.48	0	21.59	21.96	21.83	1
	1	50	22.05	22.41	22.28	0	21.51	21.87	21.74	1
	1	99	22.03	22.38	22.25	0	21.49	21.85	21.72	1
	50	0	20.98	21.34	21.21	1	20.01	20.36	20.23	2
	50	25	20.89	21.25	21.12	1	19.88	20.24	20.13	2
	50	50	20.95	21.31	21.19	1	19.85	20.21	20.06	2
	100	0	21.02	21.38	21.25	1	19.92	20.28	20.15	2

**EIRP POWER**
**WCDMA B2**

Band	WCDMA B2		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
RMC 12.2K	22.22	22.09	22.08
Gain (dBi)	1.19	1.19	1.19
Max EIRP Power (dBm)	23.41	23.28	23.27

**LTE Band 2**

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18607	18900	19193		18607	18900	19193	
			1850.7	1880	1909.3		1850.7	1880	1909.3	
	MHz	MHz	MHz		MHz	MHz	MHz			
2 / 1.4M	1	0	22.21	22.58	22.42	0	21.52	21.86	21.76	1
Gain (dBi)		1.19	1.19	1.19	0	1.19	1.19	1.19		
Max EIRP Power (dBm)		23.40	23.77	23.61	0	22.71	23.05	22.95		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18615	18900	19185		18615	18900	19185	
			1851.5	1880	1908.5		1851.5	1880	1908.5	
	MHz	MHz	MHz		MHz	MHz	MHz			
2 / 3M	1	0	22.24	22.59	21.23	0	21.57	21.88	21.80	1
Gain (dBi)		1.19	1.19	1.19	0	1.19	1.19	1.19		
Max EIRP Power (dBm)		23.43	23.78	22.42	0	22.76	23.07	22.99		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18625	18900	19175		18625	18900	19175	
			1852.5	1880	1907.5		1852.5	1880	1907.5	
	MHz	MHz	MHz		MHz	MHz	MHz			
2 / 5M	1	0	22.25	22.58	22.39	0	21.54	21.91	21.79	1
Gain (dBi)		1.19	1.19	1.19	0	1.19	1.19	1.19		
Max EIRP Power (dBm)		23.44	23.77	23.58	0	22.73	23.10	22.98		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18650	18900	19150		20000	20175	20350	
			1855	1880	1905		1715	1732.5	1750	
	MHz	MHz	MHz		MHz	MHz	MHz			
2 / 10M	1	0	22.22	22.51	22.44	0	21.58	21.95	21.82	1
Gain (dBi)		1.19	1.19	1.19	0	1.19	1.19	1.19		
Max EIRP Power (dBm)		23.41	23.70	23.63	0	22.77	23.14	23.01		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18675	18900	19125		18675	18900	19125	
			1857.5	1880	1902.5		1857.5	1880	1902.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 15M	1	0	22.17	22.56	22.41	0	21.57	21.87	21.76	1
Gain (dBi)			1.19	1.19	1.19		1.19	1.19	1.19	
Max EIRP Power (dBm)			23.36	23.75	23.60		22.76	23.06	22.95	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18700	18900	19100		18700	18900	19100	
			1860	1880	1900		1860	1880	1900	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 20M	1	0	22.25	22.61	22.48	0	21.59	21.96	21.83	1
Gain (dBi)			1.19	1.19	1.19		1.19	1.19	1.19	
Max EIRP Power (dBm)			23.44	23.80	23.67		22.78	23.15	23.02	

## 4.2 Modulation Characteristics Measurement

### 4.2.1 Limits of Modulation Characteristics

N/A

### 4.2.2 Test Procedure


Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

### 4.2.3 Test Setup




## 4.2.4 Test Results

### WCDMA B2

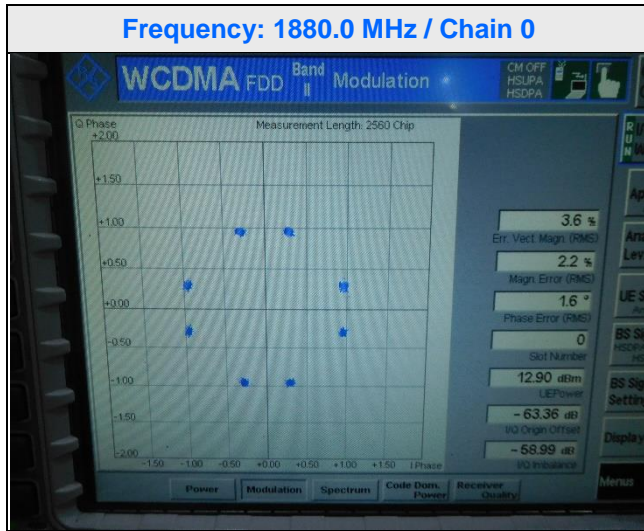

### LTE Band 2

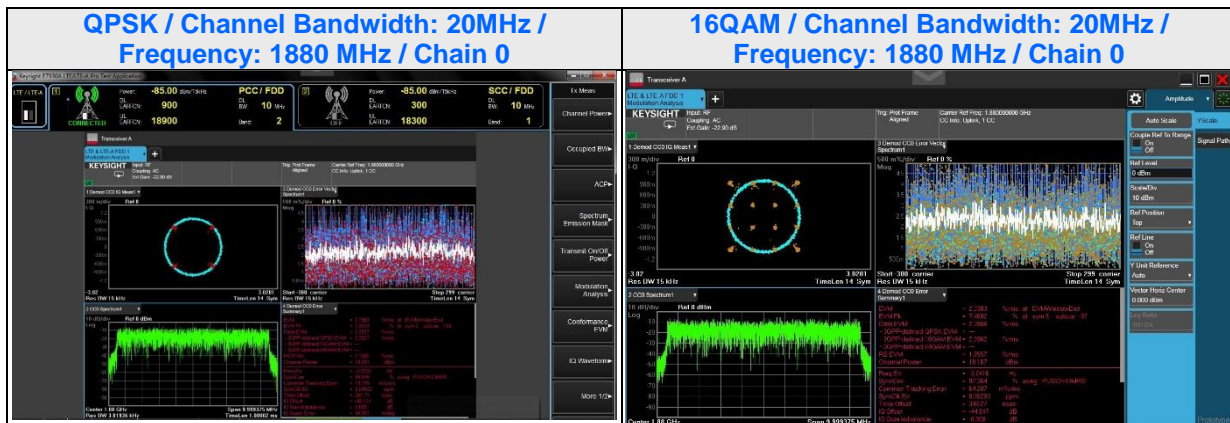



### 4.3 Frequency Stability Measurement

#### 4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5$  °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 4.3.3 Test Setup

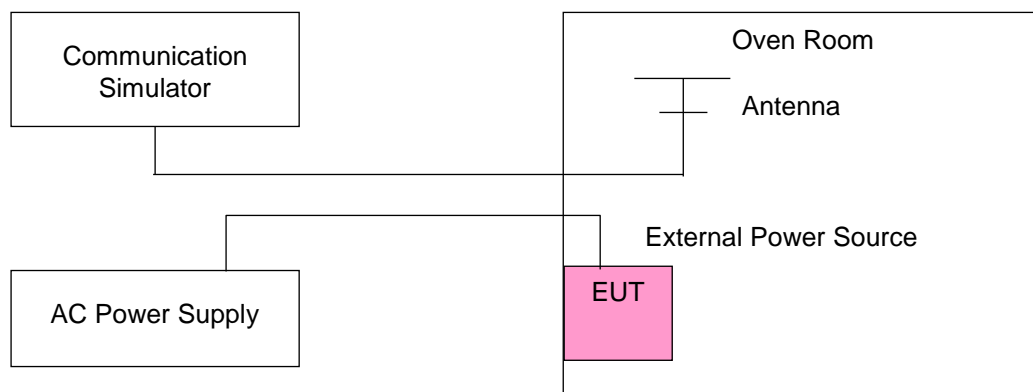

#### 4.3.4 Test Results

##### WCDMA B2

##### Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (MHz)		Limit (MHz)	
	WCDMA B2		Low Edge	High Edge
	Low	High		
102	1850.320000	1909.689994	1850	1910
138	1850.319997	1909.689994	1850	1910

##### Frequency Error vs. Temperature.

TEMP. (°C)	Frequency Error (MHz)		Limit (MHz)	
	WCDMA B2		Low Edge	High Edge
	Low	High		
50	1850.320002	1909.689996	1850	1910
40	1850.319999	1909.690005	1850	1910
30	1850.320001	1909.690003	1850	1910
20	1850.320006	1909.689996	1850	1910
10	1850.319996	1909.690003	1850	1910
0	1850.319994	1909.690001	1850	1910
-10	1850.319994	1909.689990	1850	1910
-20	1850.319997	1909.689994	1850	1910
-30	1850.320008	1909.690007	1850	1910

## LTE Band 2

### Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (MHz)												Limit (MHz)	
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz		Low Edge	High Edge
	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High		
102	1850.159998	1909.840005	1850.150000	1909.840009	1850.259996	1909.750002	1850.540004	1909.480005	1850.839991	1909.189997	1851.119991	1908.960001	1850	1910
138	1850.160001	1909.840005	1850.149995	1909.840004	1850.259998	1909.749994	1850.539995	1909.480006	1850.839998	1909.190007	1851.119994	1908.959993	1850	1910

### Frequency Error vs. Temperature

Temp. (°C)	Frequency Error (MHz)												Limit (MHz)	
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz		Low Edge	High Edge
	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High		
50	1850.159998	1909.840000	1850.149992	1909.839996	1850.259997	1909.749990	1850.539990	1909.480002	1850.840003	1909.189993	1851.119997	1908.960003	1850	1910
40	1850.159990	1909.840001	1850.150002	1909.839991	1850.260005	1909.750003	1850.540009	1909.480007	1850.839991	1909.189995	1851.120009	1908.959993	1850	1910
30	1850.160009	1909.839998	1850.149993	1909.840008	1850.259998	1909.750003	1850.540003	1909.480009	1850.840008	1909.190001	1851.120009	1908.959990	1850	1910
20	1850.159996	1909.839994	1850.149991	1909.840009	1850.259999	1909.750006	1850.540007	1909.479993	1850.840009	1909.190000	1851.120005	1908.959990	1850	1910
10	1850.159996	1909.840006	1850.149998	1909.840005	1850.260004	1909.750009	1850.540005	1909.479999	1850.839991	1909.190007	1851.119994	1908.960007	1850	1910
0	1850.159995	1909.839991	1850.149992	1909.839996	1850.260005	1909.750007	1850.539991	1909.479996	1850.839996	1909.189995	1851.119996	1908.960005	1850	1910
-10	1850.159994	1909.840009	1850.149997	1909.840001	1850.259993	1909.750003	1850.539991	1909.480003	1850.840000	1909.190002	1851.119995	1908.959996	1850	1910
-20	1850.160003	1909.840005	1850.149998	1909.839998	1850.259990	1909.749990	1850.540001	1909.480009	1850.840006	1909.189999	1851.119996	1908.960001	1850	1910
-30	1850.160008	1909.839995	1850.150002	1909.840002	1850.260005	1909.750009	1850.539990	1909.479996	1850.839999	1909.190005	1851.120001	1908.960005	1850	1910

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Procedure

All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. The bandwidth of the fundamental frequency was measured by spectrum analyzer with  $RBW \geq 1\% \times OBW$  and  $VBW \geq 3 \times VBW$ .


#### Occupied Bandwidth Measurement:

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 26 dB Bandwidth Measurement:


The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26dB below the transmitter power.

### 4.4.2 Test Setup

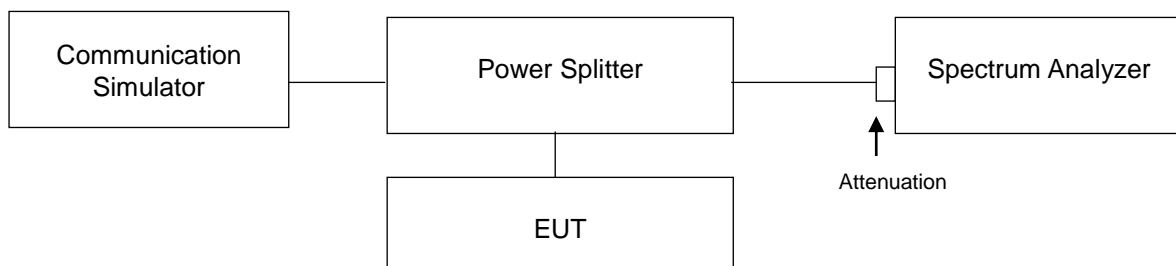

#### 4.4.3 Test Result (-26dB Bandwidth)


Channel	Freq. (MHz)	-26dB Bandwidth (MHz)
		WCDMA B2
9262	1852.4	4.69
9400	1880.0	4.70
9538	1907.6	4.69

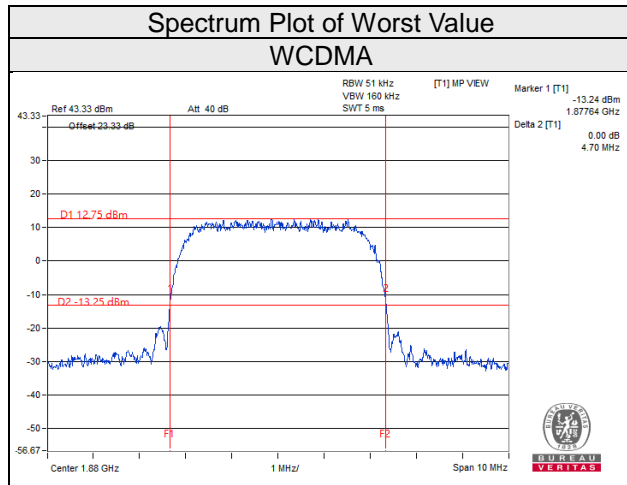


LTE Band 2							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.26	1.25	18615	1851.5	2.96	2.93
18900	1880	1.25	1.26	18900	1880	2.95	2.93
19193	1909.3	1.23	1.24	19185	1908.5	2.94	2.93
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.88	4.88	18650	1855	9.67	9.76
18900	1880	4.92	4.93	18900	1880	9.73	9.78
19175	1907.5	4.90	4.94	19150	1905	9.79	9.83
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	-26dB Bandwidth (MHz)		Channel	Frequency (MHz)	-26dB Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	14.37	14.51	18700	1860	19.05	19.05
18900	1880	14.59	14.55	18900	1880	19.18	19.23
19125	1902.5	14.55	14.50	19100	1900	19.23	19.16

### Spectrum Plot of Worst Value


#### 1.4MHz / QPSK

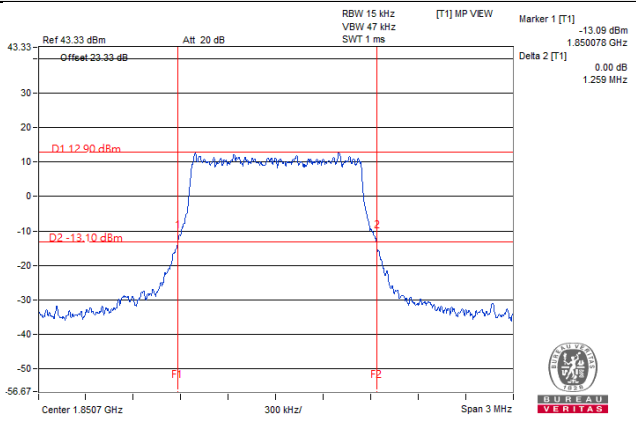


#### 3MHz / QPSK

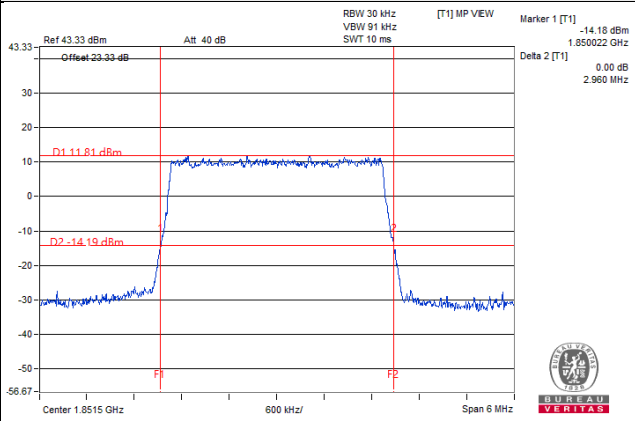


#### 5MHz / 16QAM

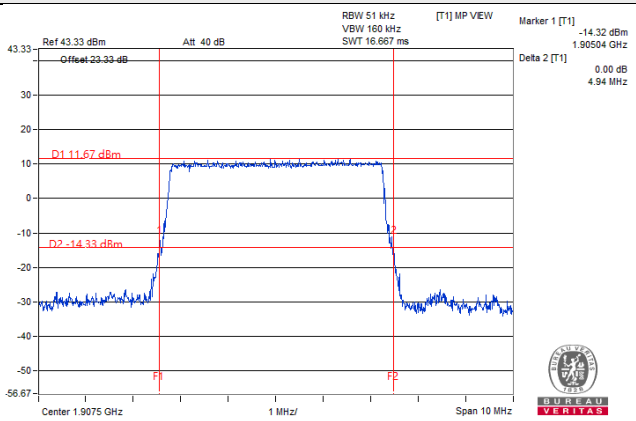


#### 10MHz / 16QAM

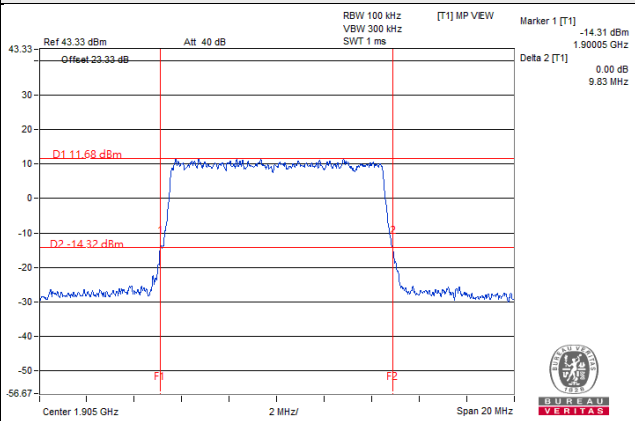

#### 15MHz / QPSK

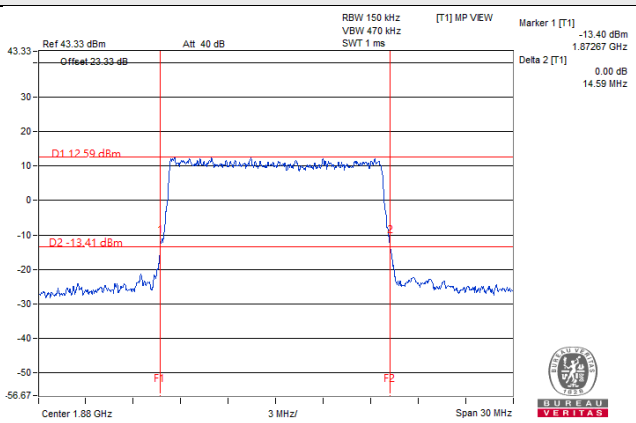


#### 20MHz / 16QAM

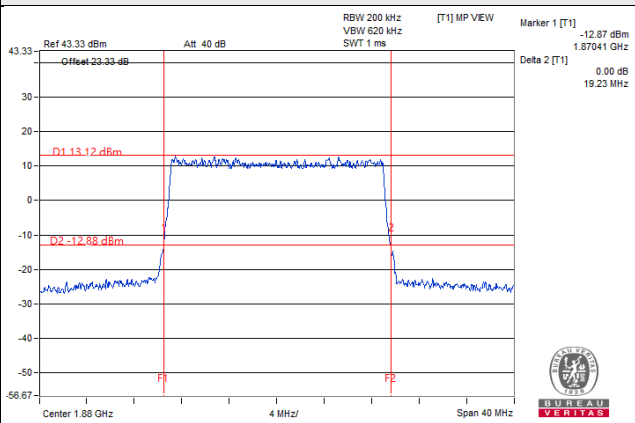

#### 4.4.4 Test Result (Occupied Bandwidth)

Channel	Freq. (MHz)	99% Occupied Bandwidth (MHz)
		WCDMA B2
9262	1852.4	4.16
9400	1880.0	4.16
9538	1907.6	4.17

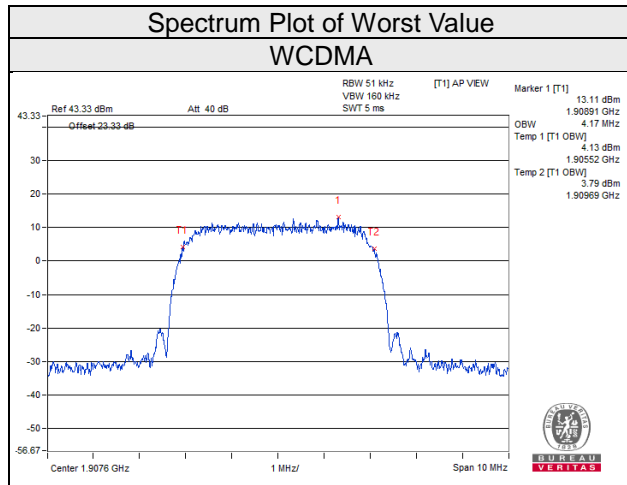





LTE Band 2							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.08	1.08	18615	1851.5	2.69	2.68
18900	1880	1.08	1.08	18900	1880	2.68	2.68
19193	1909.3	1.08	1.08	19185	1908.5	2.68	2.68
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.49	4.48	18650	1855	8.96	8.94
18900	1880	4.48	4.48	18900	1880	8.94	8.96
19175	1907.5	4.48	4.48	19150	1905	8.96	8.96
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.41	13.41	18700	1860	17.84	17.88
18900	1880	13.44	13.44	18900	1880	17.88	17.88
19125	1902.5	13.44	13.47	19100	1900	17.92	17.88

### Spectrum Plot of Worst Value


#### 1.4MHz / QPSK

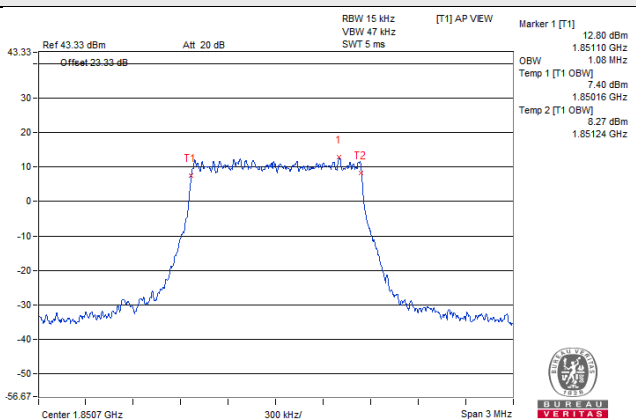


#### 3MHz / QPSK

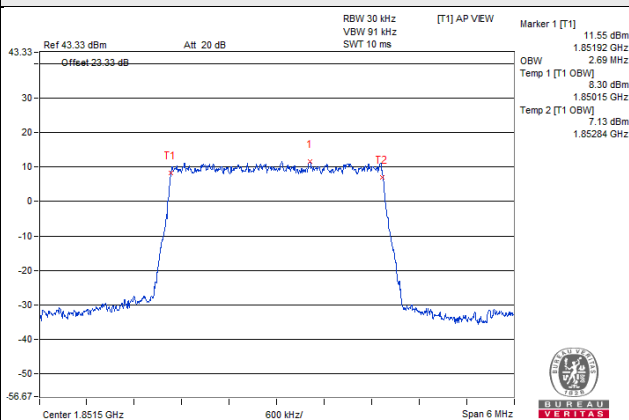


#### 5MHz / QPSK

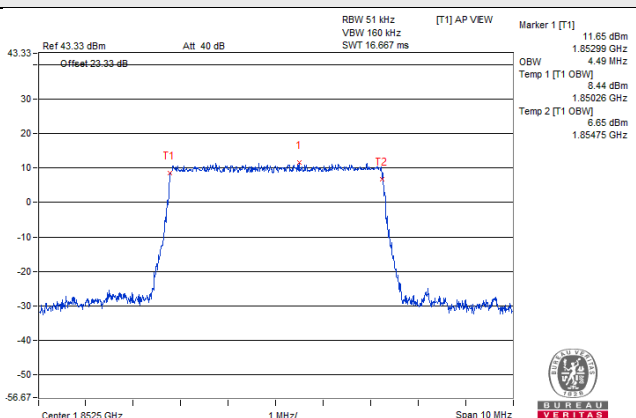


#### 10MHz / QPSK

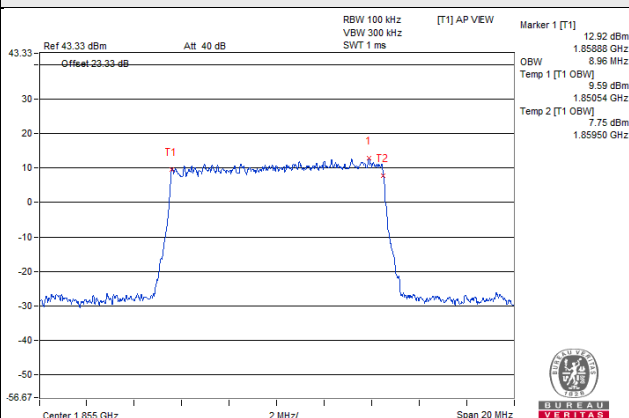

#### 15MHz / 16QAM

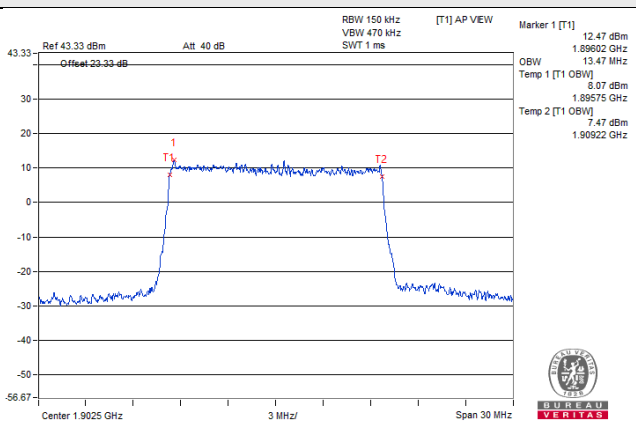

#### 20MHz / QPSK

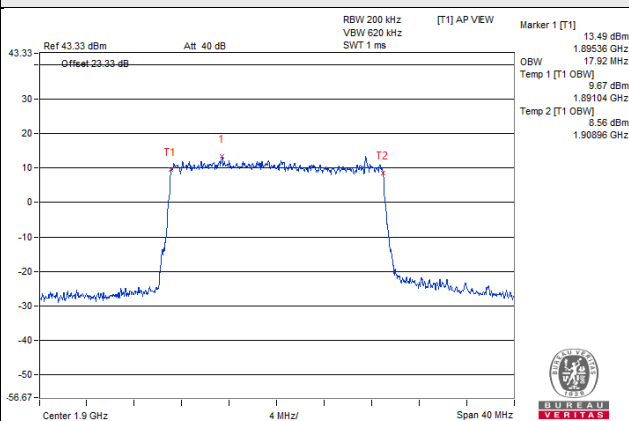


## 4.5 Band Edge Measurement

### 4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### 4.5.2 Test Setup

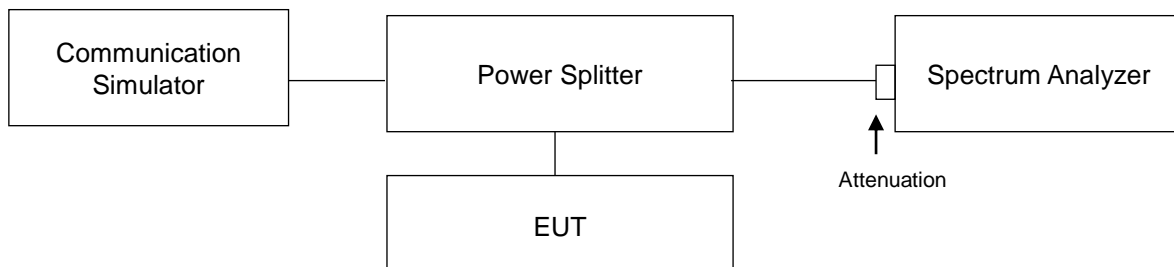

### 4.5.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and RB of the spectrum is  $>1\%$  emission bandwidth and VB of the spectrum is  $\geq 3*RB$ .
- c. Record the max trace plot into the test report.


#### 4.5.4 Test Results

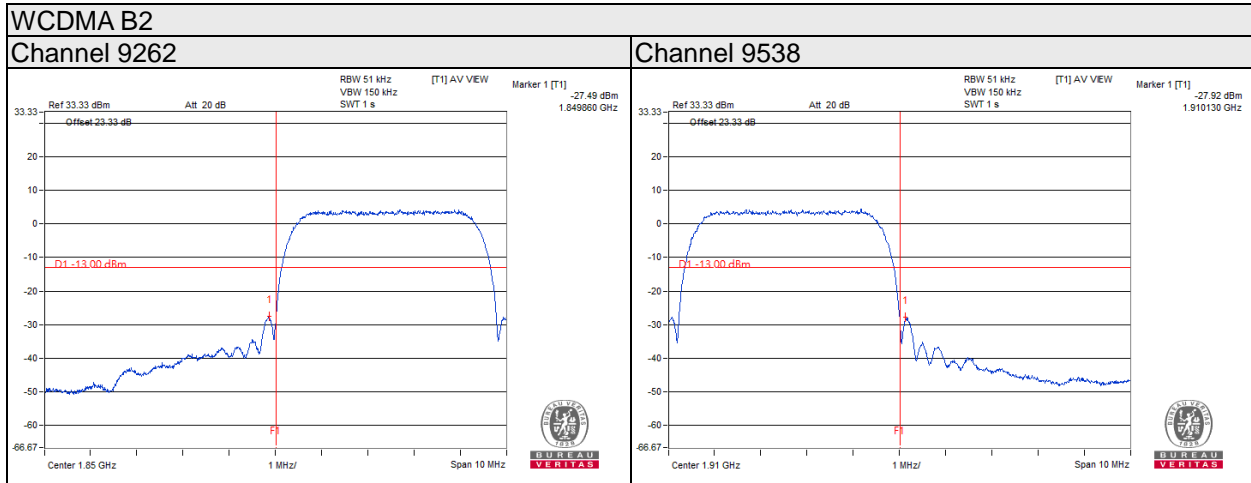

**LTE Band 2 Channel Bandwidth: 1.4MHz**


**Channel 18607**

**1 RB**

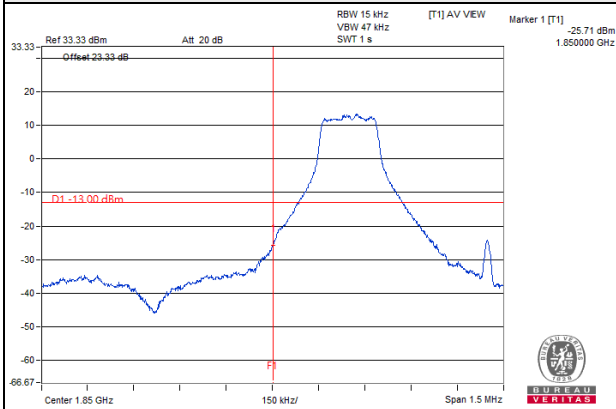


**Channel 19193**


**1 RB**

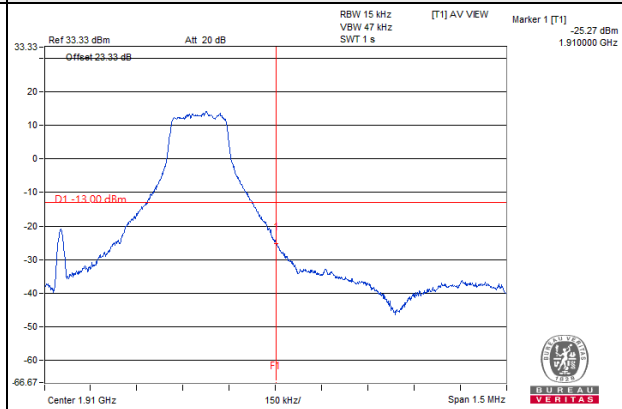

**6 RB**

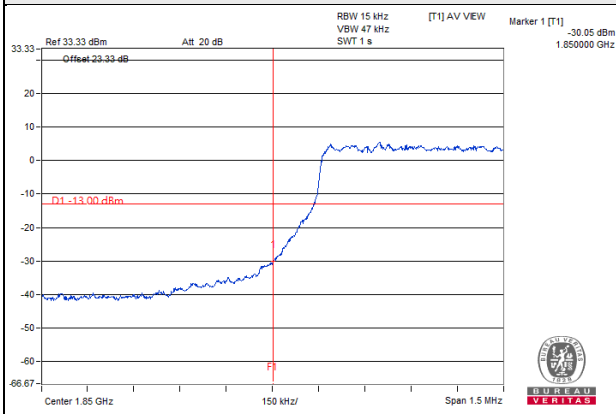


**6 RB**

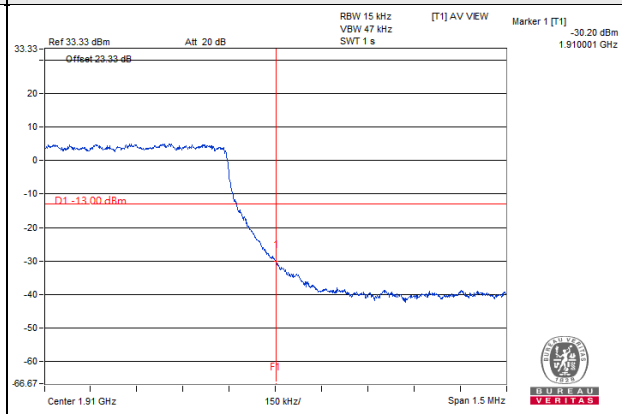

**LTE Band 2 Channel Bandwidth: 3MHz**


**Channel 18615**

**1 RB**

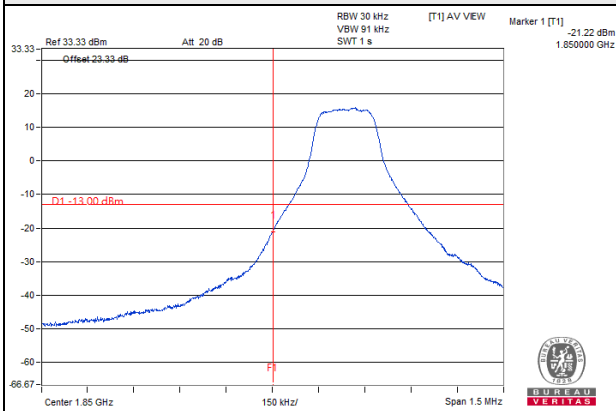


**Channel 19185**


**1 RB**

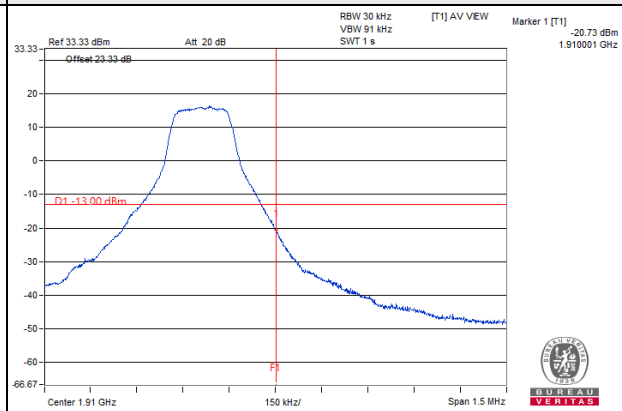

**15 RB**

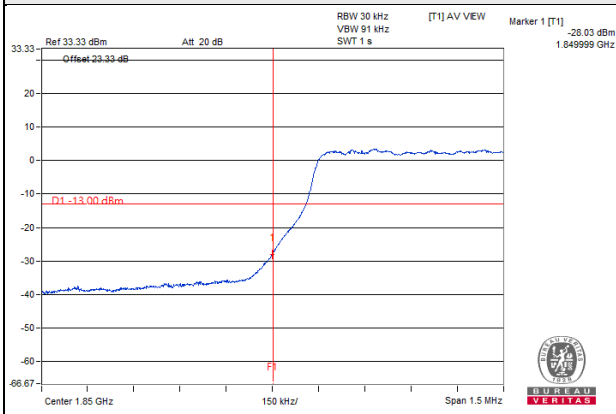


**15 RB**

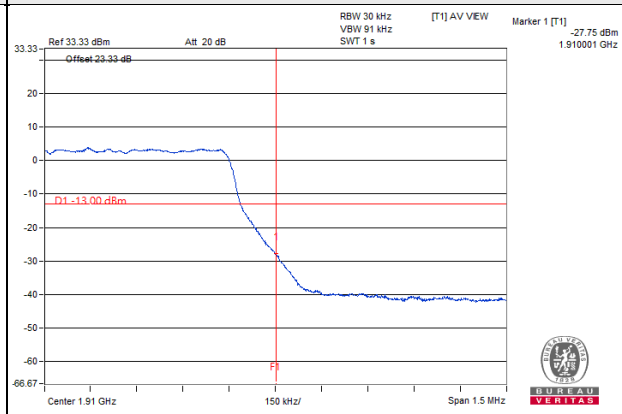

**LTE Band 2 Channel Bandwidth: 5MHz**


**Channel 18625**

**1 RB**

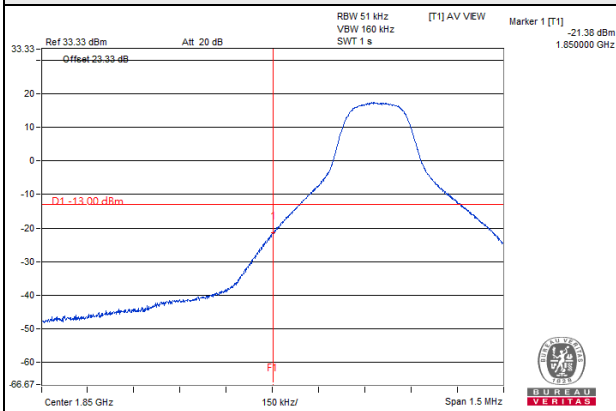


**Channel 19175**


**1 RB**

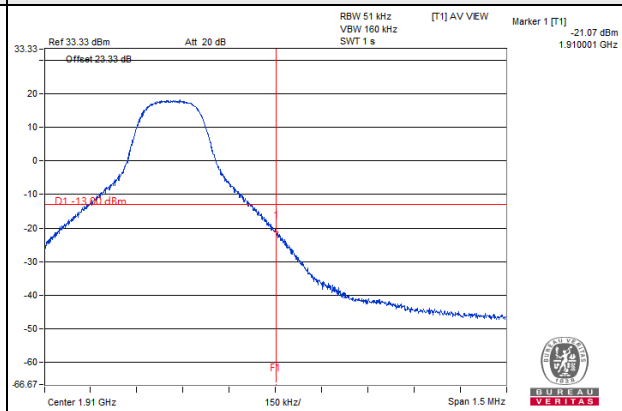

**25 RB**

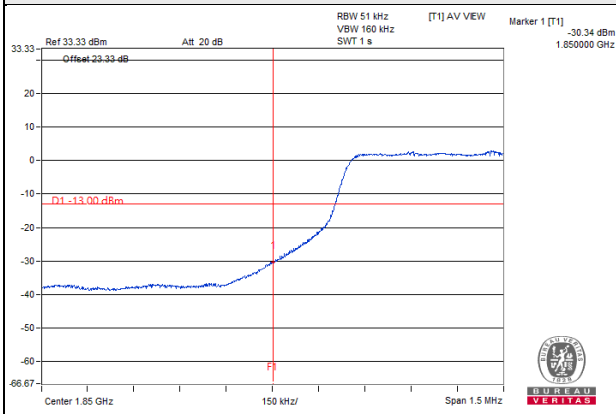


**25 RB**

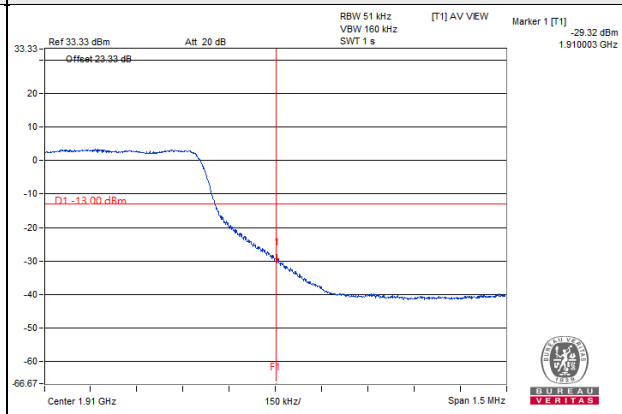

**LTE Band 2 Channel Bandwidth: 10MHz**


**Channel 18650**

**1 RB**

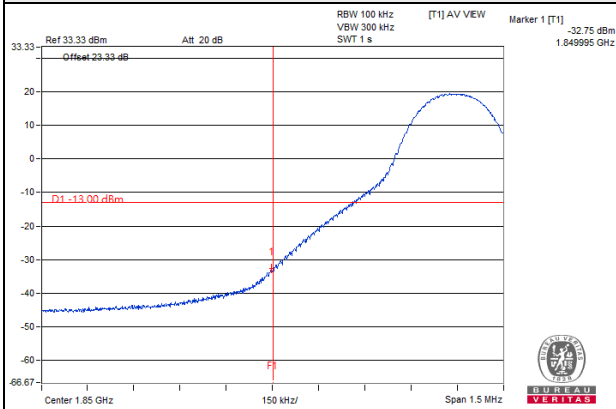


**Channel 19150**


**1 RB**

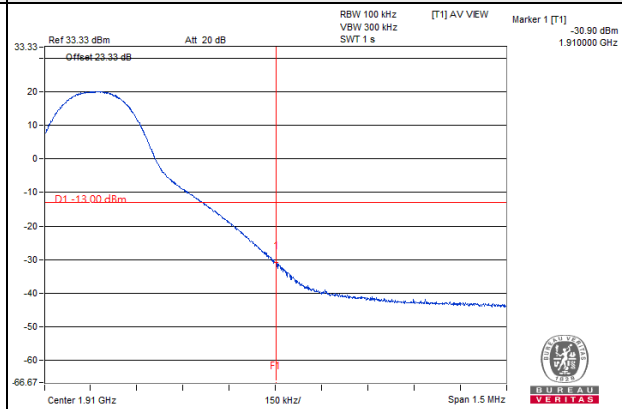

**50 RB**

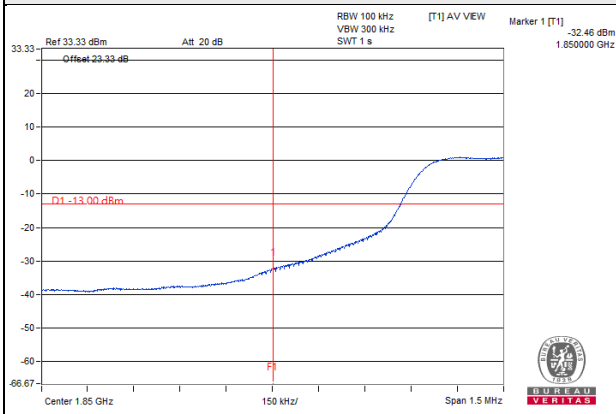

**50 RB**

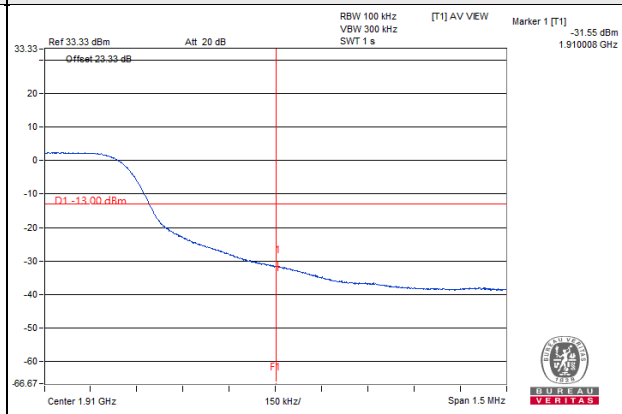




**LTE Band 2 Channel Bandwidth: 15MHz**


**Channel 18675**

**1 RB**

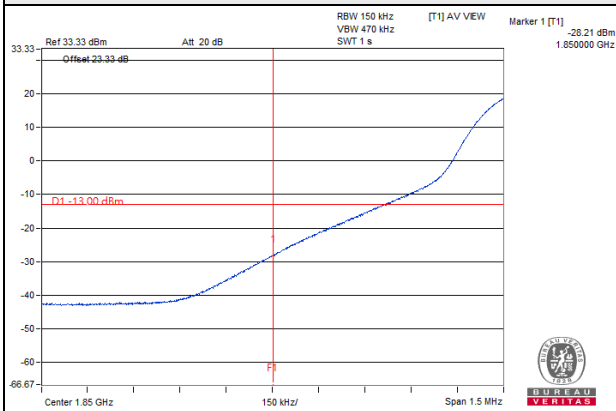


**Channel 19125**


**1 RB**

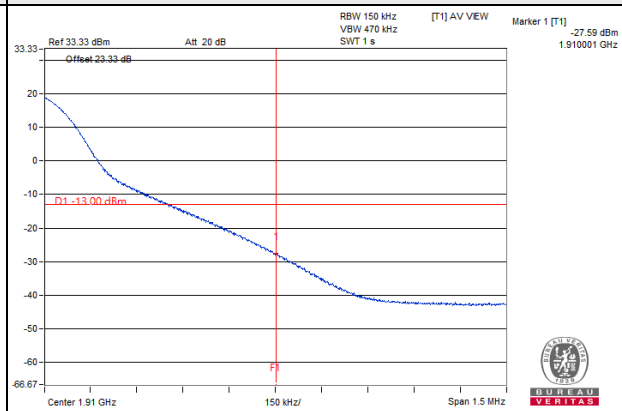

**75 RB**

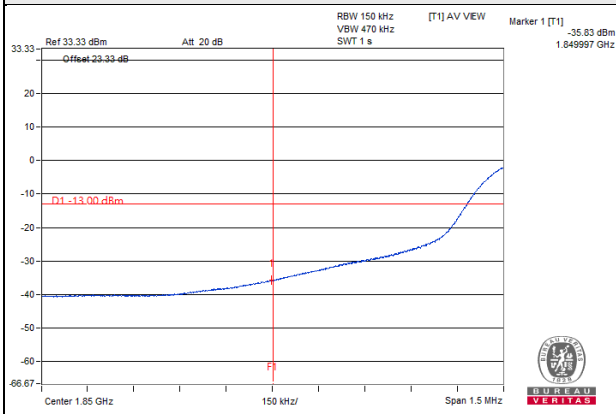


**75 RB**

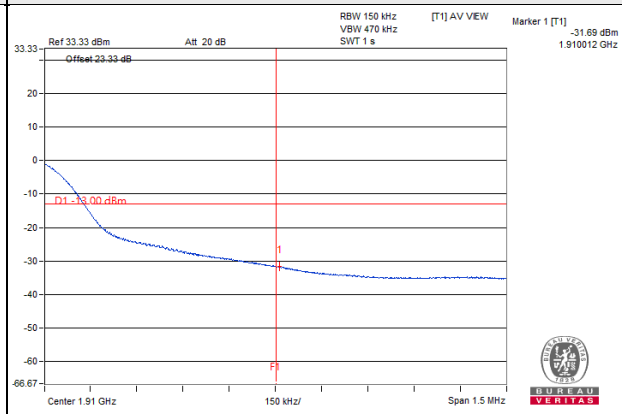

**LTE Band 2 Channel Bandwidth: 20MHz**


**Channel 18700**

**1 RB**

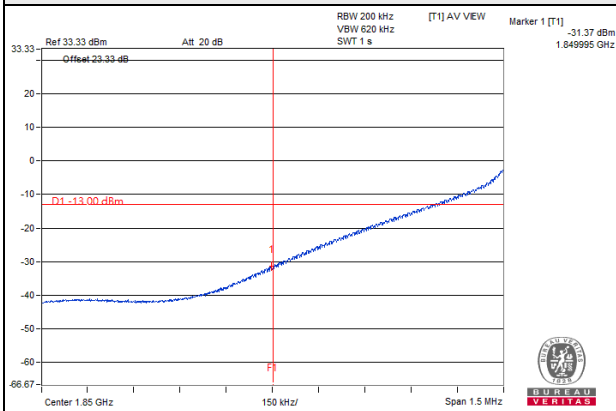


**Channel 19100**


**1 RB**

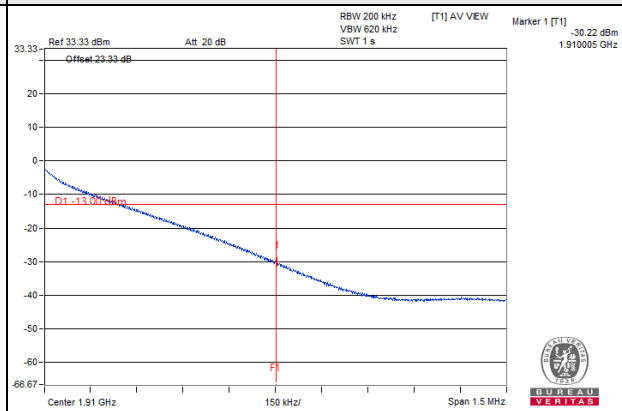

**100 RB**

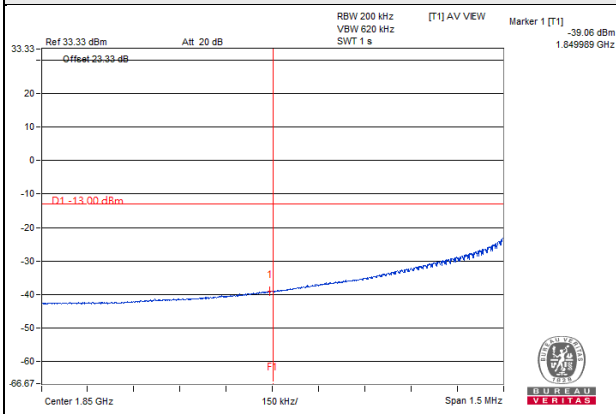

**100 RB**

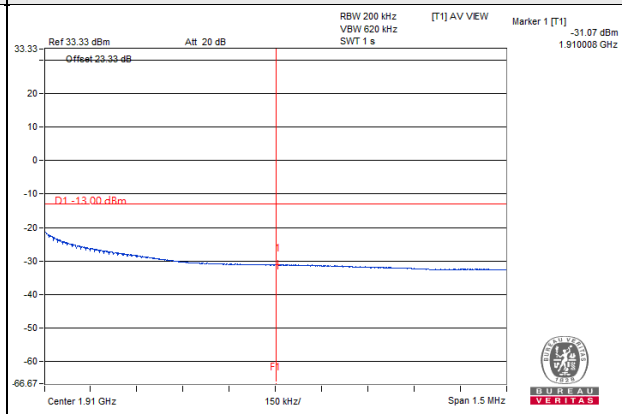


## 4.6 Peak to Average Ratio

### 4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.5.2 Test Setup

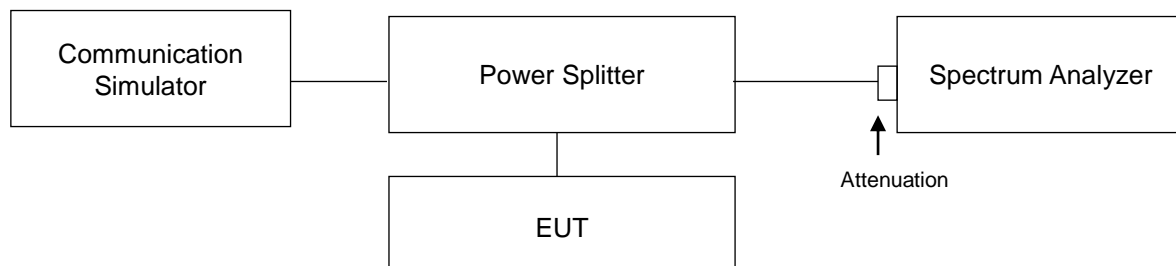


### 4.5.3 Test Procedures

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 4.5.4 Test Results


Channel	Freq. (MHz)	Peak to Average Ratio (dB)
		WCDMA B2
9262	1852.4	3.17
9400	1880	3.18
9538	1907.6	3.17

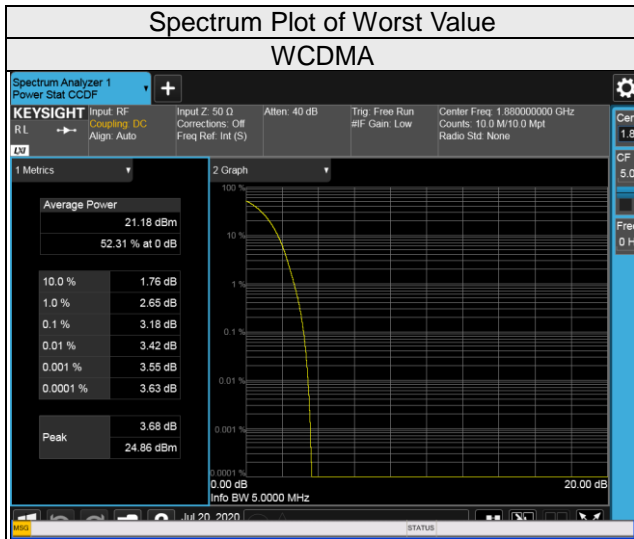


LTE Band 2							
Channel Bandwidth 1.4MHz				Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	5.24	6.01	18615	1851.5	5.29	6.16
18900	1880	5.34	6.10	18900	1880	5.32	6.17
19193	1909.3	5.21	6.00	19185	1908.5	5.25	6.11
Channel Bandwidth 5MHz				Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	5.39	6.20	18650	1855	5.36	6.23
18900	1880	5.37	6.19	18900	1880	5.32	6.14
19175	1907.5	5.30	6.13	19150	1905	5.26	6.08
Channel Bandwidth 15MHz				Channel Bandwidth 20MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	5.54	6.16	18700	1860	5.10	5.94
18900	1880	5.57	6.20	18900	1880	5.38	6.09
19125	1902.5	5.48	6.09	19100	1900	5.23	5.95

### Spectrum Plot of Worst Value


1.4MHz / 16QAM

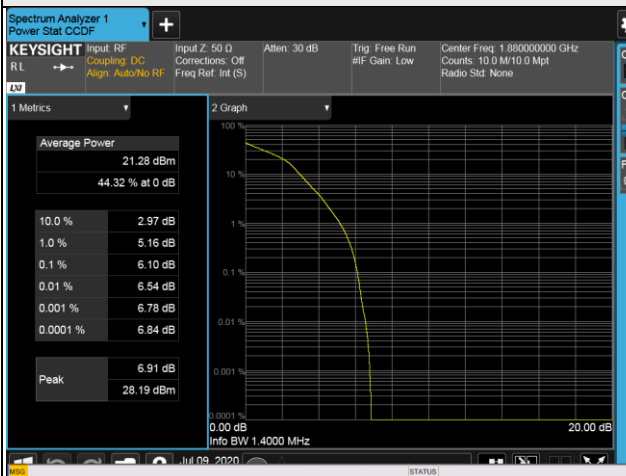

3MHz / 16QAM

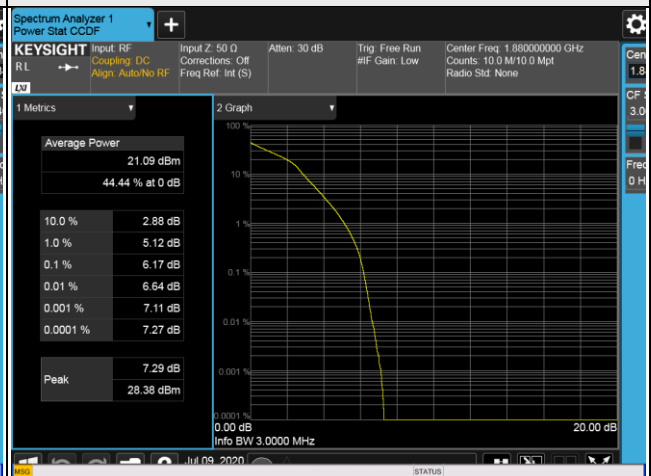


5MHz / 16QAM

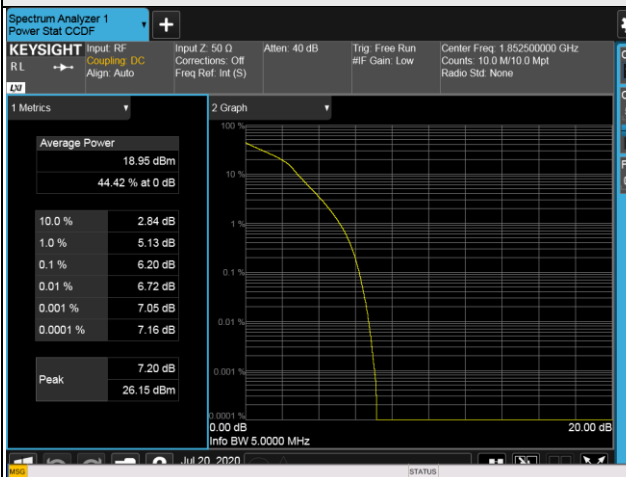


10MHz / 16QAM



15MHz / 16QAM

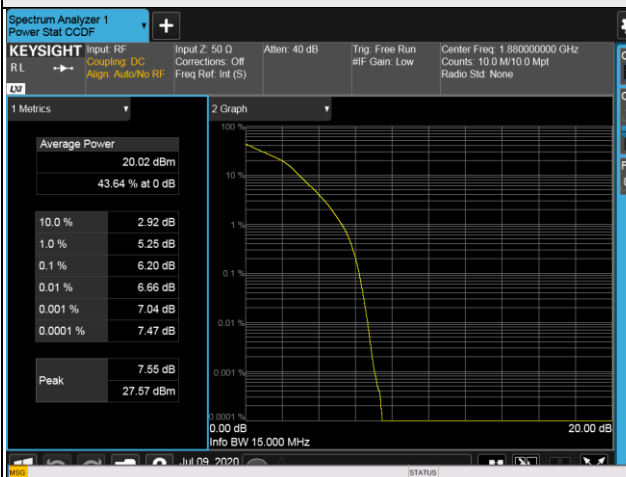

20MHz / 16QAM

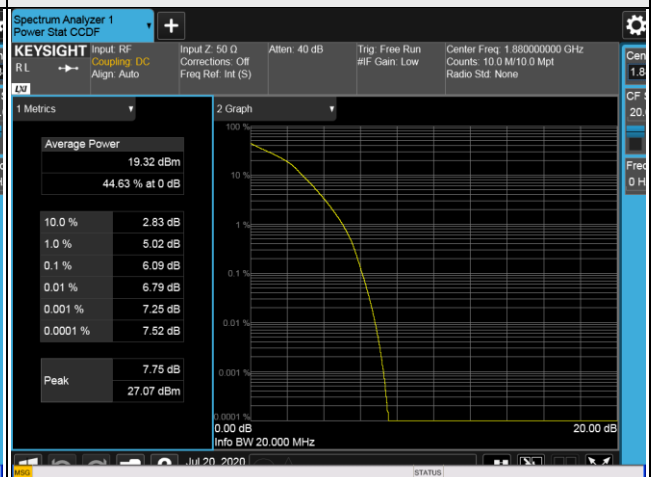


## 4.7 Conducted Spurious Emissions

### 4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .


### 4.7.2 Test Setup

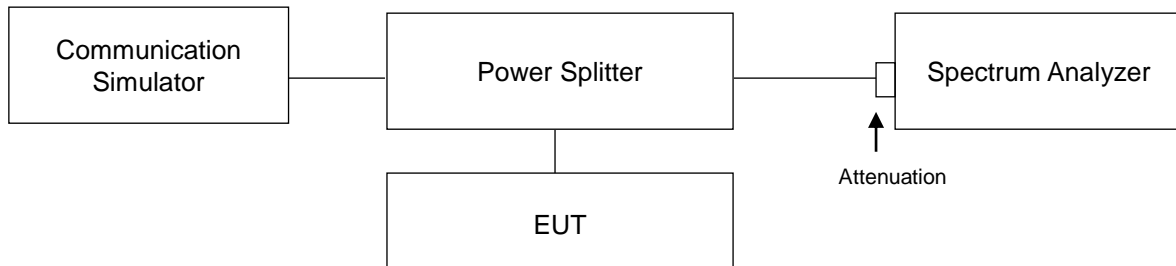

### 4.7.3 Test Procedure

- All measurements were done at middle operational frequency range.
- Measuring frequency range is from 9 kHz to the tenth harmonic of the highest fundamental frequency, it shall be connected to the pad attenuated the carried frequency.  
RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 4.7.4 Test Results

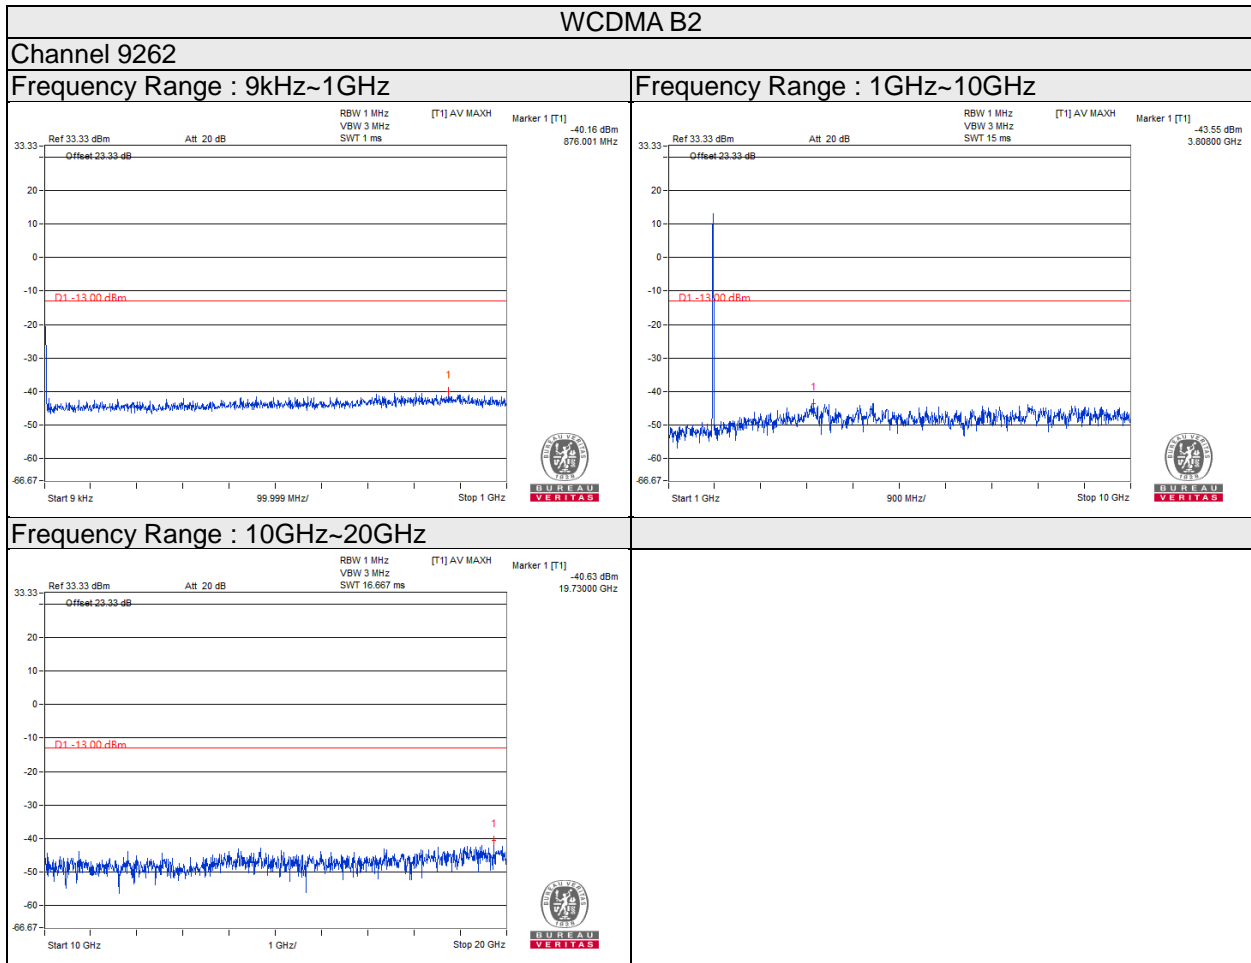


Note: The signal of 9kHz is IF signal from test instrument.




### WCDMA B2

#### Channel 9400


#### Frequency Range : 9kHz~1GHz

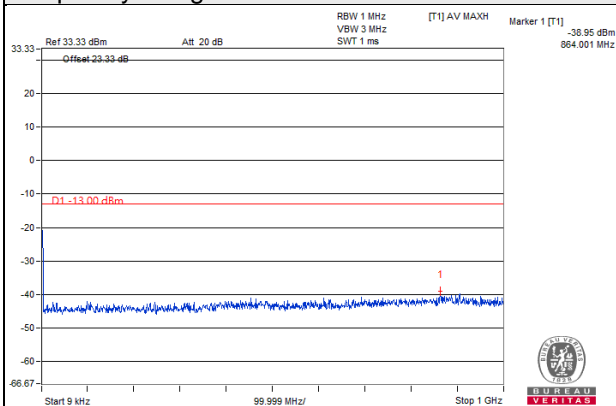

#### Frequency Range : 1GHz~10GHz

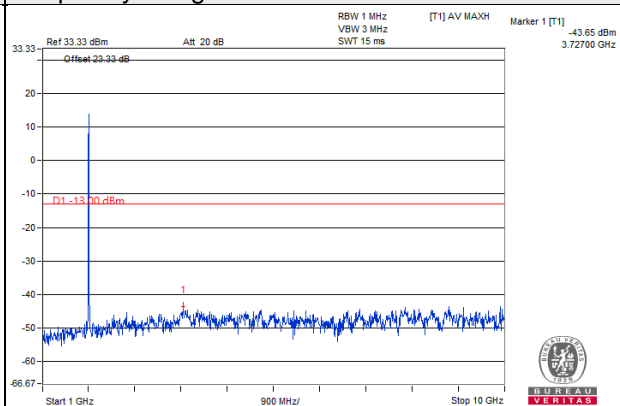

#### Frequency Range : 10GHz~20GHz

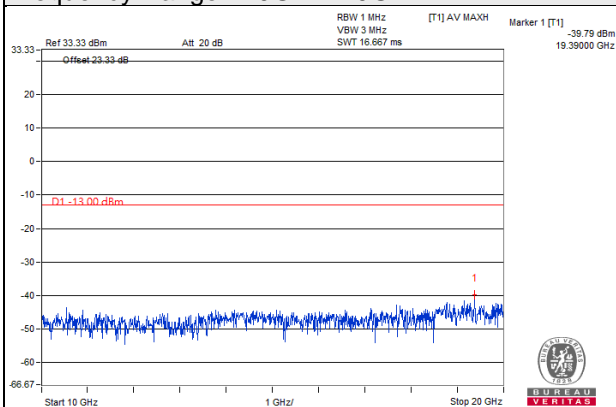


Note: The signal of 9kHz is IF signal from test instrument.


## WCDMA B2

### Channel 9538


#### Frequency Range : 9kHz~1GHz

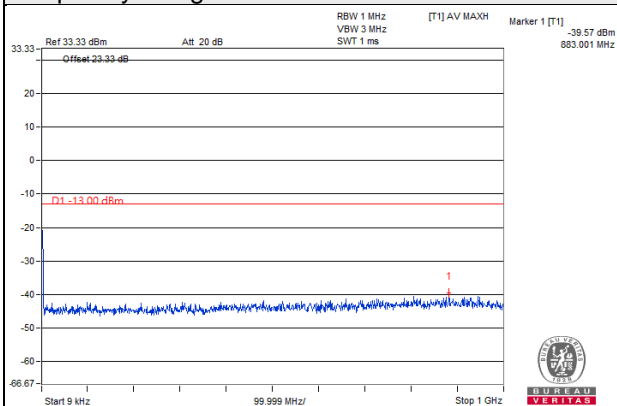

#### Frequency Range : 1GHz~10GHz

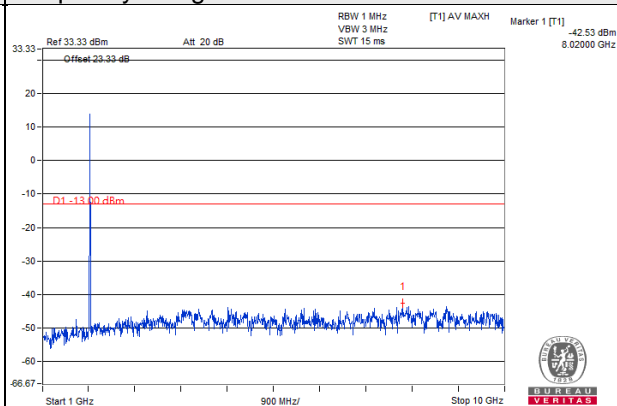

#### Frequency Range : 10GHz~20GHz

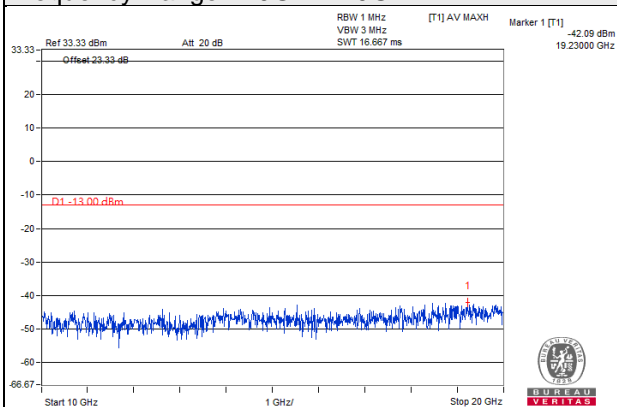


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 1.4MHz**

**Channel 18607**


**Frequency Range : 9kHz~1GHz**

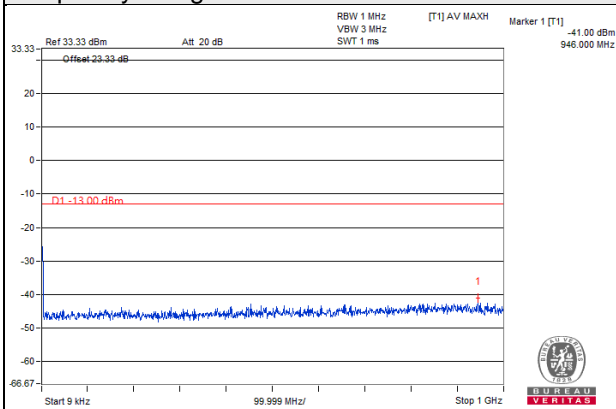

**Frequency Range : 1GHz ~10GHz**

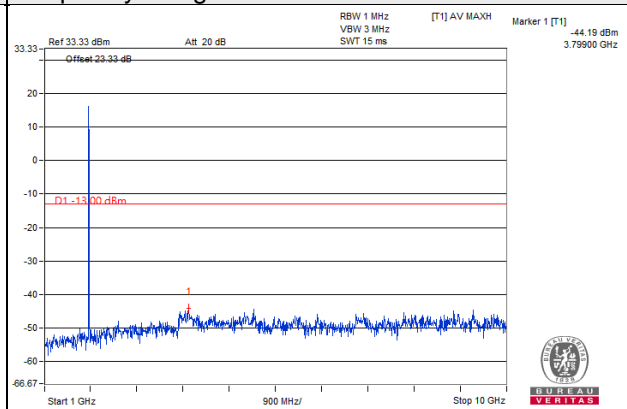

**Frequency Range : 10GHz~20GHz**

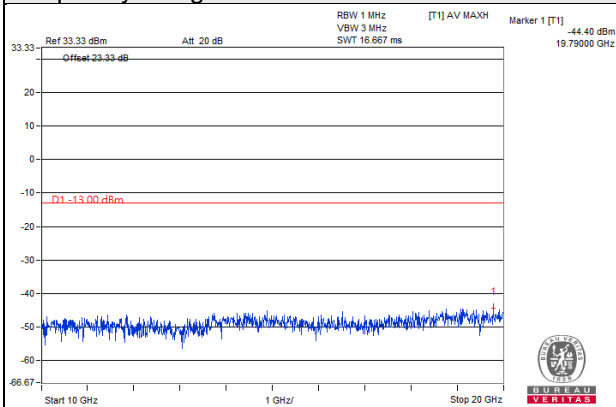


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 1.4MHz**

**Channel 18900**


**Frequency Range : 9kHz~1GHz**

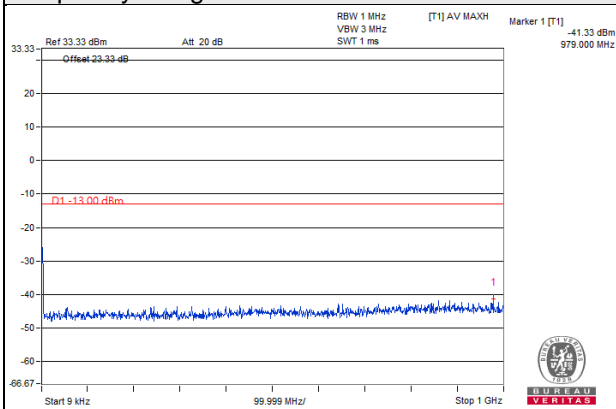

**Frequency Range : 1GHz ~10GHz**

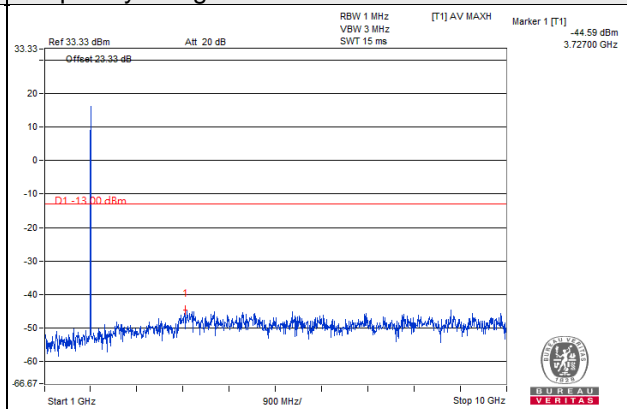

**Frequency Range : 10GHz~20GHz**

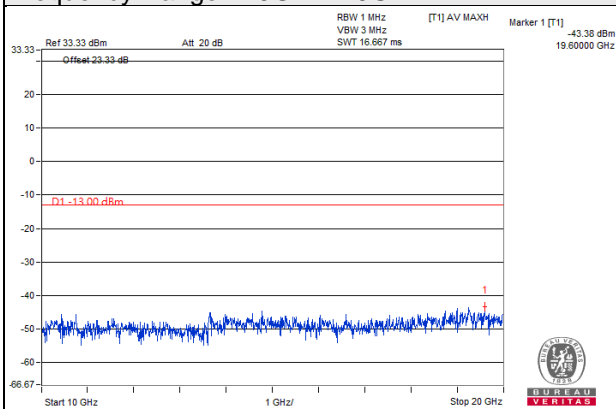


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 1.4MHz**

**Channel 19193**


**Frequency Range : 9kHz~1GHz**

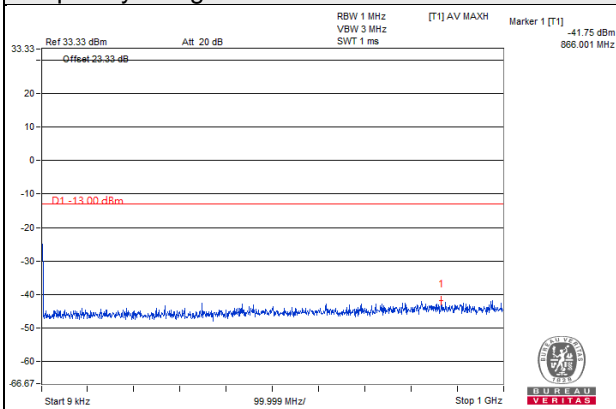

**Frequency Range : 1GHz ~10GHz**

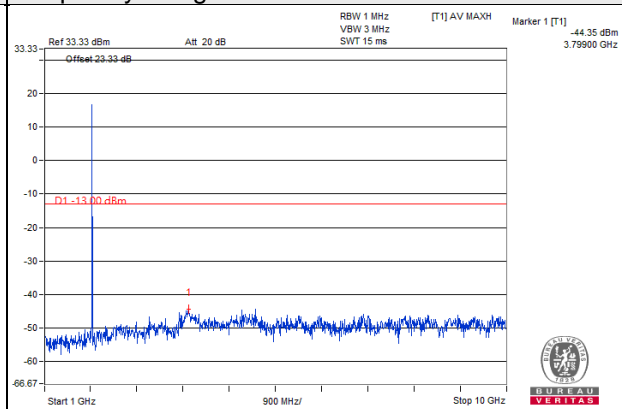

**Frequency Range : 10GHz~20GHz**

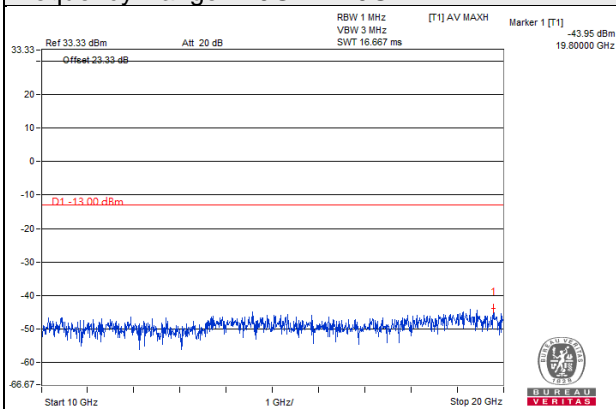


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 3MHz**

**Channel 18615**


**Frequency Range : 9kHz~1GHz**

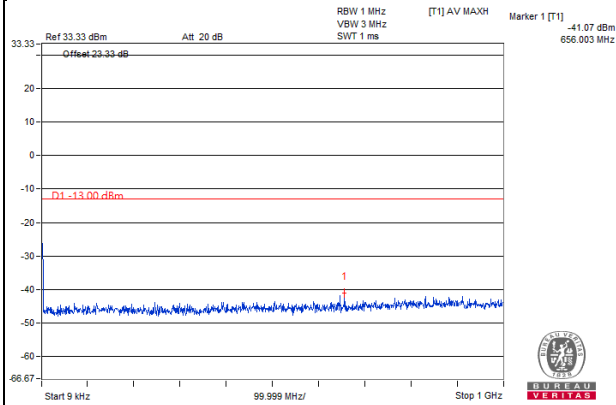

**Frequency Range : 1GHz ~10GHz**

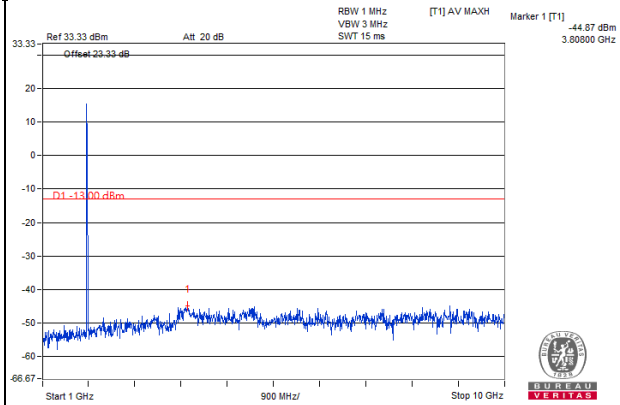

**Frequency Range : 10GHz~20GHz**

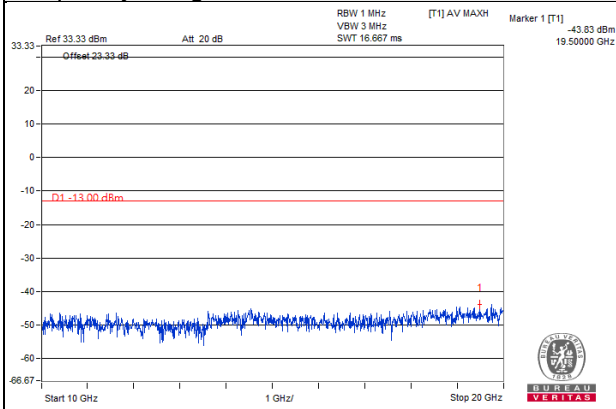


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 3MHz**

**Channel 18900**


**Frequency Range : 9kHz~1GHz**

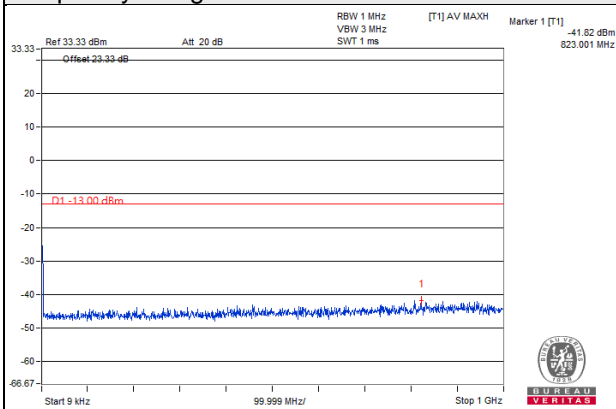

**Frequency Range : 1GHz ~10GHz**

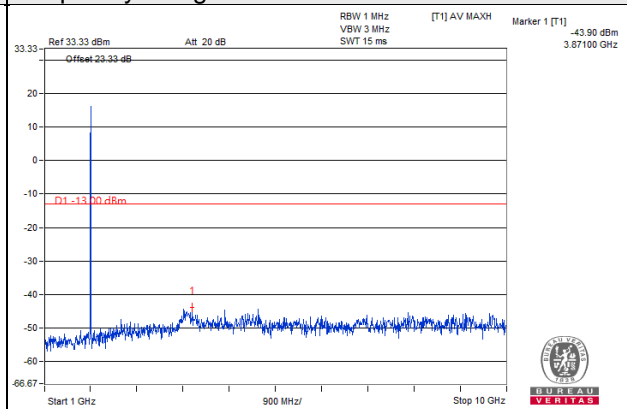

**Frequency Range : 10GHz~20GHz**

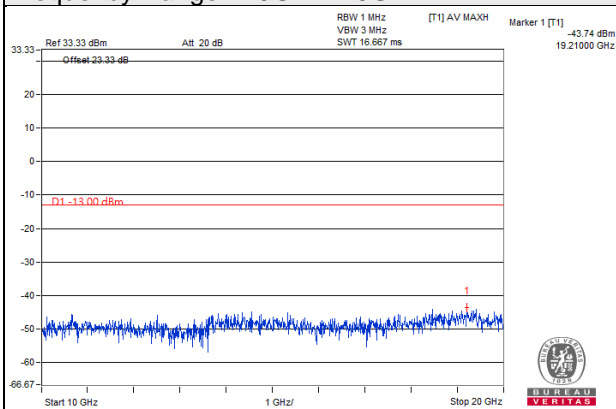


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 3MHz**

**Channel 19185**


**Frequency Range : 9kHz~1GHz**

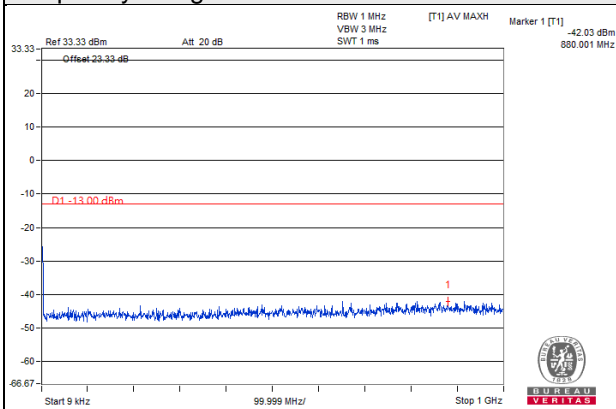

**Frequency Range : 1GHz ~10GHz**

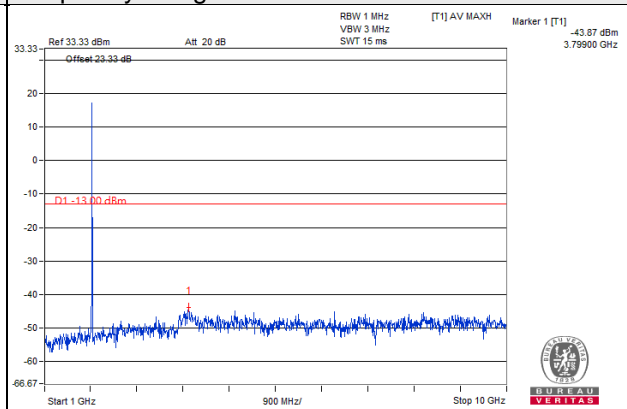

**Frequency Range : 10GHz~20GHz**

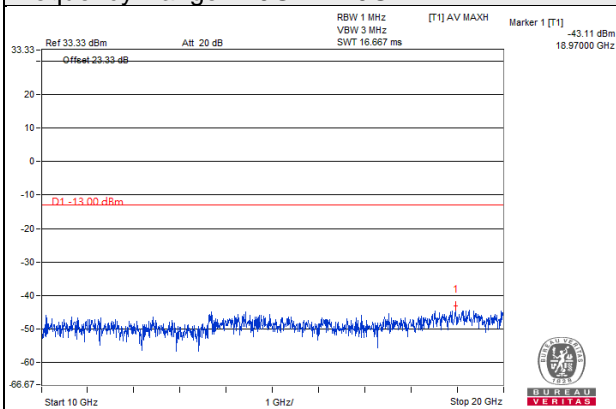


Note: The signal of 9kHz is IF signal from test instrument.




**LTE Band 2 Channel Bandwidth: 5MHz**

**Channel 18625**


**Frequency Range : 9kHz~1GHz**

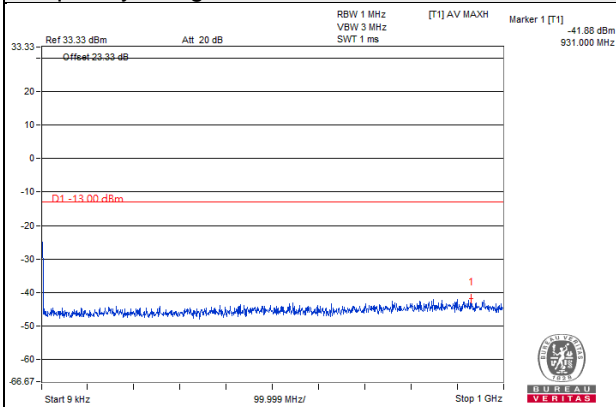

**Frequency Range : 1GHz ~10GHz**

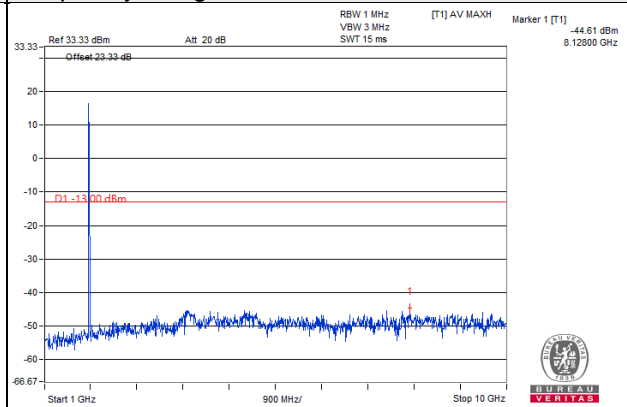

**Frequency Range : 10GHz~20GHz**

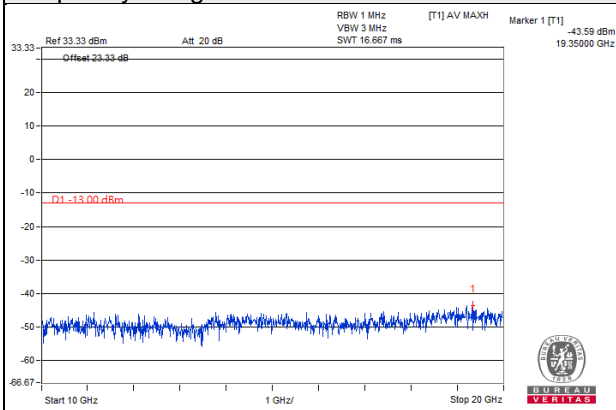


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 5MHz**

**Channel 18900**


**Frequency Range : 9kHz~1GHz**

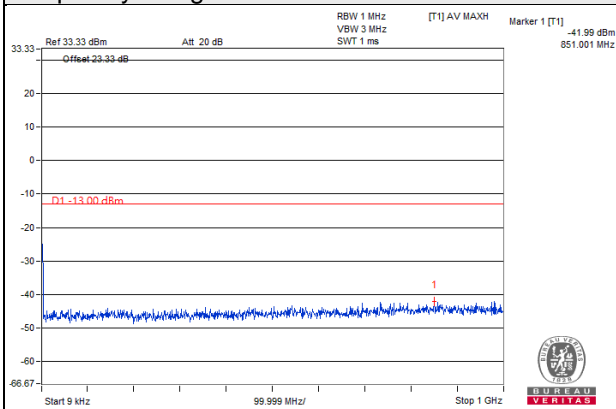

**Frequency Range : 1GHz ~10GHz**

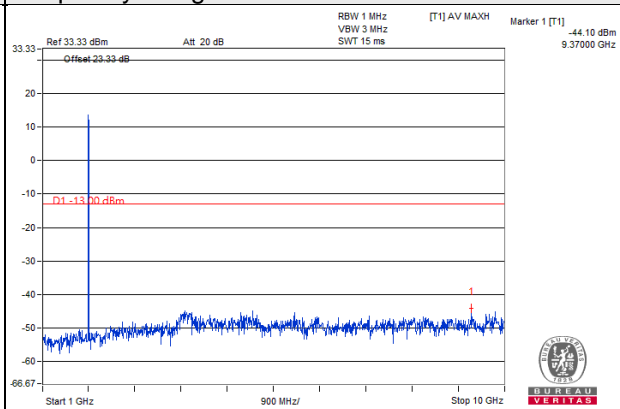

**Frequency Range : 10GHz~20GHz**

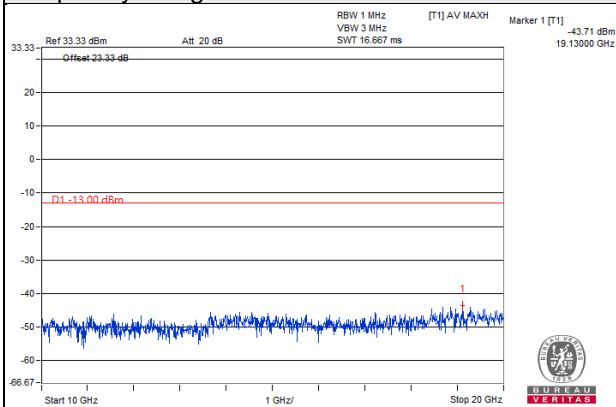


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 5MHz**

**Channel 19175**


**Frequency Range : 9kHz~1GHz**

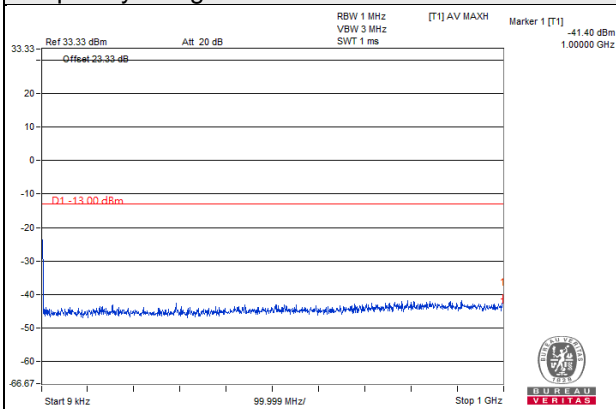

**Frequency Range : 1GHz ~10GHz**

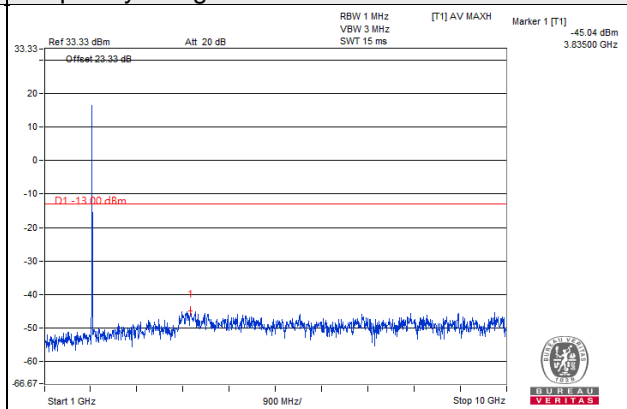

**Frequency Range : 10GHz~20GHz**

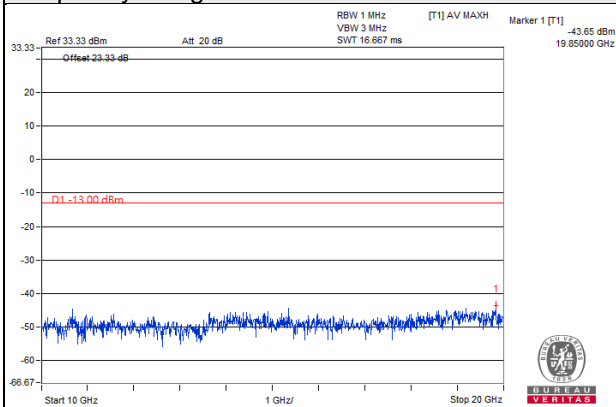


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 10MHz**

**Channel 18650**


**Frequency Range : 9kHz~1GHz**

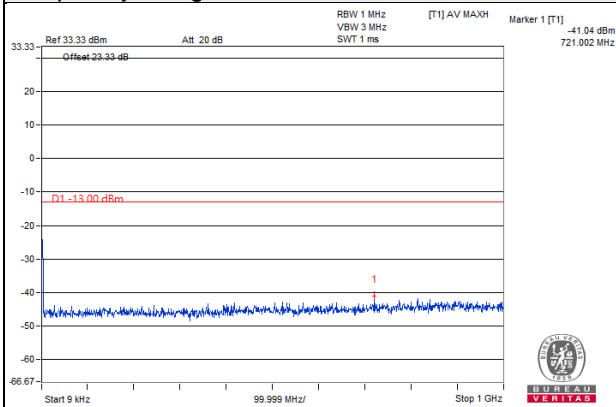

**Frequency Range : 1GHz ~10GHz**

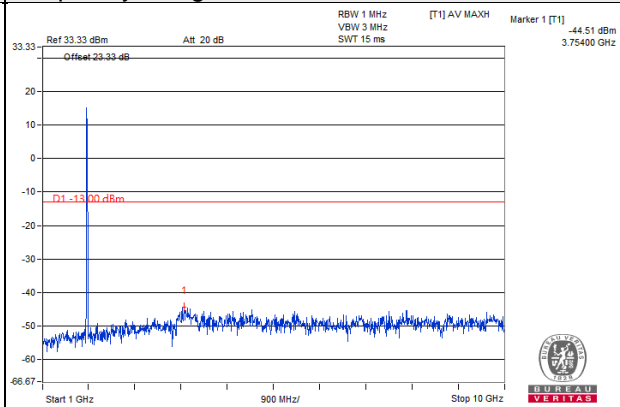


**Frequency Range : 10GHz~20GHz**

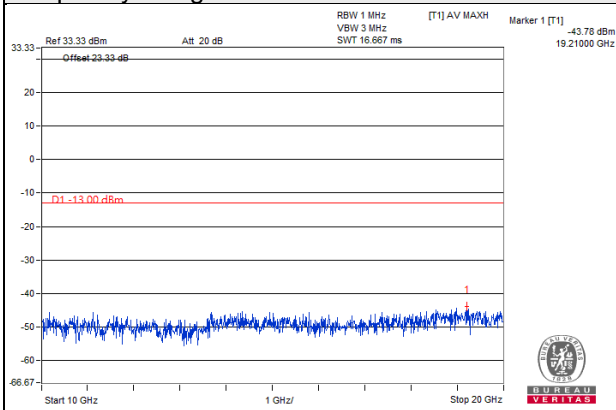


Note: The signal of 9kHz is IF signal from test instrument.

**LTE Band 2 Channel Bandwidth: 10MHz**  
**Channel 18900**


**Frequency Range : 9kHz~1GHz**

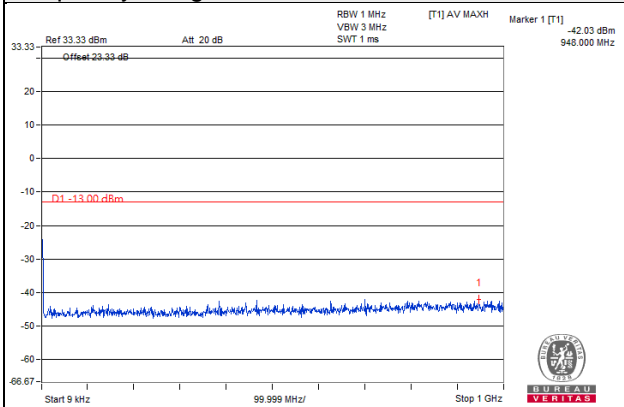

**Frequency Range : 1GHz ~10GHz**

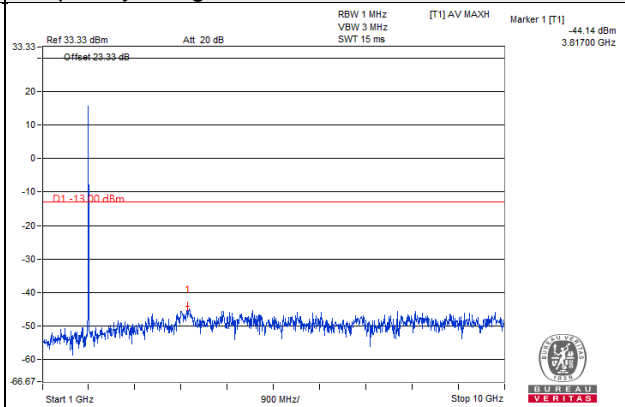

**Frequency Range : 10GHz~20GHz**

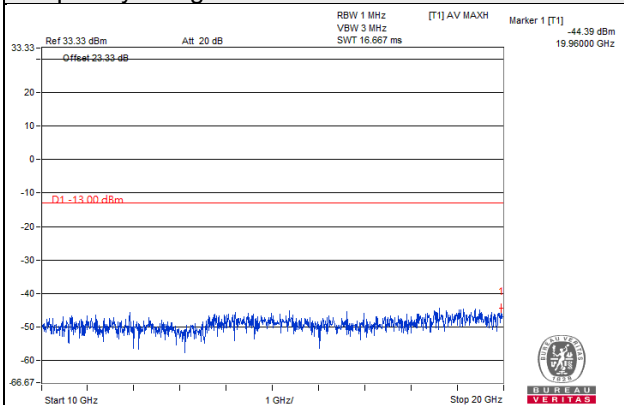


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 10MHz**

**Channel 19150**


**Frequency Range : 9kHz~1GHz**

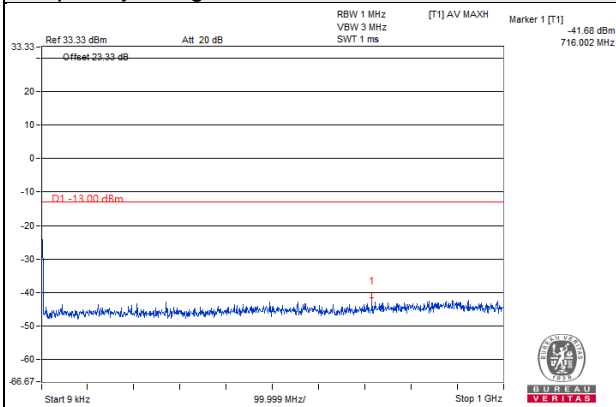

**Frequency Range : 1GHz ~10GHz**

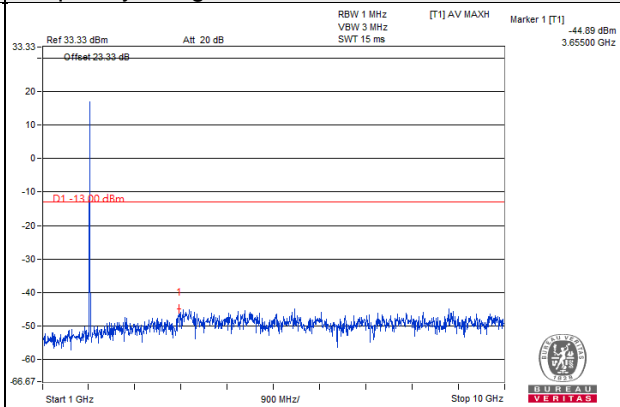

**Frequency Range : 10GHz~20GHz**

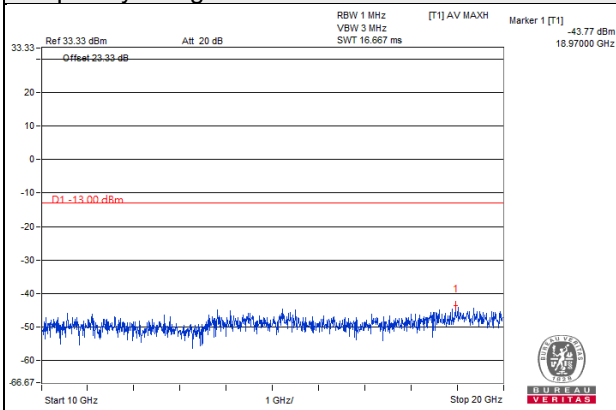


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 15MHz**

**Channel 18675**


**Frequency Range : 9kHz~1GHz**

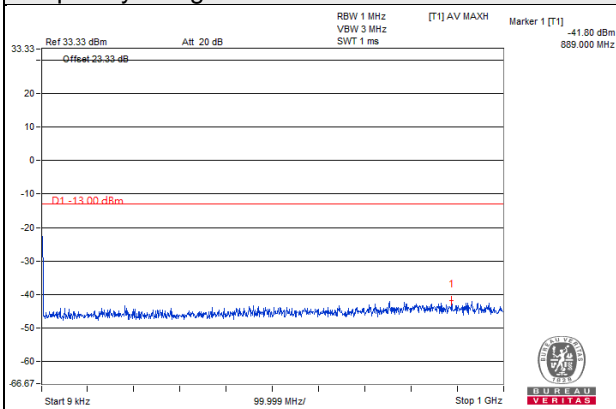

**Frequency Range : 1GHz ~10GHz**

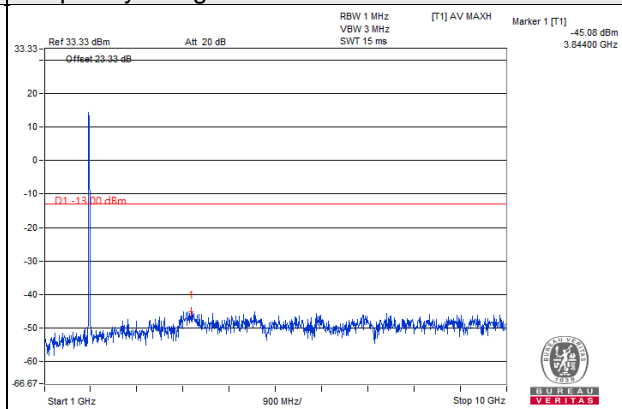

**Frequency Range : 10GHz~20GHz**

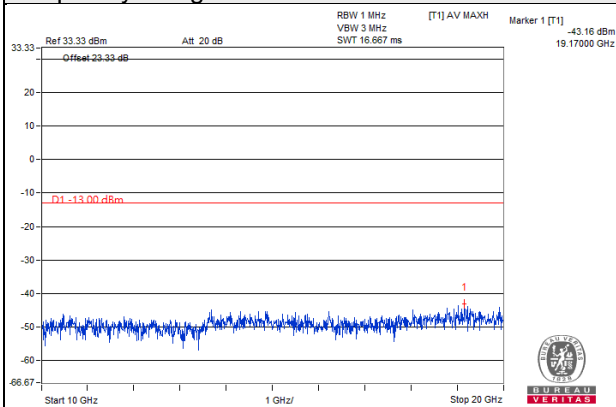


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 15MHz**

**Channel 18900**


**Frequency Range : 9kHz~1GHz**

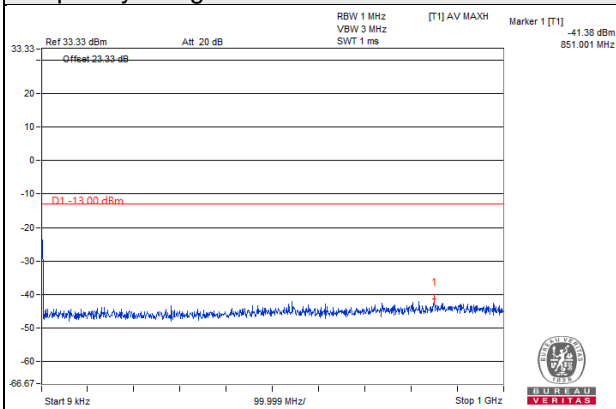

**Frequency Range : 1GHz ~10GHz**

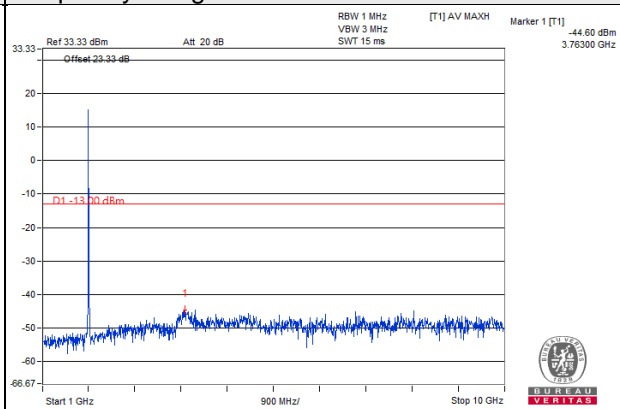

**Frequency Range : 10GHz~20GHz**

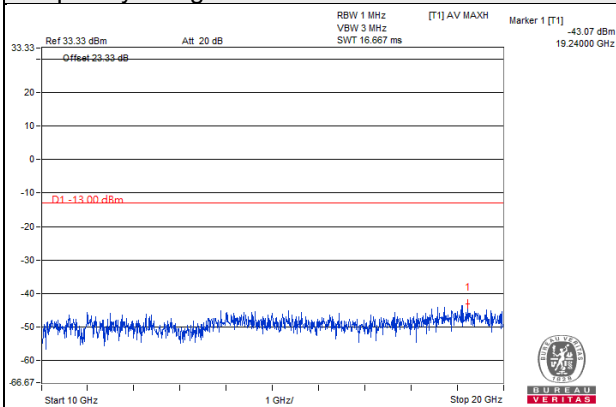


Note: The signal of 9kHz is IF signal from test instrument.




**LTE Band 2 Channel Bandwidth: 15MHz**

**Channel 19125**


**Frequency Range : 9kHz~1GHz**

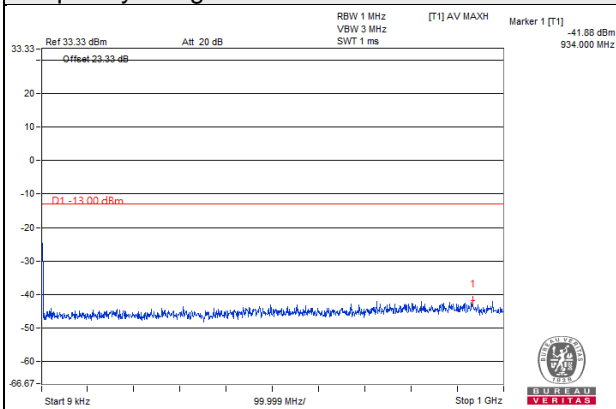

**Frequency Range : 1GHz ~10GHz**

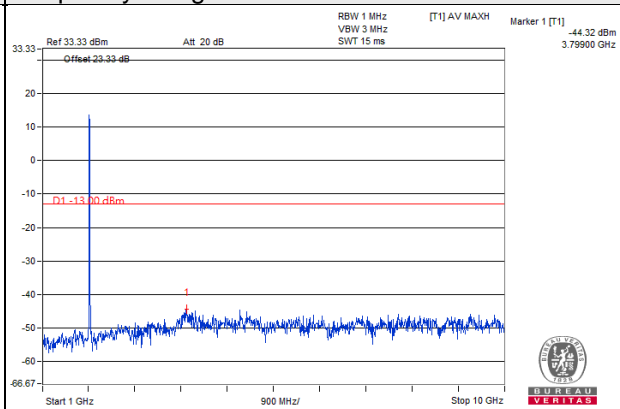

**Frequency Range : 10GHz~20GHz**

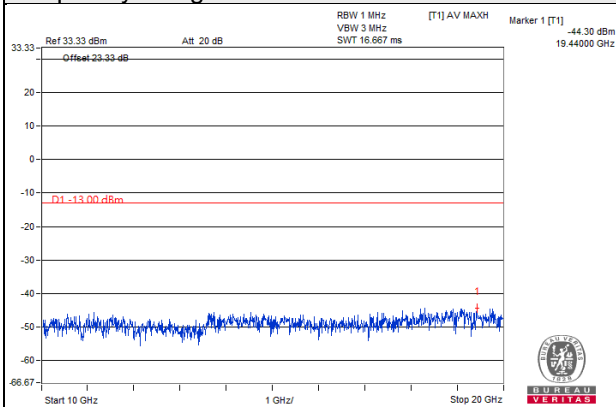


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 20MHz**

**Channel 18700**


**Frequency Range : 9kHz~1GHz**

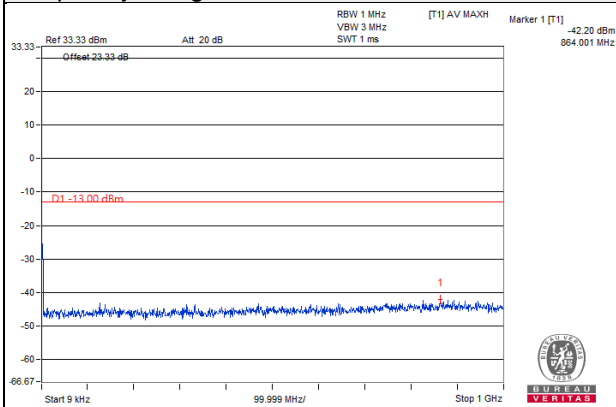

**Frequency Range : 1GHz ~10GHz**

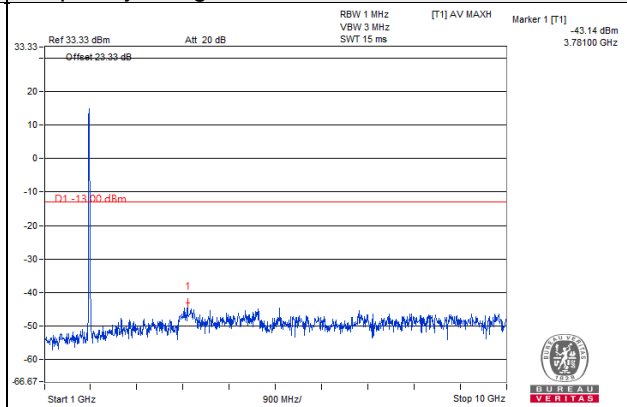

**Frequency Range : 10GHz~20GHz**

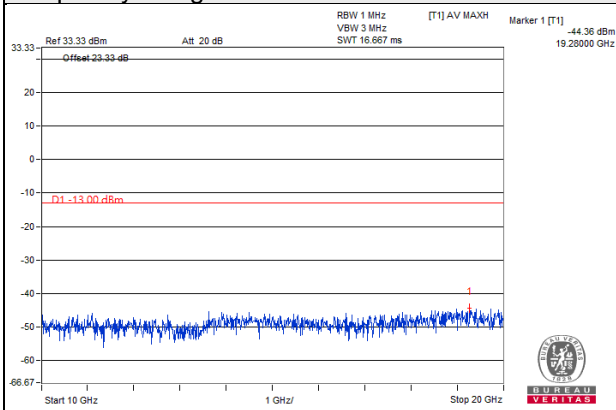


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 20MHz**

**Channel 18900**


**Frequency Range : 9kHz~1GHz**

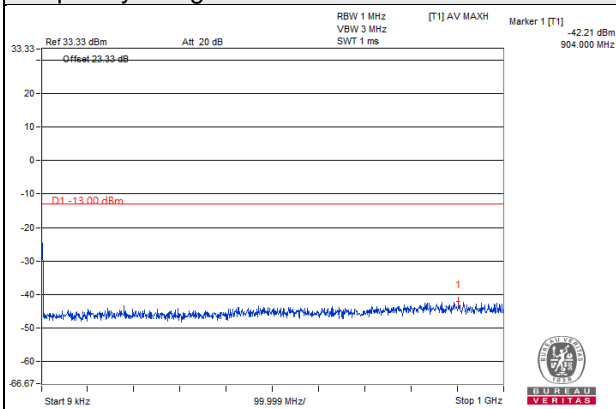

**Frequency Range : 1GHz ~10GHz**

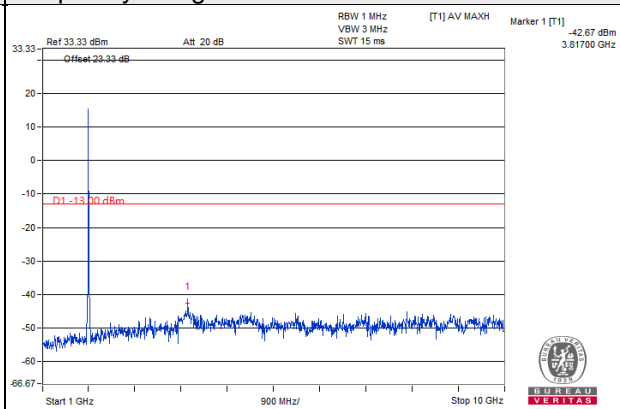

**Frequency Range : 10GHz~20GHz**


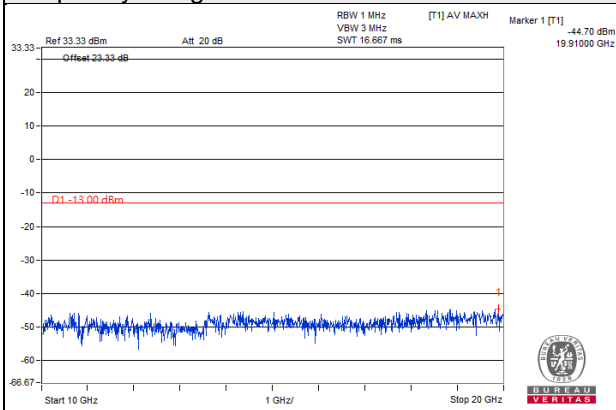


Note: The signal of 9kHz is IF signal from test instrument.


**LTE Band 2 Channel Bandwidth: 20MHz**

**Channel 19100**

**Frequency Range : 9kHz~1GHz**      **Frequency Range : 1GHz ~10GHz**

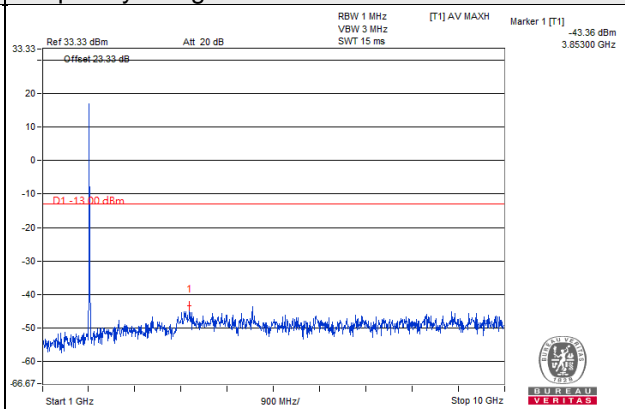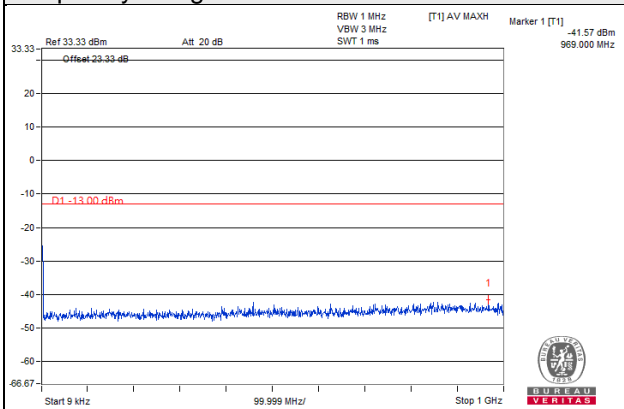

**Frequency Range : 10GHz~20GHz**

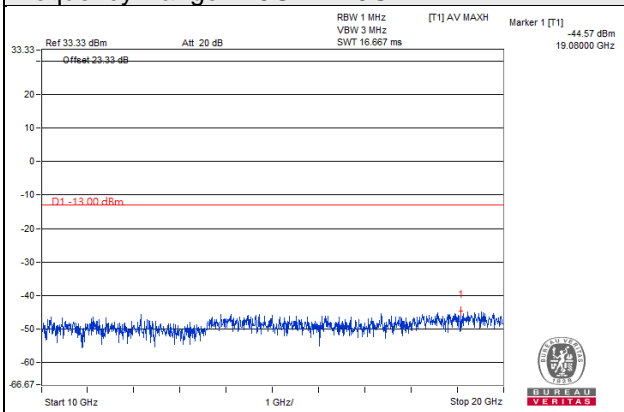

Note: The signal of 9kHz is IF signal from test instrument.

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.8.2 Test Procedure


- a. The power was measured with Spectrum Analyzer.
- b. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. Follow ANSI 63.26 section 5.2.7 d),  $\text{EIRP Value (dBm)} = \text{Read Value (dB}\mu\text{V/m)} - \text{Correction Factor @ 3m}$
- d.  $\text{Correction Factor (dB) @ 3m} = 20\log(D) - 104.8$ ; where D is the measurement distance @3m  $= -95.26\text{dB}$
- e. ERP power can be calculated from EIRP power by subtracting the gain of dipole,  $\text{ERP power} = \text{EIRP power} - 2.15\text{dBi}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


### 4.8.3 Deviation from Test Standard

No deviation.

4.8.4 Test Setup  
For Below 1GHz:

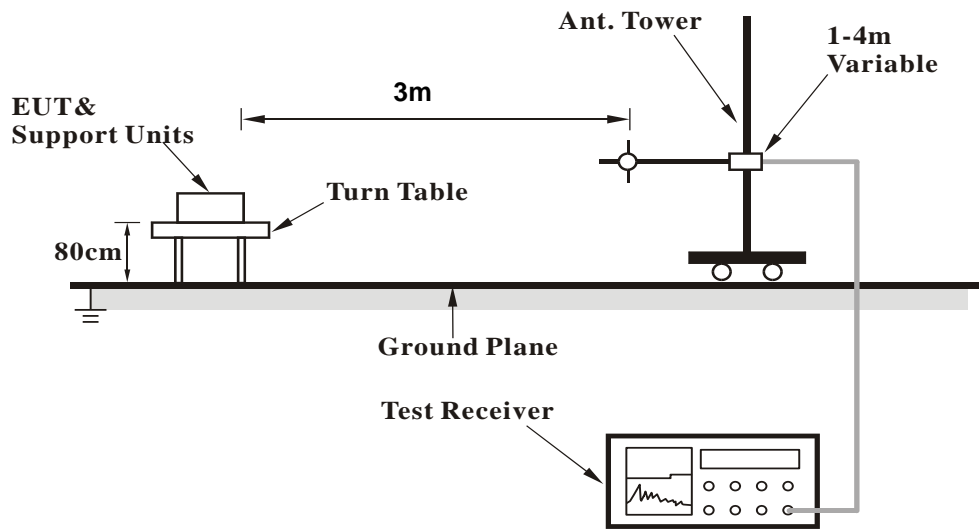

For Above 1GHz:

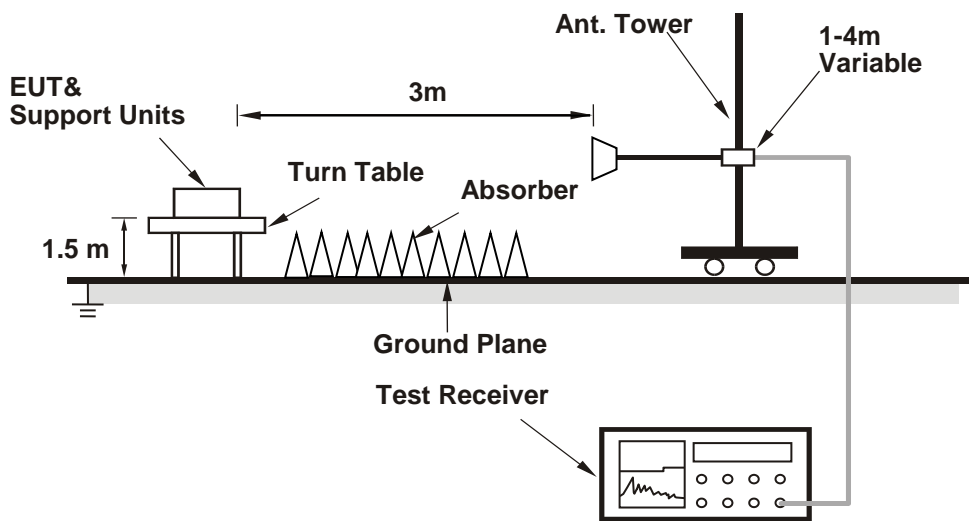

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 4.8.5 Test Results

**Below 1GHz**
**WCDMA B2:**

Mode	TX channel 9262	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.51	27.96	-95.26	-67.30	-13	-54.30
2	150.23	30.14	-95.26	-65.12	-13	-52.12
3	205.65	32.71	-95.26	-62.55	-13	-49.55
4	296.93	35.31	-95.26	-59.95	-13	-46.95
5	406.37	37.13	-95.26	-58.13	-13	-45.13
6	645.78	36.6	-95.26	-58.66	-13	-45.66

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.9	28.46	-95.26	-66.80	-13	-53.80
2	154.65	31.56	-95.26	-63.70	-13	-50.70
3	200.55	31.56	-95.26	-63.70	-13	-50.70
4	293.21	36.79	-95.26	-58.47	-13	-45.47
5	405.88	33.8	-95.26	-61.46	-13	-48.46
6	658.61	35.18	-95.26	-60.08	-13	-47.08

## Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9400	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.65	27.85	-95.26	-67.41	-13	-54.41
2	150.28	30.57	-95.26	-64.69	-13	-51.69
3	205.36	31.99	-95.26	-63.27	-13	-50.27
4	296.7	35.48	-95.26	-59.78	-13	-46.78
5	406.74	37.48	-95.26	-57.78	-13	-44.78
6	645.48	36.7	-95.26	-58.56	-13	-45.56

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84	28.99	-95.26	-66.27	-13	-53.27
2	154.05	31.84	-95.26	-63.42	-13	-50.42
3	200.9	31.38	-95.26	-63.88	-13	-50.88
4	293.56	36.74	-95.26	-58.52	-13	-45.52
5	406.03	34.37	-95.26	-60.89	-13	-47.89
6	659.21	35.7	-95.26	-59.56	-13	-46.56

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



Mode	TX channel 9538	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.68	27.79	-95.26	-67.47	-13	-54.47
2	149.71	30.84	-95.26	-64.42	-13	-51.42
3	205.69	32.57	-95.26	-62.69	-13	-49.69
4	296.99	35.14	-95.26	-60.12	-13	-47.12
5	407.15	37.14	-95.26	-58.12	-13	-45.12
6	645.43	37.16	-95.26	-58.10	-13	-45.10

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.97	29.2	-95.26	-66.06	-13	-53.06
2	154.58	31.79	-95.26	-63.47	-13	-50.47
3	200.7	31.29	-95.26	-63.97	-13	-50.97
4	293.27	36.93	-95.26	-58.33	-13	-45.33
5	406.53	33.78	-95.26	-61.48	-13	-48.48
6	659.26	35.01	-95.26	-60.25	-13	-47.25

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 1.4 MHz**

Mode	TX channel 18607	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.2	27.53	-95.26	-67.73	-13	-54.73
2	150	30.6	-95.26	-64.66	-13	-51.66
3	205.3	32.29	-95.26	-62.97	-13	-49.97
4	296.66	35.48	-95.26	-59.78	-13	-46.78
5	406.8	37.29	-95.26	-57.97	-13	-44.97
6	645.88	37.05	-95.26	-58.21	-13	-45.21

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.66	28.9	-95.26	-66.36	-13	-53.36
2	154.19	31.96	-95.26	-63.30	-13	-50.30
3	200.42	31.4	-95.26	-63.86	-13	-50.86
4	293.23	37.14	-95.26	-58.12	-13	-45.12
5	406.21	34.15	-95.26	-61.11	-13	-48.11
6	658.88	35.42	-95.26	-59.84	-13	-46.84

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.86	28.01	-95.26	-67.25	-13	-54.25
2	149.87	30.75	-95.26	-64.51	-13	-51.51
3	204.93	32.03	-95.26	-63.23	-13	-50.23
4	296.81	35.73	-95.26	-59.53	-13	-46.53
5	406.75	37.78	-95.26	-57.48	-13	-44.48
6	646.22	36.95	-95.26	-58.31	-13	-45.31

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.95	28.77	-95.26	-66.49	-13	-53.49
2	154.02	32.14	-95.26	-63.12	-13	-50.12
3	200.31	31.65	-95.26	-63.61	-13	-50.61
4	292.95	37.06	-95.26	-58.20	-13	-45.20
5	406.45	34.06	-95.26	-61.20	-13	-48.20
6	658.85	35.78	-95.26	-59.48	-13	-46.48

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19193	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.95	27.37	-95.26	-67.89	-13	-54.89
2	149.67	31.05	-95.26	-64.21	-13	-51.21
3	205.38	32.71	-95.26	-62.55	-13	-49.55
4	296.51	35.44	-95.26	-59.82	-13	-46.82
5	406.57	37.63	-95.26	-57.63	-13	-44.63
6	645.88	36.81	-95.26	-58.45	-13	-45.45

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.08	28.55	-95.26	-66.71	-13	-53.71
2	153.82	31.88	-95.26	-63.38	-13	-50.38
3	200.31	31.63	-95.26	-63.63	-13	-50.63
4	293.55	36.91	-95.26	-58.35	-13	-45.35
5	406.16	34.31	-95.26	-60.95	-13	-47.95
6	659.16	35.19	-95.26	-60.07	-13	-47.07

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 3 MHz**

Mode	TX channel 18615	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.8	27.83	-95.26	-67.43	-13	-54.43
2	149.97	30.14	-95.26	-65.12	-13	-52.12
3	204.94	32.21	-95.26	-63.05	-13	-50.05
4	296.75	35.31	-95.26	-59.95	-13	-46.95
5	406.85	37.13	-95.26	-58.13	-13	-45.13
6	645.38	37.36	-95.26	-57.90	-13	-44.90

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.98	28.88	-95.26	-66.38	-13	-53.38
2	153.75	32.04	-95.26	-63.22	-13	-50.22
3	200.16	31.05	-95.26	-64.21	-13	-51.21
4	293.56	37.22	-95.26	-58.04	-13	-45.04
5	406.31	33.69	-95.26	-61.57	-13	-48.57
6	659.18	35.42	-95.26	-59.84	-13	-46.84

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.34	27.39	-95.26	-67.87	-13	-54.87
2	150.14	31.09	-95.26	-64.17	-13	-51.17
3	205.37	32.79	-95.26	-62.47	-13	-49.47
4	296.93	35.96	-95.26	-59.30	-13	-46.30
5	407.01	37.61	-95.26	-57.65	-13	-44.65
6	645.58	37.21	-95.26	-58.05	-13	-45.05

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.1	28.74	-95.26	-66.52	-13	-53.52
2	154.09	31.68	-95.26	-63.58	-13	-50.58
3	200.7	31.13	-95.26	-64.13	-13	-51.13
4	293.29	36.9	-95.26	-58.36	-13	-45.36
5	406.48	34.51	-95.26	-60.75	-13	-47.75
6	658.56	35.78	-95.26	-59.48	-13	-46.48

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19185	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.69	27.2	-95.26	-68.06	-13	-55.06
2	149.64	30.48	-95.26	-64.78	-13	-51.78
3	205.49	32.51	-95.26	-62.75	-13	-49.75
4	296.41	35.11	-95.26	-60.15	-13	-47.15
5	406.31	37.13	-95.26	-58.13	-13	-45.13
6	646.36	37.07	-95.26	-58.19	-13	-45.19

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.29	28.96	-95.26	-66.30	-13	-53.30
2	153.71	32.23	-95.26	-63.03	-13	-50.03
3	200.58	31.73	-95.26	-63.53	-13	-50.53
4	292.74	37.3	-95.26	-57.96	-13	-44.96
5	406.35	34.35	-95.26	-60.91	-13	-47.91
6	658.91	35.79	-95.26	-59.47	-13	-46.47

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 5 MHz**

Mode	TX channel 18625	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.67	27.7	-95.26	-67.56	-13	-54.56
2	150.18	30.64	-95.26	-64.62	-13	-51.62
3	204.98	32.11	-95.26	-63.15	-13	-50.15
4	296.17	35.97	-95.26	-59.29	-13	-46.29
5	407.14	37.31	-95.26	-57.95	-13	-44.95
6	646.31	37.51	-95.26	-57.75	-13	-44.75

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.66	28.48	-95.26	-66.78	-13	-53.78
2	154.43	31.47	-95.26	-63.79	-13	-50.79
3	200.25	30.93	-95.26	-64.33	-13	-51.33
4	292.94	36.65	-95.26	-58.61	-13	-45.61
5	405.85	34.28	-95.26	-60.98	-13	-47.98
6	658.89	34.97	-95.26	-60.29	-13	-47.29

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.



Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.35	27.07	-95.26	-68.19	-13	-55.19
2	150.42	30.89	-95.26	-64.37	-13	-51.37
3	205.2	31.92	-95.26	-63.34	-13	-50.34
4	296.26	35.74	-95.26	-59.52	-13	-46.52
5	406.79	37.66	-95.26	-57.60	-13	-44.60
6	646.36	36.91	-95.26	-58.35	-13	-45.35

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.46	28.71	-95.26	-66.55	-13	-53.55
2	154.49	31.74	-95.26	-63.52	-13	-50.52
3	200.4	30.99	-95.26	-64.27	-13	-51.27
4	292.8	36.77	-95.26	-58.49	-13	-45.49
5	406.48	33.7	-95.26	-61.56	-13	-48.56
6	658.83	35.62	-95.26	-59.64	-13	-46.64

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.25	27.46	-95.26	-67.80	-13	-54.80
2	150.48	30.9	-95.26	-64.36	-13	-51.36
3	204.87	31.98	-95.26	-63.28	-13	-50.28
4	296.63	35.97	-95.26	-59.29	-13	-46.29
5	406.51	37.49	-95.26	-57.77	-13	-44.77
6	645.66	37.3	-95.26	-57.96	-13	-44.96

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.09	29.37	-95.26	-65.89	-13	-52.89
2	154.04	32.08	-95.26	-63.18	-13	-50.18
3	200.4	31.19	-95.26	-64.07	-13	-51.07
4	293.12	37.54	-95.26	-57.72	-13	-44.72
5	406.18	34.27	-95.26	-60.99	-13	-47.99
6	658.67	35.4	-95.26	-59.86	-13	-46.86

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 10 MHz

Mode	TX channel 18650	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.96	27.72	-95.26	-67.54	-13	-54.54
2	149.94	30.17	-95.26	-65.09	-13	-52.09
3	204.96	31.99	-95.26	-63.27	-13	-50.27
4	296.56	35.78	-95.26	-59.48	-13	-46.48
5	406.77	37.41	-95.26	-57.85	-13	-44.85
6	645.77	36.82	-95.26	-58.44	-13	-45.44

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.11	29.15	-95.26	-66.11	-13	-53.11
2	154.6	31.97	-95.26	-63.29	-13	-50.29
3	200.08	31.58	-95.26	-63.68	-13	-50.68
4	293.31	37.48	-95.26	-57.78	-13	-44.78
5	405.85	33.75	-95.26	-61.51	-13	-48.51
6	658.78	35.32	-95.26	-59.94	-13	-46.94

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.5	27.76	-95.26	-67.50	-13	-54.50
2	150.37	30.51	-95.26	-64.75	-13	-51.75
3	204.92	32.28	-95.26	-62.98	-13	-49.98
4	297.14	35.38	-95.26	-59.88	-13	-46.88
5	407.2	37.45	-95.26	-57.81	-13	-44.81
6	645.8	36.82	-95.26	-58.44	-13	-45.44

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.38	28.45	-95.26	-66.81	-13	-53.81
2	154.08	31.74	-95.26	-63.52	-13	-50.52
3	200.88	31.78	-95.26	-63.48	-13	-50.48
4	293.33	37.04	-95.26	-58.22	-13	-45.22
5	406.6	34.29	-95.26	-60.97	-13	-47.97
6	659.22	35.84	-95.26	-59.42	-13	-46.42

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19150	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.18	27.61	-95.26	-67.65	-13	-54.65
2	149.73	30.96	-95.26	-64.30	-13	-51.30
3	205.73	32.21	-95.26	-63.05	-13	-50.05
4	296.81	35.44	-95.26	-59.82	-13	-46.82
5	406.46	36.98	-95.26	-58.28	-13	-45.28
6	646.18	36.68	-95.26	-58.58	-13	-45.58

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.15	29.15	-95.26	-66.11	-13	-53.11
2	153.9	31.95	-95.26	-63.31	-13	-50.31
3	200.62	31.15	-95.26	-64.11	-13	-51.11
4	292.89	37.15	-95.26	-58.11	-13	-45.11
5	406.39	33.78	-95.26	-61.48	-13	-48.48
6	659.18	35.49	-95.26	-59.77	-13	-46.77

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 15 MHz**

Mode	TX channel 18675	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.73	27.17	-95.26	-68.09	-13	-55.09
2	150.49	31.07	-95.26	-64.19	-13	-51.19
3	204.85	32.72	-95.26	-62.54	-13	-49.54
4	296.78	35.3	-95.26	-59.96	-13	-46.96
5	407.07	37.61	-95.26	-57.65	-13	-44.65
6	646.31	37.19	-95.26	-58.07	-13	-45.07

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.22	28.44	-95.26	-66.82	-13	-53.82
2	154.32	32.41	-95.26	-62.85	-13	-49.85
3	200.15	31.54	-95.26	-63.72	-13	-50.72
4	293.28	37.22	-95.26	-58.04	-13	-45.04
5	405.8	34.14	-95.26	-61.12	-13	-48.12
6	658.83	35.75	-95.26	-59.51	-13	-46.51

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.81	27.85	-95.26	-67.41	-13	-54.41
2	150.23	30.35	-95.26	-64.91	-13	-51.91
3	205.7	32.22	-95.26	-63.04	-13	-50.04
4	296.96	35.01	-95.26	-60.25	-13	-47.25
5	406.89	37.47	-95.26	-57.79	-13	-44.79
6	645.66	36.57	-95.26	-58.69	-13	-45.69

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.75	28.86	-95.26	-66.40	-13	-53.40
2	154.3	31.71	-95.26	-63.55	-13	-50.55
3	200.35	31.56	-95.26	-63.70	-13	-50.70
4	293.26	37.26	-95.26	-58.00	-13	-45.00
5	406.63	34.41	-95.26	-60.85	-13	-47.85
6	658.63	35.46	-95.26	-59.80	-13	-46.80

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19125	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.45	27.29	-95.26	-67.97	-13	-54.97
2	150.17	30.37	-95.26	-64.89	-13	-51.89
3	205.77	32.67	-95.26	-62.59	-13	-49.59
4	296.25	35.76	-95.26	-59.50	-13	-46.50
5	406.34	36.84	-95.26	-58.42	-13	-45.42
6	645.44	37.28	-95.26	-57.98	-13	-44.98

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.43	29.07	-95.26	-66.19	-13	-53.19
2	153.69	31.95	-95.26	-63.31	-13	-50.31
3	200.74	31	-95.26	-64.26	-13	-51.26
4	293.63	37.54	-95.26	-57.72	-13	-44.72
5	406.63	34.03	-95.26	-61.23	-13	-48.23
6	659.18	35.8	-95.26	-59.46	-13	-46.46

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



**LTE Band 2: 20 MHz**

Mode	TX channel 18700	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	72.91	27.94	-95.26	-67.32	-13	-54.32
2	150.03	30.64	-95.26	-64.62	-13	-51.62
3	205.4	31.87	-95.26	-63.39	-13	-50.39
4	296.61	35.22	-95.26	-60.04	-13	-47.04
5	406.85	37.22	-95.26	-58.04	-13	-45.04
6	646.27	37.38	-95.26	-57.88	-13	-44.88

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.81	28.76	-95.26	-66.50	-13	-53.50
2	153.72	31.78	-95.26	-63.48	-13	-50.48
3	200.43	31.13	-95.26	-64.13	-13	-51.13
4	292.84	36.96	-95.26	-58.30	-13	-45.30
5	405.85	34	-95.26	-61.26	-13	-48.26
6	659.16	35.56	-95.26	-59.70	-13	-46.70

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.69	27.79	-95.26	-67.47	-13	-54.47
2	149.94	30.45	-95.26	-64.81	-13	-51.81
3	204.84	32.27	-95.26	-62.99	-13	-49.99
4	296.67	35.67	-95.26	-59.59	-13	-46.59
5	406.41	37.69	-95.26	-57.57	-13	-44.57
6	645.56	37	-95.26	-58.26	-13	-45.26

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.9	29.08	-95.26	-66.18	-13	-53.18
2	154.04	32.15	-95.26	-63.11	-13	-50.11
3	200.88	31.75	-95.26	-63.51	-13	-50.51
4	293.29	37.54	-95.26	-57.72	-13	-44.72
5	405.89	34.37	-95.26	-60.89	-13	-47.89
6	659.04	35.72	-95.26	-59.54	-13	-46.54

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19100	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	73.67	27.65	-95.26	-67.61	-13	-54.61
2	150.02	30.11	-95.26	-65.15	-13	-52.15
3	205.66	32.28	-95.26	-62.98	-13	-49.98
4	296.75	35.81	-95.26	-59.45	-13	-46.45
5	406.76	37.66	-95.26	-57.60	-13	-44.60
6	646.37	37.03	-95.26	-58.23	-13	-45.23

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.36	29.17	-95.26	-66.09	-13	-53.09
2	154.19	31.81	-95.26	-63.45	-13	-50.45
3	200.7	30.92	-95.26	-64.34	-13	-51.34
4	293.11	37.36	-95.26	-57.90	-13	-44.90
5	405.76	33.76	-95.26	-61.50	-13	-48.50
6	658.81	35.79	-95.26	-59.47	-13	-46.47

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**Above 1GHz**
**WCDMA B2:**

Mode	TX channel 9262	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3704.8	46.83	-95.26	-48.43	-13	-35.43
2	5557.2	45.07	-95.26	-50.19	-13	-37.19
3	7409.6	47.88	-95.26	-47.38	-13	-34.38
4	9262	50.32	-95.26	-44.94	-13	-31.94

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
<b>1</b>	<b>3704.8</b>	<b>54.82</b>	<b>-95.26</b>	<b>-40.44</b>	<b>-13</b>	<b>-27.44</b>
2	5557.2	44.94	-95.26	-50.32	-13	-37.32
3	7409.6	47.99	-95.26	-47.27	-13	-34.27
4	9262	51.42	-95.26	-43.84	-13	-30.84

## Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 9400	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3776	46.92	-95.26	-48.34	-13	-35.34
2	5664	45.52	-95.26	-49.74	-13	-36.74
3	7552	48.32	-95.26	-46.94	-13	-33.94
4	9440	50.76	-95.26	-44.50	-13	-31.50

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3776	54.32	-95.26	-40.94	-13	-27.94
2	5664	44.88	-95.26	-50.38	-13	-37.38
3	7552	48.32	-95.26	-46.94	-13	-33.94
4	9440	51.23	-95.26	-44.03	-13	-31.03

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9538	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815.2	46.5	-95.26	-48.76	-13	-35.76
2	5722.8	45.36	-95.26	-49.90	-13	-36.90
3	7630.4	48.13	-95.26	-47.13	-13	-34.13
4	9538	50.72	-95.26	-44.54	-13	-31.54

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
<b>1</b>	<b>3815.2</b>	<b>54.82</b>	<b>-95.26</b>	<b>-40.44</b>	<b>-13</b>	<b>-27.44</b>
2	5722.8	45.32	-95.26	-49.94	-13	-36.94
3	7630.4	47.98	-95.26	-47.28	-13	-34.28
4	9538	51.53	-95.26	-43.73	-13	-30.73

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 1.4 MHz

Mode	TX channel 18607	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3701.4	46.57	-95.26	-48.69	-13	-35.69
2	5552.1	44.5	-95.26	-50.76	-13	-37.76
3	7402.8	48.2	-95.26	-47.06	-13	-34.06
4	9253.5	50.45	-95.26	-44.81	-13	-31.81
5	11104.2	50.55	-95.26	-44.71	-13	-31.71
6	12954.9	50.37	-95.26	-44.89	-13	-31.89

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3701.4	53.62	-95.26	-41.64	-13	-28.64
2	5552.1	43.66	-95.26	-51.60	-13	-38.60
3	7402.8	48.03	-95.26	-47.23	-13	-34.23
4	9253.5	50.75	-95.26	-44.51	-13	-31.51
5	11104.2	50.77	-95.26	-44.49	-13	-31.49
6	12954.9	50.62	-95.26	-44.64	-13	-31.64

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	47.05	-95.26	-48.21	-13	-35.21
2	5640	44	-95.26	-51.26	-13	-38.26
3	7520	48.23	-95.26	-47.03	-13	-34.03
4	9400	50.95	-95.26	-44.31	-13	-31.31
5	11280	50.76	-95.26	-44.50	-13	-31.50
6	13160	50.62	-95.26	-44.64	-13	-31.64

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	53.55	-95.26	-41.71	-13	-28.71
2	5640	44.11	-95.26	-51.15	-13	-38.15
3	7520	48.07	-95.26	-47.19	-13	-34.19
4	9400	50.39	-95.26	-44.87	-13	-31.87
5	11280	50.54	-95.26	-44.72	-13	-31.72
6	13160	50.68	-95.26	-44.58	-13	-31.58

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



Mode	TX channel 19193	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3818.6	46.45	-95.26	-48.81	-13	-35.81
2	5727.9	44.76	-95.26	-50.50	-13	-37.50
3	7637.2	47.96	-95.26	-47.30	-13	-34.30
4	9546.5	49.97	-95.26	-45.29	-13	-32.29

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3818.6	53.53	-95.26	-41.73	-13	-28.73
2	5727.9	43.74	-95.26	-51.52	-13	-38.52
3	7637.2	47.53	-95.26	-47.73	-13	-34.73
4	9546.5	51.06	-95.26	-44.20	-13	-31.20

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 3 MHz

Mode	TX channel 18615	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3703	46.47	-95.26	-48.79	-13	-35.79
2	5554.5	44.56	-95.26	-50.70	-13	-37.70
3	7406	48.18	-95.26	-47.08	-13	-34.08
4	9257.5	50.28	-95.26	-44.98	-13	-31.98
5	11109	50.45	-95.26	-44.81	-13	-31.81
6	12960.5	50.6	-95.26	-44.66	-13	-31.66

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3703	53.54	-95.26	-41.72	-13	-28.72
2	5554.5	43.85	-95.26	-51.41	-13	-38.41
3	7406	47.6	-95.26	-47.66	-13	-34.66
4	9257.5	50.55	-95.26	-44.71	-13	-31.71
5	11109	50.59	-95.26	-44.67	-13	-31.67
6	12960.5	50.63	-95.26	-44.63	-13	-31.63

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	46.3	-95.26	-48.96	-13	-35.96
2	5640	44.67	-95.26	-50.59	-13	-37.59
3	7520	47.94	-95.26	-47.32	-13	-34.32
4	9400	50.43	-95.26	-44.83	-13	-31.83
5	11280	50.54	-95.26	-44.72	-13	-31.72
6	13160	50.68	-95.26	-44.58	-13	-31.58

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	53.98	-95.26	-41.28	-13	-28.28
2	5640	43.77	-95.26	-51.49	-13	-38.49
3	7520	48.52	-95.26	-46.74	-13	-33.74
4	9400	50.65	-95.26	-44.61	-13	-31.61
5	11280	50.72	-95.26	-44.54	-13	-31.54
6	13160	50.64	-95.26	-44.62	-13	-31.62

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19185	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3817	46.75	-95.26	-48.51	-13	-35.51
2	5725.5	44.35	-95.26	-50.91	-13	-37.91
3	7634	47.85	-95.26	-47.41	-13	-34.41
4	9542.5	50.46	-95.26	-44.80	-13	-31.80
5	11451	50.38	-95.26	-44.88	-13	-31.88
6	13359.5	50.63	-95.26	-44.63	-13	-31.63

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3817	53.6	-95.26	-41.66	-13	-28.66
2	5725.5	44.06	-95.26	-51.20	-13	-38.20
3	7634	47.68	-95.26	-47.58	-13	-34.58
4	9542.5	51.17	-95.26	-44.09	-13	-31.09
5	11451	50.45	-95.26	-44.81	-13	-31.81
6	13359.5	50.58	-95.26	-44.68	-13	-31.68

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 5 MHz

Mode	TX channel 18625	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3705	46.48	-95.26	-48.78	-13	-35.78
2	5557.5	44.16	-95.26	-51.10	-13	-38.10
3	7410	48.66	-95.26	-46.60	-13	-33.60
4	9262.5	50.69	-95.26	-44.57	-13	-31.57
5	11115	50.58	-95.26	-44.68	-13	-31.68
6	12967.5	50.76	-95.26	-44.50	-13	-31.50

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3705	53.74	-95.26	-41.52	-13	-28.52
2	5557.5	43.21	-95.26	-52.05	-13	-39.05
3	7410	48.35	-95.26	-46.91	-13	-33.91
4	9262.5	50.85	-95.26	-44.41	-13	-31.41
5	11115	50.57	-95.26	-44.69	-13	-31.69
6	12967.5	50.83	-95.26	-44.43	-13	-31.43

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	46.81	-95.26	-48.45	-13	-35.45
2	5640	44.19	-95.26	-51.07	-13	-38.07
3	7520	47.91	-95.26	-47.35	-13	-34.35
4	9400	50.36	-95.26	-44.90	-13	-31.90
5	11280	50.48	-95.26	-44.78	-13	-31.78
6	13160	50.66	-95.26	-44.60	-13	-31.60

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	53.35	-95.26	-41.91	-13	-28.91
2	5640	43.81	-95.26	-51.45	-13	-38.45
3	7520	48.28	-95.26	-46.98	-13	-33.98
4	9400	50.81	-95.26	-44.45	-13	-31.45
5	11280	50.72	-95.26	-44.54	-13	-31.54
6	13160	50.86	-95.26	-44.40	-13	-31.40

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815	46.95	-95.26	-48.31	-13	-35.31
2	5722.5	44.18	-95.26	-51.08	-13	-38.08
3	7630	48.51	-95.26	-46.75	-13	-33.75
4	9537.5	50.29	-95.26	-44.97	-13	-31.97
5	11445	50.38	-95.26	-44.88	-13	-31.88
6	13352.5	50.49	-95.26	-44.77	-13	-31.77

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815	53.98	-95.26	-41.28	-13	-28.28
2	5722.5	43.44	-95.26	-51.82	-13	-38.82
3	7630	47.96	-95.26	-47.30	-13	-34.30
4	9537.5	50.29	-95.26	-44.97	-13	-31.97
5	11445	50.45	-95.26	-44.81	-13	-31.81
6	13352.5	50.63	-95.26	-44.63	-13	-31.63

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 10 MHz**

Mode	TX channel 18650	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3710	46.41	-95.26	-48.85	-13	-35.85
2	5565	44.48	-95.26	-50.78	-13	-37.78
3	7420	47.98	-95.26	-47.28	-13	-34.28
4	9275	50.38	-95.26	-44.88	-13	-31.88
5	11130	50.44	-95.26	-44.82	-13	-31.82
6	12985	50.67	-95.26	-44.59	-13	-31.59

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3710	53.83	-95.26	-41.43	-13	-28.43
2	5565	43.5	-95.26	-51.76	-13	-38.76
3	7420	47.95	-95.26	-47.31	-13	-34.31
4	9275	50.54	-95.26	-44.72	-13	-31.72
5	11130	50.58	-95.26	-44.68	-13	-31.68
6	12985	50.69	-95.26	-44.57	-13	-31.57

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.



Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	46.11	-95.26	-49.15	-13	-36.15
2	5640	44.84	-95.26	-50.42	-13	-37.42
3	7520	48.43	-95.26	-46.83	-13	-33.83
4	9400	50.49	-95.26	-44.77	-13	-31.77
5	11280	50.58	-95.26	-44.68	-13	-31.68
6	13160	50.68	-95.26	-44.58	-13	-31.58

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	53.27	-95.26	-41.99	-13	-28.99
2	5640	44.14	-95.26	-51.12	-13	-38.12
3	7520	47.55	-95.26	-47.71	-13	-34.71
4	9400	50.76	-95.26	-44.50	-13	-31.50
5	11280	50.72	-95.26	-44.54	-13	-31.54
6	13160	50.86	-95.26	-44.40	-13	-31.40

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19150	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3810	46.93	-95.26	-48.33	-13	-35.33
2	5715	44.55	-95.26	-50.71	-13	-37.71
3	7620	48.04	-95.26	-47.22	-13	-34.22
4	9525	50.45	-95.26	-44.81	-13	-31.81
5	11430	50.52	-95.26	-44.74	-13	-31.74
6	13335	50.64	-95.26	-44.62	-13	-31.62

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3810	53.82	-95.26	-41.44	-13	-28.44
2	5715	43.79	-95.26	-51.47	-13	-38.47
3	7620	48.22	-95.26	-47.04	-13	-34.04
4	9525	51.02	-95.26	-44.24	-13	-31.24
5	11430	50.89	-95.26	-44.37	-13	-31.37
6	13335	51.05	-95.26	-44.21	-13	-31.21

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 15 MHz

Mode	TX channel 18675	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3715	46.71	-95.26	-48.55	-13	-35.55
2	5572.5	44.19	-95.26	-51.07	-13	-38.07
3	7430	48.15	-95.26	-47.11	-13	-34.11
4	9287.5	50.52	-95.26	-44.74	-13	-31.74
5	11145	50.47	-95.26	-44.79	-13	-31.79
6	13002.5	50.63	-95.26	-44.63	-13	-31.63

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3715	53.34	-95.26	-41.92	-13	-28.92
2	5572.5	44.05	-95.26	-51.21	-13	-38.21
3	7430	47.79	-95.26	-47.47	-13	-34.47
4	9287.5	51.07	-95.26	-44.19	-13	-31.19
5	11145	51.02	-95.26	-44.24	-13	-31.24
6	13002.5	51.16	-95.26	-44.10	-13	-31.10

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	47.04	-95.26	-48.22	-13	-35.22
2	5640	44.88	-95.26	-50.38	-13	-37.38
3	7520	48.17	-95.26	-47.09	-13	-34.09
4	9400	50.21	-95.26	-45.05	-13	-32.05
5	11280	50.32	-95.26	-44.94	-13	-31.94
6	13160	50.47	-95.26	-44.79	-13	-31.79

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	53.25	-95.26	-42.01	-13	-29.01
2	5640	43.37	-95.26	-51.89	-13	-38.89
3	7520	47.94	-95.26	-47.32	-13	-34.32
4	9400	50.44	-95.26	-44.82	-13	-31.82
5	11280	50.53	-95.26	-44.73	-13	-31.73
6	13160	50.76	-95.26	-44.50	-13	-31.50

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19125	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3805	46.66	-95.26	-48.60	-13	-35.60
2	5707.5	44.43	-95.26	-50.83	-13	-37.83
3	7610	47.98	-95.26	-47.28	-13	-34.28
4	9512.5	50.29	-95.26	-44.97	-13	-31.97
5	11415	50.43	-95.26	-44.83	-13	-31.83
6	13317.5	50.61	-95.26	-44.65	-13	-31.65

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3805	53.75	-95.26	-41.51	-13	-28.51
2	5707.5	43.36	-95.26	-51.90	-13	-38.90
3	7610	47.7	-95.26	-47.56	-13	-34.56
4	9512.5	50.65	-95.26	-44.61	-13	-31.61
5	11415	50.68	-95.26	-44.58	-13	-31.58
6	13317.5	50.77	-95.26	-44.49	-13	-31.49

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 20 MHz

Mode	TX channel 18700	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3720	46.53	-95.26	-48.73	-13	-35.73
2	5580	44.77	-95.26	-50.49	-13	-37.49
3	7440	47.96	-95.26	-47.30	-13	-34.30
4	9300	50.51	-95.26	-44.75	-13	-31.75
5	11160	50.63	-95.26	-44.63	-13	-31.63
6	13020	50.74	-95.26	-44.52	-13	-31.52

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3720	53.99	-95.26	-41.27	-13	-28.27
2	5580	43.98	-95.26	-51.28	-13	-38.28
3	7440	48.49	-95.26	-46.77	-13	-33.77
4	9300	51.22	-95.26	-44.04	-13	-31.04
5	11160	51.25	-95.26	-44.01	-13	-31.01
6	13020	51.29	-95.26	-43.97	-13	-30.97

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	46.38	-95.26	-48.88	-13	-35.88
2	5640	44.02	-95.26	-51.24	-13	-38.24
3	7520	48.01	-95.26	-47.25	-13	-34.25
4	9400	50.78	-95.26	-44.48	-13	-31.48
5	11280	50.83	-95.26	-44.43	-13	-31.43
6	13160	50.97	-95.26	-44.29	-13	-31.29

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	53.82	-95.26	-41.44	-13	-28.44
2	5640	43.38	-95.26	-51.88	-13	-38.88
3	7520	48.15	-95.26	-47.11	-13	-34.11
4	9400	50.45	-95.26	-44.81	-13	-31.81
5	11280	50.57	-95.26	-44.69	-13	-31.69
6	13160	50.66	-95.26	-44.60	-13	-31.60

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19100	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3800	46.63	-95.26	-48.63	-13	-35.63
2	5700	44.46	-95.26	-50.80	-13	-37.80
3	7600	48.26	-95.26	-47.00	-13	-34.00
4	9500	50.65	-95.26	-44.61	-13	-31.61
5	11400	50.72	-95.26	-44.54	-13	-31.54
6	13300	50.81	-95.26	-44.45	-13	-31.45

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3800	53.51	-95.26	-41.75	-13	-28.75
2	5700	44.1	-95.26	-51.16	-13	-38.16
3	7600	47.79	-95.26	-47.47	-13	-34.47
4	9500	51.21	-95.26	-44.05	-13	-31.05
5	11400	51.28	-95.26	-43.98	-13	-30.98
6	13300	51.35	-95.26	-43.91	-13	-30.91

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---