



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
1	2412	17.61	≥0.5	Pass
6	2437	17.60	≥0.5	Pass
11	2462	17.57	≥0.5	Pass


### Channel 1

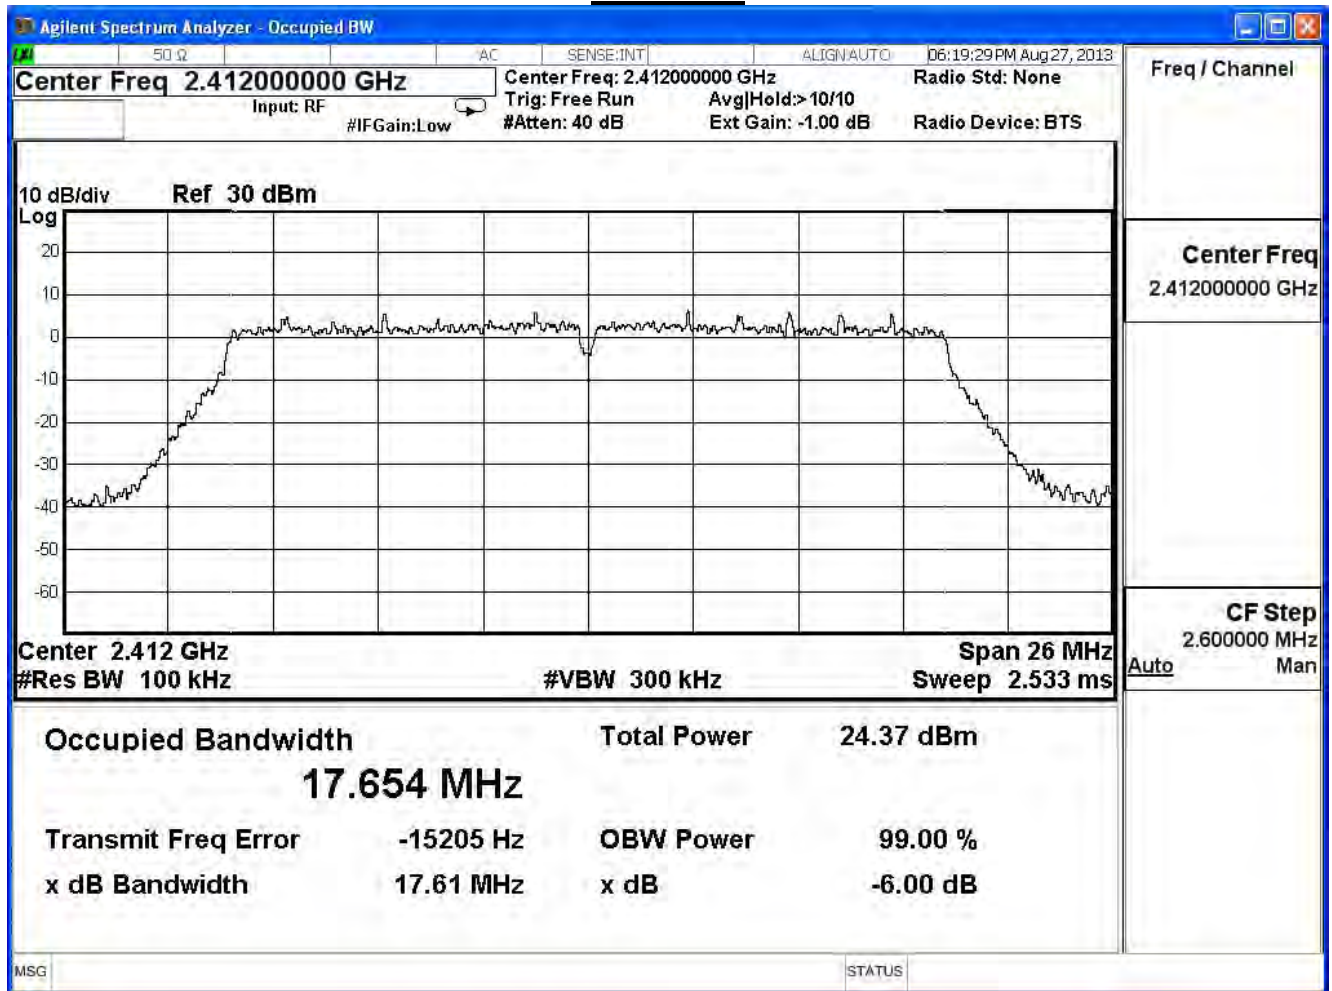

Channel 6

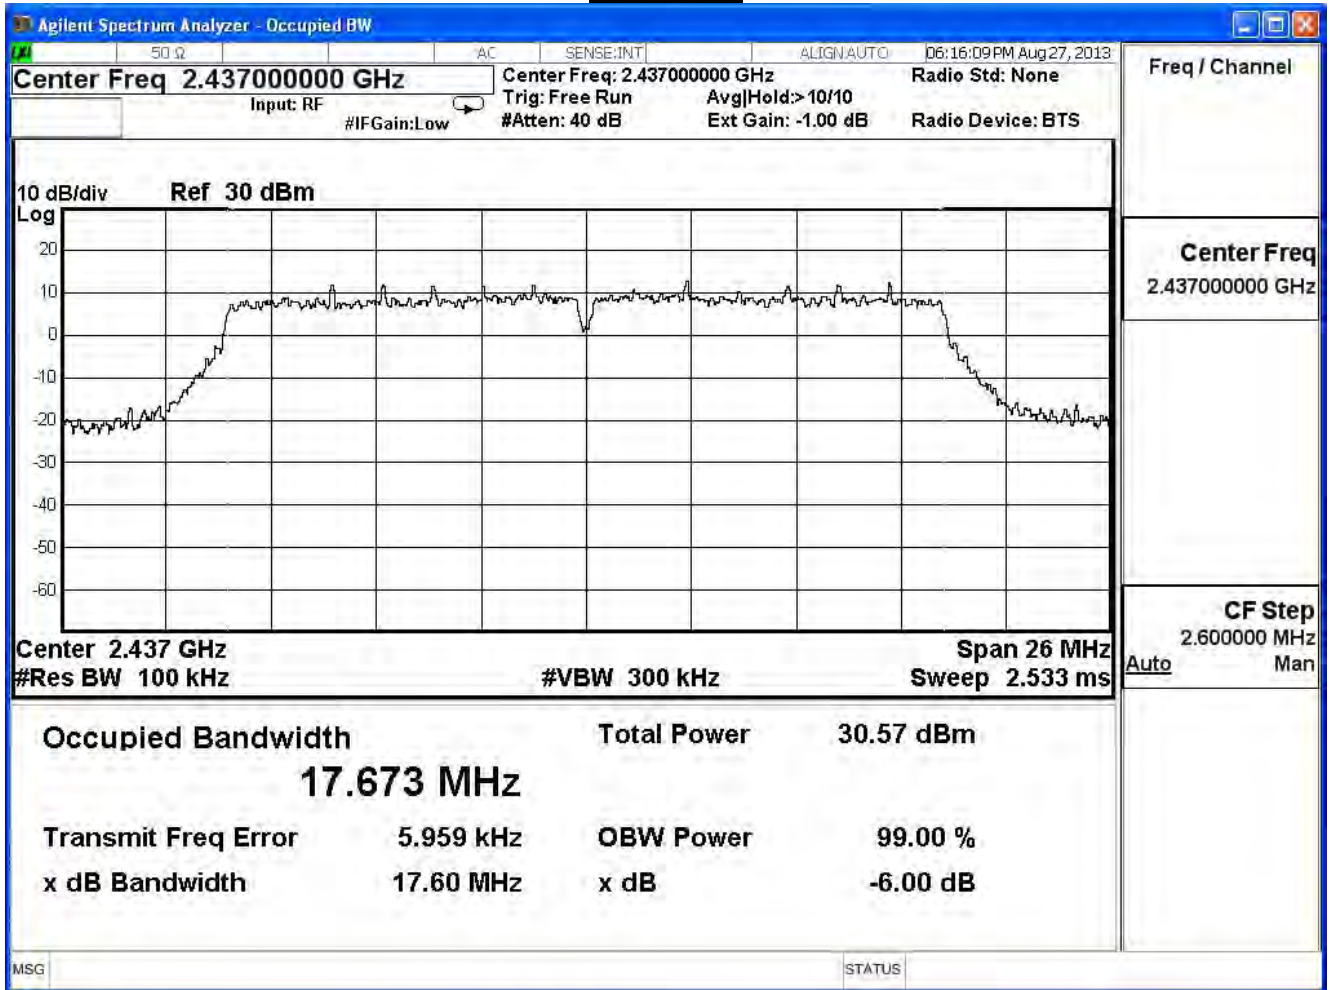


Channel 11

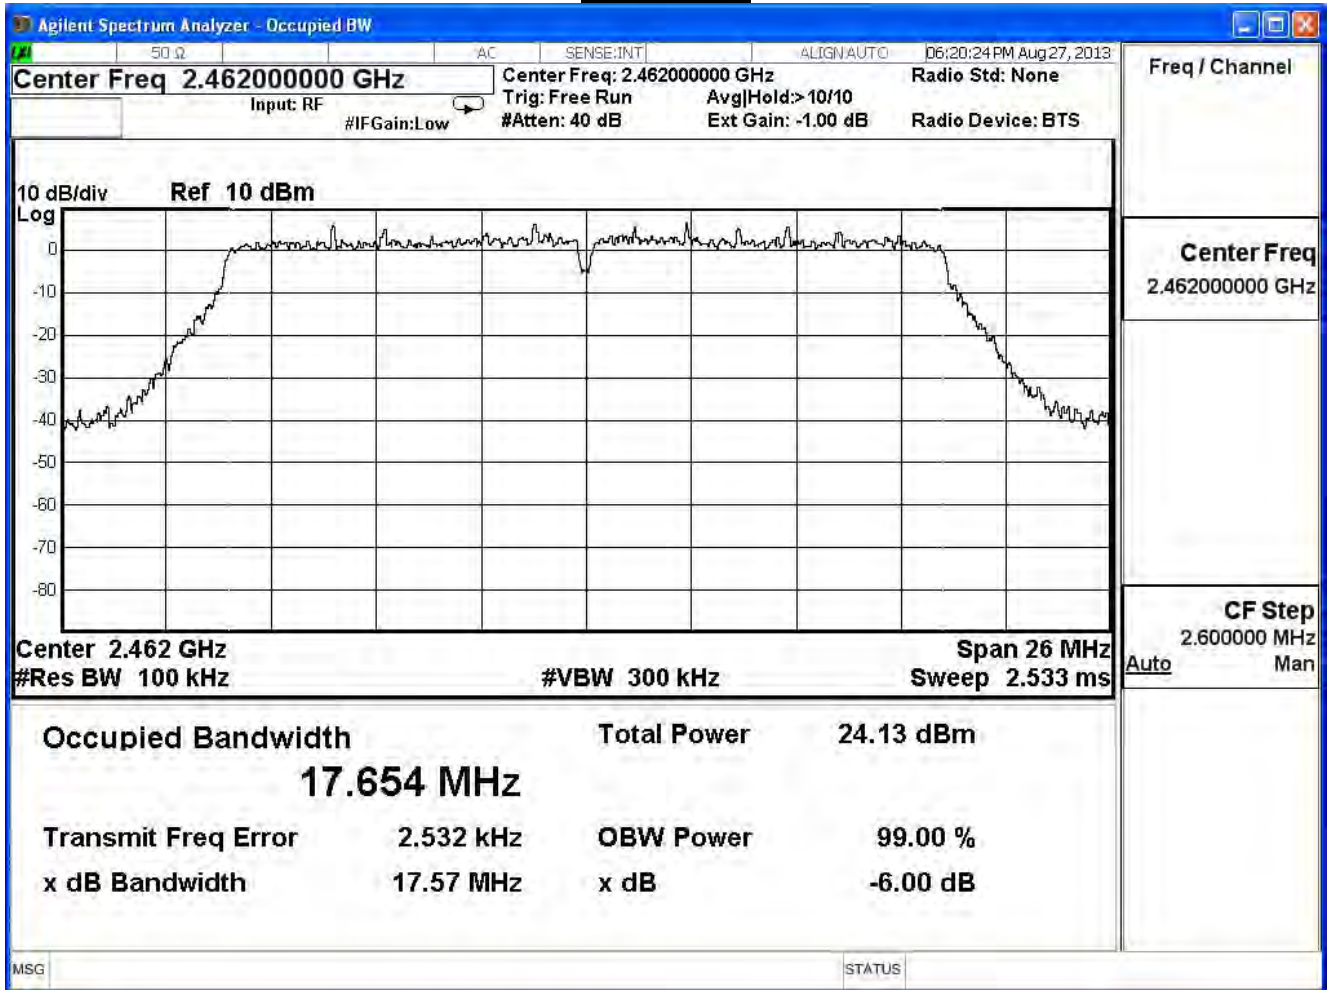


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
1	2412	17.60	$\geq 0.5$	Pass
6	2437	17.59	$\geq 0.5$	Pass
11	2462	17.59	$\geq 0.5$	Pass


### Channel 1

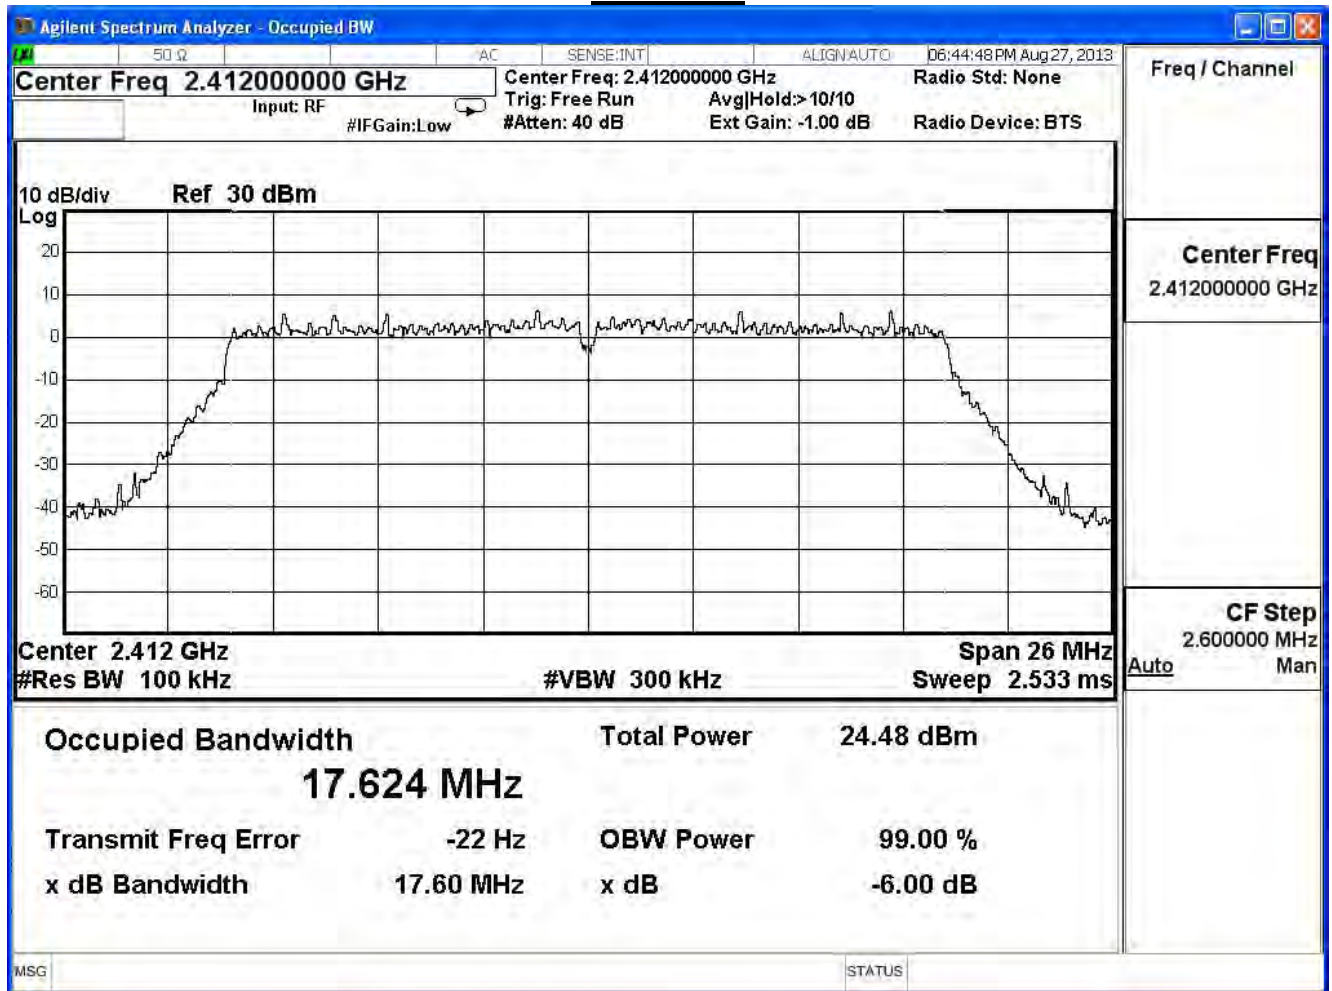

Channel 6

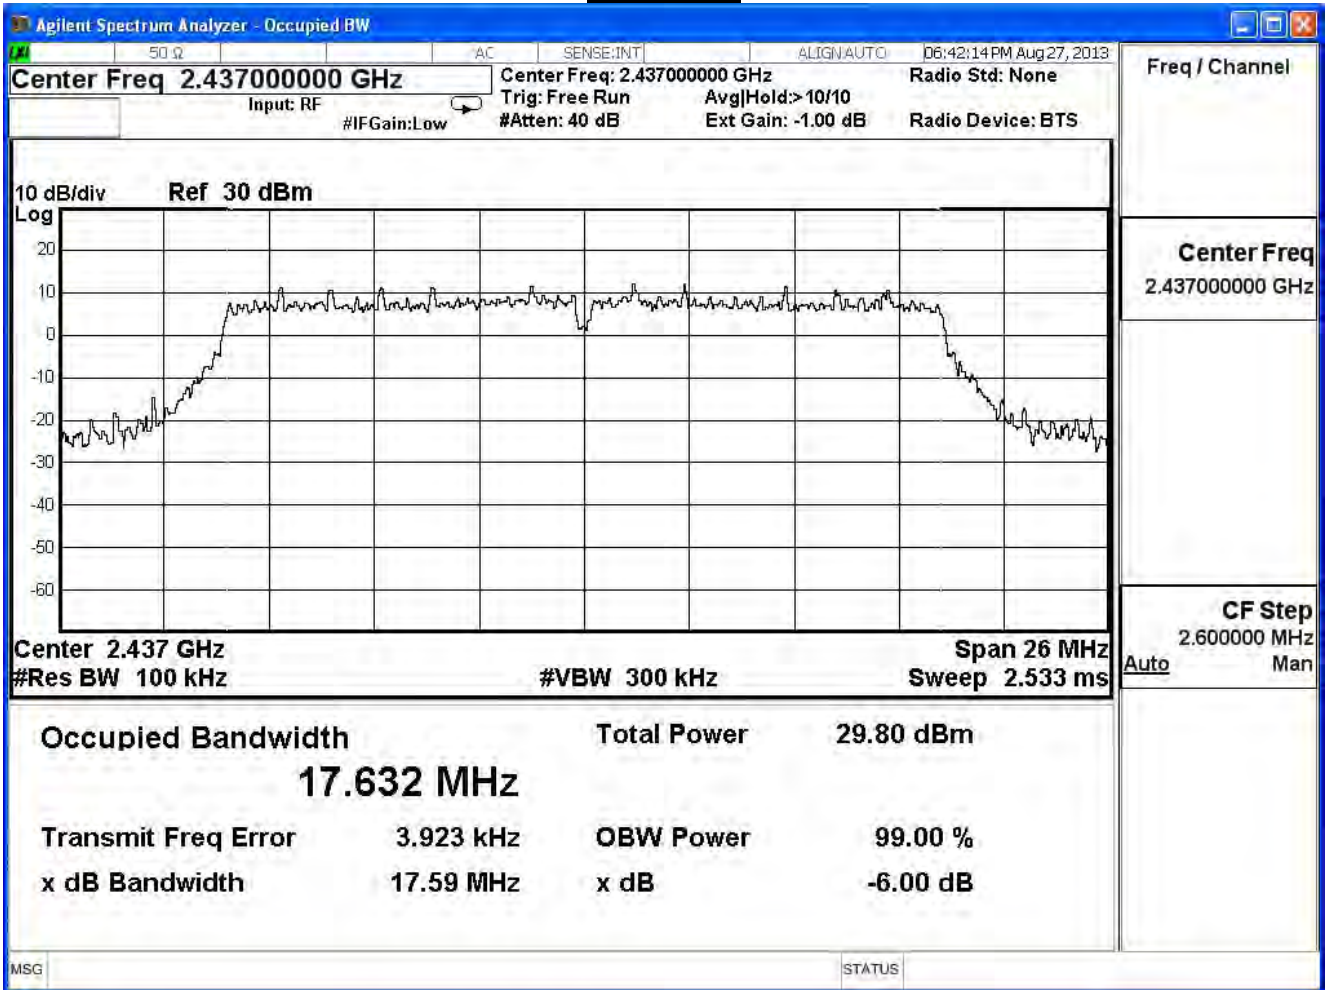


Channel 11

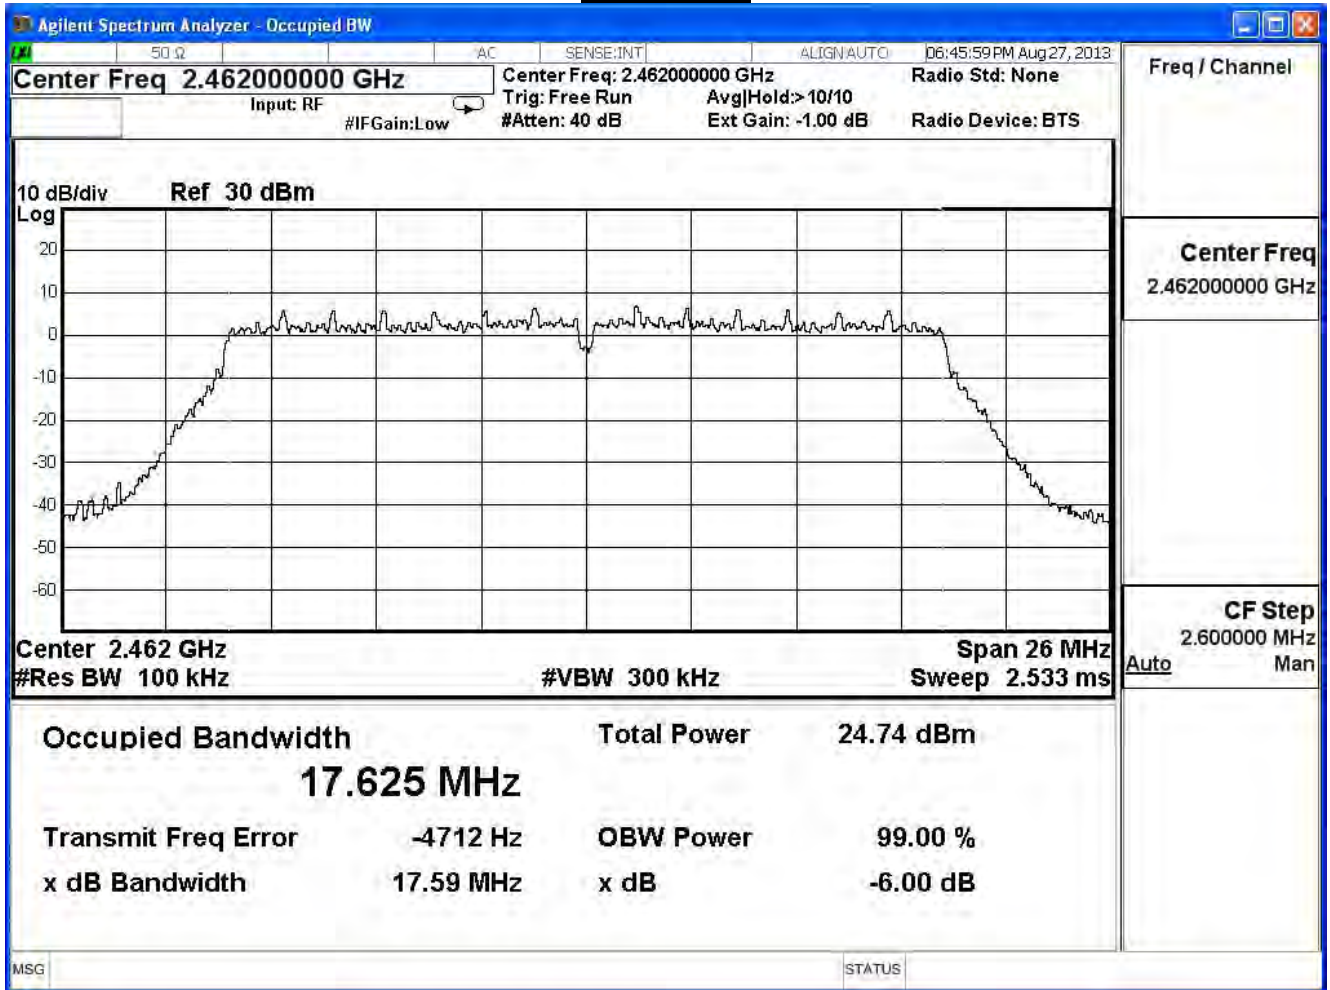


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
1	2412	17.61	≥ 0.5	Pass
6	2437	17.35	≥ 0.5	Pass
11	2462	17.60	≥ 0.5	Pass

### Channel 1

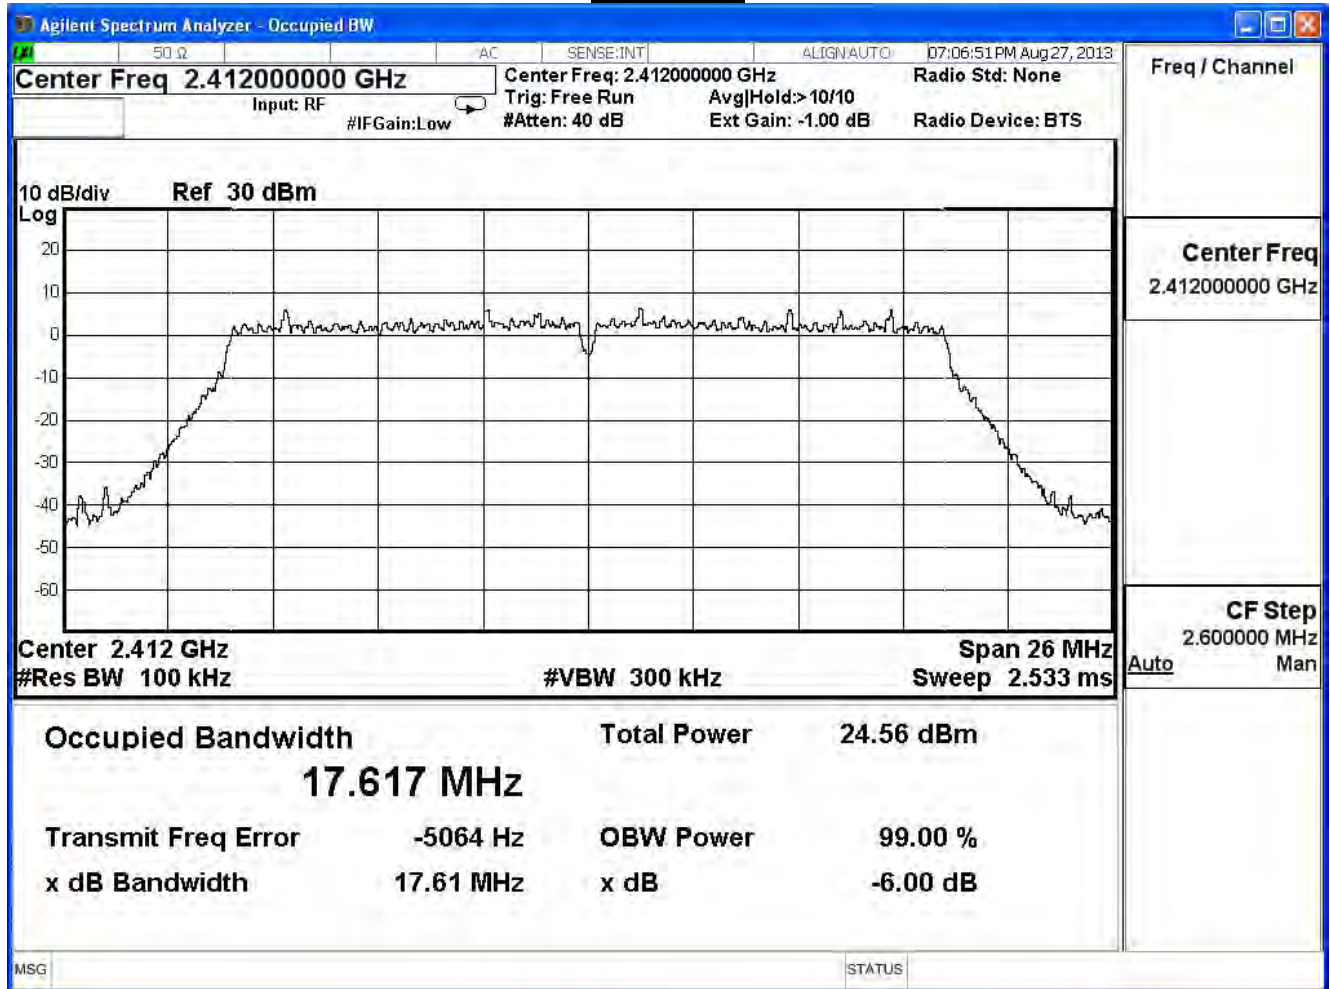


Channel 6

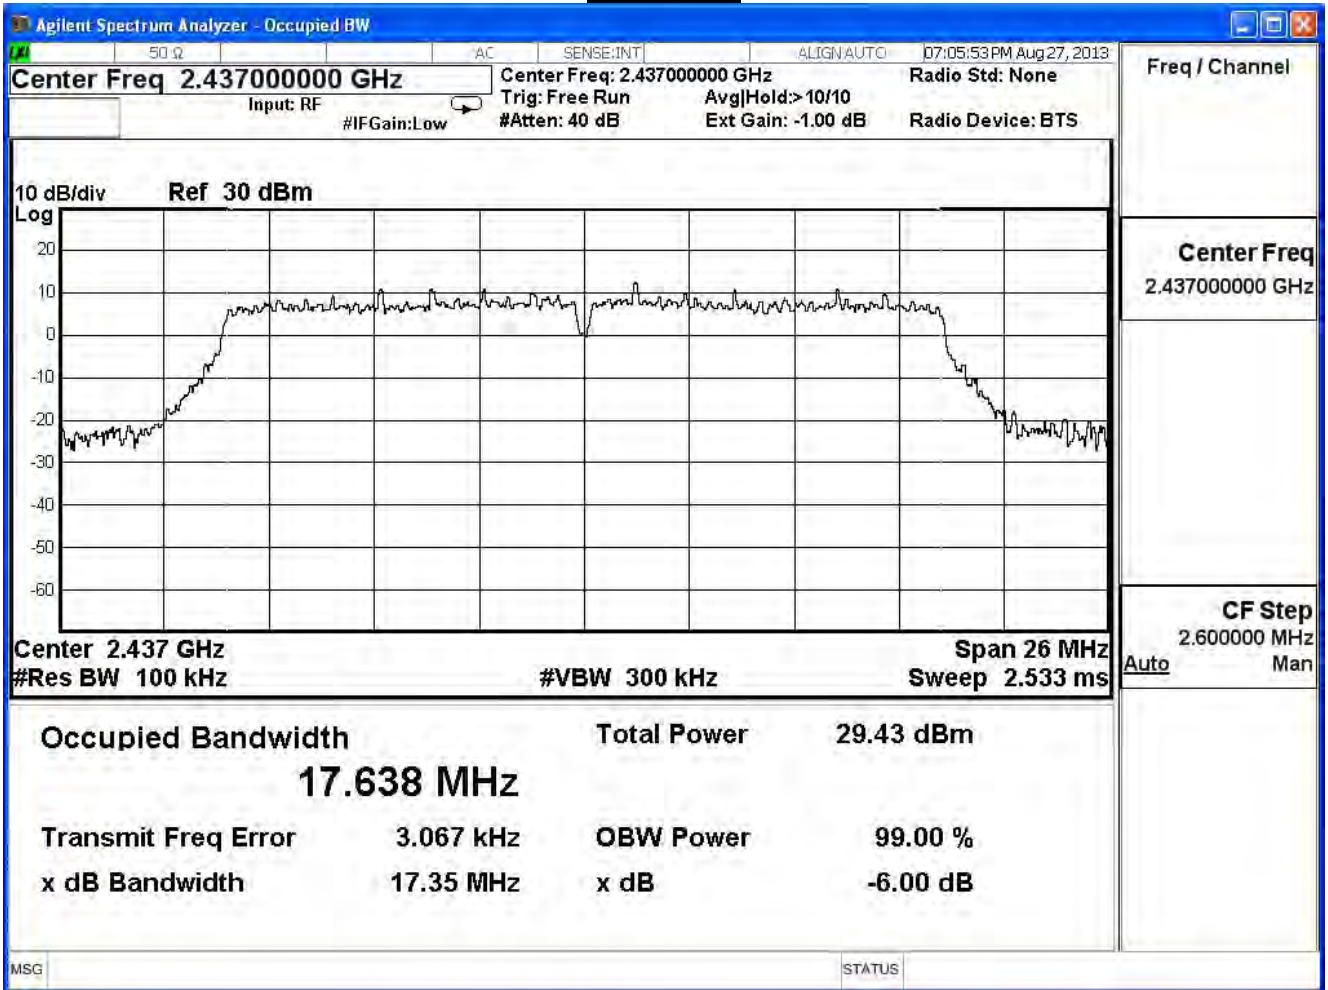




Channel 11

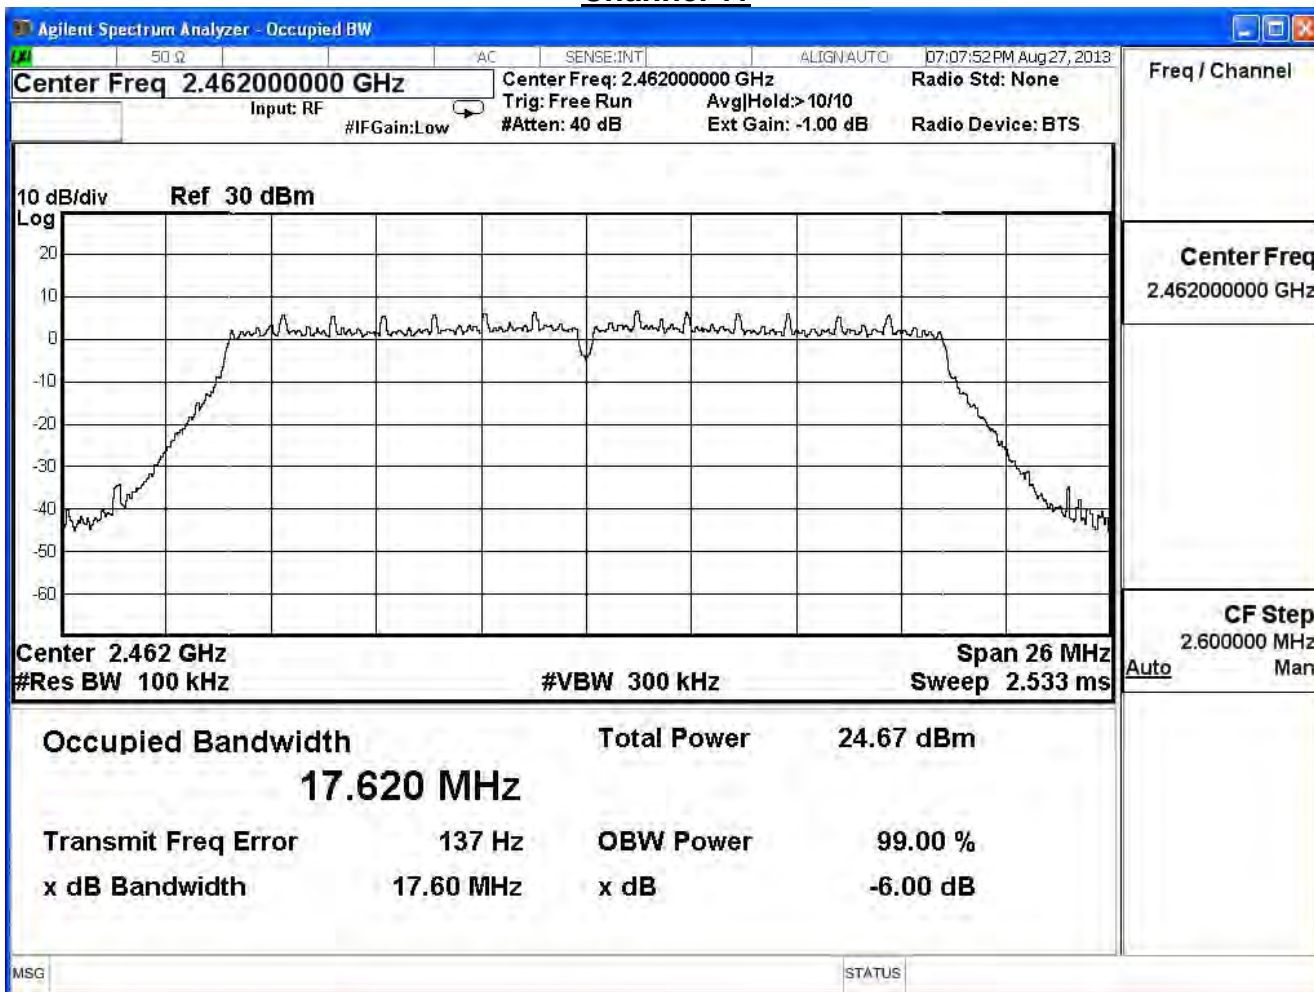


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
3	2422	36.09	≥ 0.5	Pass
6	2437	36.11	≥ 0.5	Pass
9	2452	36.12	≥ 0.5	Pass


### Channel 3

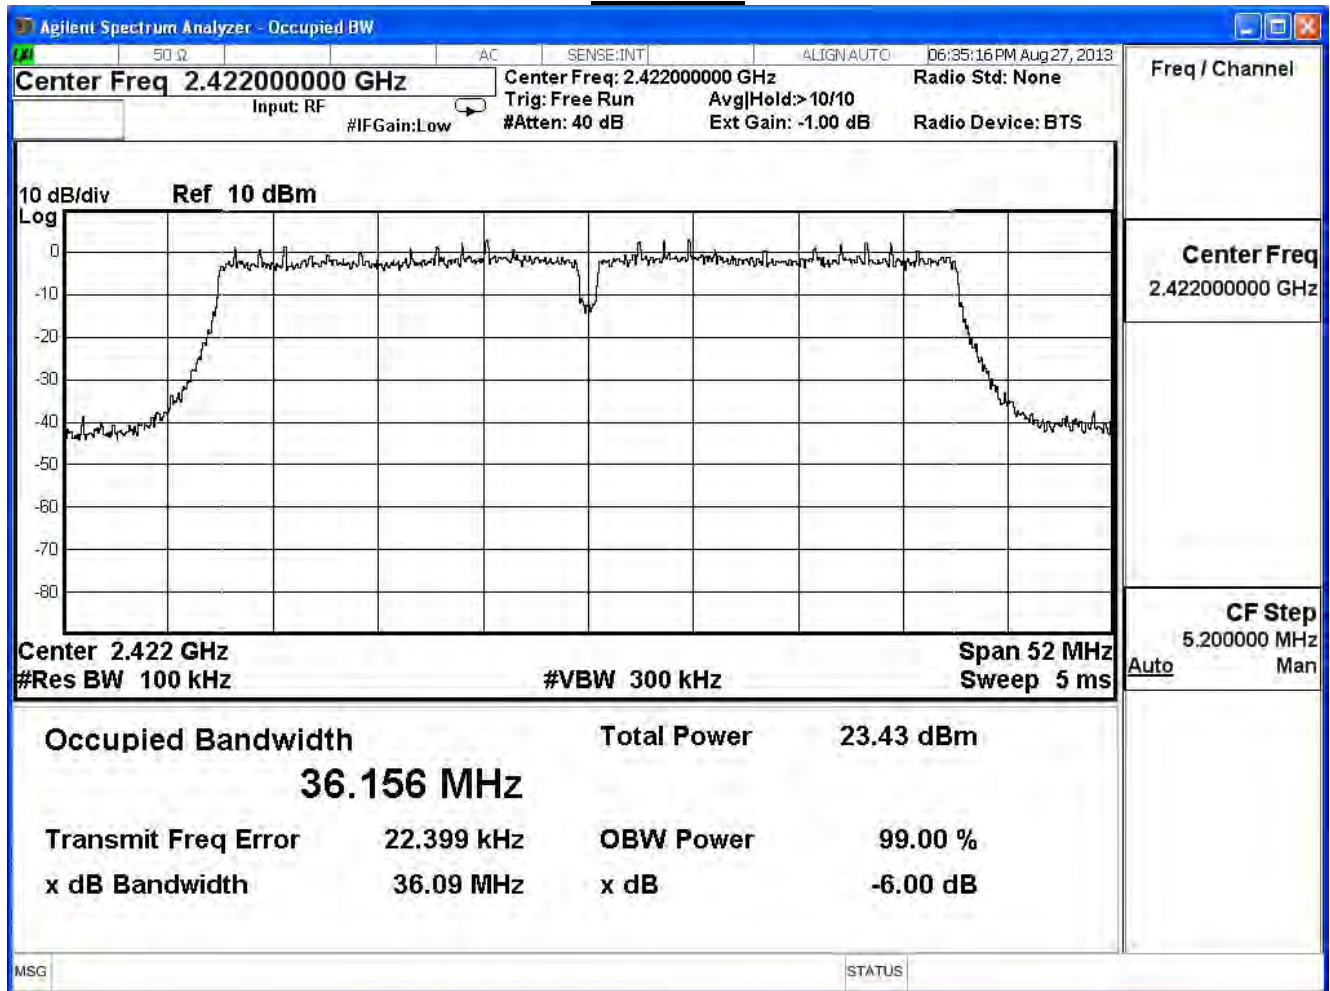

Channel 6

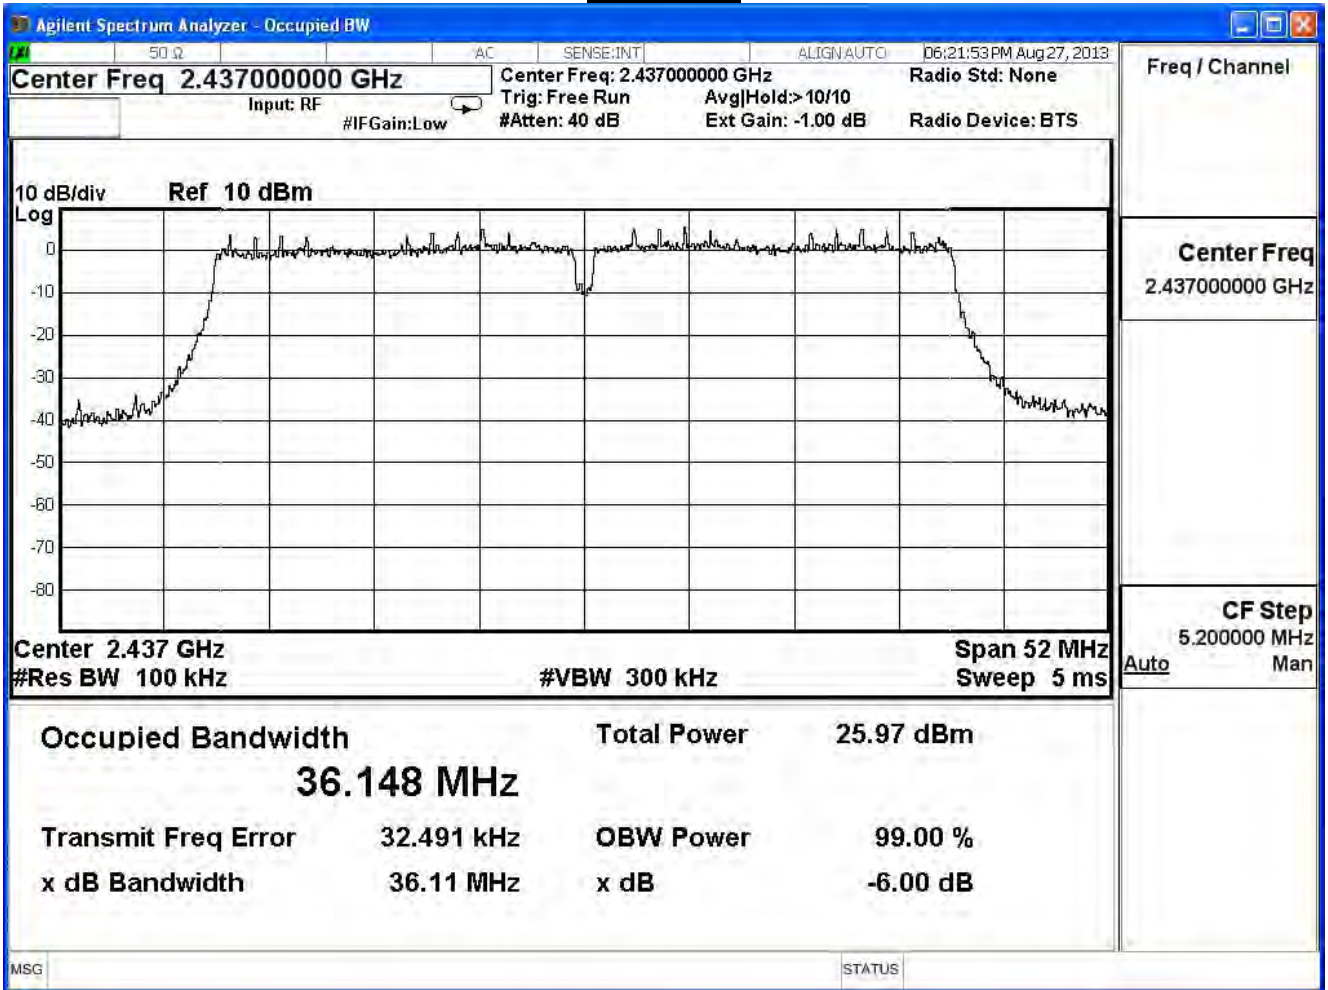


Channel 9

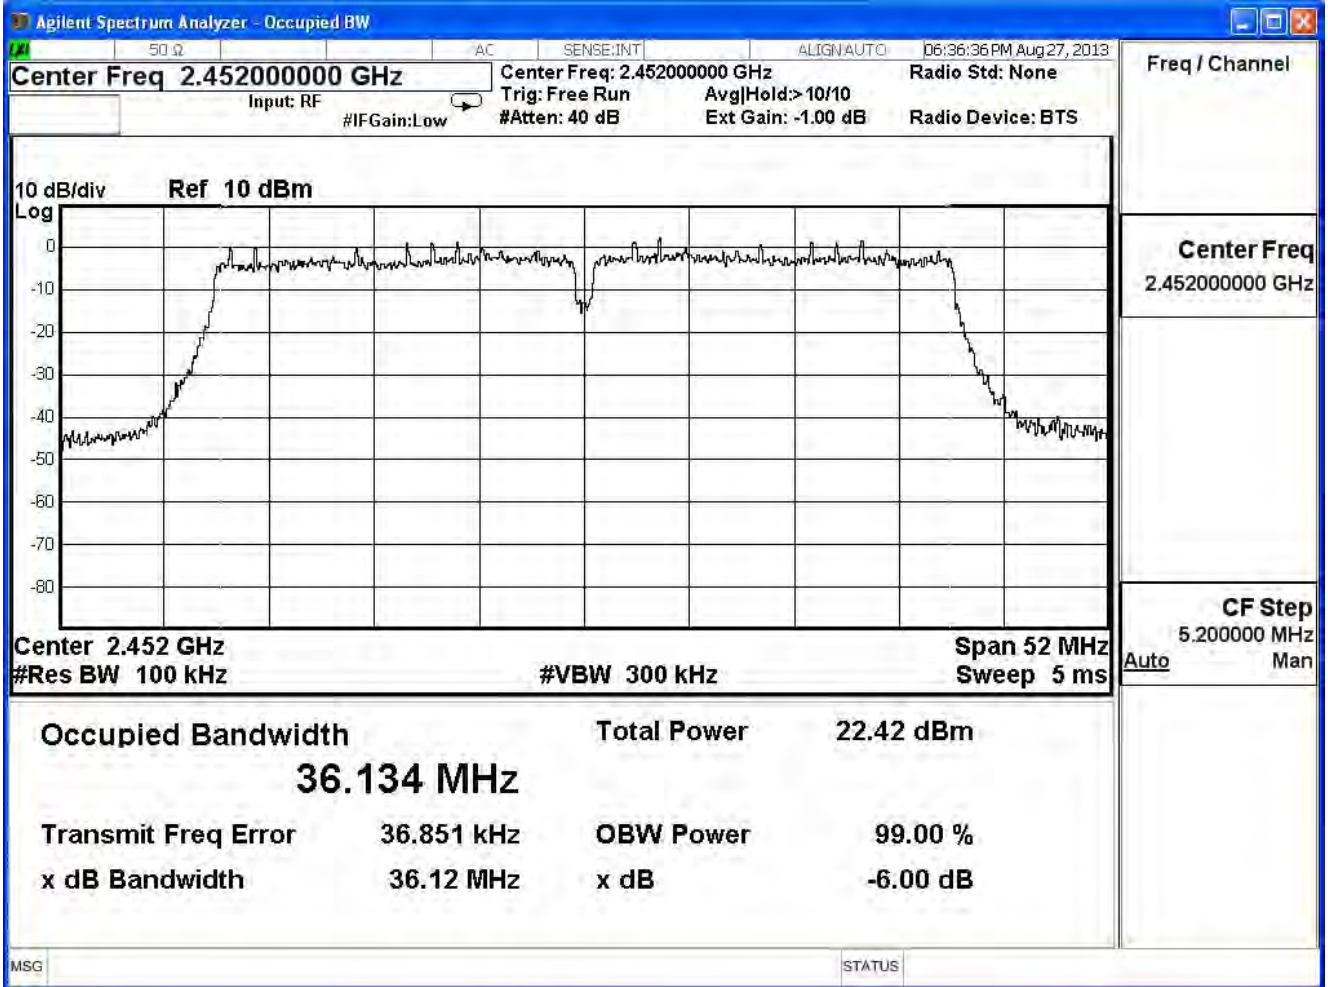


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
3	2422	36.35	≥ 0.5	Pass
6	2437	36.34	≥ 0.5	Pass
9	2452	36.14	≥ 0.5	Pass


### Channel 3

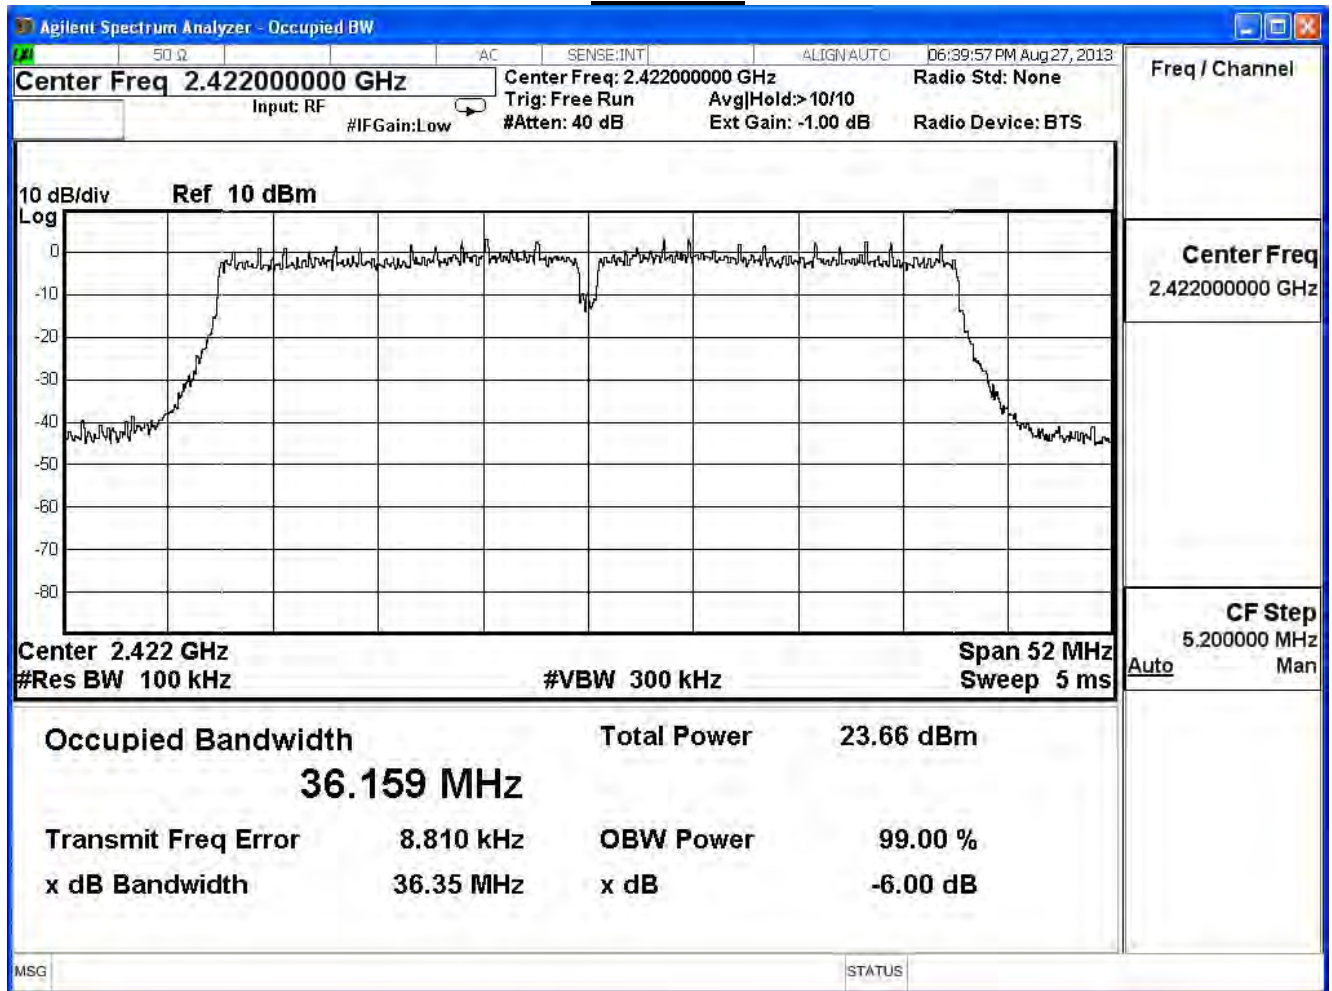

Channel 6

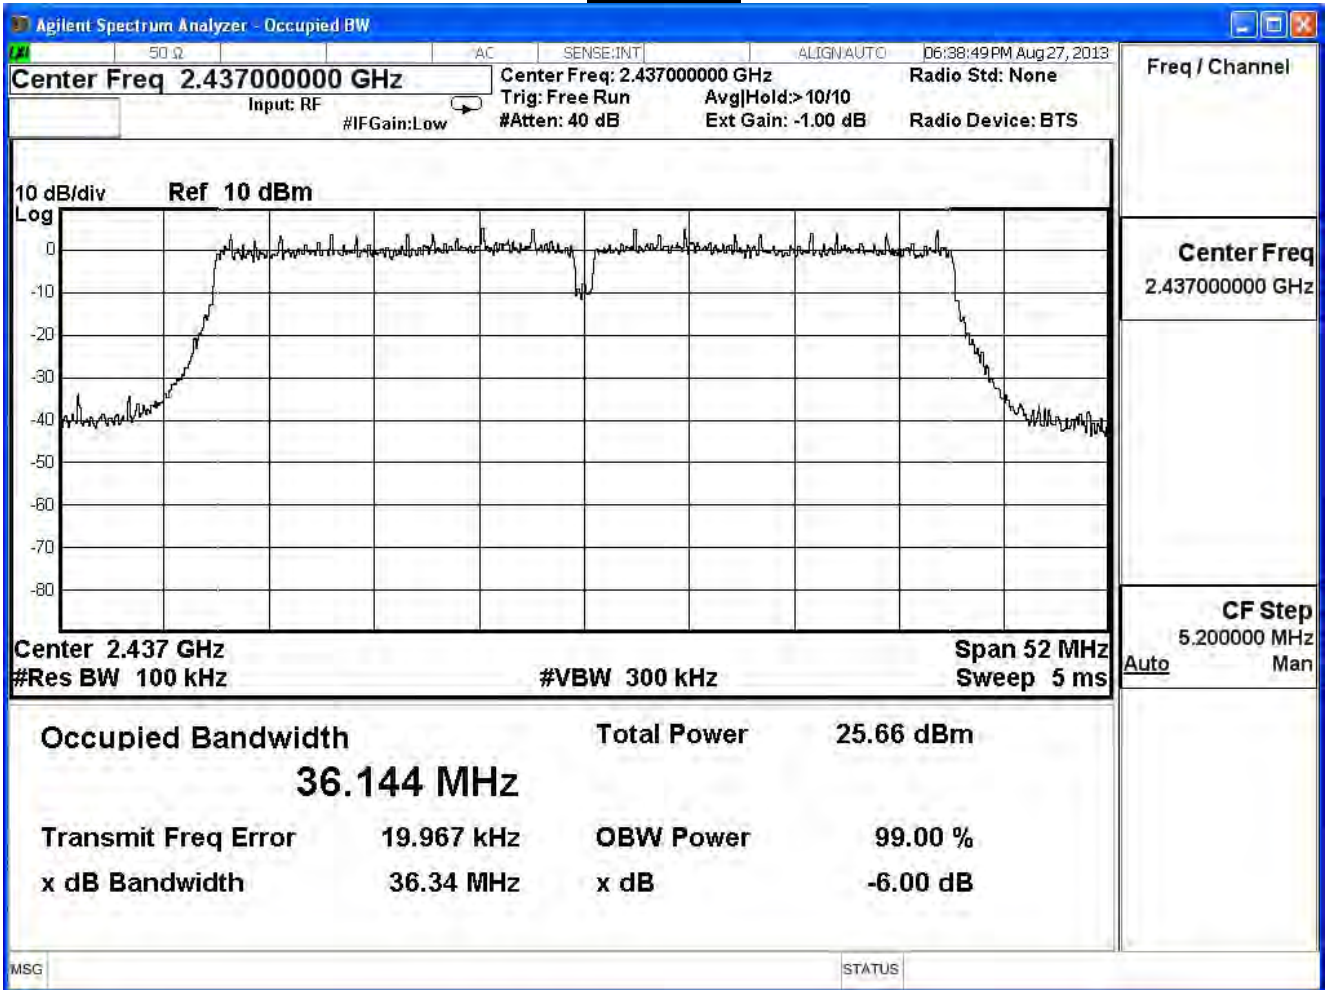


Channel 9

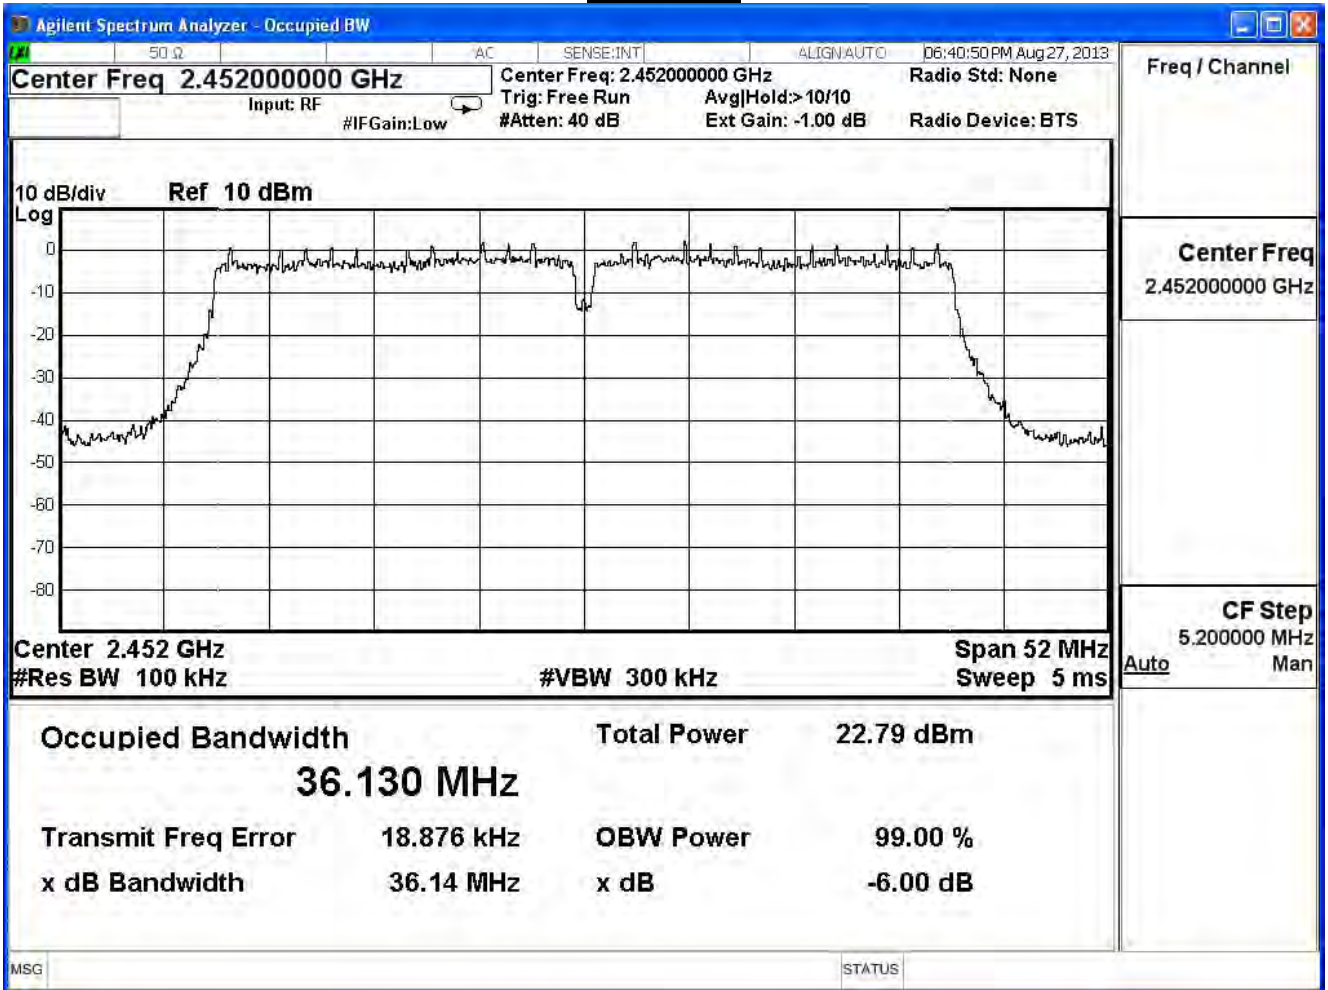

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7


IEEE 802.11n (40MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
3	2422	36.34	$\geq 0.5$	Pass
6	2437	36.33	$\geq 0.5$	Pass
9	2452	36.31	$\geq 0.5$	Pass

### Channel 3

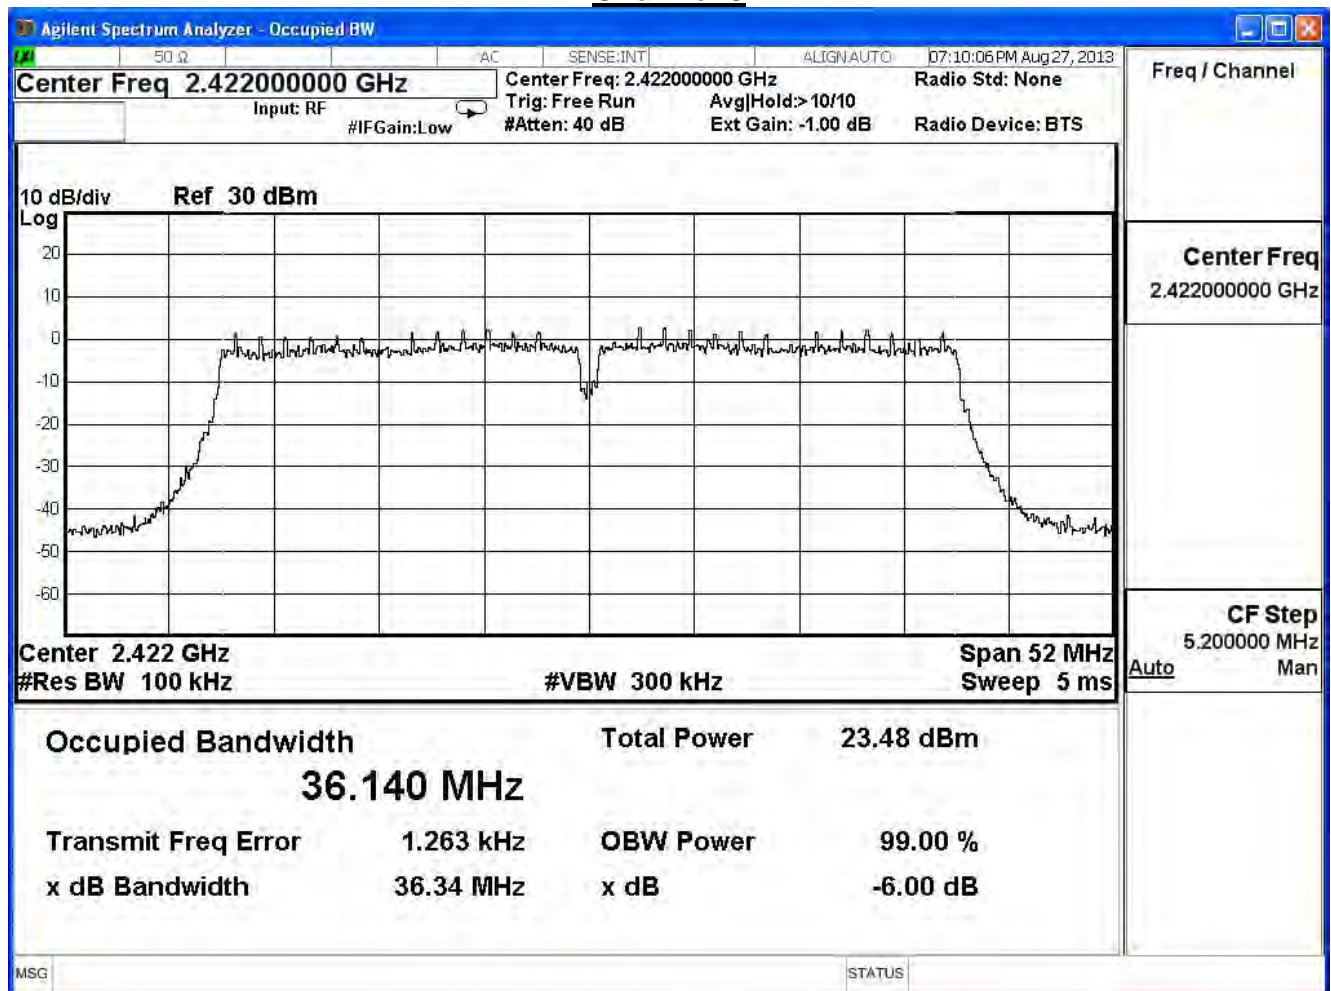




Channel 6

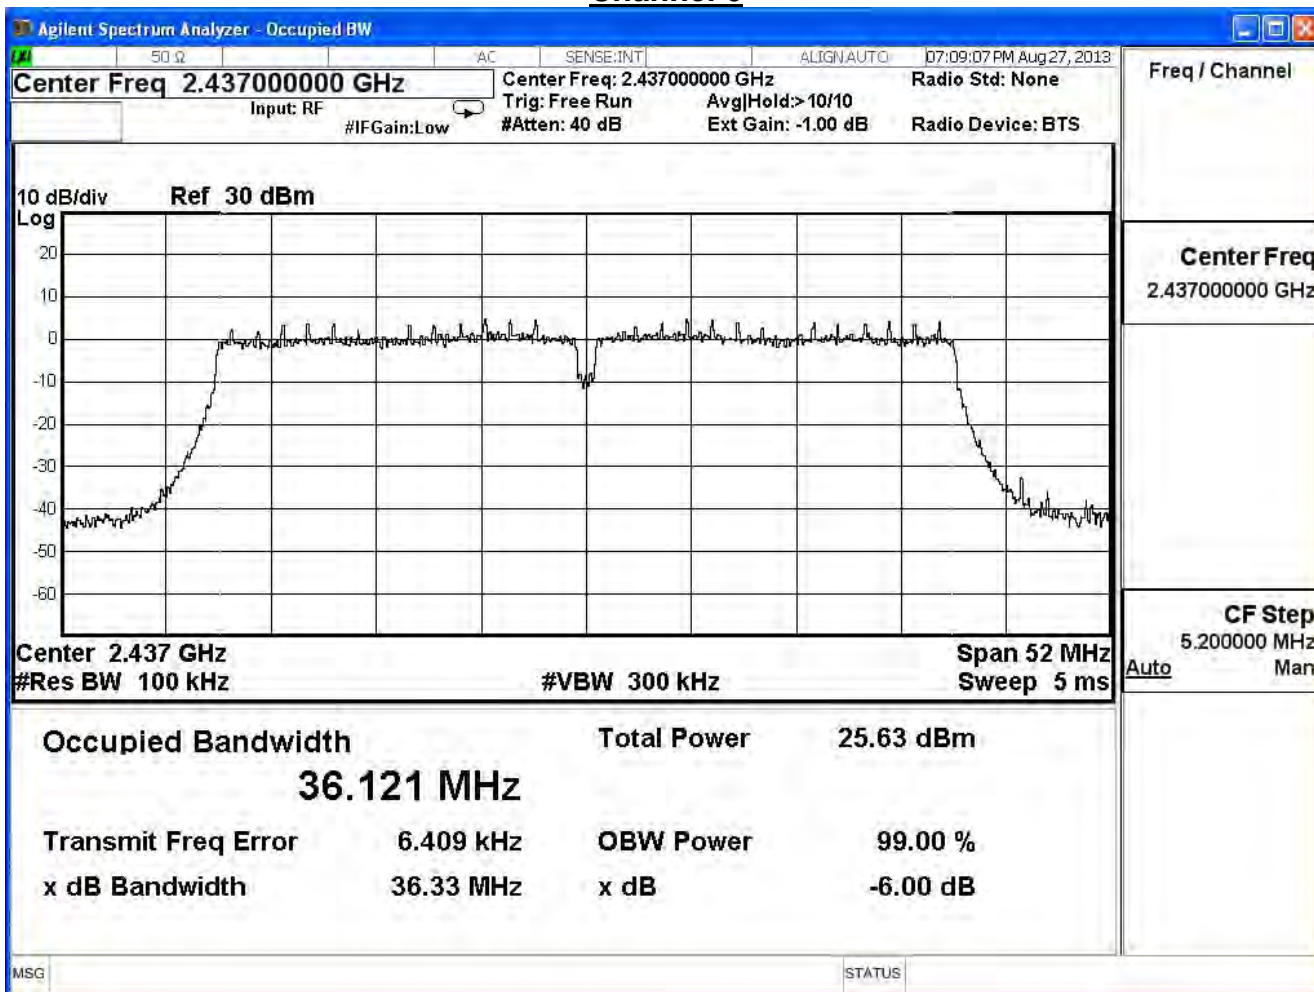

Channel 9

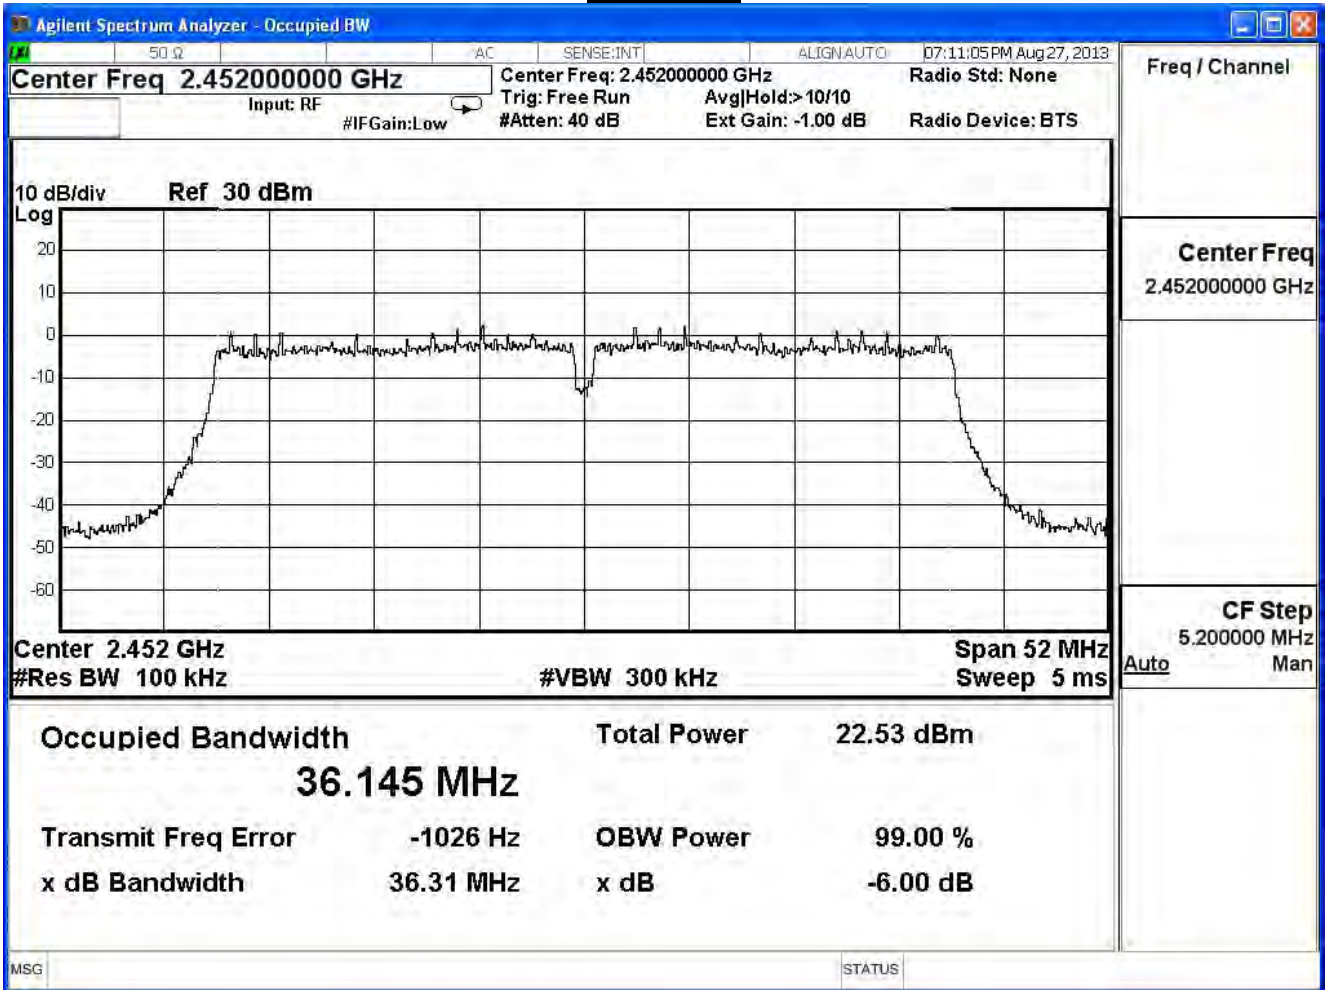


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7


802.11 a (ANT0)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	16.37	≥ 0.5	Pass
157	5785	16.40	≥ 0.5	Pass
165	5825	16.40	≥ 0.5	Pass


### Channel 149

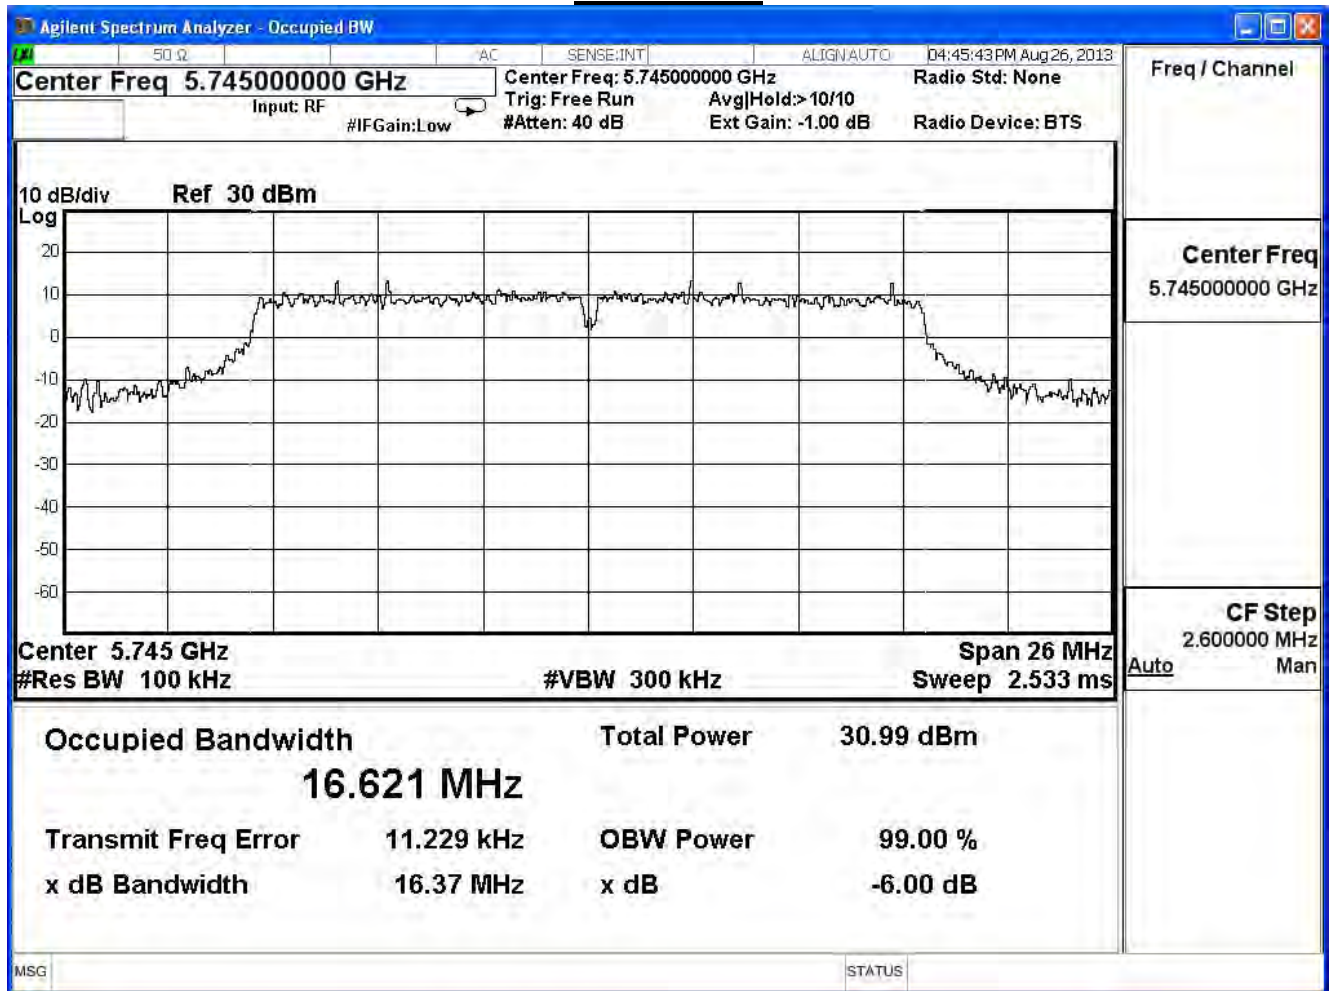

Channel 157

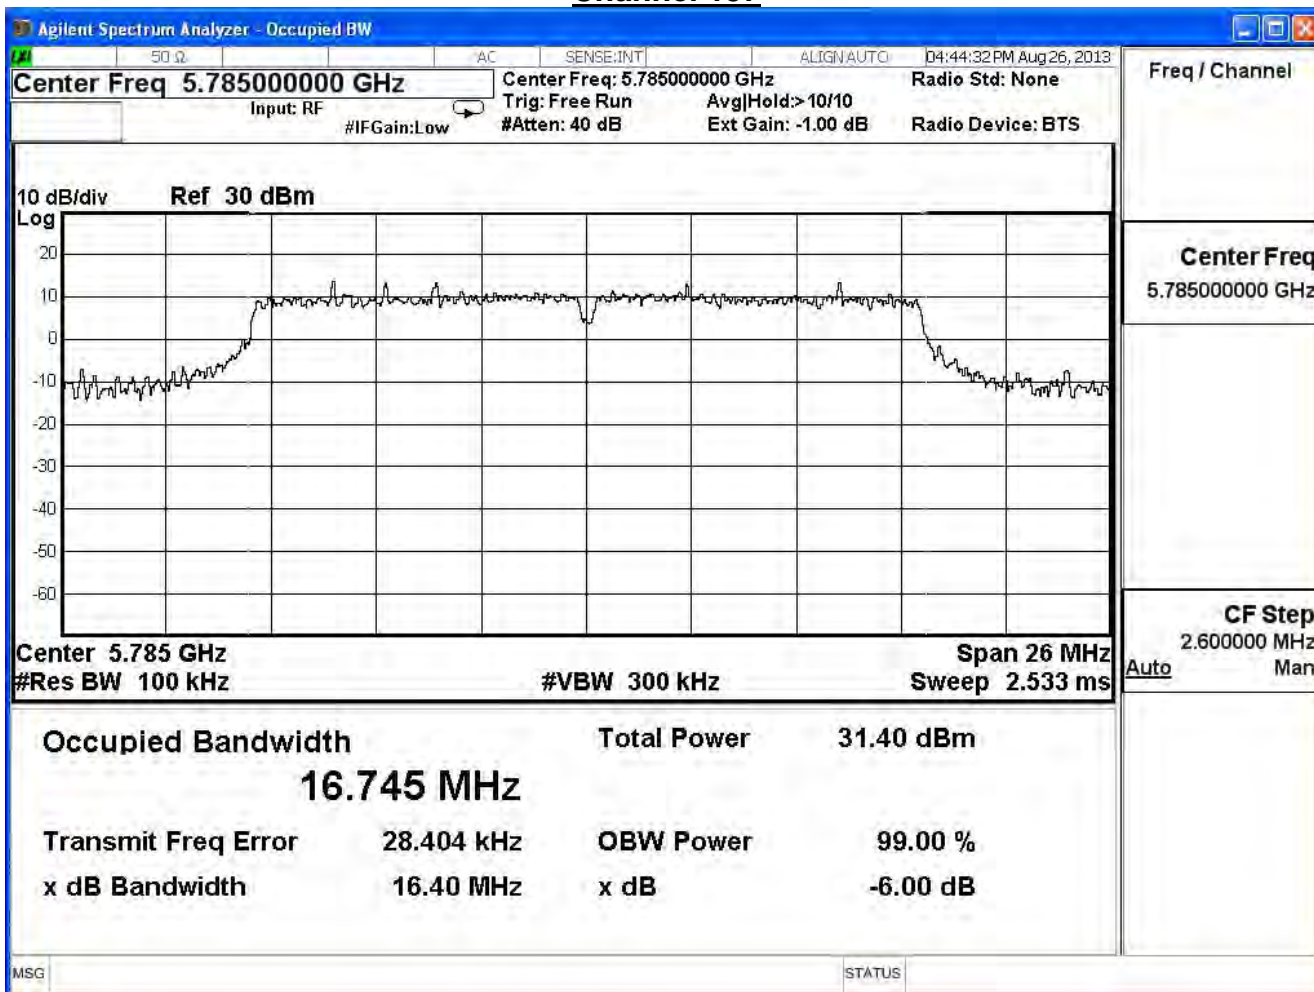


Channel 165

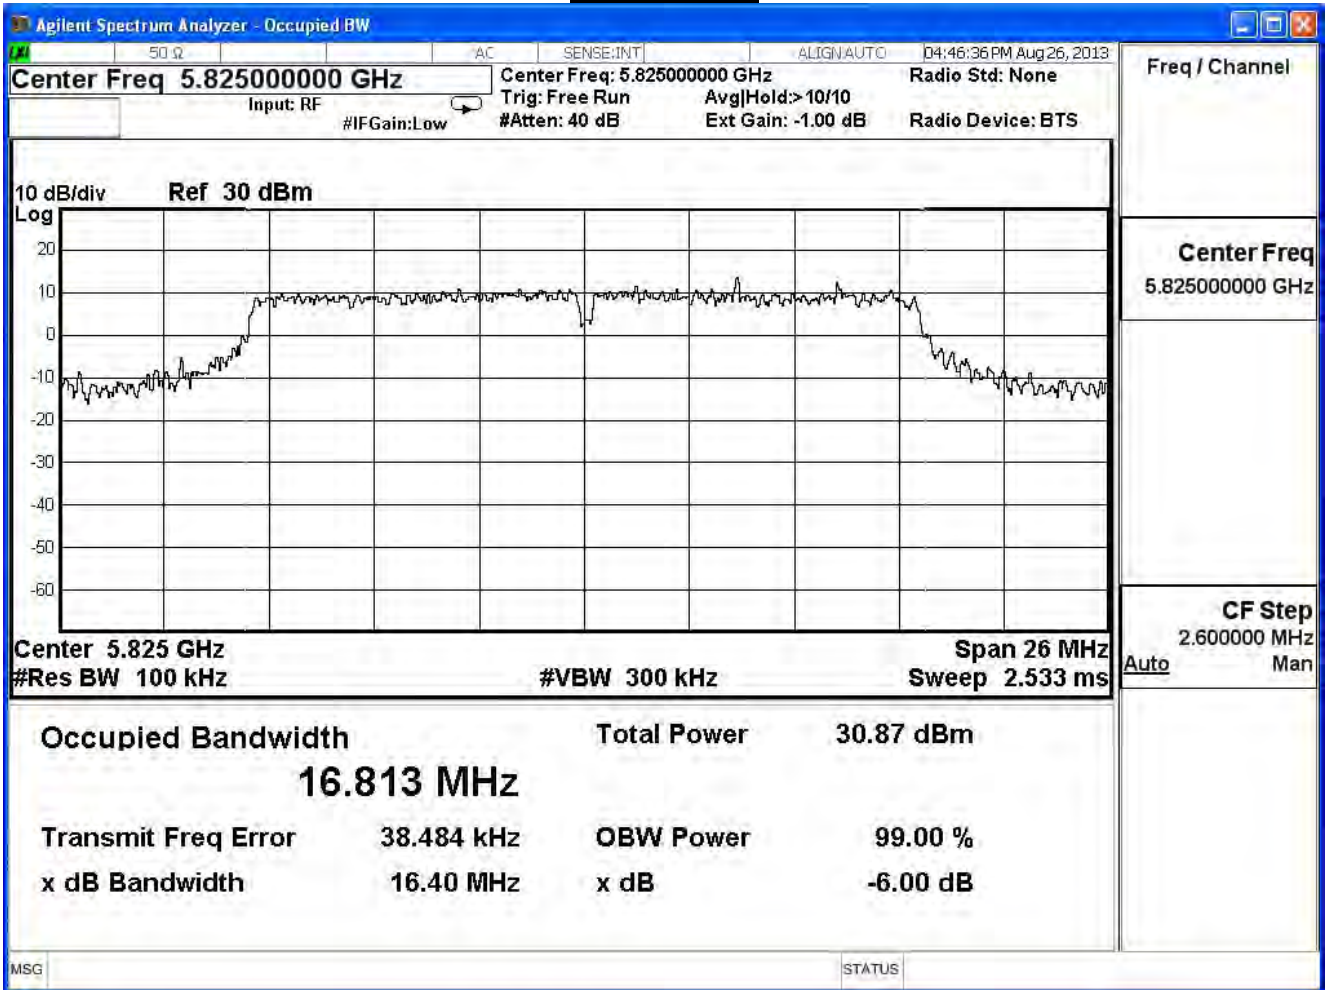


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

802.11 a (ANT1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	16.34	≥ 0.5	Pass
157	5785	16.34	≥ 0.5	Pass
165	5825	16.38	≥ 0.5	Pass


### Channel 149

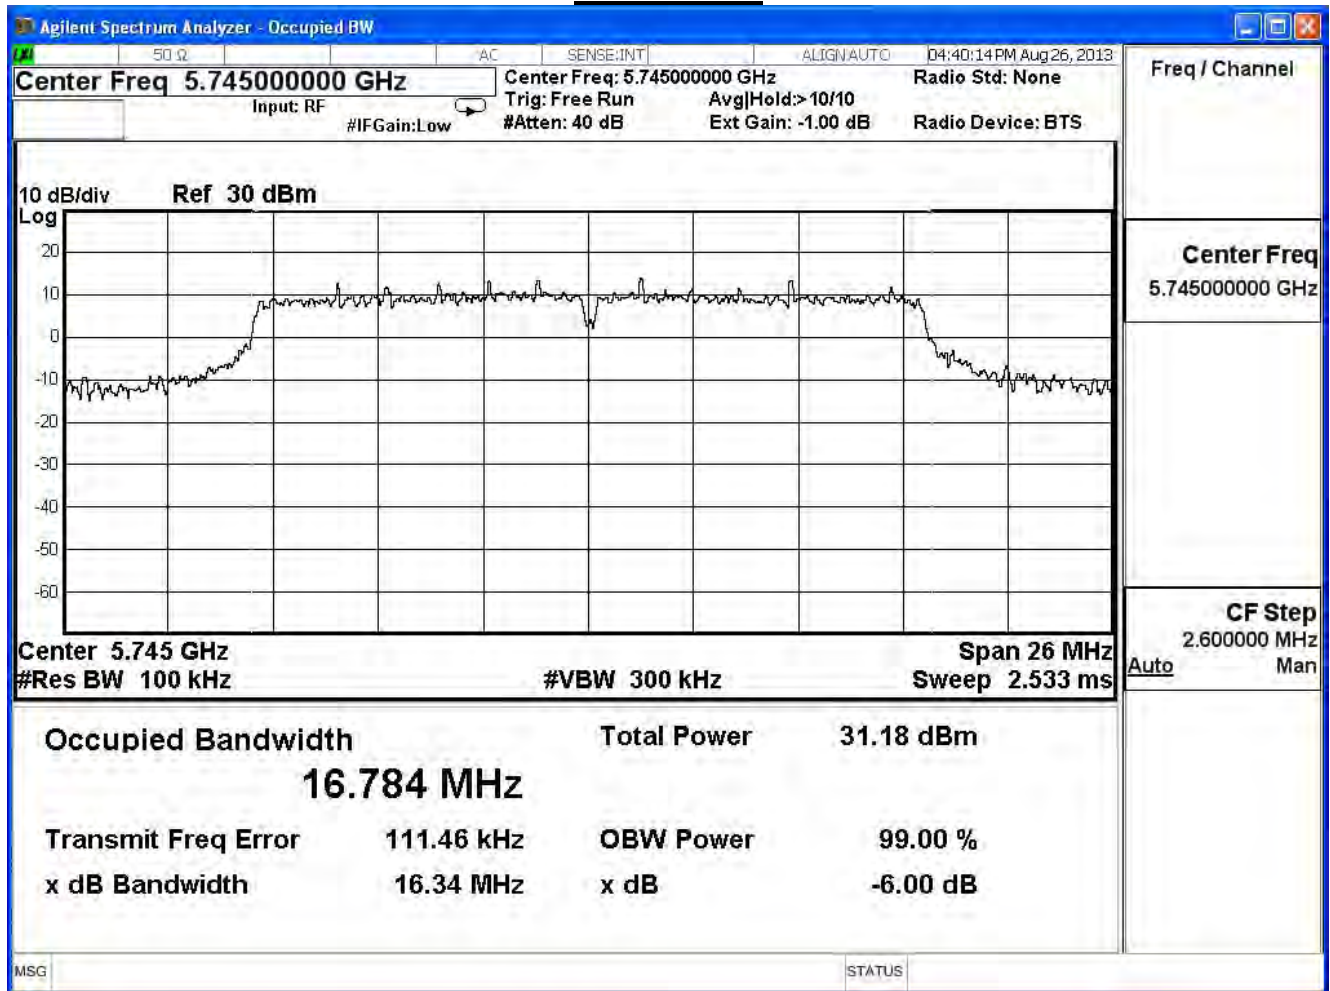

Channel 157

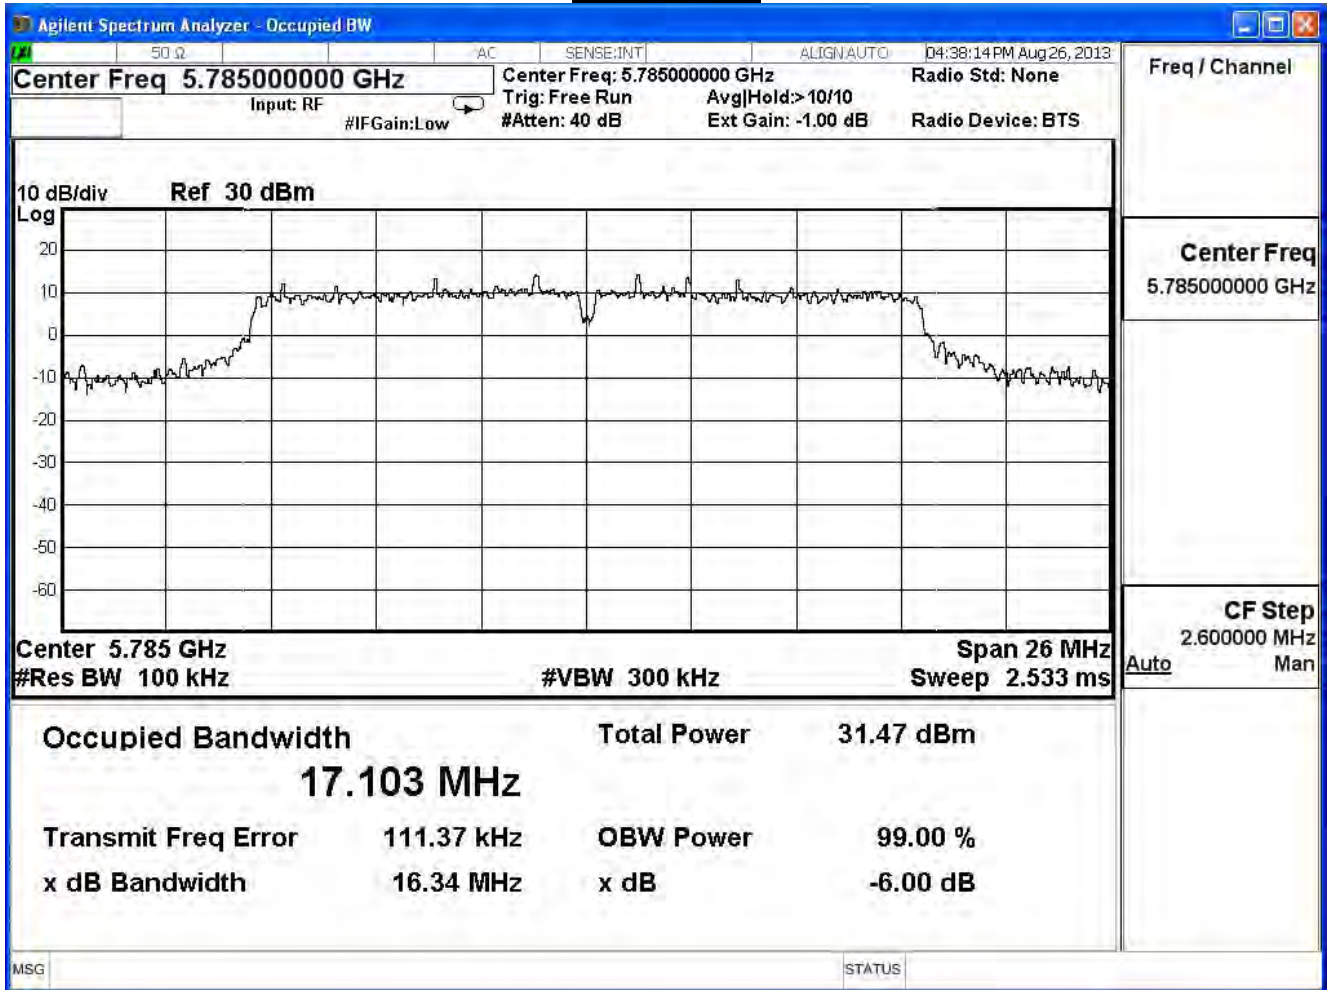

Channel 165

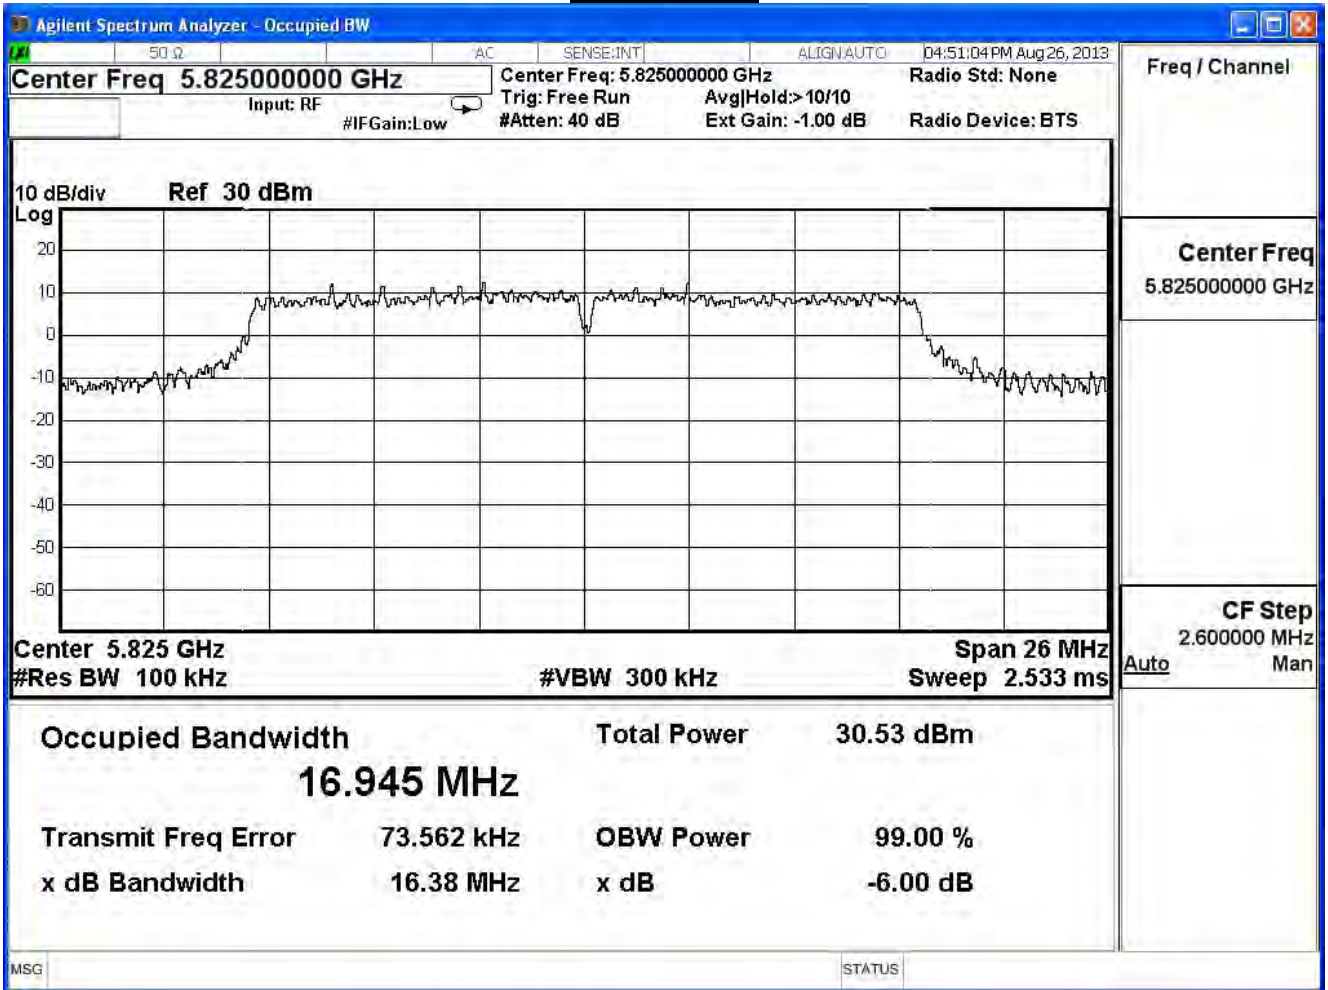





Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

802.11 a (ANT2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	16.35	≥ 0.5	Pass
157	5785	16.36	≥ 0.5	Pass
165	5825	16.37	≥ 0.5	Pass


### Channel 149

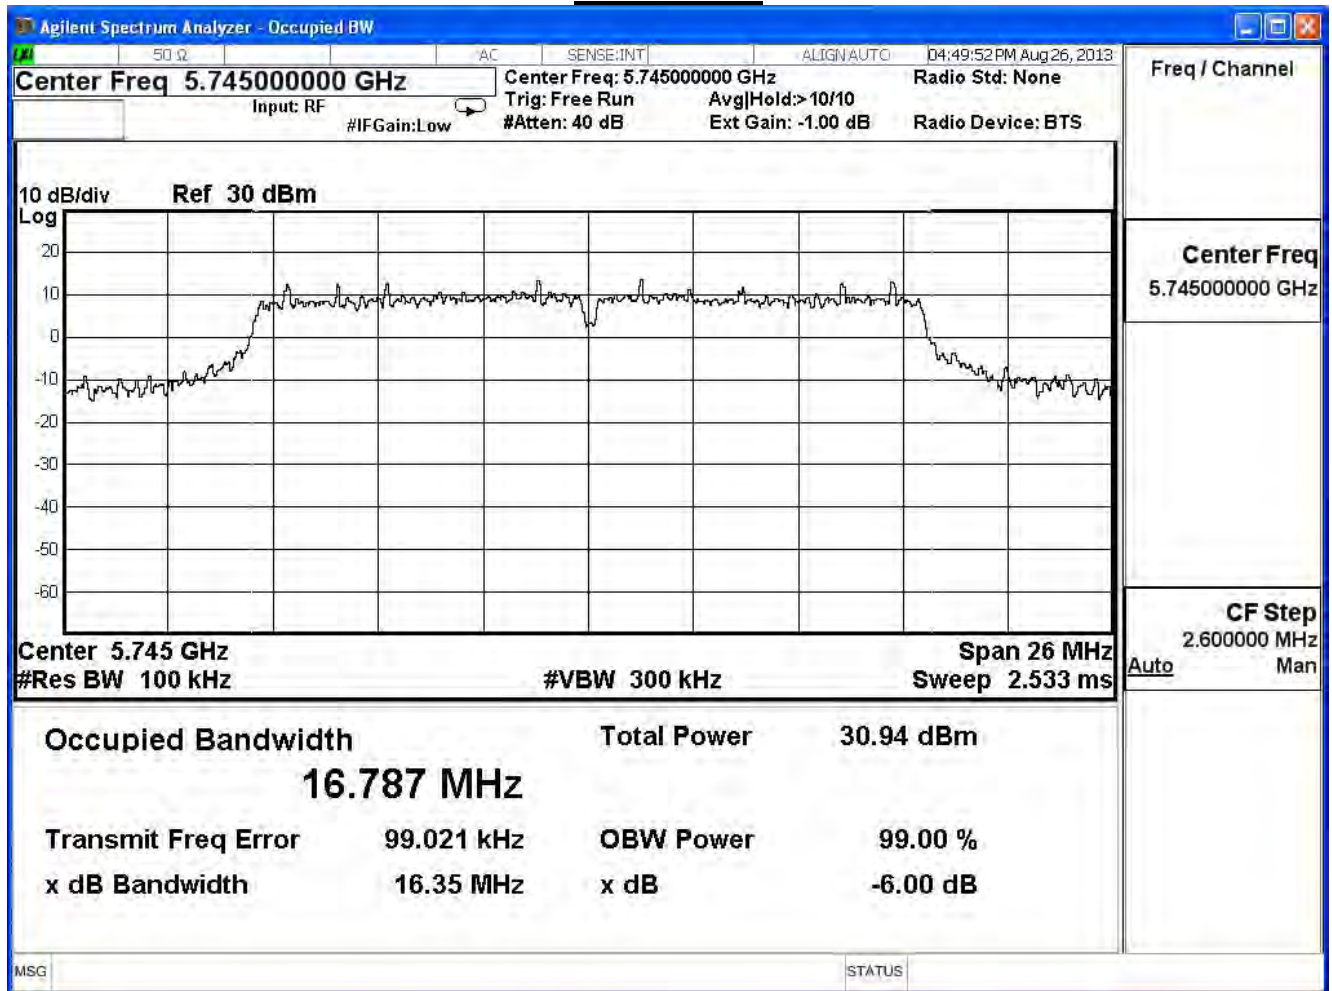

Channel 157

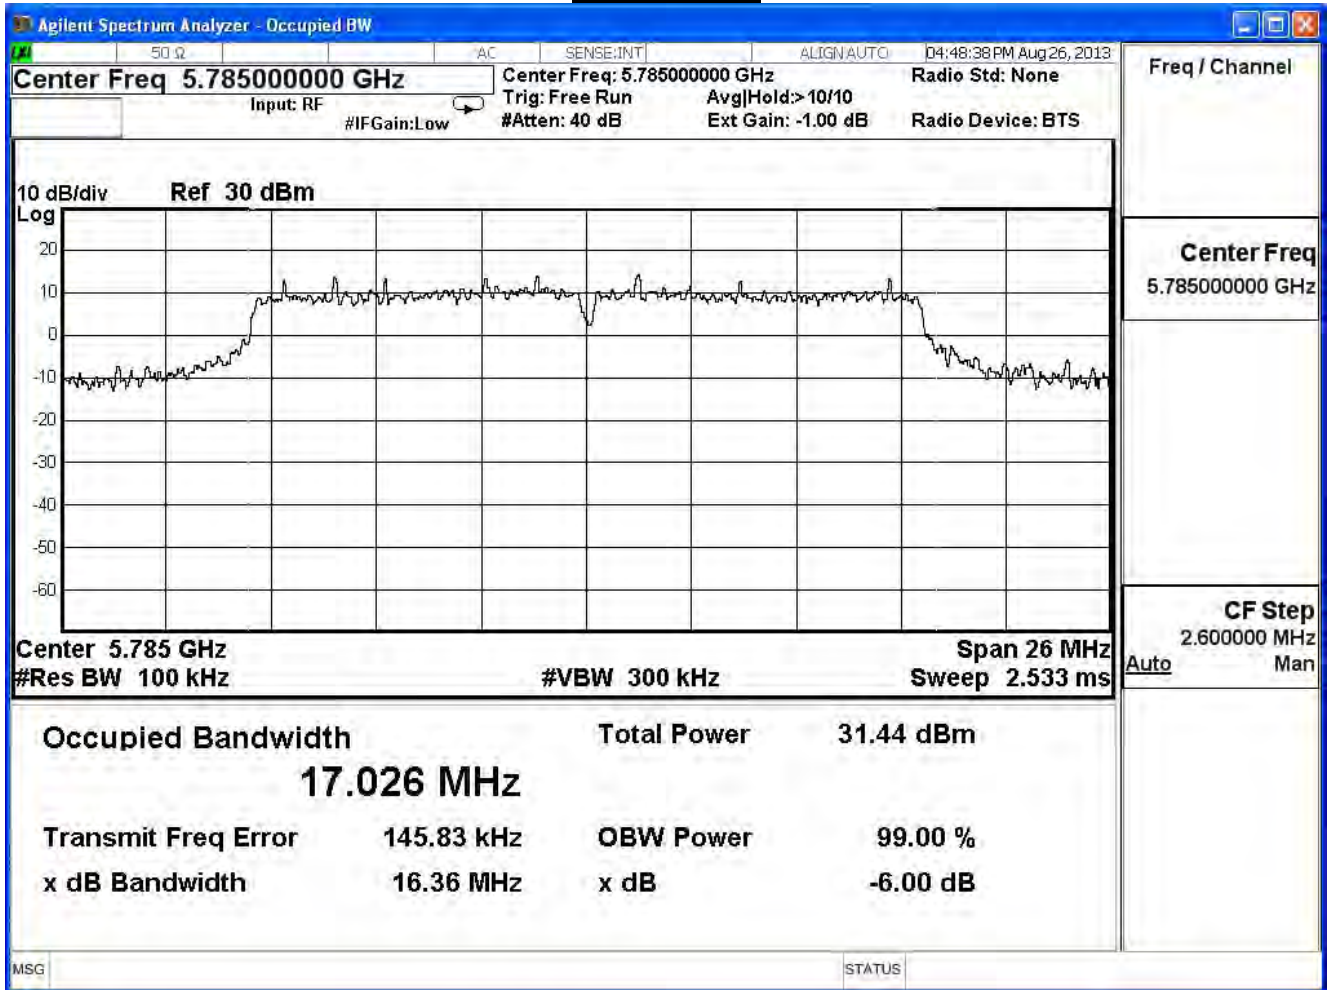


Channel 165

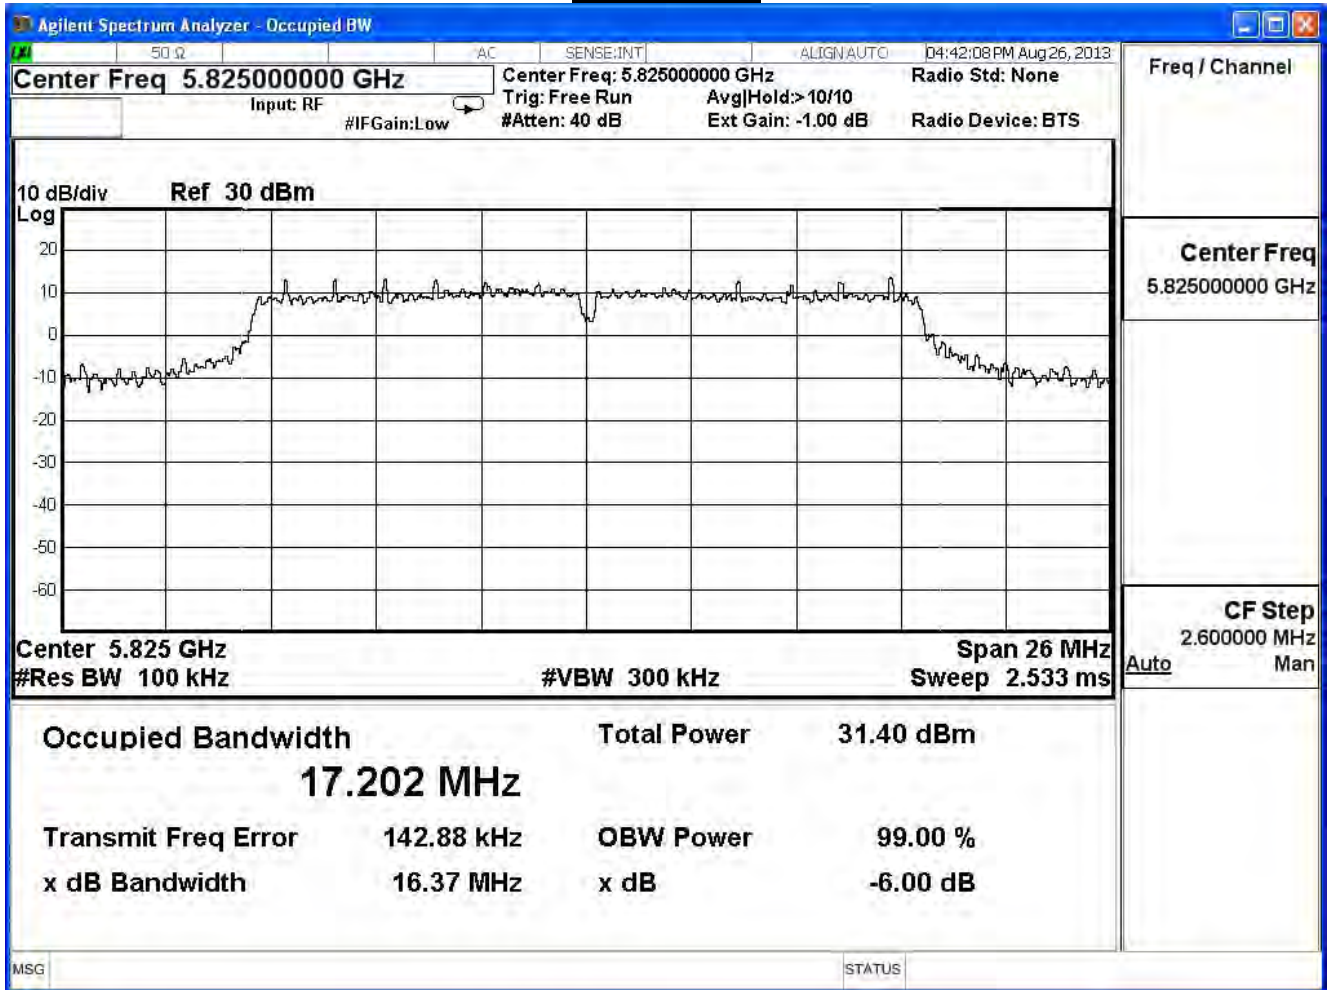


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	17.61	$\geq 0.5$	Pass
157	5785	17.55	$\geq 0.5$	Pass
165	5825	17.61	$\geq 0.5$	Pass


### Channel 149

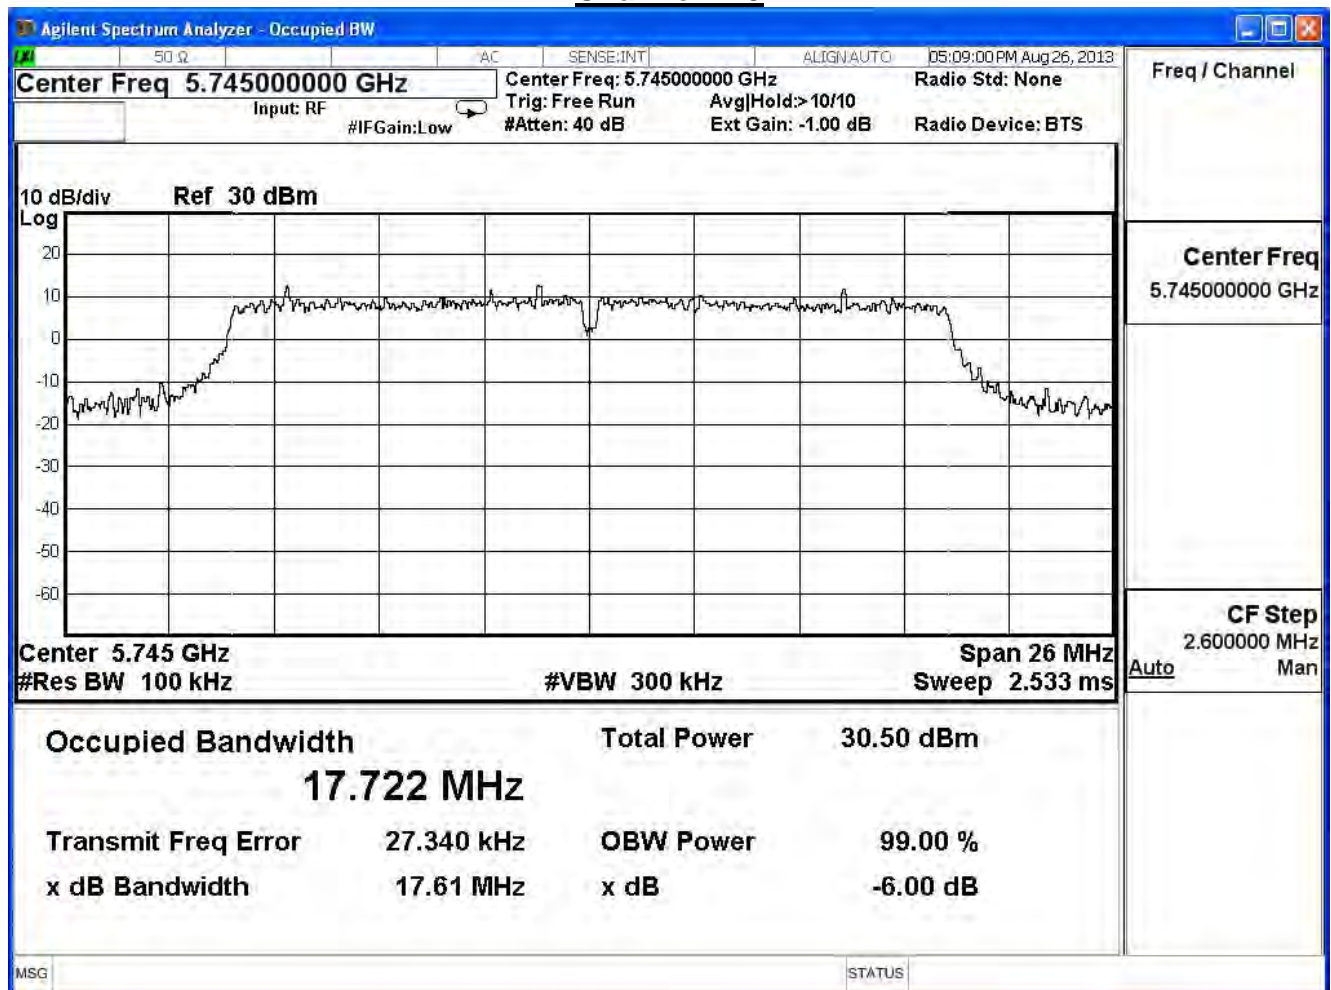

Channel 157

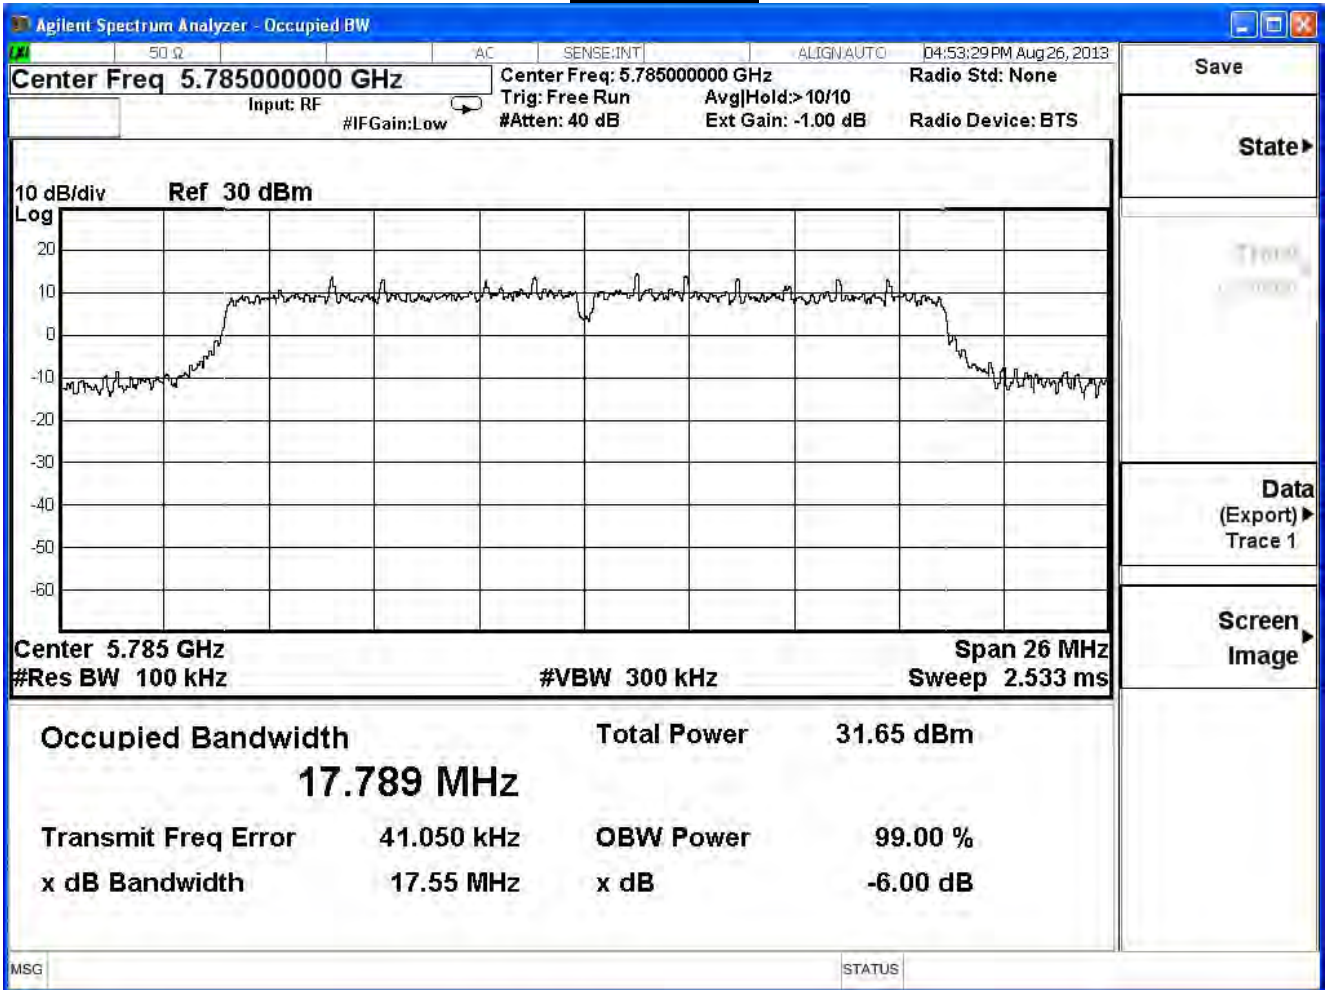


Channel 165

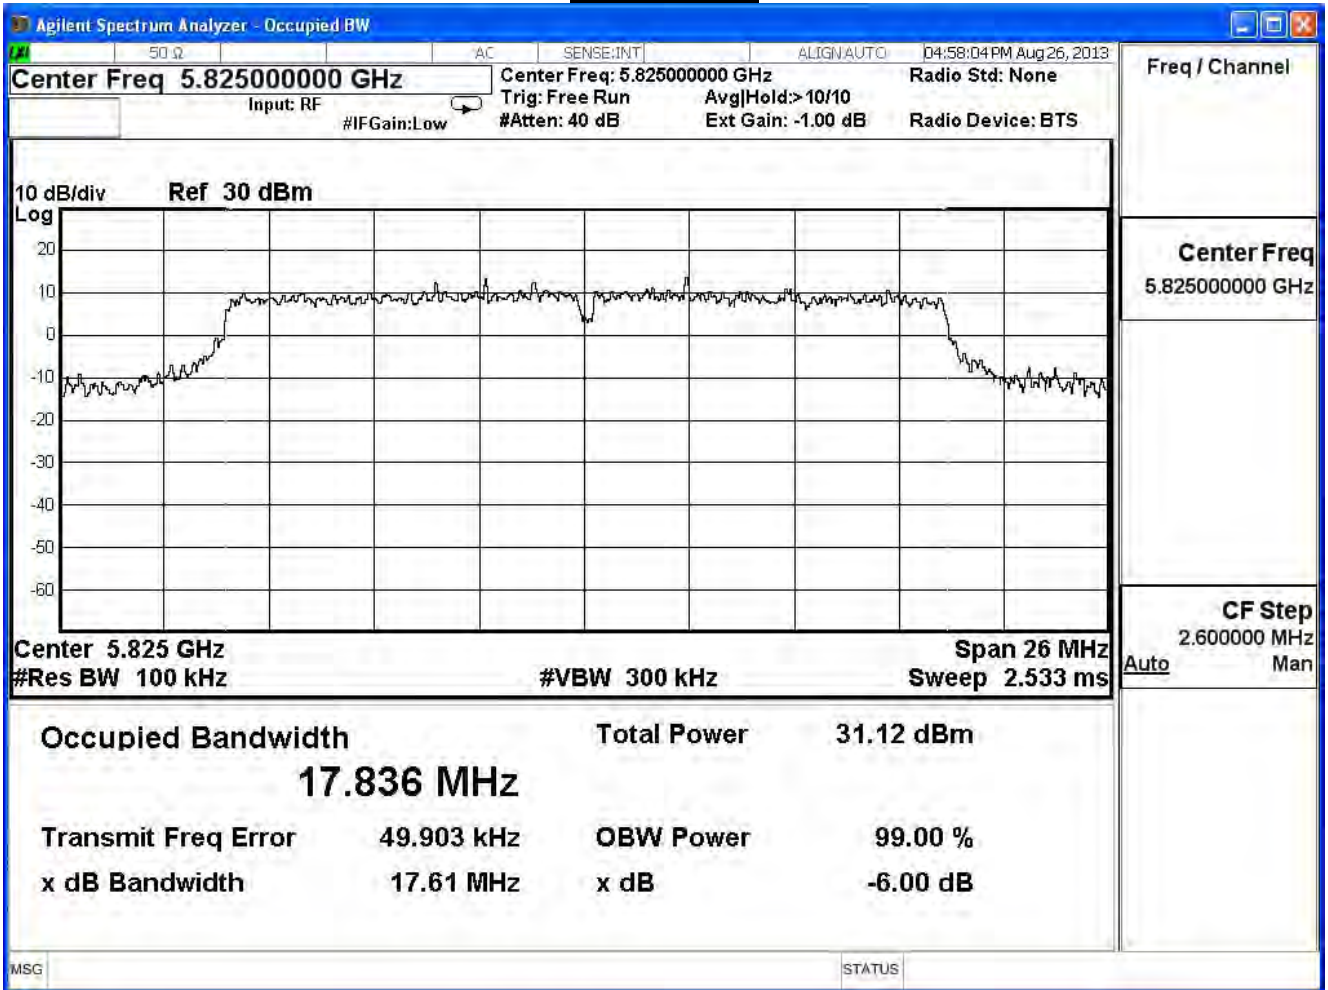


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	17.62	≥ 0.5	Pass
157	5785	17.62	≥ 0.5	Pass
165	5825	17.63	≥ 0.5	Pass

### Channel 149

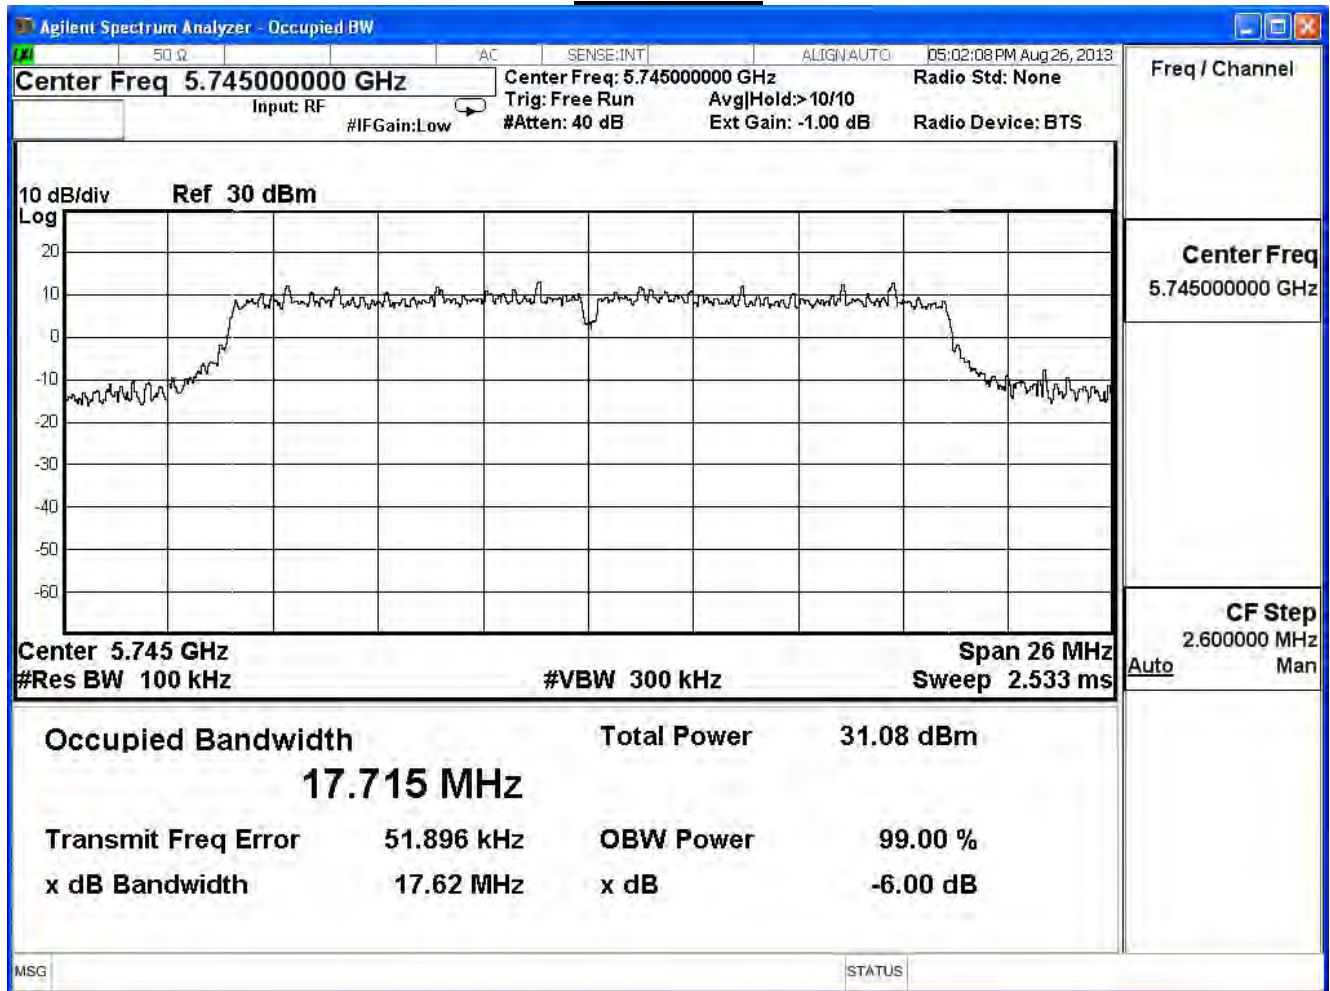


Channel 157

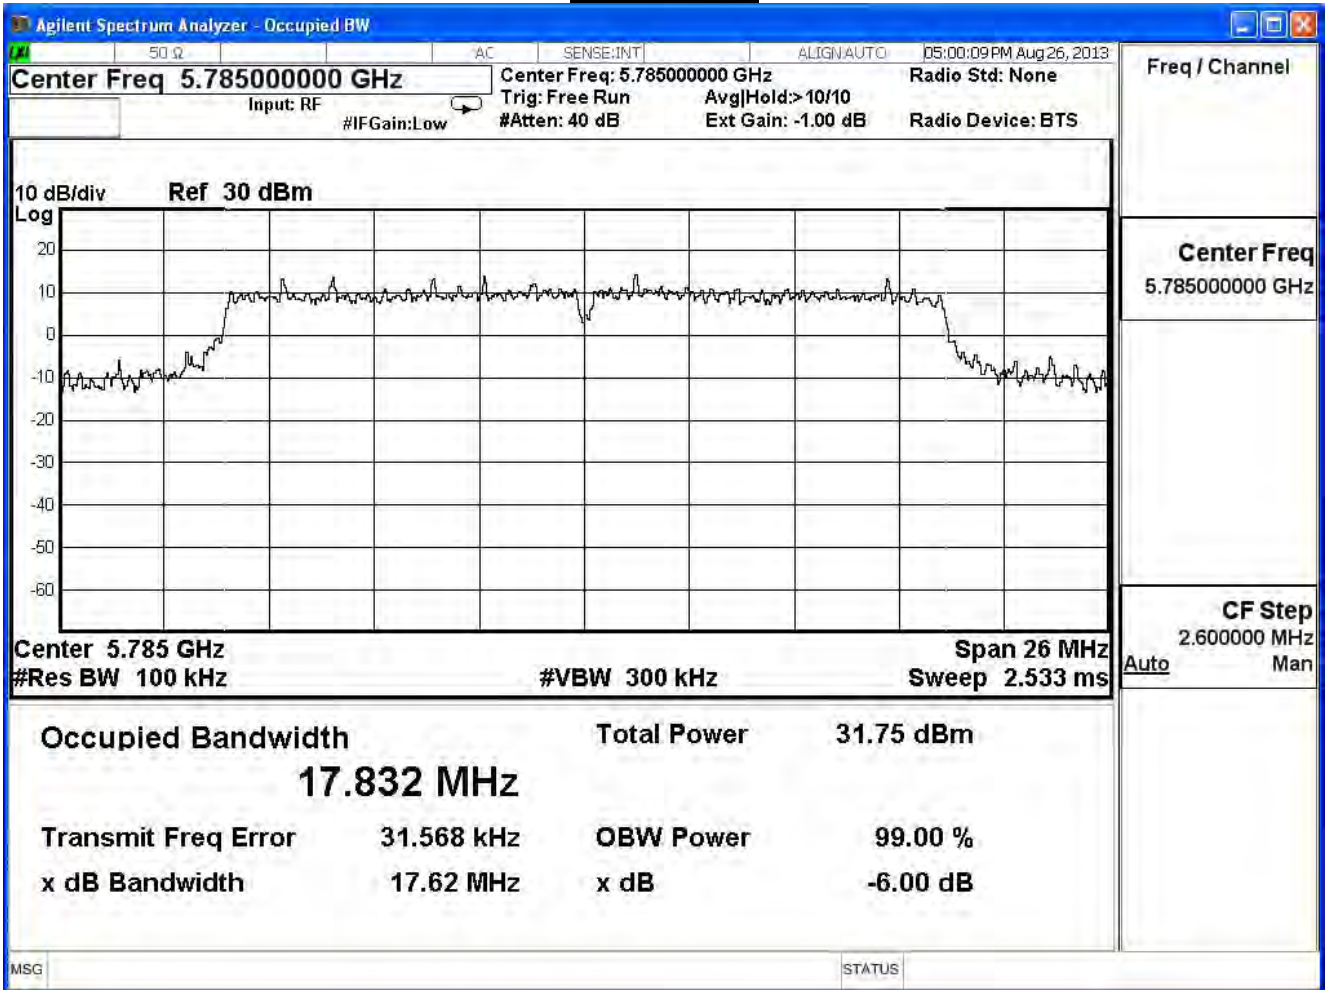




Channel 165

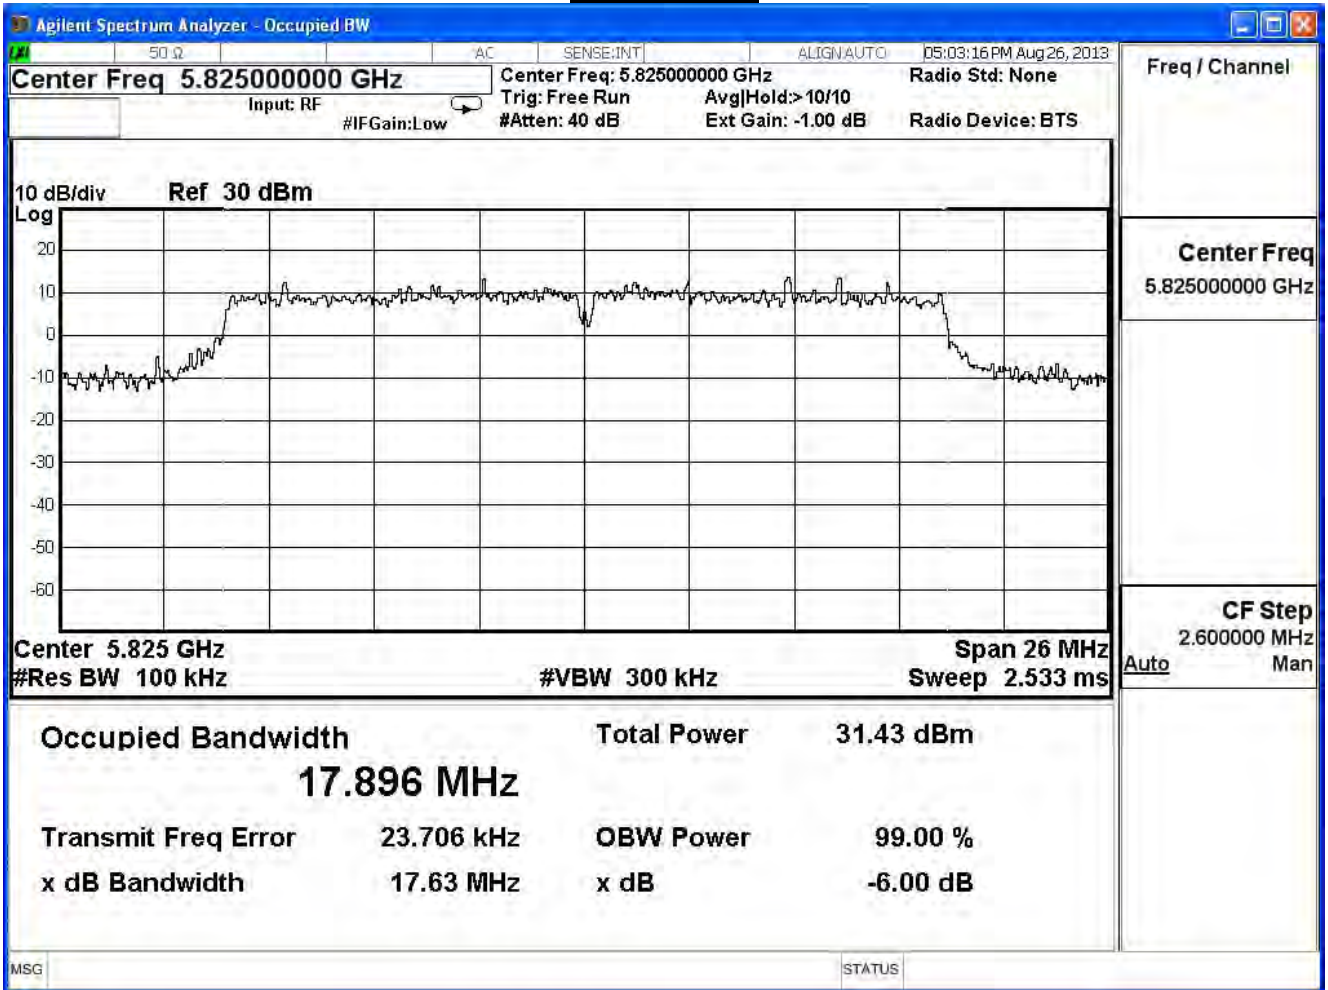


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	17.62	$\geq 0.5$	Pass
157	5785	17.63	$\geq 0.5$	Pass
165	5825	17.60	$\geq 0.5$	Pass


### Channel 149

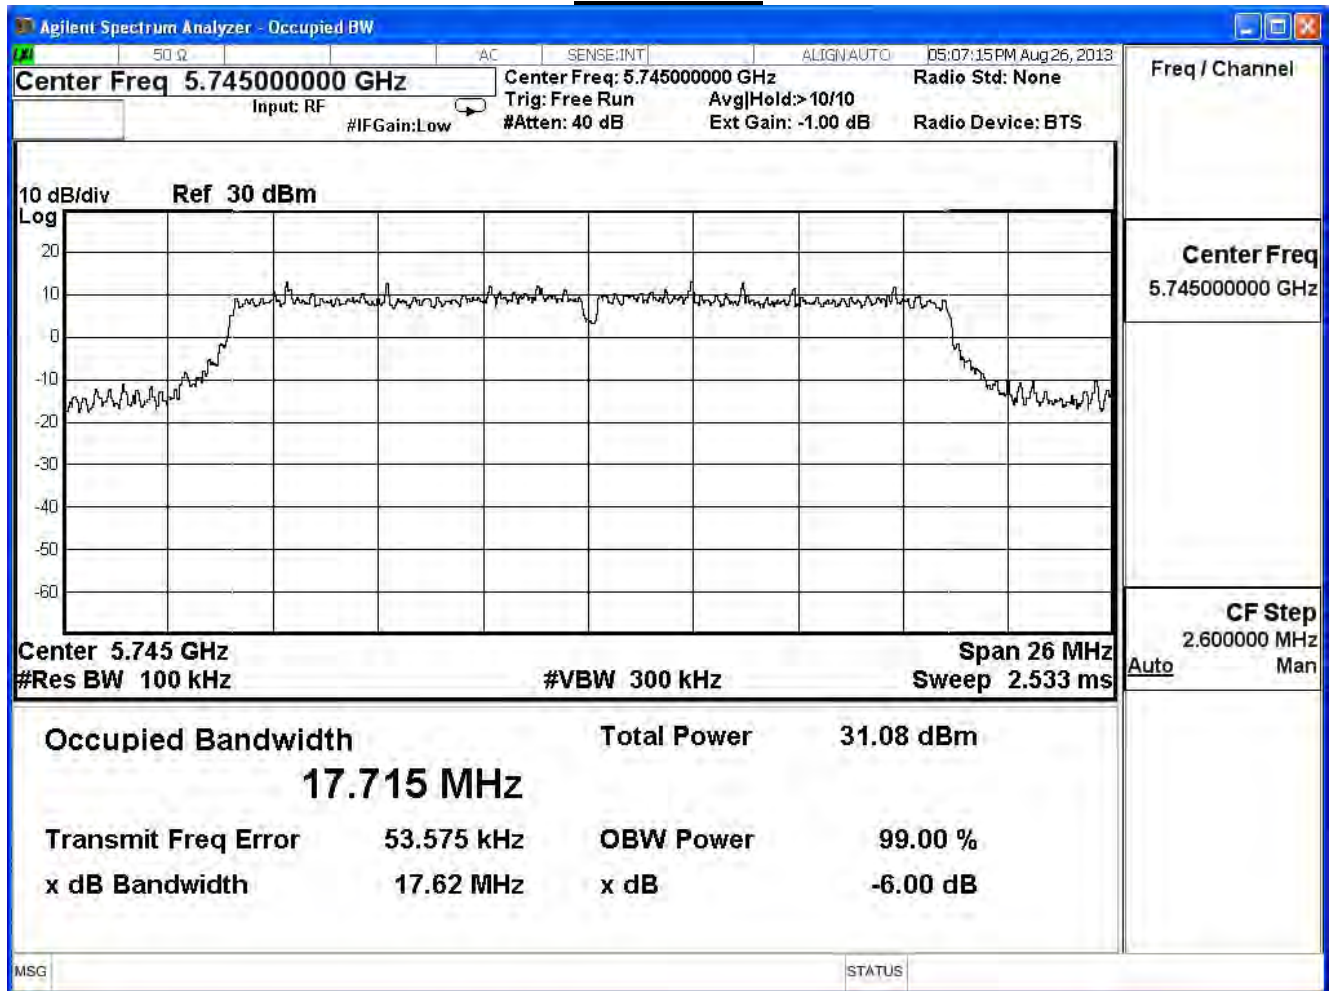

Channel 157

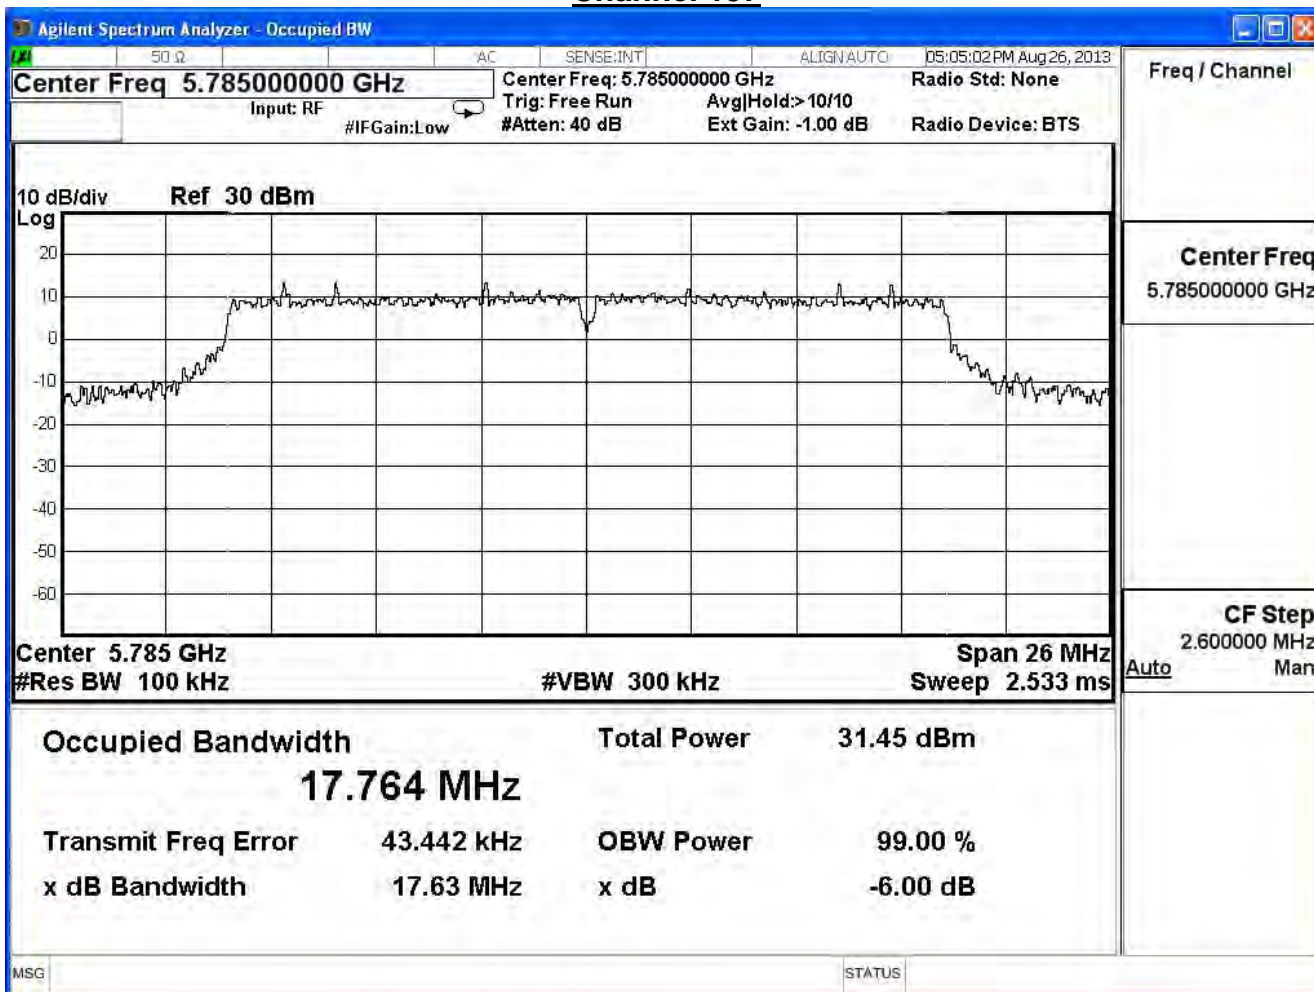


Channel 165

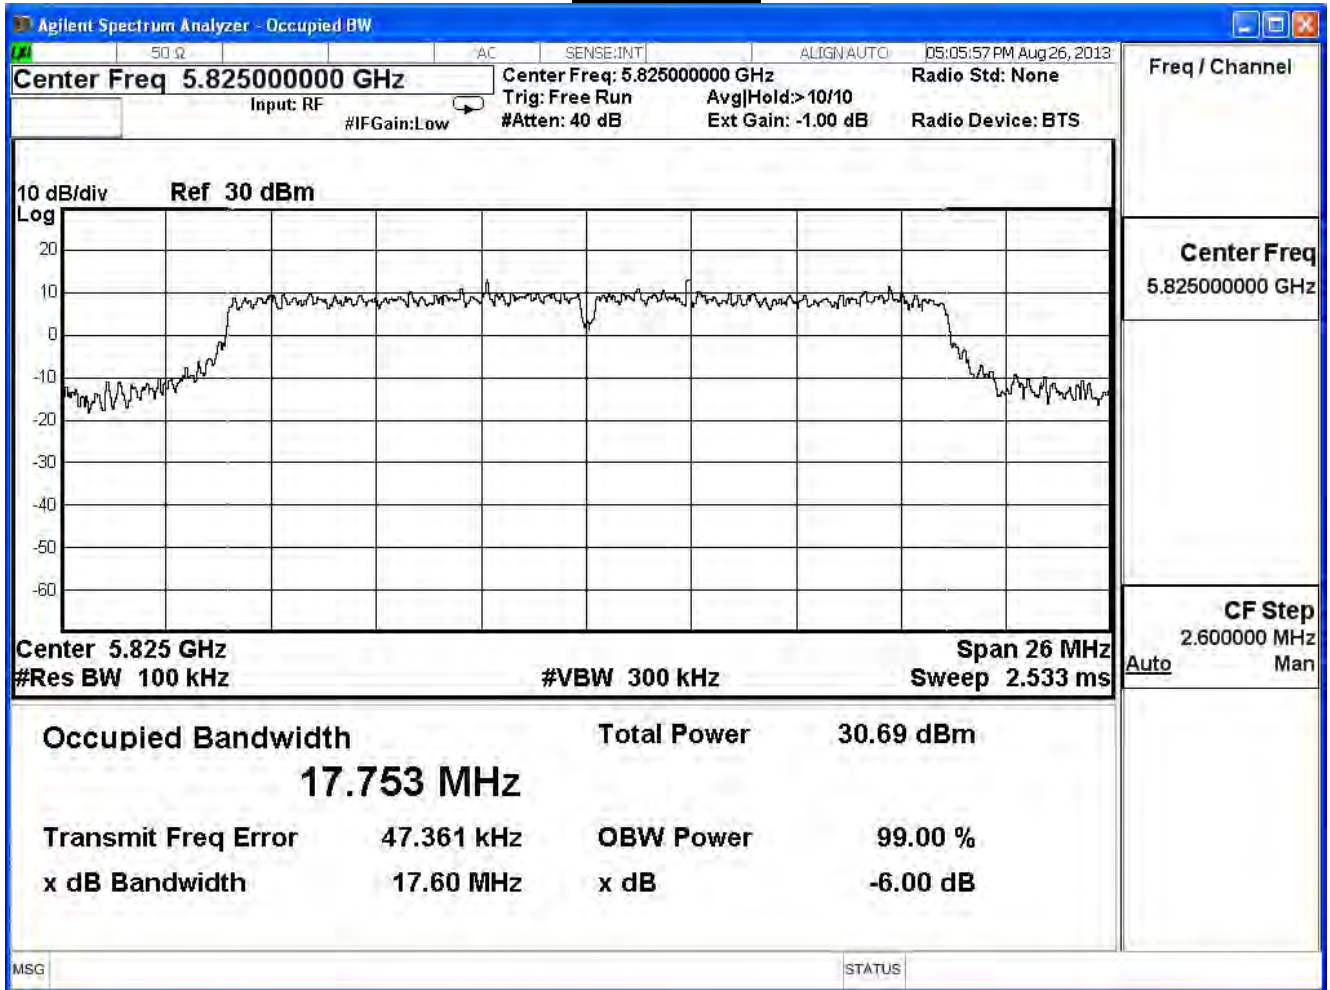


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
151	5755	36.35	$\geq 0.5$	Pass
159	5795	36.34	$\geq 0.5$	Pass

### Channel 151

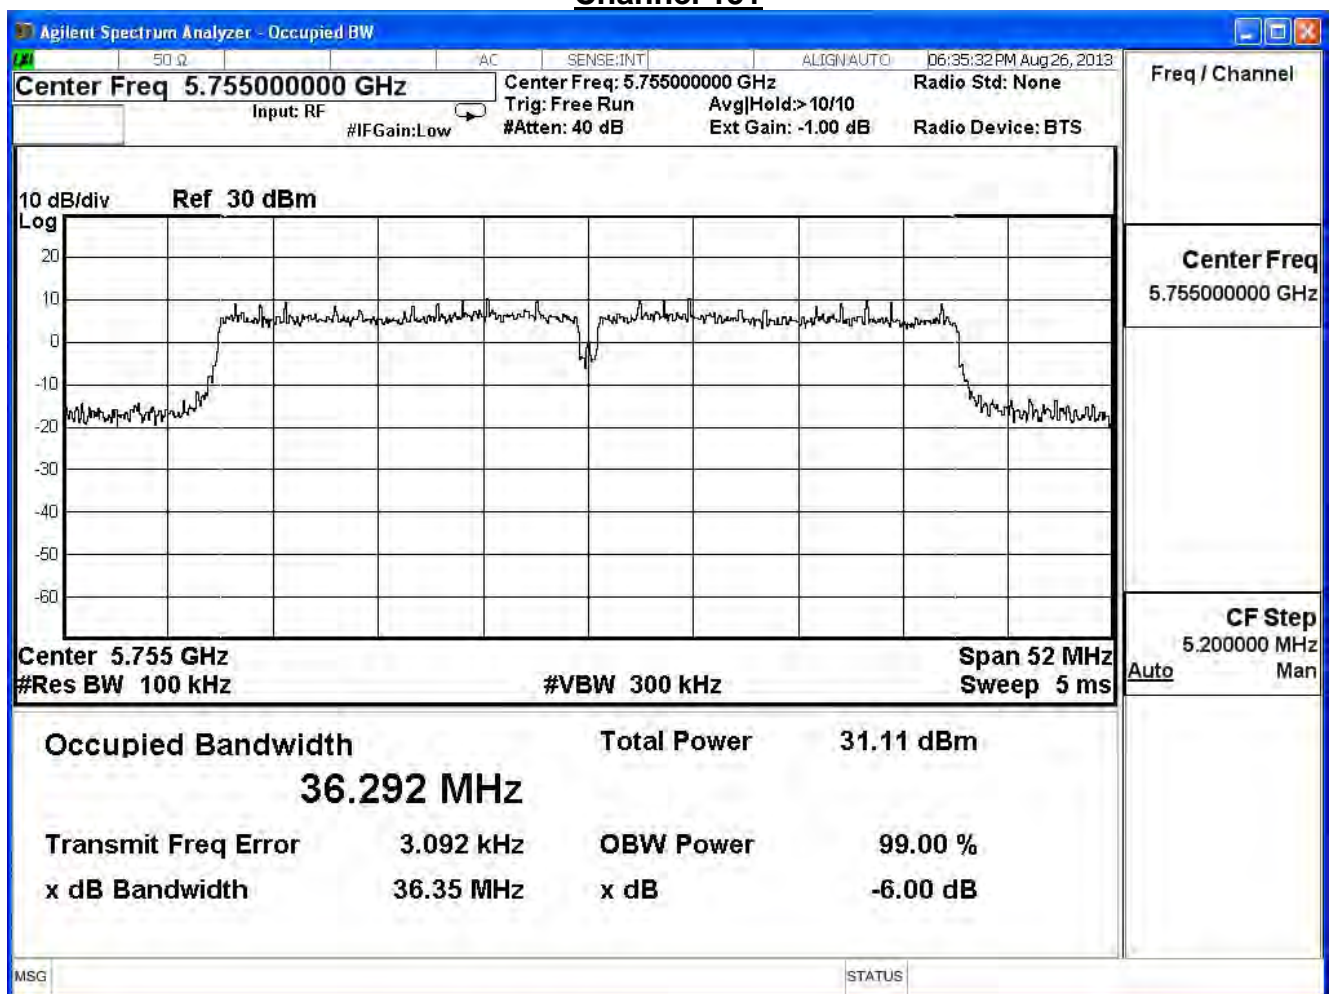


## Channel 159

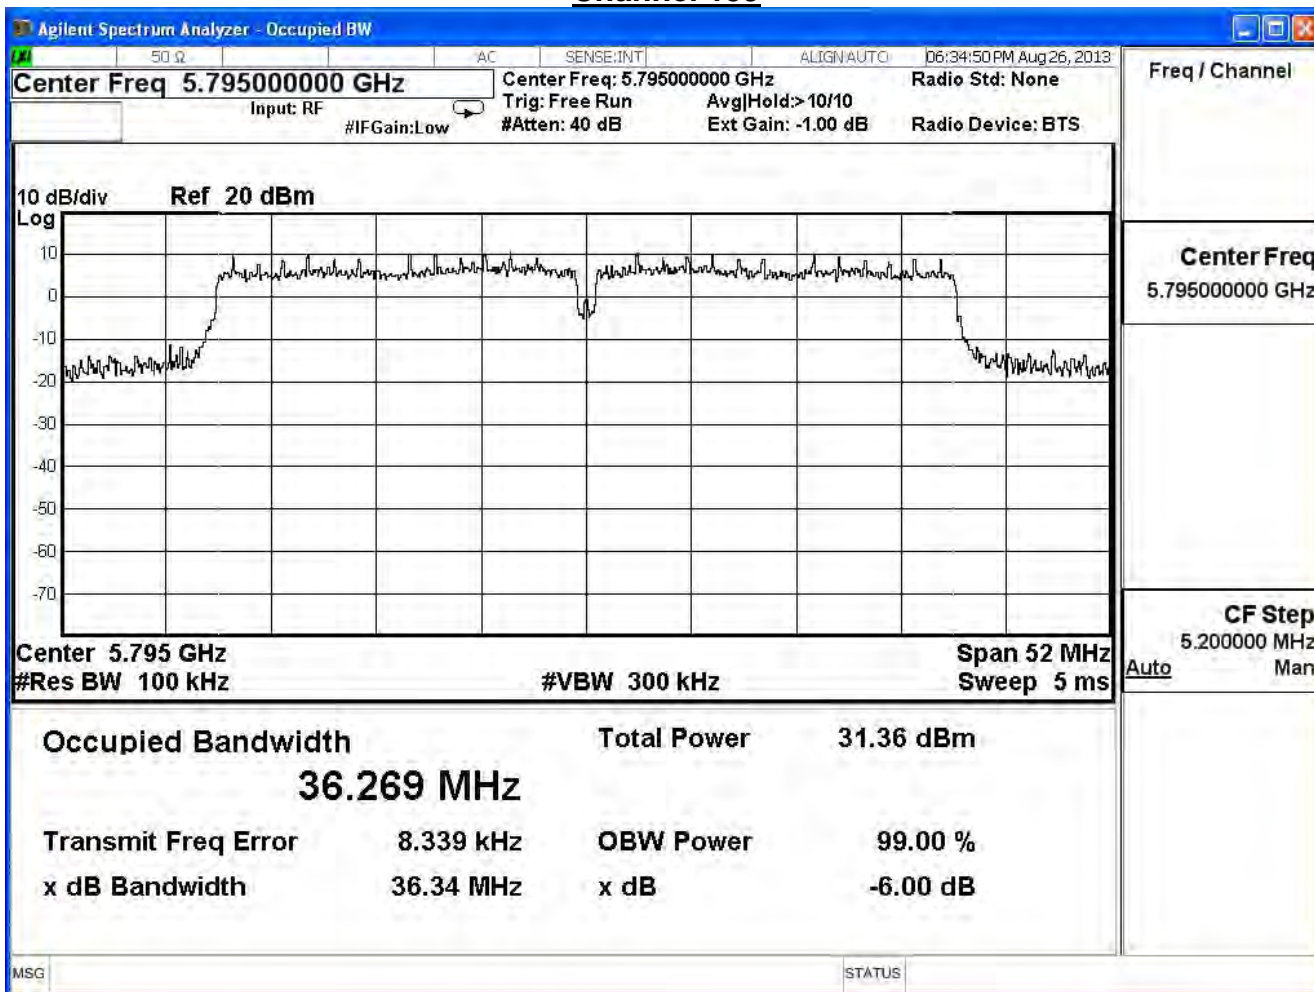


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
151	5755	36.35	$\geq 0.5$	Pass
159	5795	36.36	$\geq 0.5$	Pass

### Channel 151

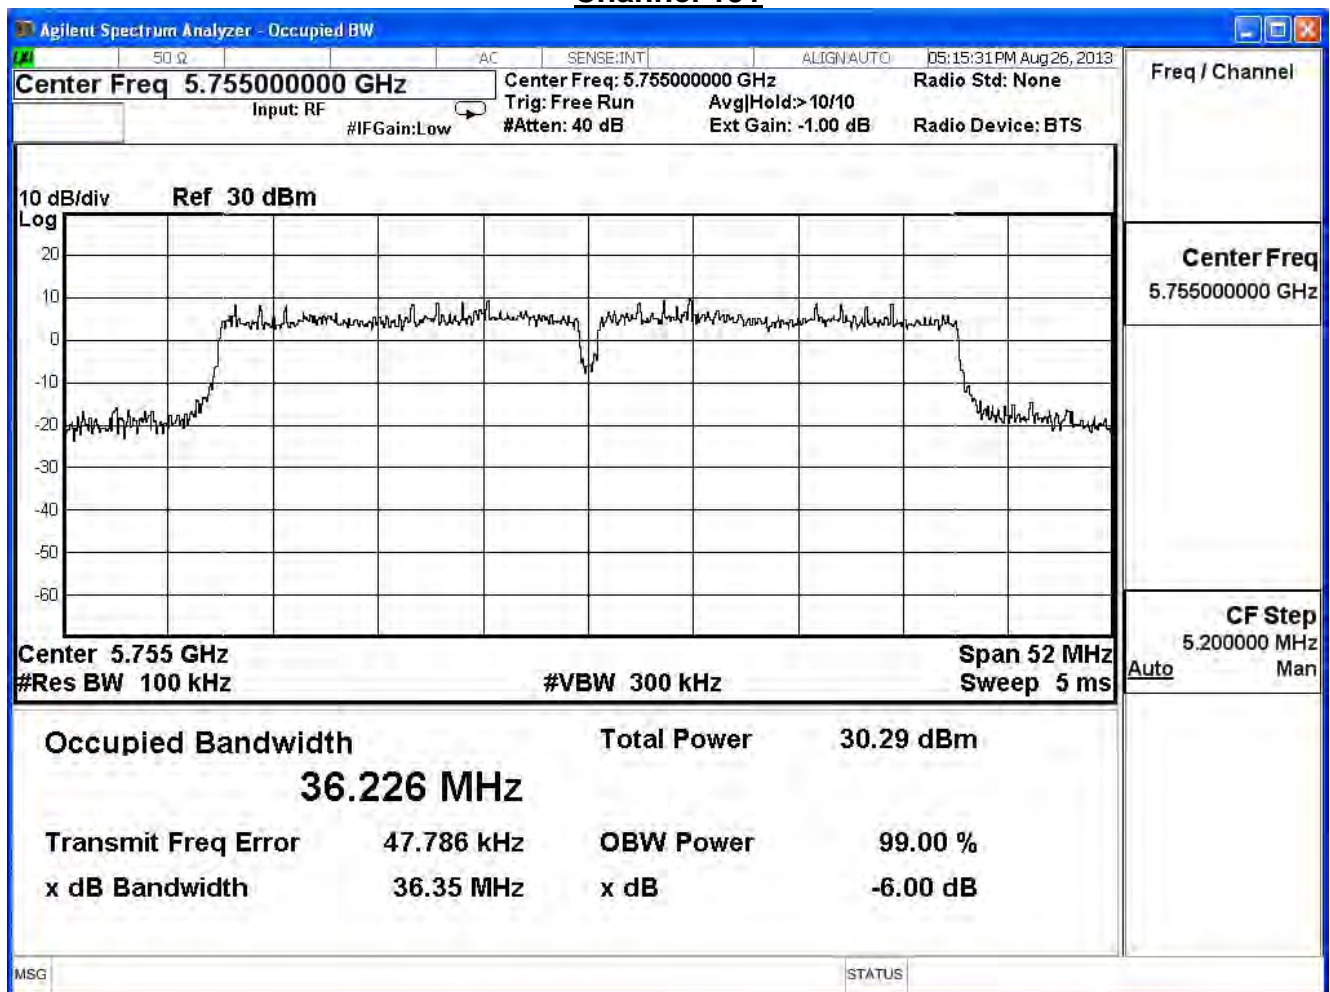

Channel 159

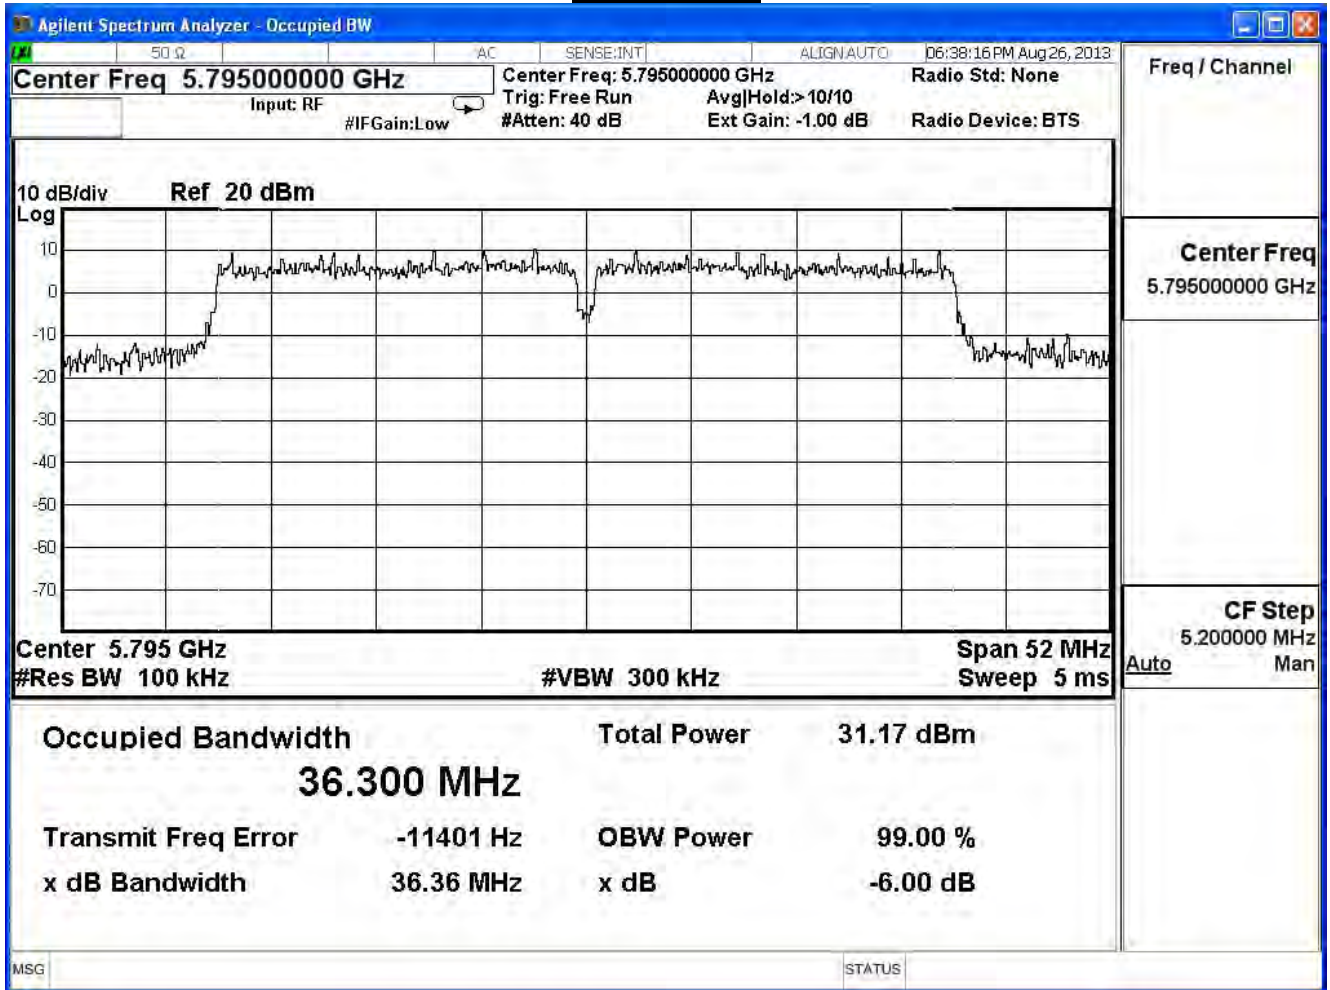





Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
151	5755	36.37	≥ 0.5	Pass
159	5795	36.38	≥ 0.5	Pass

### Channel 151

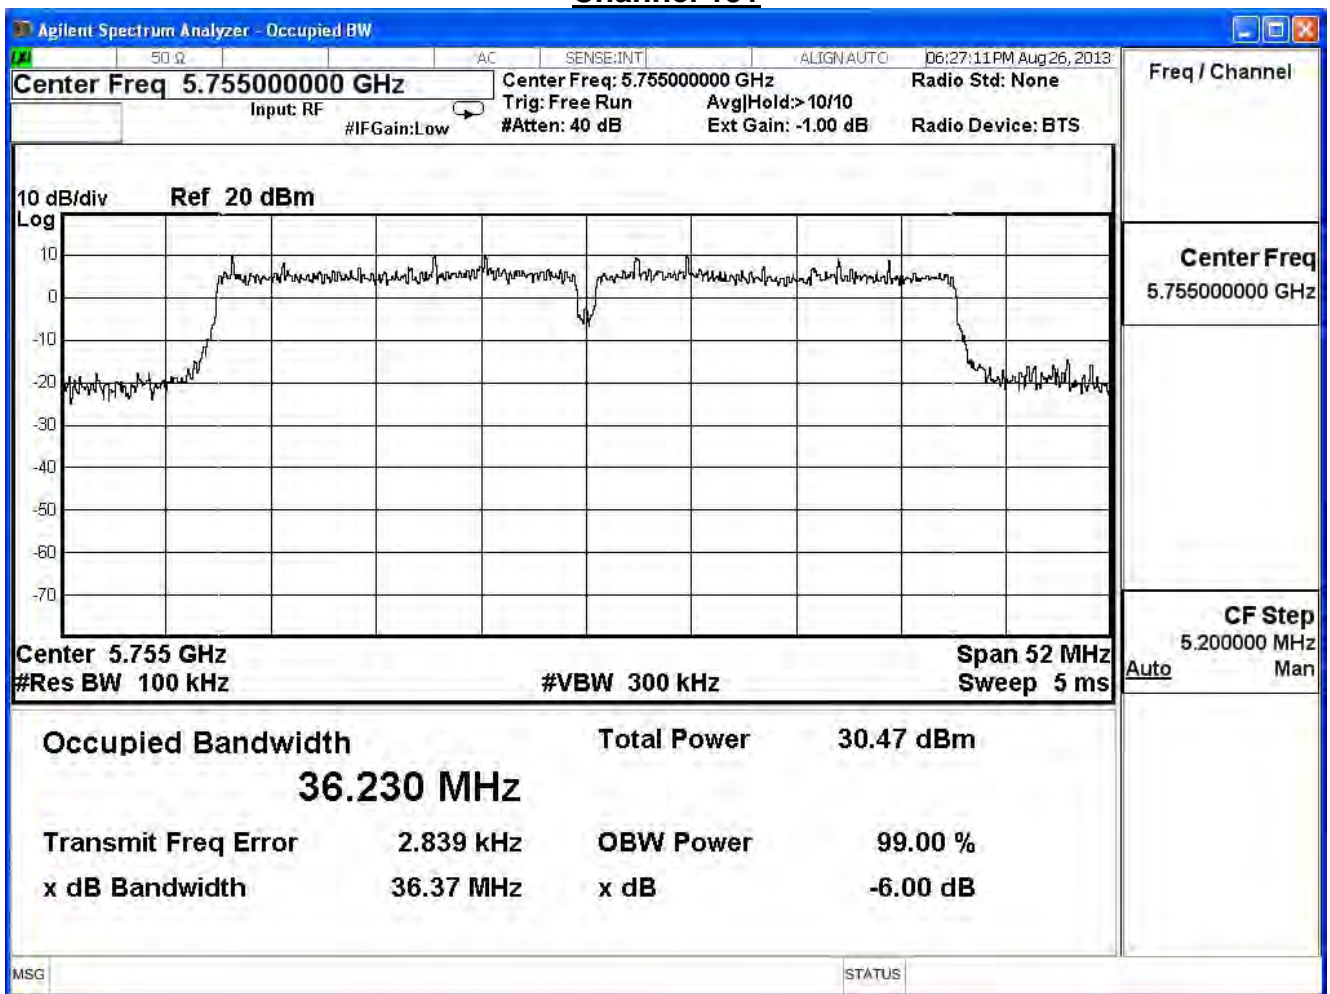


## Channel 159

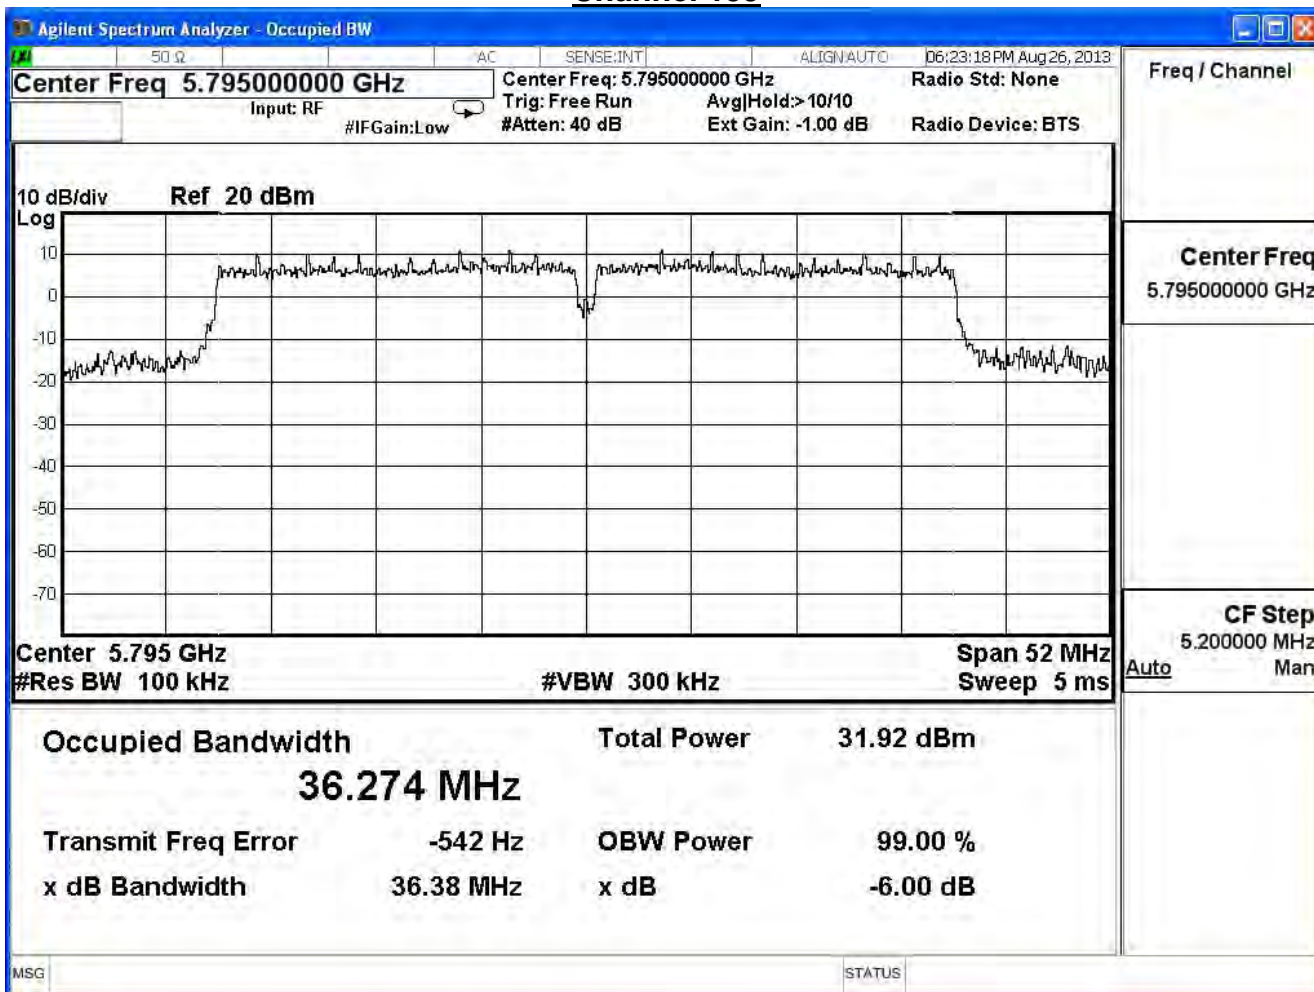

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
155	5775	75.57	≥ 0.5	Pass


### Channel 155

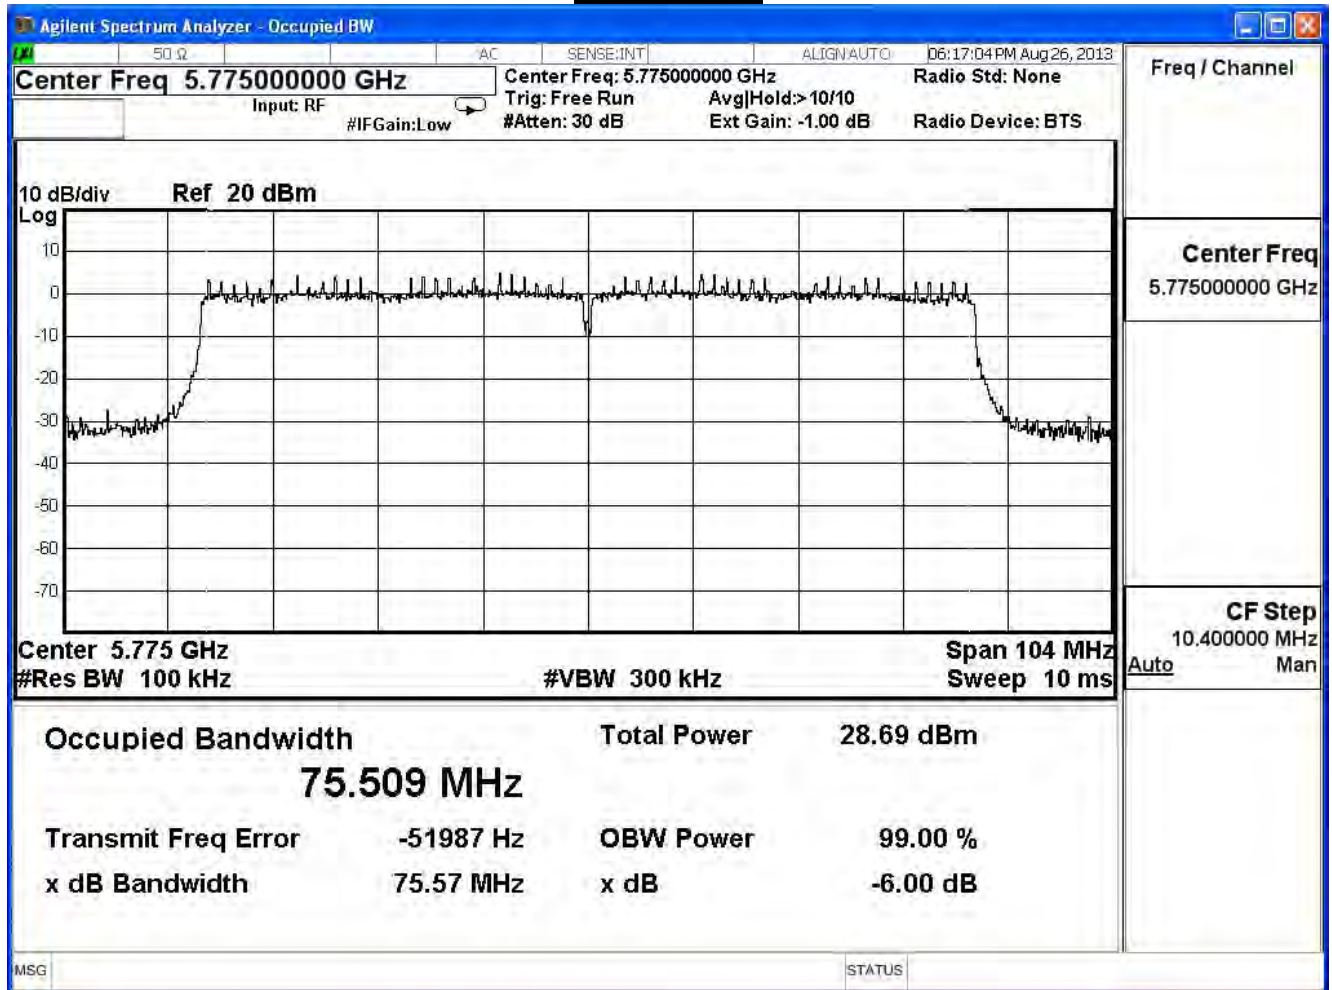

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
155	5775	76.05	≥ 0.5	Pass


### Channel 155

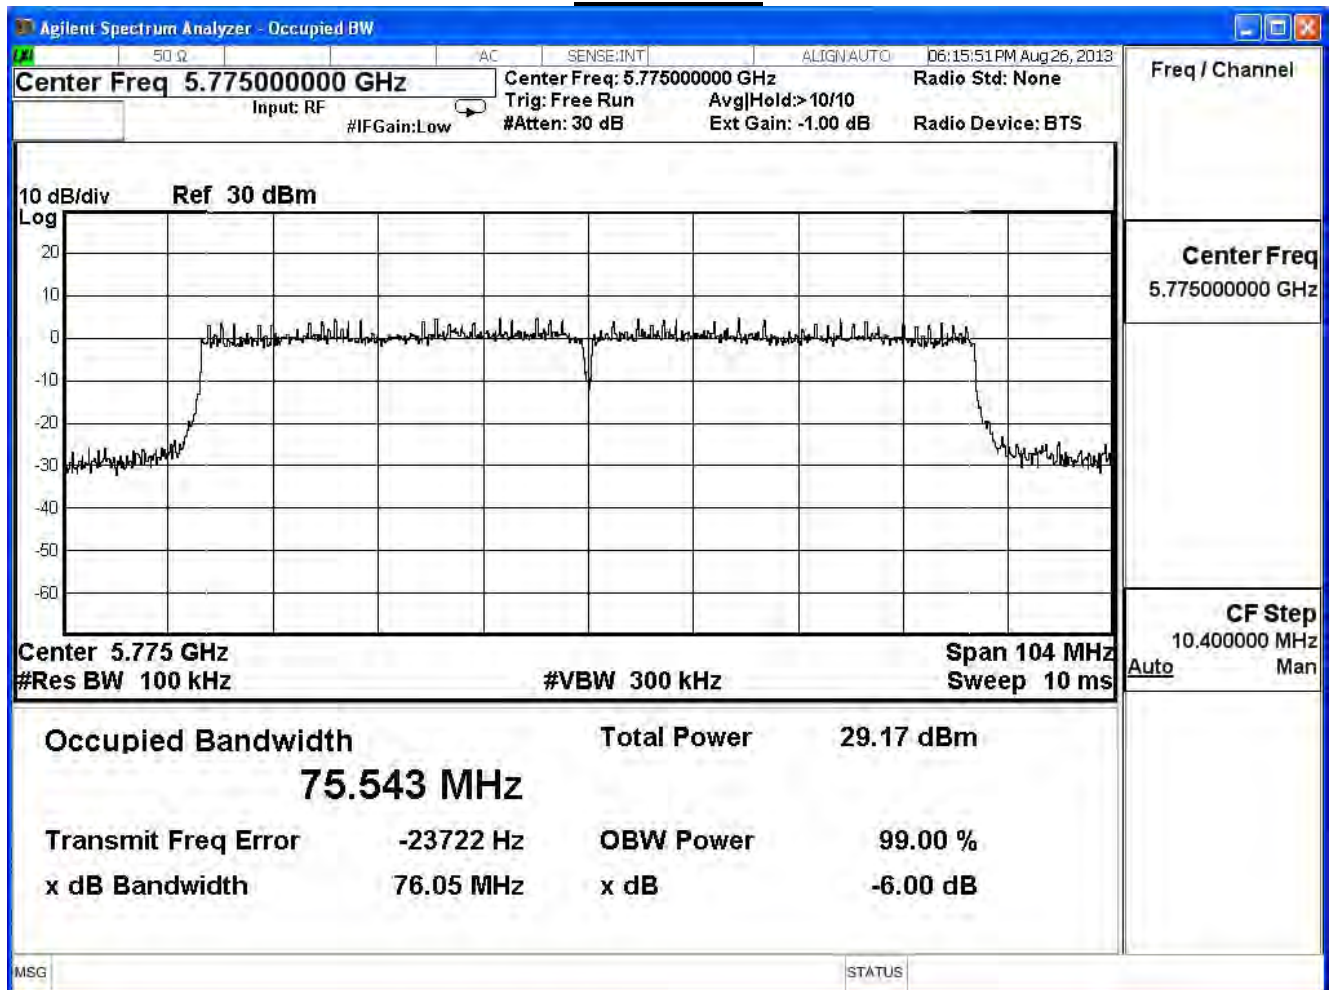

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
155	5775	75.82	≥ 0.5	Pass

### Channel 155

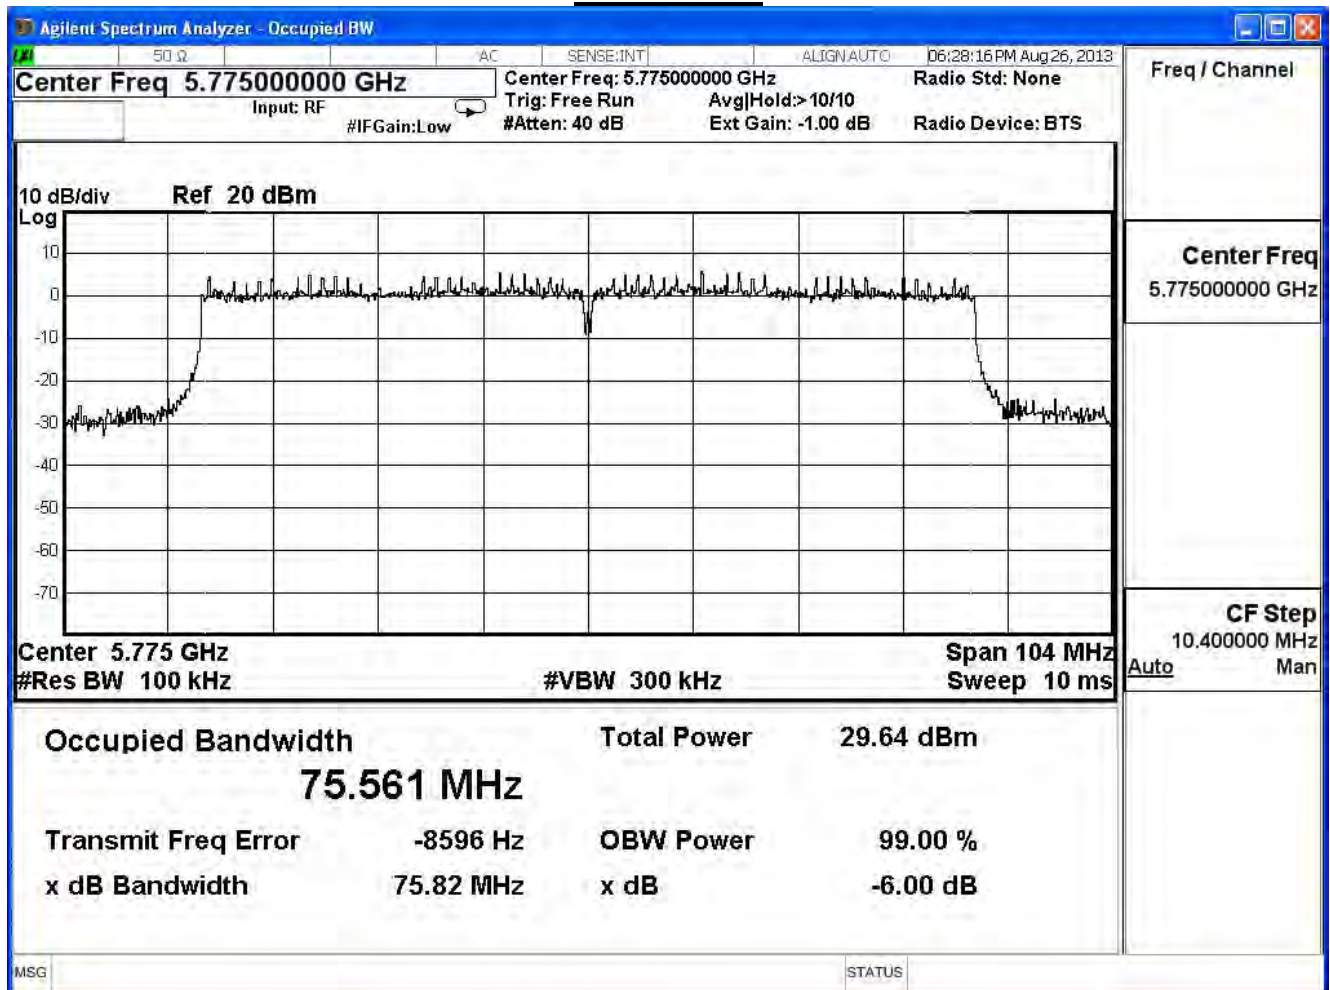

**8. Power Density**

**8.1. Test Equipment**

The following test equipment is used during the test:


**Power Density / SR7**

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A-EXA	US47140172	2014/08/05

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

**8.2. Test Setup**

IEEE 802.11 b / g / a / n ( 20M / 40M ) MODE

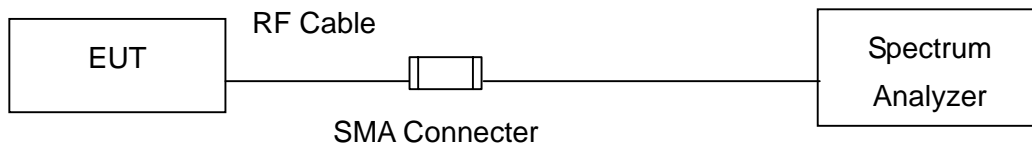

**8.3. Limits**

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8dBm in any 3kHz band during any time interval of continuous transmission.

**8.4. Test Procedures**

The EUT was setup according to ANSI C63.4: 2009; tested according to DTS test procedure of Oct. 2012 KDB558074, Section 9.2 Measurement Procedure option2 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, Set VBW= 300 kHz, Sweep time=Auto, Set detector=Peak detector.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log (3 \text{ kHz}/100 \text{ kHz} = -15.2 \text{ dB})$ .

**8.5. Test Specification**

According to FCC Part 15 Subpart C Paragraph 15.247: 2012

**8.6. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27\text{dB}$ .

## 8.7. Test Result

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11b (ANT0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.80	-14.40	≤ 7.32	Pass
6	2437	1.74	-13.46	≤ 7.32	Pass
11	2462	3.13	-12.07	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$

### Channel 1

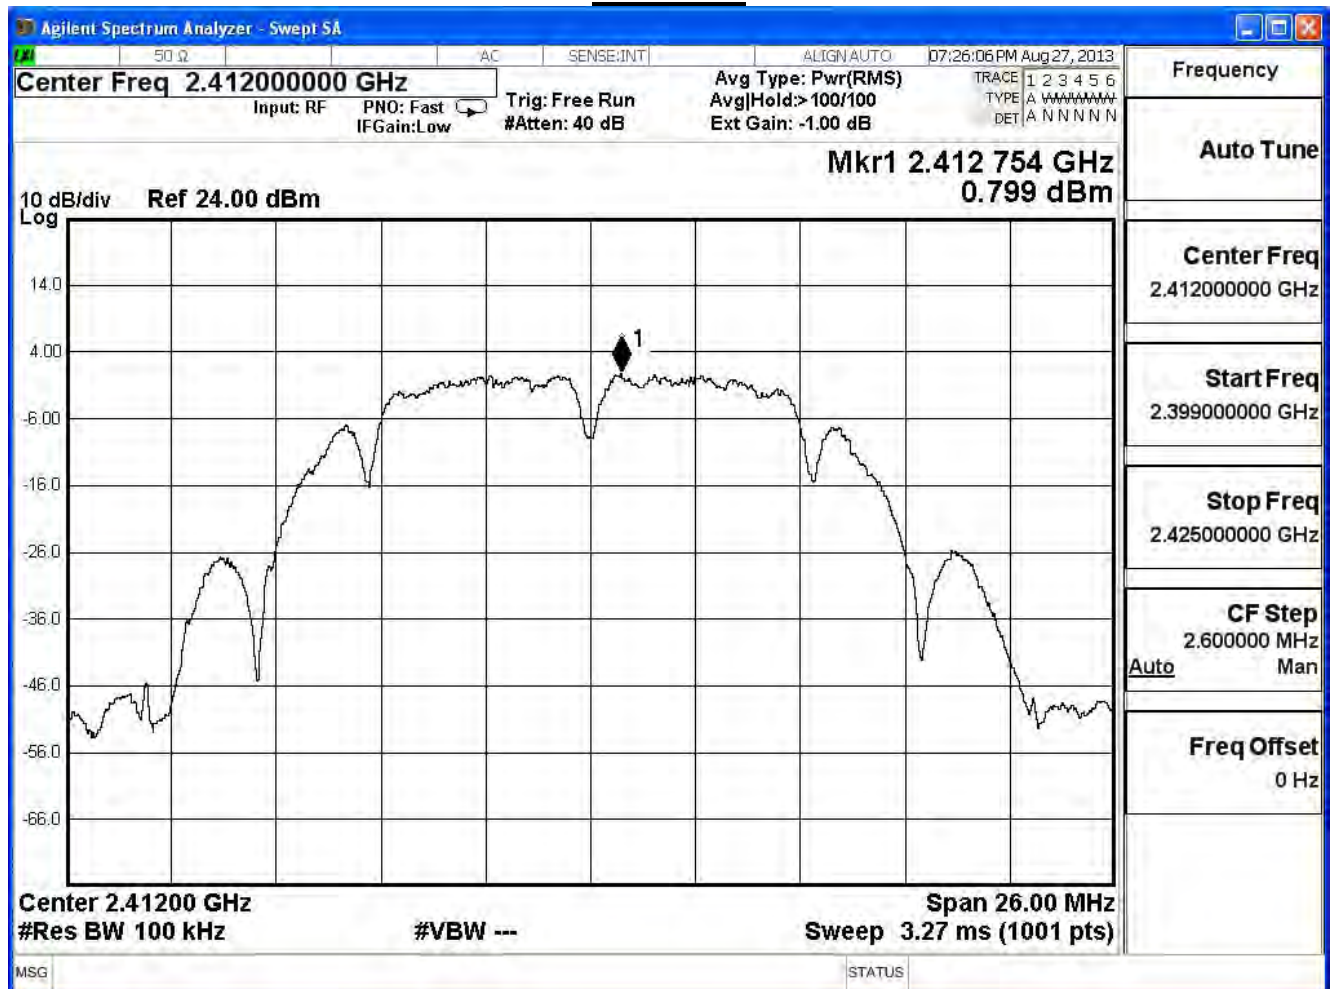


Channel 6

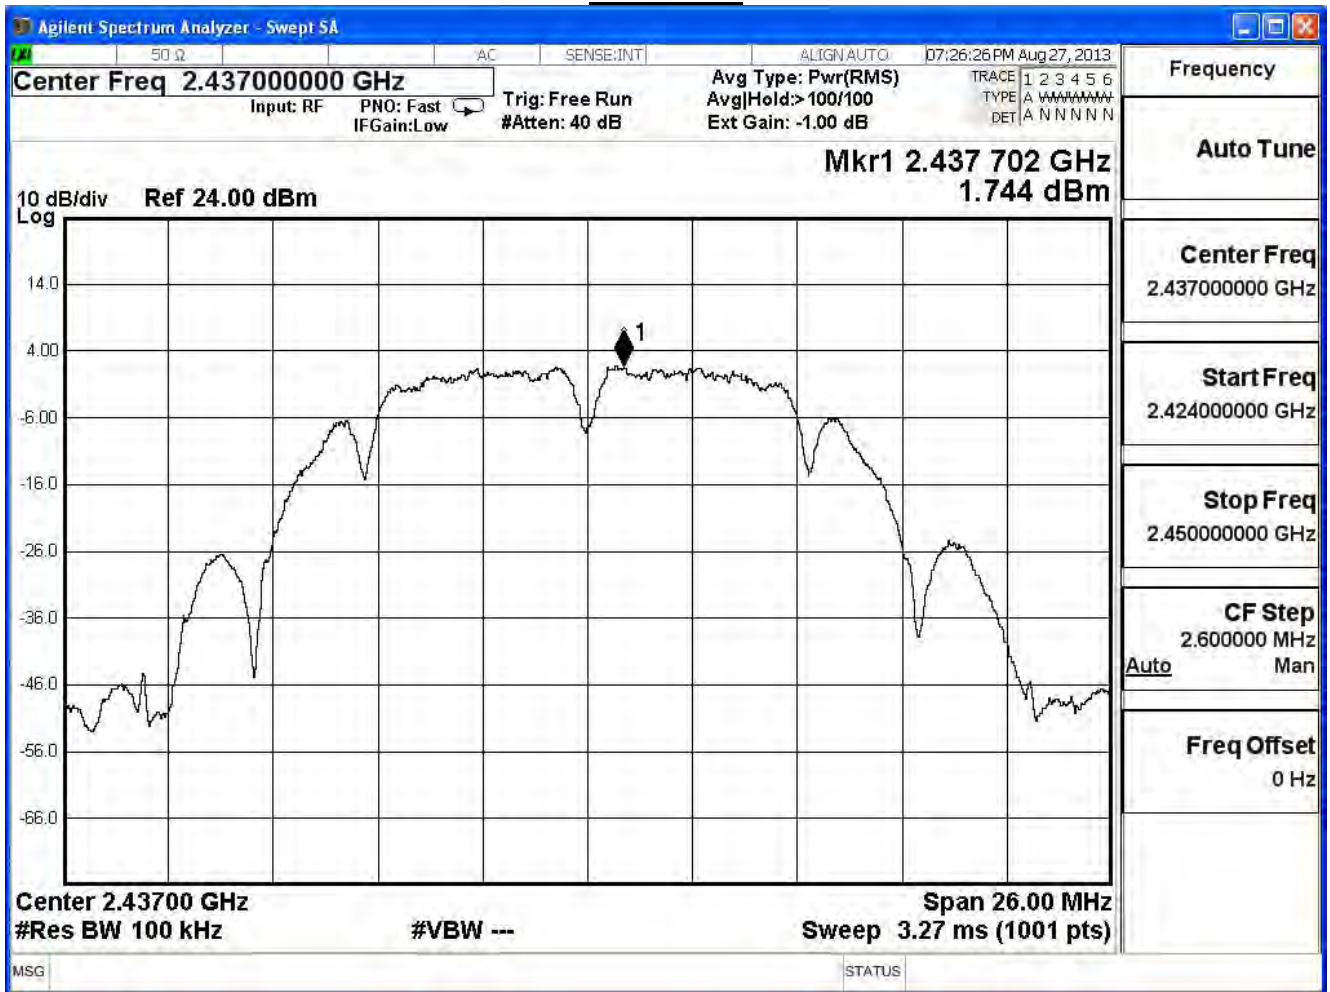



Channel 11

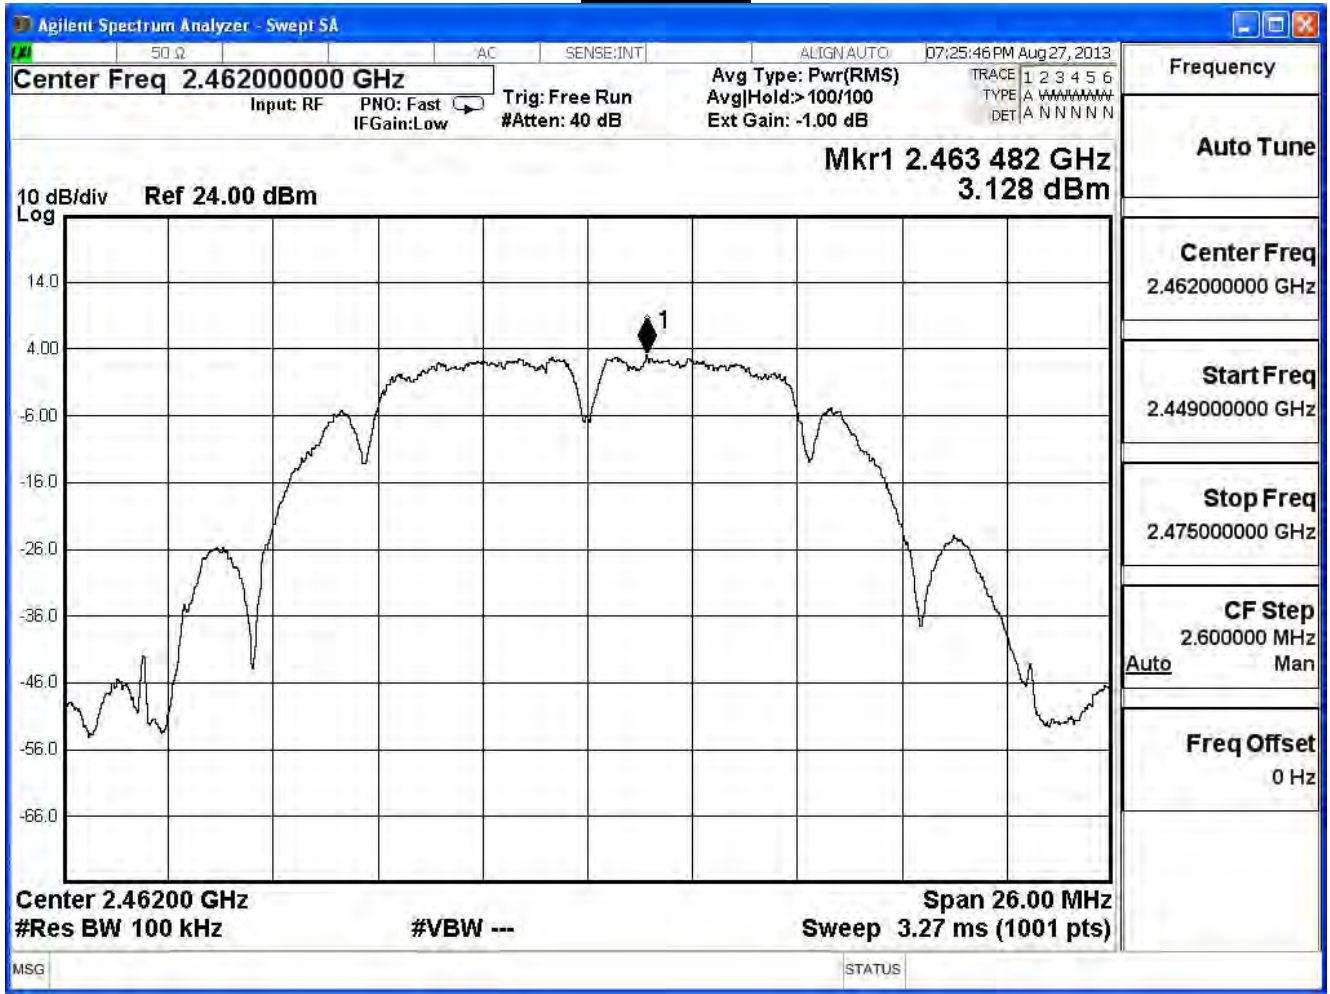

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11b (ANT1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.63	-14.57	≤ 7.32	Pass
6	2437	1.26	-13.94	≤ 7.32	Pass
11	2462	2.57	-12.63	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

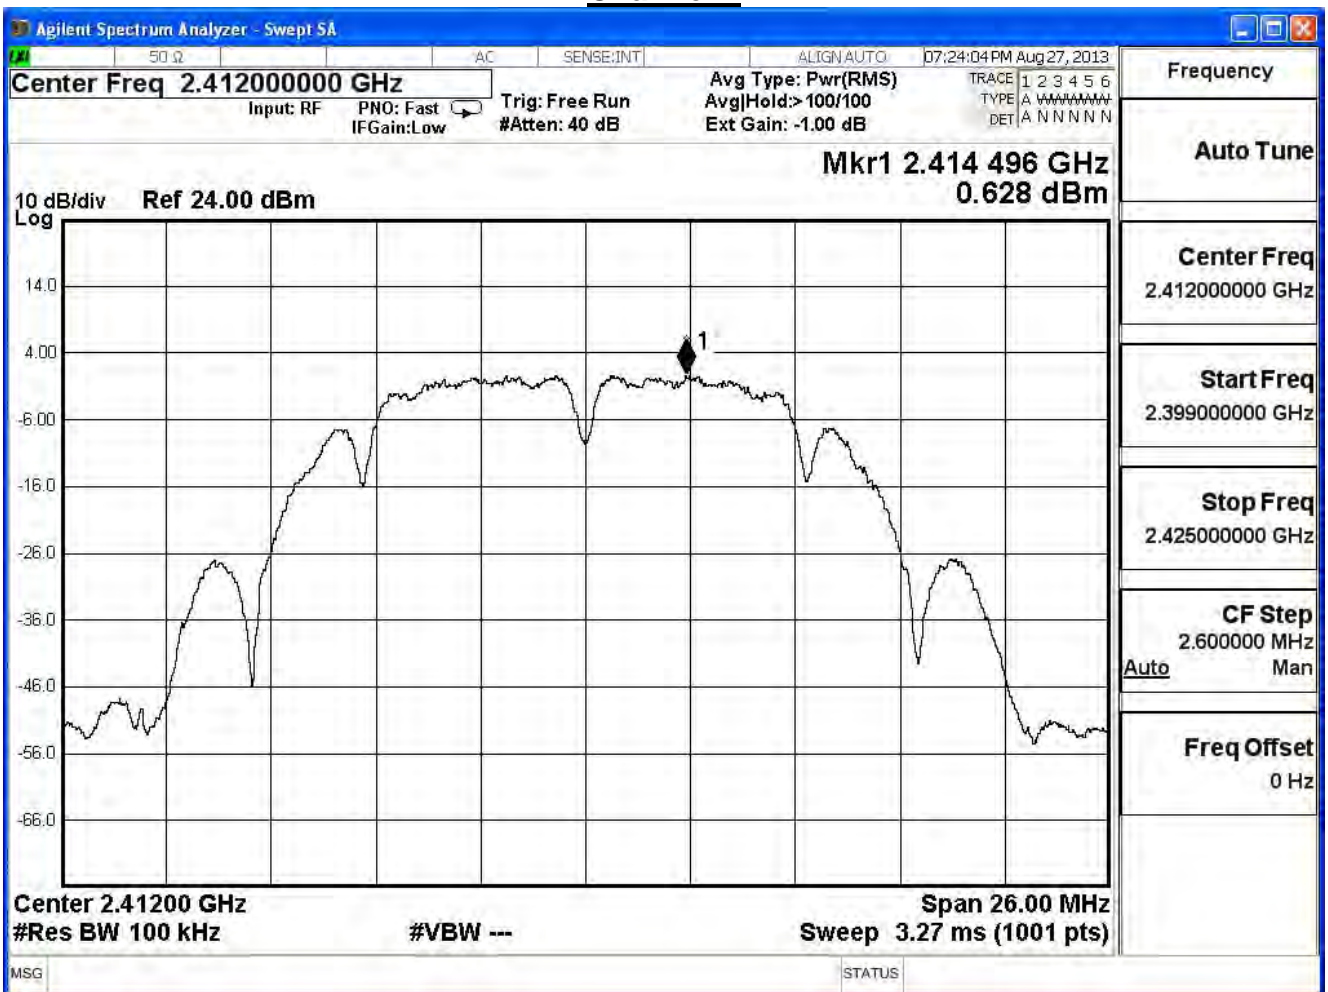

Channel 6

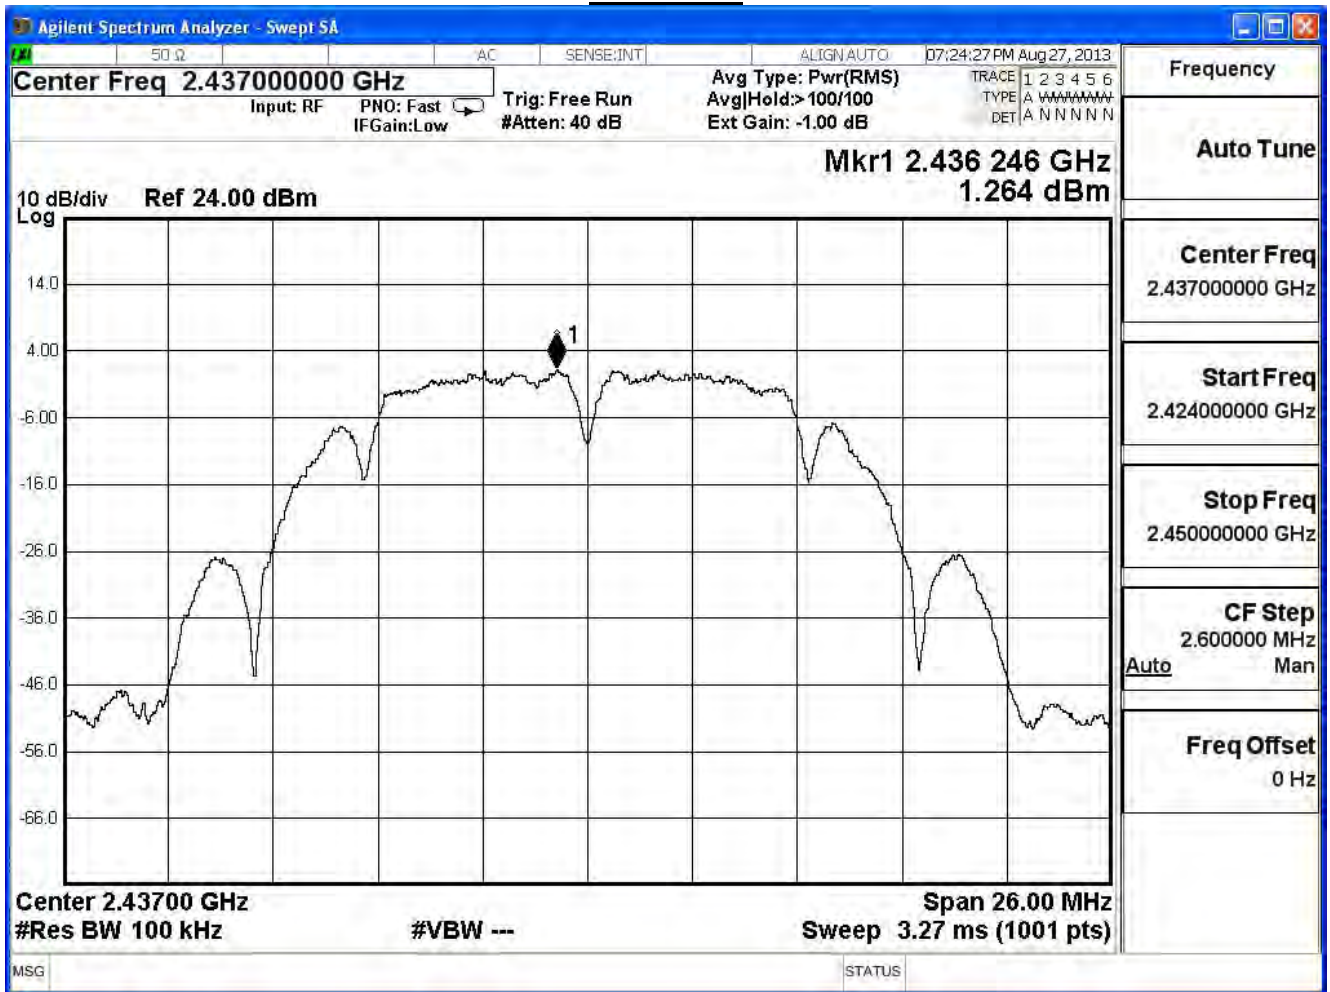

Channel 11

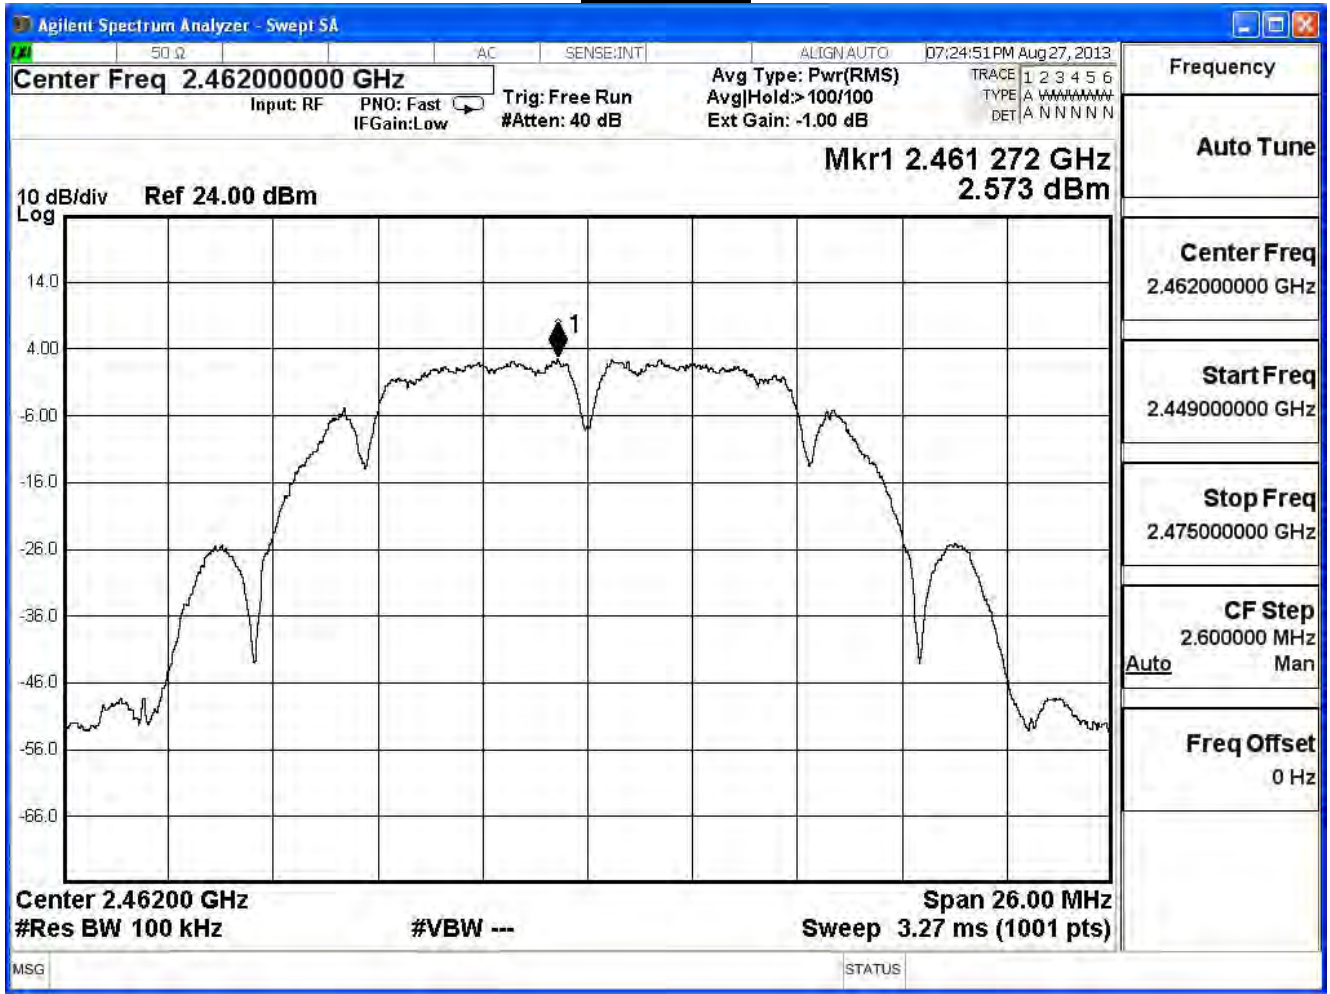

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11b (ANT2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.84	-14.36	≤ 7.32	Pass
6	2437	1.56	-13.64	≤ 7.32	Pass
11	2462	2.46	-12.74	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

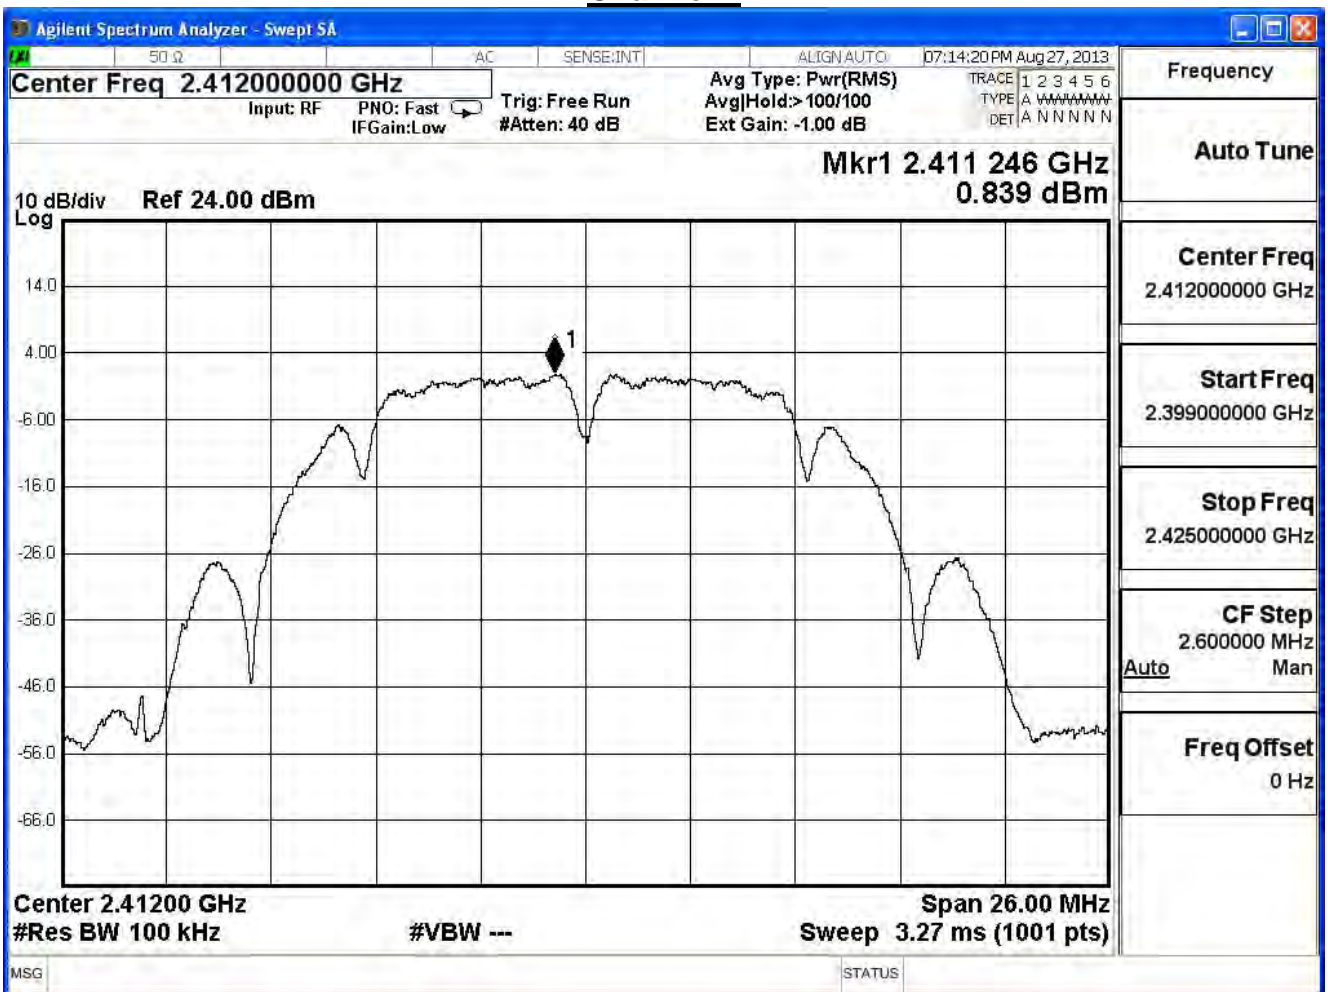

Channel 6

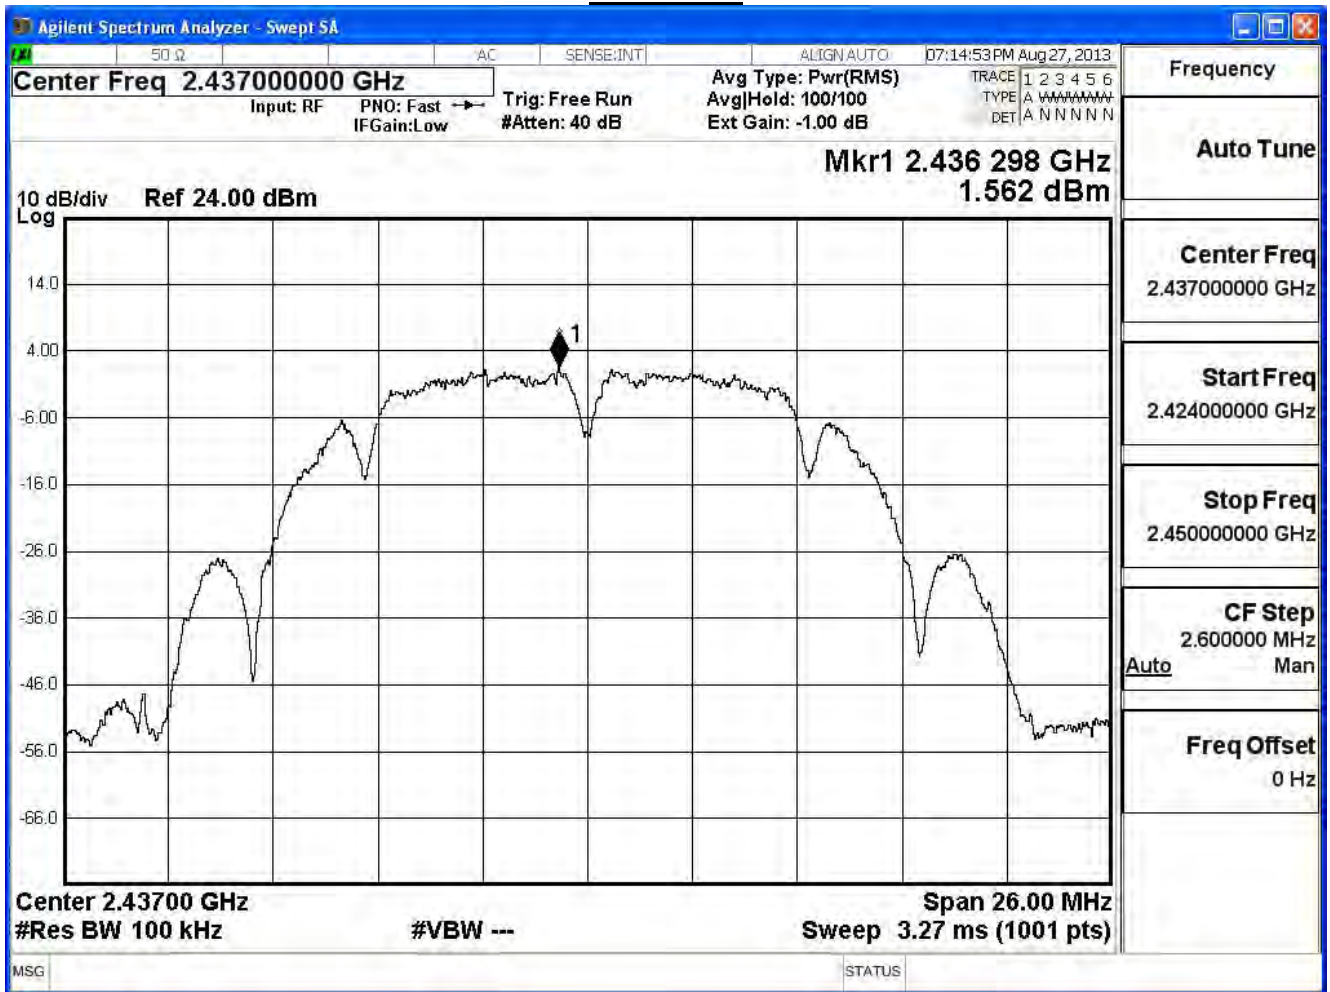

Channel 11

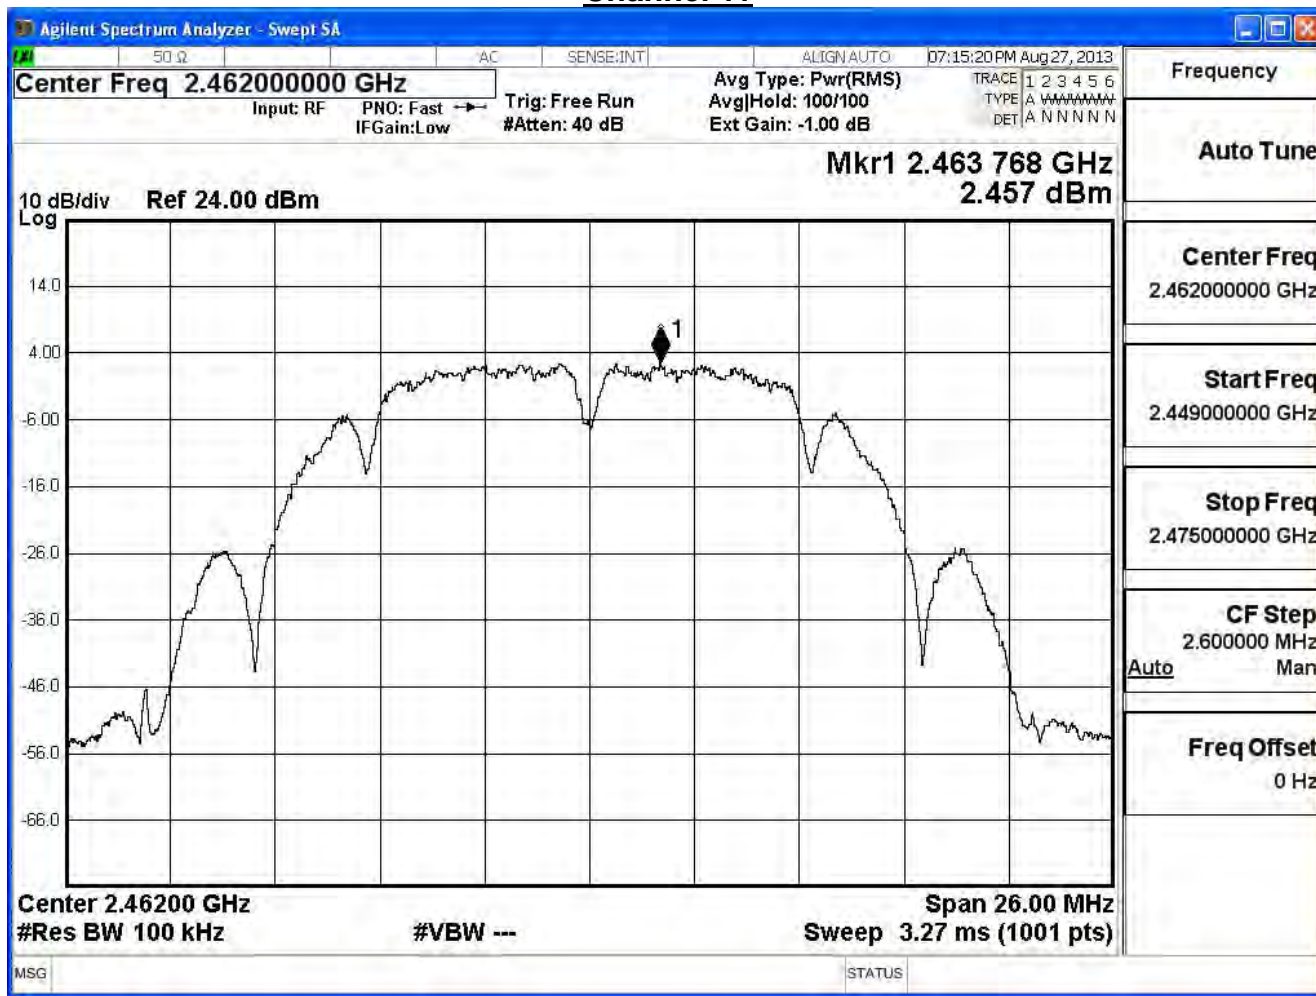

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11b (ANT0+1+2)				
Channel No.	Frequency (MHz)	Measure Level(dBm)	Limit (dBm)	Result
1	2412	-9.67	$\leq 7.32$	Pass
6	2437	-8.90	$\leq 7.32$	Pass
11	2462	-7.70	$\leq 7.32$	Pass

Note:

Total Gain :  $10\log(3)+\text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11g (ANT0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-0.24	-15.44	≤ 7.32	Pass
6	2437	5.38	-9.82	≤ 7.32	Pass
11	2462	1.69	-13.51	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

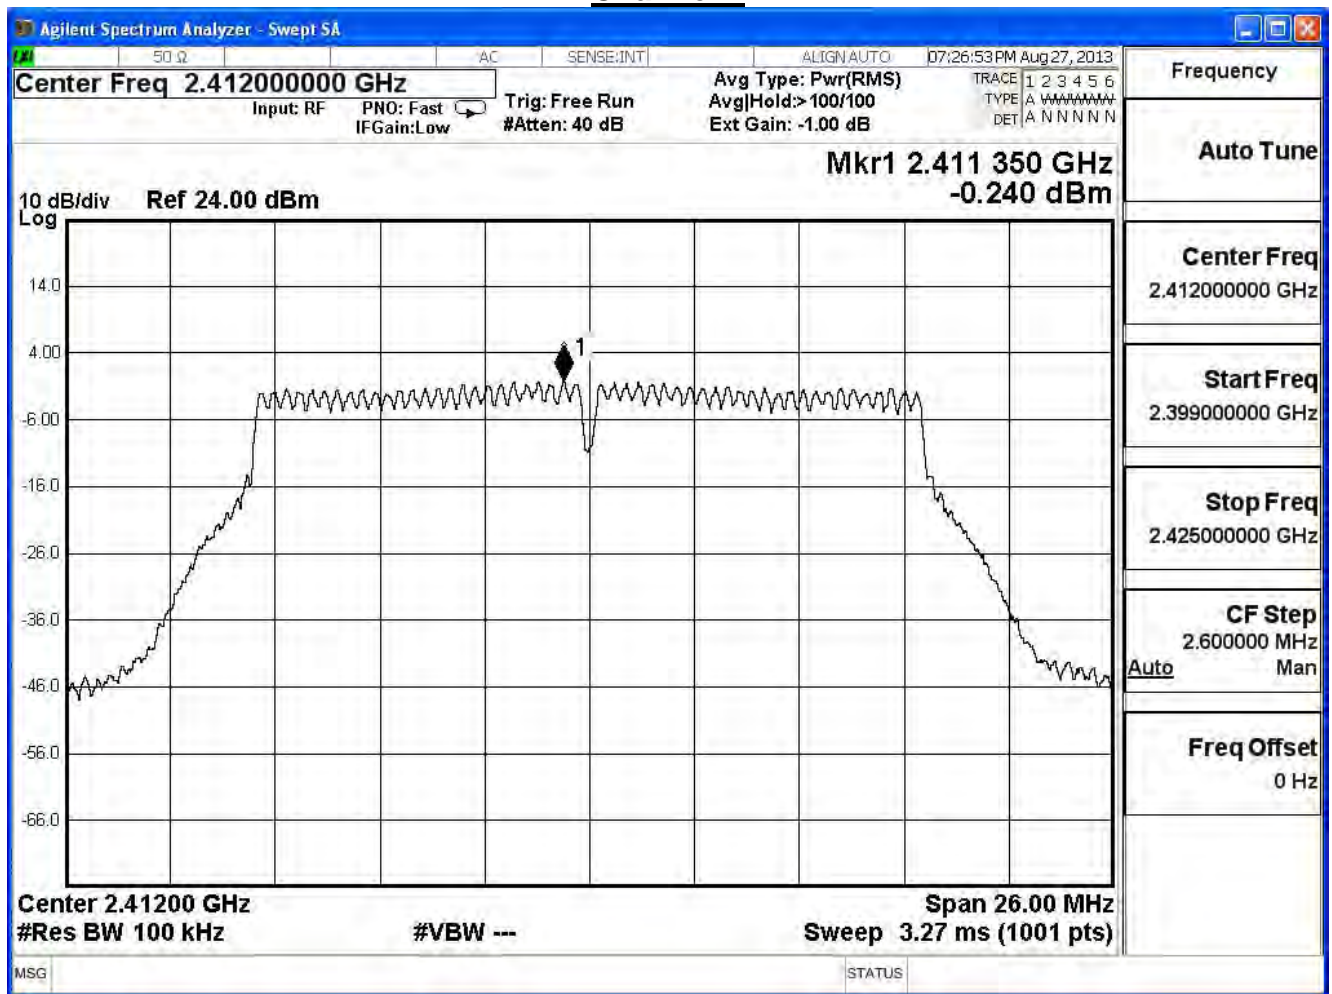

Channel 6

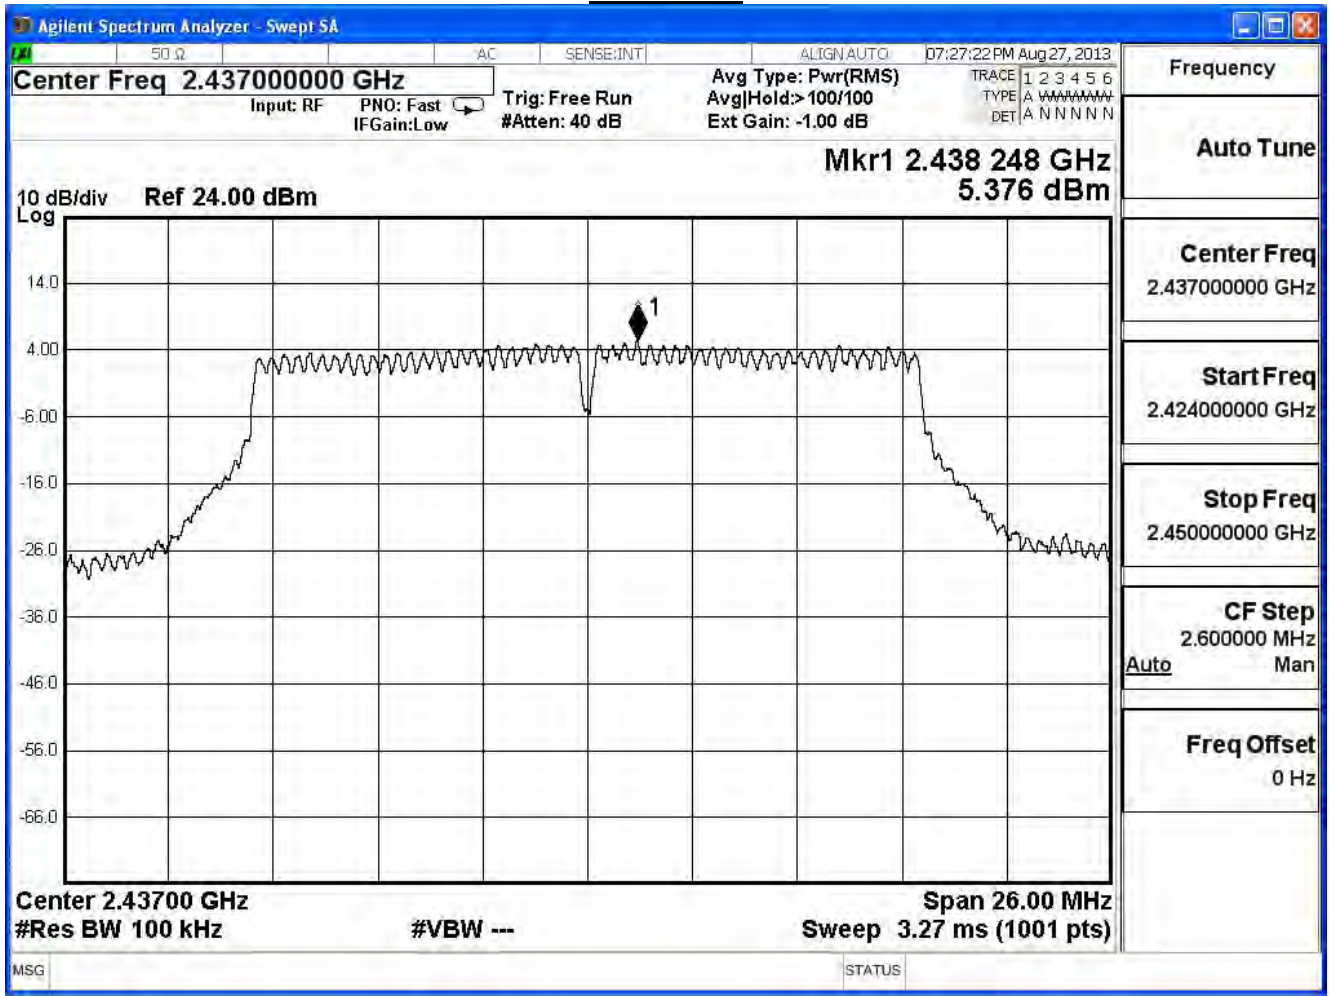

Channel 11

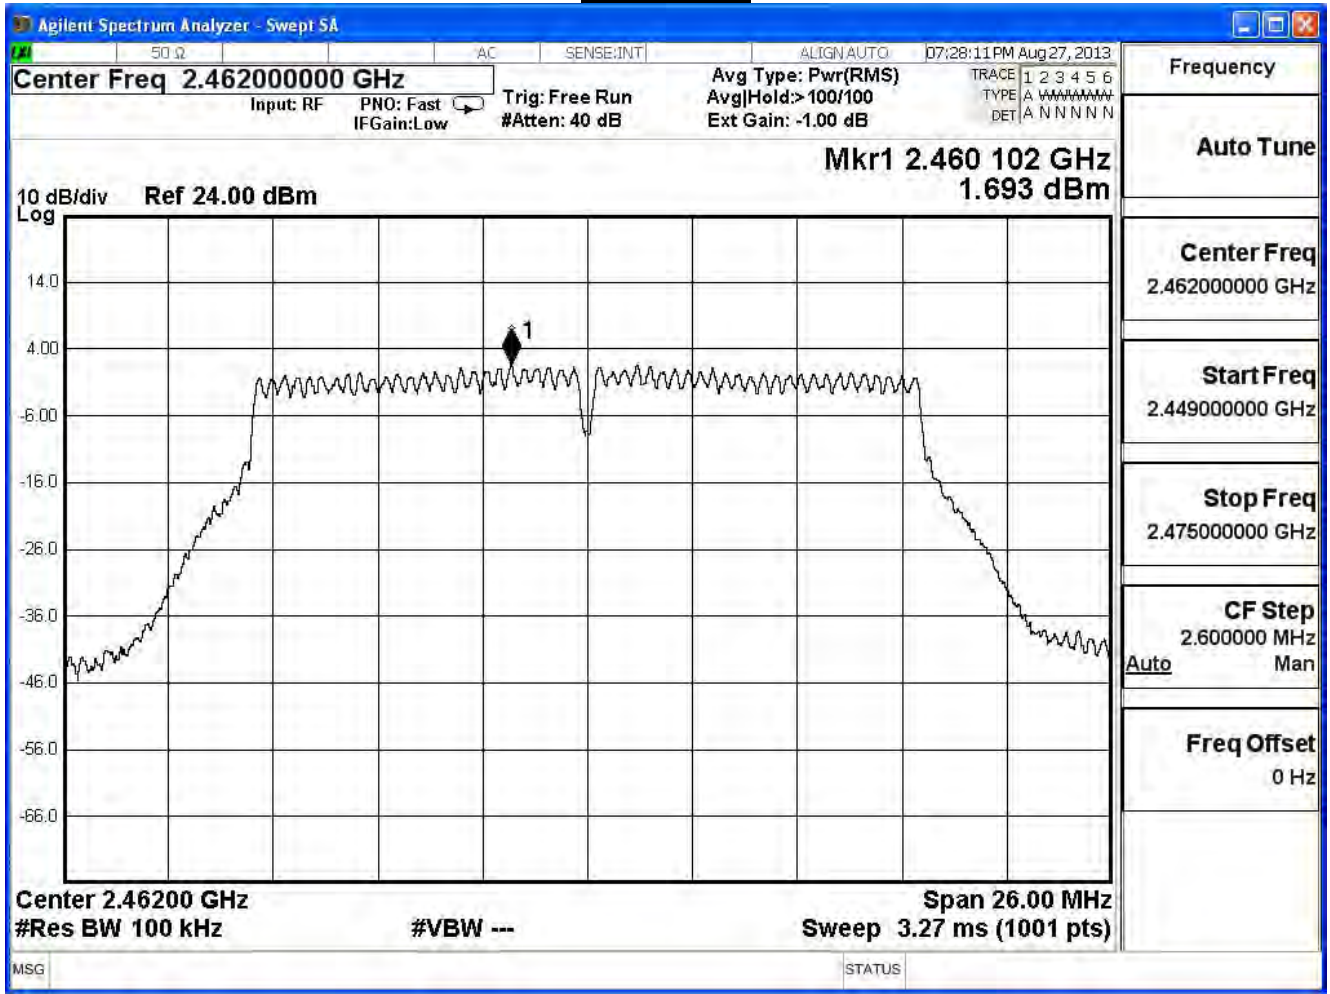

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11g (ANT1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-0.25	-15.45	≤ 7.32	Pass
6	2437	4.54	-10.66	≤ 7.32	Pass
11	2462	1.56	-13.64	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

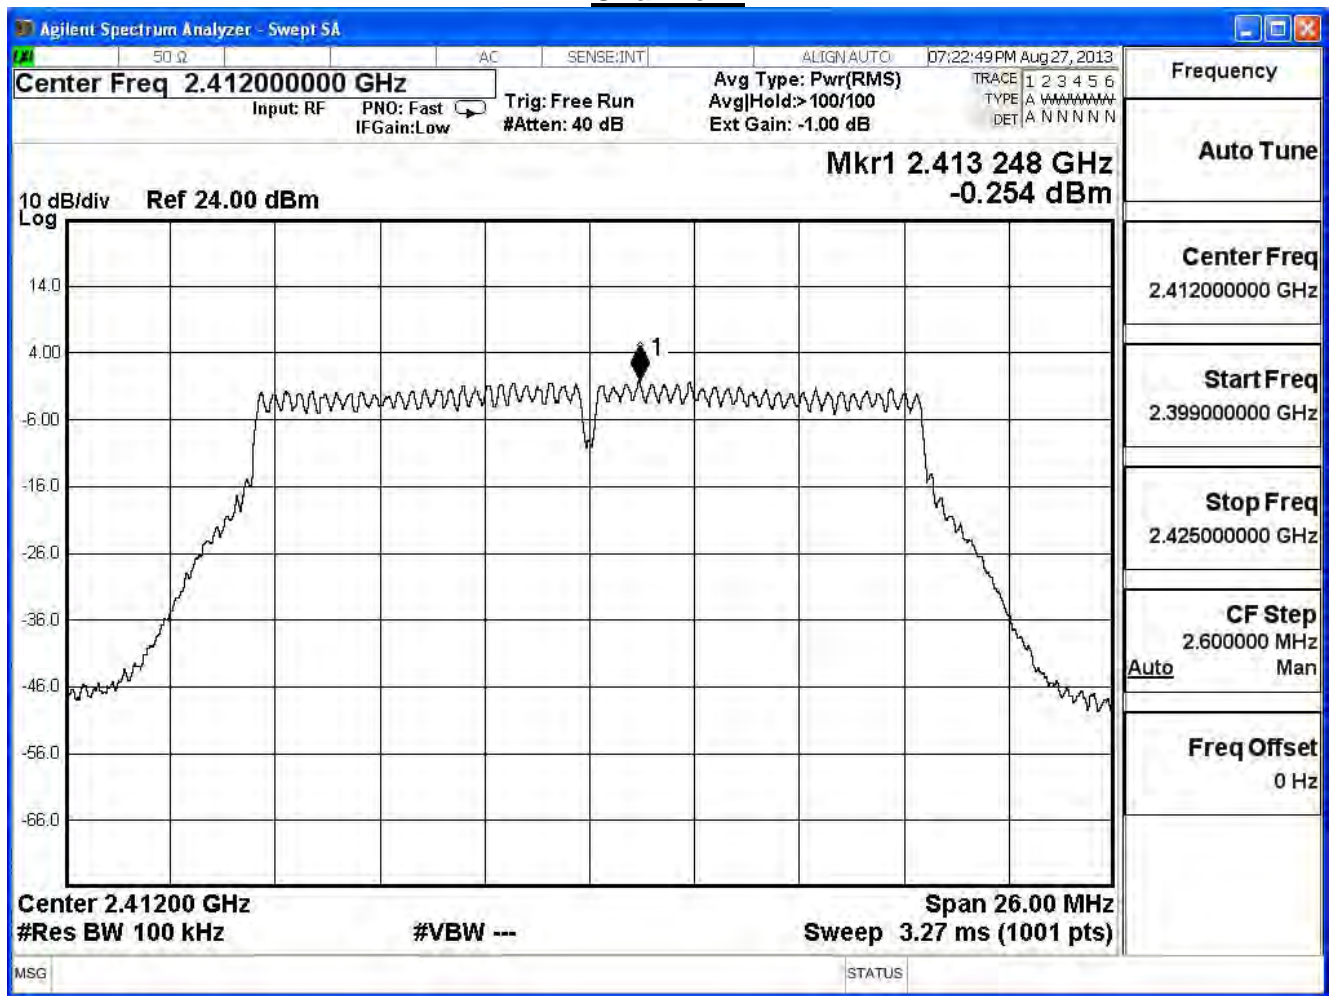

Channel 6

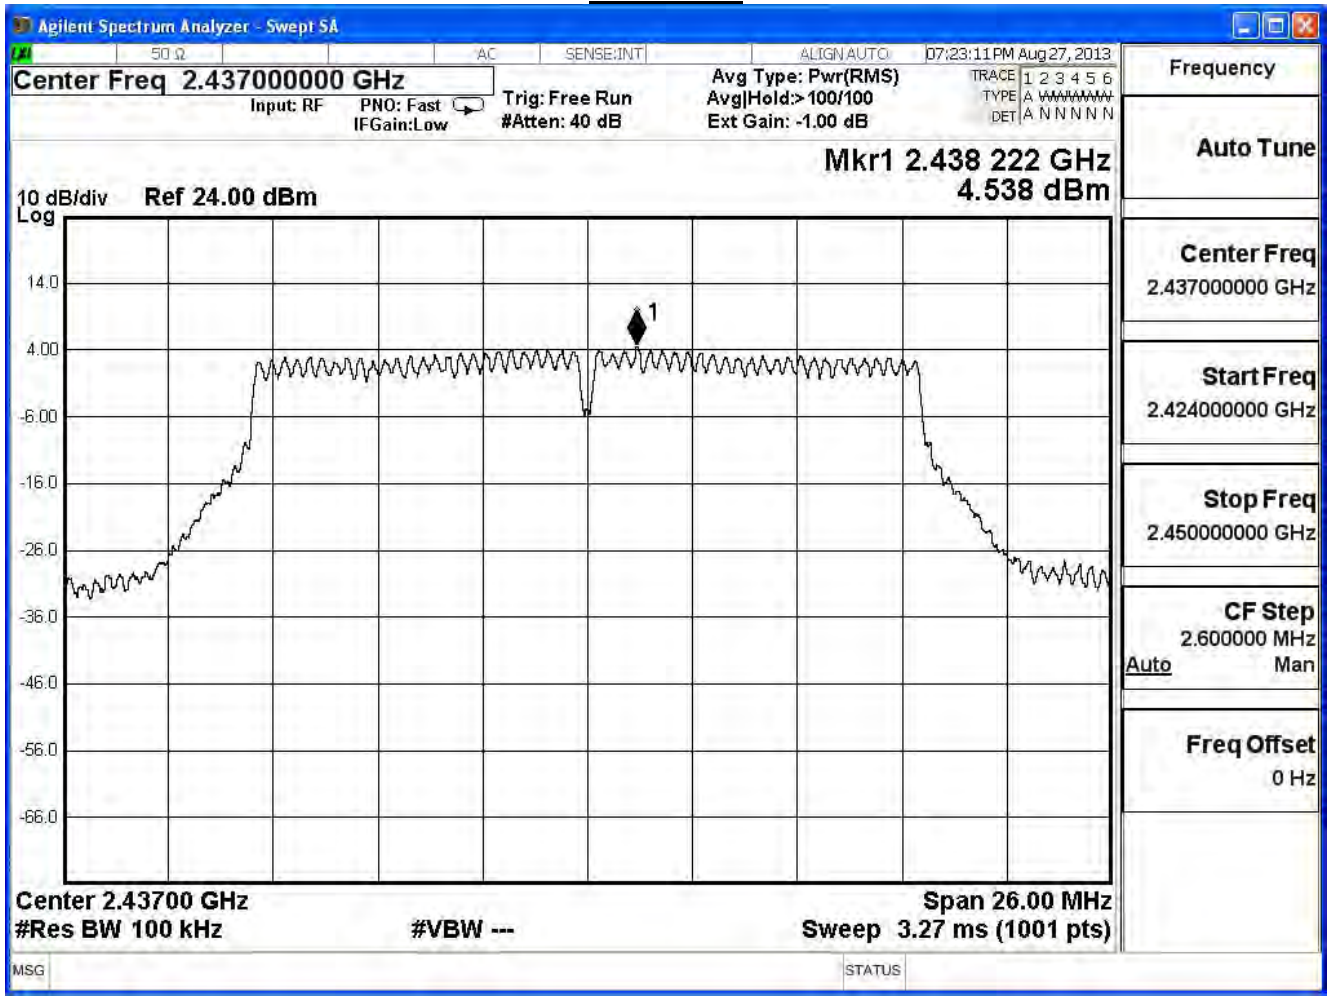

Channel 11

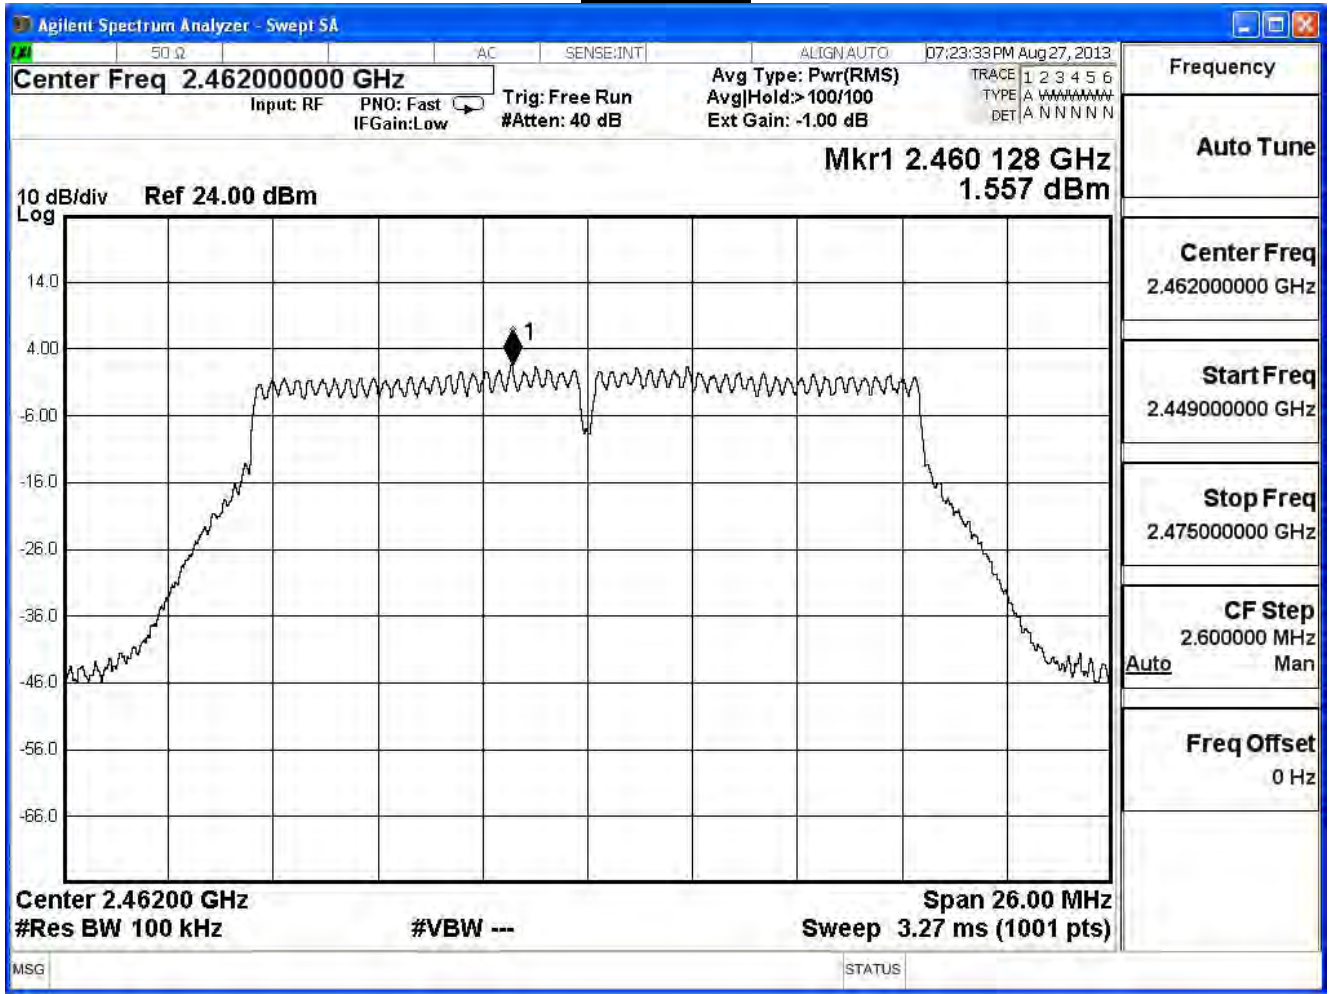

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11g (ANT2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-0.24	-15.44	≤ 7.32	Pass
6	2437	4.46	-10.74	≤ 7.32	Pass
11	2462	-1.45	-16.65	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$

### Channel 1

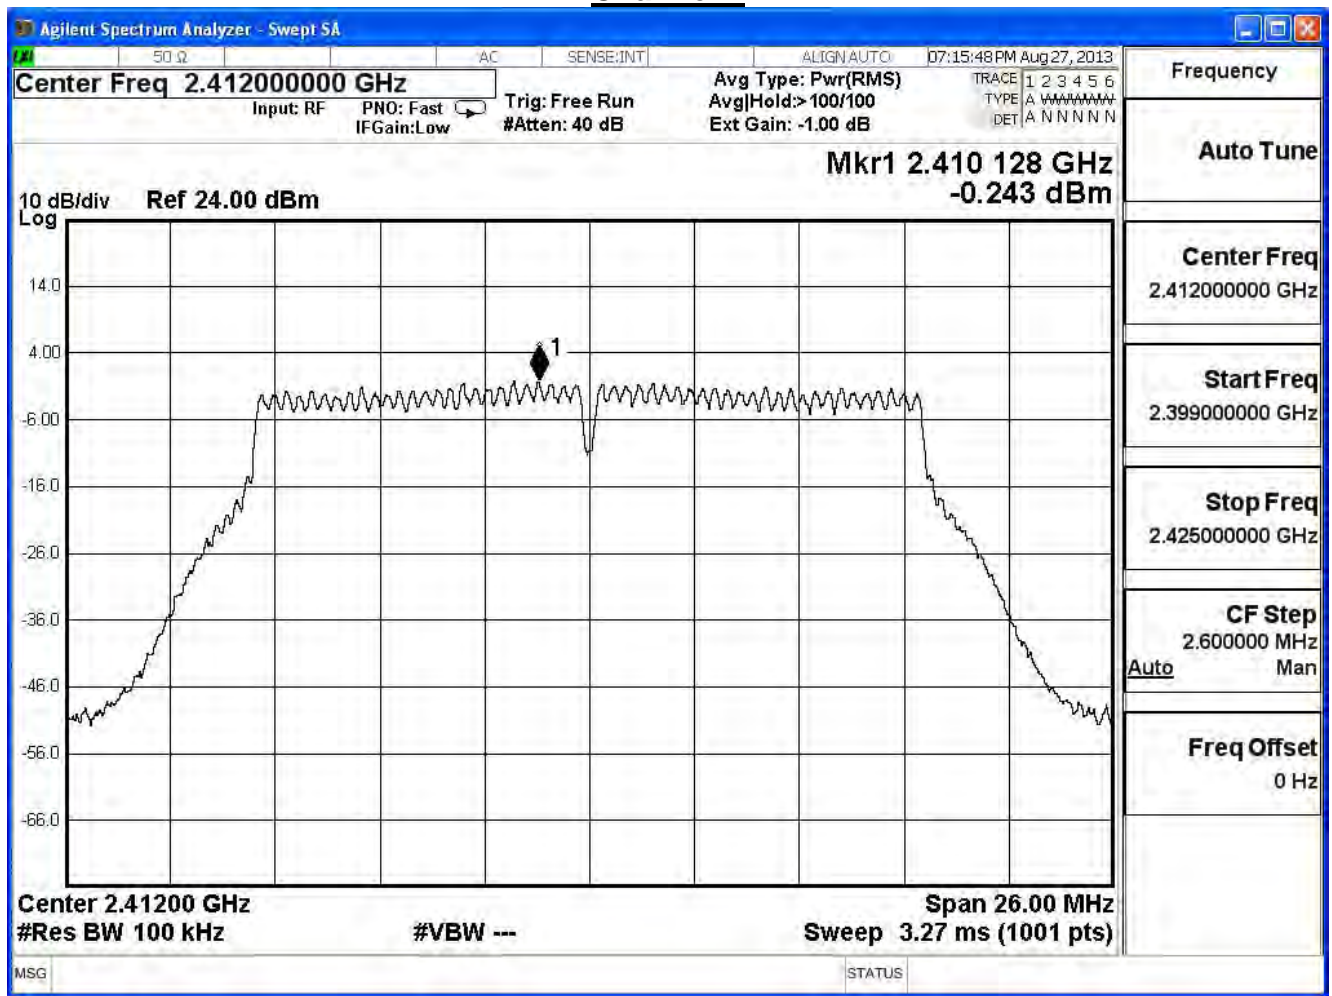


Channel 6

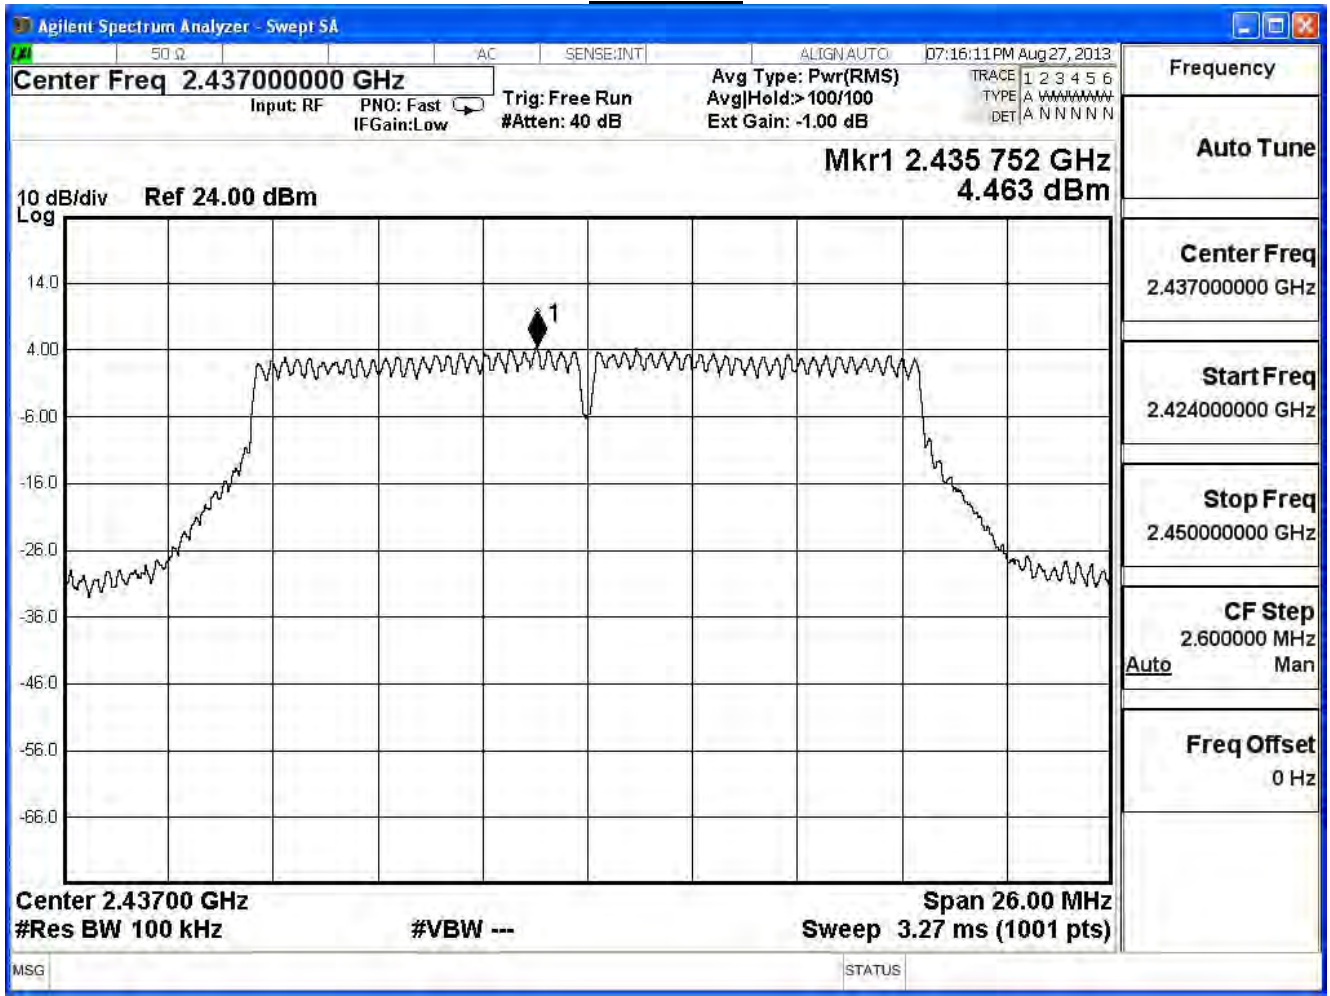



Channel 11

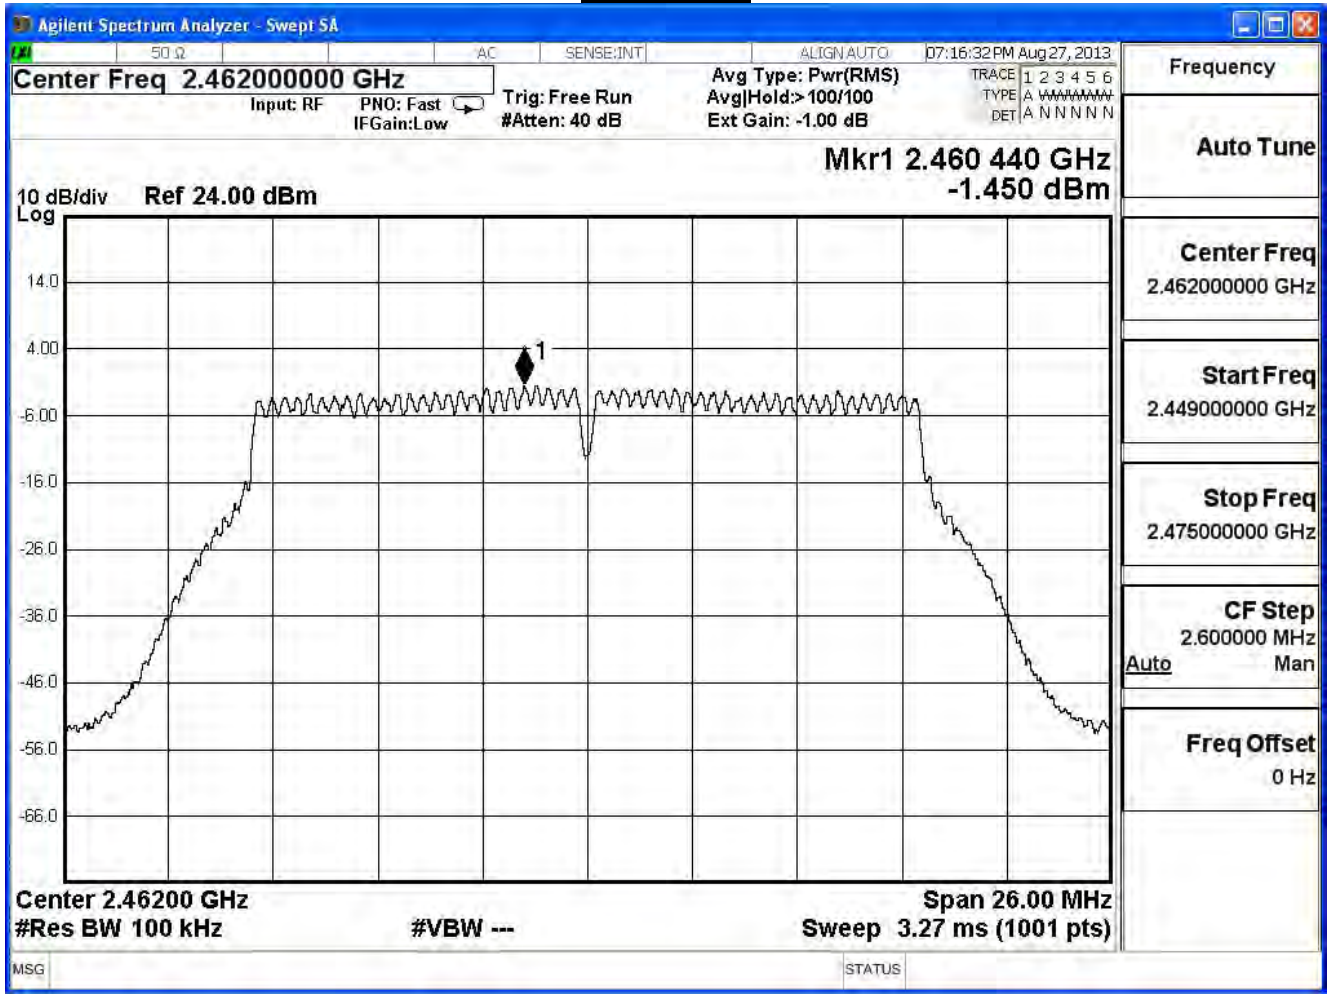

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11g (ANT0+1+2)				
Channel No.	Frequency (MHz)	Measure Level(dBm)	Limit (dBm)	Result
1	2412	-10.67	$\leq 7.32$	Pass
6	2437	-5.62	$\leq 7.32$	Pass
11	2462	-9.61	$\leq 7.32$	Pass

Note:

Total Gain :  $10\log(3)+\text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE802.11n_20MHz_(ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-2.07	-17.27	≤7.32	Pass
6	2437	3.73	-11.47	≤7.32	Pass
11	2462	-2.28	-17.48	≤7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

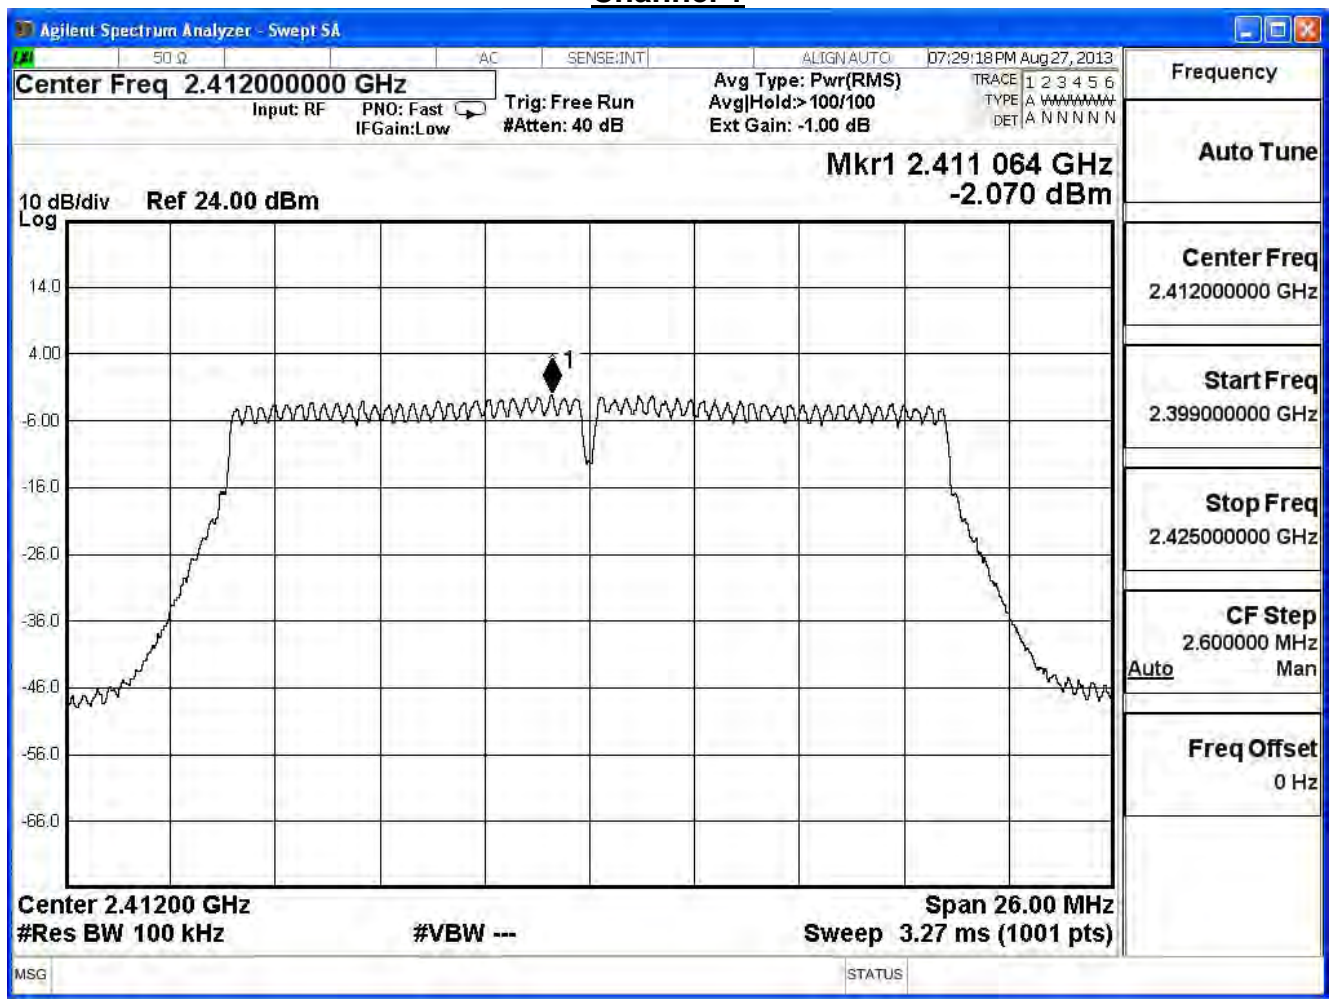

Channel 6

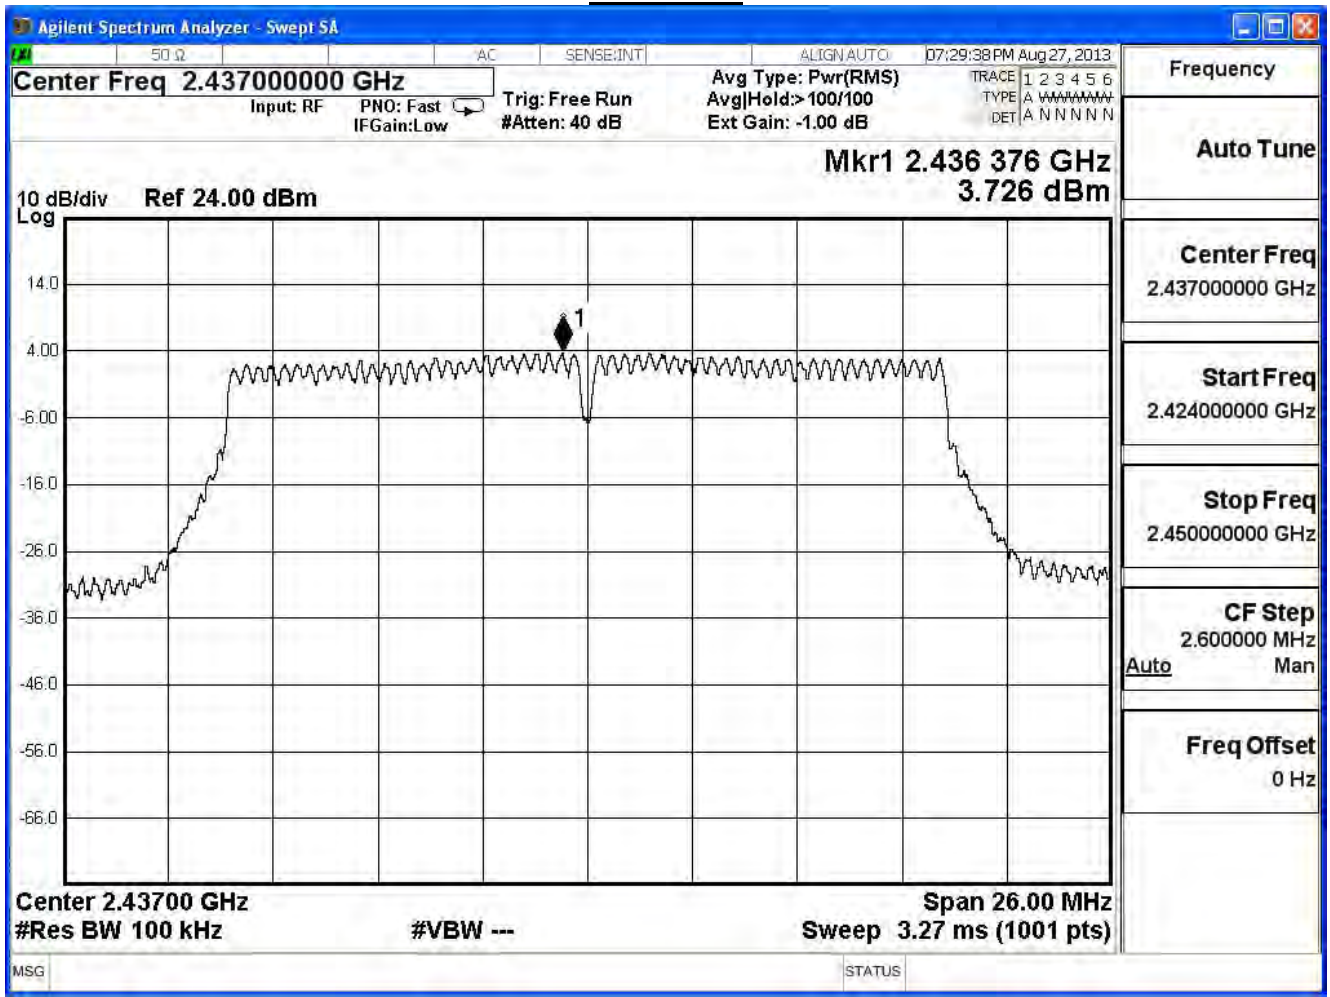

Channel 11

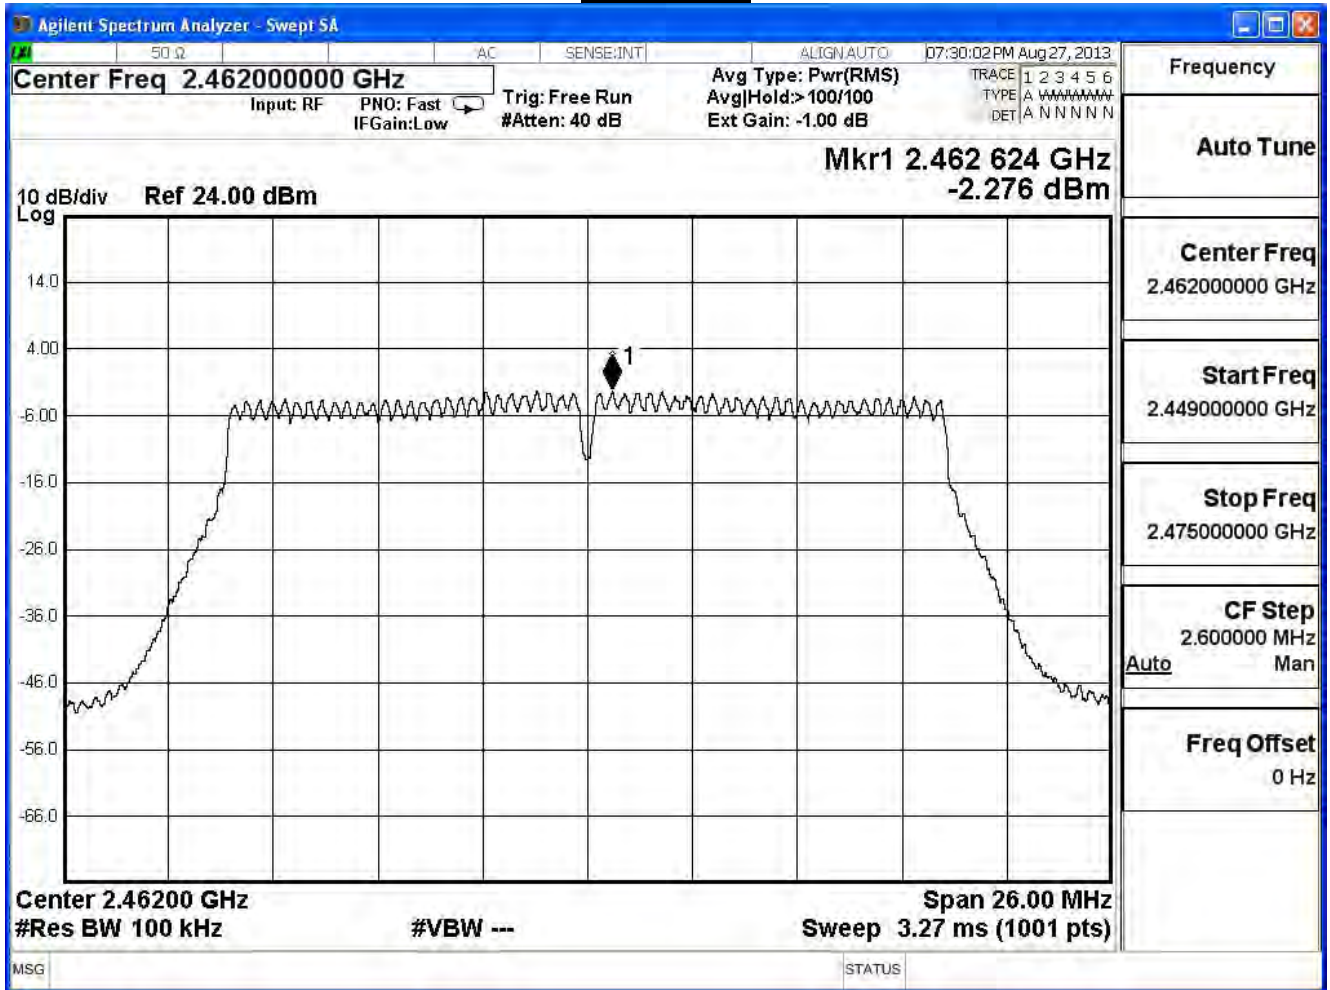

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE802.11n_20MHz_(ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-1.92	-17.12	≤ 7.32	Pass
6	2437	3.04	-12.16	≤ 7.32	Pass
11	2462	-2.50	-17.70	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

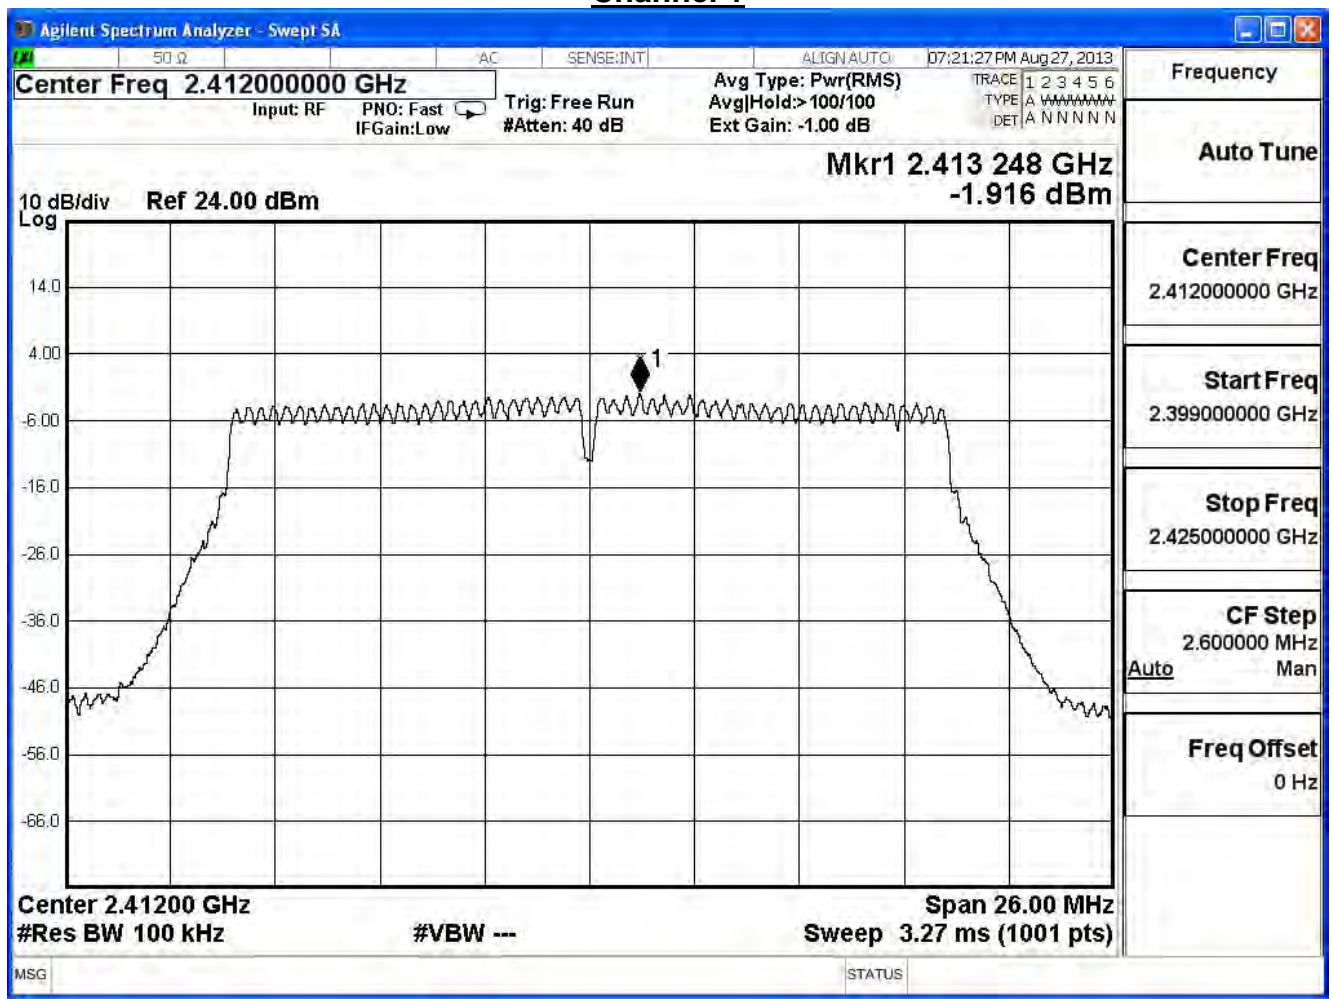

Channel 6

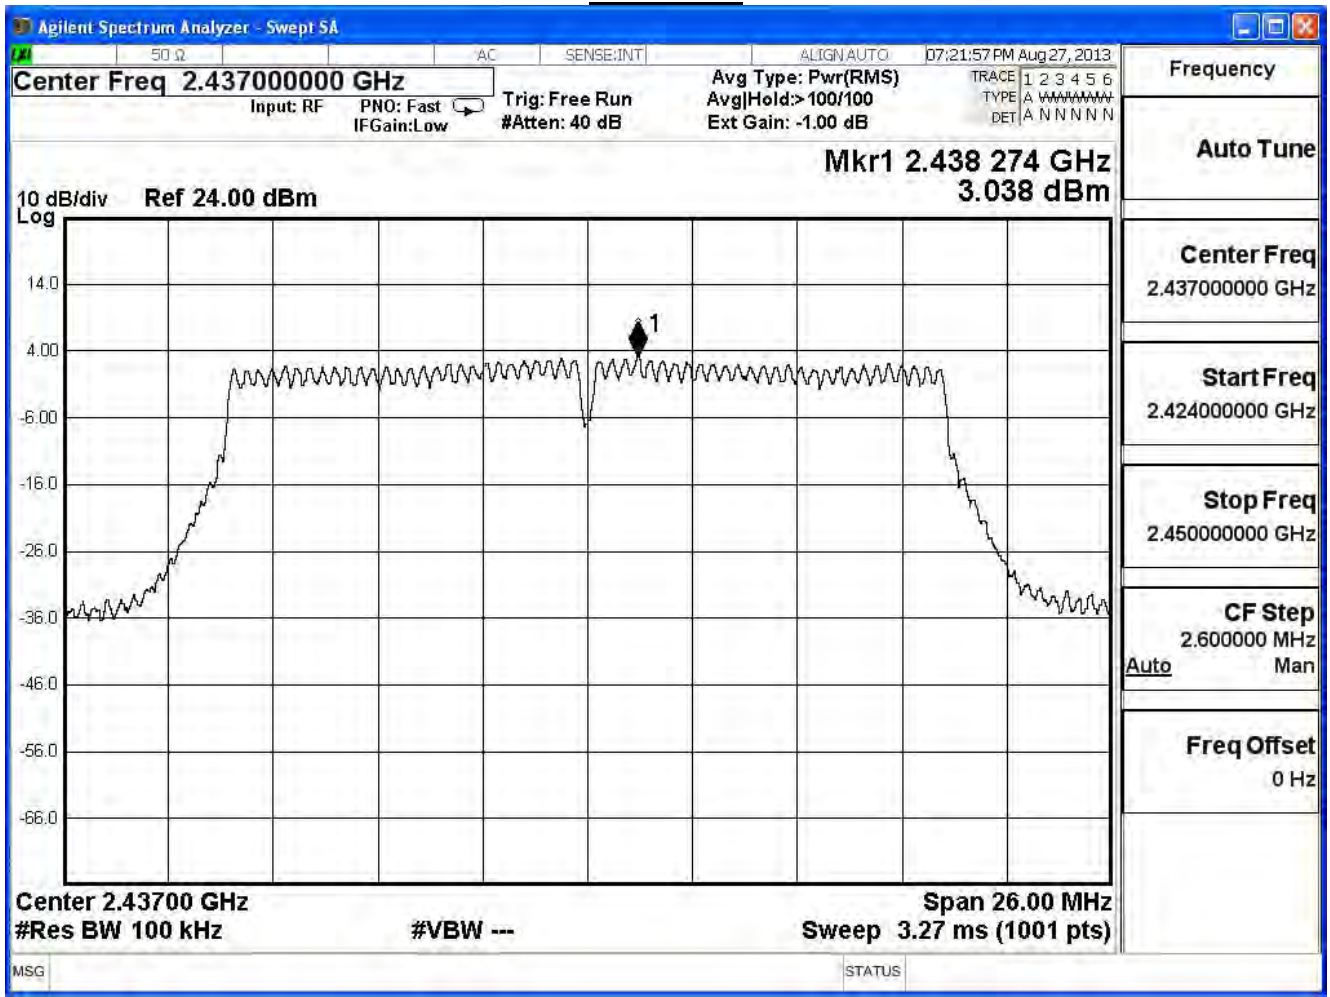

Channel 11

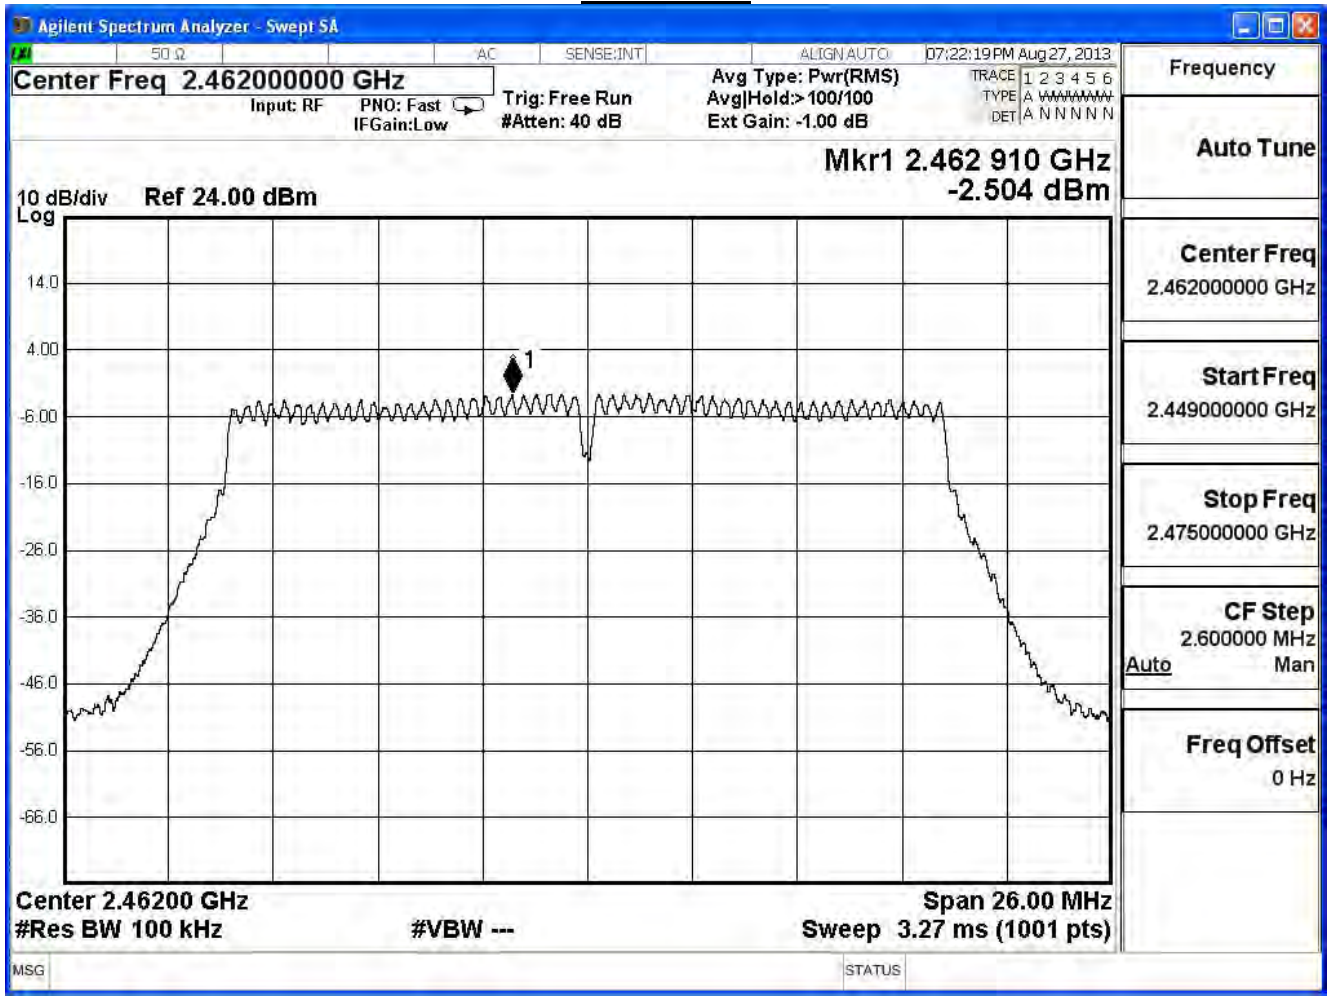



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE802.11n_20MHz_(ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-2.12	-17.32	≤ 7.32	Pass
6	2437	2.87	-12.33	≤ 7.32	Pass
11	2462	-2.67	-17.87	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 1

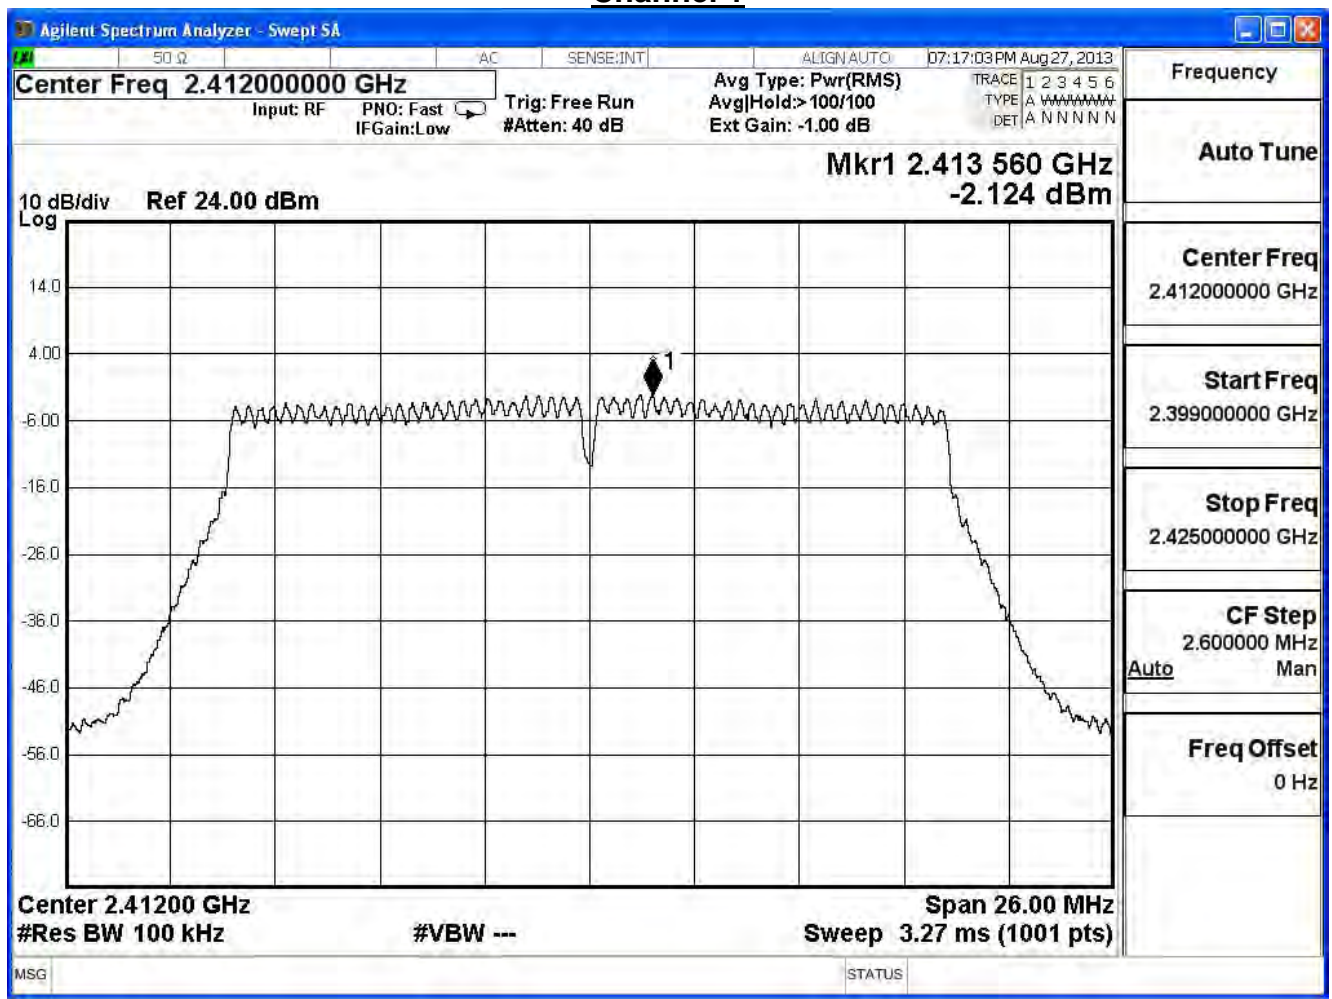

Channel 6

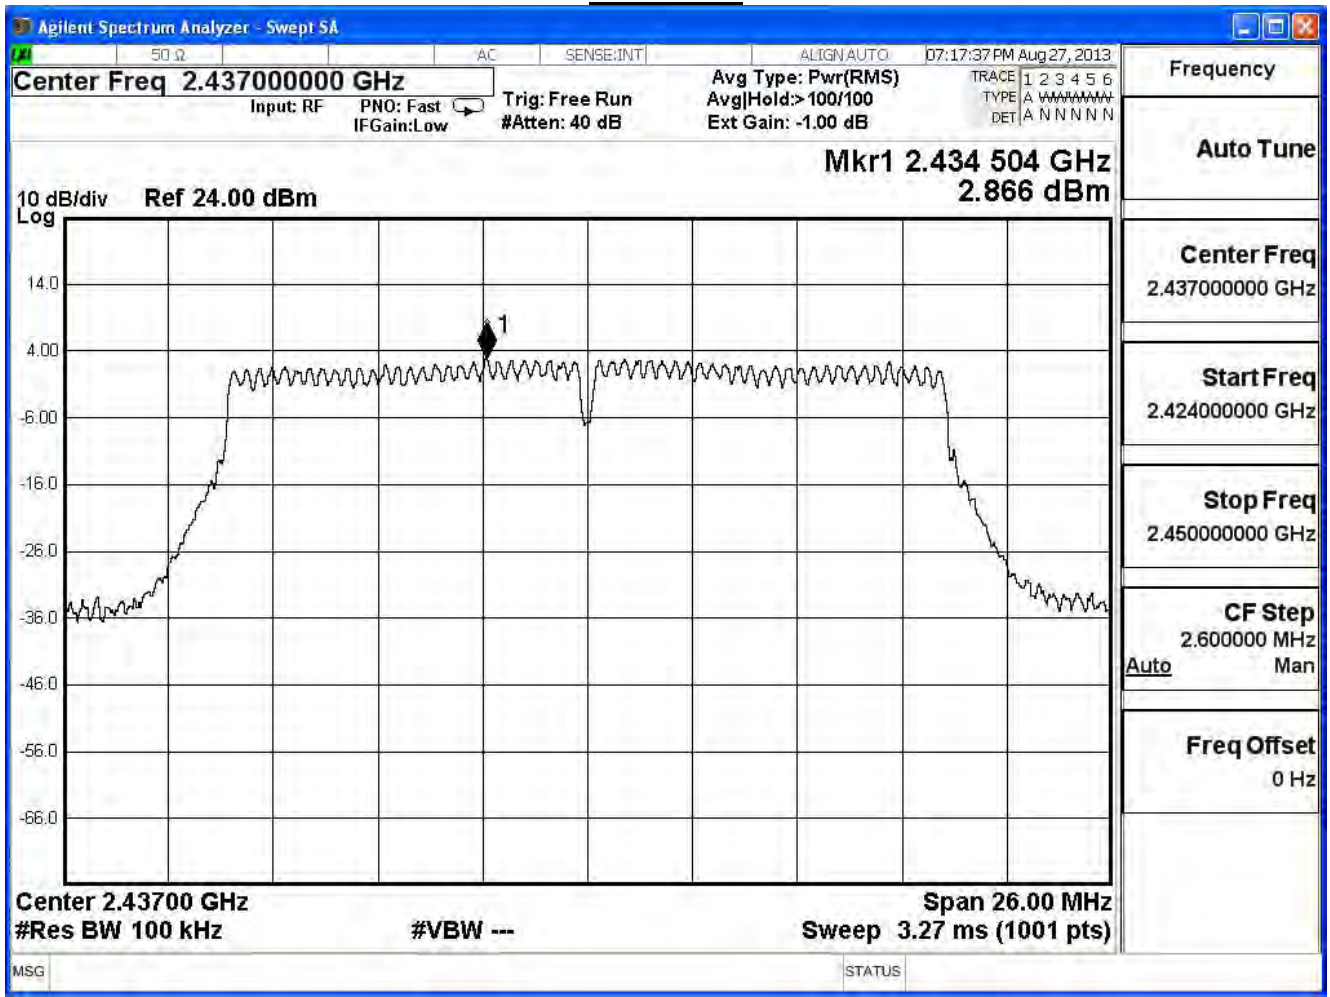

Channel 11

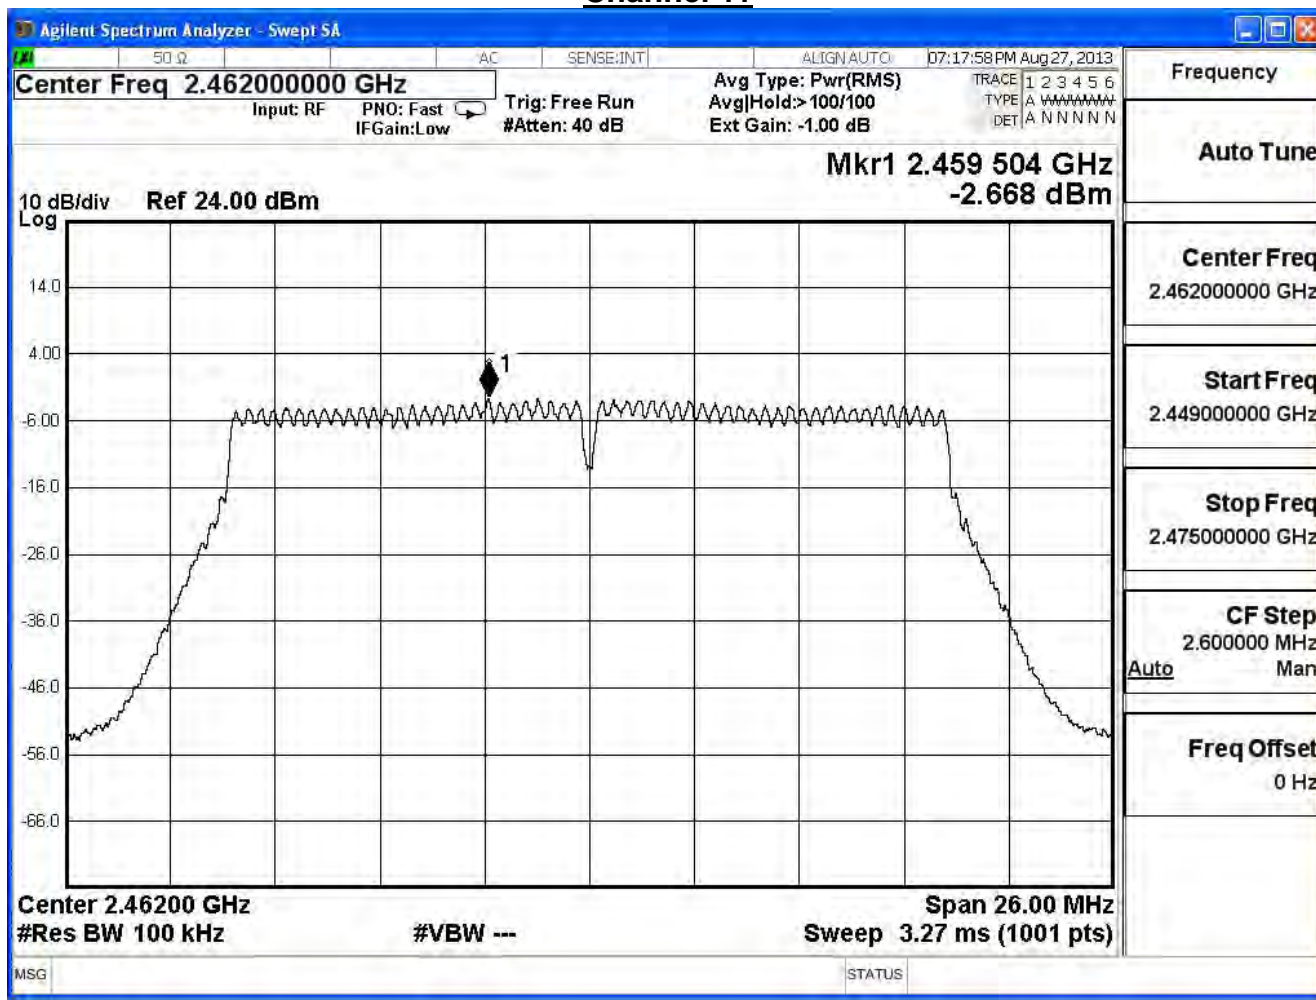

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n 20MHz (ANT 0+1+2)				
Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-12.46	$\leq 7.32$	Pass
6	2437	-7.20	$\leq 7.32$	Pass
11	2462	-12.91	$\leq 7.32$	Pass

Note:

Total Gain :  $10\log(3)+\text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
3	2422	-6.23	-21.43	≤ 7.32	Pass
6	2437	-3.89	-19.09	≤ 7.32	Pass
9	2452	-6.92	-22.12	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3)+\text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 3

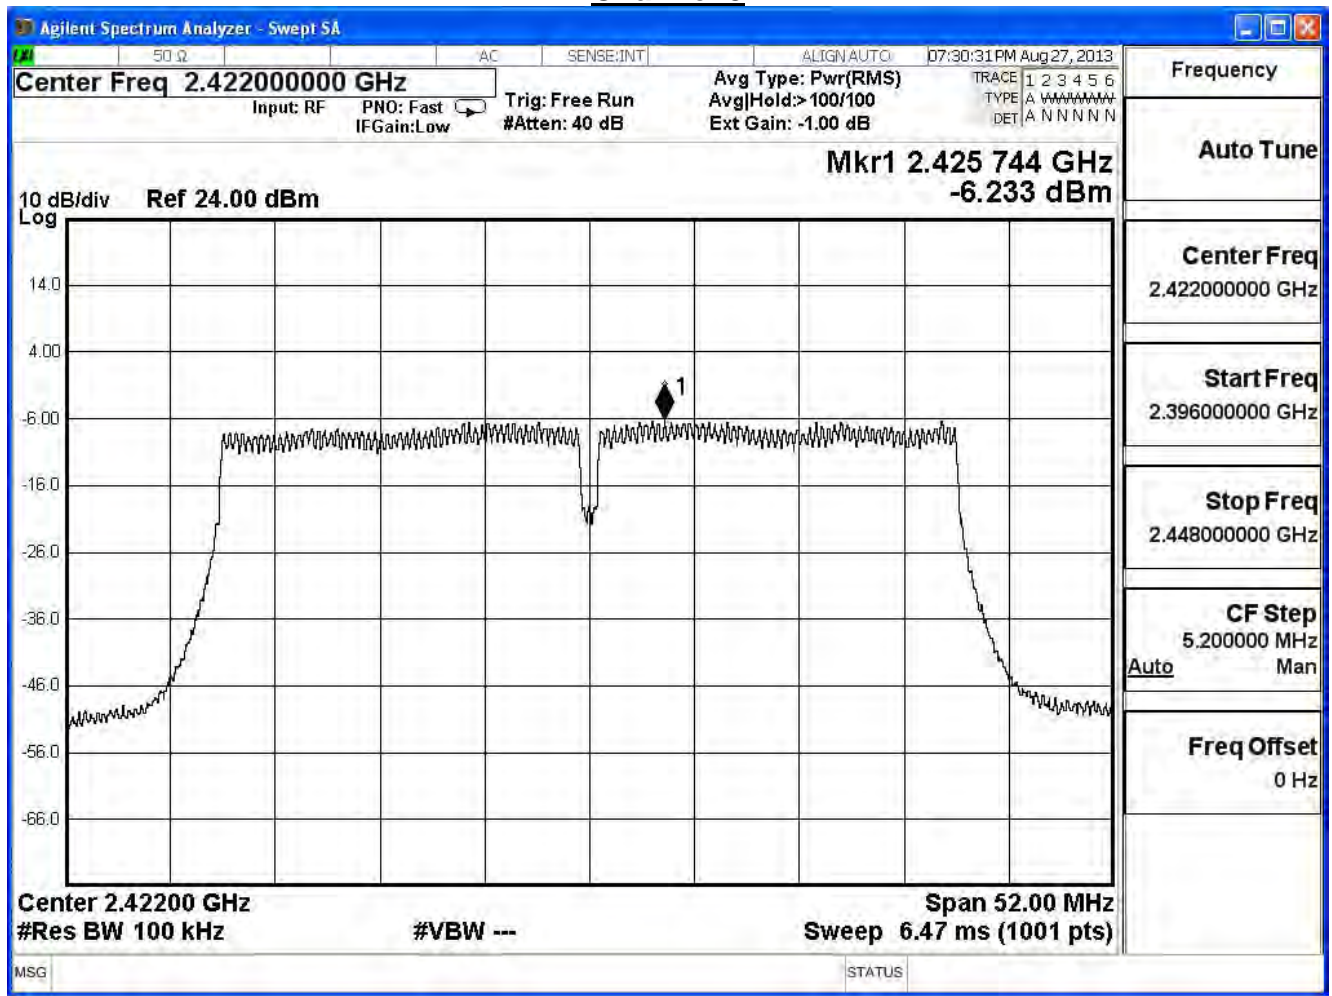

Channel 6

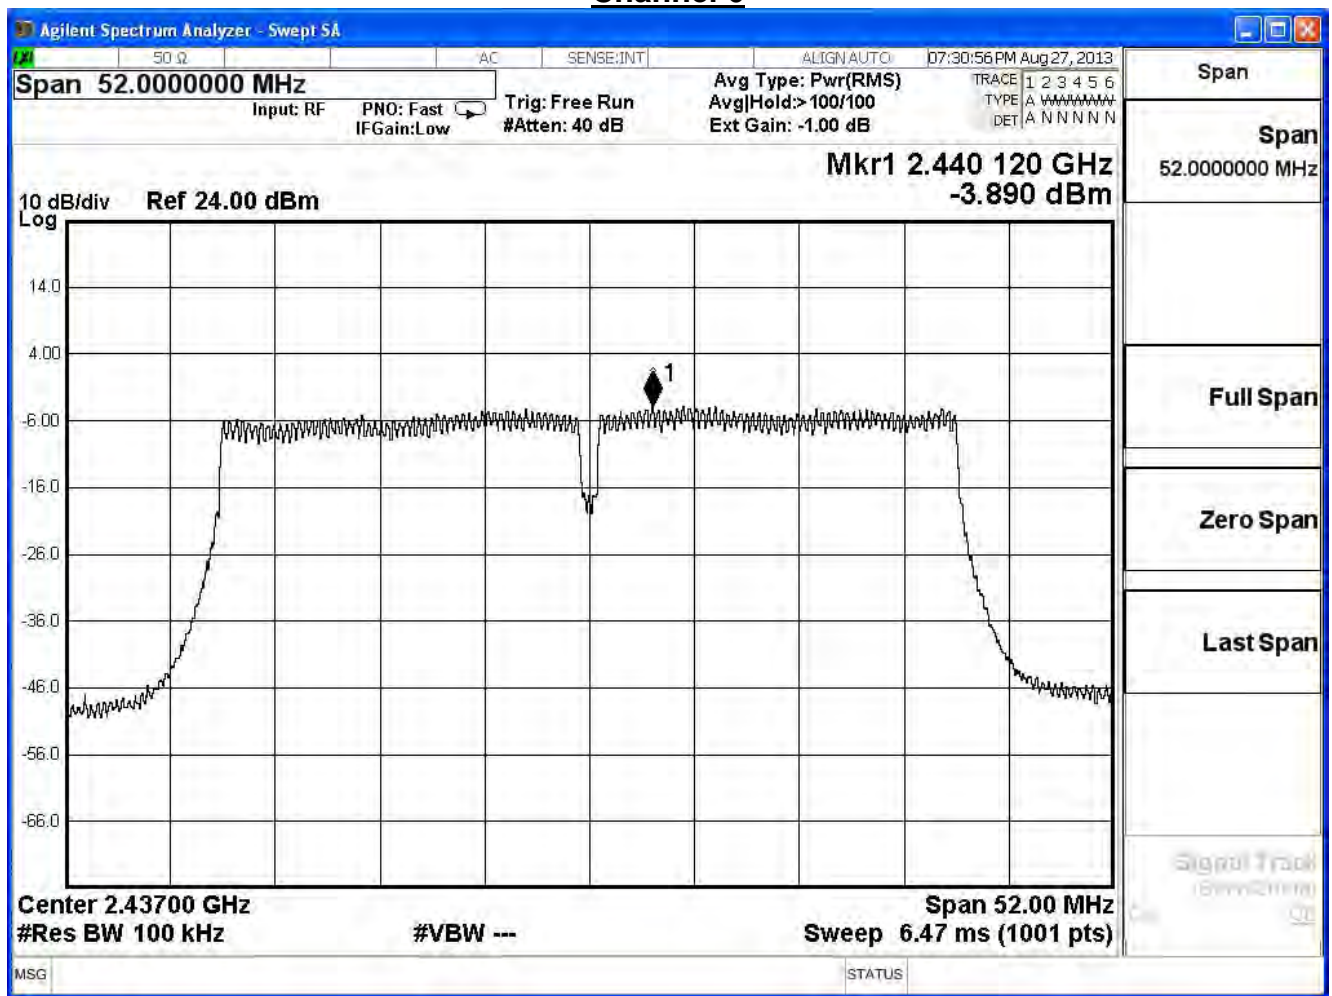

Channel 9

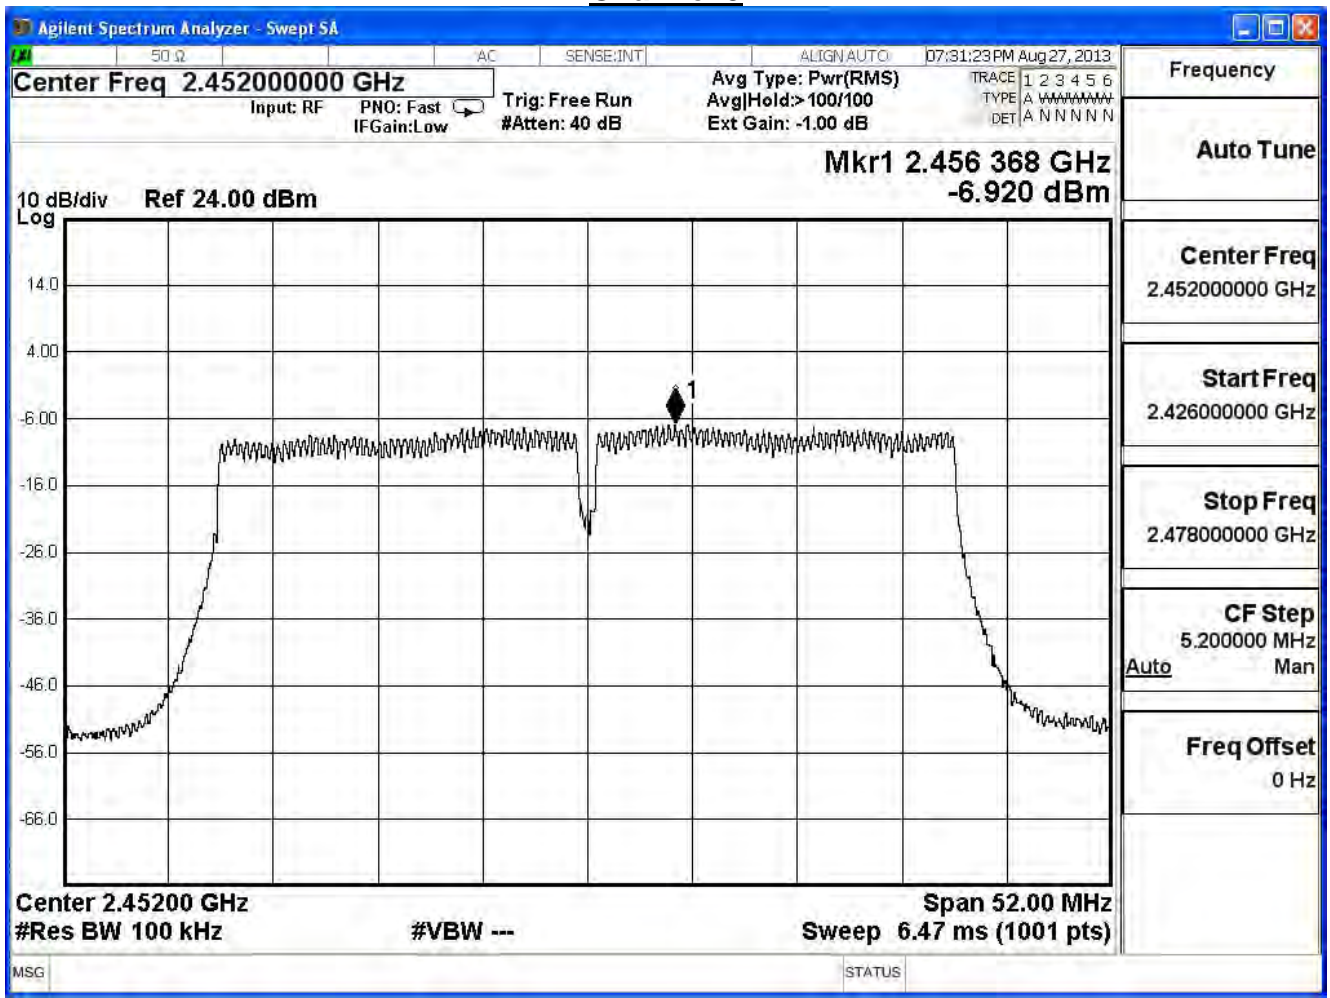

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-6.39	-21.59	≤7.32	Pass
6	2437	-3.76	-18.96	≤7.32	Pass
9	2452	-6.72	-21.92	≤7.32	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 6.68$


Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$

### Channel 3

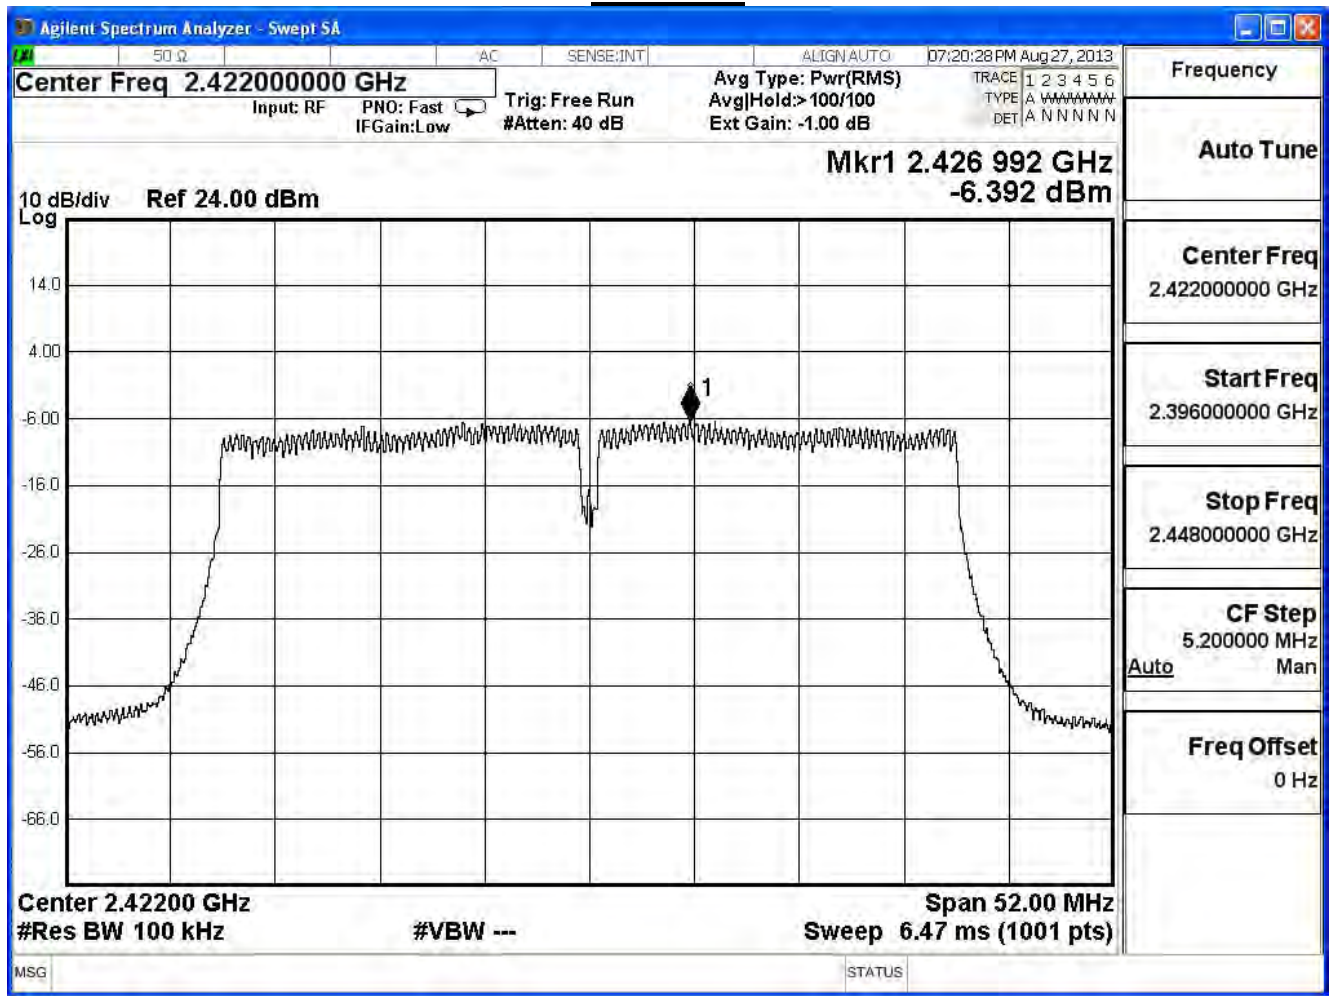




### Channel 6

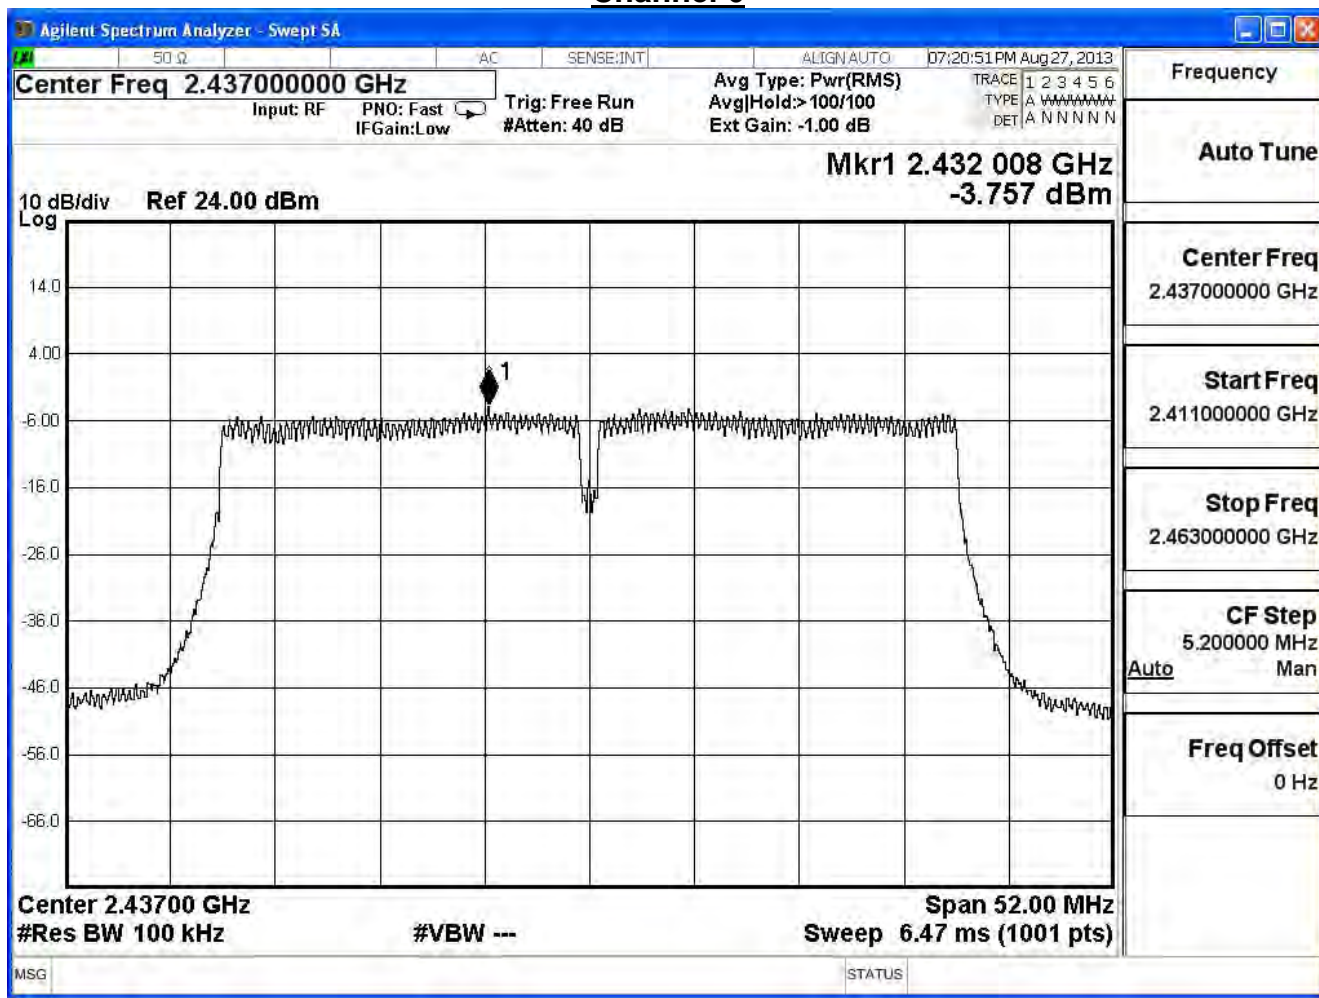

Channel 9

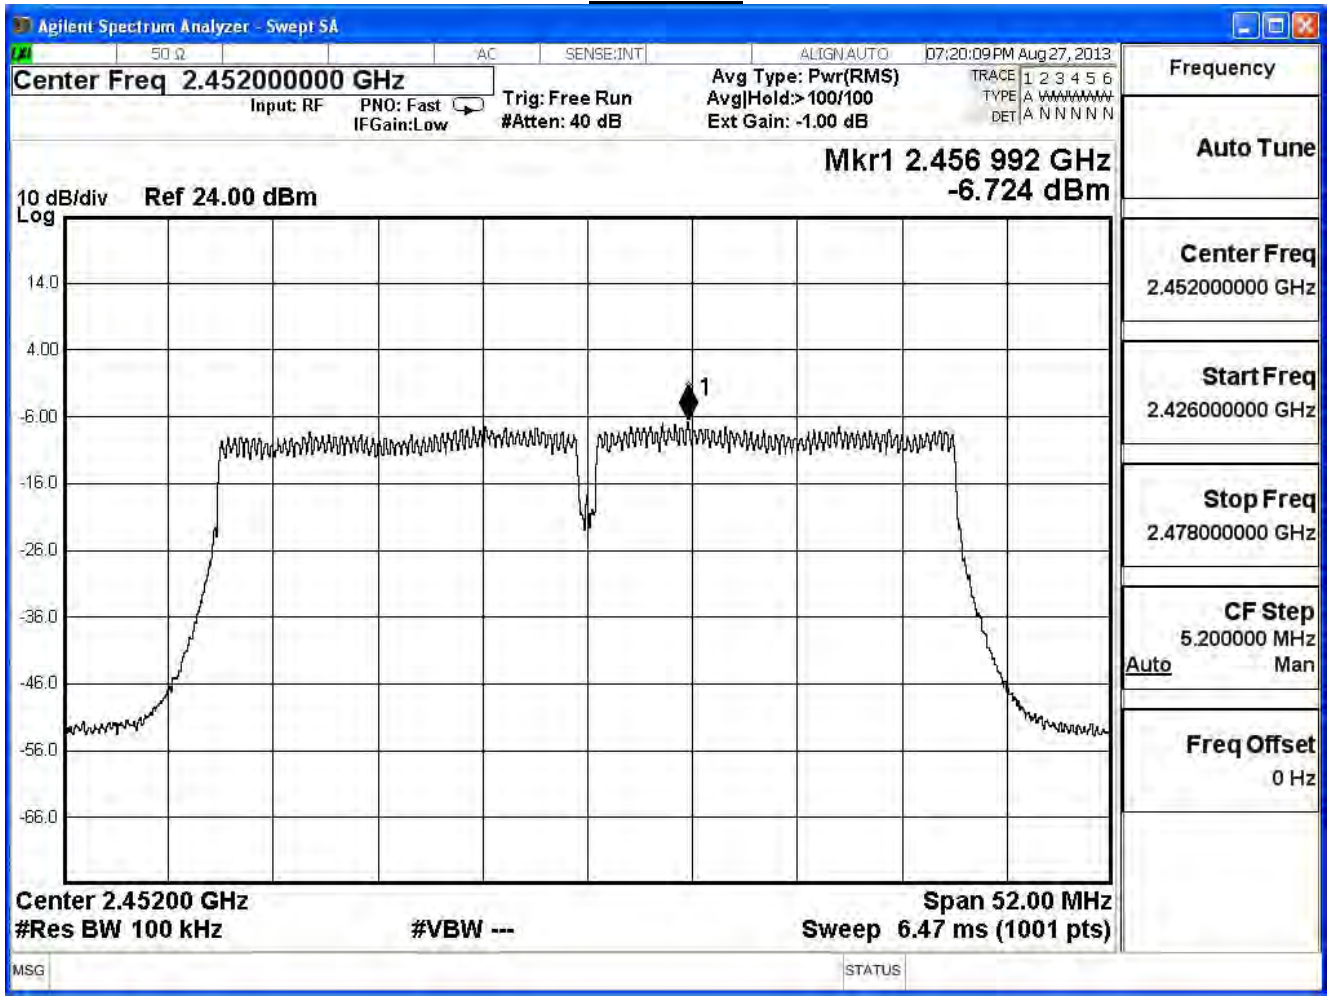

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-6.54	-21.74	≤ 7.32	Pass
6	2437	-4.07	-19.27	≤ 7.32	Pass
9	2452	-7.22	-22.42	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


### Channel 3

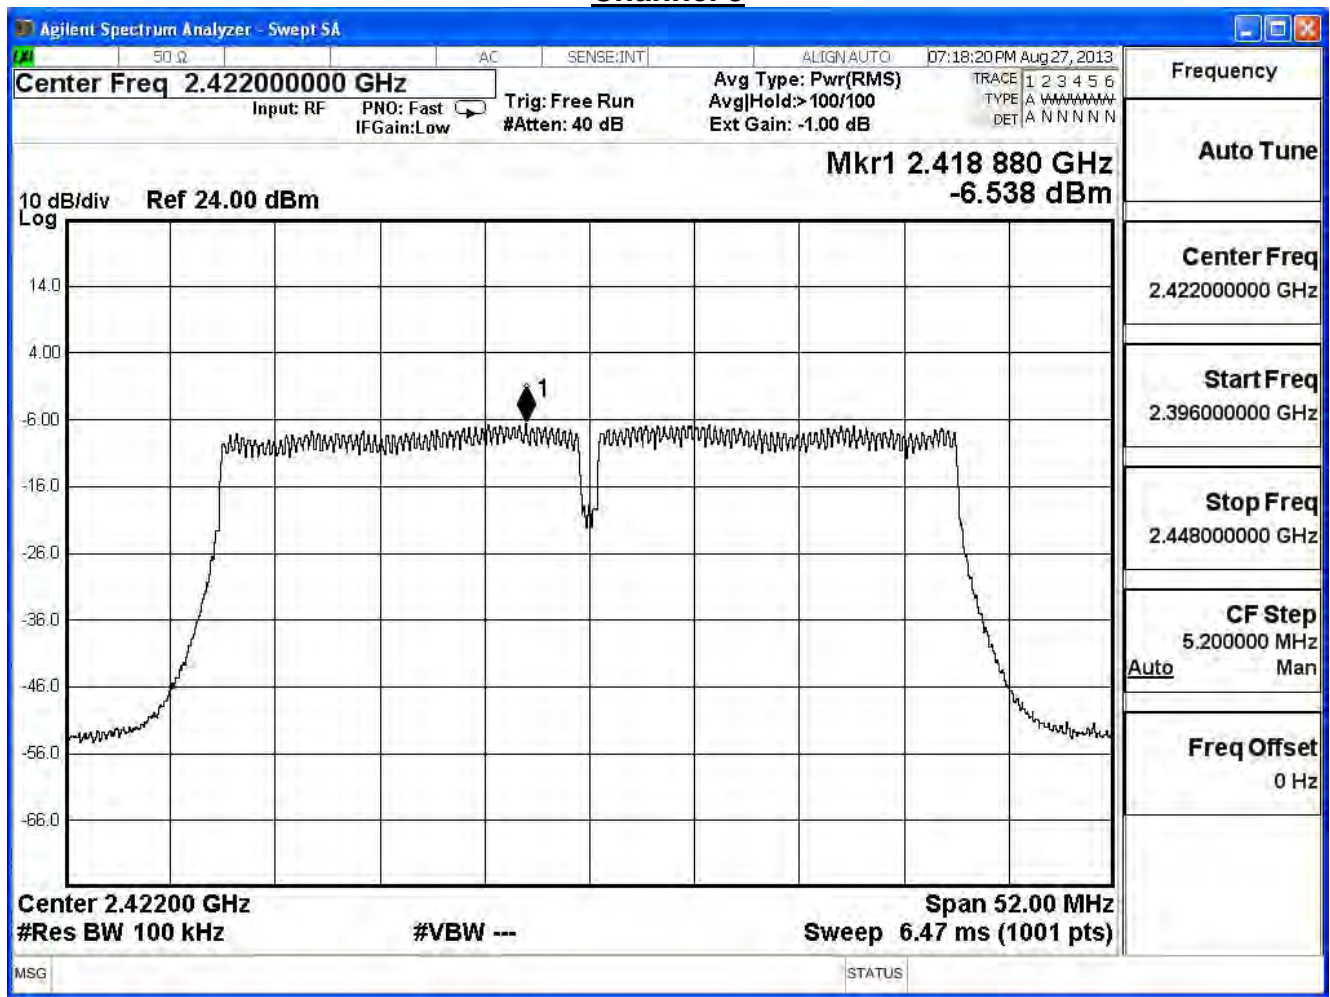

Channel 6

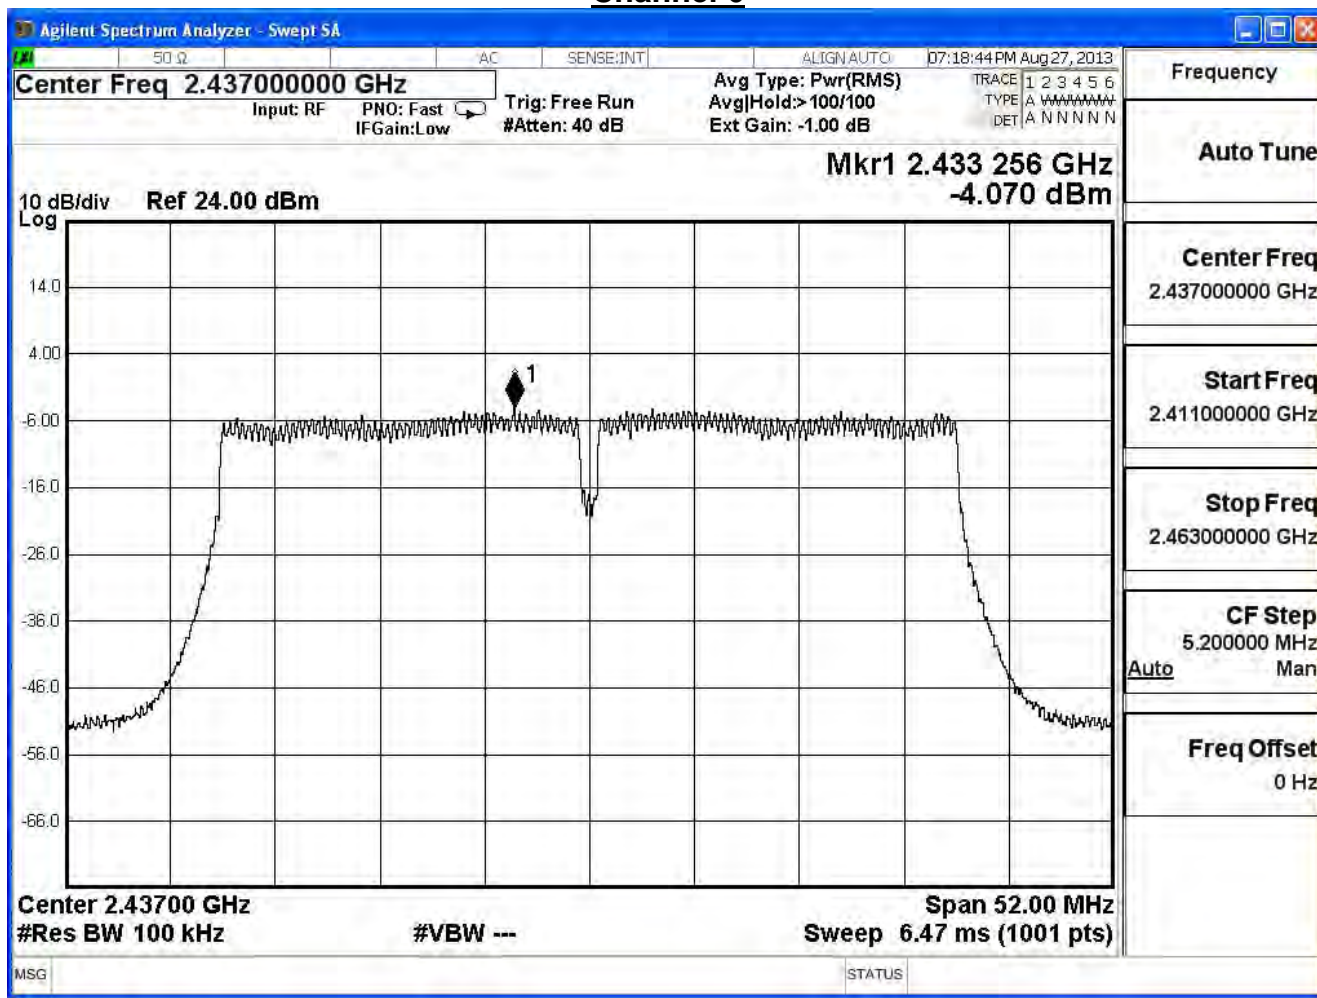

Channel 9

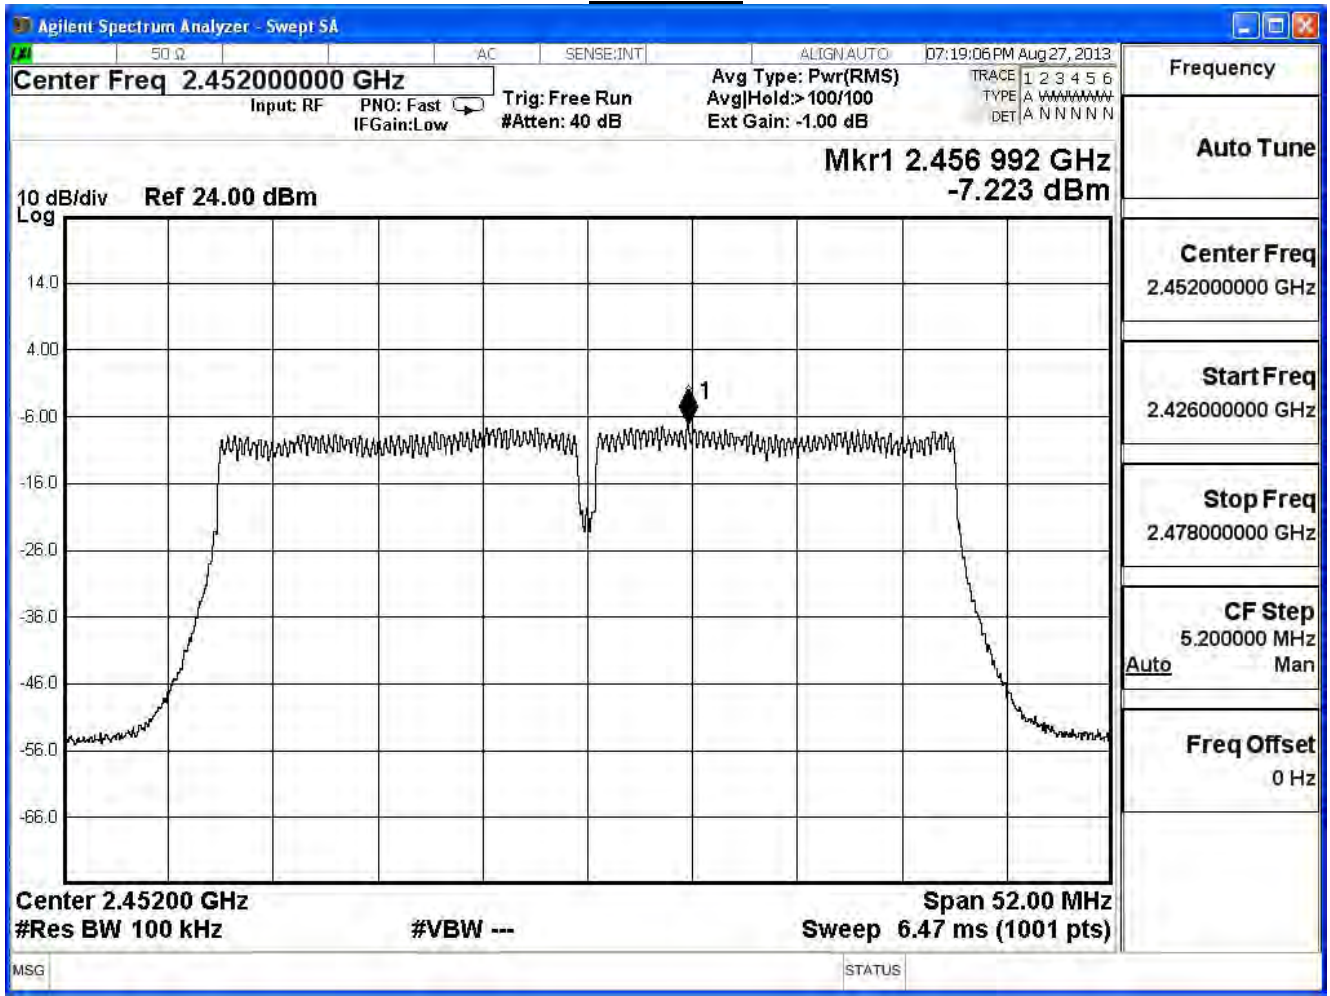

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-16.81	$\leq 7.32$	Pass
6	2437	-14.33	$\leq 7.32$	Pass
9	2452	-17.38	$\leq 7.32$	Pass

Note:


Total Gain :  $10\log(3)+\text{max Gain} = 6.68$

Required Limit =  $8\text{dBm} - (6.68 - 6\text{dBi}) = 7.32$


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11a (ANT0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.22	-9.98	≤ 8	Pass
157	5785	5.69	-9.52	≤ 8	Pass
165	5825	5.28	-9.92	≤ 8	Pass

### Channel 149

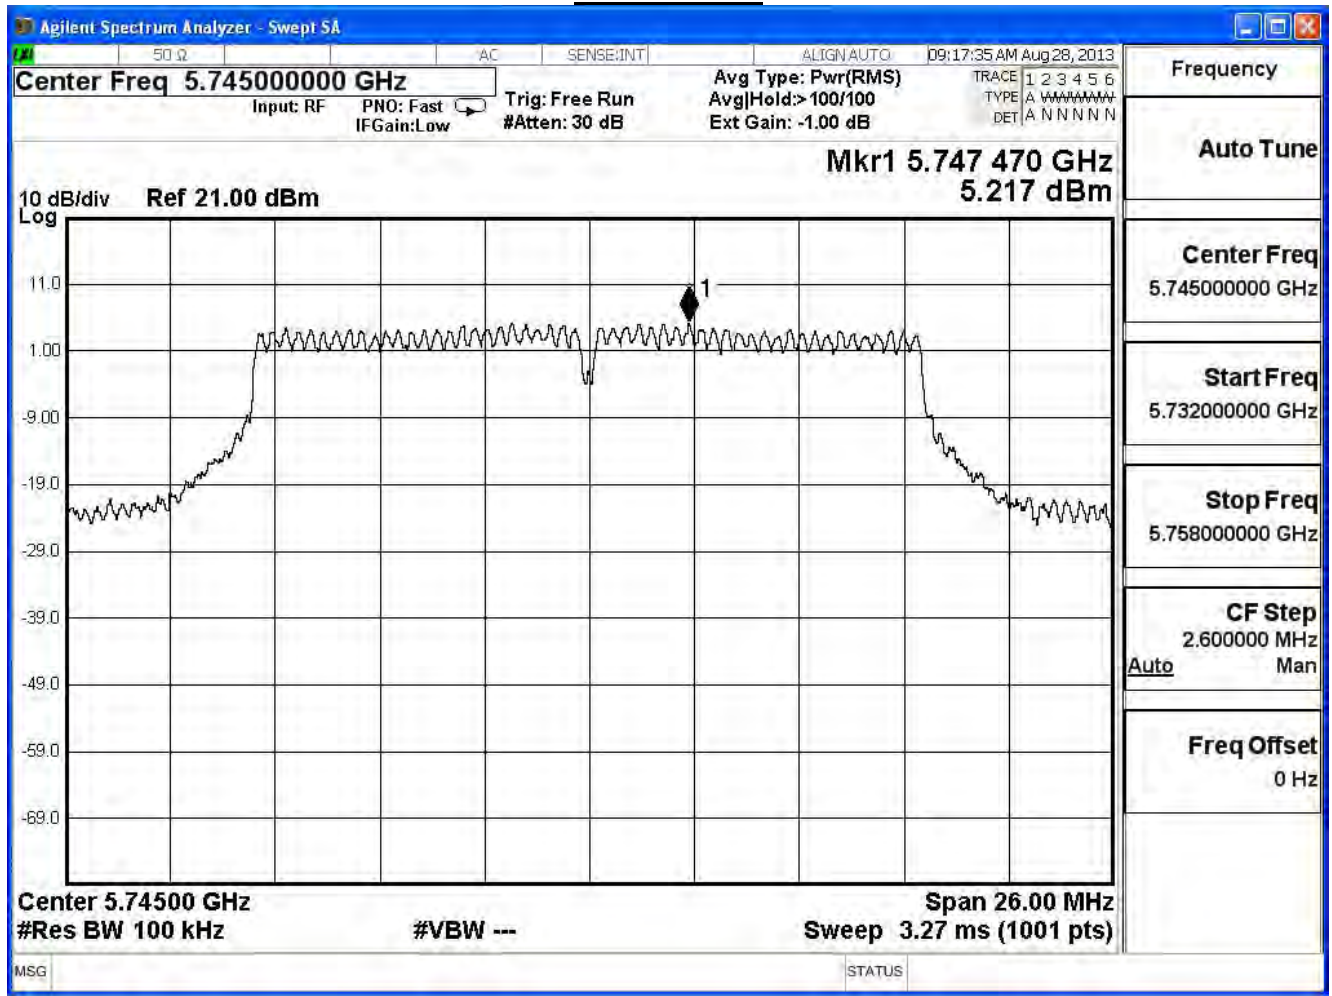


Channel 157

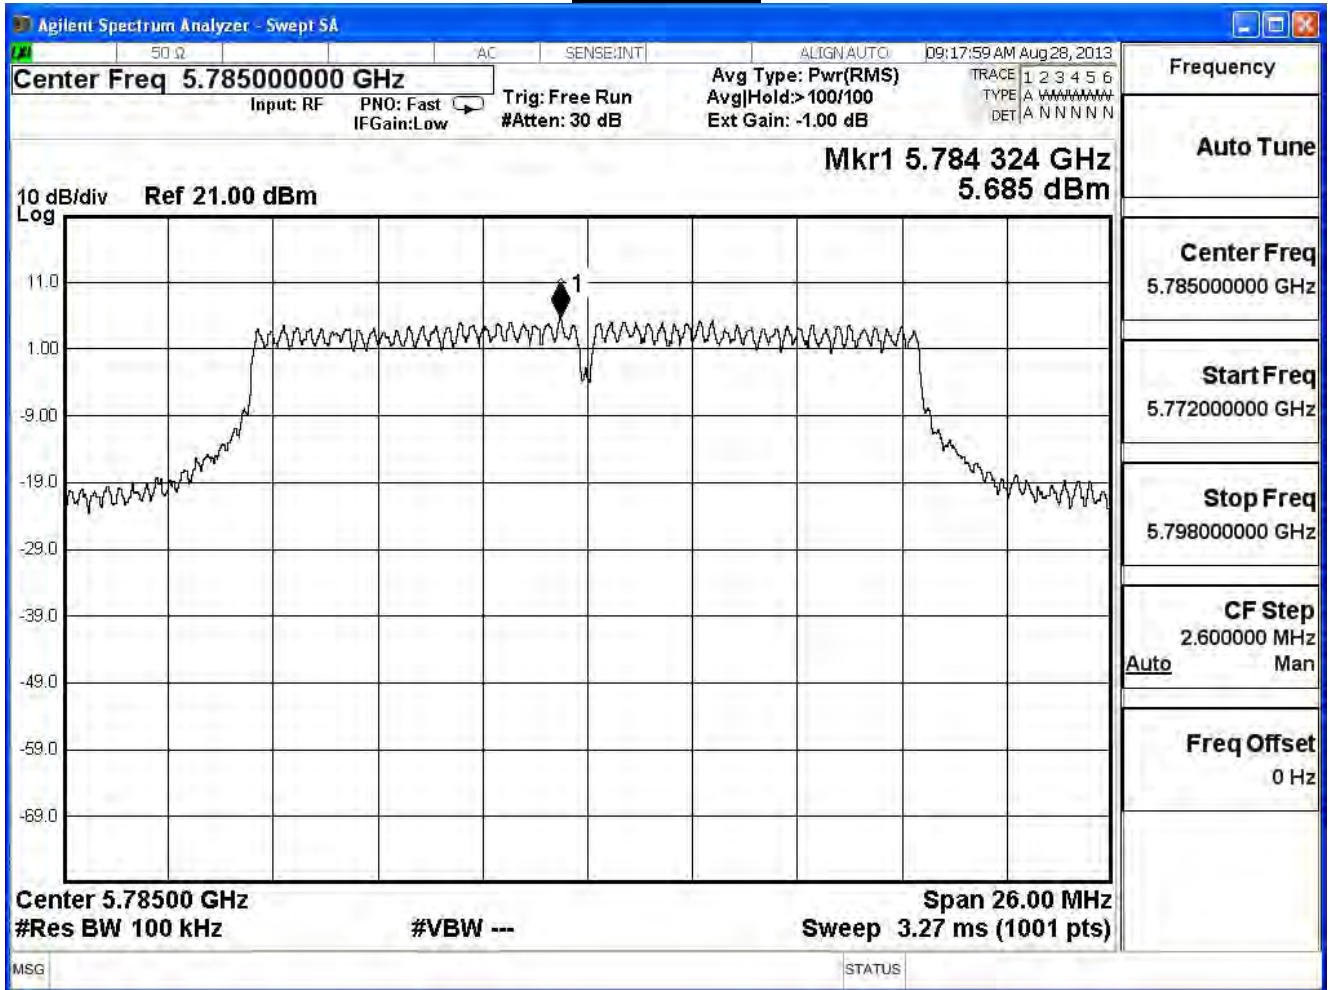



Channel 165

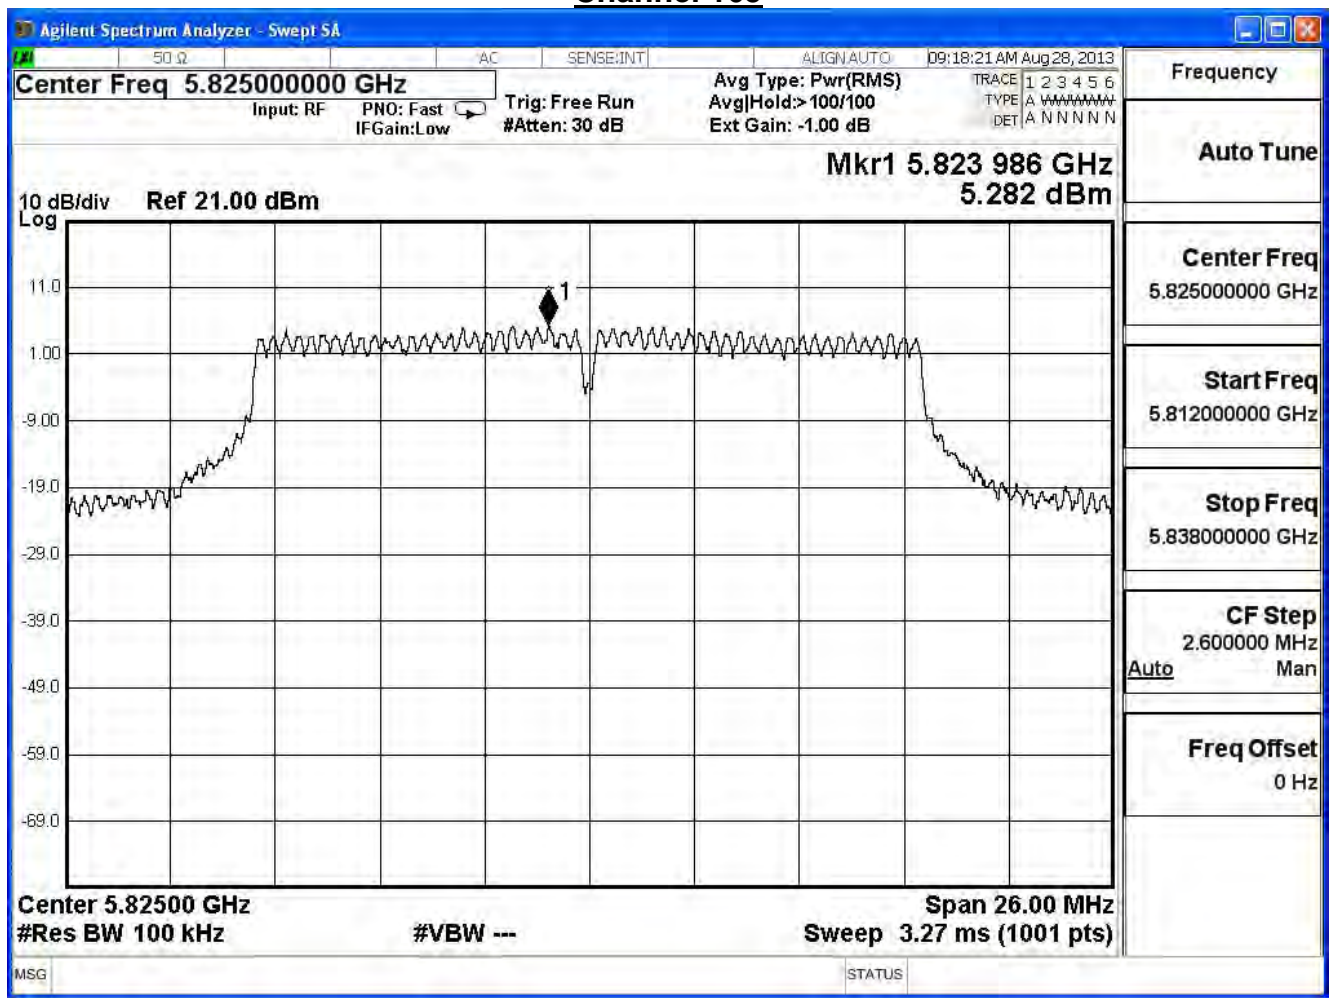

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11a (ANT1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.75	-9.45	≤ 5.19	Pass
157	5785	5.95	-9.26	≤ 5.19	Pass
165	5825	5.63	-9.57	≤ 5.19	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$


### Channel 149

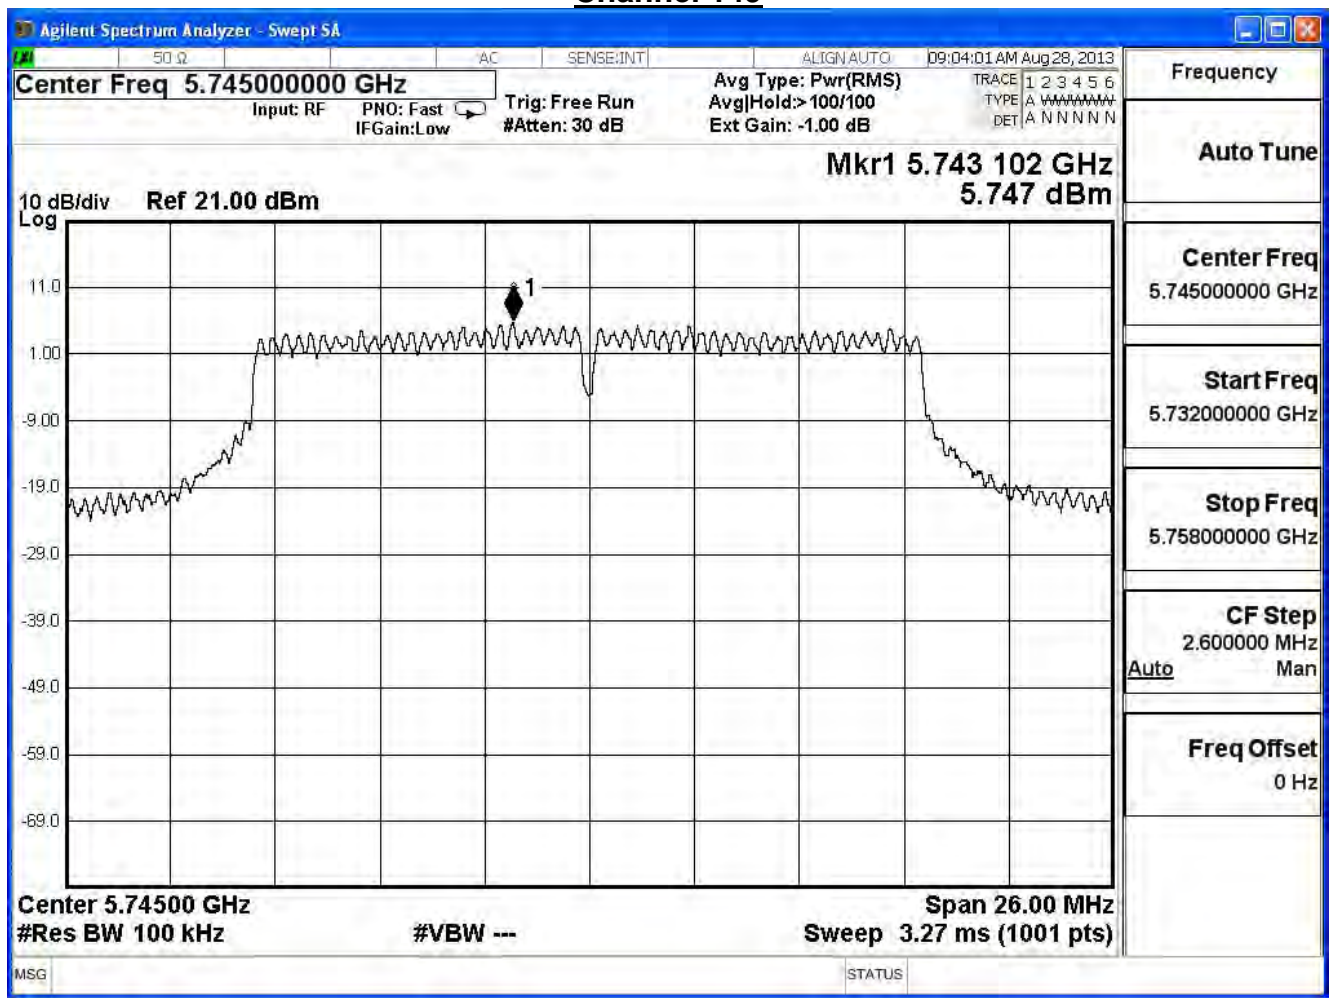

Channel 157

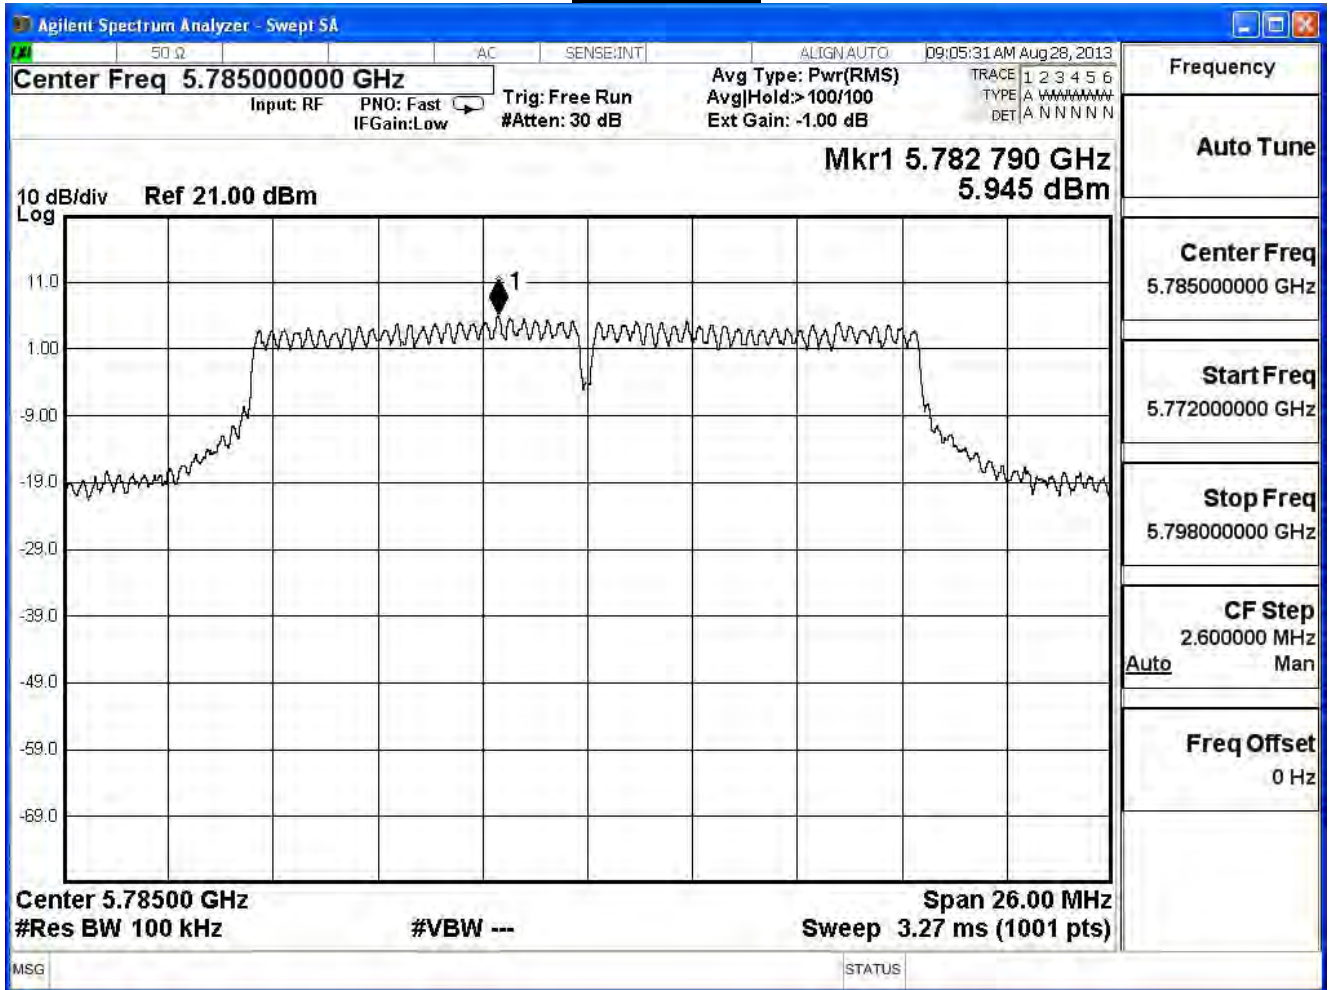

Channel 165

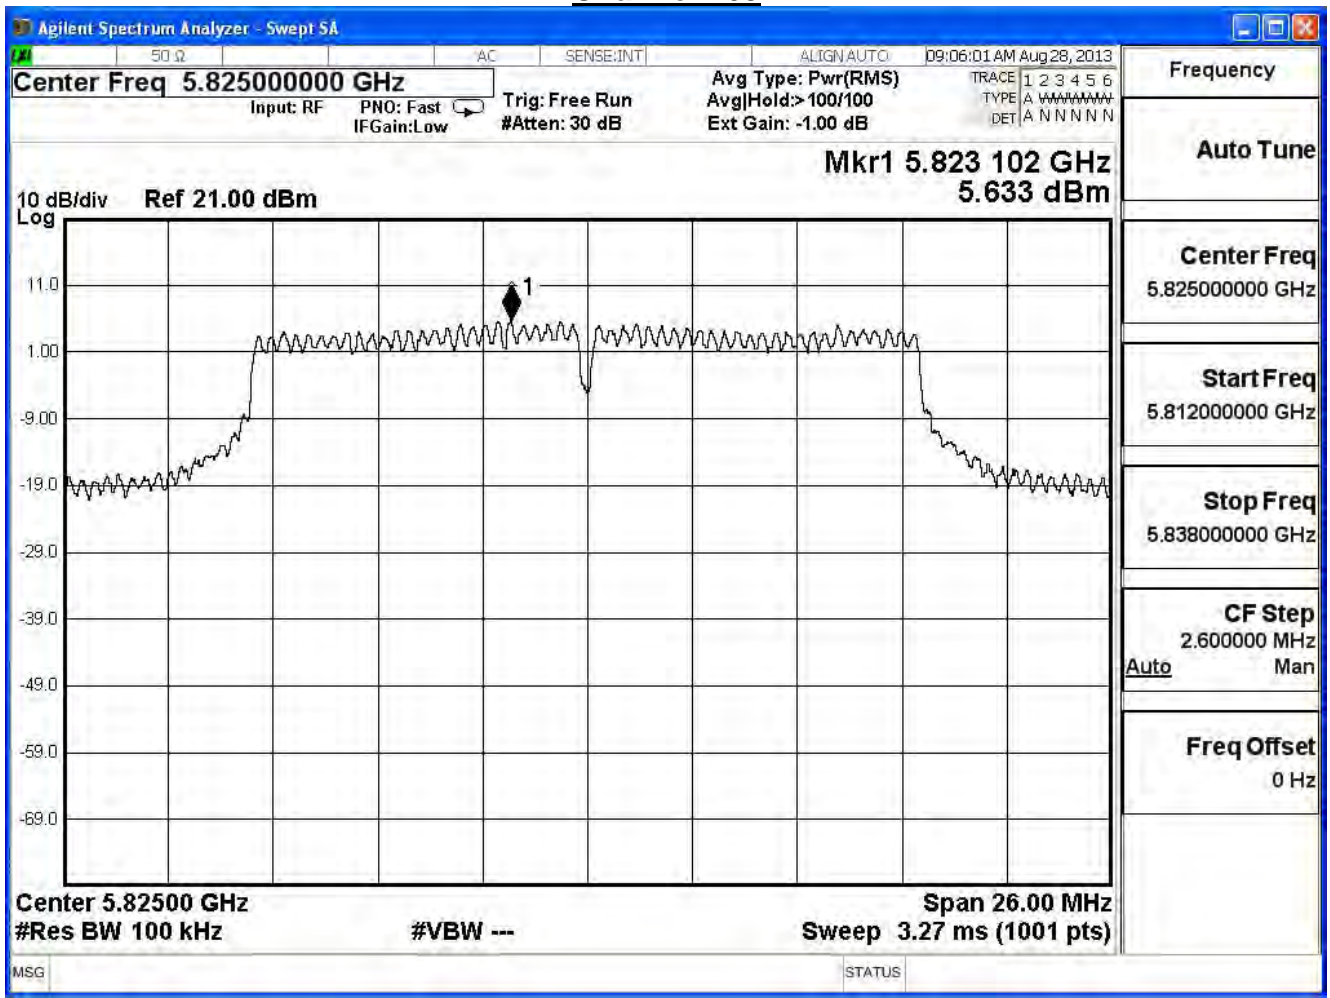

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11a (ANT2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.85	-9.35	≤ 5.19	Pass
157	5785	6.17	-9.03	≤ 5.19	Pass
165	5825	5.70	-9.50	≤ 5.19	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$


### Channel 149

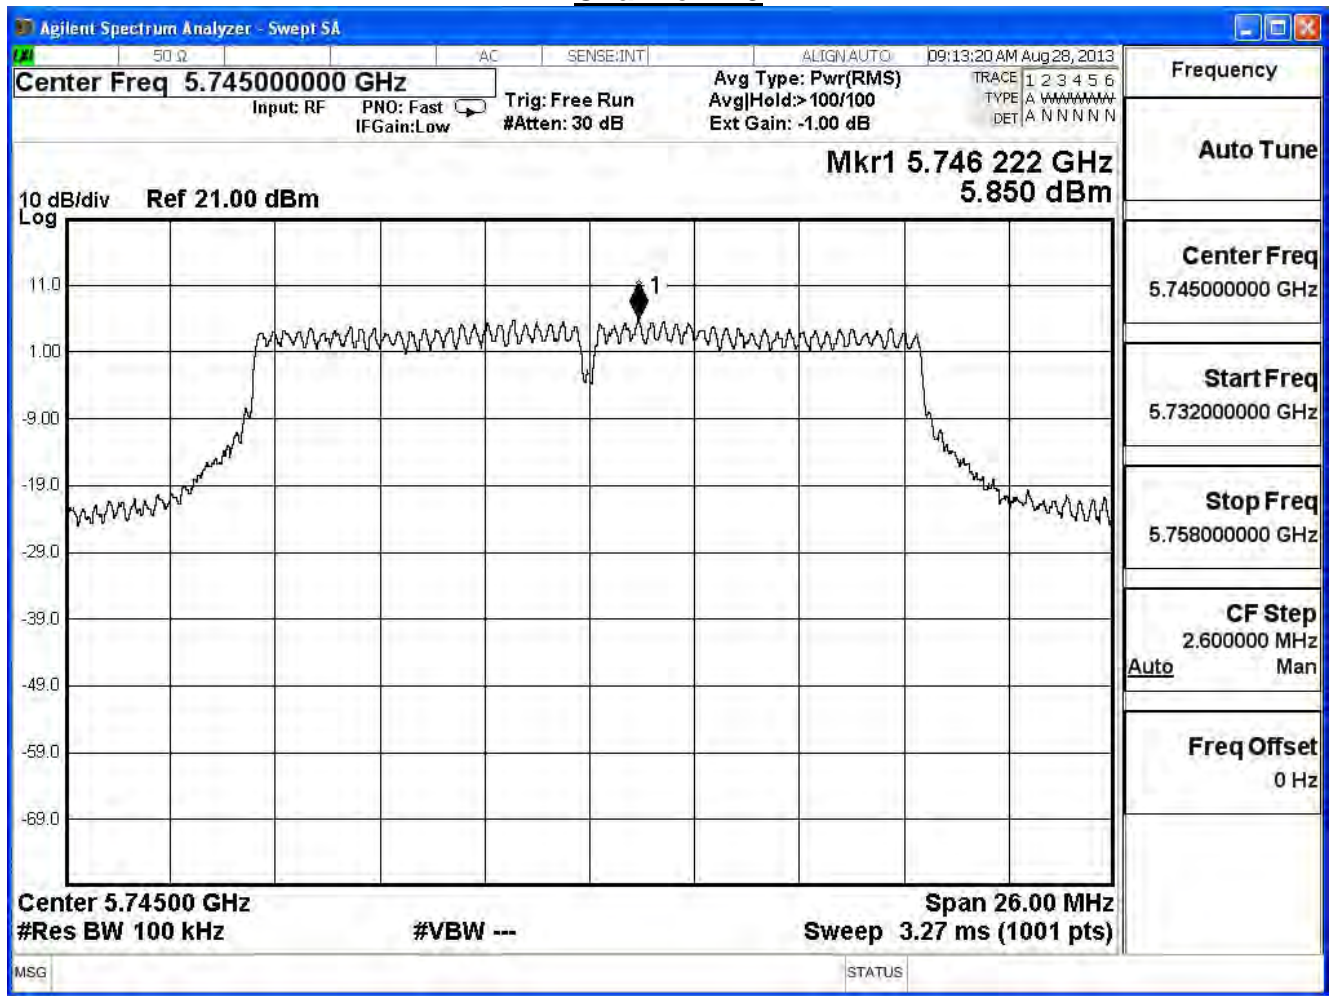

Channel 157

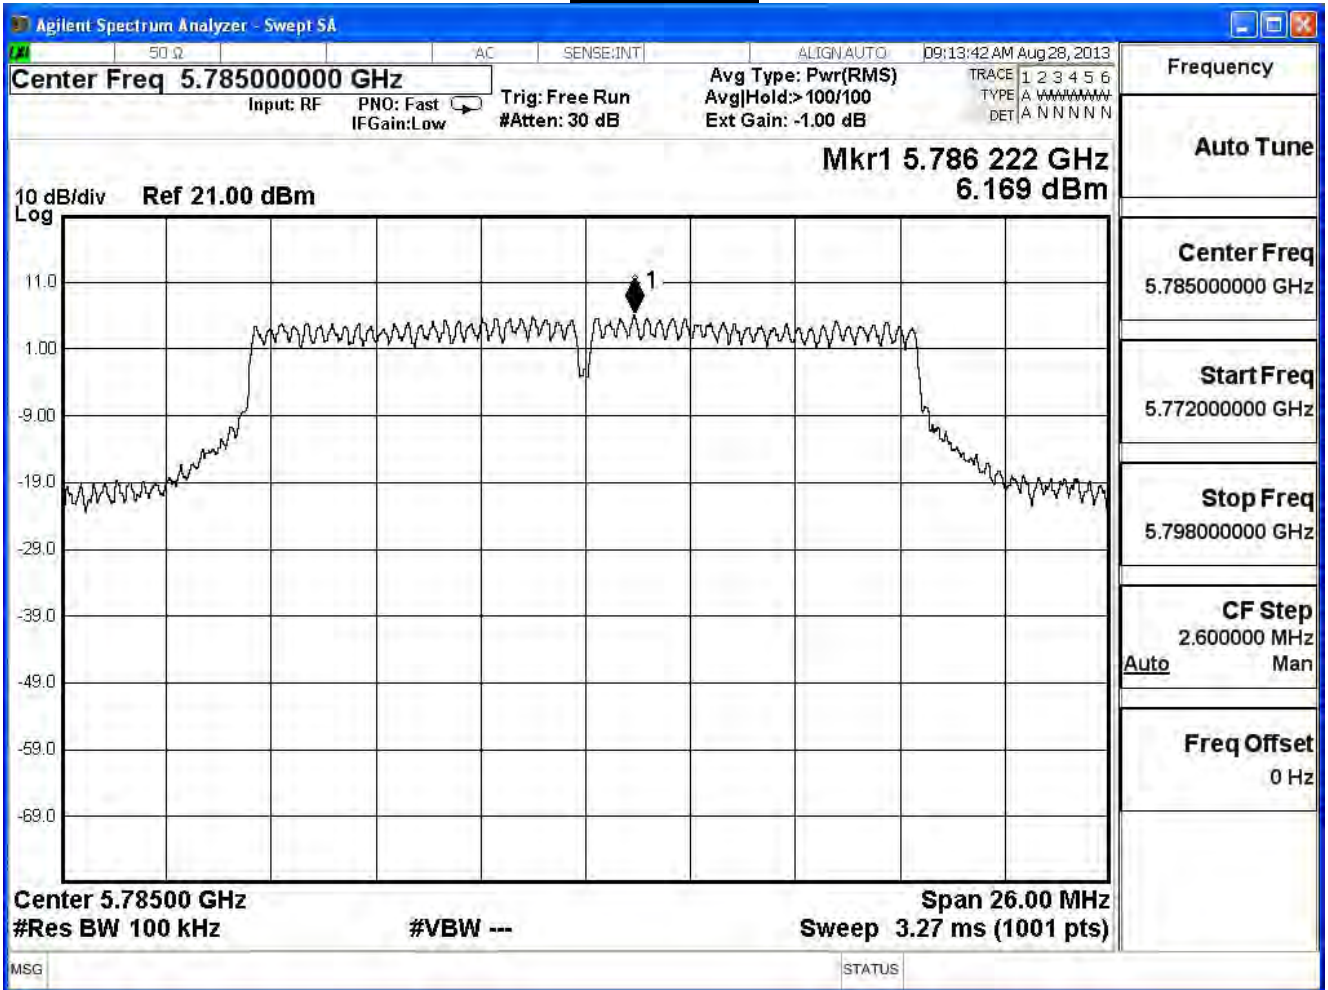

Channel 165

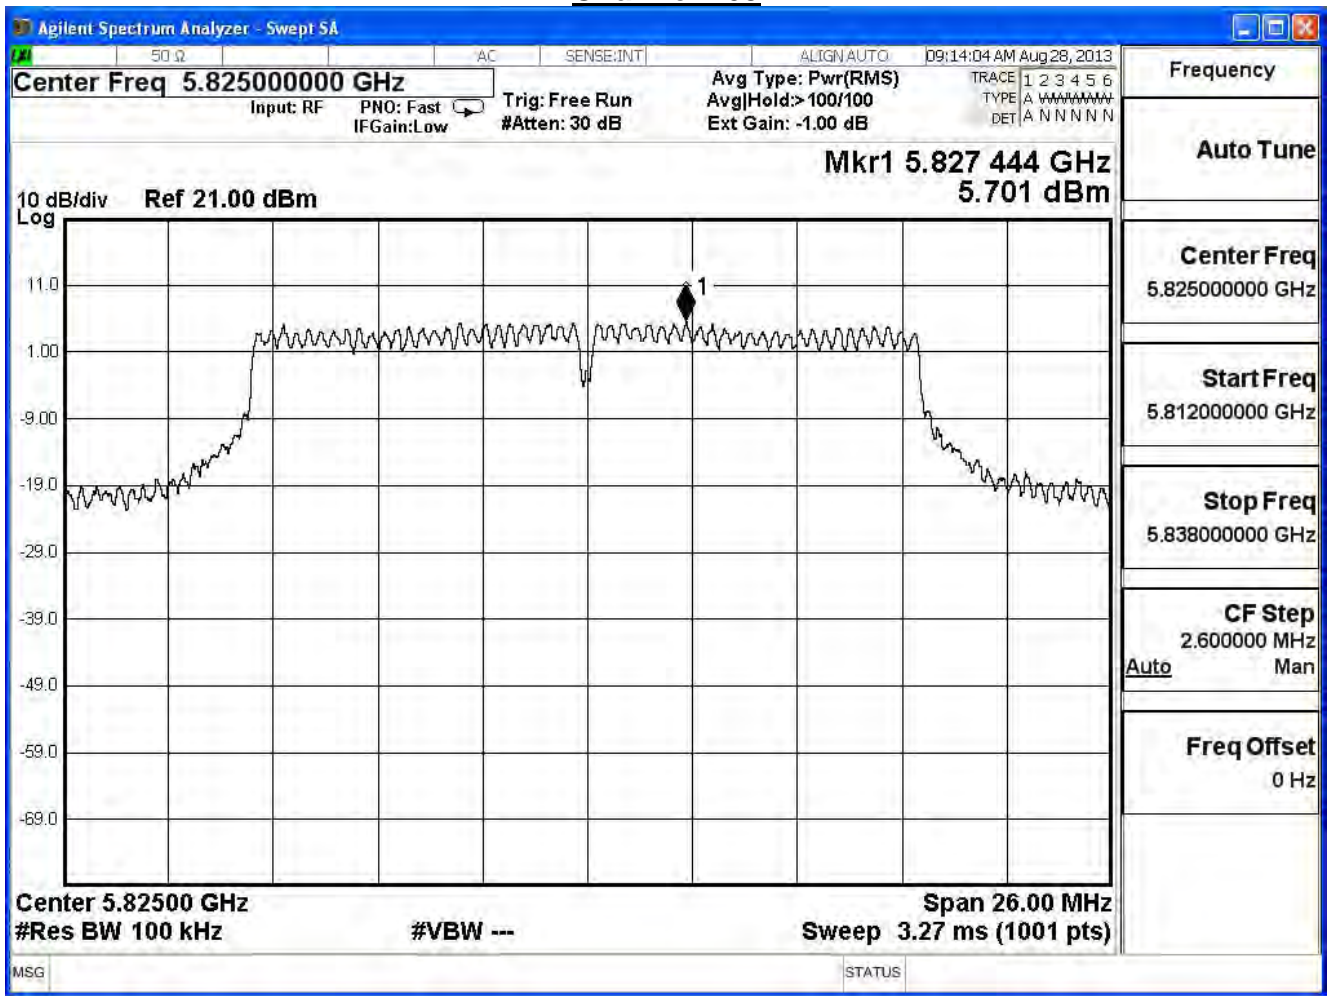

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11a (ANT0+1+2)				
Channel No.	Frequency (MHz)	Measure Level(dBm)	Limit (dBm)	Result
149	5745	-4.82	≤ 5.19	Pass
157	5785	-4.49	≤ 5.19	Pass
165	5825	-4.89	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3)+\max \text{ Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19 \text{ dBm}$



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE802.11n_20MHz_(ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
149	5745	4.50	-10.71	≤5.19	Pass
157	5785	5.17	-10.03	≤5.19	Pass
165	5825	4.69	-10.52	≤5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$


Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 149

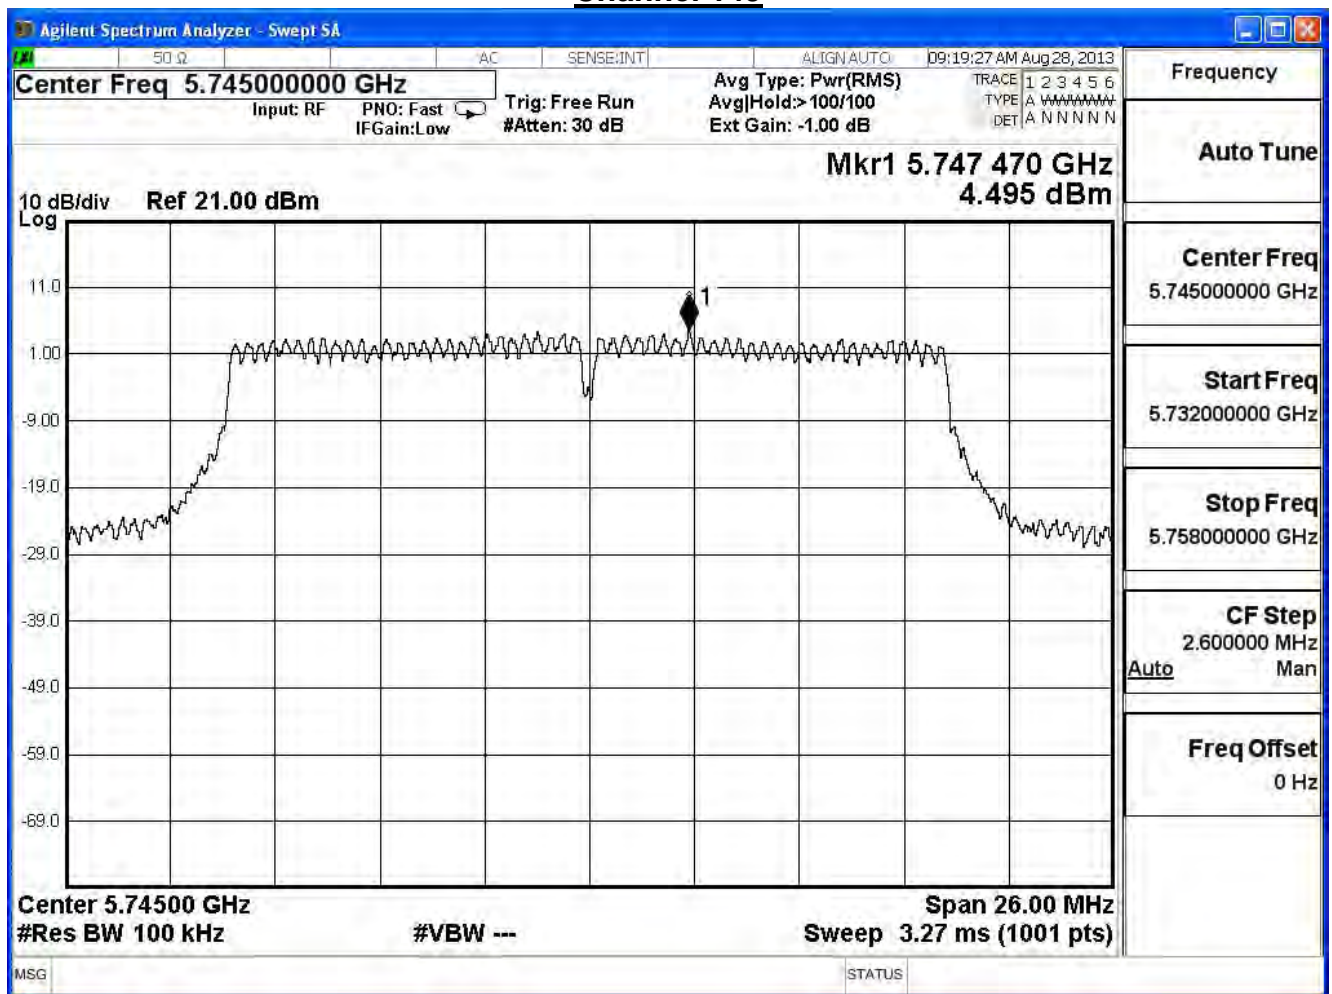



Channel 165

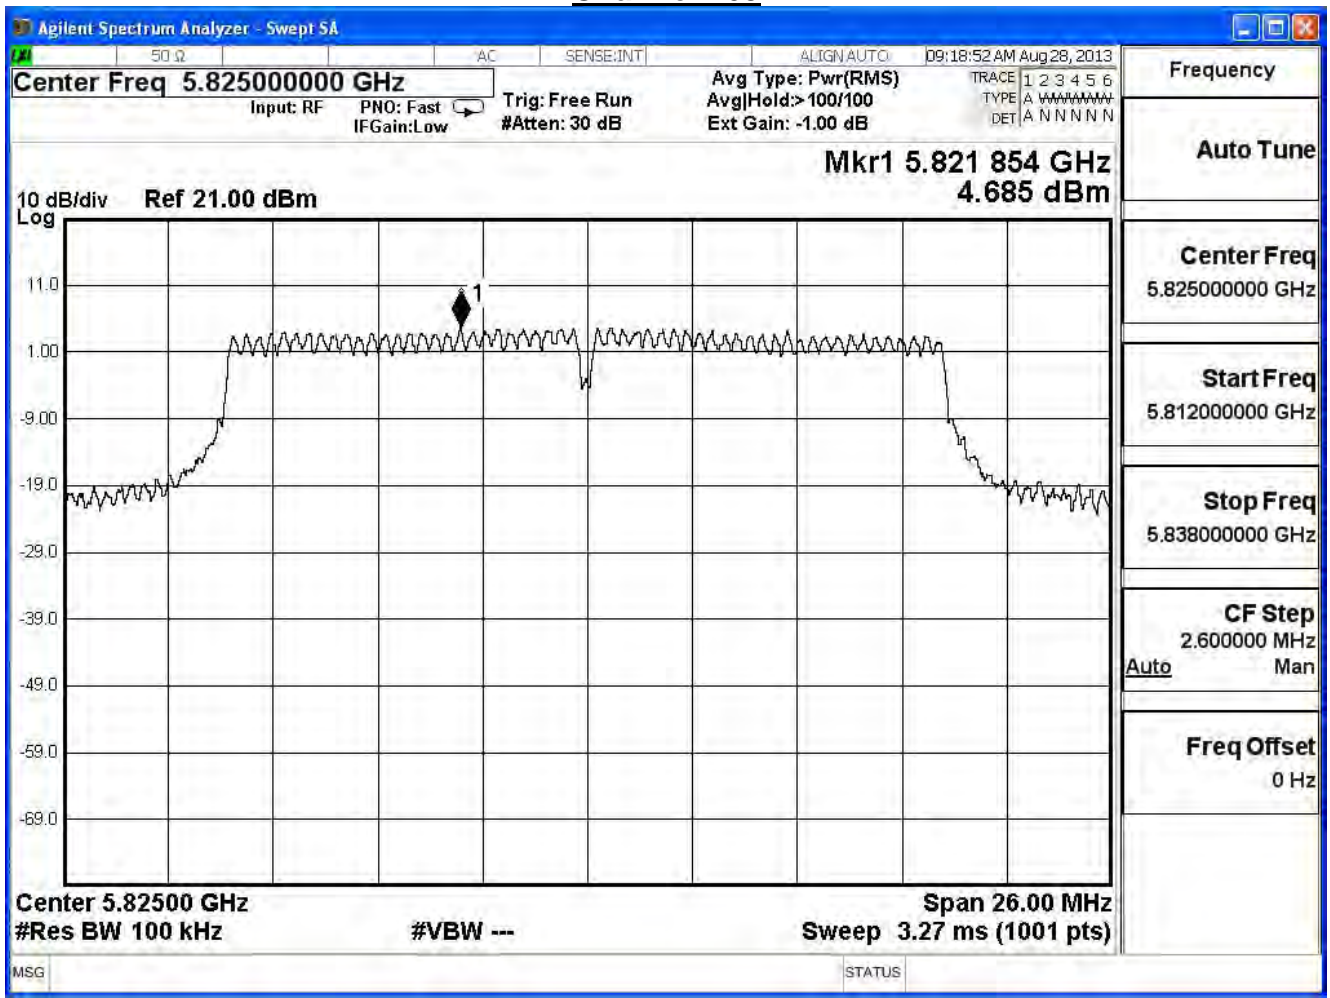

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE802.11n_20MHz_(ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	4.40	-10.80	≤5.19	Pass
157	5785	5.24	-9.96	≤5.19	Pass
165	5825	4.90	-10.30	≤5.19	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$


### Channel 149

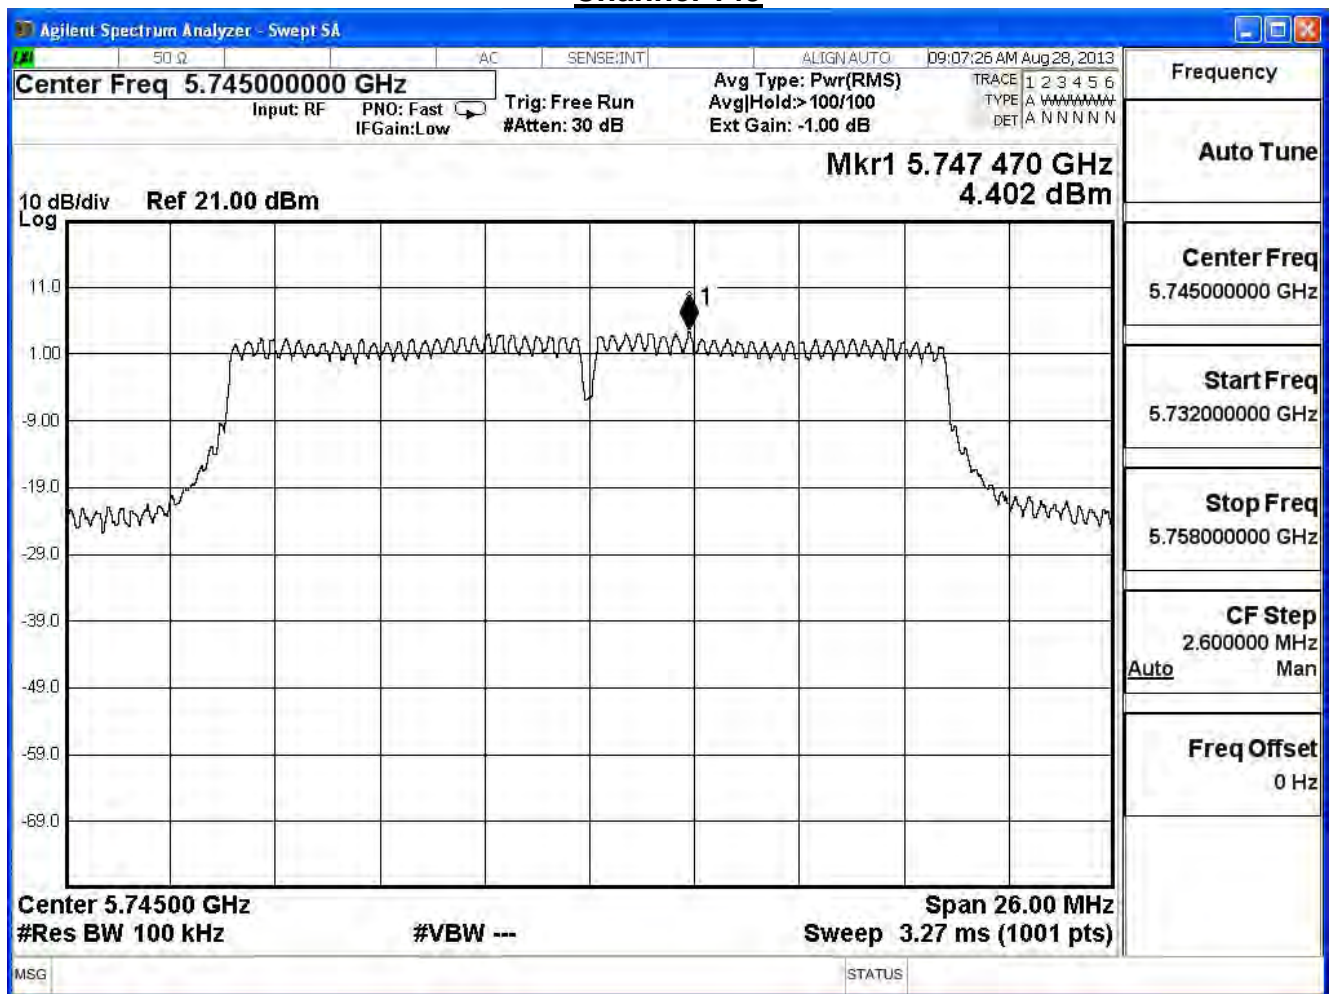

Channel 157

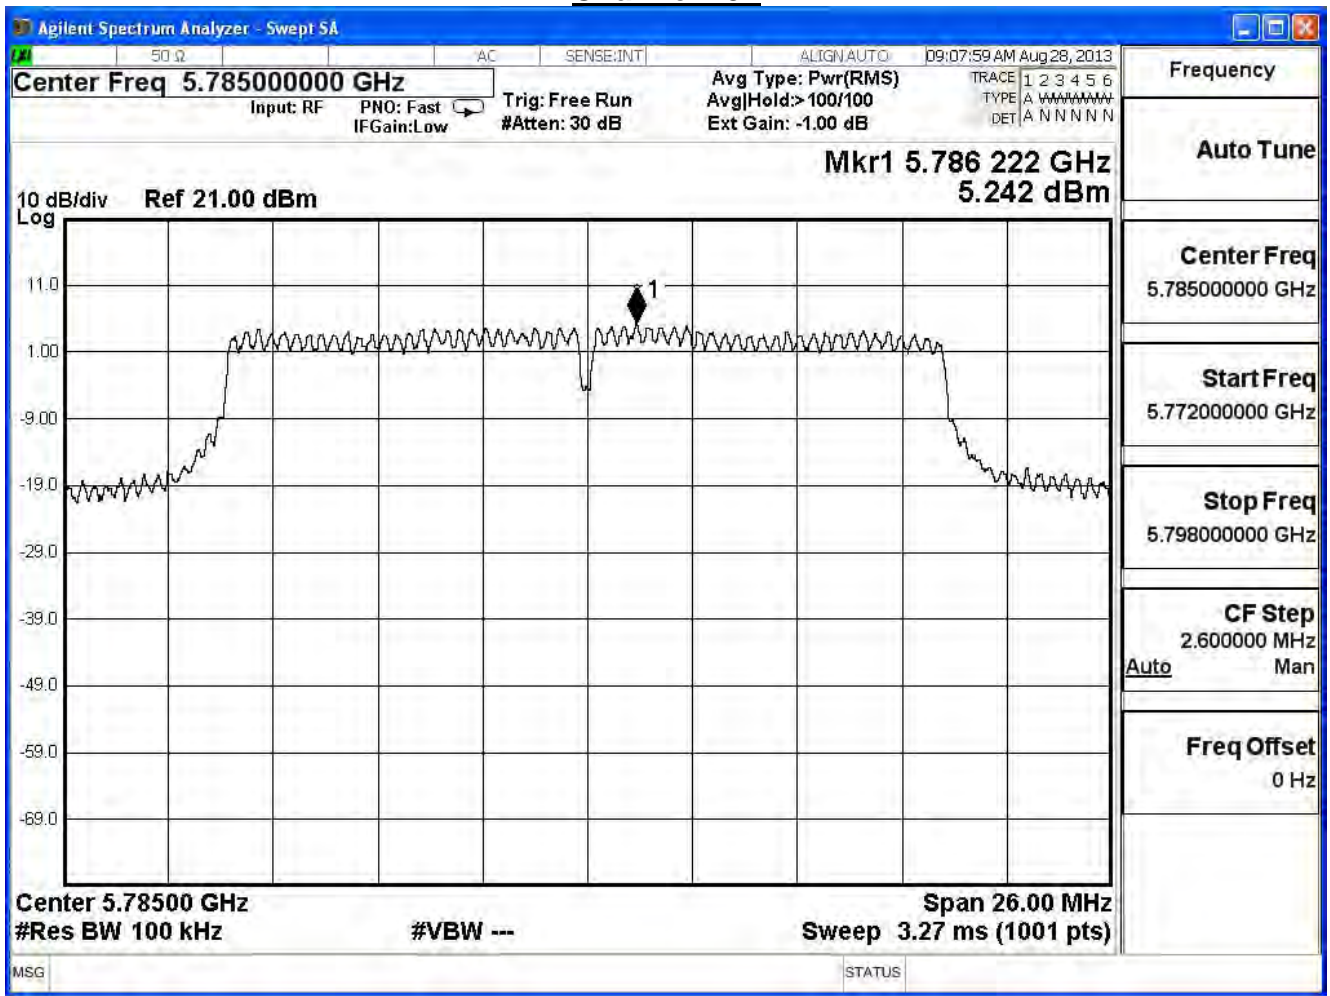

Channel 165

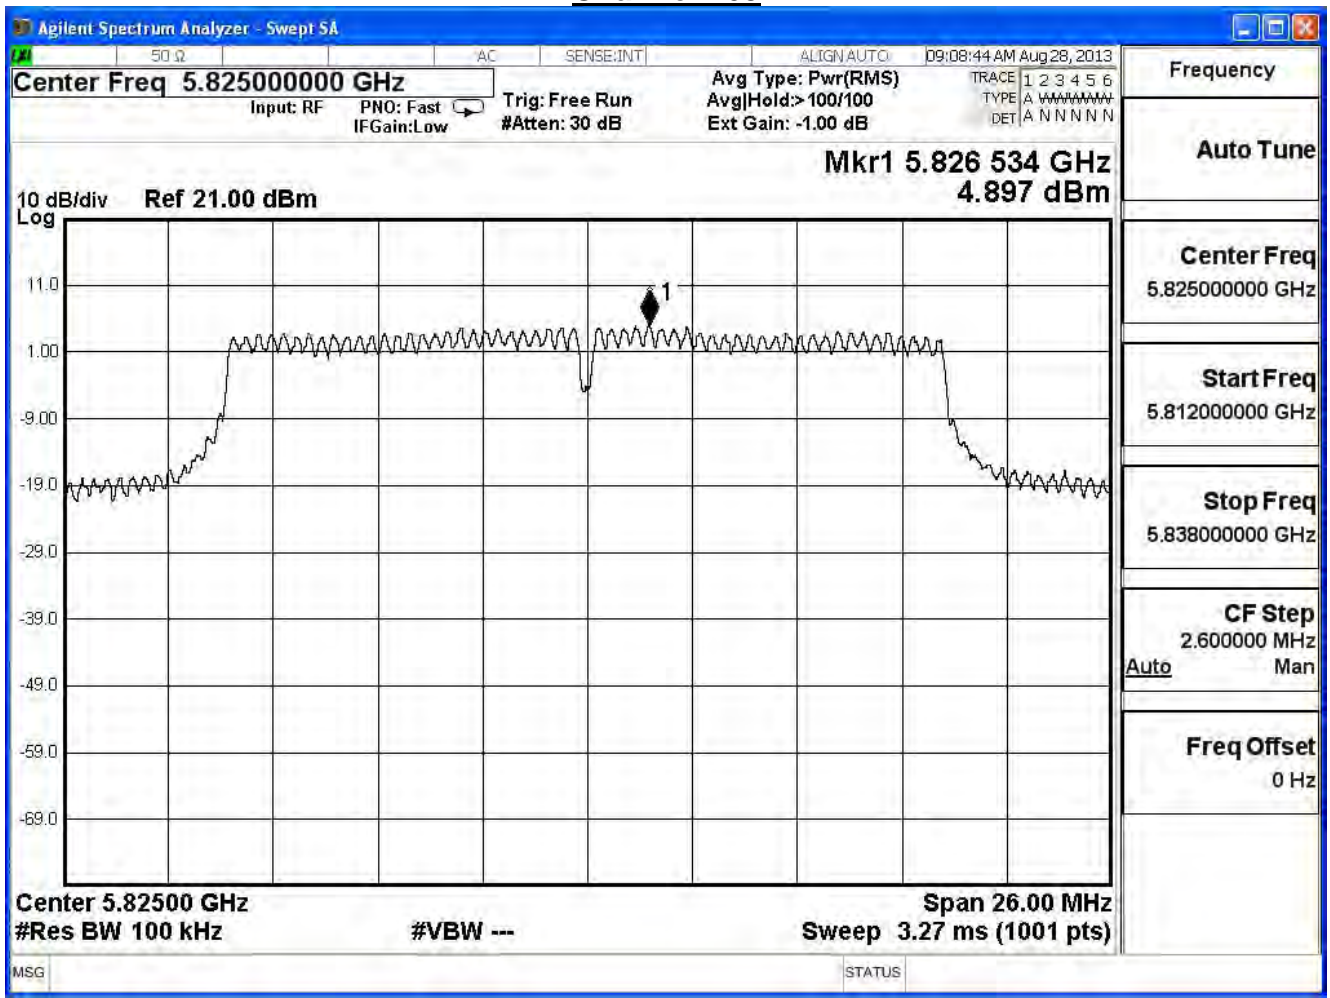

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE802.11n_20MHz_(ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.02	-10.18	≤5.19	Pass
157	5785	5.50	-9.70	≤5.19	Pass
165	5825	5.30	-9.90	≤5.19	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 149

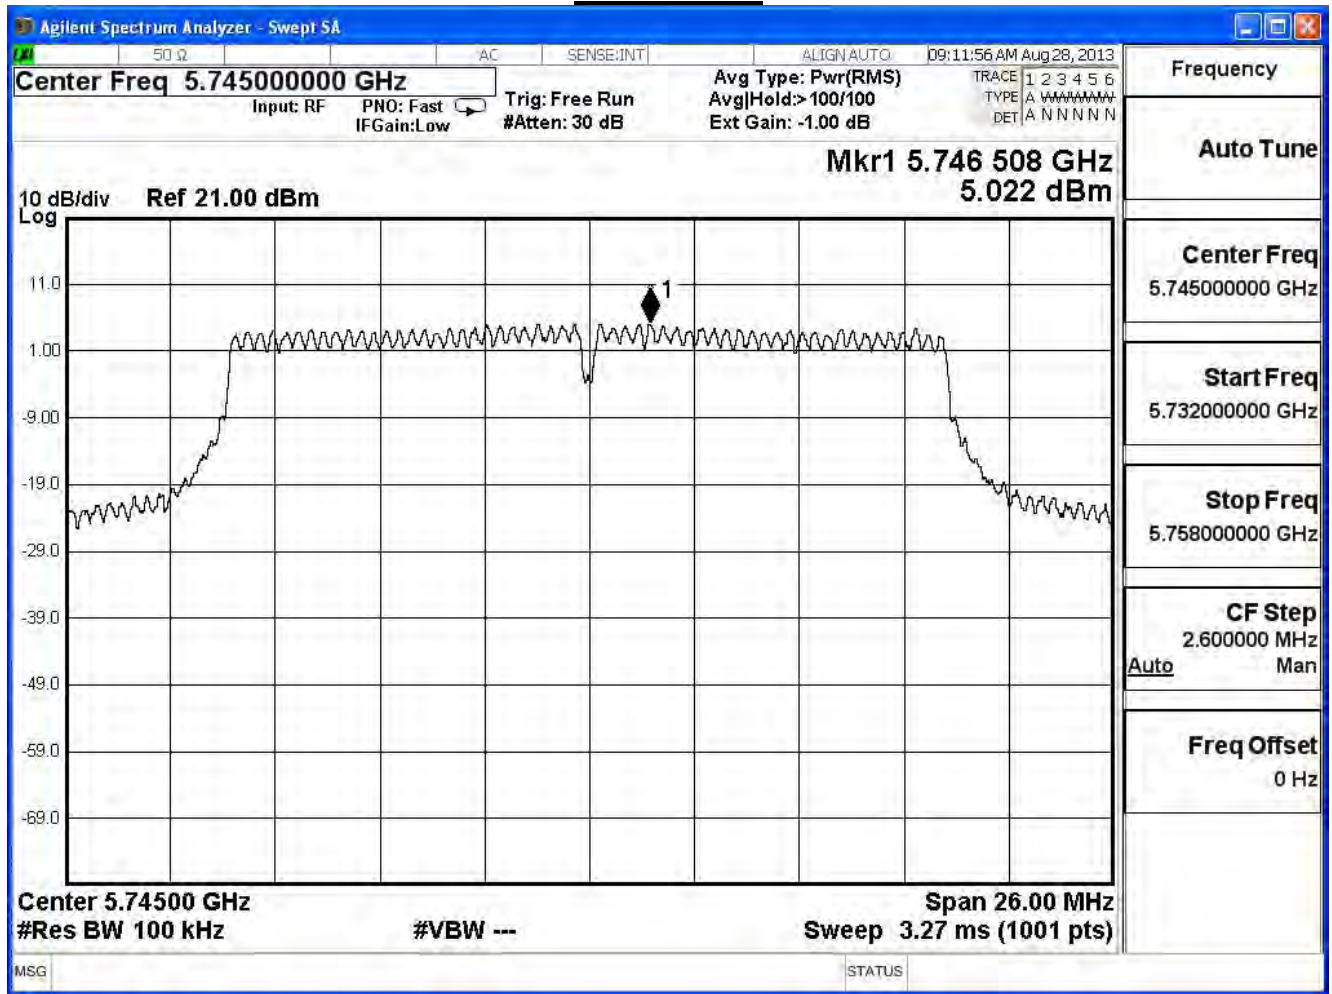


Channel 157

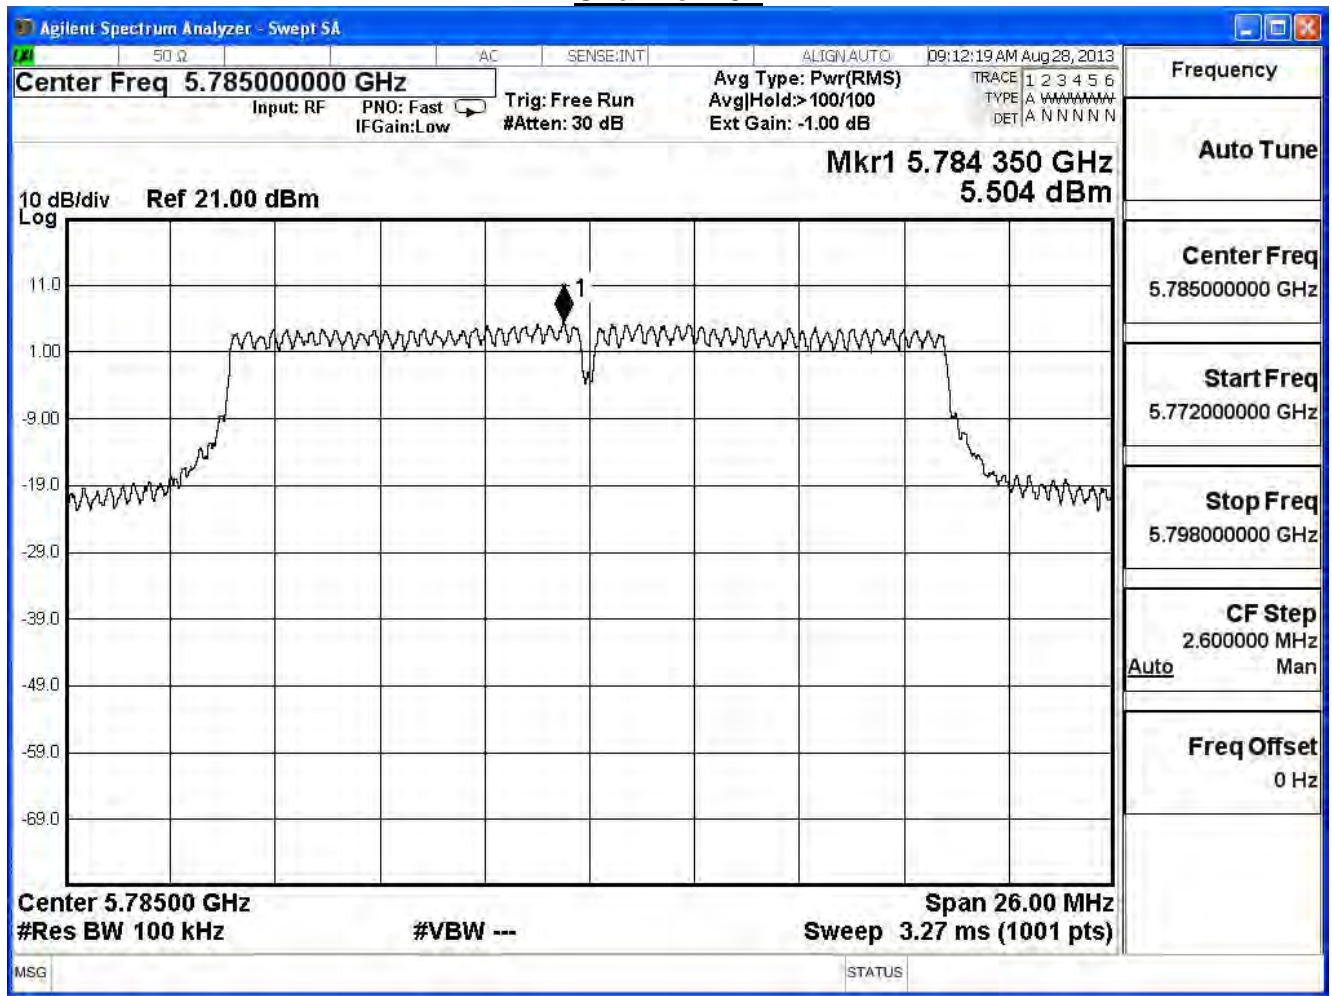



Channel 165

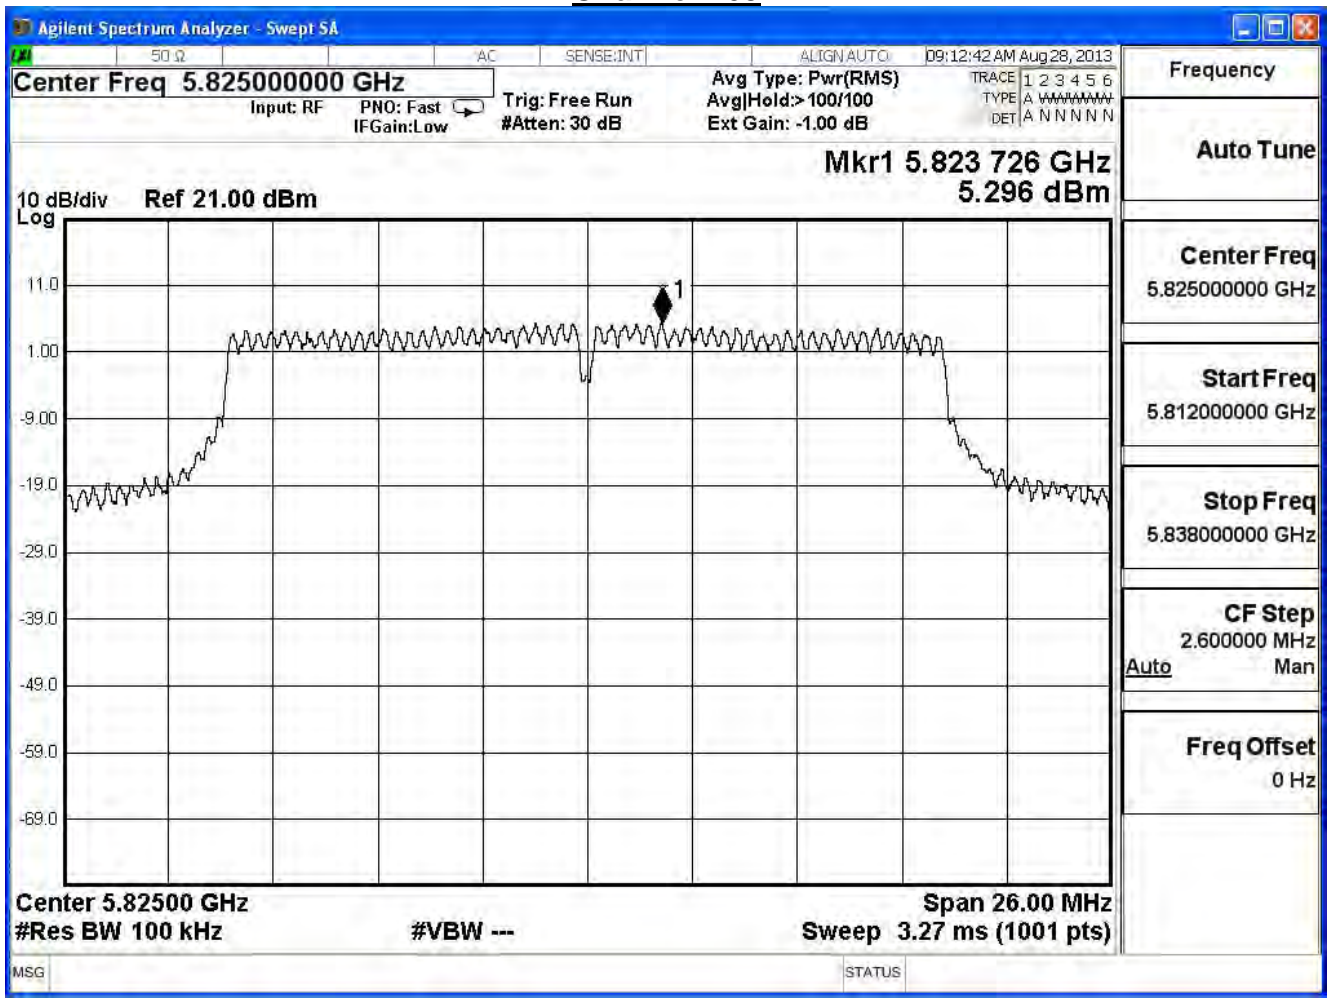

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n 20MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	-5.78	≤ 5.19	Pass
157	5785	-5.12	≤ 5.19	Pass
165	5825	-5.46	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
151	5755	0.59	-14.61	≤ 5.19	Pass
159	5795	1.31	-13.89	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 151

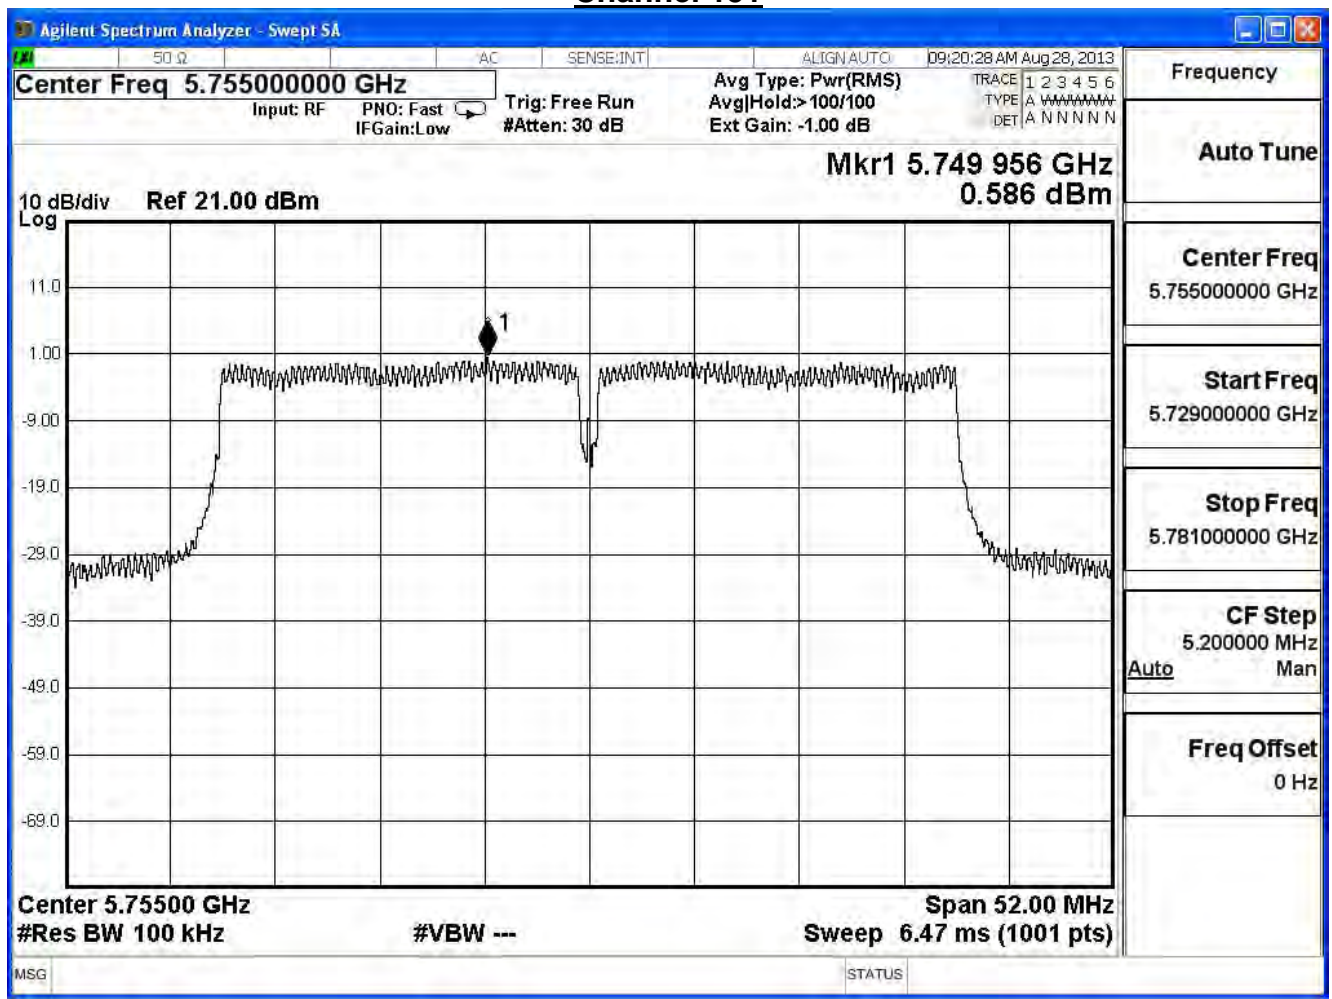



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	0.45	-14.75	≤ 5.19	Pass
159	5795	1.50	-13.70	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 151

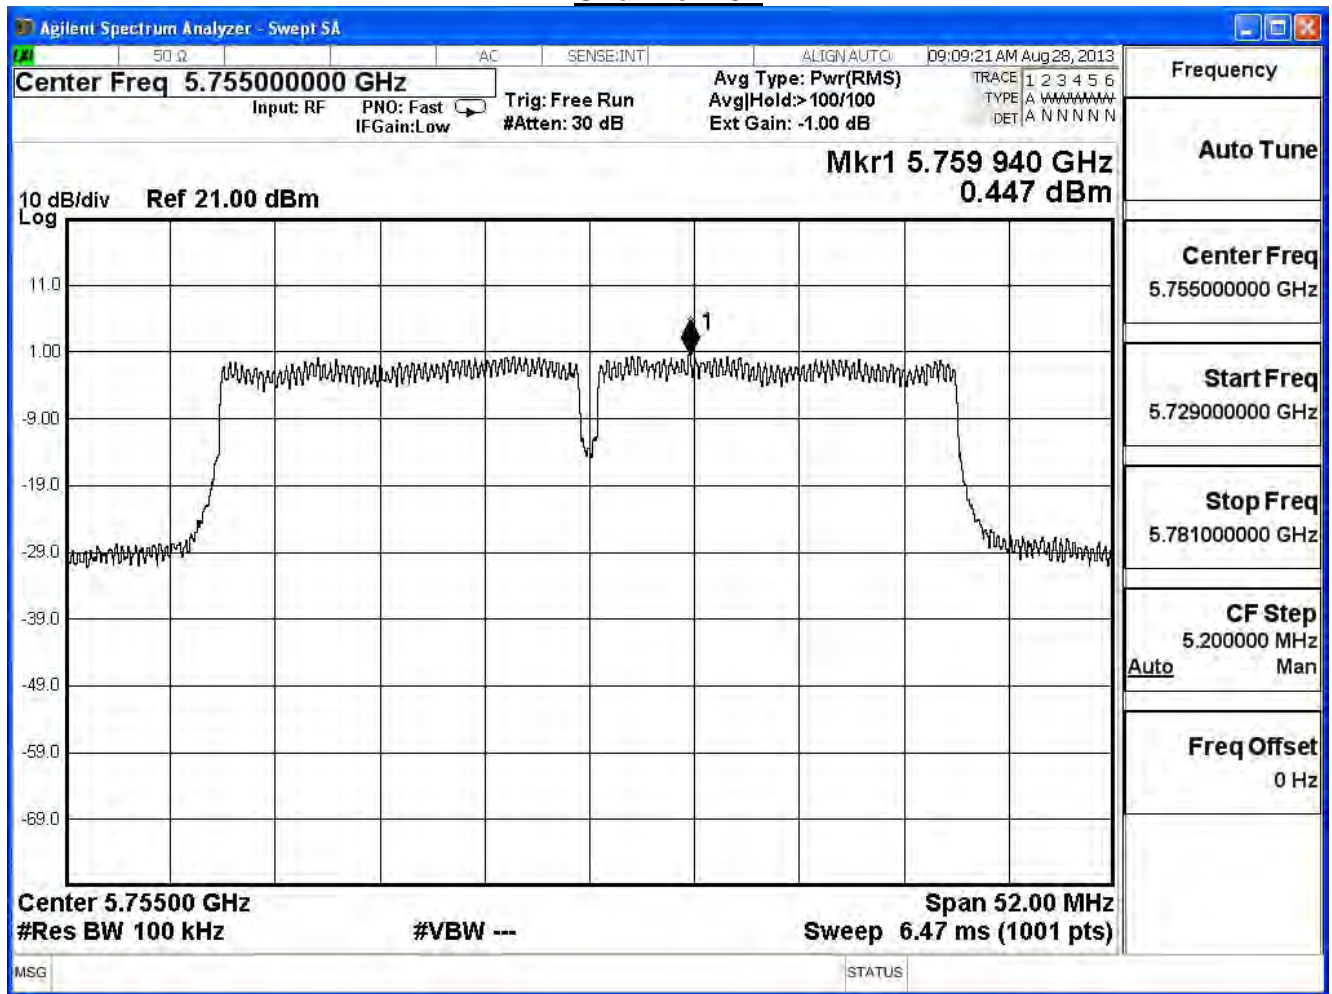



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	0.73	-14.47	≤ 5.19	Pass
159	5795	1.91	-13.29	≤ 5.19	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 151

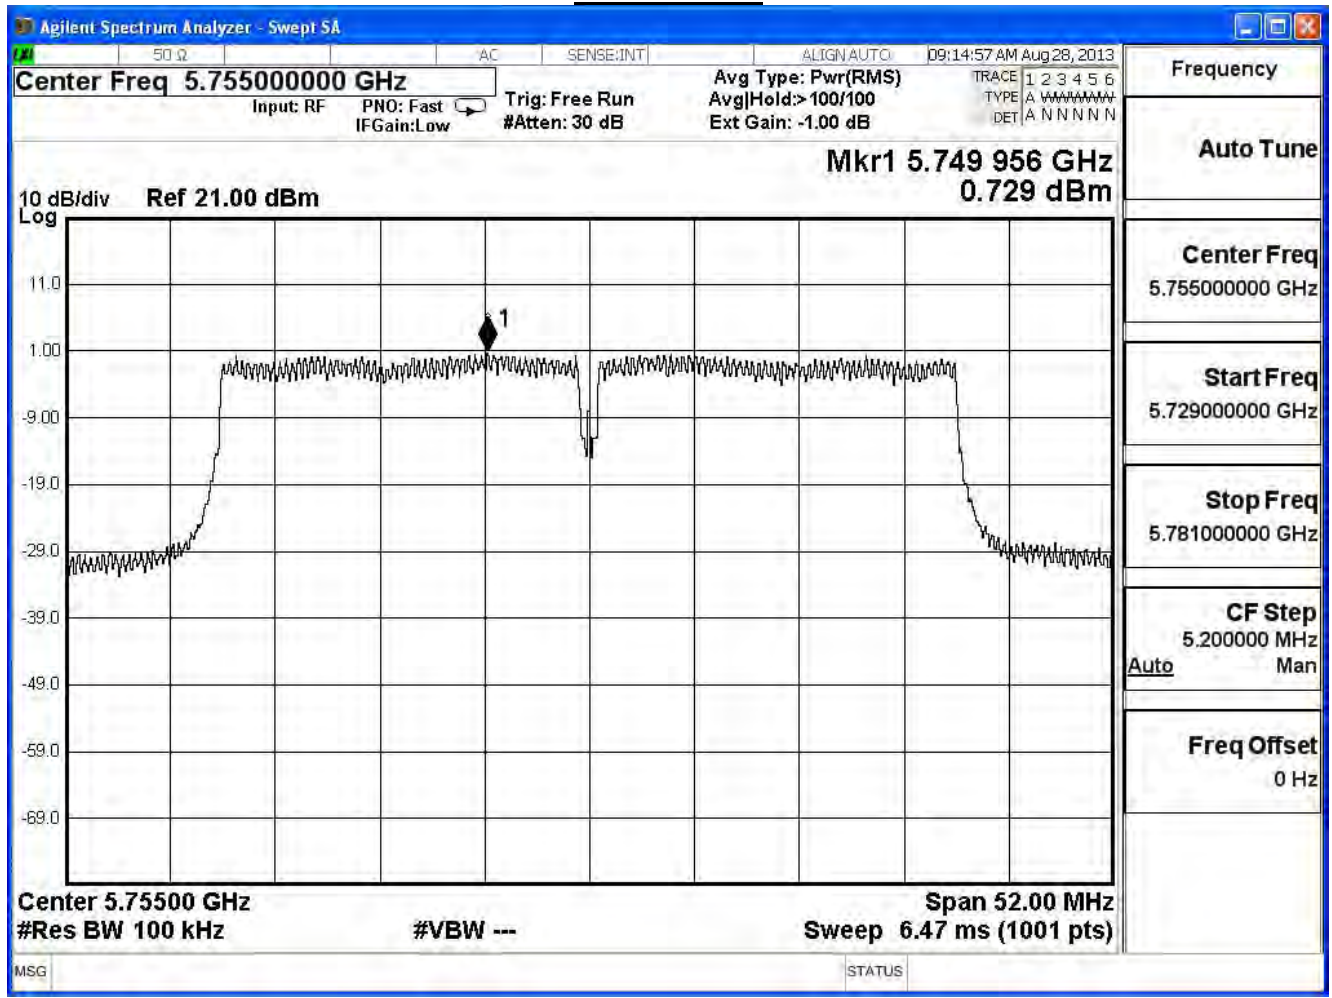

Channel 159

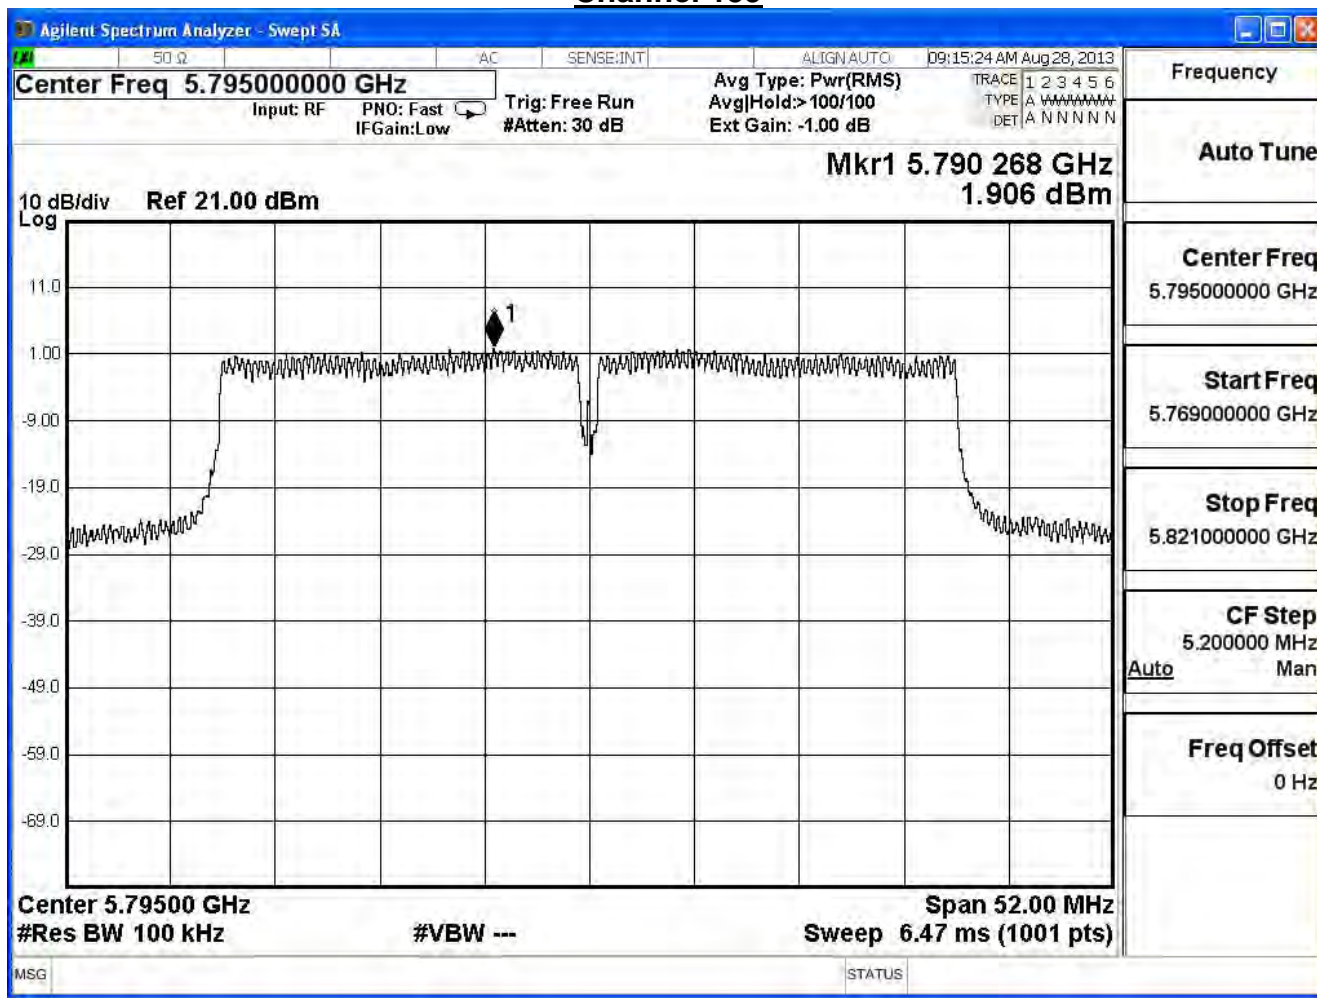



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	-9.84	$\leq 5.19$	Pass
159	5795	-8.85	$\leq 5.19$	Pass

Note:

Total Gain :  $10\log(3)+\text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-5.32	-20.52	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 155

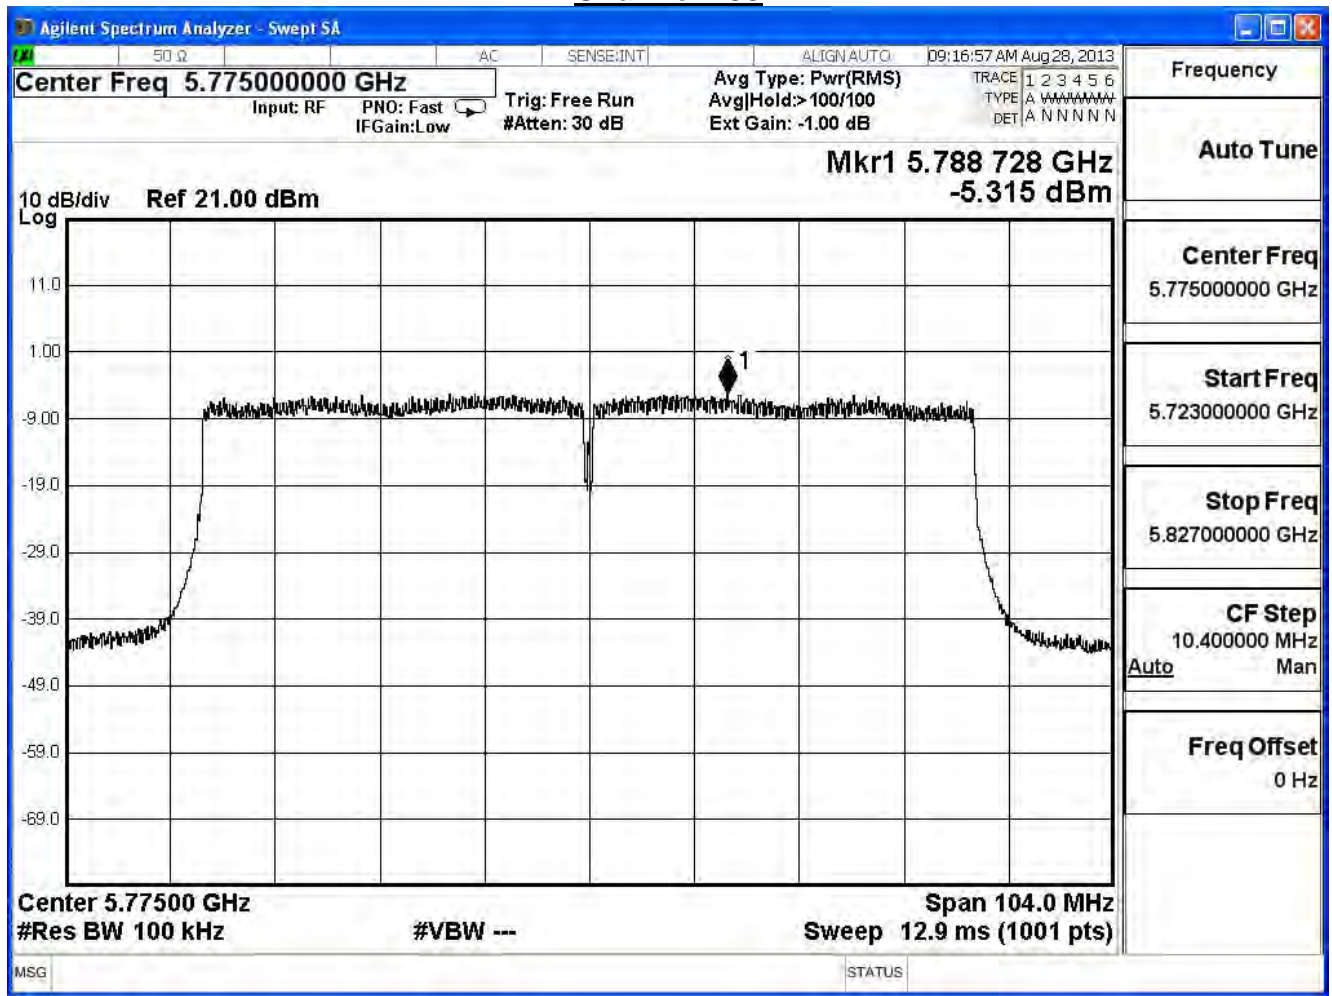

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-4.59	-19.79	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 155

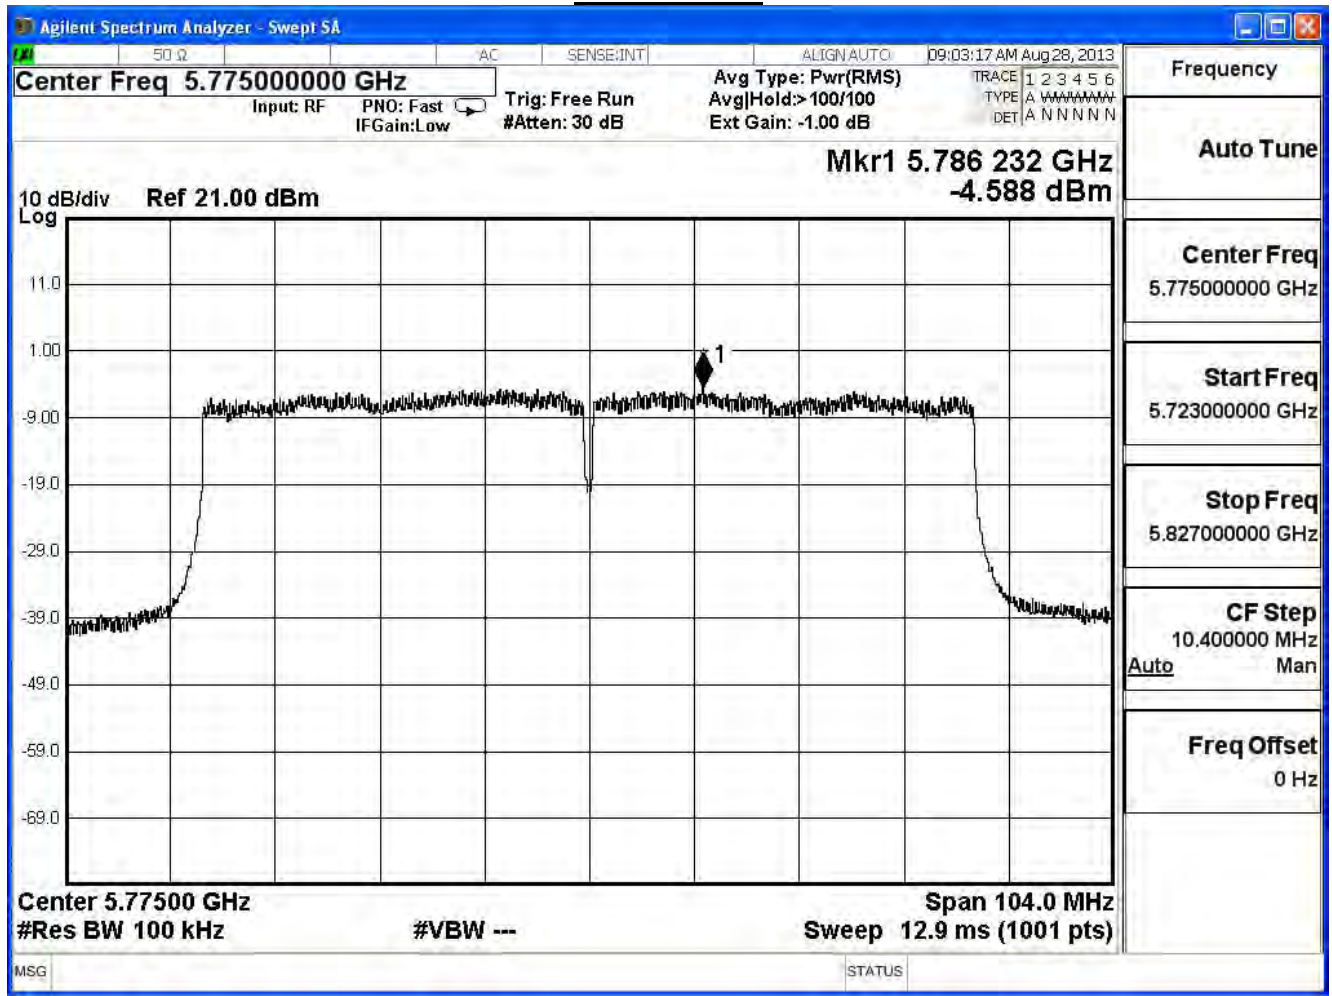

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-3.99	-19.19	≤ 5.19	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$

### Channel 155

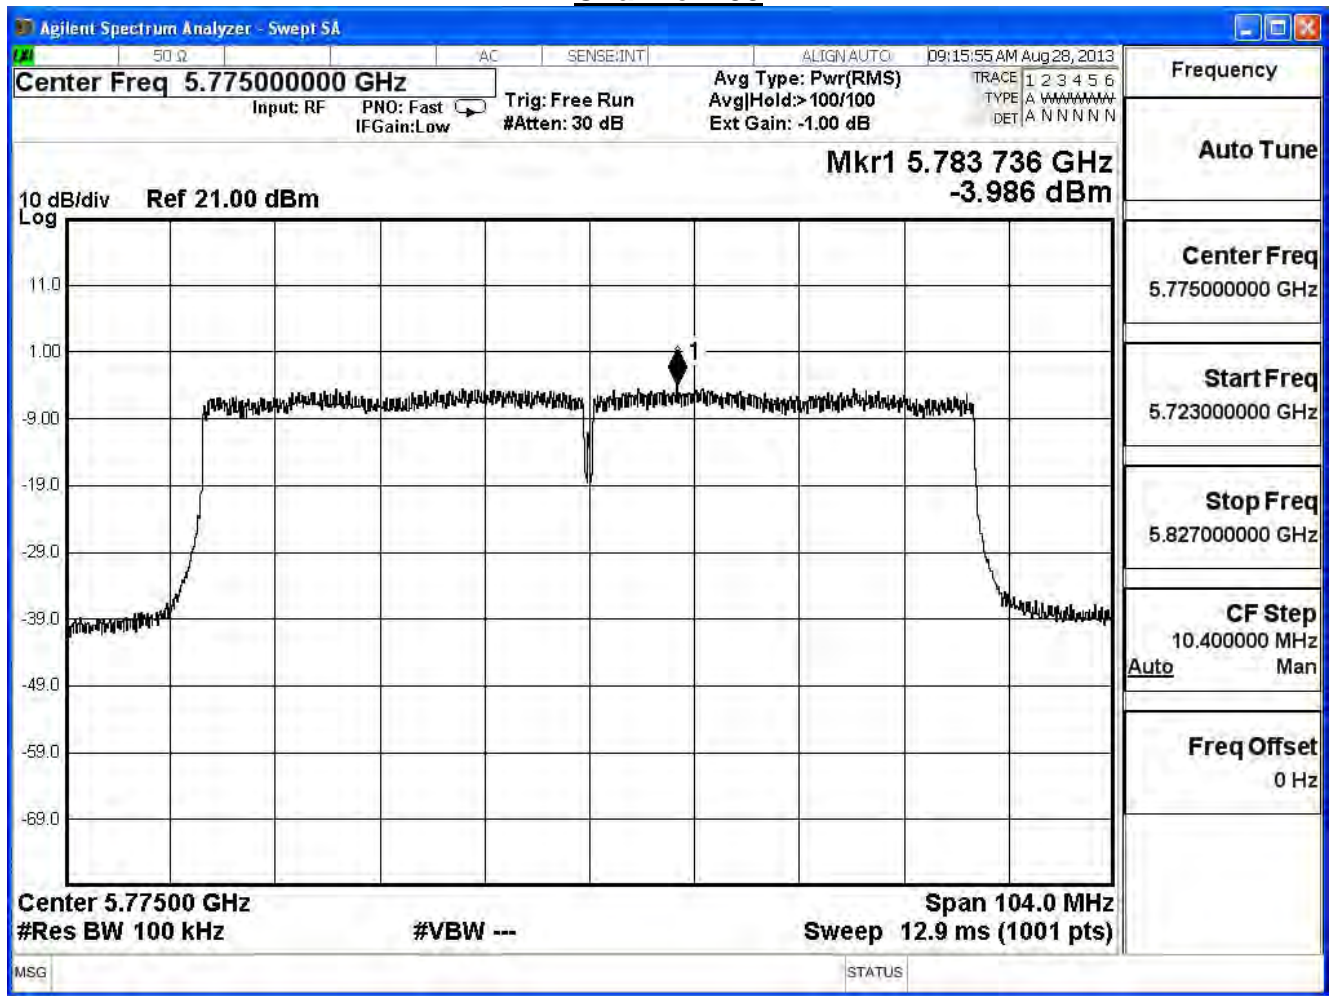

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11ac\_80MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-15.02	$\leq 5.19$	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 8.81\text{dBi}$

Required Limit =  $8\text{dBm} - (8.81\text{dBi} - 6\text{dBi}) = 5.19\text{ dBm}$


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE 802.11b					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	13.17	-2.03	≤ 8	Pass
6	2437	13.18	-2.02	≤ 8	Pass
11	2462	12.63	-2.57	≤ 8	Pass


### Channel 1

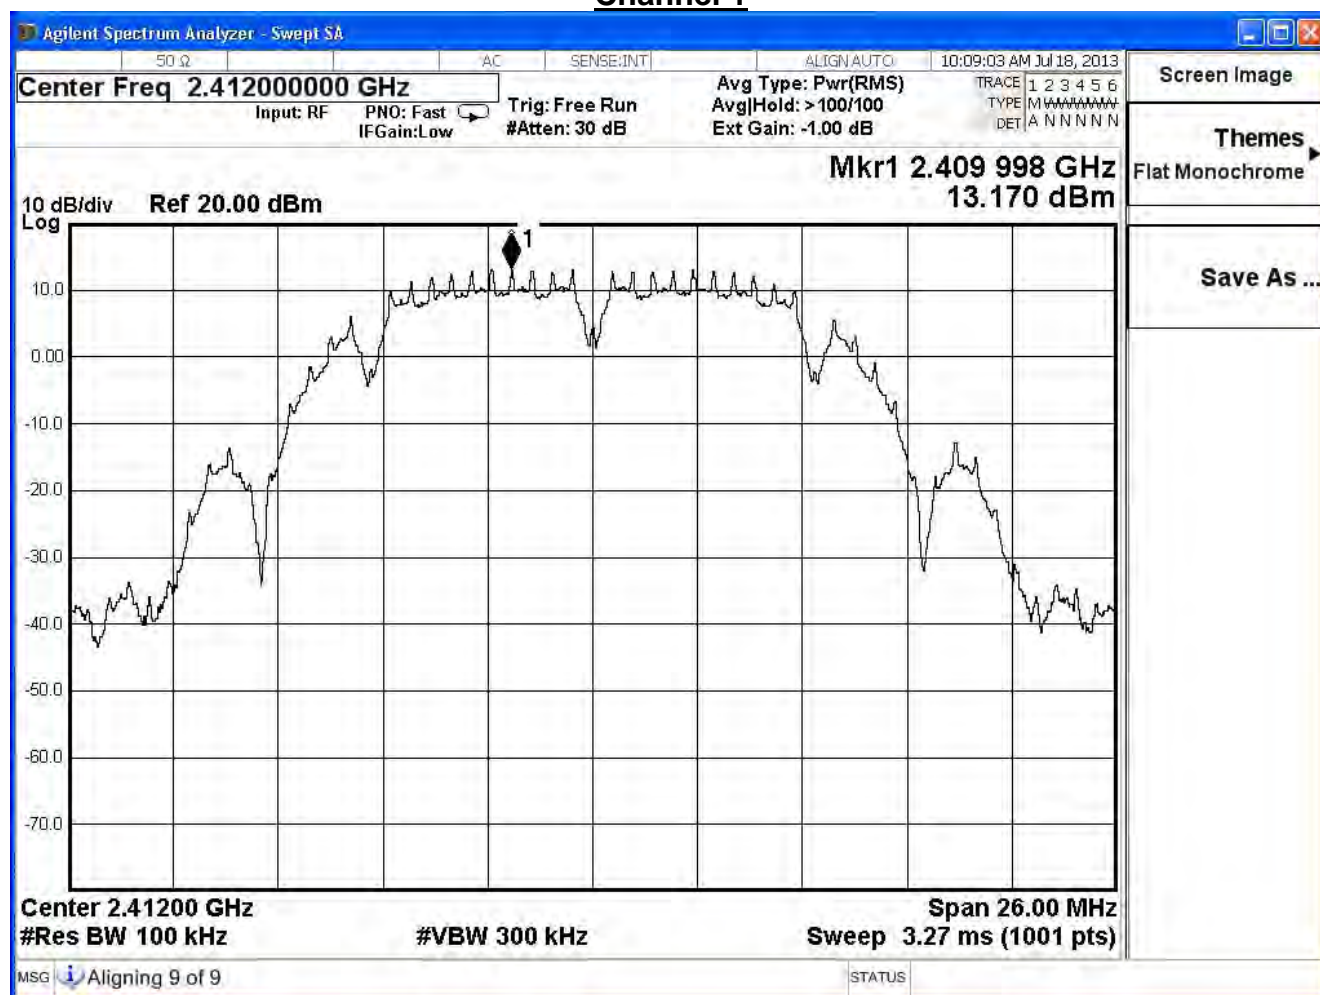

Channel 6

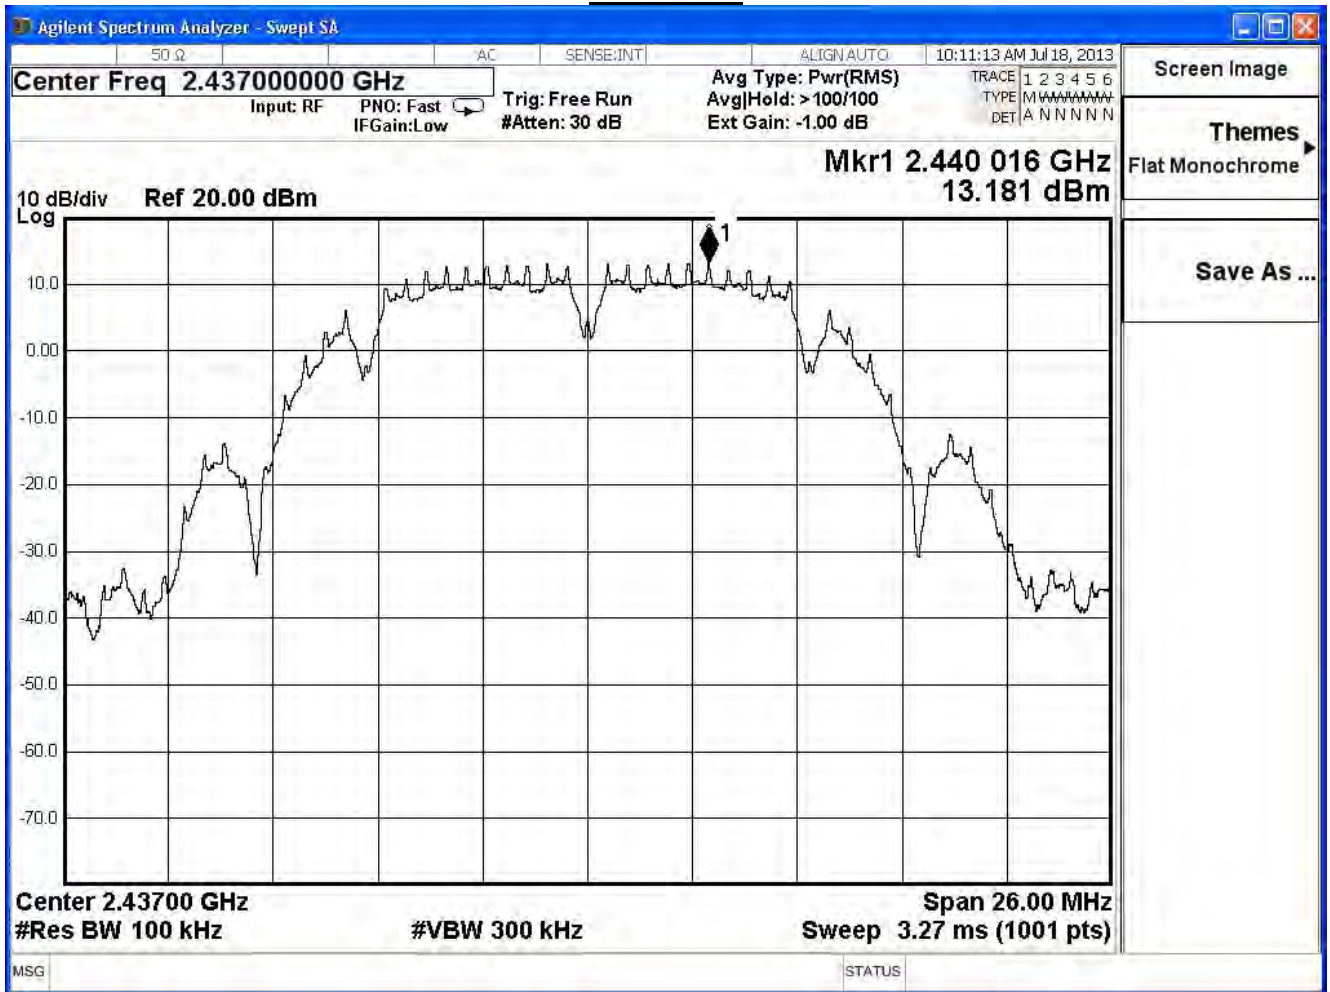

Channel 11

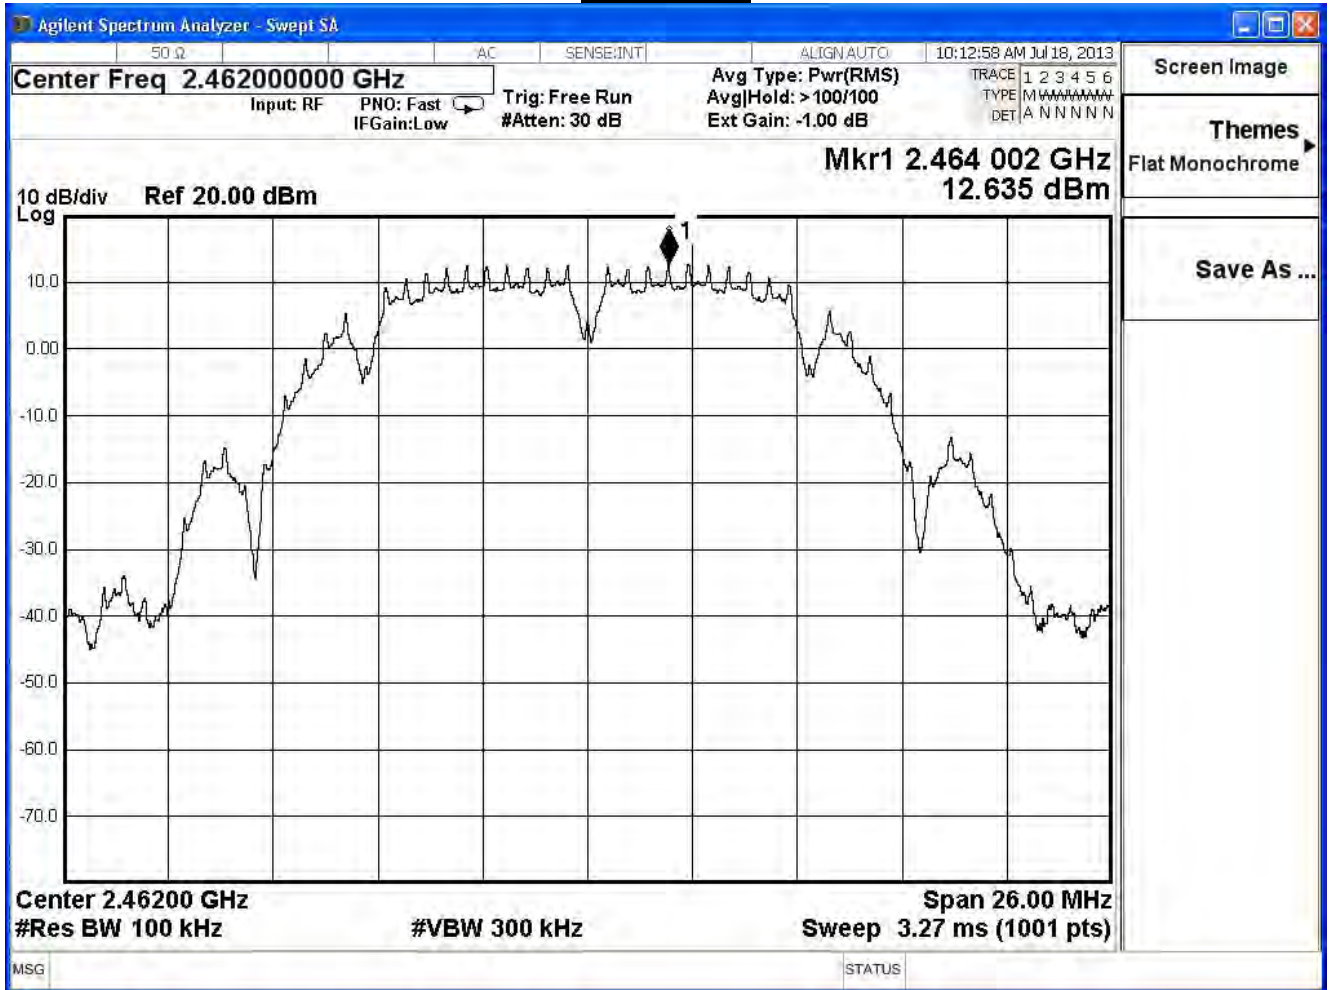





Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE 802.11g					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	9.27	-5.93	≤ 8	Pass
6	2437	14.20	-1.00	≤ 8	Pass
11	2462	7.07	-8.13	≤ 8	Pass

### Channel 1

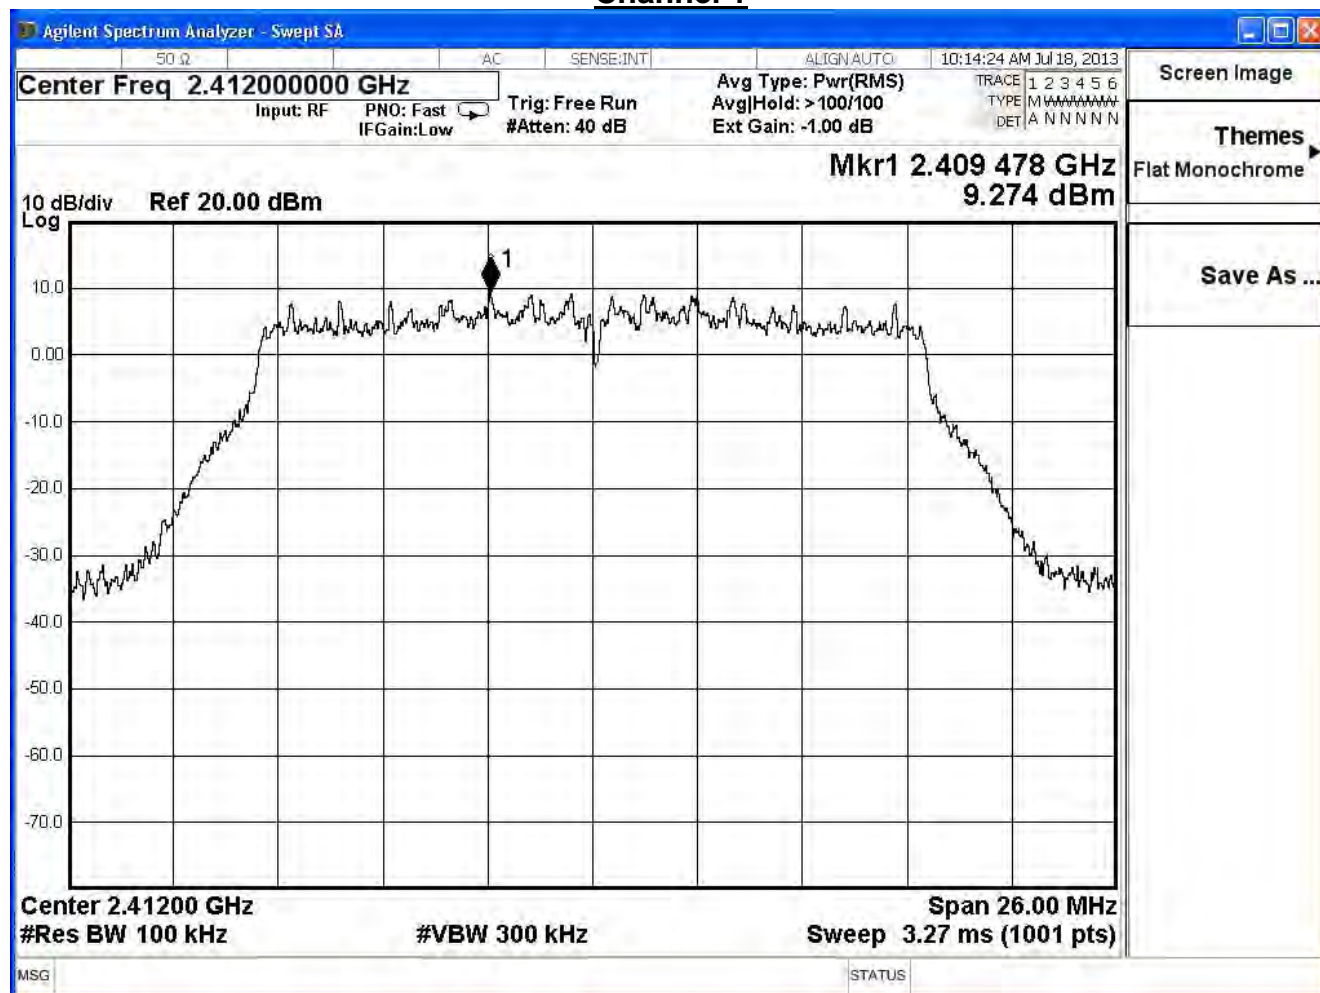

Channel 6

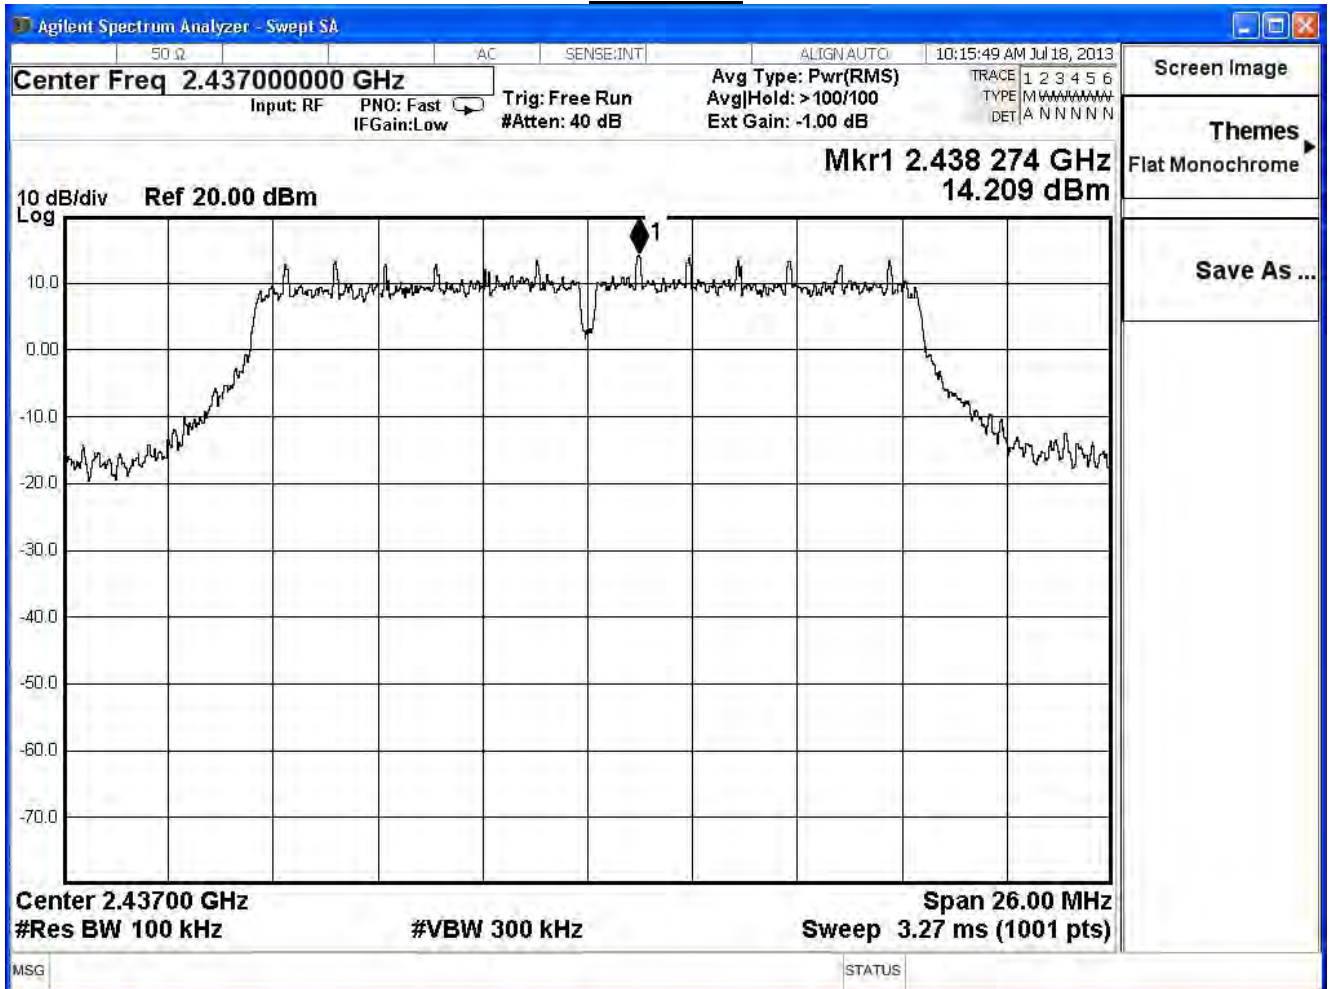



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	7.80	-7.40	≤7.32	Pass
6	2437	12.82	-2.38	≤7.32	Pass
11	2462	6.29	-8.91	≤7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$

### Channel 1

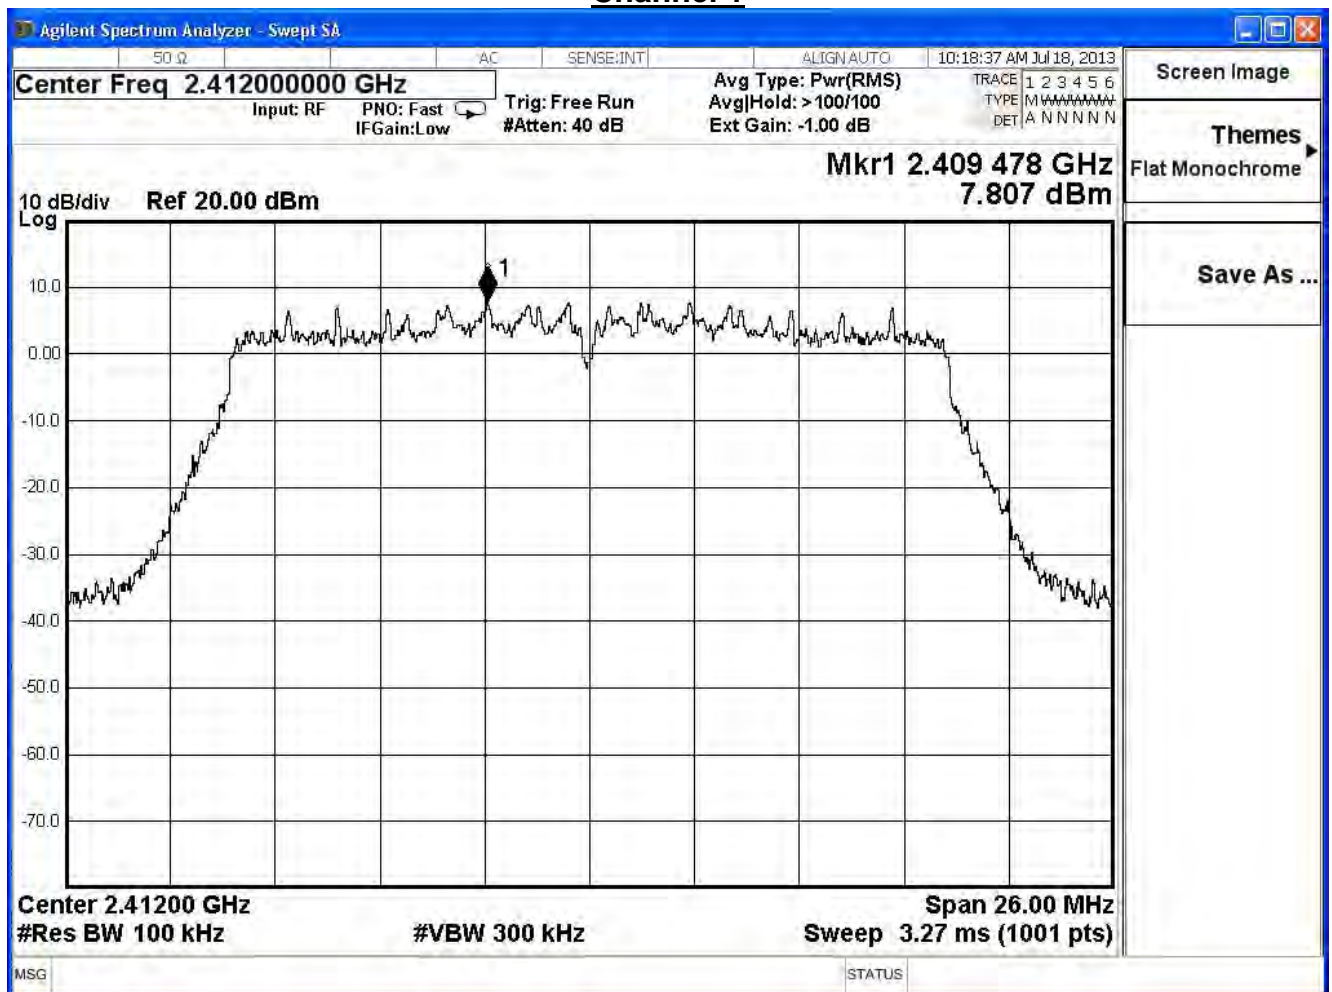

Channel 6

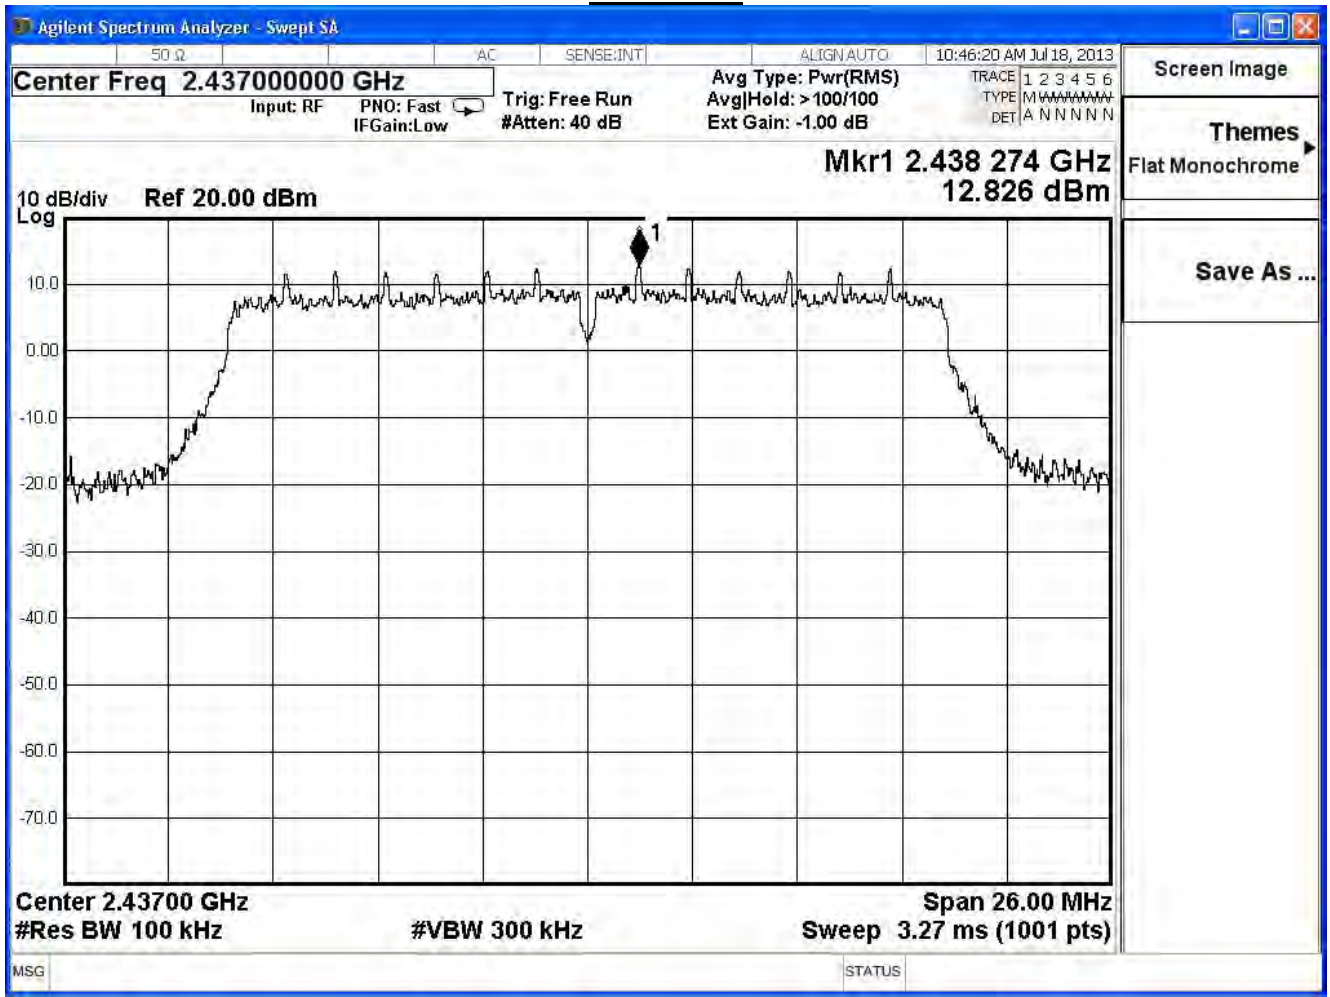



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	7.19	-8.01	≤ 7.32	Pass
6	2437	12.00	-3.20	≤ 7.32	Pass
11	2462	6.47	-8.73	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$

### Channel 1

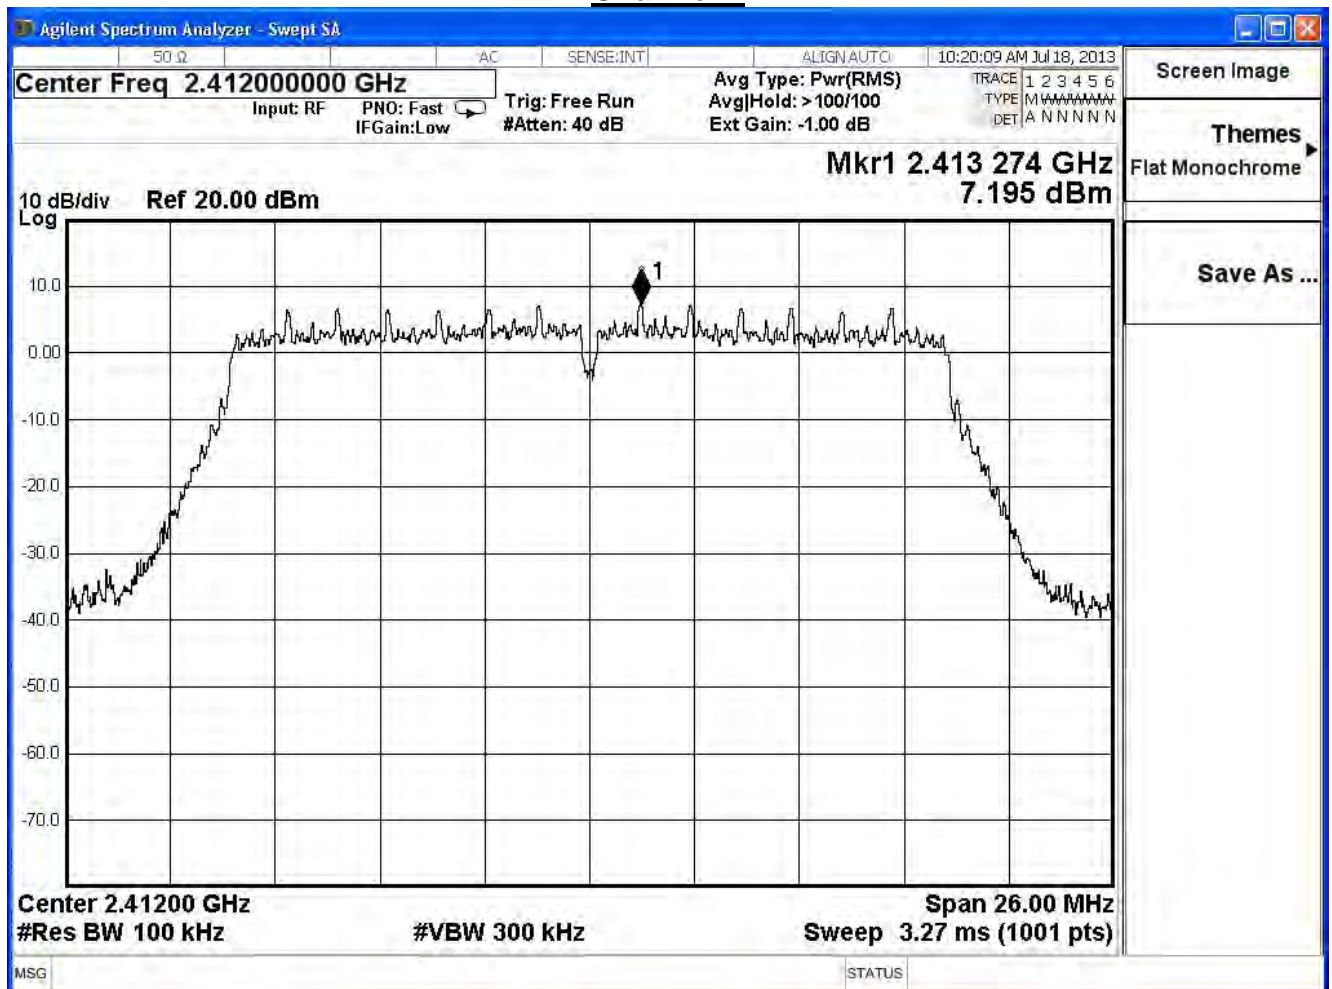


Channel 6

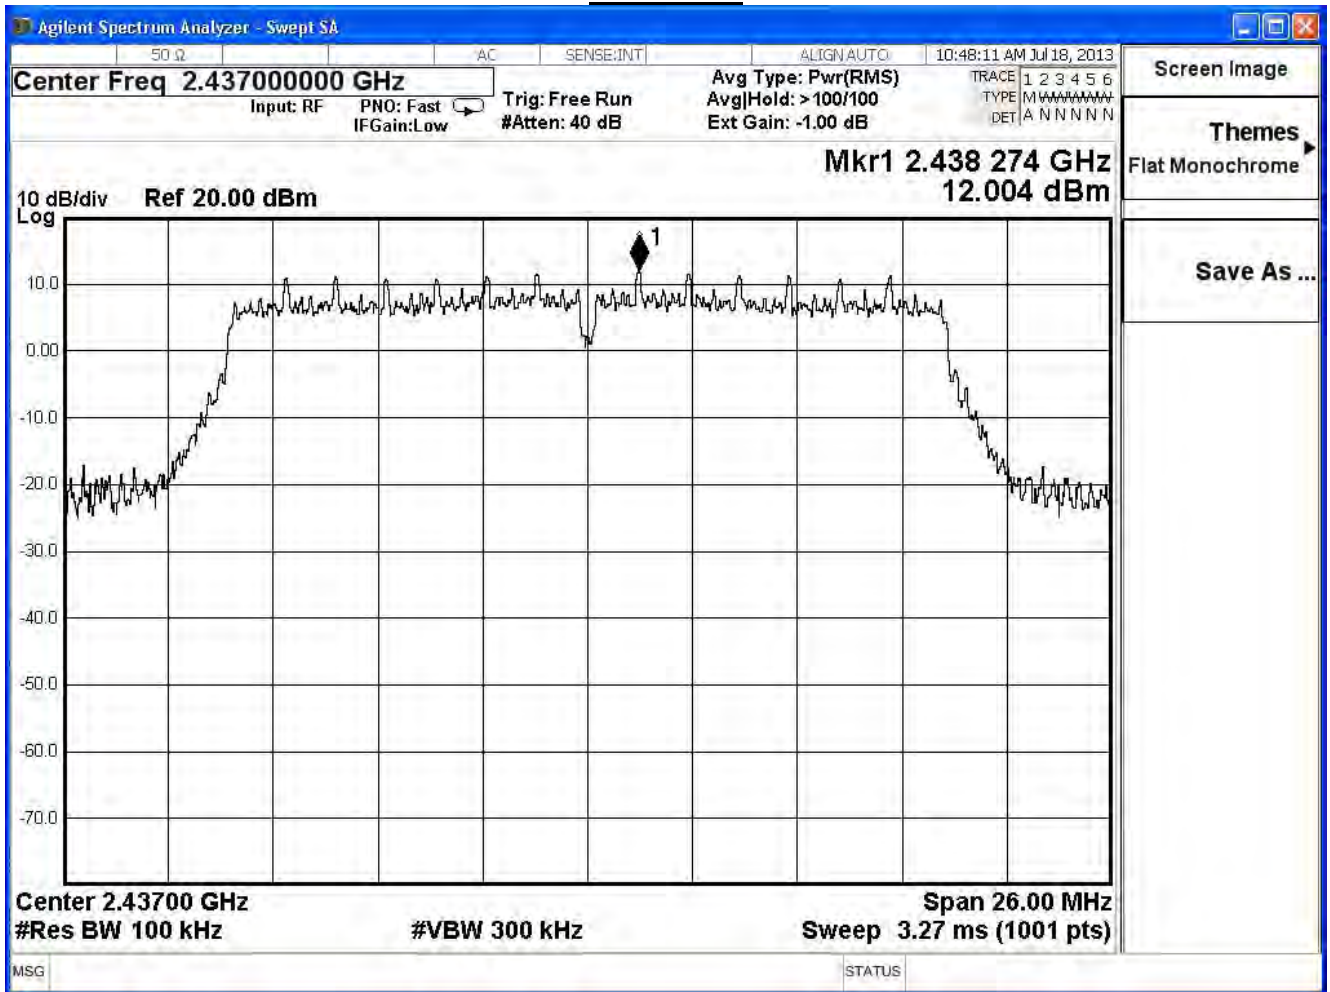



Channel 11

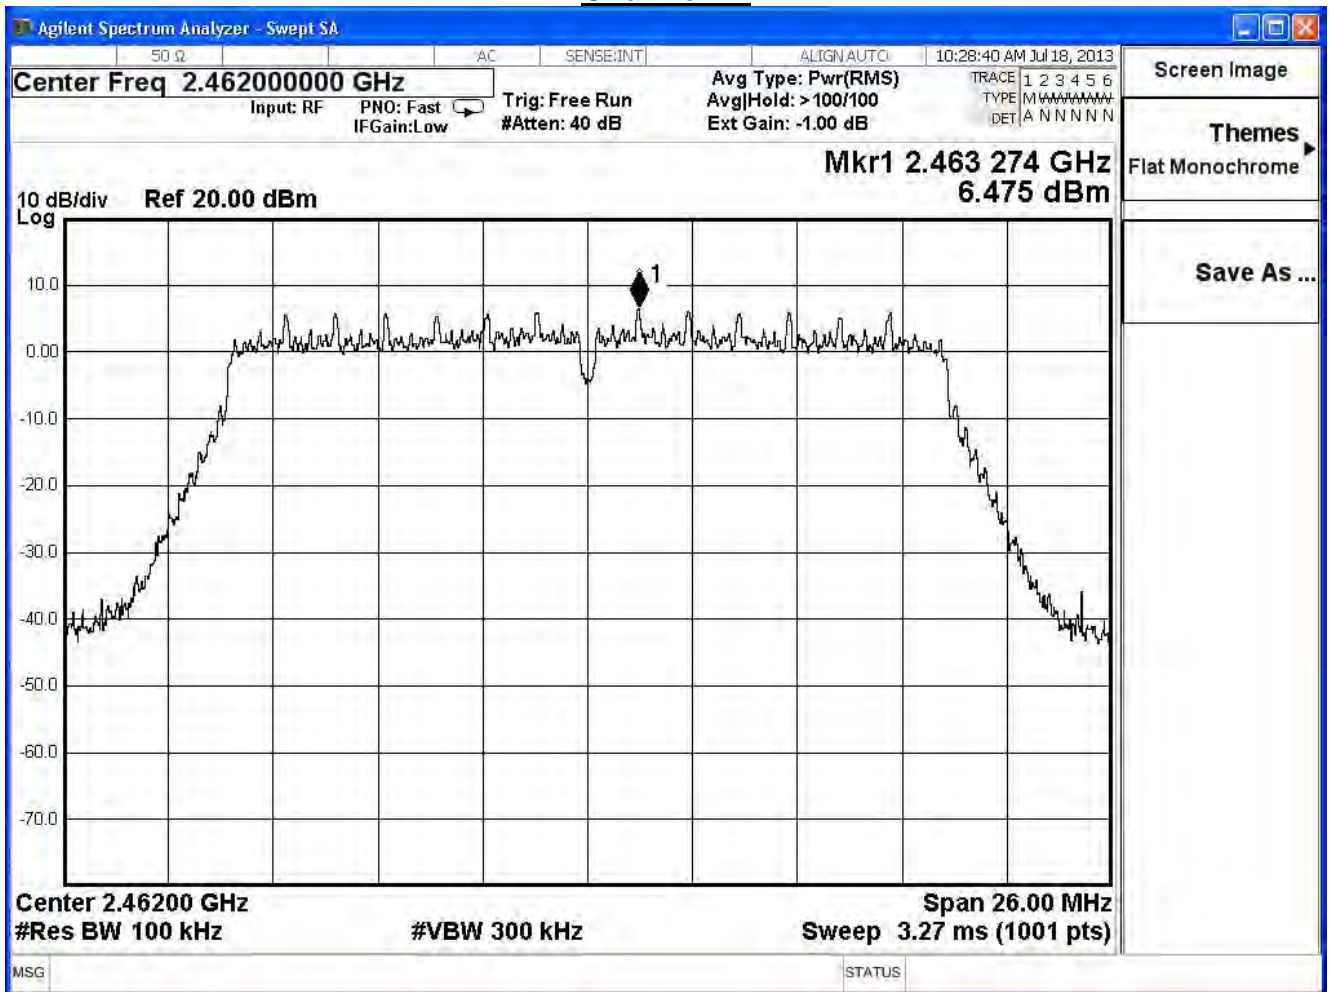

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	7.17	-8.03	≤ 7.32	Pass
6	2437	11.88	-3.32	≤ 7.32	Pass
11	2462	6.21	-8.99	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


### Channel 1

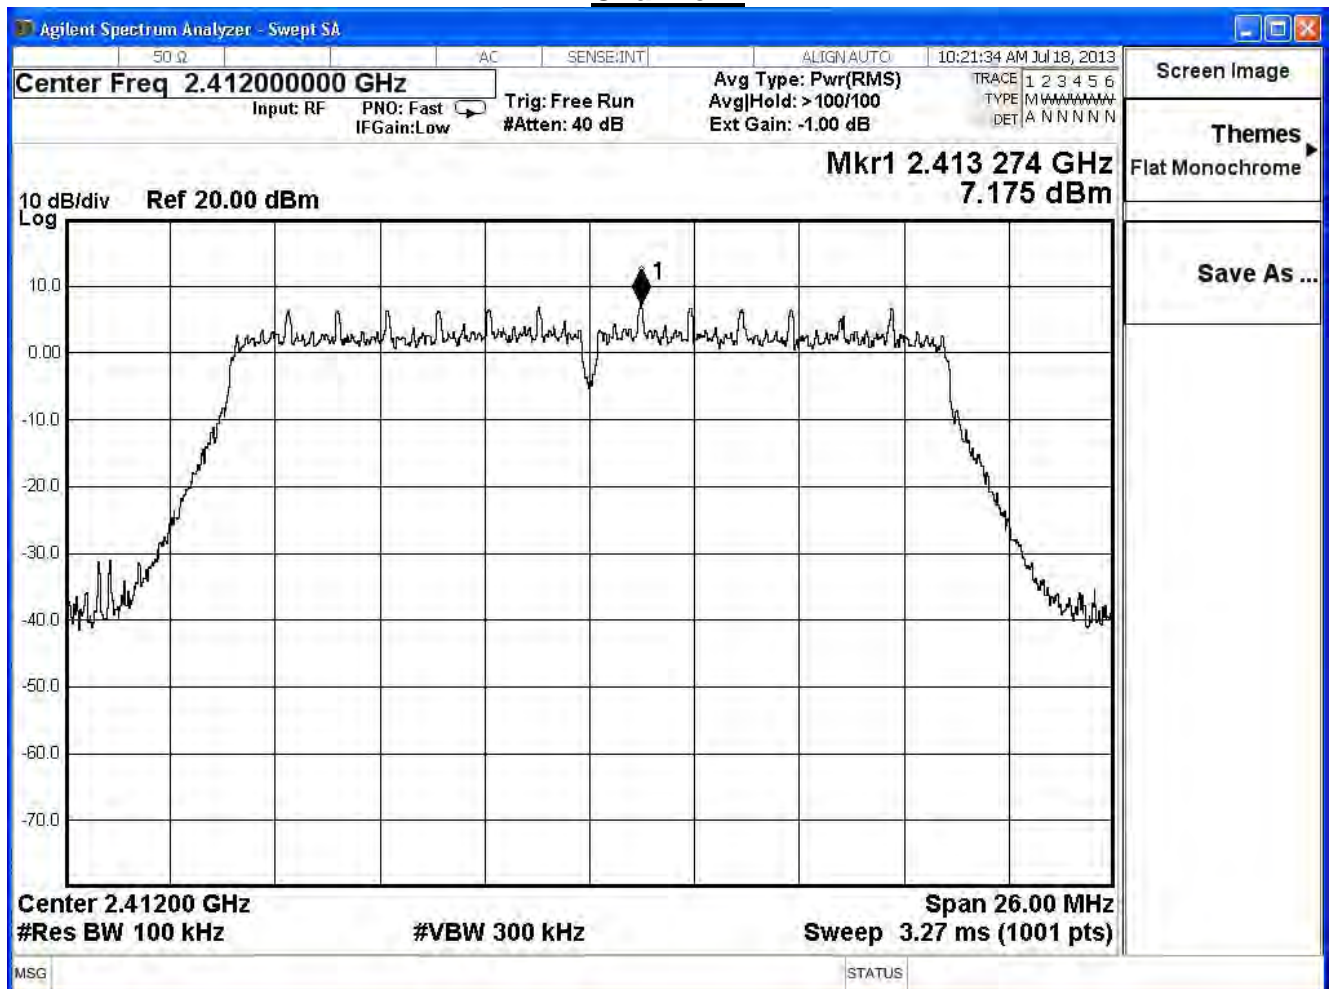

Channel 6

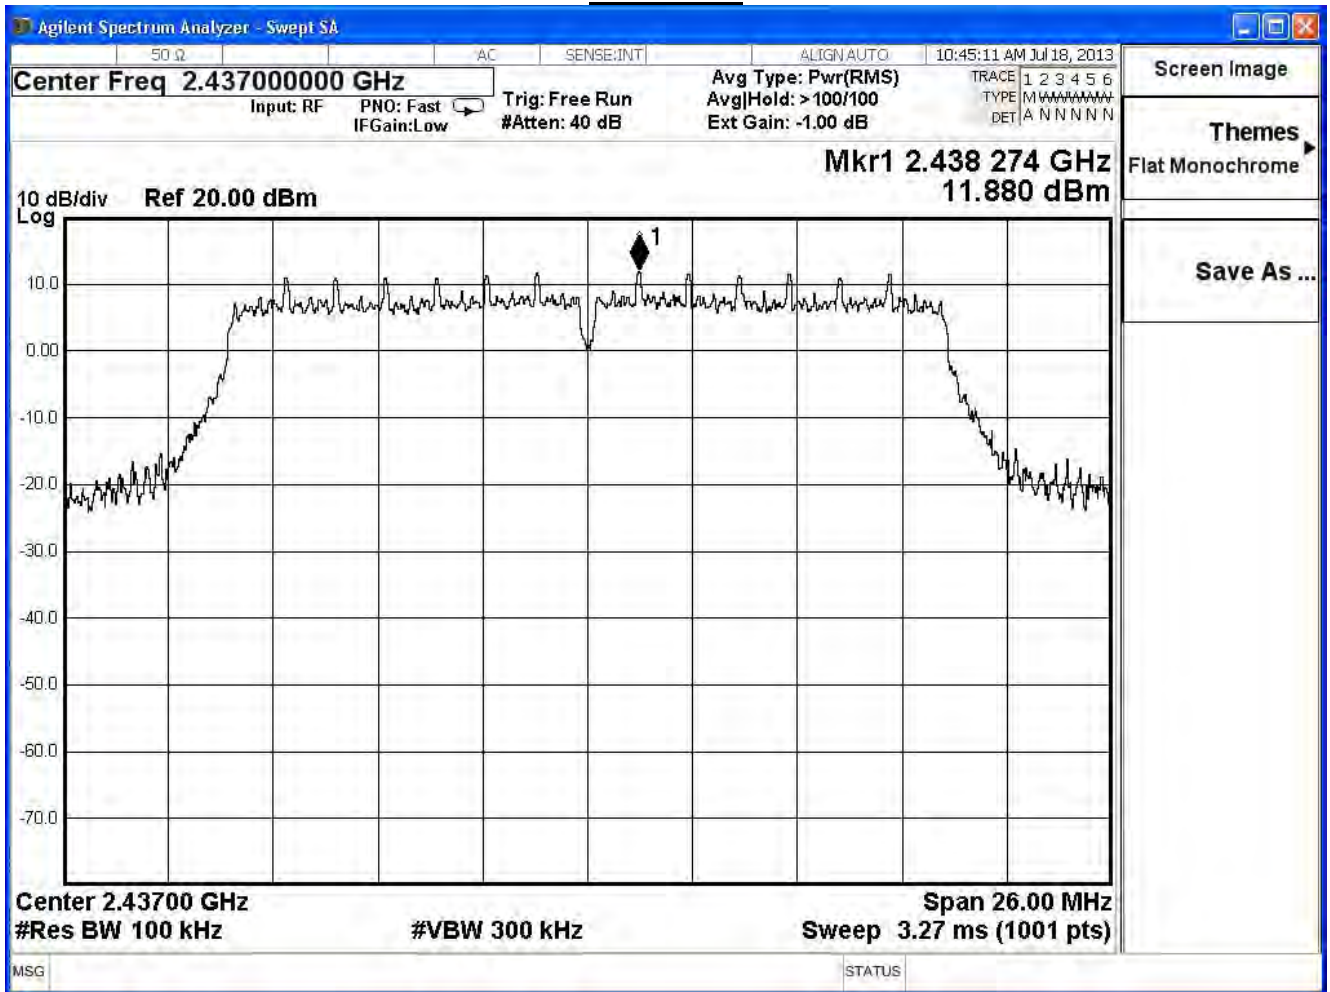

Channel 11

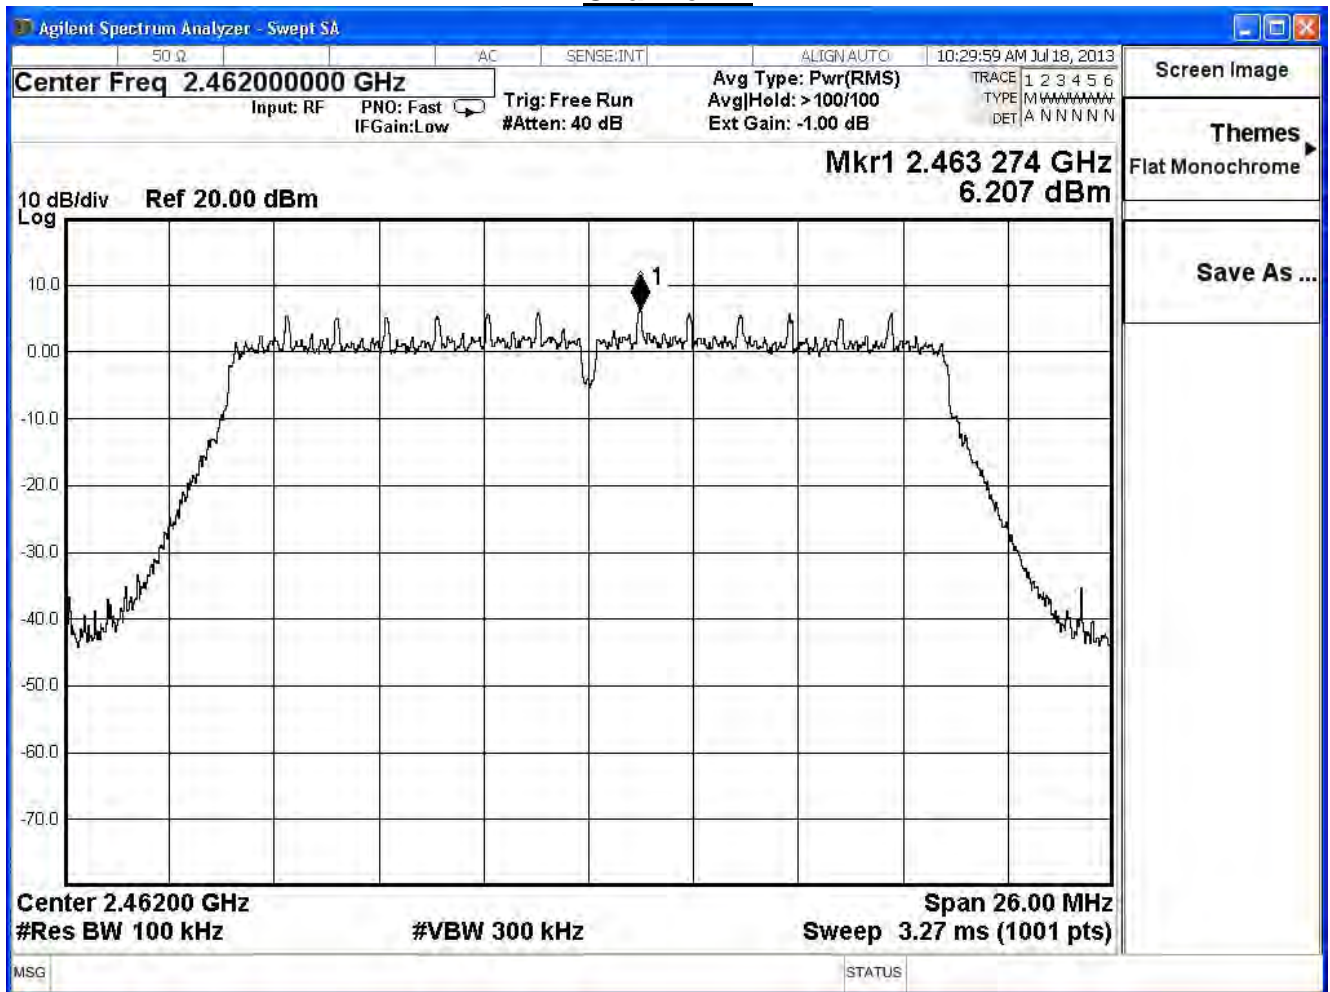

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n 20MHz (ANT 0+1+2)				
Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-3.03	$\leq 7.32$	Pass
6	2437	1.83	$\leq 7.32$	Pass
11	2462	-4.11	$\leq 7.32$	Pass

Note:

Total Gain :  $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
3	2422	-6.335	-21.535	≤ 7.32	Pass
6	2437	-3.881	-19.081	≤ 7.32	Pass
9	2452	-7.956	-23.156	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


### Channel 3

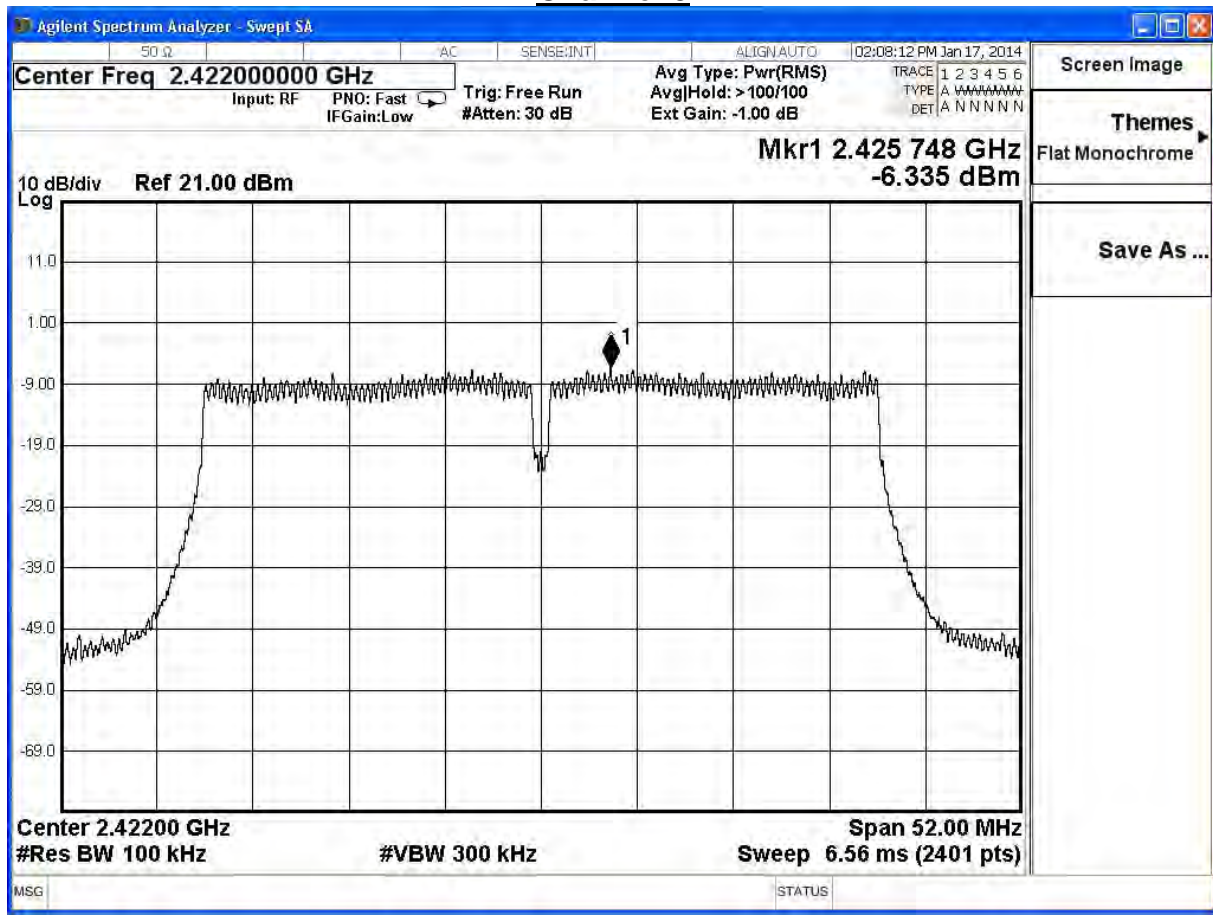

Channel 6

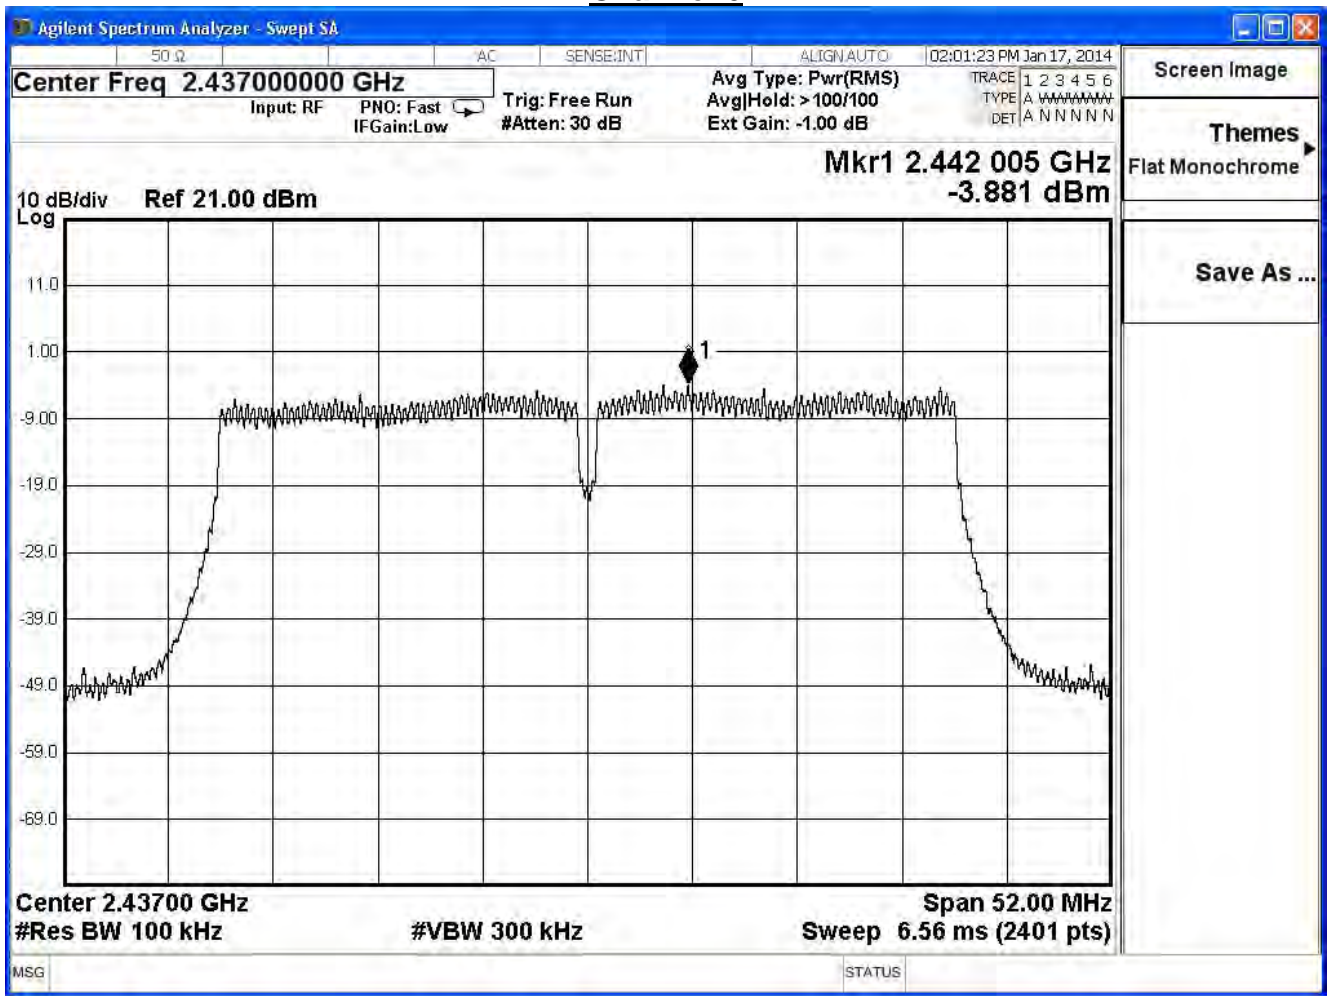


Channel 9

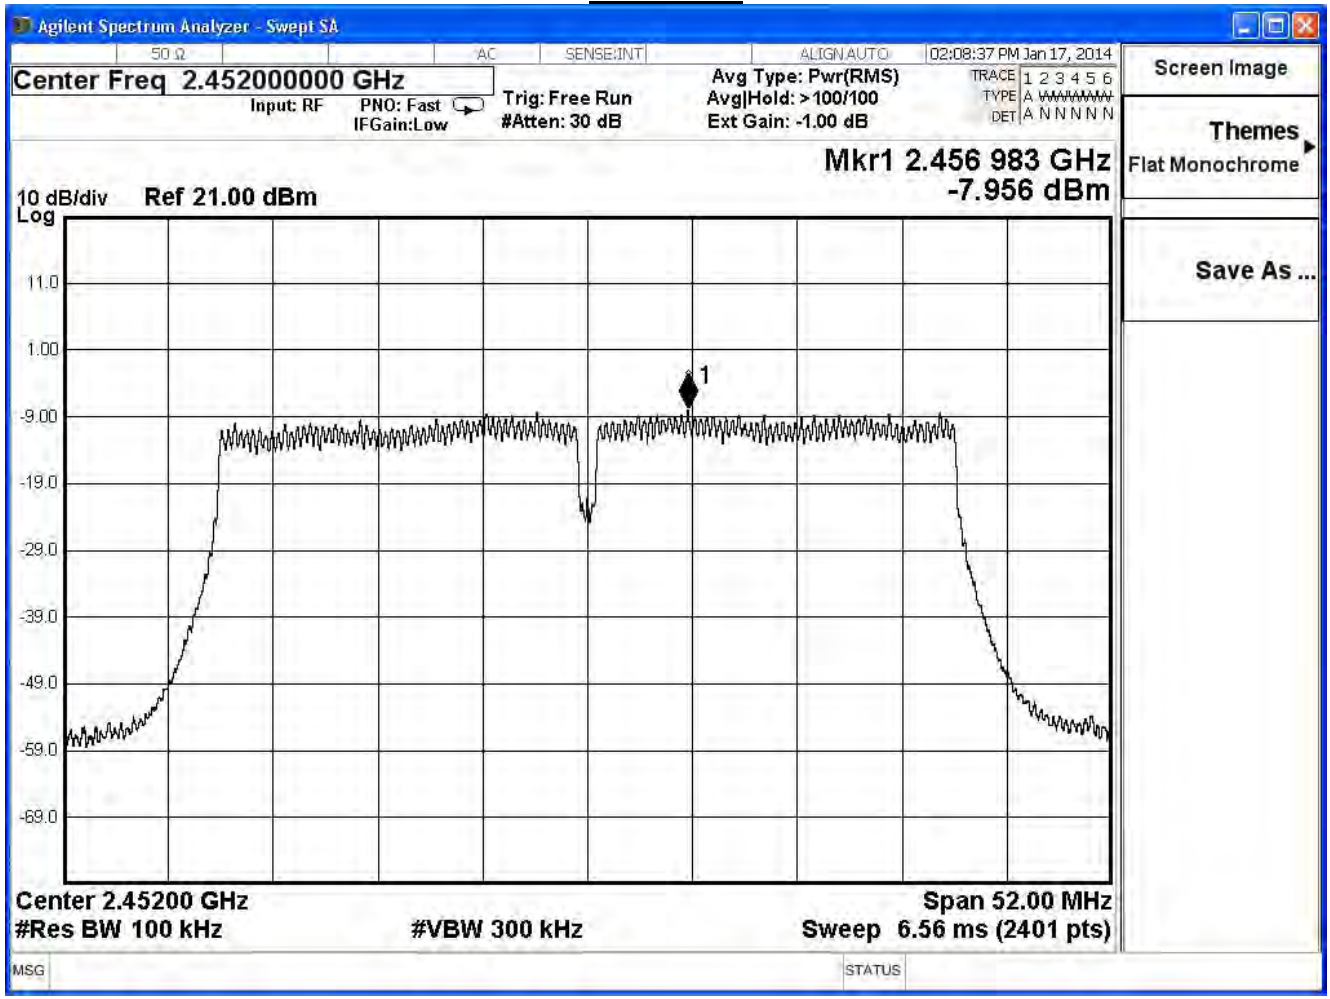






### Channel 6

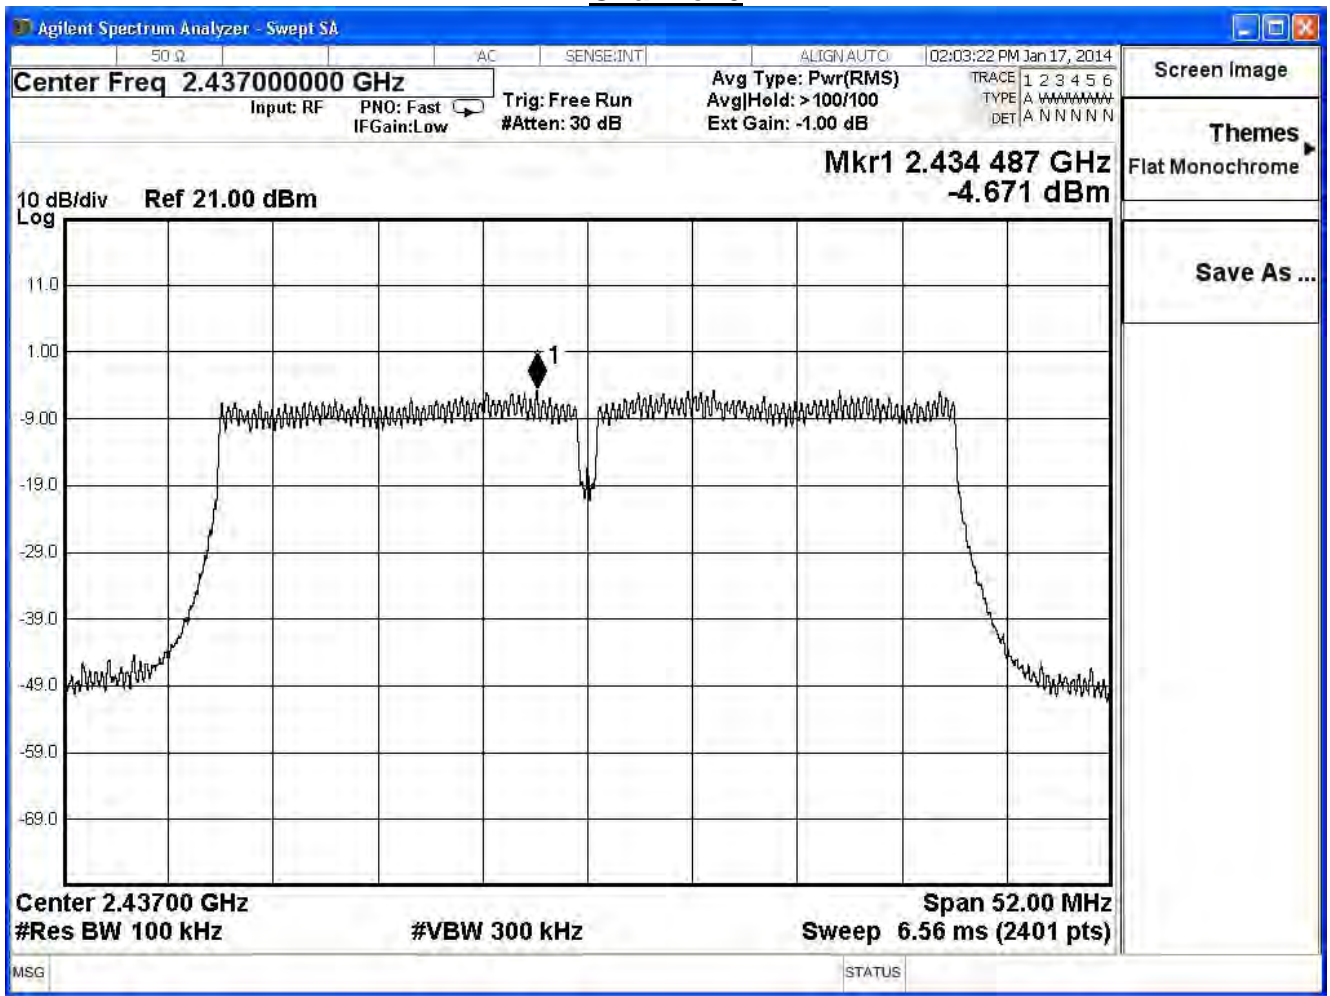

Channel 9

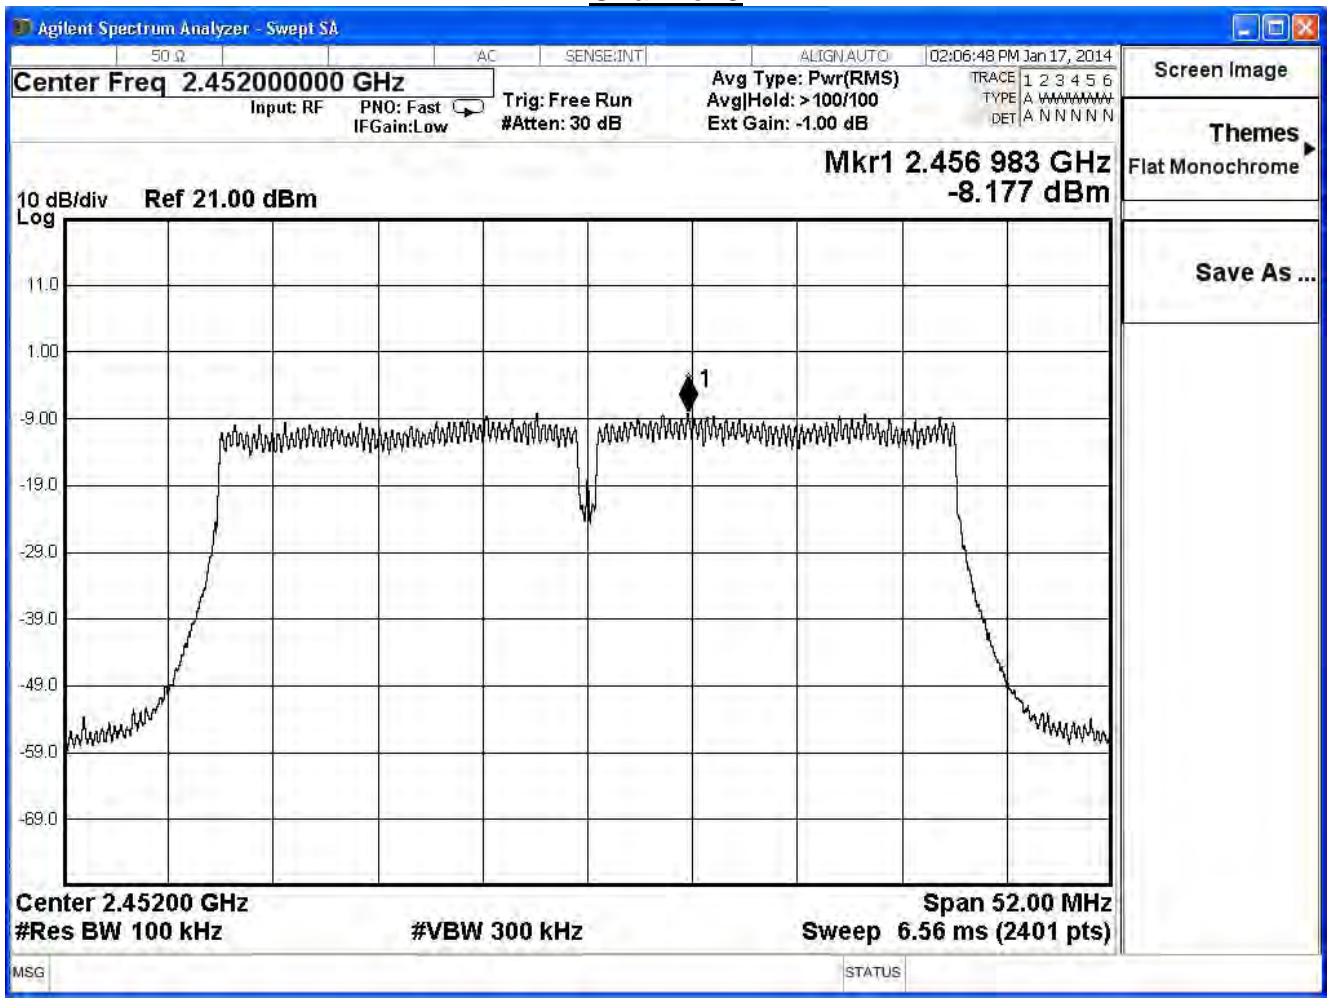

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-6.445	-21.645	≤ 7.32	Pass
6	2437	-4.697	-19.897	≤ 7.32	Pass
9	2452	-8.234	-23.434	≤ 7.32	Pass

Note:


Total Gain :  $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


### Channel 3

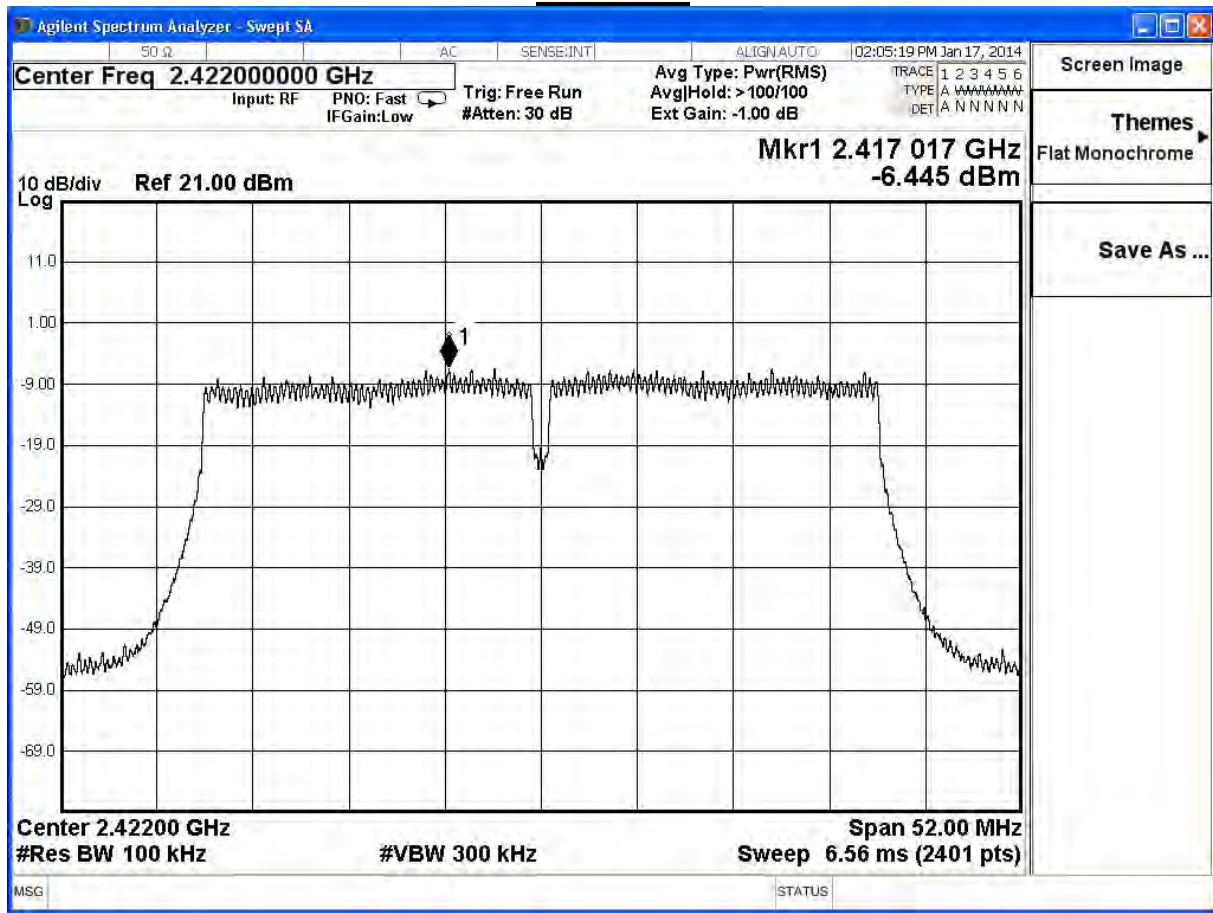

Channel 6

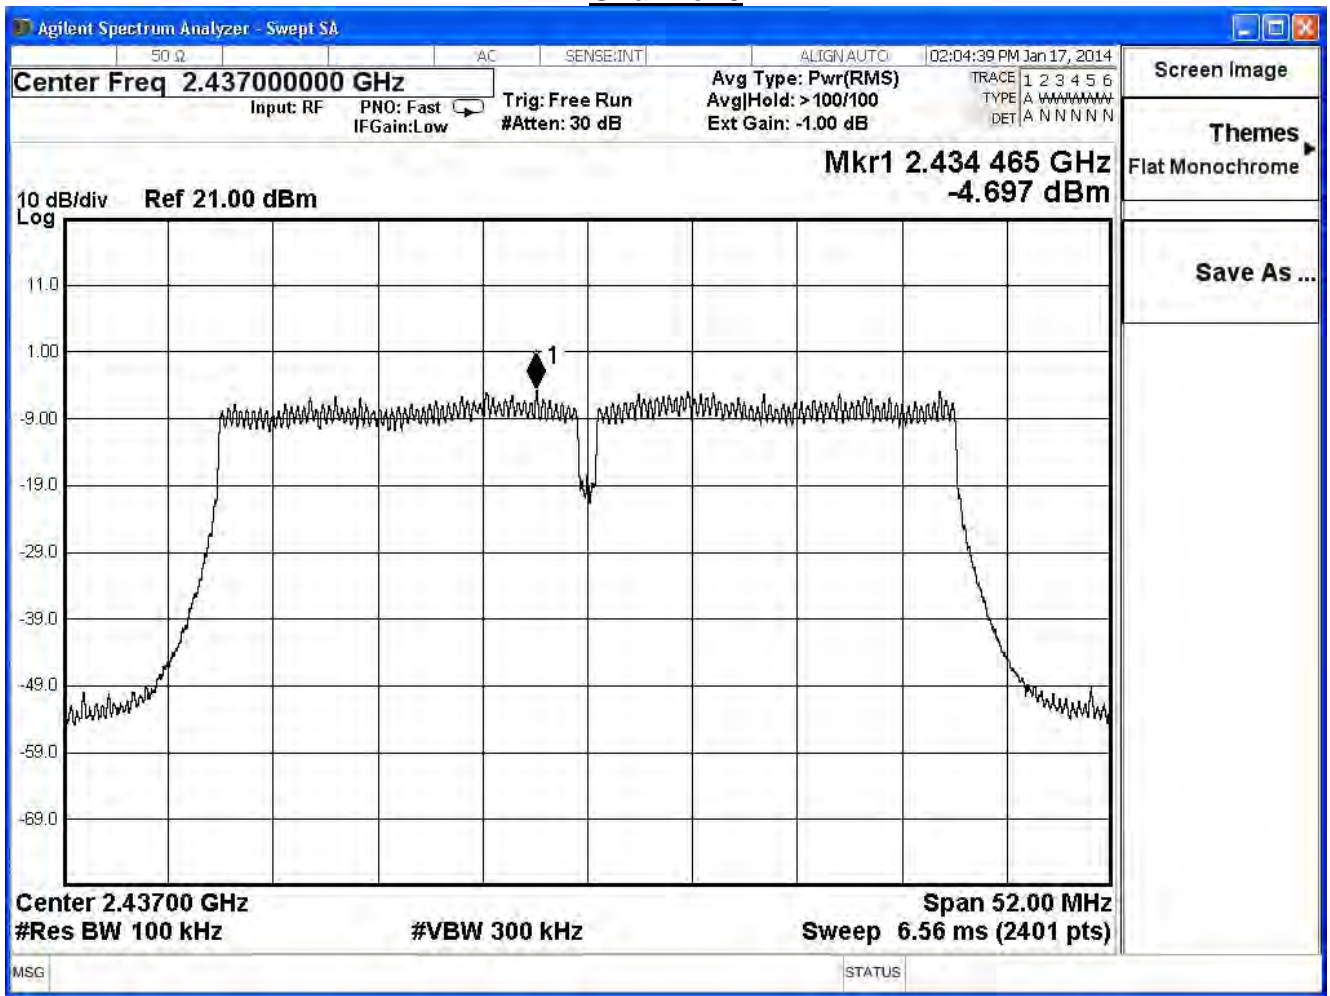

Channel 9

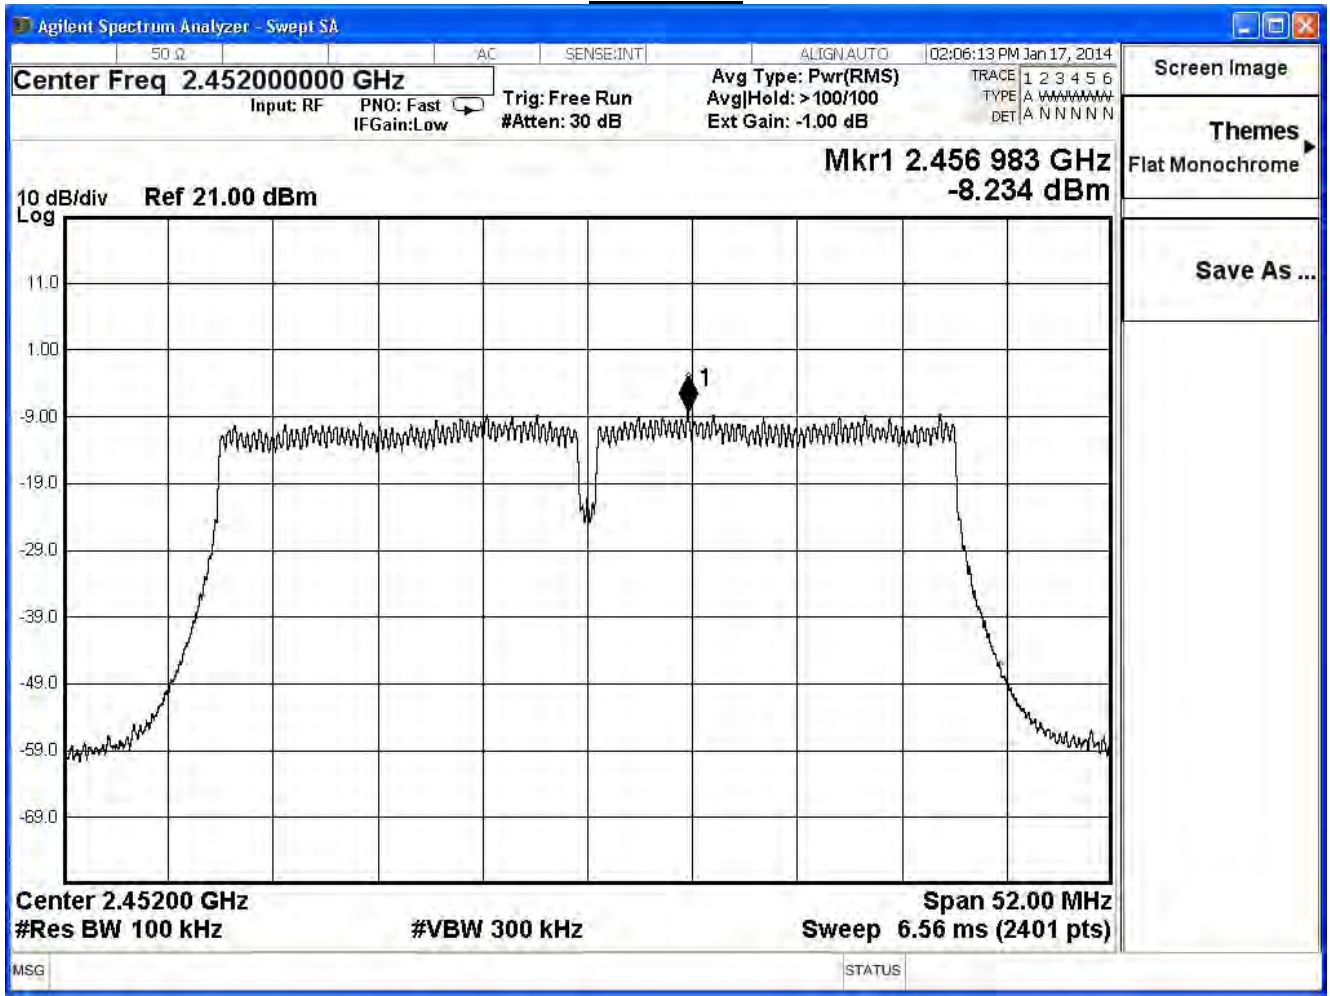

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-16.848	$\leq 7.32$	Pass
6	2437	-14.828	$\leq 7.32$	Pass
9	2452	-18.549	$\leq 7.32$	Pass

Note:

Total Gain :  $10\log(3)+\text{max Gain} = 6.68\text{dBi}$

Required Limit =  $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11a					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	14.193	-1.01	≤ 5.19	Pass
157	5785	14.303	-0.90	≤ 5.19	Pass
165	5825	14.161	-1.04	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi – 6dBi ) = 8 – 2.81 = 5.19 dBm

### Channel 149

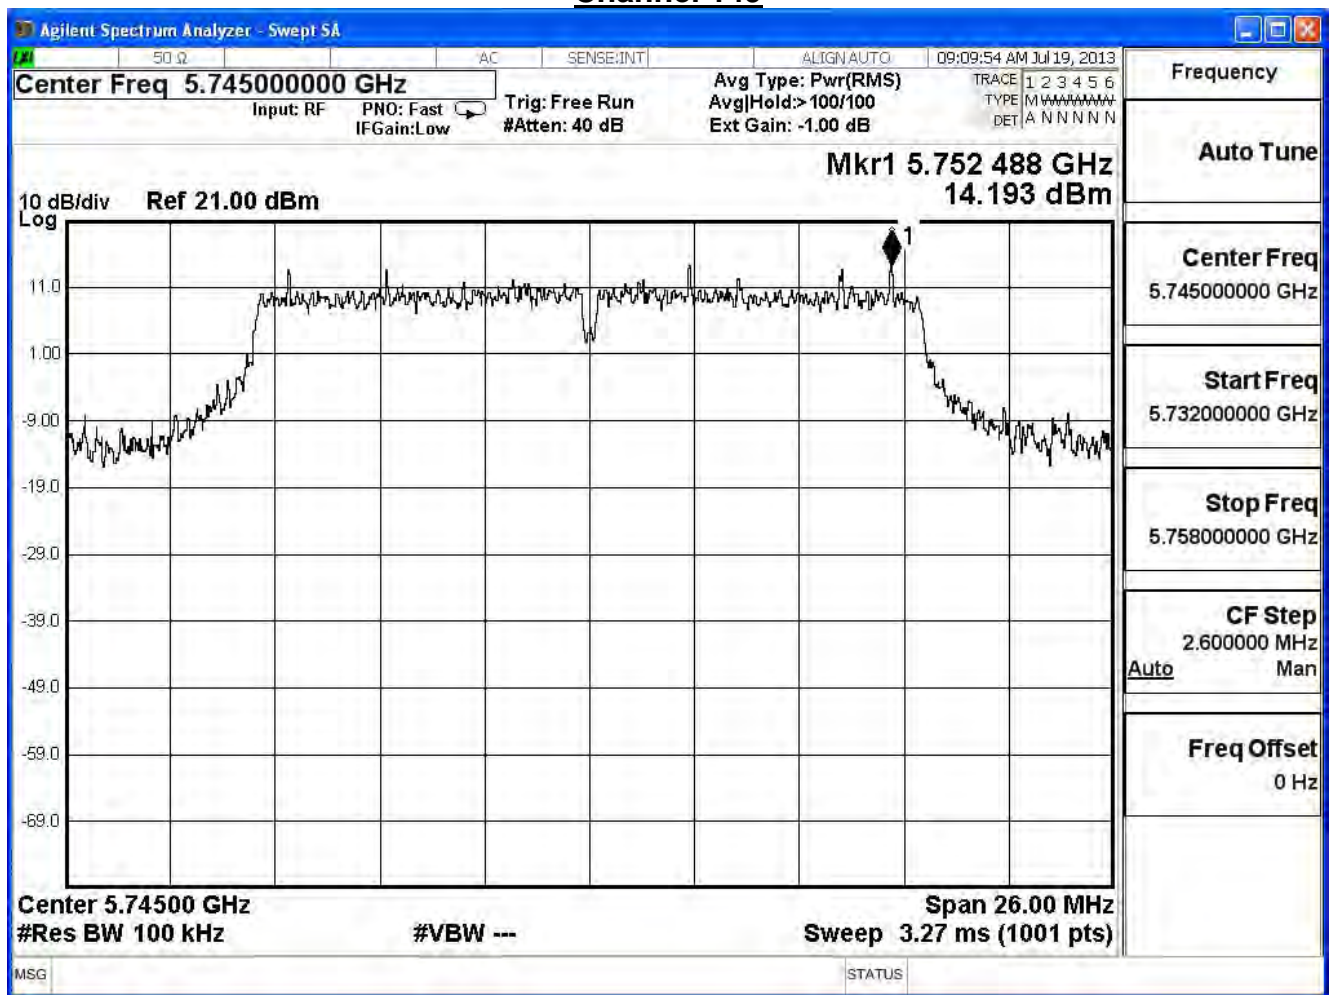







Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
149	5745	10.856	-4.34	≤5.19	Pass
157	5785	11.429	-3.77	≤5.19	Pass
165	5825	10.708	-4.49	≤5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB =8.81dBi

Required Limit = 8dBm - ( 8.81dBi – 6dBi ) = 8 – 2.81 = 5.19 dBm

### Channel 149

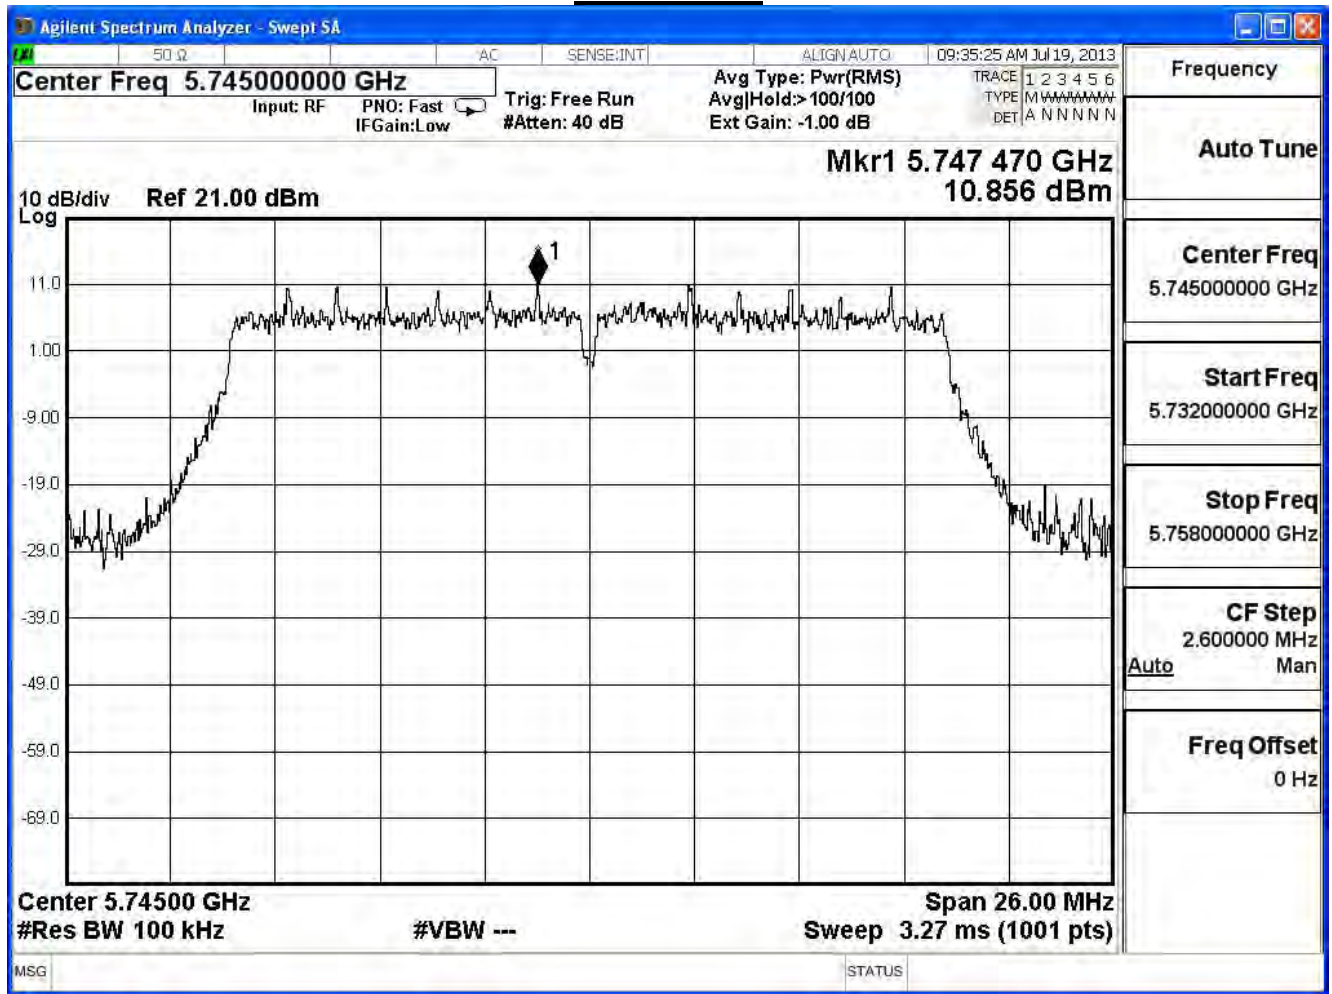





Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	10.188	-5.01	≤5.19	Pass
157	5785	10.220	-4.98	≤5.19	Pass
165	5825	9.941	-5.26	≤5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB =8.81dBi


Required Limit = 8dBm - ( 8.81dBi – 6dBi ) = 8 – 2.81 = 5.19 dBm

### Channel 149

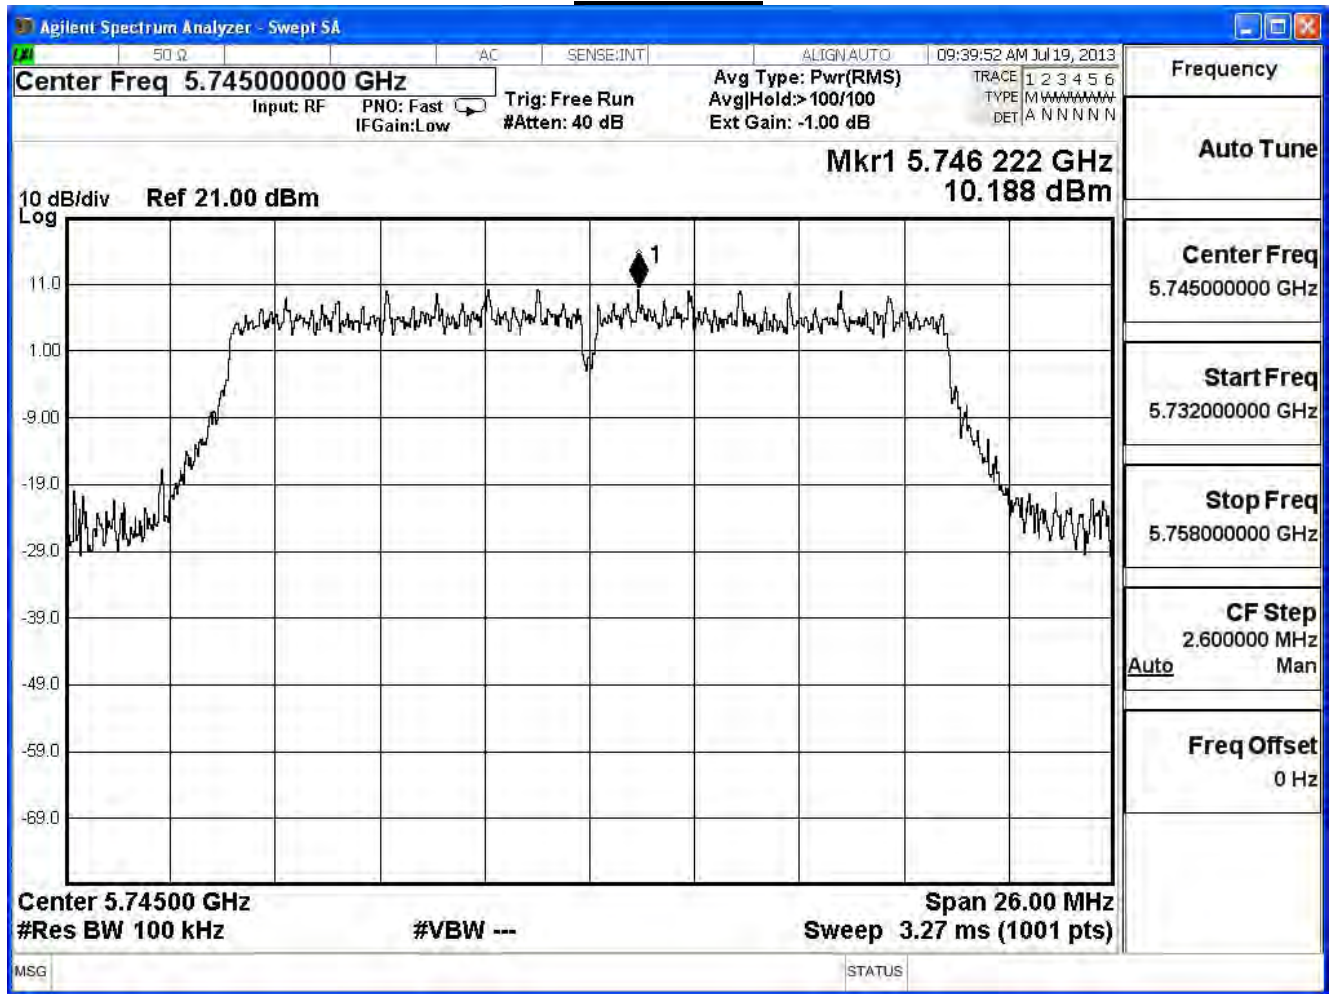



Channel 165

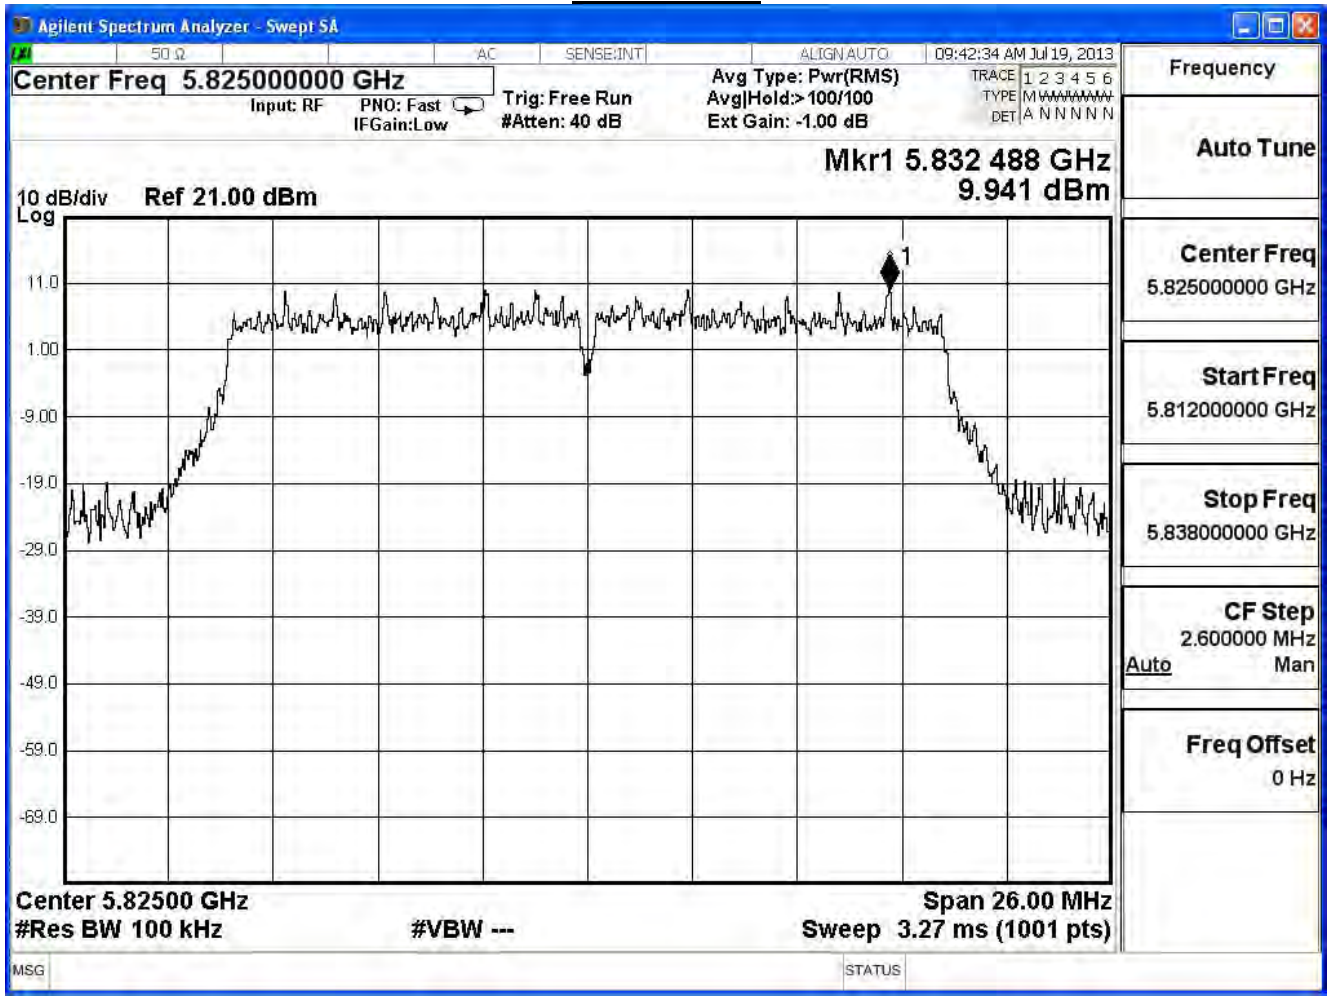



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	10.864	-4.34	≤5.19	Pass
157	5785	10.794	-4.41	≤5.19	Pass
165	5825	10.304	-4.90	≤5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB =8.81dBi

Required Limit = 8dBm - ( 8.81dBi – 6dBi ) = 8 – 2.81 = 5.19 dBm

### Channel 149

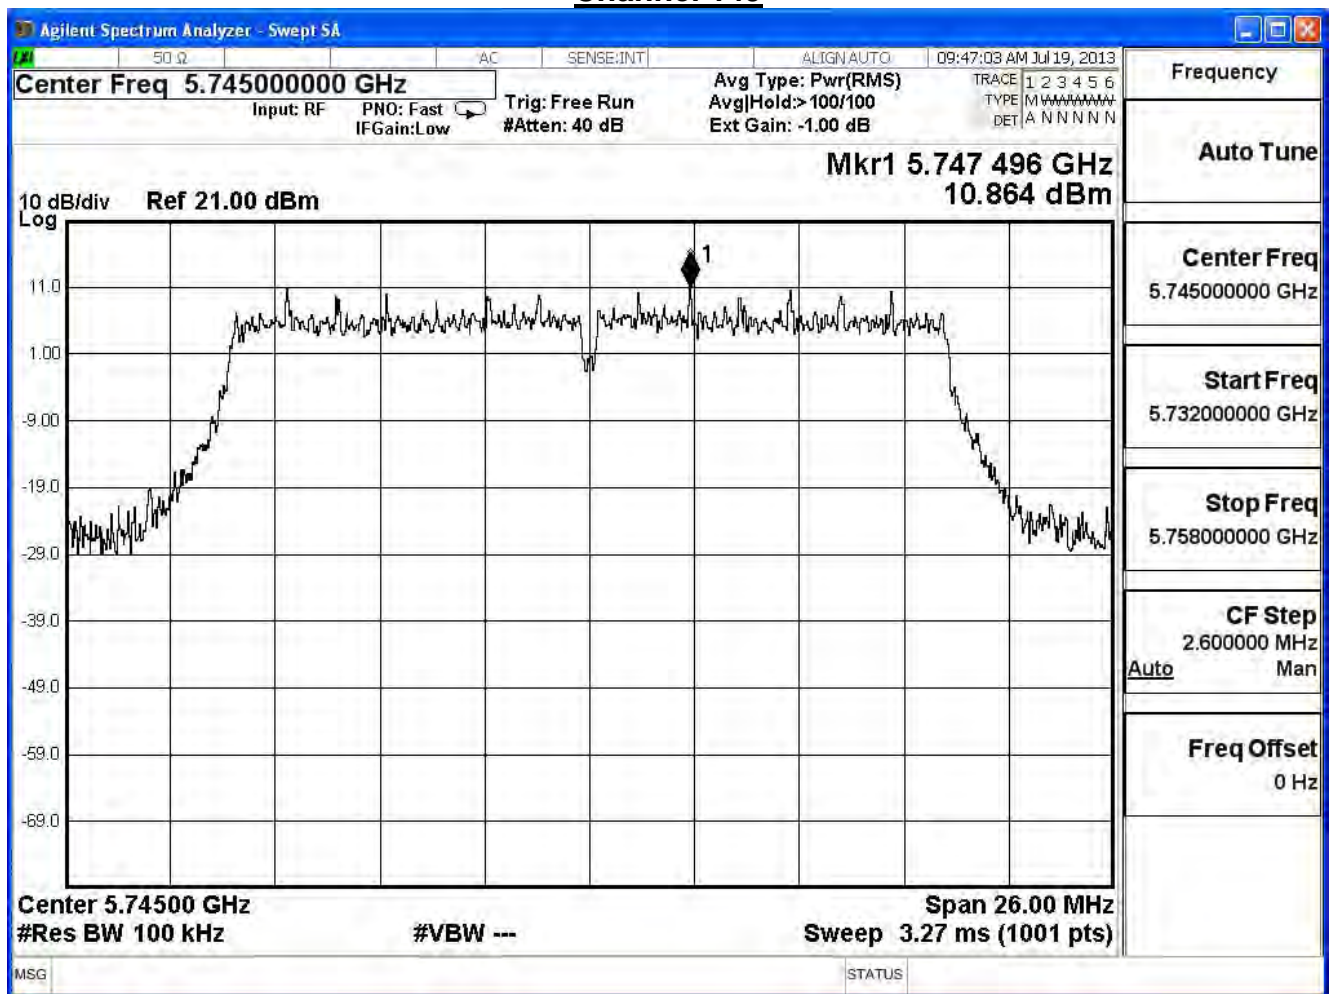





Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n 20MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	0.22	≤ 5.19	Pass
157	5785	0.41	≤ 5.19	Pass
165	5825	-0.10	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
151	5755	8.636	-6.56	≤ 5.19	Pass
159	5795	8.733	-6.47	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm

### Channel 151

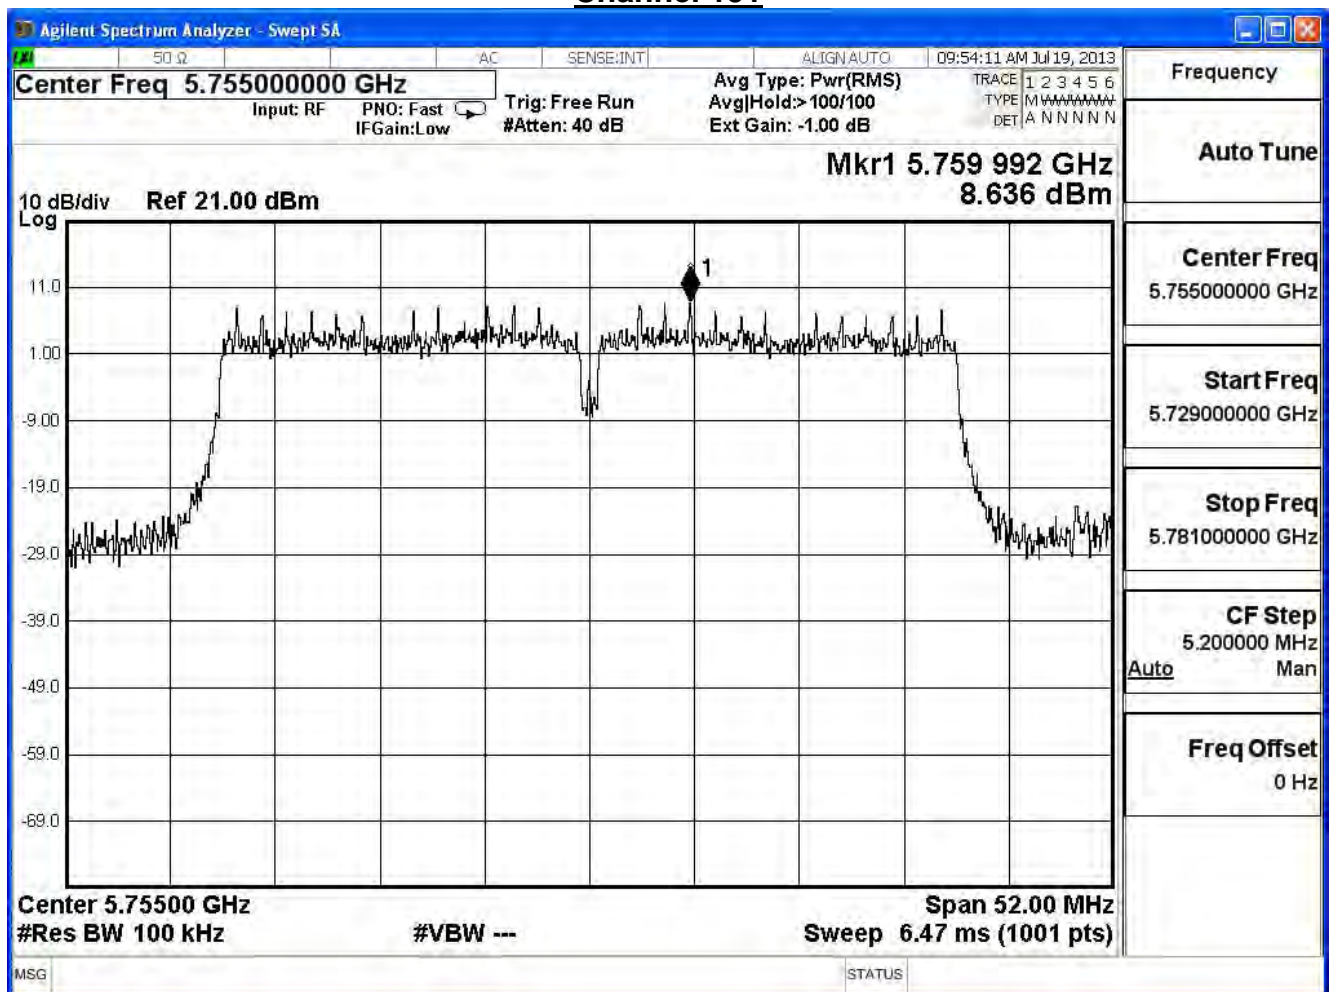



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	8.470	-6.73	≤ 5.19	Pass
159	5795	8.421	-6.78	≤ 5.19	Pass

Note:


Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm

### Channel 151

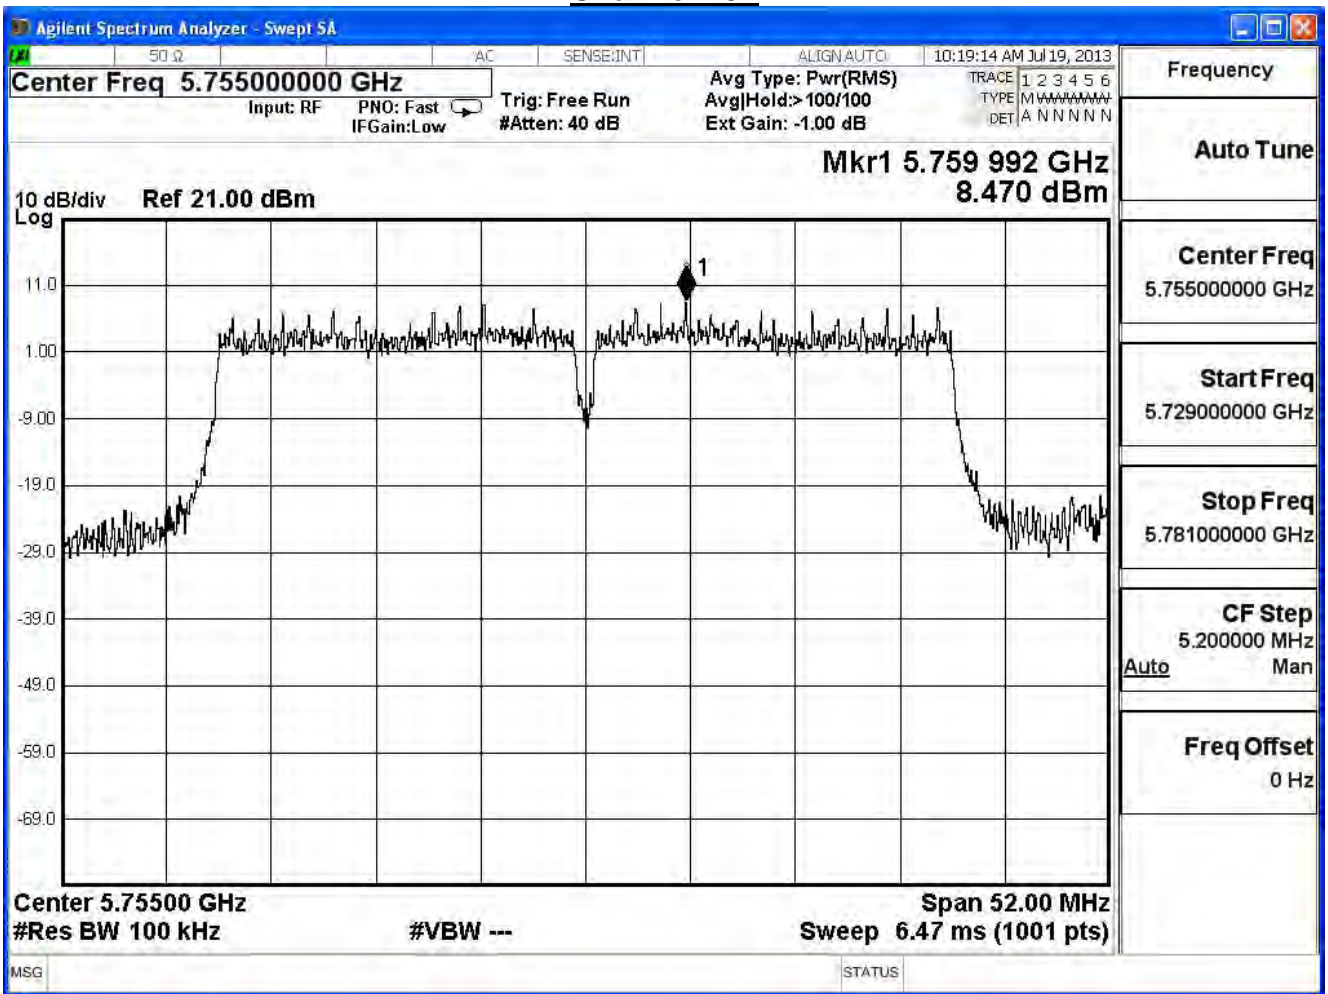

Channel 159

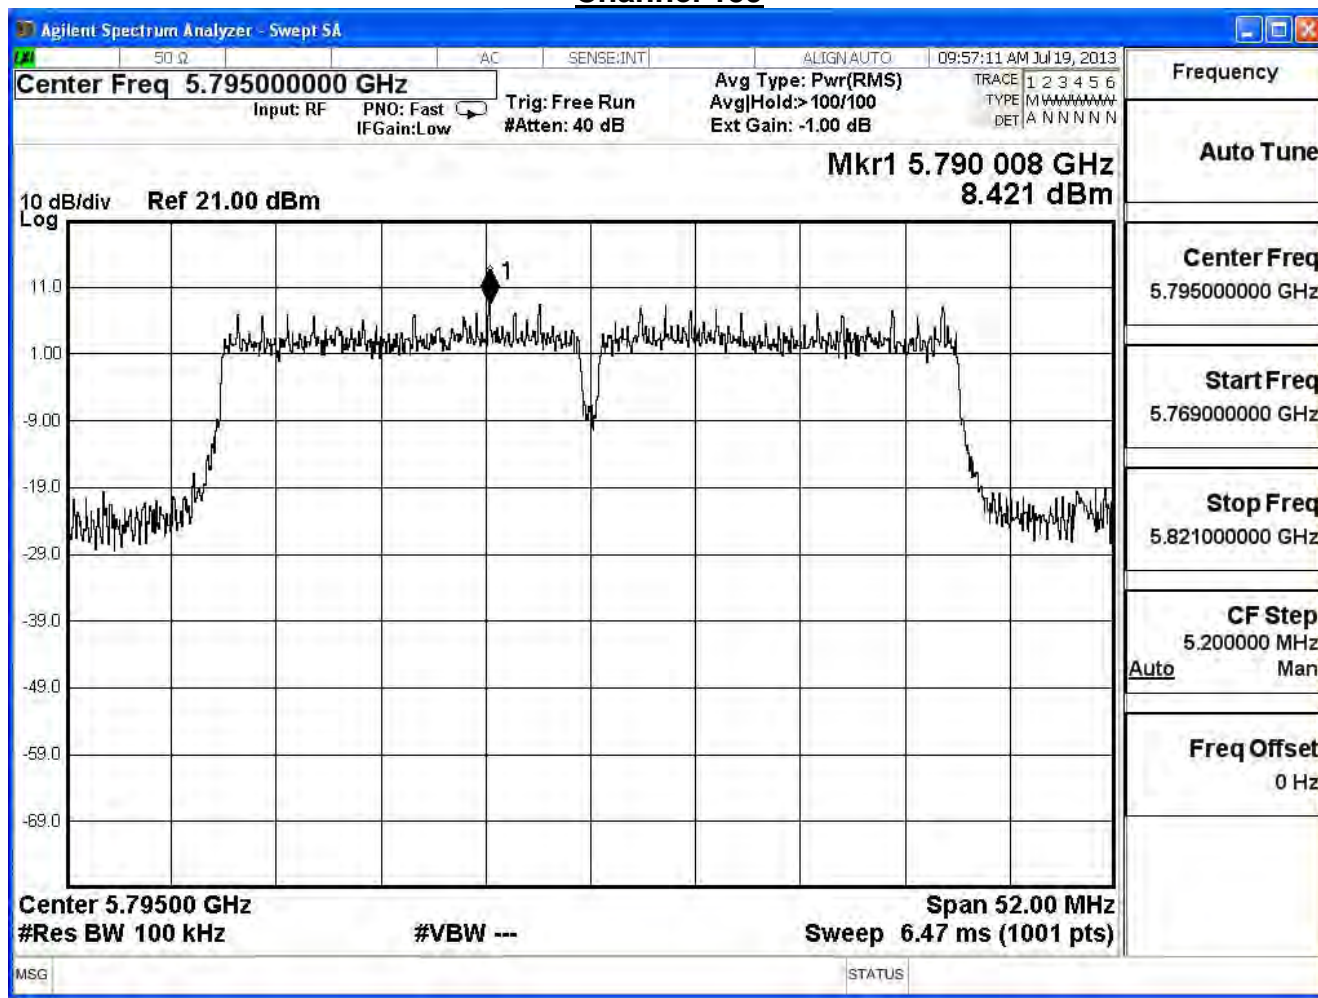



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	8.855	-6.35	≤ 5.19	Pass
159	5795	8.392	-6.81	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi – 6dBi ) = 8 – 2.81 = 5.19 dBm

### Channel 151

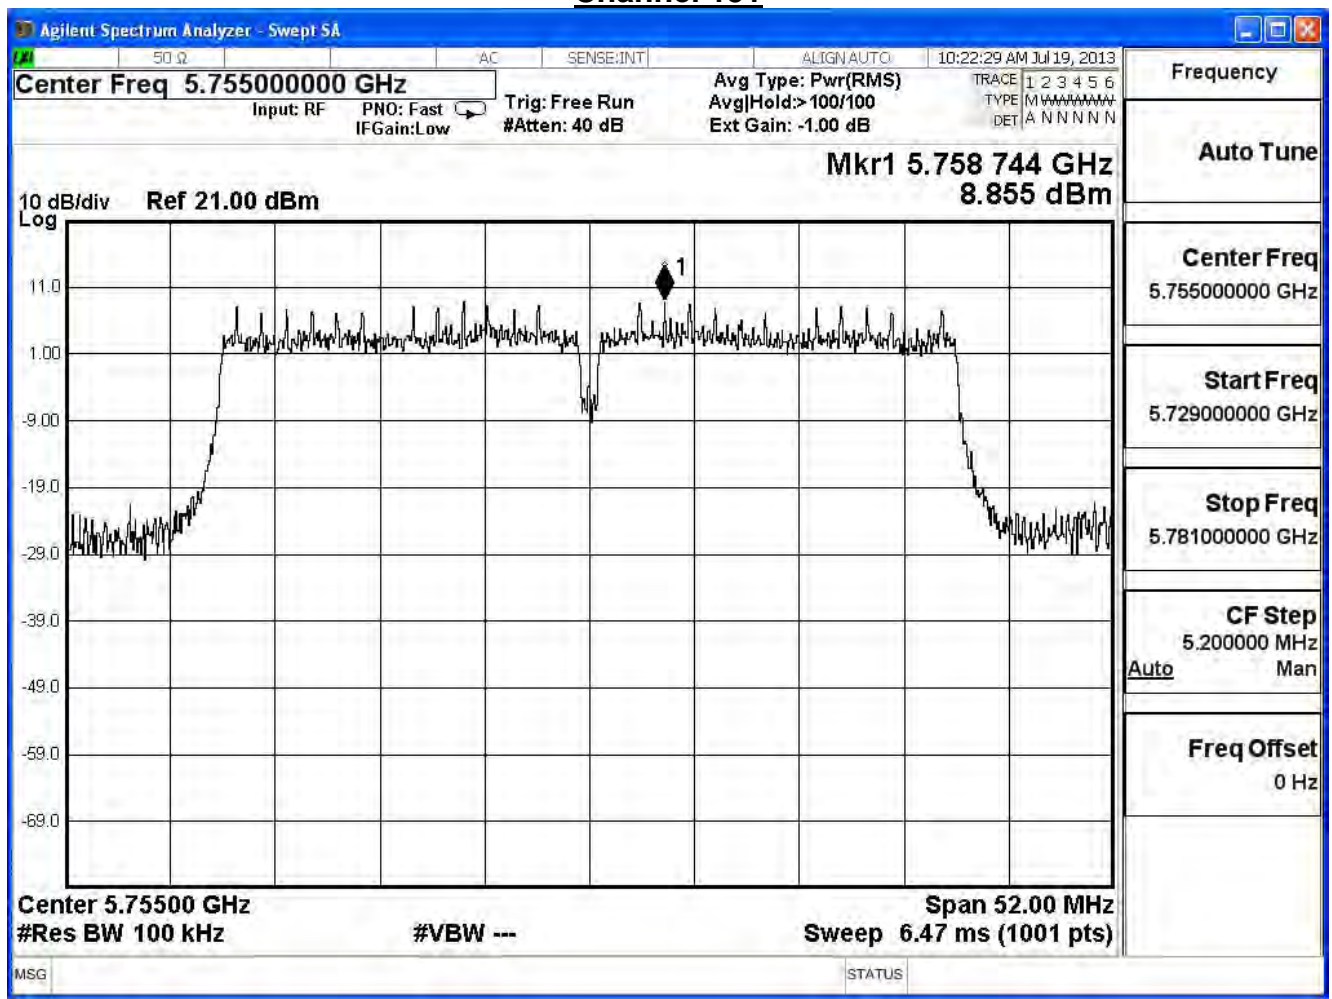



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	-1.77	≤ 5.19	Pass
159	5795	-1.91	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	2.884	-12.32	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm

### Channel 155

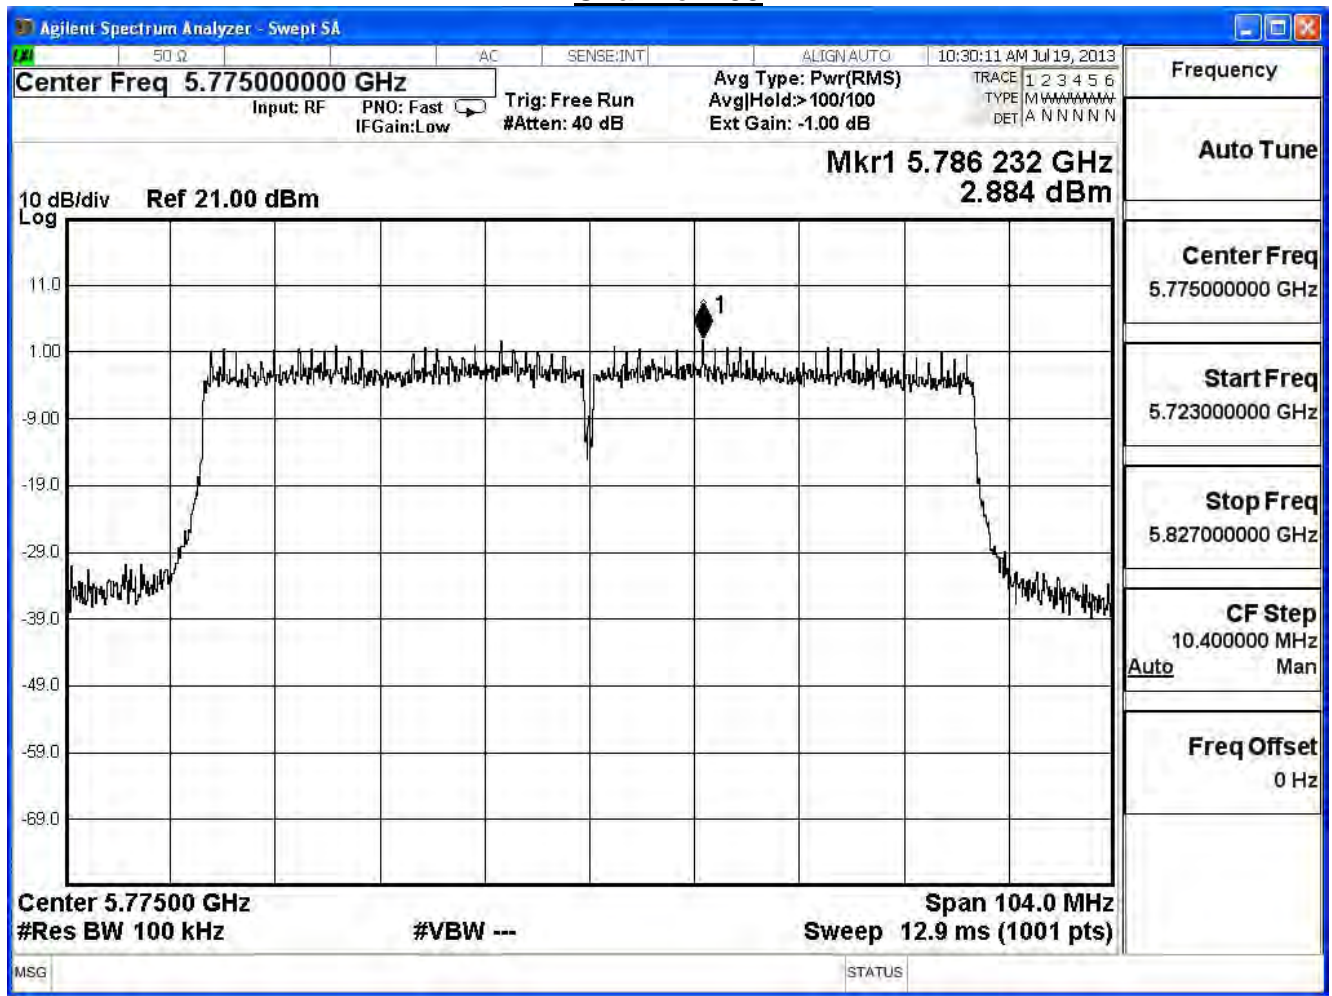

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode)_Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	2.092	-13.11	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi – 6dBi ) = 8 – 2.81 = 5.19 dBm

### Channel 155

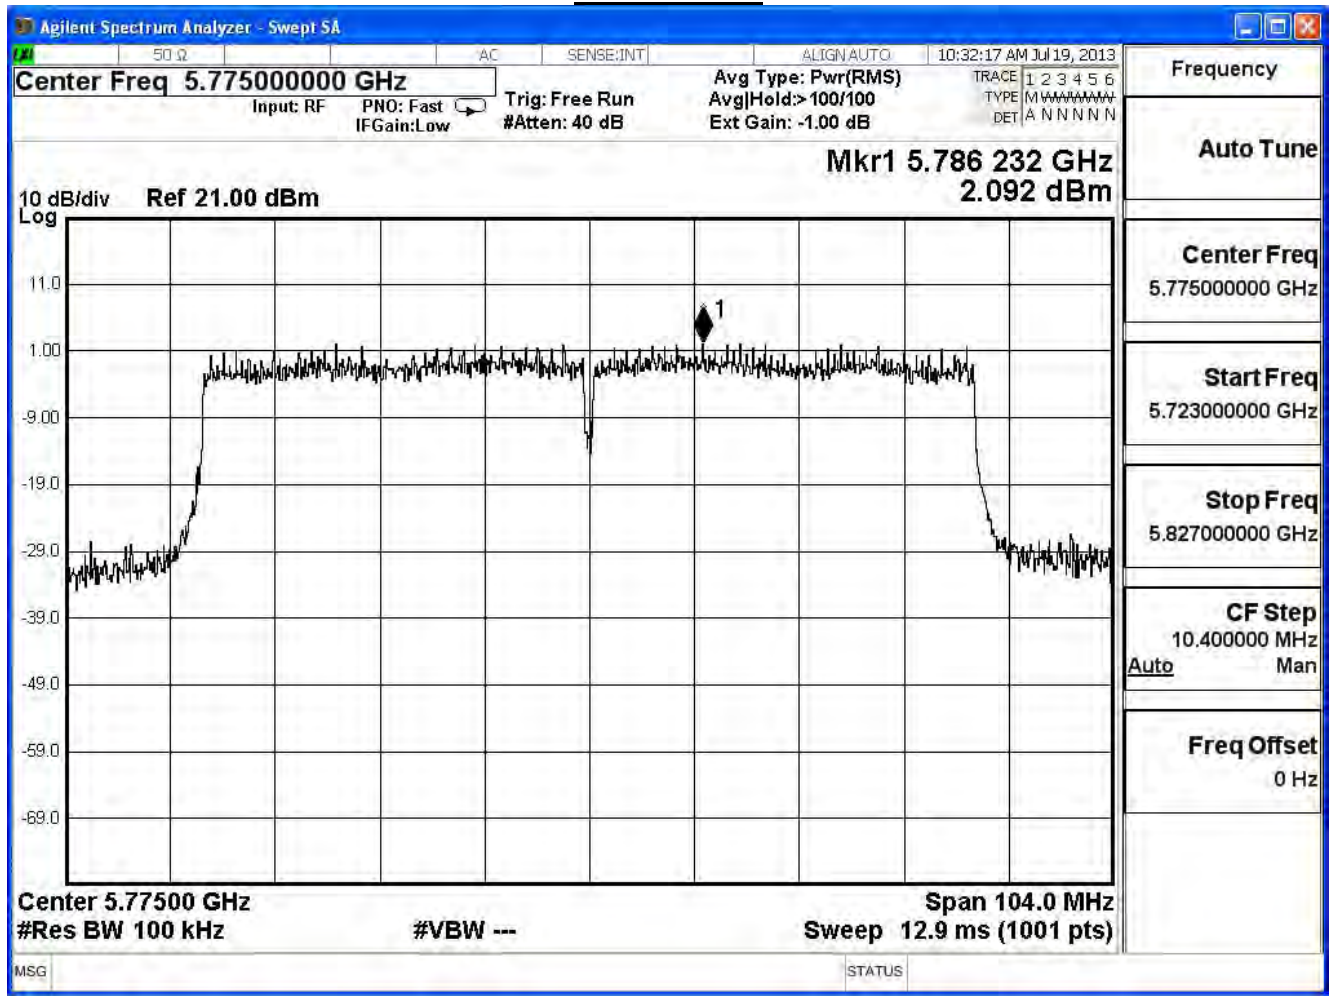

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	2.848	-12.35	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm

### Channel 155

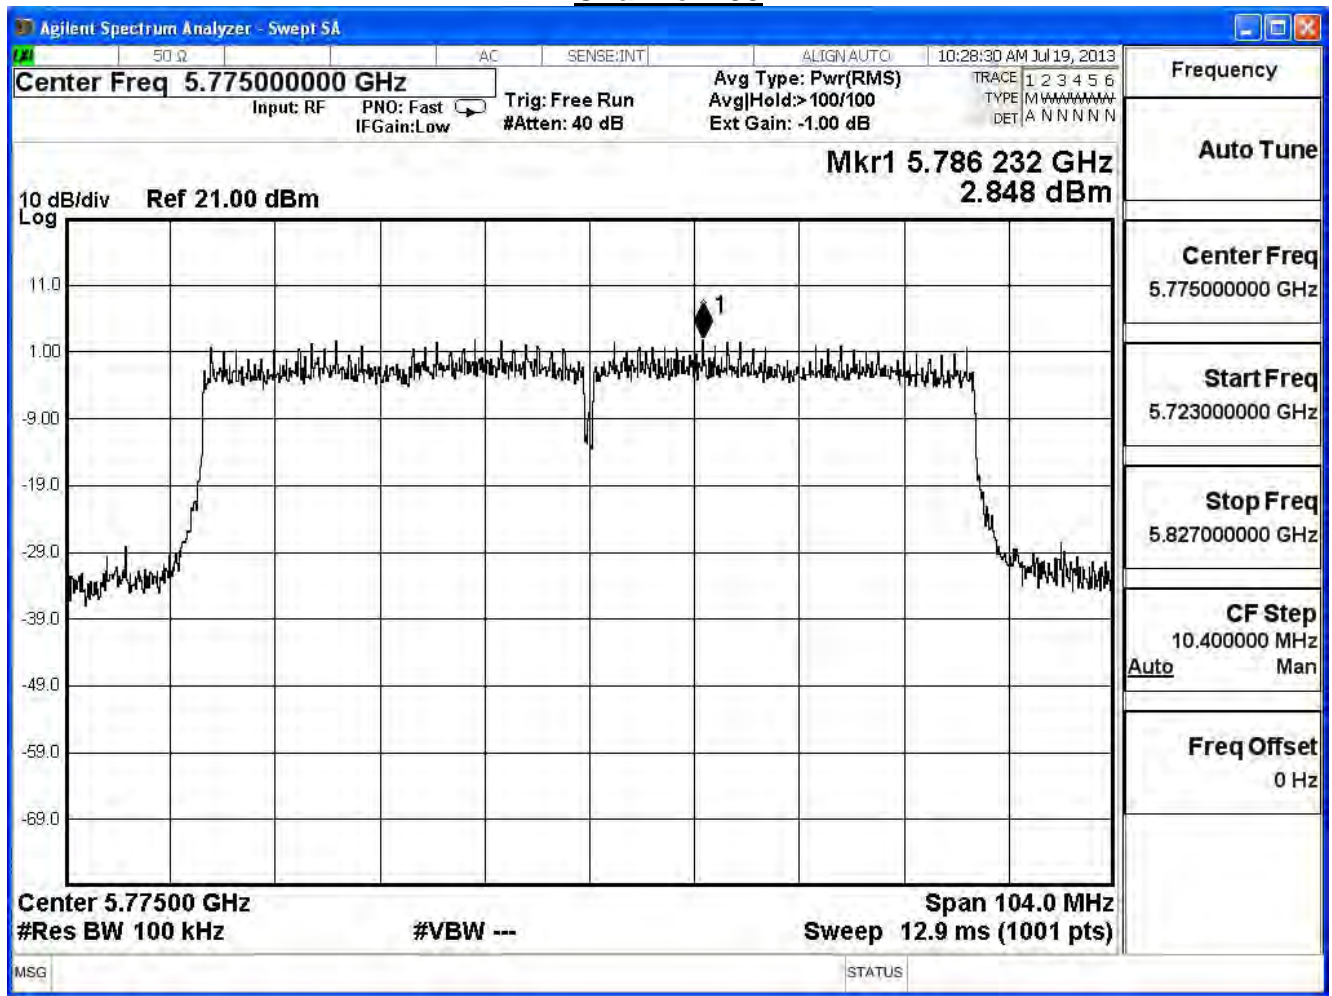

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11ac\_80MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-7.81	≤ 5.19	Pass

Note:

Total Gain = Beamforming Gain + Max Gain = 4.77dB + 4.04dB = 8.81dBi

Required Limit = 8dBm - ( 8.81dBi - 6dBi ) = 8 - 2.81 = 5.19 dBm