

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER) : 高 易 电 子 有 限 公 司

客户料号 (CUSTOMER P/N) :

品名 (DESCRIPTION) : DATE: 2024-5-20

规格 (SPECIFICATION) : A11开L槽+背胶引线长40mm REV.NO.: A0

鸿日昇威科技承认签核、盖章

部门 section	确认/日期 Confirmation/Date	审核/日期 Audit/Date	批准/日期 Approval/Date	(Seal of company)
品质 quality	董晚红 2024-5-20	吕惠 2024-5-20	韦函满 2024-5-20	
工程 project	何伟华 2024-5-20	韦立红 2024-5-20	韦立红 2024-5-20	

备注:
remark

高易电子有限公司承认签核、盖章

section	Confirmation/Date	Audit/Date	Approval/Date	(Seal of company)
开发工程				
采购				
品质				

备注:

深圳市鸿日昇威科技有限公司


HRSW ELECTRONICS CO.,LTD

ADD: 深圳市龙华新区观澜环观中路48号1栋2楼

TEL: +86-755-23461055 FAX: +86-0755-28015170


SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

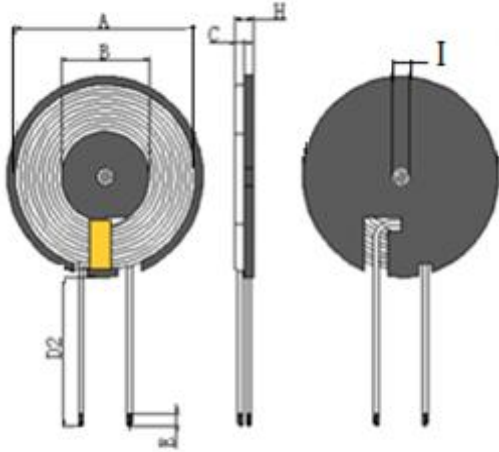

1. The coil is attached to the magnetic disc, the magnetic disc size is 50±1mm, and the L-slot is opened.
2. Wrap tape 1-2Ts around the coil outlet position;
3. Glue the bottom of the magnetic separator

2. SCHEMATICS:



天线增益Antenna gain:

Operation frequency:	115kHz-205kHz
Antenna Type:	Loop coil Antenna
Antenna gain:	0dBi

A	B	C	D2	E	H	I
50±1.0	20.5±0.5	0.8±0.1	40±3	4±2	2.8MAX	5±0.5

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线Ø0.08*105mm 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q value	HI-POT
TEST	Coil and diskette	S-F	Individual coil		
CON	100KHz, 0.25V	AT 25℃	100KHz, 0.25V		
SPEC	6.3uH±10%	60mΩ Max	3.8uH±15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Silk covered thread 0.08*105 strands	Acetone silk-covered wire 0.08*105 strands	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Magnetic sheet	Ø50* Manganese zinc hard disk with L slot	TAIYI CO.,LTD	
4	glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	8mm wide high temperature adhesive paper	CUDAK CO.,LTD	
6	Rubber backing	Ø49*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	A11 L slot + adhesive lead length 40mm
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红

SPECIFICATION FOR APPROVAL

6. SAMPLE TEST DATA								
6.1DIMENSION TEST (UNIT:mm)								
TEST ITEM	A	B	C	D	E	H	I	
SPEC	41±1.0	20.5±0.5	0.80±0.1	40±3	4±2	2.8Max	5±0.5	
1	41	20.65	0.86	40	3.50	2.35	5.01	
2	41.59	20.63	0.87	41	4.00	2.46	4.99	
3	41.59	20.65	0.85	39.8	3.98	2.36	5.02	
4	41.67	20.055	0.83	40.02	3.79	2.38	4.98	
5	41.85	20.45	0.84	40.01	4.02	2.28	4.99	
6								
7								
8								
9								
10								
MAX	41.85	20.65	0.87	41.00	4.02	2.46	5.02	
MIN	41.00	20.65	0.83	39.80	3.50	2.28	4.98	
AVERAGE	41.54	20.49	0.85	40.17	3.86	2.37	4.998	
6.2ELECTRICAL TEST								
TEST ITEM	L		DCR	IDC		Q	HI-POT	
	S-F		S-F					
TEST COND	100KHz/0.25v		AT 25℃					
SPEC	6.3uH ±10%		60mΩ (Max)					
1	6.31		42.00					
2	6.35		45.00					
3	6.34		43.00					
4	6.41		43.50					
5	6.38		43.60					
6								
7								
8								
9								
10								
MAX	6.41		45.00					
MIN	6.31		42.00					
AVERAGE	6.36		43.42					
HRSW ELECTRONICS CO., LTD					PART NO			
					TITLE		A11 L slot + adhesive lead length 40mm	
DRAWN BY			CHECKED BY				APPROVED BY	
何伟华			韦立红				韦立红	

