



Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
1	2412	17.61	≥ 0.5	Pass
6	2437	17.60	≥ 0.5	Pass
11	2462	17.57	≥ 0.5	Pass


Channel 1

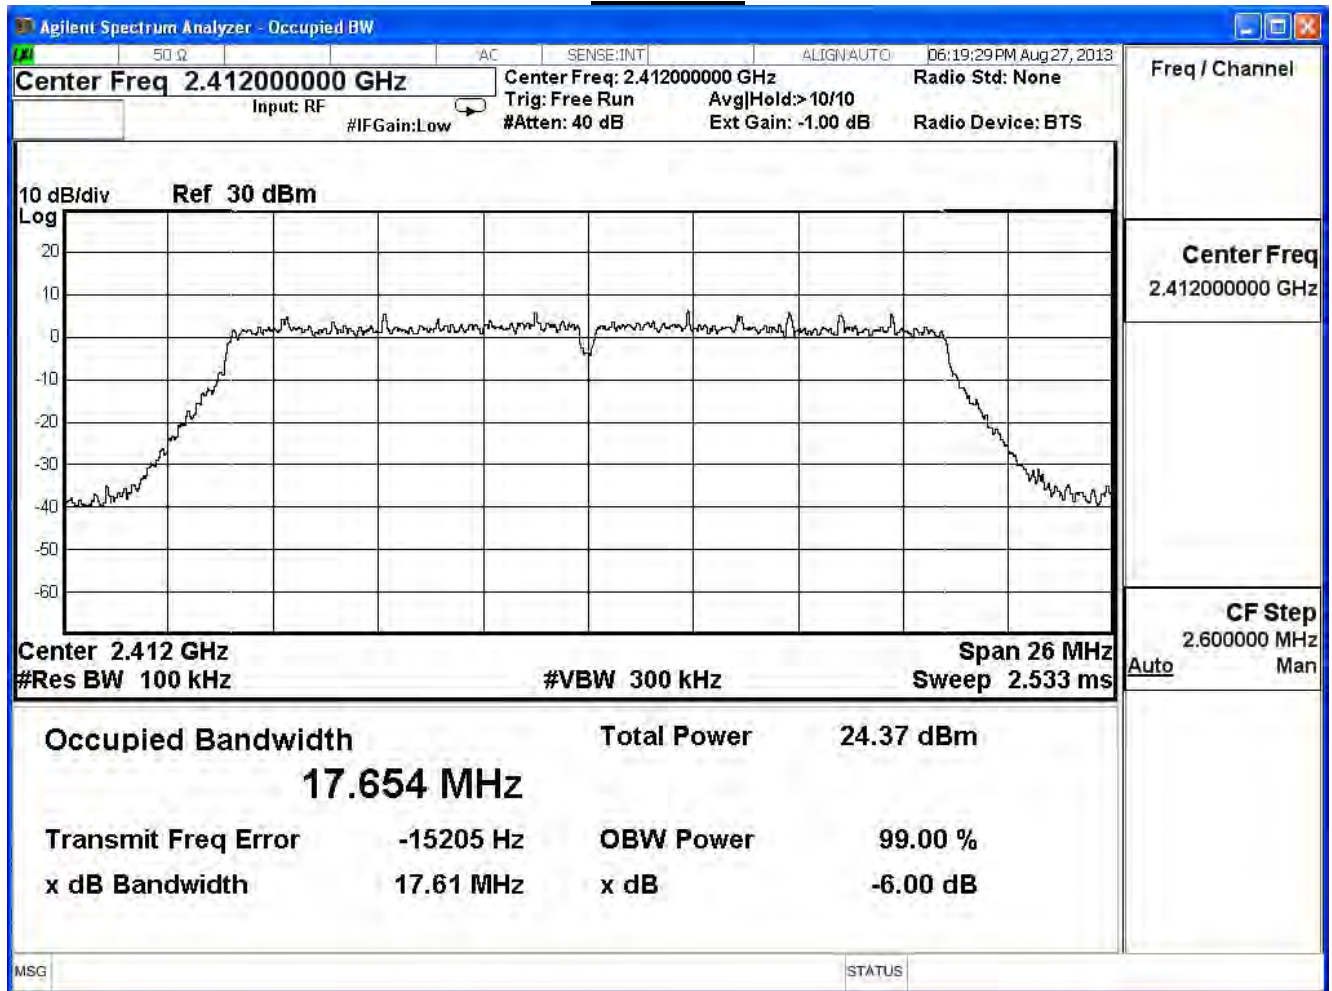

Channel 6

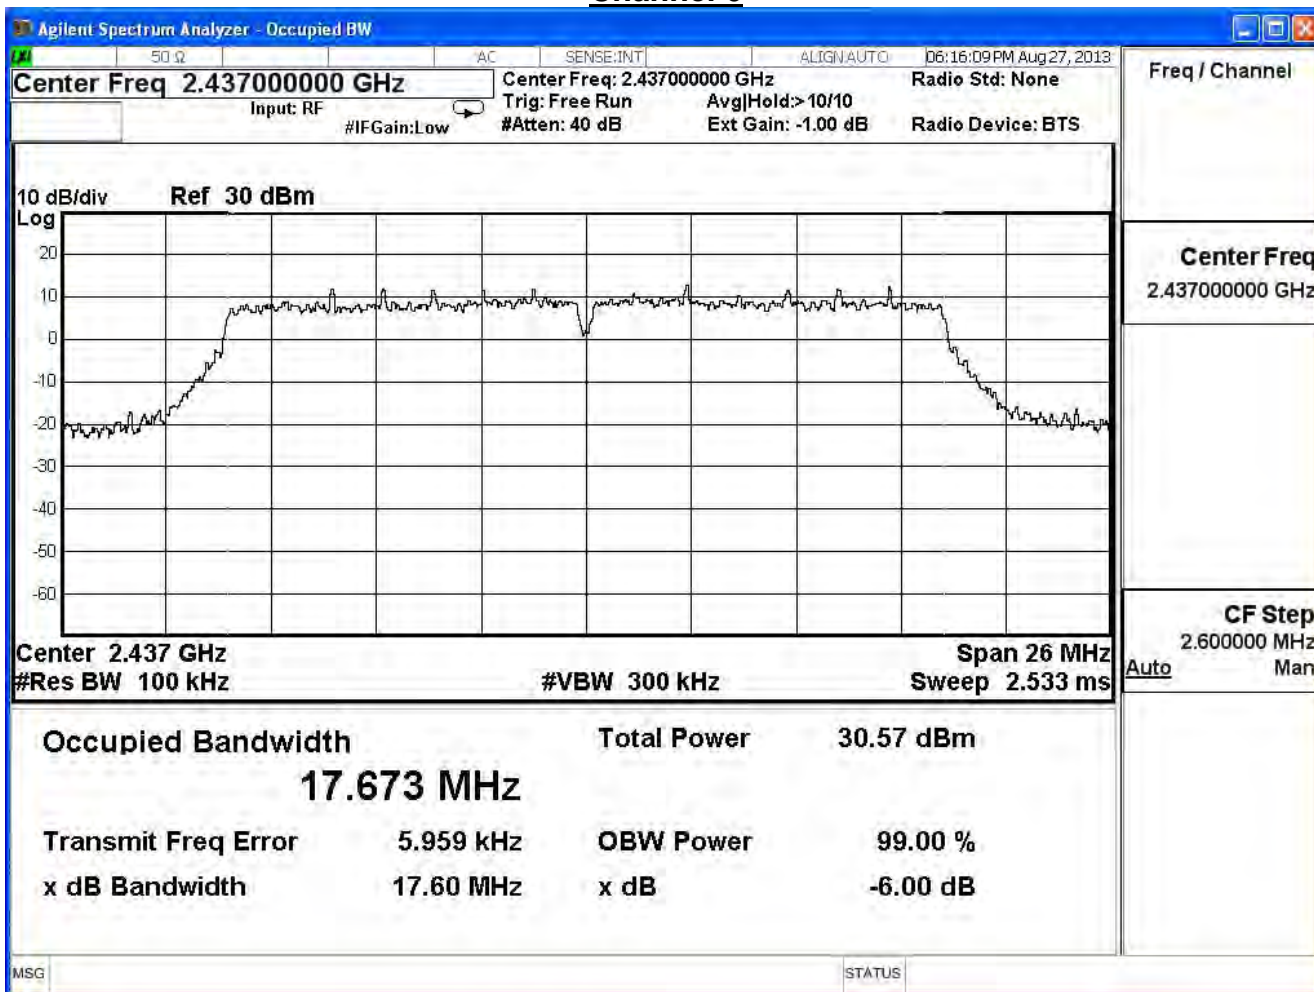


Channel 11

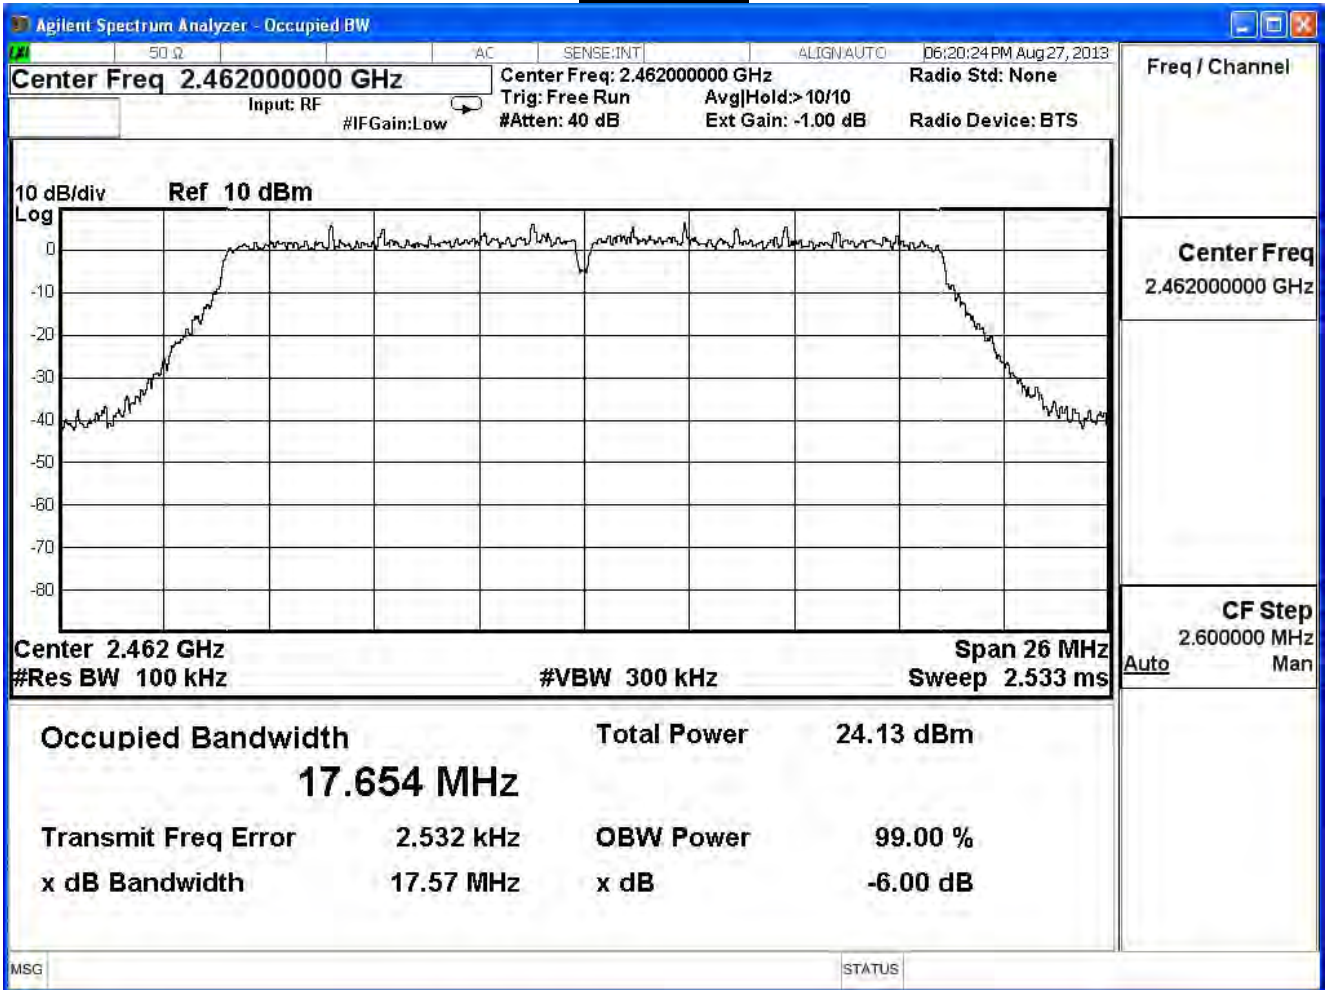


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
1	2412	17.60	≥0.5	Pass
6	2437	17.59	≥0.5	Pass
11	2462	17.59	≥0.5	Pass


Channel 1

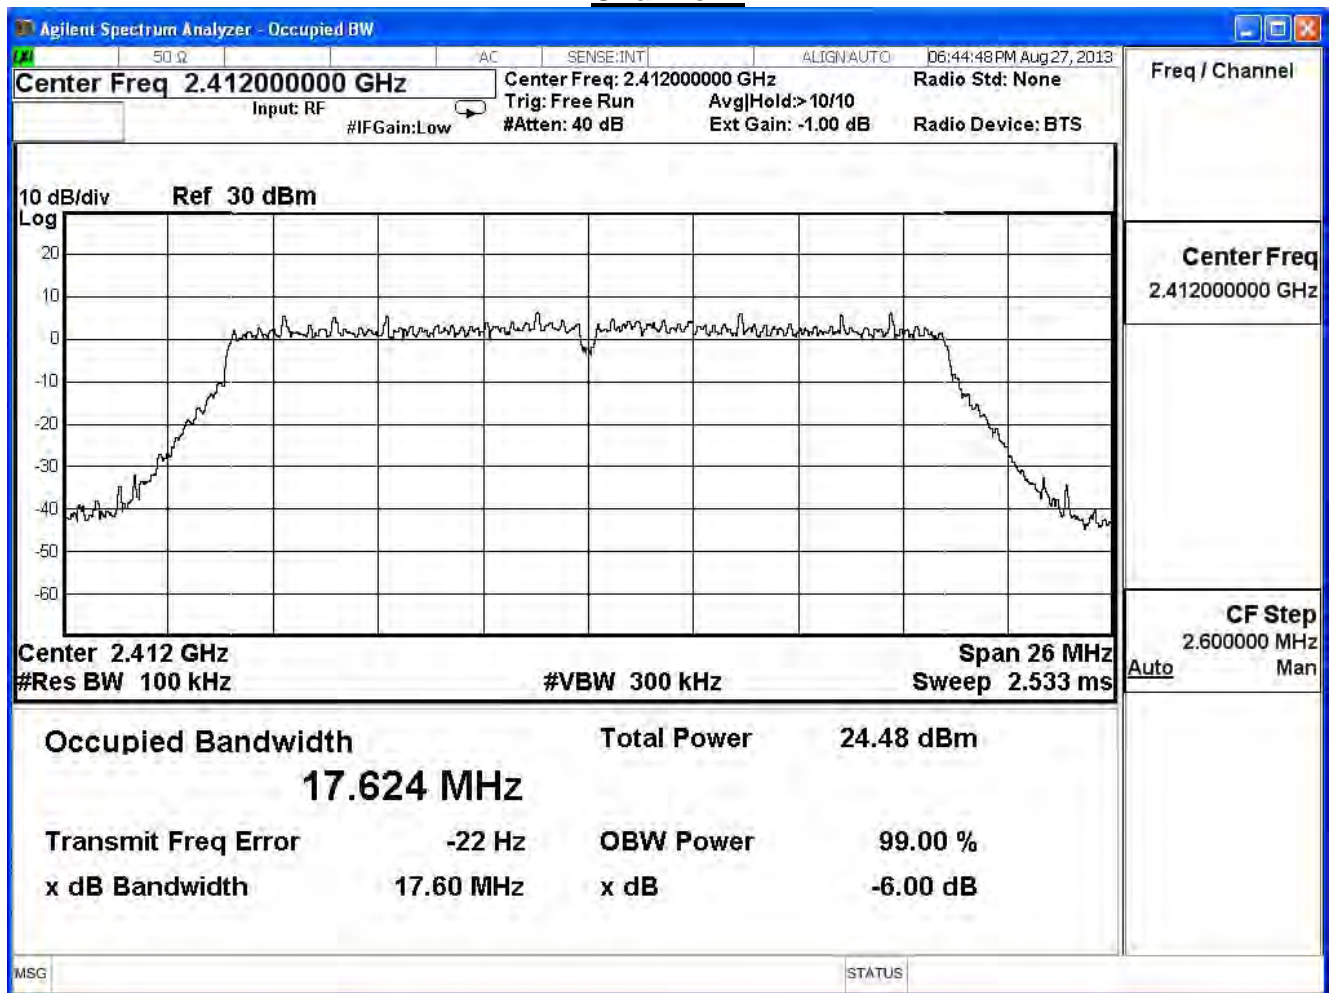

Channel 6

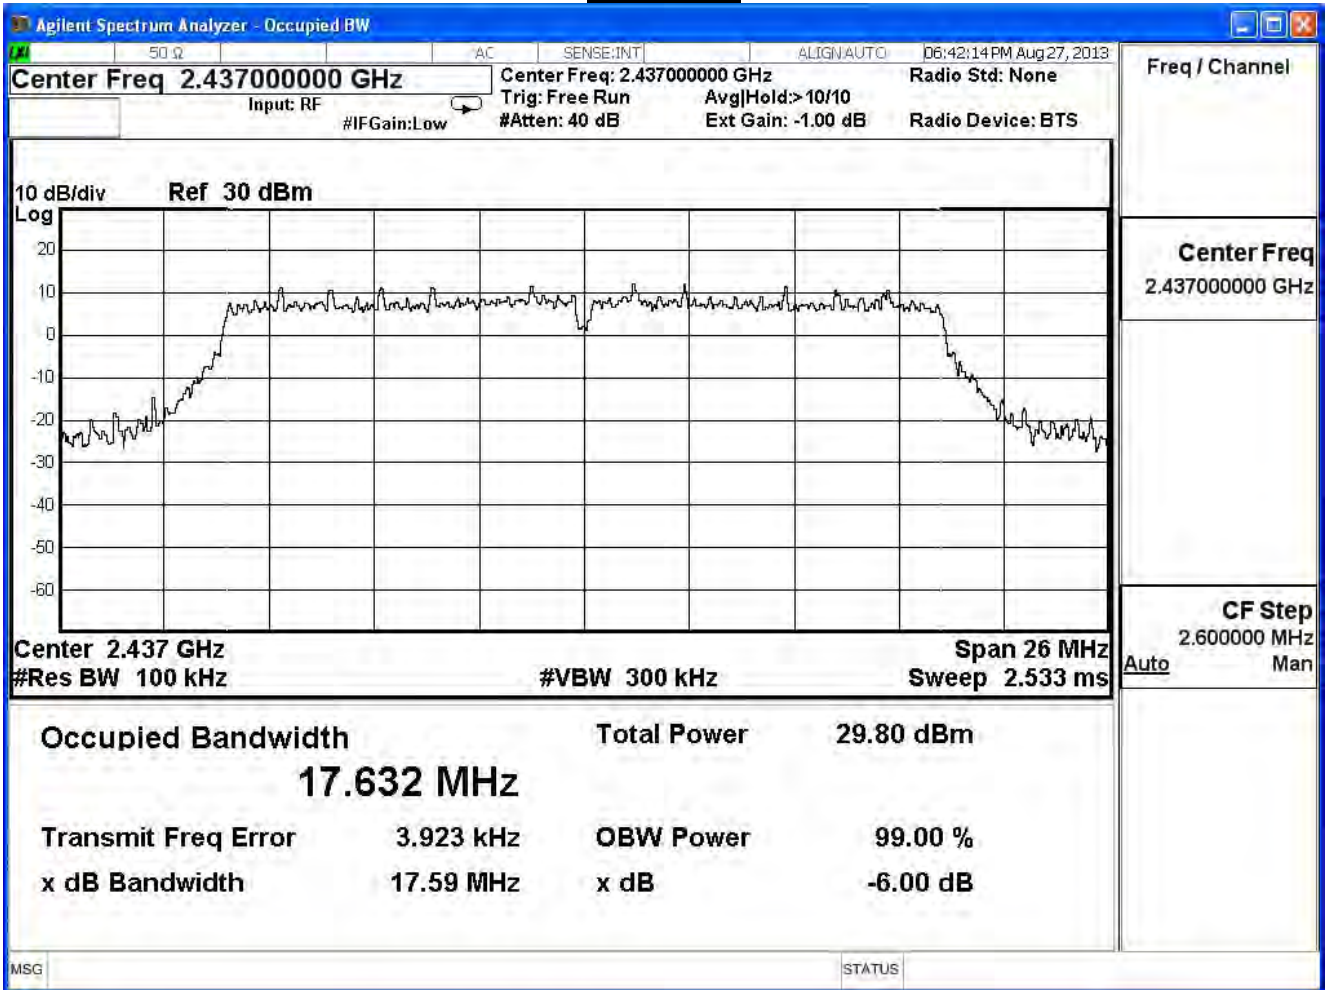


Channel 11

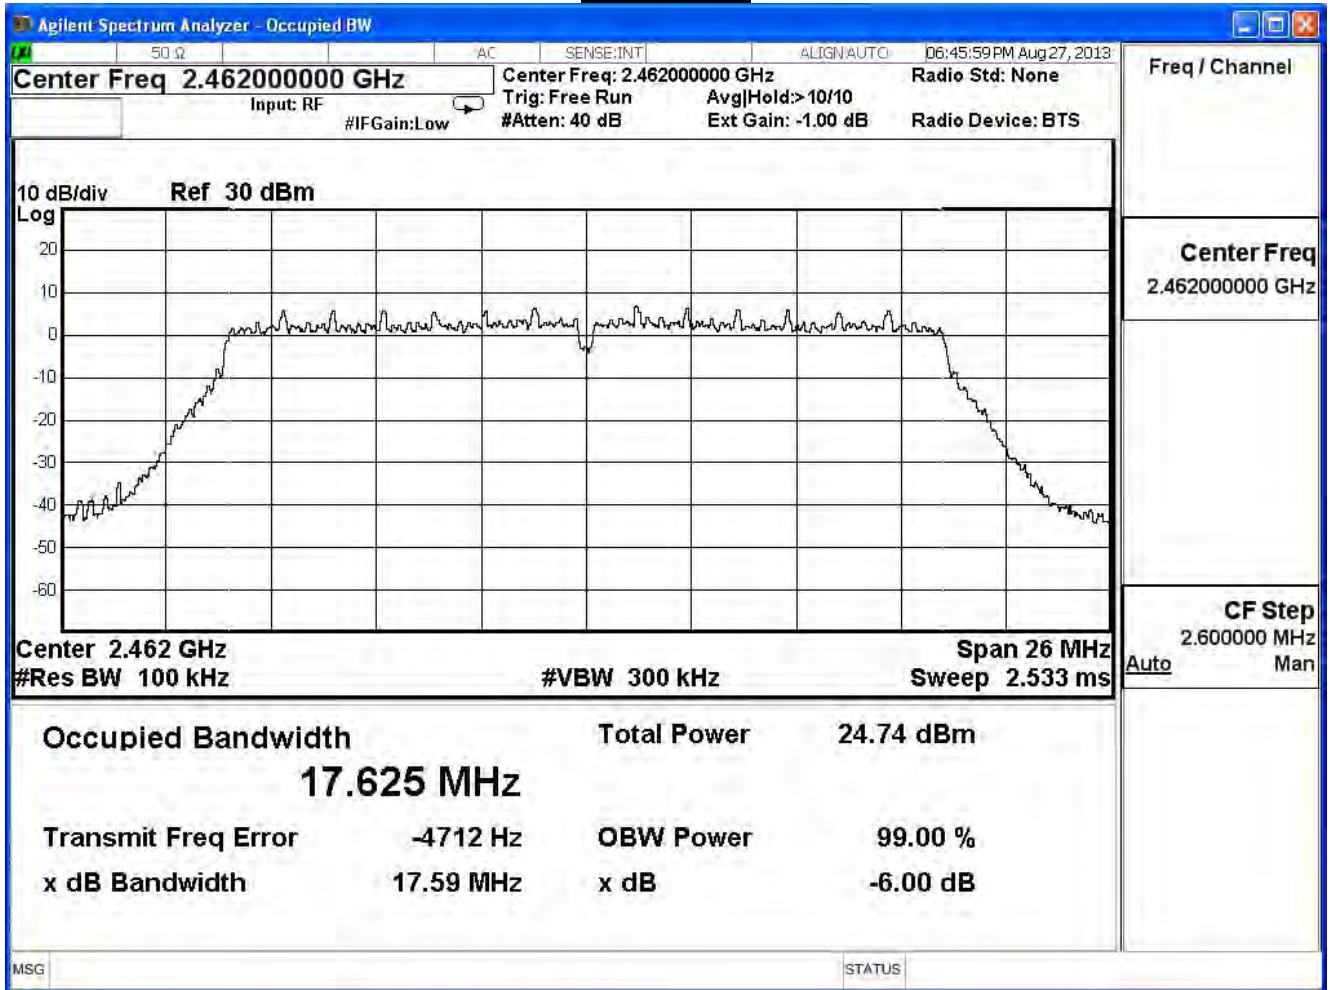


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
1	2412	17.61	≥ 0.5	Pass
6	2437	17.35	≥ 0.5	Pass
11	2462	17.60	≥ 0.5	Pass


Channel 1

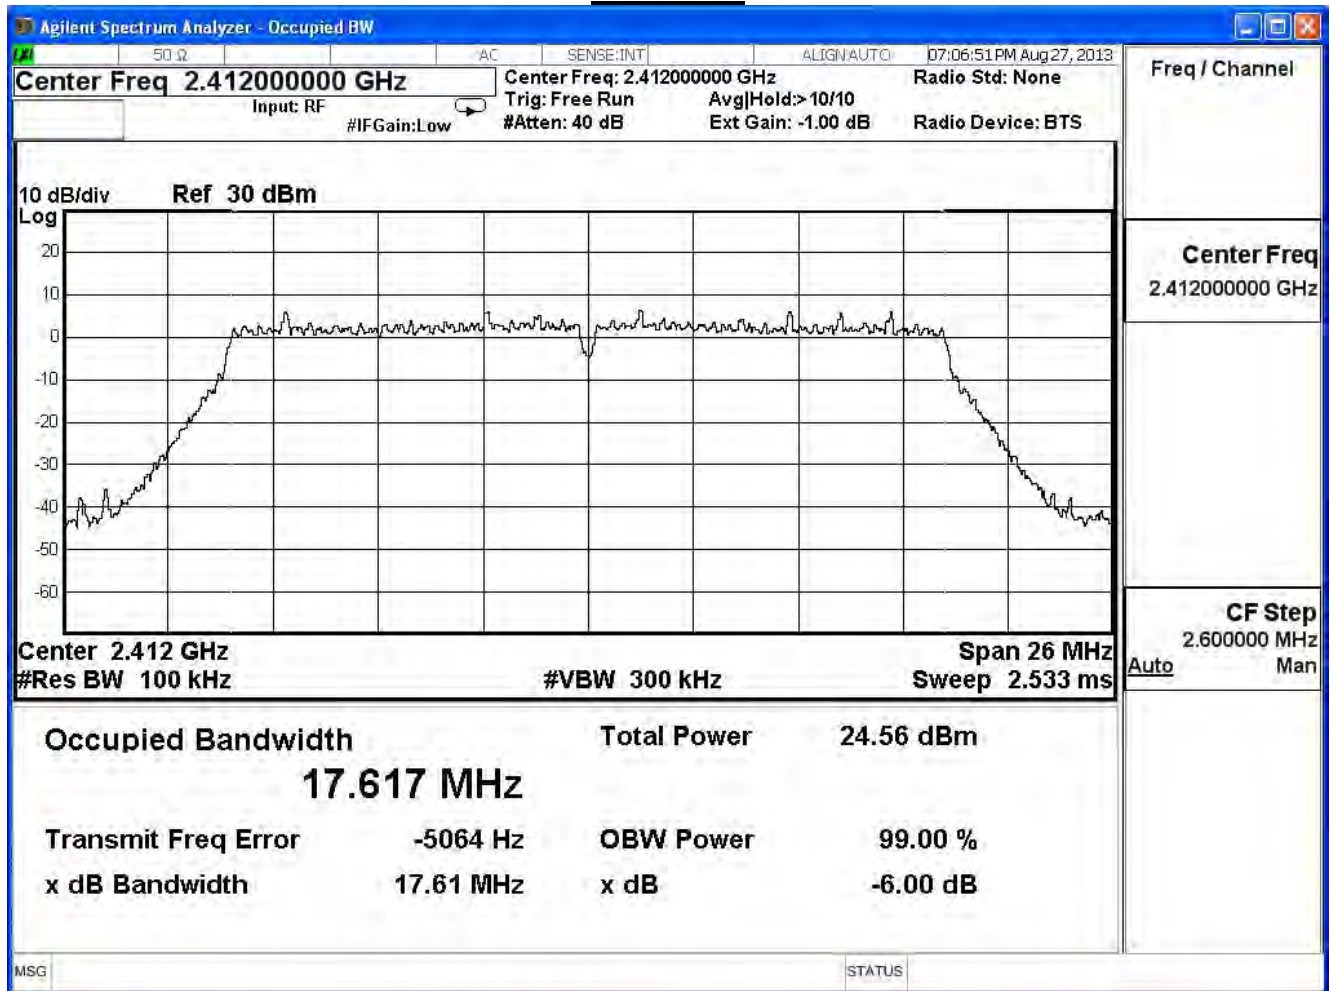

Channel 6

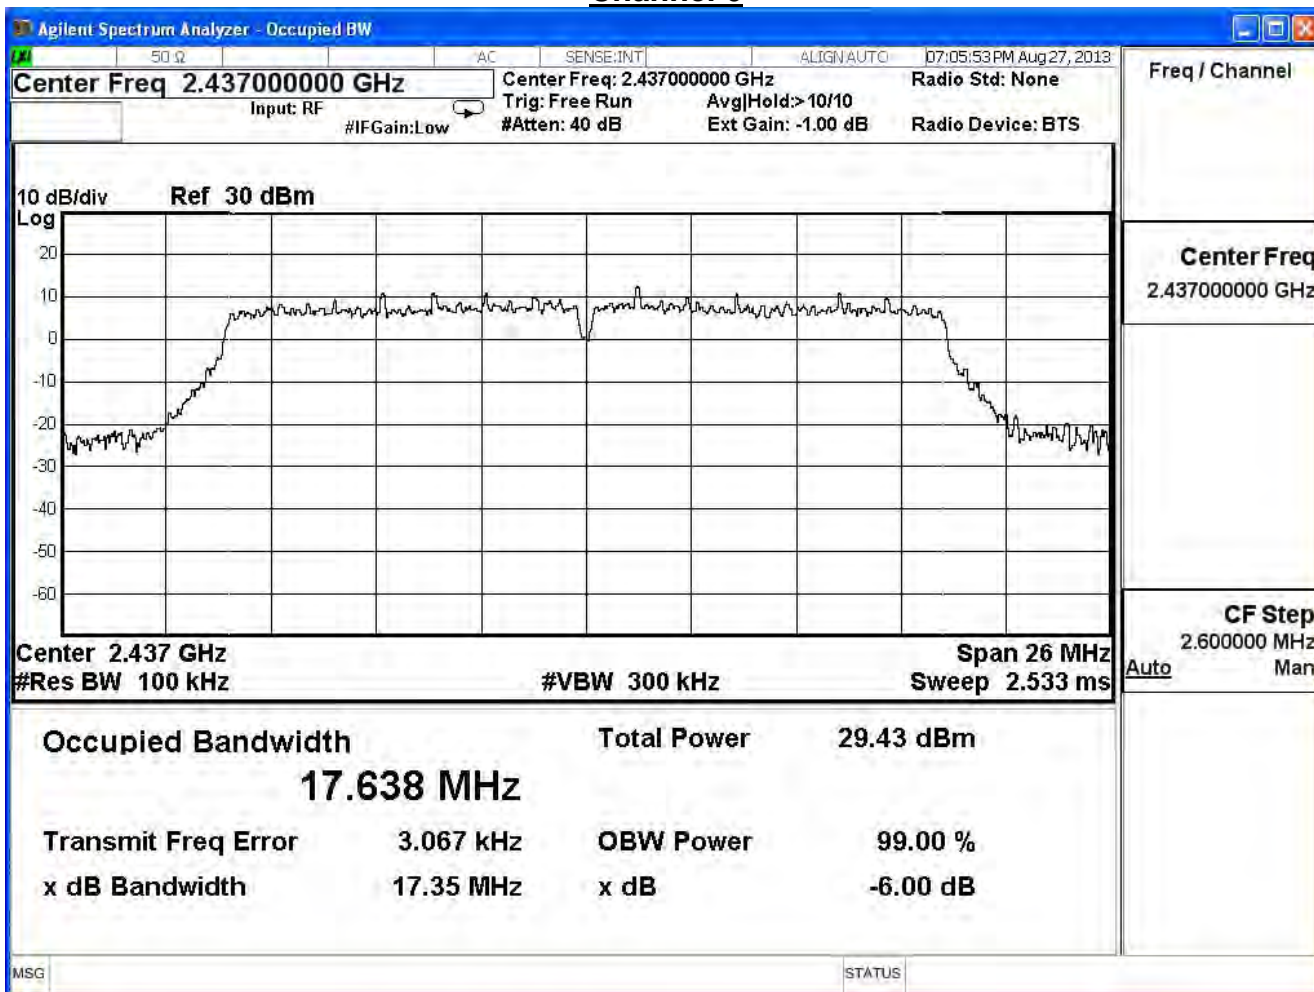


Channel 11

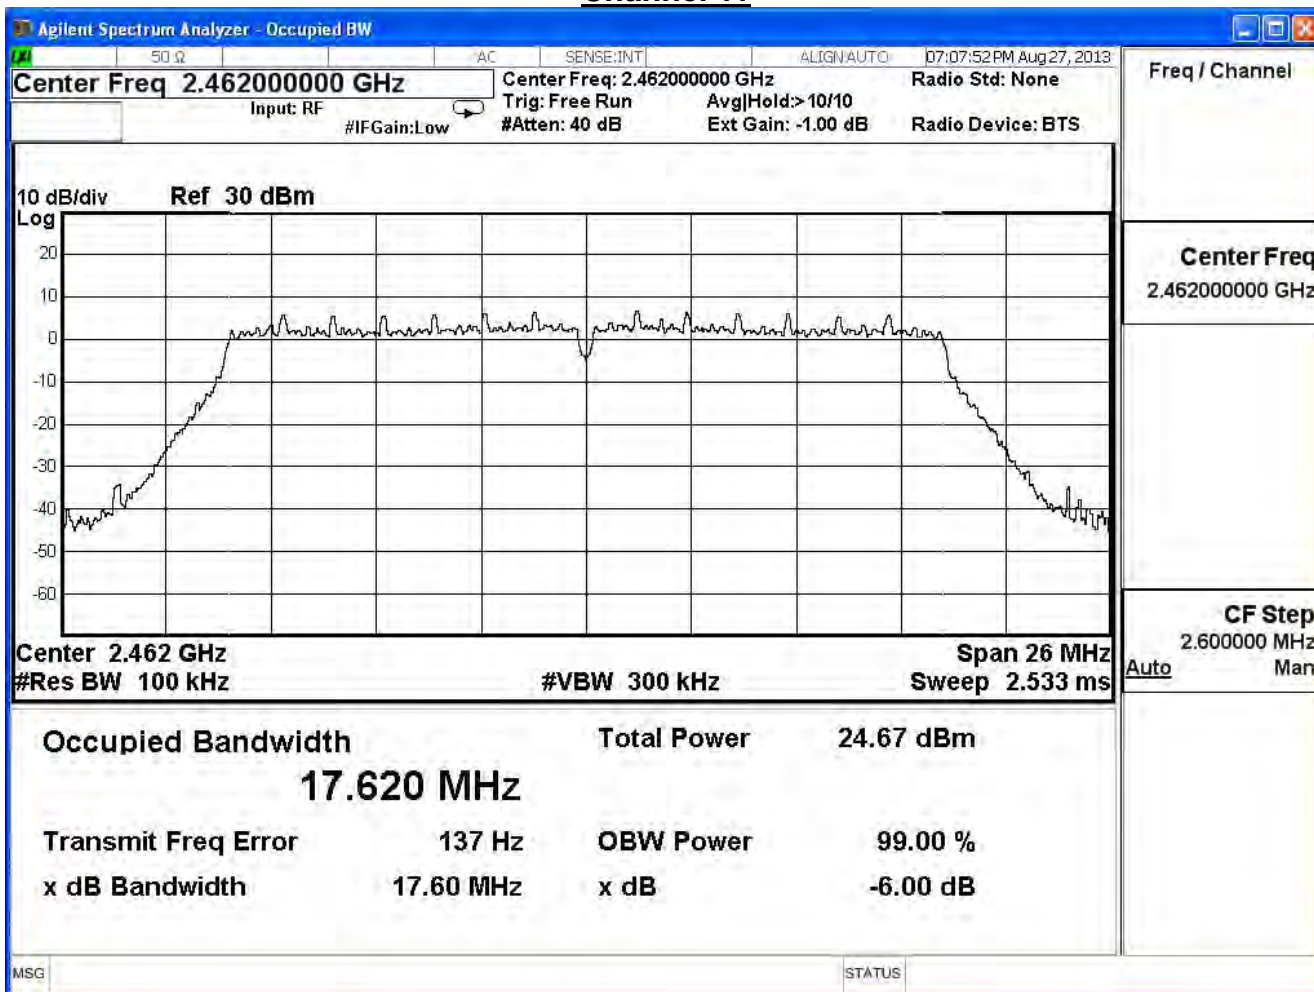


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
3	2422	36.09	≥ 0.5	Pass
6	2437	36.11	≥ 0.5	Pass
9	2452	36.12	≥ 0.5	Pass


Channel 3

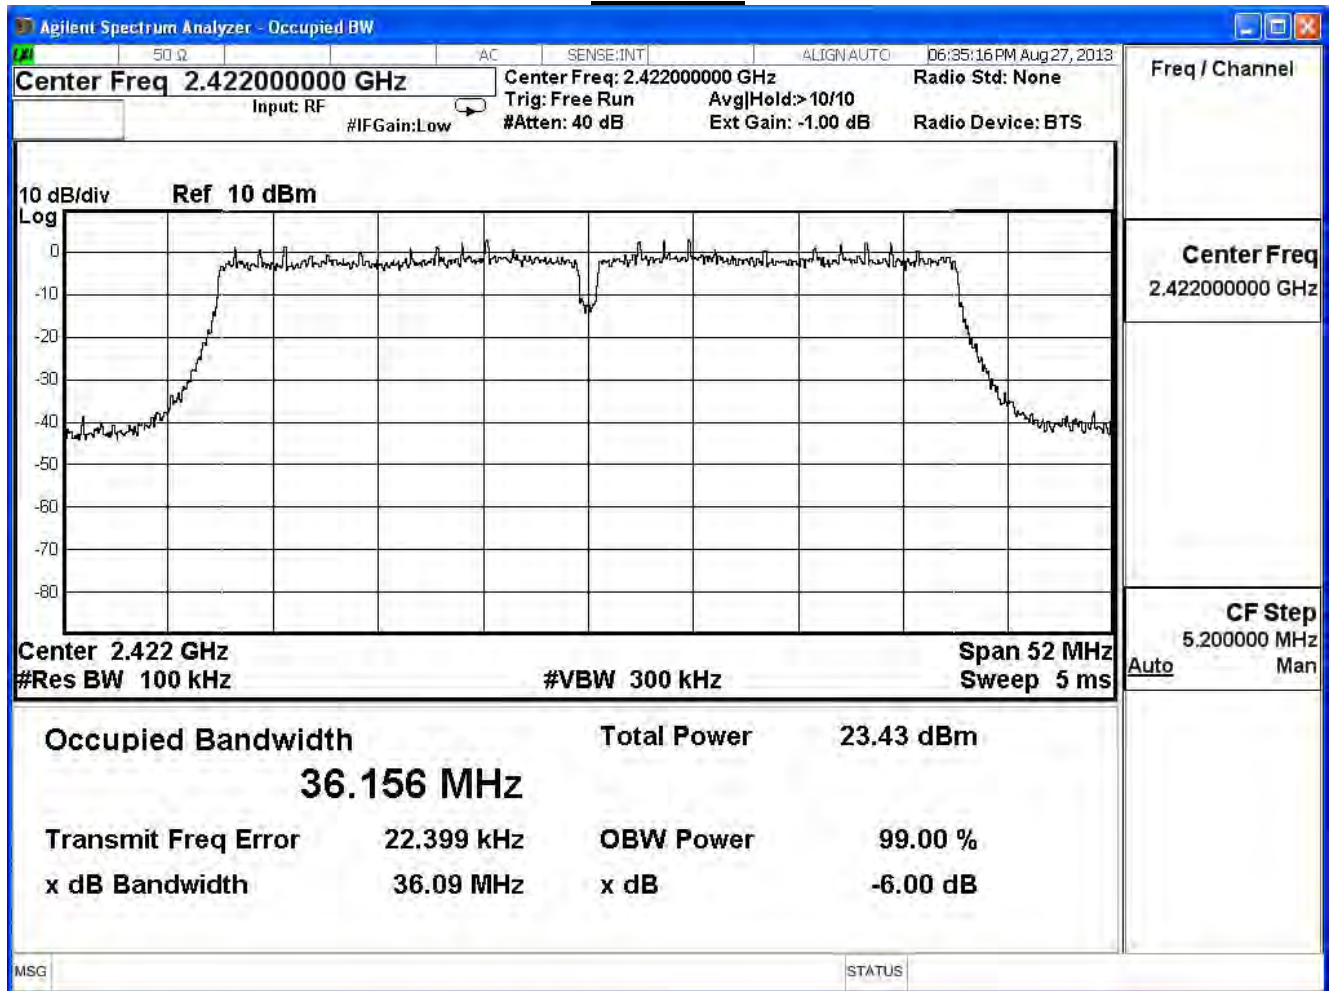

Channel 6

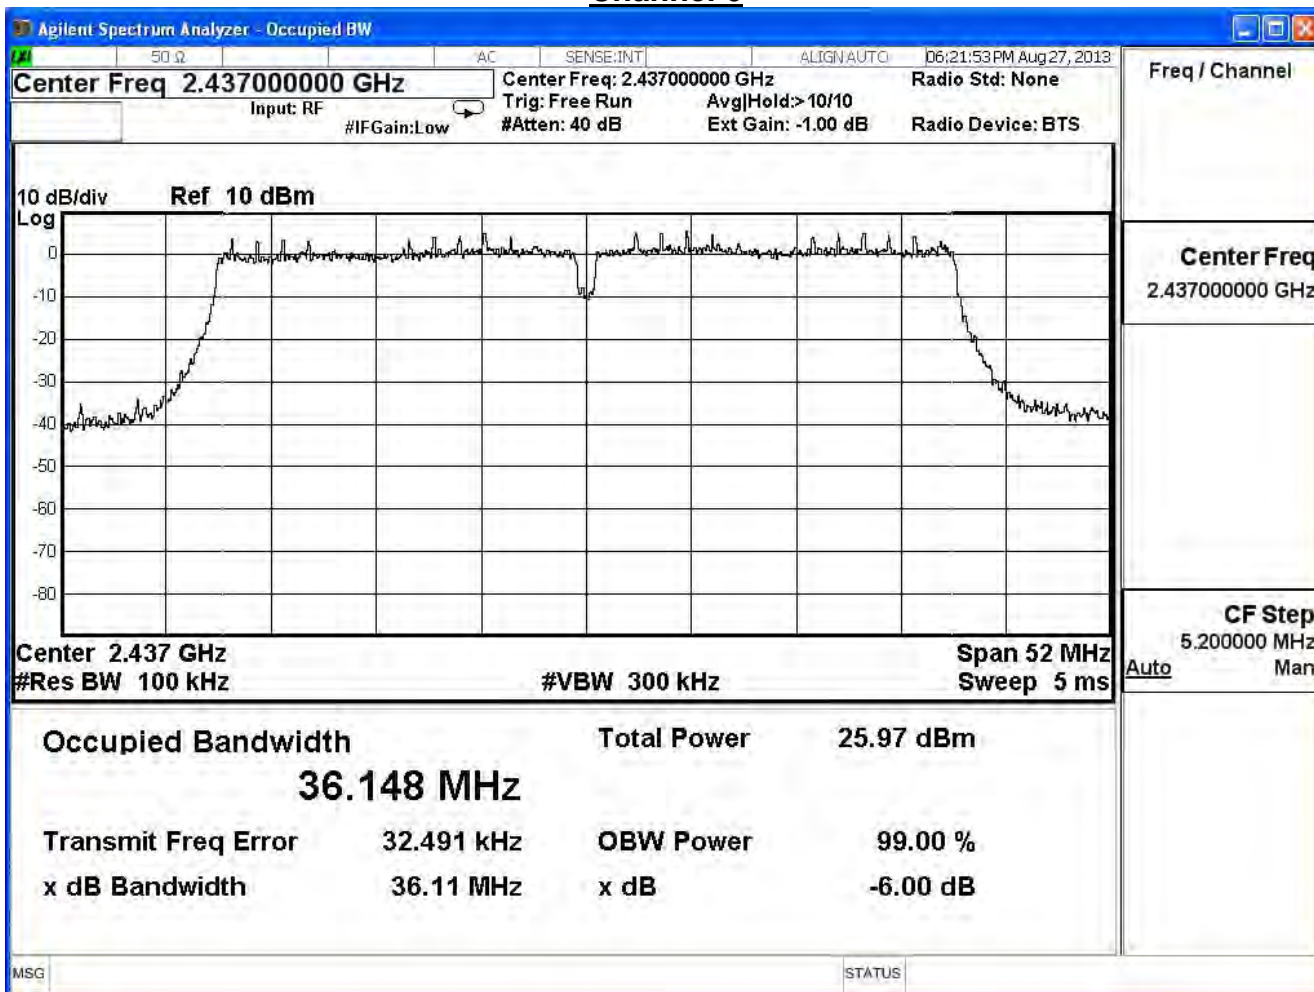


Channel 9

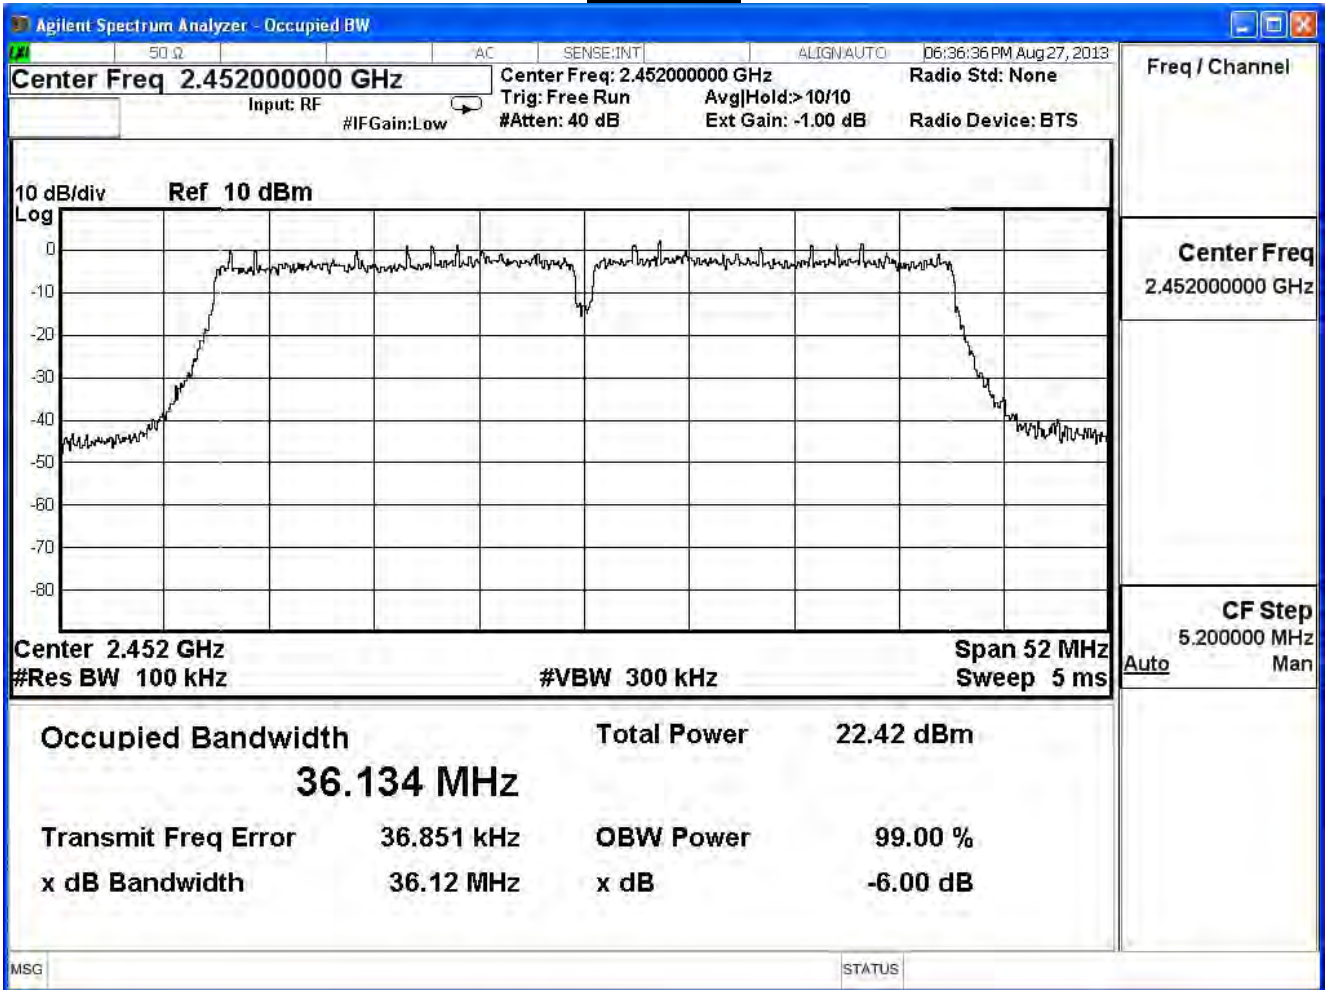


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
3	2422	36.35	≥ 0.5	Pass
6	2437	36.34	≥ 0.5	Pass
9	2452	36.14	≥ 0.5	Pass


Channel 3

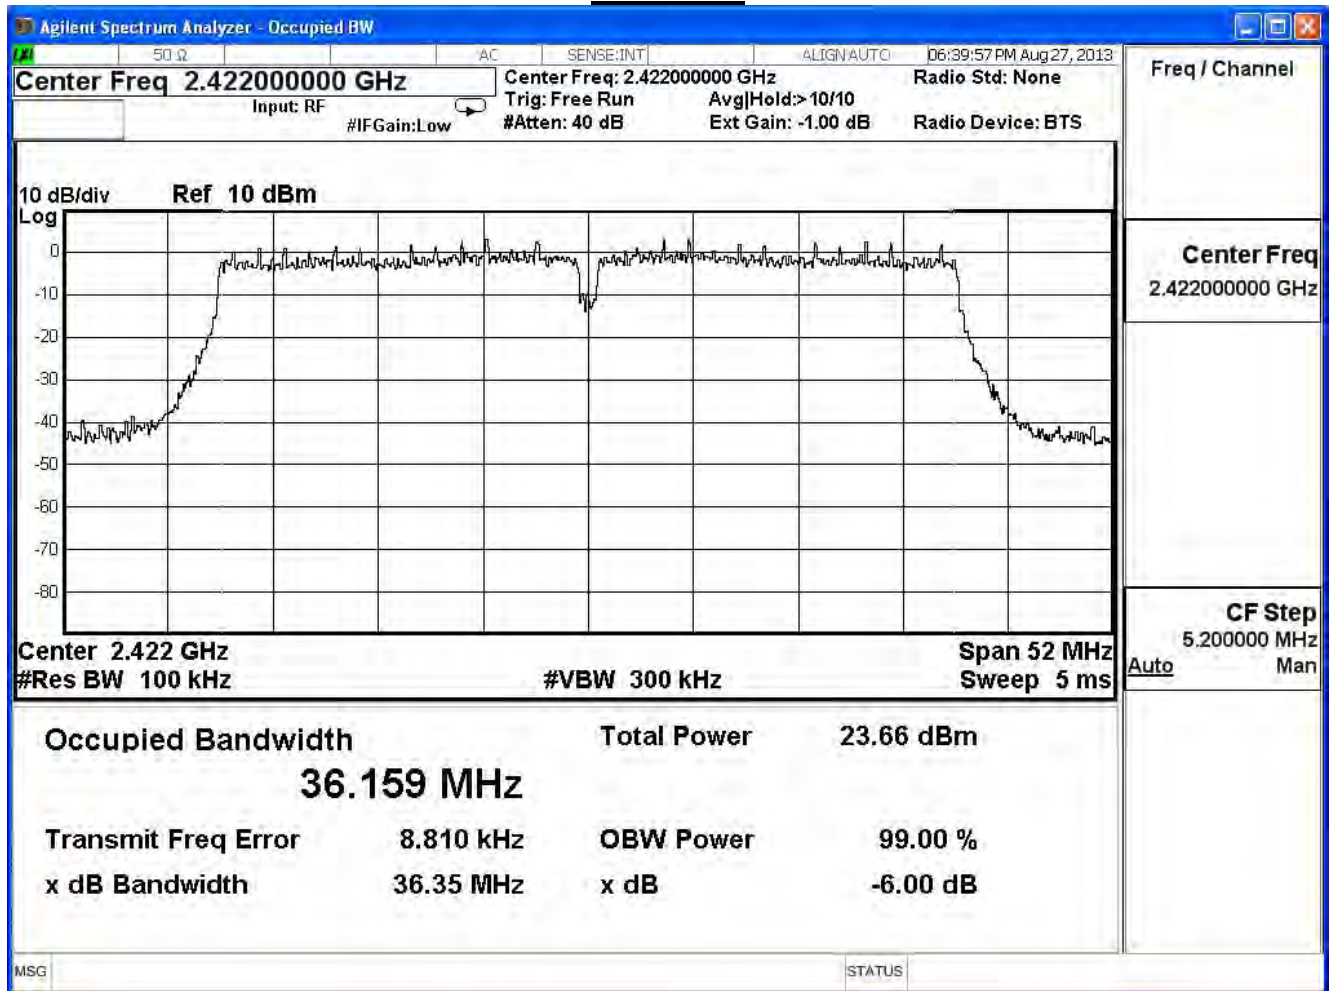

Channel 6

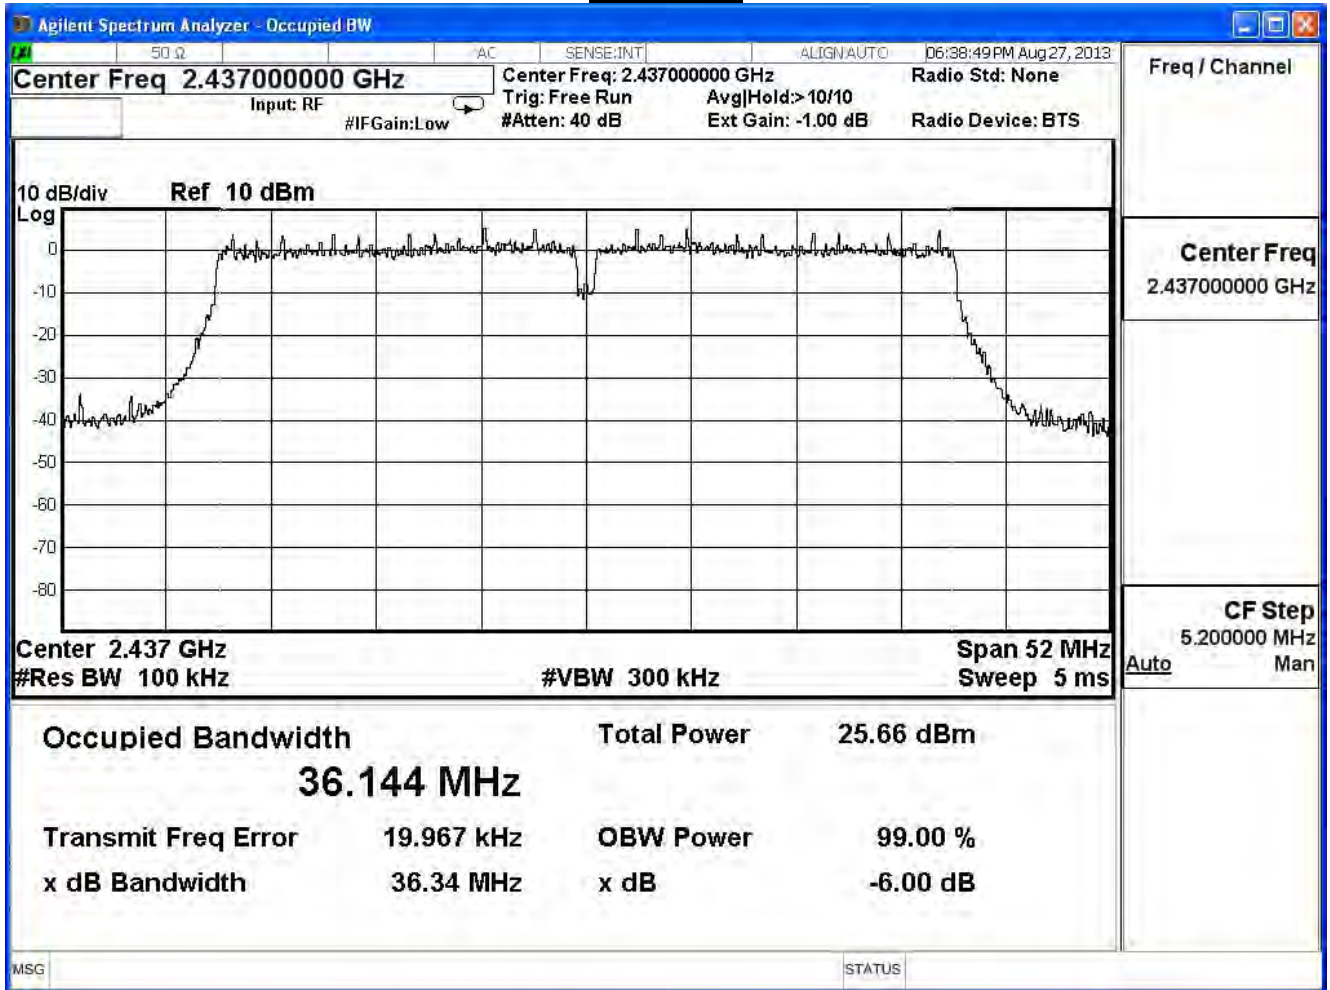


Channel 9

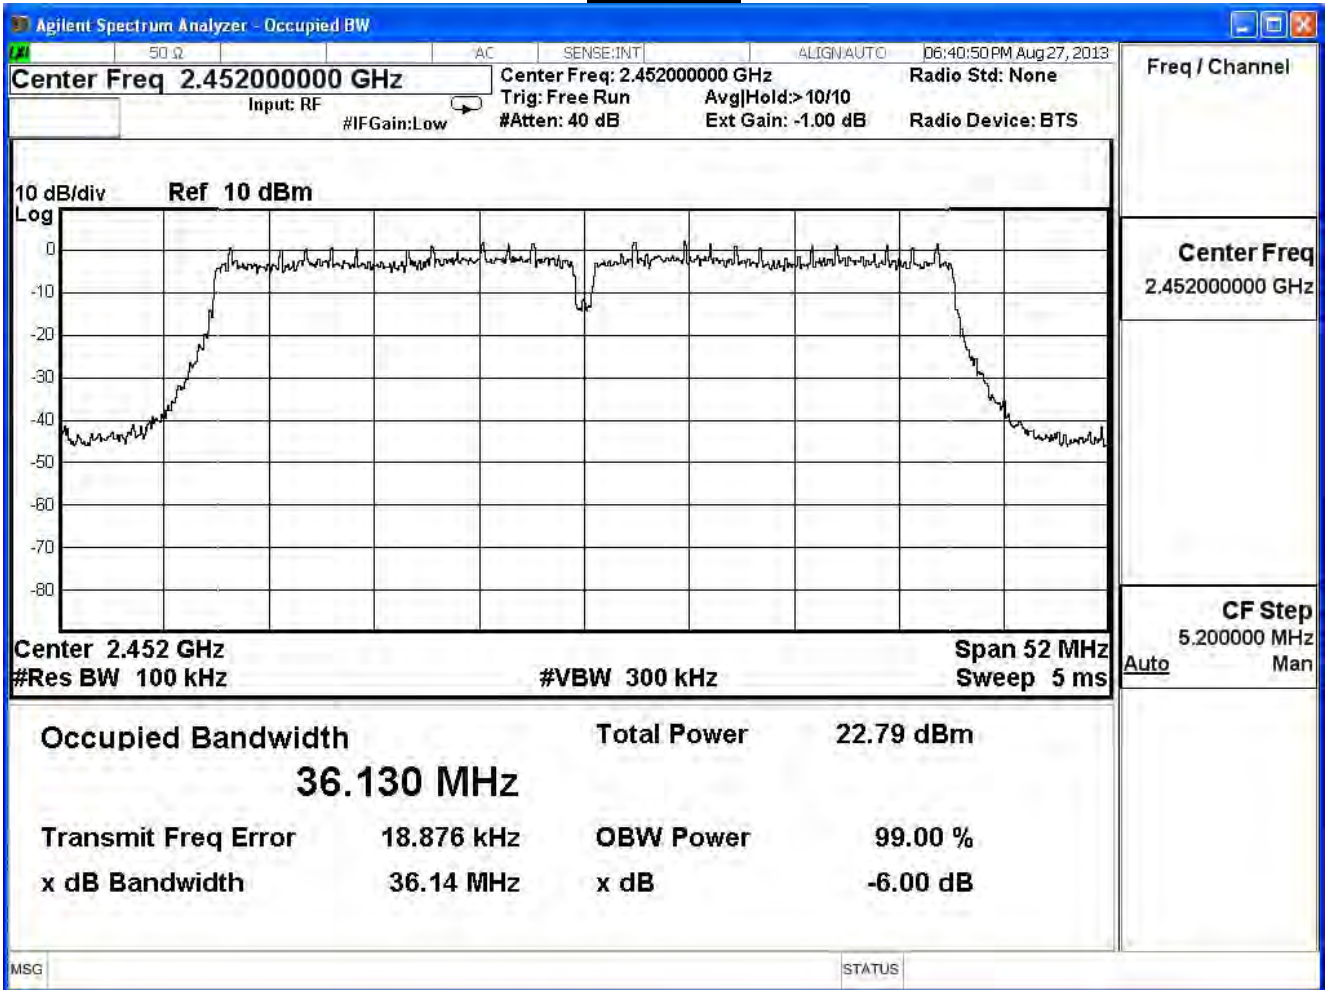


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
3	2422	36.34	≥ 0.5	Pass
6	2437	36.33	≥ 0.5	Pass
9	2452	36.31	≥ 0.5	Pass


Channel 3

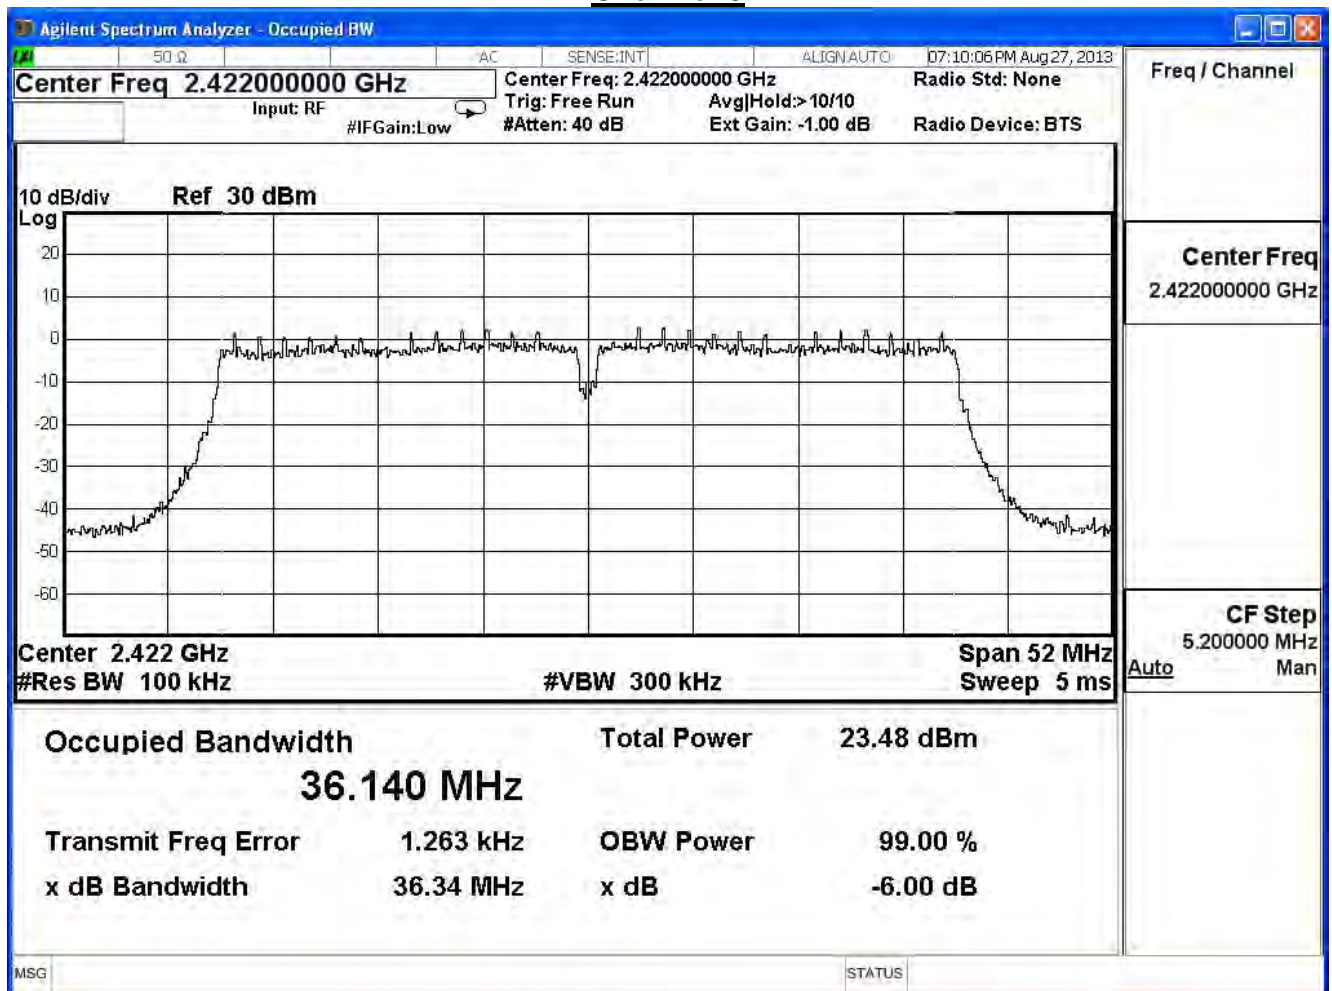

Channel 6

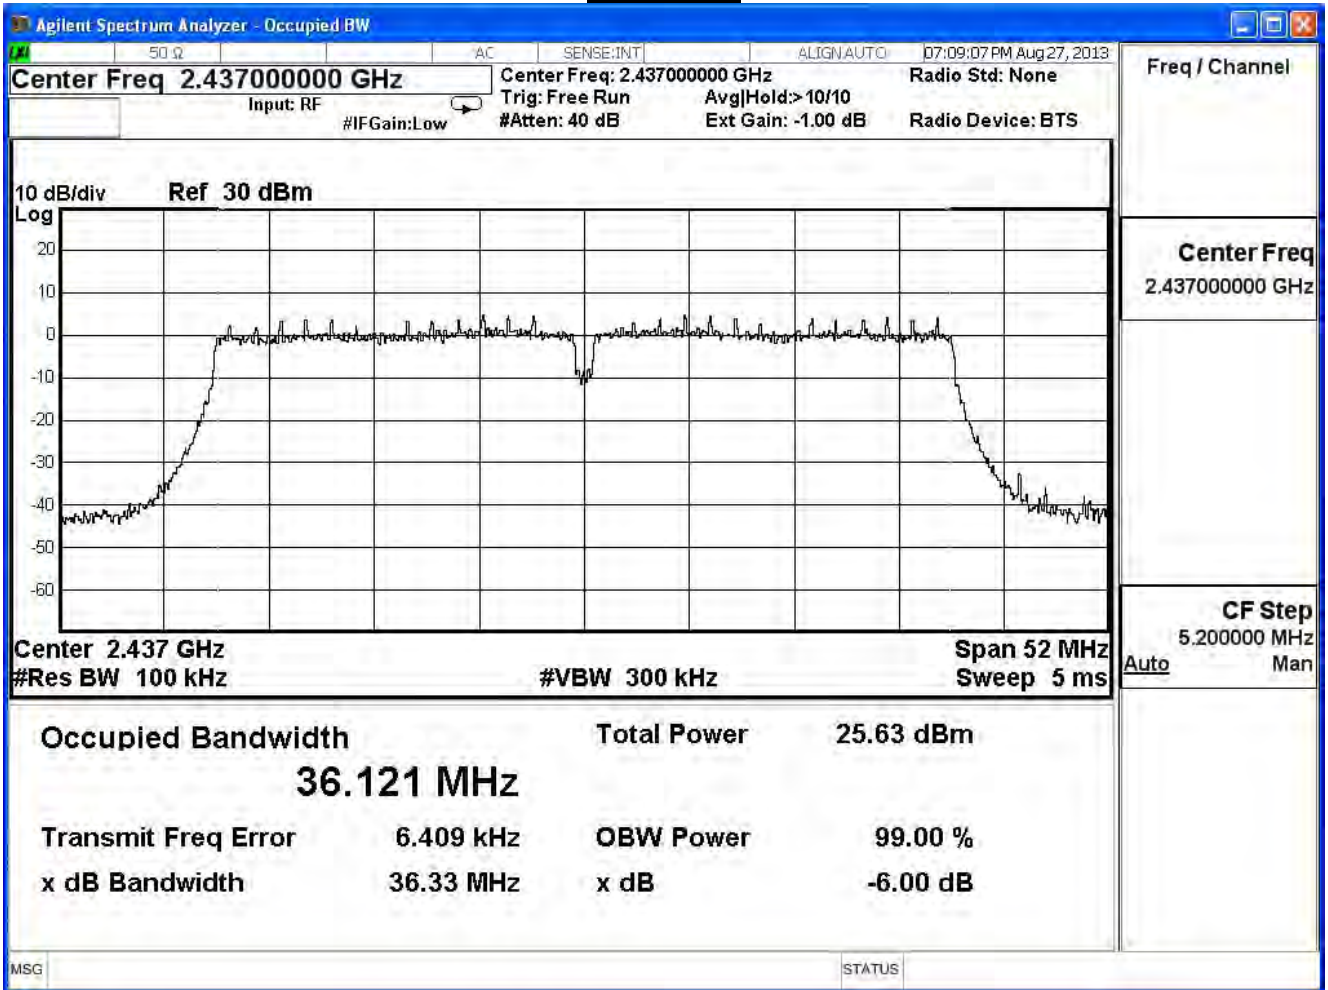

Channel 9

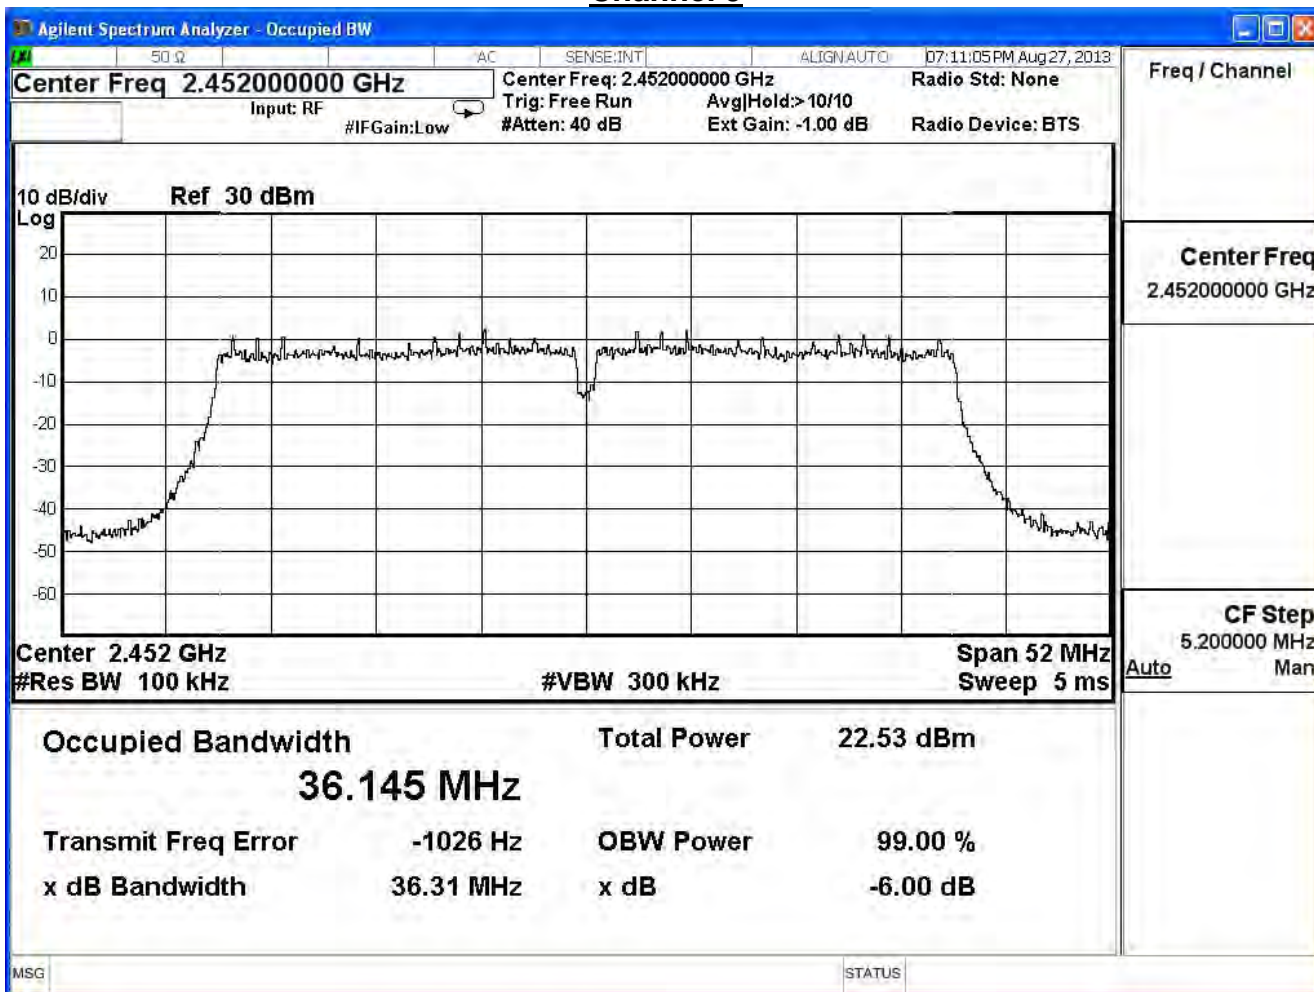


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7


802.11 a (ANT0)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	16.37	≥ 0.5	Pass
157	5785	16.40	≥ 0.5	Pass
165	5825	16.40	≥ 0.5	Pass


Channel 149

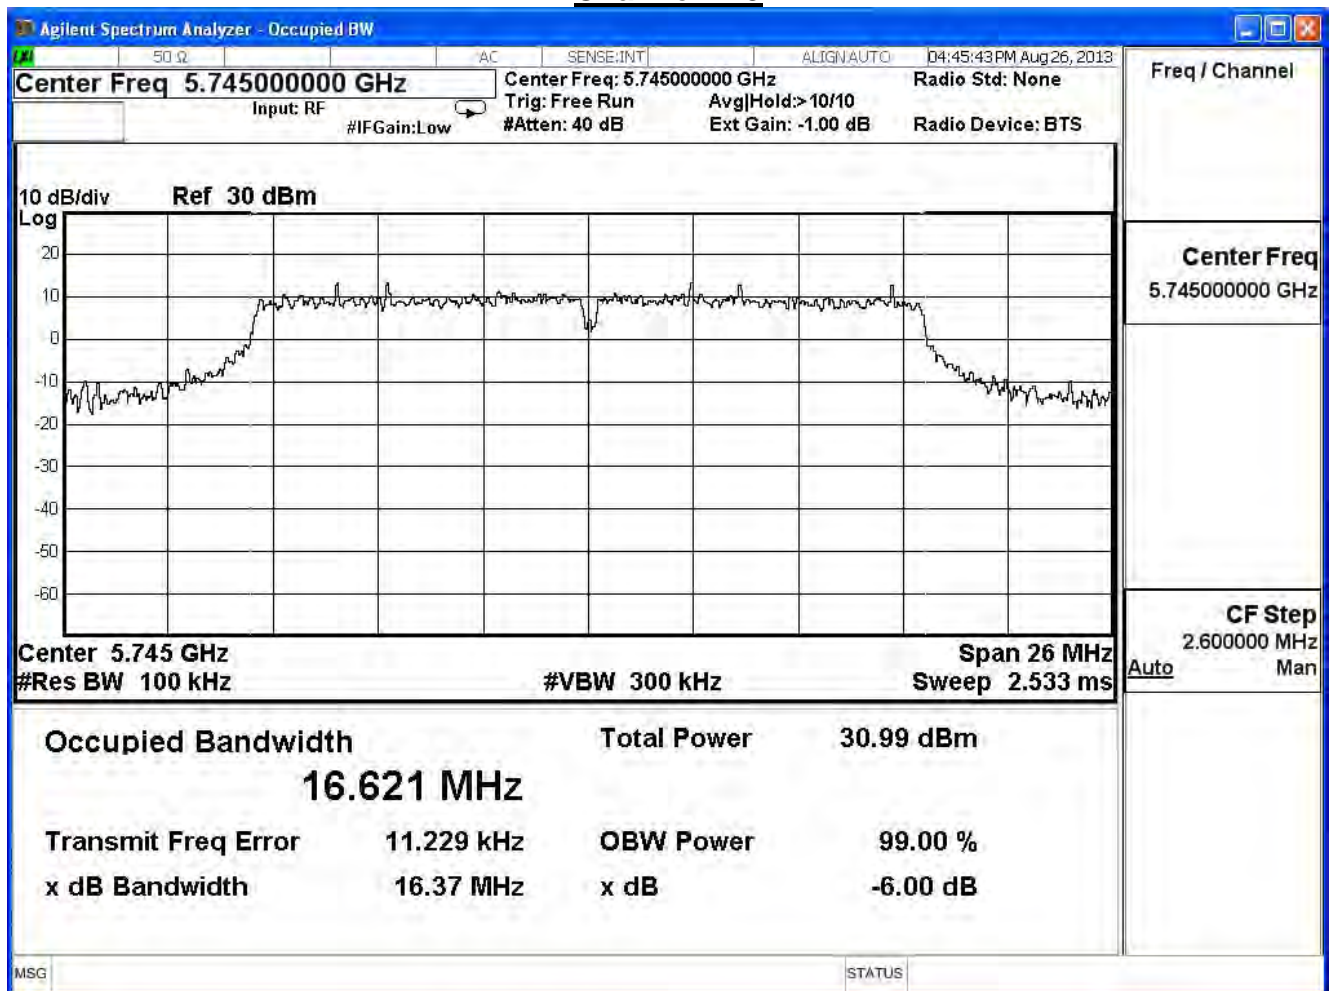

Channel 157

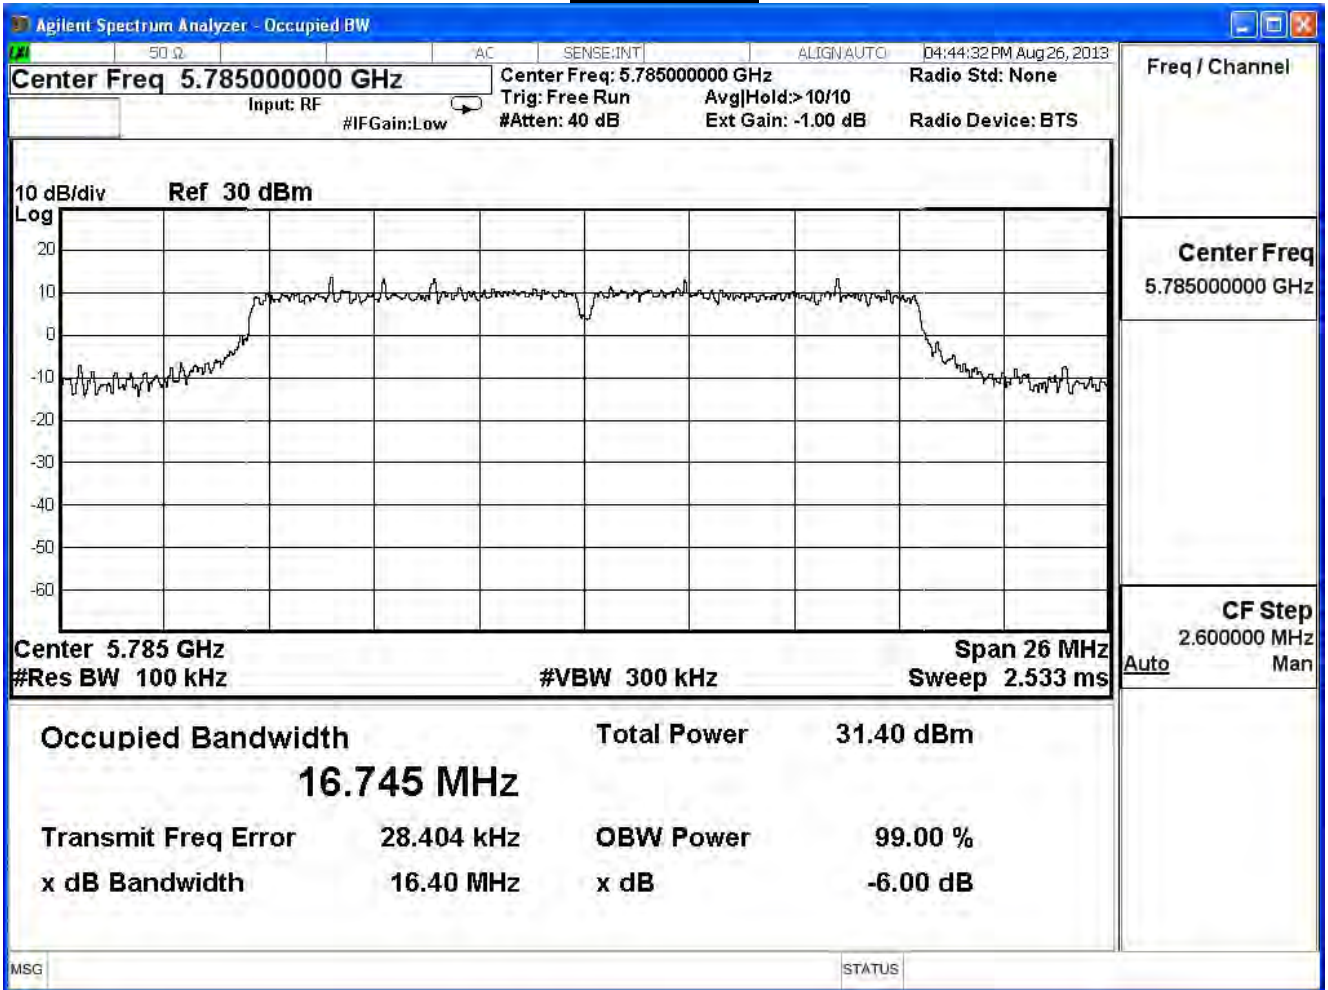

Channel 165

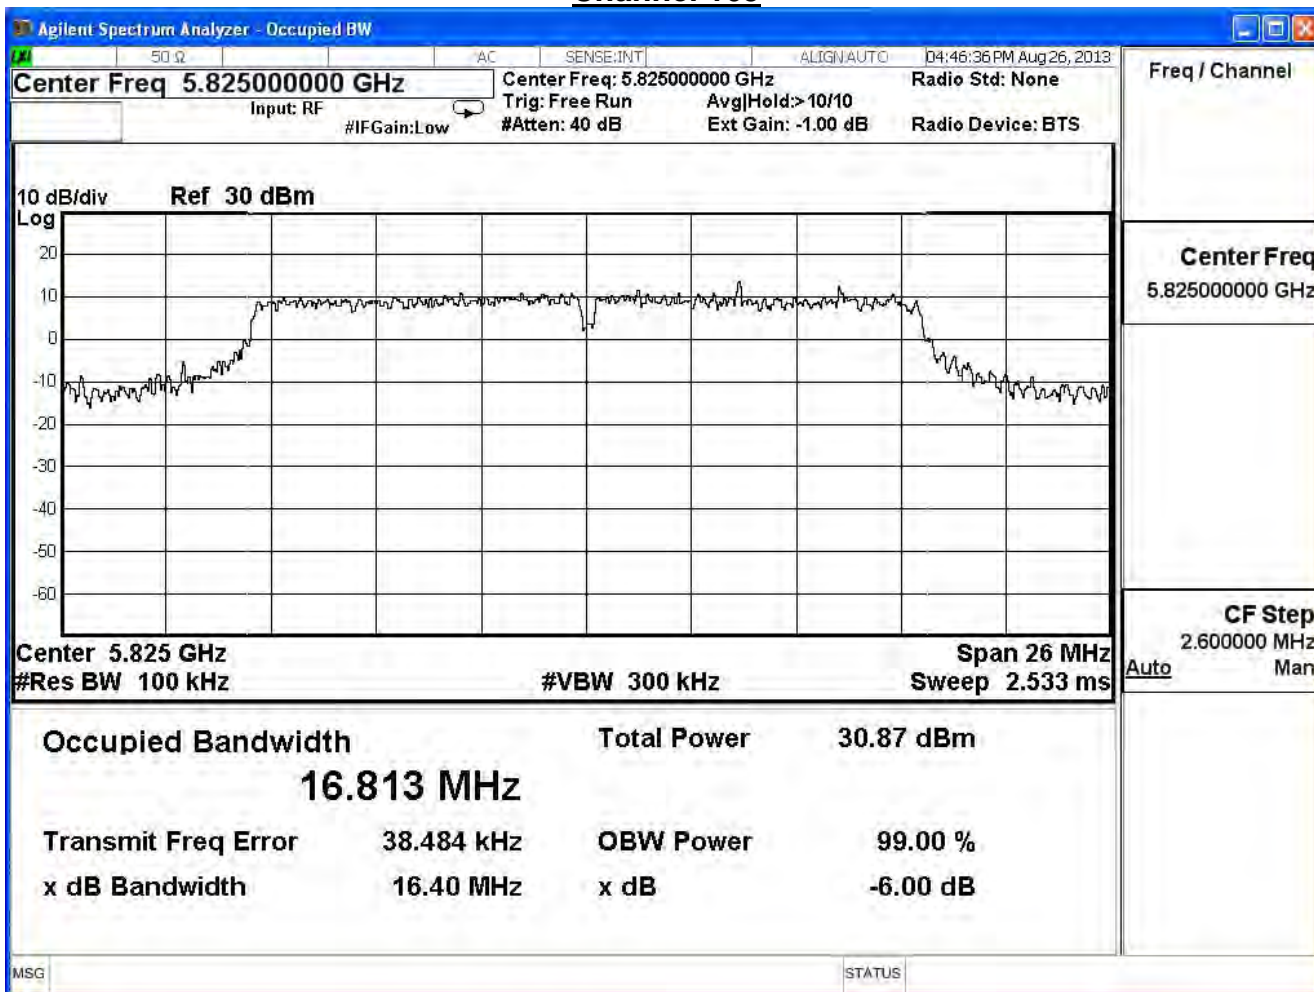


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7


802.11 a (ANT1)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	16.34	≥ 0.5	Pass
157	5785	16.34	≥ 0.5	Pass
165	5825	16.38	≥ 0.5	Pass


Channel 149

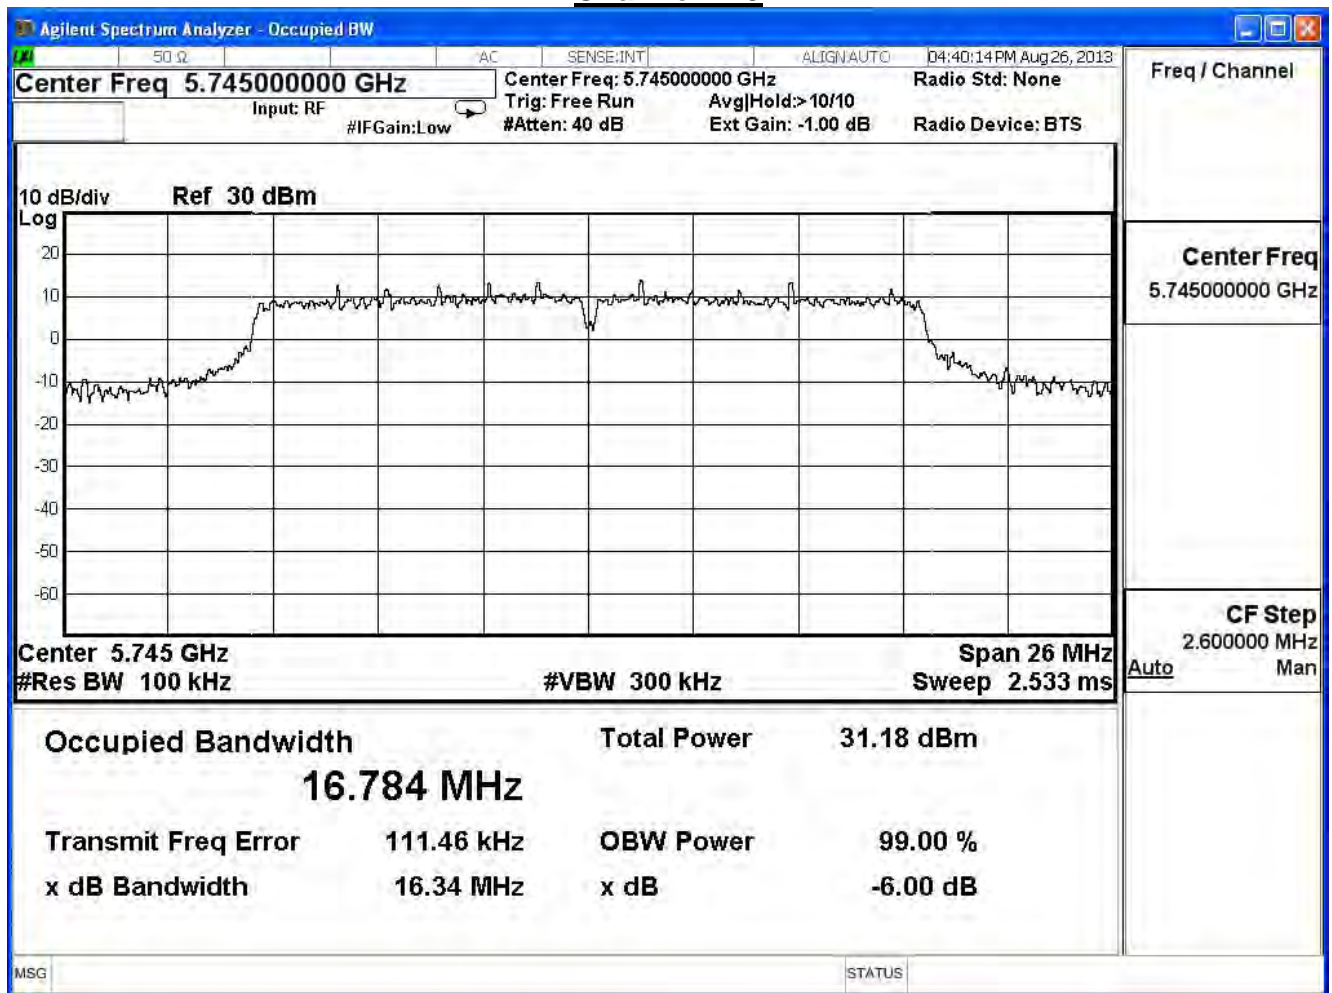

Channel 157

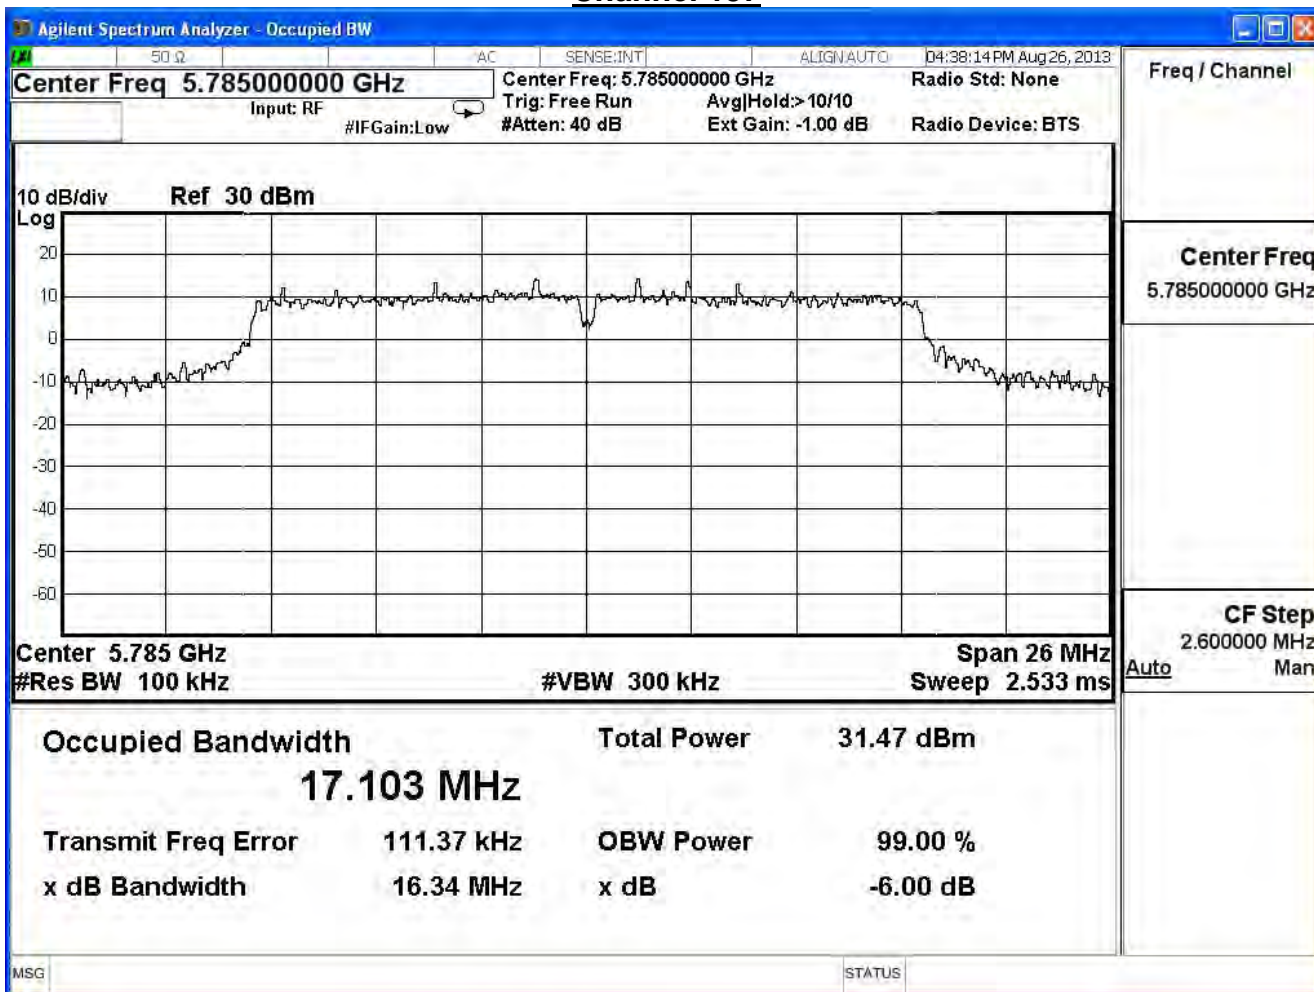

Channel 165

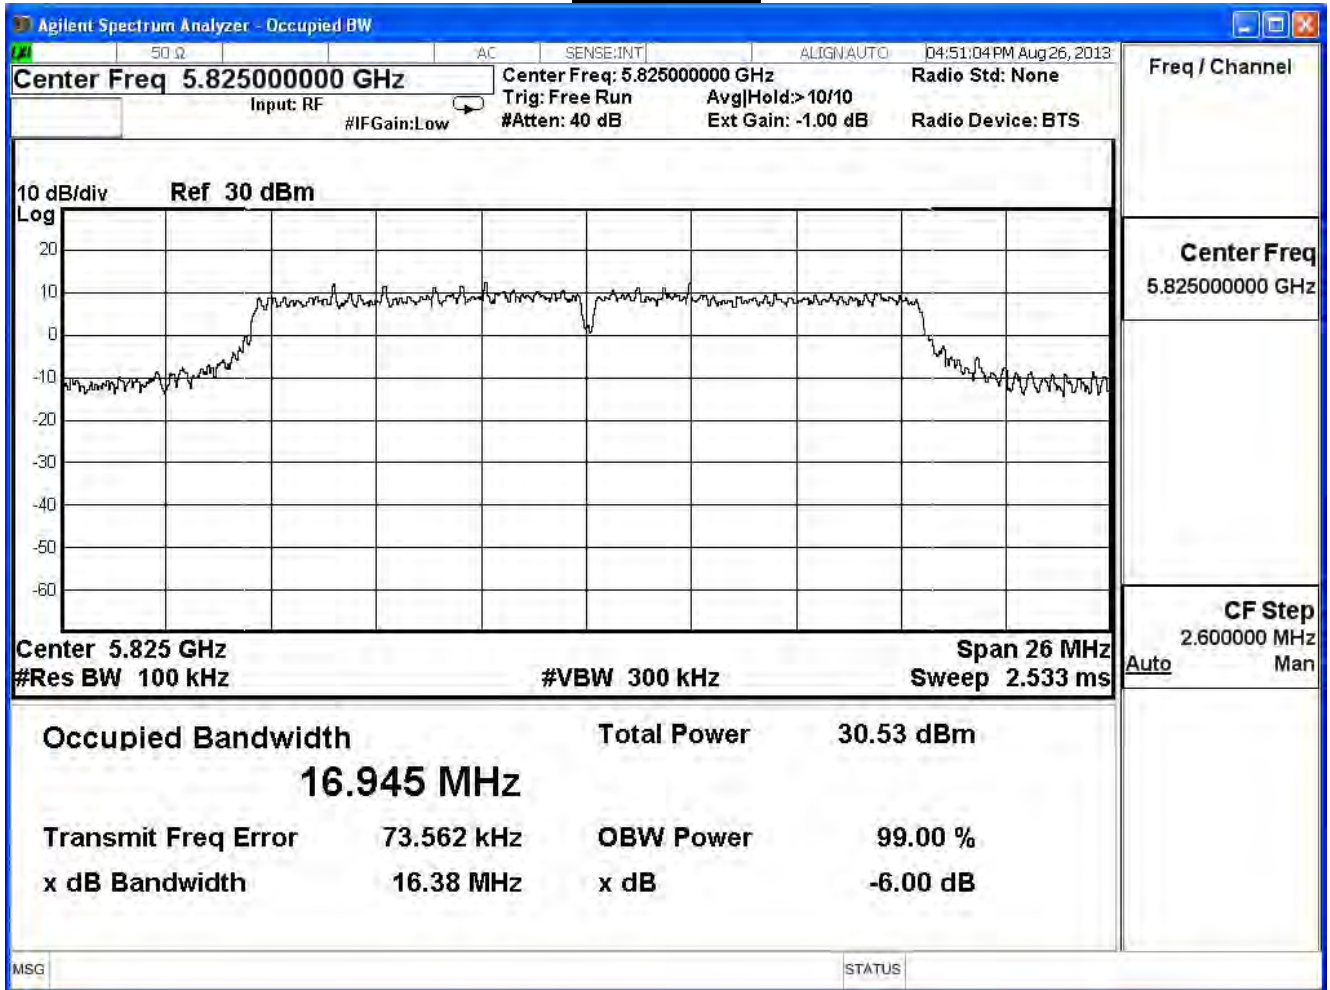


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7


802.11 a (ANT2)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	16.35	≥ 0.5	Pass
157	5785	16.36	≥ 0.5	Pass
165	5825	16.37	≥ 0.5	Pass


Channel 149

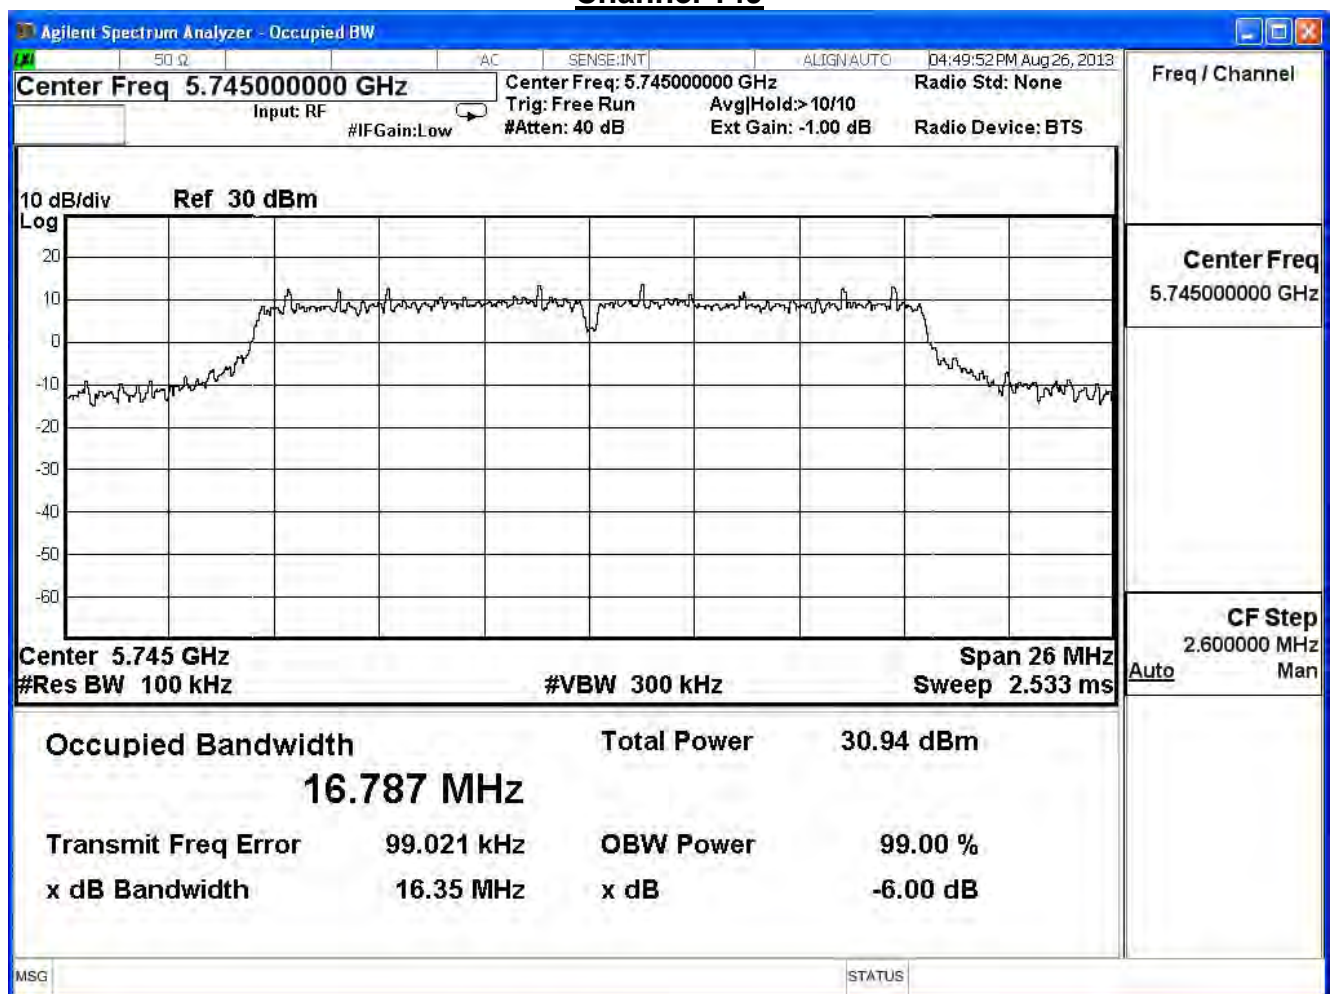

Channel 157

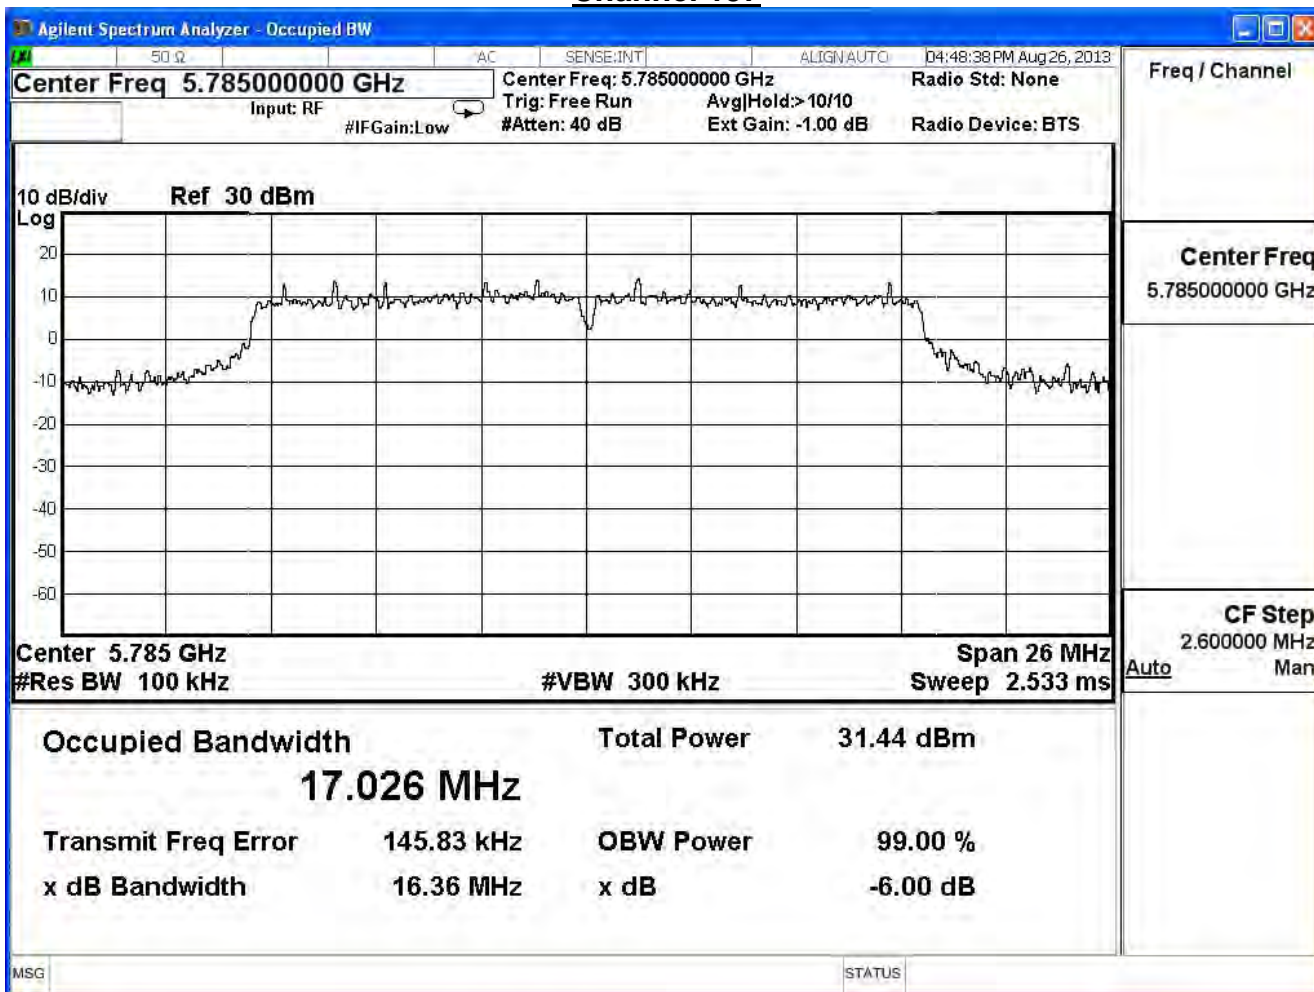


Channel 165

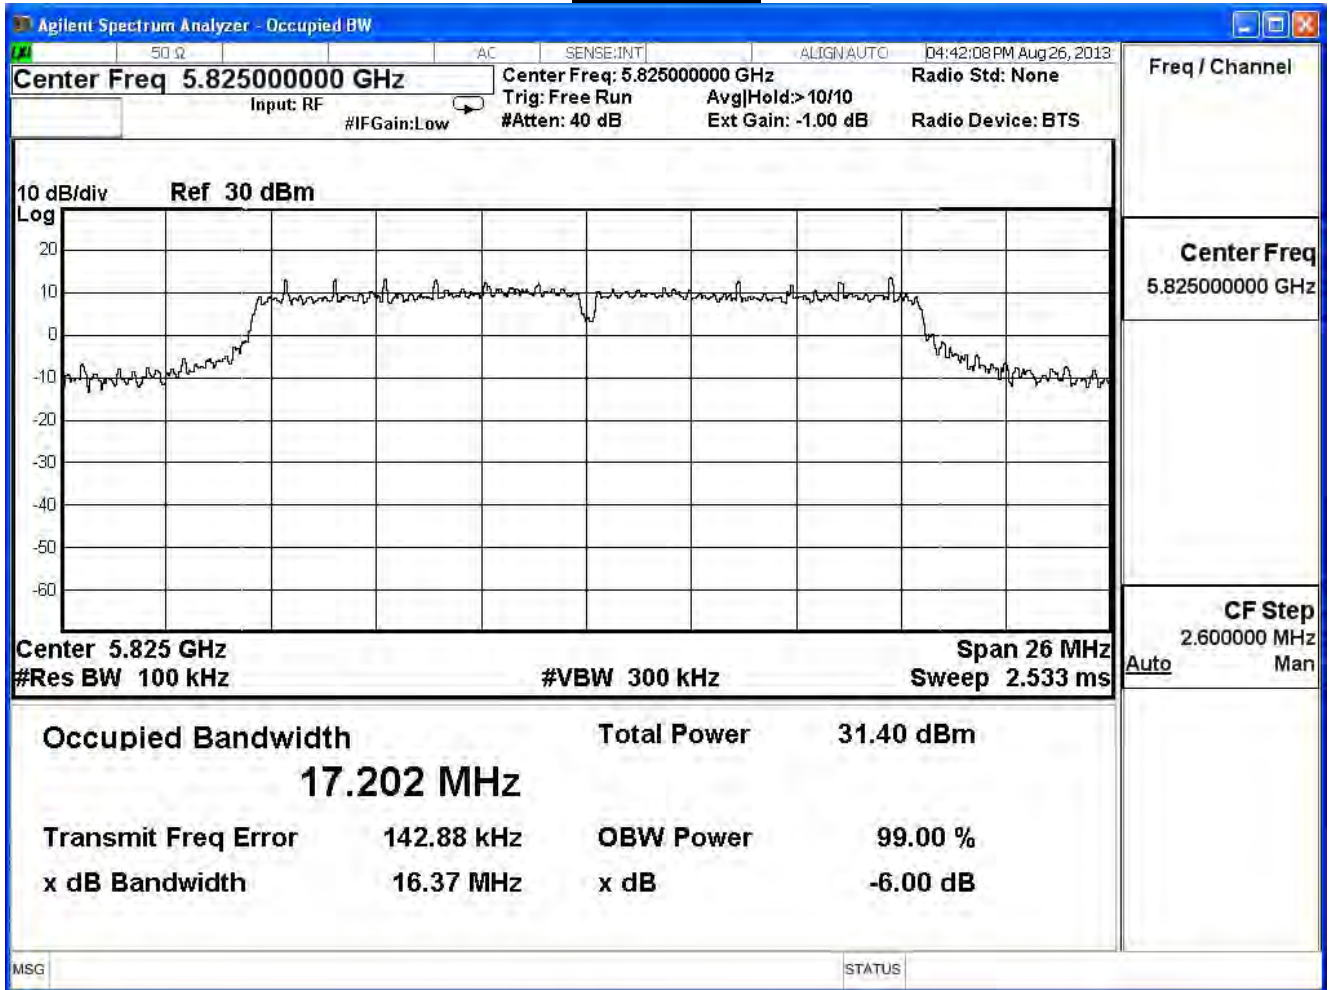


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	17.61	≥ 0.5	Pass
157	5785	17.55	≥ 0.5	Pass
165	5825	17.61	≥ 0.5	Pass


Channel 149

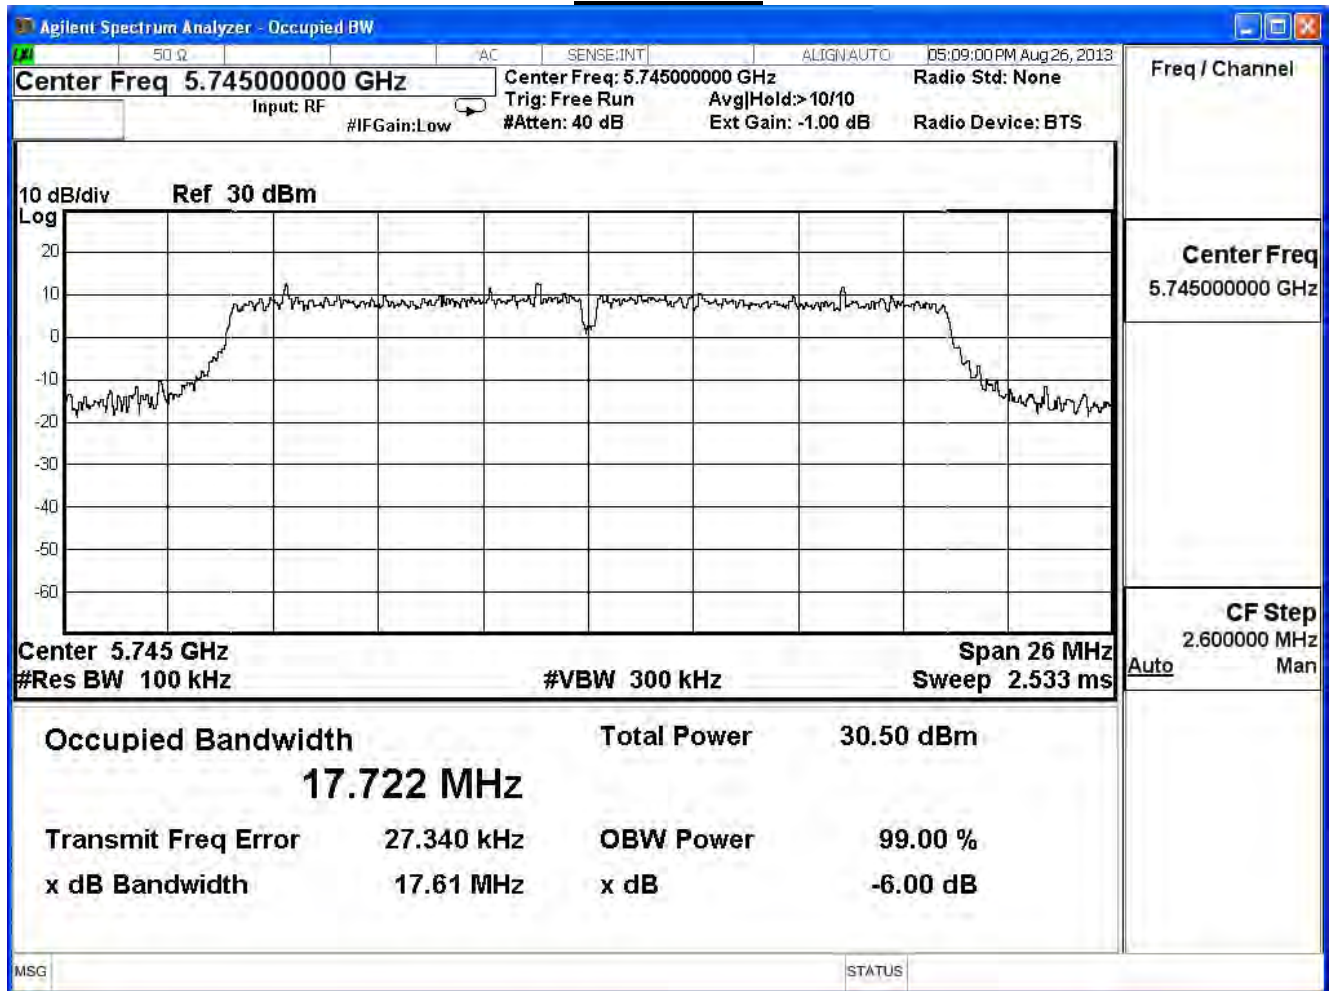

Channel 157

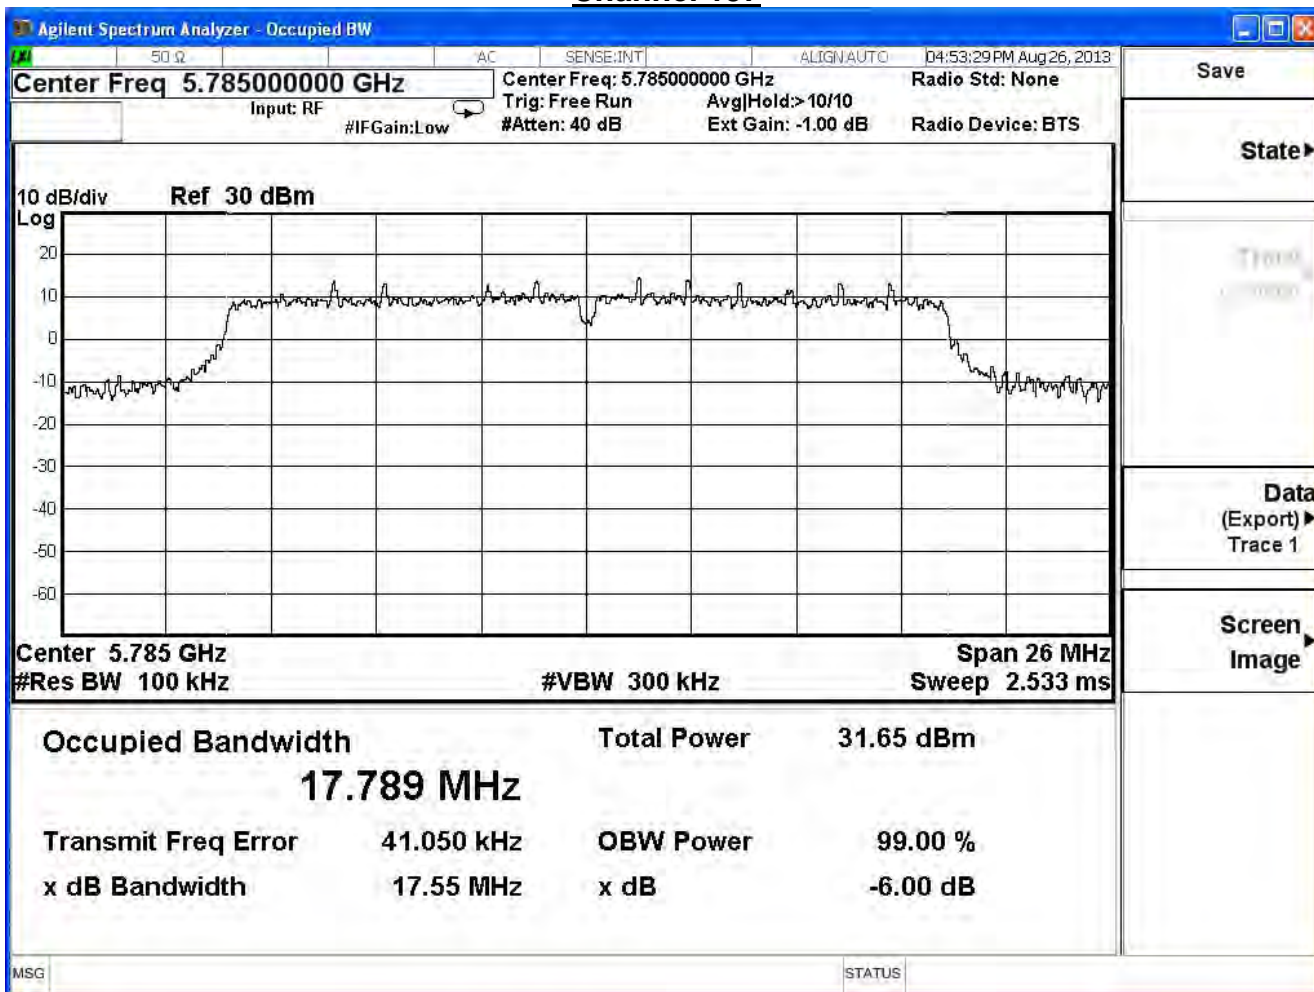


Channel 165

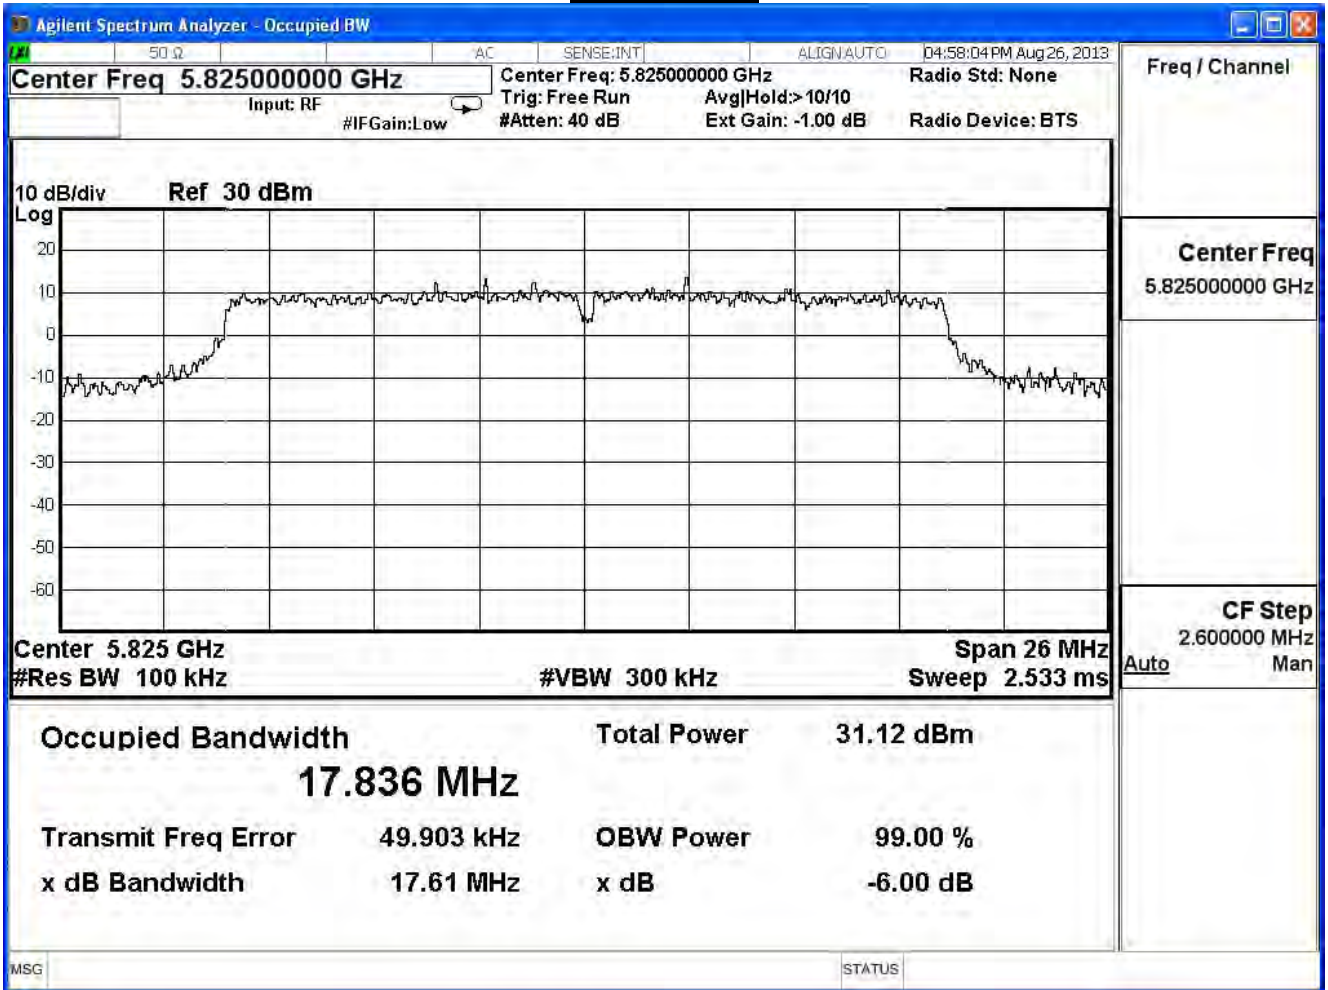


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	17.62	≥ 0.5	Pass
157	5785	17.62	≥ 0.5	Pass
165	5825	17.63	≥ 0.5	Pass


Channel 149

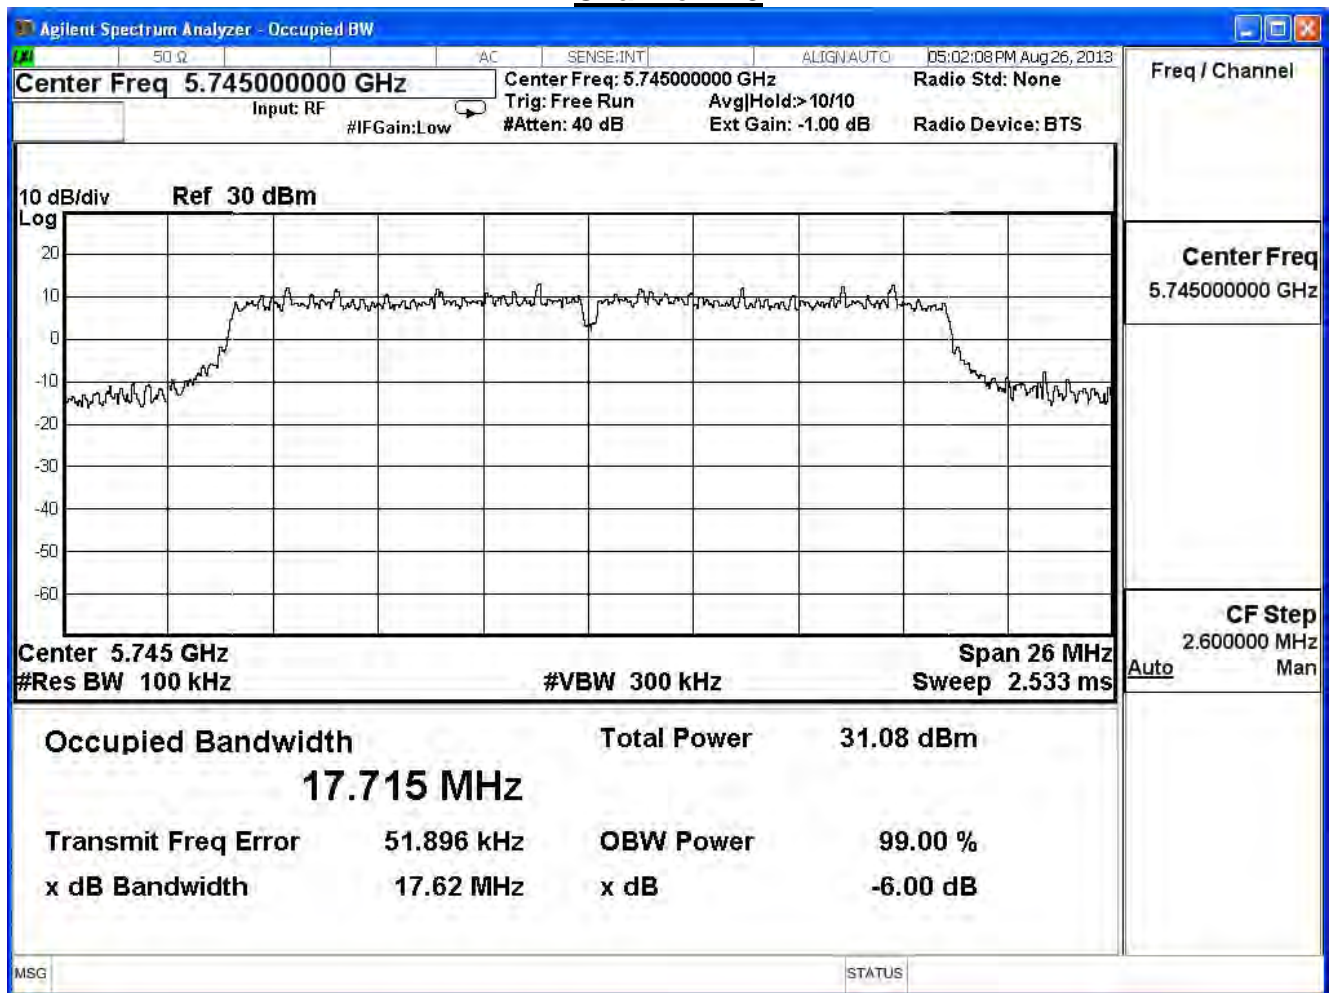

Channel 157

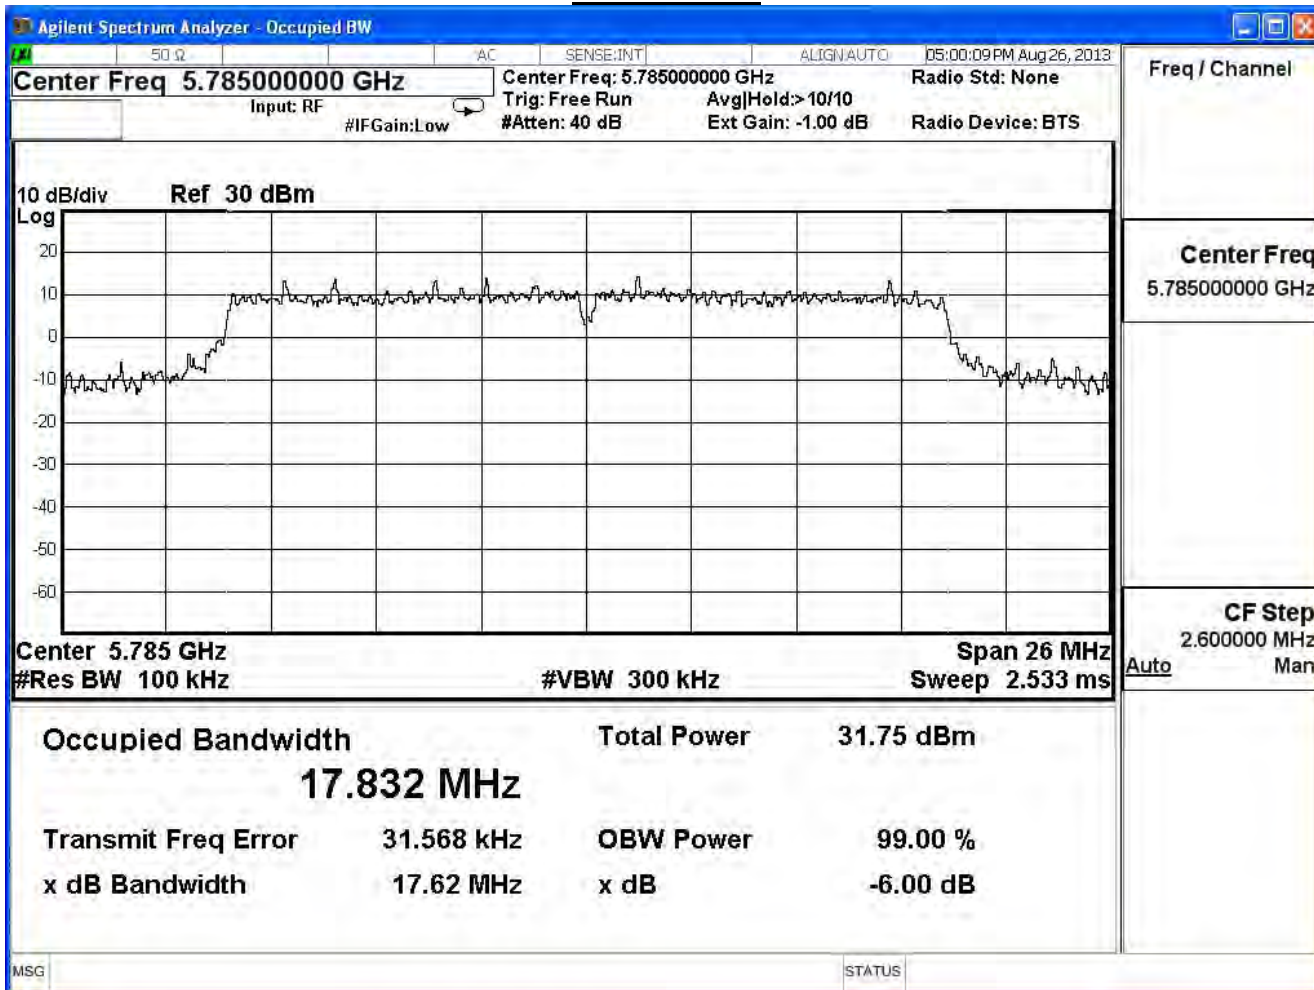


Channel 165

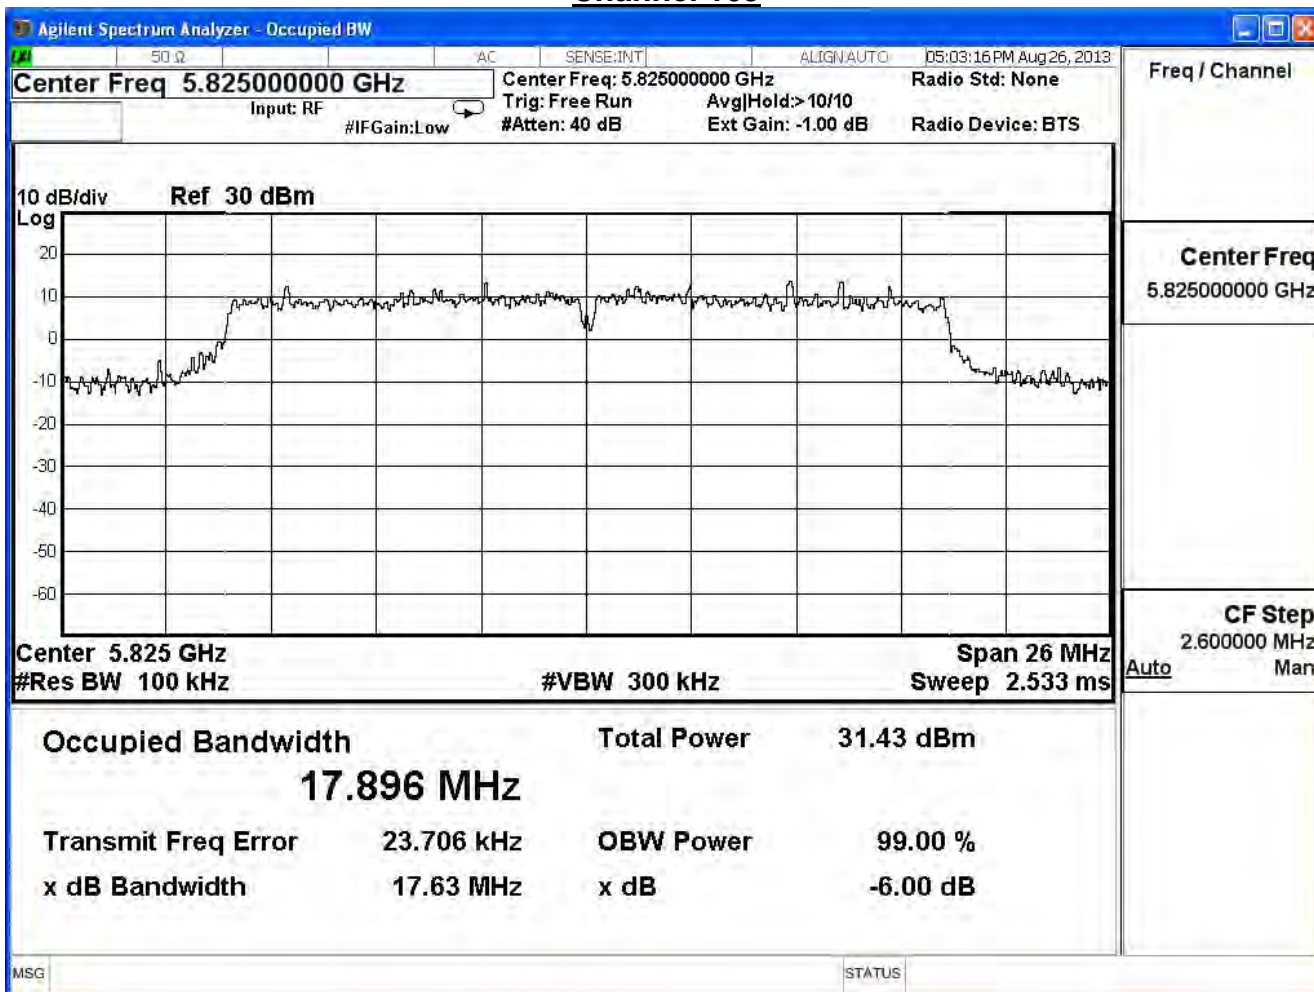


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (20MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
149	5745	17.62	≥ 0.5	Pass
157	5785	17.63	≥ 0.5	Pass
165	5825	17.60	≥ 0.5	Pass


Channel 149

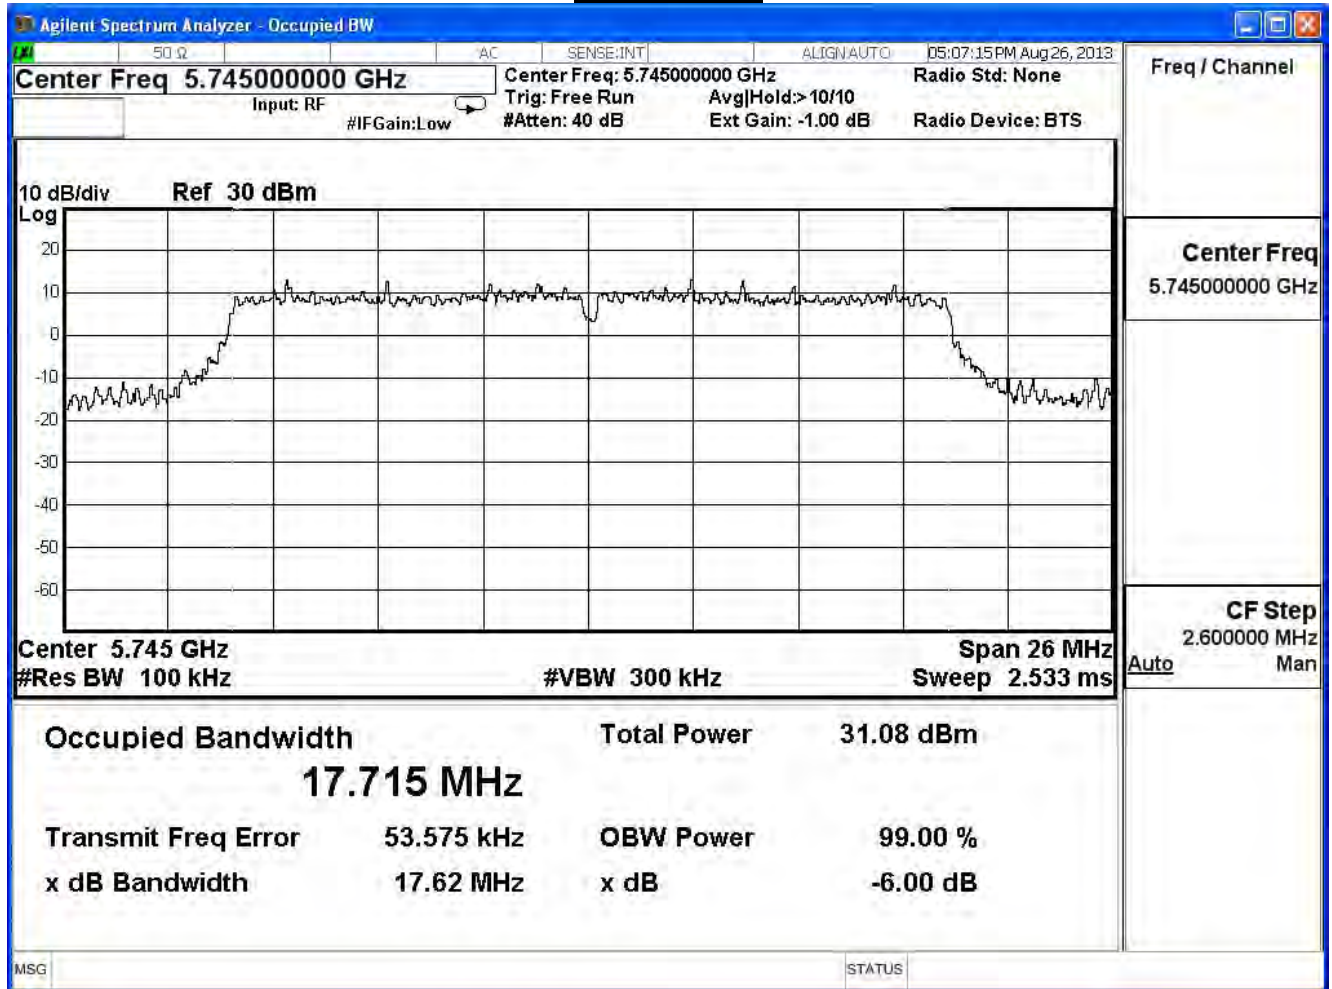

Channel 157

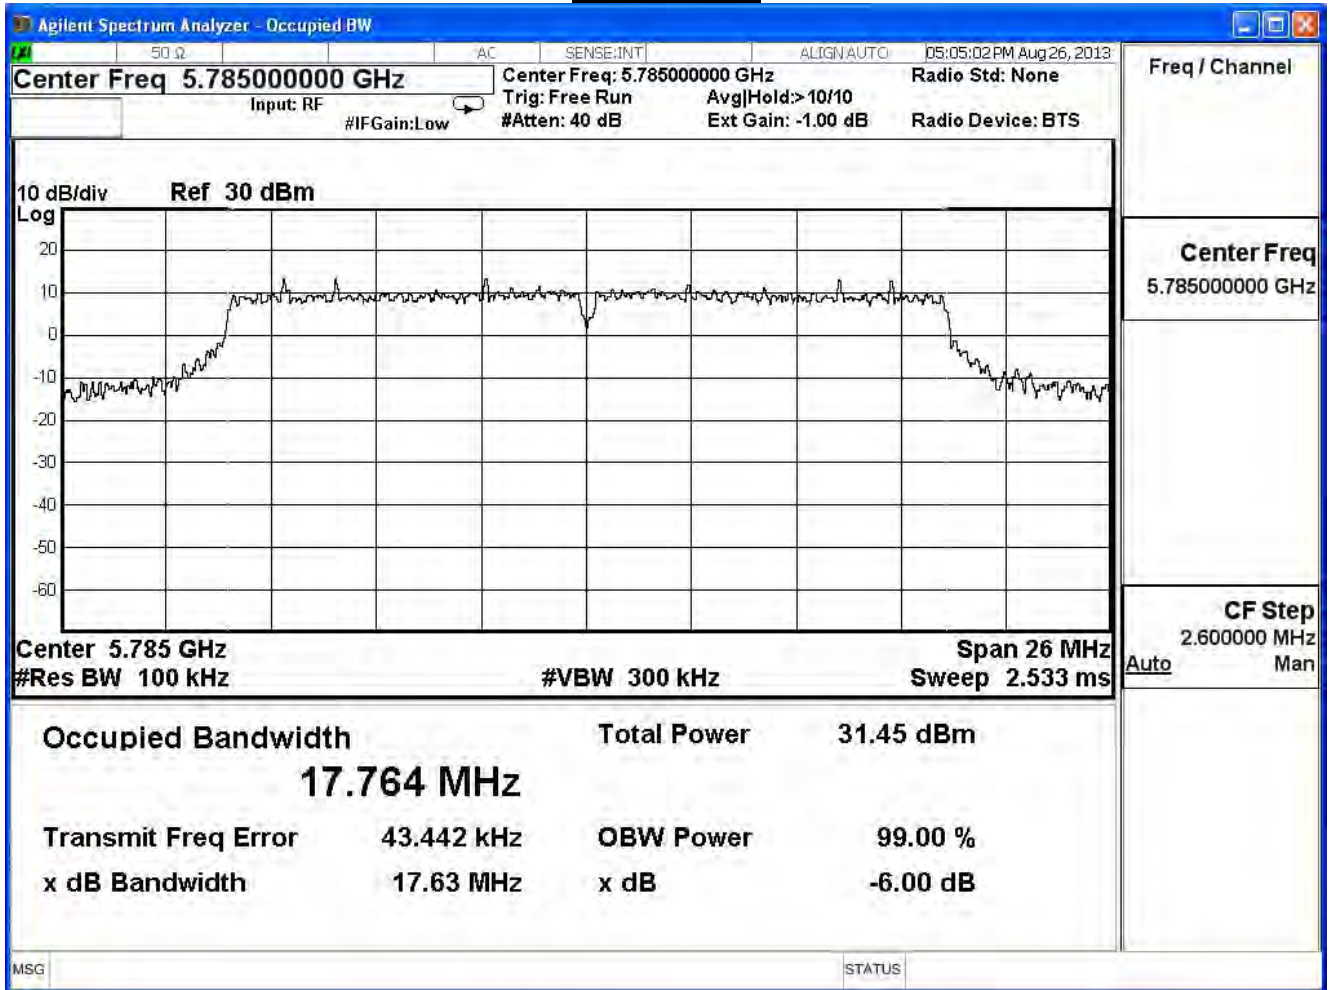


Channel 165

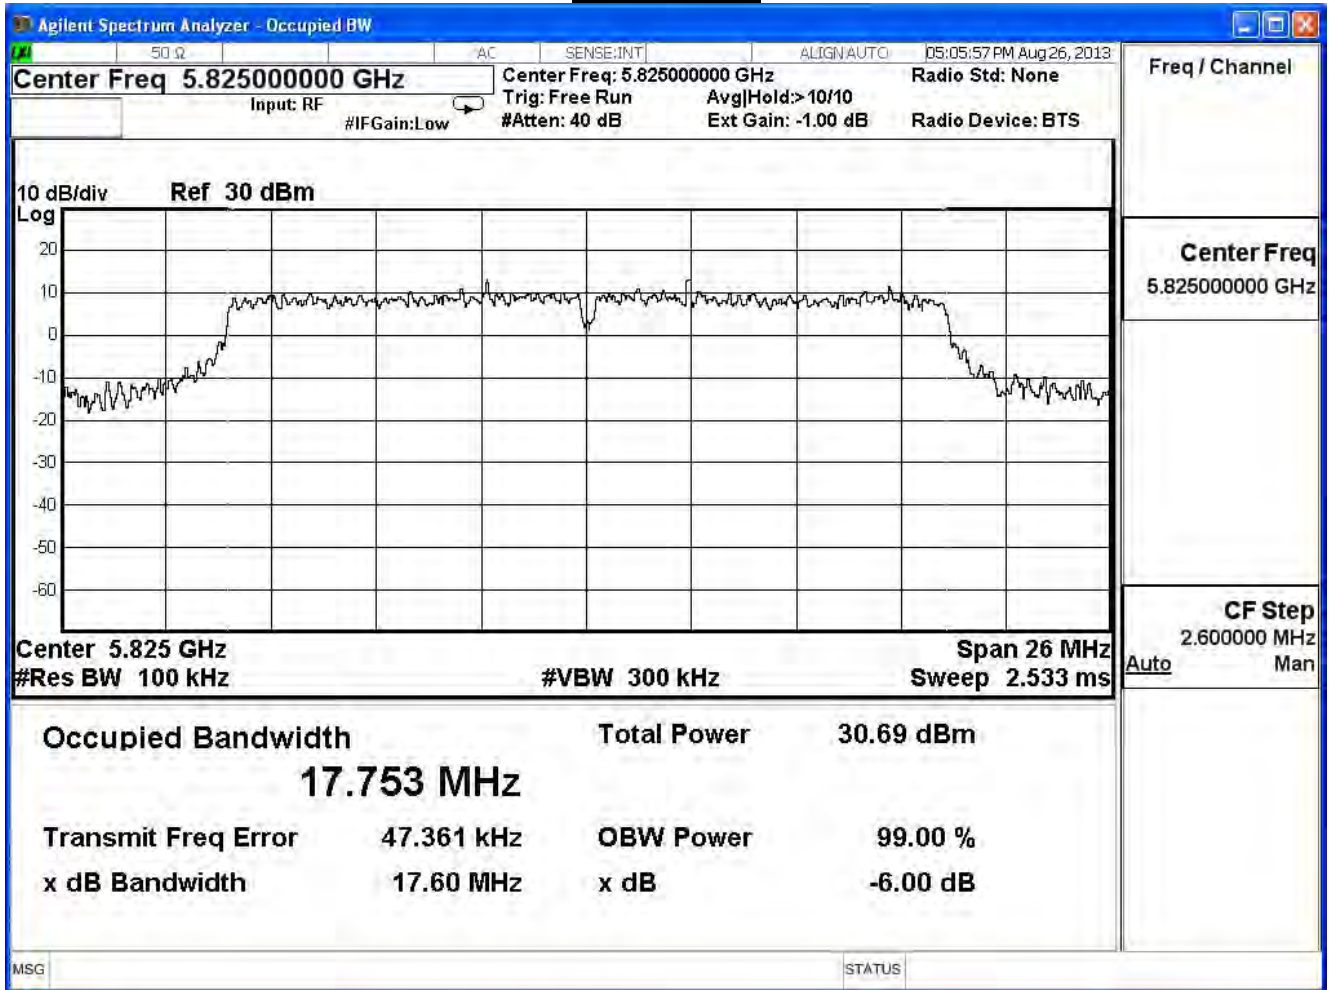


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
151	5755	36.35	≥ 0.5	Pass
159	5795	36.34	≥ 0.5	Pass

Channel 151

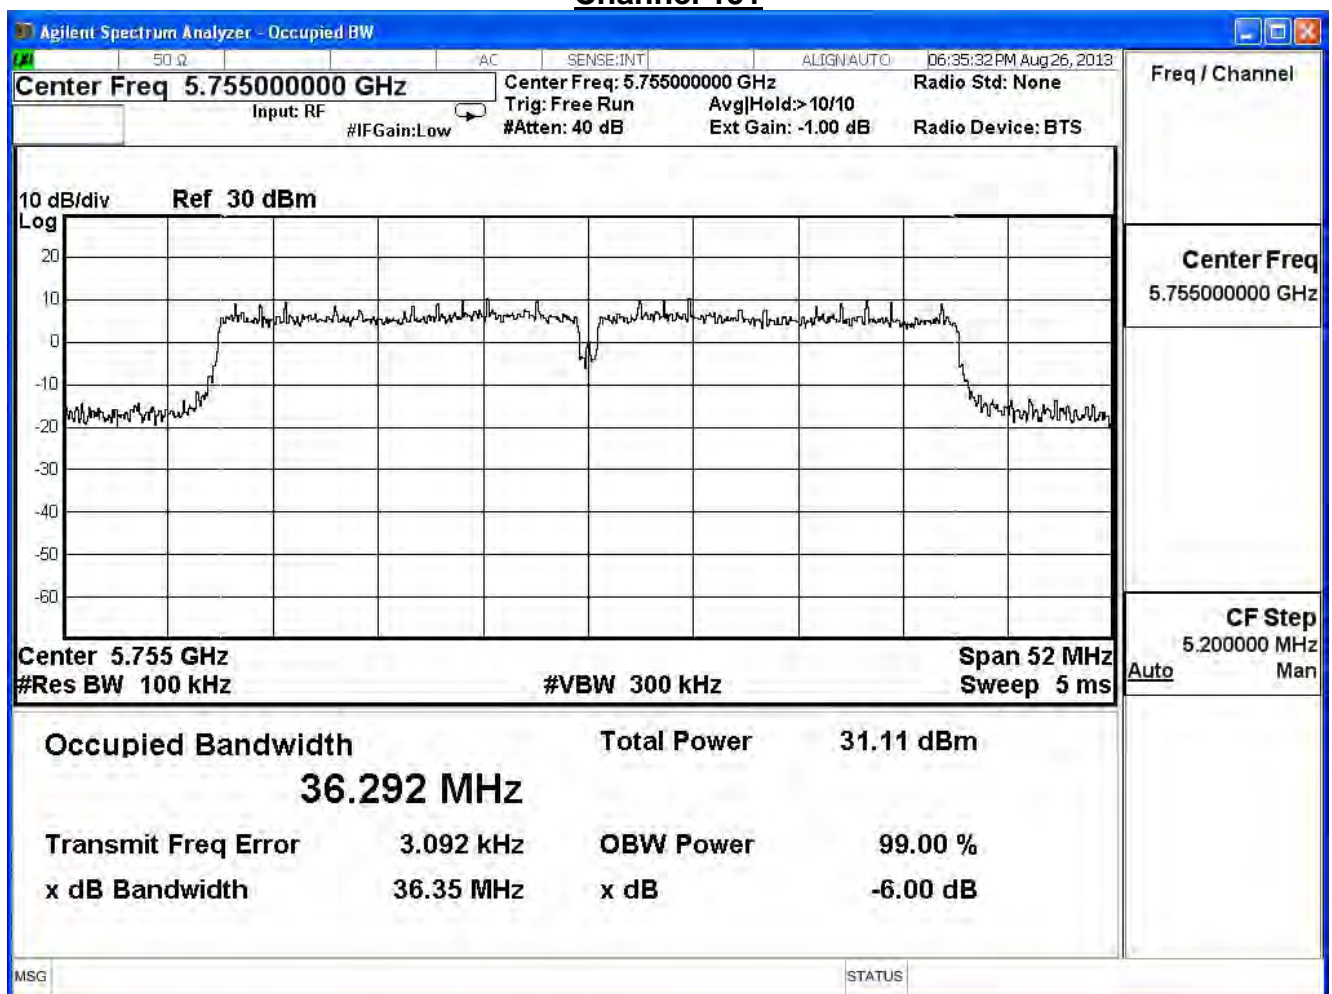


Channel 159

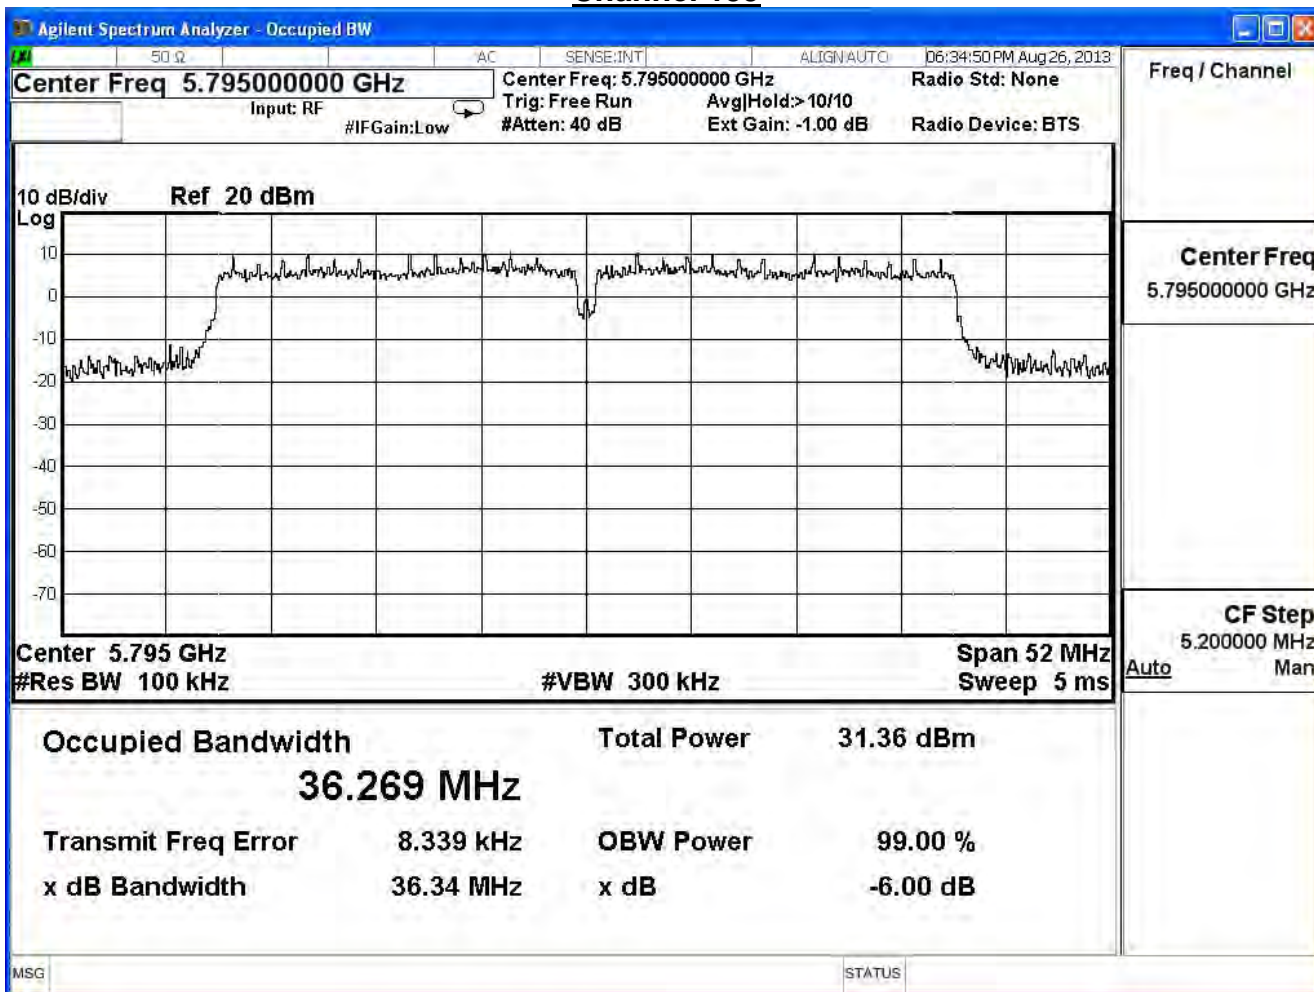


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
151	5755	36.35	≥ 0.5	Pass
159	5795	36.36	≥ 0.5	Pass

Channel 151

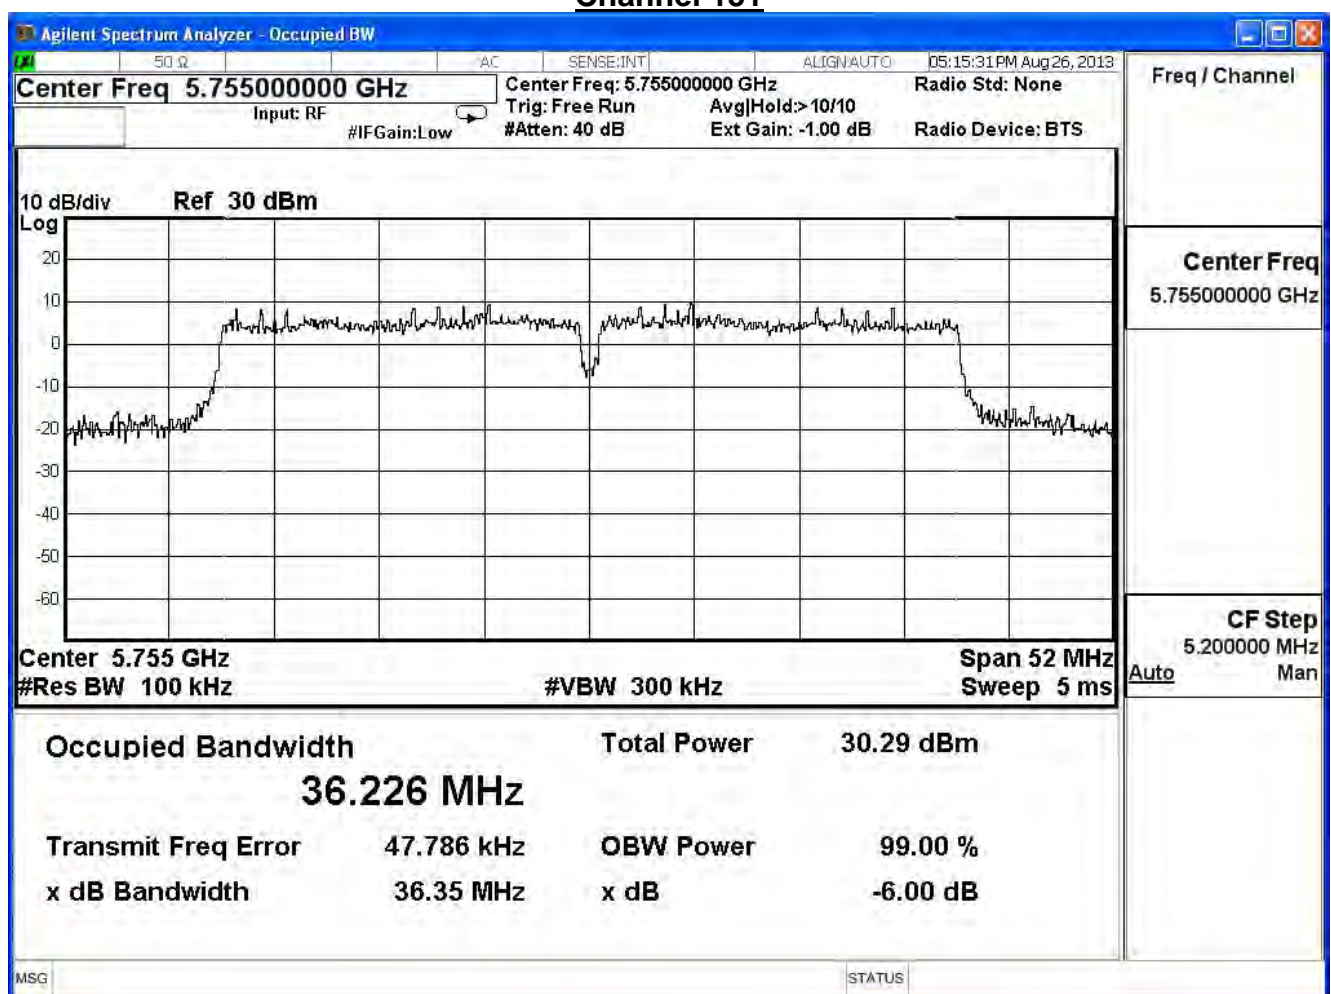


Channel 159

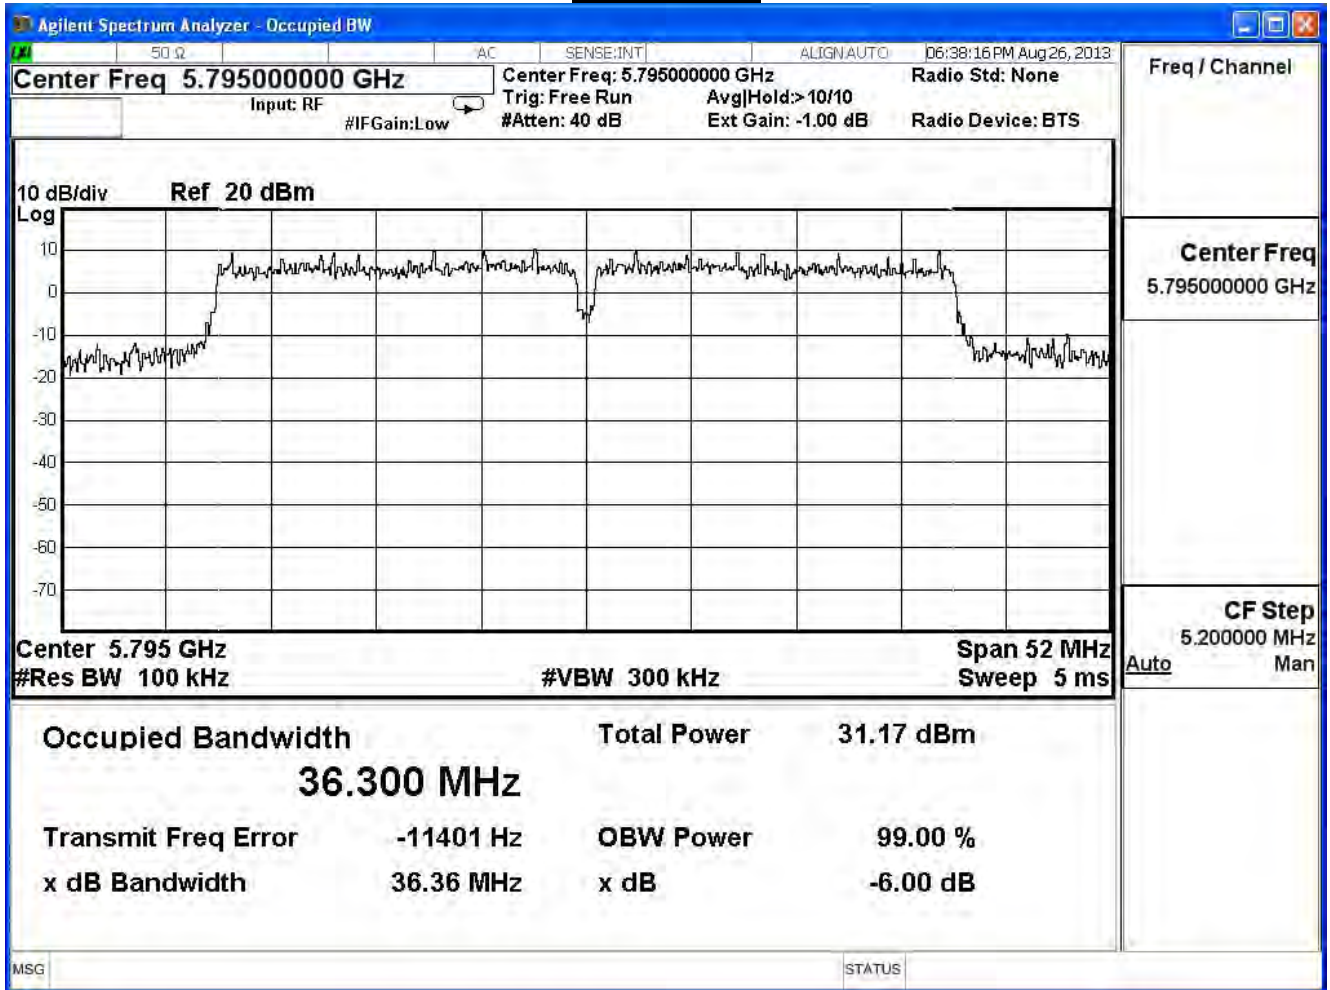


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
151	5755	36.37	≥ 0.5	Pass
159	5795	36.38	≥ 0.5	Pass

Channel 151

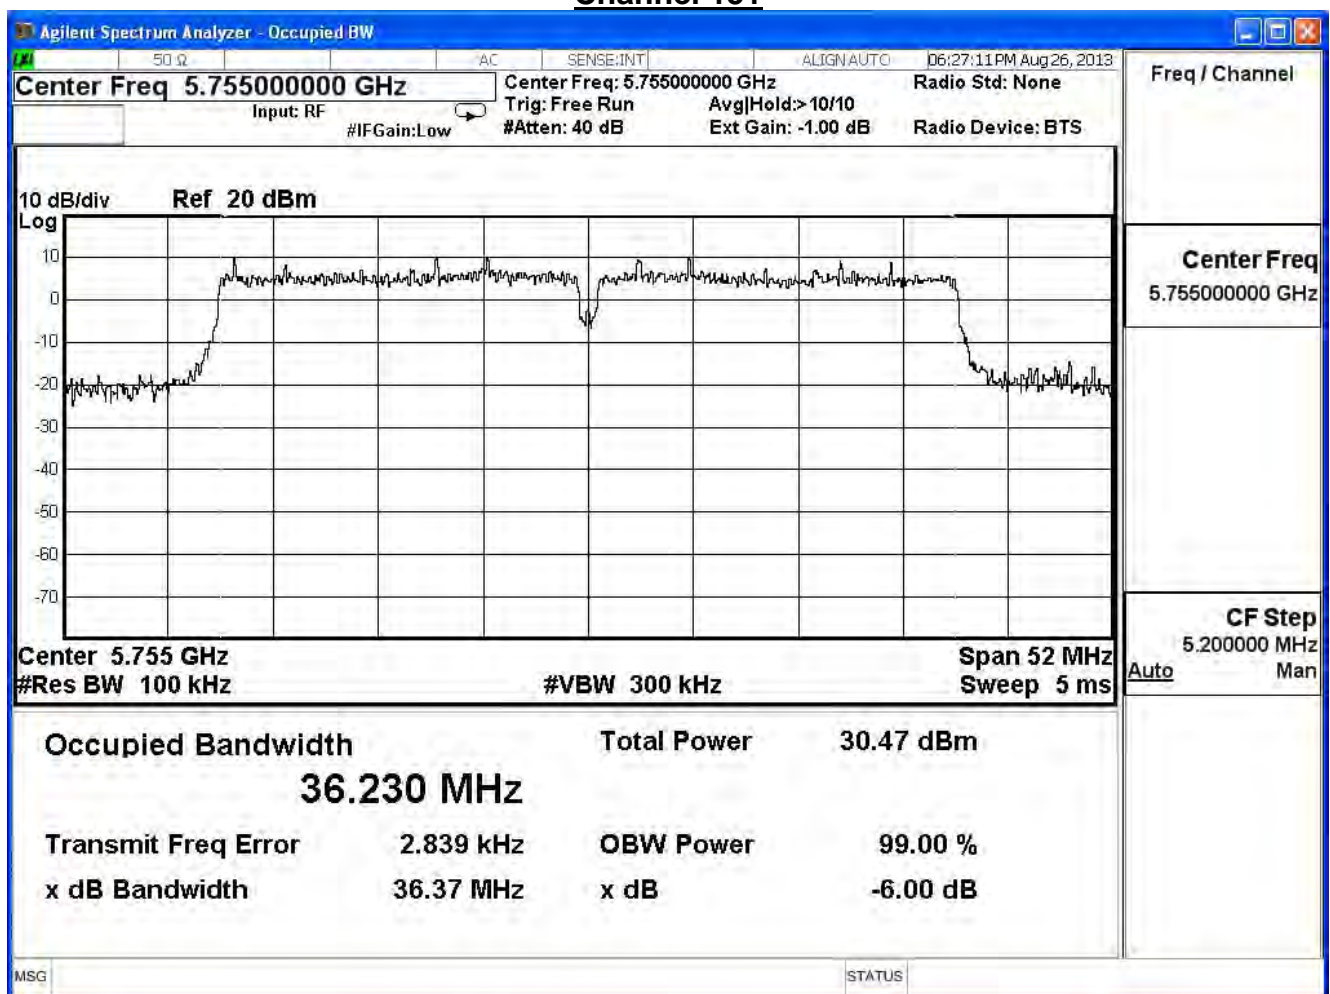


Channel 159

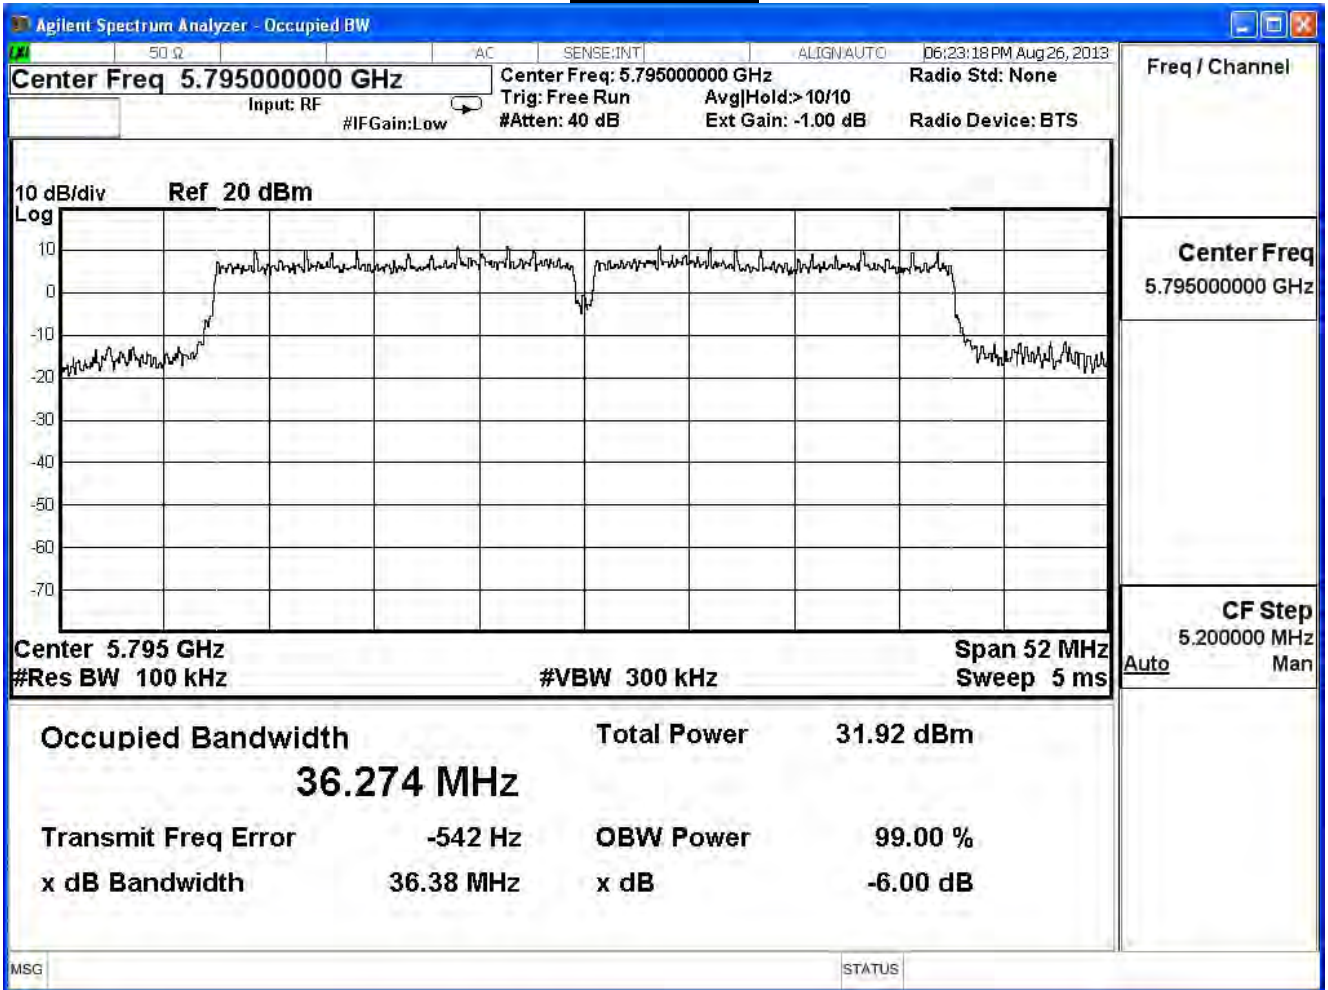

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 0)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
155	5775	75.57	≥ 0.5	Pass


Channel 155

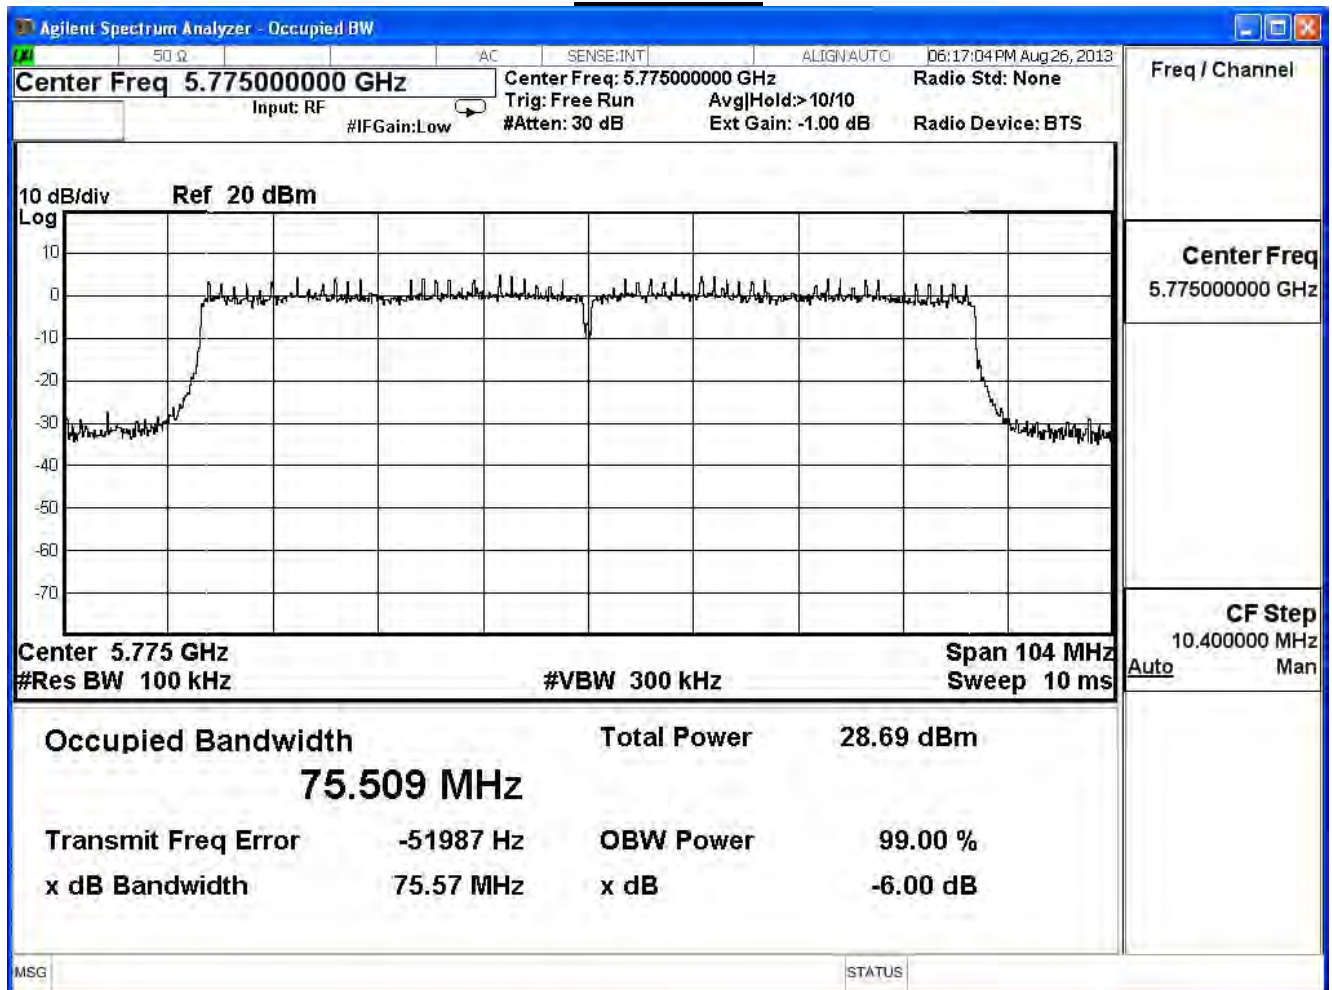

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 1)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
155	5775	76.05	≥ 0.5	Pass


Channel 155

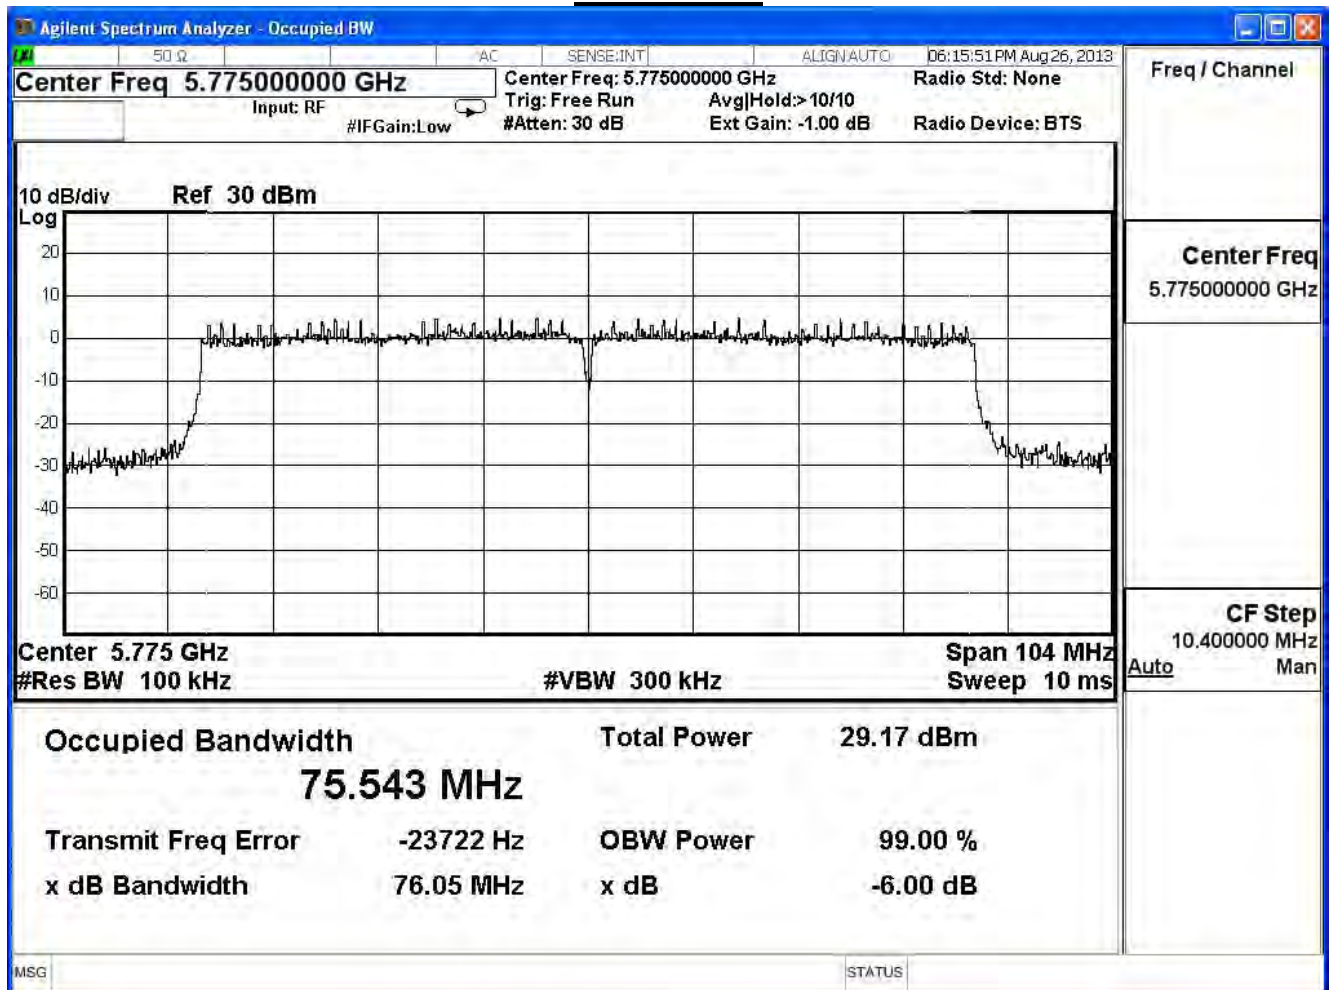

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/27	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 2)				
Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required Limit (MHz)	Result
155	5775	75.82	≥ 0.5	Pass

Channel 155

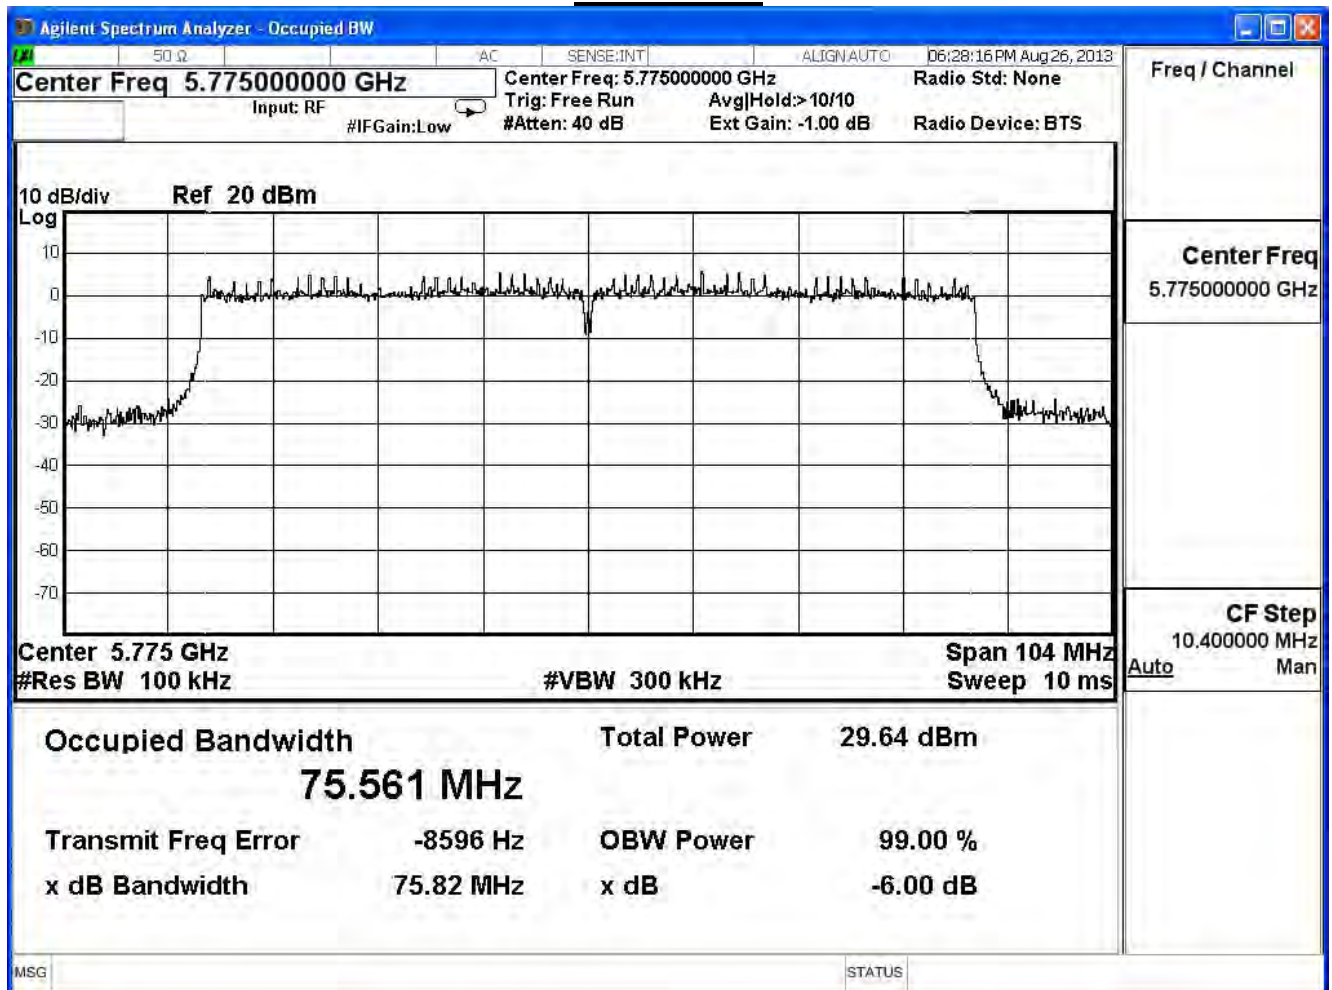

8. Power Density

8.1. Test Equipment

The following test equipment is used during the test:


Power Density / SR7

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A-EXA	US47140172	2014/08/05

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

8.2. Test Setup

IEEE 802.11 b / g / a / n (20M / 40M) MODE

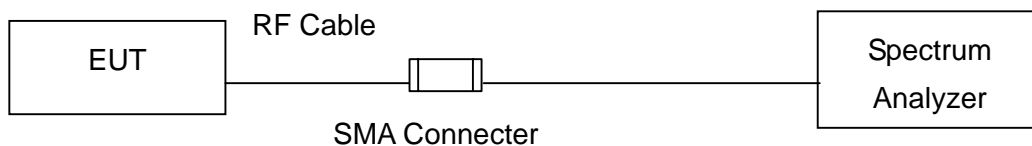

8.3. Limits

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8dBm in any 3kHz band during any time interval of continuous transmission.

8.4. Test Procedures

The EUT was setup according to ANSI C63.4: 2009; tested according to DTS test procedure of Oct. 2012 KDB558074, Section 9.2 Measurement Procedure option2 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, Set VBW= 300 kHz, Sweep time=Auto, Set detector=Peak detector.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log (3 \text{ kHz}/100 \text{ kHz} = -15.2 \text{ dB})$.

8.5. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2012

8.6. Uncertainty

The measurement uncertainty is defined as $\pm 1.27\text{dB}$.

8.7. Test Result

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11b (ANT0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.513	-14.687	≤ 7.32	Pass
6	2437	1.065	-14.135	≤ 7.32	Pass
11	2462	0.673	-14.527	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

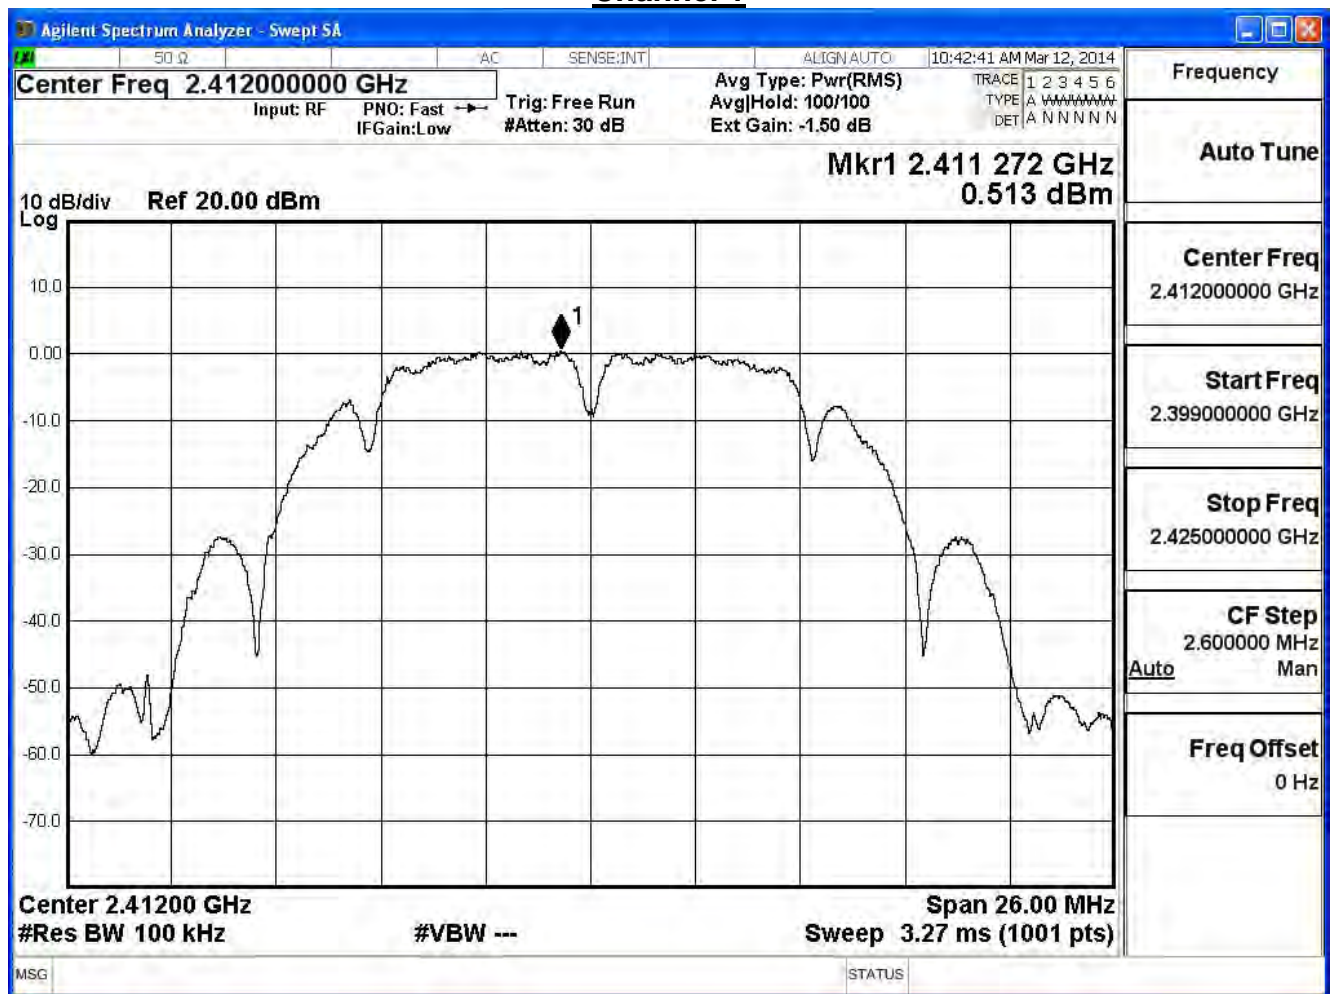

Channel 6

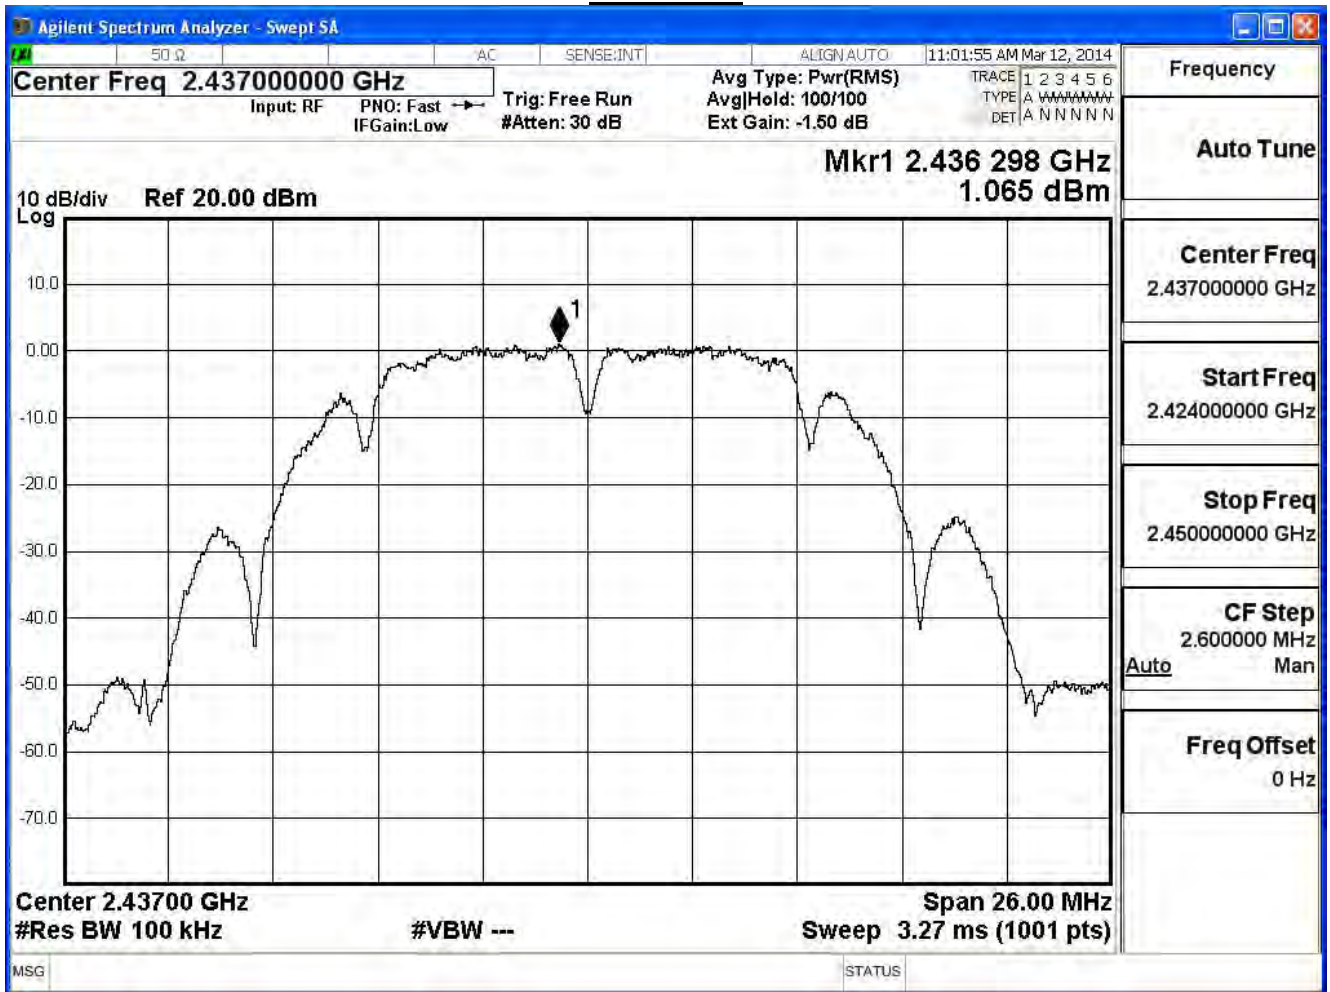

Channel 11

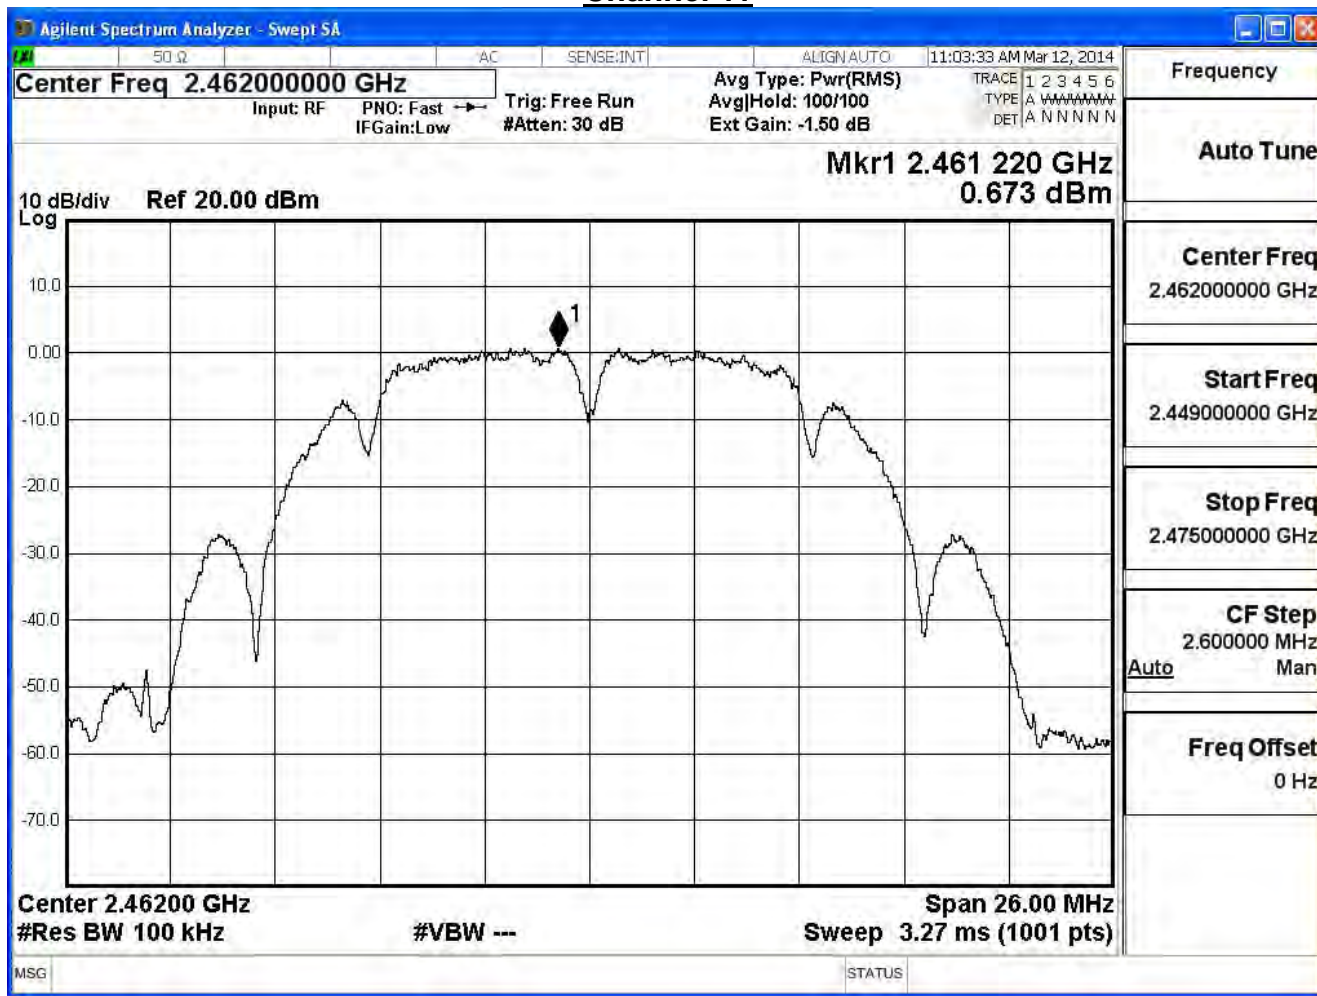

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11b (ANT1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.282	-14.918	≤ 7.32	Pass
6	2437	0.969	-14.231	≤ 7.32	Pass
11	2462	0.714	-14.486	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

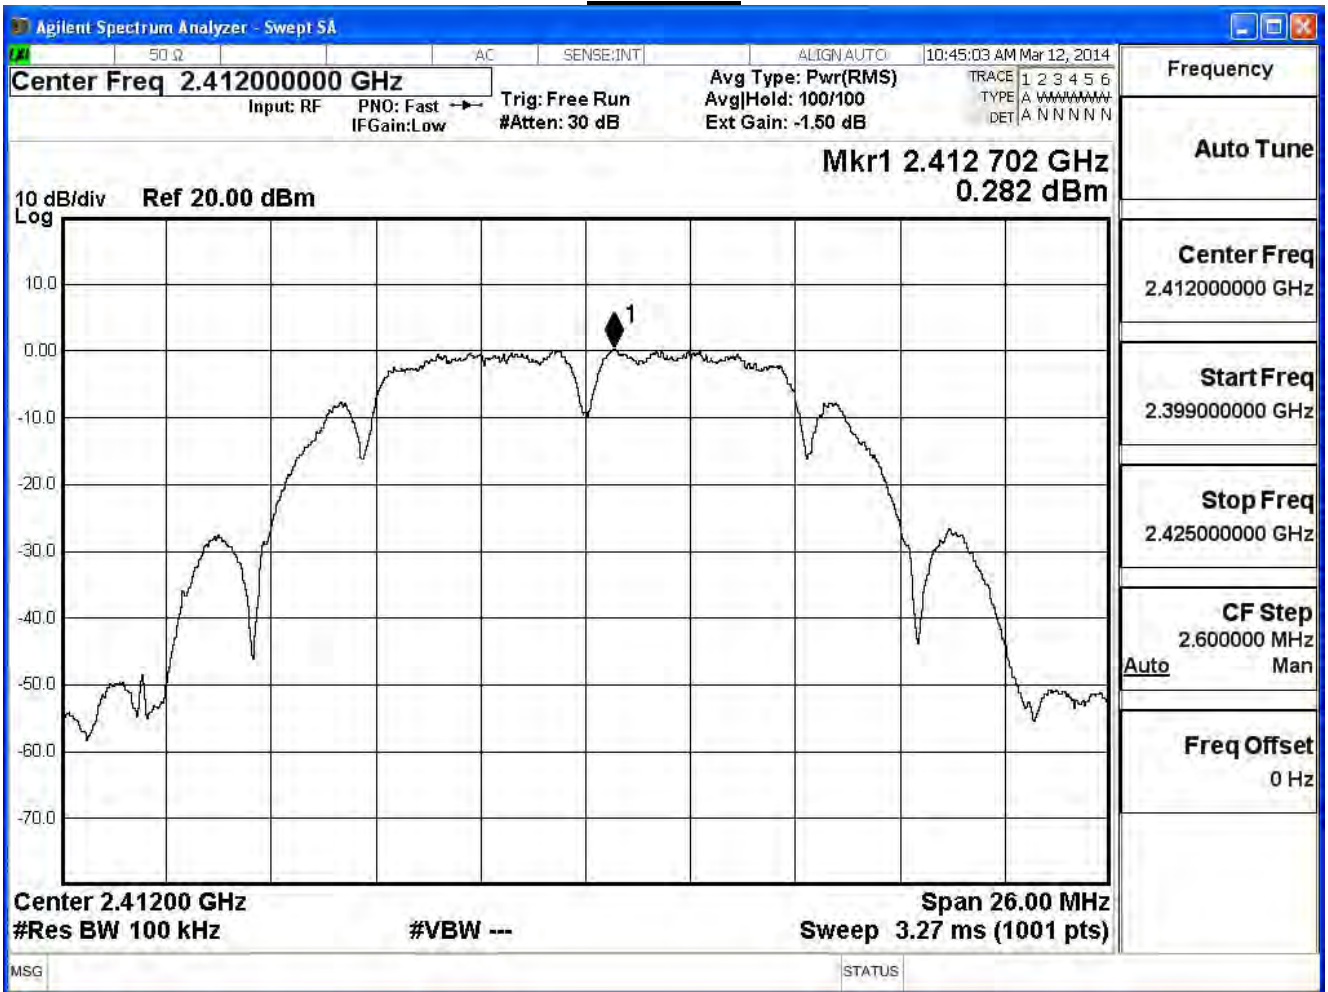

Channel 6

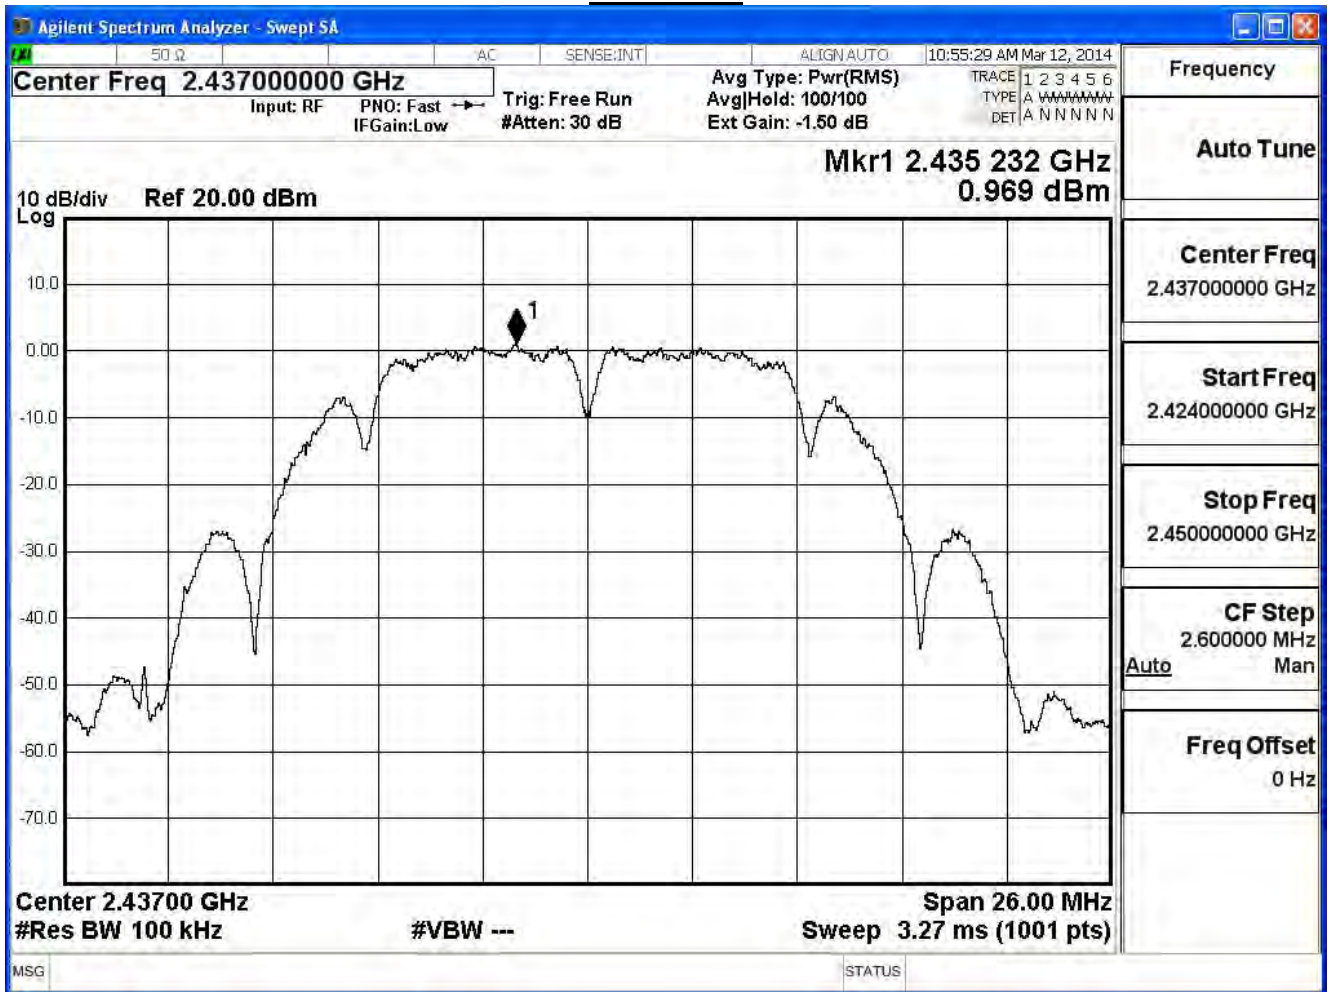

Channel 11

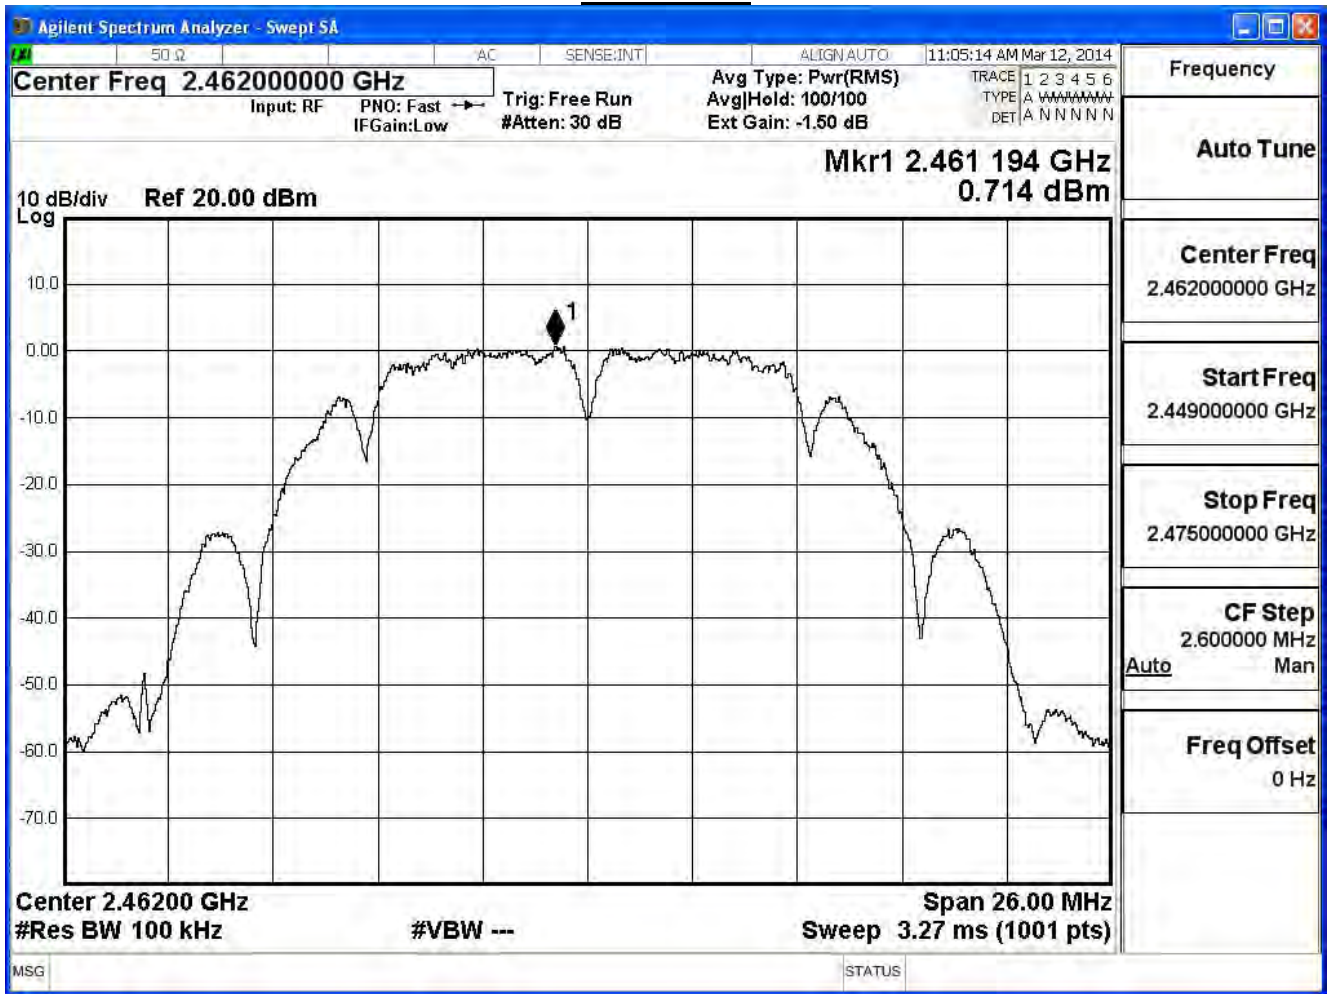

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11b (ANT2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	0.406	-14.794	≤ 7.32	Pass
6	2437	0.929	-14.271	≤ 7.32	Pass
11	2462	0.955	-14.245	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

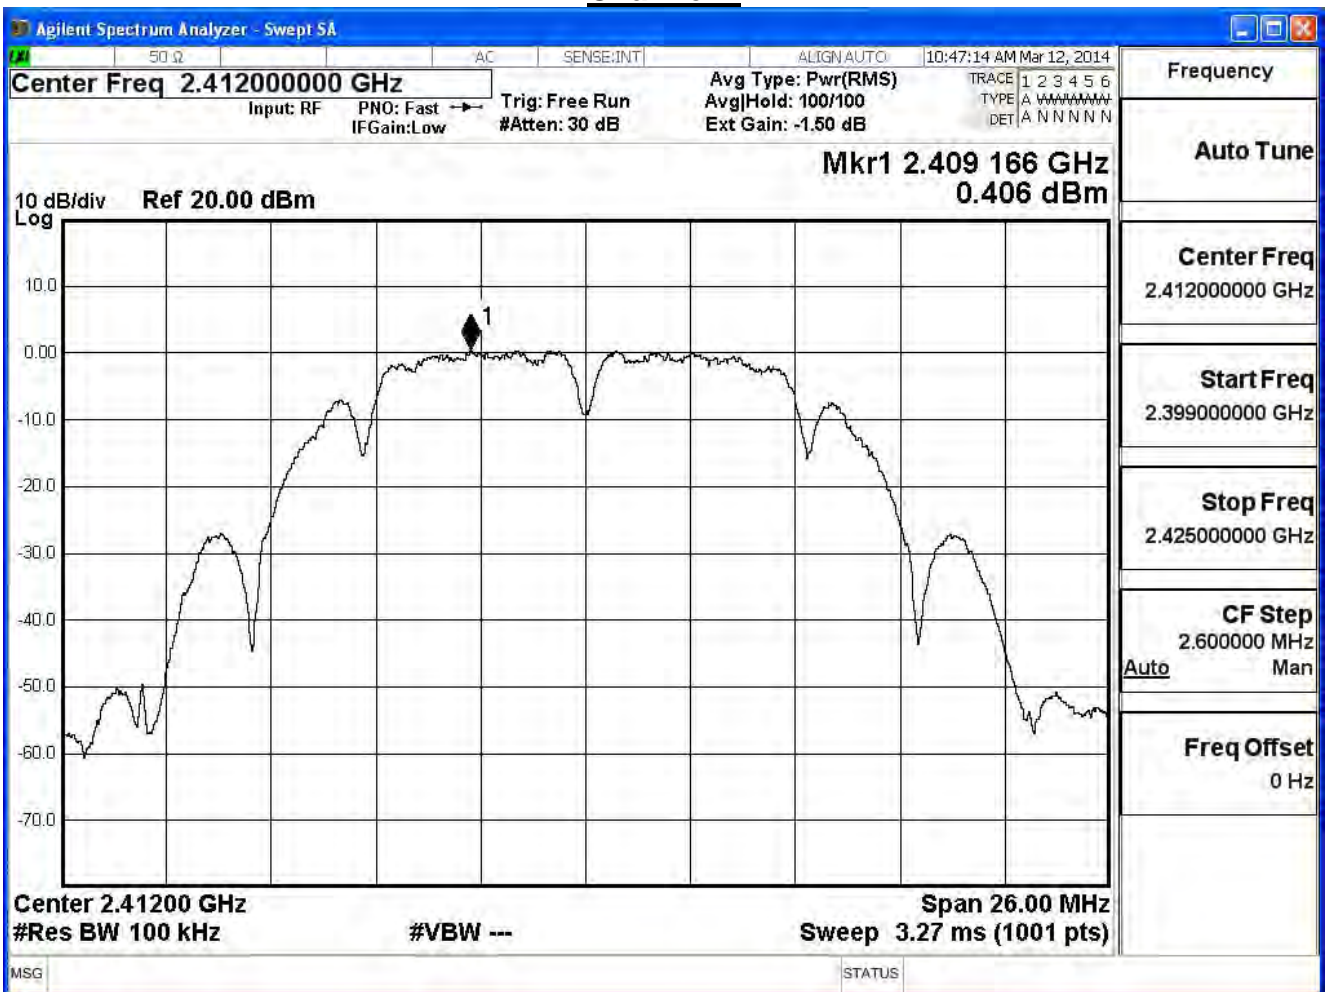

Channel 6

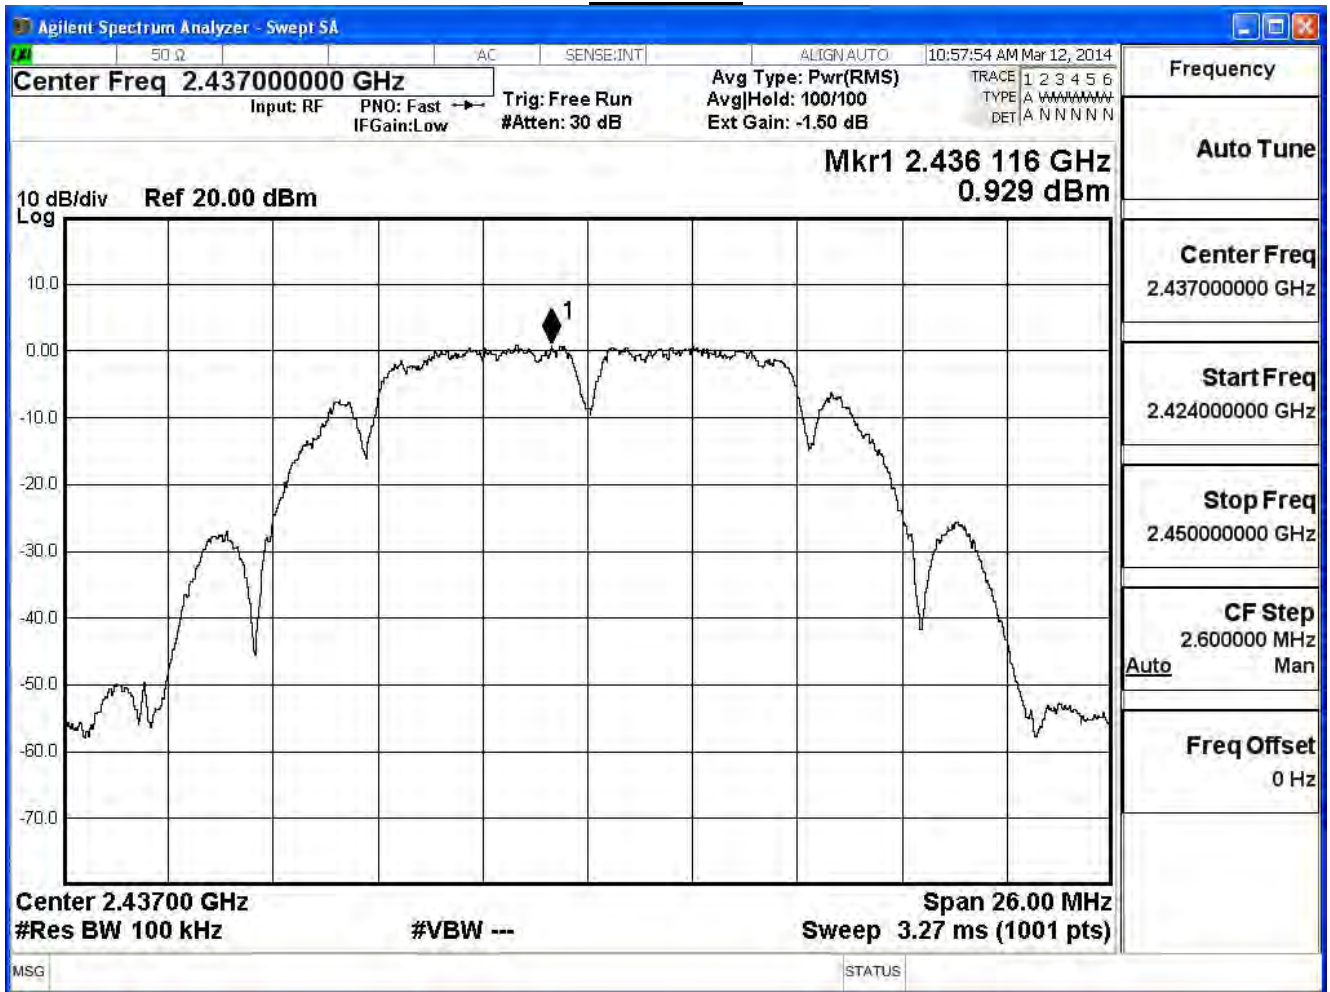

Channel 11

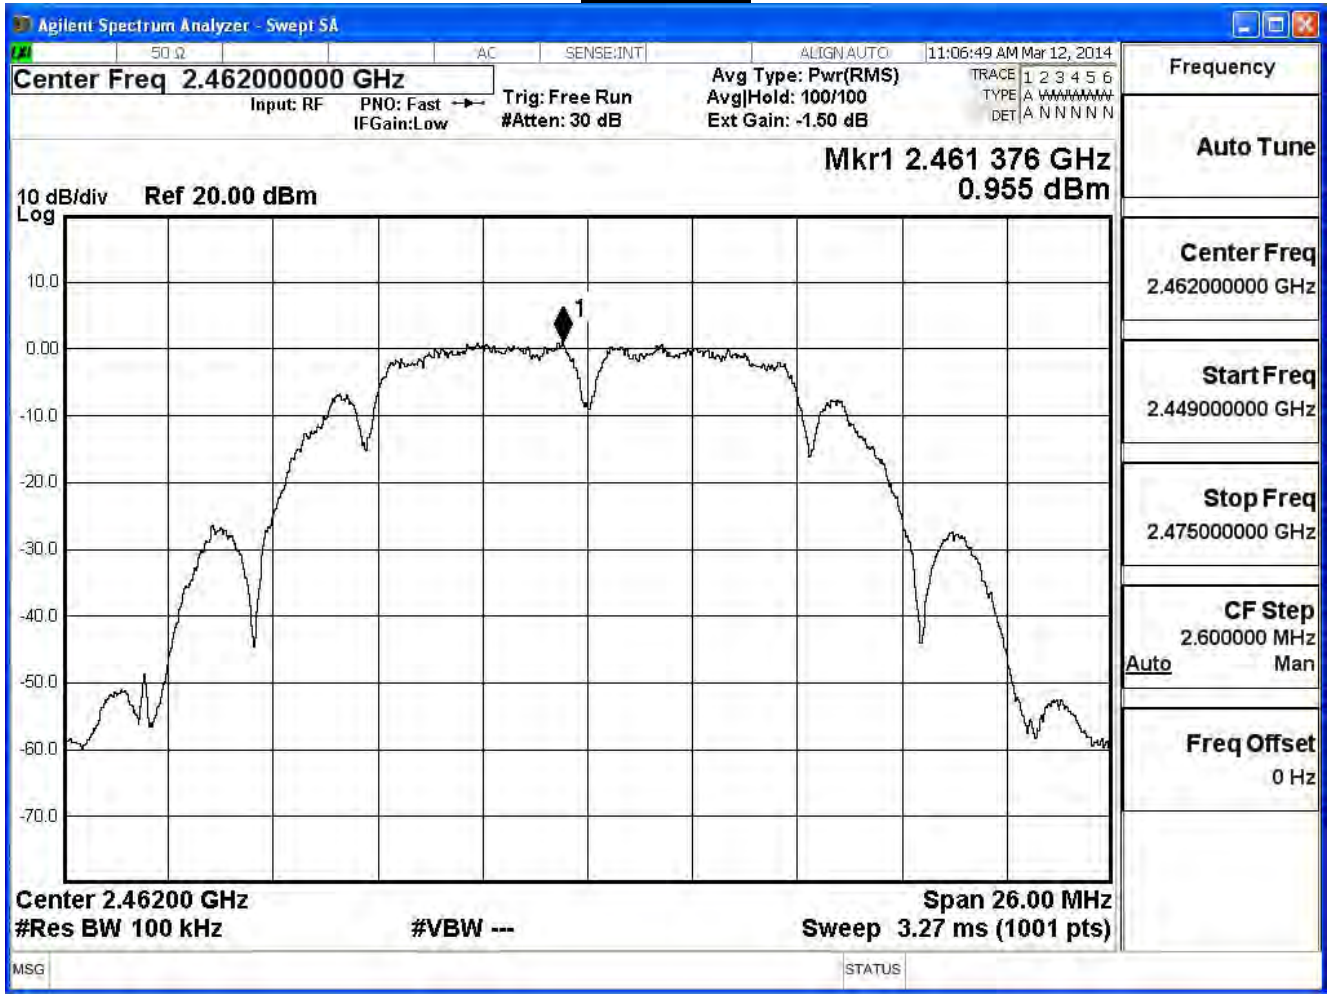

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE 802.11b (ANT0+1+2)				
Channel No.	Frequency (MHz)	Measure Level(dBm)	Limit (dBm)	Result
1	2412	-10.027	≤ 7.32	Pass
6	2437	-9.441	≤ 7.32	Pass
11	2462	-9.646	≤ 7.32	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11g (ANT0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-2.004	-17.204	≤ 7.32	Pass
6	2437	3.718	-11.482	≤ 7.32	Pass
11	2462	-1.584	-16.784	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

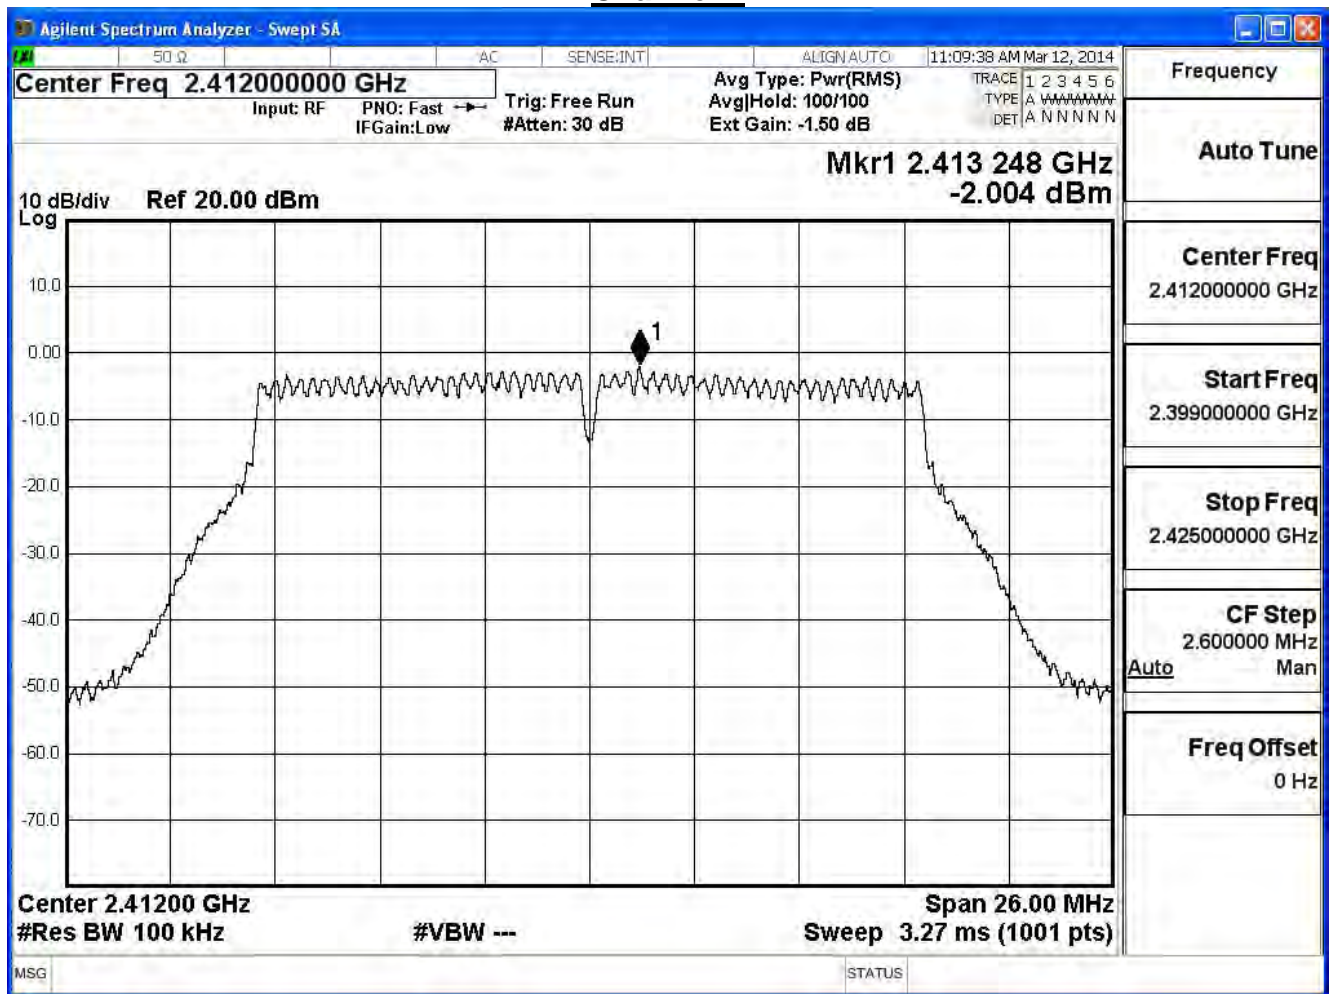

Channel 6

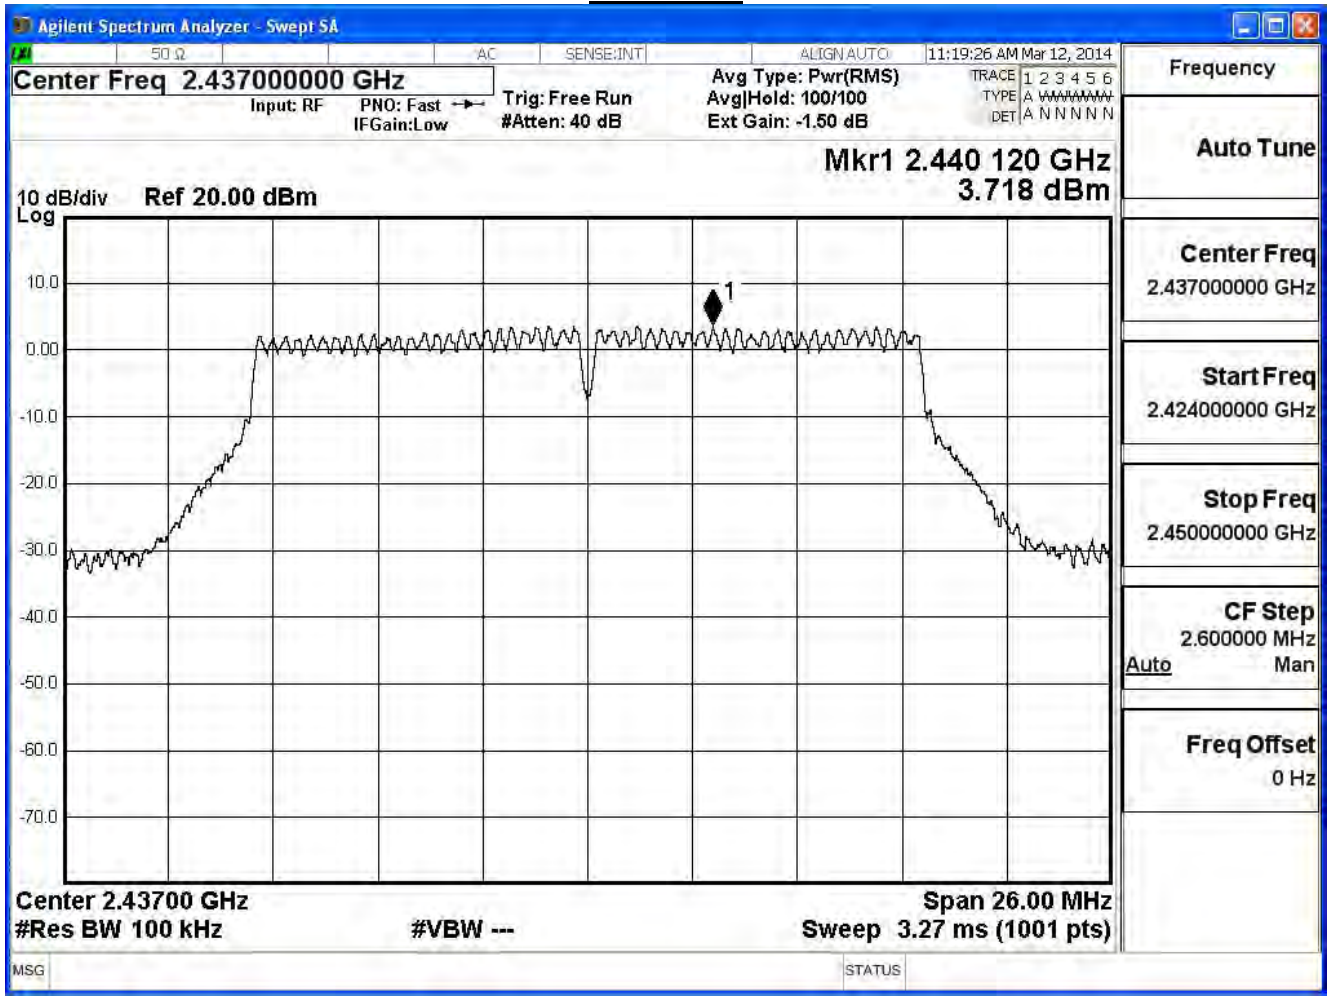

Channel 11

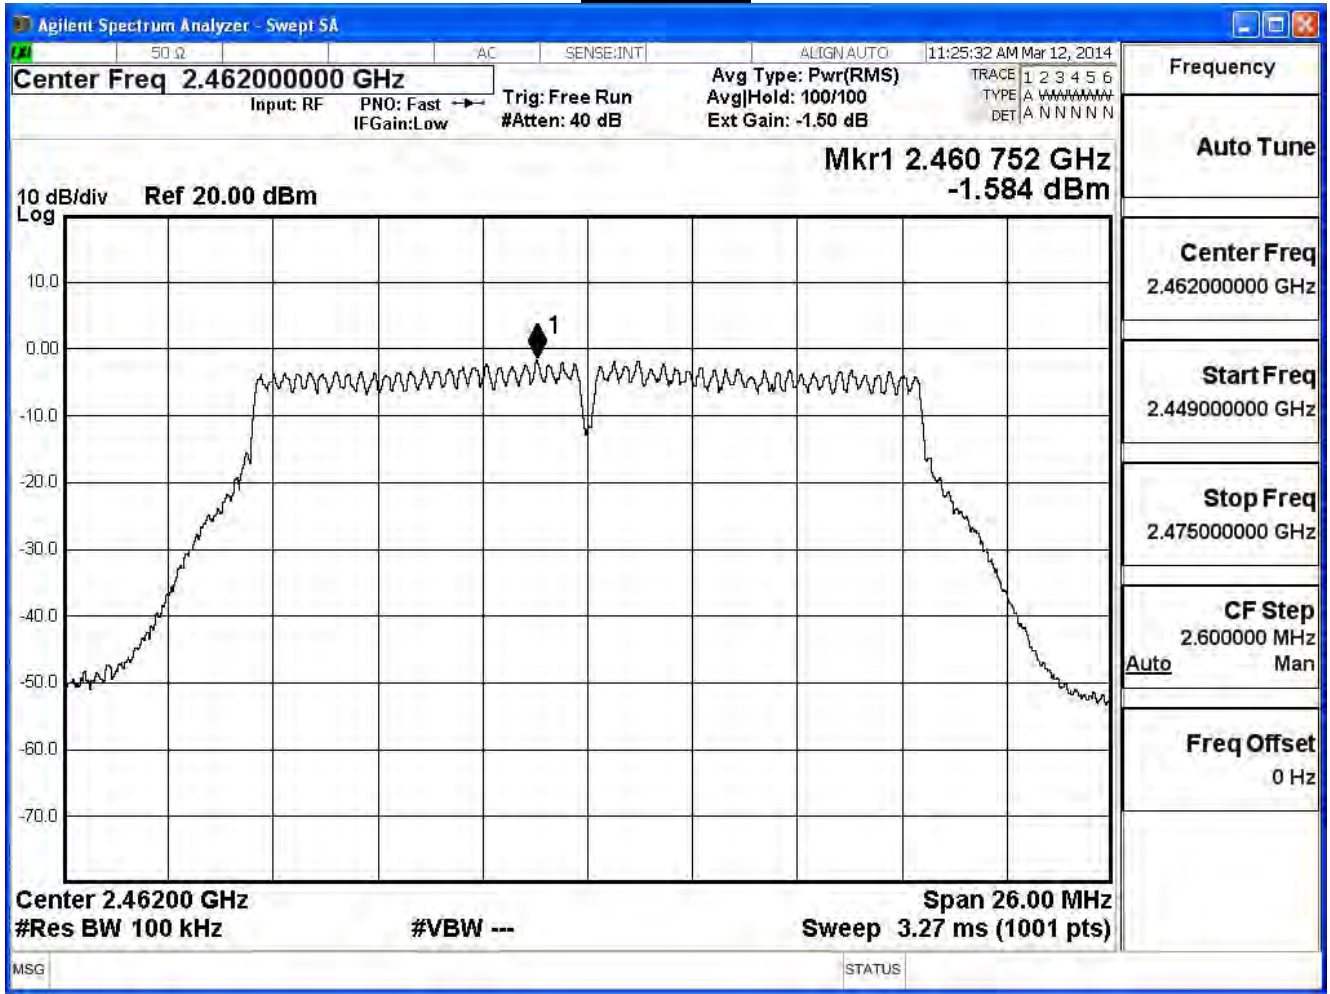

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11g (ANT1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-1.972	-17.172	≤ 7.32	Pass
6	2437	3.682	-11.518	≤ 7.32	Pass
11	2462	-1.851	-17.051	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

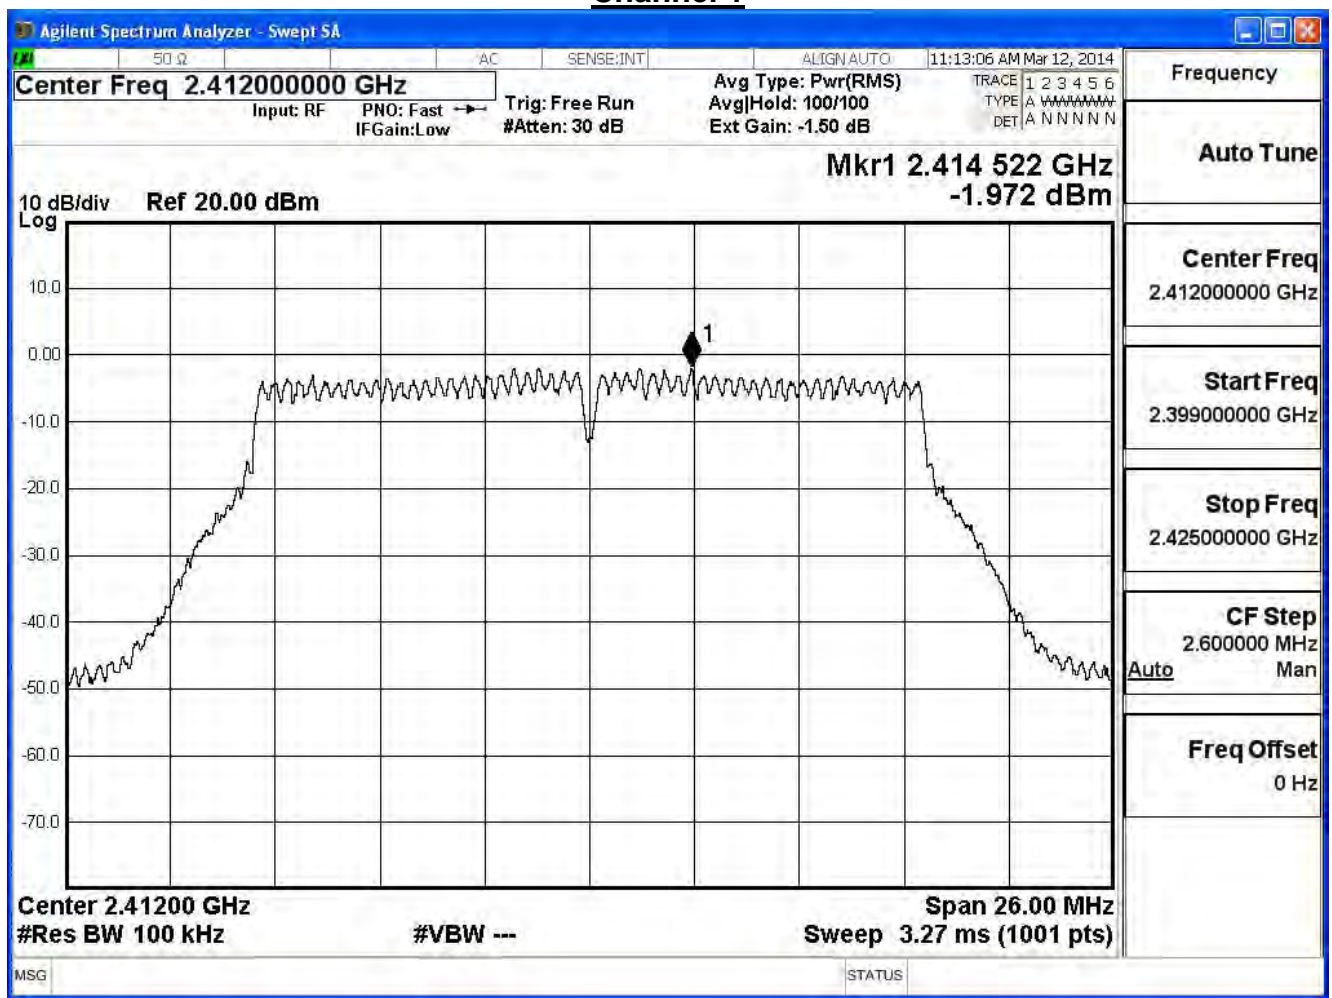

Channel 6

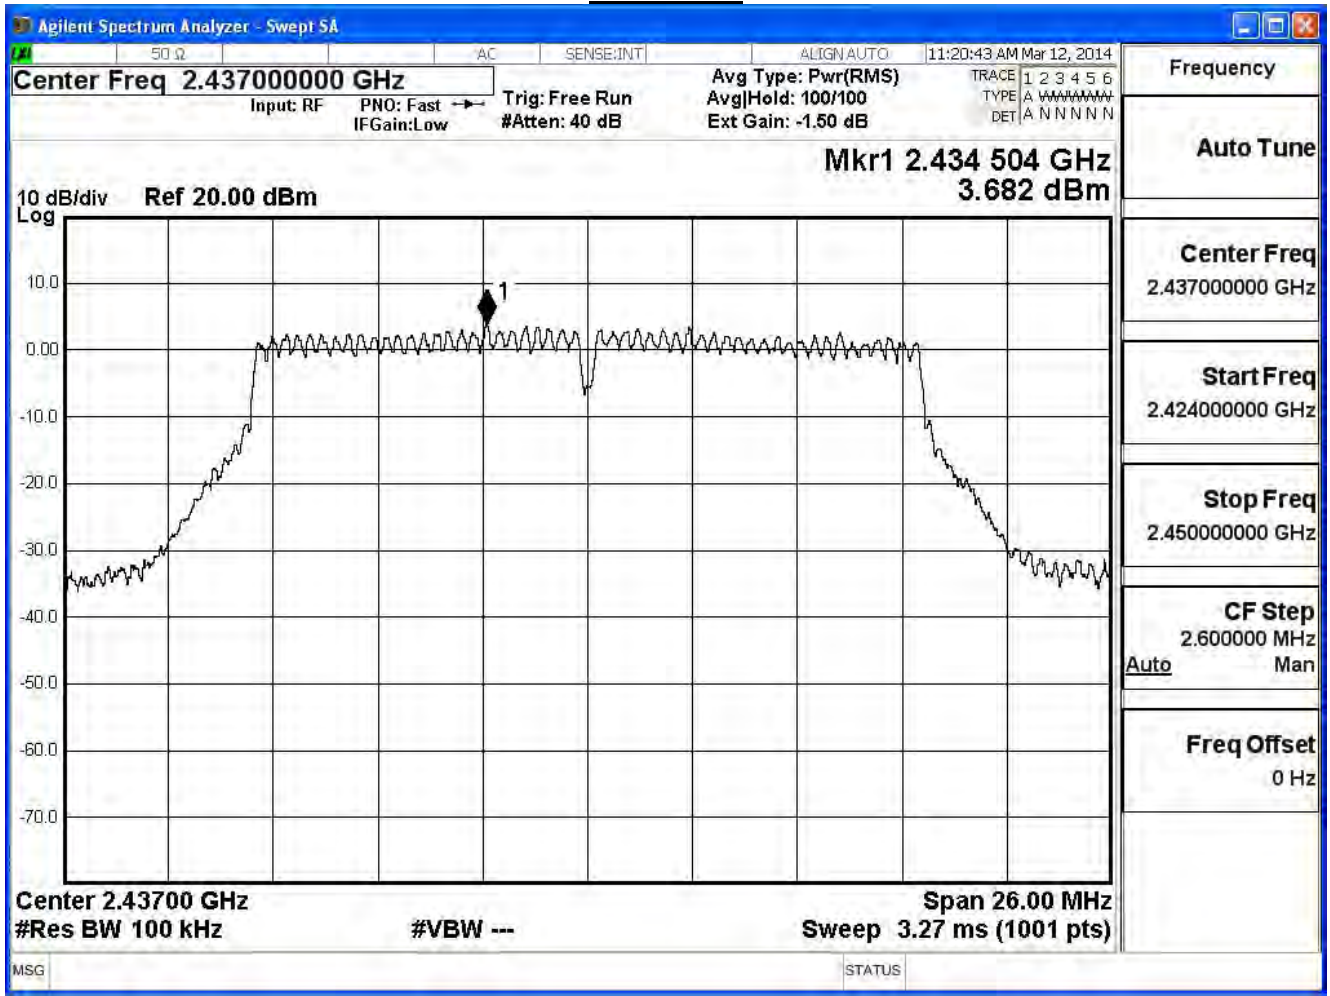

Channel 11

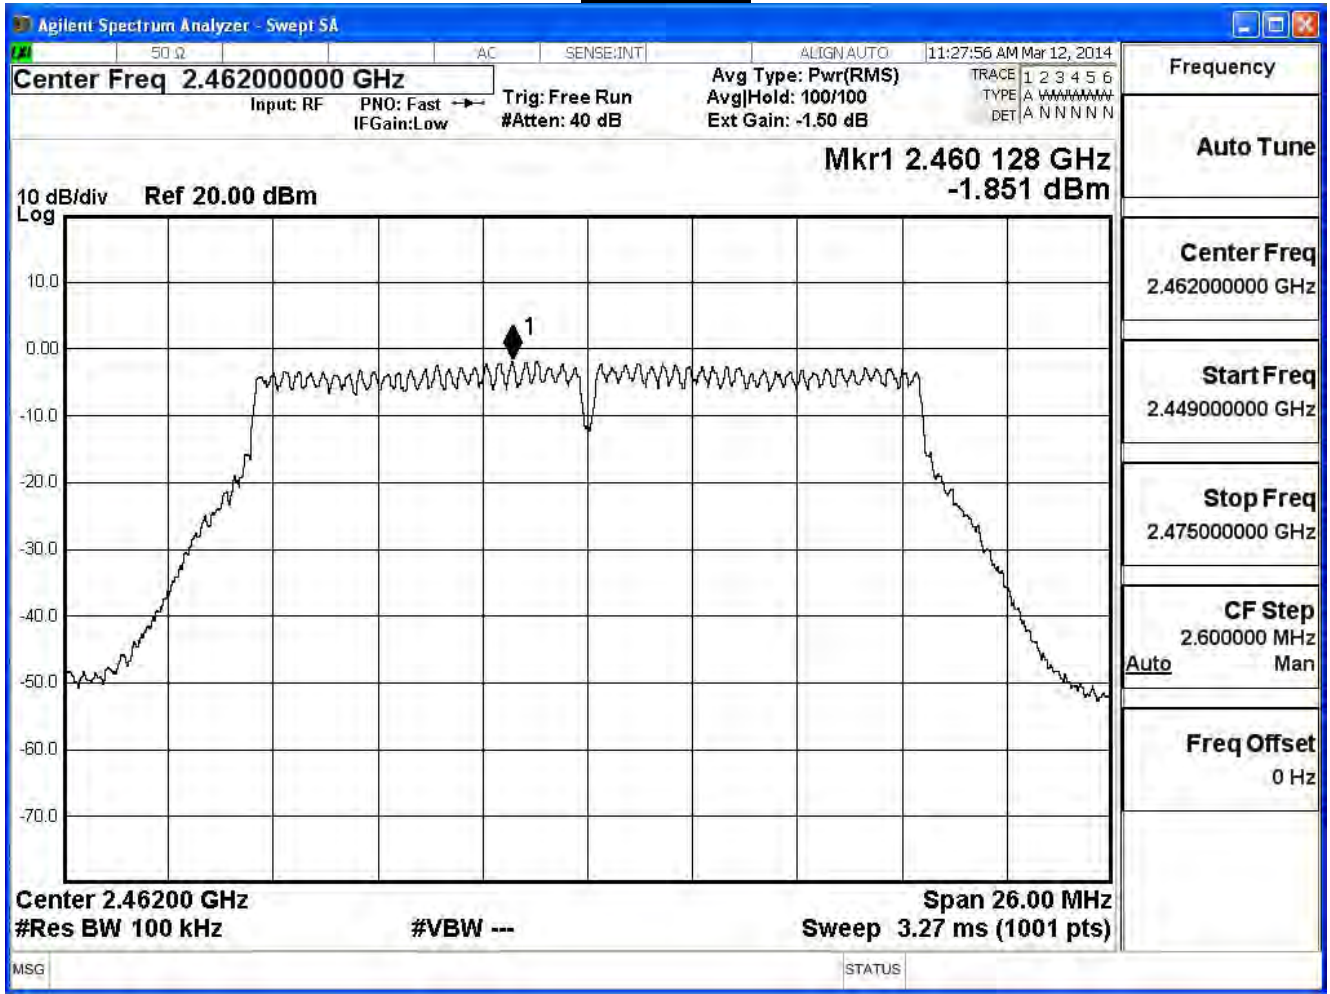

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11g (ANT2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-2.042	-17.242	≤ 7.32	Pass
6	2437	3.897	-11.303	≤ 7.32	Pass
11	2462	-1.492	-16.692	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

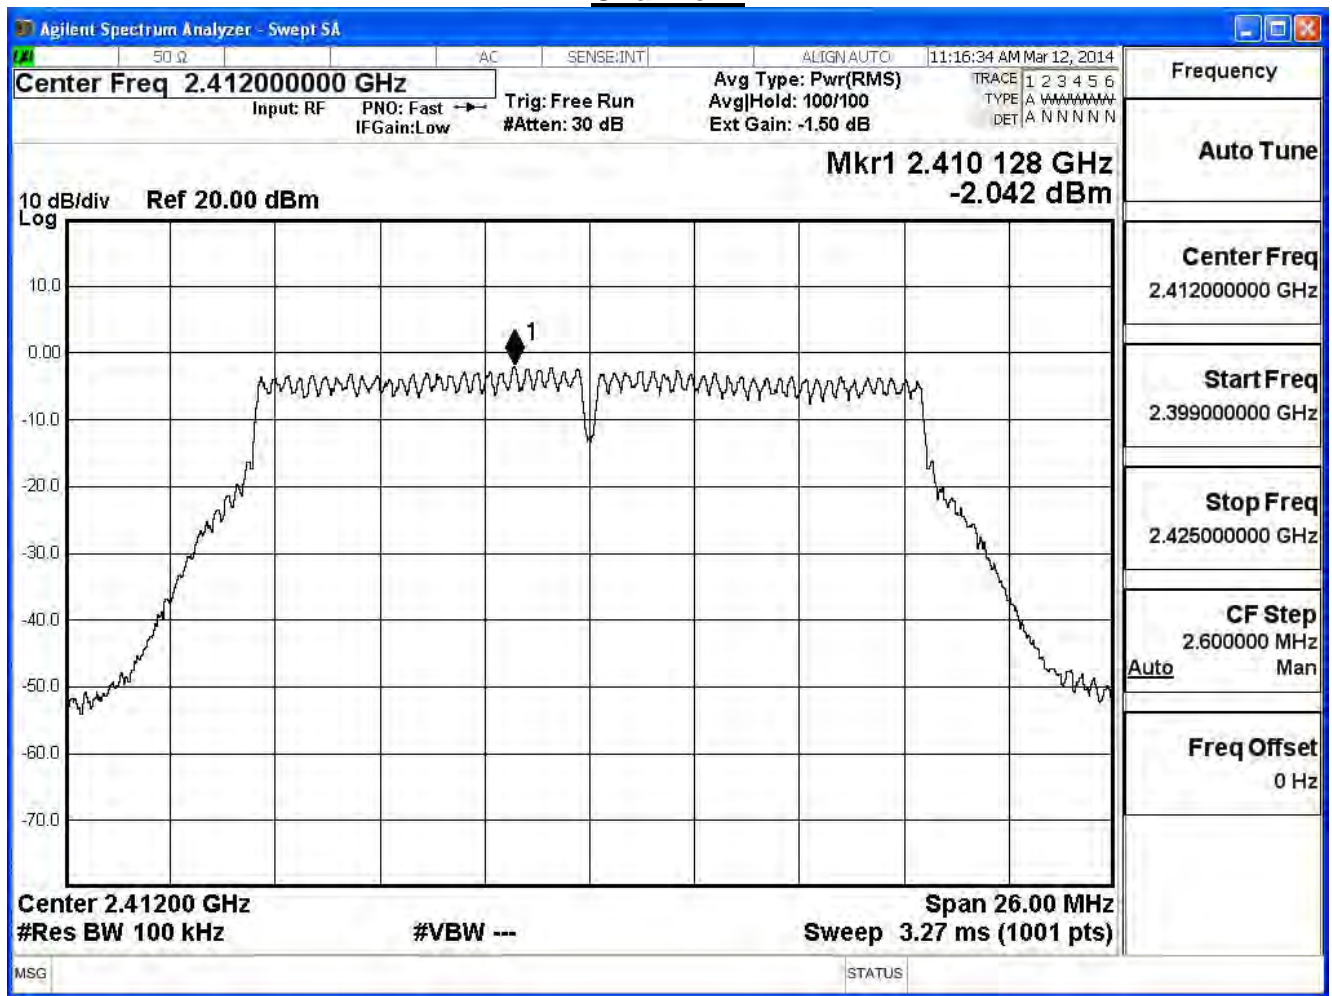

Channel 6

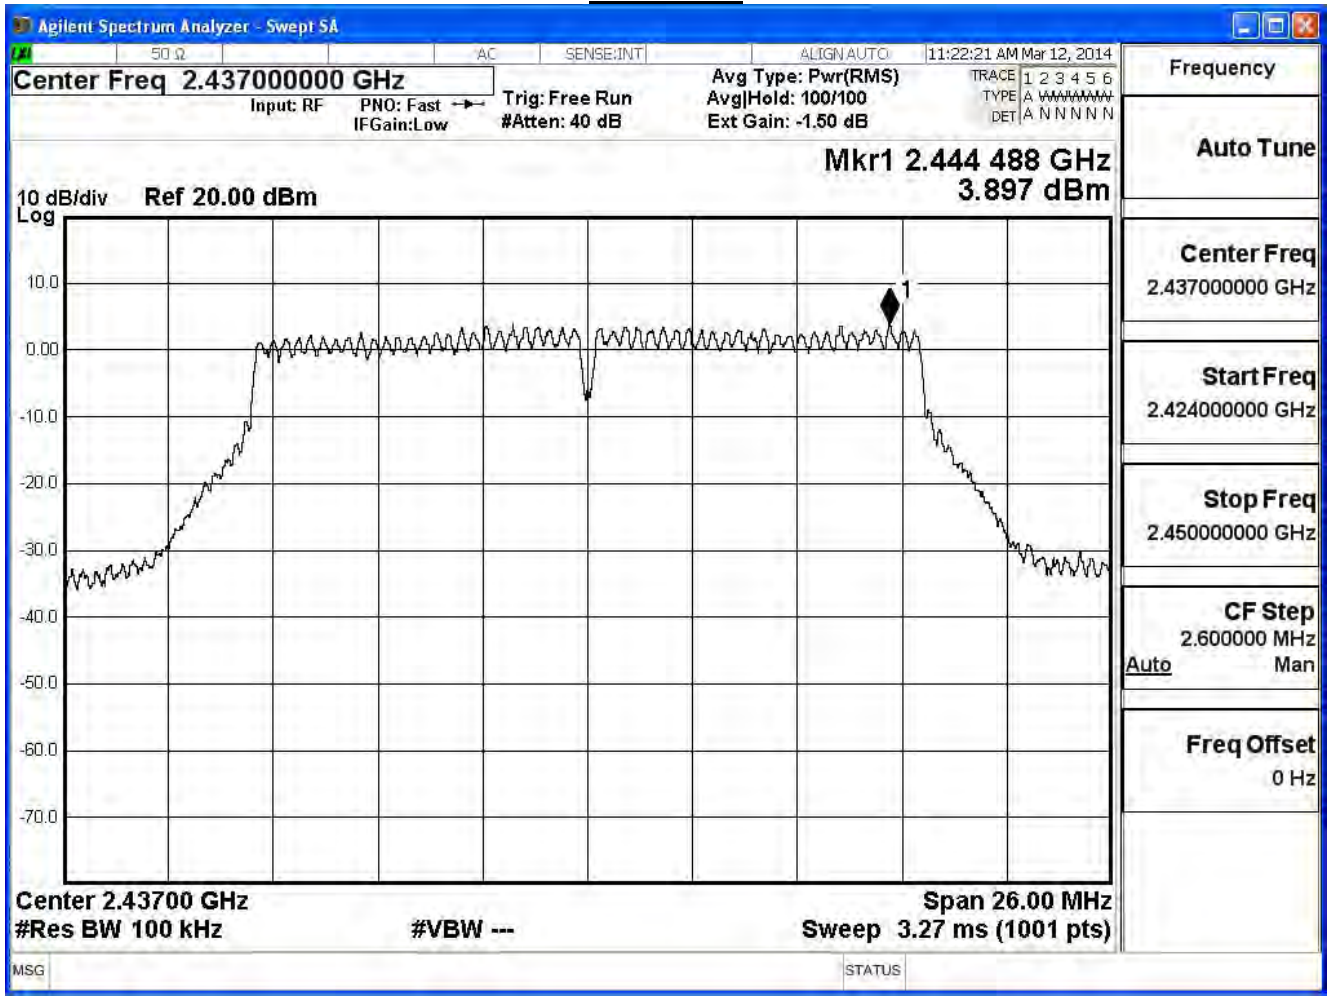

Channel 11

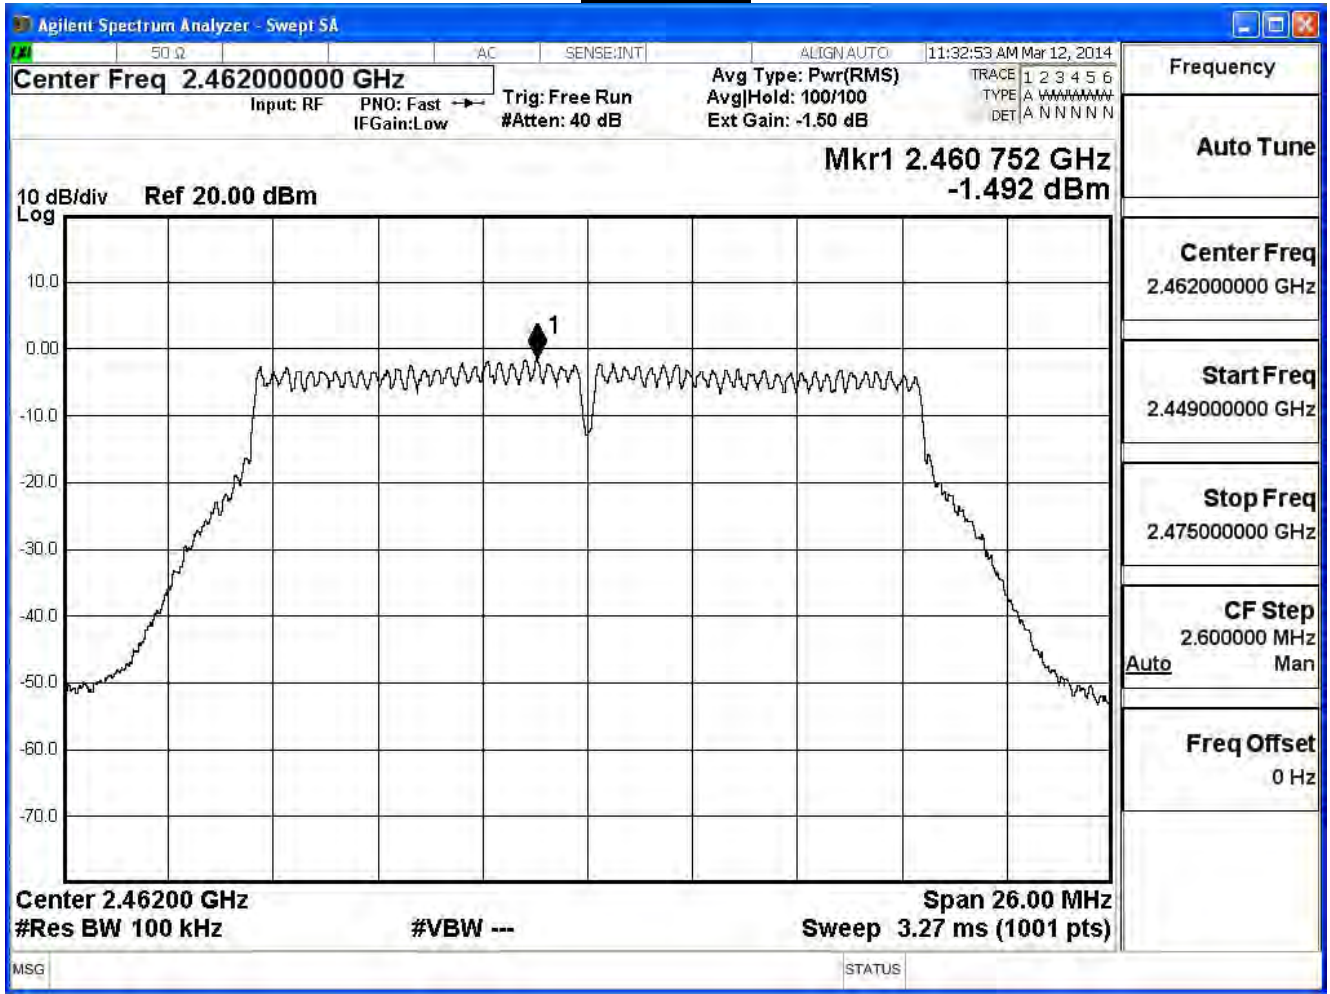

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE 802.11g (ANT0+1+2)				
Channel No.	Frequency (MHz)	Measure Level(dBm)	Limit (dBm)	Result
1	2412	-12.435	≤ 7.32	Pass
6	2437	-6.662	≤ 7.32	Pass
11	2462	-12.068	≤ 7.32	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE802.11n_20MHz_(ANT 0)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-4.352	-19.552	≤ 7.32	Pass
6	2437	2.765	-12.435	≤ 7.32	Pass
11	2462	-2.574	-17.774	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

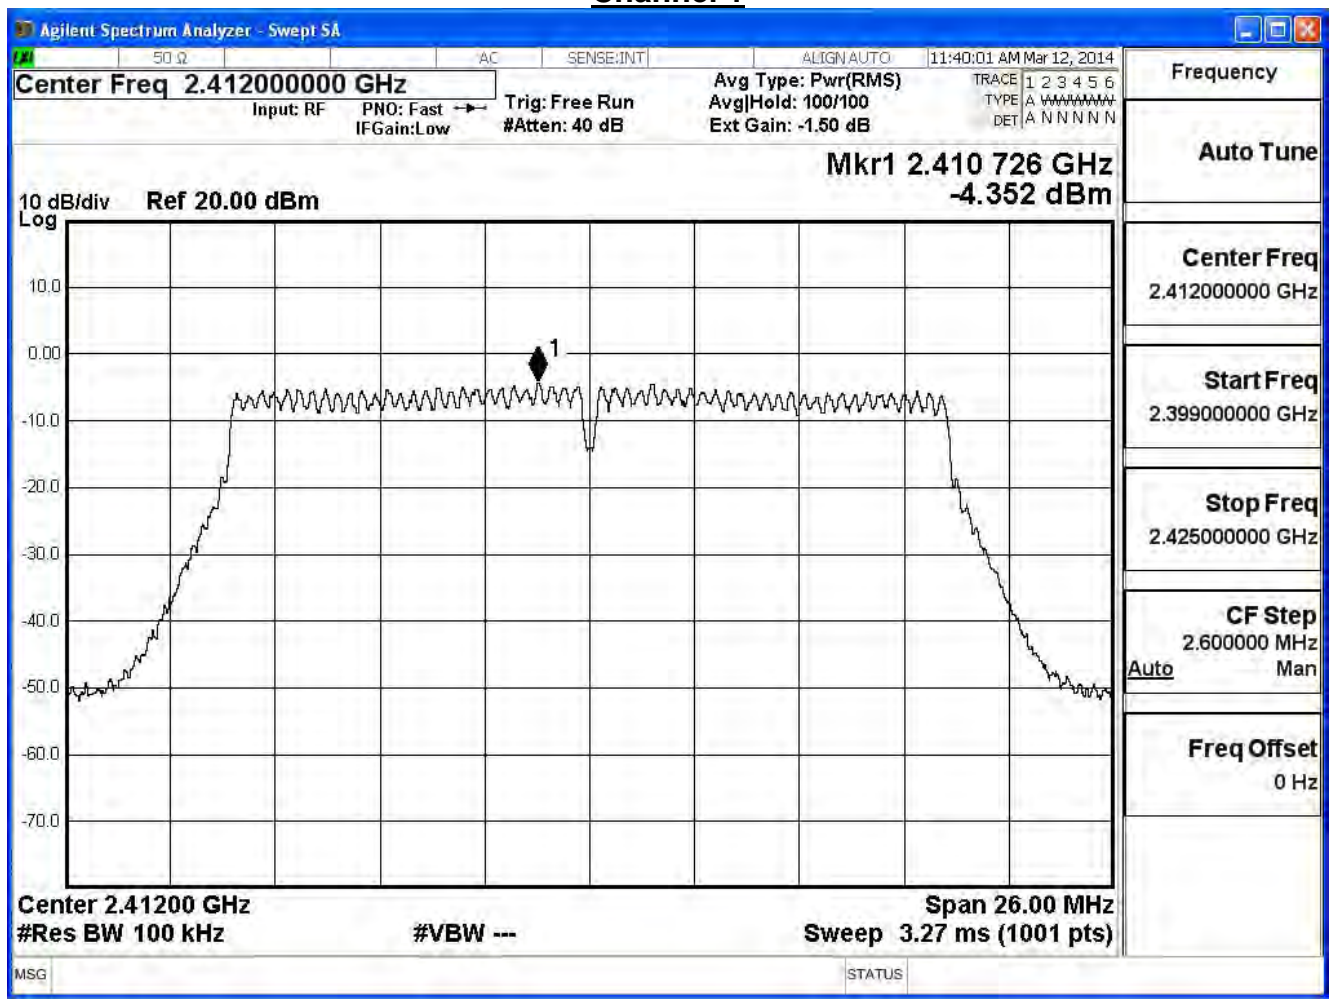

Channel 6

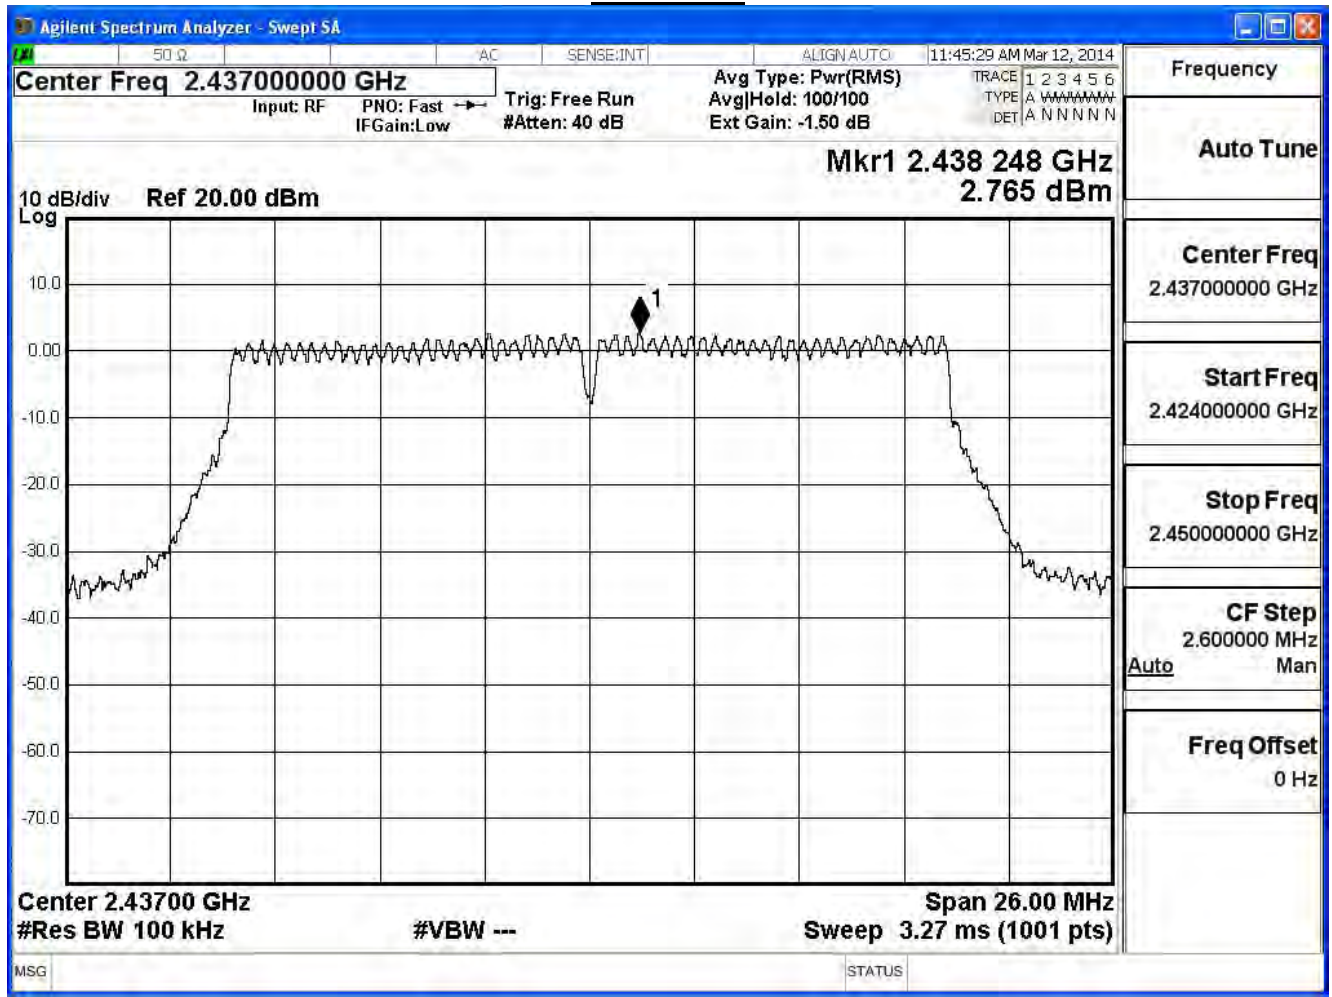

Channel 11

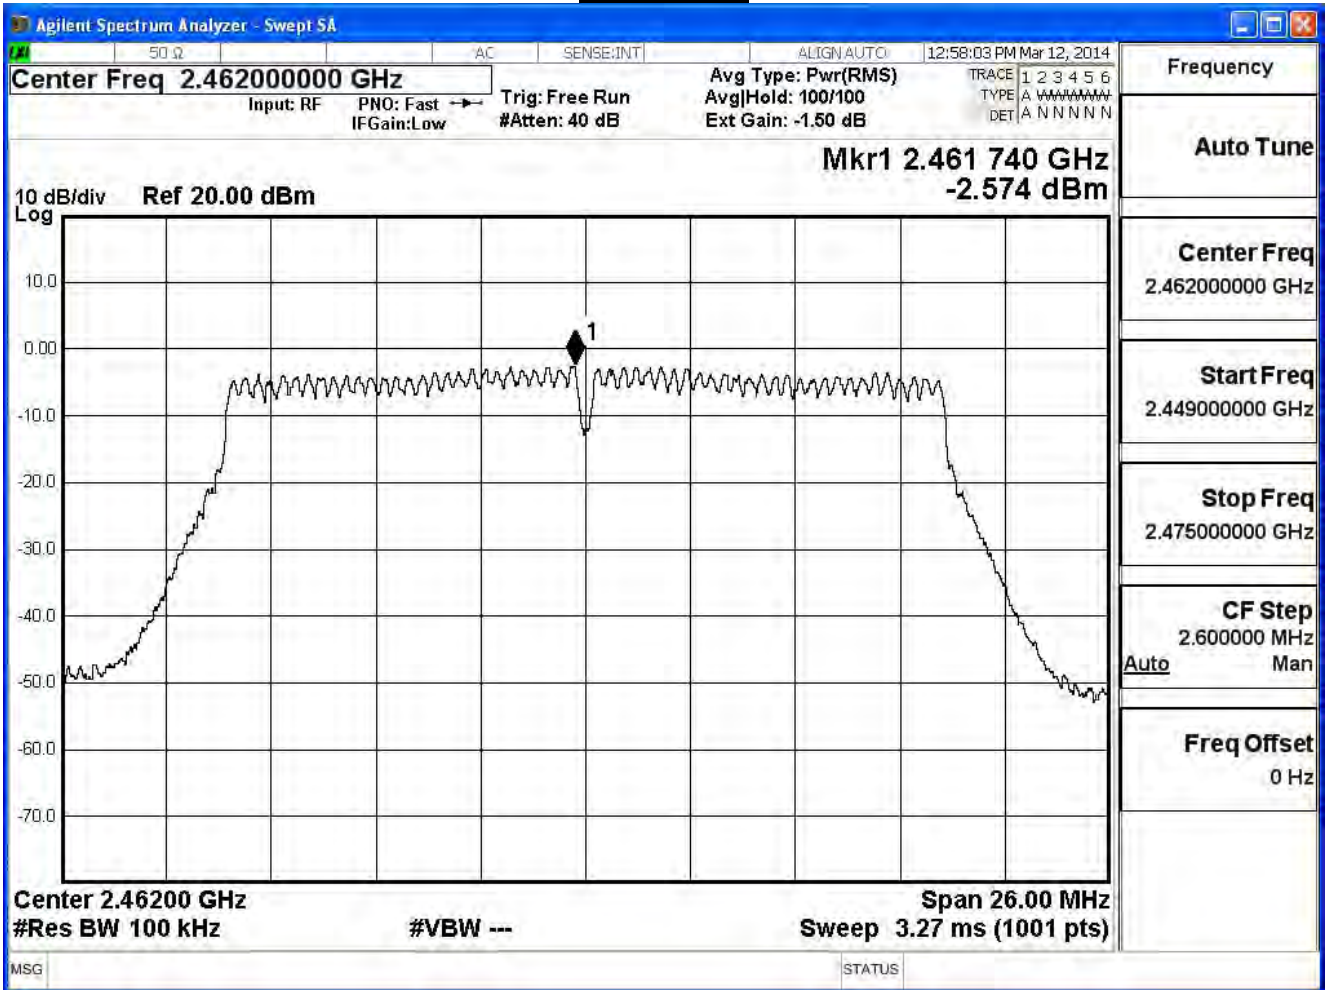

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE802.11n_20MHz_(ANT 1)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-4.275	-19.475	≤ 7.32	Pass
6	2437	2.303	-12.897	≤ 7.32	Pass
11	2462	-2.782	-17.982	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

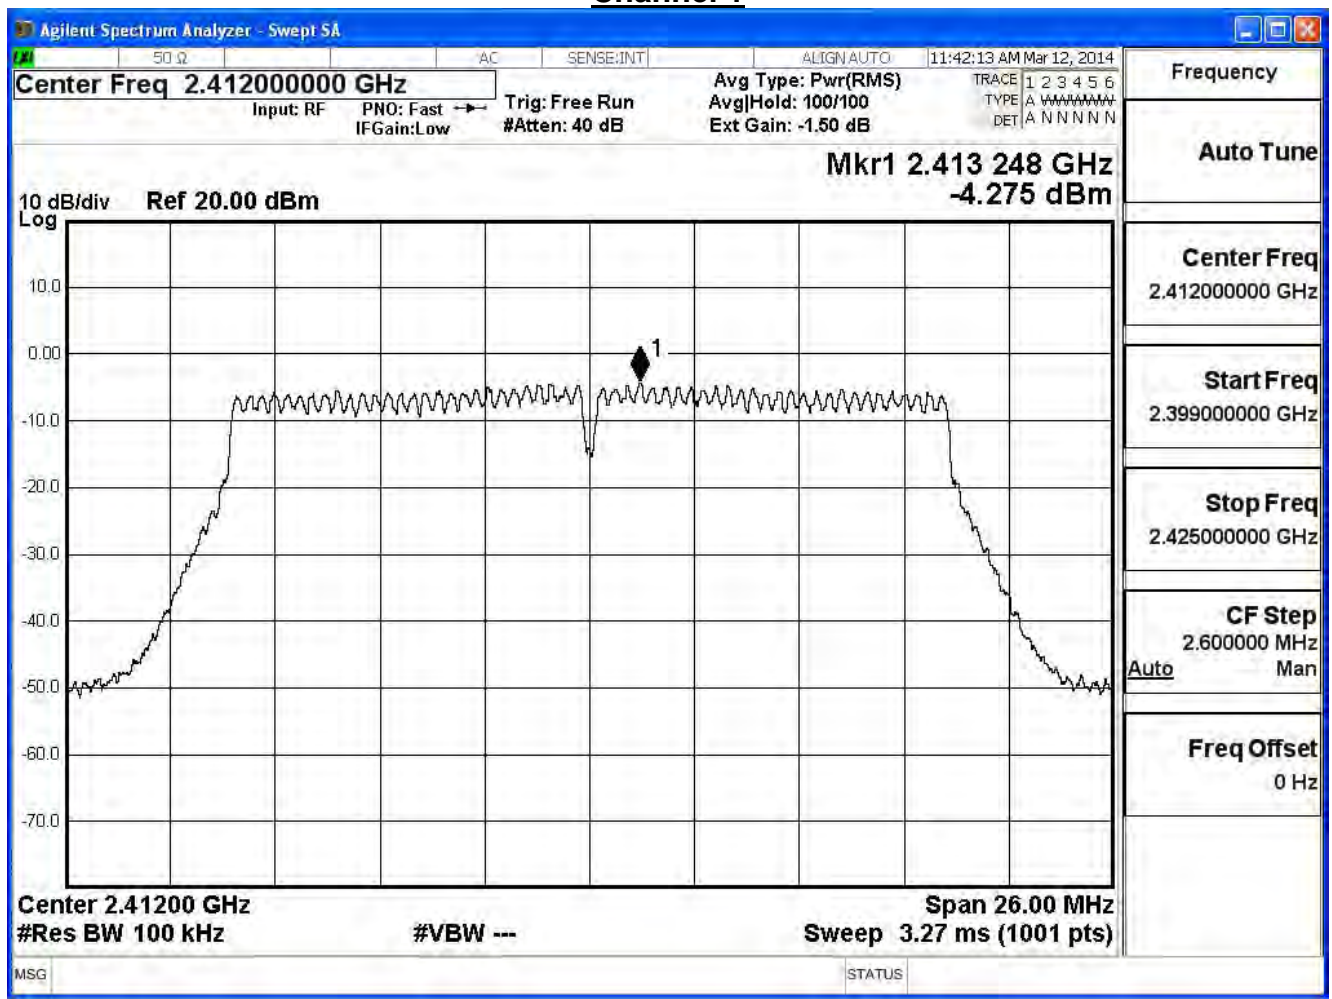

Channel 6

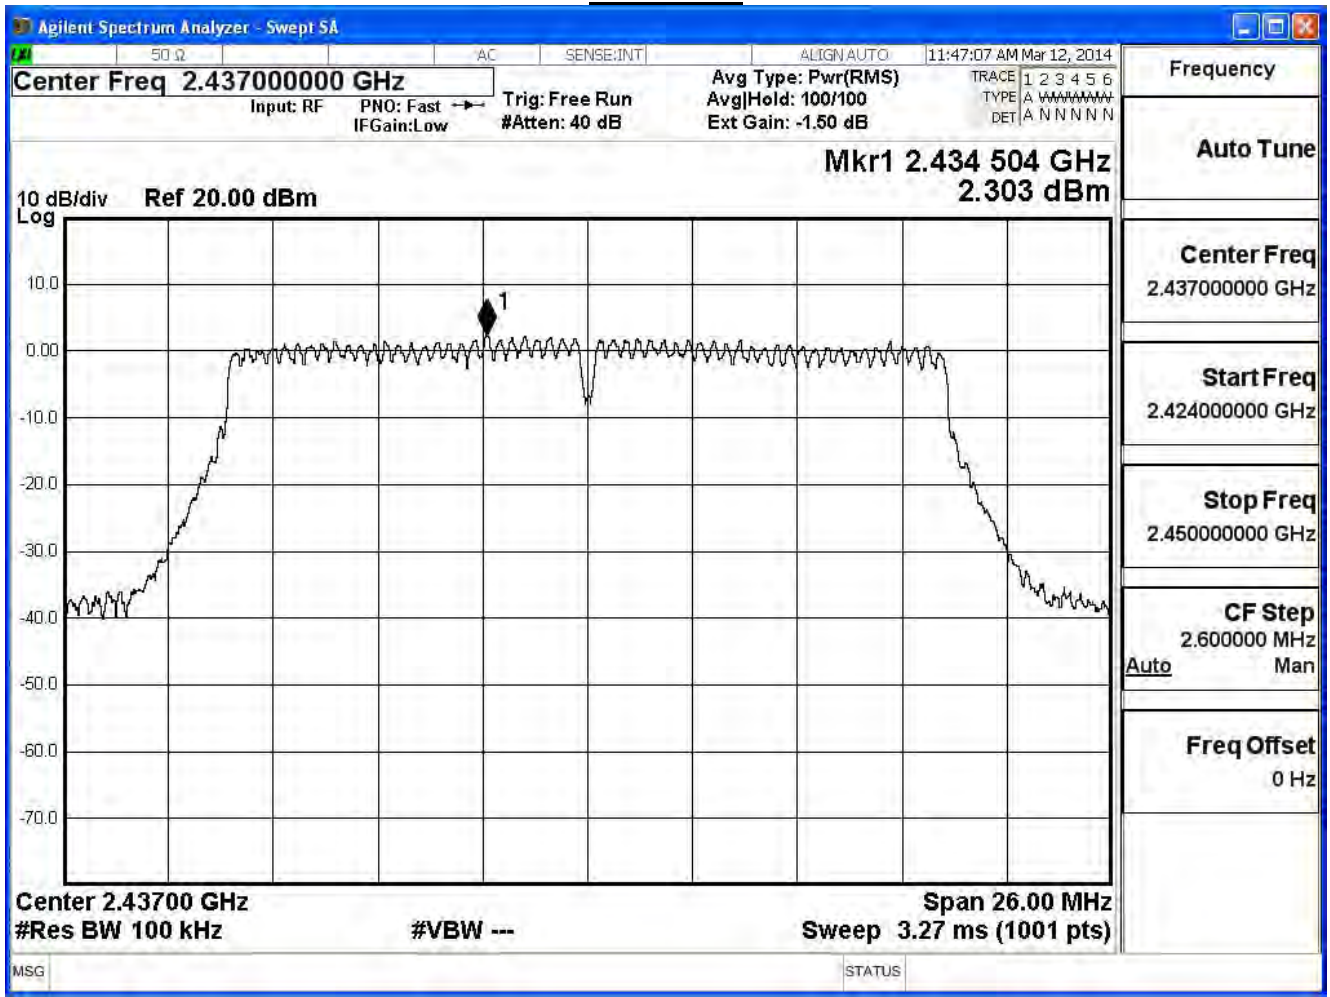

Channel 11

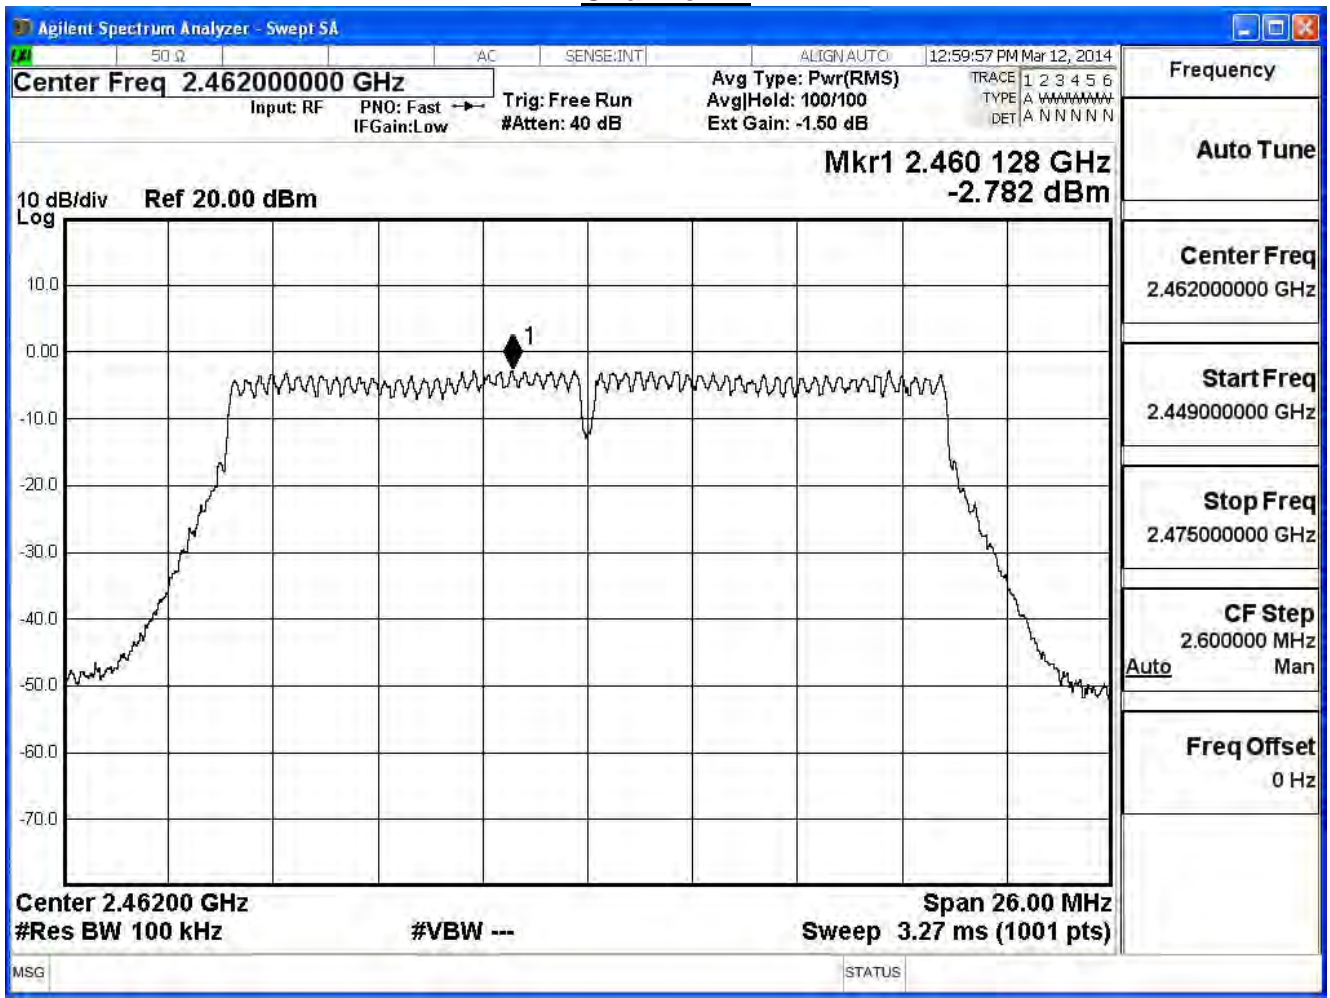

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE802.11n_20MHz_(ANT 2)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	-4.104	-19.304	≤ 7.32	Pass
6	2437	2.293	-12.907	≤ 7.32	Pass
11	2462	-2.800	-18.000	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 1

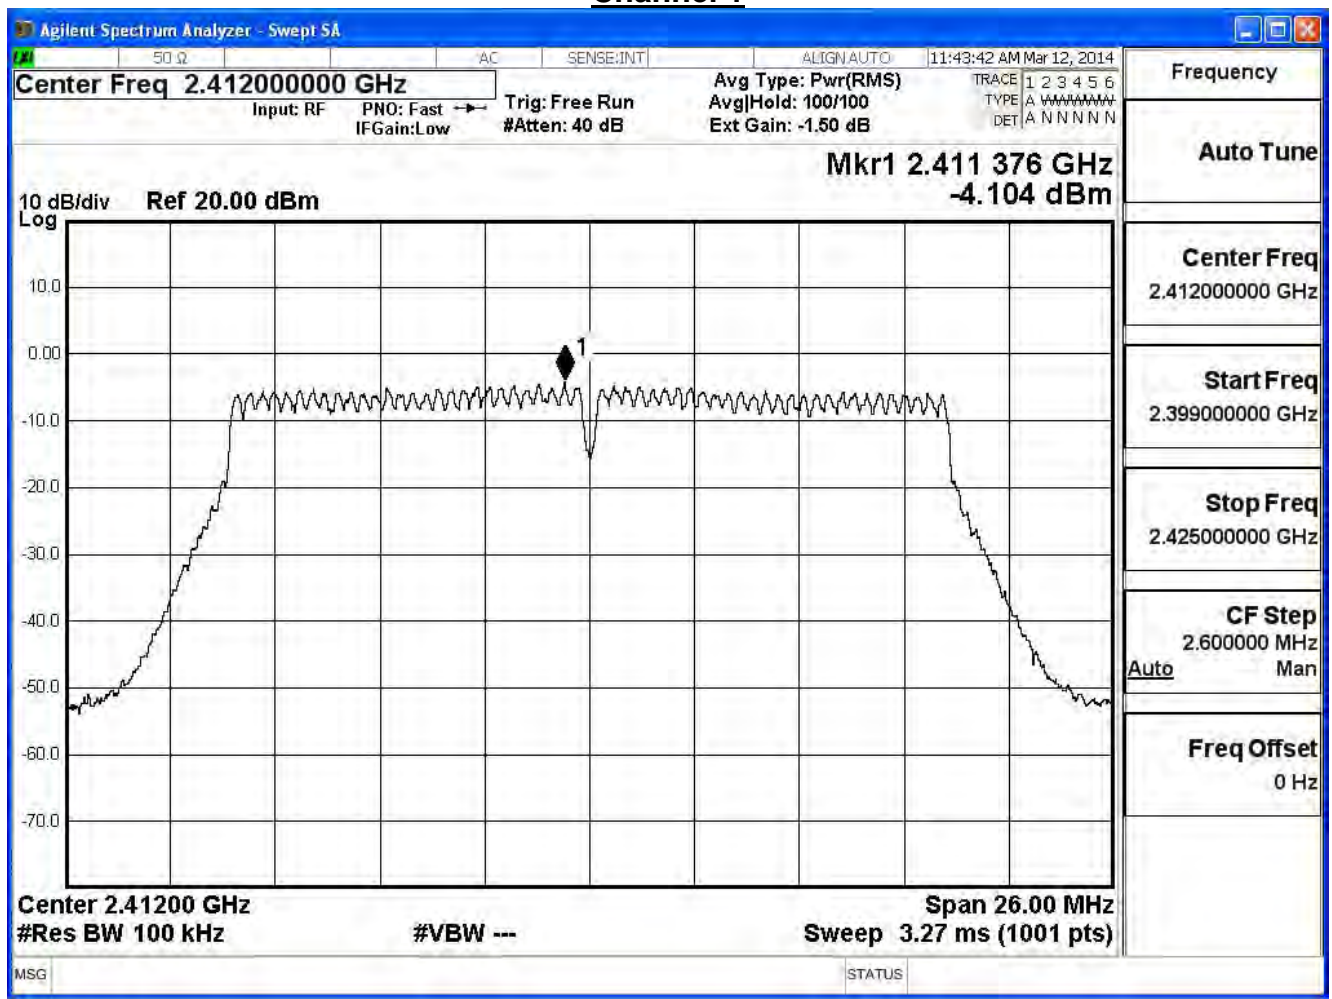

Channel 6

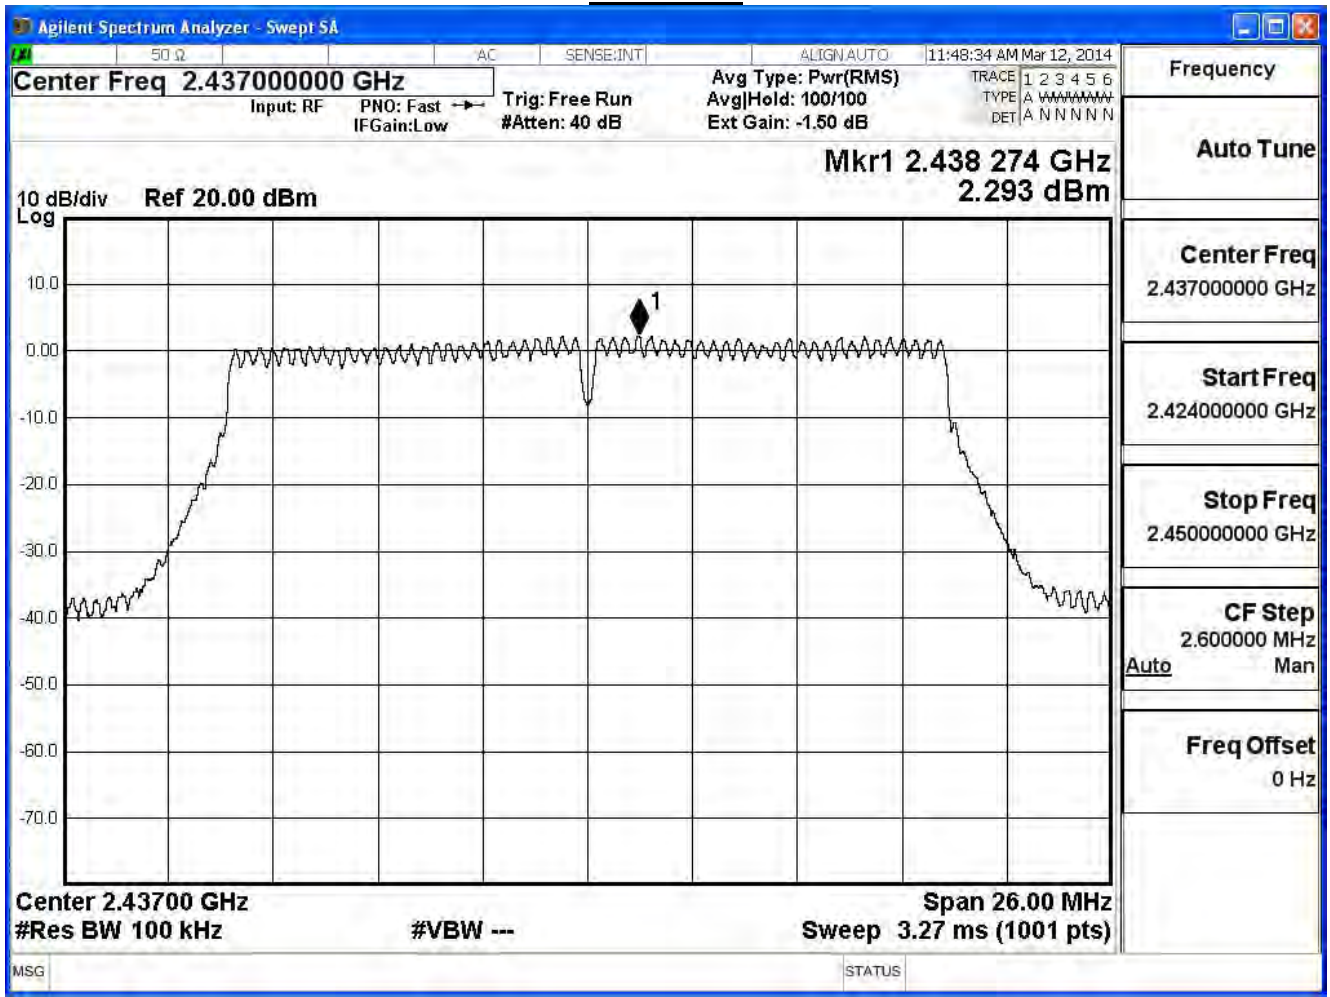

Channel 11

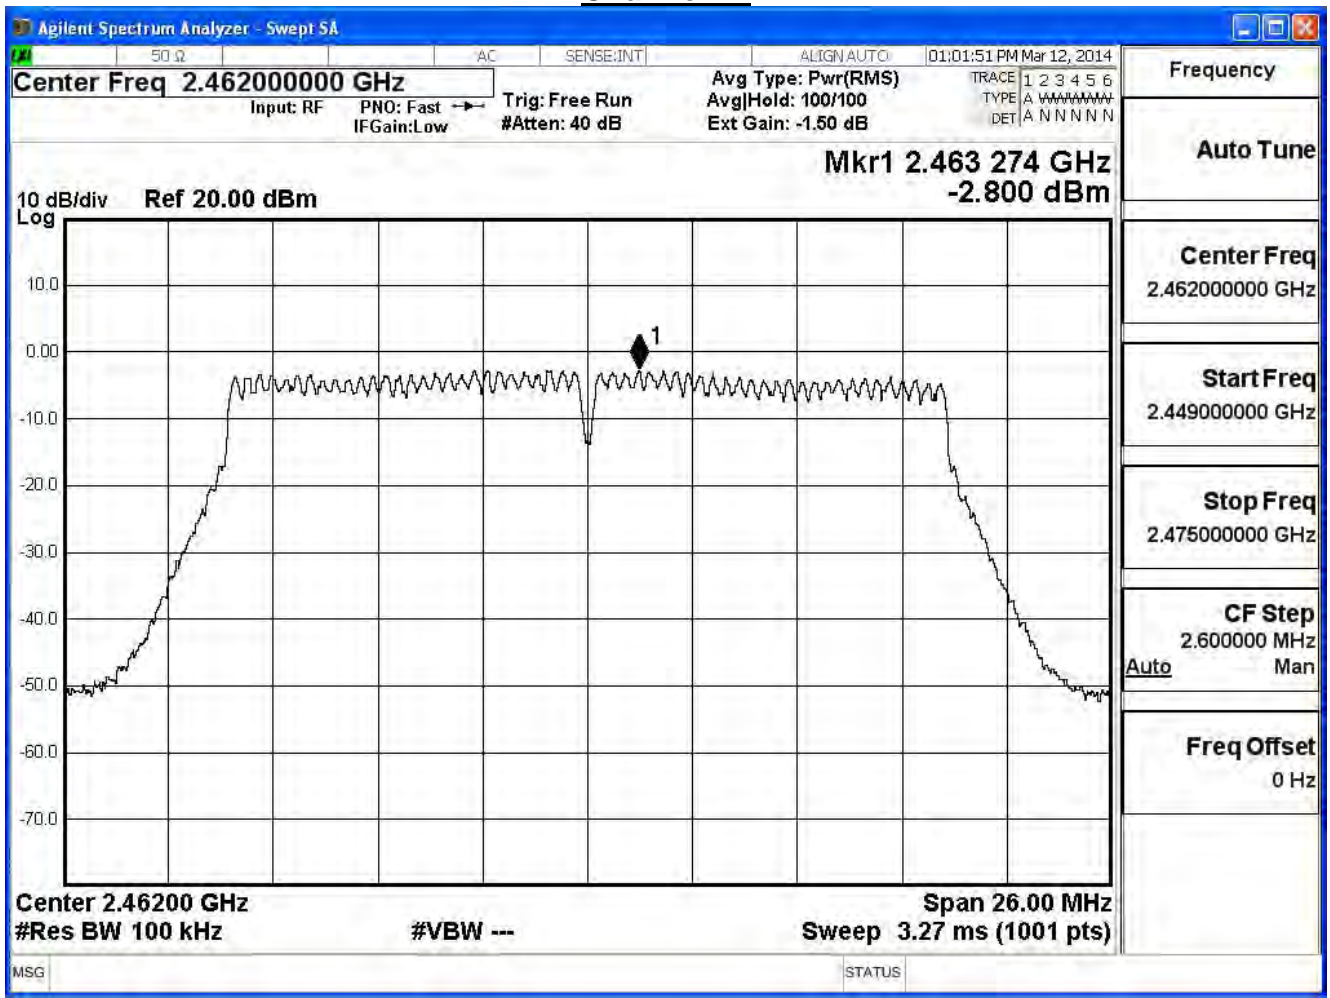

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE802.11n 20MHz (ANT 0+1+2)				
Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-14.671	≤ 7.32	Pass
6	2437	-7.969	≤ 7.32	Pass
11	2462	-13.146	≤ 7.32	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
3	2422	-8.797	-23.997	≤ 7.32	Pass
6	2437	-4.913	-20.113	≤ 7.32	Pass
9	2452	-7.096	-22.296	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 3

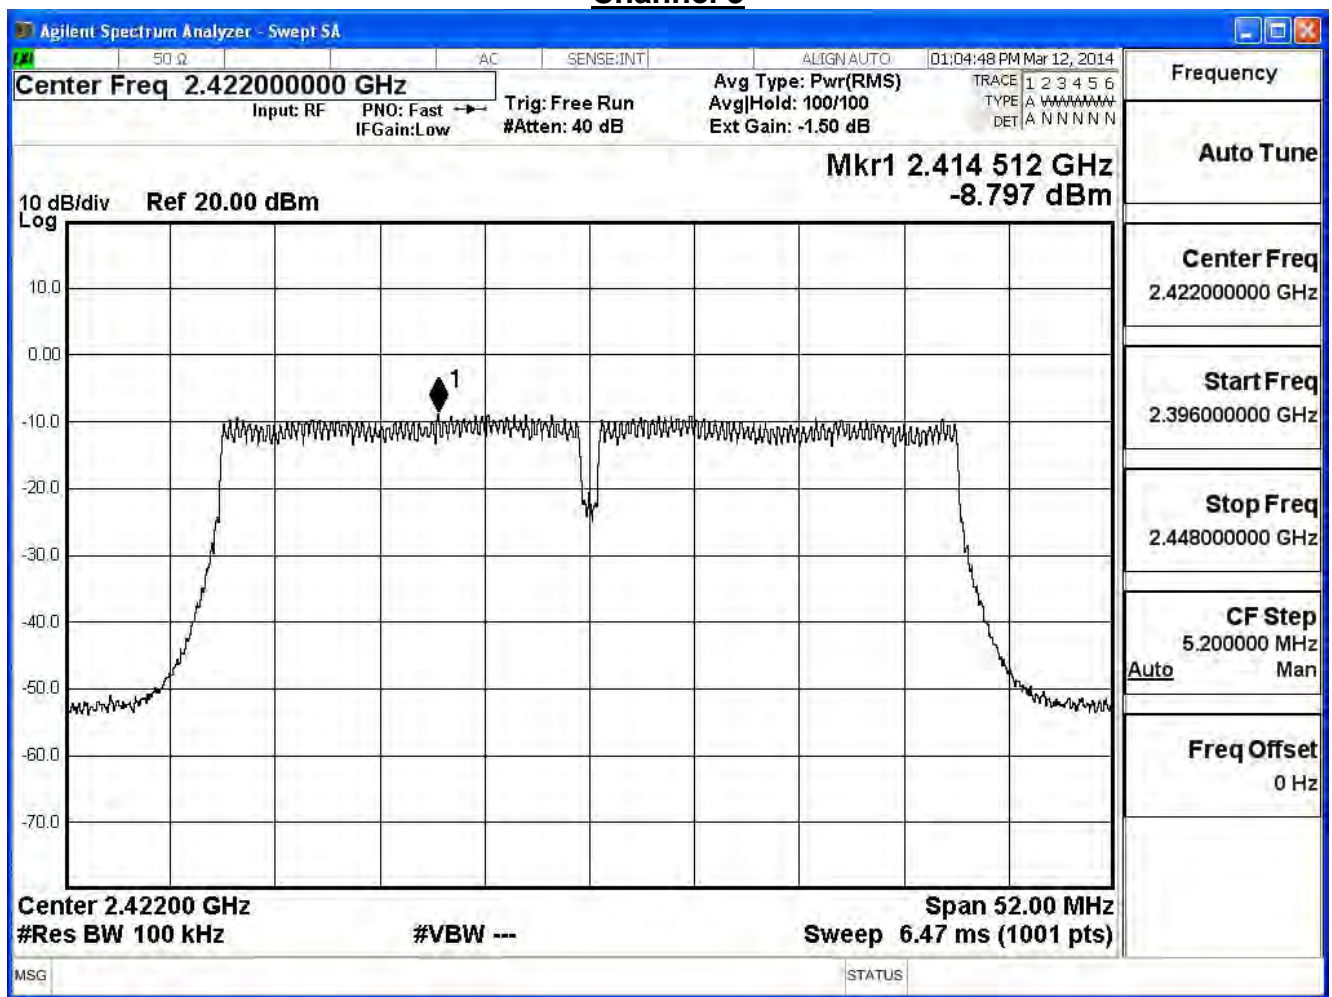

Channel 6

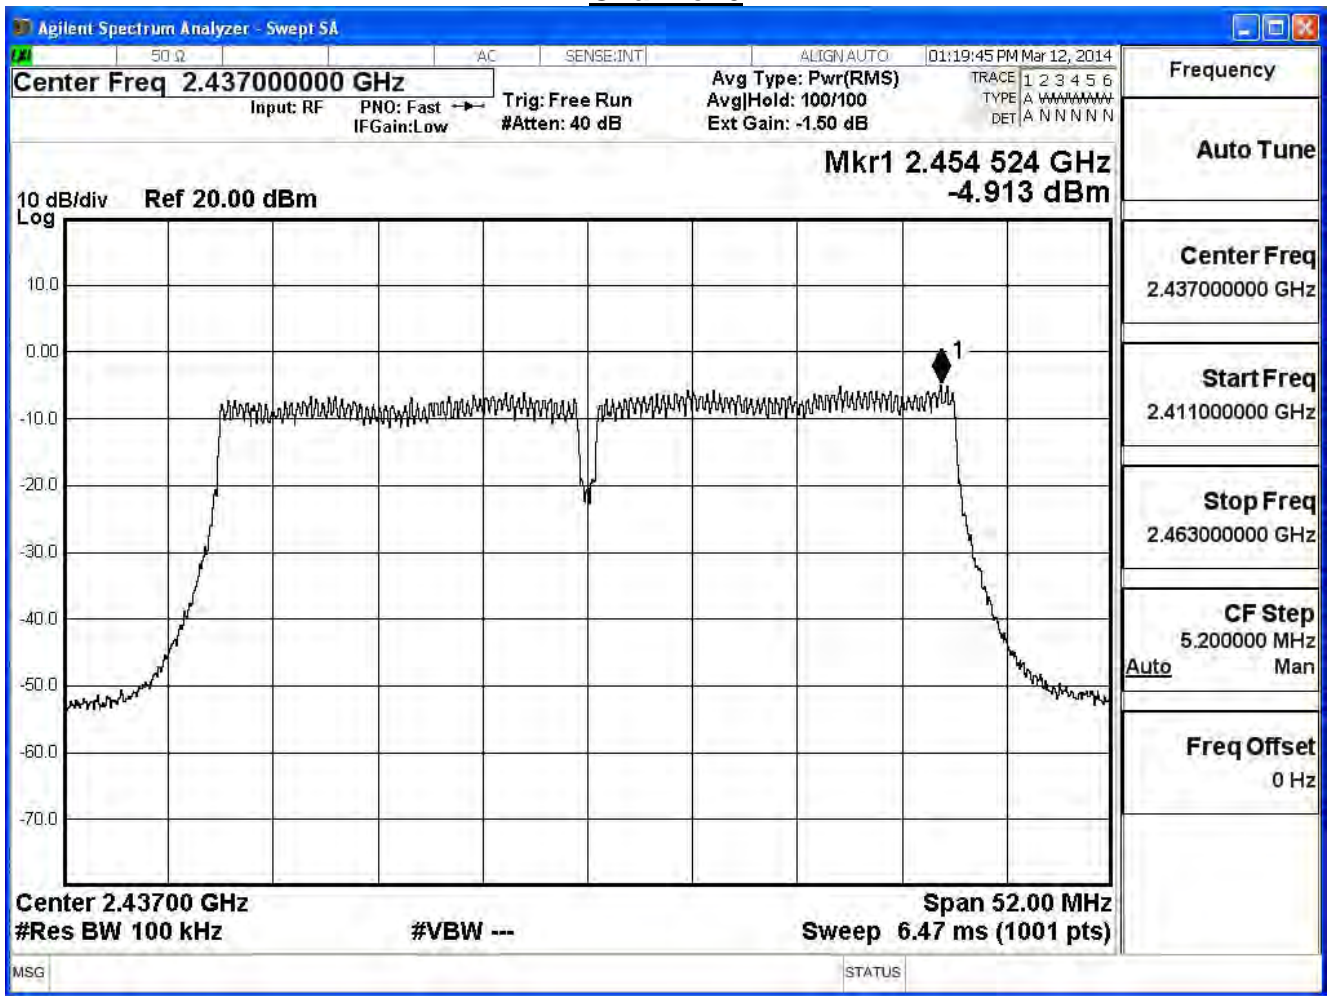

Channel 9

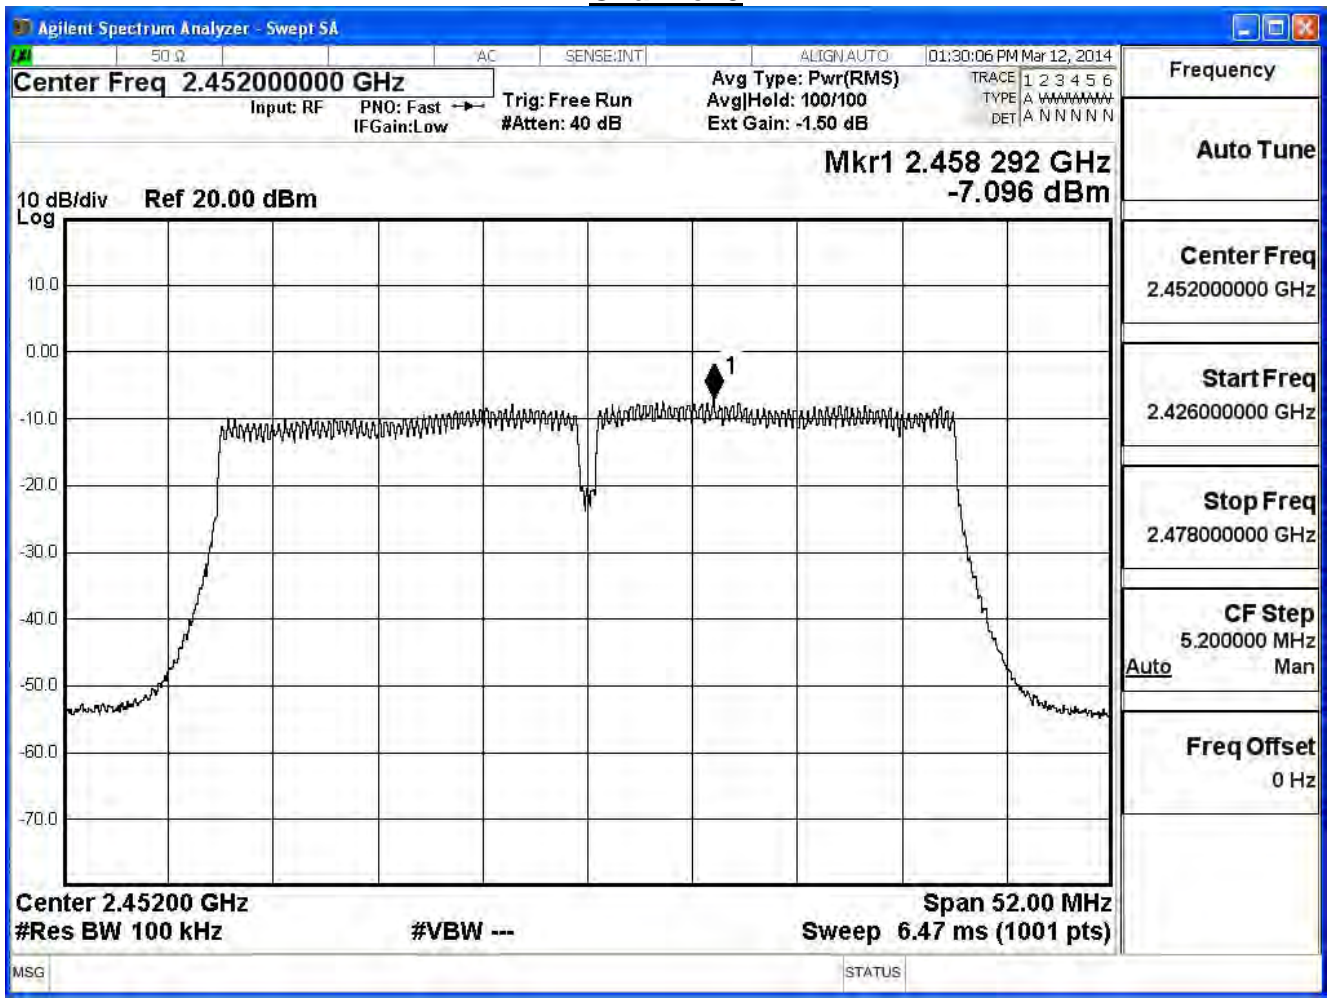

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-8.638	-23.838	≤7.32	Pass
6	2437	-5.001	-20.201	≤7.32	Pass
9	2452	-7.502	-22.702	≤7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$

Channel 3

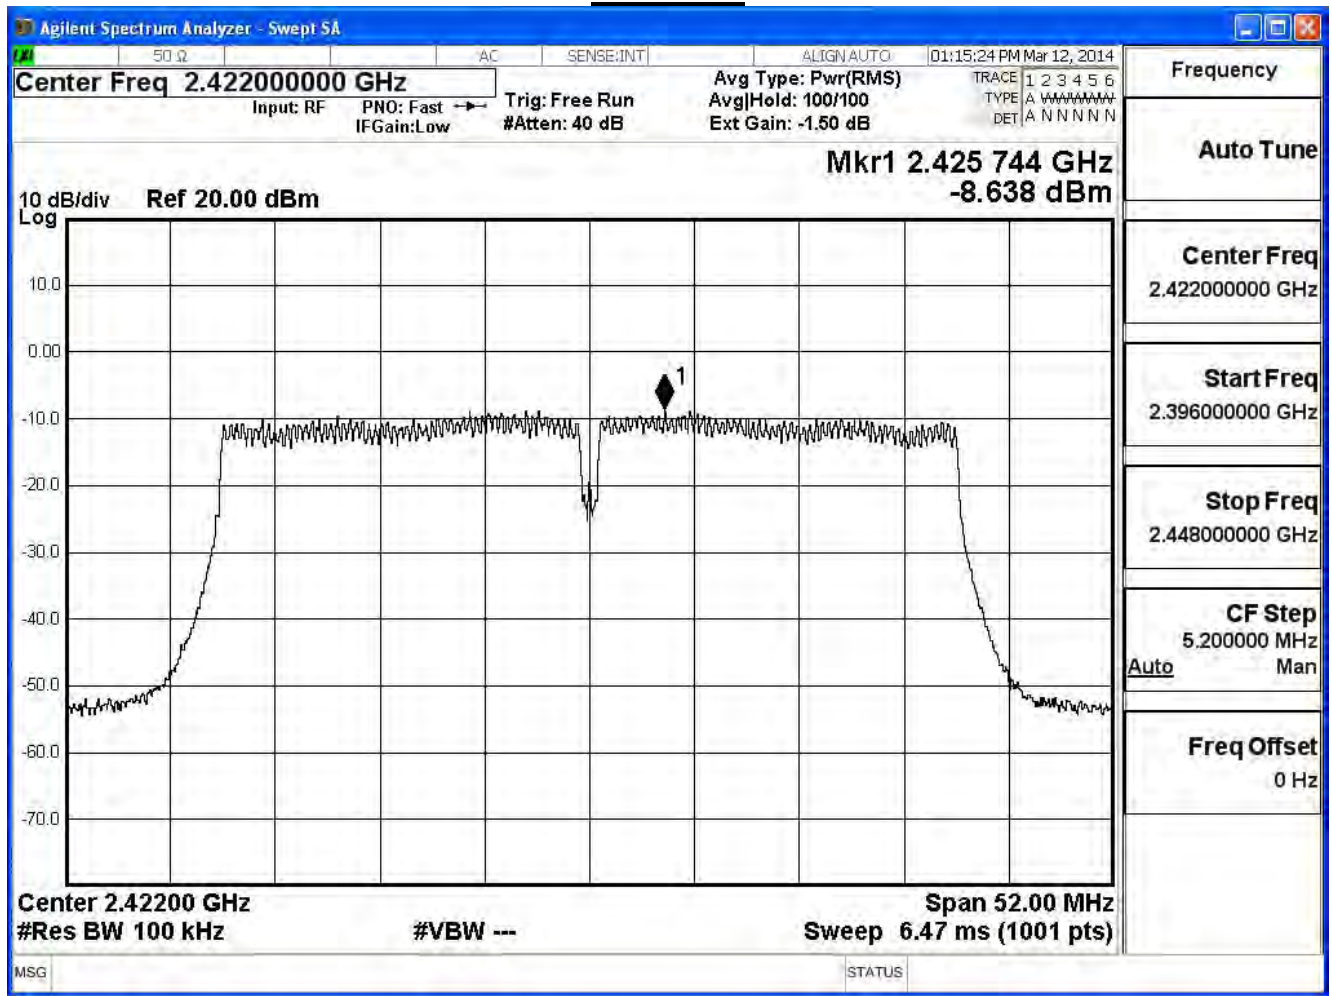

Channel 9

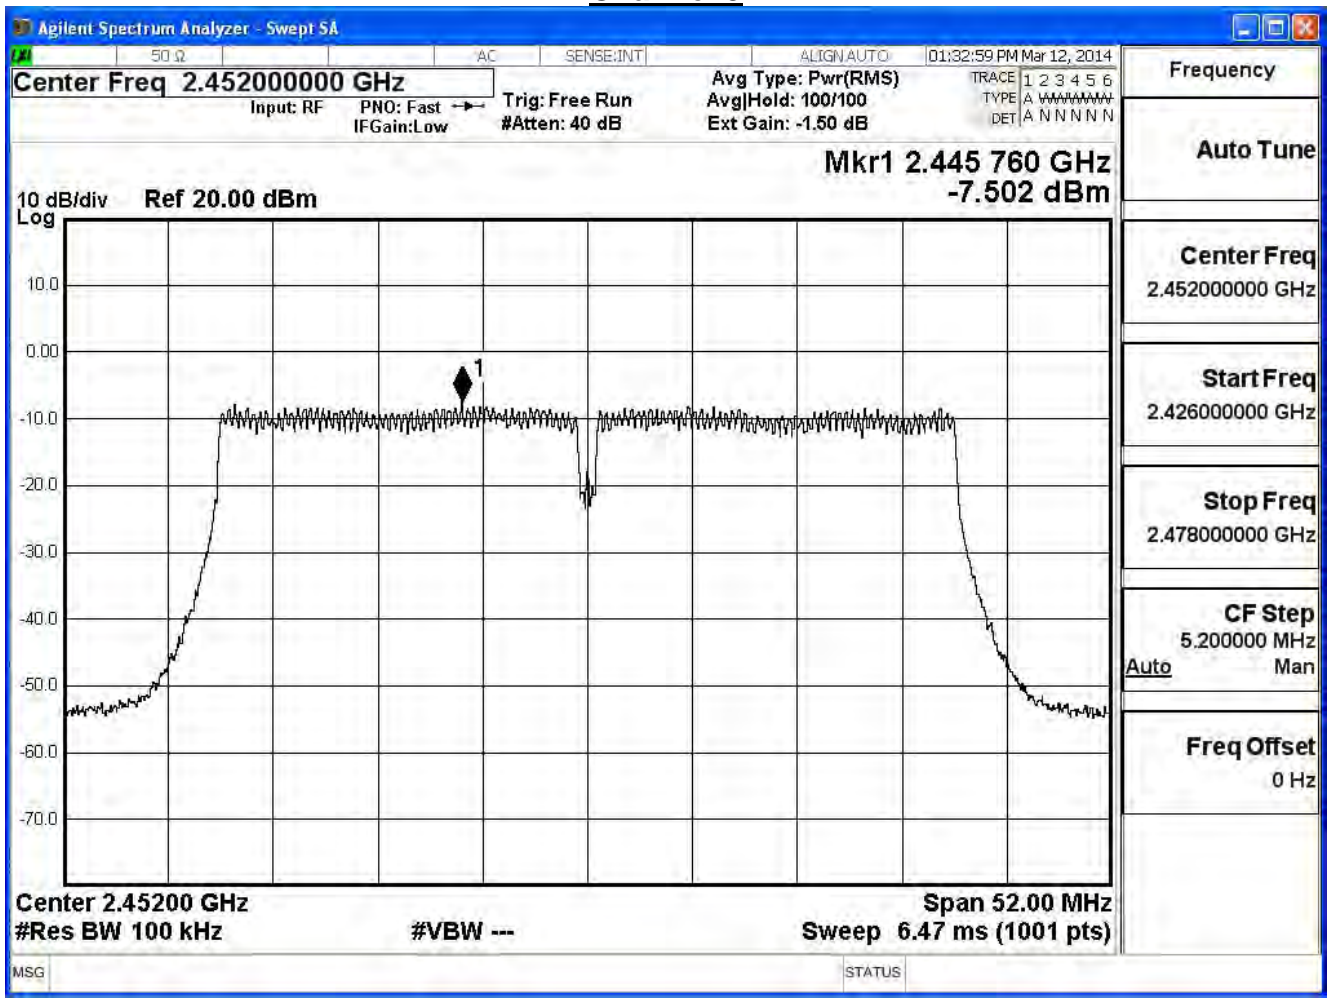

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-8.582	-23.782	≤ 7.32	Pass
6	2437	-5.296	-20.496	≤ 7.32	Pass
9	2452	-7.367	-22.567	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Channel 3

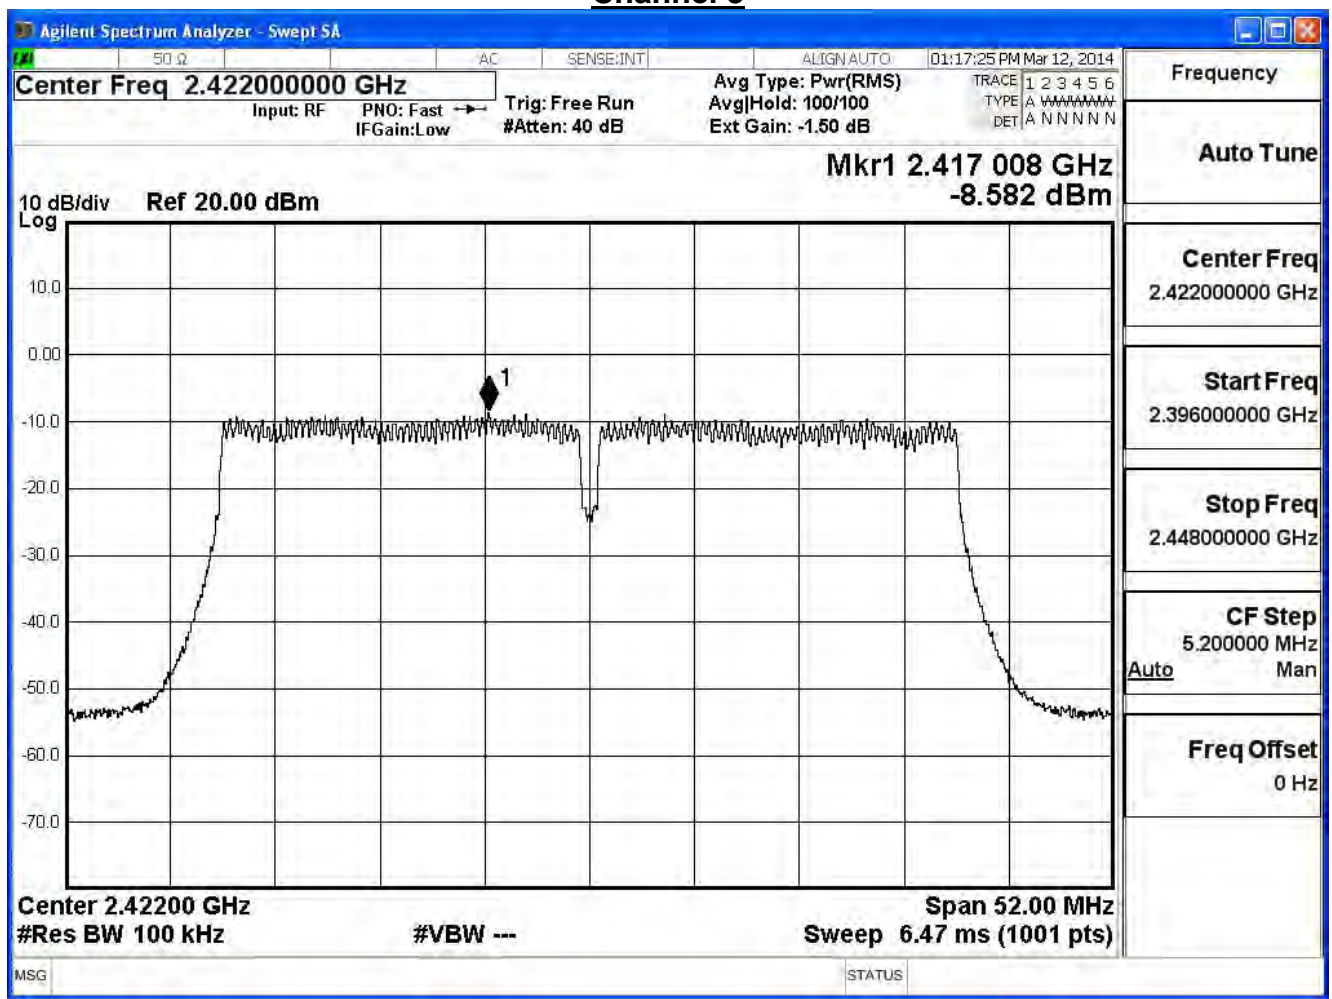

Channel 6

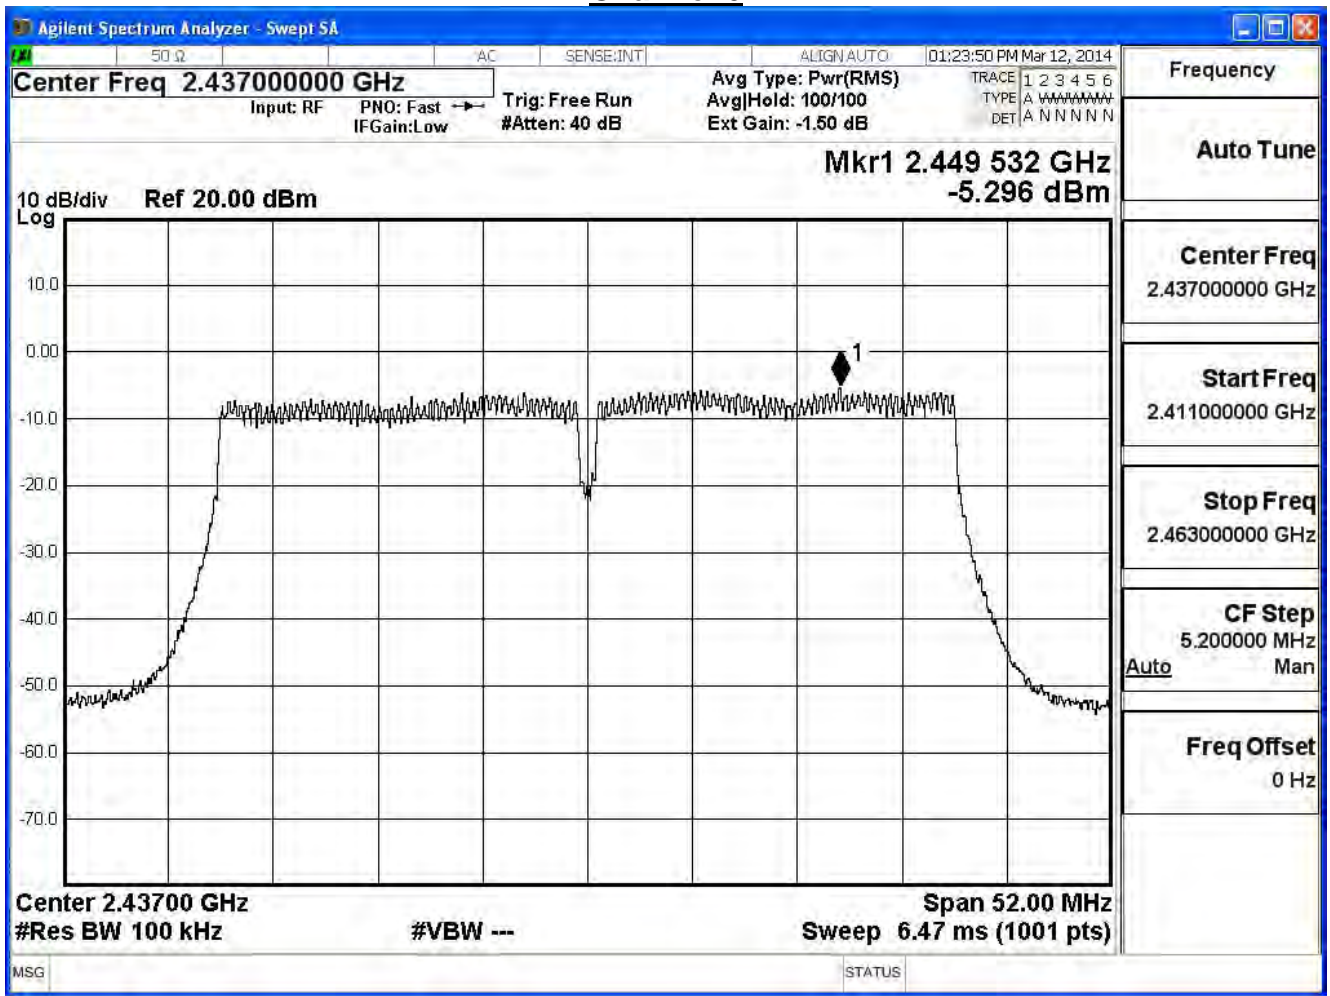

Channel 9

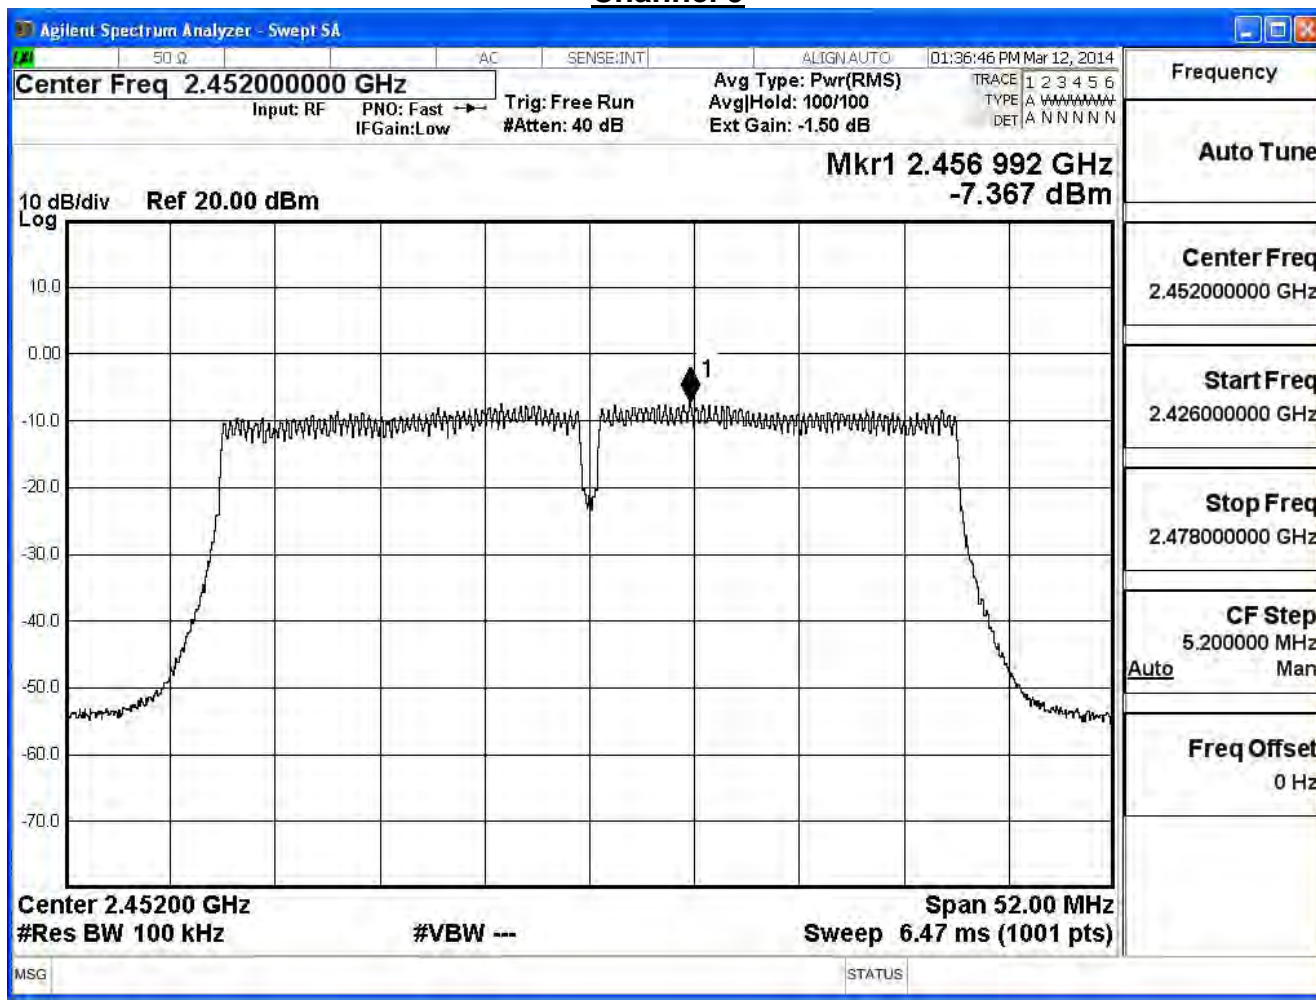

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2014/03/12	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-19.100	≤ 7.32	Pass
6	2437	-15.496	≤ 7.32	Pass
9	2452	-17.747	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68 - 6\text{dB}) = 7.32\text{dBm}$


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11a (ANT0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.22	-9.98	≤ 8	Pass
157	5785	5.69	-9.52	≤ 8	Pass
165	5825	5.28	-9.92	≤ 8	Pass


Channel 149

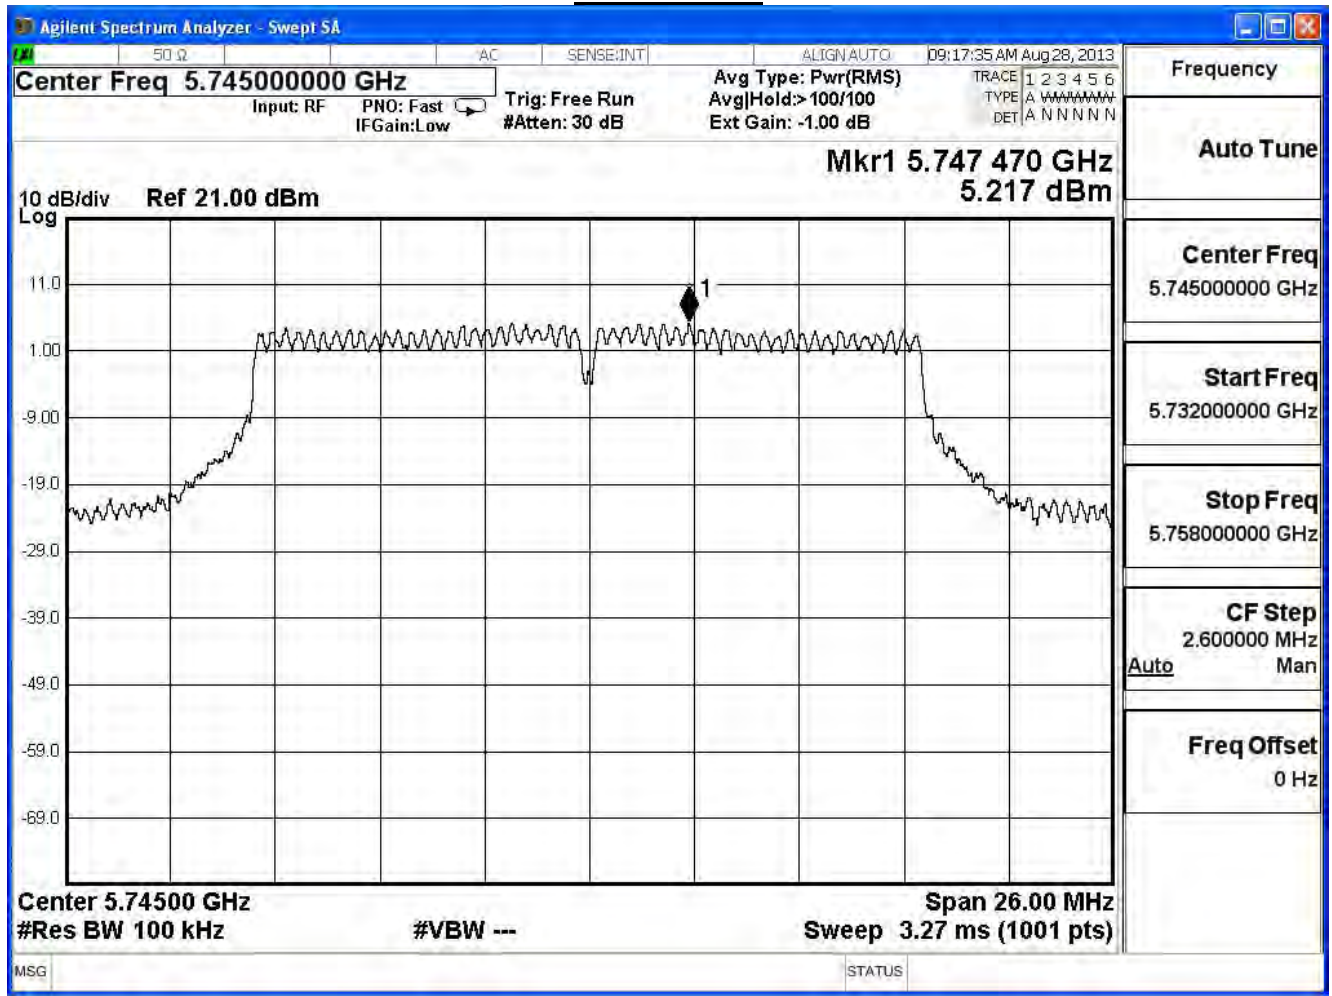

Channel 157

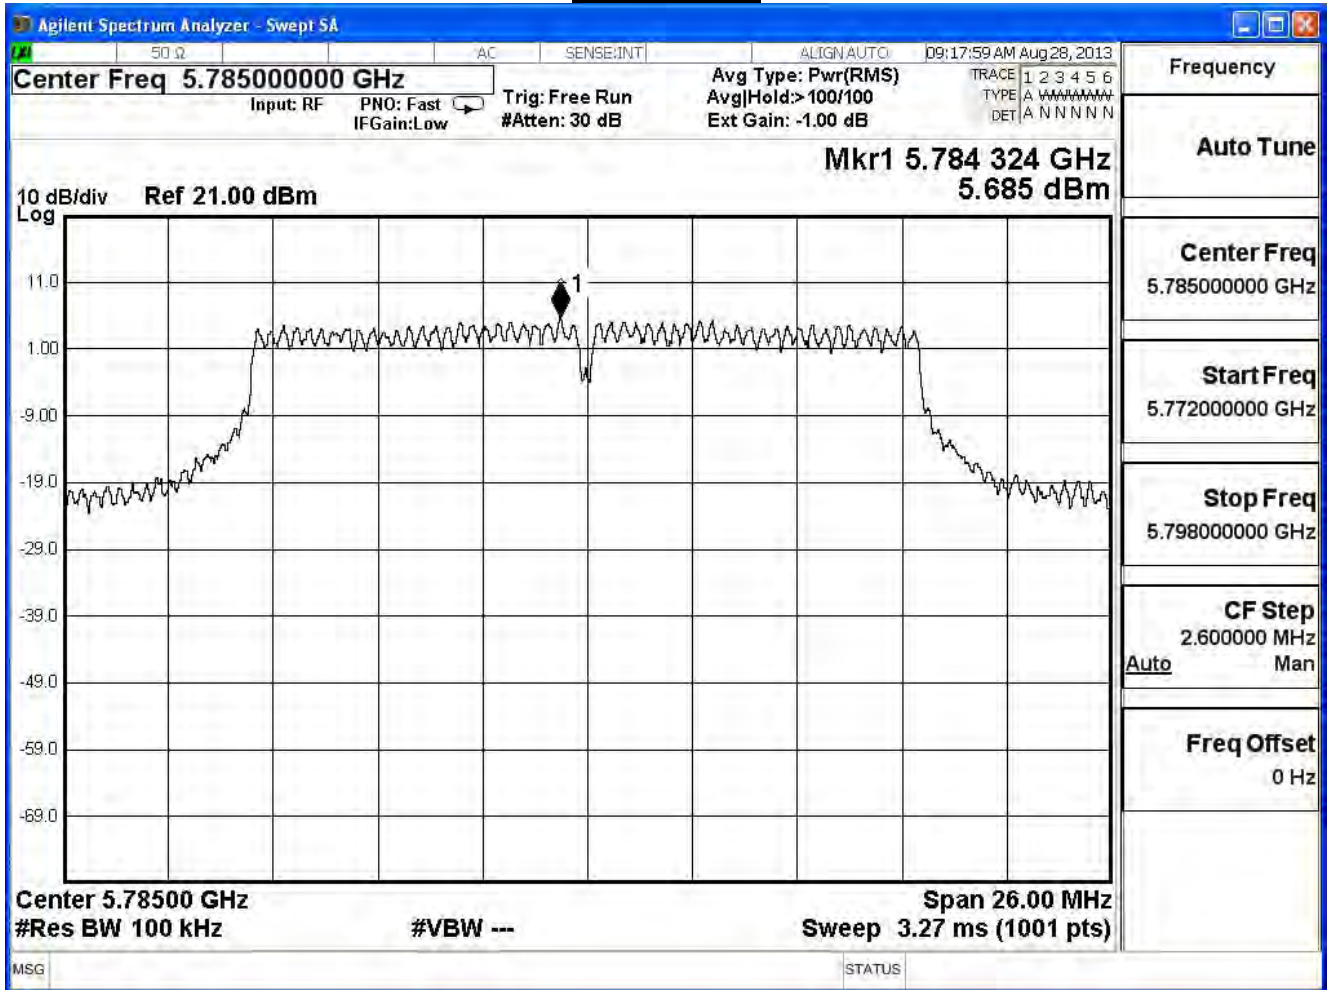

Channel 165

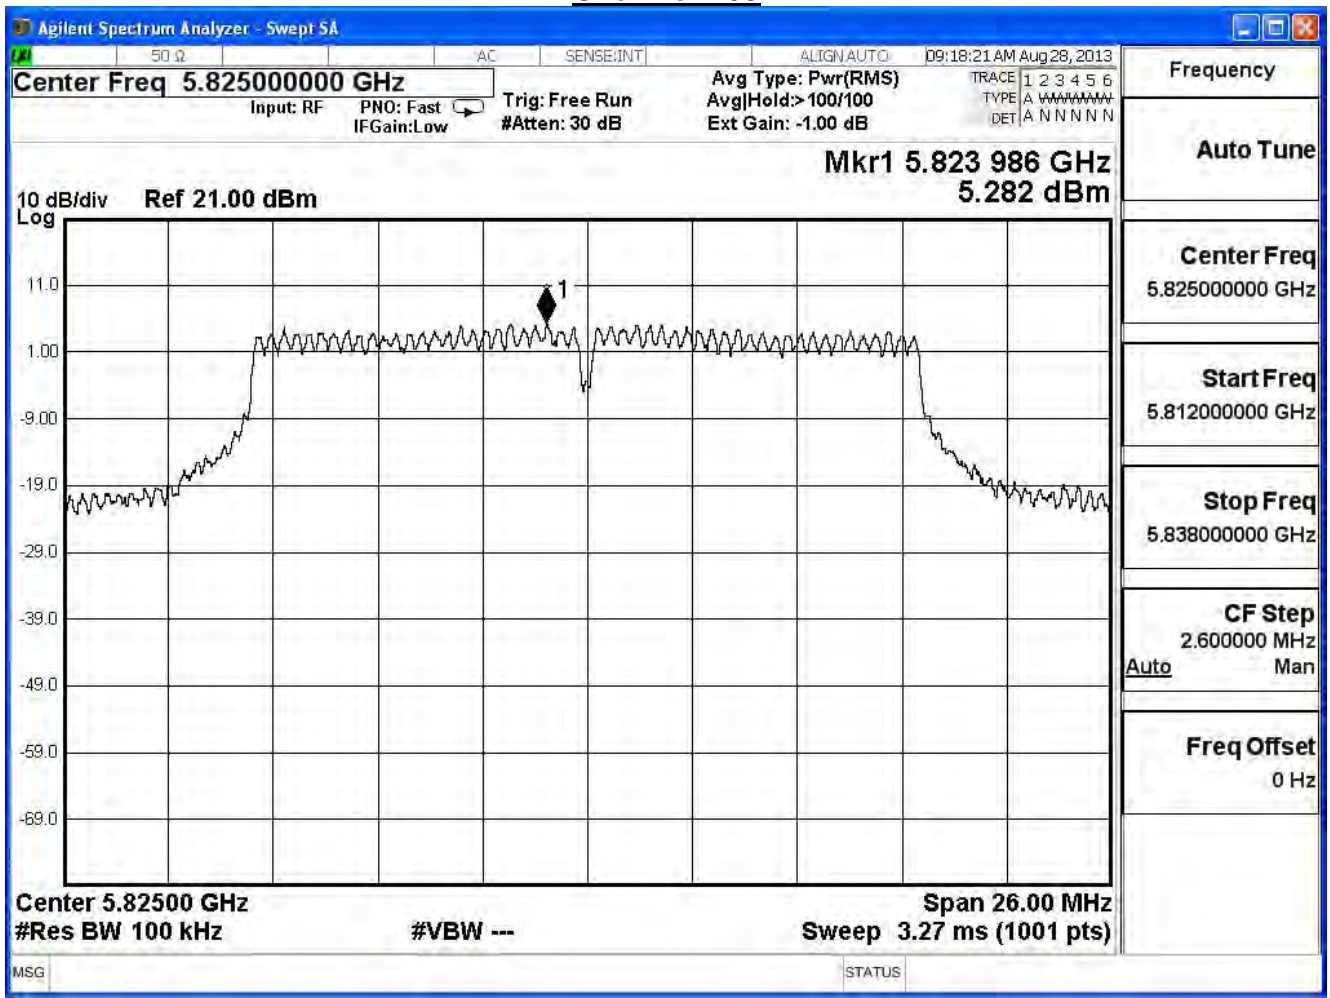

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11a (ANT1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.75	-9.45	≤ 4.79	Pass
157	5785	5.95	-9.26	≤ 4.79	Pass
165	5825	5.63	-9.57	≤ 4.79	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$


Channel 149

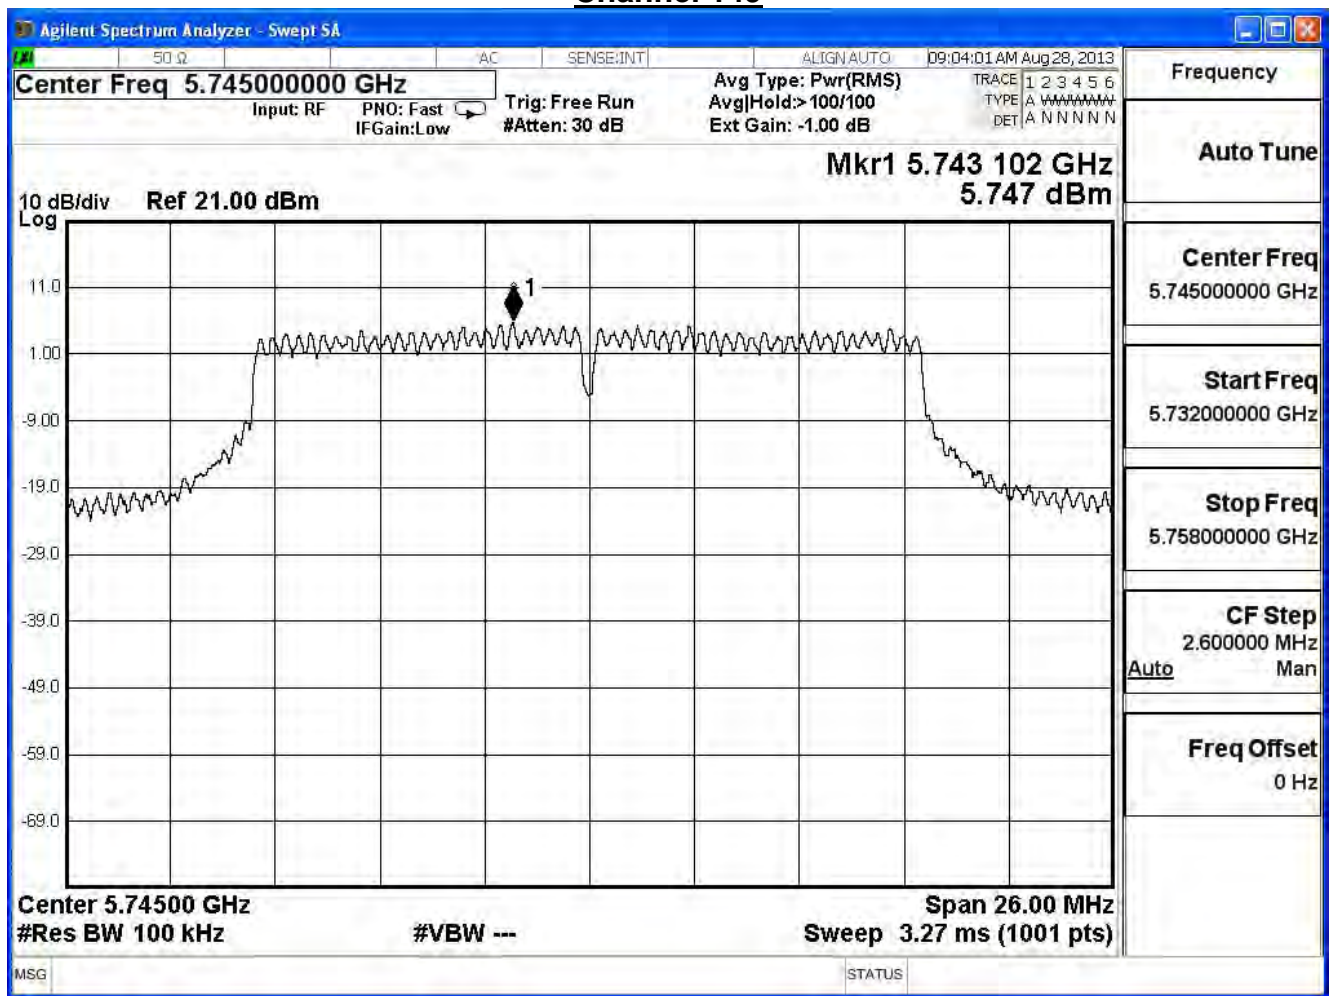

Channel 157

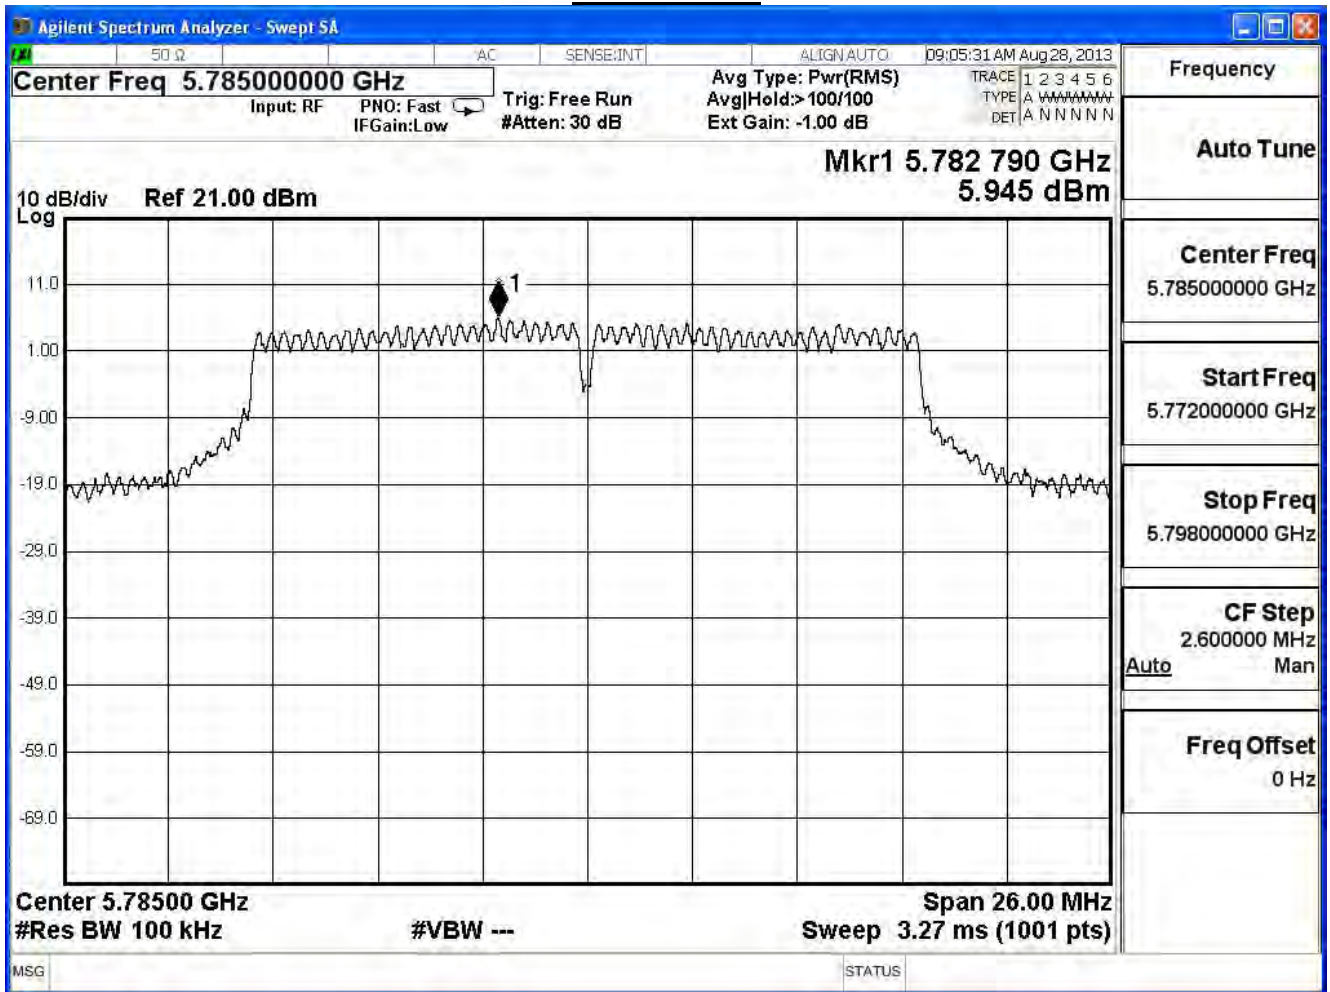

Channel 165

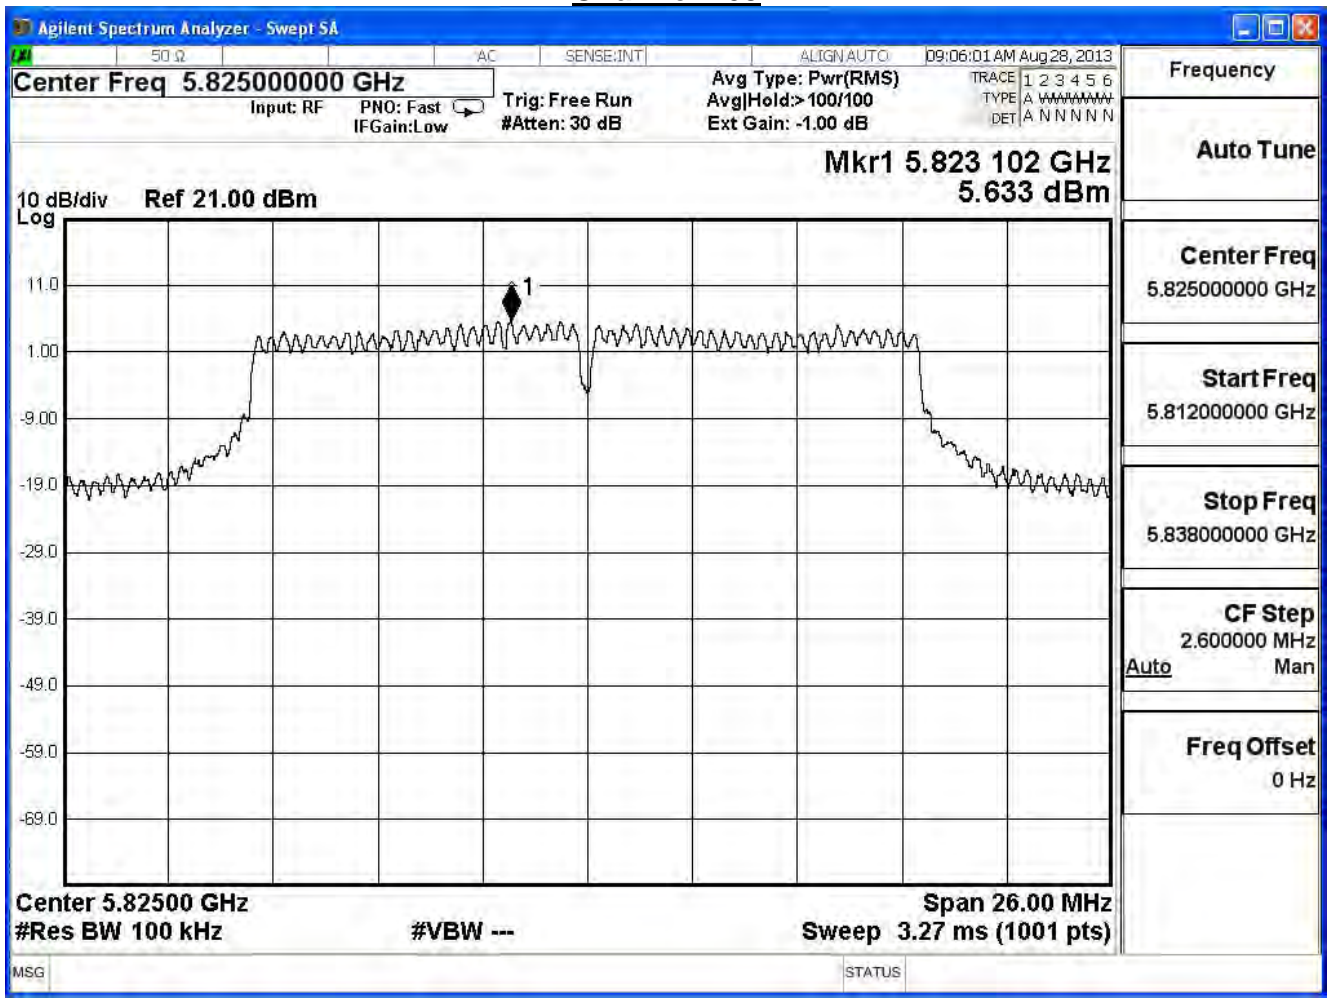


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11a (ANT2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.85	-9.35	≤ 4.79	Pass
157	5785	6.17	-9.03	≤ 4.79	Pass
165	5825	5.70	-9.50	≤ 4.79	Pass


Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$
 Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$


Channel 149

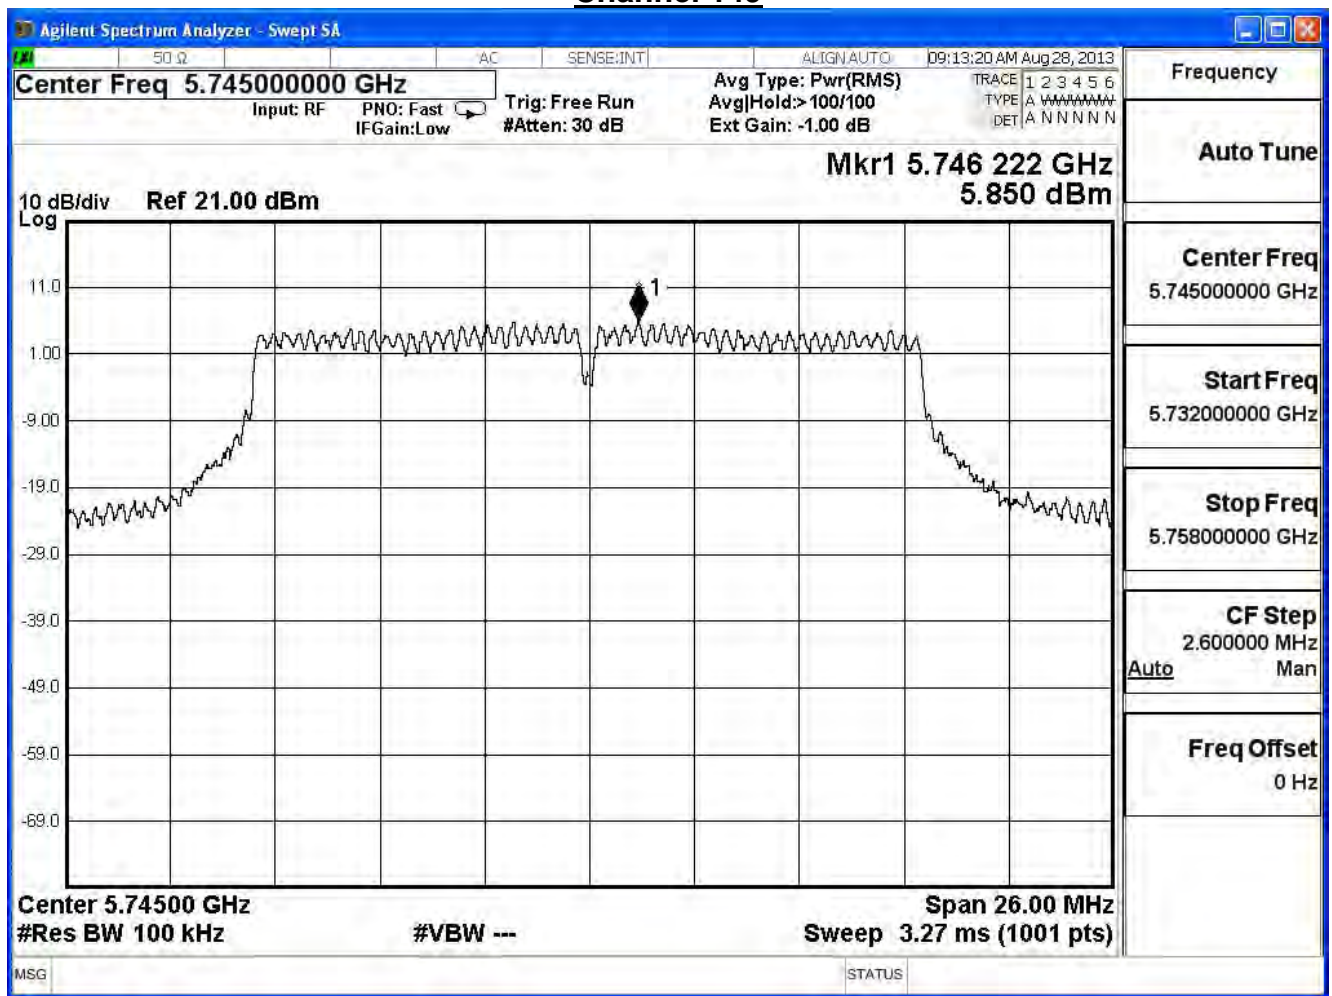

Channel 157

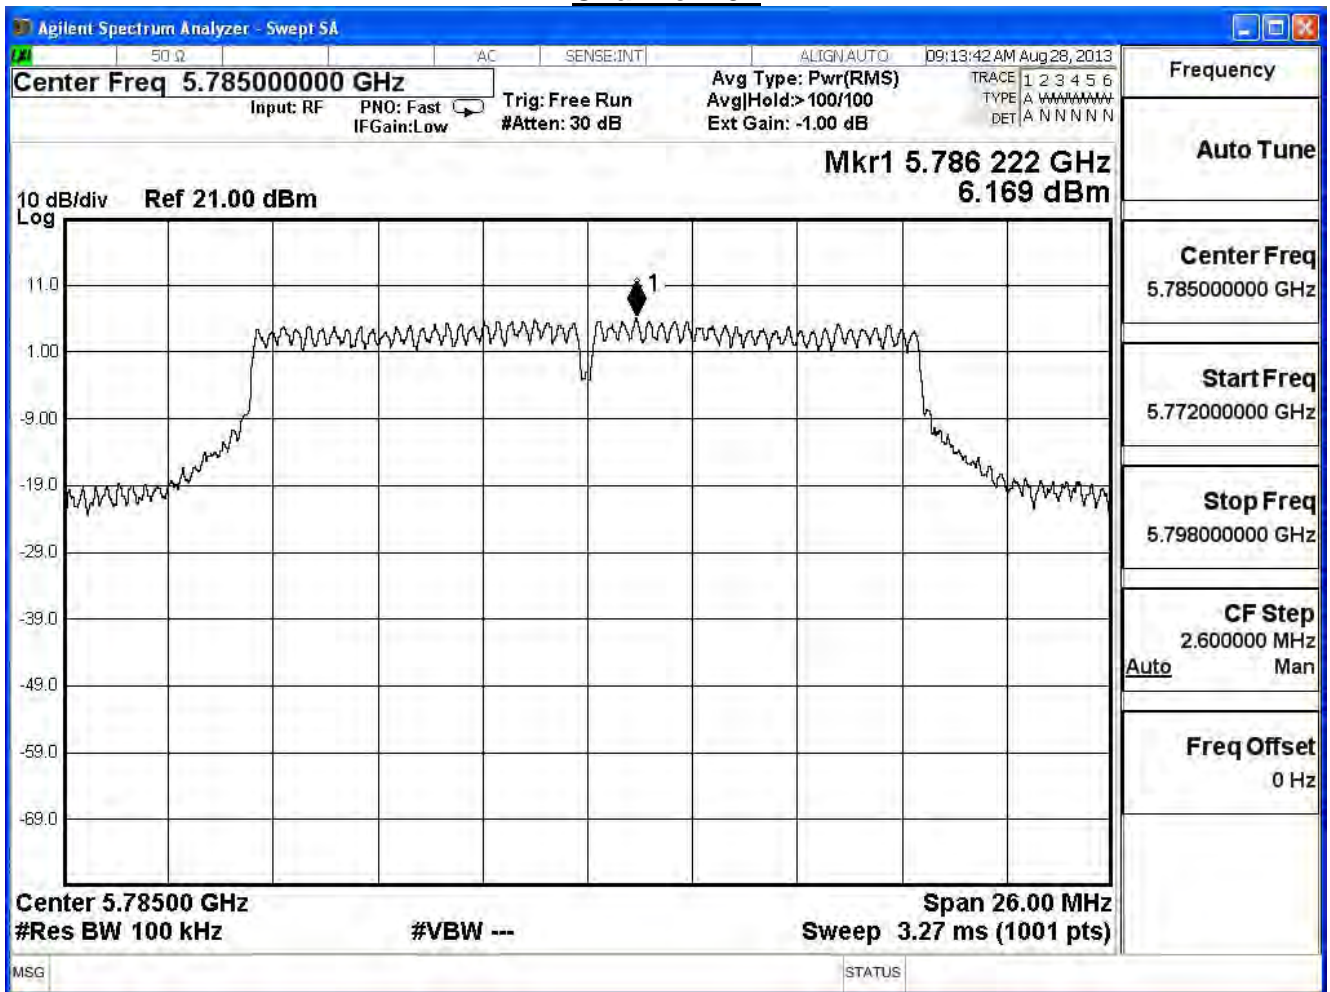

Channel 165

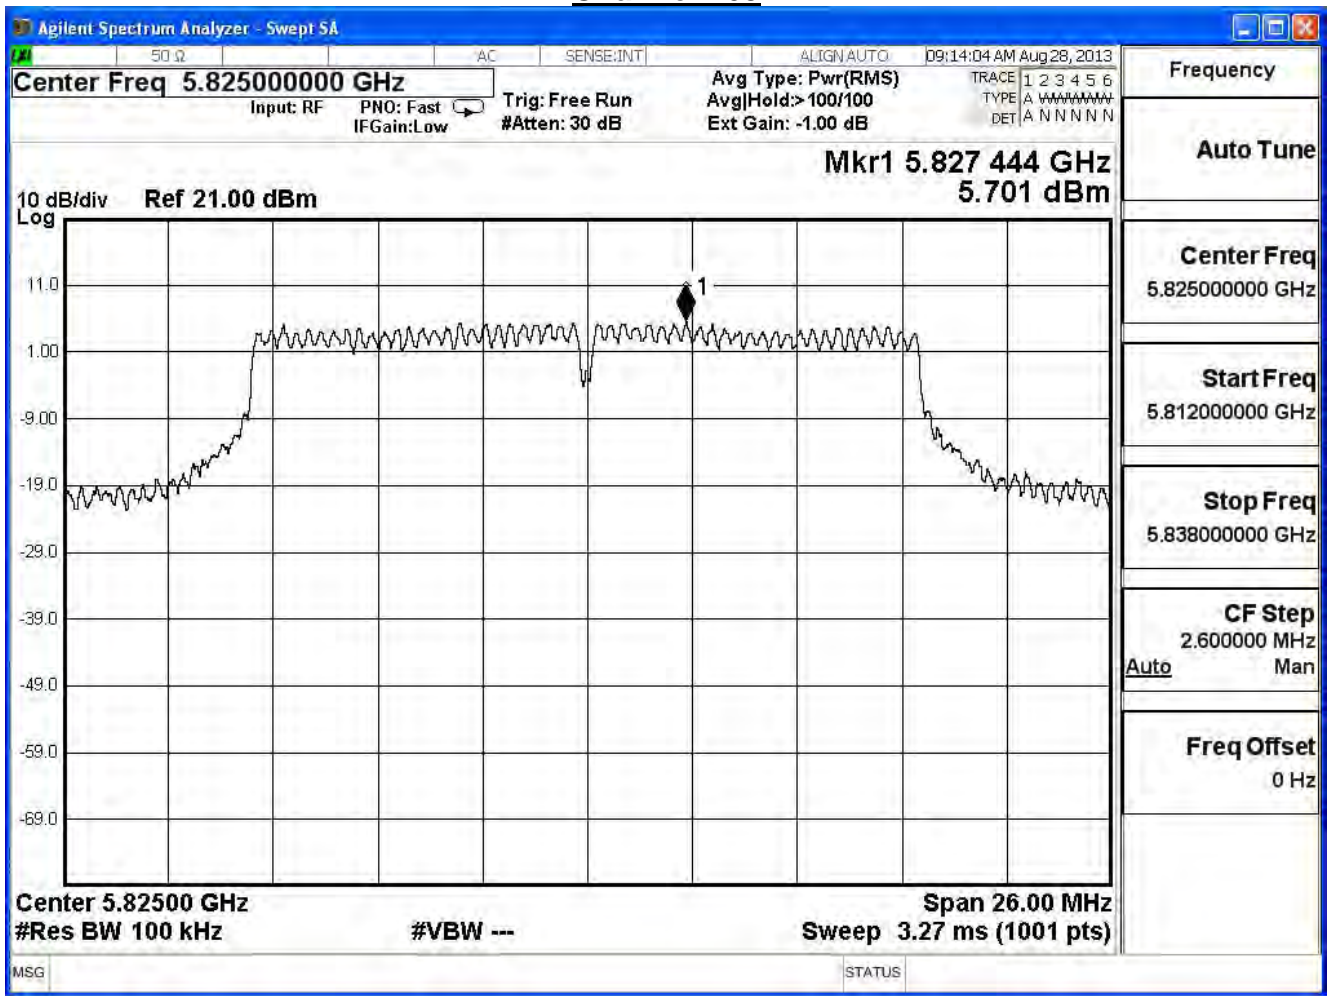

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11a (ANT0+1+2)				
Channel No.	Frequency (MHz)	Measure Level(dBm)	Limit (dBm)	Result
149	5745	-4.82	≤ 4.79	Pass
157	5785	-4.49	≤ 4.79	Pass
165	5825	-4.89	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n_20MHz_(ANT 0)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
149	5745	4.50	-10.71	≤ 4.79	Pass
157	5785	5.17	-10.03	≤ 4.79	Pass
165	5825	4.69	-10.52	≤ 4.79	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 149

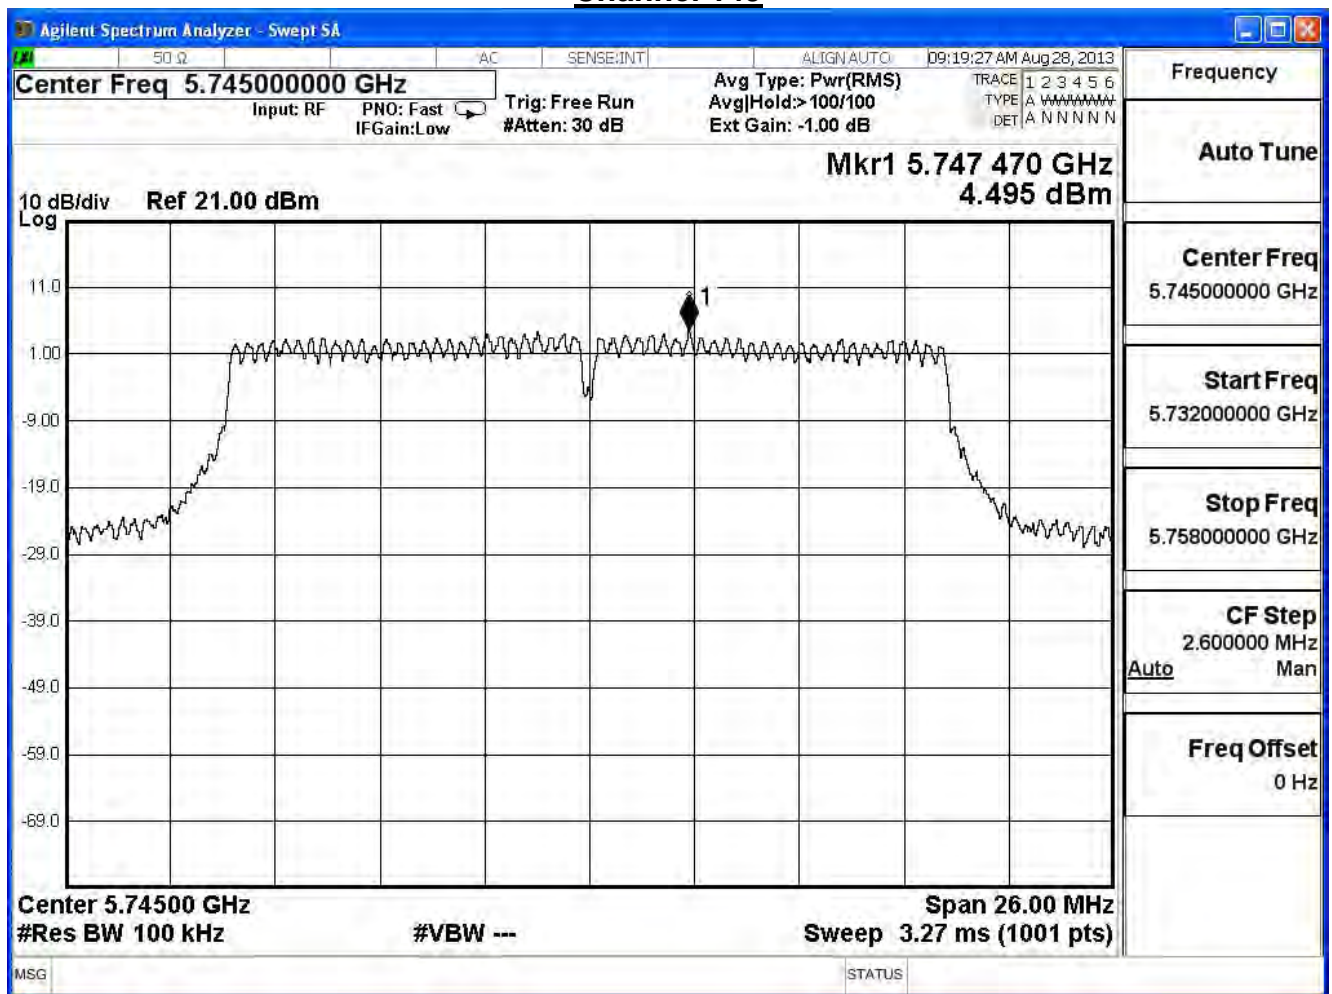

Channel 165

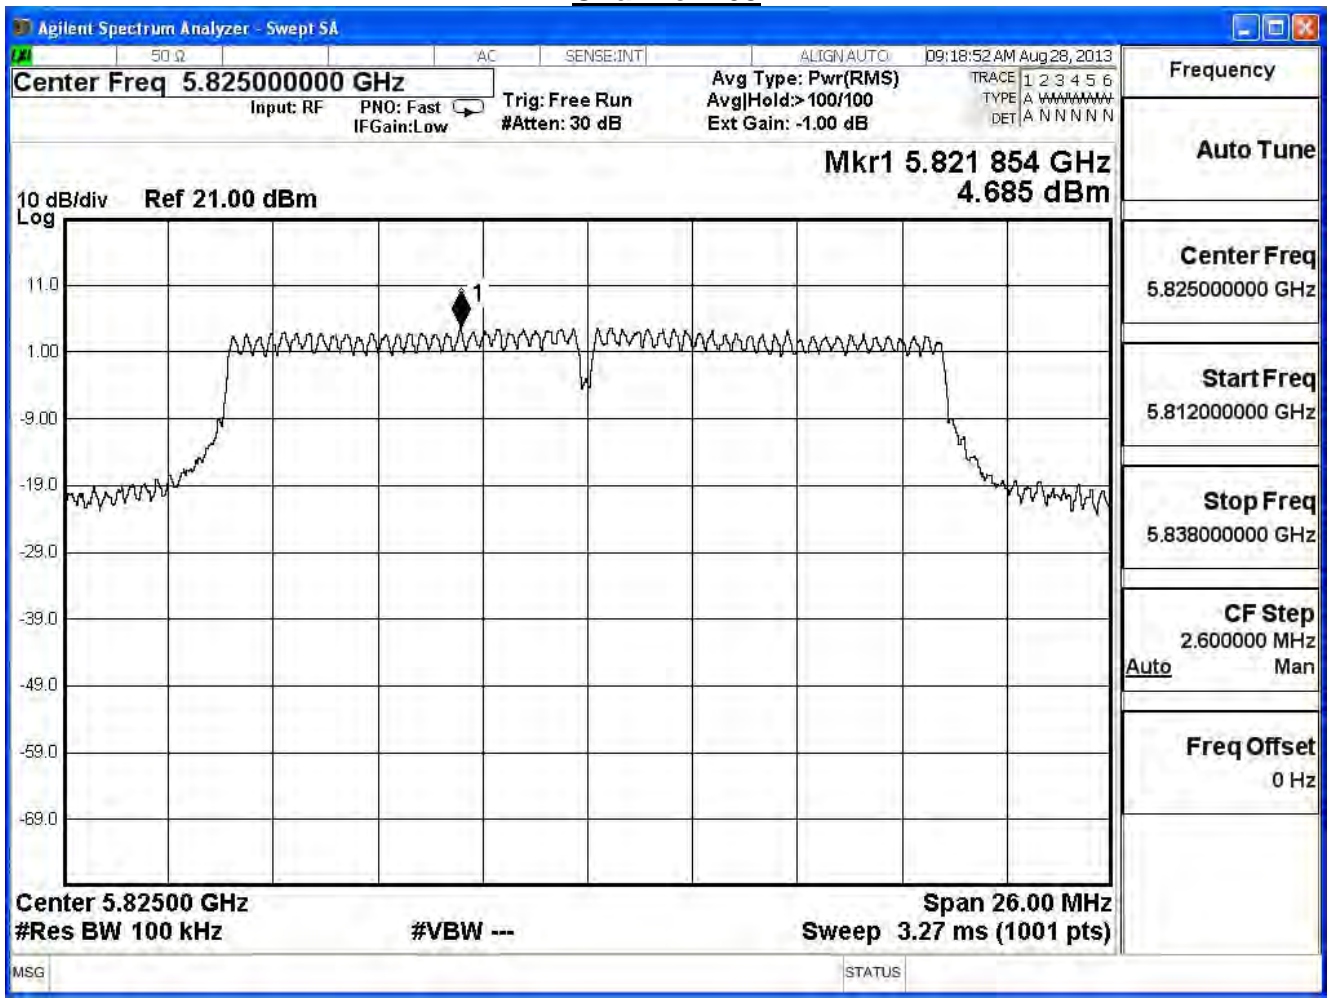

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n_20MHz_(ANT 1)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	4.40	-10.80	≤ 4.79	Pass
157	5785	5.24	-9.96	≤ 4.79	Pass
165	5825	4.90	-10.30	≤ 4.79	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 149

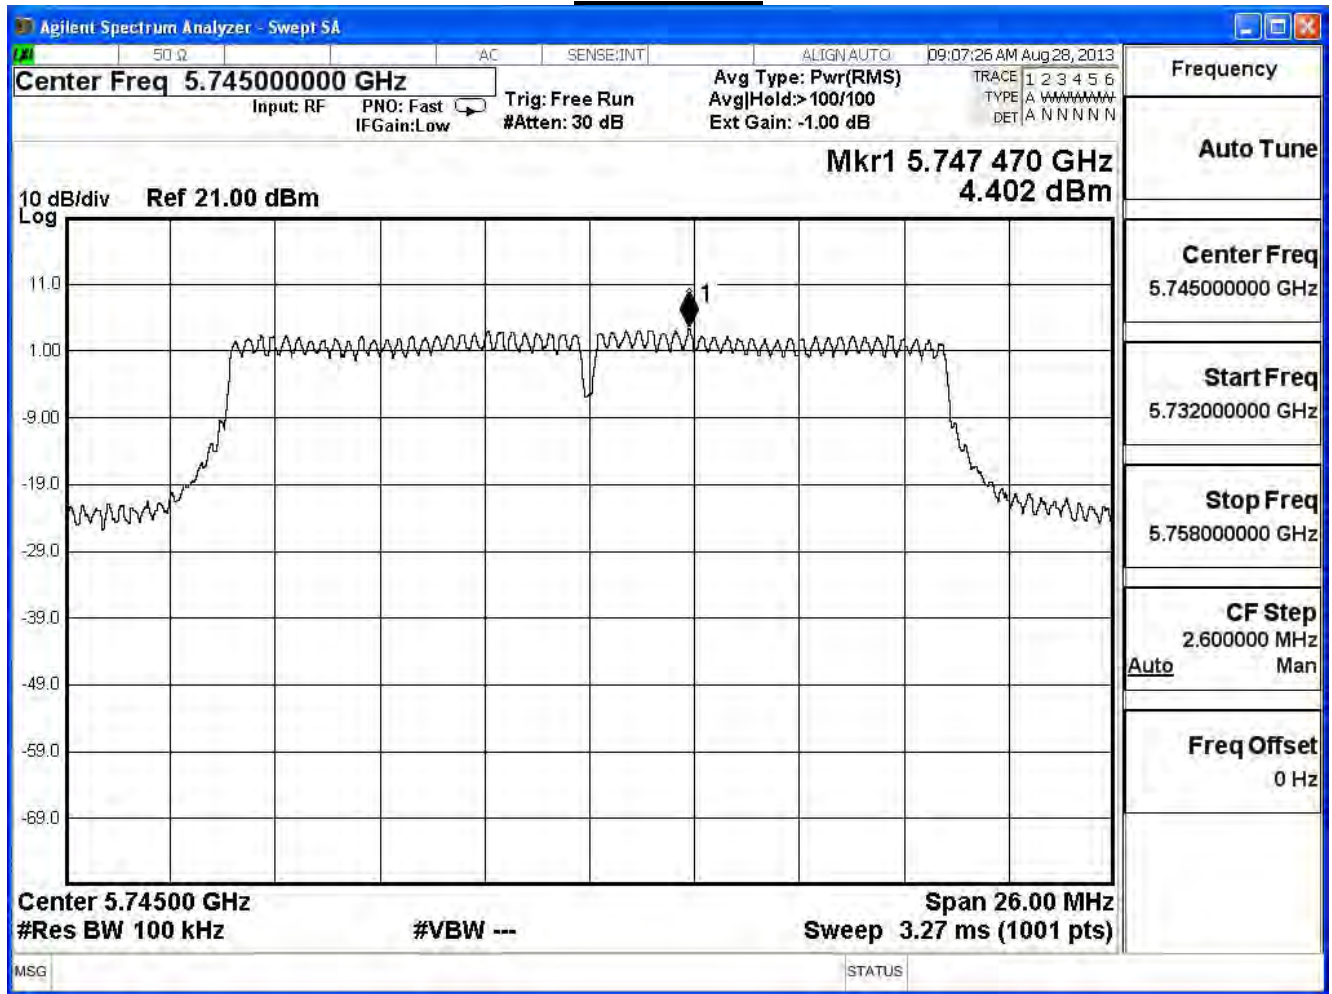

Channel 165

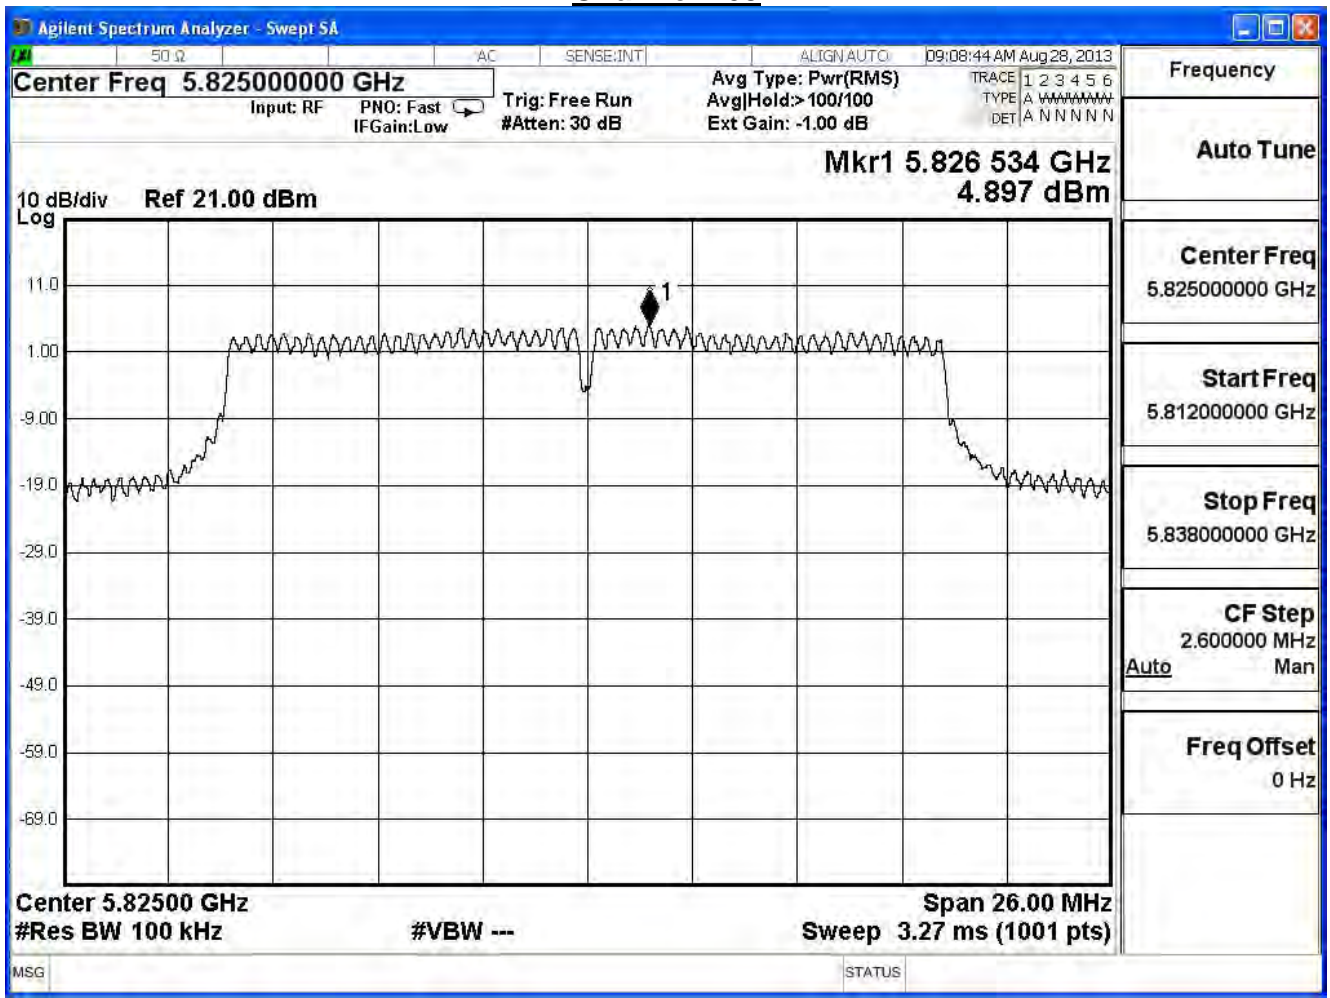

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n_20MHz_(ANT 2)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	5.02	-10.18	≤ 4.79	Pass
157	5785	5.50	-9.70	≤ 4.79	Pass
165	5825	5.30	-9.90	≤ 4.79	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$


Channel 149

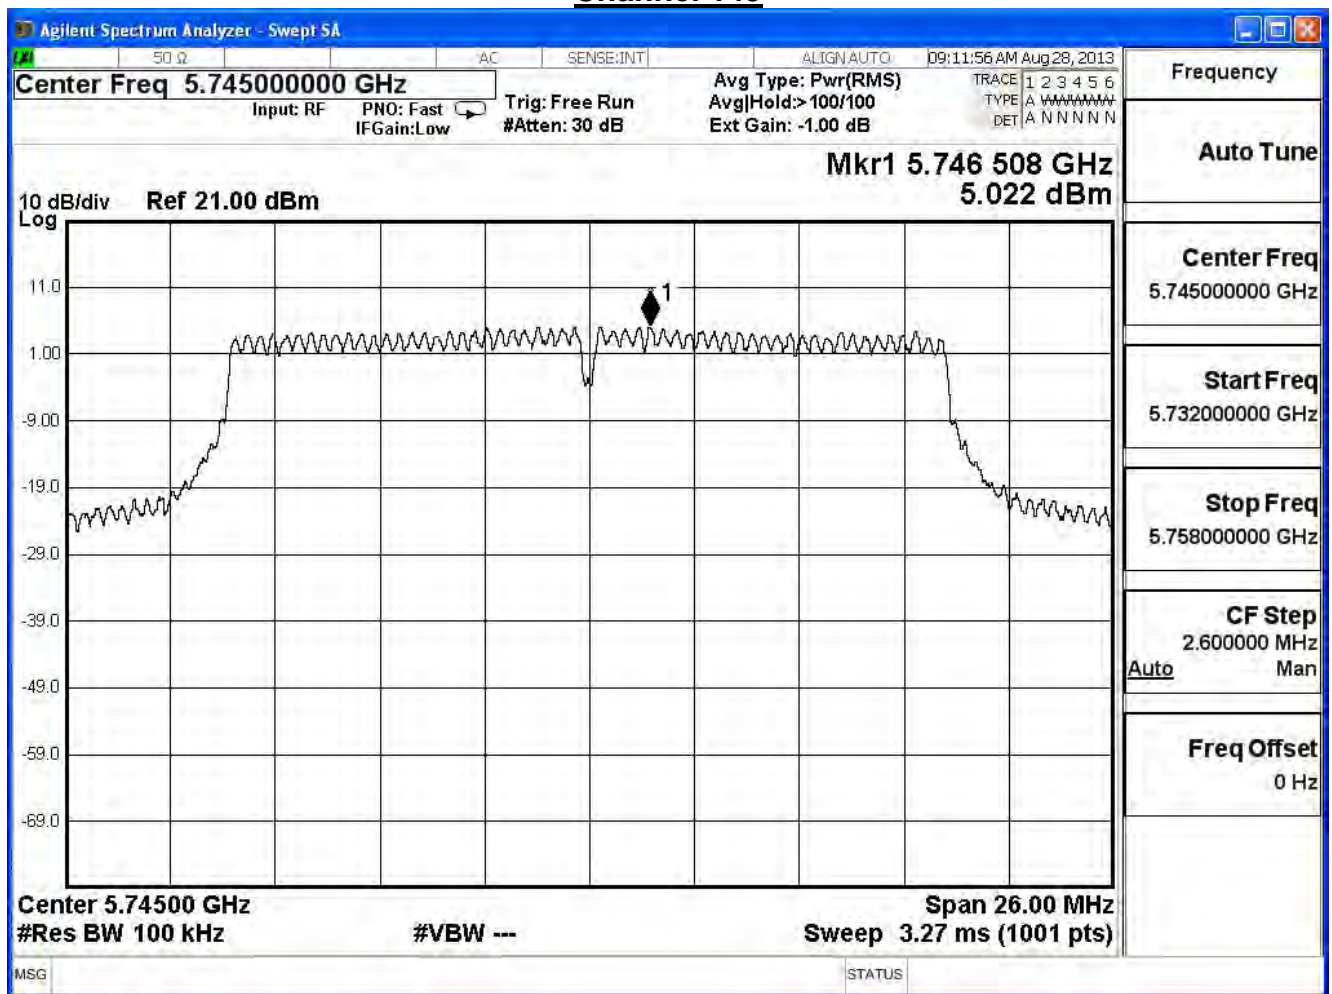

Channel 157

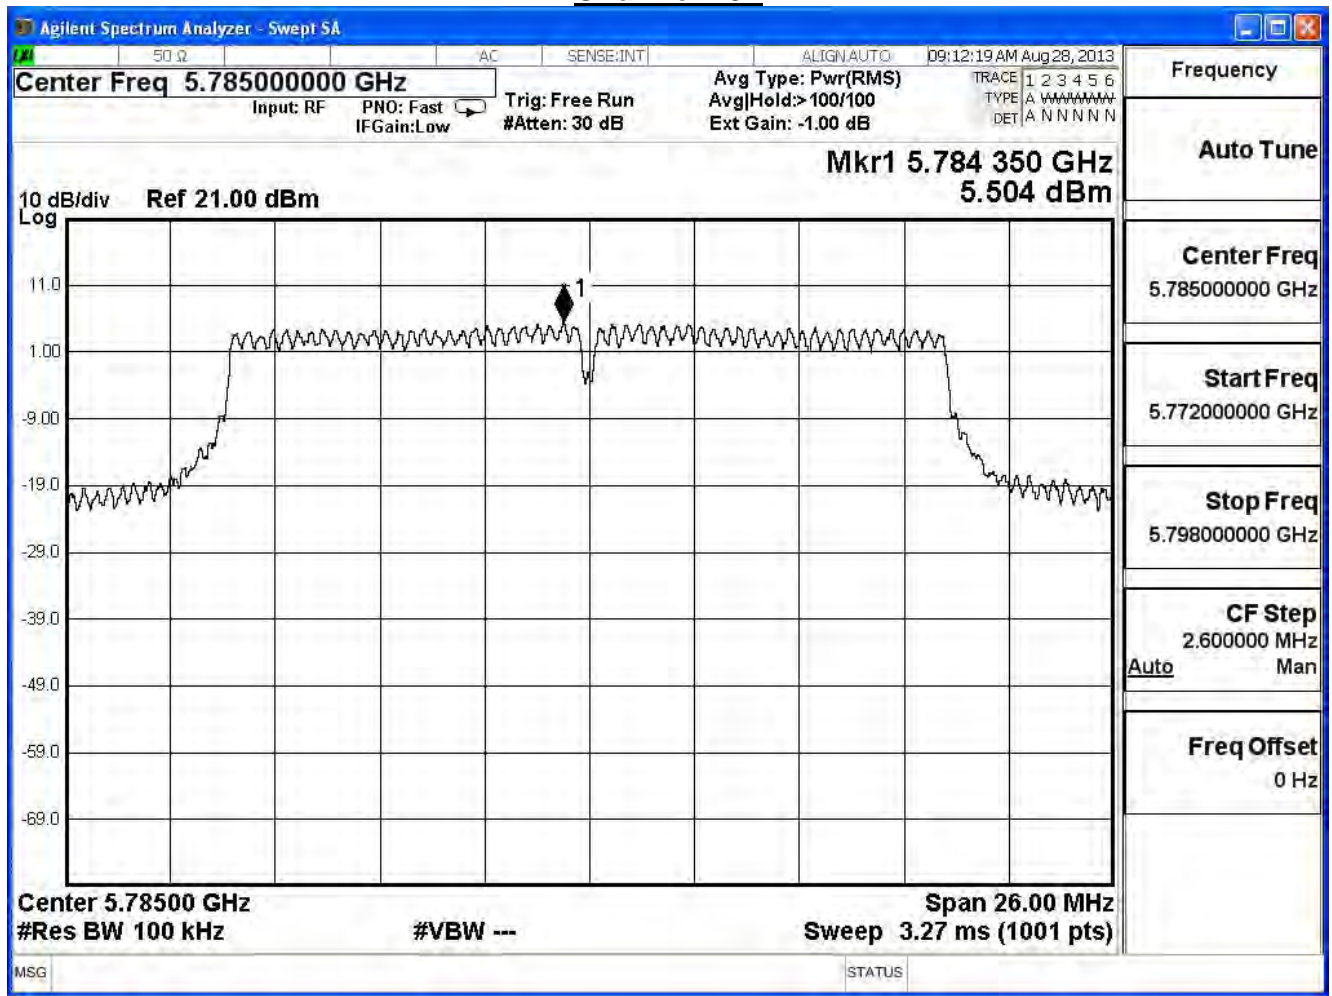

Channel 165

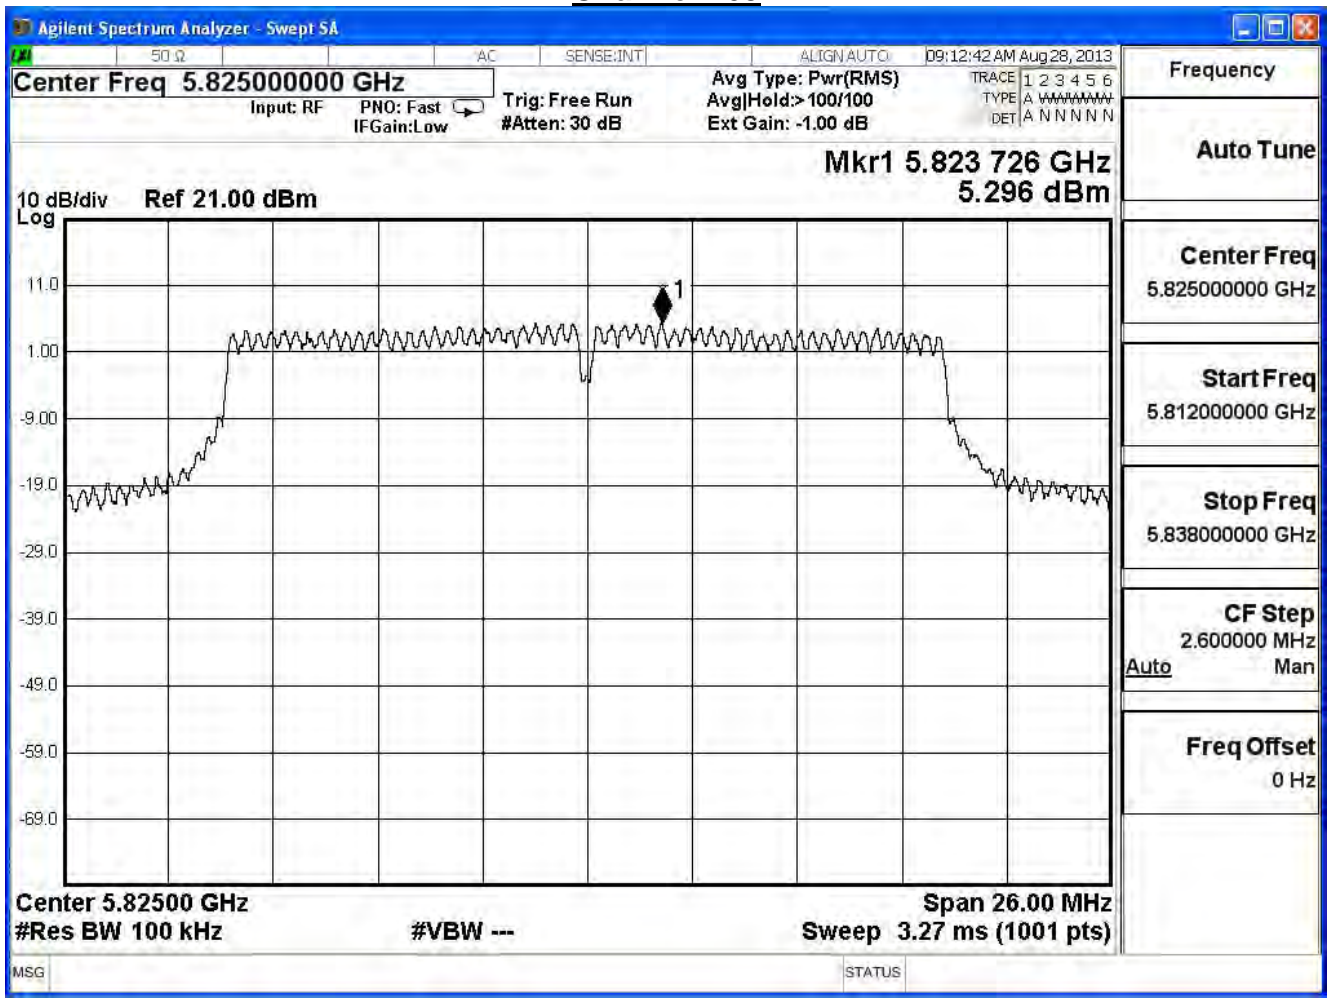

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n 20MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	-5.78	≤ 4.79	Pass
157	5785	-5.12	≤ 4.79	Pass
165	5825	-5.46	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
151	5755	0.59	-14.61	≤ 4.79	Pass
159	5795	1.31	-13.89	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 151

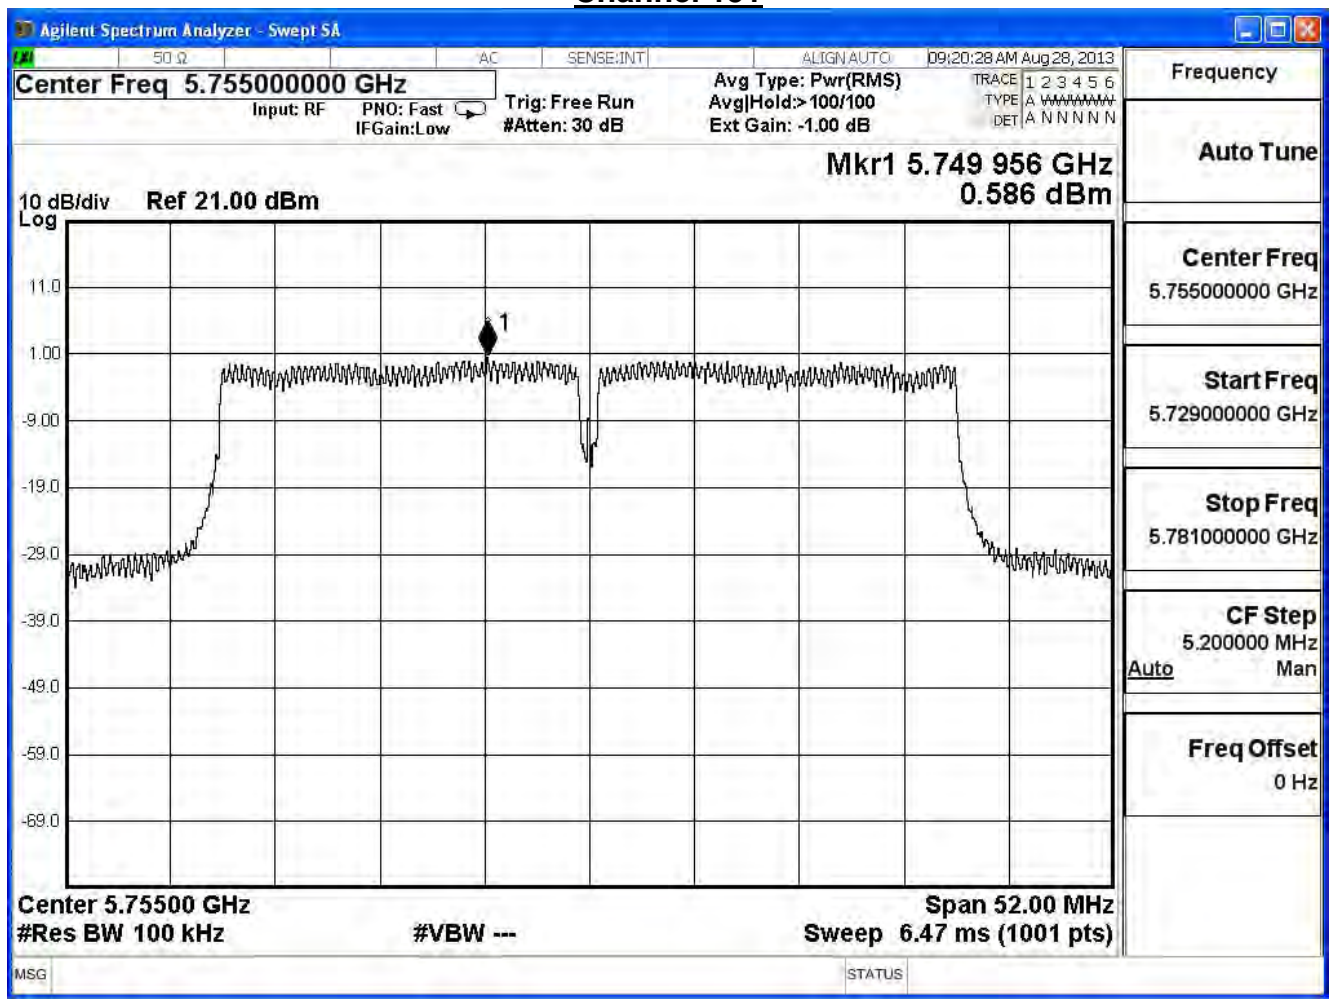


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	0.45	-14.75	≤ 4.79	Pass
159	5795	1.50	-13.70	≤ 4.79	Pass


Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$
 Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 151

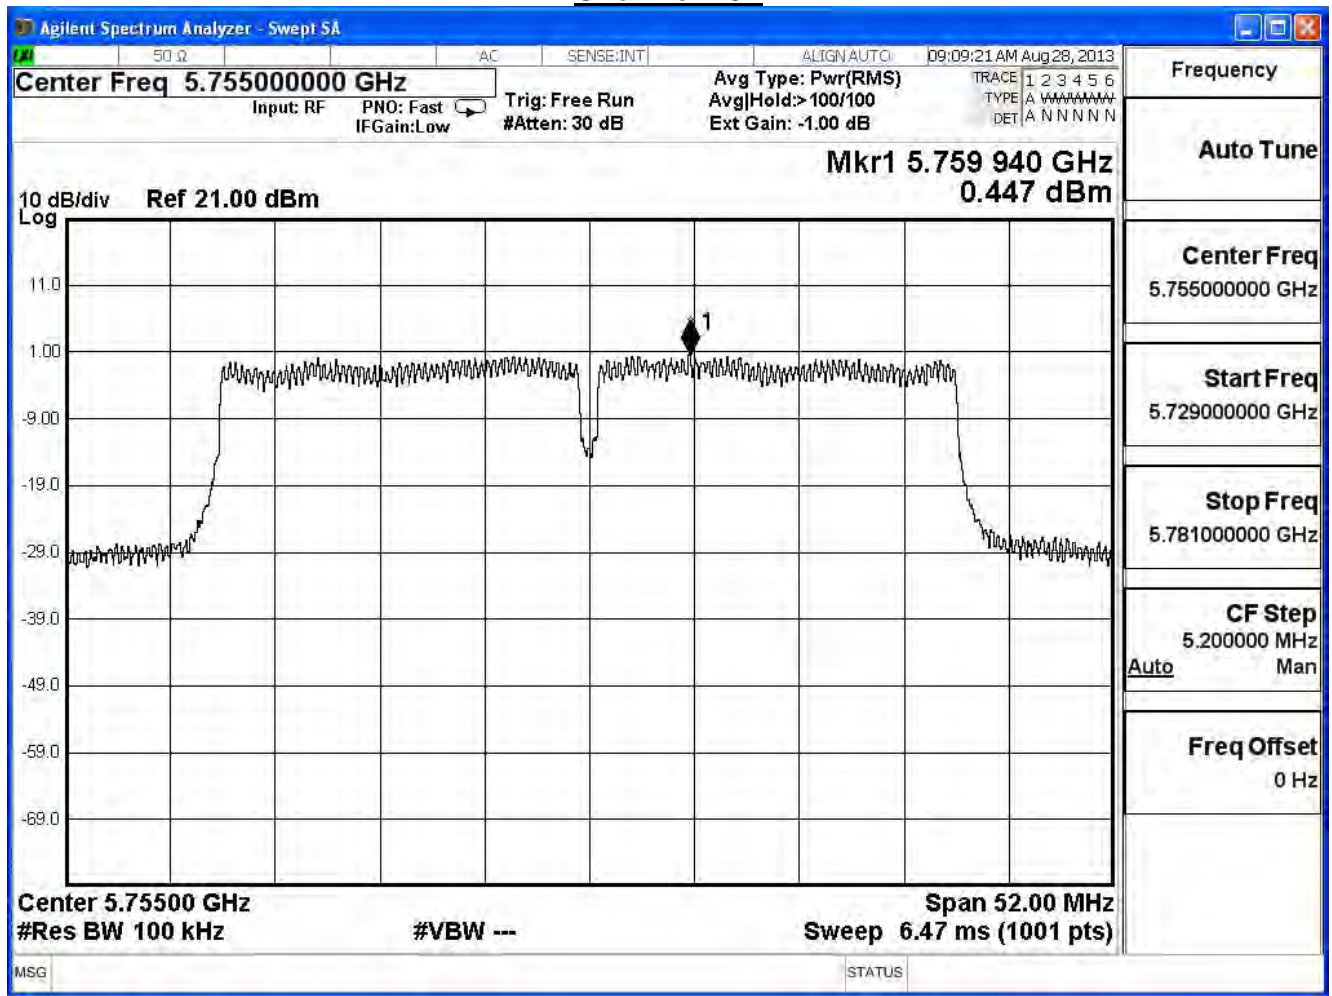

Channel 159

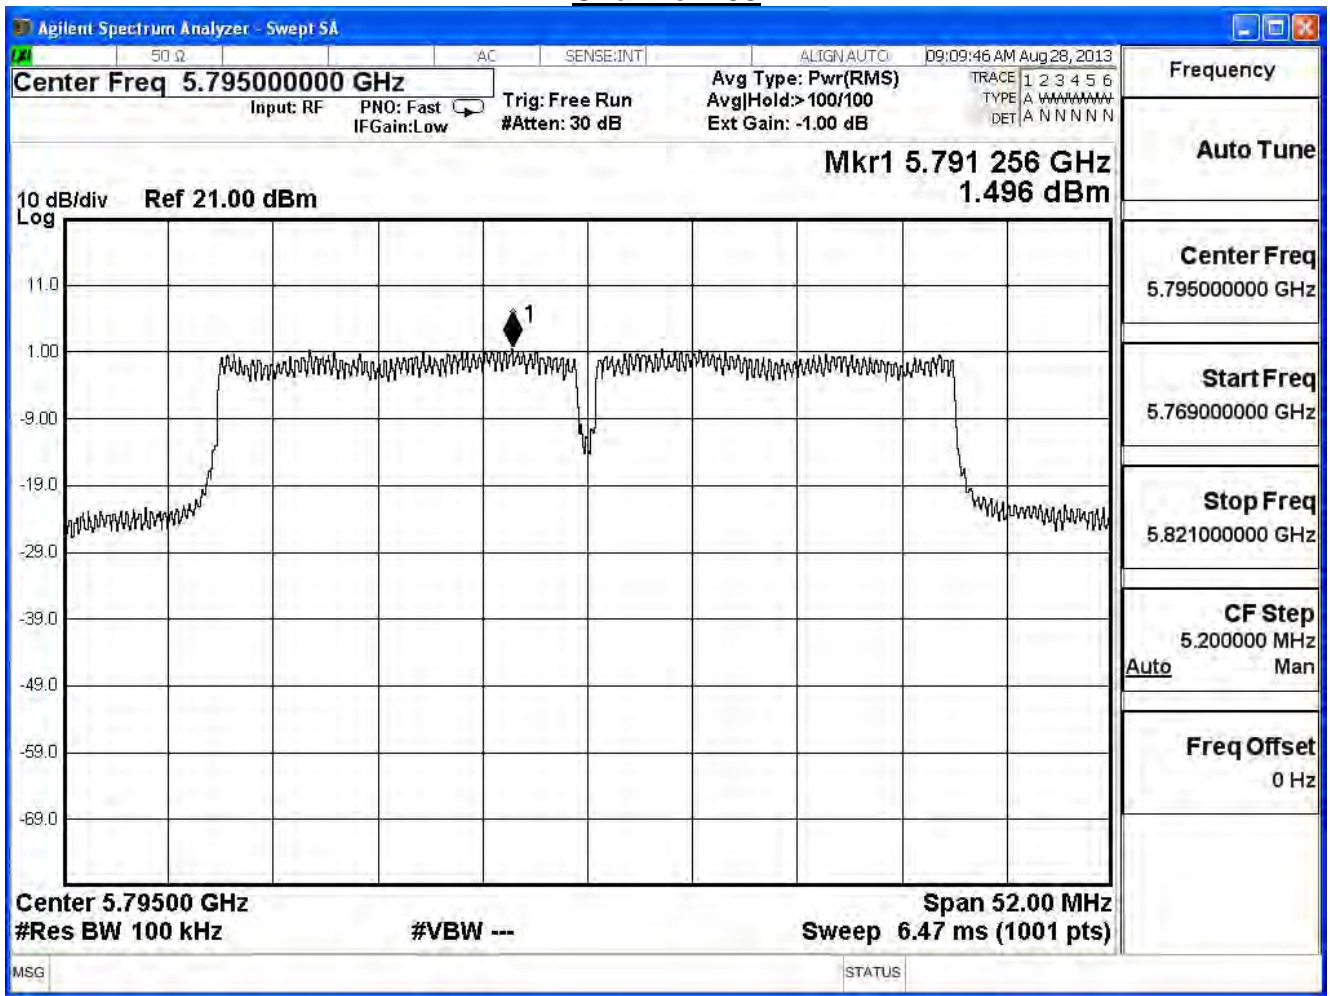

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	0.73	-14.47	≤ 4.79	Pass
159	5795	1.91	-13.29	≤ 4.79	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 151

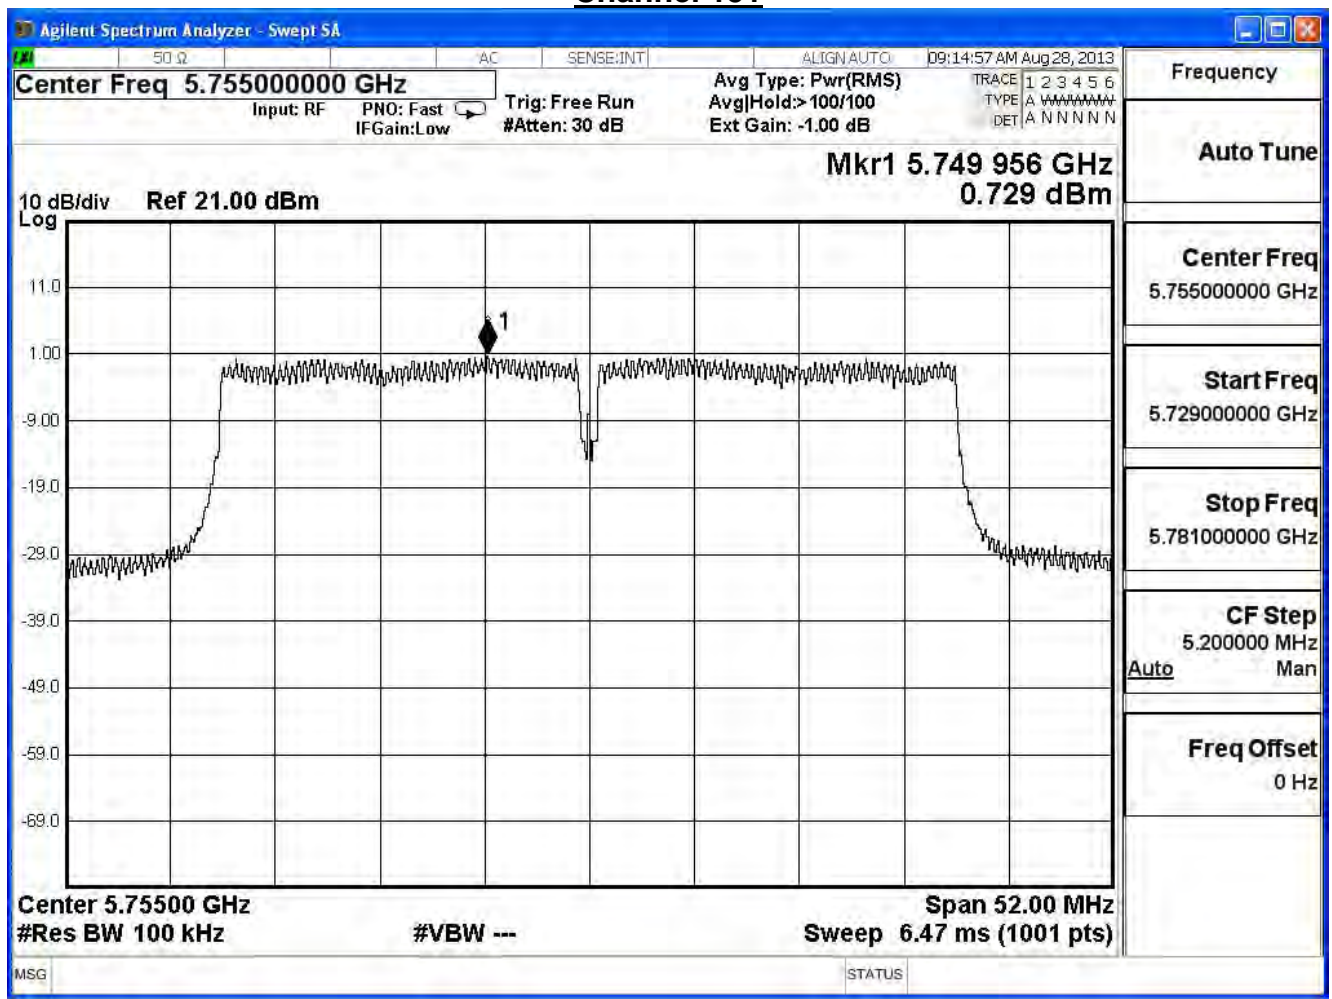

Channel 159

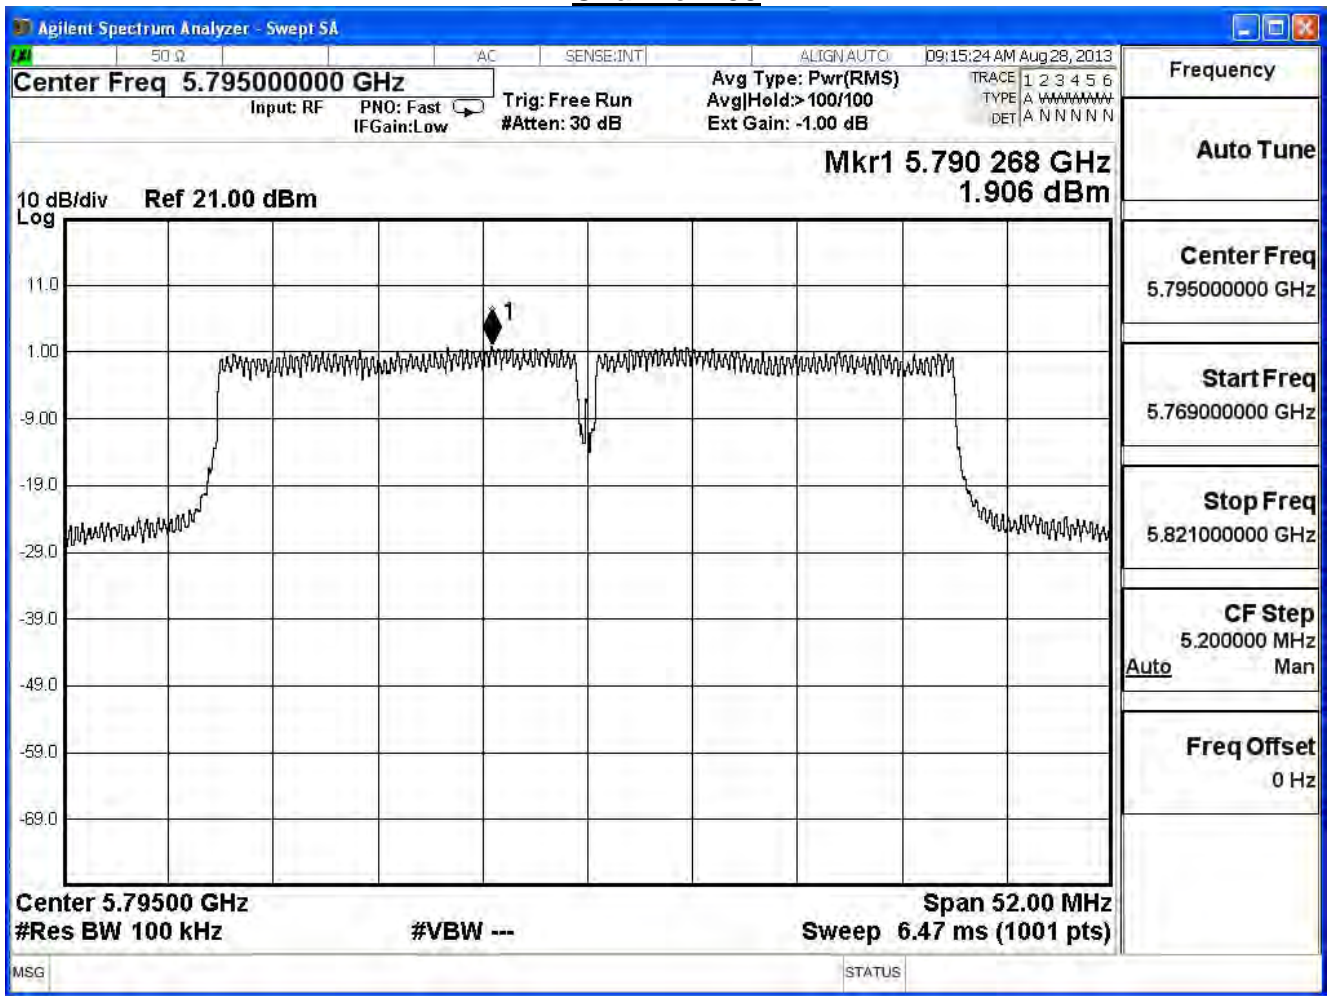

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	-9.84	≤ 4.79	Pass
159	5795	-8.85	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-5.32	-20.52	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 155

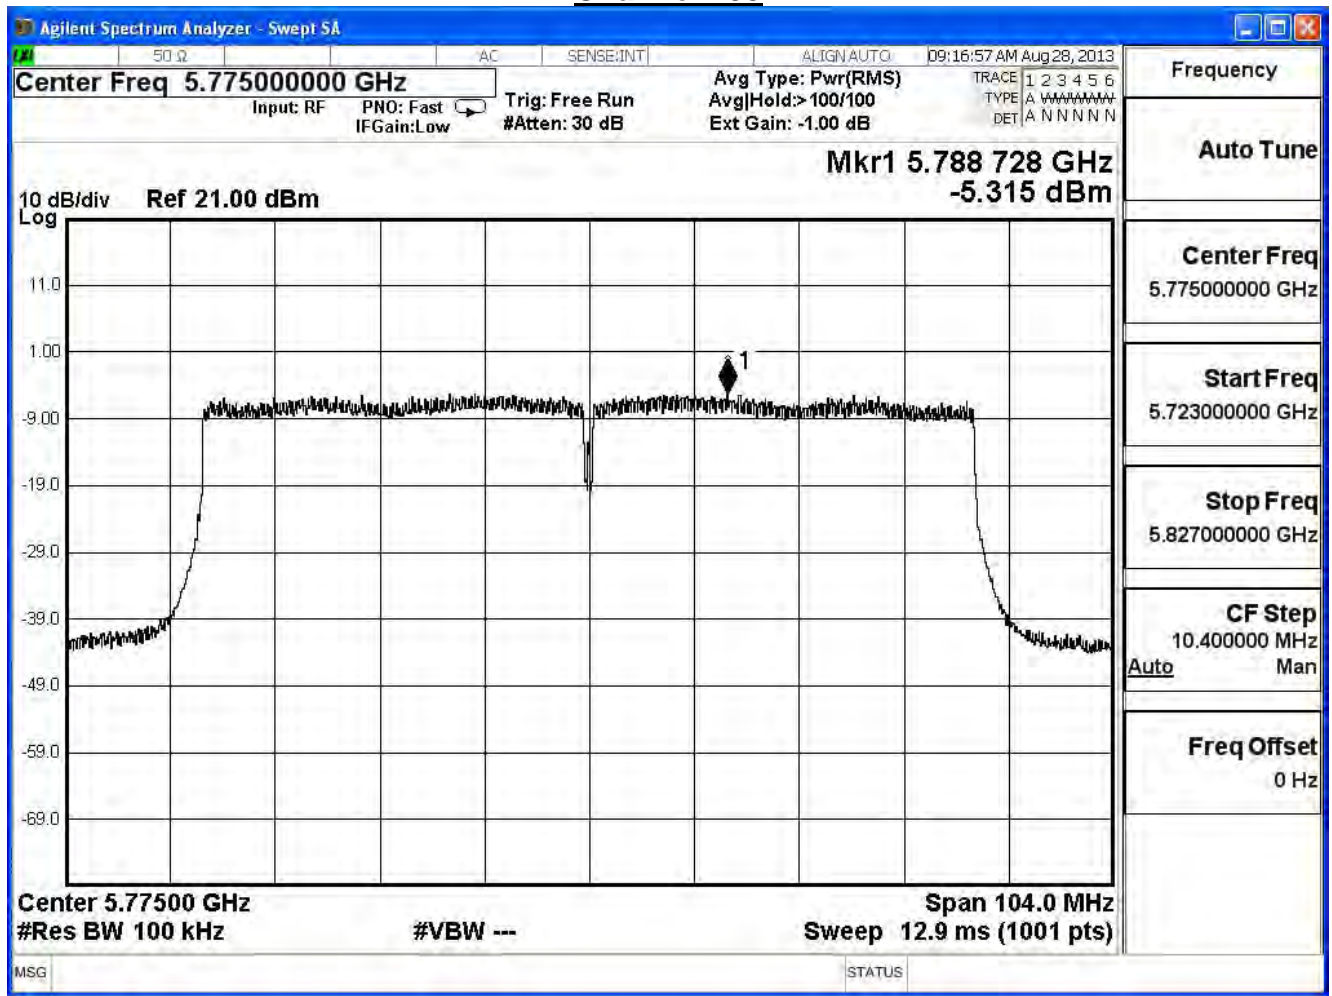

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-4.59	-19.79	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 155

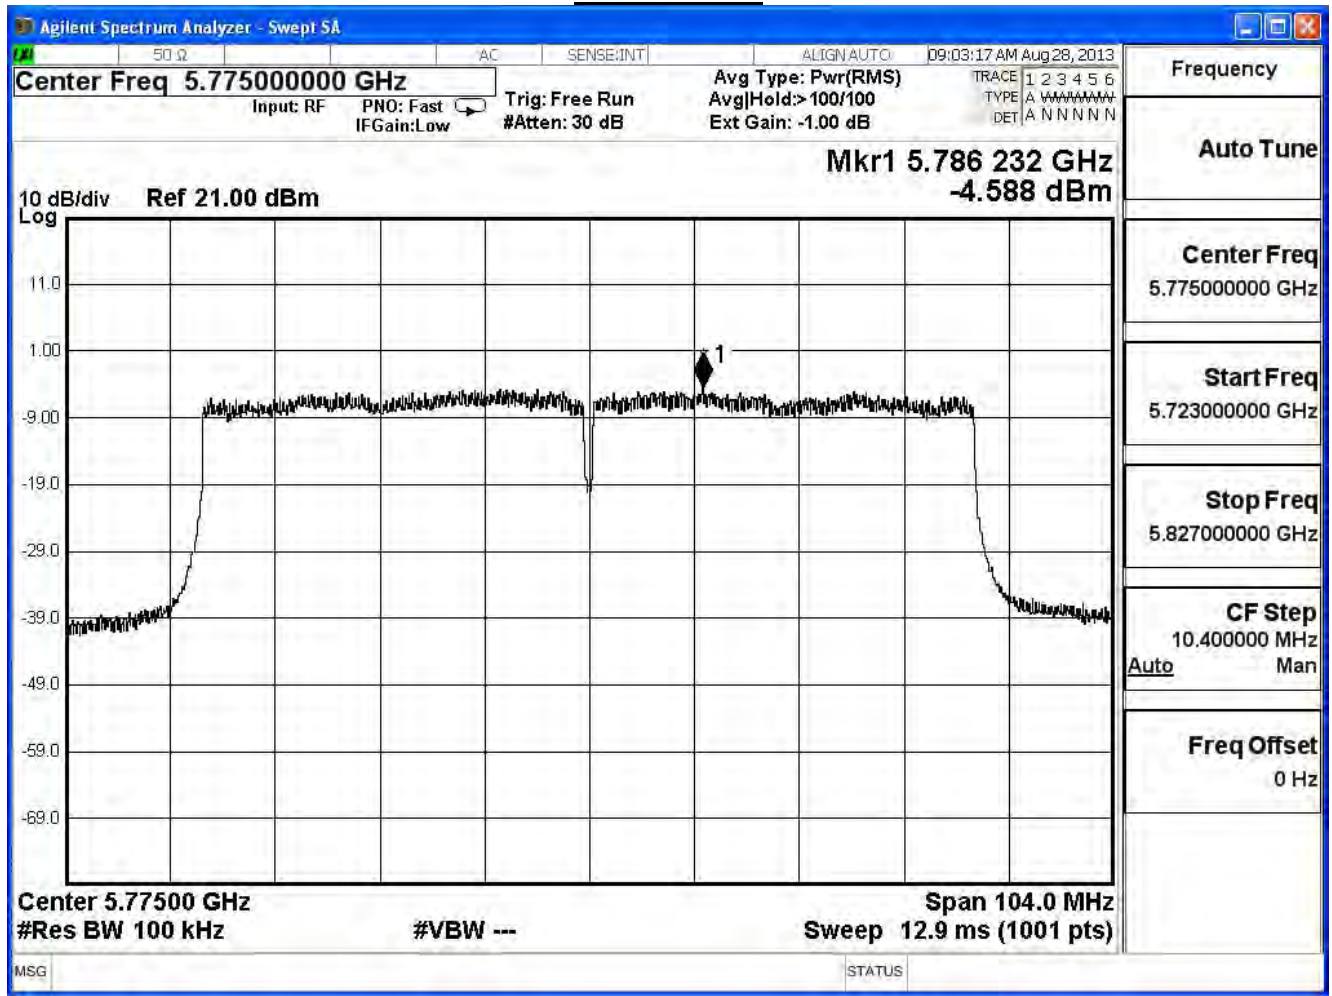

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-3.99	-19.19	≤ 4.79	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$

Channel 155

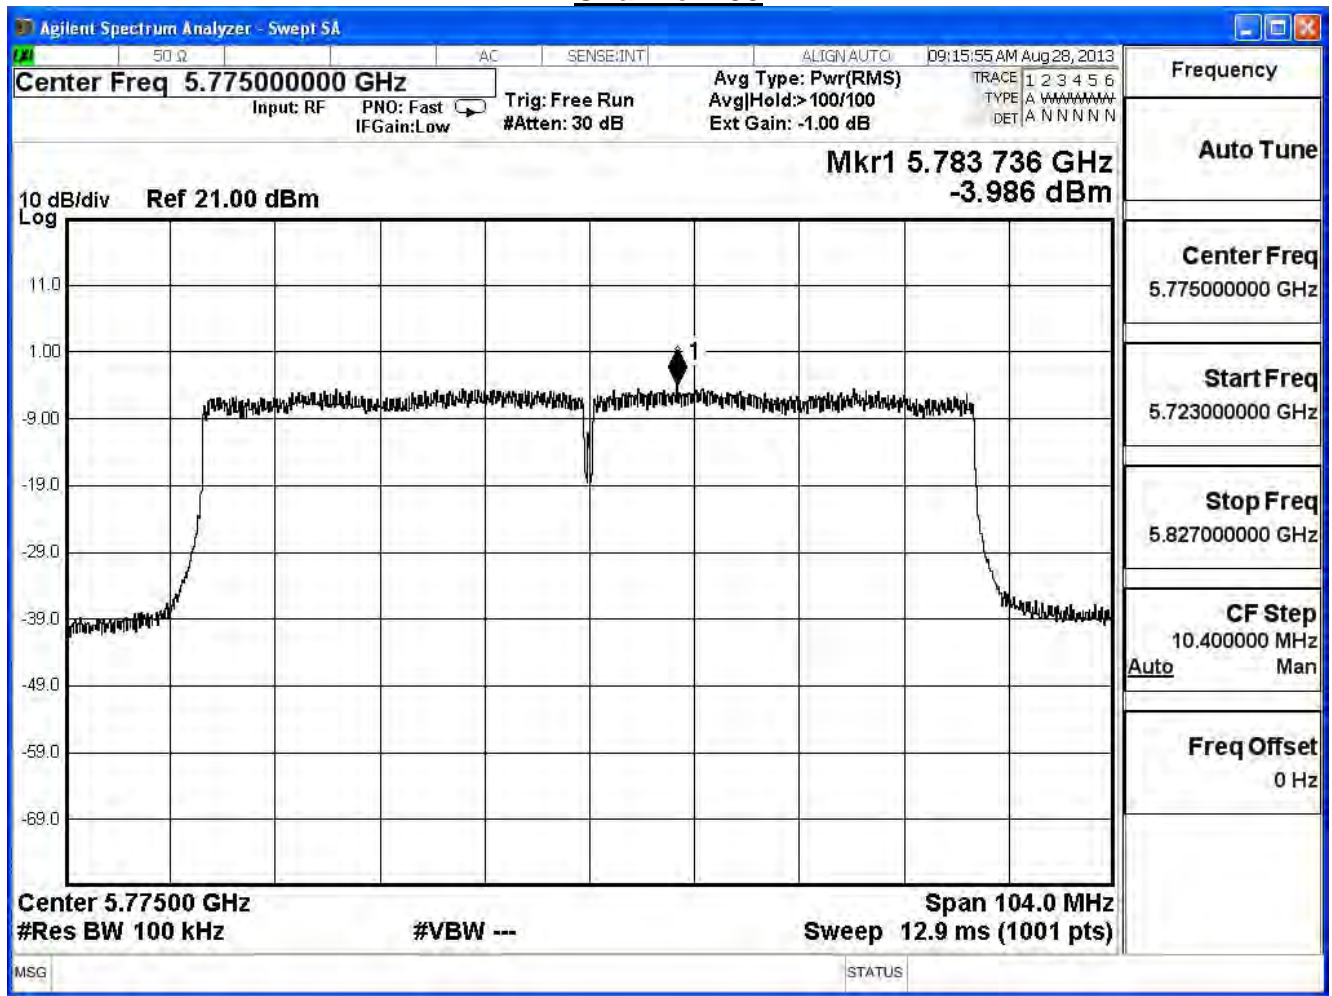

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 1: Transmit (CDD Mode)_Adapter: EXA1206UH		
Date of Test	2013/08/28	Test Site	SR7

IEEE802.11ac_80MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-15.02	≤ 4.79	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{Max Gain} = 9.21\text{dBi}$

Required Limit = $8\text{dBm} - (9.21\text{dBi} - 6\text{dB}) = 4.79\text{ dBm}$


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE 802.11b					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	13.17	-2.03	≤ 8	Pass
6	2437	13.18	-2.02	≤ 8	Pass
11	2462	12.63	-2.57	≤ 8	Pass


Channel 1

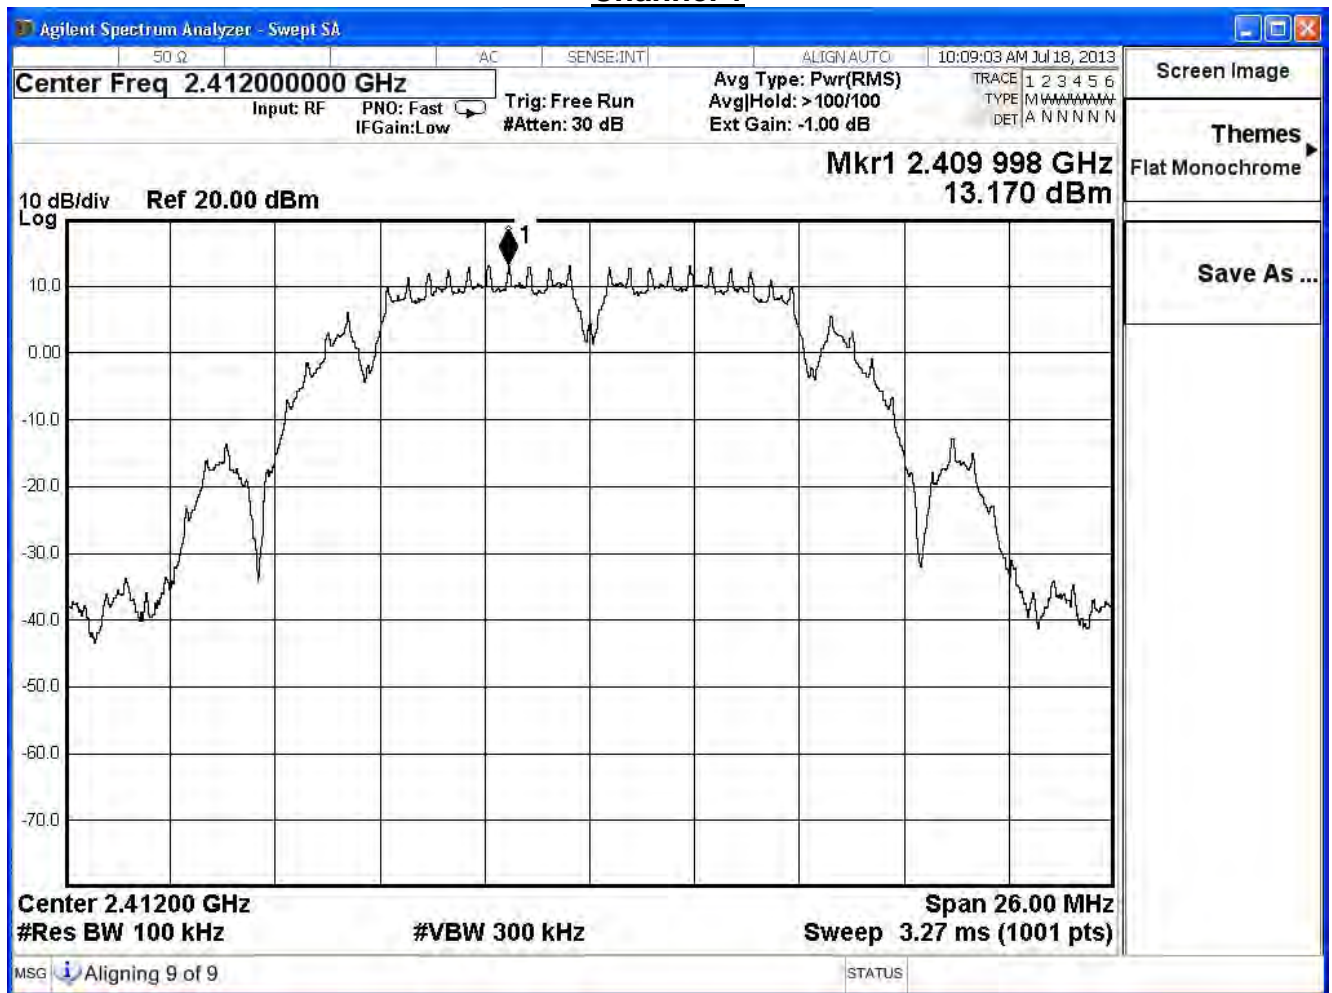

Channel 6

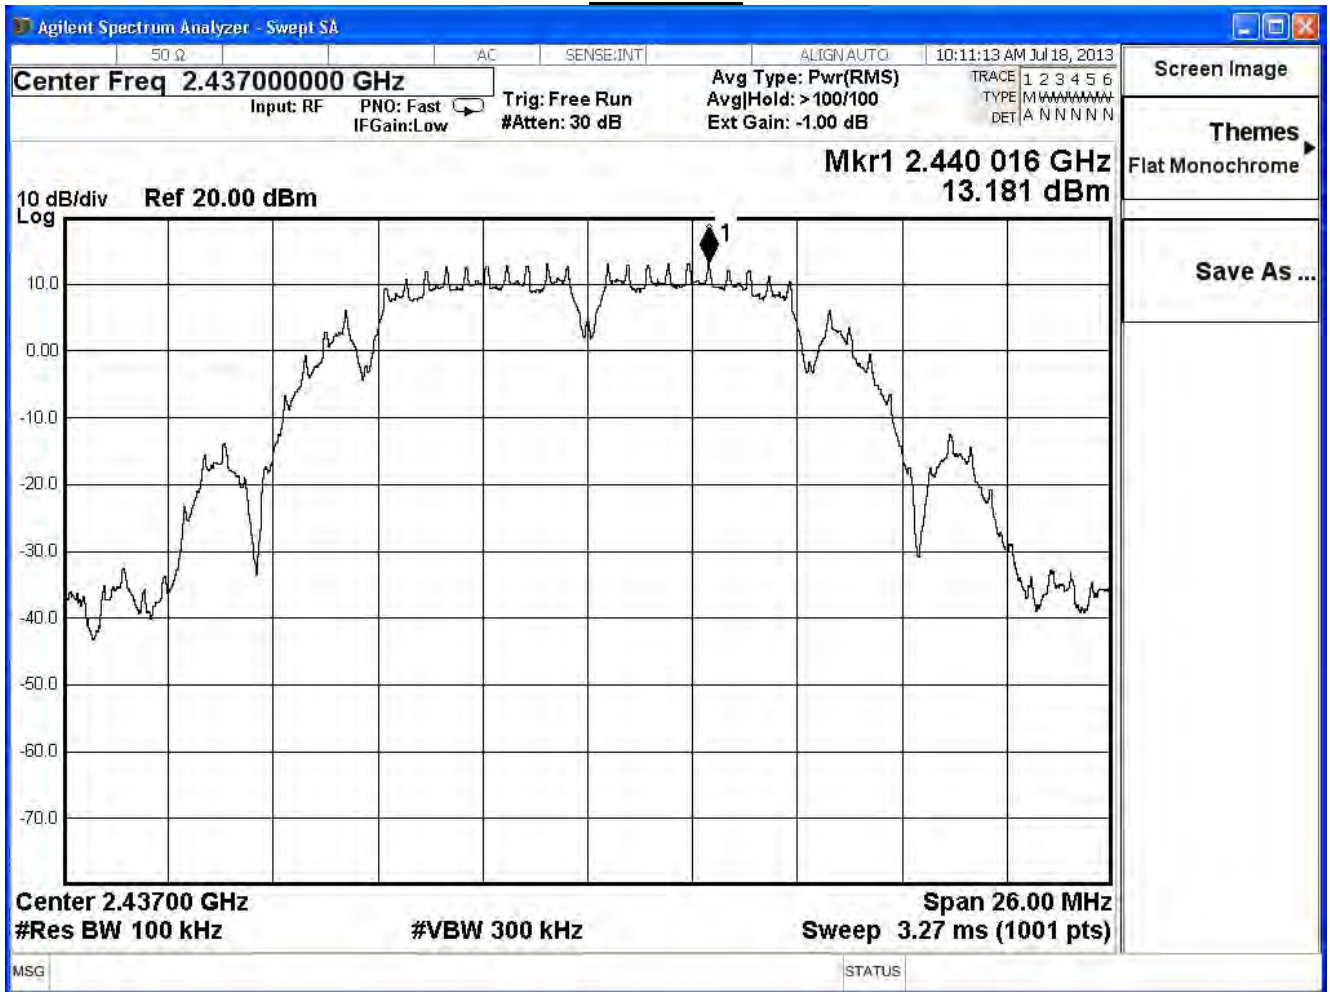


Channel 11

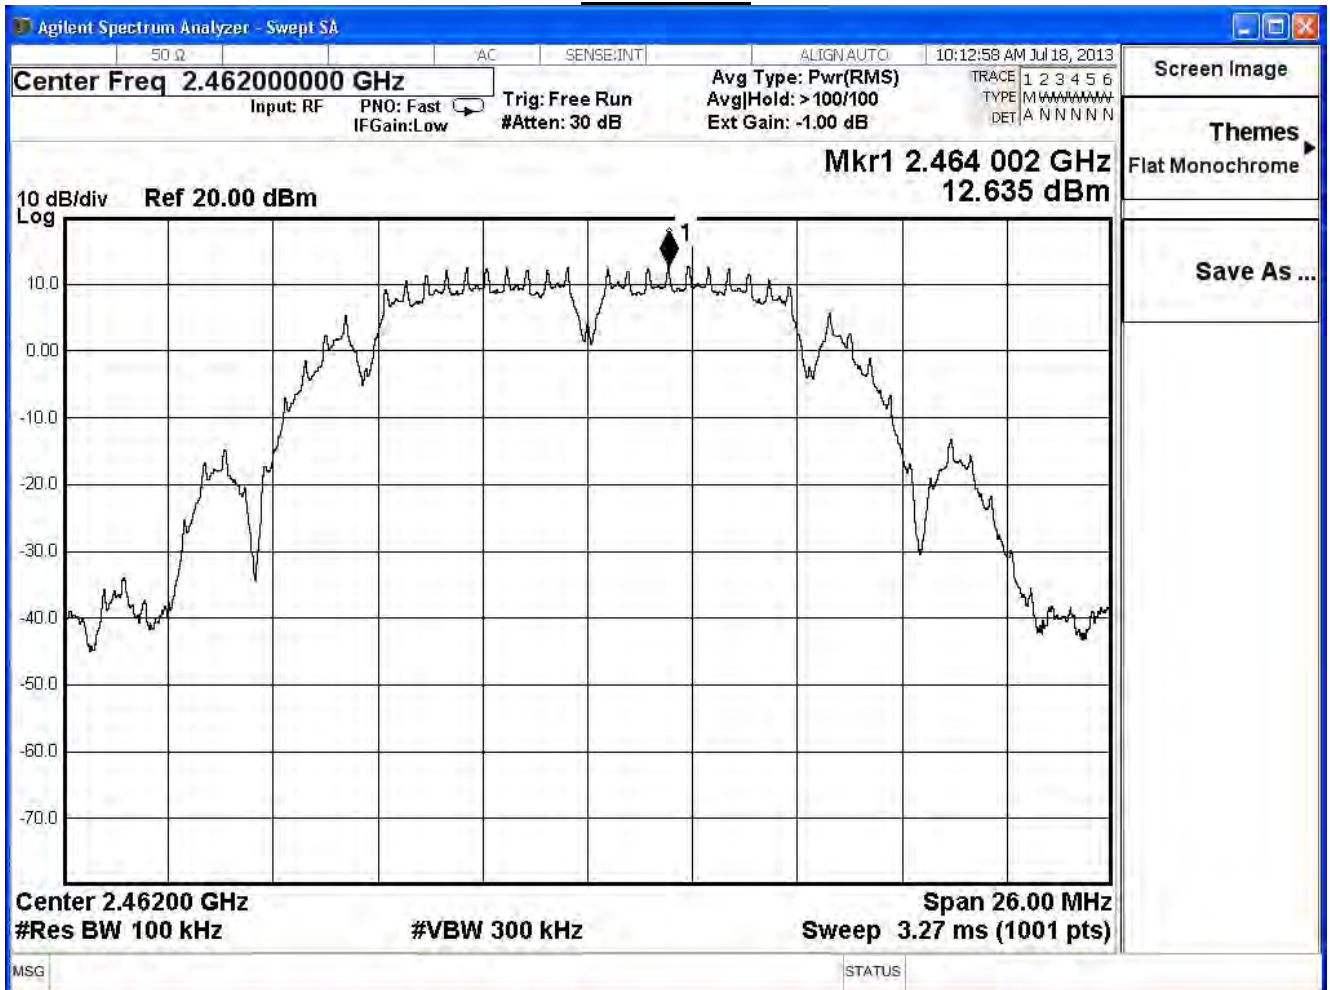


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE 802.11g					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	9.27	-5.93	≤ 8	Pass
6	2437	14.20	-1.00	≤ 8	Pass
11	2462	7.07	-8.13	≤ 8	Pass


Channel 1

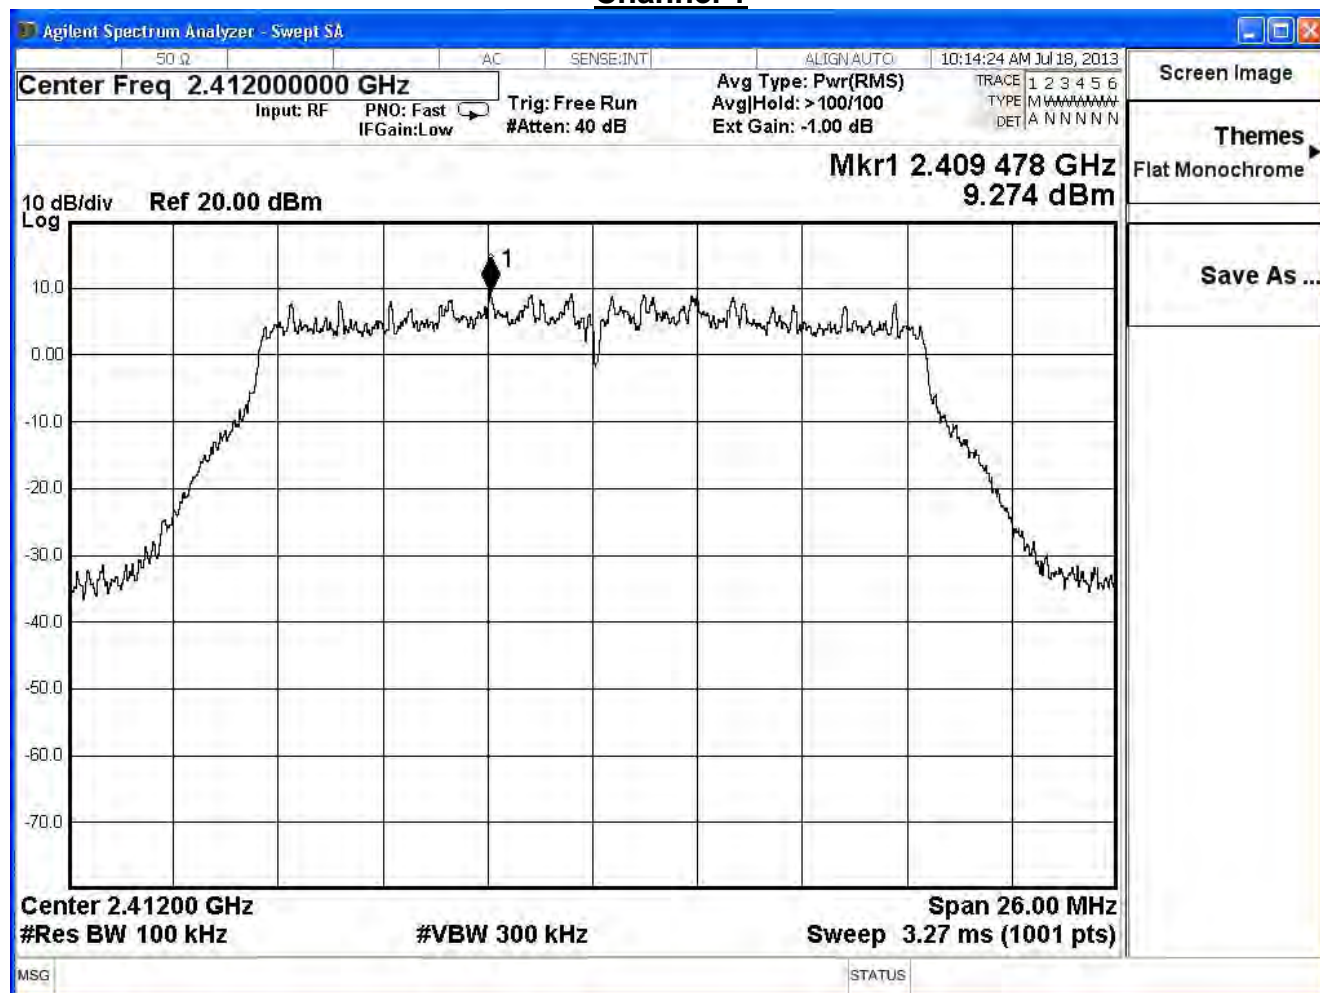

Channel 6

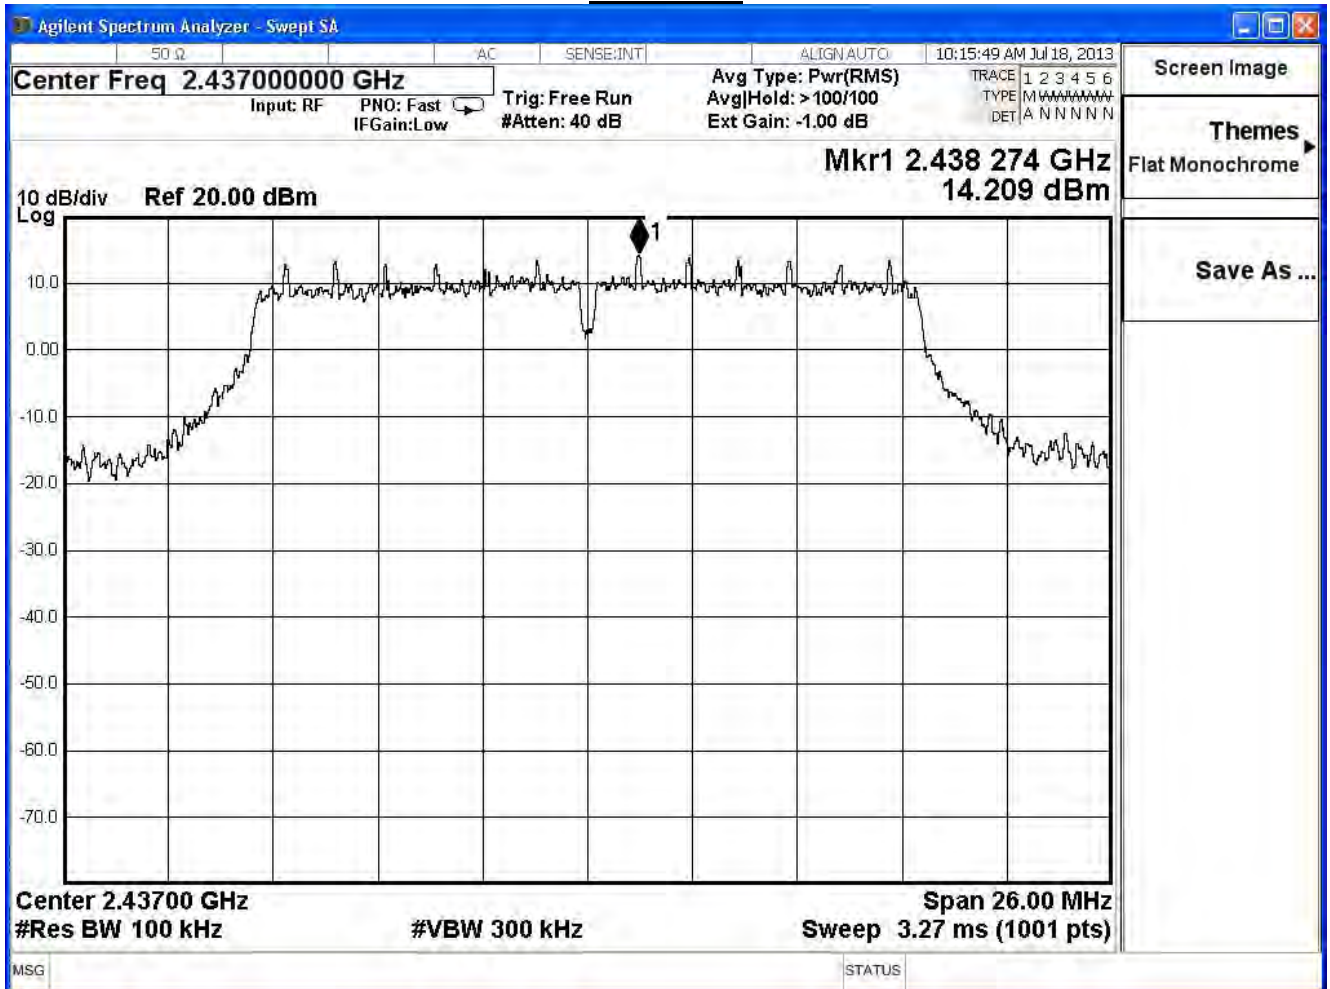

Channel 11

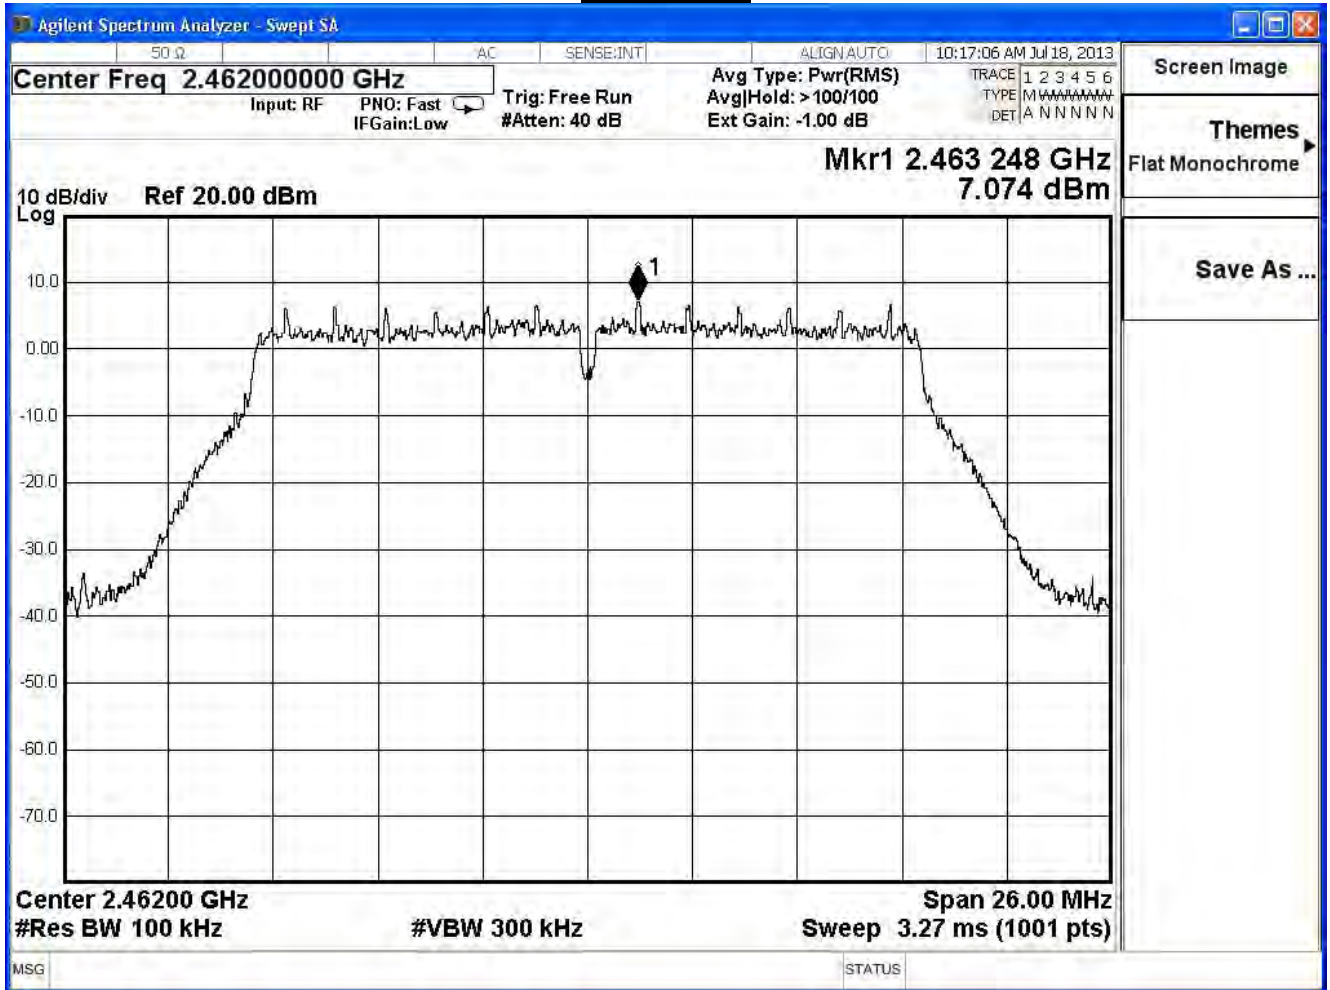

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE802.11n_20MHz_(ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	7.80	-7.40	≤7.32	Pass
6	2437	12.82	-2.38	≤7.32	Pass
11	2462	6.29	-8.91	≤7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Channel 1

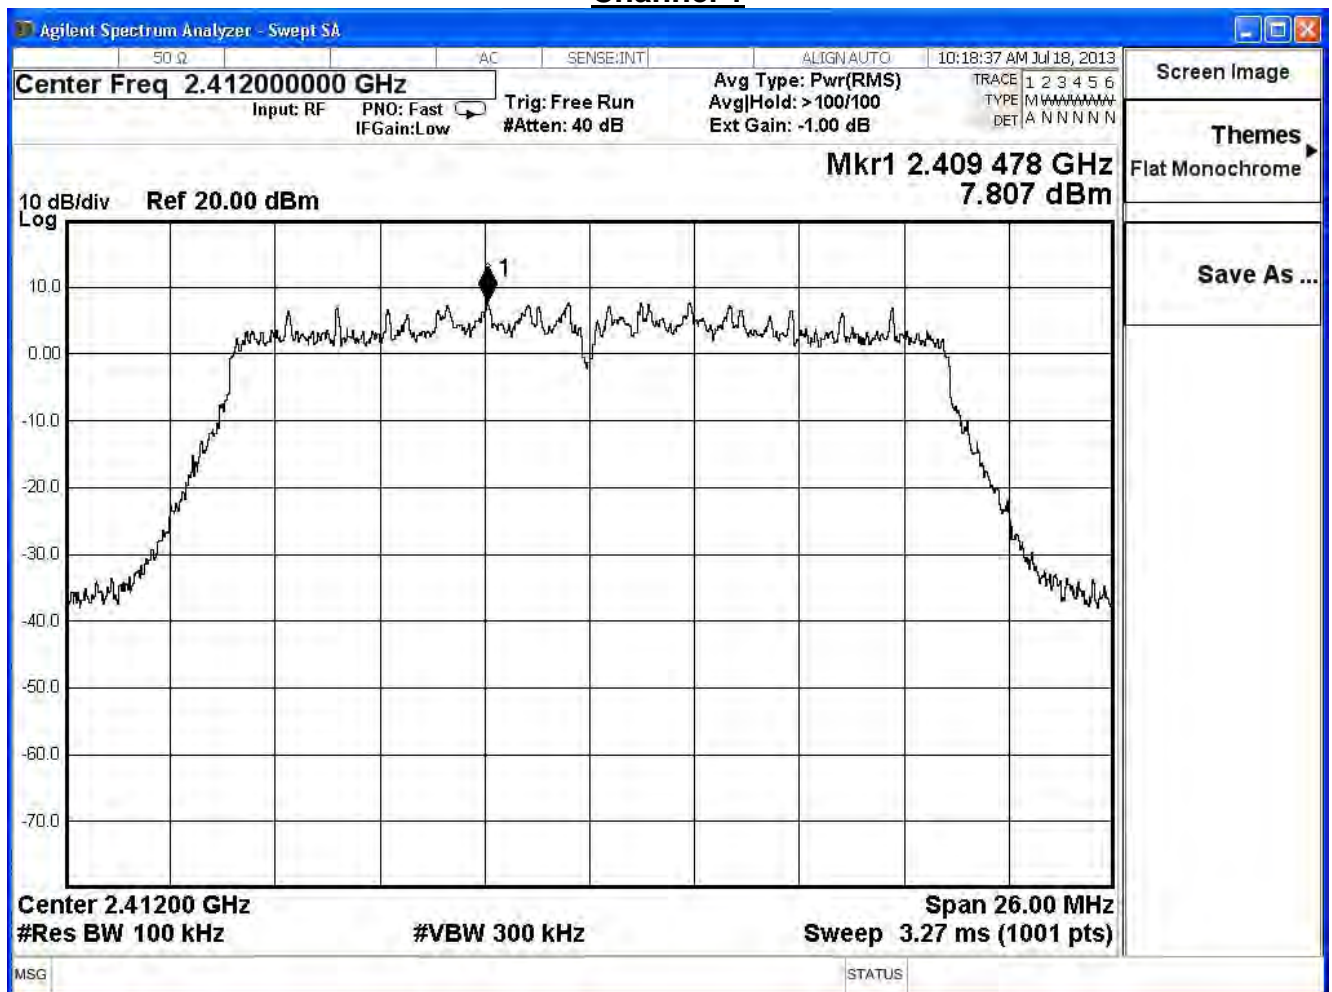

Channel 6

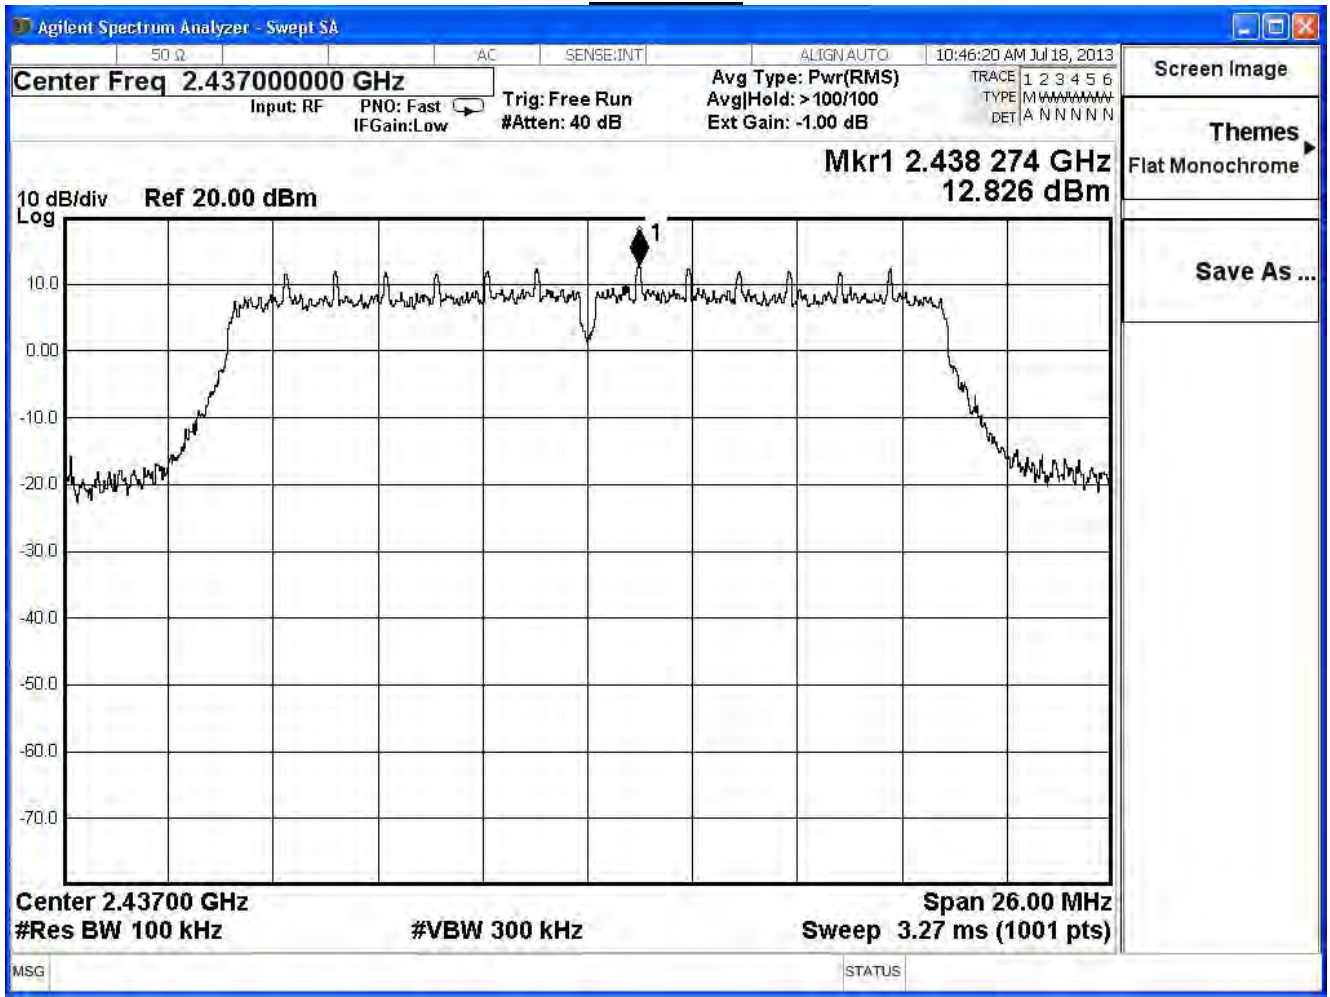

Channel 11

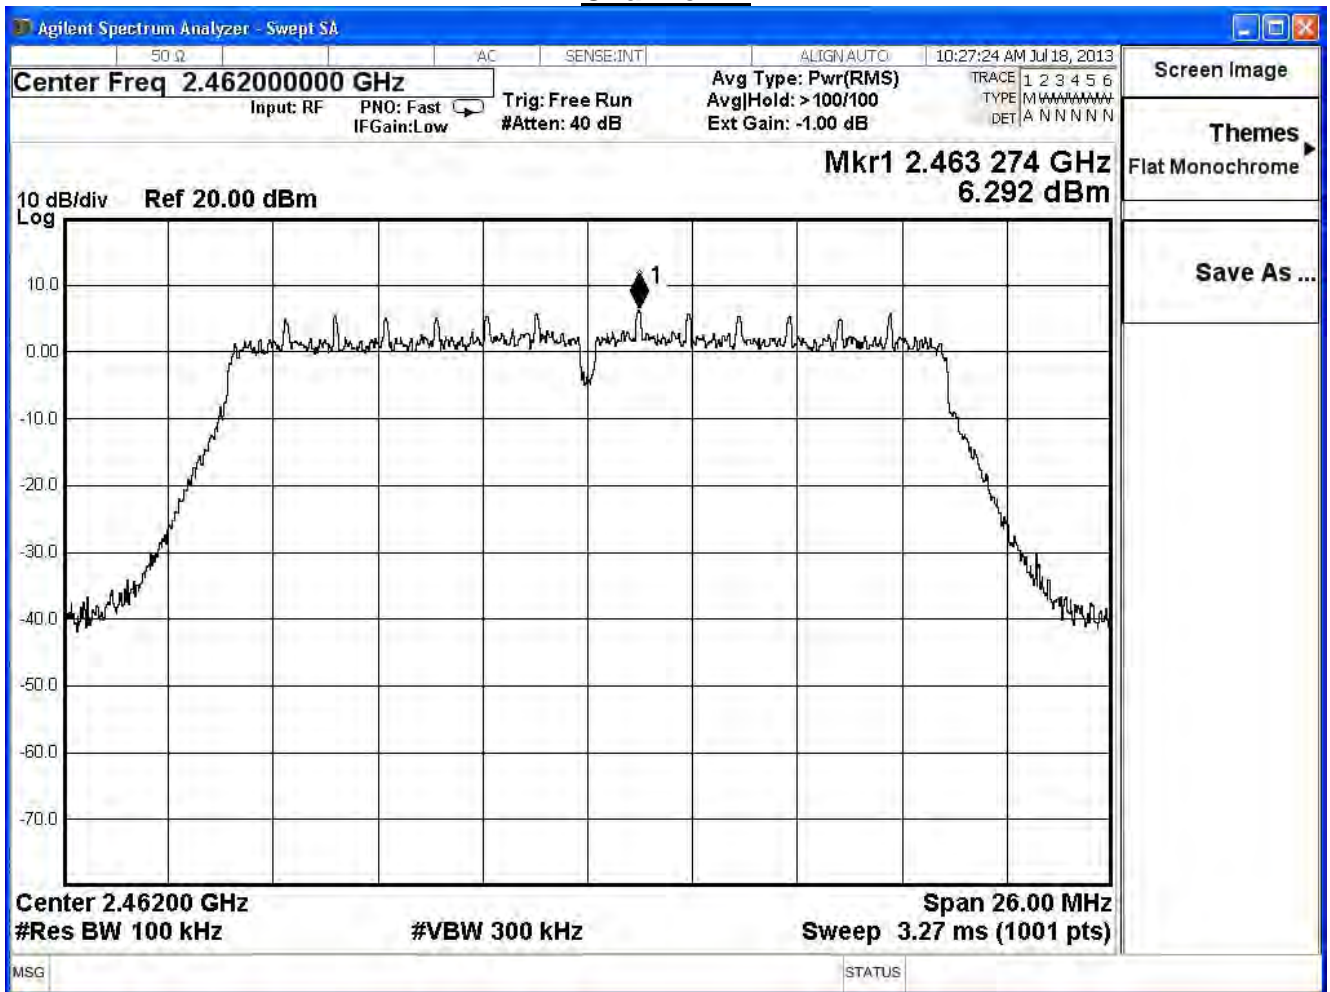

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n_20MHz_(ANT 1)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	7.19	-8.01	≤ 7.32	Pass
6	2437	12.00	-3.20	≤ 7.32	Pass
11	2462	6.47	-8.73	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Channel 1

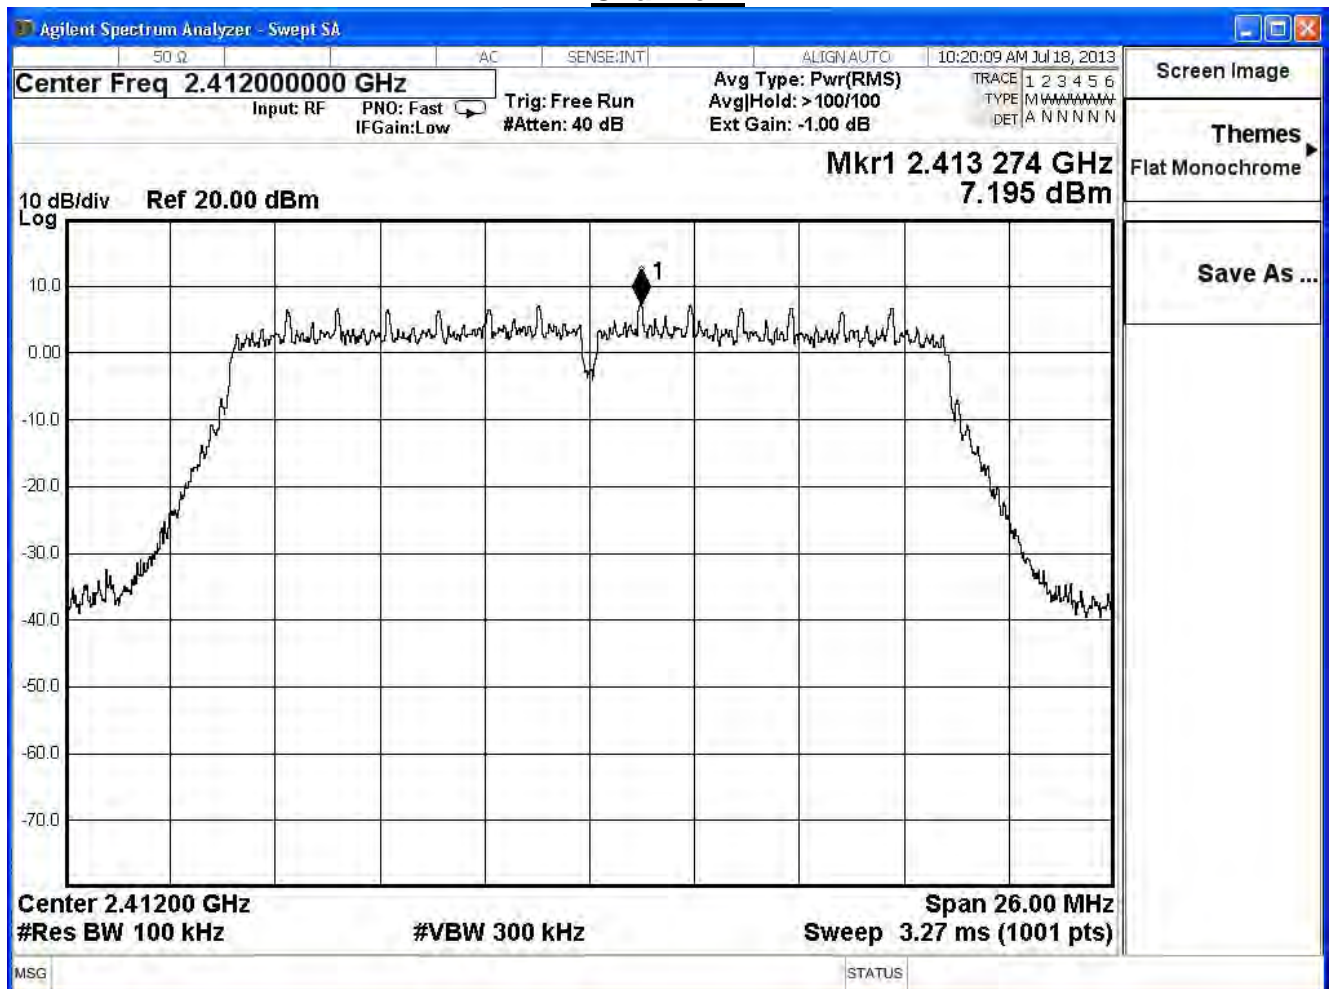

Channel 6

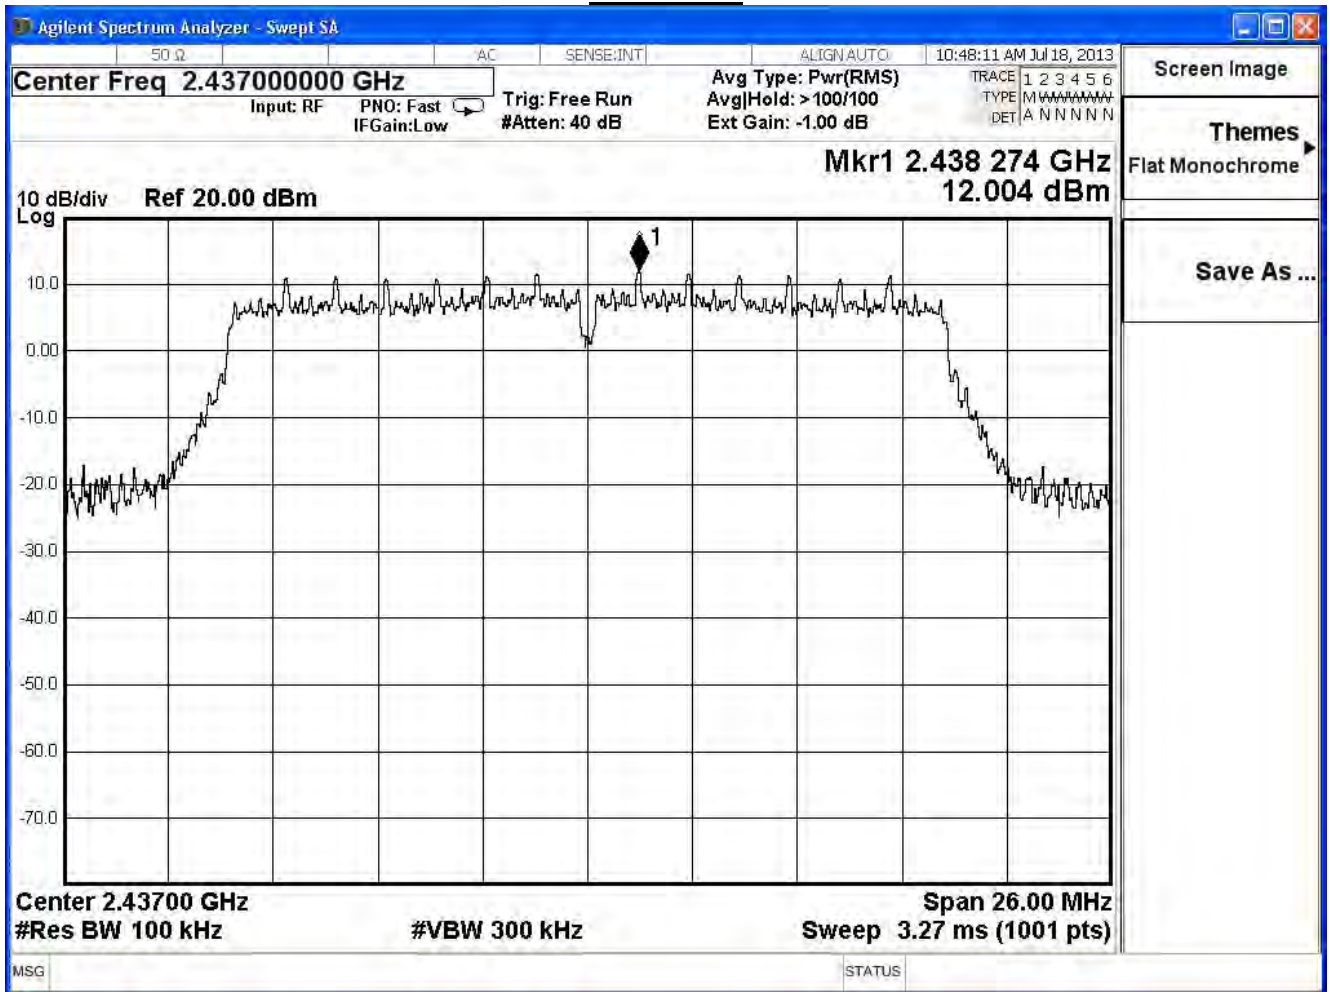

Channel 11

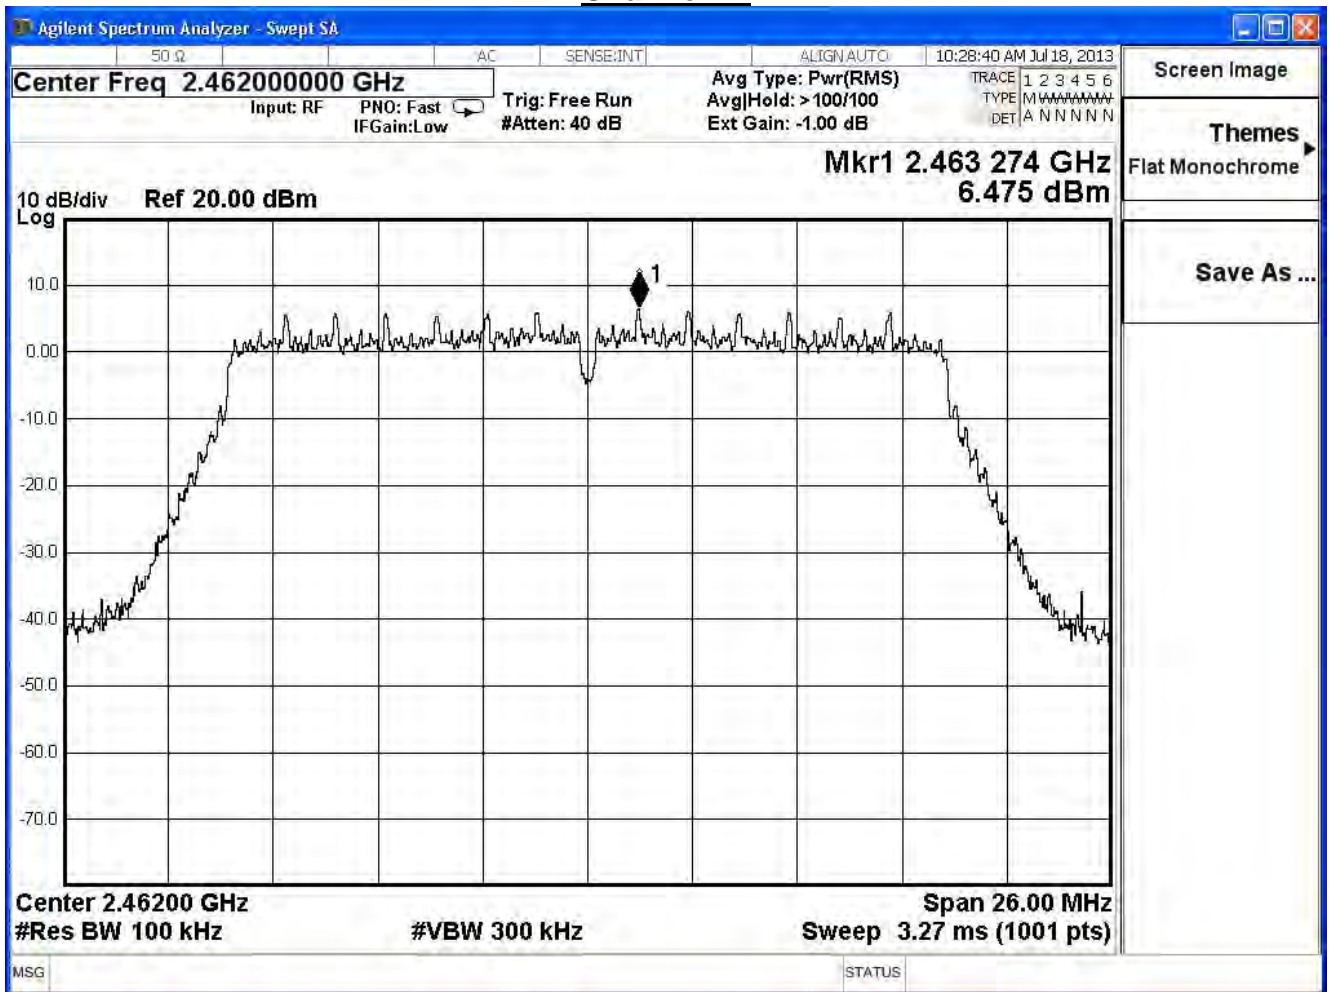

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n_20MHz_(ANT 2)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
1	2412	7.17	-8.03	≤ 7.32	Pass
6	2437	11.88	-3.32	≤ 7.32	Pass
11	2462	6.21	-8.99	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Channel 1

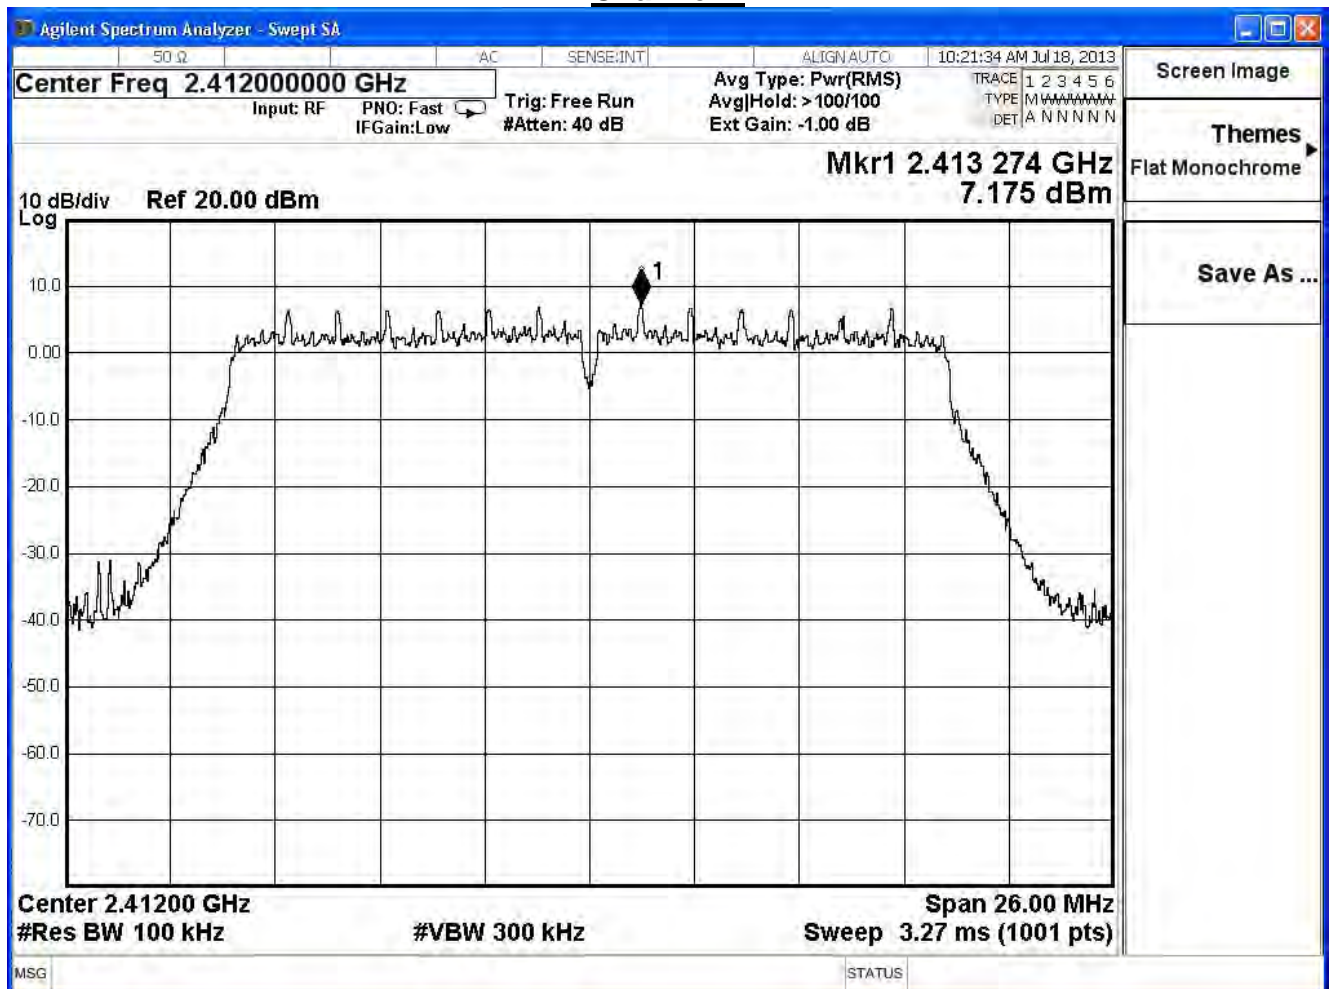

Channel 6

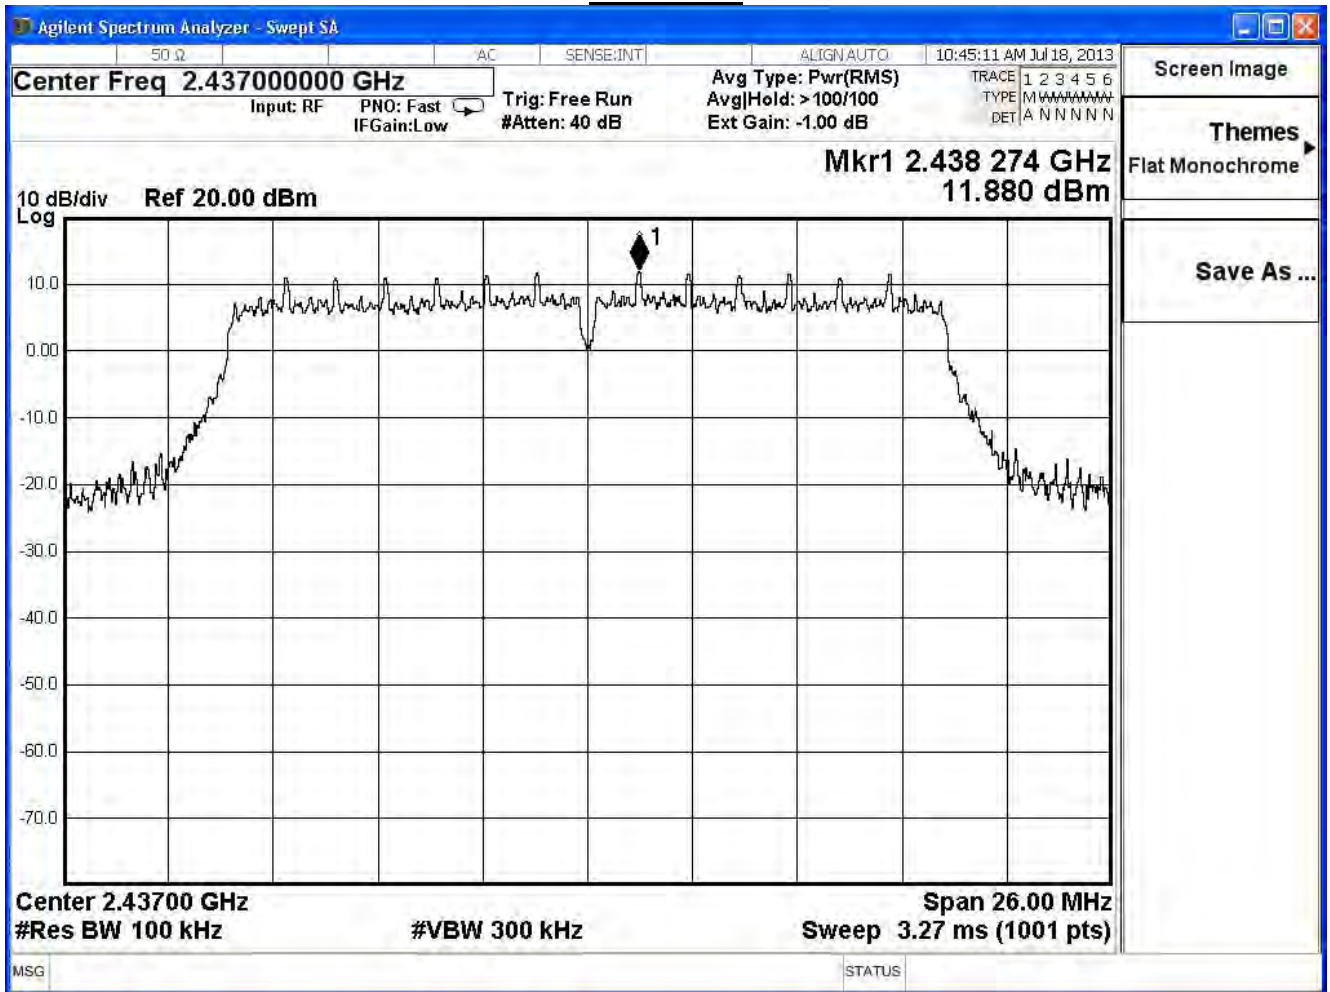

Channel 11

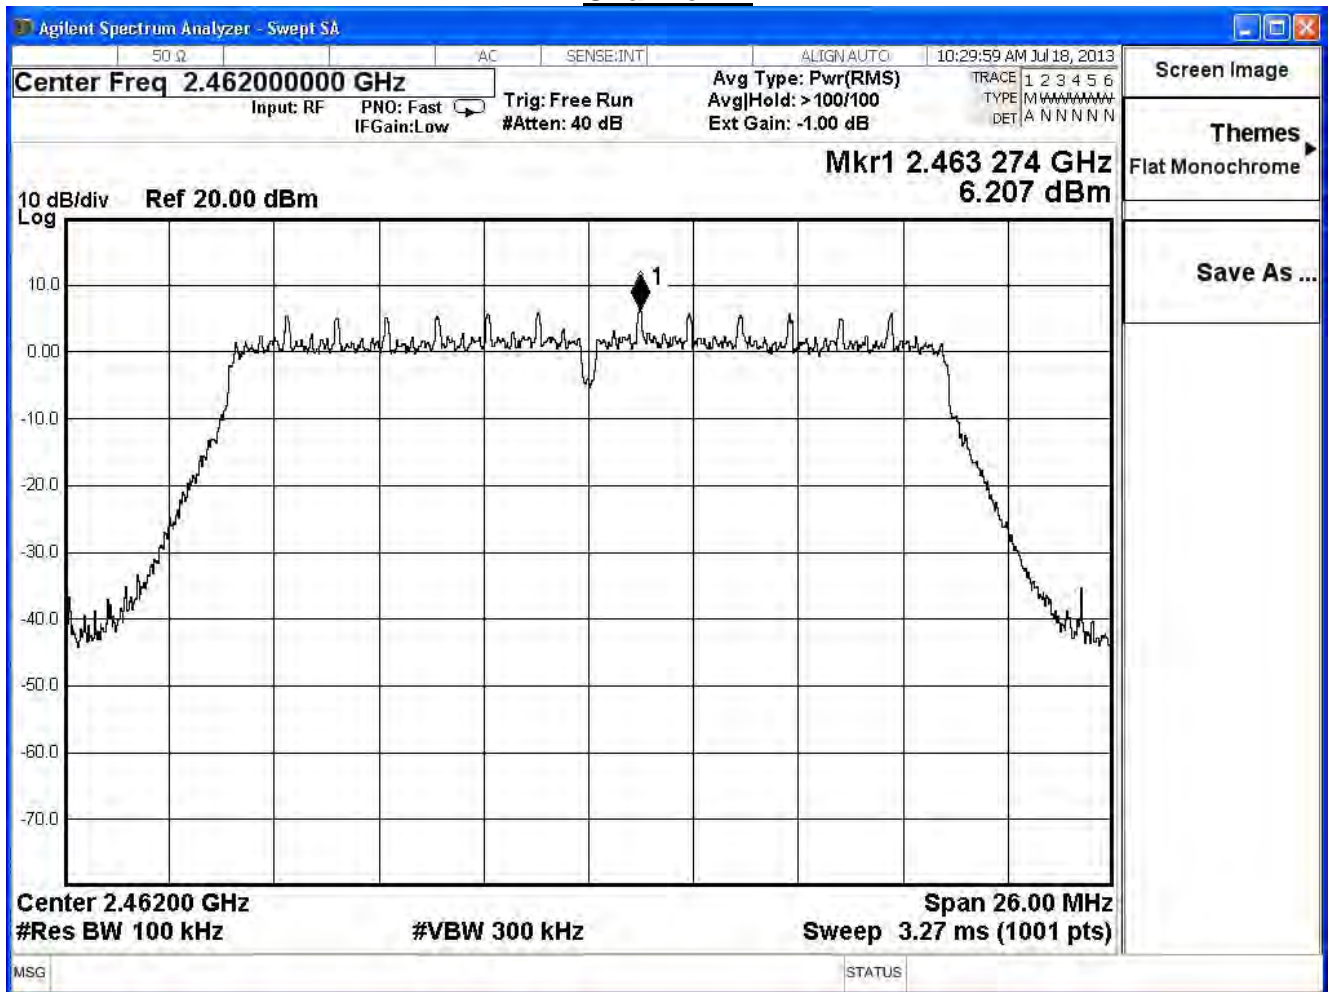

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n 20MHz (ANT 0+1+2)				
Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-3.03	≤ 7.32	Pass
6	2437	1.83	≤ 7.32	Pass
11	2462	-4.11	≤ 7.32	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
3	2422	-6.335	-21.535	≤ 7.32	Pass
6	2437	-3.881	-19.081	≤ 7.32	Pass
9	2452	-7.956	-23.156	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Channel 3

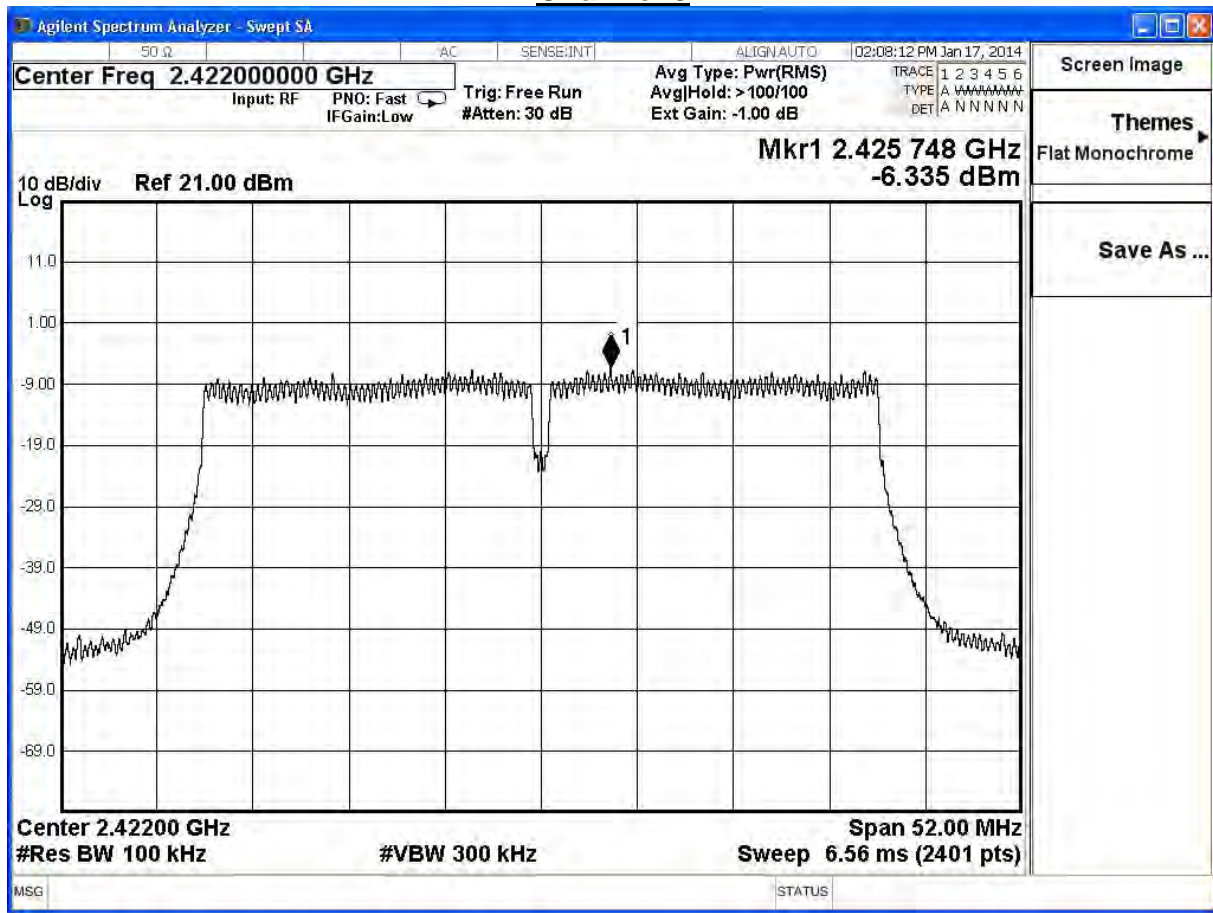

Channel 6

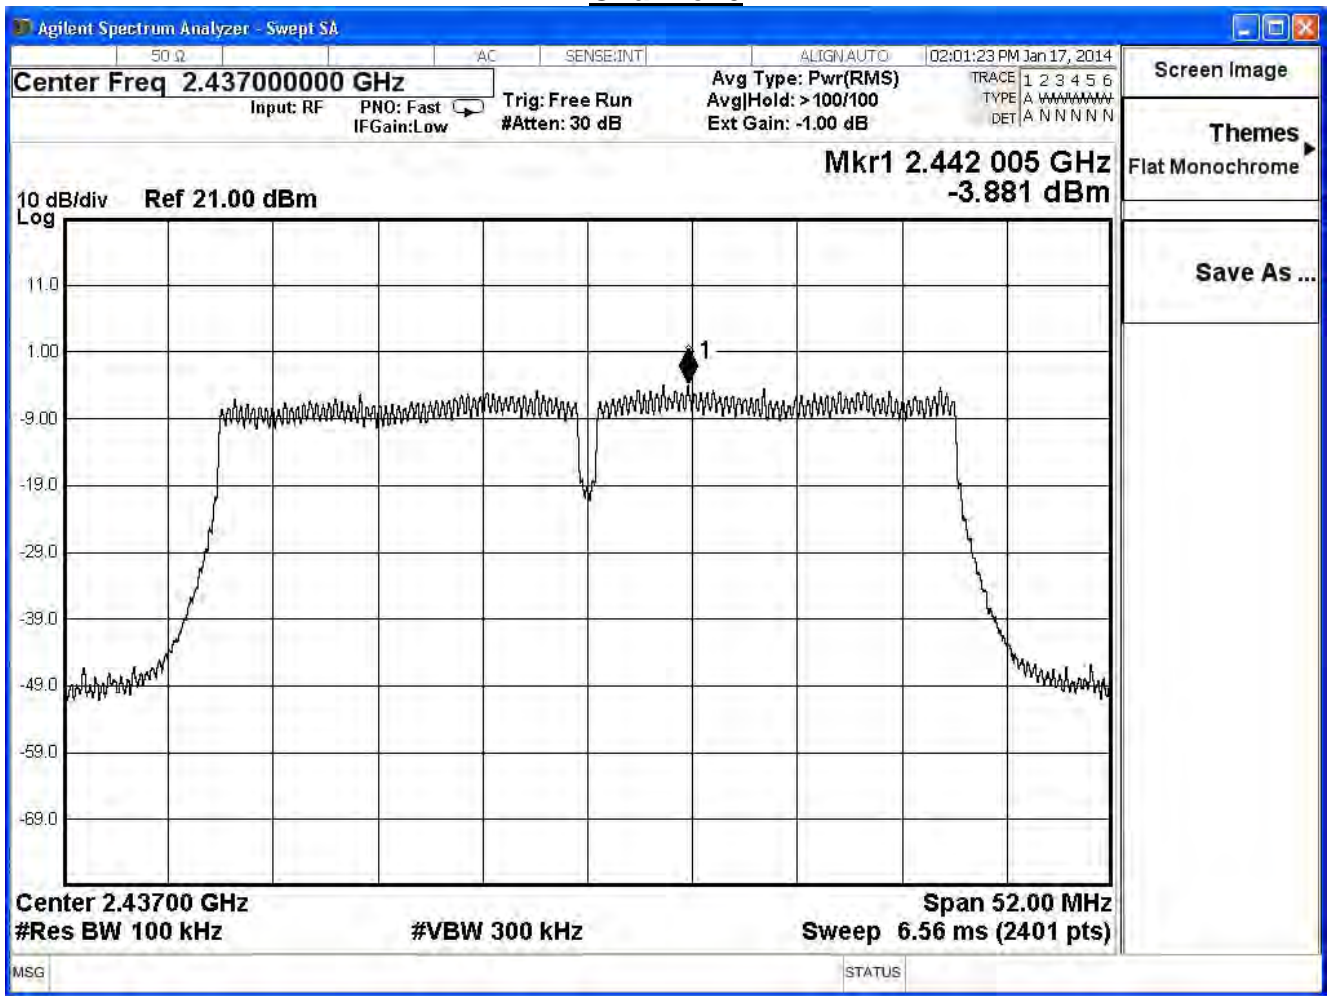

Channel 9

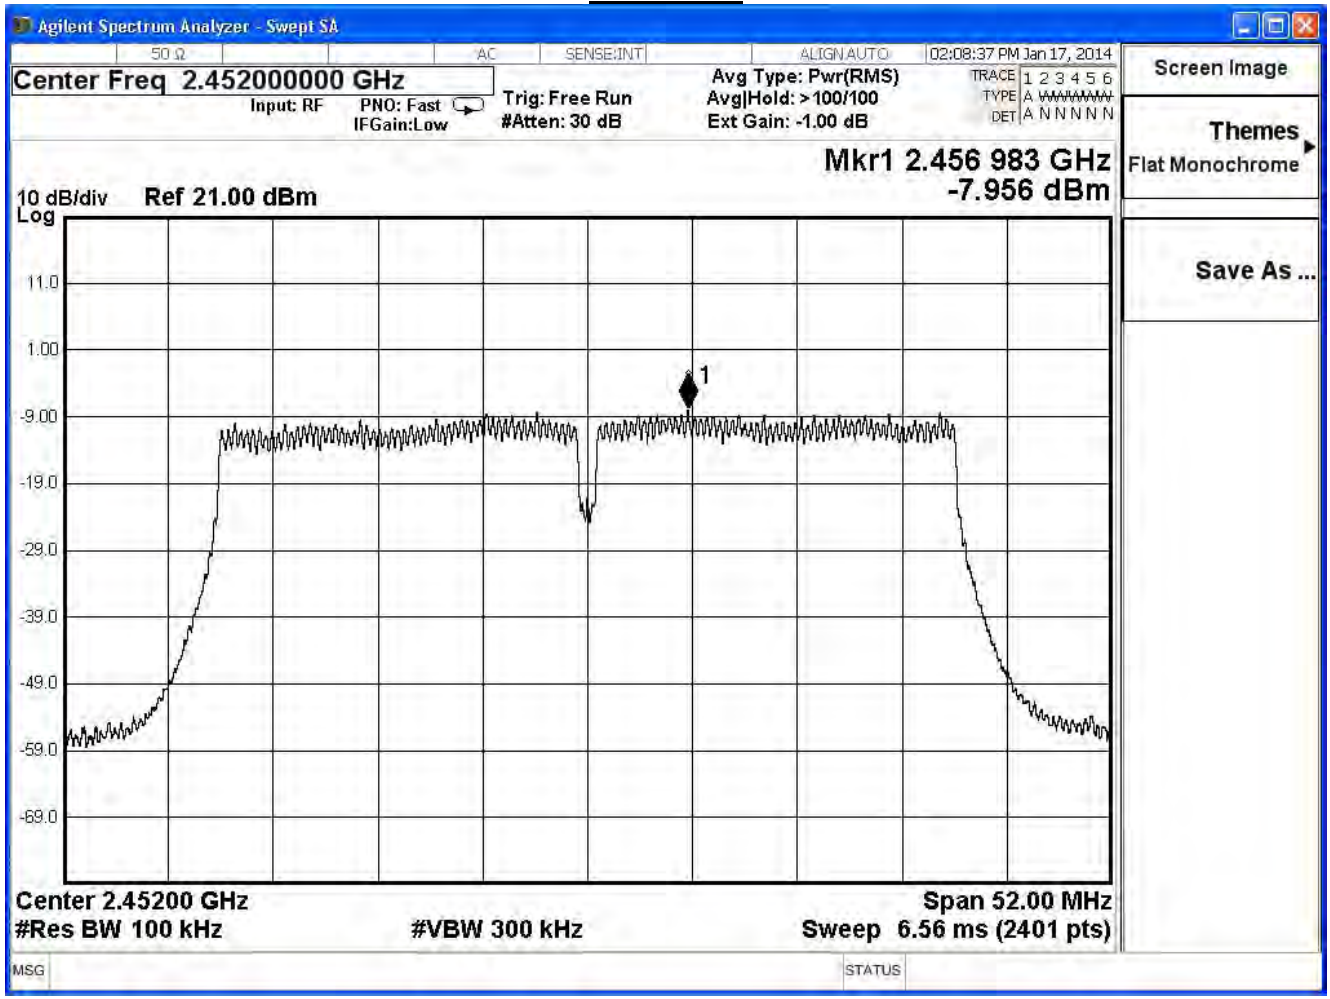

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7


IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-6.479	-21.679	≤ 7.32	Pass
6	2437	-4.671	-19.871	≤ 7.32	Pass
9	2452	-8.177	-23.377	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Channel 3

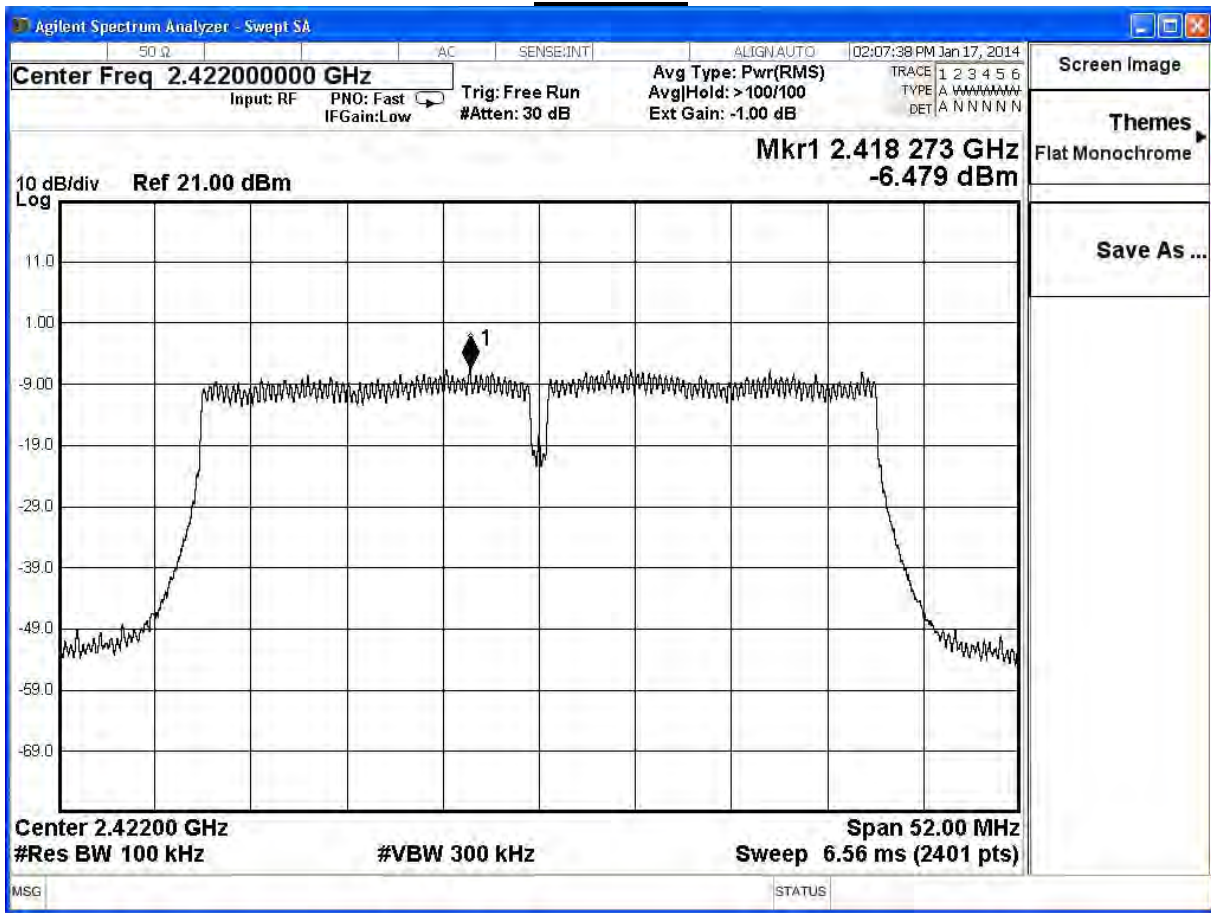

Channel 6

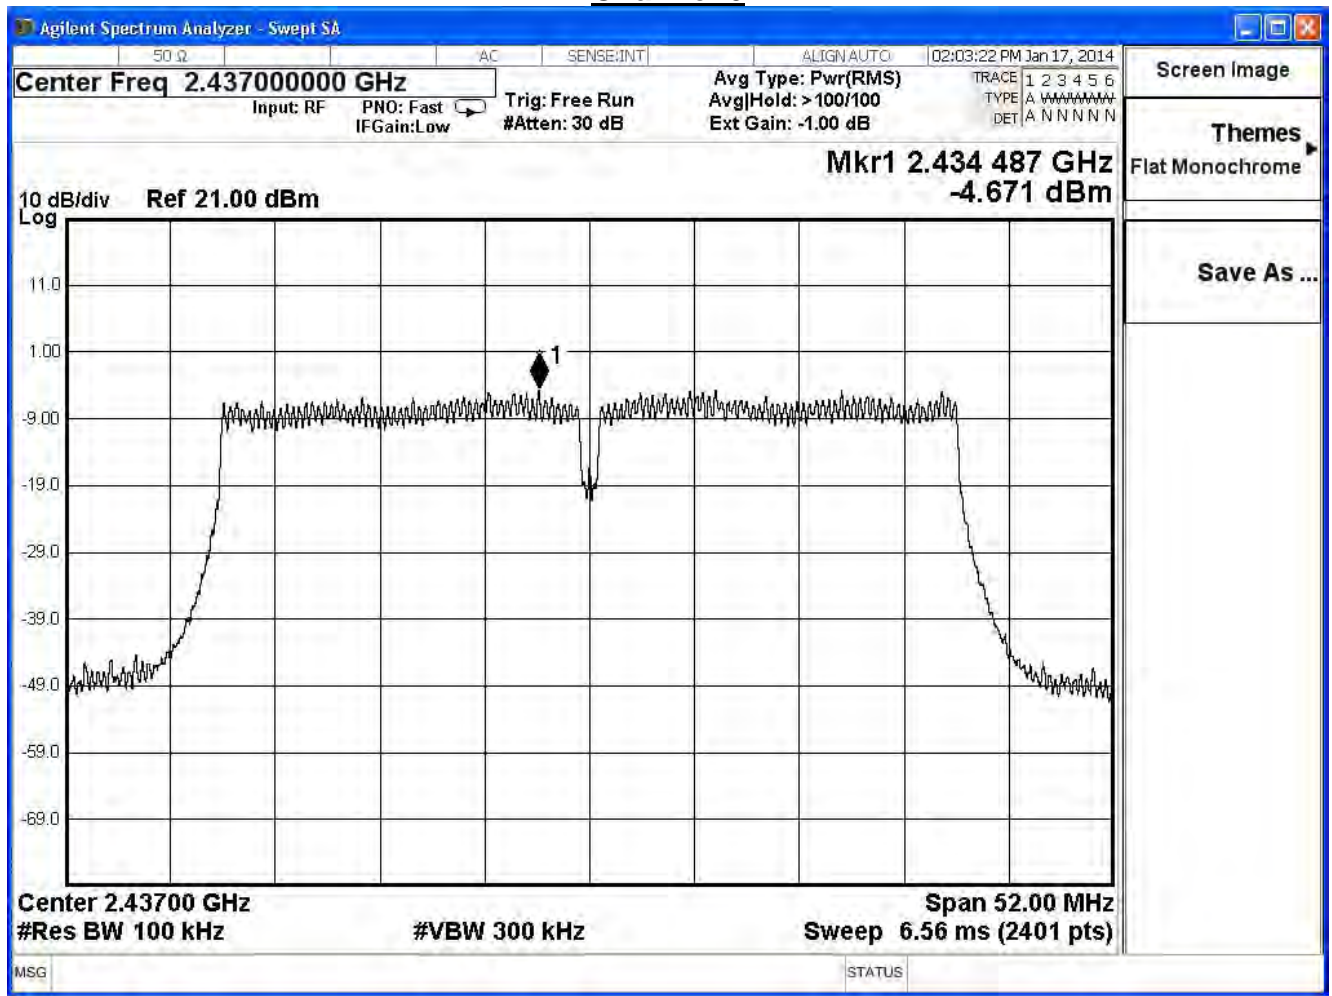

Channel 9

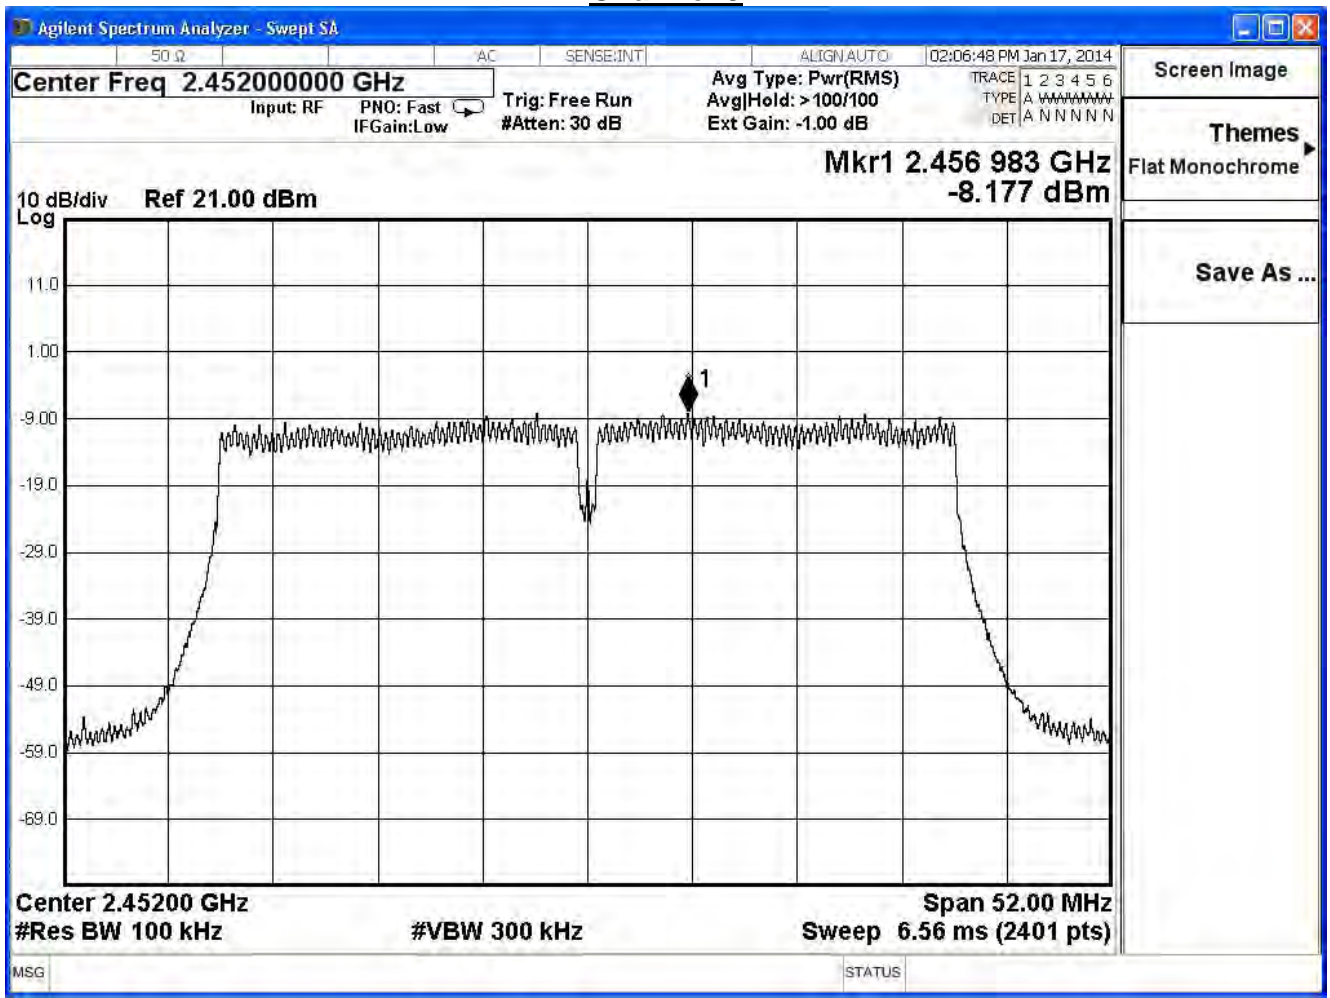

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-6.445	-21.645	≤ 7.32	Pass
6	2437	-4.697	-19.897	≤ 7.32	Pass
9	2452	-8.234	-23.434	≤ 7.32	Pass

Note:


Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Channel 3

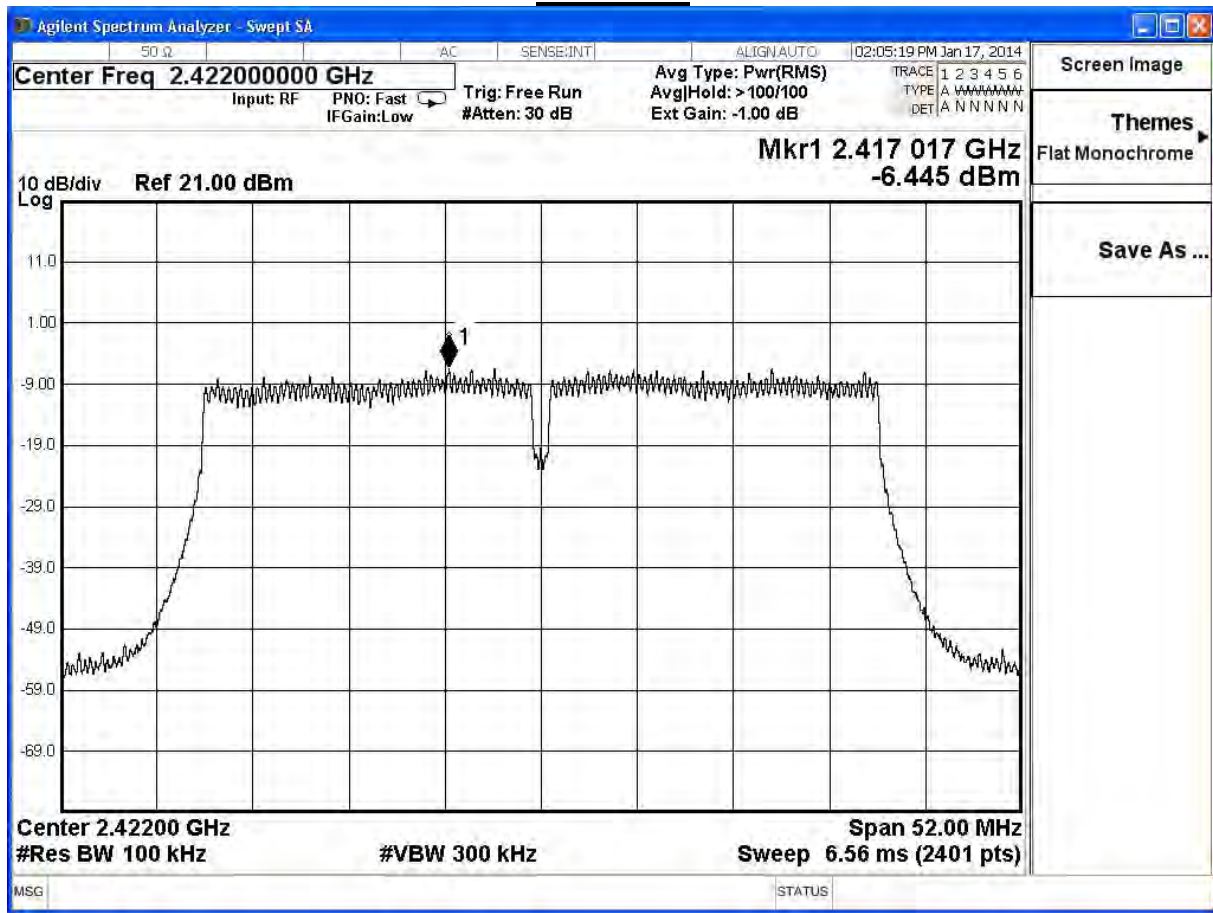

Channel 6

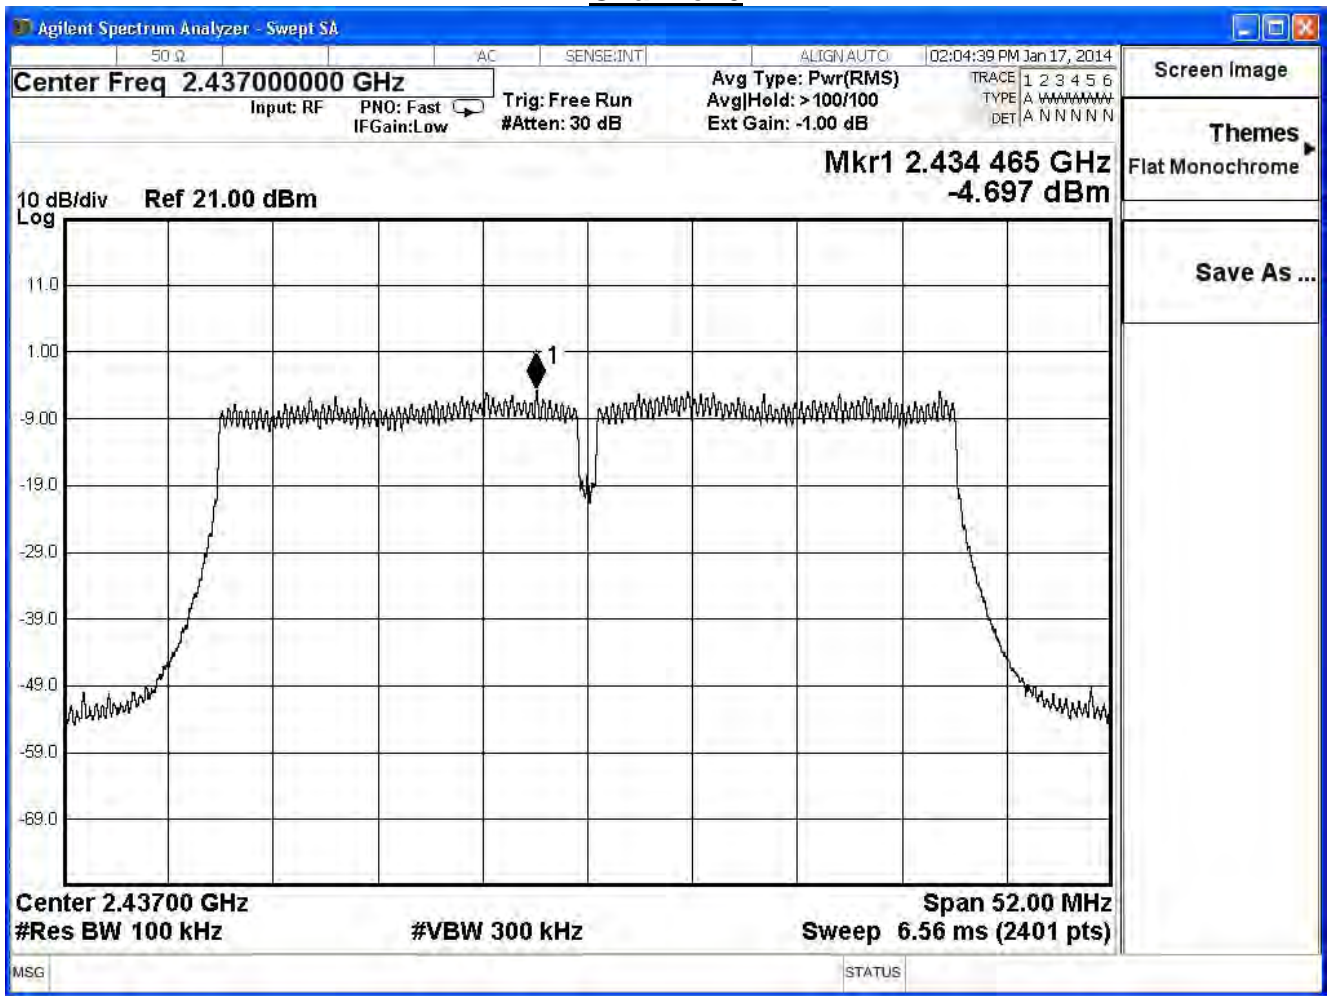

Channel 9

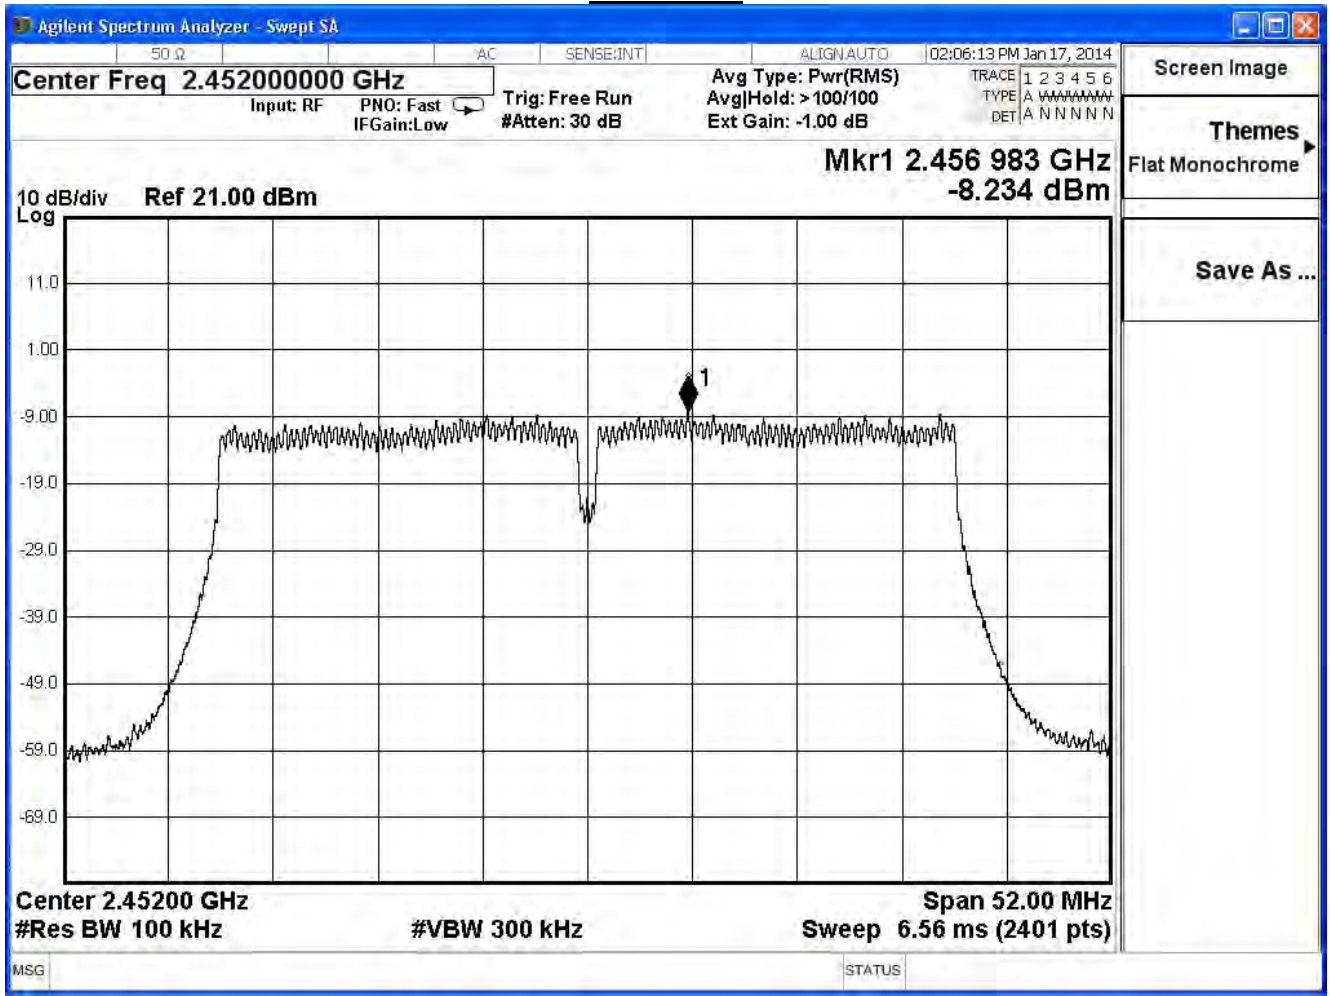

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2014/01/22	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
3	2422	-16.848	≤ 7.32	Pass
6	2437	-14.828	≤ 7.32	Pass
9	2452	-18.549	≤ 7.32	Pass

Note:

Directional Antenna Gain = $10\log(3) + \text{max Gain} = 6.68\text{dBdBi}$

Required Limit = $8\text{dBm} - (6.68\text{dBi} - 6\text{dBi}) = 7.32\text{ dBm}$


Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE 802.11a					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	14.193	-1.01	≤ 4.79	Pass
157	5785	14.303	-0.90	≤ 4.79	Pass
165	5825	14.161	-1.04	≤ 4.79	Pass


Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi
 Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm


Channel 149

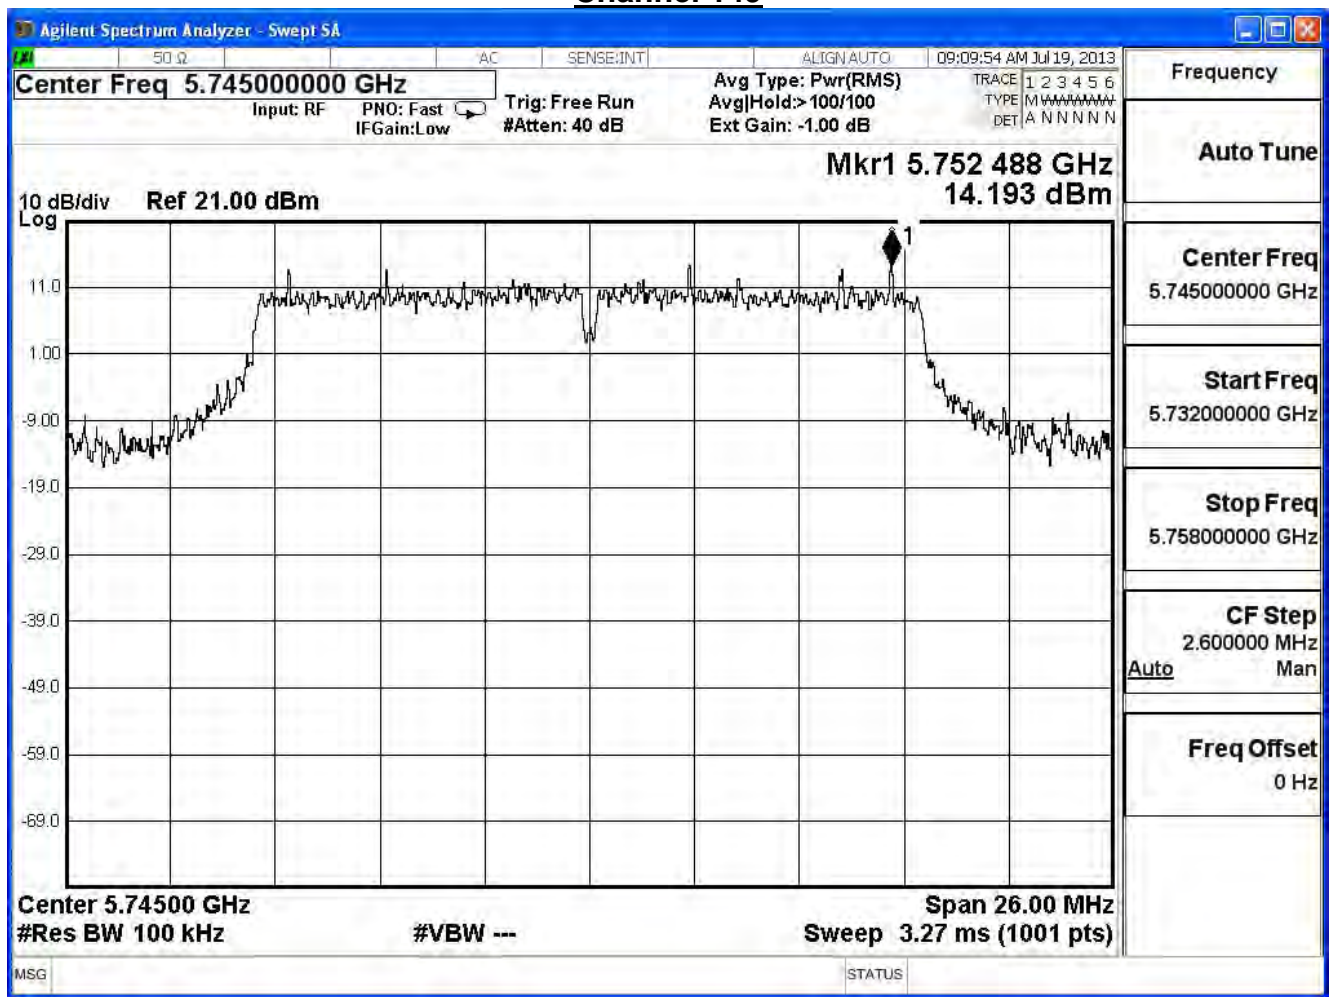

Channel 157

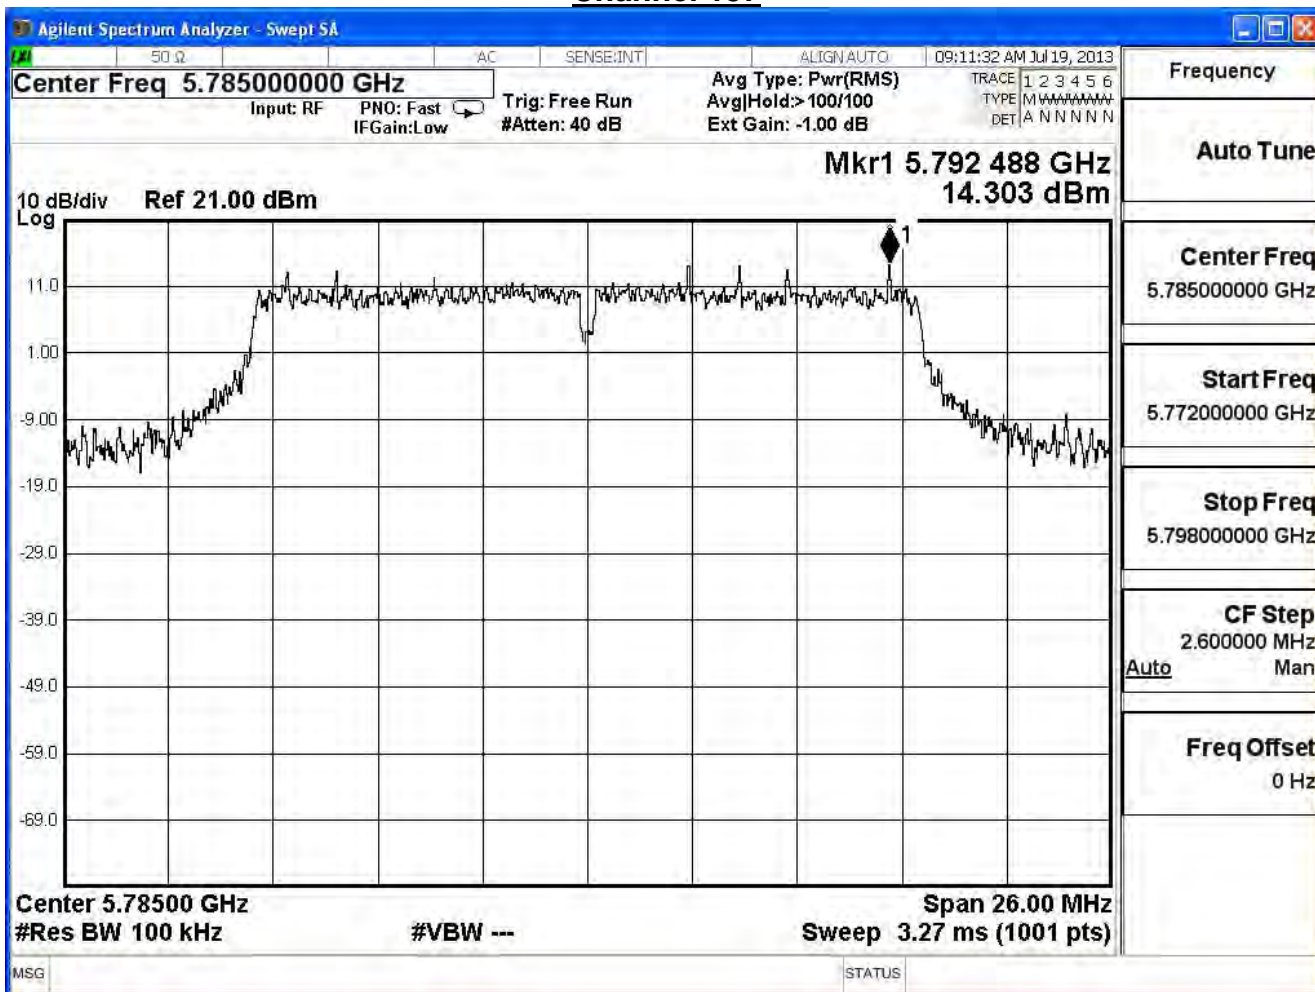

Channel 165

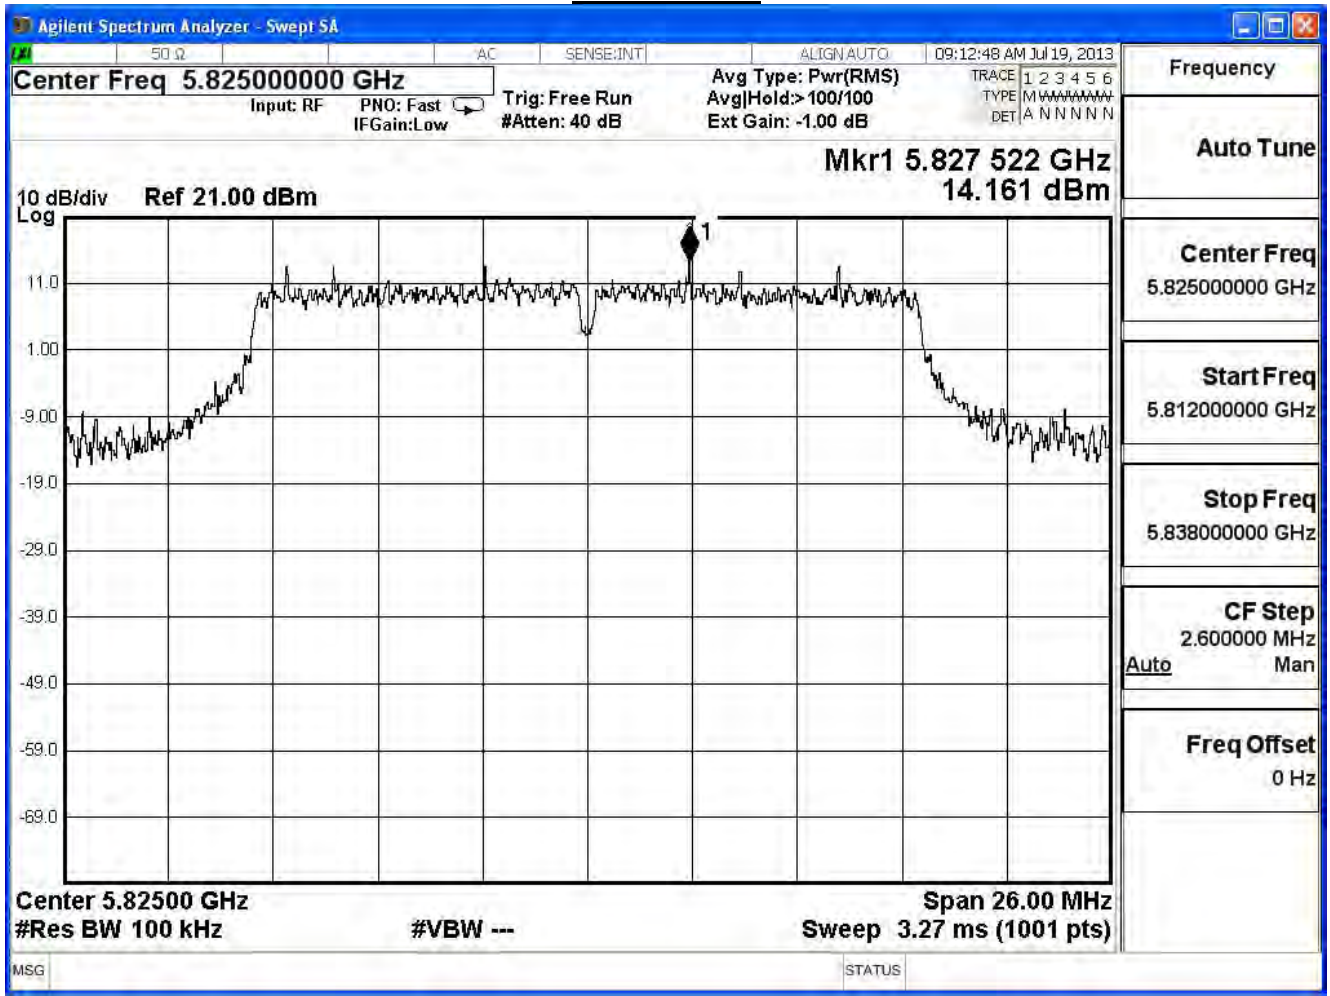

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n_20MHz_(ANT 0)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
149	5745	10.856	-4.34	≤ 4.79	Pass
157	5785	11.429	-3.77	≤ 4.79	Pass
165	5825	10.708	-4.49	≤ 4.79	Pass

Note:


Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm


Channel 149

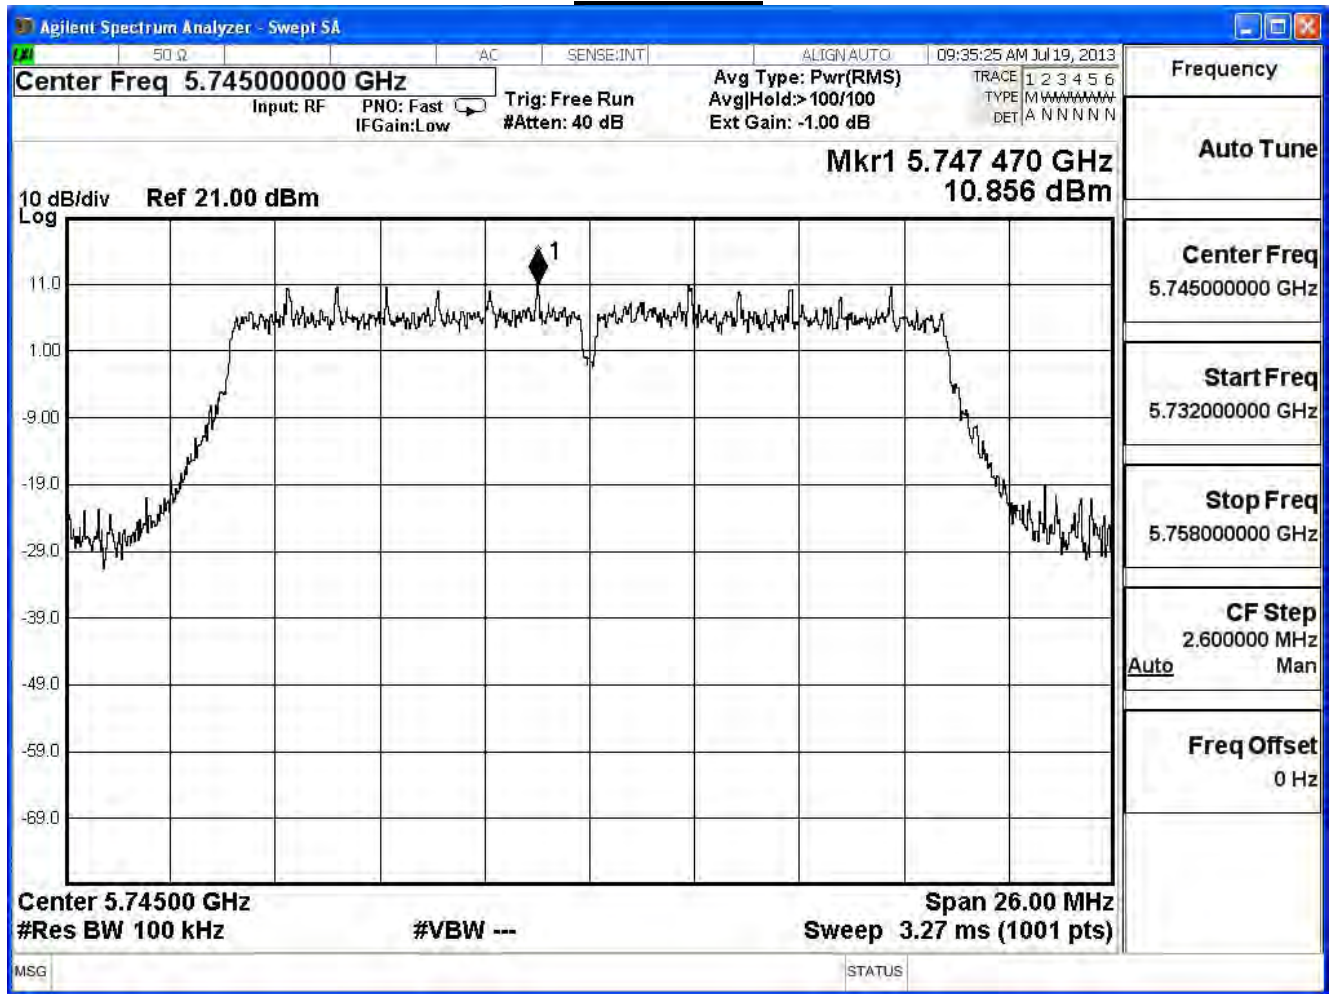

Channel 157

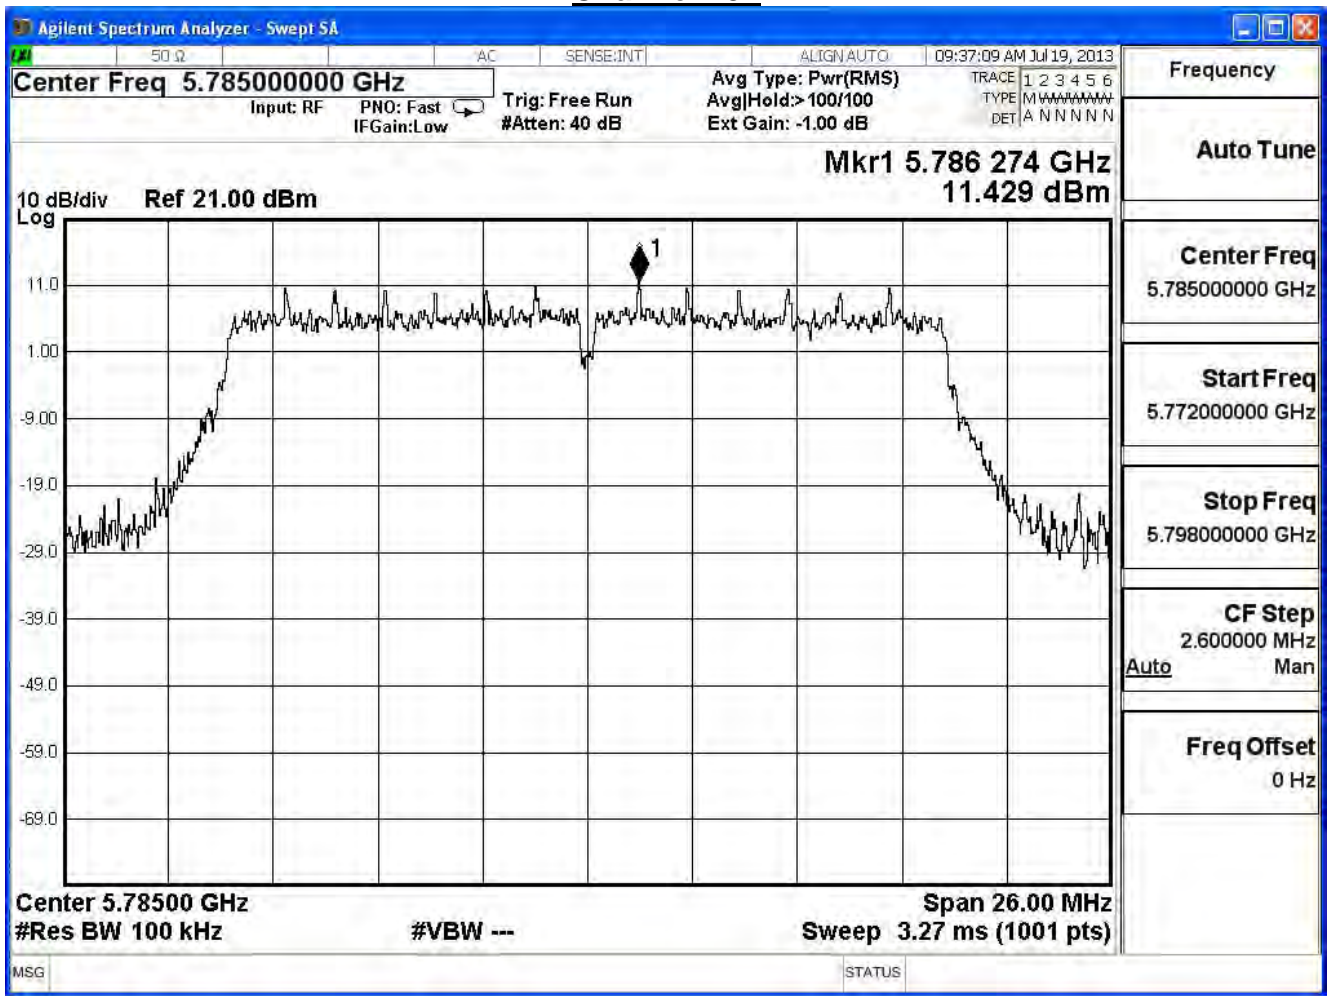

Channel 165

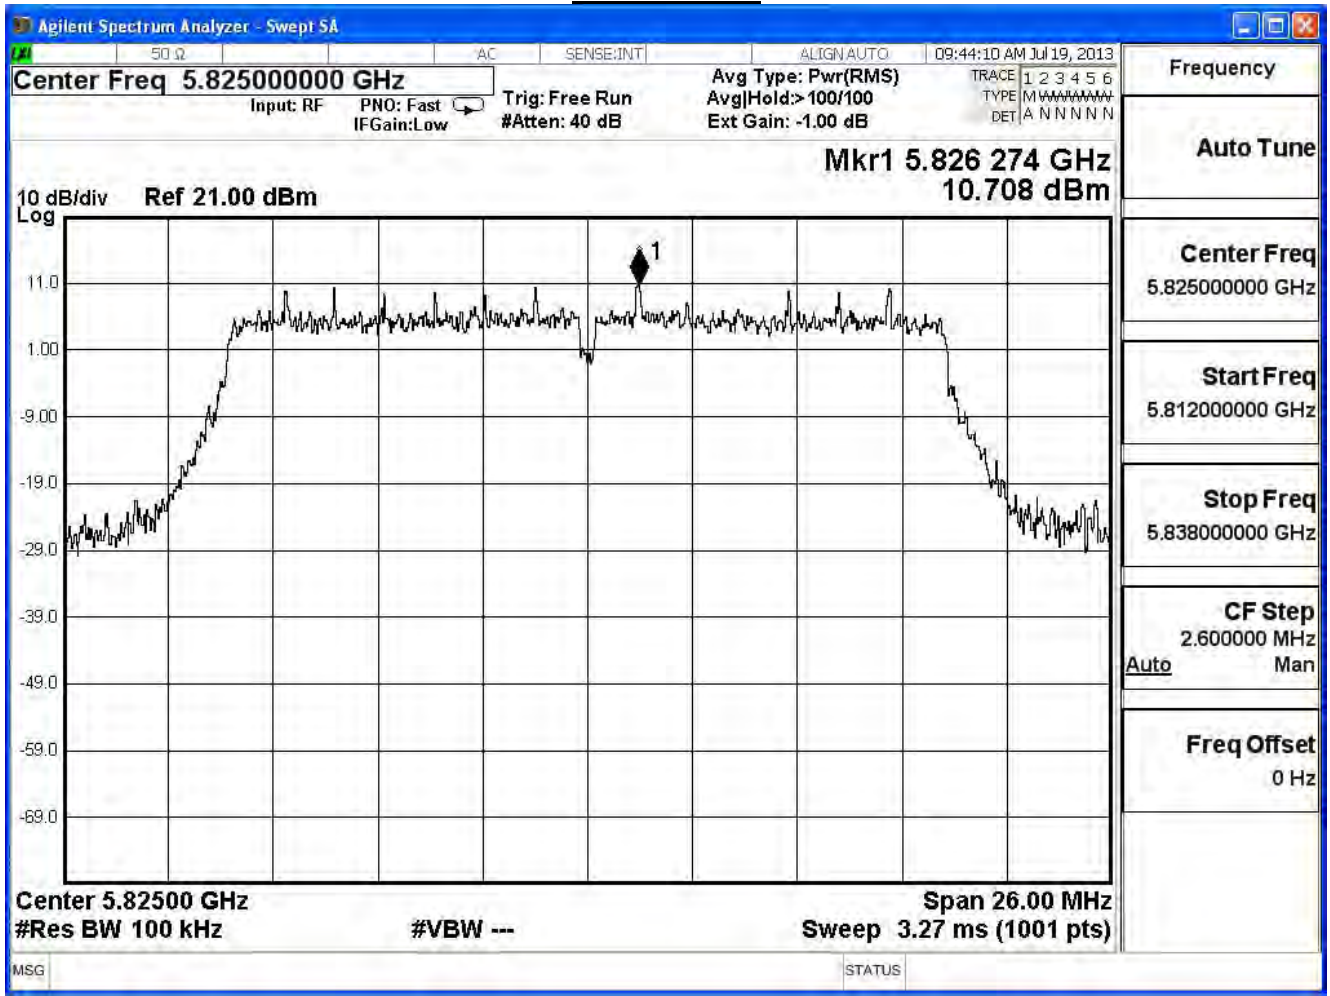

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n_20MHz_(ANT 1)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	10.188	-5.01	≤ 4.79	Pass
157	5785	10.220	-4.98	≤ 4.79	Pass
165	5825	9.941	-5.26	≤ 4.79	Pass

Note:


Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 149

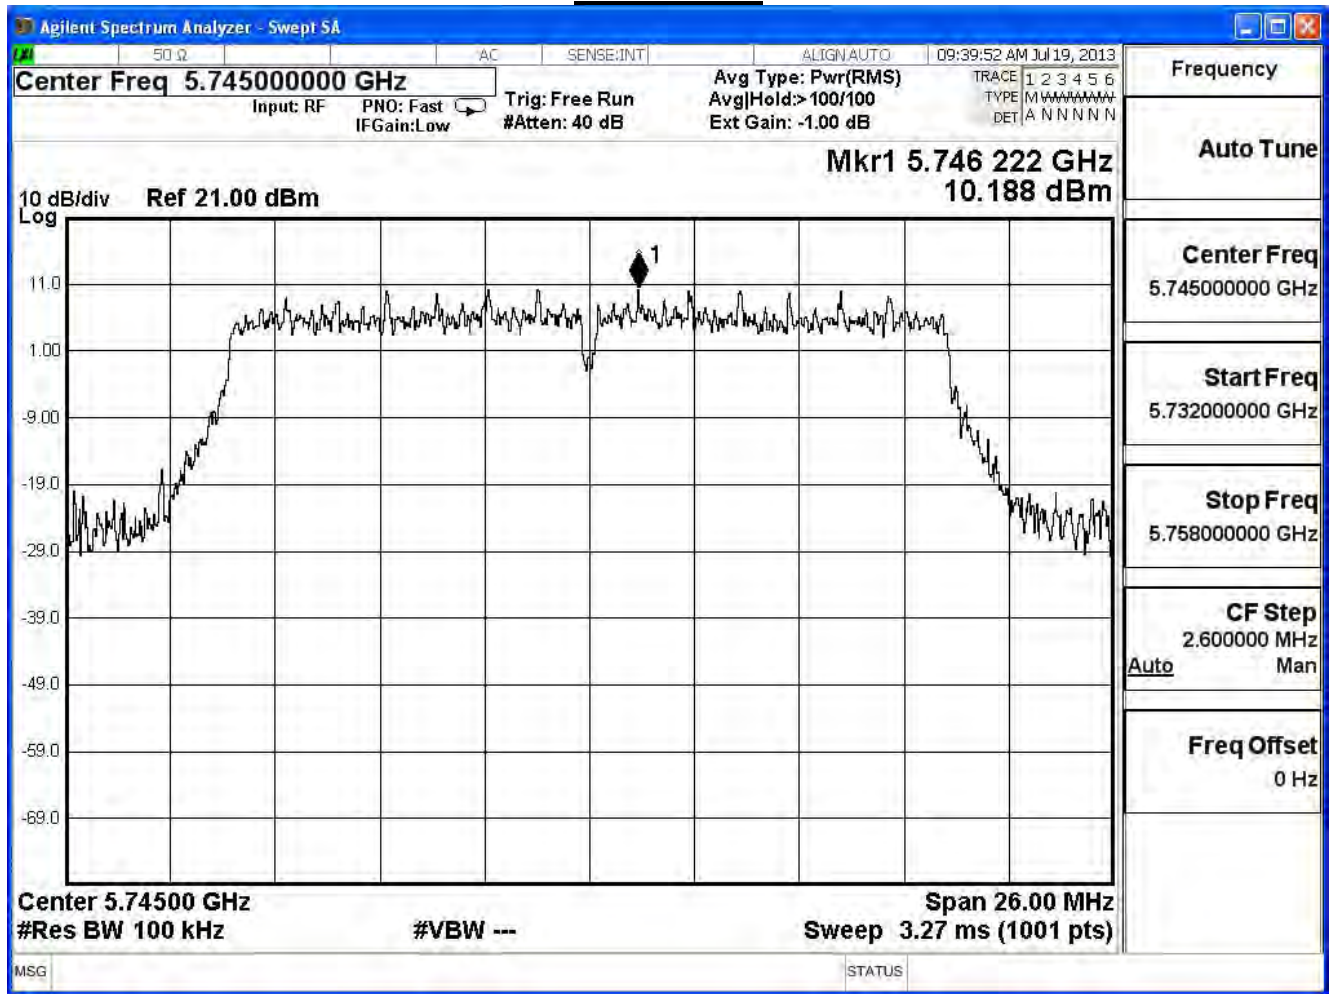

Channel 165

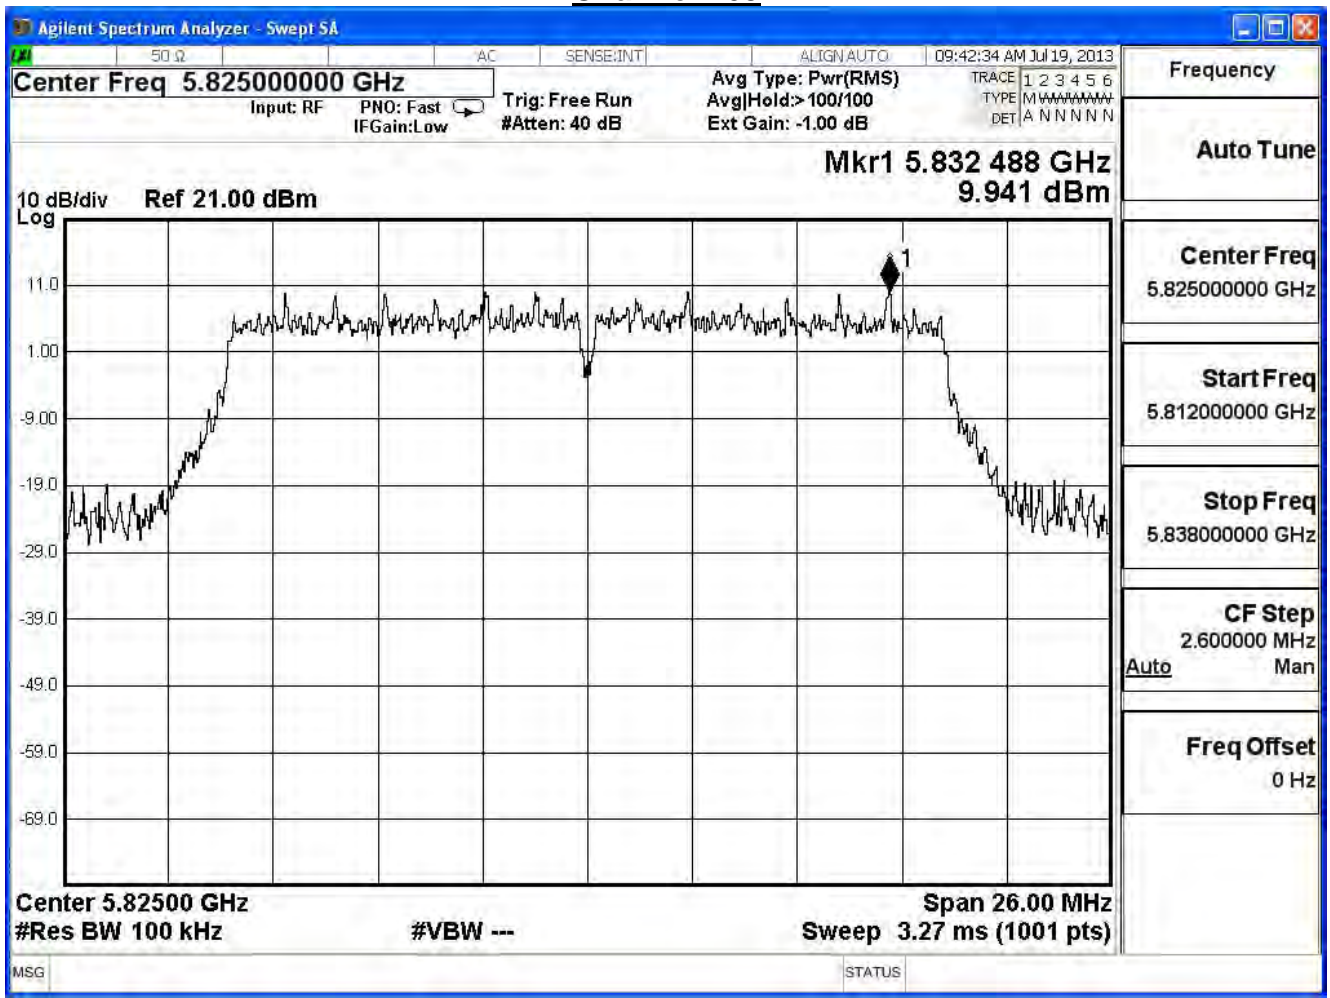

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n_20MHz_(ANT 2)


Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	10.864	-4.34	≤ 4.79	Pass
157	5785	10.794	-4.41	≤ 4.79	Pass
165	5825	10.304	-4.90	≤ 4.79	Pass

Note:


Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 149

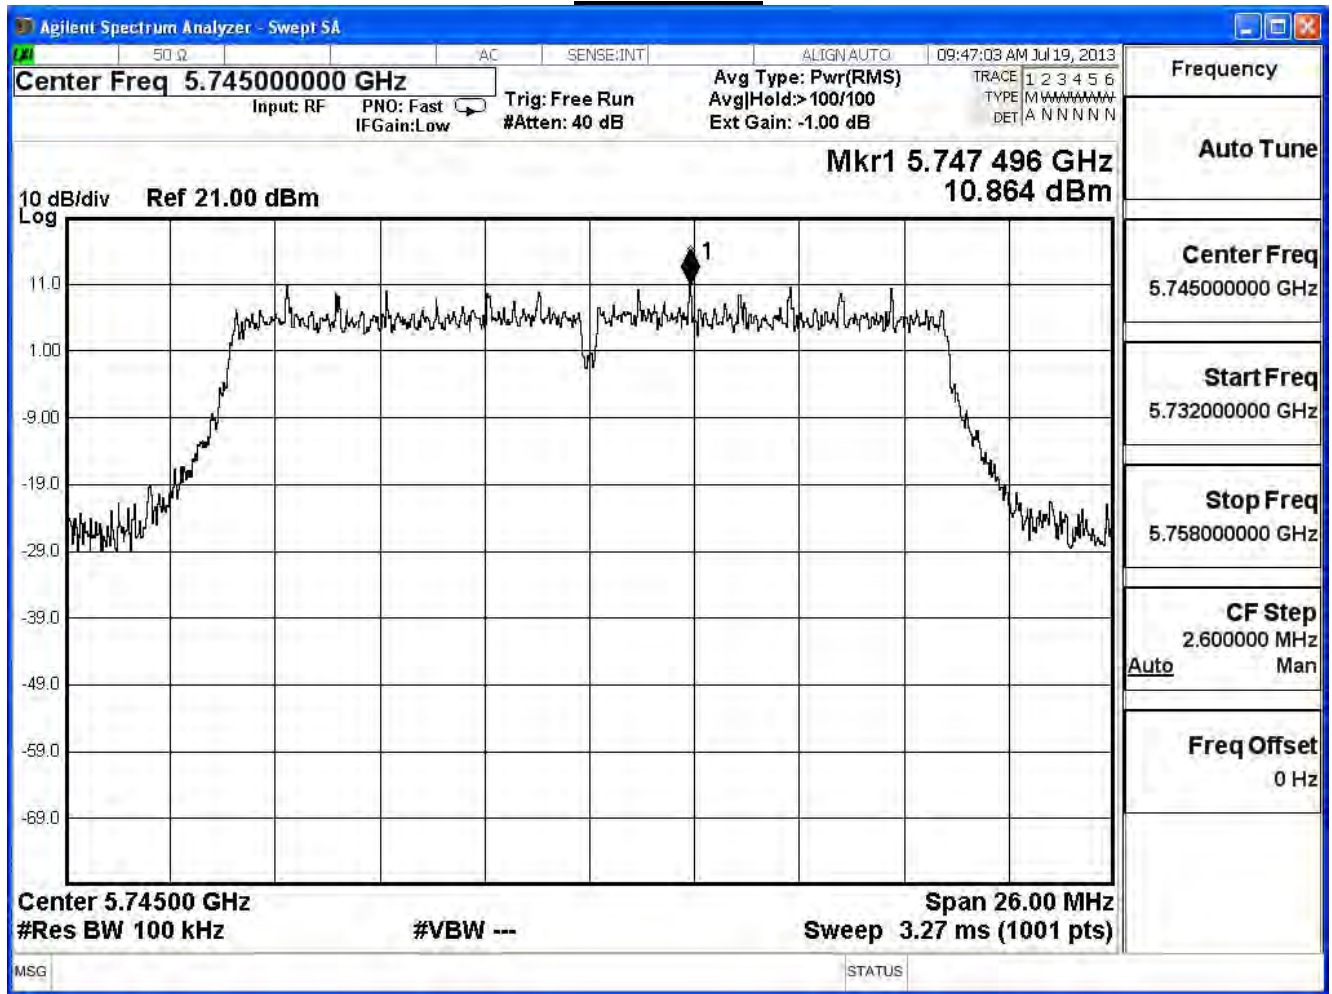

Channel 165

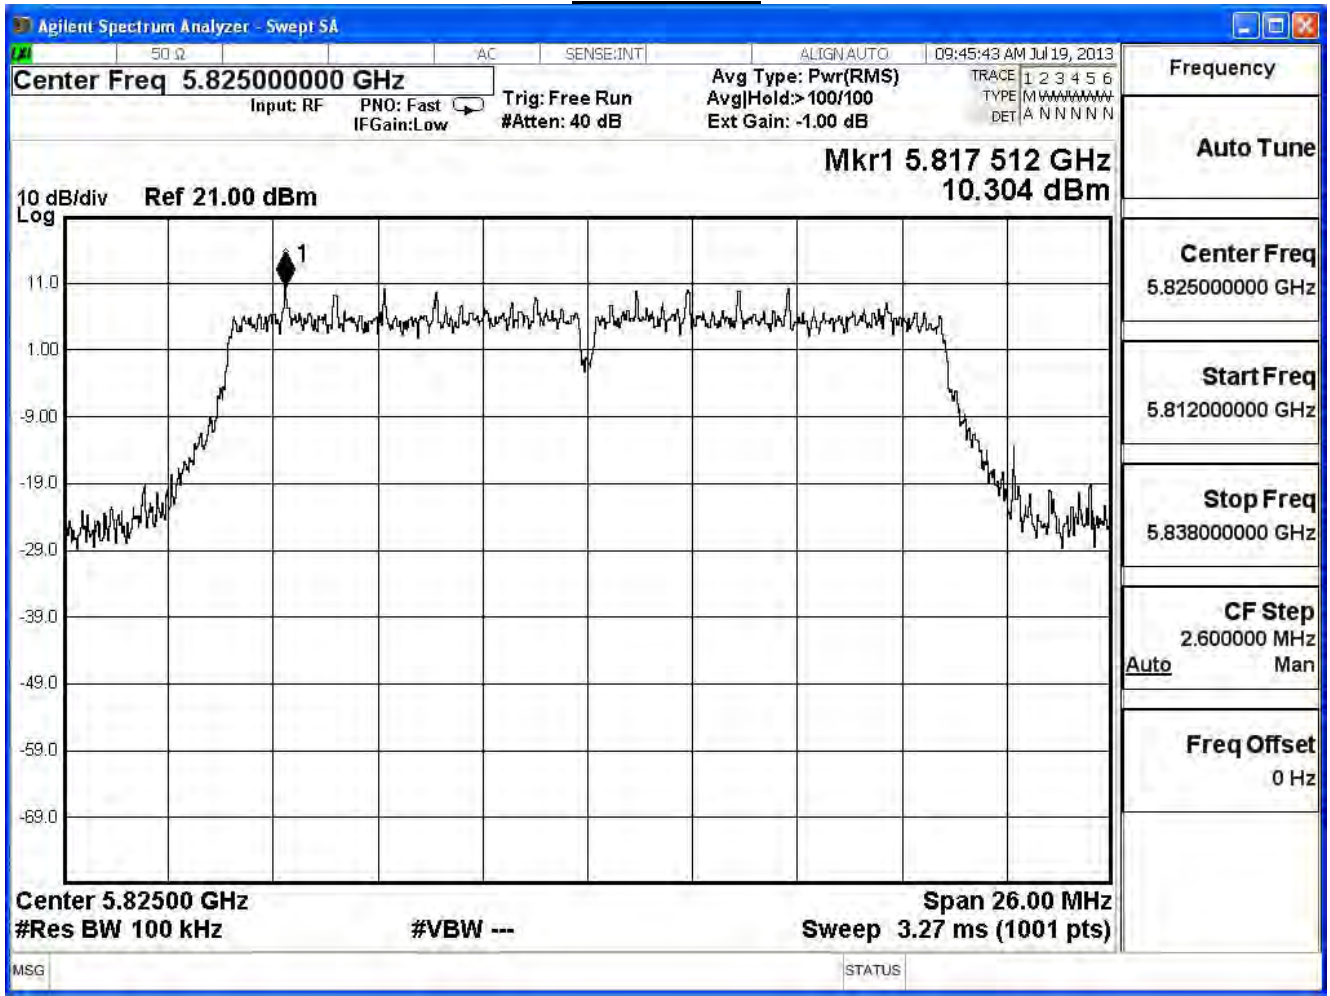

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n 20MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745	0.22	≤ 4.79	Pass
157	5785	0.41	≤ 4.79	Pass
165	5825	-0.10	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi - 6dBi) = 4.79 dBm

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11n_40MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measurement (dBm)	Limit (dBm)	Result
151	5755	8.636	-6.56	≤ 4.79	Pass
159	5795	8.733	-6.47	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 151

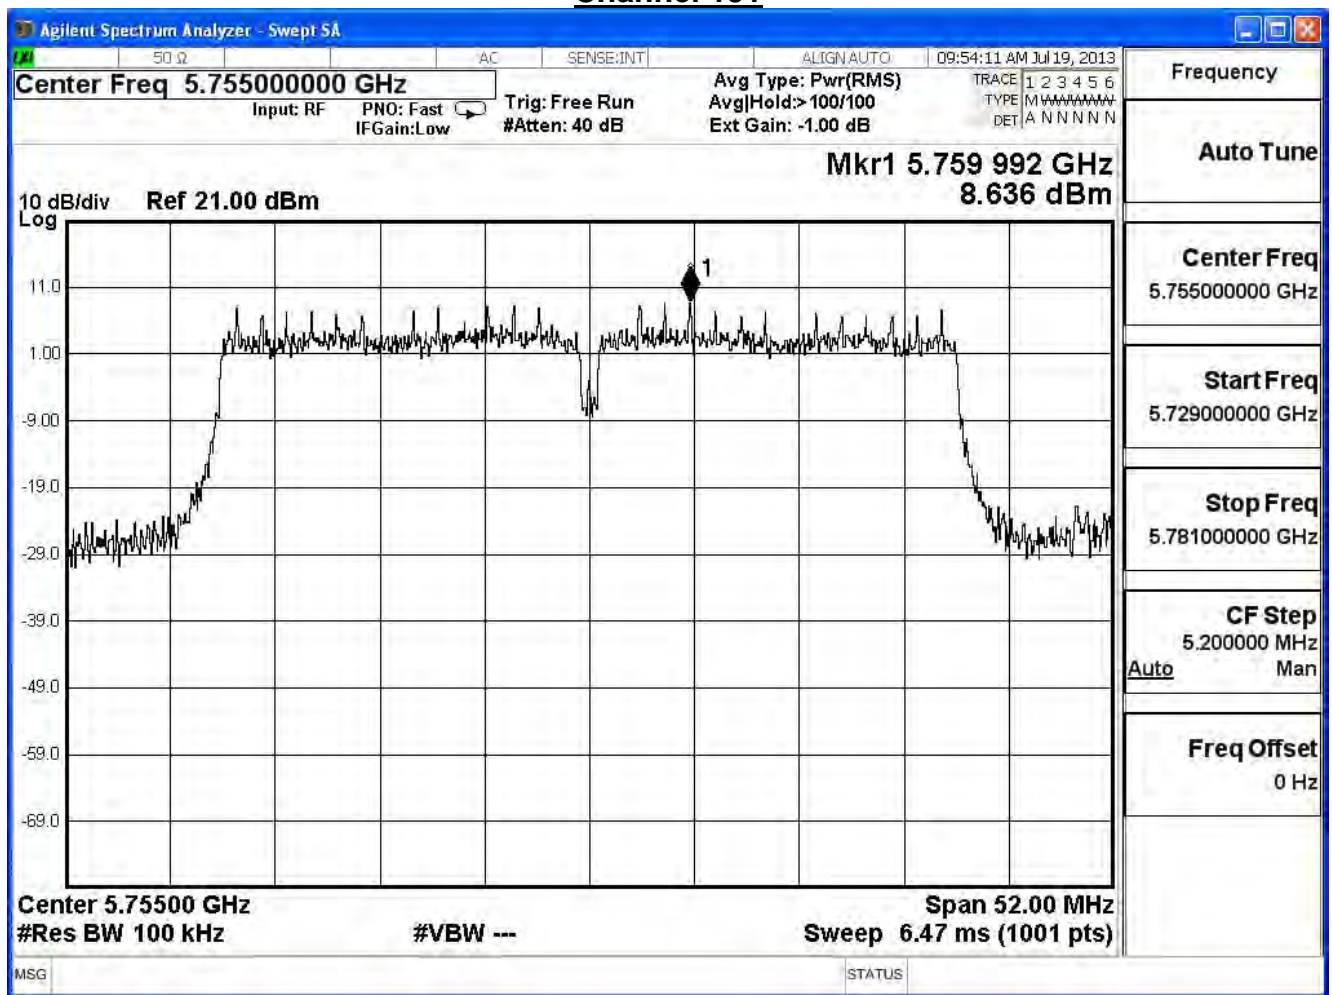

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11n_40MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	8.470	-6.73	≤ 4.79	Pass
159	5795	8.421	-6.78	≤ 4.79	Pass

Note:


Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 151

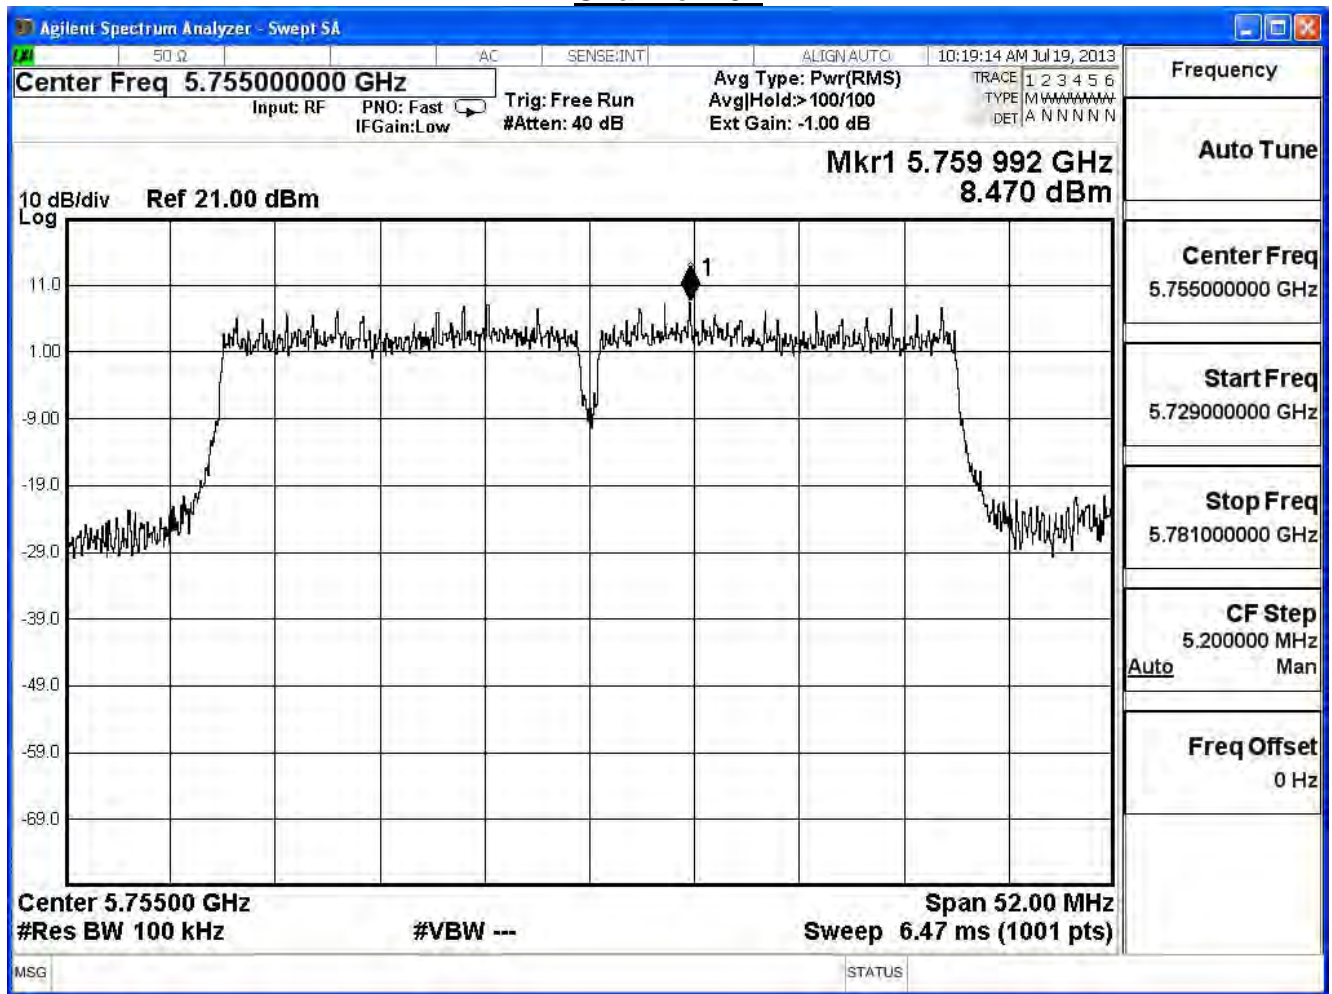

Channel 159

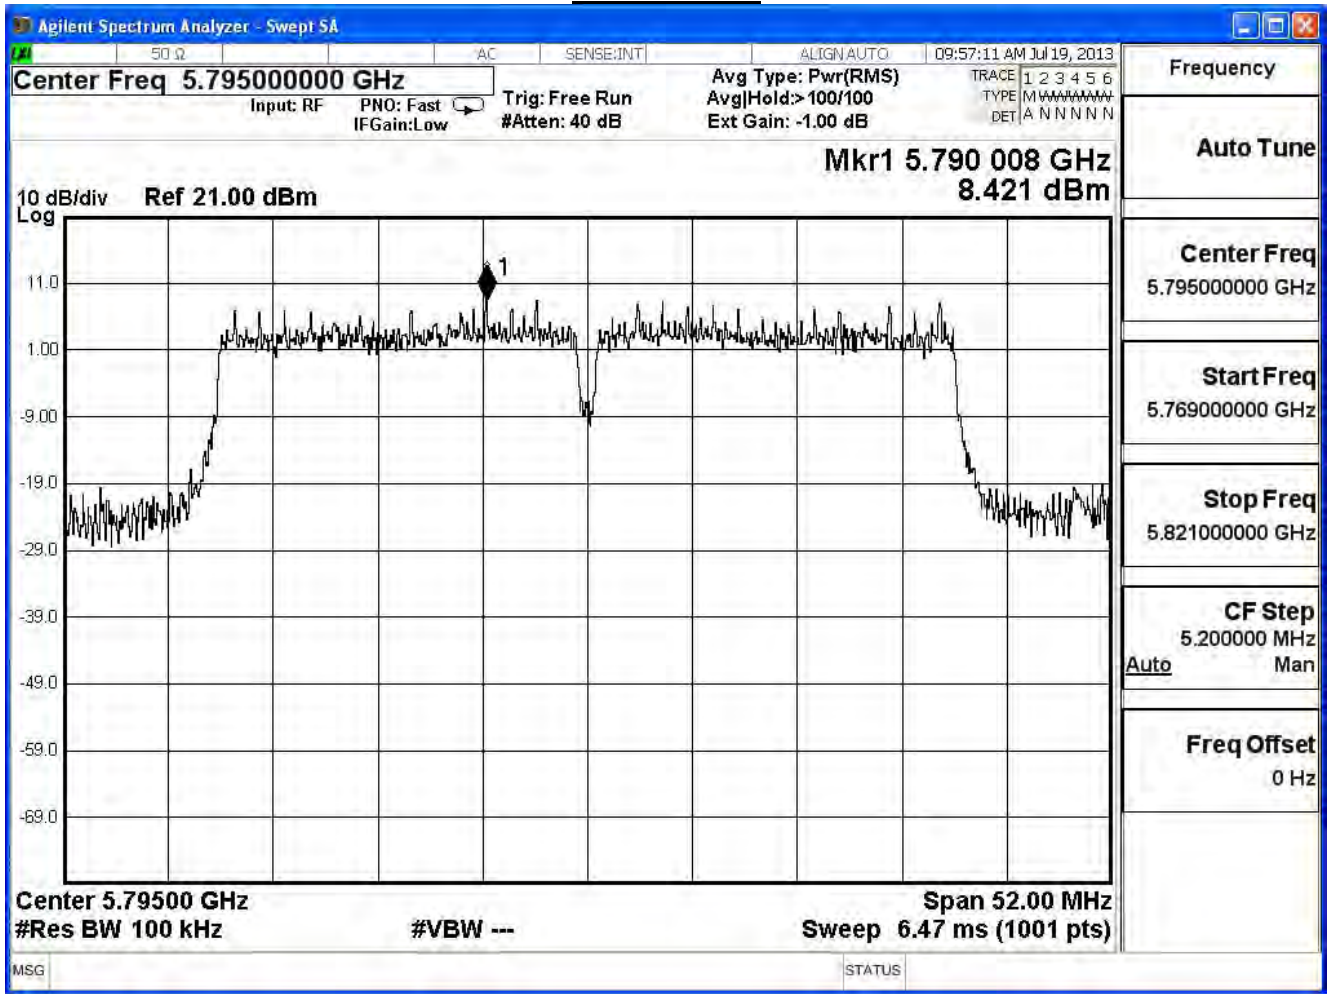

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11n_40MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	8.855	-6.35	≤ 4.79	Pass
159	5795	8.392	-6.81	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 151

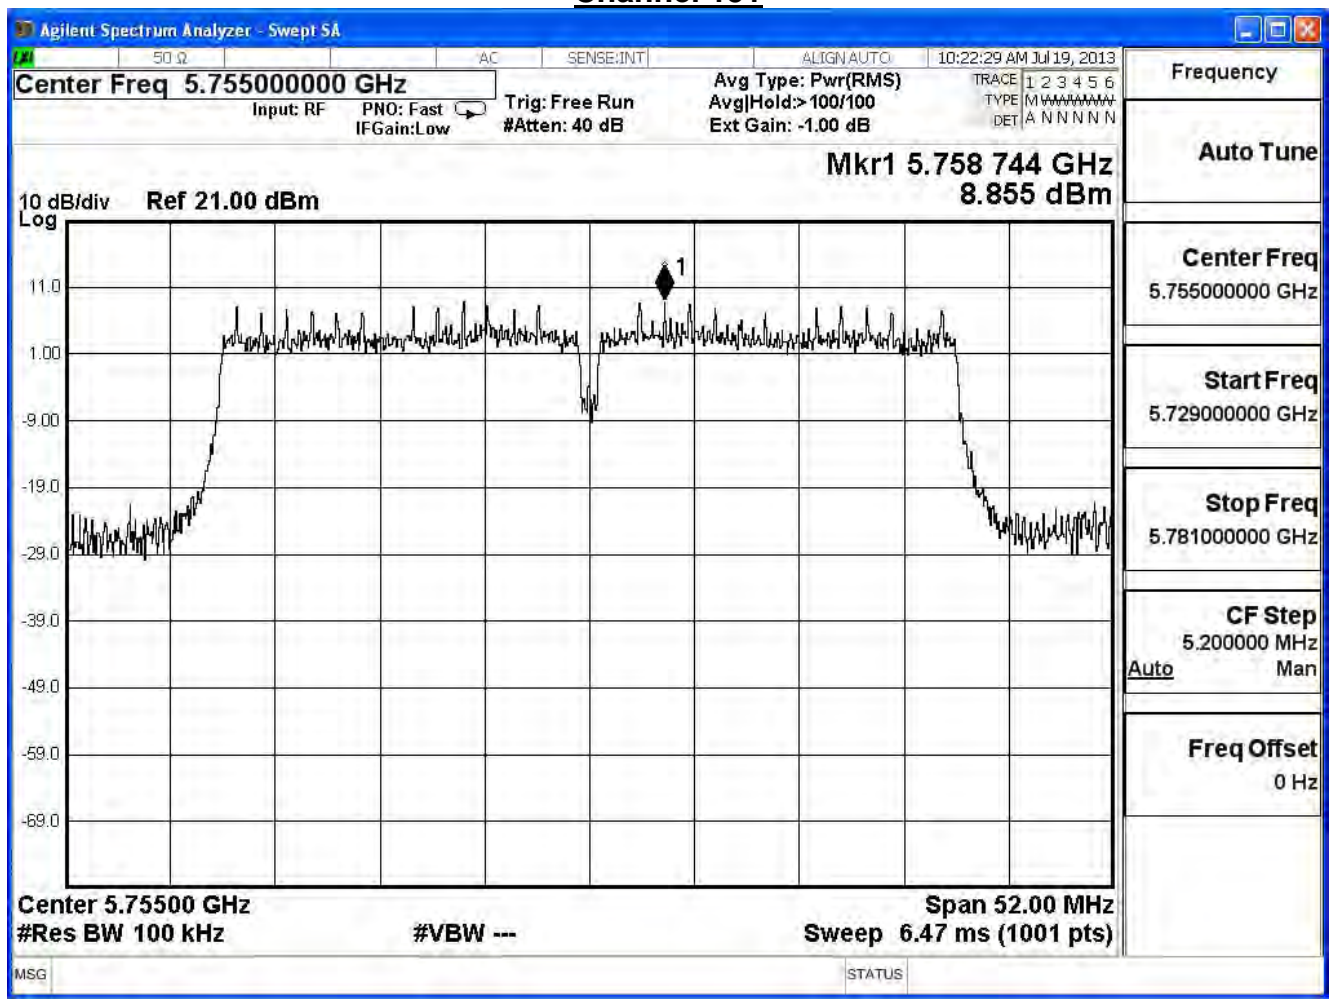

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11n 40MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
151	5755	-1.77	≤ 4.79	Pass
159	5795	-1.91	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 0)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	2.884	-12.32	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi - 6dBi) = 4.79 dBm

Channel 155

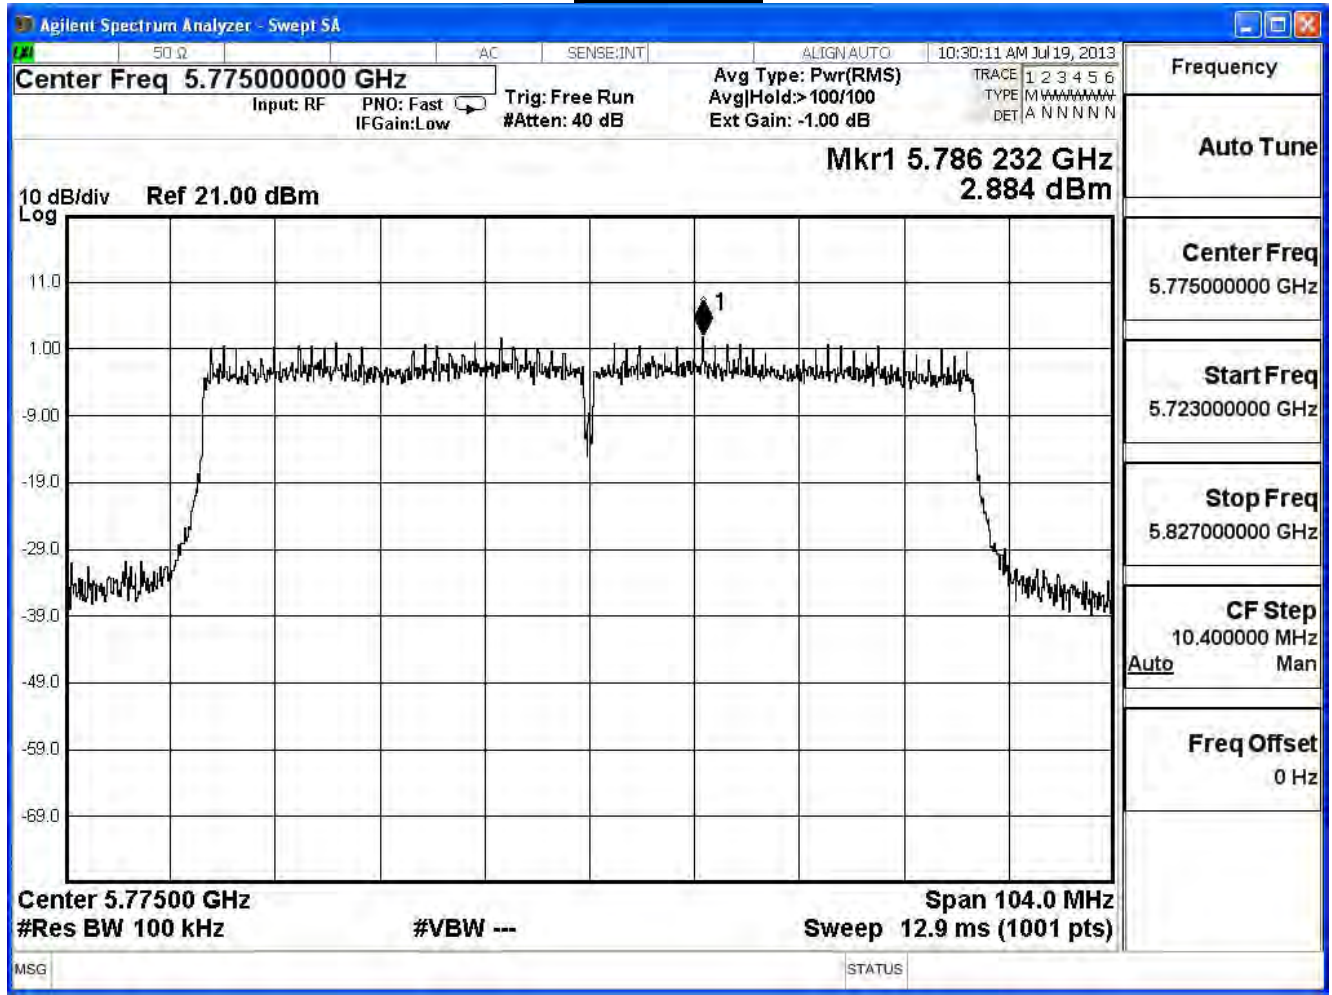

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode)_Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 1)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	2.092	-13.11	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 155

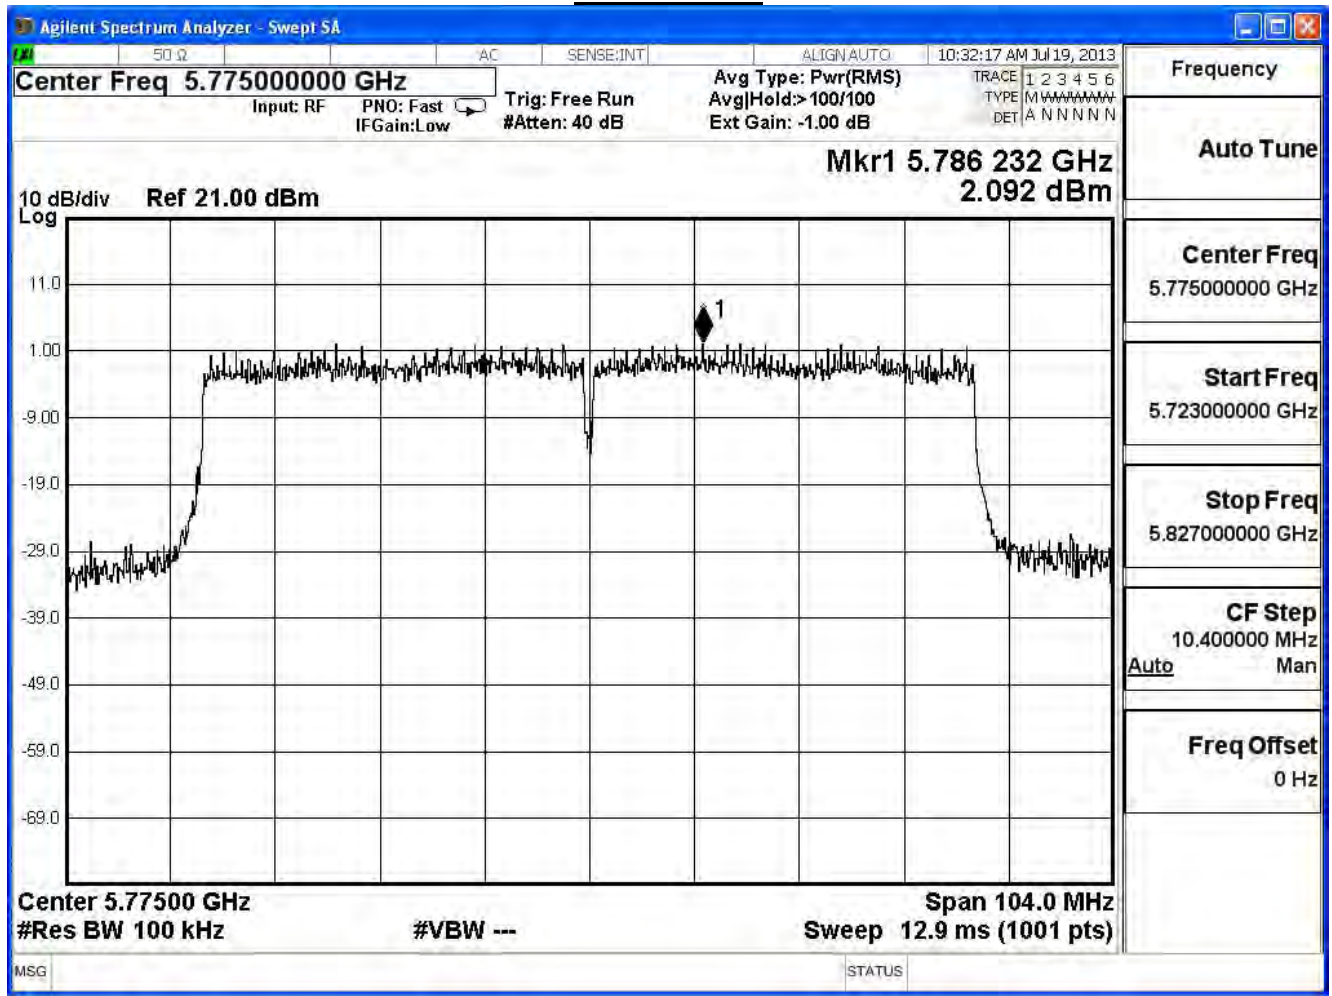

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7


IEEE 802.11ac_80MHz (ANT 2)					
Channel No.	Frequency (MHz)	Reading Level (dBm)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	2.848	-12.35	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm

Channel 155

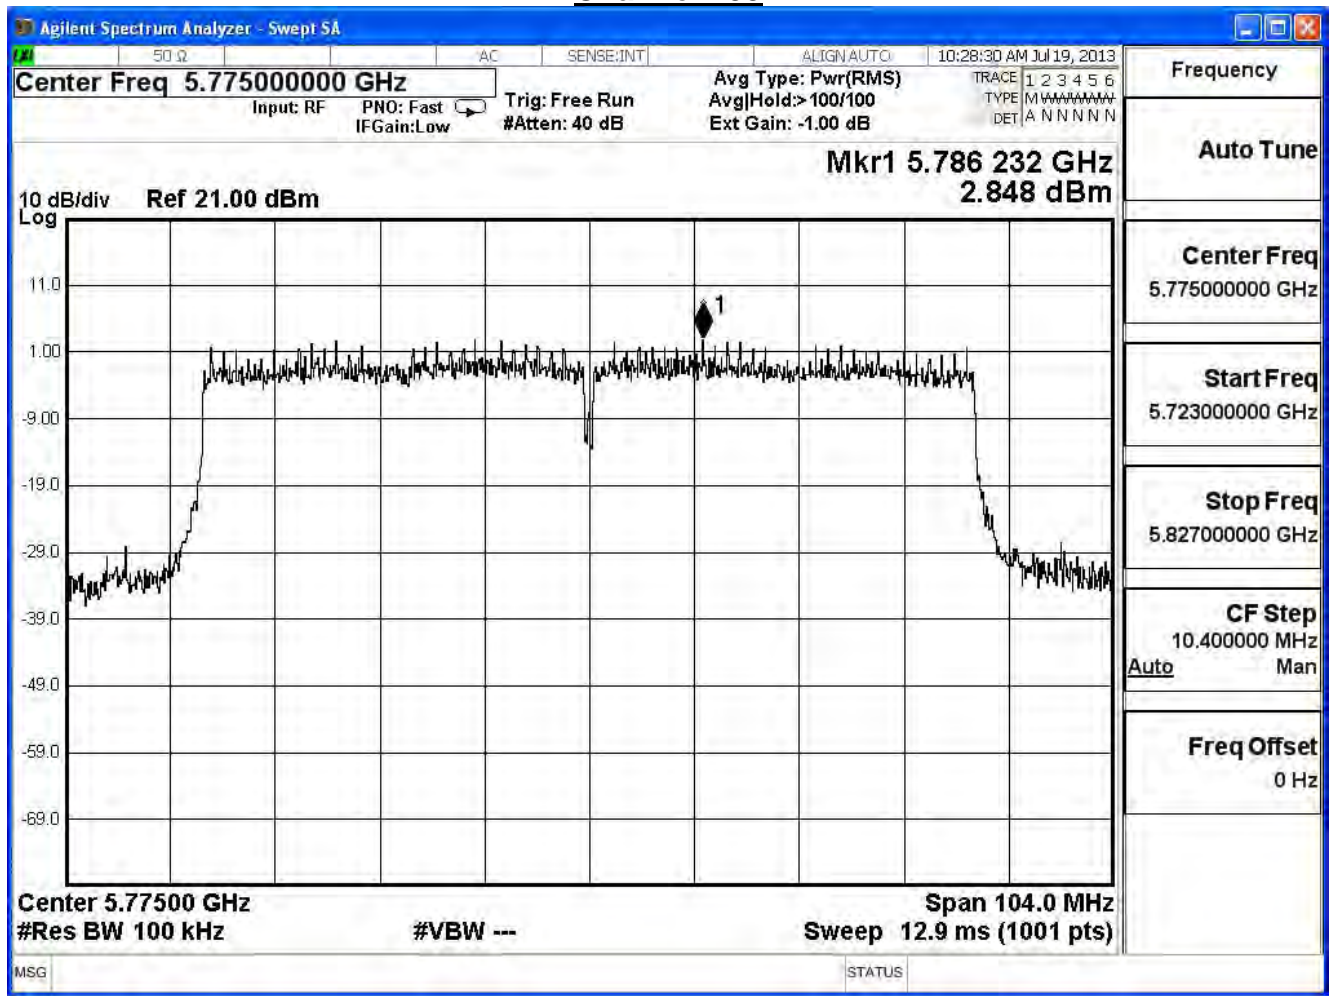

Product	Wireless-AC1900 Dual Band Gigabit Router		
Test Item	Power Density		
Test Mode	Mode 2: Transmit (Beamforming Mode) Adapter: EXA1206UH		
Date of Test	2013/07/19	Test Site	SR7

IEEE802.11ac_80MHz(ANT 0+1+2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
155	5775	-7.81	≤ 4.79	Pass

Note:

Directional Antenna Gain = Beamforming Gain + Max Gain = 9.21dBi

Required Limit = 8dBm - (9.21Bi – 6dBi) = 4.79 dBm