


5. Maximum power spectral density

5.1. Test Setup

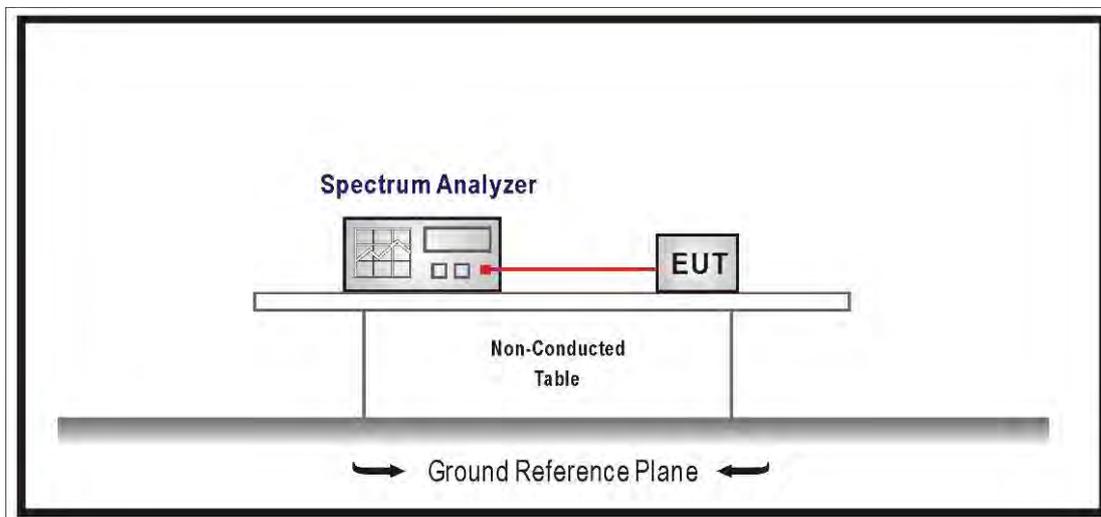

5.2. Limits

1. For the band 5.15-5.25 GHz, the Maximum power spectral density shall not exceed 17 dBm in any 1MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi
3. For the band 5.25-5.35 GHz, the Maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
4. For the band 5.725-5.850 GHz, the Maximum power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi..

5.3. Test Procedure

The EUT was setup to ANSI C63.10: 2013; tested to U-NII test procedure of KDB 789033.v01r02 for compliance to FCC 47CFR Subpart E requirements.

For Band1 : Set RBW=1MHz, VBW=3MHz with RMS detector. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging.


For Band4 : Set RBW=500KHz, VBW=1.5MHz with RMS detector. The PPSD is the highest level found across the emission in any 500KHz band after 100 sweeps of averaging.

5.4. Test Result


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11a (ANT0+1+2+3+4+5+6+8) | | | | |
|-----------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 11.723 | 11.850 | Pass |
| 44 | 5220 | 11.624 | 11.850 | Pass |
| 48 | 5240 | 11.625 | 11.850 | Pass |


Channel 36

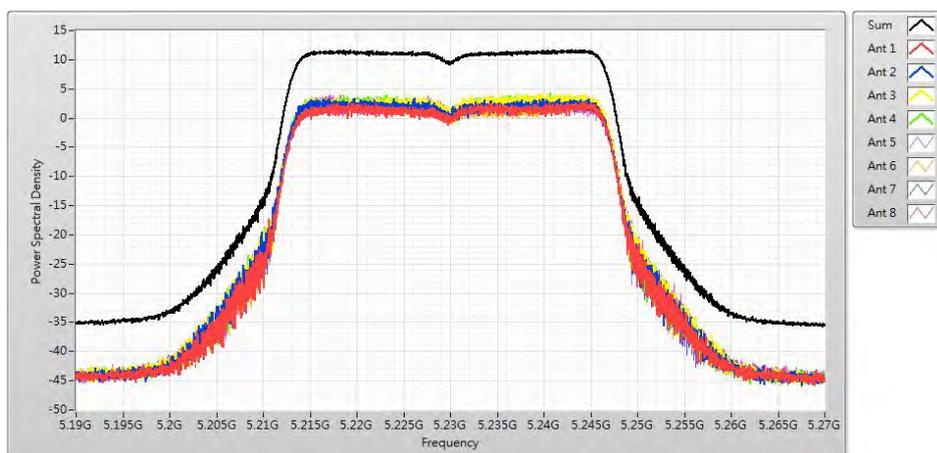

Channel 44

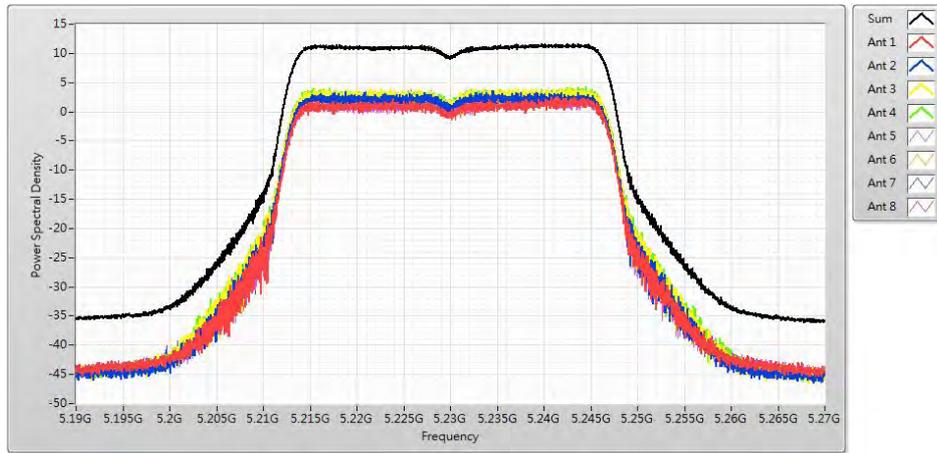


Channel 48

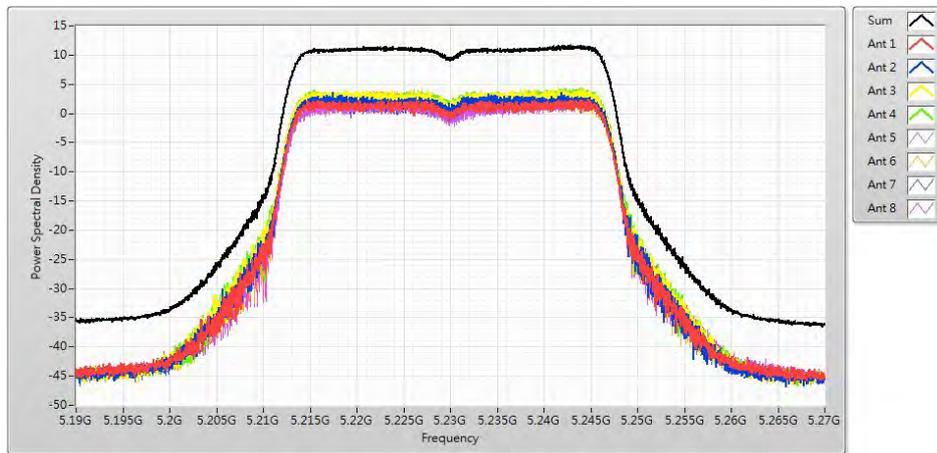


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 11.608 | 11.850 | Pass |
| 44 | 5220 | 11.568 | 11.850 | Pass |
| 48 | 5240 | 11.678 | 11.850 | Pass |


Channel 36

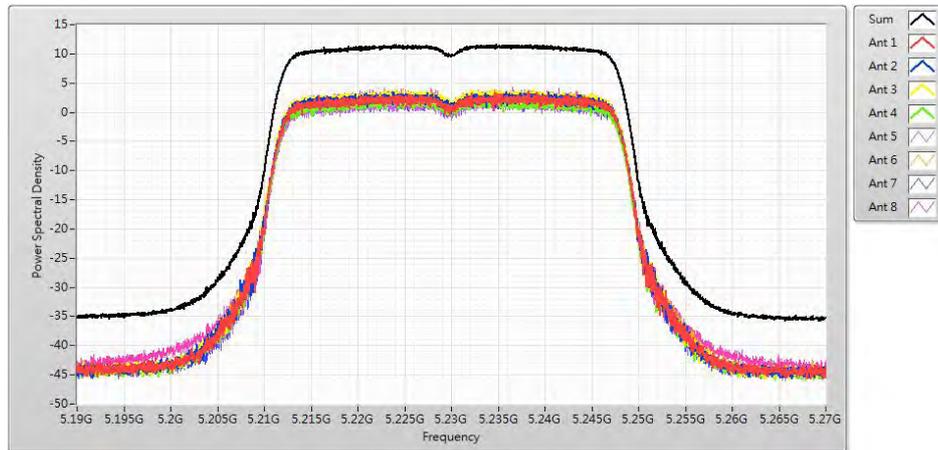

Channel 44

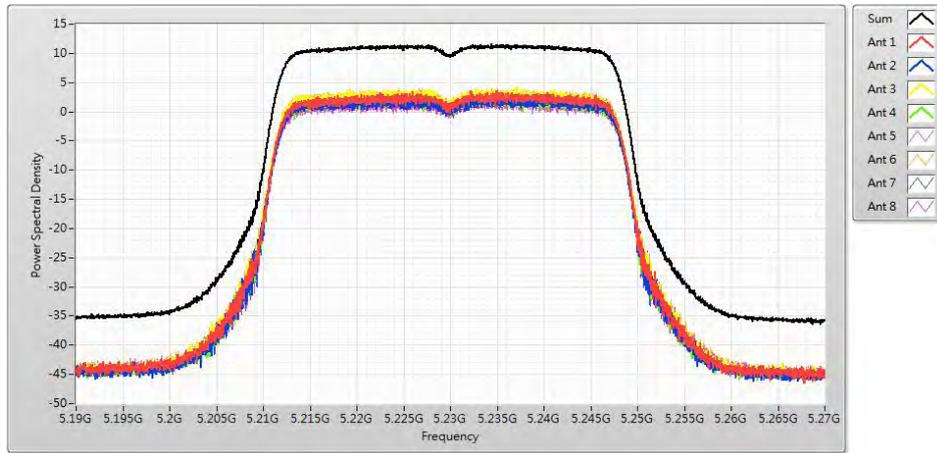


Channel 48

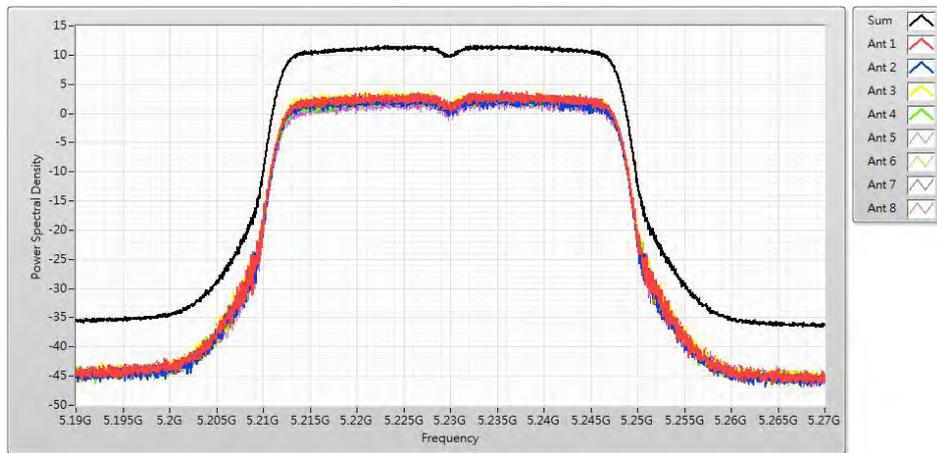


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 9.090 | 11.850 | Pass |
| 46 | 5230 | 11.667 | 11.850 | Pass |

Channel 38

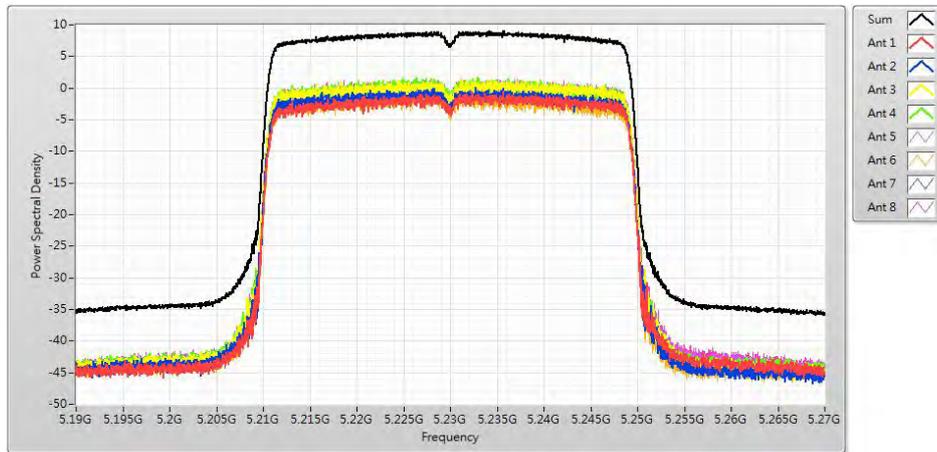


Channel 46

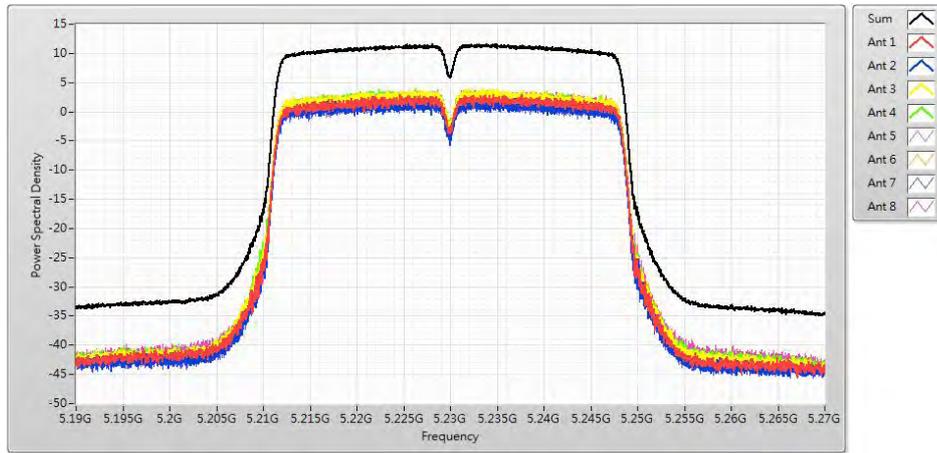

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 6.230 | 11.850 | Pass |


Channel 42

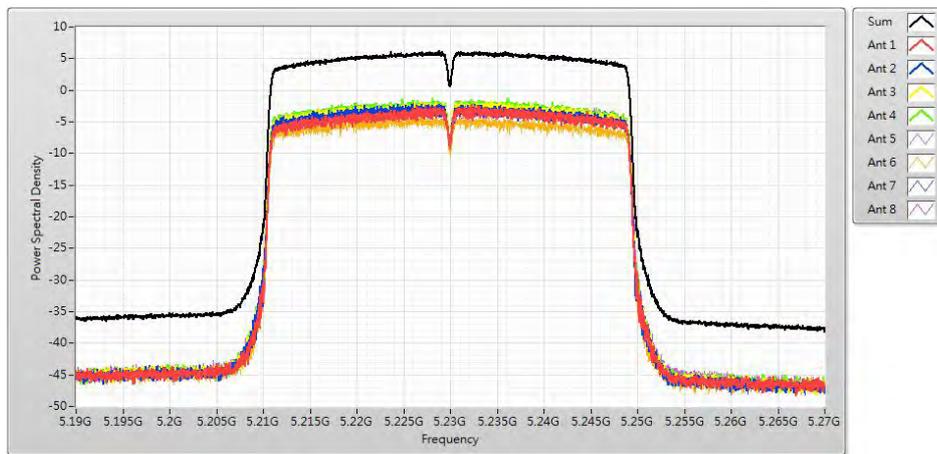


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ax(20MHz)(ANT0+1+2+3+4+5+6+7) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 11.676 | 11.850 | Pass |
| 44 | 5220 | 11.624 | 11.850 | Pass |
| 48 | 5240 | 11.680 | 11.850 | Pass |


Channel 36

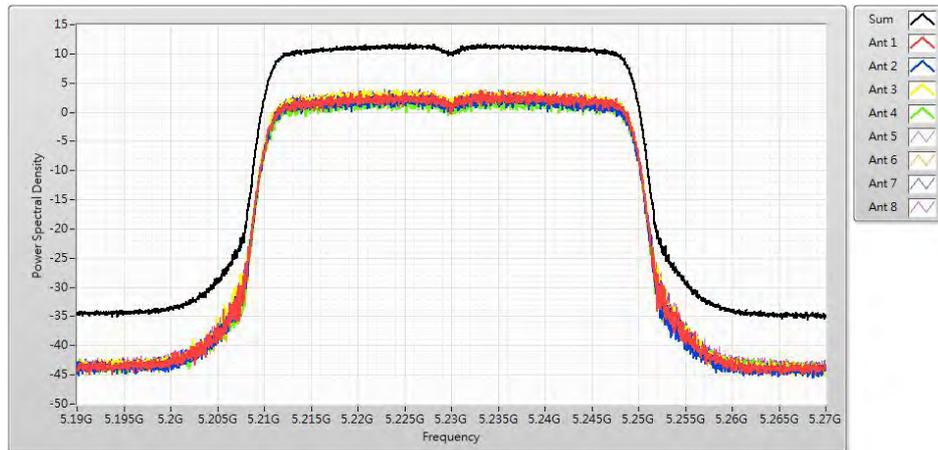

Channel 44

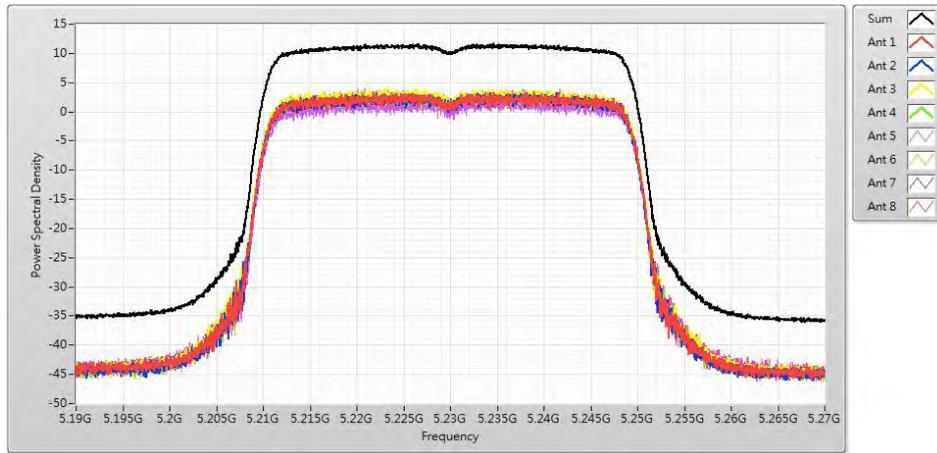


Channel 48

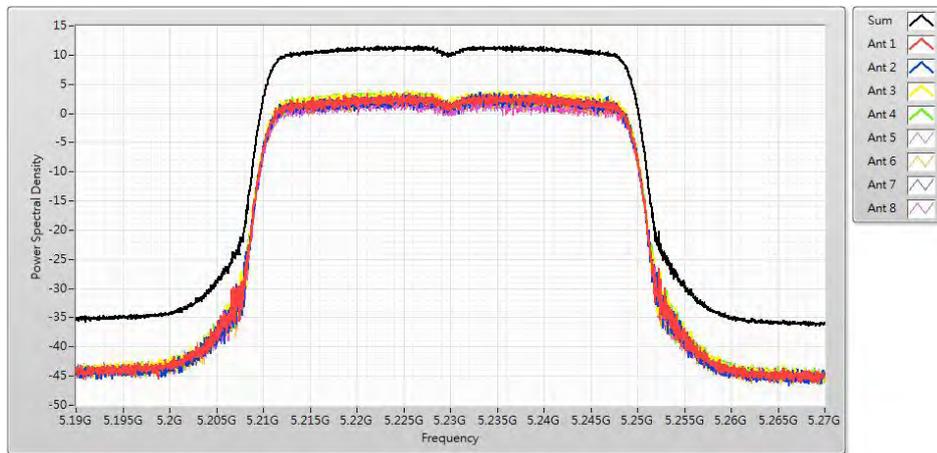


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ax(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 8.370 | 11.850 | Pass |
| 46 | 5230 | 11.669 | 11.850 | Pass |

Channel 38

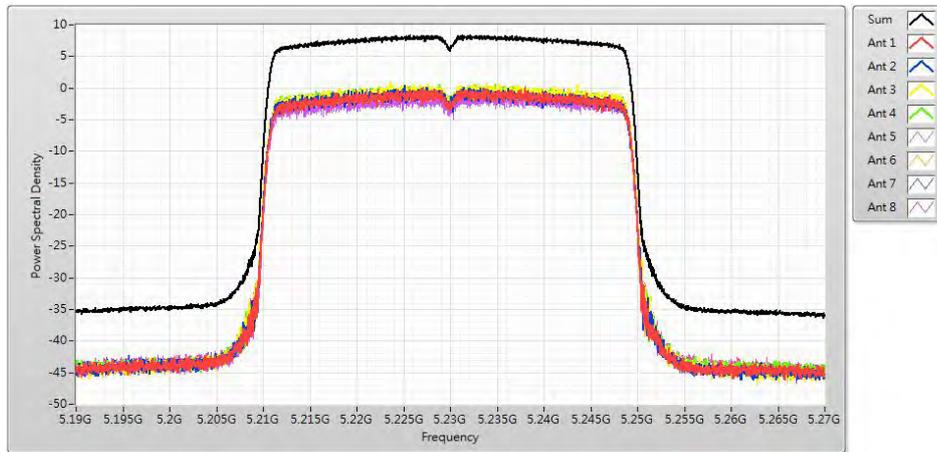


Channel 46

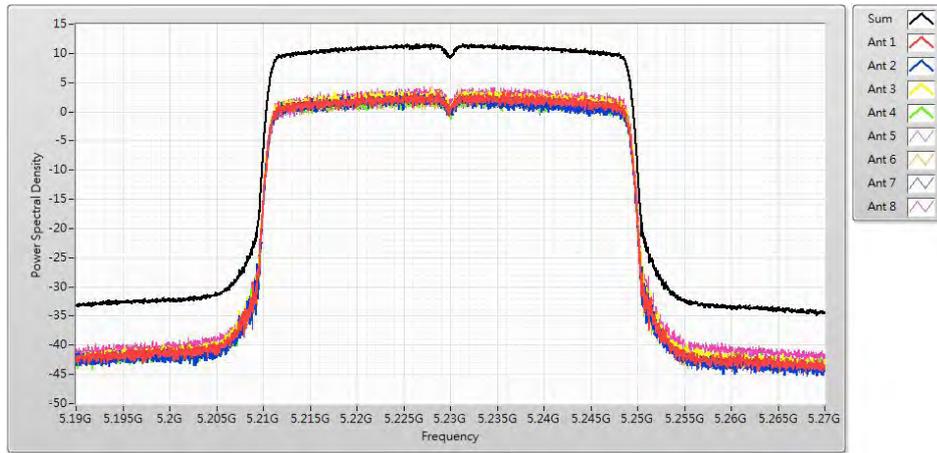

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ax(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 4.830 | 11.850 | Pass |


Channel 42

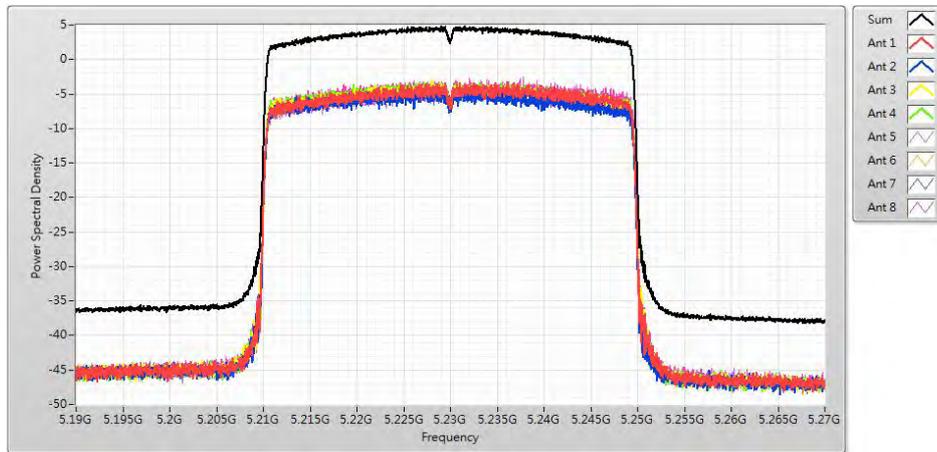


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11a (ANT0+1+2+3+4+5+6+8) | | | | |
|-----------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 149 | 5745 | 17.400 | 24.850 | Pass |
| 157 | 5785 | 19.070 | 24.850 | Pass |
| 165 | 5825 | 17.770 | 24.850 | Pass |


Channel 149

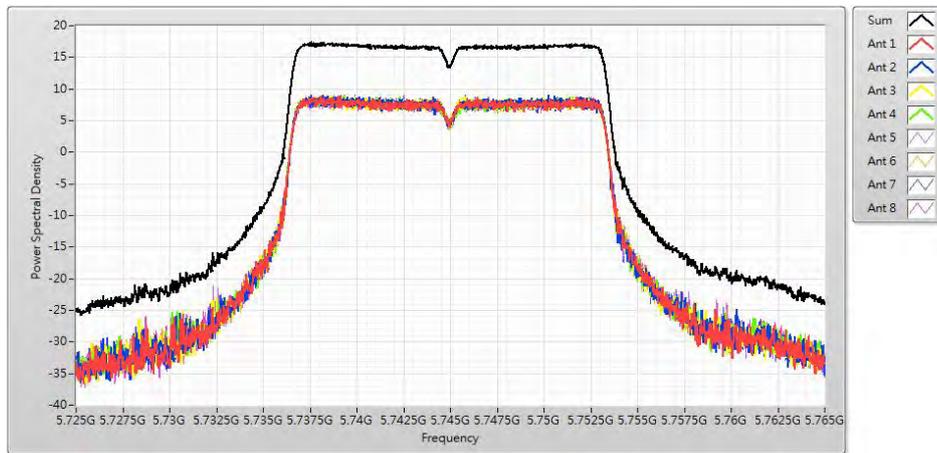

Channel 157

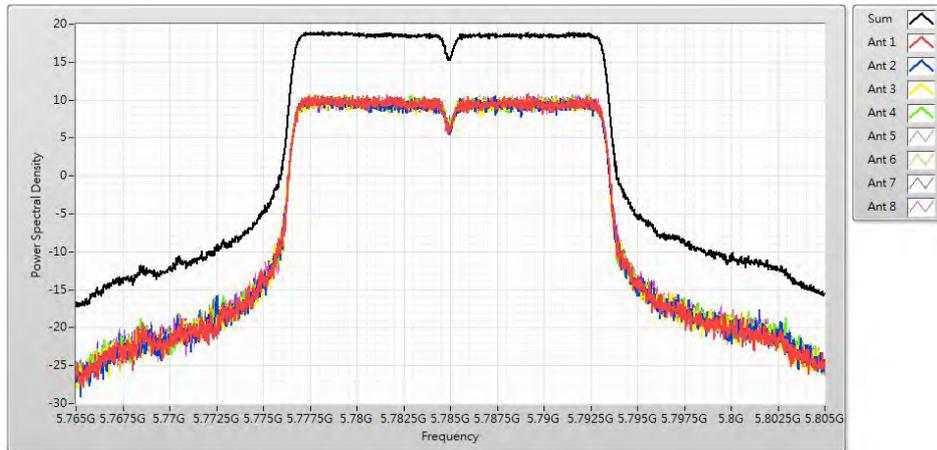


Channel 165

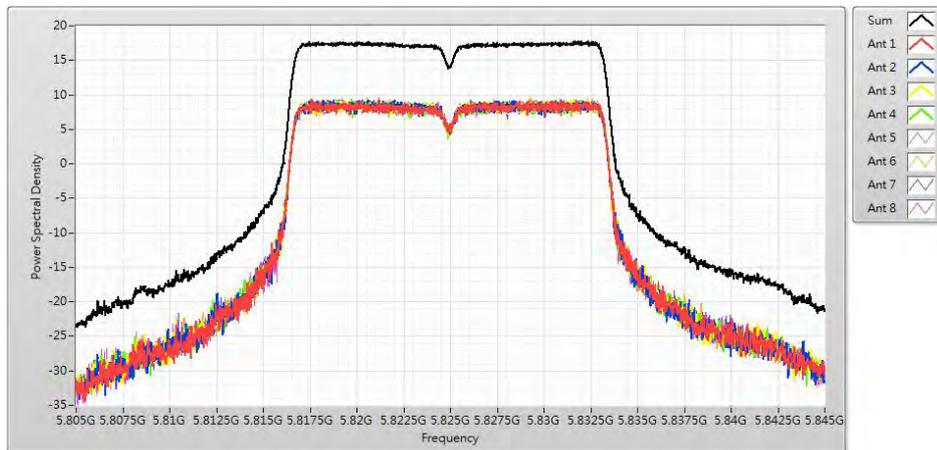


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 149 | 5745 | 17.090 | 24.850 | Pass |
| 157 | 5785 | 18.930 | 24.850 | Pass |
| 165 | 5825 | 17.390 | 24.850 | Pass |


Channel 149

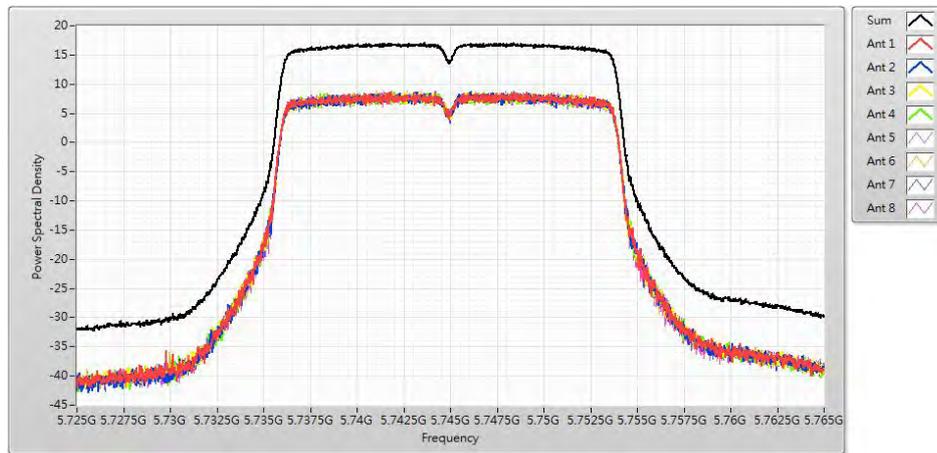

Channel 157

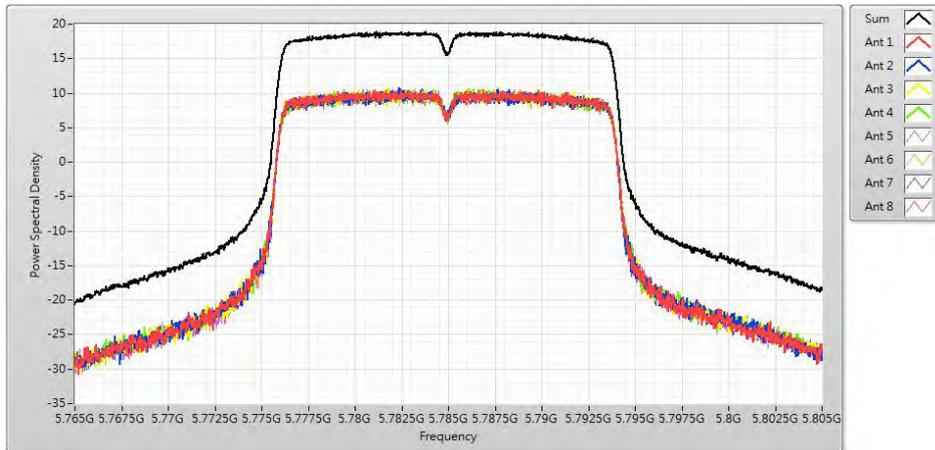


Channel 165

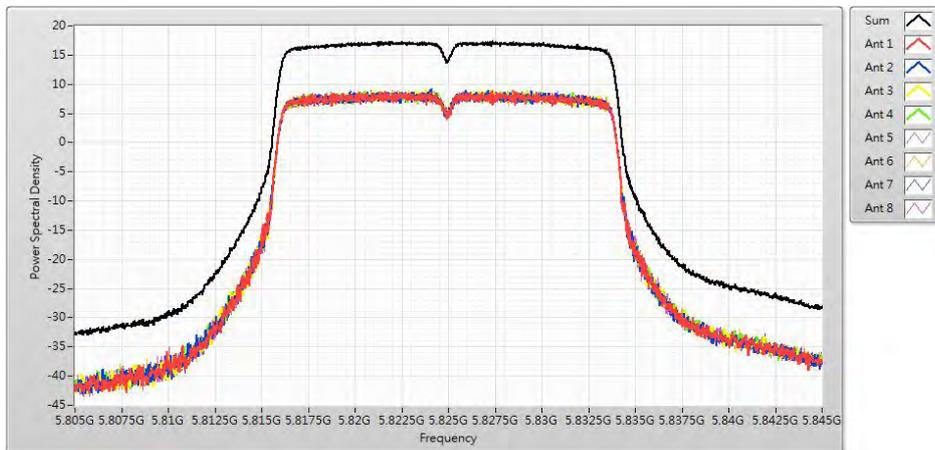


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 151 | 5755 | 15.560 | 24.850 | Pass |
| 159 | 5795 | 15.570 | 24.850 | Pass |

Channel 151

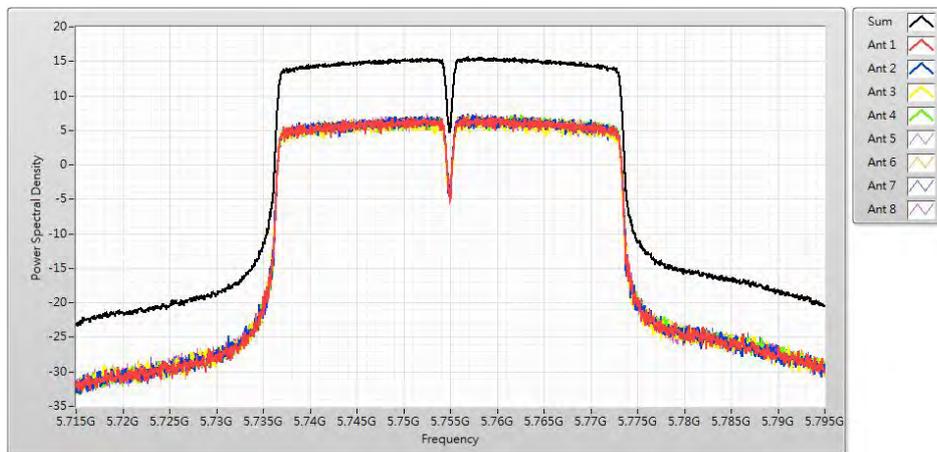


Channel 159

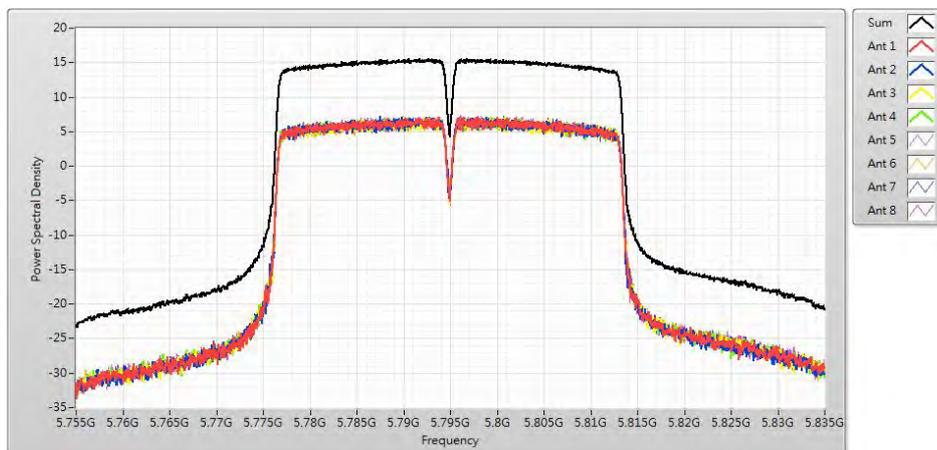

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 155 | 5775 | 10.430 | 24.850 | Pass |


Channel 155

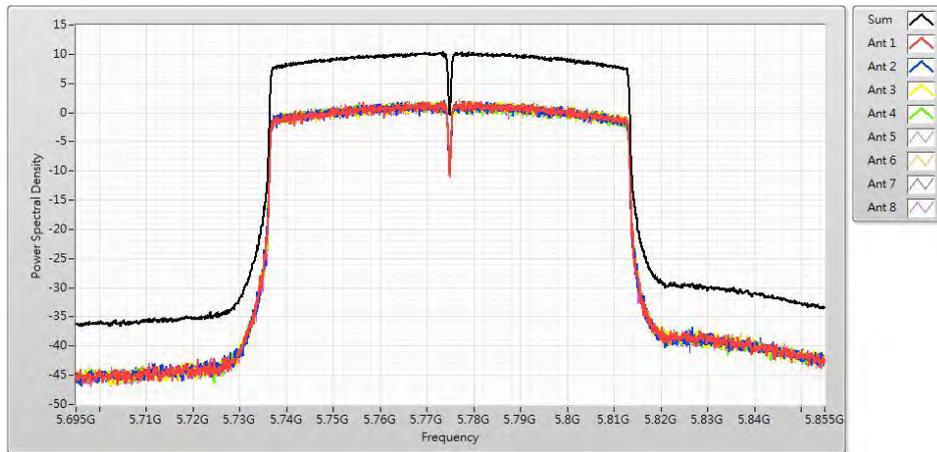


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ax(20MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 149 | 5745 | 16.630 | 24.850 | Pass |
| 157 | 5785 | 18.820 | 24.850 | Pass |
| 165 | 5825 | 17.030 | 24.850 | Pass |


Channel 149

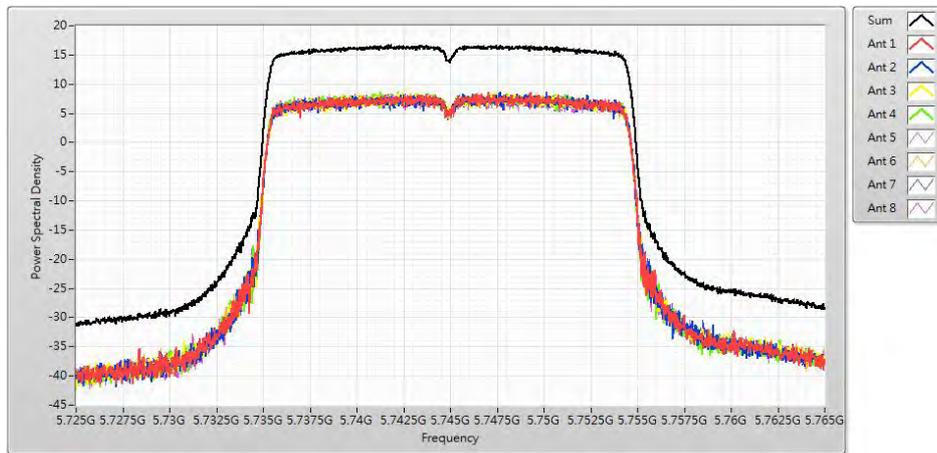

Channel 157

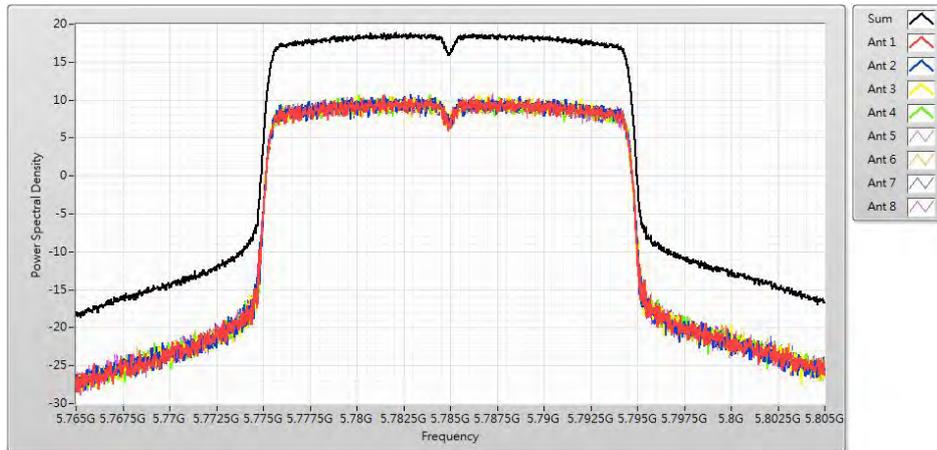


Channel 165

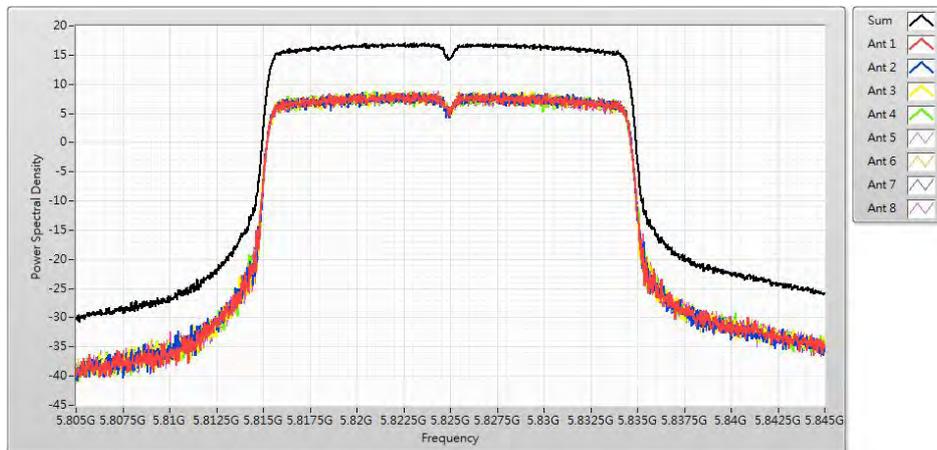


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_AD P-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ax(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 151 | 5755 | 13.460 | 24.850 | Pass |
| 159 | 5795 | 15.180 | 24.850 | Pass |

Channel 151

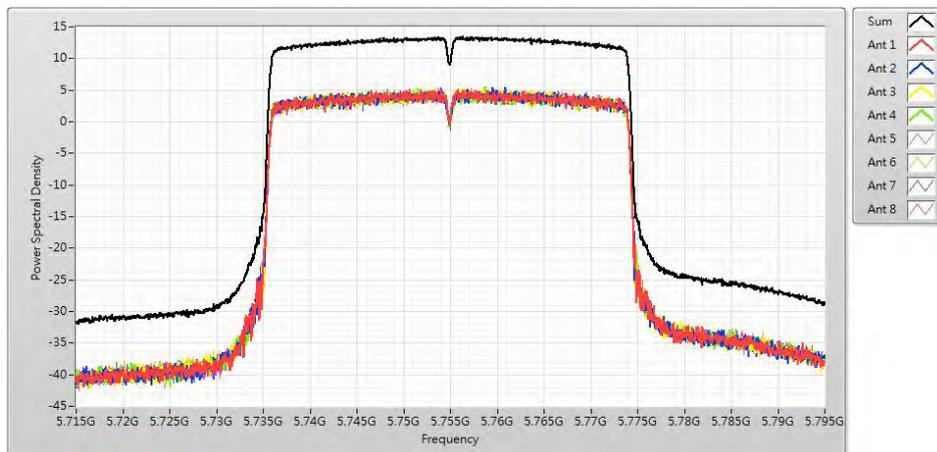


Channel 159

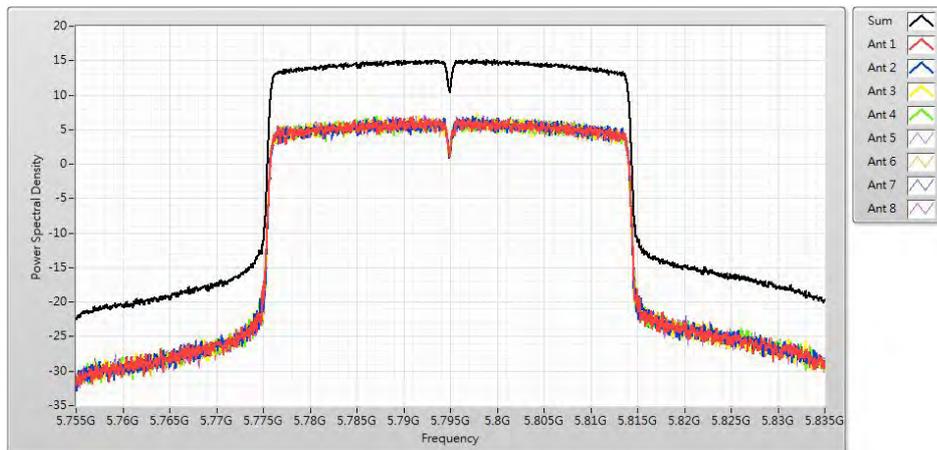

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ax(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 155 | 5775 | 9.980 | 24.850 | Pass |


Channel 155

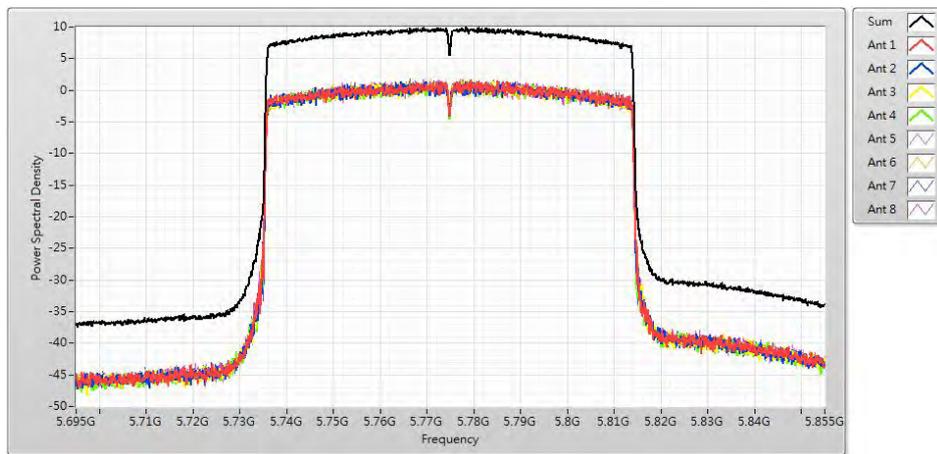


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 3:TX_Beamforming_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 11.608 | 11.850 | Pass |
| 44 | 5220 | 11.568 | 11.850 | Pass |
| 48 | 5240 | 11.678 | 11.850 | Pass |


Channel 36

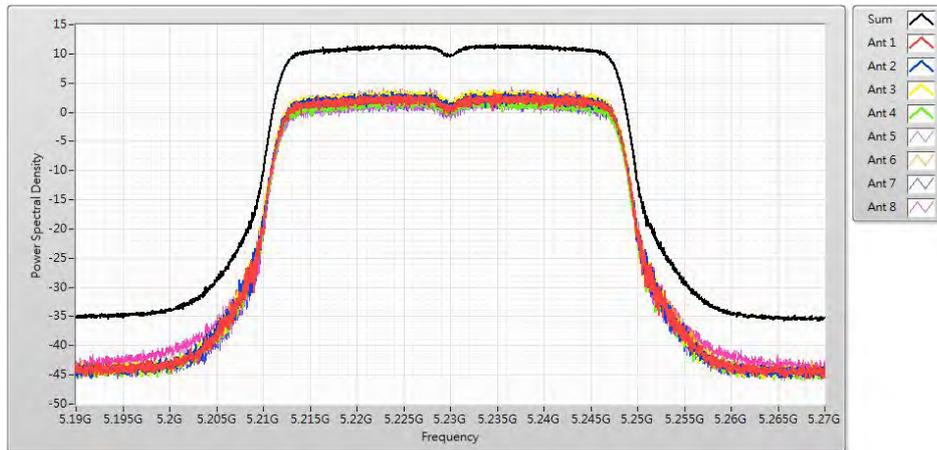

Channel 44

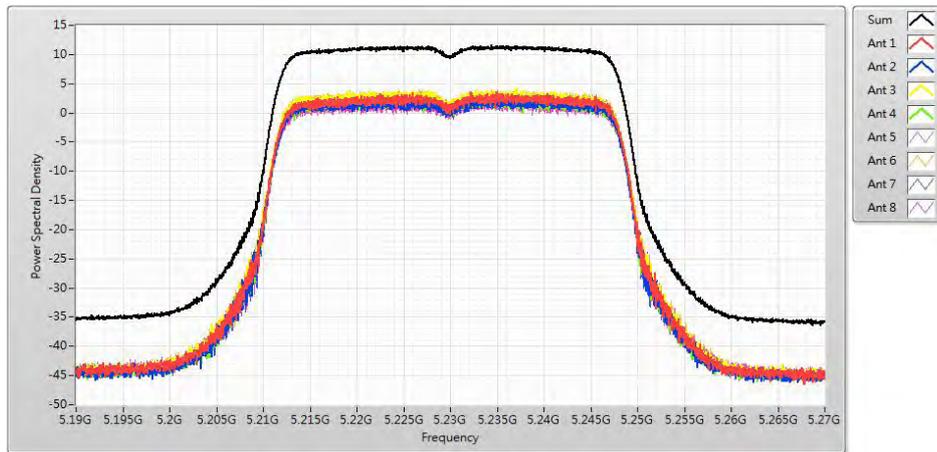


Channel 48

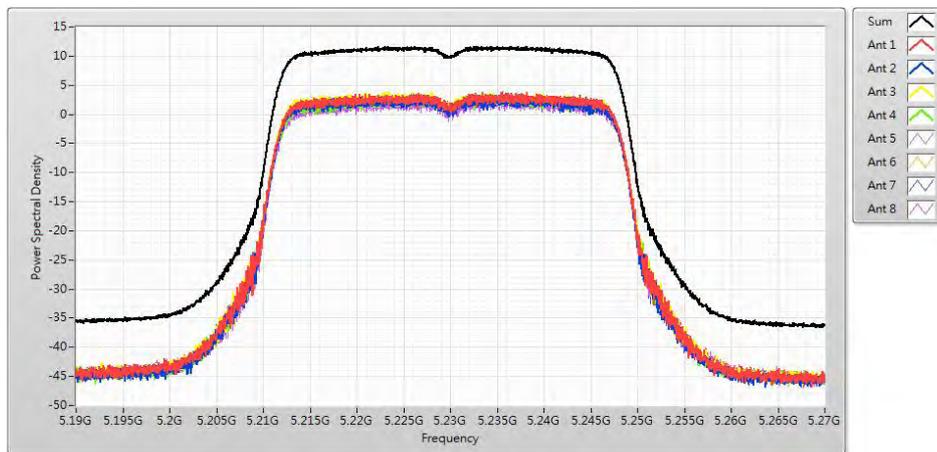


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 3:TX_Beamforming_ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 11.330 | 11.850 | Pass |
| 46 | 5230 | 11.667 | 11.850 | Pass |

Channel 38

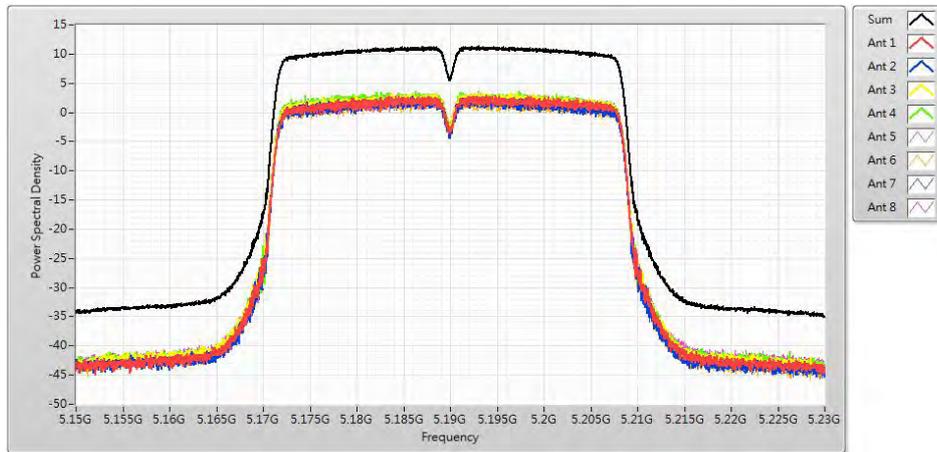


Channel 46

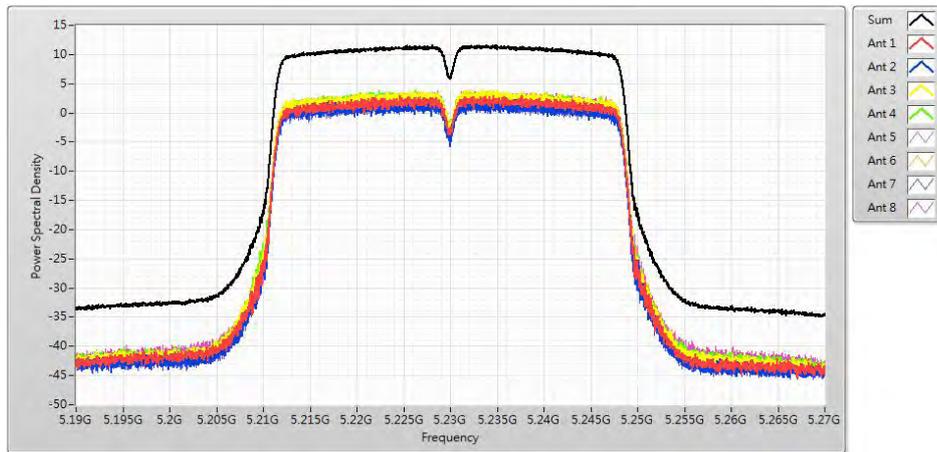

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 3:TX Beamforming ADP-65DW Y | | |
| Date of Test | 2018/08/24 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 7.980 | 11.850 | Pass |


Channel 42

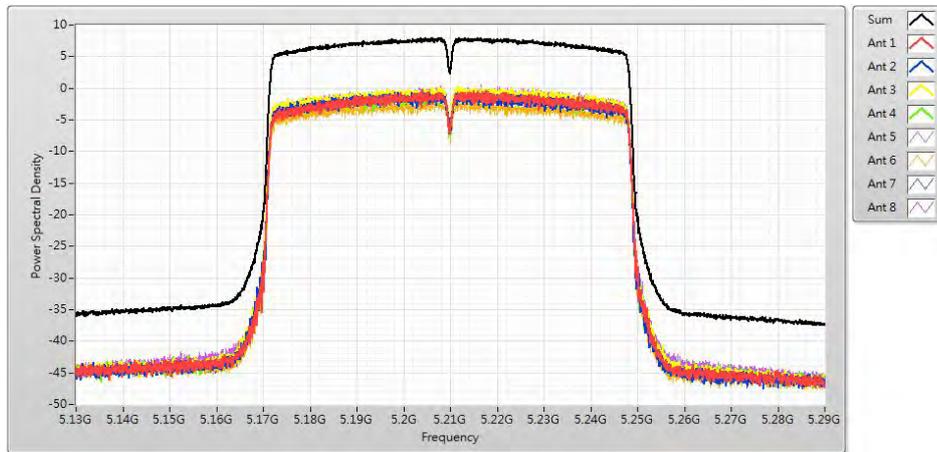


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 4:TX_Non Beamforming_NSS2_ADP1 | | |
| Date of Test | 2018/08/28 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 14.700 | 14.850 | Pass |
| 44 | 5220 | 14.710 | 14.850 | Pass |
| 48 | 5240 | 14.760 | 14.850 | Pass |


Channel 36

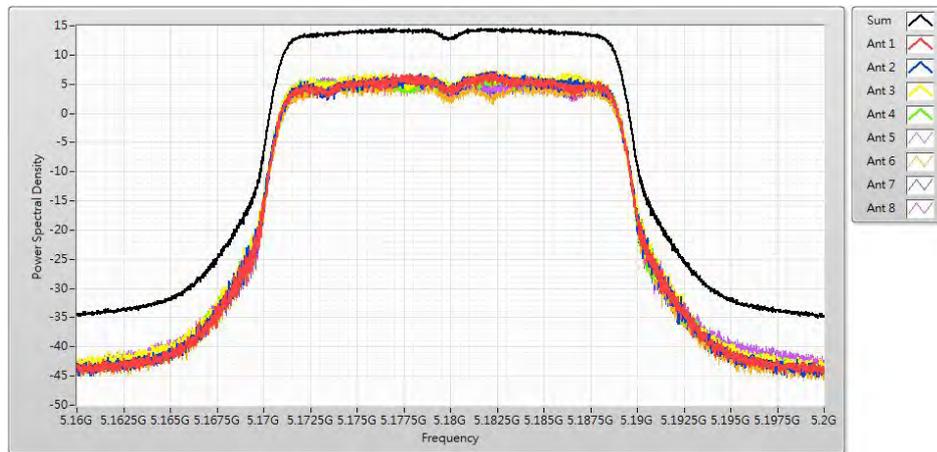

Channel 44

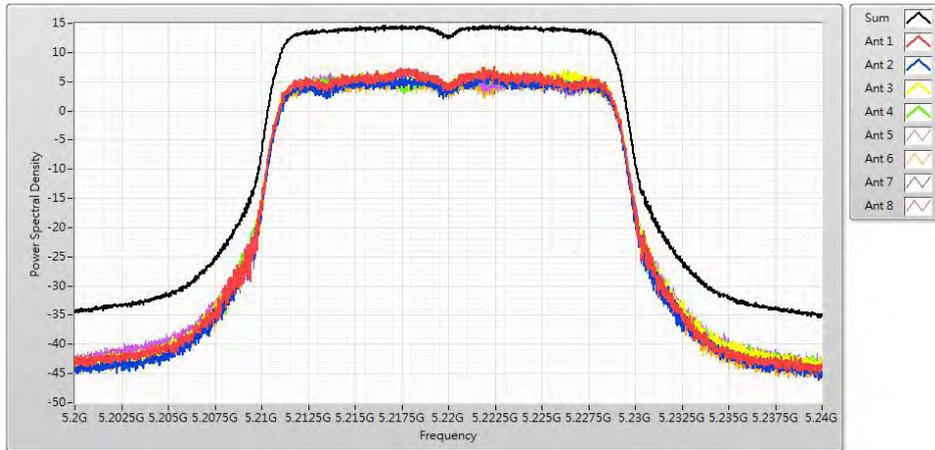


Channel 48

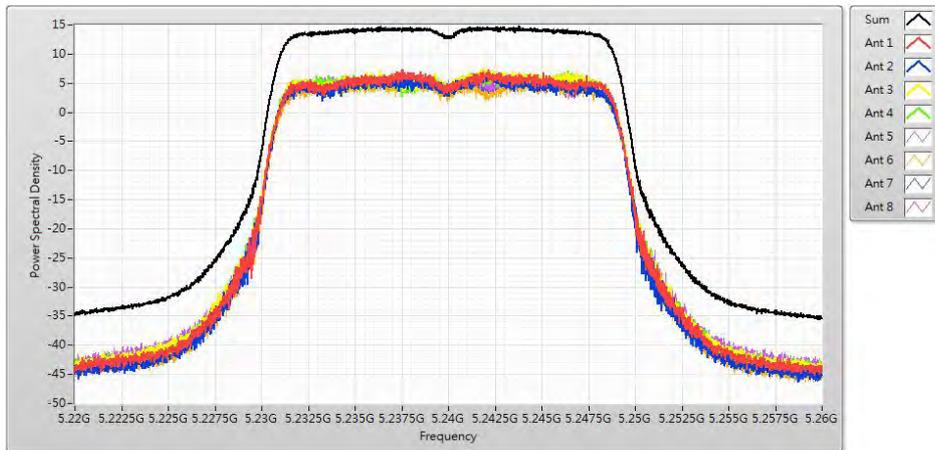


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 4:TX_Non Beamforming_NSS2_AD P1 | | |
| Date of Test | 2018/08/28 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 11.260 | 14.850 | Pass |
| 46 | 5230 | 14.570 | 14.850 | Pass |

Channel 38

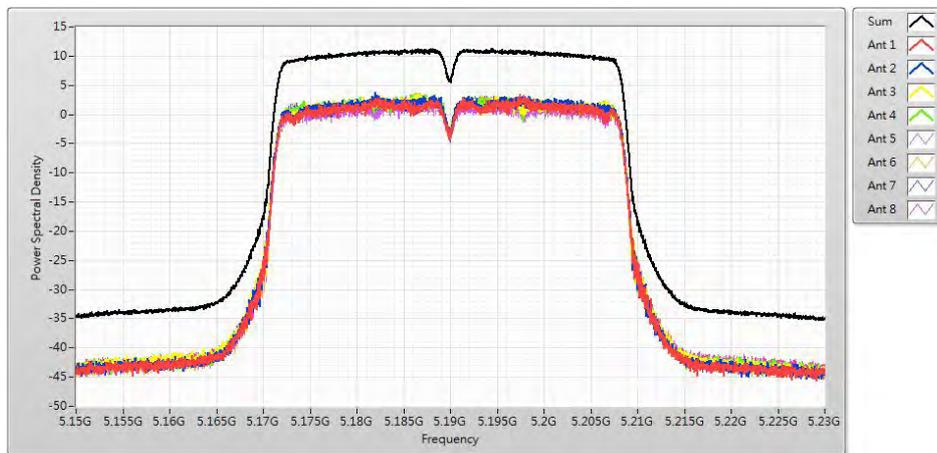


Channel 46

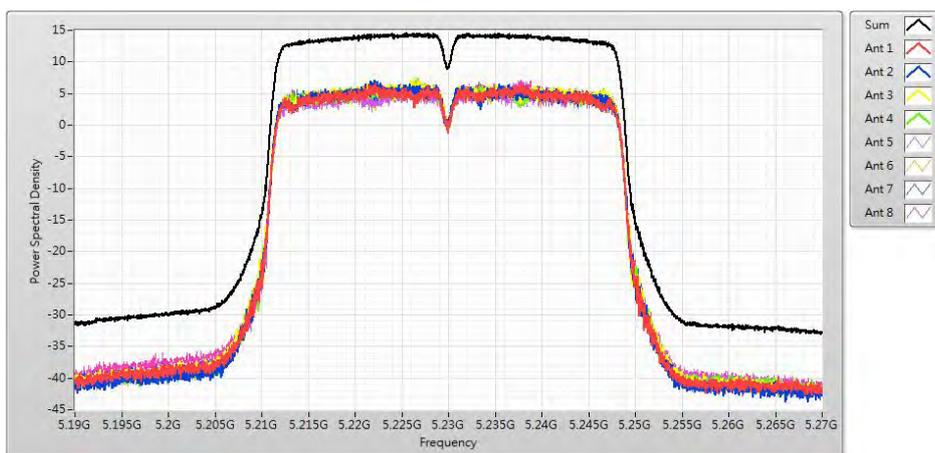

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 4:TX_Non Beamforming_NSS2_AD P1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 8.680 | 14.850 | Pass |


Channel 42

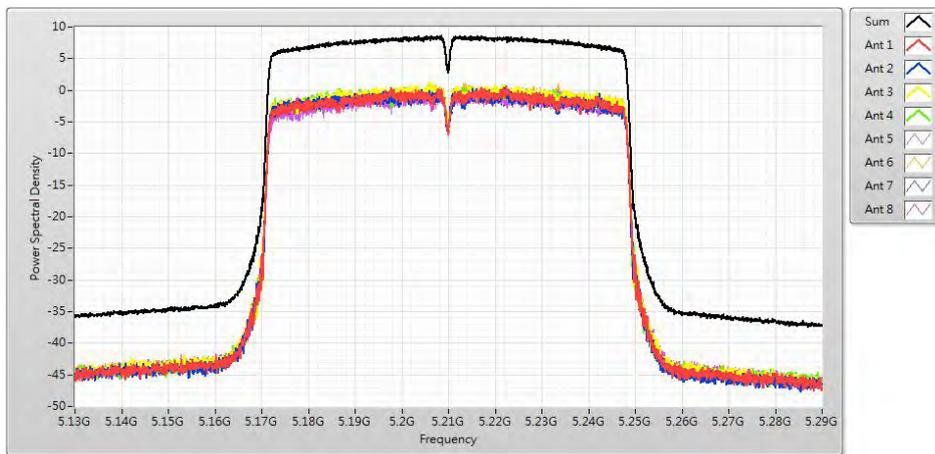


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 4:TX_Non Beamforming_NSS2_ADP1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ax(20MHz)(ANT0+1+2+3+4+5+6+7) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 14.540 | 14.850 | Pass |
| 44 | 5220 | 14.590 | 14.850 | Pass |
| 48 | 5240 | 14.540 | 14.850 | Pass |


Channel 36

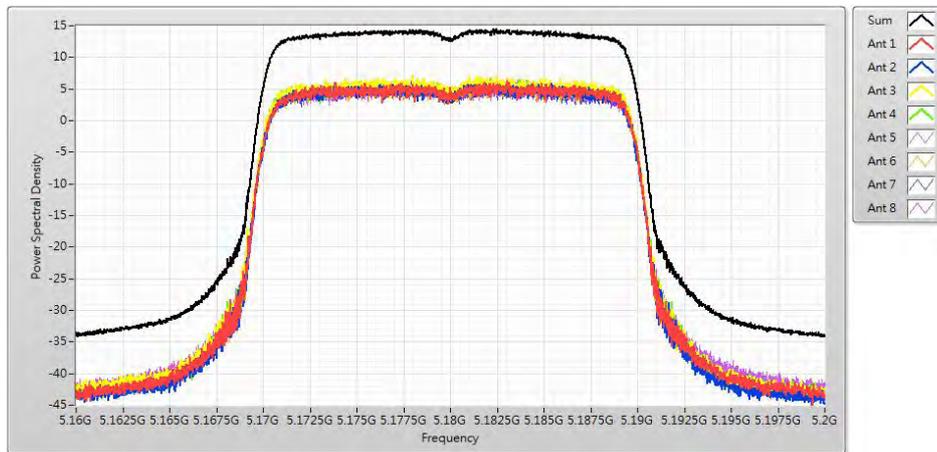

Channel 44

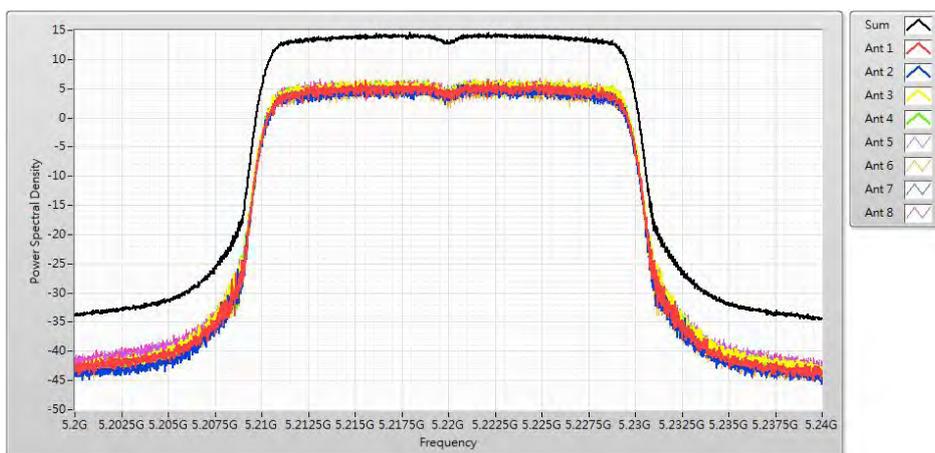


Channel 48

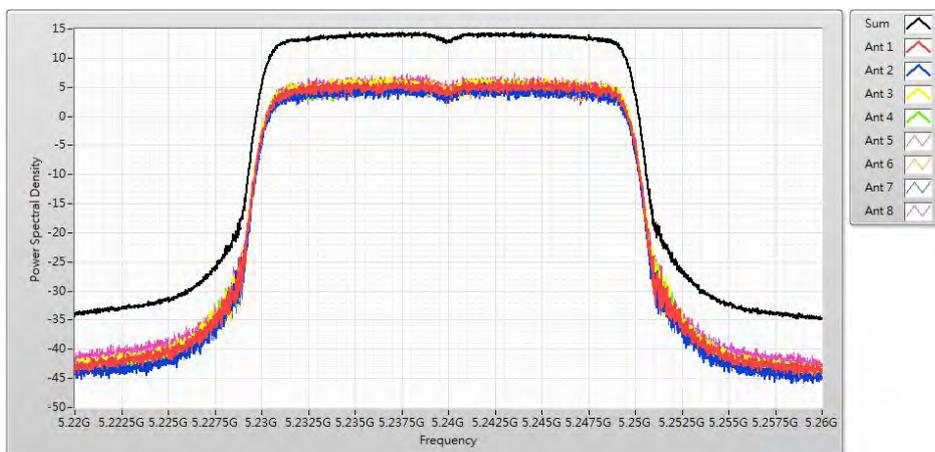


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 4:TX_Non Beamforming_NSS2_AD P1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ax(40MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 10.790 | 14.850 | Pass |
| 46 | 5230 | 14.370 | 14.850 | Pass |

Channel 38

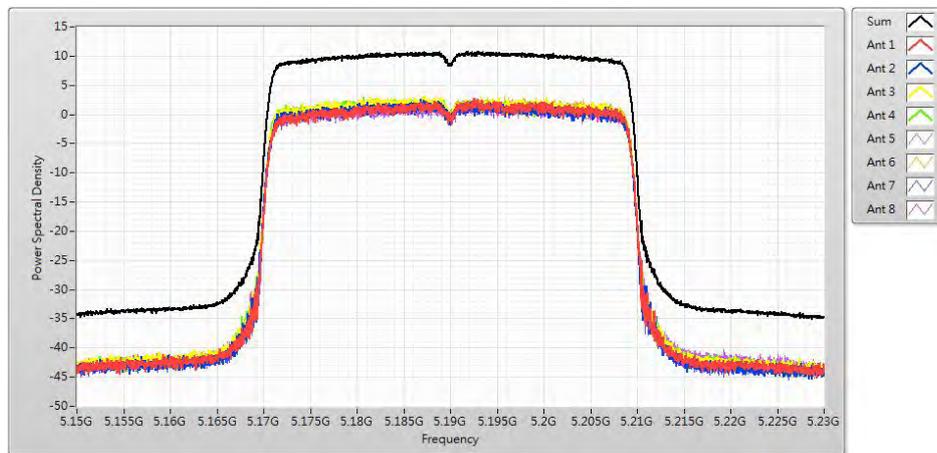


Channel 46

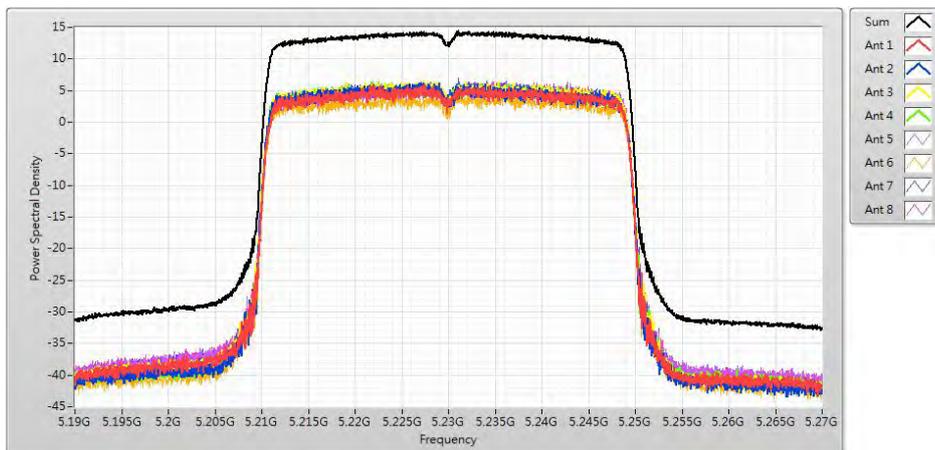

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 4:TX_Non Beamforming_NSS2_AD P1 | | |
| Date of Test | 2018/09/03 | Test Site | SR10-H |

| IEEE 802.11ax(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 7.714 | 14.850 | Pass |


Channel 42

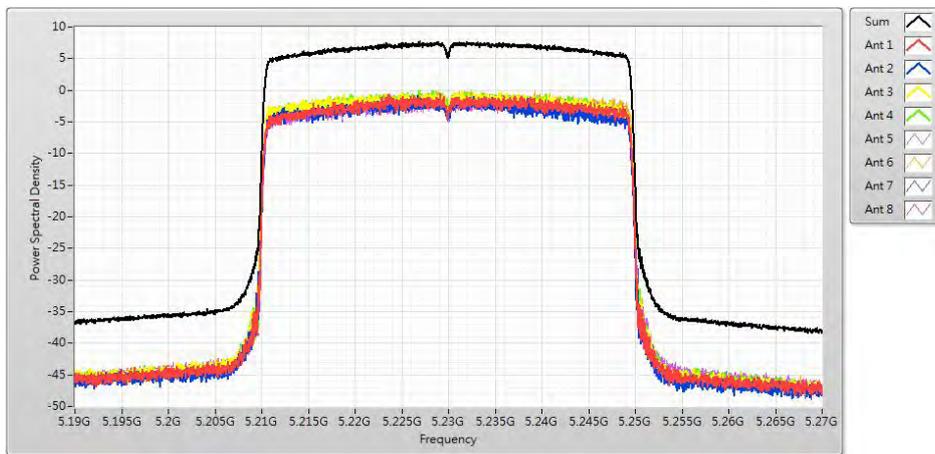


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 5:TX_Beamforming_NSS2_ADP1 | | |
| Date of Test | 2018/08/28 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 14.700 | 14.850 | Pass |
| 44 | 5220 | 14.710 | 14.850 | Pass |
| 48 | 5240 | 14.760 | 14.850 | Pass |


Channel 36

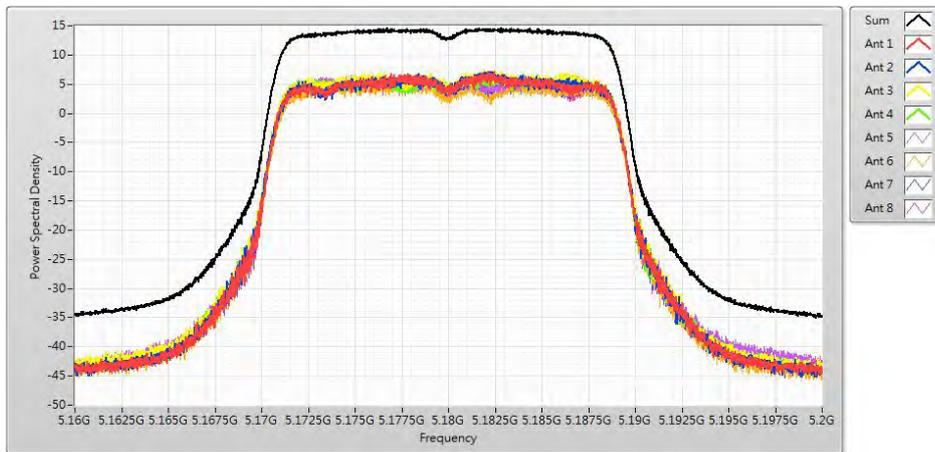

Channel 44

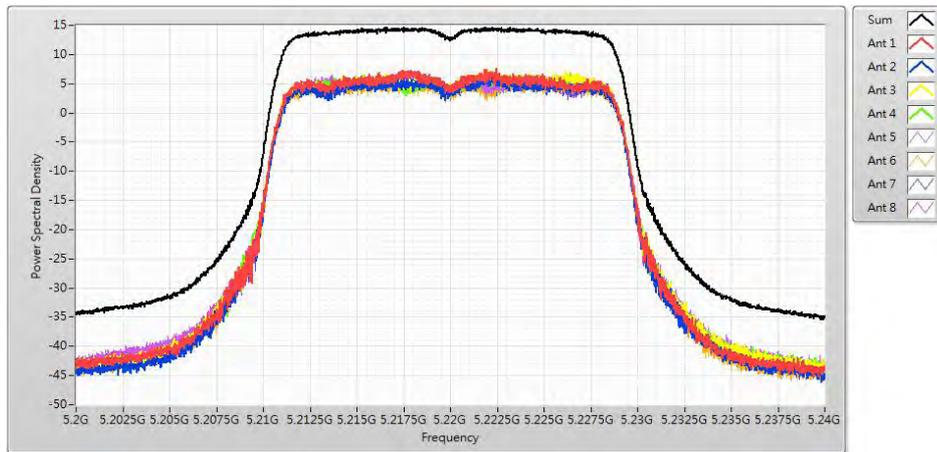


Channel 48

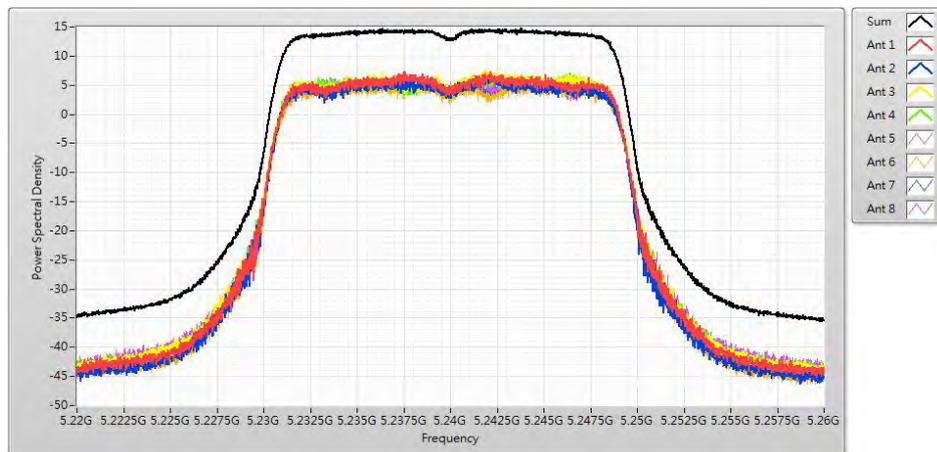


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 5:TX_Beamforming_NSS2_ADP1 | | |
| Date of Test | 2018/08/31 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz)(ANT0+1+2+3+4+5+6+7) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 12.300 | 14.850 | Pass |
| 46 | 5230 | 14.570 | 14.850 | Pass |

Channel 38

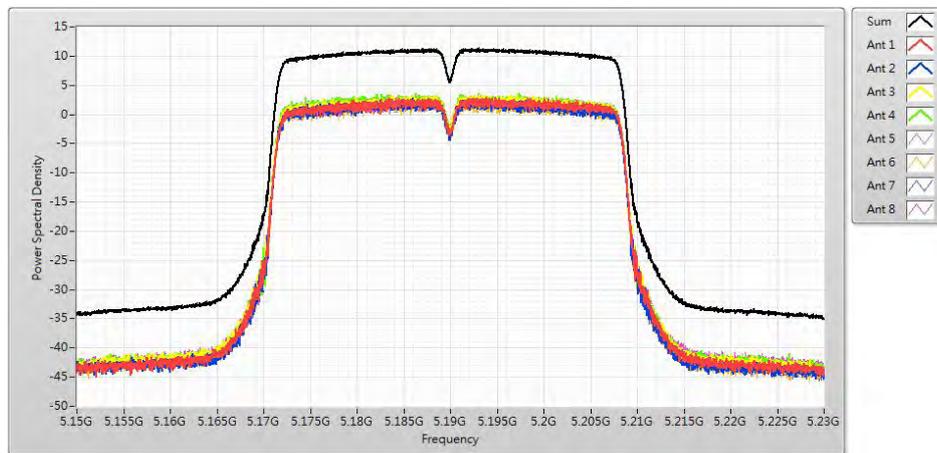


Channel 46

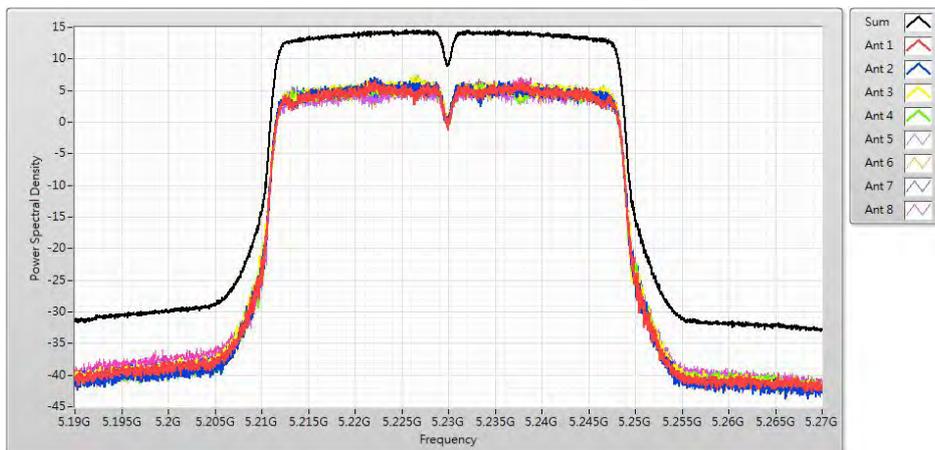

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 5:TX Beamforming NSS2 ADP1 | | |
| Date of Test | 2018/08/28 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz) (ANT0+1+2+3+4+5+6+8) | | | | |
|---|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 7.980 | 14.850 | Pass |


Channel 42

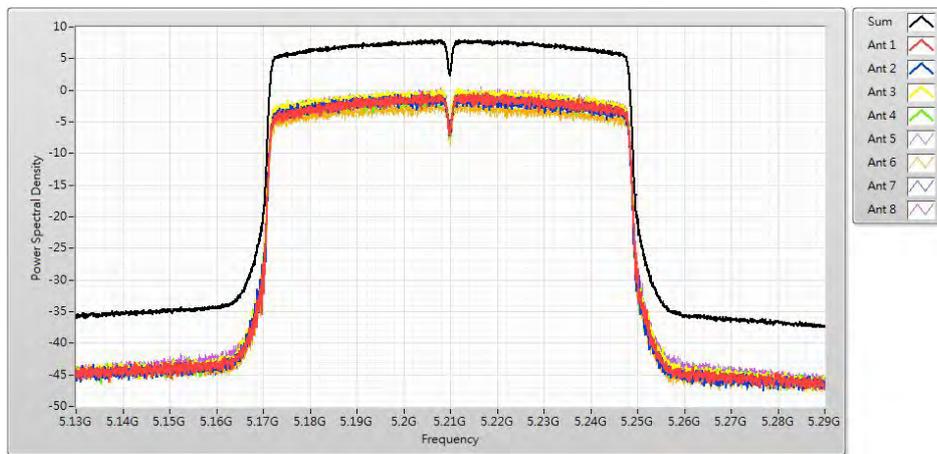


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 6:TX_Non Beamforming_NSS4_ADP1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 16.650 | 17.000 | Pass |
| 44 | 5220 | 16.860 | 17.000 | Pass |
| 48 | 5240 | 16.650 | 17.000 | Pass |


Channel 36

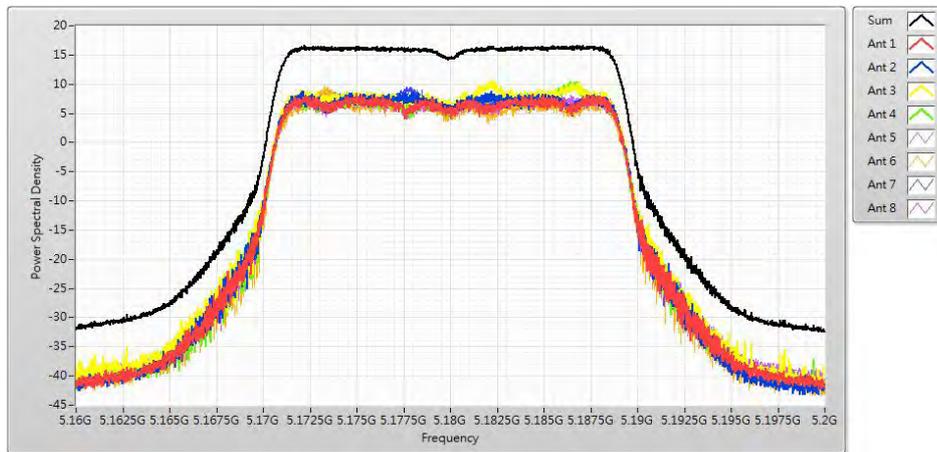

Channel 44

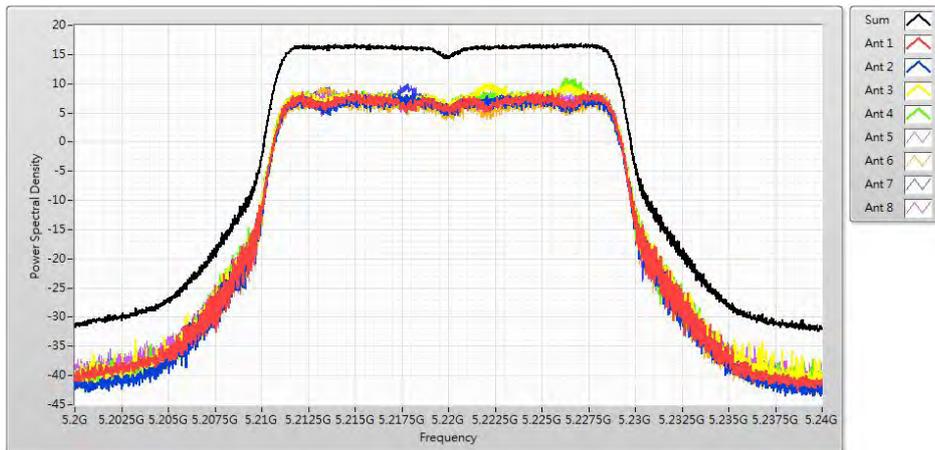


Channel 48

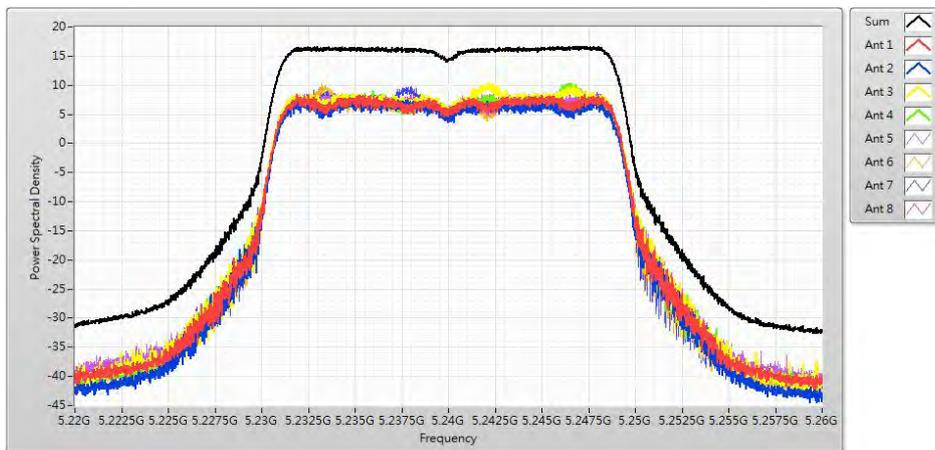


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 6:TX_Non Beamforming_NSS4_AD P1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 16.670 | 17.000 | Pass |
| 46 | 5230 | 16.680 | 17.000 | Pass |

Channel 38

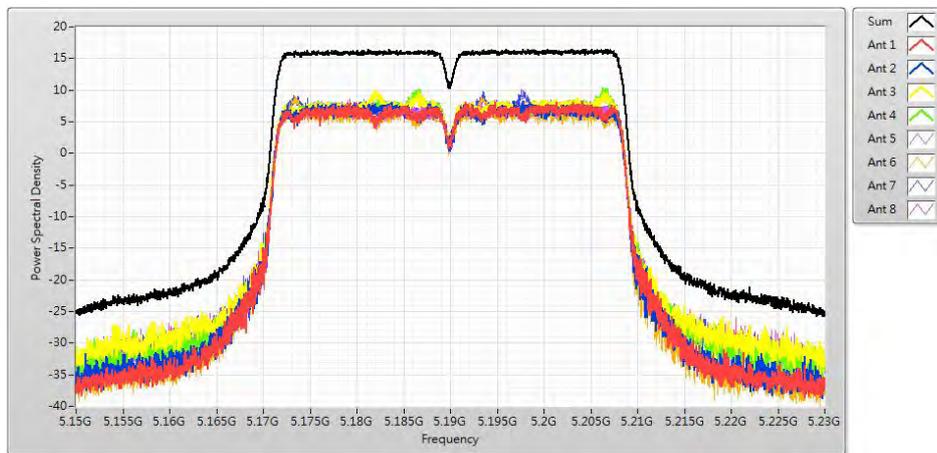


Channel 46

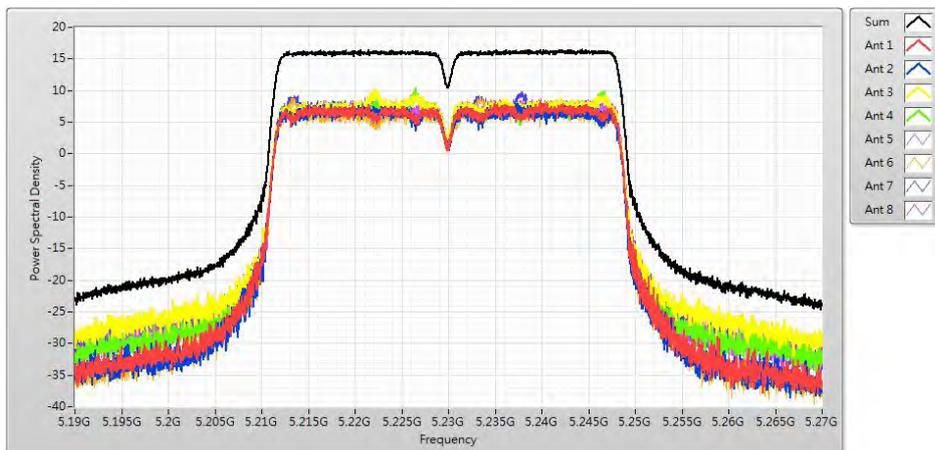

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 6:TX_Non Beamforming_NSS4_AD P1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 15.650 | 17.000 | Pass |


Channel 42

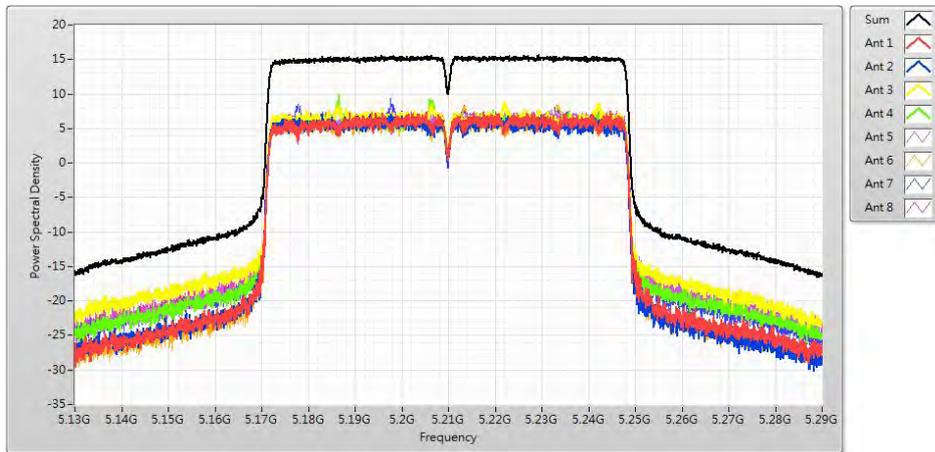


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 6:TX_Non Beamforming_NSS4_ADP1 | | |
| Date of Test | 2018/08/30 | Test Site | SR10-H |

| IEEE 802.11ax(20MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 16.540 | 17.000 | Pass |
| 44 | 5220 | 16.640 | 17.000 | Pass |
| 48 | 5240 | 16.520 | 17.000 | Pass |


Channel 36

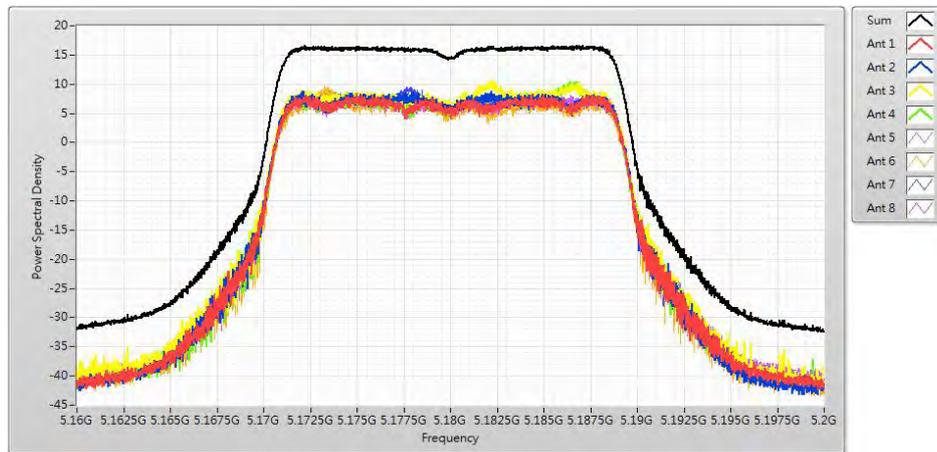

Channel 44

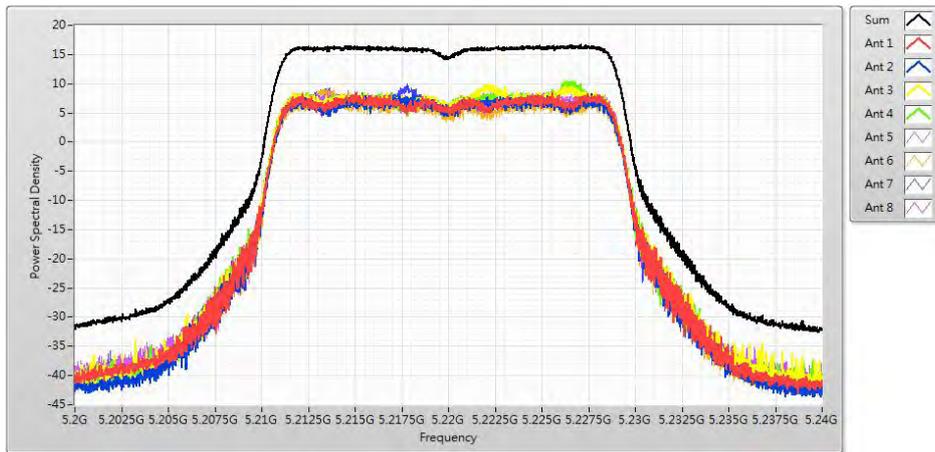


Channel 48

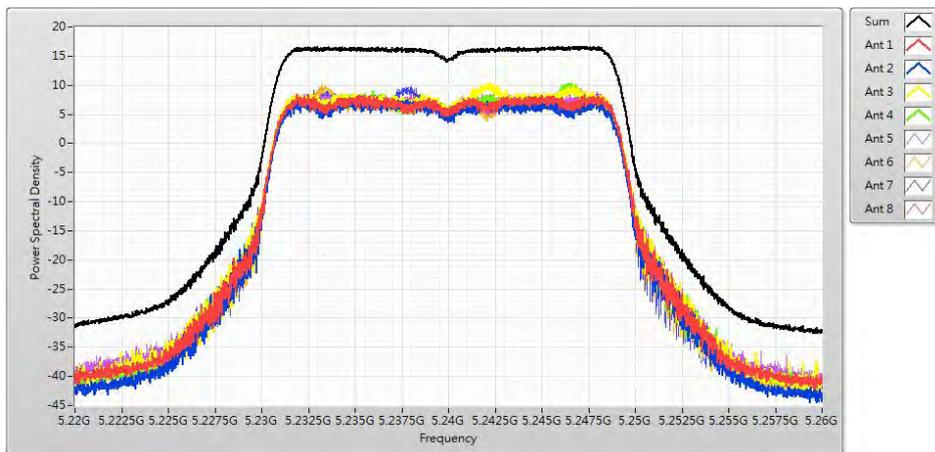


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 6:TX_Non Beamforming_NSS4_AD P1 | | |
| Date of Test | 2018/08/30 | Test Site | SR10-H |

| IEEE 802.11ax(40MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 16.640 | 17.000 | Pass |
| 46 | 5230 | 16.730 | 17.000 | Pass |

Channel 38

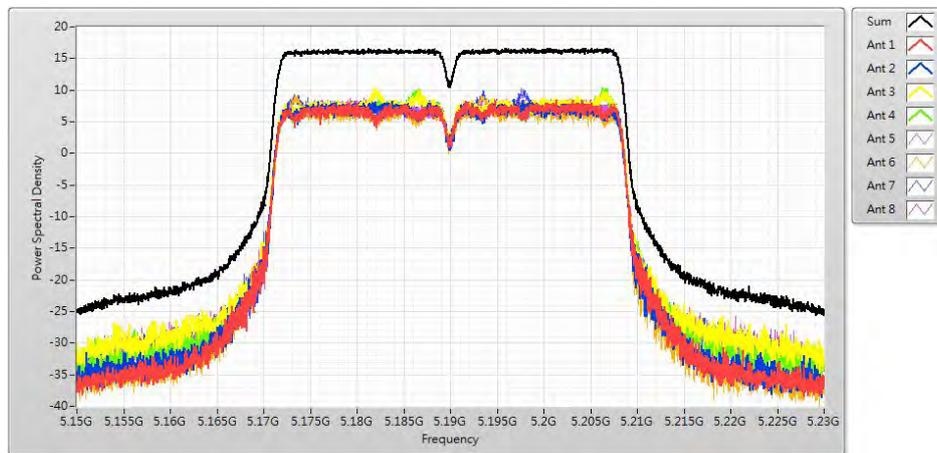


Channel 46

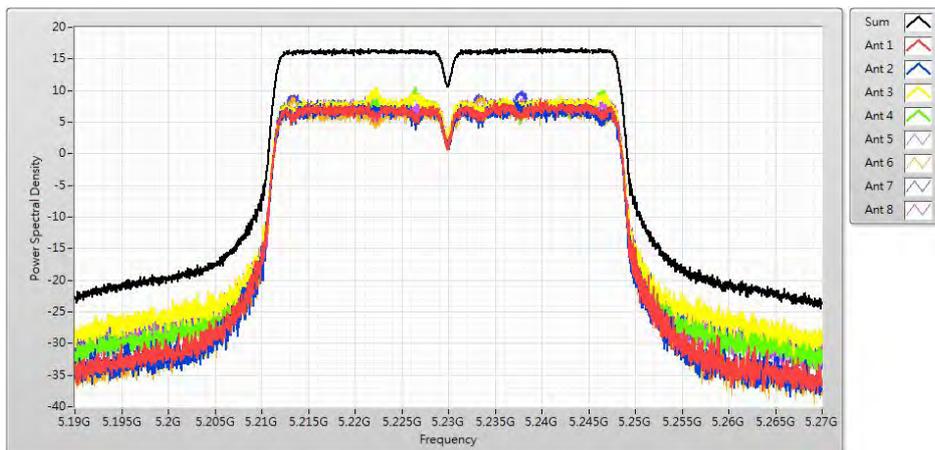

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 6:TX_Non Beamforming_NSS4_AD P1 | | |
| Date of Test | 2018/08/30 | Test Site | SR10-H |

| IEEE 802.11ax(80MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 15.600 | 17.000 | Pass |


Channel 42

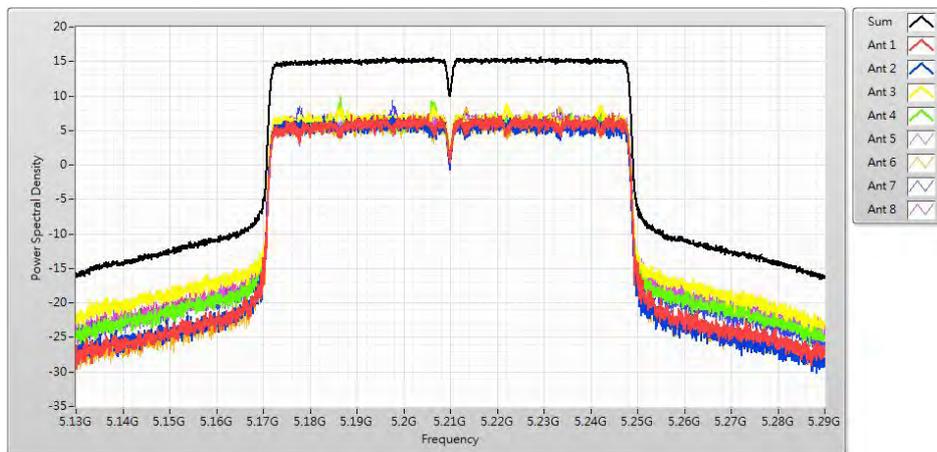


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 7:TX_Beamforming_NSS4_ADP1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ac(20MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 16.650 | 17.000 | Pass |
| 44 | 5220 | 16.860 | 17.000 | Pass |
| 48 | 5240 | 16.650 | 17.000 | Pass |


Channel 36

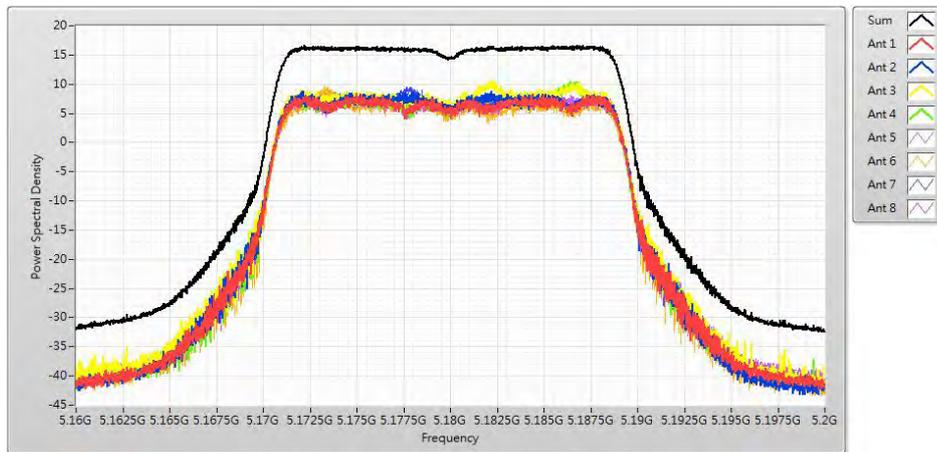

Channel 44

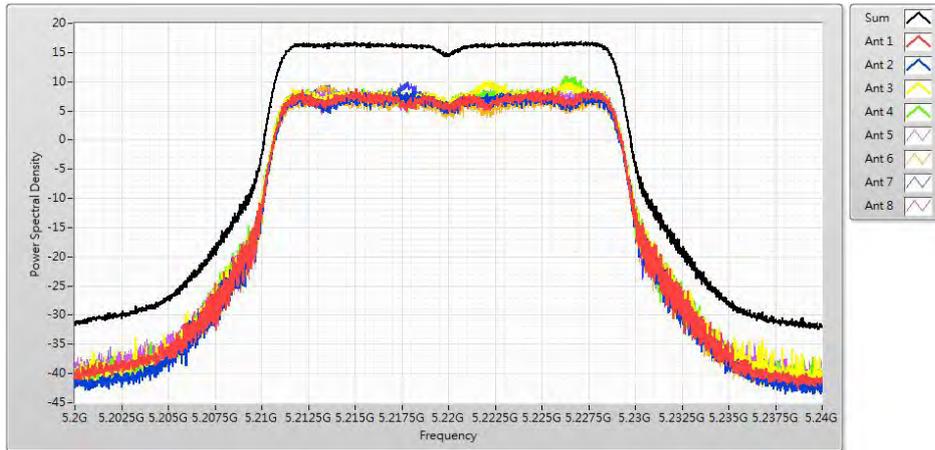


Channel 48

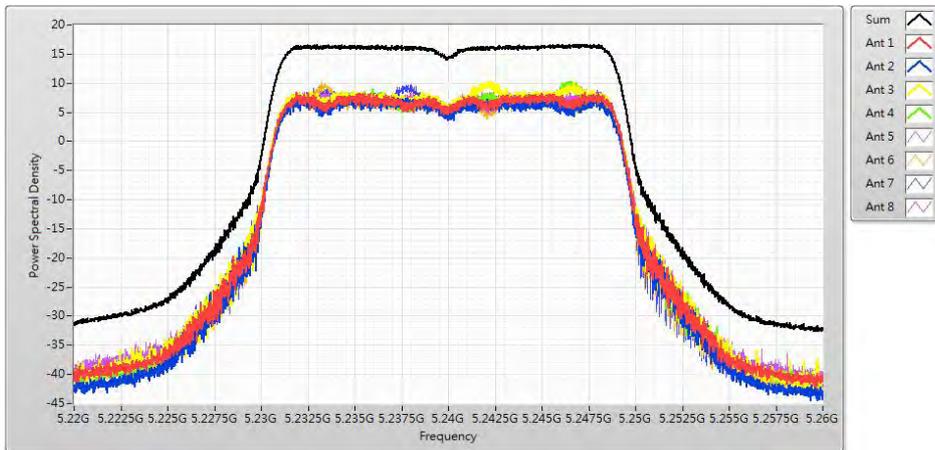


| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 7:TX_Beamforming_NSS4_ADP1 | | |
| Date of Test | 2018/08/29 | Test Site | SR10-H |

| IEEE 802.11ac(40MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 11.530 | 17.000 | Pass |
| 46 | 5230 | 16.680 | 17.000 | Pass |

Channel 38

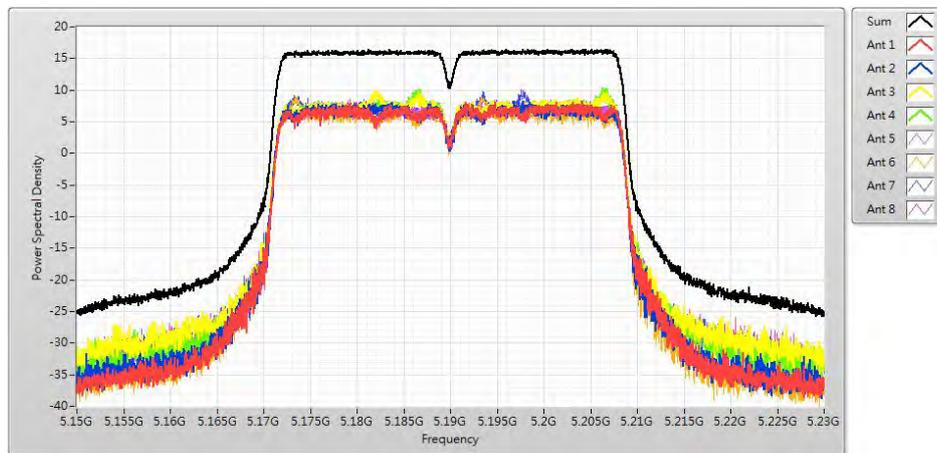


Channel 46

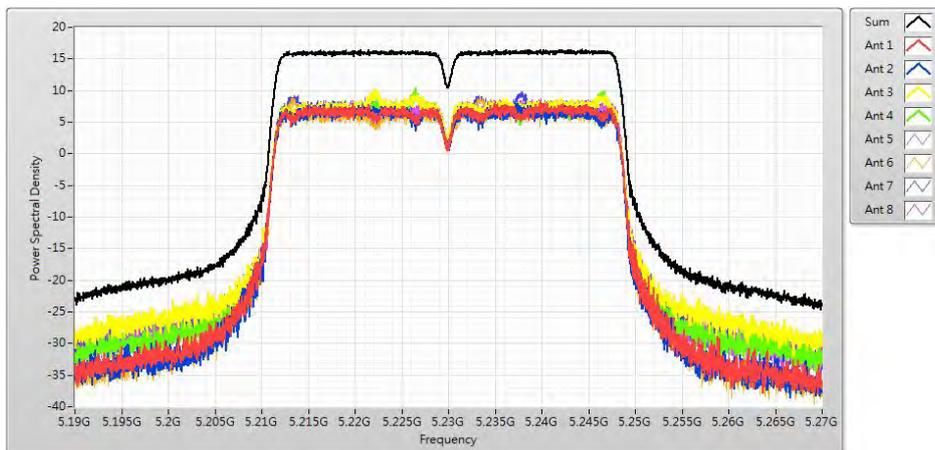

| | | | |
|--------------|---|-----------|--------|
| Product | ROG Rapture GT-AX6000 Dual-band Gaming Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 7:TX Beamforming NSS4 ADP1 | | |
| Date of Test | 2018/09/04 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz)(ANT0+1+2+3+4+5+6+8) | | | | |
|--|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 6.900 | 17.000 | Pass |


Channel 42

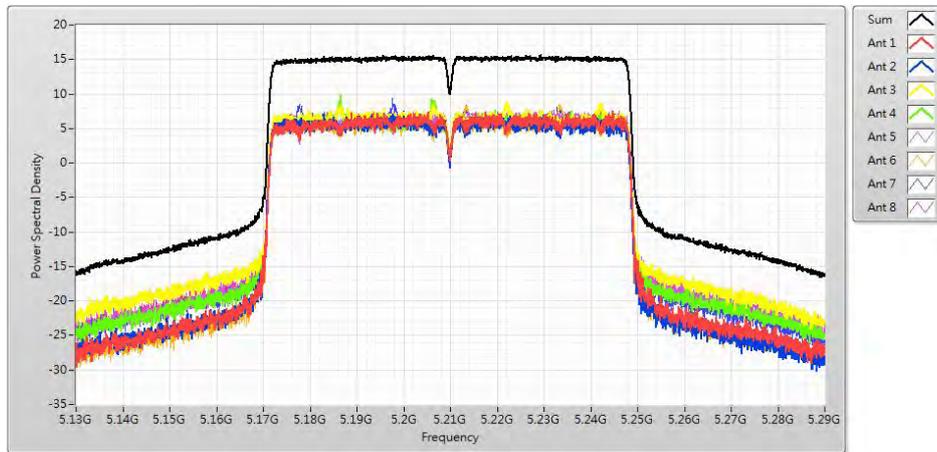


6. Radiated Emission

6.1. Test Setup

Under 1GHz Test Setup:

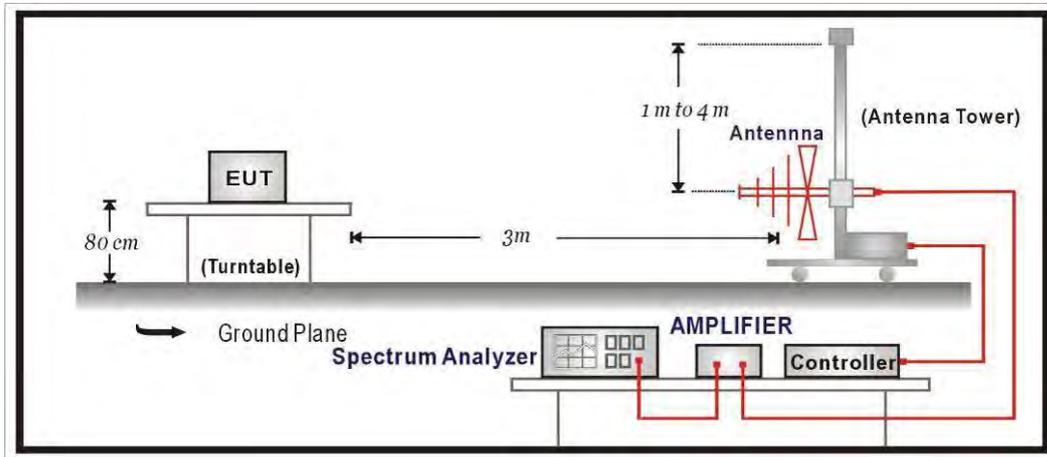

Above 1GHz Test Setup:

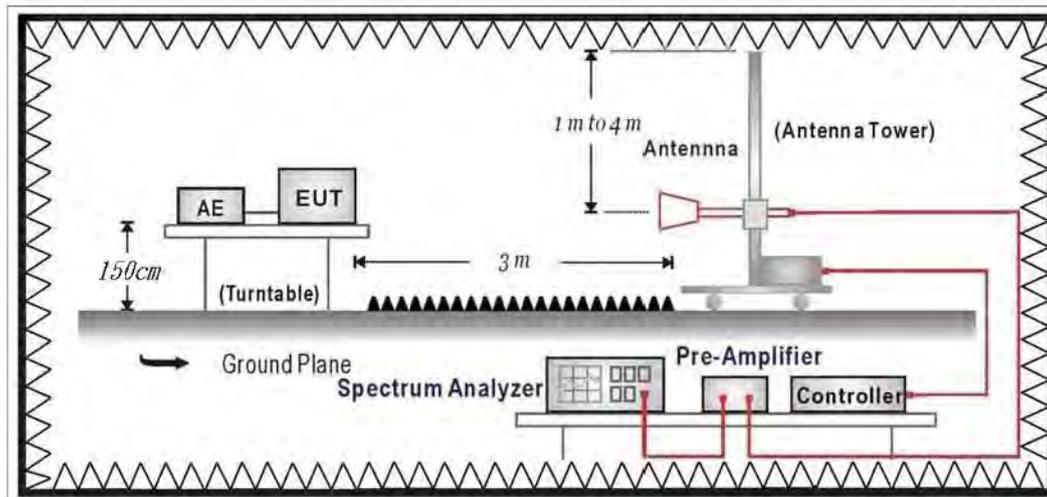

6.2. Limits

➤ General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

| FCC Part 15 Subpart C Paragraph 15.209 Limits | | |
|---|----------|-----------|
| Frequency MHz | uV/m @3m | dBuV/m@3m |
| 30 - 88 | 100 | 40 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46 |
| Above 960 | 500 | 54 |

Remark:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ Unwanted Emission out of the restricted bands Limits

| FCC Part 15 Subpart C Paragraph 15.407(b) Limits | | |
|--|---------------------|--|
| Frequency (MHz) | EIRP Limit (dBm) | Equivalent Field Strength (dBuV/m@3m) |
| 5150 - 5250 | -27 | 68.3 |
| 5250 - 5350 | -27 | 68.3 |
| 5470 - 5725 | -27 | 68.3 |
| 5725 - 5850 | -27 (Note1) | 68.3 |
| | -17 (Note2) | 78.3 |

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.

$$3. \quad uV/m = \frac{1000000\sqrt{30 \times EIRP}}{3}, \quad \text{RF Voltage (dBuV/m)} = 20 \log \text{RF Voltage (uV/m)}$$

6.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.


The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

6.4. Test Result

30MHz-1GHz Spurious

| | | | |
|----------------|---------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_AD P-65DW Y | | |
| Note : | 802.11a_5220MHz | | |

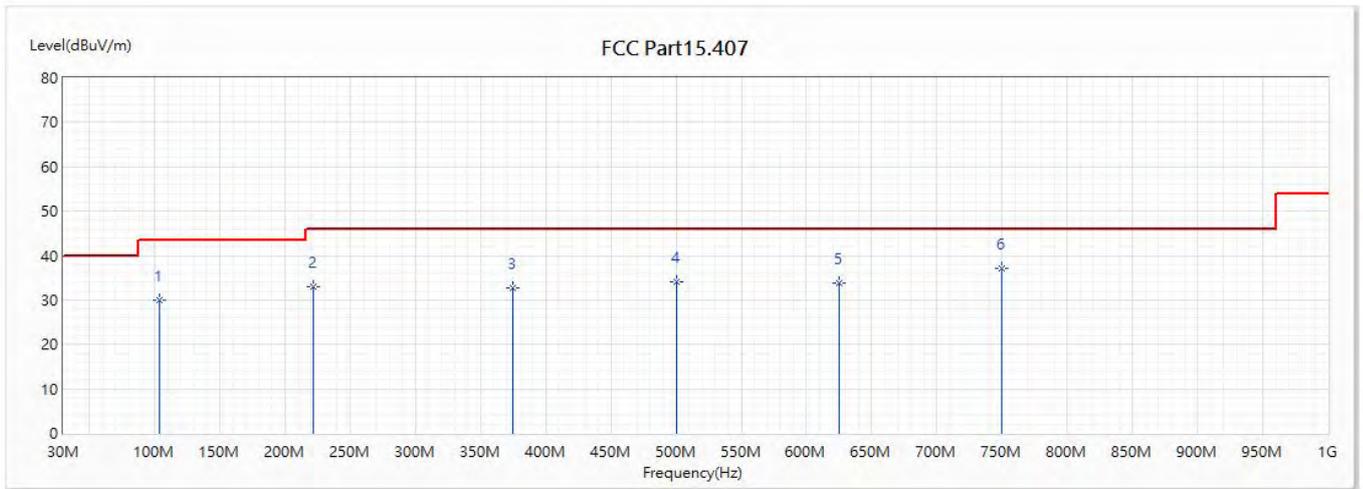


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 103.526 | 29.99 | 43.50 | -13.51 | 51.40 | -21.41 | QP |
| 2 | 221.478 | 33.04 | 46.00 | -12.96 | 55.16 | -22.12 | QP |
| 3 | 375.029 | 32.58 | 46.00 | -13.42 | 49.69 | -17.11 | QP |
| 4 | 500.062 | 34.14 | 46.00 | -11.86 | 48.78 | -14.64 | QP |
| 5 | 624.998 | 33.90 | 46.00 | -12.10 | 47.26 | -13.36 | QP |
| * 6 | 750.031 | 37.04 | 46.00 | -8.96 | 48.24 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5220MHz | | |

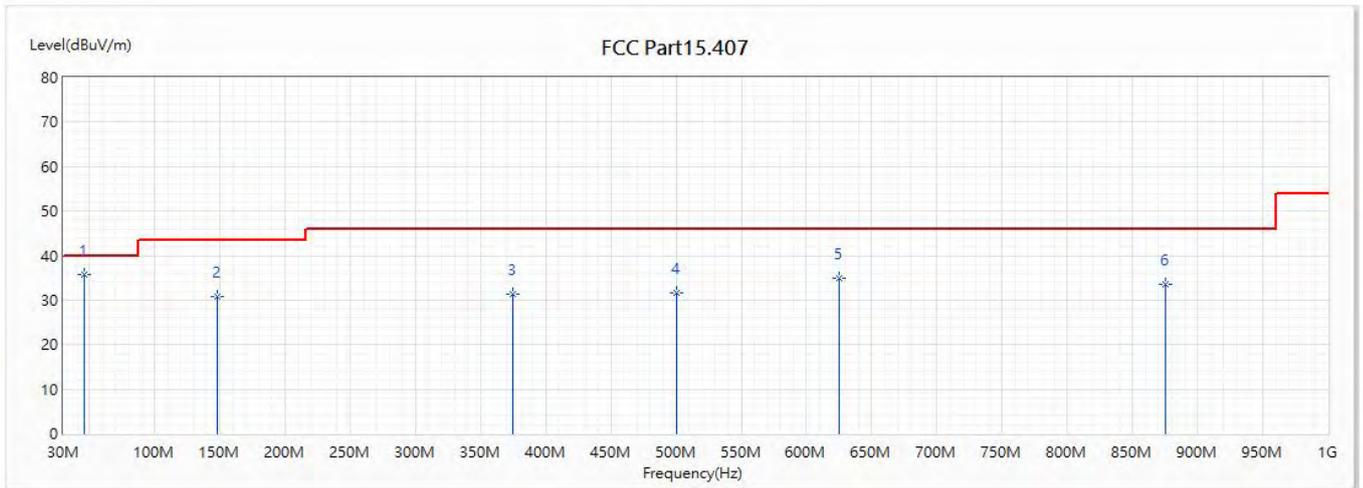


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 46.296 | 35.72 | 40.00 | -4.28 | 56.13 | -20.41 | QP |
| 2 | 148.534 | 30.81 | 43.50 | -12.69 | 52.68 | -21.87 | QP |
| 3 | 375.029 | 31.29 | 46.00 | -14.71 | 48.40 | -17.11 | QP |
| 4 | 500.062 | 31.71 | 46.00 | -14.29 | 46.35 | -14.64 | QP |
| 5 | 624.998 | 34.98 | 46.00 | -11.02 | 48.34 | -13.36 | QP |
| 6 | 875.064 | 33.60 | 46.00 | -12.40 | 43.30 | -9.70 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|---------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_AD P-65DW Y | | |
| Note : | 802.11ac(20M)_5220MHz | | |

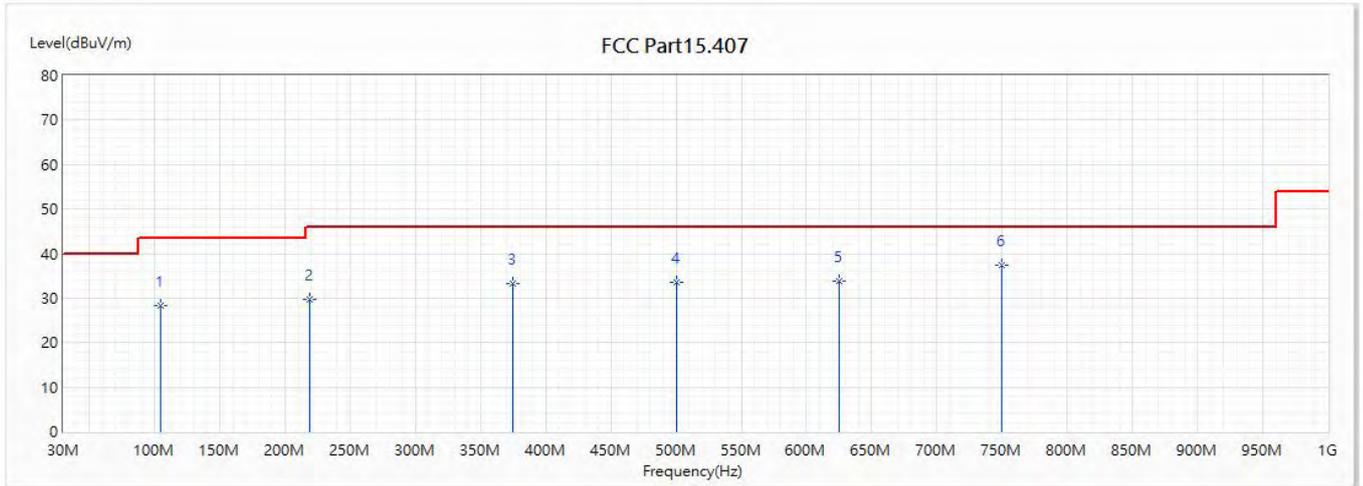


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 104.302 | 28.35 | 43.50 | -15.15 | 49.71 | -21.36 | QP |
| 2 | 218.859 | 29.81 | 46.00 | -16.19 | 52.44 | -22.63 | QP |
| 3 | 375.029 | 33.28 | 46.00 | -12.72 | 50.39 | -17.11 | QP |
| 4 | 500.062 | 33.64 | 46.00 | -12.36 | 48.28 | -14.64 | QP |
| 5 | 624.998 | 33.76 | 46.00 | -12.24 | 47.12 | -13.36 | QP |
| * 6 | 750.031 | 37.34 | 46.00 | -8.66 | 48.54 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|---------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_AD P-65DW Y | | |
| Note : | 802.11ac(20M)_5220MHz | | |

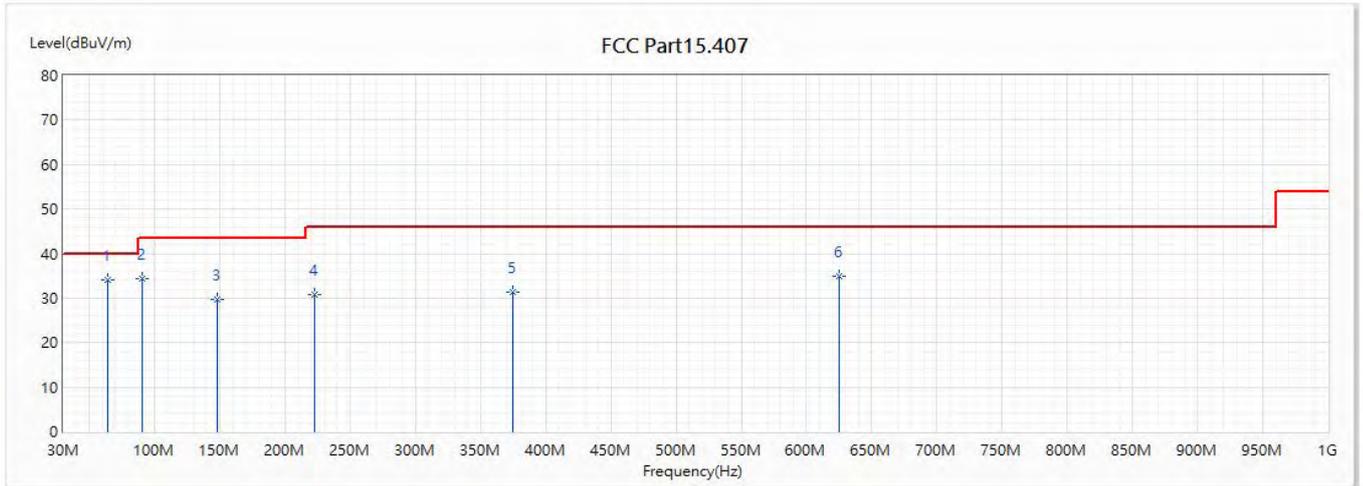


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 64.241 | 34.19 | 40.00 | -5.81 | 60.53 | -26.34 | QP |
| 2 | 90.237 | 34.48 | 43.50 | -9.02 | 59.38 | -24.90 | QP |
| 3 | 148.534 | 29.67 | 43.50 | -13.83 | 51.54 | -21.87 | QP |
| 4 | 222.739 | 30.83 | 46.00 | -15.17 | 52.68 | -21.85 | QP |
| 5 | 375.029 | 31.36 | 46.00 | -14.64 | 48.47 | -17.11 | QP |
| 6 | 624.998 | 34.92 | 46.00 | -11.08 | 48.28 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5190MHz | | |

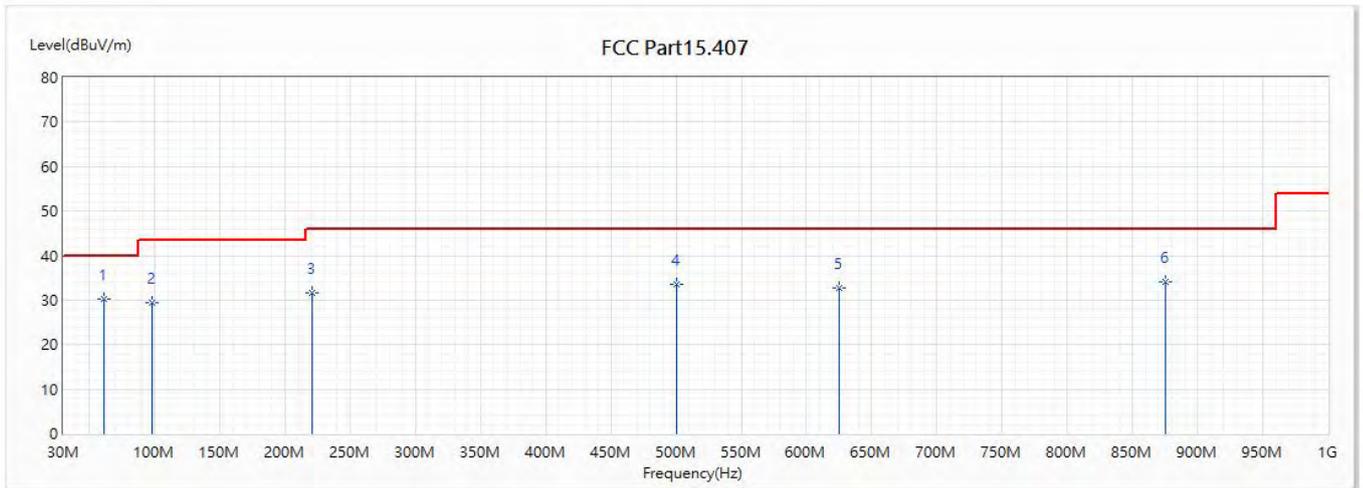


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.428 | 30.30 | 40.00 | -9.70 | 56.36 | -26.06 | QP |
| 2 | 98.191 | 29.28 | 43.50 | -14.22 | 51.60 | -22.32 | QP |
| 3 | 220.508 | 31.48 | 46.00 | -14.52 | 53.80 | -22.32 | QP |
| 4 | 500.062 | 33.42 | 46.00 | -12.58 | 48.06 | -14.64 | QP |
| 5 | 624.998 | 32.76 | 46.00 | -13.24 | 46.12 | -13.36 | QP |
| 6 | 875.064 | 34.00 | 46.00 | -12.00 | 43.70 | -9.70 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW Y | | |
| Note : | 802.11ac(40M)_5190MHz | | |

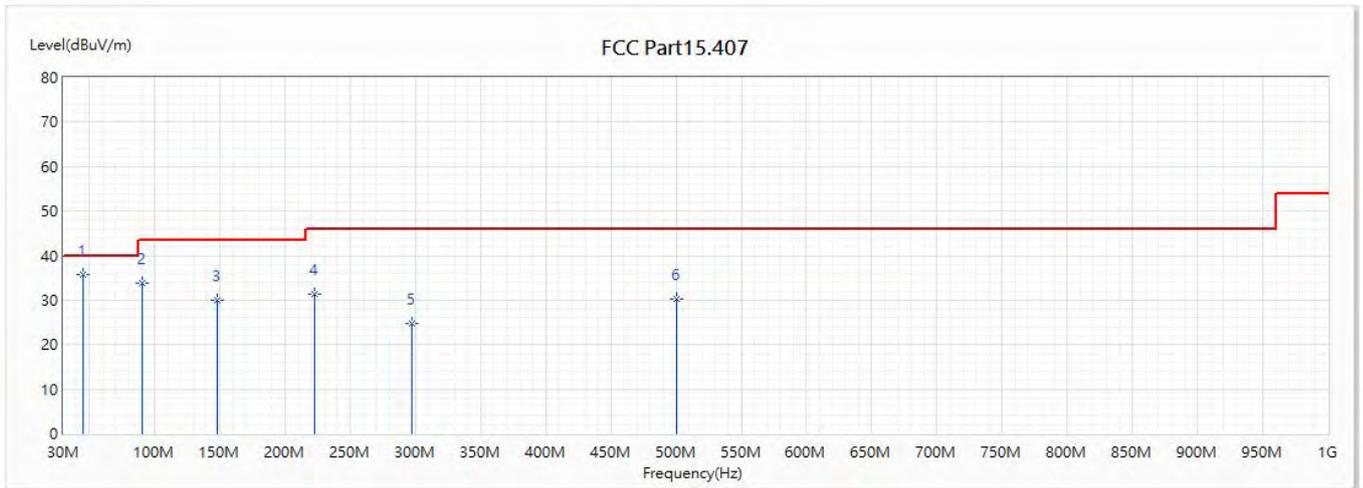


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 44.841 | 35.75 | 40.00 | -4.25 | 55.08 | -19.33 | QP |
| 2 | 90.14 | 33.85 | 43.50 | -9.65 | 58.77 | -24.92 | QP |
| 3 | 148.437 | 30.10 | 43.50 | -13.40 | 51.95 | -21.85 | QP |
| 4 | 222.739 | 31.22 | 46.00 | -14.78 | 53.07 | -21.85 | QP |
| 5 | 297.041 | 24.69 | 46.00 | -21.31 | 43.99 | -19.30 | QP |
| 6 | 499.965 | 30.24 | 46.00 | -15.76 | 44.89 | -14.65 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5210MHz | | |

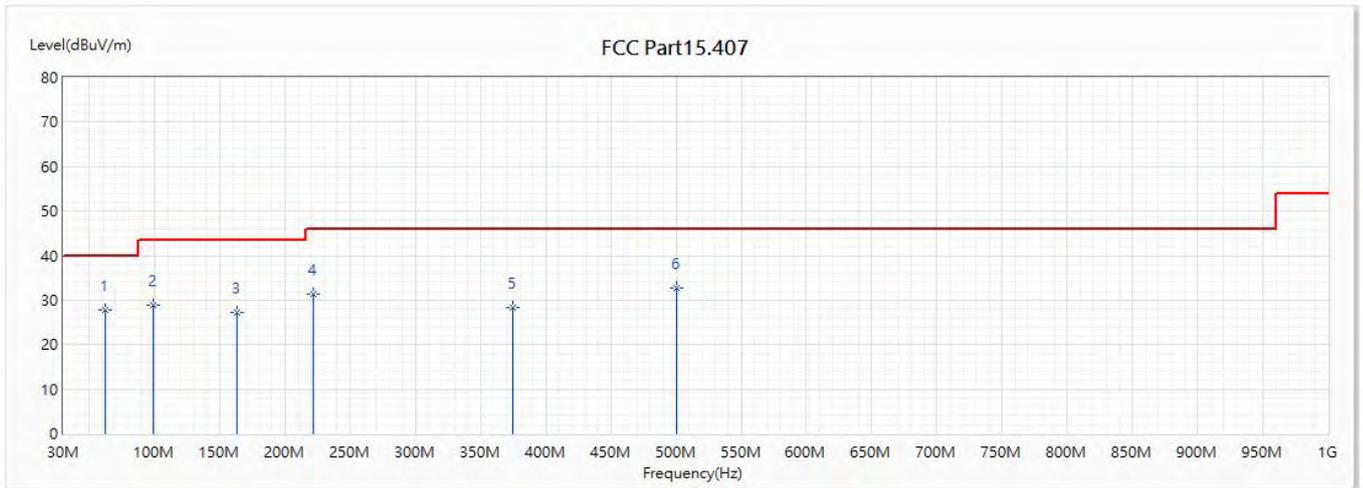


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.816 | 27.89 | 40.00 | -12.11 | 53.99 | -26.10 | QP |
| 2 | 98.676 | 28.77 | 43.50 | -14.73 | 50.96 | -22.19 | QP |
| 3 | 162.987 | 27.35 | 43.50 | -16.15 | 49.66 | -22.31 | QP |
| 4 | 221.478 | 31.39 | 46.00 | -14.61 | 53.51 | -22.12 | QP |
| 5 | 375.126 | 28.43 | 46.00 | -17.57 | 45.54 | -17.11 | QP |
| 6 | 499.965 | 32.83 | 46.00 | -13.17 | 47.48 | -14.65 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5210MHz | | |

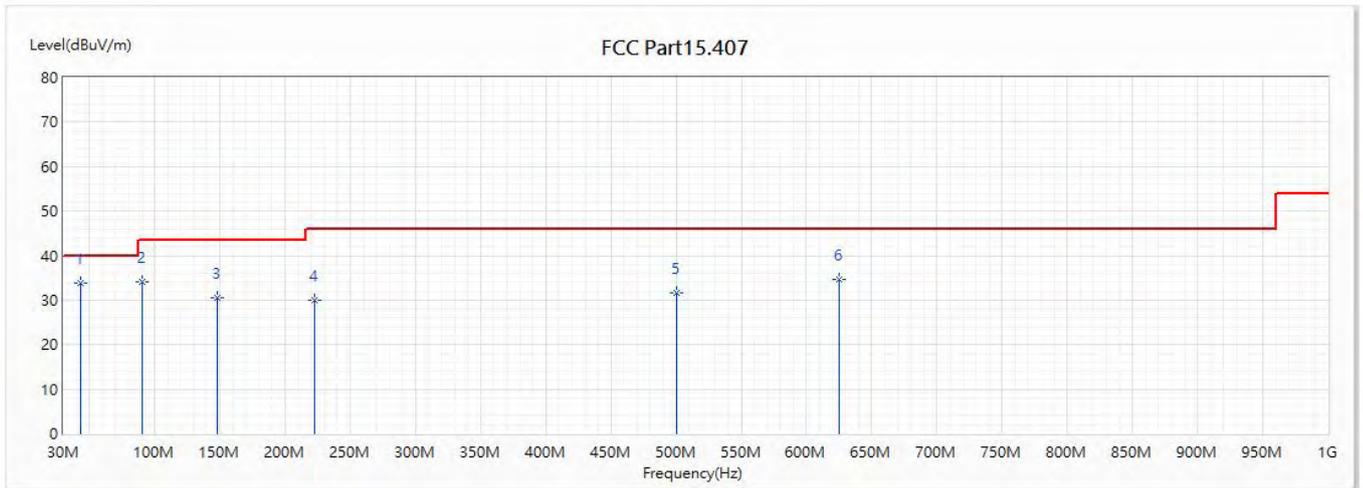


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 43.386 | 33.79 | 40.00 | -6.21 | 52.13 | -18.34 | QP |
| 2 | 90.237 | 34.02 | 43.50 | -9.48 | 58.92 | -24.90 | QP |
| 3 | 148.534 | 30.50 | 43.50 | -13.00 | 52.37 | -21.87 | QP |
| 4 | 222.739 | 30.04 | 46.00 | -15.96 | 51.89 | -21.85 | QP |
| 5 | 500.062 | 31.70 | 46.00 | -14.30 | 46.34 | -14.64 | QP |
| 6 | 624.998 | 34.64 | 46.00 | -11.36 | 48.00 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5220MHz | | |

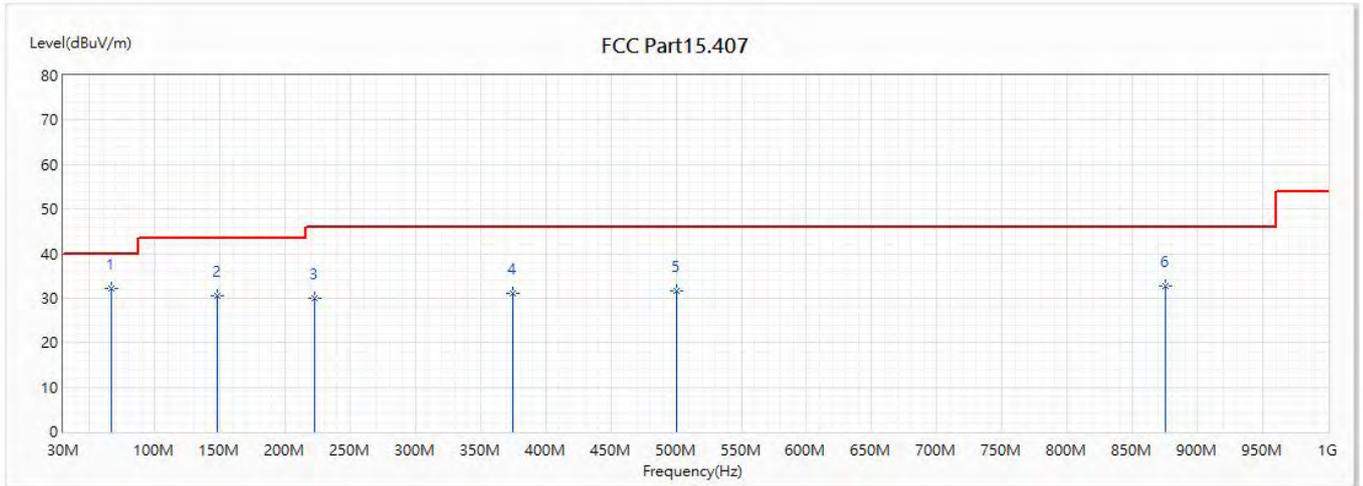


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 66.86 | 32.15 | 40.00 | -7.85 | 58.76 | -26.61 | QP |
| 2 | 148.534 | 30.50 | 43.50 | -13.00 | 52.37 | -21.87 | QP |
| 3 | 222.739 | 30.04 | 46.00 | -15.96 | 51.89 | -21.85 | QP |
| 4 | 375.029 | 31.03 | 46.00 | -14.97 | 48.14 | -17.11 | QP |
| 5 | 500.062 | 31.70 | 46.00 | -14.30 | 46.34 | -14.64 | QP |
| 6 | 875.064 | 32.68 | 46.00 | -13.32 | 42.38 | -9.70 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5220MHz | | |

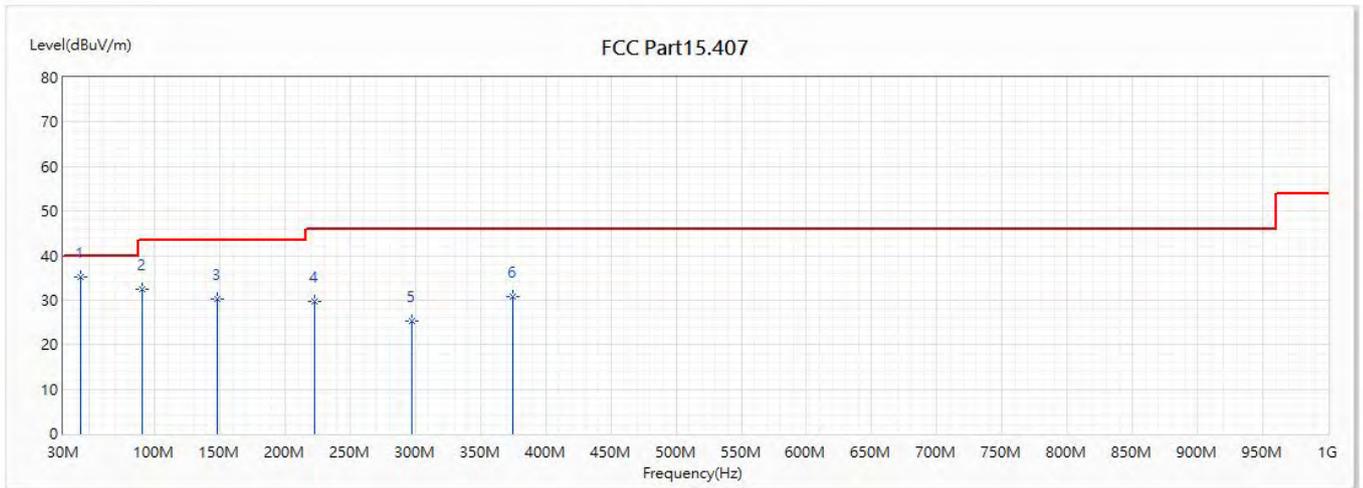


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 43.677 | 35.21 | 40.00 | -4.79 | 53.75 | -18.54 | QP |
| 2 | 90.14 | 32.43 | 43.50 | -11.07 | 57.35 | -24.92 | QP |
| 3 | 148.534 | 30.21 | 43.50 | -13.29 | 52.08 | -21.87 | QP |
| 4 | 222.739 | 29.77 | 46.00 | -16.23 | 51.62 | -21.85 | QP |
| 5 | 297.041 | 25.42 | 46.00 | -20.58 | 44.72 | -19.30 | QP |
| 6 | 375.029 | 30.82 | 46.00 | -15.18 | 47.93 | -17.11 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW Y | | |
| Note : | 802.11ax(40M)_5190MHz | | |

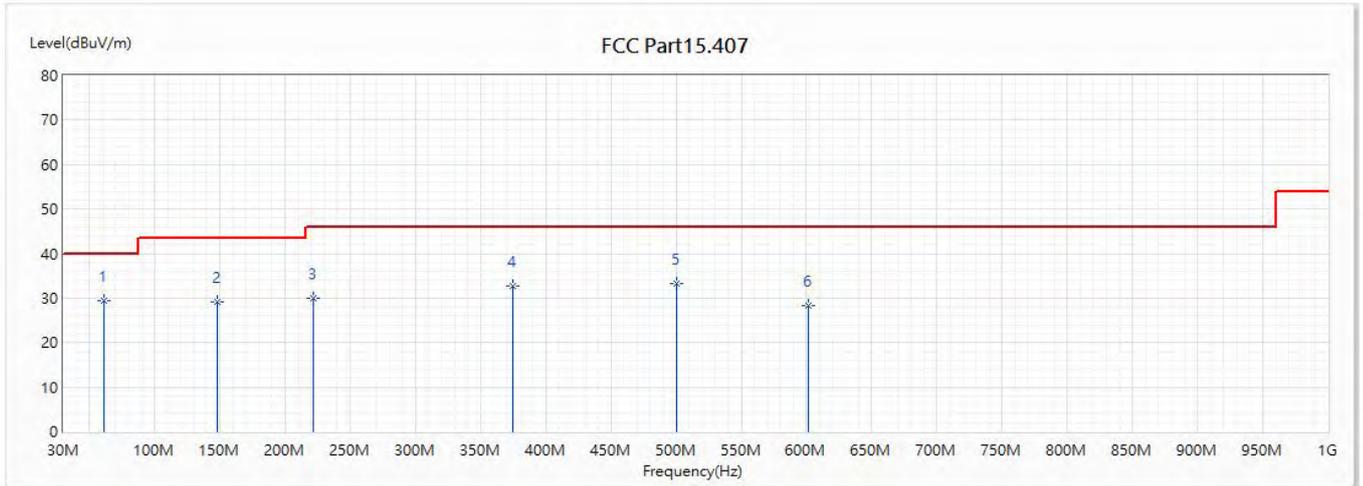


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.331 | 29.49 | 40.00 | -10.51 | 55.54 | -26.05 | QP |
| 2 | 148.534 | 29.23 | 43.50 | -14.27 | 51.10 | -21.87 | QP |
| 3 | 221.478 | 30.03 | 46.00 | -15.97 | 52.15 | -22.12 | QP |
| 4 | 375.029 | 32.79 | 46.00 | -13.21 | 49.90 | -17.11 | QP |
| 5 | 500.062 | 33.32 | 46.00 | -12.68 | 47.96 | -14.64 | QP |
| 6 | 601.718 | 28.24 | 46.00 | -17.76 | 40.00 | -11.76 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5190MHz | | |

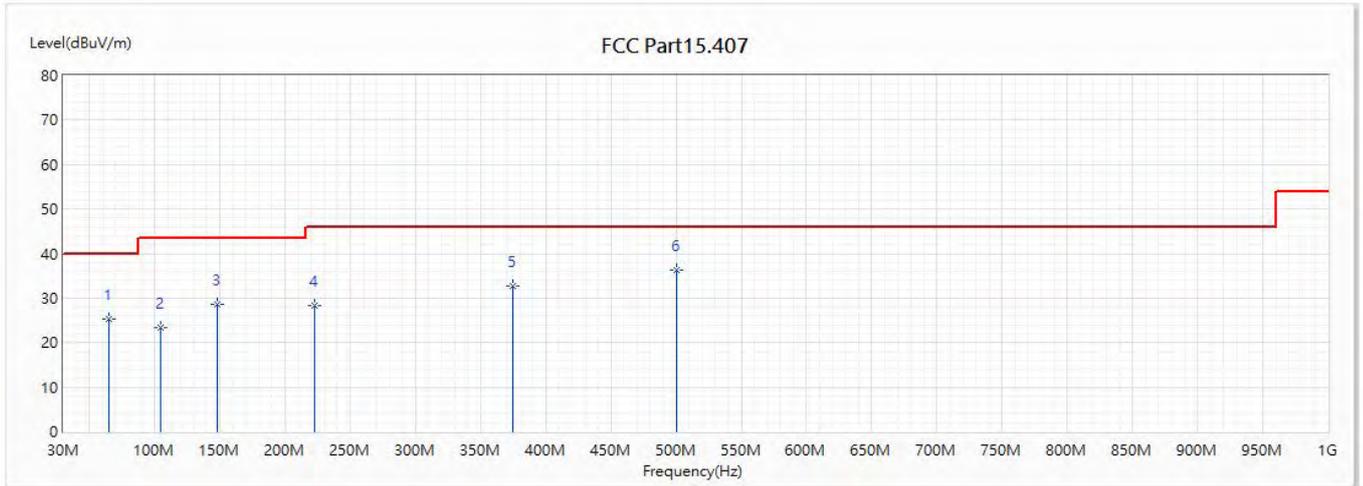


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 64.726 | 25.25 | 40.00 | -14.75 | 51.65 | -26.40 | QP |
| 2 | 104.69 | 23.36 | 43.50 | -20.14 | 44.75 | -21.39 | QP |
| 3 | 148.534 | 28.58 | 43.50 | -14.92 | 50.45 | -21.87 | QP |
| 4 | 222.739 | 28.29 | 46.00 | -17.71 | 50.14 | -21.85 | QP |
| 5 | 375.029 | 32.65 | 46.00 | -13.35 | 49.76 | -17.11 | QP |
| * 6 | 500.062 | 36.32 | 46.00 | -9.68 | 50.96 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW Y | | |
| Note : | 802.11ax(80M)_5210MHz | | |

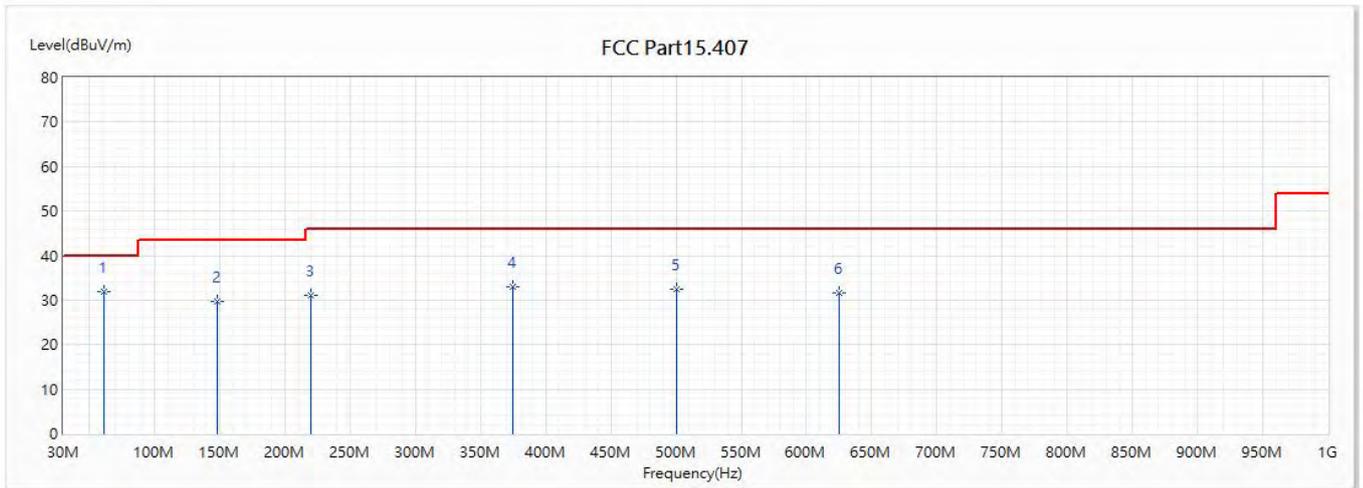


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.428 | 31.78 | 40.00 | -8.22 | 57.84 | -26.06 | QP |
| 2 | 148.534 | 29.72 | 43.50 | -13.78 | 51.59 | -21.87 | QP |
| 3 | 219.926 | 31.10 | 46.00 | -14.90 | 53.55 | -22.45 | QP |
| 4 | 375.029 | 33.01 | 46.00 | -12.99 | 50.12 | -17.11 | QP |
| 5 | 500.062 | 32.44 | 46.00 | -13.56 | 47.08 | -14.64 | QP |
| 6 | 624.998 | 31.51 | 46.00 | -14.49 | 44.87 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(80M)_5210MHz | | |

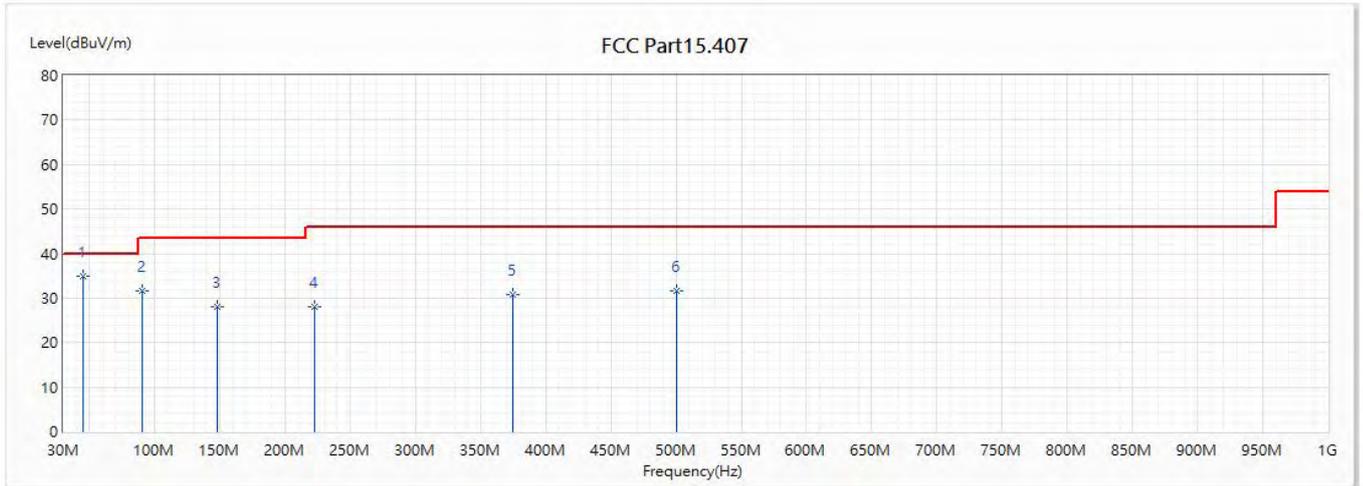


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 45.132 | 35.04 | 40.00 | -4.96 | 54.58 | -19.54 | QP |
| 2 | 90.237 | 31.56 | 43.50 | -11.94 | 56.46 | -24.90 | QP |
| 3 | 148.534 | 28.12 | 43.50 | -15.38 | 49.99 | -21.87 | QP |
| 4 | 222.739 | 28.16 | 46.00 | -17.84 | 50.01 | -21.85 | QP |
| 5 | 375.029 | 30.85 | 46.00 | -15.15 | 47.96 | -17.11 | QP |
| 6 | 500.062 | 31.64 | 46.00 | -14.36 | 46.28 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5210MHz | | |

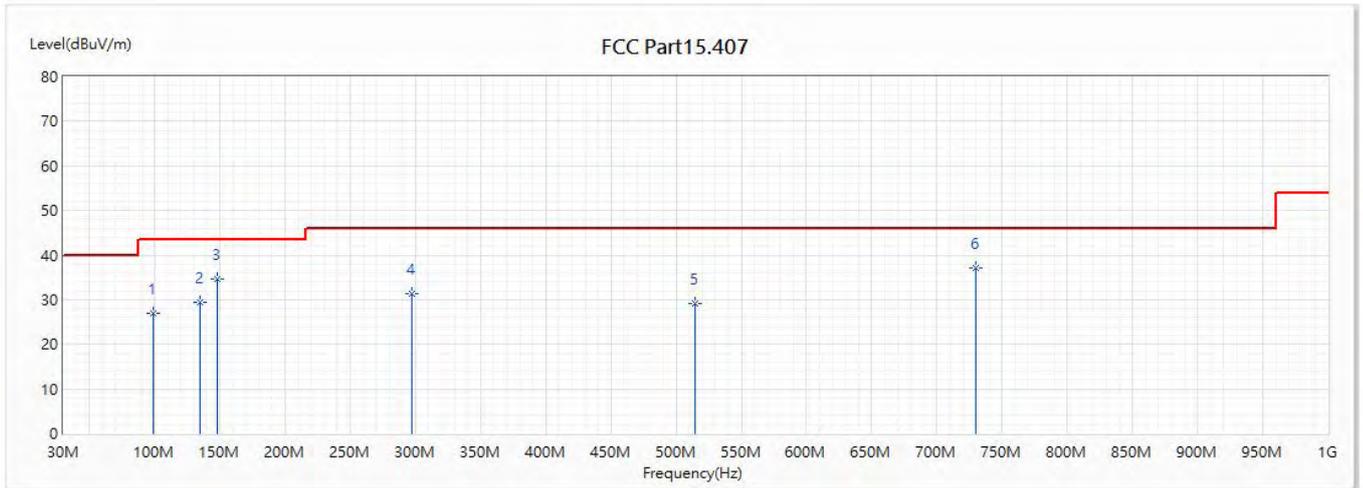


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 99.258 | 27.03 | 43.50 | -16.47 | 49.08 | -22.05 | QP |
| 2 | 135.148 | 29.40 | 43.50 | -14.10 | 51.25 | -21.85 | QP |
| 3 | 148.534 | 34.55 | 43.50 | -8.95 | 56.42 | -21.87 | QP |
| 4 | 297.041 | 31.39 | 46.00 | -14.61 | 50.69 | -19.30 | QP |
| 5 | 514.709 | 29.10 | 46.00 | -16.90 | 42.85 | -13.75 | QP |
| * 6 | 729.758 | 37.14 | 46.00 | -8.86 | 48.29 | -11.15 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5210MHz | | |

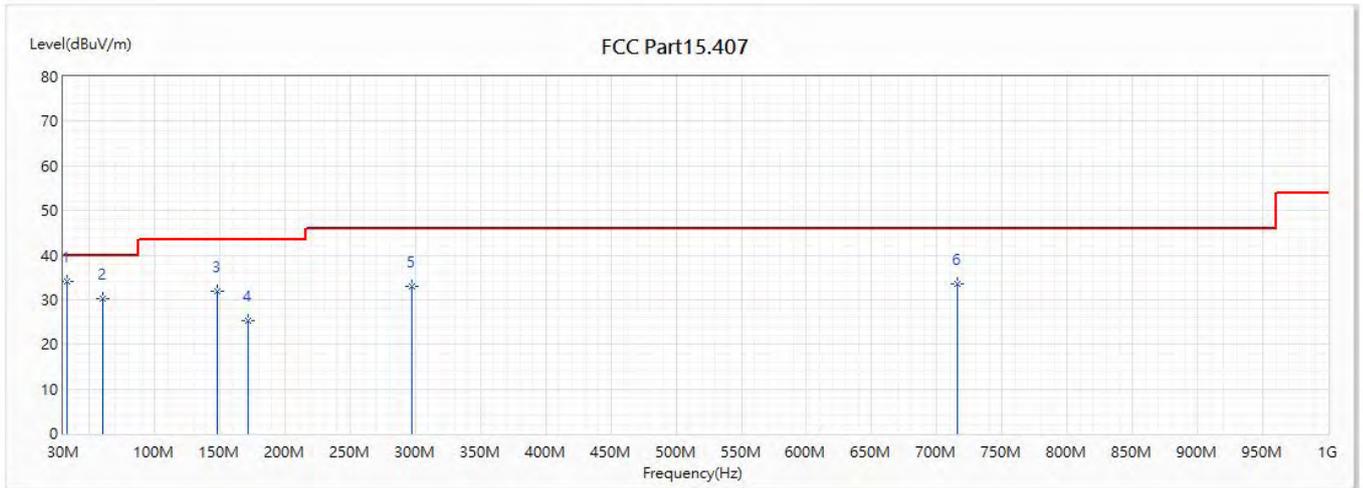


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 33.298 | 34.09 | 40.00 | -5.91 | 49.82 | -15.73 | QP |
| 2 | 60.07 | 30.25 | 40.00 | -9.75 | 56.17 | -25.92 | QP |
| 3 | 148.534 | 31.80 | 43.50 | -11.70 | 53.67 | -21.87 | QP |
| 4 | 172.008 | 25.20 | 43.50 | -18.30 | 46.92 | -21.72 | QP |
| 5 | 297.041 | 33.10 | 46.00 | -12.90 | 52.40 | -19.30 | QP |
| 6 | 715.79 | 33.59 | 46.00 | -12.41 | 45.90 | -12.31 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ax(80M)_5210MHz | | |

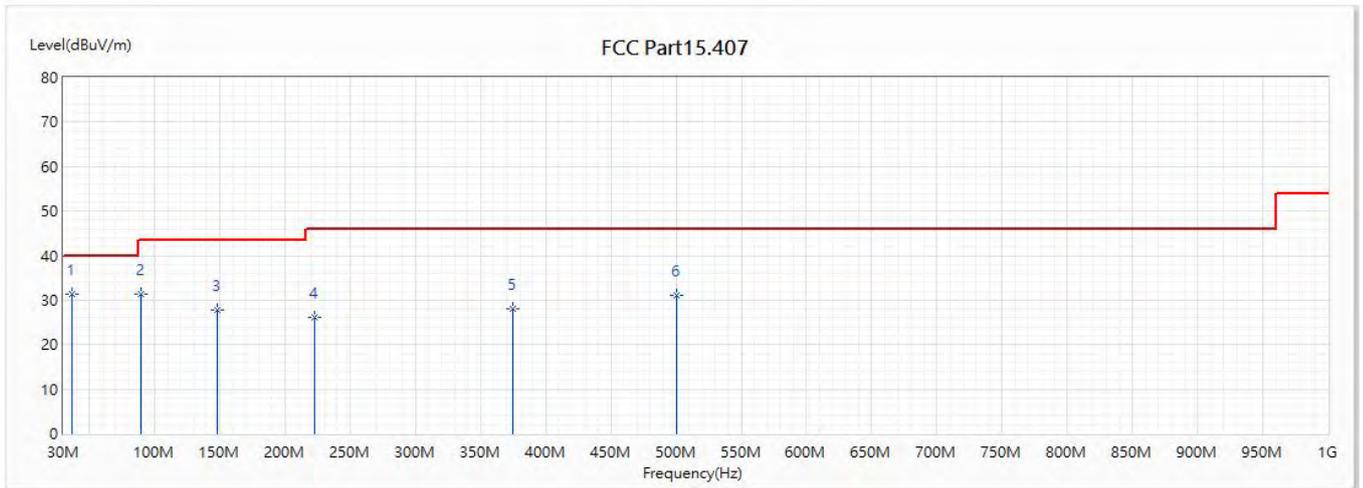


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 36.79 | 31.40 | 40.00 | -8.60 | 47.41 | -16.01 | QP |
| 2 | 89.073 | 31.30 | 43.50 | -12.20 | 56.36 | -25.06 | QP |
| 3 | 148.534 | 27.82 | 43.50 | -15.68 | 49.69 | -21.87 | QP |
| 4 | 222.739 | 26.17 | 46.00 | -19.83 | 48.02 | -21.85 | QP |
| 5 | 375.029 | 27.93 | 46.00 | -18.07 | 45.04 | -17.11 | QP |
| 6 | 500.062 | 31.00 | 46.00 | -15.00 | 45.64 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ax(80M)_5210MHz | | |

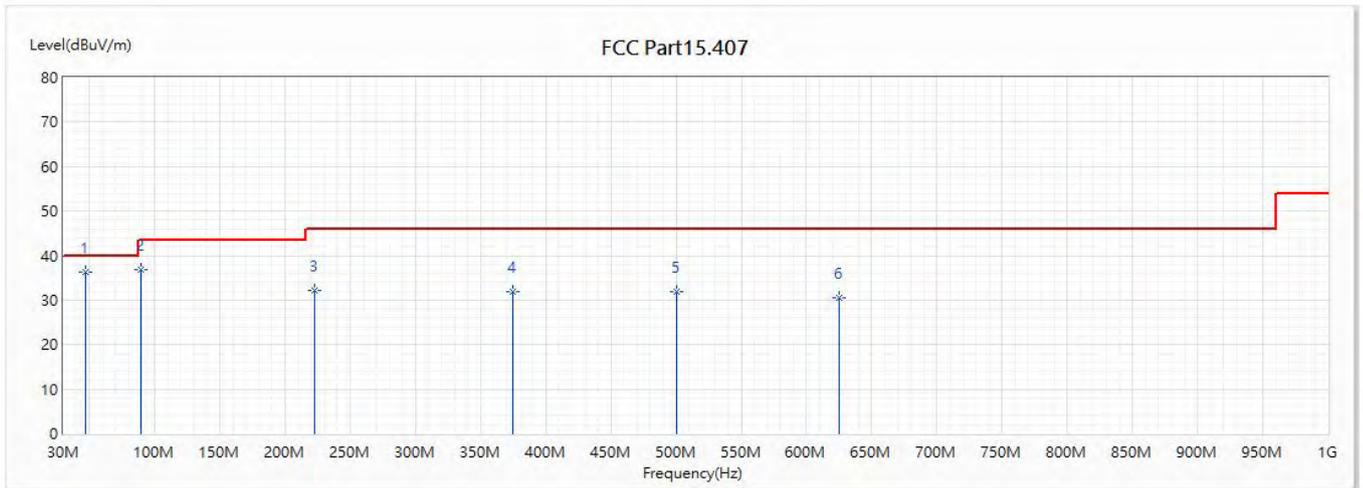


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 47.072 | 36.23 | 40.00 | -3.77 | 57.22 | -20.99 | QP |
| 2 | 89.073 | 36.89 | 43.50 | -6.61 | 61.95 | -25.06 | QP |
| 3 | 222.739 | 32.16 | 46.00 | -13.84 | 54.01 | -21.85 | QP |
| 4 | 375.029 | 31.79 | 46.00 | -14.21 | 48.90 | -17.11 | QP |
| 5 | 500.062 | 31.93 | 46.00 | -14.07 | 46.57 | -14.64 | QP |
| 6 | 624.998 | 30.43 | 46.00 | -15.57 | 43.79 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ac(80M)_5210MHz | | |

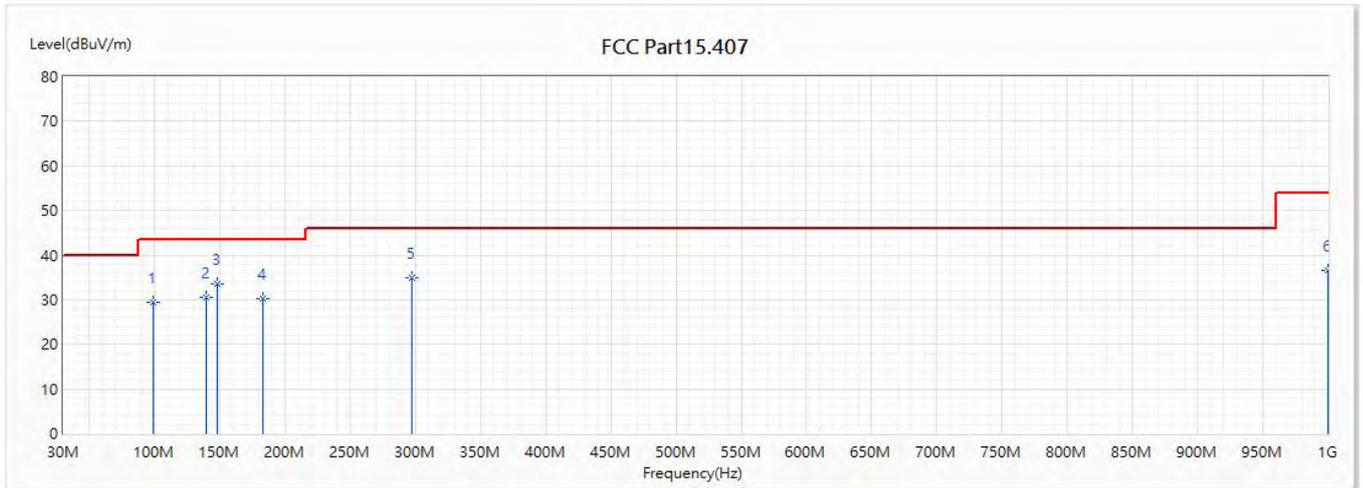


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 99.355 | 29.52 | 43.50 | -13.98 | 51.55 | -22.03 | QP |
| 2 | 139.125 | 30.59 | 43.50 | -12.91 | 51.97 | -21.38 | QP |
| * 3 | 148.461 | 33.62 | 43.50 | -9.88 | 55.48 | -21.86 | QP |
| 4 | 183.018 | 30.11 | 43.50 | -13.39 | 52.44 | -22.33 | QP |
| 5 | 297.114 | 35.03 | 46.00 | -10.97 | 54.34 | -19.31 | QP |
| 6 | 1000 | 36.56 | 54.00 | -17.44 | 44.63 | -8.07 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ac(80M)_5210MHz | | |

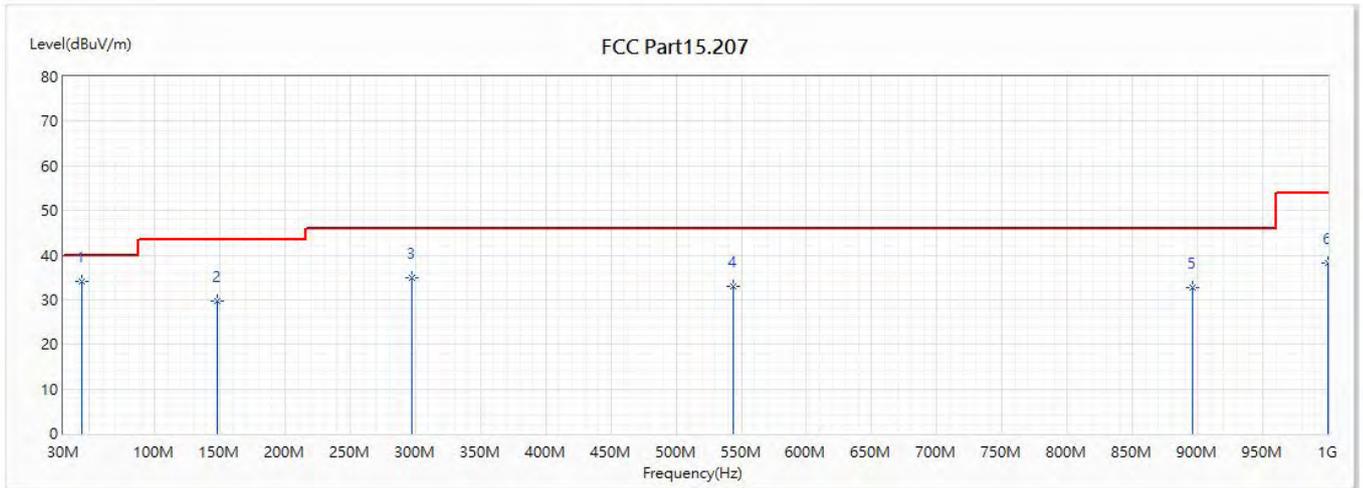


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 43.701 | 34.22 | 40.00 | -5.78 | 52.78 | -18.56 | QP |
| 2 | 148.461 | 29.69 | 43.50 | -13.81 | 51.55 | -21.86 | QP |
| 3 | 297.114 | 34.93 | 46.00 | -11.07 | 54.24 | -19.31 | QP |
| 4 | 544.221 | 33.01 | 46.00 | -12.99 | 45.66 | -12.65 | QP |
| 5 | 896.21 | 32.82 | 46.00 | -13.18 | 42.26 | -9.44 | QP |
| 6 | 1000 | 38.18 | 54.00 | -15.82 | 46.25 | -8.07 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5785MHz | | |

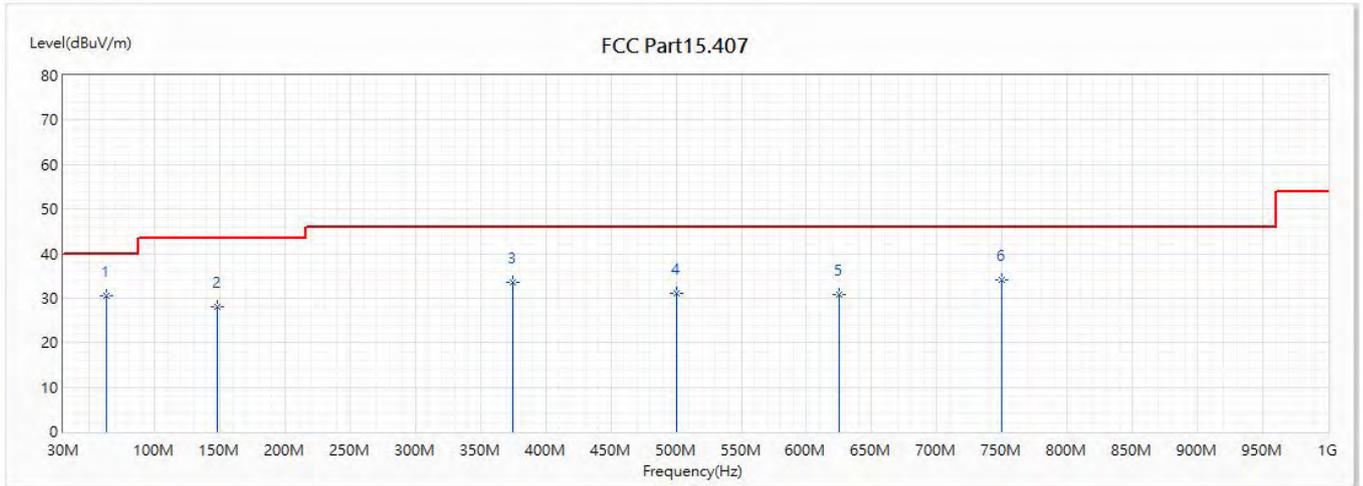


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 62.98 | 30.60 | 40.00 | -9.40 | 56.82 | -26.22 | QP |
| 2 | 148.534 | 28.02 | 43.50 | -15.48 | 49.89 | -21.87 | QP |
| 3 | 375.029 | 33.53 | 46.00 | -12.47 | 50.64 | -17.11 | QP |
| 4 | 500.062 | 30.95 | 46.00 | -15.05 | 45.59 | -14.64 | QP |
| 5 | 624.998 | 30.85 | 46.00 | -15.15 | 44.21 | -13.36 | QP |
| 6 | 750.031 | 34.15 | 46.00 | -11.85 | 45.35 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5785MHz | | |

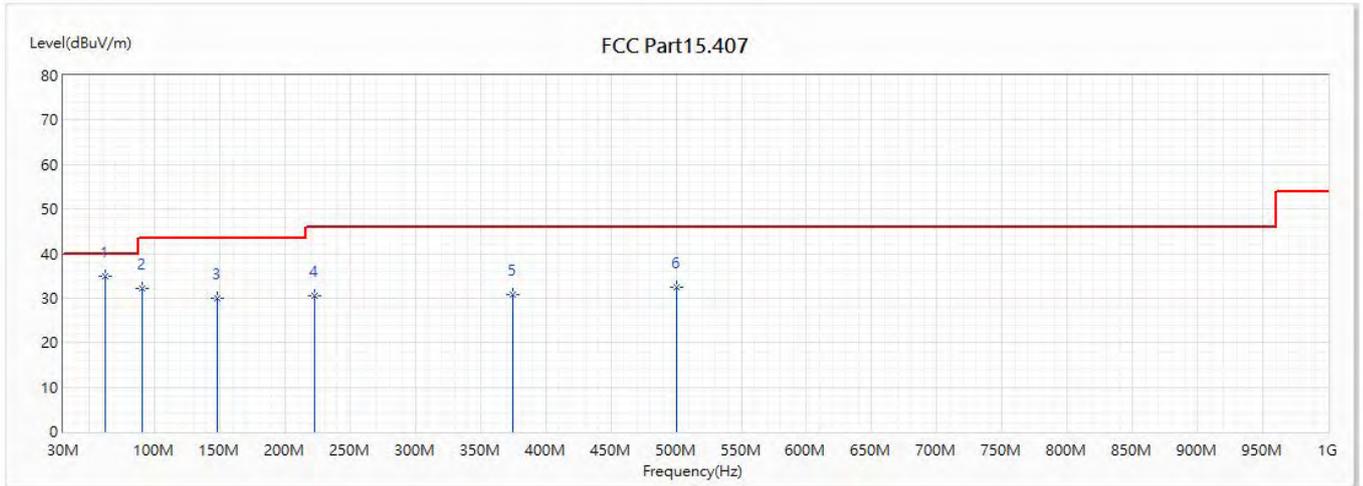


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 62.495 | 34.89 | 40.00 | -5.11 | 61.06 | -26.17 | QP |
| 2 | 90.334 | 32.19 | 43.50 | -11.31 | 57.07 | -24.88 | QP |
| 3 | 148.437 | 30.02 | 43.50 | -13.48 | 51.87 | -21.85 | QP |
| 4 | 222.739 | 30.54 | 46.00 | -15.46 | 52.39 | -21.85 | QP |
| 5 | 375.029 | 30.72 | 46.00 | -15.28 | 47.83 | -17.11 | QP |
| 6 | 500.062 | 32.36 | 46.00 | -13.64 | 47.00 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5785MHz | | |

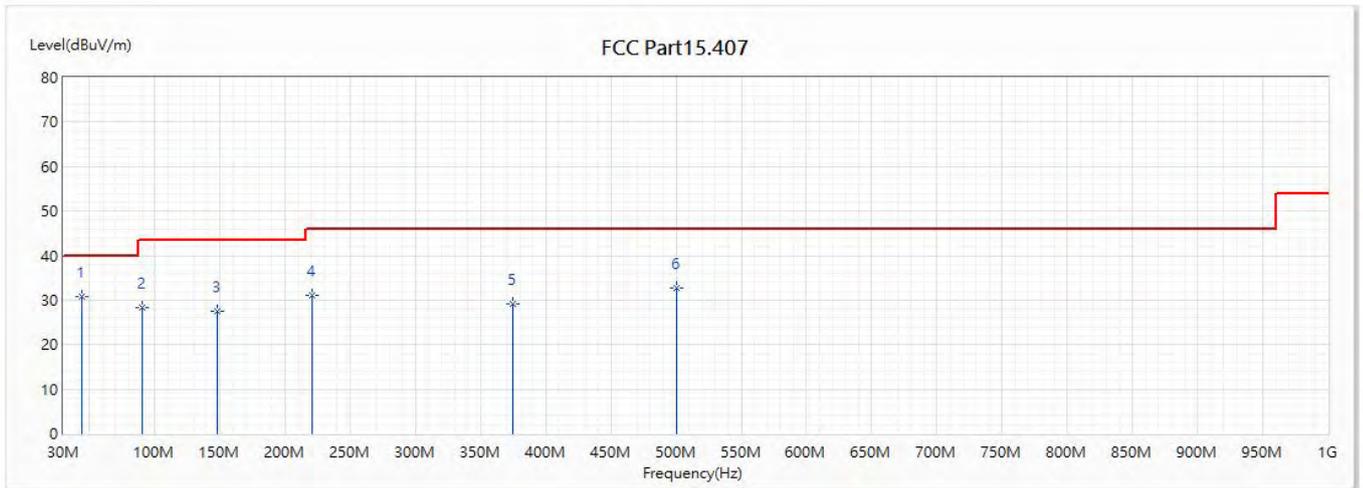


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 44.55 | 30.80 | 40.00 | -9.20 | 49.91 | -19.11 | QP |
| 2 | 90.237 | 28.35 | 43.50 | -15.15 | 53.25 | -24.90 | QP |
| 3 | 148.534 | 27.46 | 43.50 | -16.04 | 49.33 | -21.87 | QP |
| 4 | 220.702 | 30.95 | 46.00 | -15.05 | 53.24 | -22.29 | QP |
| 5 | 375.126 | 29.22 | 46.00 | -16.78 | 46.33 | -17.11 | QP |
| 6 | 499.965 | 32.75 | 46.00 | -13.25 | 47.40 | -14.65 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5785MHz | | |

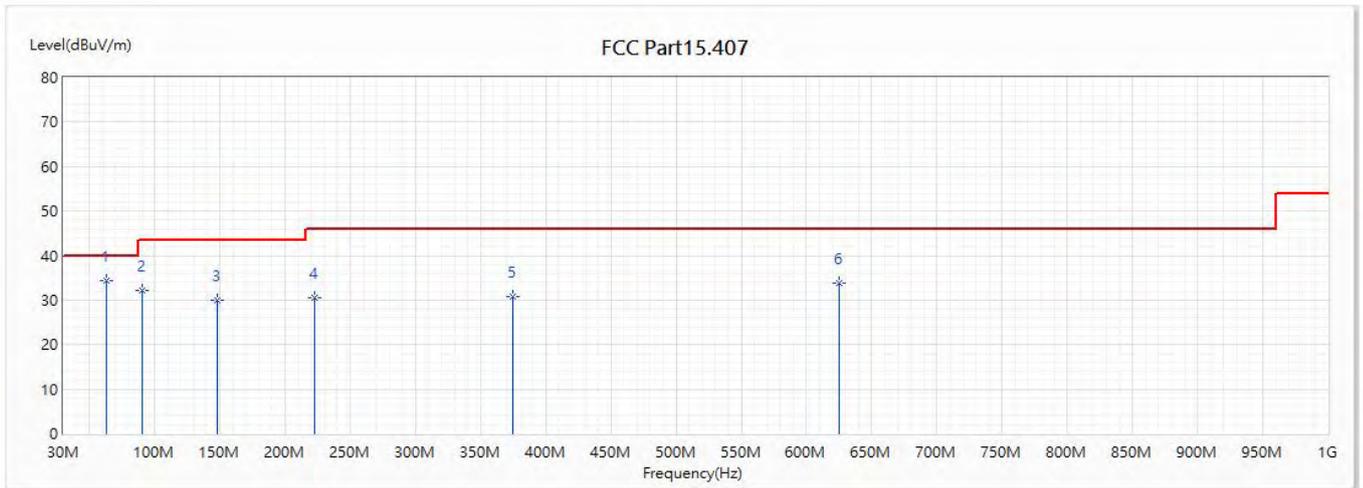


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 62.883 | 34.26 | 40.00 | -5.74 | 60.47 | -26.21 | QP |
| 2 | 90.334 | 32.19 | 43.50 | -11.31 | 57.07 | -24.88 | QP |
| 3 | 148.437 | 30.02 | 43.50 | -13.48 | 51.87 | -21.85 | QP |
| 4 | 222.739 | 30.54 | 46.00 | -15.46 | 52.39 | -21.85 | QP |
| 5 | 375.029 | 30.72 | 46.00 | -15.28 | 47.83 | -17.11 | QP |
| 6 | 624.998 | 33.74 | 46.00 | -12.26 | 47.10 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5755MHz | | |

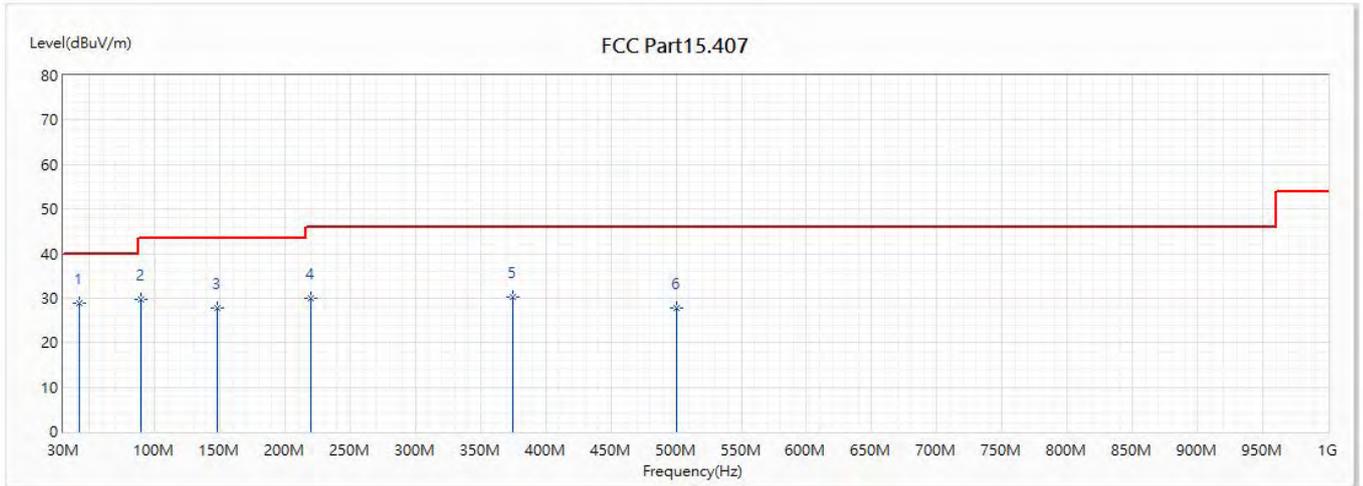


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 42.707 | 28.76 | 40.00 | -11.24 | 46.67 | -17.91 | QP |
| 2 | 89.17 | 29.68 | 43.50 | -13.82 | 54.72 | -25.04 | QP |
| 3 | 148.534 | 27.79 | 43.50 | -15.71 | 49.66 | -21.87 | QP |
| 4 | 219.441 | 30.05 | 46.00 | -15.95 | 52.60 | -22.55 | QP |
| 5 | 375.126 | 30.26 | 46.00 | -15.74 | 47.37 | -17.11 | QP |
| 6 | 500.159 | 27.87 | 46.00 | -18.13 | 42.51 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5755MHz | | |

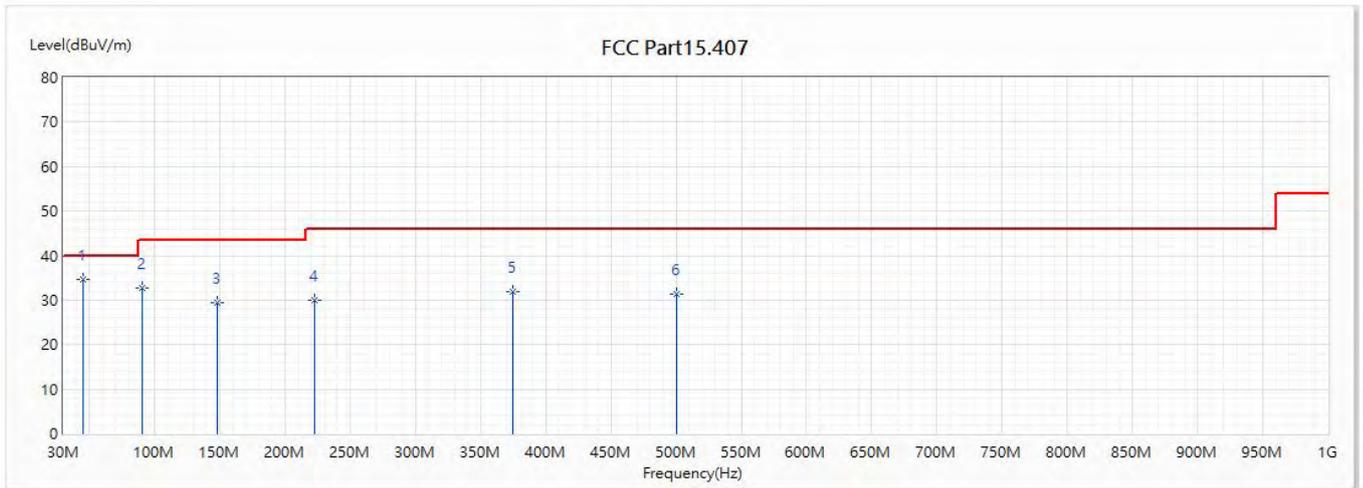


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 44.744 | 34.75 | 40.00 | -5.25 | 54.01 | -19.26 | QP |
| 2 | 90.334 | 32.72 | 43.50 | -10.78 | 57.60 | -24.88 | QP |
| 3 | 148.534 | 29.34 | 43.50 | -14.16 | 51.21 | -21.87 | QP |
| 4 | 222.739 | 30.06 | 46.00 | -15.94 | 51.91 | -21.85 | QP |
| 5 | 375.029 | 31.86 | 46.00 | -14.14 | 48.97 | -17.11 | QP |
| 6 | 500.062 | 31.33 | 46.00 | -14.67 | 45.97 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5775MHz | | |

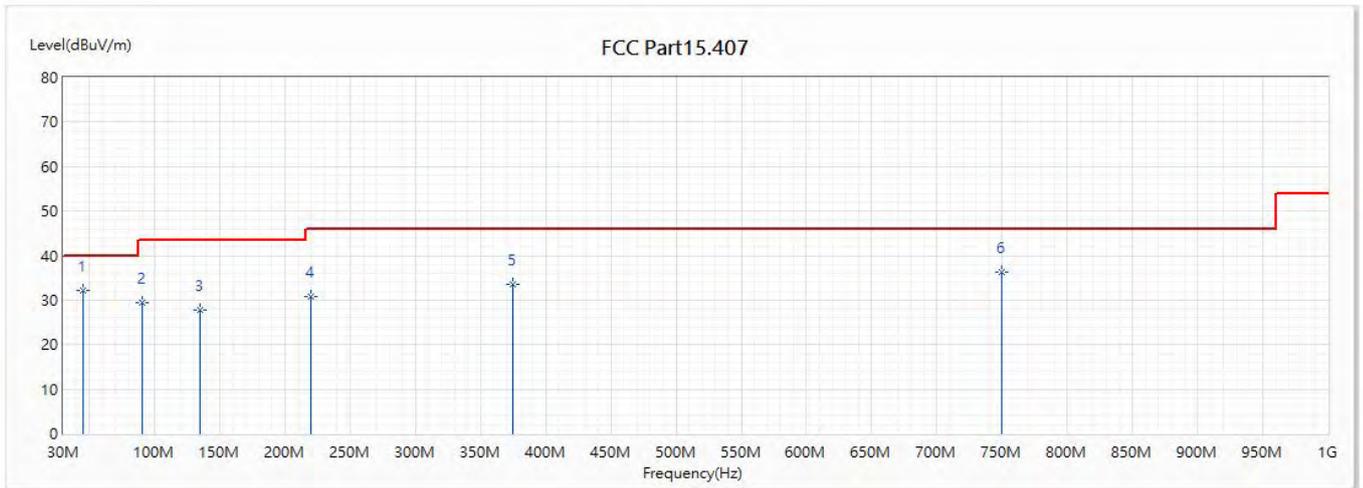


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 45.326 | 32.09 | 40.00 | -7.91 | 51.79 | -19.70 | QP |
| 2 | 90.14 | 29.43 | 43.50 | -14.07 | 54.35 | -24.92 | QP |
| 3 | 135.148 | 27.72 | 43.50 | -15.78 | 49.57 | -21.85 | QP |
| 4 | 220.023 | 30.71 | 46.00 | -15.29 | 53.14 | -22.43 | QP |
| 5 | 374.932 | 33.58 | 46.00 | -12.42 | 50.71 | -17.13 | QP |
| 6 | 750.031 | 36.25 | 46.00 | -9.75 | 47.45 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|---------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_AD P-65DW Y | | |
| Note : | 802.11ac(80M)_5775MHz | | |

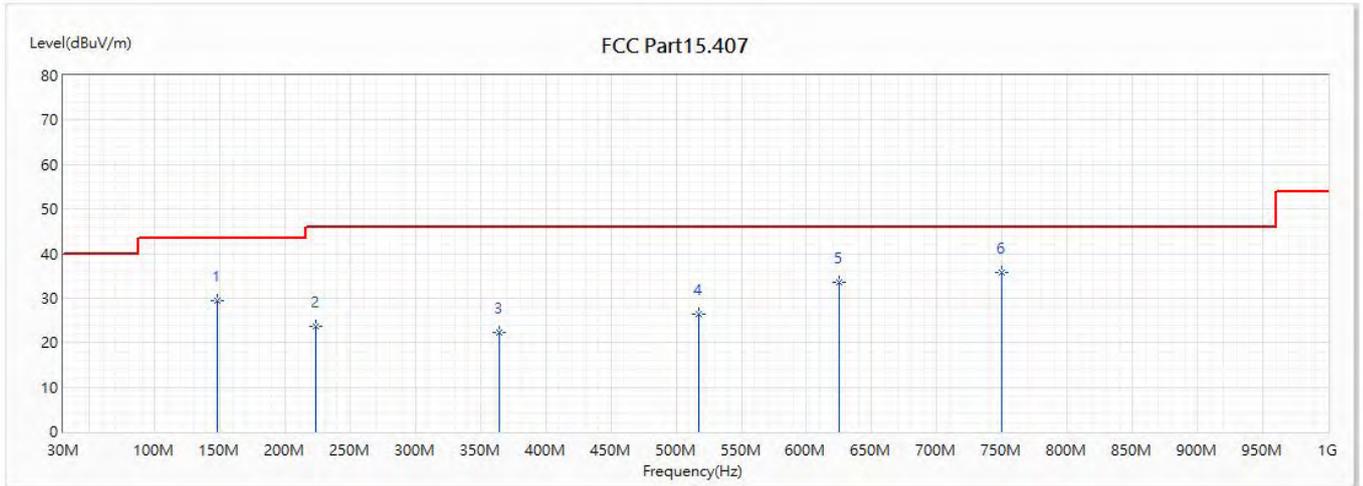


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 148.534 | 29.53 | 43.50 | -13.97 | 51.40 | -21.87 | QP |
| 2 | 223.224 | 23.75 | 46.00 | -22.25 | 45.49 | -21.74 | QP |
| 3 | 364.747 | 22.39 | 46.00 | -23.61 | 39.19 | -16.80 | QP |
| 4 | 517.134 | 26.44 | 46.00 | -19.56 | 39.97 | -13.53 | QP |
| 5 | 624.998 | 33.45 | 46.00 | -12.55 | 46.81 | -13.36 | QP |
| * 6 | 750.031 | 35.83 | 46.00 | -10.17 | 47.03 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5785MHz | | |

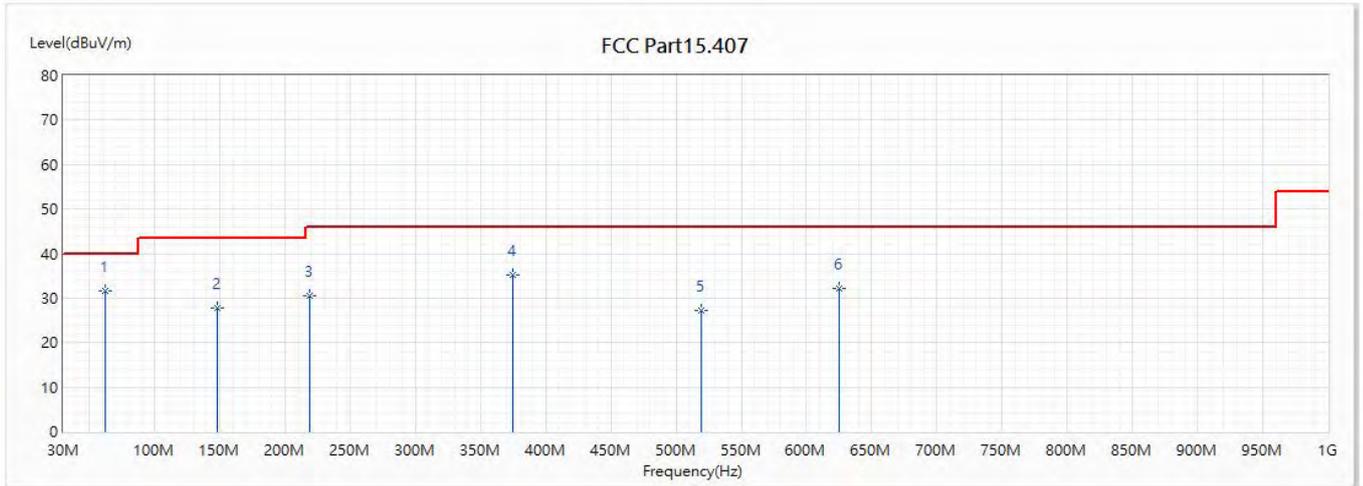


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 62.01 | 31.66 | 40.00 | -8.34 | 57.79 | -26.13 | QP |
| 2 | 148.534 | 27.68 | 43.50 | -15.82 | 49.55 | -21.87 | QP |
| 3 | 219.344 | 30.62 | 46.00 | -15.38 | 53.19 | -22.57 | QP |
| 4 | 375.029 | 35.15 | 46.00 | -10.85 | 52.26 | -17.11 | QP |
| 5 | 519.268 | 27.09 | 46.00 | -18.91 | 40.46 | -13.37 | QP |
| 6 | 624.998 | 32.13 | 46.00 | -13.87 | 45.49 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5785MHz | | |

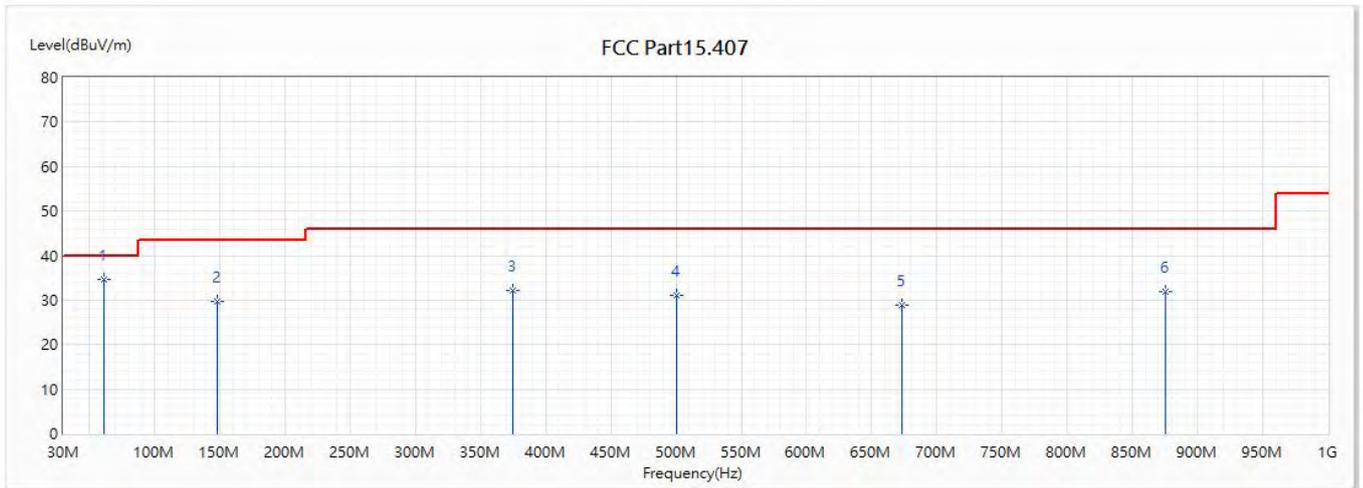


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.331 | 34.76 | 40.00 | -5.24 | 60.81 | -26.05 | QP |
| 2 | 148.534 | 29.58 | 43.50 | -13.92 | 51.45 | -21.87 | QP |
| 3 | 375.029 | 32.14 | 46.00 | -13.86 | 49.25 | -17.11 | QP |
| 4 | 500.062 | 31.14 | 46.00 | -14.86 | 45.78 | -14.64 | QP |
| 5 | 673.498 | 28.73 | 46.00 | -17.27 | 40.18 | -11.45 | QP |
| 6 | 875.064 | 31.77 | 46.00 | -14.23 | 41.47 | -9.70 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5755MHz | | |

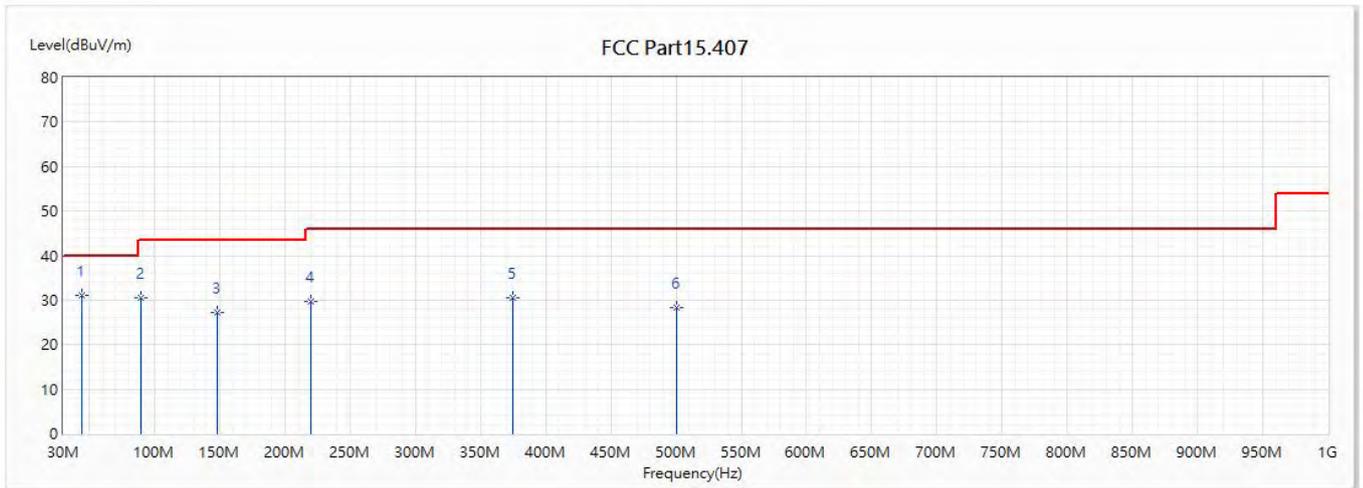


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 43.968 | 31.17 | 40.00 | -8.83 | 49.90 | -18.73 | QP |
| 2 | 89.073 | 30.52 | 43.50 | -12.98 | 55.58 | -25.06 | QP |
| 3 | 148.534 | 27.17 | 43.50 | -16.33 | 49.04 | -21.87 | QP |
| 4 | 220.314 | 29.81 | 46.00 | -16.19 | 52.18 | -22.37 | QP |
| 5 | 375.126 | 30.43 | 46.00 | -15.57 | 47.54 | -17.11 | QP |
| 6 | 500.159 | 28.28 | 46.00 | -17.72 | 42.92 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5755MHz | | |

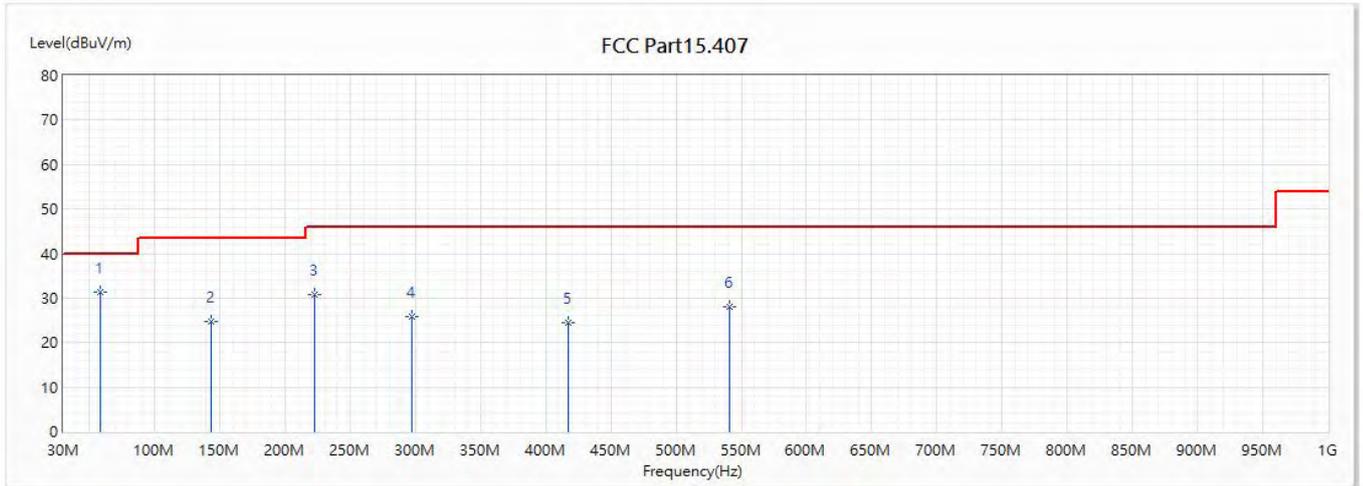


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 58.324 | 31.42 | 40.00 | -8.58 | 56.64 | -25.22 | QP |
| 2 | 143.005 | 24.77 | 43.50 | -18.73 | 46.17 | -21.40 | QP |
| 3 | 222.739 | 30.78 | 46.00 | -15.22 | 52.63 | -21.85 | QP |
| 4 | 297.041 | 25.80 | 46.00 | -20.20 | 45.10 | -19.30 | QP |
| 5 | 417.03 | 24.60 | 46.00 | -21.40 | 39.87 | -15.27 | QP |
| 6 | 540.608 | 28.17 | 46.00 | -17.83 | 41.20 | -13.03 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(80M)_5775MHz | | |

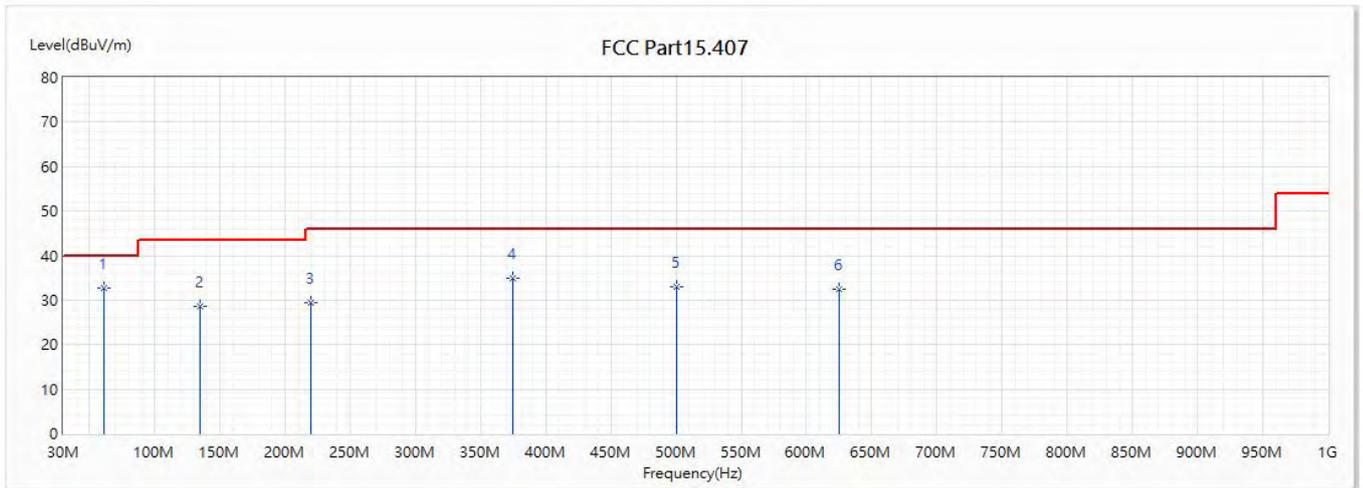


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.428 | 32.85 | 40.00 | -7.15 | 58.91 | -26.06 | QP |
| 2 | 135.148 | 28.48 | 43.50 | -15.02 | 50.33 | -21.85 | QP |
| 3 | 220.12 | 29.45 | 46.00 | -16.55 | 51.86 | -22.41 | QP |
| 4 | 375.029 | 34.82 | 46.00 | -11.18 | 51.93 | -17.11 | QP |
| 5 | 499.965 | 33.10 | 46.00 | -12.90 | 47.75 | -14.65 | QP |
| 6 | 624.998 | 32.35 | 46.00 | -13.65 | 45.71 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(80M)_5775MHz | | |

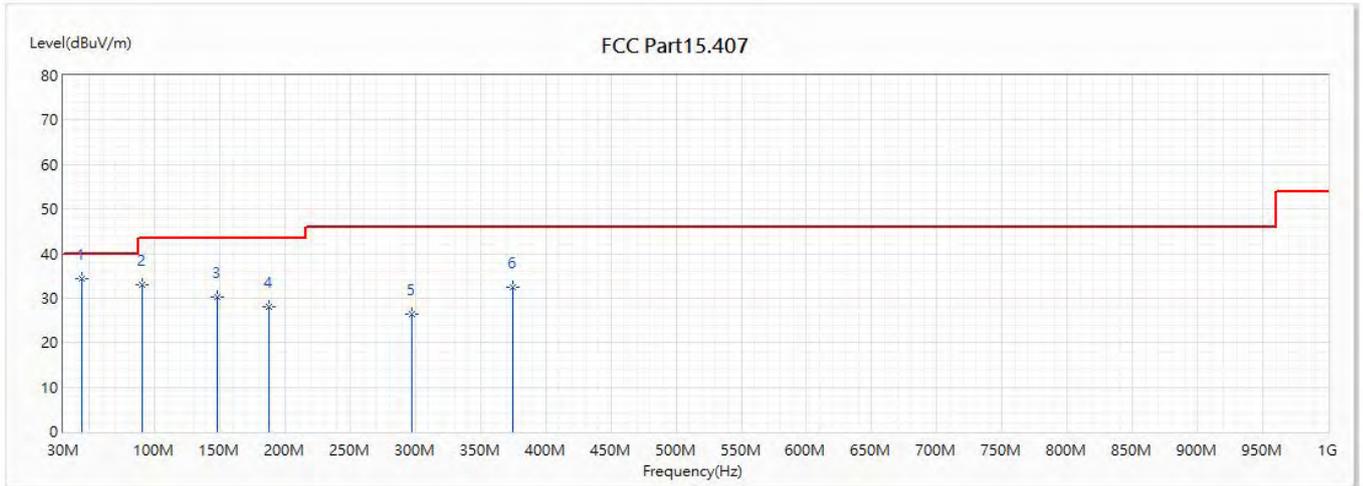


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 43.968 | 34.44 | 40.00 | -5.56 | 53.17 | -18.73 | QP |
| 2 | 90.14 | 33.03 | 43.50 | -10.47 | 57.95 | -24.92 | QP |
| 3 | 148.534 | 30.21 | 43.50 | -13.29 | 52.08 | -21.87 | QP |
| 4 | 187.431 | 28.02 | 43.50 | -15.48 | 50.59 | -22.57 | QP |
| 5 | 297.041 | 26.35 | 46.00 | -19.65 | 45.65 | -19.30 | QP |
| 6 | 375.029 | 32.36 | 46.00 | -13.64 | 49.47 | -17.11 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5775MHz | | |

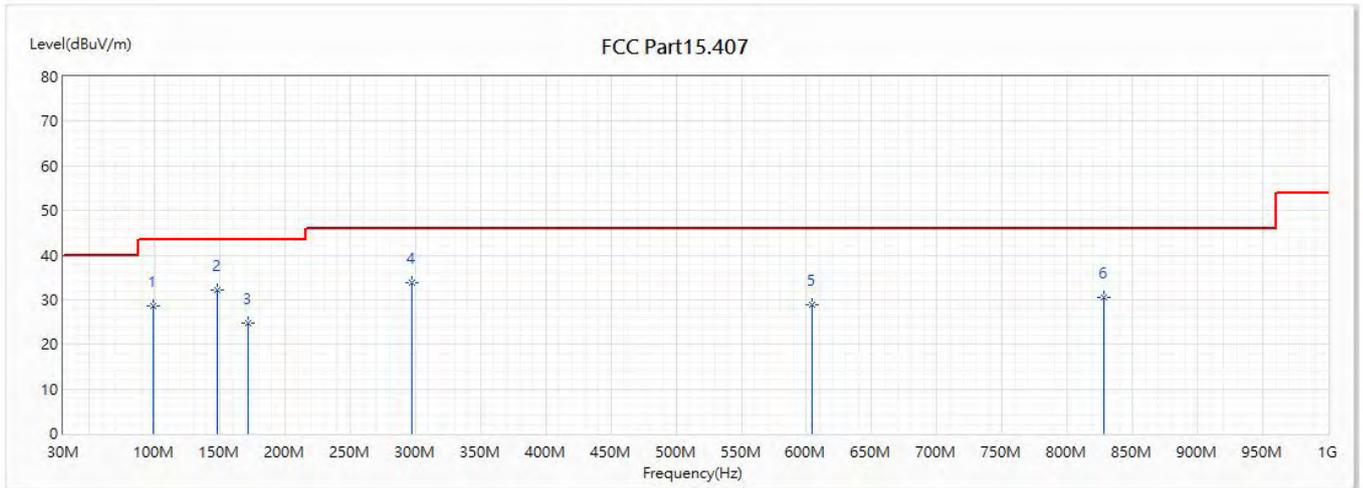


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 99.234 | 28.51 | 43.50 | -14.99 | 50.56 | -22.05 | QP |
| * 2 | 148.461 | 32.12 | 43.50 | -11.38 | 53.98 | -21.86 | QP |
| 3 | 171.984 | 24.69 | 43.50 | -18.81 | 46.41 | -21.72 | QP |
| 4 | 297.114 | 33.91 | 46.00 | -12.09 | 53.22 | -19.31 | QP |
| 5 | 604.24 | 28.92 | 46.00 | -17.08 | 40.46 | -11.54 | QP |
| 6 | 828.431 | 30.54 | 46.00 | -15.46 | 40.72 | -10.18 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5775MHz | | |

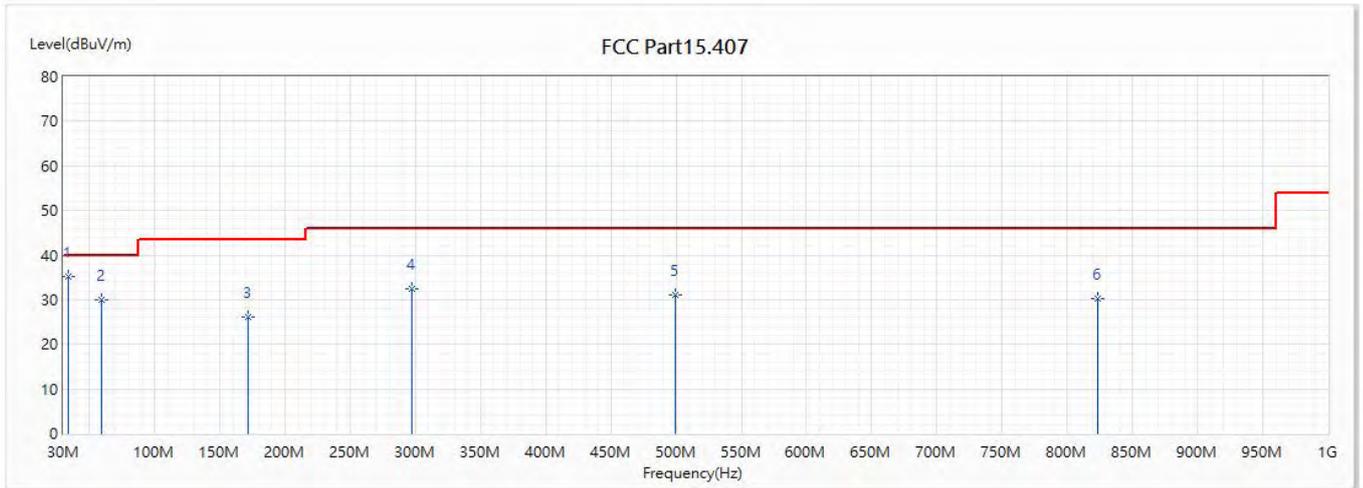


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 33.759 | 35.30 | 40.00 | -4.70 | 51.07 | -15.77 | QP |
| 2 | 58.979 | 29.90 | 40.00 | -10.10 | 55.41 | -25.51 | QP |
| 3 | 171.984 | 25.99 | 43.50 | -17.51 | 47.71 | -21.72 | QP |
| 4 | 297.114 | 32.38 | 46.00 | -13.62 | 51.69 | -19.31 | QP |
| 5 | 499.844 | 31.06 | 46.00 | -14.94 | 45.71 | -14.65 | QP |
| 6 | 823.096 | 30.28 | 46.00 | -15.72 | 40.23 | -9.95 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ax(80M)_5775MHz | | |

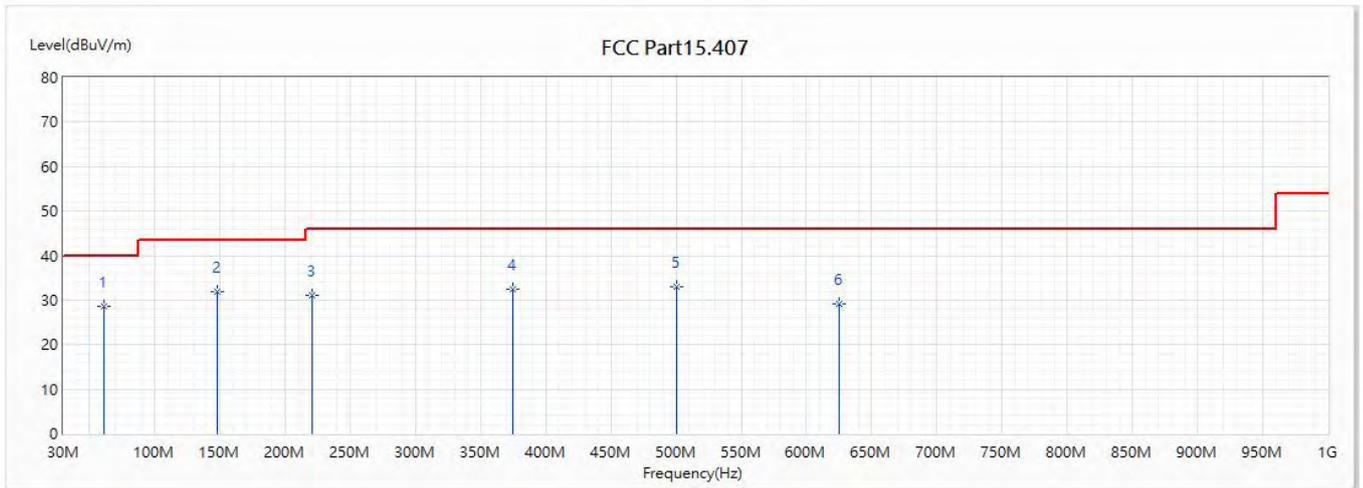


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 61.331 | 28.53 | 40.00 | -11.47 | 54.58 | -26.05 | QP |
| 2 | 148.534 | 31.88 | 43.50 | -11.62 | 53.75 | -21.87 | QP |
| 3 | 221.09 | 31.01 | 46.00 | -14.99 | 53.21 | -22.20 | QP |
| 4 | 375.029 | 32.45 | 46.00 | -13.55 | 49.56 | -17.11 | QP |
| 5 | 500.062 | 33.11 | 46.00 | -12.89 | 47.75 | -14.64 | QP |
| 6 | 625.095 | 29.10 | 46.00 | -16.90 | 42.46 | -13.36 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Scott |
| Model No : | GT-AX6000 | Test Date : | 2018/9/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ax(80M)_5775MHz | | |

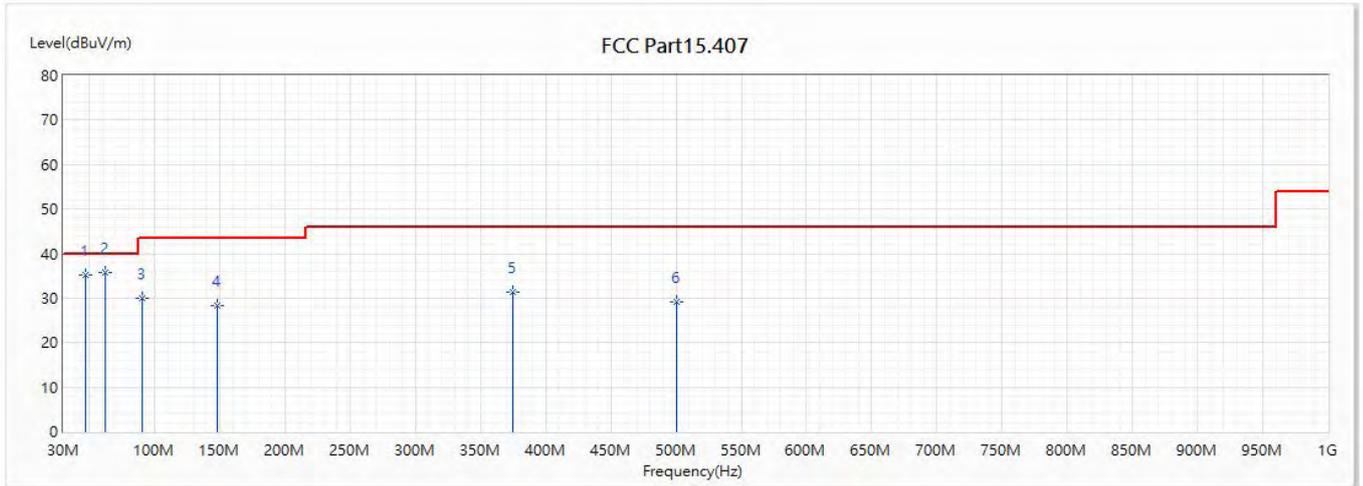


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 47.072 | 35.23 | 40.00 | -4.77 | 56.22 | -20.99 | QP |
| * 2 | 62.495 | 35.68 | 40.00 | -4.32 | 61.85 | -26.17 | QP |
| 3 | 90.237 | 30.05 | 43.50 | -13.45 | 54.95 | -24.90 | QP |
| 4 | 148.534 | 28.43 | 43.50 | -15.07 | 50.30 | -21.87 | QP |
| 5 | 375.029 | 31.43 | 46.00 | -14.57 | 48.54 | -17.11 | QP |
| 6 | 500.062 | 29.25 | 46.00 | -16.75 | 43.89 | -14.64 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ac(80M)_5775MHz | | |

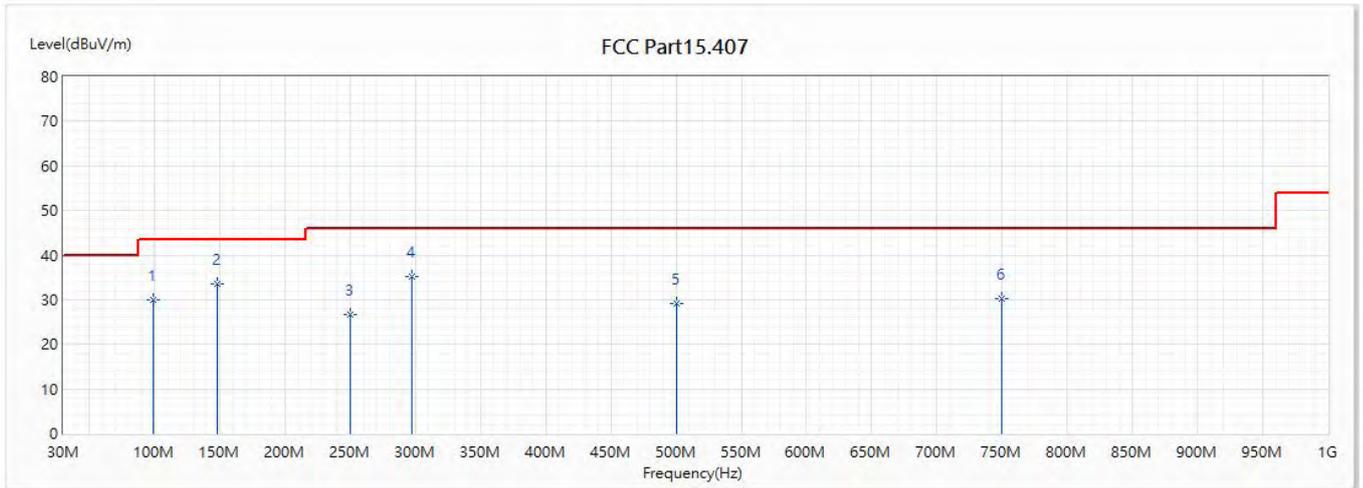


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 99.234 | 30.03 | 43.50 | -13.47 | 52.08 | -22.05 | QP |
| * 2 | 148.461 | 33.51 | 43.50 | -9.99 | 55.37 | -21.86 | QP |
| 3 | 249.948 | 26.68 | 46.00 | -19.32 | 47.53 | -20.85 | QP |
| 4 | 297.114 | 35.08 | 46.00 | -10.92 | 54.39 | -19.31 | QP |
| 5 | 499.965 | 29.08 | 46.00 | -16.92 | 43.73 | -14.65 | QP |
| 6 | 750.104 | 30.27 | 46.00 | -15.73 | 41.47 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|----------|
| Site : | CB4-H | Engineer : | Carter |
| Model No : | GT-AC5400 | Test Date : | 2018/9/6 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 2:TX_CDD_ADP-65DW B | | |
| Note : | 802.11ac(80M)_5775MHz | | |

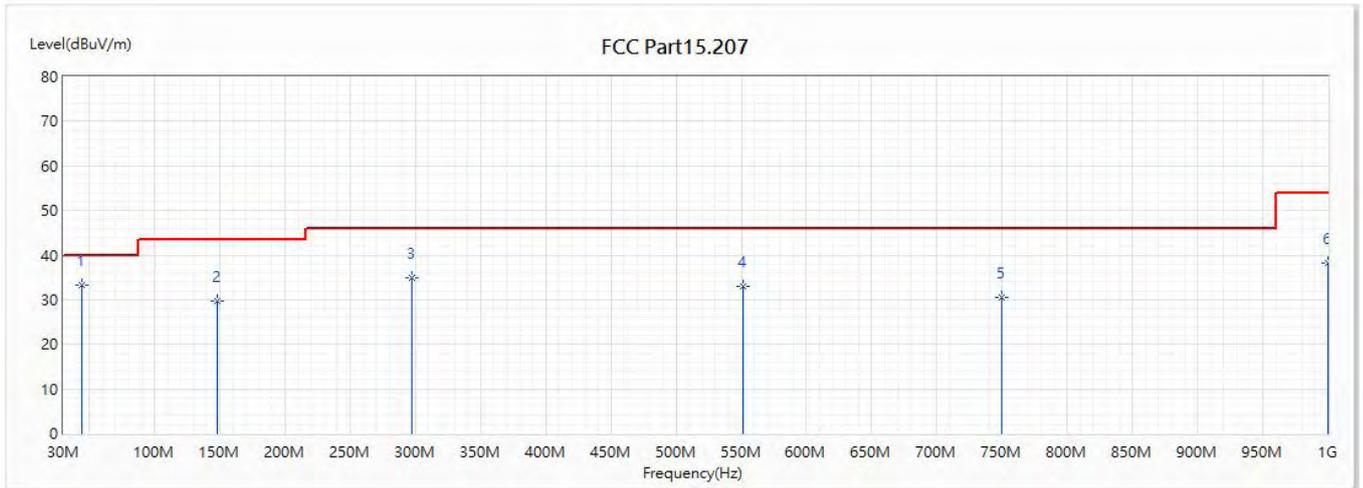


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| * 1 | 44.186 | 33.24 | 40.00 | -6.76 | 52.11 | -18.87 | QP |
| 2 | 148.461 | 29.67 | 43.50 | -13.83 | 51.53 | -21.86 | QP |
| 3 | 297.114 | 34.91 | 46.00 | -11.09 | 54.22 | -19.31 | QP |
| 4 | 551.739 | 32.90 | 46.00 | -13.10 | 46.04 | -13.14 | QP |
| 5 | 750.104 | 30.47 | 46.00 | -15.53 | 41.67 | -11.20 | QP |
| 6 | 1000 | 38.18 | 54.00 | -15.82 | 46.25 | -8.07 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

Harmonic & Spurious:

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW Y | | |
| Note : | 802.11a_5180MHz | | |

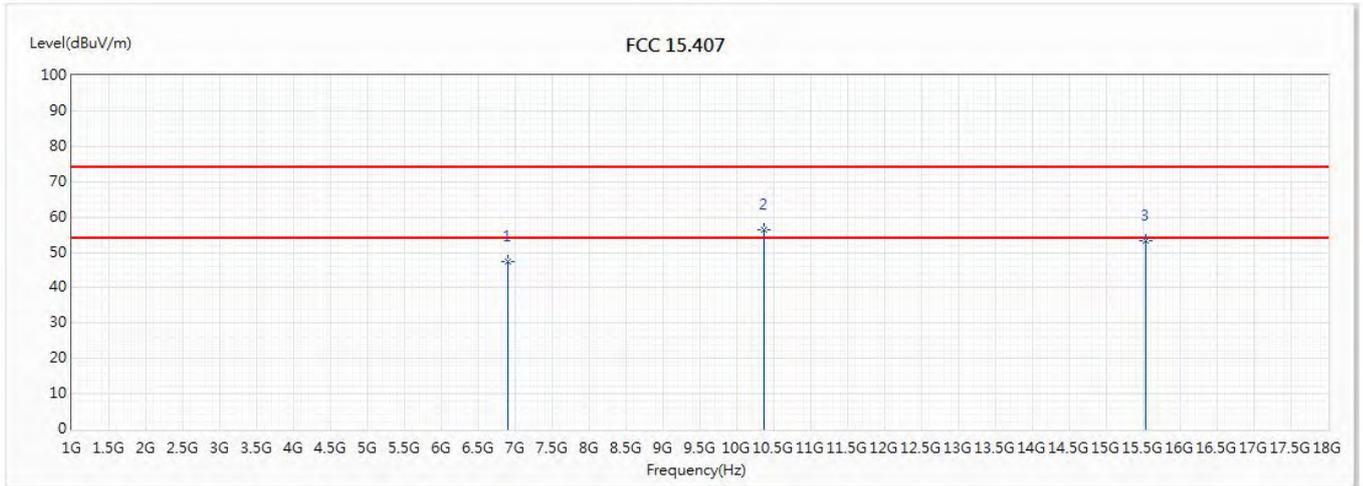


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6906 | 47.51 | 74.00 | -26.49 | 41.55 | 5.96 | PK |
| * 2 | 10360 | 56.36 | 74.00 | -17.64 | 41.88 | 14.48 | PK |
| 3 | 15540 | 53.23 | 74.00 | -20.77 | 38.45 | 14.78 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5180MHz | | |

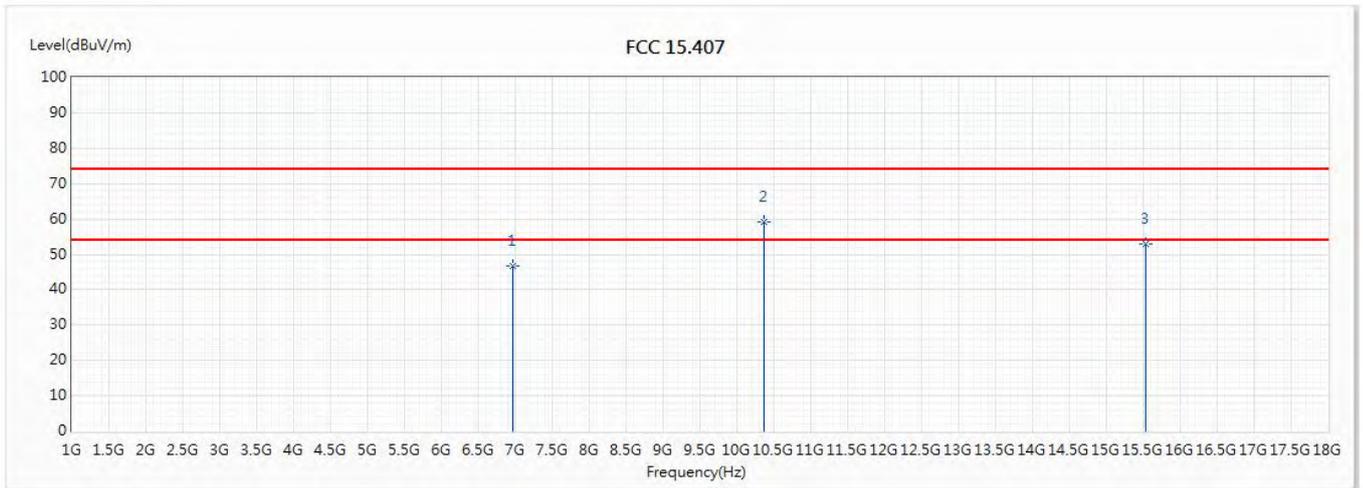


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 46.68 | 74.00 | -27.32 | 40.52 | 6.16 | PK |
| * 2 | 10360 | 59.08 | 74.00 | -14.92 | 44.60 | 14.48 | PK |
| 3 | 15540 | 52.83 | 74.00 | -21.17 | 38.05 | 14.78 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5220MHz | | |

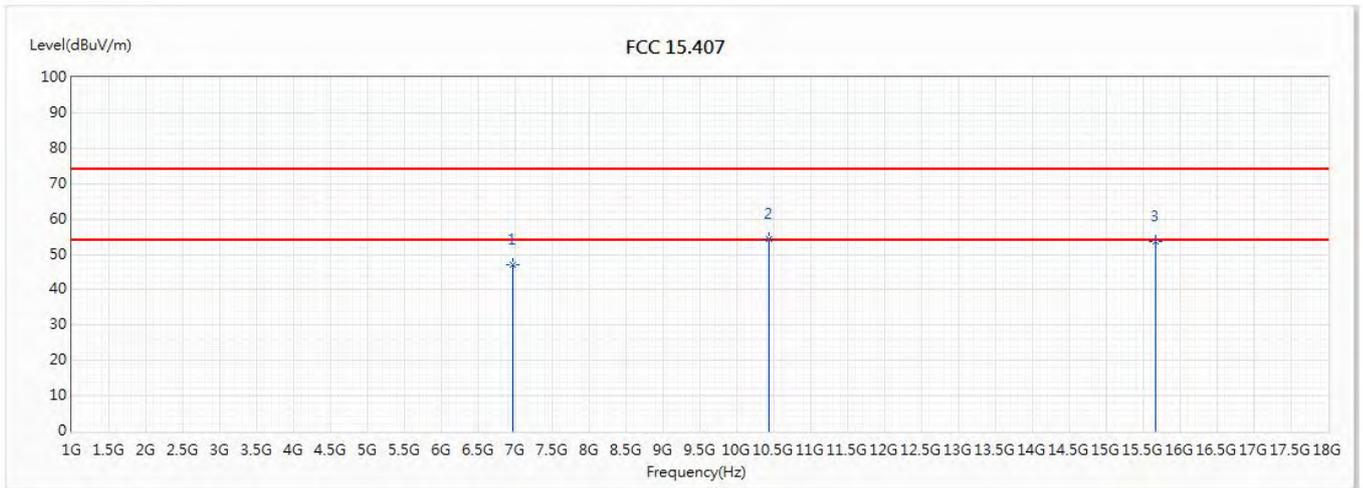


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 47.11 | 74.00 | -26.89 | 40.95 | 6.16 | PK |
| * 2 | 10440 | 54.27 | 74.00 | -19.73 | 39.58 | 14.69 | PK |
| 3 | 15660 | 53.75 | 74.00 | -20.25 | 39.58 | 14.17 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5220MHz | | |

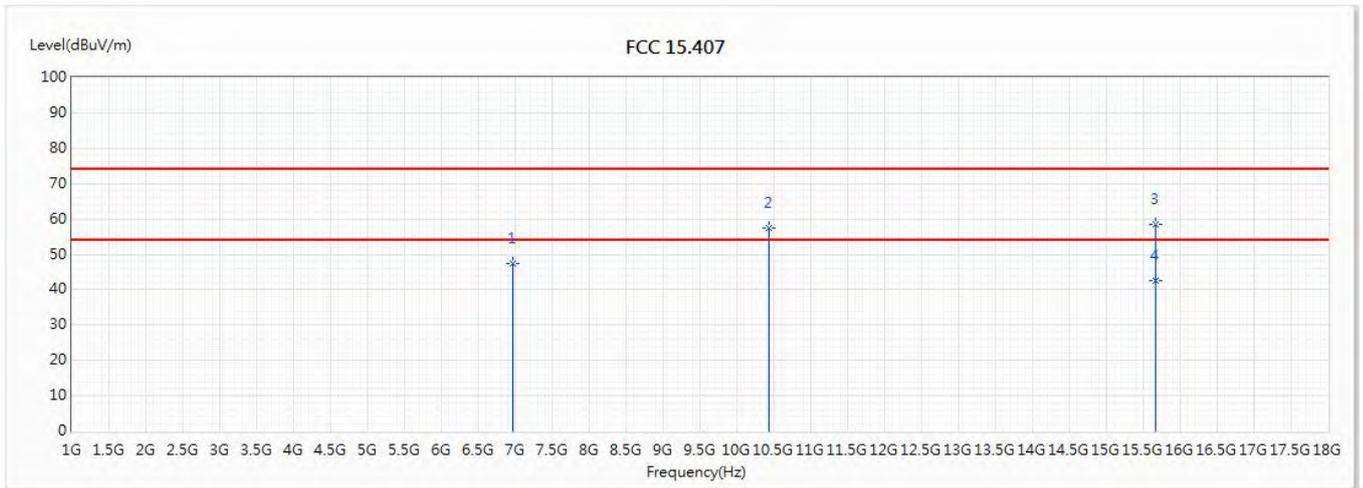


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 47.38 | 74.00 | -26.62 | 41.22 | 6.16 | PK |
| 2 | 10440 | 57.58 | 74.00 | -16.42 | 42.89 | 14.69 | PK |
| 3 | 15660 | 58.51 | 74.00 | -15.49 | 44.34 | 14.17 | PK |
| * 4 | 15660 | 42.50 | 54.00 | -11.50 | 28.33 | 14.17 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5240MHz | | |

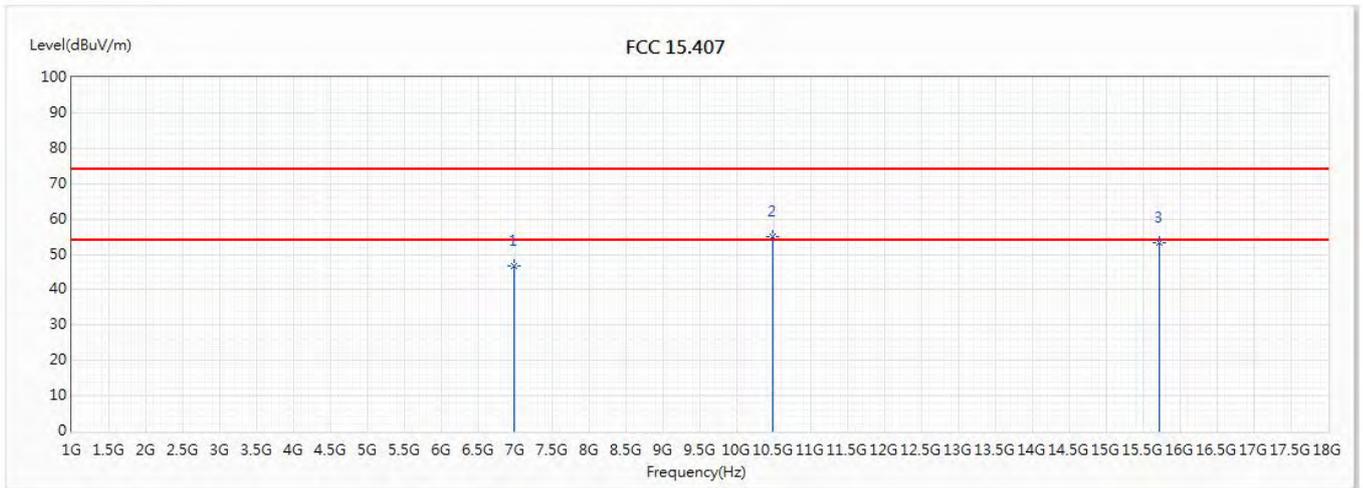


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6986 | 46.71 | 74.00 | -27.29 | 40.43 | 6.28 | PK |
| * 2 | 10480 | 55.09 | 74.00 | -18.91 | 40.37 | 14.72 | PK |
| 3 | 15720 | 53.37 | 74.00 | -20.63 | 39.64 | 13.73 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5240MHz | | |

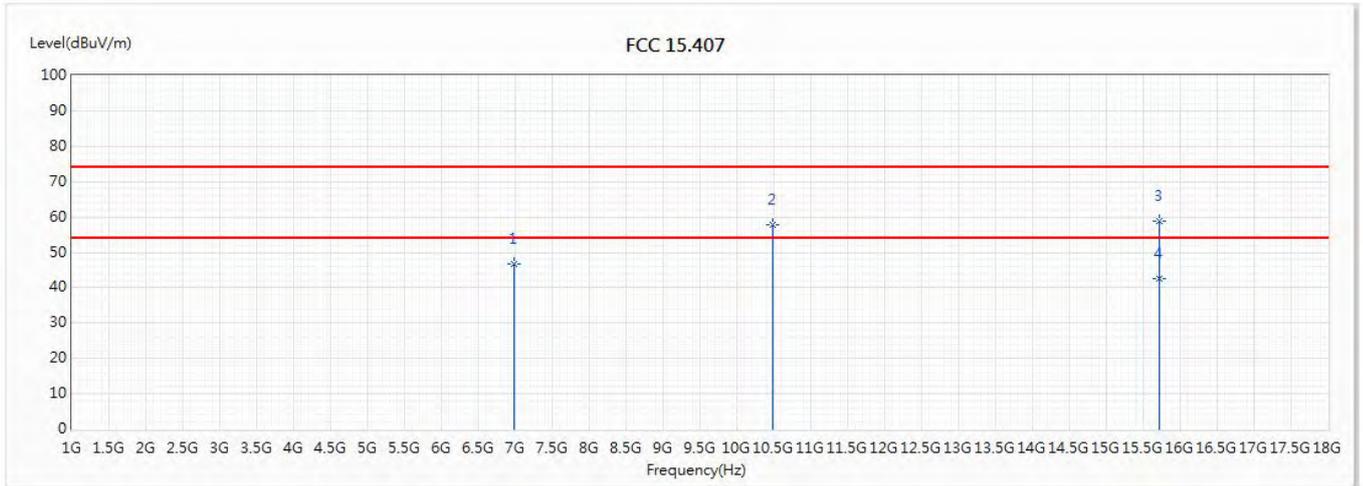


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6986 | 46.62 | 74.00 | -27.38 | 40.34 | 6.28 | PK |
| 2 | 10480 | 57.64 | 74.00 | -16.36 | 42.92 | 14.72 | PK |
| 3 | 15720 | 58.84 | 74.00 | -15.16 | 45.11 | 13.73 | PK |
| * 4 | 15720 | 42.44 | 54.00 | -11.56 | 28.71 | 13.73 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5180MHz | | |

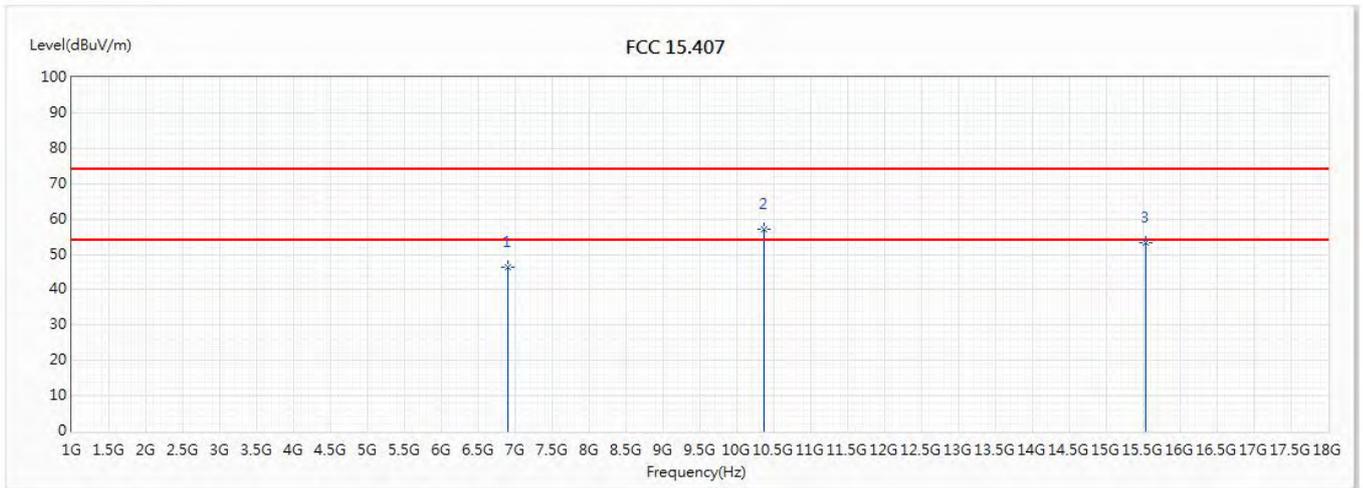


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6906 | 46.28 | 74.00 | -27.72 | 40.32 | 5.96 | PK |
| * 2 | 10360 | 57.26 | 74.00 | -16.74 | 42.78 | 14.48 | PK |
| 3 | 15540 | 53.27 | 74.00 | -20.73 | 38.49 | 14.78 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5180MHz | | |

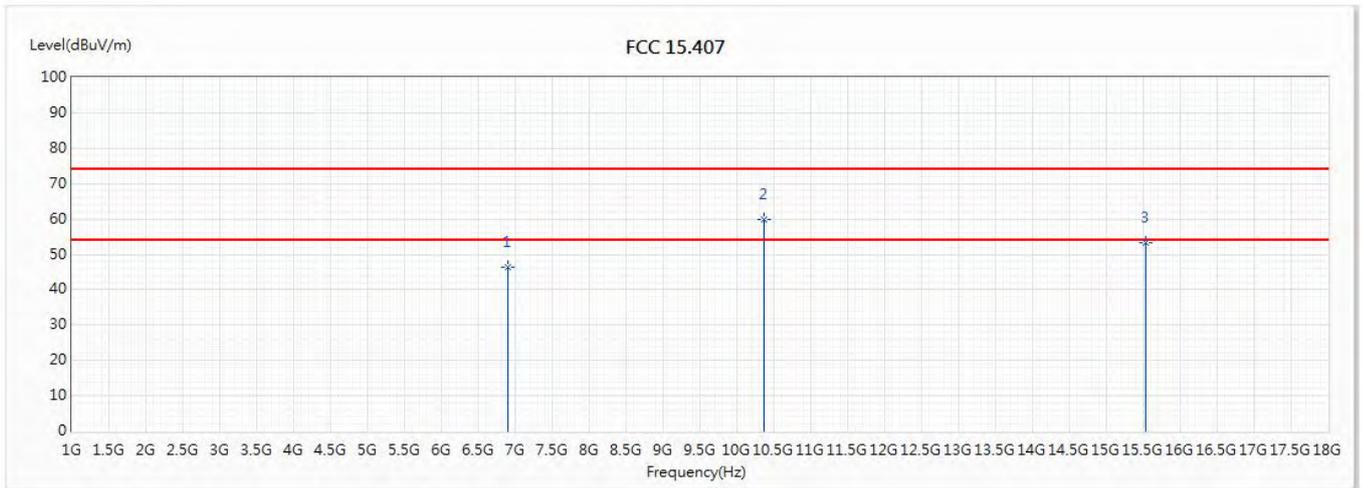


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6906 | 46.43 | 74.00 | -27.57 | 40.47 | 5.96 | PK |
| * 2 | 10360 | 59.70 | 74.00 | -14.30 | 45.22 | 14.48 | PK |
| 3 | 15540 | 53.37 | 74.00 | -20.63 | 38.59 | 14.78 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5220MHz | | |

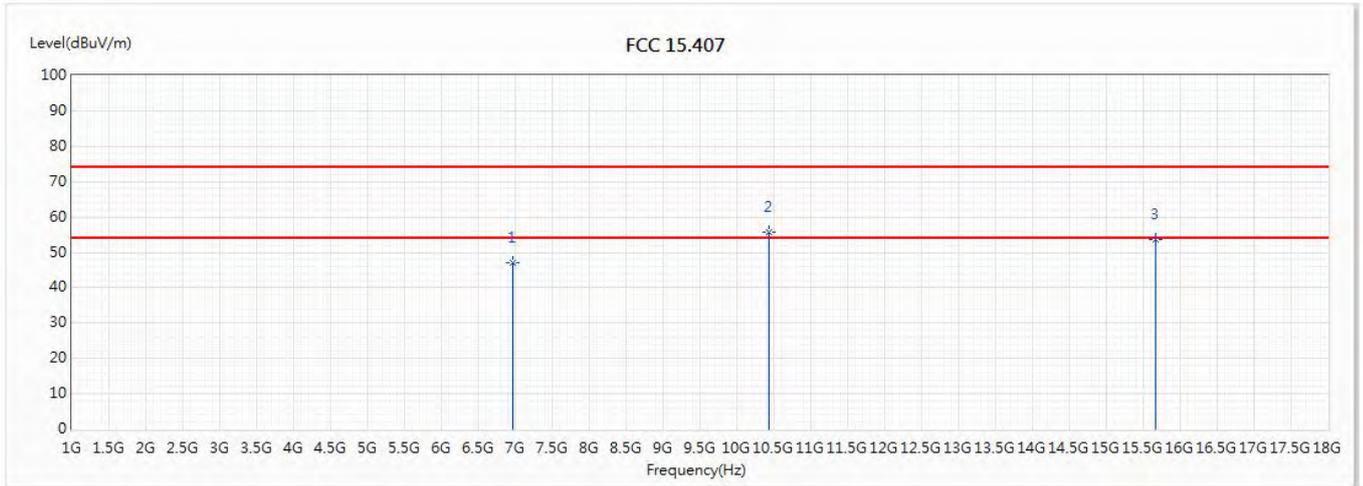


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 47.12 | 74.00 | -26.88 | 40.96 | 6.16 | PK |
| * 2 | 10440 | 55.62 | 74.00 | -18.38 | 40.93 | 14.69 | PK |
| 3 | 15660 | 53.67 | 74.00 | -20.33 | 39.50 | 14.17 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5220MHz | | |

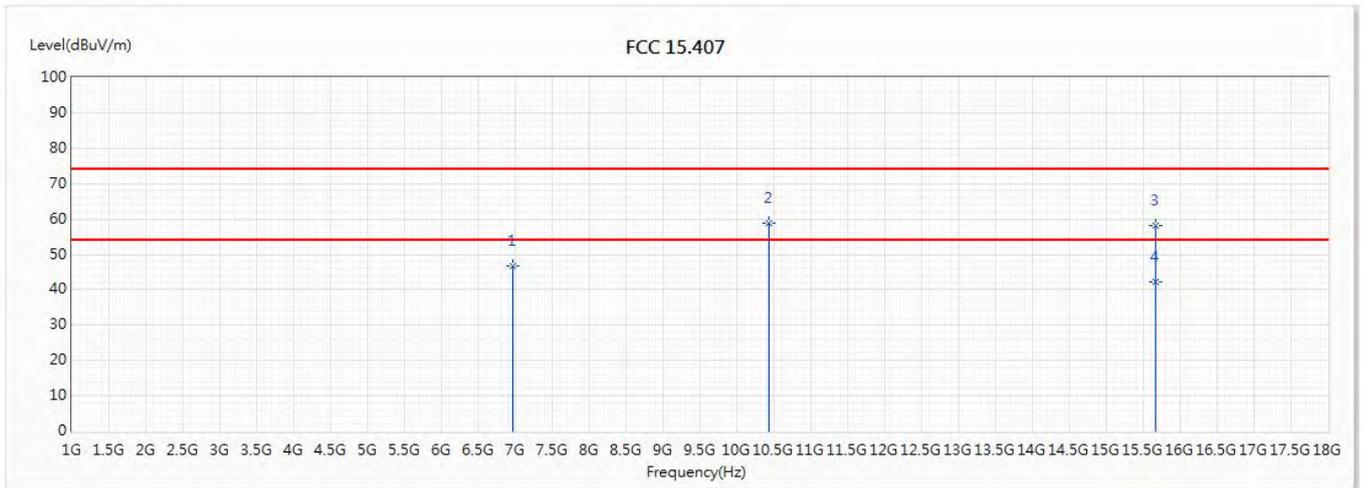


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 46.88 | 74.00 | -27.12 | 40.72 | 6.16 | PK |
| 2 | 10440 | 58.96 | 74.00 | -15.04 | 44.27 | 14.69 | PK |
| 3 | 15660 | 57.97 | 74.00 | -16.03 | 43.80 | 14.17 | PK |
| * 4 | 15660 | 42.23 | 54.00 | -11.77 | 28.06 | 14.17 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5240MHz | | |

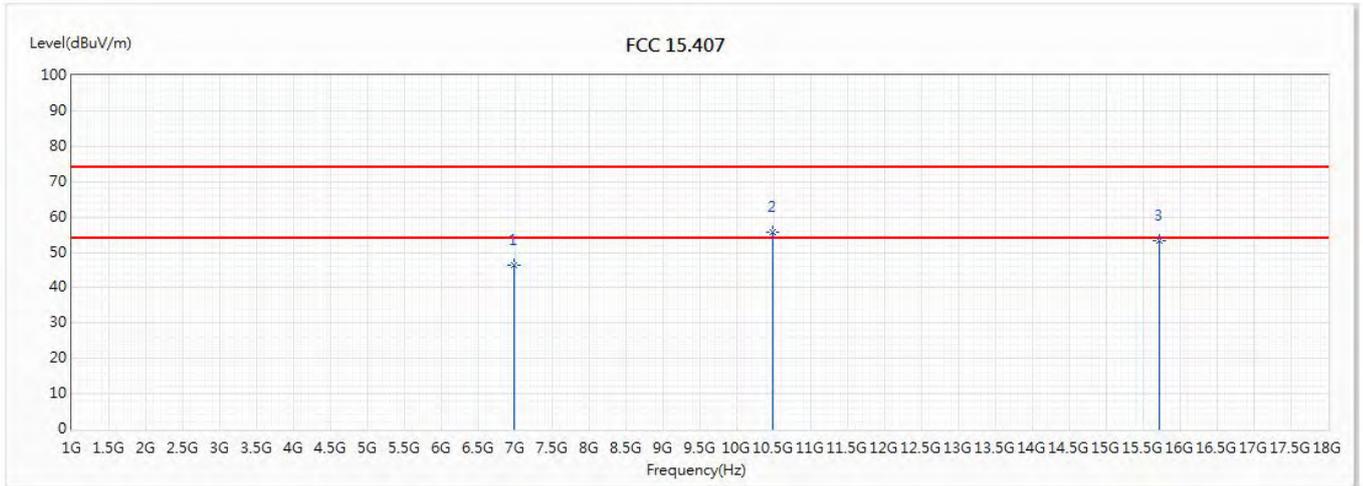


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6986 | 46.23 | 74.00 | -27.77 | 39.95 | 6.28 | PK |
| * 2 | 10480 | 55.55 | 74.00 | -18.45 | 40.83 | 14.72 | PK |
| 3 | 15720 | 53.17 | 74.00 | -20.83 | 39.44 | 13.73 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5240MHz | | |

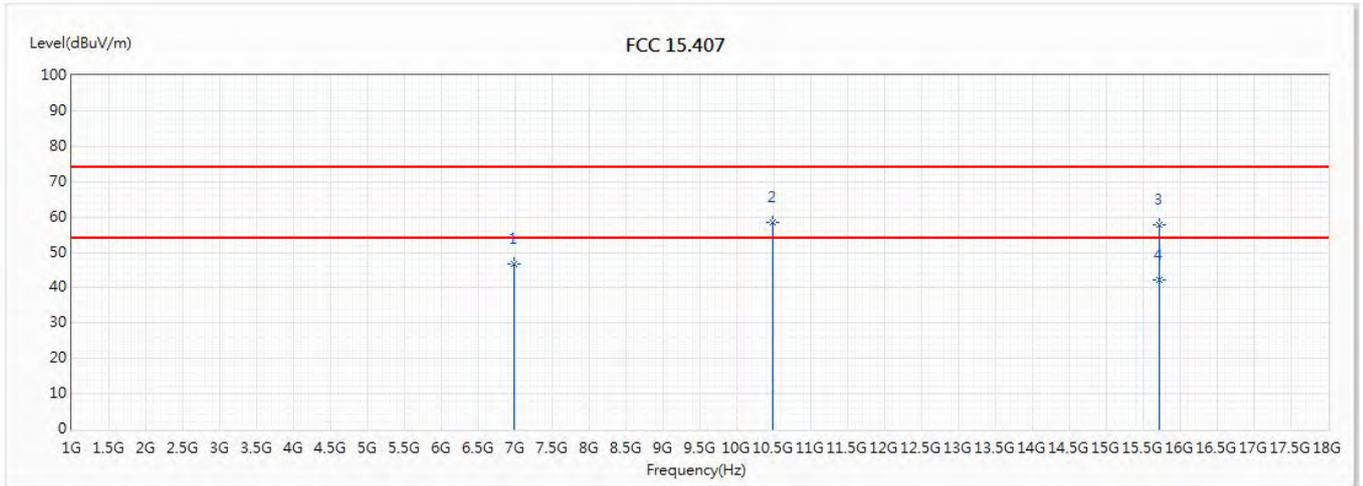


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6986 | 46.55 | 74.00 | -27.45 | 40.27 | 6.28 | PK |
| 2 | 10480 | 58.52 | 74.00 | -15.48 | 43.80 | 14.72 | PK |
| 3 | 15720 | 57.89 | 74.00 | -16.11 | 44.16 | 13.73 | PK |
| * 4 | 15720 | 42.19 | 54.00 | -11.81 | 28.46 | 13.73 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5190MHz | | |

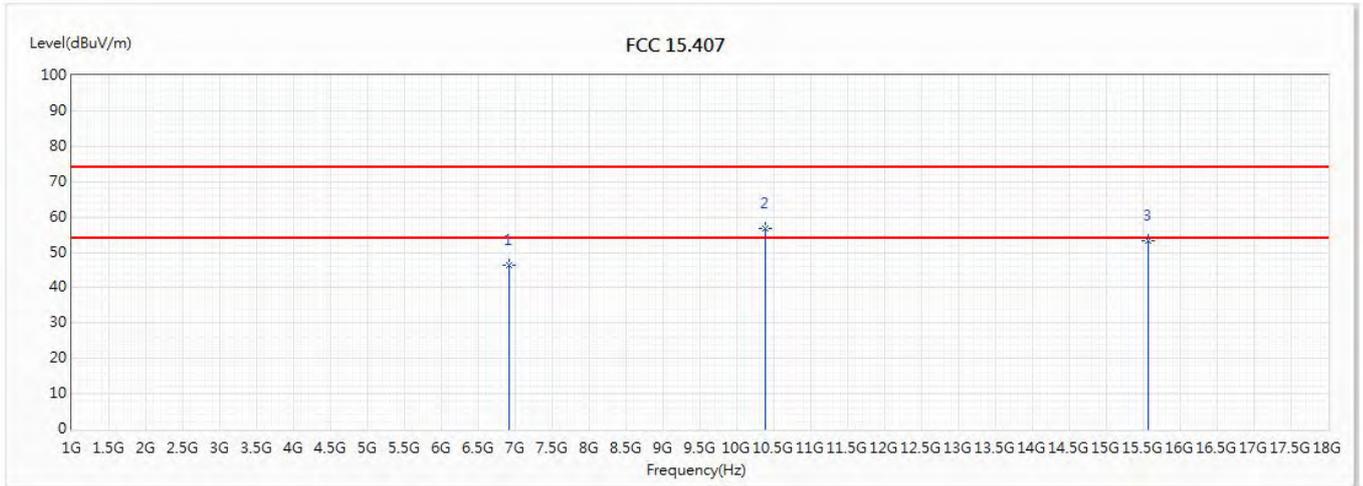


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6920 | 46.33 | 74.00 | -27.67 | 40.32 | 6.01 | PK |
| * 2 | 10380 | 56.69 | 74.00 | -17.31 | 42.15 | 14.54 | PK |
| 3 | 15570 | 53.13 | 74.00 | -20.87 | 38.45 | 14.68 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5190MHz | | |

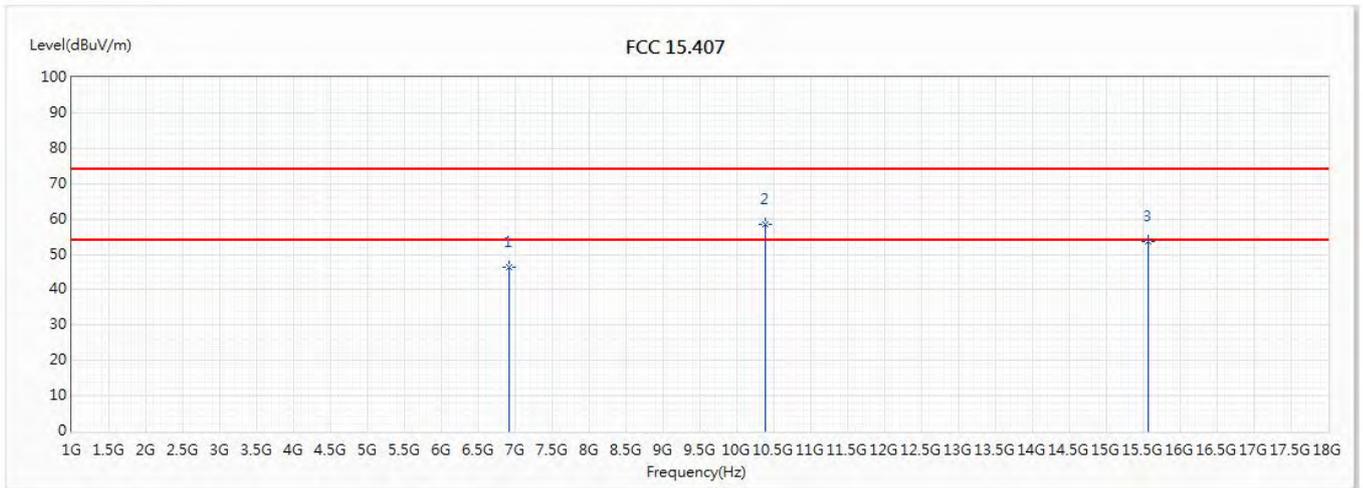


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6920 | 46.28 | 74.00 | -27.72 | 40.27 | 6.01 | PK |
| * 2 | 10380 | 58.62 | 74.00 | -15.38 | 44.08 | 14.54 | PK |
| 3 | 15570 | 53.62 | 74.00 | -20.38 | 38.94 | 14.68 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5230MHz | | |

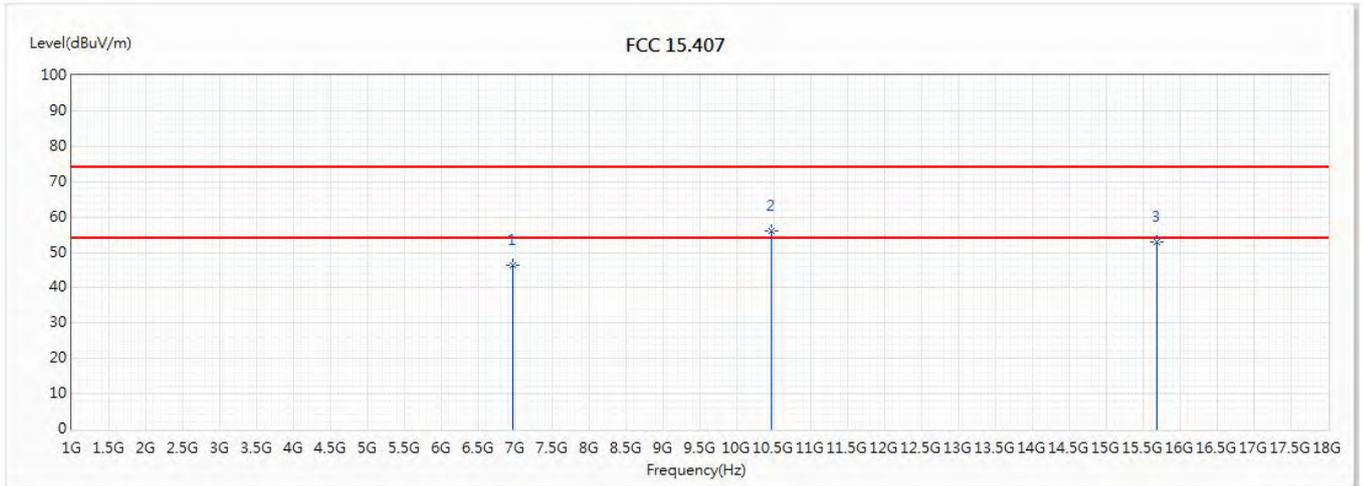


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6973 | 46.29 | 74.00 | -27.71 | 40.07 | 6.22 | PK |
| * 2 | 10460 | 55.99 | 74.00 | -18.01 | 41.28 | 14.71 | PK |
| 3 | 15690 | 52.78 | 74.00 | -21.22 | 38.87 | 13.91 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5230MHz | | |

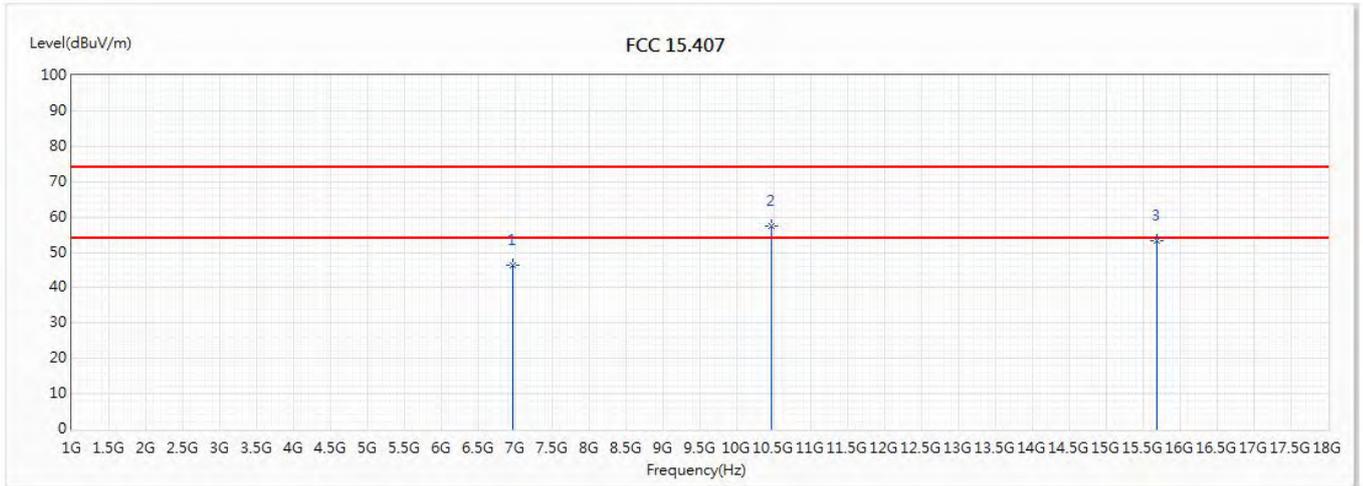


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6973 | 46.47 | 74.00 | -27.53 | 40.25 | 6.22 | PK |
| * 2 | 10460 | 57.27 | 74.00 | -16.73 | 42.56 | 14.71 | PK |
| 3 | 15690 | 53.23 | 74.00 | -20.77 | 39.32 | 13.91 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5210MHz | | |

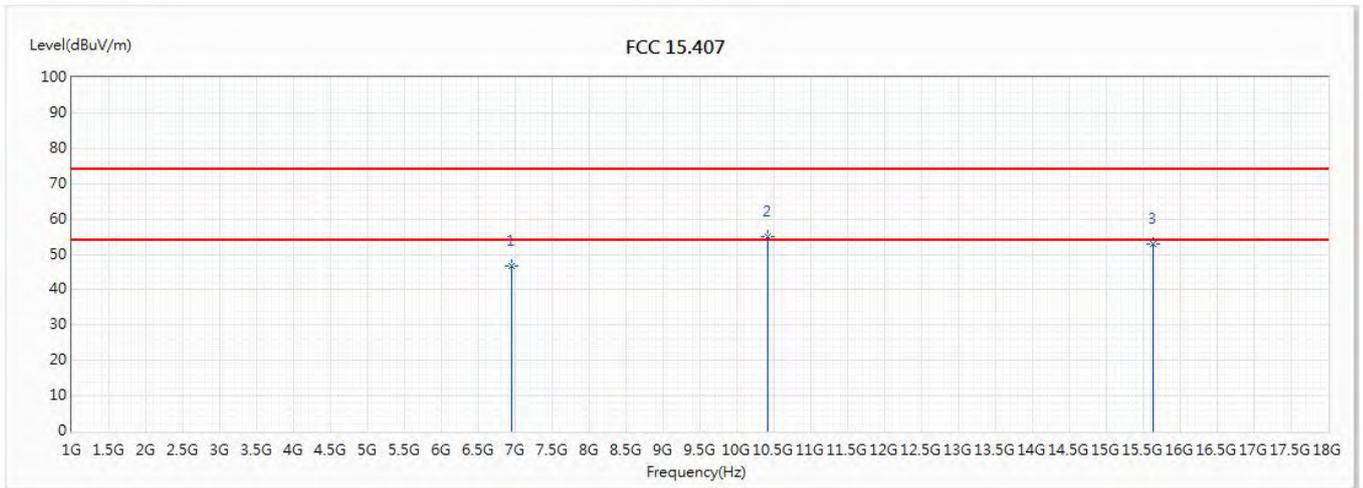


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6946 | 46.65 | 74.00 | -27.35 | 40.54 | 6.11 | PK |
| * 2 | 10420 | 55.16 | 74.00 | -18.84 | 40.51 | 14.65 | PK |
| 3 | 15630 | 52.93 | 74.00 | -21.07 | 38.51 | 14.42 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5210MHz | | |

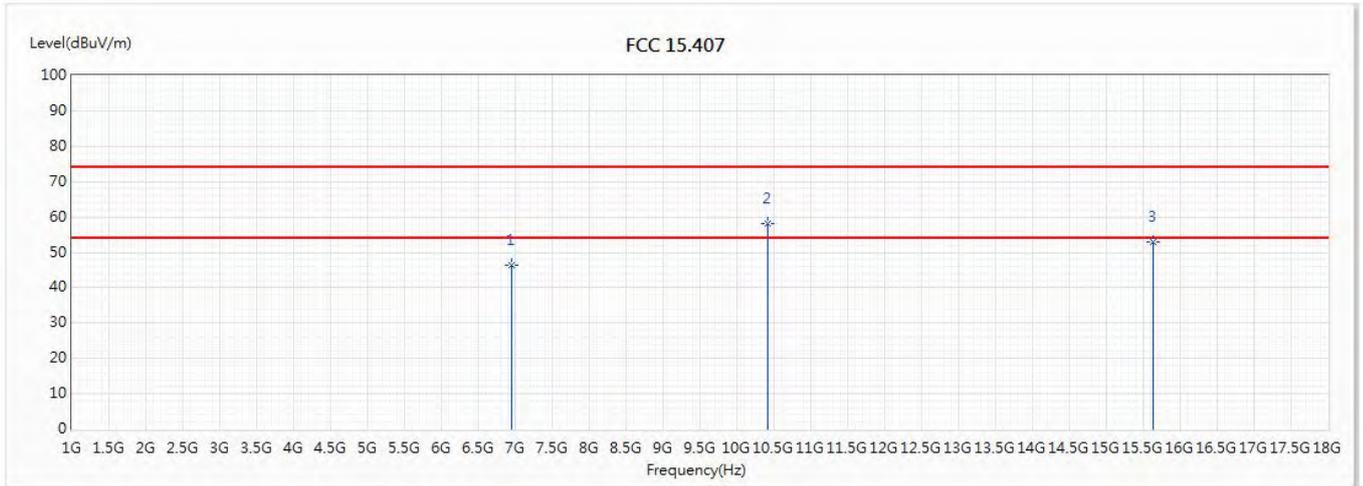


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6946 | 46.36 | 74.00 | -27.64 | 40.25 | 6.11 | PK |
| * 2 | 10420 | 58.04 | 74.00 | -15.96 | 43.39 | 14.65 | PK |
| 3 | 15630 | 52.87 | 74.00 | -21.13 | 38.45 | 14.42 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5180MHz | | |

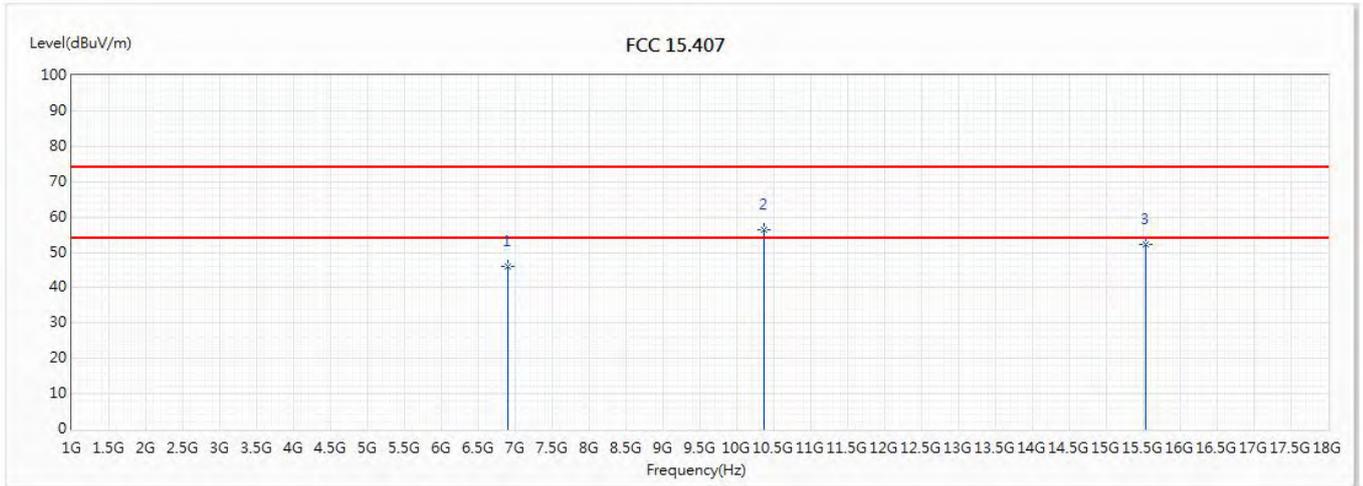


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6906 | 46.15 | 74.00 | -27.85 | 40.19 | 5.96 | PK |
| * 2 | 10360 | 56.49 | 74.00 | -17.51 | 42.01 | 14.48 | PK |
| 3 | 15540 | 52.36 | 74.00 | -21.64 | 37.58 | 14.78 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5180MHz | | |

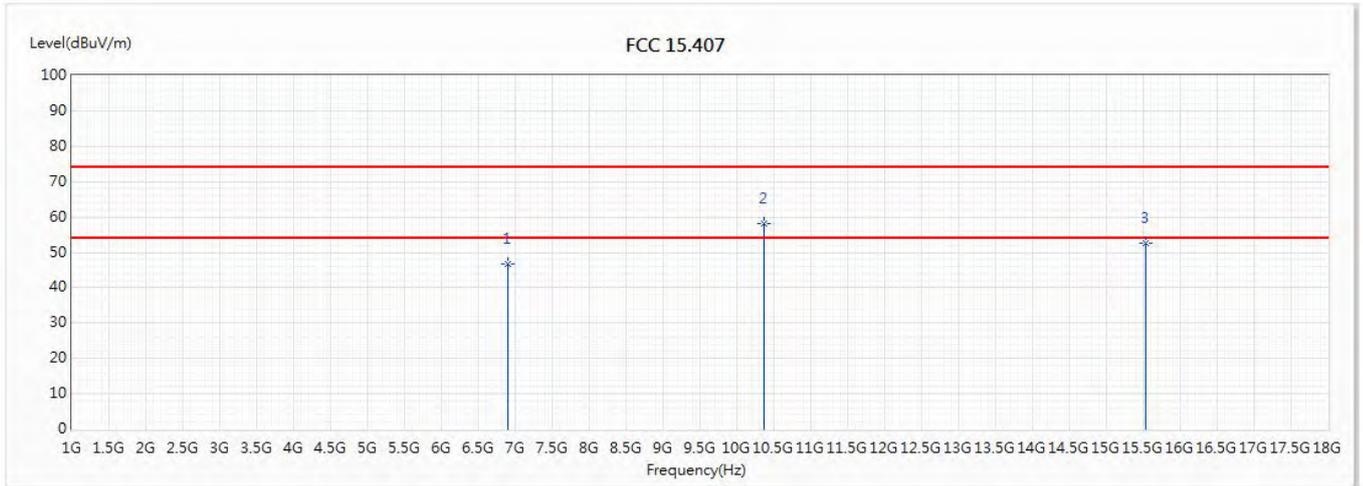


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6906 | 46.69 | 74.00 | -27.31 | 40.73 | 5.96 | PK |
| * 2 | 10360 | 58.24 | 74.00 | -15.76 | 43.76 | 14.48 | PK |
| 3 | 15540 | 52.47 | 74.00 | -21.53 | 37.69 | 14.78 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5220MHz | | |

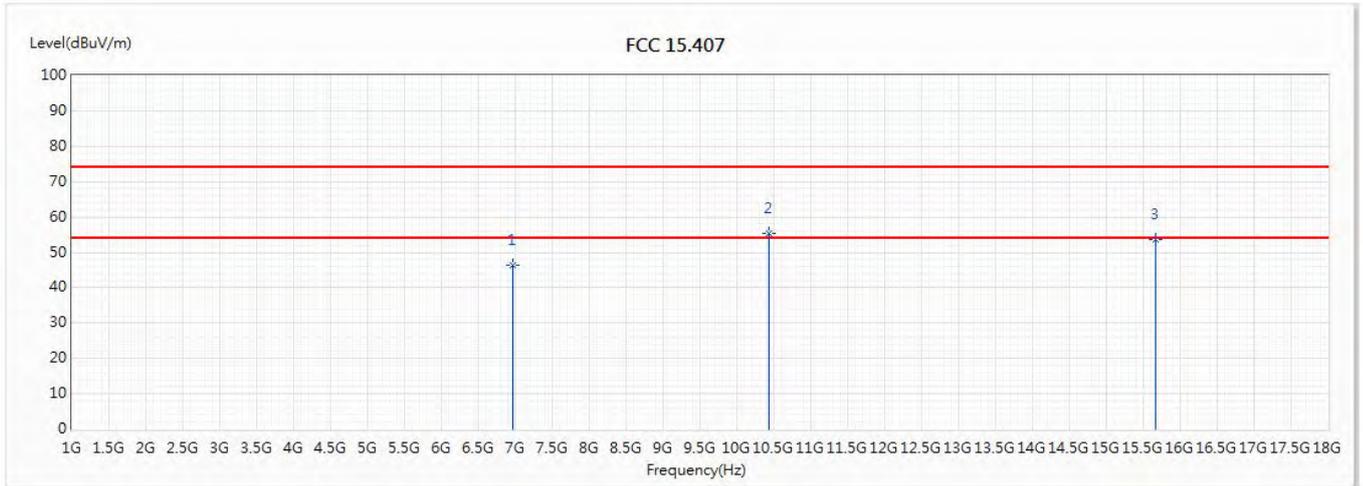


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 46.29 | 74.00 | -27.71 | 40.13 | 6.16 | PK |
| * 2 | 10440 | 55.35 | 74.00 | -18.65 | 40.66 | 14.69 | PK |
| 3 | 15660 | 53.47 | 74.00 | -20.53 | 39.30 | 14.17 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5220MHz | | |

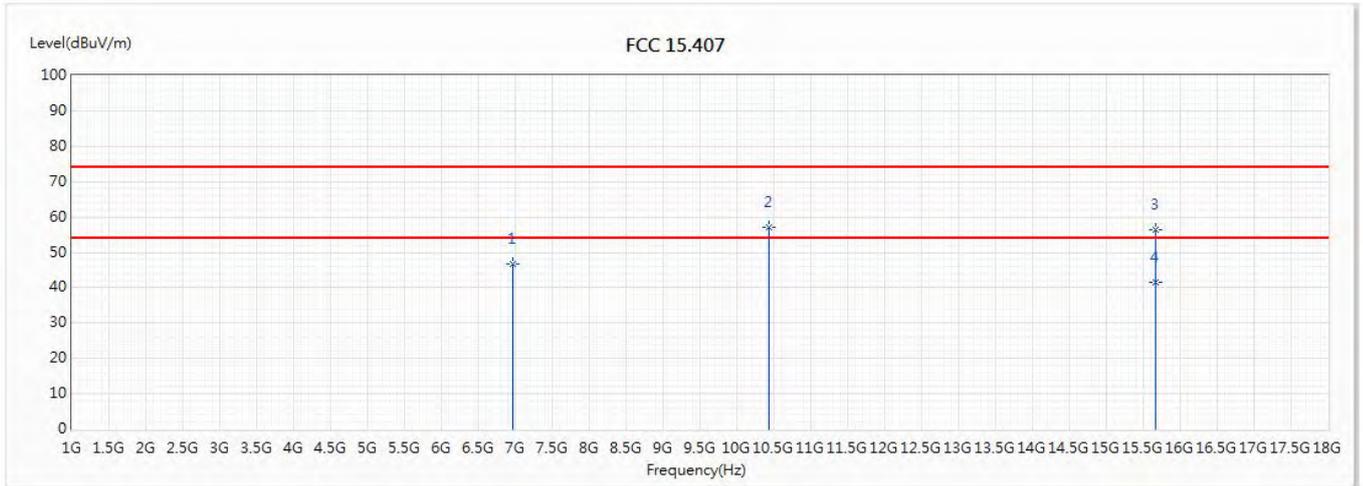


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6960 | 46.82 | 74.00 | -27.18 | 40.66 | 6.16 | PK |
| 2 | 10440 | 56.97 | 74.00 | -17.03 | 42.28 | 14.69 | PK |
| 3 | 15660 | 56.49 | 74.00 | -17.51 | 42.32 | 14.17 | PK |
| * 4 | 15660 | 41.38 | 54.00 | -12.62 | 27.21 | 14.17 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5240MHz | | |

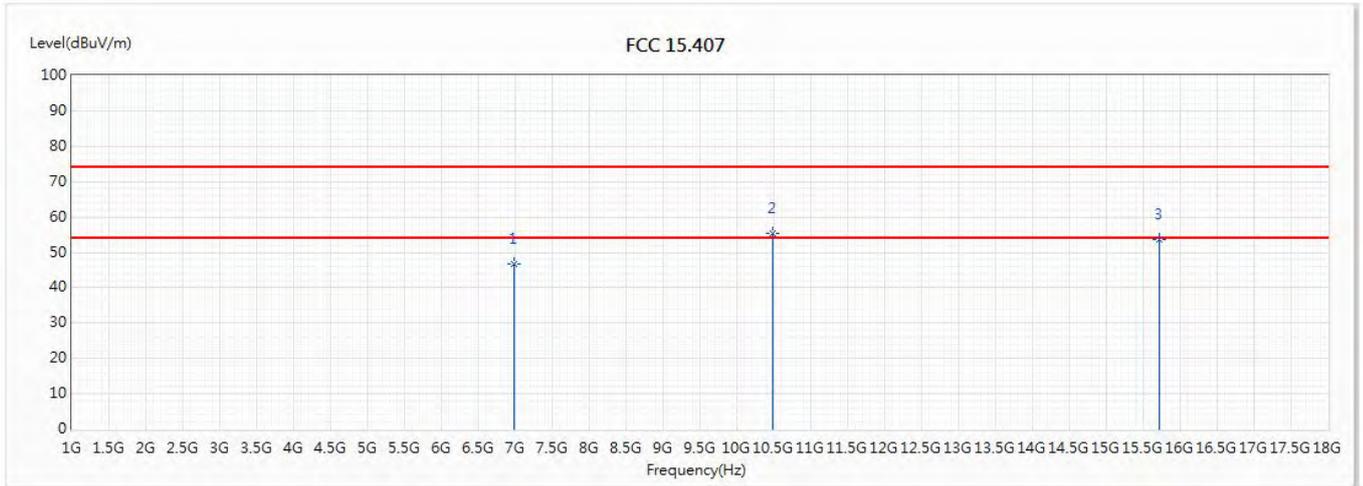


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6986 | 46.63 | 74.00 | -27.37 | 40.35 | 6.28 | PK |
| * 2 | 10480 | 55.26 | 74.00 | -18.74 | 40.54 | 14.72 | PK |
| 3 | 15720 | 53.48 | 74.00 | -20.52 | 39.75 | 13.73 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(20M)_5240MHz | | |

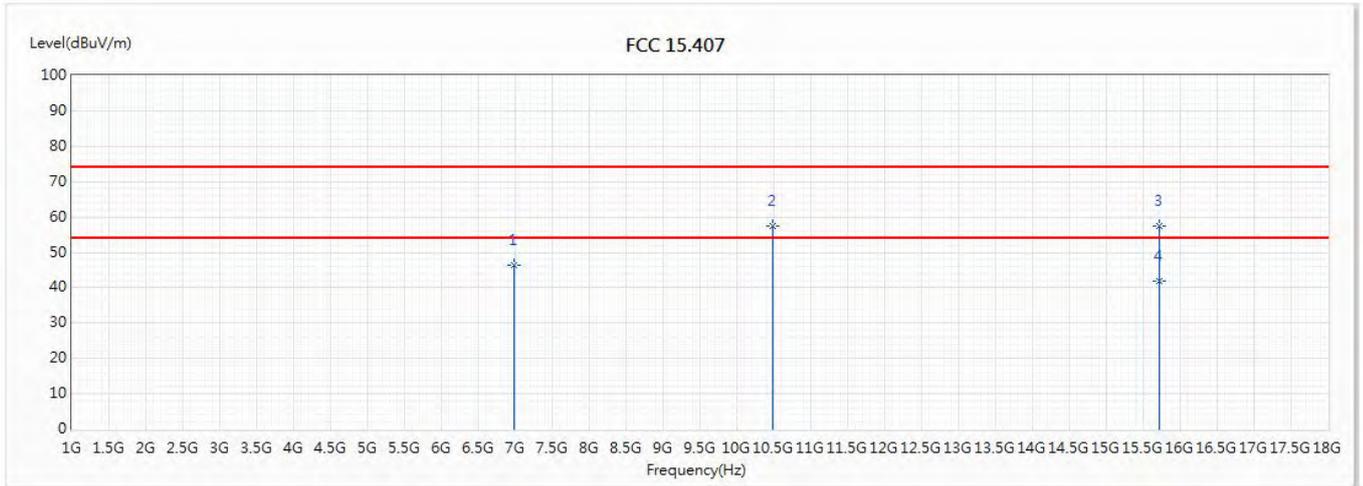


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6986 | 46.31 | 74.00 | -27.69 | 40.03 | 6.28 | PK |
| 2 | 10480 | 57.29 | 74.00 | -16.71 | 42.57 | 14.72 | PK |
| 3 | 15720 | 57.46 | 74.00 | -16.54 | 43.73 | 13.73 | PK |
| * 4 | 15720 | 41.86 | 54.00 | -12.14 | 28.13 | 13.73 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5190MHz | | |

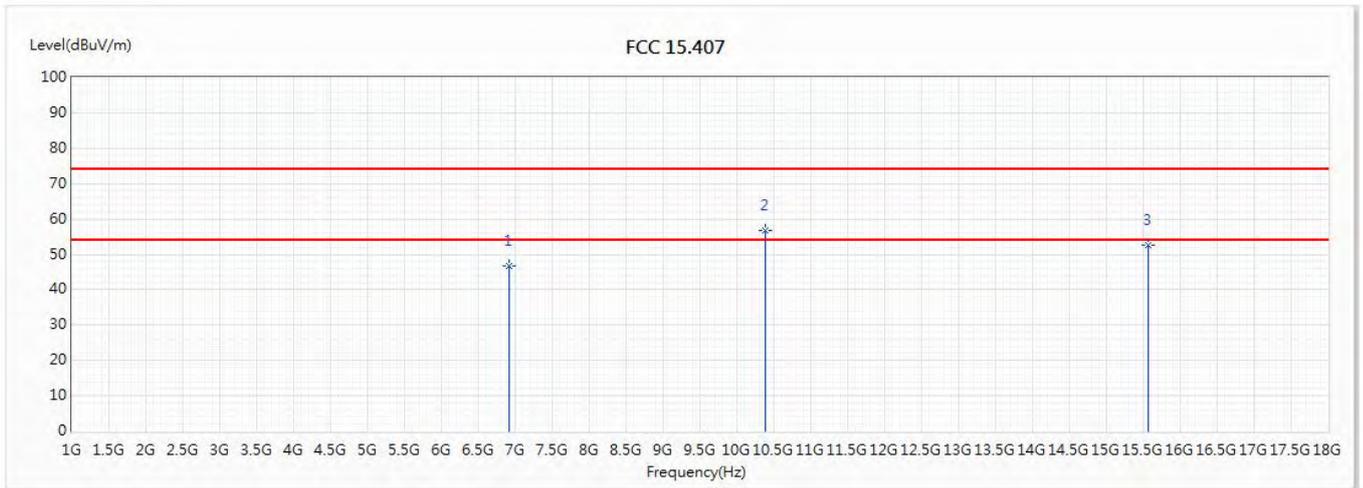


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6920 | 46.72 | 74.00 | -27.28 | 40.71 | 6.01 | PK |
| * 2 | 10380 | 56.82 | 74.00 | -17.18 | 42.28 | 14.54 | PK |
| 3 | 15570 | 52.66 | 74.00 | -21.34 | 37.98 | 14.68 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5190MHz | | |

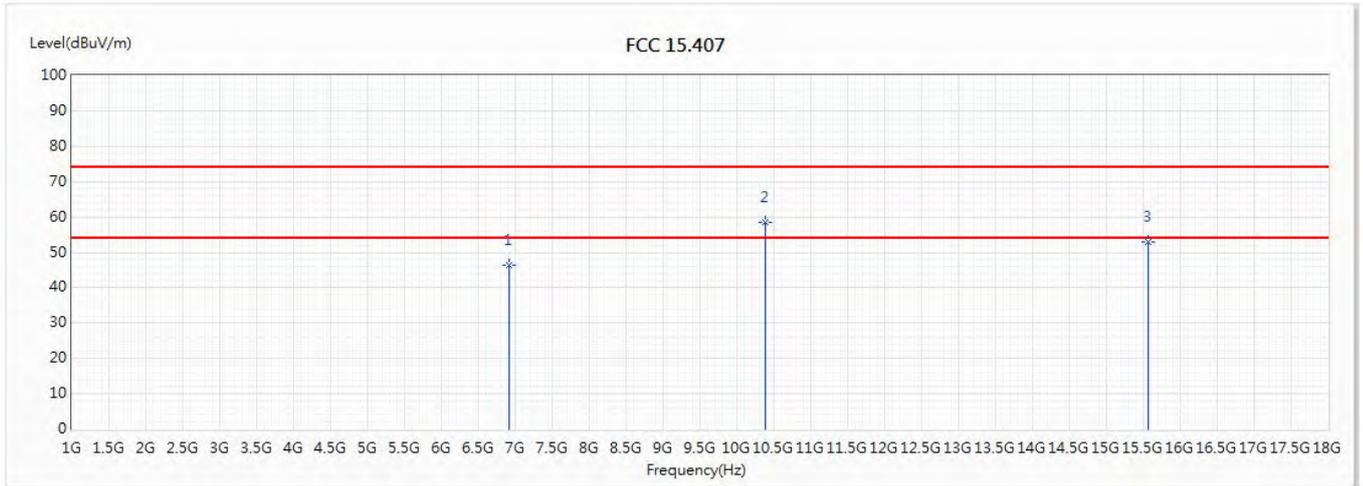


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6920 | 46.21 | 74.00 | -27.79 | 40.20 | 6.01 | PK |
| * 2 | 10380 | 58.54 | 74.00 | -15.46 | 44.00 | 14.54 | PK |
| 3 | 15570 | 52.93 | 74.00 | -21.07 | 38.25 | 14.68 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5230MHz | | |

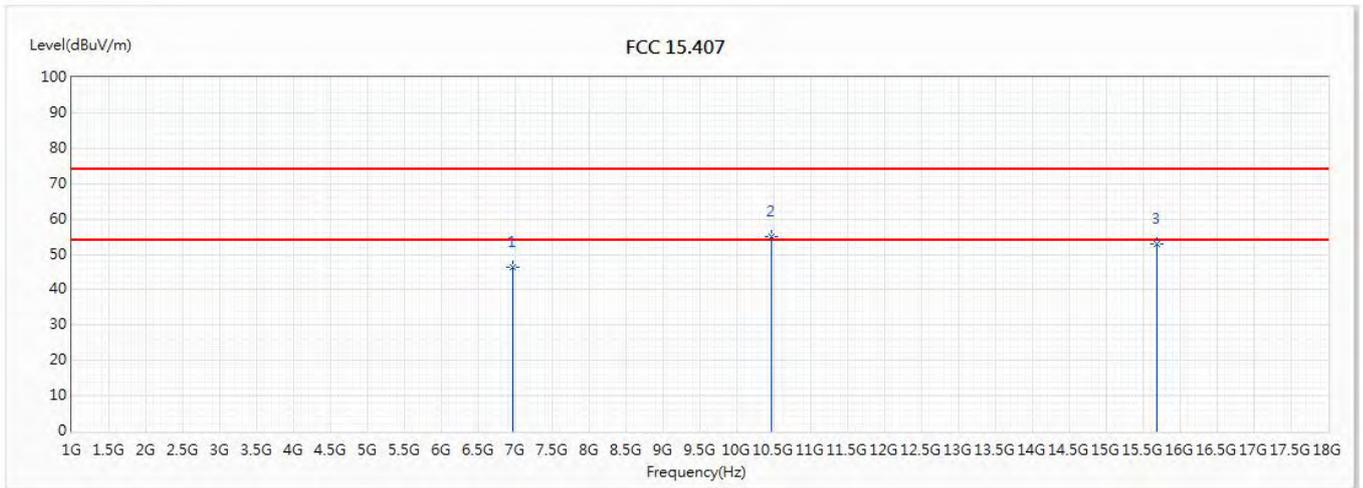


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6973 | 46.32 | 74.00 | -27.68 | 40.10 | 6.22 | PK |
| * 2 | 10460 | 55.19 | 74.00 | -18.81 | 40.48 | 14.71 | PK |
| 3 | 15690 | 52.87 | 74.00 | -21.13 | 38.96 | 13.91 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(40M)_5230MHz | | |

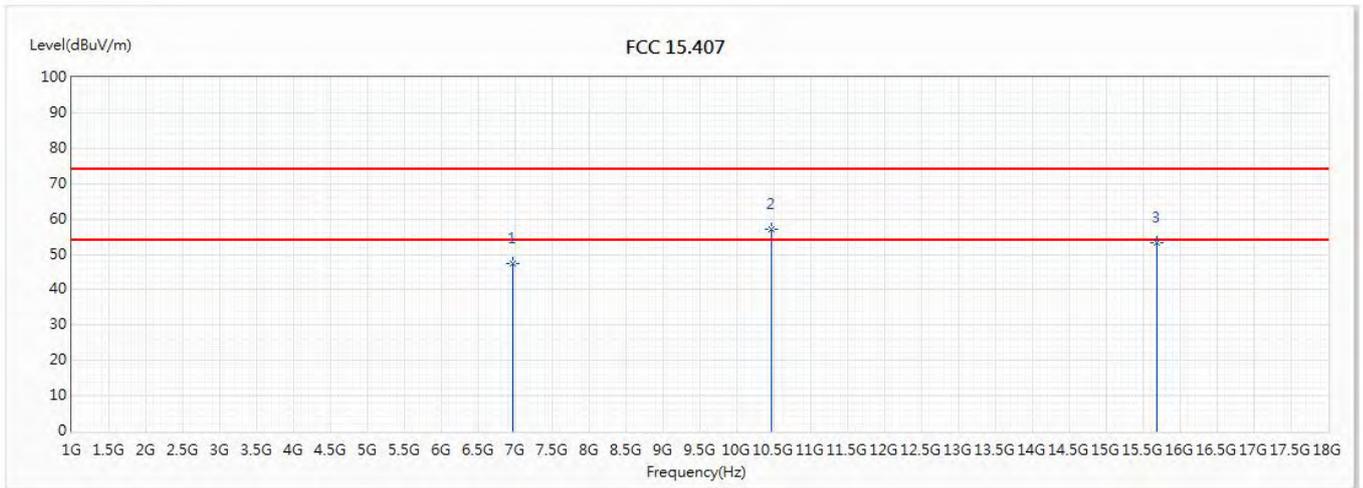


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6973 | 47.37 | 74.00 | -26.63 | 41.15 | 6.22 | PK |
| * 2 | 10460 | 57.21 | 74.00 | -16.79 | 42.50 | 14.71 | PK |
| 3 | 15690 | 53.23 | 74.00 | -20.77 | 39.32 | 13.91 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ax(80M)_5210MHz | | |

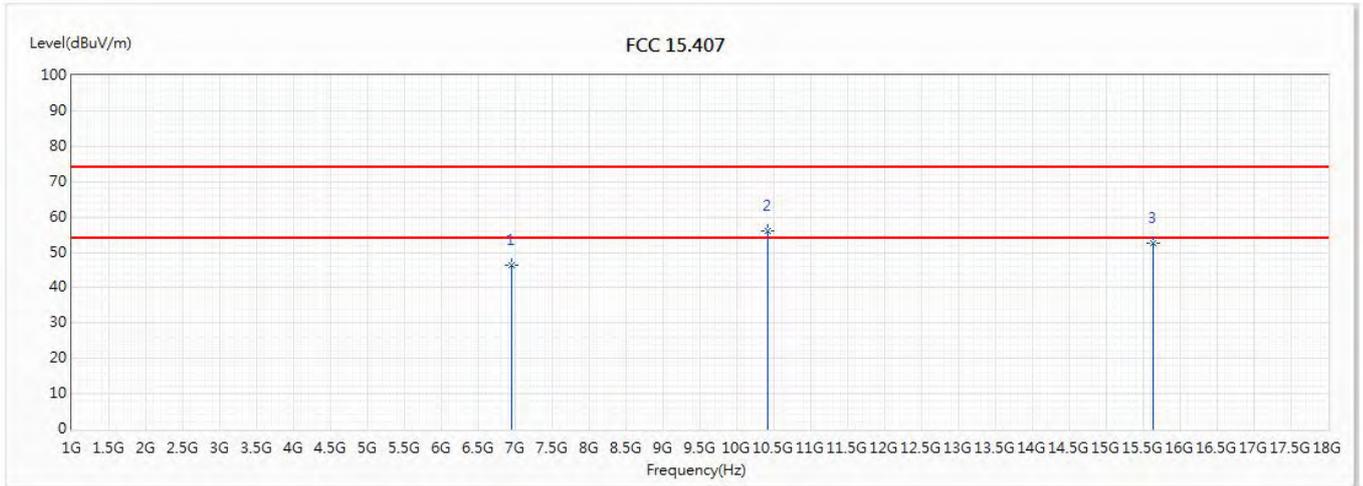


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6946 | 46.24 | 74.00 | -27.76 | 40.13 | 6.11 | PK |
| * 2 | 10420 | 55.98 | 74.00 | -18.02 | 41.33 | 14.65 | PK |
| 3 | 15630 | 52.64 | 74.00 | -21.36 | 38.22 | 14.42 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_AD65DW Y | | |
| Note : | 802.11ax(80M)_5210MHz | | |

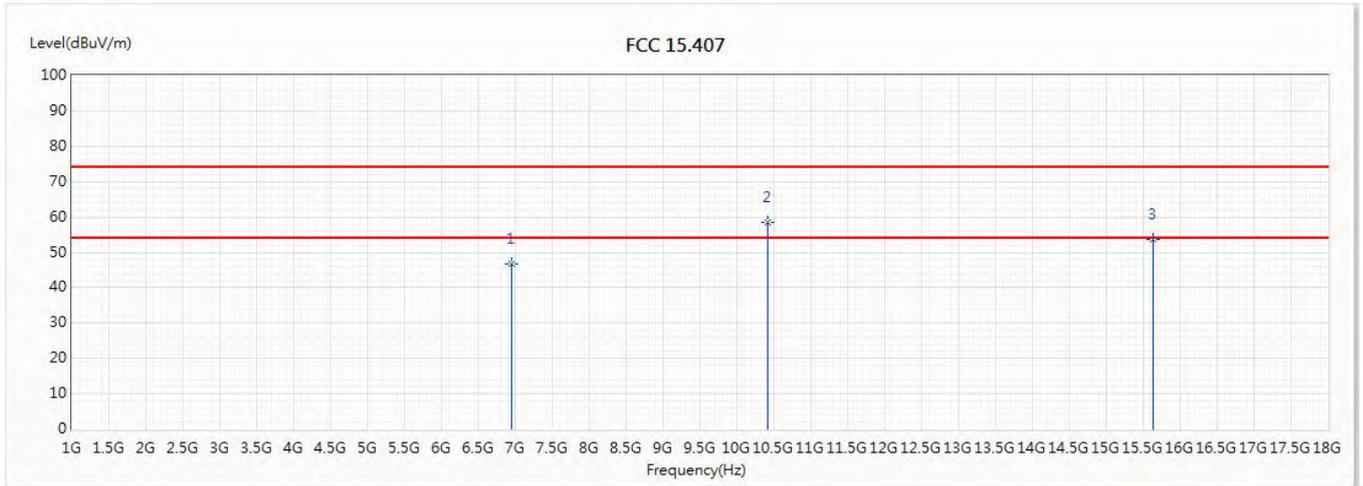


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6946 | 46.75 | 74.00 | -27.25 | 40.64 | 6.11 | PK |
| * 2 | 10420 | 58.53 | 74.00 | -15.47 | 43.88 | 14.65 | PK |
| 3 | 15630 | 53.65 | 74.00 | -20.35 | 39.23 | 14.42 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/16 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5745MHz | | |

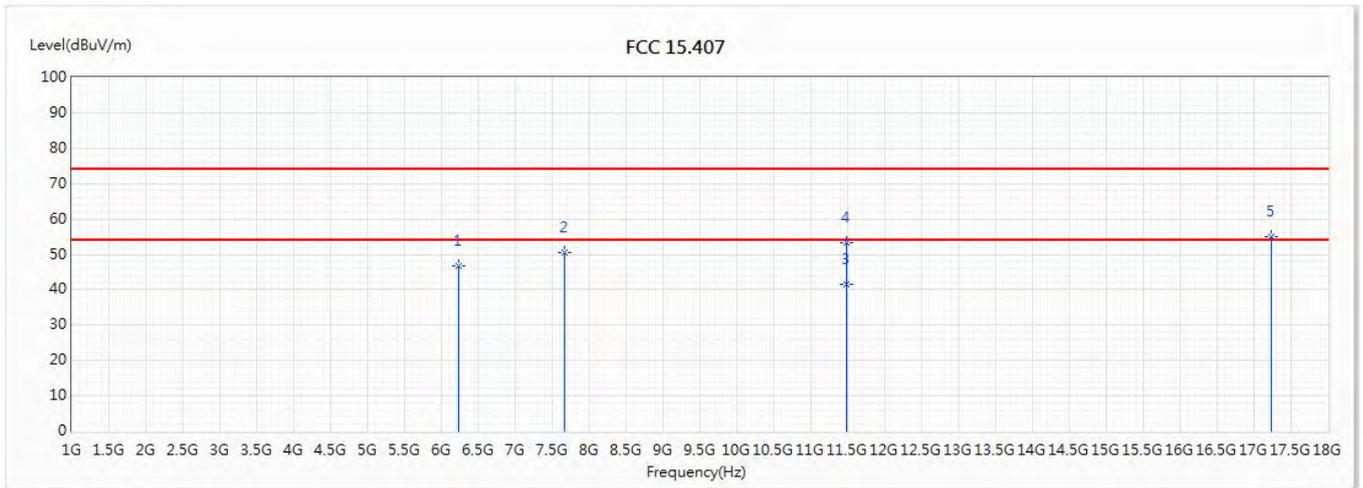


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.71 | 74.00 | -27.29 | 43.46 | 3.25 | PK |
| 2 | 7660 | 50.57 | 74.00 | -23.43 | 41.97 | 8.60 | PK |
| * 3 | 11490 | 41.42 | 54.00 | -12.58 | 24.61 | 16.81 | AV |
| 4 | 11490 | 53.46 | 74.00 | -20.54 | 36.65 | 16.81 | PK |
| 5 | 17235 | 55.04 | 74.00 | -18.96 | 38.54 | 16.50 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/16 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5745MHz | | |

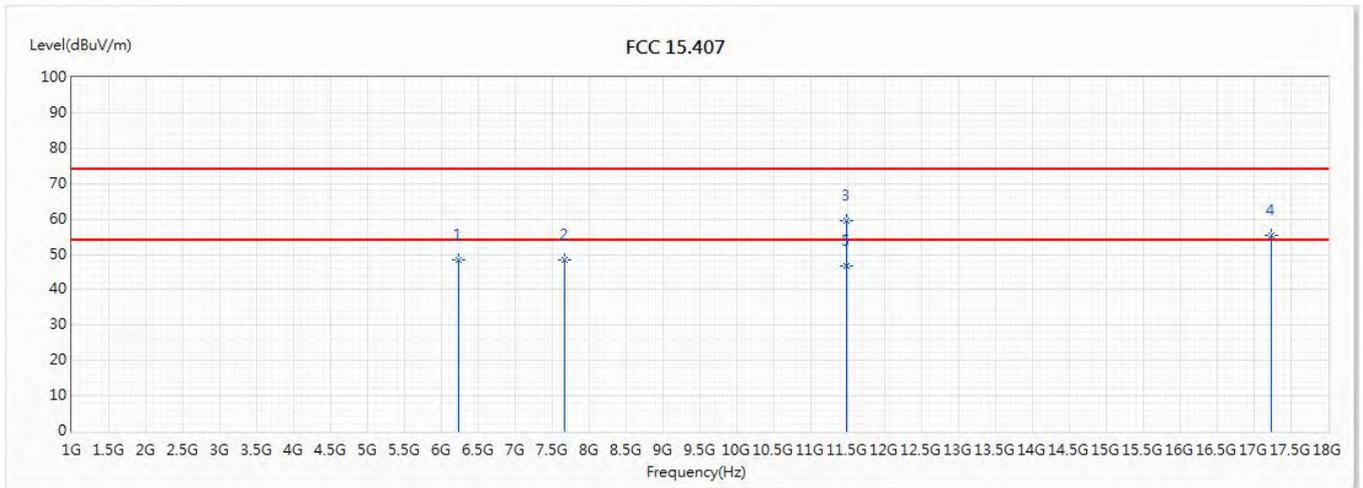


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 48.32 | 74.00 | -25.68 | 45.07 | 3.25 | PK |
| 2 | 7660 | 48.29 | 74.00 | -25.71 | 39.69 | 8.60 | PK |
| 3 | 11490 | 59.65 | 74.00 | -14.35 | 42.84 | 16.81 | PK |
| 4 | 17235 | 55.45 | 74.00 | -18.55 | 38.95 | 16.50 | PK |
| * 5 | 11490 | 46.64 | 54.00 | -7.36 | 29.83 | 16.81 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5785MHz | | |

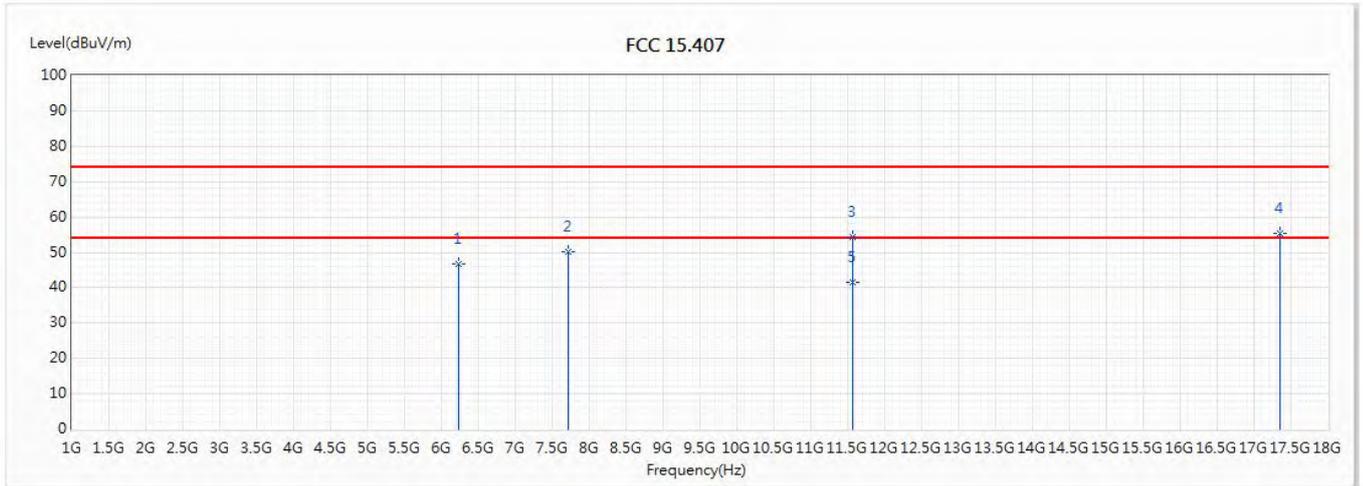


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.81 | 74.00 | -27.19 | 43.56 | 3.25 | PK |
| 2 | 7713 | 50.13 | 74.00 | -23.87 | 41.36 | 8.77 | PK |
| 3 | 11570 | 54.45 | 74.00 | -19.55 | 37.75 | 16.70 | PK |
| 4 | 17355 | 55.20 | 74.00 | -18.80 | 38.02 | 17.18 | PK |
| * 5 | 11570 | 41.56 | 54.00 | -12.44 | 24.86 | 16.70 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5785MHz | | |

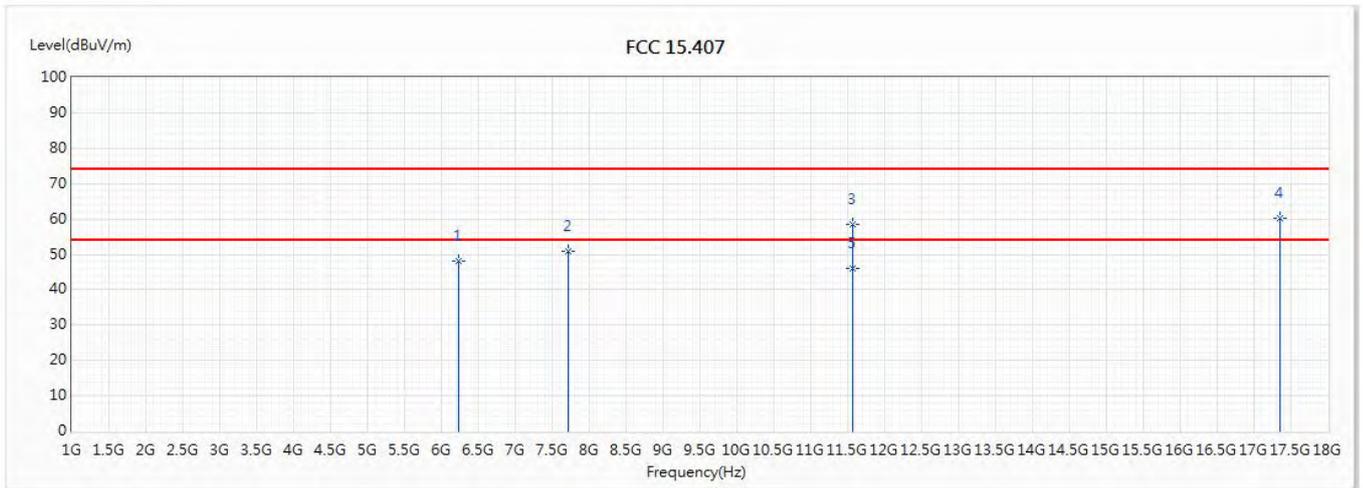


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 48.16 | 74.00 | -25.84 | 44.91 | 3.25 | PK |
| 2 | 7713 | 50.96 | 74.00 | -23.04 | 42.19 | 8.77 | PK |
| 3 | 11570 | 58.57 | 74.00 | -15.43 | 41.87 | 16.70 | PK |
| 4 | 17355 | 60.24 | 74.00 | -13.76 | 43.06 | 17.18 | PK |
| * 5 | 11570 | 46.11 | 54.00 | -7.89 | 29.41 | 16.70 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5825MHz | | |

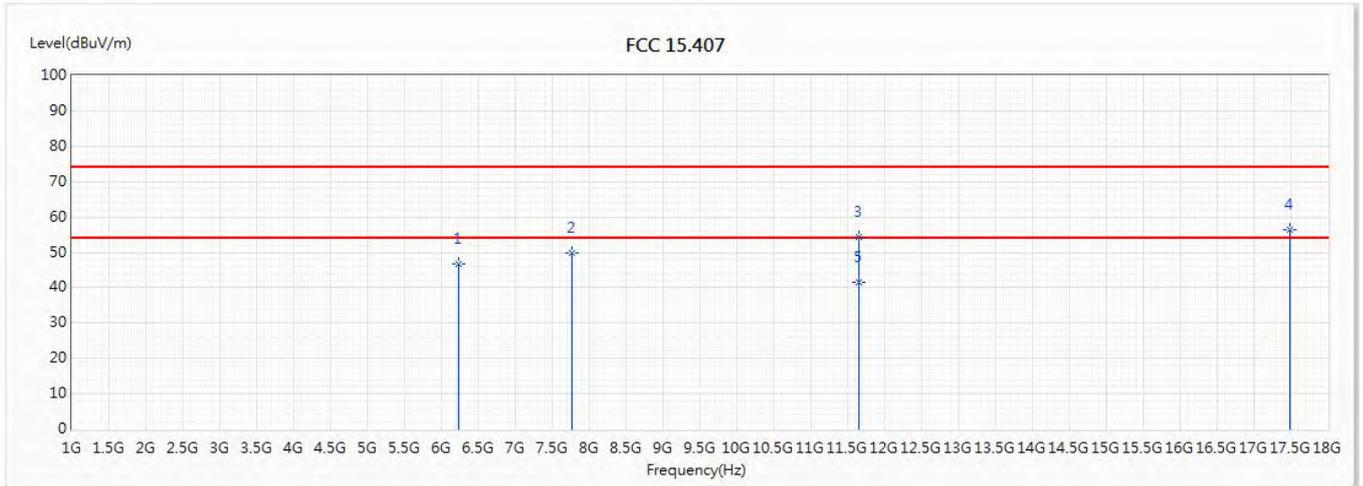


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.62 | 74.00 | -27.38 | 43.37 | 3.25 | PK |
| 2 | 7766 | 49.85 | 74.00 | -24.15 | 40.93 | 8.92 | PK |
| 3 | 11650 | 54.25 | 74.00 | -19.75 | 37.84 | 16.41 | PK |
| 4 | 17475 | 56.36 | 74.00 | -17.64 | 38.67 | 17.69 | PK |
| * 5 | 11650 | 41.36 | 54.00 | -12.64 | 24.95 | 16.41 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11a_5825MHz | | |

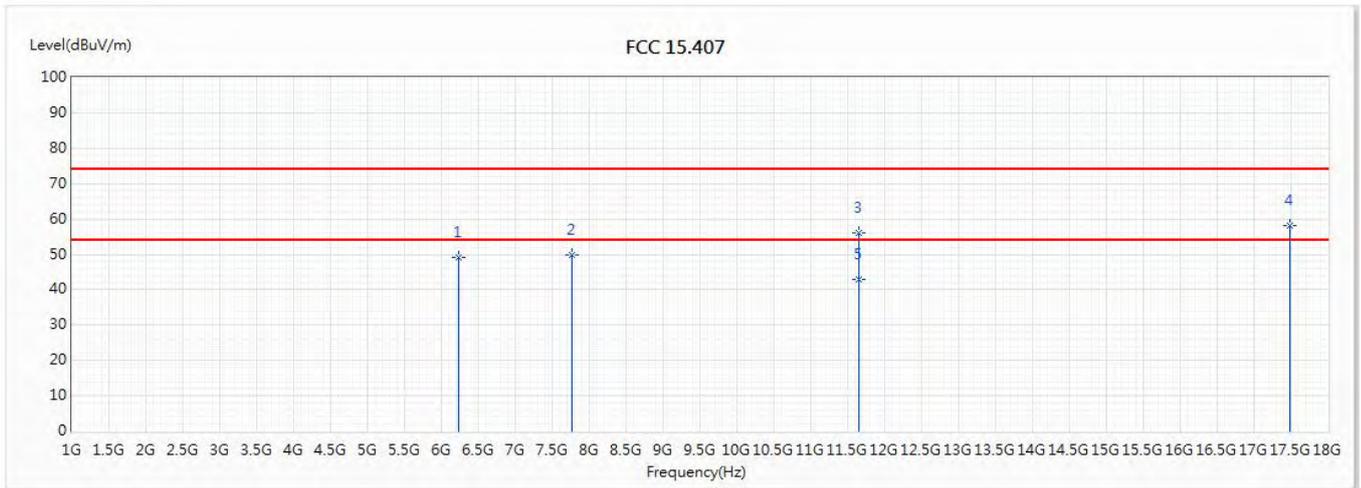


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 49.09 | 74.00 | -24.91 | 45.84 | 3.25 | PK |
| 2 | 7766 | 49.85 | 74.00 | -24.15 | 40.93 | 8.92 | PK |
| 3 | 11650 | 55.96 | 74.00 | -18.04 | 39.55 | 16.41 | PK |
| 4 | 17475 | 58.01 | 74.00 | -15.99 | 40.32 | 17.69 | PK |
| * 5 | 11650 | 42.86 | 54.00 | -11.14 | 26.45 | 16.41 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5745MHz | | |

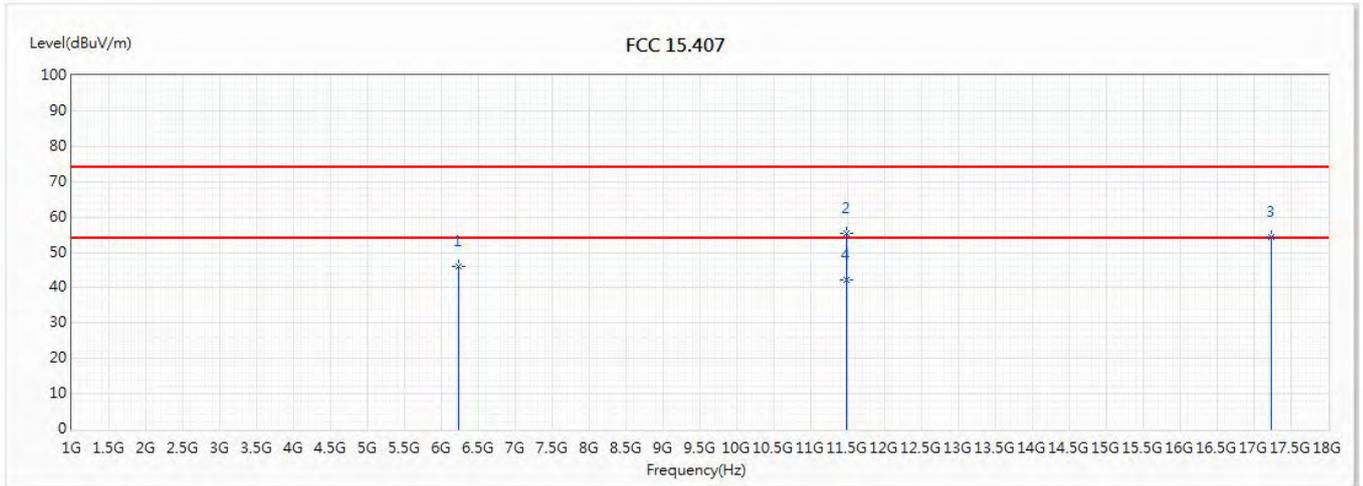


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.11 | 74.00 | -27.89 | 42.86 | 3.25 | PK |
| 2 | 11490 | 55.36 | 74.00 | -18.64 | 38.55 | 16.81 | PK |
| 3 | 17235 | 54.42 | 74.00 | -19.58 | 37.92 | 16.50 | PK |
| * 4 | 11490 | 42.17 | 54.00 | -11.83 | 25.36 | 16.81 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5745MHz | | |

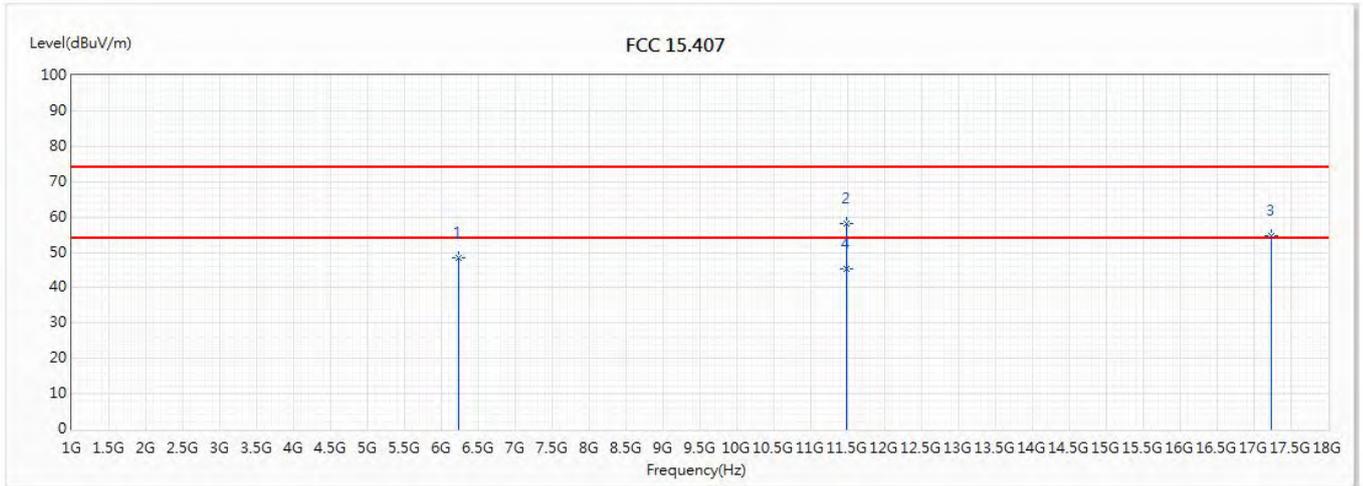


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 48.48 | 74.00 | -25.52 | 45.23 | 3.25 | PK |
| 2 | 11490 | 58.17 | 74.00 | -15.83 | 41.36 | 16.81 | PK |
| 3 | 17235 | 54.80 | 74.00 | -19.20 | 38.30 | 16.50 | PK |
| * 4 | 11490 | 45.25 | 54.00 | -8.75 | 28.44 | 16.81 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5785MHz | | |

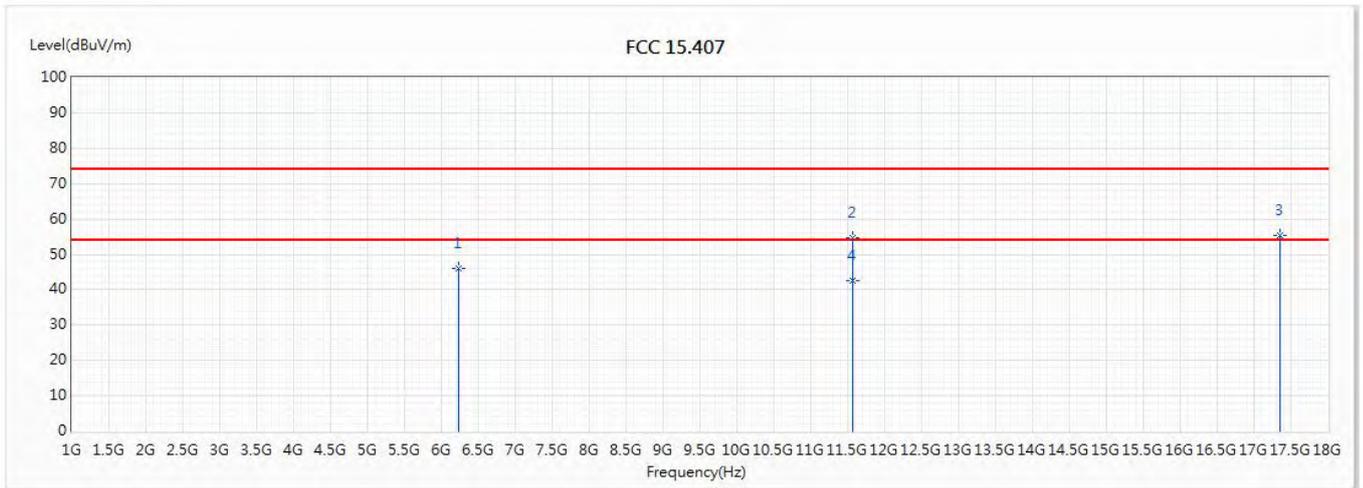


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.03 | 74.00 | -27.97 | 42.78 | 3.25 | PK |
| 2 | 11570 | 54.56 | 74.00 | -19.44 | 37.86 | 16.70 | PK |
| 3 | 17355 | 55.42 | 74.00 | -18.58 | 38.24 | 17.18 | PK |
| * 4 | 11570 | 42.65 | 54.00 | -11.35 | 25.95 | 16.70 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5785MHz | | |

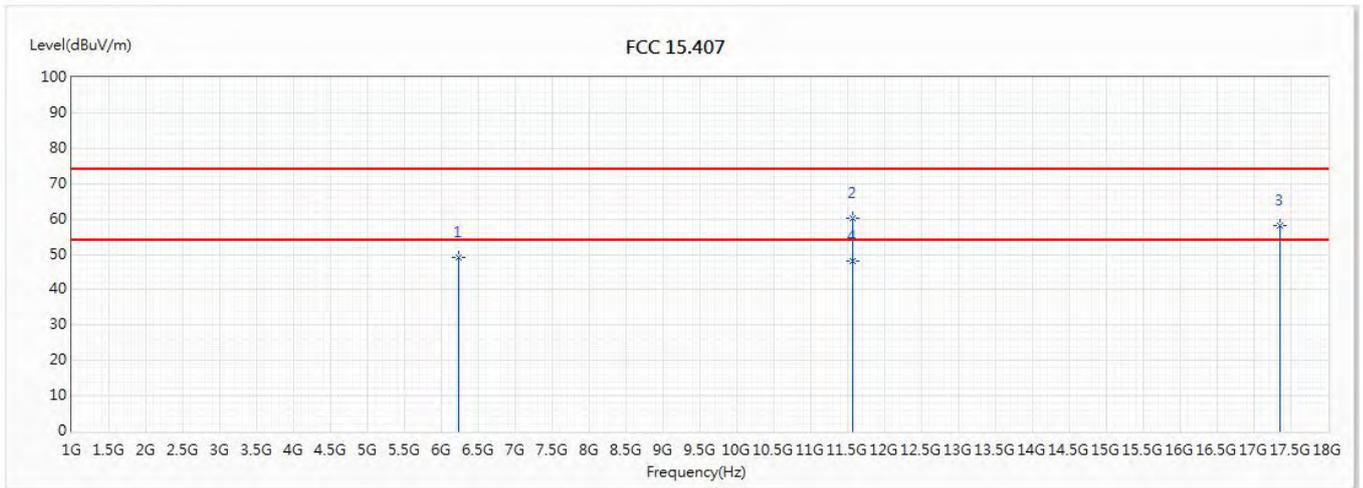


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 49.06 | 74.00 | -24.94 | 45.81 | 3.25 | PK |
| 2 | 11570 | 60.22 | 74.00 | -13.78 | 43.52 | 16.70 | PK |
| 3 | 17355 | 58.29 | 74.00 | -15.71 | 41.11 | 17.18 | PK |
| * 4 | 11570 | 48.04 | 54.00 | -5.96 | 31.34 | 16.70 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5825MHz | | |

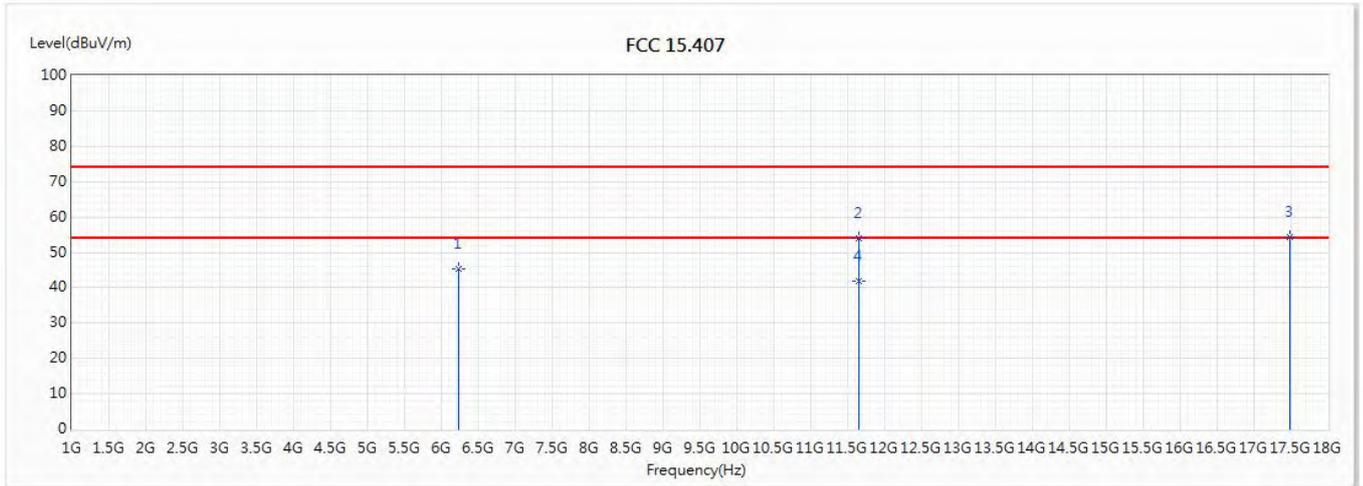


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 45.27 | 74.00 | -28.73 | 42.02 | 3.25 | PK |
| 2 | 11650 | 54.12 | 74.00 | -19.88 | 37.71 | 16.41 | PK |
| 3 | 17475 | 54.35 | 74.00 | -19.65 | 36.66 | 17.69 | PK |
| * 4 | 11650 | 41.98 | 54.00 | -12.02 | 25.57 | 16.41 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(20M)_5825MHz | | |

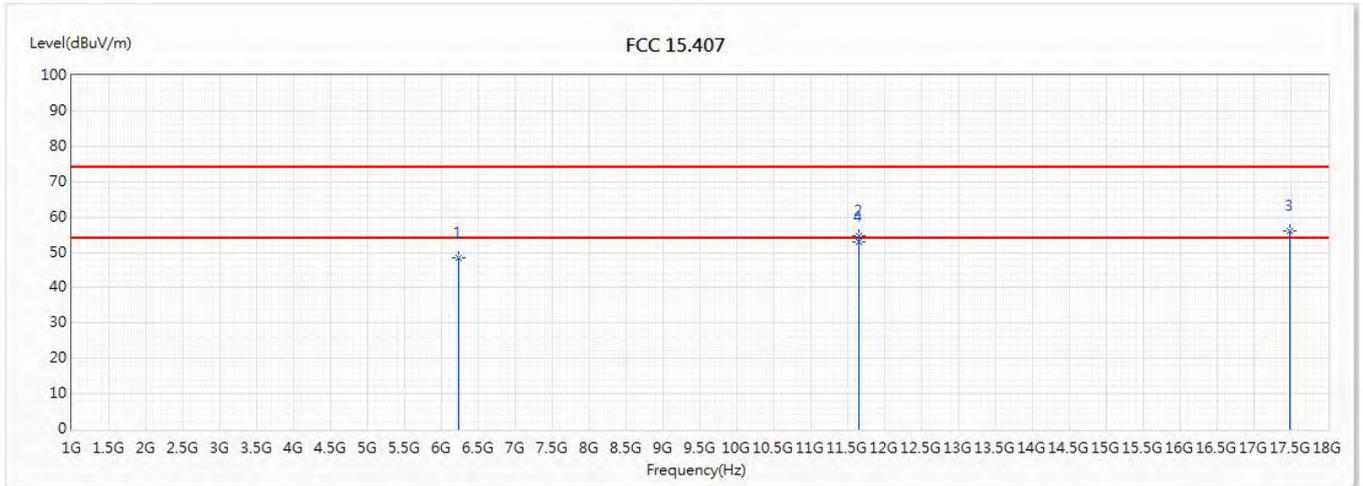


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 48.45 | 74.00 | -25.55 | 45.20 | 3.25 | PK |
| 2 | 11650 | 54.77 | 74.00 | -19.23 | 38.36 | 16.41 | PK |
| 3 | 17475 | 56.21 | 74.00 | -17.79 | 38.52 | 17.69 | PK |
| * 4 | 11650 | 52.85 | 54.00 | -1.15 | 36.44 | 16.41 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5755MHz | | |

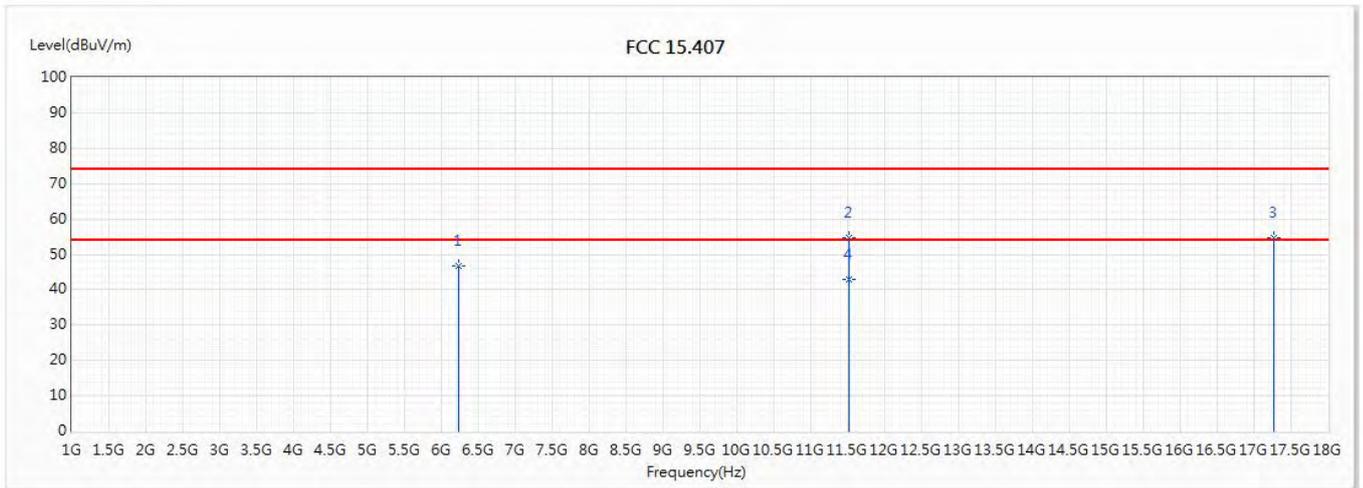


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.69 | 74.00 | -27.31 | 43.44 | 3.25 | PK |
| 2 | 11510 | 54.72 | 74.00 | -19.28 | 37.88 | 16.84 | PK |
| 3 | 17265 | 54.55 | 74.00 | -19.45 | 37.86 | 16.69 | PK |
| * 4 | 11510 | 42.87 | 54.00 | -11.13 | 26.03 | 16.84 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5755MHz | | |

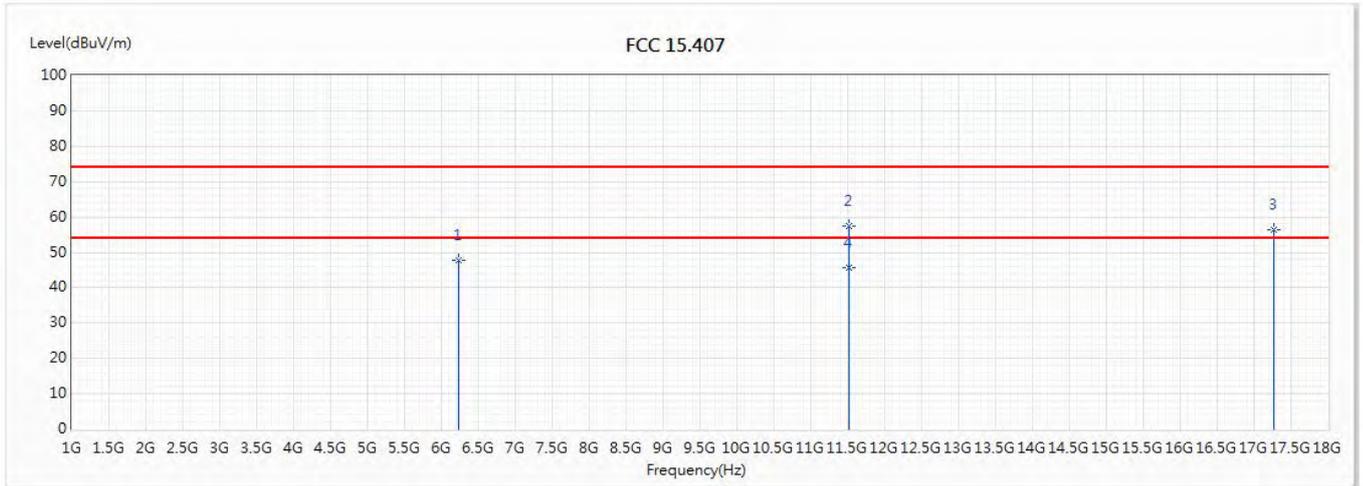


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 47.81 | 74.00 | -26.19 | 44.56 | 3.25 | PK |
| 2 | 11510 | 57.61 | 74.00 | -16.39 | 40.77 | 16.84 | PK |
| 3 | 17265 | 56.31 | 74.00 | -17.69 | 39.62 | 16.69 | PK |
| * 4 | 11510 | 45.57 | 54.00 | -8.43 | 28.73 | 16.84 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(40M)_5795MHz | | |

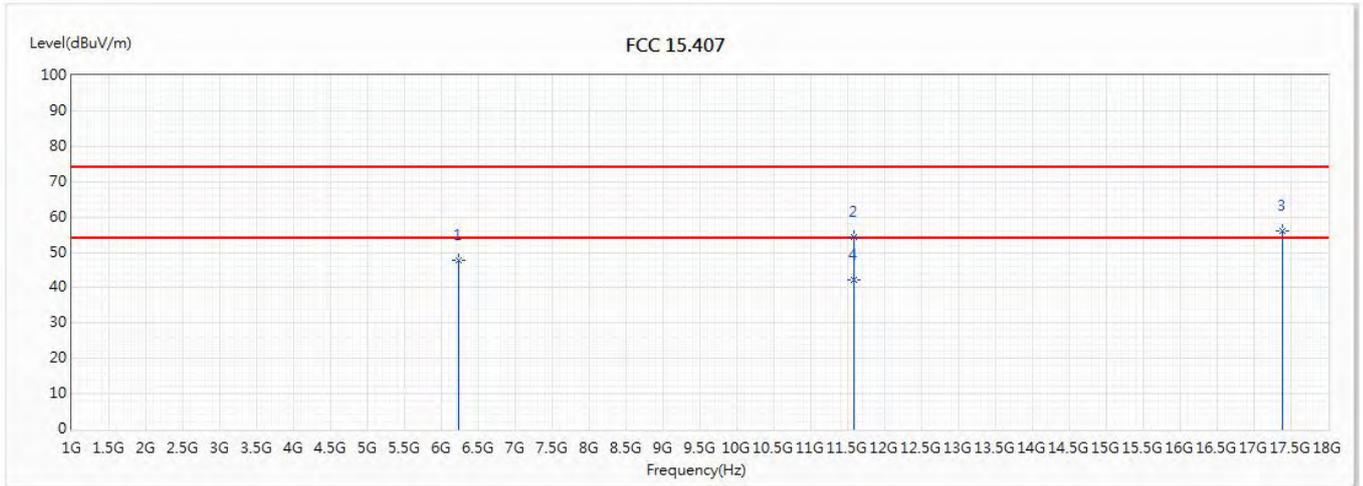


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 47.82 | 74.00 | -26.18 | 44.57 | 3.25 | PK |
| 2 | 11590 | 54.28 | 74.00 | -19.72 | 37.64 | 16.64 | PK |
| 3 | 17385 | 56.01 | 74.00 | -17.99 | 38.70 | 17.31 | PK |
| * 4 | 11590 | 42.17 | 54.00 | -11.83 | 25.53 | 16.64 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|---------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_AD P-65DW Y | | |
| Note : | 802.11ac(40M)_5795MHz | | |

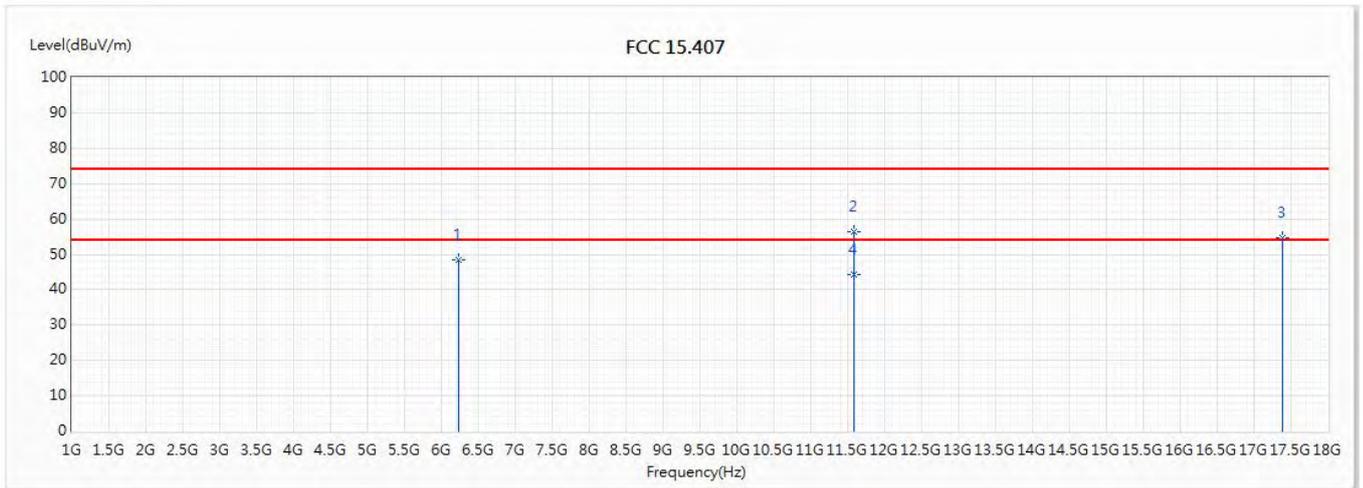


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 48.55 | 74.00 | -25.45 | 45.30 | 3.25 | PK |
| 2 | 11590 | 56.29 | 74.00 | -17.71 | 39.65 | 16.64 | PK |
| 3 | 17385 | 54.83 | 74.00 | -19.17 | 37.52 | 17.31 | PK |
| * 4 | 11590 | 44.38 | 54.00 | -9.62 | 27.74 | 16.64 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5775MHz | | |

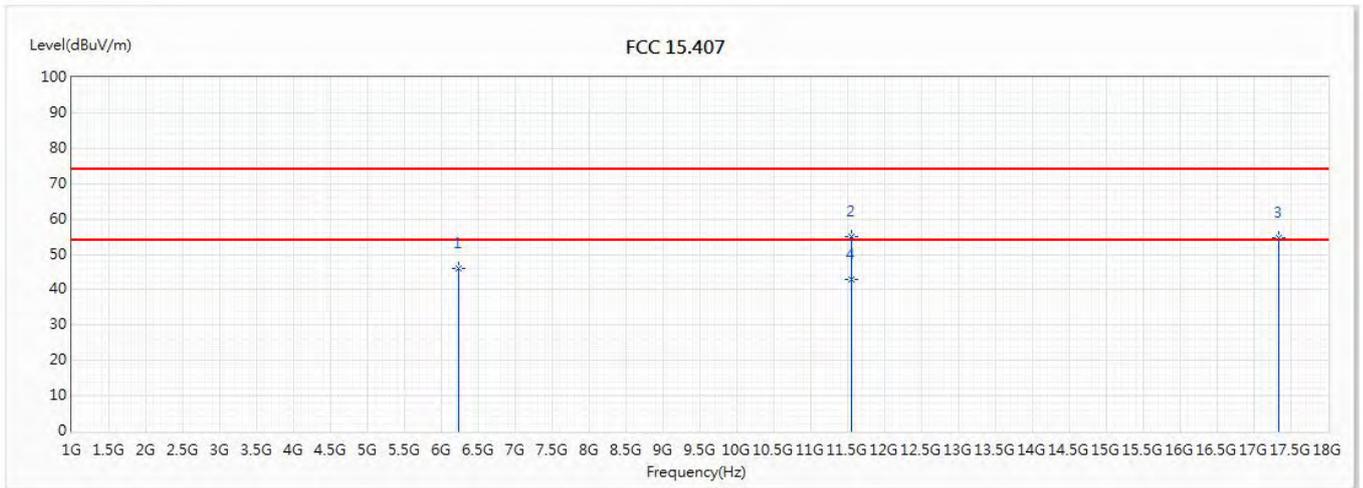


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 46.06 | 74.00 | -27.94 | 42.81 | 3.25 | PK |
| 2 | 11550 | 54.94 | 74.00 | -19.06 | 38.17 | 16.77 | PK |
| 3 | 17325 | 54.75 | 74.00 | -19.25 | 37.69 | 17.06 | PK |
| * 4 | 11550 | 43.04 | 54.00 | -10.96 | 26.27 | 16.77 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

| | | | |
|----------------|--------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Elwin |
| Model No : | GT-AX6000 | Test Date : | 2018/8/17 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1:TX_CDD_ADP-65DW_Y | | |
| Note : | 802.11ac(80M)_5775MHz | | |

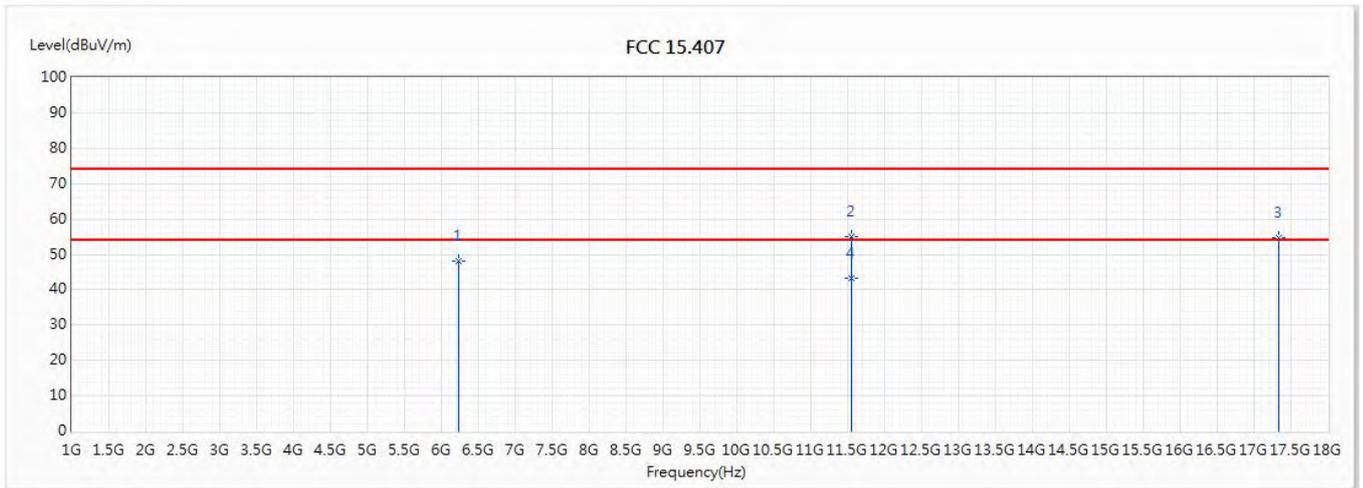

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 6240 | 48.03 | 74.00 | -25.97 | 44.78 | 3.25 | PK |
| 2 | 11550 | 54.91 | 74.00 | -19.09 | 38.14 | 16.77 | PK |
| 3 | 17325 | 54.77 | 74.00 | -19.23 | 37.71 | 17.06 | PK |
| * 4 | 11550 | 43.27 | 54.00 | -10.73 | 26.50 | 16.77 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.