




# AFC DUT TEST HARNESS REPORT

**FCC ID** : MSQ-RTBE6M00  
**Equipment** : ROG Rapture GT-BE98 Pro BE30000 Quad-band Gaming Router  
**Brand Name** : ASUS  
**Model Name** : GT-BE98 Pro  
**Applicant** : ASUSTeK COMPUTER INC.  
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Mar. 06, 2024, and testing was started from Jun. 03, 2024 and completed on Jun. 03, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in AFC Device (AFC DUT) Compliance Test Plan Version 1.5 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

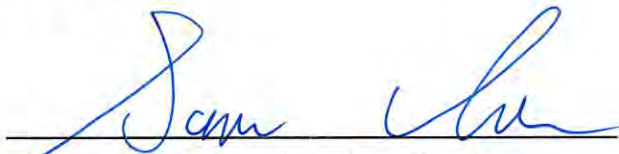  
Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**  
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

<b>1</b>	<b>General Description .....</b>	<b>6</b>
1.1	Product Feature of Equipment Under Test .....	6
1.2	Antenna Information .....	7
1.3	Table for EUT supports function .....	9
1.4	Table for Radio function .....	9
1.5	Table for EUT Information .....	9
1.6	Table for Permissive Change .....	9
1.7	Accessories .....	10
1.8	Support Equipment .....	10
1.9	Applicable Standards .....	11
1.10	Testing Location .....	11
<b>2</b>	<b>Measurement Environment .....</b>	<b>12</b>
2.1	AFCD General Capabilities Declaration .....	12
2.2	Test Configuration .....	13
<b>3</b>	<b>Protocol Test Results .....</b>	<b>15</b>
3.1	Successful Registration and Spectrum Access Request .....	15
3.2	Unsuccessful Spectrum Access Request .....	17
3.3	Successful Spectrum Access Update .....	18
3.4	Unsuccessful Spectrum Access Update .....	20
3.5	Unsuccessful Server Validation .....	22
<b>4</b>	<b>Test Equipment and Calibration Data .....</b>	<b>23</b>
<b>5</b>	<b>Measurement Uncertainty .....</b>	<b>24</b>

**Appendix A. Tools Report**

**Appendix B. DUT Spectrum Inquiry Request/Response Logs**

**Appendix C. RF Measurement Plots**

**Photographs of EUT v01**



### History of this test report

Report No.	Version	Description	Issued Date
F3321615-08	01	Initial issue of report	Jul. 01, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Case Name	Result (PASS/FAIL)	Remark
<b>AFC capability - Inquired Frequency</b>				
<b>Test Group: Inquired Frequency - Always</b>				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_160MHz_10614_1	N/A	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1	N/A	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1	N/A	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUUAU34_Frequency_10617_1	N/A	-
<b>AFC capability - Inquired Channel</b>				
<b>Test Group: Inquired Channel - Always</b>				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_20MHz_10618_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_40MHz_10619_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_80MHz_10620_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_160MHz_10621_1	N/A	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1	N/A	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_Channel_10623_1	N/A	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUUAU34_Channel_10624_1	N/A	-
<b>AFC capability - Inquired Frequency &amp; Channel</b>				
<b>Test Group: Inquired Frequency and Channel - Always</b>				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80MHz_10627_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160MHz_10628_1	PASS	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1	PASS	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_FrequencyChannel_10630_1	PASS	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUUAU34_FrequencyChannel_10631_1	PASS	-
<b>AFC capability - Server Validation – Mandatory</b>				
<b>Test Group: Server Validation - Always</b>				
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1	PASS	-



**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen**

**Report Producer: Sandy Chuang**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature of Equipment Under Test	
Power Type	From power adapter
EUT Type	<input type="checkbox"/> Standard Power Access Point with Proxy <input checked="" type="checkbox"/> Standard Power Access Point without Proxy <input type="checkbox"/> Fixed Client with Proxy <input type="checkbox"/> Fixed Client without Proxy
Bandwidth (MHz)	20 / 40 / 80 / 160 / 320
Condition of EUT	<input checked="" type="checkbox"/> Indoor <input type="checkbox"/> Outdoor
Professional Installation	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Firmware Version	9.0.0.6.102_34909
Software Version	N/A
Hardware Version	N/A

Note: The above information was declared by manufacturer.



## 1.2 Antenna Information

Ant.	Port				Brand	Model Name			Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7/8		WLAN 2.4GHz / WLAN5GHz	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7/8			
1	-	-	1	-	Whayu	-	C660-510595-AW1	-	Dipole	I-PEX	Note 1
2	-	-	2	-	Whayu	-	C660-510596-AW1	-	Dipole	I-PEX	
3	-	-	3	-	Whayu	-	C660-510597-AW1	-	Dipole	I-PEX	
4	-	-	4	-	Whayu	-	C660-510598-AW1	-	Dipole	I-PEX	
5	-	-	-	1	Whayu	-	-	C660-510595-AW2	Dipole	I-PEX	
6	-	-	-	4	Whayu	-	-	C660-510596-AW2	Dipole	I-PEX	
7	-	-	-	2	Whayu	-	-	C660-510597-AW2	Dipole	I-PEX	
8	-	-	-	3	Whayu	-	-	C660-510598-AW2	Dipole	I-PEX	
9	4	1	-	-	Whayu	C660-510591-AW1	-	-	Dipole	I-PEX	
10	1	4	-	-	Whayu	C660-510592-AW1	-	-	Dipole	I-PEX	
11	2	3	-	-	Whayu	C660-510593-AW1	-	-	Dipole	I-PEX	
12	3	2	-	-	Whayu	C660-510594-AW1	-	-	Dipole	I-PEX	

Note 1

Ant.	Antenna Gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz		
						UNII 5	UNII7	UNII8
1	-	-	-	-	-	1.80	-	-
2	-	-	-	-	-	1.95	-	-
3	-	-	-	-	-	1.82	-	-
4	-	-	-	-	-	1.74	-	-
5	-	-	-	-	-	-	1.38	1.91
6	-	-	-	-	-	-	2.30	3.01
7	-	-	-	-	-	-	3.50	3.51
8	-	-	-	-	-	-	3.29	2.92
9	3.22	2.16	1.26	2.44	3.08	-	-	-
10	3.31	2.91	2.84	2.86	4.20	-	-	-
11	4.09	4.07	3.99	3.62	3.02	-	-	-
12	1.94	2.30	2.28	2.41	3.66	-	-	-



Item	Directional gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz		
						UNII 5	UNII7	UNII8
4T1S	6.24	5.90	5.76	5.94	5.78	5.66	5.48	5.92
4T2S	4.09	4.07	3.99	3.62	4.20	2.66	3.50	3.51

Note 2: The above information (excepting gain) was declared by manufacturer.

Note 3: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.

Note 4: **For 2.4GHz function:**

**For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac/ax/be (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For 6GHz function:**

**For IEEE 802.11ax/be mode (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.





### 1.3 Table for EUT supports function

Function	Type
AP Router	Master
Bridge	Slave without radar detection
Extender	Master
Mesh	Master

Note: The above information was declared by manufacturer.

### 1.4 Table for Radio function

Radio	2.4GHz	5GHz UNII1~UNII3	6GHz UNII7~UNII8	6GHz UNII5
1	-	-	V	-
2	-	-	-	V
3	V	-	-	-
4	-	V	-	-

Note: The above information was declared by manufacturer.

### 1.5 Table for EUT Information

EUT	H/W version	Integrated circuit packaging (Location: UP1)	Barometric pressure sensor (Location: U102)
1	R2.50	FCBGA Package Brand : Broadcom Model : BCM84891L	Without
2	R2.70	FCFBGA Package Brand : Broadcom Model : BCM84891L	With

Note 1: From the above EUTs, EUT 1 was selected to test all the test items.

Note 2: The above information was declared by manufacturer.

### 1.6 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR321615AC

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Adding the EUT 2 (Please refer to section 1.5 for detailed information about the difference with EUT 1).	All test items



### 1.7 Accessories

Accessories				
Power	Brand Name	Model Name	Rating	Remark
Adapter	AcBel	ADD011	Input: 100-240V~ 1.7A, 50-60Hz Output: +19.5V, 3.33A, 65.0W MAX	With the DC cable: Non-shielded, 1.5m
Others				
RJ-45 cable*1: Shielded, 1.5m				
Power cord*1: Non-shielded, 0.9m				

### 1.8 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	WLAN module	Intel	BE200NGW	PD9BE200NG



### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ AFC Device (AFC DUT) Compliance Test Plan Version 1.5
- ♦ FCC KDB 987594 D05 v01r01

### 1.10 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065                      FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Caster Chang	22.7~23.1 / 47~49	Jun. 03, 2024



## 2 Measurement Environment


Measurement Environment Information	
AFC DUT Test Harness version	2.0.65.148

### 2.1 AFCD General Capabilities Declaration


Item	Question	Vendor Response
1	AFC DUT Type	Standalone AP
2	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Frequency Range field?	Yes
3	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Channels fields?	Yes
4	If the Answer to Items 2 and 3 is "Yes", what is AFC DUT's default inquiry type?	Both
5	Does the AFC DUT need to be supplied with BSS configuration parameters?	No
6	Does the AFC DUT manufacturer attest to AFC DUT compliance with rules for LPI operation?	Yes
7	Does the AFC DUT need to be supplied with mandatory registration information to formulate an Available Spectrum Inquiry Request	No
8	If the Answer to Item 7 is "Yes". What is the geographic Supported by the AFC DUT?	N/A
9	Does the AFC DUT supports 160 MHz channel width operation?	Yes
10	Which method does AFC DUT acting as a Fixed Client uses for sending an Available Spectrum Inquiry Request?	N/A

Note: The above information was declared by manufacturer.

## 2.2 Test Configuration

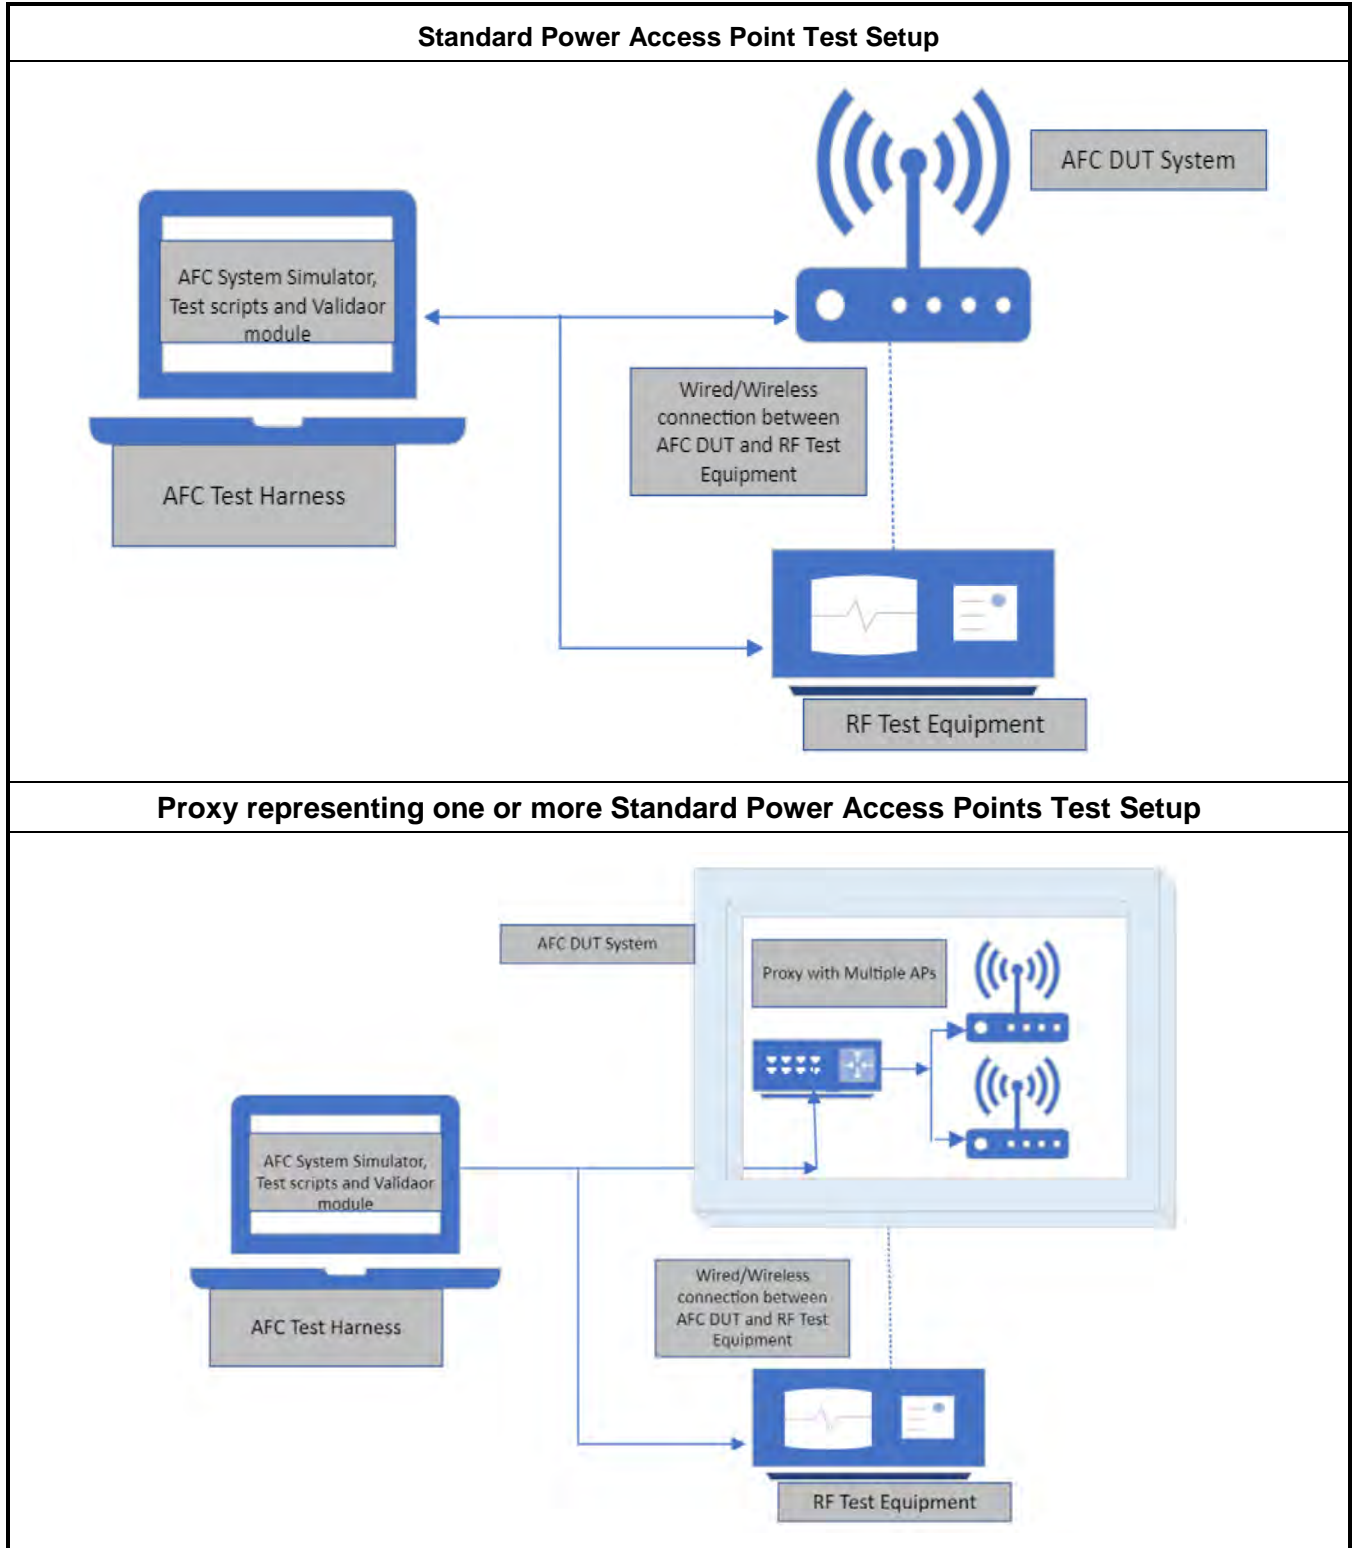

### Fixed Client Device Test Setup

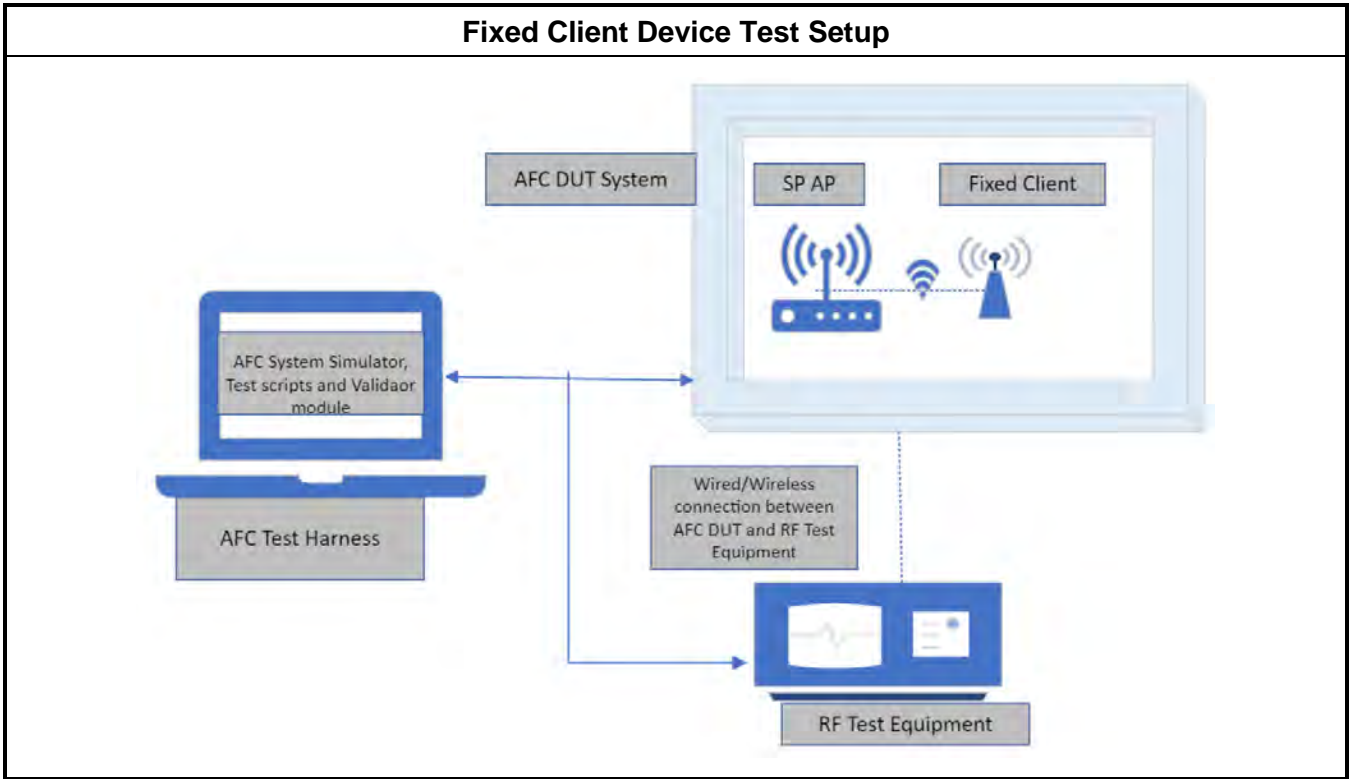



### 3 Protocol Test Results

#### 3.1 Successful Registration and Spectrum Access Request

##### 3.1.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields*.
4	AFC DUT Test Harness validates the presence of mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout Step 1 to Step 4, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: <ul style="list-style-type: none"> <li>In the band if the AFC DUT supports only SP operation</li> </ul> Or <ul style="list-style-type: none"> <li>Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation</li> </ul> Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li> </ul>
7	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
8	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
9	AFC DUT Test Harness validates the presence of mandatory registration information
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5.
11	Wait for 5 minutes (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the latest Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li> </ul>
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.



18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods
21	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
22	AFC DUT Test Harness validates the presence of mandatory registration information
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 17.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

**3.1.2 Test Result**

Refer as Appendix A~C





### 3.2 Unsuccessful Spectrum Access Request

#### 3.2.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 7
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Test Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
6	Throughout Step 2 to Step 5 and subsequent to Step 5, RF Test Equipment monitors the output of the AFC DUT to confirm the following: <ul style="list-style-type: none"><li>• For SP only operation, AFC DUT does not transmit in the band.</li><li>• For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.</li></ul>
7	If the AFC DUT is Fixed Client, go to Step 8 else Stop the test
8	The AFC DUT set to Initial Pre-test State.
9	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
10	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
11	AFC DUT Test Harness validates mandatory registration information.
12	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available using either In-band or Out-of-band methods.
13	If AFC DUT used Out-of-band method, initiate connection procedure between Fixed Client and SP Access Point by following instructions provided by the AFC DUT Vendor
13	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

#### 3.2.2 Test Result

Refer as Appendix A-C



### 3.3 Successful Spectrum Access Update

#### 3.3.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the preceding steps, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: <ul style="list-style-type: none"> <li>In the band if the AFC DUT supports only SP operation</li> </ul> Or <ul style="list-style-type: none"> <li>Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation</li> </ul> Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li> </ul>
7	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the following and STOP the test <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT does not transmit in the band.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.</li> </ul> If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 9
9	AFC DUT Test Harness evaluates validity of mandatory registration information
10	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5. <ul style="list-style-type: none"> <li>During the 60 seconds wait time: <ul style="list-style-type: none"> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT does not transmit above LPI threshold limits</li> <li>For SP only operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT doesn't transmit in the band</li> </ul> </li> </ul>
11	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li> </ul>
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.



14	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel and STOP the test. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 21
22	AFC DUT Test Harness evaluates validity of mandatory registration information
23	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from step 17. During the 60 seconds wait time, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

**3.3.2 Test Result**

Refer as Appendix A~C



### 3.4 Unsuccessful Spectrum Access Update

#### 3.4.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the DUT with AFC System URL and server root certificate. Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields.
4	AFC DUT Test Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the Step 2 to 5, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: <ul style="list-style-type: none"> <li>In the band if the AFC DUT supports only SP operation</li> </ul> Or <ul style="list-style-type: none"> <li>Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation</li> </ul> Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> </ul> For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies
7	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds <ul style="list-style-type: none"> <li>If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the DUT to verify the following and STOP the test: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT does not transmit in the band,</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.</li> </ul> </li> <li>If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 8</li> </ul>
9	AFC DUT Test Harness evaluates validity of mandatory registration information.
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
11	Throughout Step 7 to 10 and subsequent to Step 10 Test Equipment monitors the output of the AFC DUT to confirm that: For SP only operation, AFC DUT does not transmit in the band. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 5 declaration), configure the DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency



	ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel., If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 22 else STOP the test
22	AFC DUT Test Harness evaluates validity of mandatory registration information.
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

**3.4.2 Test Result**

Refer as Appendix A~C



### 3.5 Unsuccessful Server Validation

#### 3.5.1 Test Procedure

Step	Description
1	<p>The AFC DUT set to Initial Pre-test State.            If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters.            Configure the AFC DUT Test Harness with TLS configuration that is the same as the default configuration defined in Section 2.3.1 except for the following:</p> <ul style="list-style-type: none"> <li>Run 1: A different server certificate (and private key) with SAN domain name entry "badafc.com" (i.e. that does not match AFC system URL's domain name); signed by the same root certificate as per Section 2.3.1</li> <li>Run 2: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1, but the certificate is signed by a different root certificate</li> <li>Run 3: A different server certificate (and private key) with SAN domain name entry "wfatestorg.org" only (i.e. SAN domain name only matches suffix of AFC server's hostname); signed by the same root certificate as per Section 2.3.1</li> <li>Run 4: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1 signed by the same root certificate as per Section 2.3.1, but the server certificate is revoked as indicated in stapled OCSP response</li> <li>Run 5: Same configuration as per Section 2.3.1, except OCSP stapling is disabled and CRL/OCSP servers are not available</li> <li>Run 6: Same configuration as per Section 2.3.1, except stapled OCSP response has expired and CRL/OCSP servers are not available</li> <li>Run 7: Same configuration as per Section 2.3.1, except only the TLS cipher suite "eNULL" (no encryption) is enabled</li> <li>Run 8: N/A (same configuration as per Section 2.3.1)</li> </ul> <p>Configure the AFC DUT with the AFC System URL and the following root certificate:            Runs 1-7: Root certificate as per Section 2.3.1            Run 8: No root certificate</p> <p>Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.</p>
2	AFC DUT Test Harness waits 10 seconds, and verifies no Available Spectrum Inquiry Request is sent to it.
3	Steps 1 and 2 are repeated for each of the remaining Runs

#### 3.5.2 Test Result

Refer as Appendix A



## 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2024	May 26, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Power Divider	MTJ	2 Way	DF01-DV03	1GHz ~ 8GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
RF Power Divider	MTJ	2 Way	DF01-DV02	1GHz ~ 8GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
RF Power Divider	Titan	2 Way	DV-8G -09	2GHz ~ 8GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
RF Power Divider	Titan	2 Way	DV-8G -10	2GHz ~ 8GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.  
NCR means Non-Calibration required.



## **5 Measurement Uncertainty**

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
Conducted Emission	3.0 dB	Confidence levels of 95%



### AFC DUT Compliance Test Report

#### DUT Information

AFC DUT System	Standard Power AP
DUT Vendor Name	ASUS
DUT Product Model	GT-BE98 Pro

#### Test Result

FTC Requirements	Test Case Name	Test Result
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1 (Unsuccessful server validation)</a>	PASS
15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(9)(i)	<a href="#">CT_AFC_SP_AP_AFCDUAU34_FrequencyChannel_10631_1 (Unsuccessful spectrum access update)</a>	PASS
15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(9)(i)	<a href="#">CT_AFC_SP_AP_AFCDUAU33_FrequencyChannel_10630_1 (Successful spectrum access update)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii)	<a href="#">CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1 (Unsuccessful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160MHz_10628_1 (Successful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80MHz_10627_1 (Successful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1 (Successful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1 (Successful registration and spectrum access request)</a>	PASS

#### Test Measurements

Test Case Name: [CT\\_AFC\\_ServerValidation\\_AP\\_AFCDUSV35\\_NoRootCA\\_10639\\_1 \(Unsuccessful server validation\)](#)  
 Test Result: PASS  
 Band: 6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

Test Case Name: [CT\\_AFC\\_ServerValidation\\_AP\\_AFCDUSV35\\_TLSCipherSuiteENULL\\_10638\\_1 \(Unsuccessful server validation\)](#)  
 Test Result: PASS  
 Band: 6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_StapledOCSPRespExpired\_10637\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_OCSPStaplingDisabled\_10636\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_ServerCertRevoked\_10635\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_MatchSuffixSAN\_10634\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_DifferentRootCA\_10633\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_NonMatchSAN\_10632\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDUAU34\_FrequencyChannel\_10631\_1 (Unsuccessful spectrum access update)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (23 dBm/MHz PSD, 36.0 dBm EIRP) in Spectrum Response] on channel 133 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SP_OPERATION_NO_REQ	AFC DUT transmit with standard power in the band in no Spectrum Inquiry Request case	false	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDSA33\_FrequencyChannel\_10630\_1 (Successful spectrum access update)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION_1	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD) , SP limits (15.487820241157493 dBm/MHz PSD, 28.498120197797306 dBm EIRP) in Spectrum Reponse] on channel 37 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SP_OPERATION_NO_REQ	AFC DUT transmit with standard power in the band in no Spectrum Inquiry Request case	false	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDSA32\_FrequencyChannel\_10629\_1 (Unsuccessful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE	AFC DUT conforms to the conditions in the Spectrum Inquiry Response	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_160MHz\_10628\_1 (Successful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD) , SP limits (8.01486269274553 dBm/MHz PSD, 30.05606231930478 dBm EIRP) in Spectrum Reponse] on channel center frequency index 143 bandwidth 160.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD) , SP limits (9.840758436838783 dBm/MHz PSD, 31.881958263398033 dBm EIRP) in Spectrum Reponse] on channel center frequency index 79 bandwidth 160.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_80MHz\_10627\_1 (Successful registration and spectrum access request)

TestResult:PASS  
Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (14.690378434279456 dBm/MHz PSD, 33.72127830419889 dBm EIRP) in Spectrum Response] on channel center frequency index 87 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (11.021146109895595 dBm/MHz PSD, 30.052045979815027 dBm EIRP) in Spectrum Response] on channel center frequency index 131 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_40MHz\_10626\_1 (Successful registration and spectrum access request)  
TestResult:PASS  
Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (12.1222533924984 dBm/MHz PSD, 28.142853252529463 dBm EIRP) in Spectrum Response] on channel center frequency index 131 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (10.569732254293235 dBm/MHz PSD, 26.59033216757286 dBm EIRP) in Spectrum Response] on channel center frequency index 35 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_20MHz\_10625\_1 (Successful registration and spectrum access request)  
TestResult:PASS  
Band:6GHz

Measurement Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS

AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (14.95819185150725 dBm/MHz PSD, 27.968491808147064 dBm EIRP) in Spectrum Response] on channel 149 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING[LPI limits (5 dBm/MHz PSD), SP limits (19.148083126174694 dBm/MHz PSD, 32.15838308281451 dBm EIRP) in Spectrum Response] on channel 53 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS



Inquired Frequency & Channel

CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_20MHz\_10625\_1

##### 2024-06-03T06:05:12Z #####

{

"headers": {

"Host": "testserver.wfatestorg.org",

"Accept": "\*/\*",

"Content-Type": "application/json",

"X-Forwarded-For": "192.168.100.200",

"X-Forwarded-Host": "testserver.wfatestorg.org",

"X-Forwarded-Server": "testserver.wfatestorg.org",

"Content-Length": "1375",

"Connection": "Keep-Alive"

},

"body": {

"version": "1.4",

"availableSpectrumInquiryRequests": [

{

"requestId": "1704067286",

"deviceDescriptor": {

"serialNumber": "JD4100C6E2",

"certificationId": [

{

"rulesetId": "US\_47\_CFR\_PART\_15\_SUBPART\_E",

"id": "MSQ-RTBE6M00"

}

]

},

"location": {

"ellipse": {

"center": {

"longitude": -73.97434,

"latitude": 40.75924

},

"majorAxis": 100,

"minorAxis": 50,

"orientation": 45



```
    },
    "elevation": {
      "height": 3,
      "heightType": "AGL",
      "verticalUncertainty": 2
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ],
  "inquiredChannels": [
    {
      "globalOperatingClass": 131,
      "channelCfi": [
        1,
        5,
        9,
        13,
        17,
        21,
        25,
        29,
        33,
        37,
        41,
        45,
        49,
        53,
        57,
```



61,  
65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,





```
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,
```



```
        203,  
        211,  
        219,  
        227  
    ]  
},  
{  
    "globalOperatingClass": 133,  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55,  
        71,  
        87,  
        103,  
        119,  
        135,  
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
}
```



```
    ],
    "minDesiredPower": 24
  }
]
}
}
```

##### 2024-06-03T06:05:12Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [],
      "availableChannelInfo": [],
      "requestId": "1704067286",
      "availabilityExpireTime": "2024-06-04T06:05:12Z",
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ],
  "version": "1.4"
}
```

##### 2024-06-03T06:11:43Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
}
```

```
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "1704067287",
      "deviceDescriptor": {
        "serialNumber": "JD4100C6E2",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "MSQ-RTBE6M00"
          }
        ]
      },
      "location": {
        "ellipse": {
          "center": {
            "longitude": -73.97434,
            "latitude": 40.75924
          },
          "majorAxis": 100,
          "minorAxis": 50,
          "orientation": 45
        },
        "elevation": {
          "height": 3,
          "heightType": "AGL",
          "verticalUncertainty": 2
        },
        "indoorDeployment": 2
      },
      "inquiredFrequencyRange": [
        {
          "lowFrequency": 5925,
          "highFrequency": 6425
        }
      ]
    }
  ]
}
```



```
"lowFrequency": 6525,
"highFrequency": 6875
}
],
"inquiredChannels": [
{
"globalOperatingClass": 131,
"channelCfi": [
1,
5,
9,
13,
17,
21,
25,
29,
33,
37,
41,
45,
49,
53,
57,
61,
65,
69,
73,
77,
81,
85,
89,
93,
97,
101,
105,
109,
113,
```



```
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,
```



```
19,  
27,  
35,  
43,  
51,  
59,  
67,  
75,  
83,  
91,  
99,  
107,  
115,  
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,
```



```

      87,
      103,
      119,
      135,
      151,
      167,
      183,
      199,
      215
    ]
  },
  {
    "globalOperatingClass": 134,
    "channelCfi": [
      15,
      47,
      79,
      111,
      143,
      175,
      207
    ]
  }
],
"minDesiredPower": 24
}
]
}
}

```

##### 2024-06-03T06:11:43Z #####

```

{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      }
    }
  ]
}

```



```
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 6605,
      "lowFrequency": 6585
    },
    "maxPsd": 17.23629214907757
  },
  {
    "frequencyRange": {
      "highFrequency": 6625,
      "lowFrequency": 6605
    },
    "maxPsd": 12.917212339325843
  },
  {
    "frequencyRange": {
      "highFrequency": 6645,
      "lowFrequency": 6625
    },
    "maxPsd": 19.62603713171996
  },
  {
    "frequencyRange": {
      "highFrequency": 6665,
      "lowFrequency": 6645
    },
    "maxPsd": 12.46035451395359
  },
  {
    "frequencyRange": {
      "highFrequency": 6685,
      "lowFrequency": 6665
    },
    "maxPsd": 20.229372699454153
  },
}
```

```
{
  "frequencyRange": {
    "highFrequency": 6705,
    "lowFrequency": 6685
  },
  "maxPsd": 14.95819185150725
},
{
  "frequencyRange": {
    "highFrequency": 6725,
    "lowFrequency": 6705
  },
  "maxPsd": 10.423966144699964
},
{
  "frequencyRange": {
    "highFrequency": 6745,
    "lowFrequency": 6725
  },
  "maxPsd": 17.74826447236955
}
],
"availableChannelInfo": [
  {
    "channelCfi": [
      129,
      133,
      137,
      141,
      145,
      149,
      153,
      157
    ],
    "globalOperatingClass": 131,
    "maxEirp": [
      30.246592105717383,
```



```
        25.927512295965656,  
        32.636337088359774,  
        25.470654470593402,  
        33.239672656093965,  
        27.968491808147064,  
        23.434266101339777,  
        30.75856442900936  
    ]  
},  
{  
    "channelCfi": [  
        131,  
        139,  
        147,  
        155  
    ],  
    "globalOperatingClass": 132,  
    "maxEirp": [  
        28.937812252605468,  
        28.480954427233215,  
        30.978791764786877,  
        26.44456605797959  
    ]  
},  
{  
    "channelCfi": [  
        135,  
        151  
    ],  
    "globalOperatingClass": 133,  
    "maxEirp": [  
        31.491254383873024,  
        29.454866014619398  
    ]  
},  
{  
    "channelCfi": [  

```



```
        143
      ],
      "globalOperatingClass": 134,
      "maxEirp": [
        32.46516597125921
      ]
    }
  ],
  "requestId": "1704067287",
  "availabilityExpireTime": "2024-06-04T06:11:43Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
"version": "1.4"
}
```

##### 2024-06-03T06:22:20Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067288",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {

```

```
        "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
        "id": "MSQ-RTBE6M00"
    }
]
},
"location": {
    "ellipse": {
        "center": {
            "longitude": -73.97434,
            "latitude": 40.75924
        },
        "majorAxis": 100,
        "minorAxis": 50,
        "orientation": 45
    },
    "elevation": {
        "height": 3,
        "heightType": "AGL",
        "verticalUncertainty": 2
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"inquiredChannels": [
    {
        "globalOperatingClass": 131,
        "channelCfi": [
            1,
```



5,  
9,  
13,  
17,  
21,  
25,  
29,  
33,  
37,  
41,  
45,  
49,  
53,  
57,  
61,  
65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,



```
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,
```



```
91,  
99,  
107,  
115,  
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,  
    151,  
    167,  
    183,  
    199,  
    215
```





```
    ]
  },
  {
    "globalOperatingClass": 134,
    "channelCfi": [
      15,
      47,
      79,
      111,
      143,
      175,
      207
    ]
  }
],
"minDesiredPower": 24
}
]
}
}
```

##### 2024-06-03T06:22:20Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 16.630162858720887
        }
      ]
    }
  ]
}
```

```
{
  "frequencyRange": {
    "highFrequency": 5985,
    "lowFrequency": 5965
  },
  "maxPsd": 16.02222665954049
},
{
  "frequencyRange": {
    "highFrequency": 6005,
    "lowFrequency": 5985
  },
  "maxPsd": 15.267717352867647
},
{
  "frequencyRange": {
    "highFrequency": 6025,
    "lowFrequency": 6005
  },
  "maxPsd": 20.019306127653216
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 18.27129411961466
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 13.218050734127733
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6085,
        "lowFrequency": 6065
    },
    "maxPsd": 19.274580299004036
},
{
    "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
    },
    "maxPsd": 18.83363764340995
},
{
    "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
    },
    "maxPsd": 16.204484953800016
},
{
    "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
    },
    "maxPsd": 10.973241560692454
},
{
    "frequencyRange": {
        "highFrequency": 6165,
        "lowFrequency": 6145
    },
    "maxPsd": 15.99426802624102
},
{
    "frequencyRange": {
        "highFrequency": 6185,
        "lowFrequency": 6165
```

```
    },
    "maxPsd": 18.67056159078556
  },
  {
    "frequencyRange": {
      "highFrequency": 6205,
      "lowFrequency": 6185
    },
    "maxPsd": 19.338261836456788
  },
  {
    "frequencyRange": {
      "highFrequency": 6225,
      "lowFrequency": 6205
    },
    "maxPsd": 19.148083126174694
  },
  {
    "frequencyRange": {
      "highFrequency": 6245,
      "lowFrequency": 6225
    },
    "maxPsd": 16.906763045173673
  },
  {
    "frequencyRange": {
      "highFrequency": 6265,
      "lowFrequency": 6245
    },
    "maxPsd": 8.94501025497371
  },
  {
    "frequencyRange": {
      "highFrequency": 6285,
      "lowFrequency": 6265
    },
    "maxPsd": 11.818722668628935
  }
```

```
},
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 18.773843933431106
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 9.821923022312472
},
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 18.214322698177615
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 17.961381656499498
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 9.857670595268505
},
{
```

```
"frequencyRange": {
  "highFrequency": 6405,
  "lowFrequency": 6385
},
"maxPsd": 9.782002365803367
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 14.436253243732136
}
],
"availableChannelInfo": [
  {
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
      65,
      69,
      73,
      77,
```



```
81,  
85,  
89,  
93  
],  
"globalOperatingClass": 131,  
"maxEirp": [  
29.6404628153607,  
29.032526616180302,  
28.27801730950746,  
33.02960608429303,  
31.28159407625447,  
26.228350690767545,  
32.28488025564385,  
31.843937600049763,  
29.21478491043983,  
23.983541517332267,  
29.004567982880832,  
31.680861547425373,  
32.3485617930966,  
32.15838308281451,  
29.917063001813485,  
21.955310211613522,  
24.82902262526875,  
31.78414389007092,  
22.832222978952284,  
31.224622654817427,  
30.97168161313931,  
22.867970551908318,  
22.792302322443177,  
27.446553200371948  
]  
},  
{  
"channelCfi": [  
3,  
11,
```

```
19,  
27,  
35,  
43,  
51,  
59,  
67,  
75,  
83,  
91  
],  
"globalOperatingClass": 132,  
"maxEirp": [  
    32.04282657282012,  
    31.288317266147274,  
    29.238650647407358,  
    34.854237556689576,  
    26.99384147397208,  
    32.01486793952064,  
    35.16868303945432,  
    24.965610168253335,  
    27.83932258190856,  
    25.842522935592097,  
    25.87827050854813,  
    25.80260227908299  
]  
},  
{  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55,  
        71,  
        87  
    ],  
    "globalOperatingClass": 133,
```



```
"maxEirp": [  
    34.29861722278708,  
    32.24895060404717,  
    30.004141430611888,  
    27.975910124893144,  
    28.852822892231906,  
    28.812902235722802  
]  
,  
{  
    "channelCfi": [  
        15,  
        47,  
        79  
    ],  
    "globalOperatingClass": 134,  
    "maxEirp": [  
        35.25925056068698,  
        30.98621008153296,  
        31.823202192362615  
    ]  
}  
],  
"requestId": "1704067288",  
"availabilityExpireTime": "2024-06-04T06:22:20Z",  
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}  
],  
"version": "1.4"  
}
```



CT\_AFC\_SP\_AP\_AFCRSA31\_FrequencyChannel\_40MHz\_10626\_1

##### 2024-06-03T06:33:28Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067289",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MSQ-RTBE6M00"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "longitude": -73.97434,
              "latitude": 40.75924
            },
            "majorAxis": 100,
            "minorAxis": 50,
            "orientation": 45
          }
        }
      }
    ]
  }
}
```

```
"elevation": {
  "height": 3,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
```



65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,



```
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,  
    203,
```



```
        211,  
        219,  
        227  
    ]  
},  
{  
    "globalOperatingClass": 133,  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55,  
        71,  
        87,  
        103,  
        119,  
        135,  
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
}  
],
```

```
"minDesiredPower": 24
  }
]
}
}

##### 2024-06-03T06:33:28Z #####

{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 21.867514515042622
        },
        {
          "frequencyRange": {
            "highFrequency": 5985,
            "lowFrequency": 5965
          },
          "maxPsd": 20.705637574663772
        },
        {
          "frequencyRange": {
            "highFrequency": 6005,
            "lowFrequency": 5985
          },
          "maxPsd": 9.629895216236
        },
        {

```

```
"frequencyRange": {
  "highFrequency": 6025,
  "lowFrequency": 6005
},
"maxPsd": 17.52697525692878
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 13.072167204294223
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 11.427586744976669
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 16.161592689918667
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 17.62429134516602
},
{
  "frequencyRange": {
    "highFrequency": 6285,
```



```
        "lowFrequency": 6265
      },
      "maxPsd": 11.060404866015942
    },
    {
      "frequencyRange": {
        "highFrequency": 6305,
        "lowFrequency": 6285
      },
      "maxPsd": 11.737239554964122
    },
    {
      "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
      },
      "maxPsd": 15.519222418890898
    },
    {
      "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
      },
      "maxPsd": 13.139031843253768
    },
    {
      "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
      },
      "maxPsd": 21.025148641958967
    },
    {
      "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
      },
    },
```

```
"maxPsd": 14.263753413848544
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 10.885981996112676
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 13.72698925735832
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 12.12225333924984
},
{
  "frequencyRange": {
    "highFrequency": 6625,
    "lowFrequency": 6605
  },
  "maxPsd": 18.475205750459274
},
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 8.322550431811445
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 14.22849773454863
},
{
  "frequencyRange": {
    "highFrequency": 6685,
    "lowFrequency": 6665
  },
  "maxPsd": 19.76859721245292
},
{
  "frequencyRange": {
    "highFrequency": 6705,
    "lowFrequency": 6685
  },
  "maxPsd": 21.521032183186726
},
{
  "frequencyRange": {
    "highFrequency": 6725,
    "lowFrequency": 6705
  },
  "maxPsd": 14.673035788206533
},
{
  "frequencyRange": {
    "highFrequency": 6745,
    "lowFrequency": 6725
  },
  "maxPsd": 17.500758748977514
}
],
"availableChannelInfo": [
```

```
{  
  "channelCfi": [  
    1,  
    5,  
    9,  
    13,  
    17,  
    21,  
    25,  
    29,  
    65,  
    69,  
    73,  
    77,  
    81,  
    85,  
    89,  
    93,  
    129,  
    133,  
    137,  
    141,  
    145,  
    149,  
    153,  
    157  
  ],  
  "globalOperatingClass": 131,  
  "maxEirp": [  
    34.877814471682434,  
    33.71593753130358,  
    22.640195172875814,  
    30.53727521356859,  
    26.082467160934037,  
    24.43788670161648,  
    29.17189264655848,  
    30.634591301805834,  
  ]  
}
```



```
24.070704822655756,  
24.747539511603932,  
28.52952237553071,  
26.14933179989358,  
34.03544859859878,  
27.274053370488357,  
23.89628195275249,  
26.73728921399813,  
25.13255329588965,  
31.485505707099087,  
21.332850388451256,  
27.238797691188445,  
32.77889716909273,  
34.53133213982654,  
27.683335744846346,  
30.511058705617327  
]  
,  
{  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    67,  
    75,  
    83,  
    91,  
    131,  
    139,  
    147,  
    155  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    36.0,  
    25.650495129515626,
```



```
                27.448186658256294,  
                32.18219260319829,  
                27.08100477929557,  
                29.159631756533393,  
                30.28435332712817,  
                26.9065819093923,  
                28.142853252529463,  
                24.34315034509107,  
                35.78919712573254,  
                30.69363570148616  
            ]  
        },  
        {  
            "channelCfi": [  
                7,  
                23,  
                71,  
                87,  
                135,  
                151  
            ],  
            "globalOperatingClass": 133,  
            "maxEirp": [  
                28.66079508615543,  
                30.458486614896103,  
                30.091304735935374,  
                29.91688186603211,  
                27.35345030173088,  
                33.70393565812597  
            ]  
        },  
        {  
            "channelCfi": [  
                15,  
                79,  
                143  
            ],
```



```
        "globalOperatingClass": 134,
        "maxEirp": [
            31.67109504279525,
            32.927181822671926,
            30.363750258370693
        ]
    },
    ],
    "requestId": "1704067289",
    "availabilityExpireTime": "2024-06-04T06:33:28Z",
    "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2024-06-03T06:39:10Z #####

```
{
    "headers": {
        "Host": "testserver.wfatestorg.org",
        "Accept": "*/*",
        "Content-Type": "application/json",
        "X-Forwarded-For": "192.168.100.200",
        "X-Forwarded-Host": "testserver.wfatestorg.org",
        "X-Forwarded-Server": "testserver.wfatestorg.org",
        "Content-Length": "1375",
        "Connection": "Keep-Alive"
    },
    "body": {
        "version": "1.4",
        "availableSpectrumInquiryRequests": [
            {
                "requestId": "1704067290",
                "deviceDescriptor": {
                    "serialNumber": "JD4100C6E2",
                    "certificationId": [
                        {

```

```
        "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
        "id": "MSQ-RTBE6M00"
    }
]
},
"location": {
    "ellipse": {
        "center": {
            "longitude": -73.97434,
            "latitude": 40.75924
        },
        "majorAxis": 100,
        "minorAxis": 50,
        "orientation": 45
    },
    "elevation": {
        "height": 3,
        "heightType": "AGL",
        "verticalUncertainty": 2
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"inquiredChannels": [
    {
        "globalOperatingClass": 131,
        "channelCfi": [
            1,
```





5,  
9,  
13,  
17,  
21,  
25,  
29,  
33,  
37,  
41,  
45,  
49,  
53,  
57,  
61,  
65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,



```
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,
```



```
91,  
99,  
107,  
115,  
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,  
    103,  
    119,  
    135,  
    151,  
    167,  
    183,  
    199,  
    215
```



```
    ]
  },
  {
    "globalOperatingClass": 134,
    "channelCfi": [
      15,
      47,
      79,
      111,
      143,
      175,
      207
    ]
  }
],
"minDesiredPower": 24
}
]
}
}
```

##### 2024-06-03T06:39:10Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6125,
            "lowFrequency": 6105
          },
          "maxPsd": 18.839291350507764
        }
      ]
    }
  ]
}
```

```
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 10.569732254293235
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 20.975114833911796
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 14.88142222427788
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 19.484204228790567
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 9.579278386440224
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6245,
        "lowFrequency": 6225
    },
    "maxPsd": 8.64960949685328
},
{
    "frequencyRange": {
        "highFrequency": 6265,
        "lowFrequency": 6245
    },
    "maxPsd": 11.851403584898907
}
],
"availableChannelInfo": [
    {
        "channelCfi": [
            33,
            37,
            41,
            45,
            49,
            53,
            57,
            61
        ],
        "globalOperatingClass": 131,
        "maxEirp": [
            31.849591307147577,
            23.580032210933048,
            33.98541479055161,
            27.891722180917693,
            32.49450418543038,
            22.589578343080035,
            21.659909453493093,
            24.86170354153872
        ]
    }
},
```

```
{
  "channelCfi": [
    35,
    43,
    51,
    59
  ],
  "globalOperatingClass": 132,
  "maxEirp": [
    26.59033216757286,
    30.902022137557505,
    25.599878299719848,
    24.670209410132905
  ]
},
{
  "channelCfi": [
    39,
    55
  ],
  "globalOperatingClass": 133,
  "maxEirp": [
    29.60063212421267,
    27.680509366772714
  ]
},
{
  "channelCfi": [
    47
  ],
  "globalOperatingClass": 134,
  "maxEirp": [
    30.69080932341253
  ]
}
],
"requestId": "1704067290",
```



```
"availabilityExpireTime": "2024-06-04T06:39:10Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}  
],  
  "version": "1.4"  
}
```





CT\_AFC\_SP\_AP\_AFCRSA31\_FrequencyChannel\_80MHz\_10627\_1

##### 2024-06-03T06:53:48Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067291",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MSQ-RTBE6M00"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "longitude": -73.97434,
              "latitude": 40.75924
            },
            "majorAxis": 100,
            "minorAxis": 50,
            "orientation": 45
          }
        }
      }
    ]
  }
}
```

```
"elevation": {
  "height": 3,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
```



65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,



```
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,  
    203,
```



```
        211,  
        219,  
        227  
    ]  
},  
{  
    "globalOperatingClass": 133,  
    "channelCfi": [  
        7,  
        23,  
        39,  
        55,  
        71,  
        87,  
        103,  
        119,  
        135,  
        151,  
        167,  
        183,  
        199,  
        215  
    ]  
},  
{  
    "globalOperatingClass": 134,  
    "channelCfi": [  
        15,  
        47,  
        79,  
        111,  
        143,  
        175,  
        207  
    ]  
}  
],
```



```
"minDesiredPower": 24
  }
]
}
}
```

##### 2024-06-03T06:53:48Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6285,
            "lowFrequency": 6265
          },
          "maxPsd": 14.088498744521367
        },
        {
          "frequencyRange": {
            "highFrequency": 6305,
            "lowFrequency": 6285
          },
          "maxPsd": 18.28184840285462
        },
        {
          "frequencyRange": {
            "highFrequency": 6325,
            "lowFrequency": 6305
          },
          "maxPsd": 12.168573947602557
        },
        {
```

```
"frequencyRange": {
  "highFrequency": 6345,
  "lowFrequency": 6325
},
"maxPsd": 20.609869076328742
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 18.190353922799893
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 20.115113992097324
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 19.835295651362124
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 14.690378434279456
}
],
"availableChannelInfo": [
  {
```

```
"channelCfi": [  
    65,  
    69,  
    73,  
    77,  
    81,  
    85,  
    89,  
    93  
],  
"globalOperatingClass": 131,  
"maxEirp": [  
    27.09879870116118,  
    31.292148359494433,  
    25.17887390424237,  
    33.620169032968555,  
    31.200653879439706,  
    33.12541394873713,  
    32.845595608001936,  
    27.70067839091927  
]  
},  
{  
    "channelCfi": [  
        67,  
        75,  
        83,  
        91  
    ],  
    "globalOperatingClass": 132,  
    "maxEirp": [  
        30.109098657800992,  
        28.189173860882182,  
        34.21095383607952,  
        30.71097834755908  
    ]  
},
```



```
{
  "channelCfi": [
    71,
    87
  ],
  "globalOperatingClass": 133,
  "maxEirp": [
    31.19947381752199,
    33.72127830419889
  ]
},
{
  "channelCfi": [
    79
  ],
  "globalOperatingClass": 134,
  "maxEirp": [
    34.2097737741618
  ]
}
],
"requestId": "1704067291",
"availabilityExpireTime": "2024-06-04T06:53:48Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2024-06-03T07:00:39Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
```

```
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "1375",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "1704067292",
      "deviceDescriptor": {
        "serialNumber": "JD4100C6E2",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "MSQ-RTBE6M00"
          }
        ]
      }
    }
  ],
  "location": {
    "ellipse": {
      "center": {
        "longitude": -73.97434,
        "latitude": 40.75924
      },
      "majorAxis": 100,
      "minorAxis": 50,
      "orientation": 45
    },
    "elevation": {
      "height": 3,
      "heightType": "AGL",
      "verticalUncertainty": 2
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
```



```
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"inquiredChannels": [
    {
        "globalOperatingClass": 131,
        "channelCfi": [
            1,
            5,
            9,
            13,
            17,
            21,
            25,
            29,
            33,
            37,
            41,
            45,
            49,
            53,
            57,
            61,
            65,
            69,
            73,
            77,
            81,
            85,
            89,
            93,
            97,
```



101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233

]

},

{

"globalOperatingClass": 132,

"channelCfi": [

3,

11,

19,

27,

35,

43,

51,

59,

67,

75,

83,

91,

99,

107,

115,

123,

131,

139,

147,

155,

163,

171,

179,

187,

195,

203,

211,

219,

227

]

},

{

"globalOperatingClass": 133,

"channelCfi": [

7,



23,  
39,  
55,  
71,  
87,  
103,  
119,  
135,  
151,  
167,  
183,  
199,  
215

]

},

{

"globalOperatingClass": 134,

"channelCfi": [

15,  
47,  
79,  
111,  
143,  
175,  
207

]

}

],

"minDesiredPower": 24

}

]

}

}

##### 2024-06-03T07:00:39Z #####

{

"availableSpectrumInquiryResponses": [

```
{
  "response": {
    "responseCode": 0,
    "shortDescription": "SUCCESS"
  },
  "availableFrequencyInfo": [
    {
      "frequencyRange": {
        "highFrequency": 5965,
        "lowFrequency": 5945
      },
      "maxPsd": 8.6951862387155
    },
    {
      "frequencyRange": {
        "highFrequency": 5985,
        "lowFrequency": 5965
      },
      "maxPsd": 12.3310473093419
    },
    {
      "frequencyRange": {
        "highFrequency": 6005,
        "lowFrequency": 5985
      },
      "maxPsd": 8.023882956828507
    },
    {
      "frequencyRange": {
        "highFrequency": 6025,
        "lowFrequency": 6005
      },
      "maxPsd": 14.250753761972575
    },
    {
      "frequencyRange": {
        "highFrequency": 6045,
```

```
        "lowFrequency": 6025
      },
      "maxPsd": 16.430939564495706
    },
    {
      "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
      },
      "maxPsd": 12.75592145340035
    },
    {
      "frequencyRange": {
        "highFrequency": 6085,
        "lowFrequency": 6065
      },
      "maxPsd": 17.66825159096749
    },
    {
      "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
      },
      "maxPsd": 13.292896701906137
    },
    {
      "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
      },
      "maxPsd": 8.650928954428005
    },
    {
      "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
      },
    },
```



```
"maxPsd": 18.98803085560346
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 21.295024595556697
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 12.832688131469176
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 11.66036541025788
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 16.625367621452533
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 18.7496924207815
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 20.60175847380529
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 12.993274936197022
},
{
  "frequencyRange": {
    "highFrequency": 6625,
    "lowFrequency": 6605
  },
  "maxPsd": 14.097203515126647
},
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 11.420637147089446
},
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 10.923548729783654
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6685,
        "lowFrequency": 6665
    },
    "maxPsd": 11.021146109895595
},
{
    "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
    },
    "maxPsd": 18.43258487371009
},
{
    "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
    },
    "maxPsd": 11.899729372740504
},
{
    "frequencyRange": {
        "highFrequency": 6745,
        "lowFrequency": 6725
    },
    "maxPsd": 19.98697357352655
}
],
"availableChannelInfo": [
    {
        "channelCfi": [
            1,
            5,
            9,
            13,
            17,
            21,
            25,
```



29,  
33,  
37,  
41,  
45,  
49,  
53,  
57,  
61,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157  
],  
"globalOperatingClass": 131,  
"maxEirp": [  
21.705486195355313,  
25.34134726598171,  
21.03418291346832,  
27.261053718612388,  
29.44123952113552,  
25.766221410040163,  
30.678551547607302,  
26.30319665854595,  
21.661228911067816,  
31.99833081224327,  
34.30532455219651,  
25.84298808810899,  
24.670665366897694,  
29.635667578092345,  
31.759992377421312,  
33.6120584304451,  
26.003574892836834,

```
27.10750347176646,  
24.430937103729256,  
23.933848686423467,  
24.03144606653541,  
31.442884830349904,  
24.910029329380315,  
32.99727353016637  
]  
,  
{  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    131,  
    139,  
    147,  
    155  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    24.715786151995125,  
    24.044482870108133,  
    28.776521366679976,  
    29.313496615185763,  
    24.67152886770763,  
    28.8532880447488,  
    27.680965323537507,  
    34.770292334061125,  
    29.013874849476647,  
    26.94414864306328,  
    27.04174602317522,
```

```
                27.920329286020127
            ]
        },
        {
            "channelCfi": [
                7,
                23,
                39,
                55,
                135,
                151
            ],
            "globalOperatingClass": 133,
            "maxEirp": [
                27.05478282674794,
                31.786821323319785,
                27.68182882434744,
                30.691265280177312,
                29.95444859970309,
                30.052045979815027
            ]
        },
        {
            "channelCfi": [
                15,
                47,
                143
            ],
            "globalOperatingClass": 134,
            "maxEirp": [
                30.06508278338776,
                30.692128780987254,
                32.964748556342904
            ]
        }
    ],
    "requestId": "1704067292",
```



```
"availabilityExpireTime": "2024-06-04T07:00:39Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
  }  
],  
  "version": "1.4"  
}
```



CT\_AFC\_SP\_AP\_AFCRSA31\_FrequencyChannel\_160MHz\_10628\_1

##### 2024-06-03T07:12:16Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067293",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MSQ-RTBE6M00"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "longitude": -73.97434,
              "latitude": 40.75924
            },
            "majorAxis": 100,
            "minorAxis": 50,
            "orientation": 45
          }
        }
      }
    ]
  }
}
```



```
"elevation": {
  "height": 3,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
```



65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,



```
                213,  
                217,  
                221,  
                225,  
                229,  
                233  
            ]  
        },  
        {  
            "globalOperatingClass": 132,  
            "channelCfi": [  
                3,  
                11,  
                19,  
                27,  
                35,  
                43,  
                51,  
                59,  
                67,  
                75,  
                83,  
                91,  
                99,  
                107,  
                115,  
                123,  
                131,  
                139,  
                147,  
                155,  
                163,  
                171,  
                179,  
                187,  
                195,  
                203,
```



```
                211,  
                219,  
                227  
            ]  
        },  
        {  
            "globalOperatingClass": 133,  
            "channelCfi": [  
                7,  
                23,  
                39,  
                55,  
                71,  
                87,  
                103,  
                119,  
                135,  
                151,  
                167,  
                183,  
                199,  
                215  
            ]  
        },  
        {  
            "globalOperatingClass": 134,  
            "channelCfi": [  
                15,  
                47,  
                79,  
                111,  
                143,  
                175,  
                207  
            ]  
        }  
    ],
```

```
"minDesiredPower": 24
  }
]
}
}
```

##### 2024-06-03T07:12:16Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6605,
            "lowFrequency": 6585
          },
          "maxPsd": 19.59177001038873
        },
        {
          "frequencyRange": {
            "highFrequency": 6625,
            "lowFrequency": 6605
          },
          "maxPsd": 12.276648307916851
        },
        {
          "frequencyRange": {
            "highFrequency": 6645,
            "lowFrequency": 6625
          },
          "maxPsd": 12.759651939667977
        },
        {

```

```
"frequencyRange": {
  "highFrequency": 6665,
  "lowFrequency": 6645
},
"maxPsd": 16.440042816543638
},
{
  "frequencyRange": {
    "highFrequency": 6685,
    "lowFrequency": 6665
  },
  "maxPsd": 18.772433053692655
},
{
  "frequencyRange": {
    "highFrequency": 6705,
    "lowFrequency": 6685
  },
  "maxPsd": 9.71529466166627
},
{
  "frequencyRange": {
    "highFrequency": 6725,
    "lowFrequency": 6705
  },
  "maxPsd": 18.586735754848057
},
{
  "frequencyRange": {
    "highFrequency": 6745,
    "lowFrequency": 6725
  },
  "maxPsd": 8.01486269274553
}
],
"availableChannelInfo": [
  {
```

```
"channelCfi": [  
    129,  
    133,  
    137,  
    141,  
    145,  
    149,  
    153,  
    157  
],  
"globalOperatingClass": 131,  
"maxEirp": [  
    32.60206996702854,  
    25.286948264556663,  
    25.769951896307788,  
    29.45034277318345,  
    31.782733010332468,  
    22.725594618306083,  
    31.59703571148787,  
    21.025162649385344  
]  
},  
{  
    "channelCfi": [  
        131,  
        139,  
        147,  
        155  
    ],  
    "globalOperatingClass": 132,  
    "maxEirp": [  
        28.297248221196476,  
        28.7802518529476,  
        25.735894574945895,  
        24.035462606025156  
    ]  
},
```



```
{
  "channelCfi": [
    135,
    151
  ],
  "globalOperatingClass": 133,
  "maxEirp": [
    31.307548177836285,
    27.04576256266496
  ]
},
{
  "channelCfi": [
    143
  ],
  "globalOperatingClass": 134,
  "maxEirp": [
    30.05606251930478
  ]
}
],
"requestId": "1704067293",
"availabilityExpireTime": "2024-06-04T07:12:16Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2024-06-03T07:17:24Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
```



```
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "1375",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "1704067294",
      "deviceDescriptor": {
        "serialNumber": "JD4100C6E2",
        "certificationId": [
          {
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
            "id": "MSQ-RTBE6M00"
          }
        ]
      }
    }
  ],
  "location": {
    "ellipse": {
      "center": {
        "longitude": -73.97434,
        "latitude": 40.75924
      },
      "majorAxis": 100,
      "minorAxis": 50,
      "orientation": 45
    },
    "elevation": {
      "height": 3,
      "heightType": "AGL",
      "verticalUncertainty": 2
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
```



```
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"inquiredChannels": [
    {
        "globalOperatingClass": 131,
        "channelCfi": [
            1,
            5,
            9,
            13,
            17,
            21,
            25,
            29,
            33,
            37,
            41,
            45,
            49,
            53,
            57,
            61,
            65,
            69,
            73,
            77,
            81,
            85,
            89,
            93,
            97,
```



101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233

]

},

{

```
"globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,  
    203,  
    211,  
    219,  
    227  
  ]  
},  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,
```



23,  
39,  
55,  
71,  
87,  
103,  
119,  
135,  
151,  
167,  
183,  
199,  
215

]

},

{

"globalOperatingClass": 134,

"channelCfi": [

15,  
47,  
79,  
111,  
143,  
175,  
207

]

}

],

"minDesiredPower": 24

}

]

}

}

##### 2024-06-03T07:17:24Z #####

{

"availableSpectrumInquiryResponses": [

```
{
  "response": {
    "responseCode": 0,
    "shortDescription": "SUCCESS"
  },
  "availableFrequencyInfo": [
    {
      "frequencyRange": {
        "highFrequency": 5965,
        "lowFrequency": 5945
      },
      "maxPsd": 8.225281771386303
    },
    {
      "frequencyRange": {
        "highFrequency": 5985,
        "lowFrequency": 5965
      },
      "maxPsd": 12.210904000026446
    },
    {
      "frequencyRange": {
        "highFrequency": 6005,
        "lowFrequency": 5985
      },
      "maxPsd": 12.490883111034877
    },
    {
      "frequencyRange": {
        "highFrequency": 6025,
        "lowFrequency": 6005
      },
      "maxPsd": 21.92464432077738
    },
    {
      "frequencyRange": {
        "highFrequency": 6045,
```

```
        "lowFrequency": 6025
      },
      "maxPsd": 14.88575109978573
    },
    {
      "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
      },
      "maxPsd": 12.292061924350408
    },
    {
      "frequencyRange": {
        "highFrequency": 6085,
        "lowFrequency": 6065
      },
      "maxPsd": 18.60348270326852
    },
    {
      "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
      },
      "maxPsd": 13.748041097398081
    },
    {
      "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
      },
      "maxPsd": 10.185443471768169
    },
    {
      "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
      },
    },
```

```
"maxPsd": 21.290968772269498
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 18.6075157366105
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 8.987327206436225
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 13.674043182915629
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 18.340826216857742
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 12.756143370605677
},
},
```



```
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 21.280389613592256
},
{
  "frequencyRange": {
    "highFrequency": 6285,
    "lowFrequency": 6265
  },
  "maxPsd": 13.625994887022136
},
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 17.524295204141737
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 20.861658186036152
},
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 18.389593538787665
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6365,
        "lowFrequency": 6345
    },
    "maxPsd": 9.840758436838783
},
{
    "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
    },
    "maxPsd": 11.163040750605767
},
{
    "frequencyRange": {
        "highFrequency": 6405,
        "lowFrequency": 6385
    },
    "maxPsd": 10.758073143023314
},
{
    "frequencyRange": {
        "highFrequency": 6425,
        "lowFrequency": 6405
    },
    "maxPsd": 13.301426078854927
}
],
"availableChannelInfo": [
    {
        "channelCfi": [
            1,
            5,
            9,
            13,
            17,
            21,
            25,
```



```
29,  
33,  
37,  
41,  
45,  
49,  
53,  
57,  
61,  
65,  
69,  
73,  
77,  
81,  
85,  
89,  
93  
,  
"globalOperatingClass": 131,  
"maxEirp": [  
  21.235581728026116,  
  25.22120395666626,  
  25.50118306767469,  
  34.93494427741719,  
  27.89605105642554,  
  25.30236188099022,  
  31.61378265990833,  
  26.758341054037892,  
  23.19574342840798,  
  34.30126872890931,  
  31.617815693250314,  
  21.99762716307604,  
  26.68434313955544,  
  31.351126173497555,  
  25.76644332724549,  
  34.29068957023207,  
  26.63629484366195,
```

```
30.53459516078155,  
33.871958142675965,  
31.399893495427477,  
22.851058393478596,  
24.17334070724558,  
23.768373099663126,  
26.31172603549474  
]  
,  
{  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    24.245881684665928,  
    28.5114830243145,  
    28.31266183763003,  
    29.768641010677705,  
    26.206043385047792,  
    25.007927119715852,  
    29.694643096195254,  
    28.776743283885303,  
    29.646594800301763,  
    34.41019345206729,  
    25.861358350118408,
```



```
                26.77867305630294
            ]
        },
        {
            "channelCfi": [
                7,
                23,
                39,
                55,
                71,
                87
            ],
            "globalOperatingClass": 133,
            "maxEirp": [
                27.256181641305737,
                31.322961794269844,
                28.018227076355657,
                31.78704324052511,
                32.65689475694157,
                28.871658306758217
            ]
        },
        {
            "channelCfi": [
                15,
                47,
                79
            ],
            "globalOperatingClass": 134,
            "maxEirp": [
                30.266481597945553,
                31.028527032995477,
                31.881958263398033
            ]
        }
    ],
    "requestId": "1704067294",
```



```
"availabilityExpireTime": "2024-06-04T07:17:24Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}  
],  
  "version": "1.4"  
}
```



CT\_AFC\_SP\_AP\_AFCDUSA32\_FrequencyChannel\_10629\_1

##### 2024-06-03T07:51:19Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067295",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MSQ-RTBE6M00"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "longitude": -73.97434,
              "latitude": 40.75924
            },
            "majorAxis": 100,
            "minorAxis": 50,
            "orientation": 45
          },

```

```
"elevation": {
  "height": 3,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
```





65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,



```
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,  
    203,
```



```
                211,  
                219,  
                227  
            ]  
        },  
        {  
            "globalOperatingClass": 133,  
            "channelCfi": [  
                7,  
                23,  
                39,  
                55,  
                71,  
                87,  
                103,  
                119,  
                135,  
                151,  
                167,  
                183,  
                199,  
                215  
            ]  
        },  
        {  
            "globalOperatingClass": 134,  
            "channelCfi": [  
                15,  
                47,  
                79,  
                111,  
                143,  
                175,  
                207  
            ]  
        }  
    ],
```



```
        "minDesiredPower": 24
      }
    ]
  }
}
```

##### 2024-06-03T07:51:19Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [],
      "availableChannelInfo": [],
      "requestId": "1704067295",
      "availabilityExpireTime": "2024-06-04T07:51:19Z",
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ],
  "version": "1.4"
}
```

##### 2024-06-03T08:16:38Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "/*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
```

```
"version": "1.4",
"availableSpectrumInquiryRequests": [
  {
    "requestId": "1704067296",
    "deviceDescriptor": {
      "serialNumber": "JD4100C6E2",
      "certificationId": [
        {
          "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
          "id": "MSQ-RTBE6M00"
        }
      ]
    },
    "location": {
      "ellipse": {
        "center": {
          "longitude": -73.97434,
          "latitude": 40.75924
        },
        "majorAxis": 100,
        "minorAxis": 50,
        "orientation": 45
      },
      "elevation": {
        "height": 3,
        "heightType": "AGL",
        "verticalUncertainty": 2
      },
      "indoorDeployment": 2
    },
    "inquiredFrequencyRange": [
      {
        "lowFrequency": 5925,
        "highFrequency": 6425
      },
      {
        "lowFrequency": 6525,
```



```
"highFrequency": 6875
}
],
"inquiredChannels": [
{
  "globalOperatingClass": 131,
  "channelCfi": [
    1,
    5,
    9,
    13,
    17,
    21,
    25,
    29,
    33,
    37,
    41,
    45,
    49,
    53,
    57,
    61,
    65,
    69,
    73,
    77,
    81,
    85,
    89,
    93,
    97,
    101,
    105,
    109,
    113,
    117,
```



```
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,  
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,
```



```
27,  
35,  
43,  
51,  
59,  
67,  
75,  
83,  
91,  
99,  
107,  
115,  
123,  
131,  
139,  
147,  
155,  
163,  
171,  
179,  
187,  
195,  
203,  
211,  
219,  
227  
]  
,  
{  
  "globalOperatingClass": 133,  
  "channelCfi": [  
    7,  
    23,  
    39,  
    55,  
    71,  
    87,
```





```

        103,
        119,
        135,
        151,
        167,
        183,
        199,
        215
    ]
},
{
    "globalOperatingClass": 134,
    "channelCfi": [
        15,
        47,
        79,
        111,
        143,
        175,
        207
    ]
}
],
"minDesiredPower": 24
}
]
}
}
}

```

##### 2024-06-03T08:16:38Z #####

```

{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
                "shortDescription": "SUCCESS"
            },
        },
    ],
}

```



```
"availableFrequencyInfo": [],  
"availableChannelInfo": [],  
"requestId": "1704067296",  
"availabilityExpireTime": "2024-06-04T08:16:38Z",  
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
  }  
],  
"version": "1.4"  
}
```



CT\_AFC\_SP\_AP\_AFCDSAU33\_FrequencyChannel\_10630\_1

##### 2024-06-03T08:21:51Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1375",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067297",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MSQ-RTBE6M00"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "longitude": -73.97434,
              "latitude": 40.75924
            },
            "majorAxis": 100,
            "minorAxis": 50,
            "orientation": 45
          }
        }
      }
    ]
  }
}
```

```
"elevation": {
  "height": 3,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
```



65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,



```
        213,  
        217,  
        221,  
        225,  
        229,  
        233  
    ]  
},  
{  
    "globalOperatingClass": 132,  
    "channelCfi": [  
        3,  
        11,  
        19,  
        27,  
        35,  
        43,  
        51,  
        59,  
        67,  
        75,  
        83,  
        91,  
        99,  
        107,  
        115,  
        123,  
        131,  
        139,  
        147,  
        155,  
        163,  
        171,  
        179,  
        187,  
        195,  
        203,
```

```
                211,  
                219,  
                227  
            ]  
        },  
        {  
            "globalOperatingClass": 133,  
            "channelCfi": [  
                7,  
                23,  
                39,  
                55,  
                71,  
                87,  
                103,  
                119,  
                135,  
                151,  
                167,  
                183,  
                199,  
                215  
            ]  
        },  
        {  
            "globalOperatingClass": 134,  
            "channelCfi": [  
                15,  
                47,  
                79,  
                111,  
                143,  
                175,  
                207  
            ]  
        }  
    ],
```



```
        "minDesiredPower": 24
      }
    ]
  }
}

##### 2024-06-03T08:21:51Z #####

{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 6125,
            "lowFrequency": 6105
          },
          "maxPsd": 17.43121509127486
        },
        {
          "frequencyRange": {
            "highFrequency": 6145,
            "lowFrequency": 6125
          },
          "maxPsd": 15.487820241157493
        },
        {
          "frequencyRange": {
            "highFrequency": 6165,
            "lowFrequency": 6145
          },
          "maxPsd": 10.224785162742268
        }
      ]
    }
  ]
}
```



```
"frequencyRange": {
  "highFrequency": 6185,
  "lowFrequency": 6165
},
"maxPsd": 21.503811246600897
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 21.260284028482985
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 11.668207472080484
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 10.630206486049364
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 20.227788314983805
},
{
  "frequencyRange": {
    "highFrequency": 6285,
```

```
        "lowFrequency": 6265
      },
      "maxPsd": 16.275264250622122
    },
    {
      "frequencyRange": {
        "highFrequency": 6305,
        "lowFrequency": 6285
      },
      "maxPsd": 9.241276155886286
    },
    {
      "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
      },
      "maxPsd": 13.37295351386441
    },
    {
      "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
      },
      "maxPsd": 17.095049370479913
    },
    {
      "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
      },
      "maxPsd": 10.29616862877723
    },
    {
      "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
      },
    },
```

```
"maxPsd": 17.076239557734922
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 20.785342187502806
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 8.842735119709324
}
],
"availableChannelInfo": [
  {
    "channelCfi": [
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
      65,
      69,
      73,
      77,
      81,
      85,
      89,
      93
    ]
  }
],
```

```
"globalOperatingClass": 131,  
  "maxEirp": [  
    30.441515047914674,  
    28.498120197797306,  
    23.23508511938208,  
    34.51411120324071,  
    34.2705839851228,  
    24.678507428720295,  
    23.640506442689176,  
    33.23808827162362,  
    29.285564207261935,  
    22.2515761125261,  
    26.383253470504222,  
    30.105349327119725,  
    23.306468585417043,  
    30.086539514374735,  
    33.79564214414262,  
    21.853035076349137  
  ]  
},  
{  
  "channelCfi": [  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91  
  ],  
  "globalOperatingClass": 132,  
  "maxEirp": [  
    31.50842015443712,  
    26.245385076021893,  
    27.688807385360107,  
    26.65080639932899,
```

```
        25.26187606916591,  
        29.393553427144035,  
        26.316768542056856,  
        24.86333503298895  
    ]  
},  
{  
    "channelCfi": [  
        39,  
        55,  
        71,  
        87  
    ],  
    "globalOperatingClass": 133,  
    "maxEirp": [  
        29.255685032661702,  
        29.661106355968798,  
        28.27217602580572,  
        27.87363498962876  
    ]  
},  
{  
    "channelCfi": [  
        47,  
        79  
    ],  
    "globalOperatingClass": 134,  
    "maxEirp": [  
        32.265984989301515,  
        30.883934946268575  
    ]  
}  
],  
"requestId": "1704067297",  
"availabilityExpireTime": "2024-06-04T08:21:51Z",  
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}
```



```
{  
  "version": "1.4"  
}
```



CT\_AFC\_SP\_AP\_AFCDU34\_FrequencyChannel\_10631\_1

##### 2024-06-03T09:09:07Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.100.200",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "1371",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1704067285",
        "deviceDescriptor": {
          "serialNumber": "JD4100C6E2",
          "certificationId": [
            {
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E",
              "id": "MSQ-RTBE6M00"
            }
          ]
        },
        "location": {
          "ellipse": {
            "center": {
              "longitude": -73.97434,
              "latitude": 40.75924
            },
            "majorAxis": 100,
            "minorAxis": 50,
            "orientation": 45
          }
        }
      }
    ]
  }
}
```

```
"elevation": {
  "height": 3,
  "heightType": "AGL",
  "verticalUncertainty": 2
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"inquiredChannels": [
  {
    "globalOperatingClass": 131,
    "channelCfi": [
      1,
      5,
      9,
      13,
      17,
      21,
      25,
      29,
      33,
      37,
      41,
      45,
      49,
      53,
      57,
      61,
```





65,  
69,  
73,  
77,  
81,  
85,  
89,  
93,  
97,  
101,  
105,  
109,  
113,  
117,  
121,  
125,  
129,  
133,  
137,  
141,  
145,  
149,  
153,  
157,  
161,  
165,  
169,  
173,  
177,  
181,  
185,  
189,  
193,  
197,  
201,  
205,  
209,



```
213,  
217,  
221,  
225,  
229,  
233  
]  
,  
{  
  "globalOperatingClass": 132,  
  "channelCfi": [  
    3,  
    11,  
    19,  
    27,  
    35,  
    43,  
    51,  
    59,  
    67,  
    75,  
    83,  
    91,  
    99,  
    107,  
    115,  
    123,  
    131,  
    139,  
    147,  
    155,  
    163,  
    171,  
    179,  
    187,  
    195,  
    203,
```



```
                211,  
                219,  
                227  
            ]  
        },  
        {  
            "globalOperatingClass": 133,  
            "channelCfi": [  
                7,  
                23,  
                39,  
                55,  
                71,  
                87,  
                103,  
                119,  
                135,  
                151,  
                167,  
                183,  
                199,  
                215  
            ]  
        },  
        {  
            "globalOperatingClass": 134,  
            "channelCfi": [  
                15,  
                47,  
                79,  
                111,  
                143,  
                175,  
                207  
            ]  
        }  
    ],
```



```
"minDesiredPower": 24
  }
]
}
}
```

##### 2024-06-03T09:09:07Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5945,
            "lowFrequency": 5925
          },
          "maxPsd": 23
        },
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 23
        },
        {
          "frequencyRange": {
            "highFrequency": 5985,
            "lowFrequency": 5965
          },
          "maxPsd": 23
        },
        {
```

```
"frequencyRange": {
  "highFrequency": 6005,
  "lowFrequency": 5985
},
"maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6025,
    "lowFrequency": 6005
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6105,
```

```
        "lowFrequency": 6085
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6125,
        "lowFrequency": 6105
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6145,
        "lowFrequency": 6125
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6165,
        "lowFrequency": 6145
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6185,
        "lowFrequency": 6165
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6205,
        "lowFrequency": 6185
      },
    },
```

```
"maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6285,
    "lowFrequency": 6265
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6305,
    "lowFrequency": 6285
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 23
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
```



```
        "highFrequency": 6545,
        "lowFrequency": 6525
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6565,
        "lowFrequency": 6545
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6585,
        "lowFrequency": 6565
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6605,
        "lowFrequency": 6585
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6625,
        "lowFrequency": 6605
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6645,
        "lowFrequency": 6625
```

```
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6665,
      "lowFrequency": 6645
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6685,
      "lowFrequency": 6665
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6705,
      "lowFrequency": 6685
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6725,
      "lowFrequency": 6705
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6745,
      "lowFrequency": 6725
    },
    "maxPsd": 23
  }
```

```
},
{
  "frequencyRange": {
    "highFrequency": 6765,
    "lowFrequency": 6745
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6785,
    "lowFrequency": 6765
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6805,
    "lowFrequency": 6785
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6825,
    "lowFrequency": 6805
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6845,
    "lowFrequency": 6825
  },
  "maxPsd": 23
},
{
```



```
"frequencyRange": {  
  "highFrequency": 6865,  
  "lowFrequency": 6845  
},  
"maxPsd": 23  
},  
],  
"availableChannelInfo": [  
  {  
    "channelCfi": [  
      1,  
      5,  
      9,  
      13,  
      17,  
      21,  
      25,  
      29,  
      33,  
      37,  
      41,  
      45,  
      49,  
      53,  
      57,  
      61,  
      65,  
      69,  
      73,  
      77,  
      81,  
      85,  
      89,  
      93,  
      117,  
      121,  
      125,
```









```
    39,  
    55,  
    71,  
    87,  
    135,  
    151,  
    167  
  ],  
  "globalOperatingClass": 133,  
  "maxEirp": [  
    36.0,  
    36.0,  
    36.0,  
    36.0,  
    36.0,  
    36.0,  
    36.0,  
    36.0,  
    36.0,  
    36.0  
  ]  
},  
{  
  "channelCfi": [  
    15,  
    47,  
    79,  
    143  
  ],  
  "globalOperatingClass": 134,  
  "maxEirp": [  
    36.0,  
    36.0,  
    36.0,  
    36.0  
  ]  
}  
],
```





```
"requestId": "1704067285",  
  "availabilityExpireTime": "2024-06-04T09:09:07Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
},  
"version": "1.4"  
}
```

AFCD.RSA: Successful registration and spectrum access request											
Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
5975	LPI	20	1.95	7.51	9.46	-	N/A	-5.84	-3.89	5.00	Pass
6695	SP	20	3.50	16.40	19.90	27.96	Pass	3.06	6.56	14.95	Pass
6215	SP	20	1.95	17.54	19.49	32.15	Pass	4.18	6.13	19.14	Pass
6205	LPI	40	1.95	9.50	11.45	-	N/A	-6.87	-4.92	5.00	Pass
6605	SP	40	3.50	19.20	22.70	28.14	Pass	2.88	6.38	12.12	Pass
6125	SP	40	1.95	21.05	23.00	26.59	Pass	4.69	6.64	10.56	Pass
6785	LPI	80	3.50	11.28	14.78	-	N/A	-7.97	-4.47	5.00	Pass
6385	SP	80	1.95	23.06	25.01	33.72	Pass	3.97	5.92	14.69	Pass
6705	SP	80	3.50	21.74	25.24	30.05	Pass	2.76	6.26	11.02	Pass
6665	LPI	160	3.50	15.20	18.70	-	N/A	-6.82	-3.32	5.00	Pass
6665	SP	160	3.50	24.27	27.77	30.05	Pass	2.31	5.81	8.01	Pass
6345	SP	160	1.95	24.94	26.89	31.88	Pass	3.13	5.08	9.84	Pass

AFCD.USA: Unsuccessful spectrum access request											
Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
6775	LPI	20	3.50	7.35	10.85	-	N/A	-6.07	-2.57	5.00	Pass
6055	LPI	20	1.95	7.27	9.22	-	N/A	-5.93	-3.98	5.00	Pass

AFCD.SAU: Successful spectrum access update											
Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
6055	LPI	20	1.95	7.44	9.39	-	N/A	-6.01	-4.06	5.00	Pass
6135	SP	20	1.95	17.90	19.85	28.49	Pass	4.46	6.41	15.48	Pass
6135	LPI	20	1.95	7.62	9.57	-	N/A	-5.74	-3.79	5.00	Pass

AFCD.UAU: Unsuccessful spectrum access update											
Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
6135	LPI	20	1.95	7.63	9.58	-	N/A	-5.73	-3.78	5.00	Pass
6615	SP	20	3.50	16.18	19.68	36.00	Pass	2.78	6.28	23.00	Pass
6615	LPI	20	3.50	7.18	10.68	-	N/A	-6.20	-2.70	5.00	Pass

AFC capability - Inquired Frequency & Channel

CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_20MHz\_10625\_1

Frequency (MHz): 5975

5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

AV Power

5975MHz\_TX

03/06/2024

CF (Hz)  
5.975G

Span (Hz)  
30M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
1.067m

Detector Type  
RMS

CP BW (Hz)  
20M

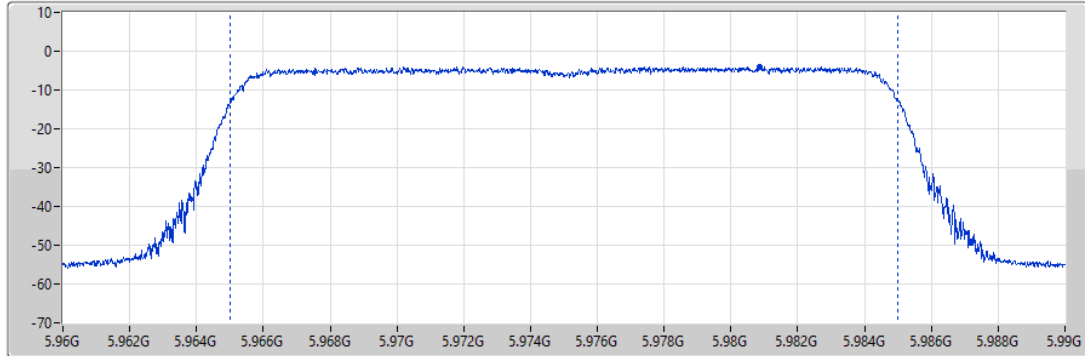

Port 1

Sum= Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
7.51	7.51

5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

PSD

5975MHz

03/06/2024

CF (Hz)  
5.975G


Span (Hz)  
30M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m



Detector Type  
RMS


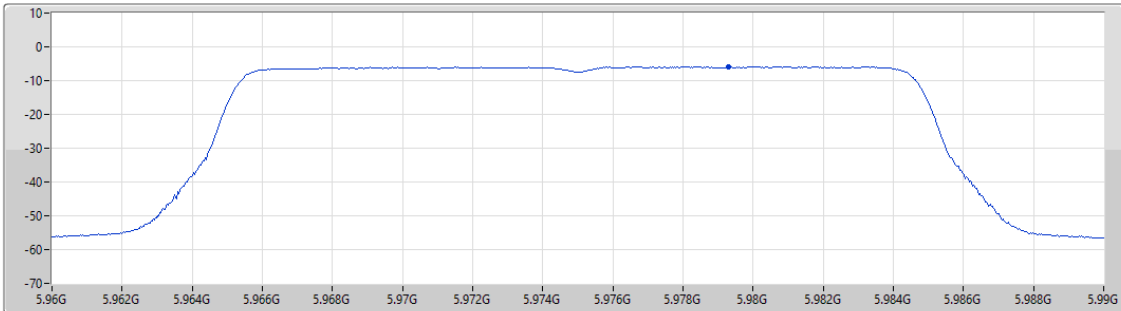


Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.84	-5.84	-5.84

**Frequency (MHz): 6695**

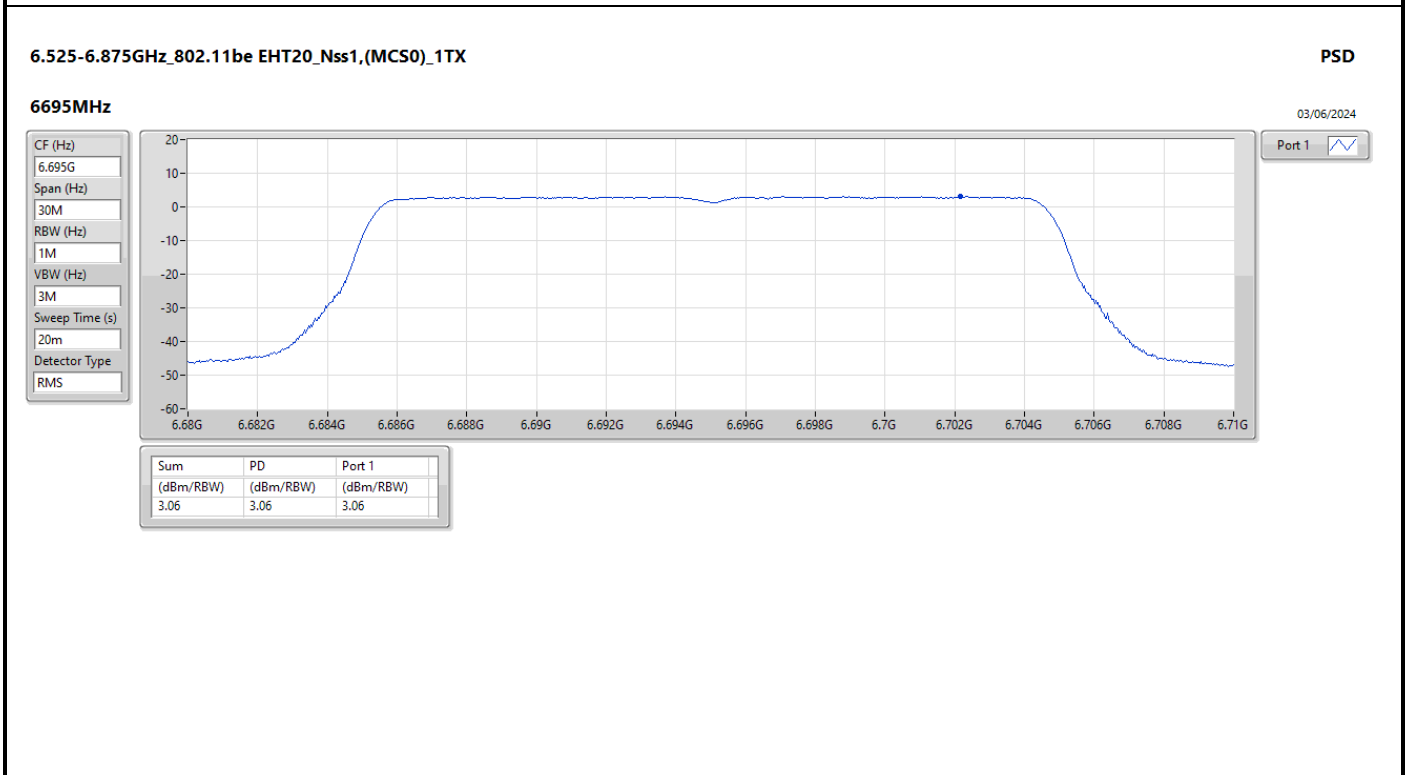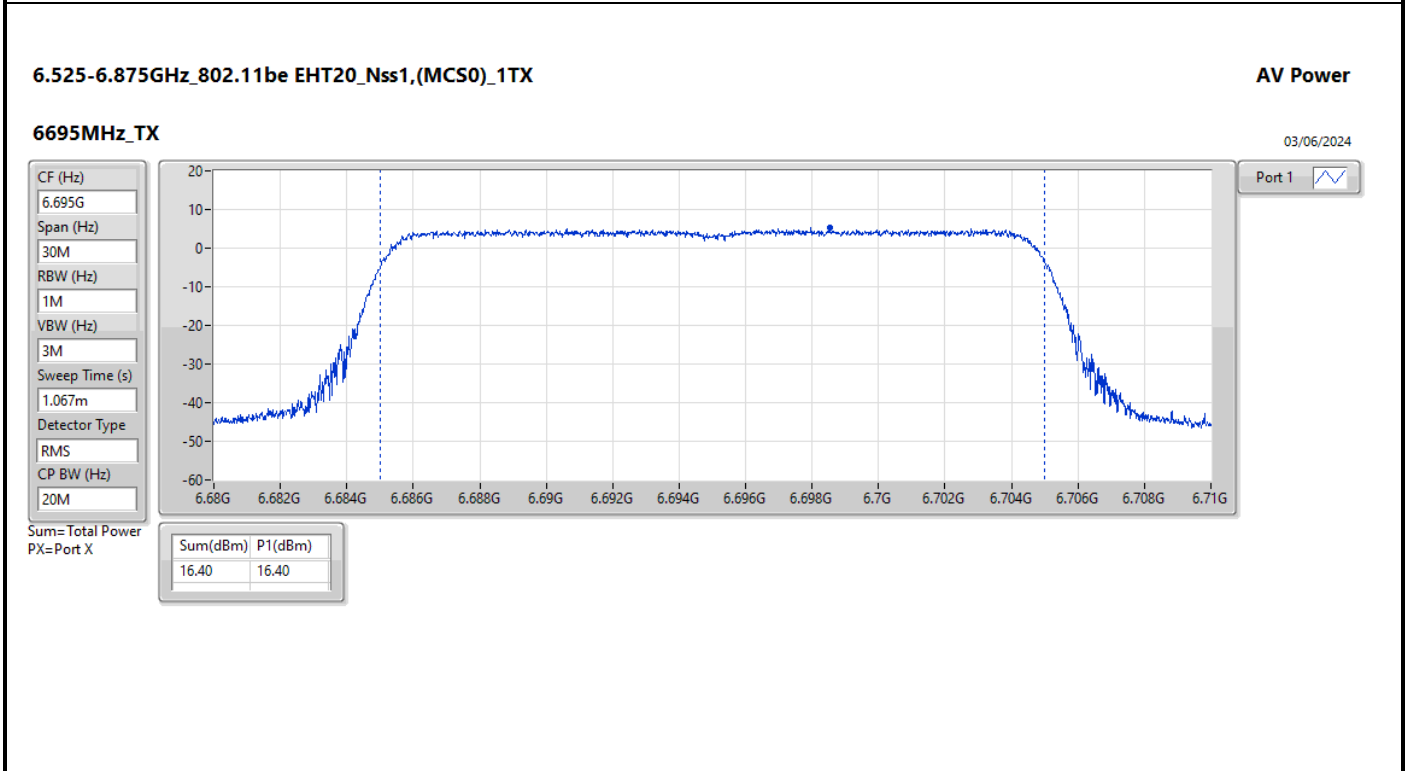

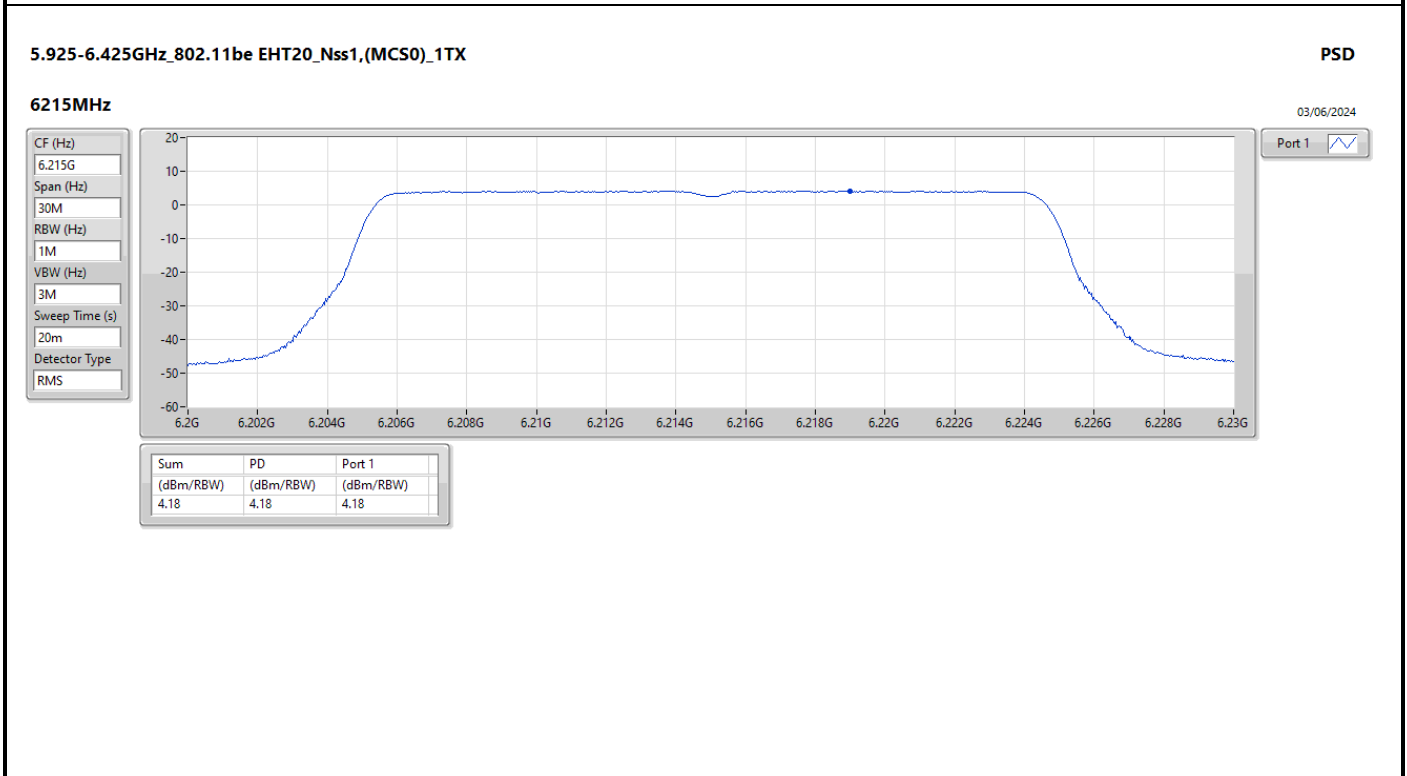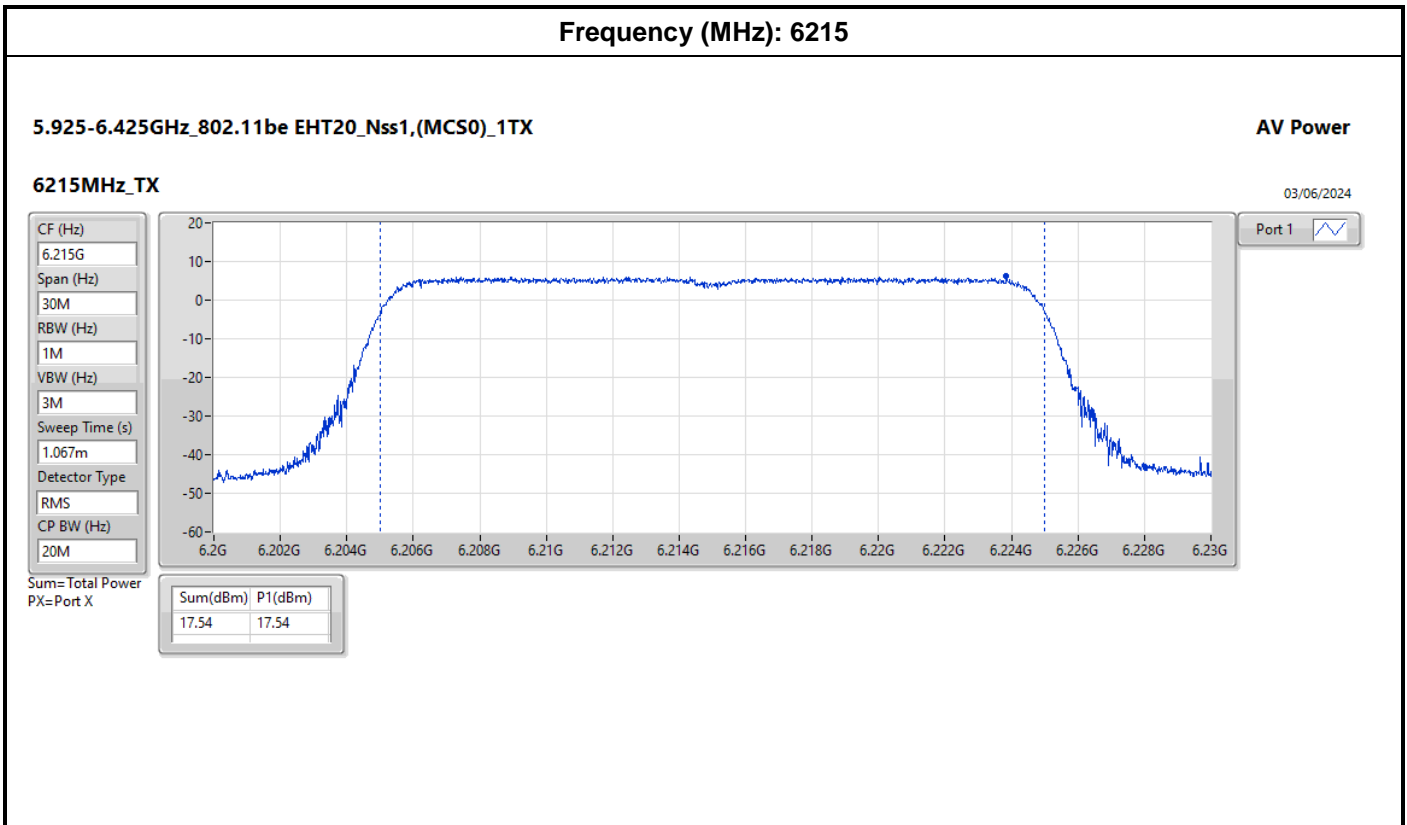

CT\_AFC\_SP\_AP\_AFCRSA31\_FrequencyChannel\_40MHz\_10626\_1

Frequency (MHz): 6205

5.925-6.425GHz\_802.11be EHT40\_Nss1,(MCS0)\_1TX

AV Power

6205MHz\_TX

03/06/2024

CF (Hz)  
6.205G

Span (Hz)  
60M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m

Detector Type  
RMS

CP BW (Hz)  
40M

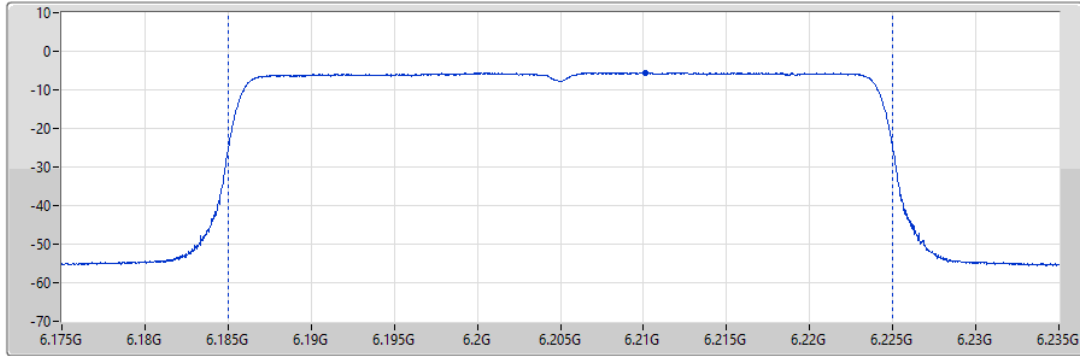

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
9.50	9.50

5.925-6.425GHz\_802.11be EHT40\_Nss1,(MCS0)\_1TX

PSD

6205MHz

03/06/2024

CF (Hz)  
6.205G


Span (Hz)  
60M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m



Detector Type  
RMS

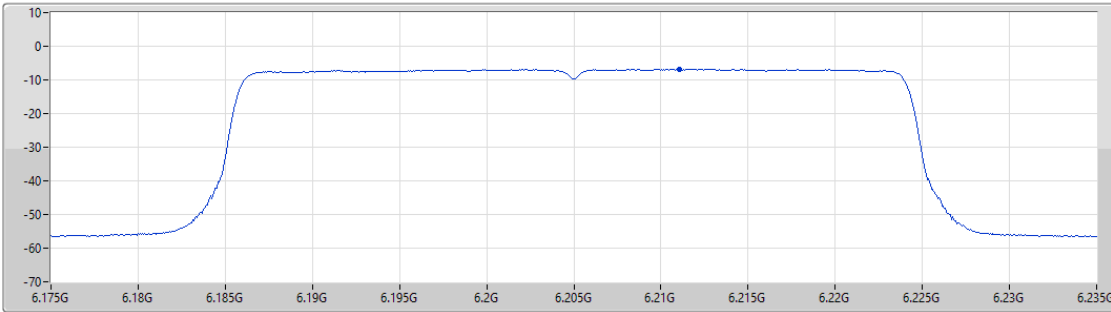

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.87	-6.87	-6.87



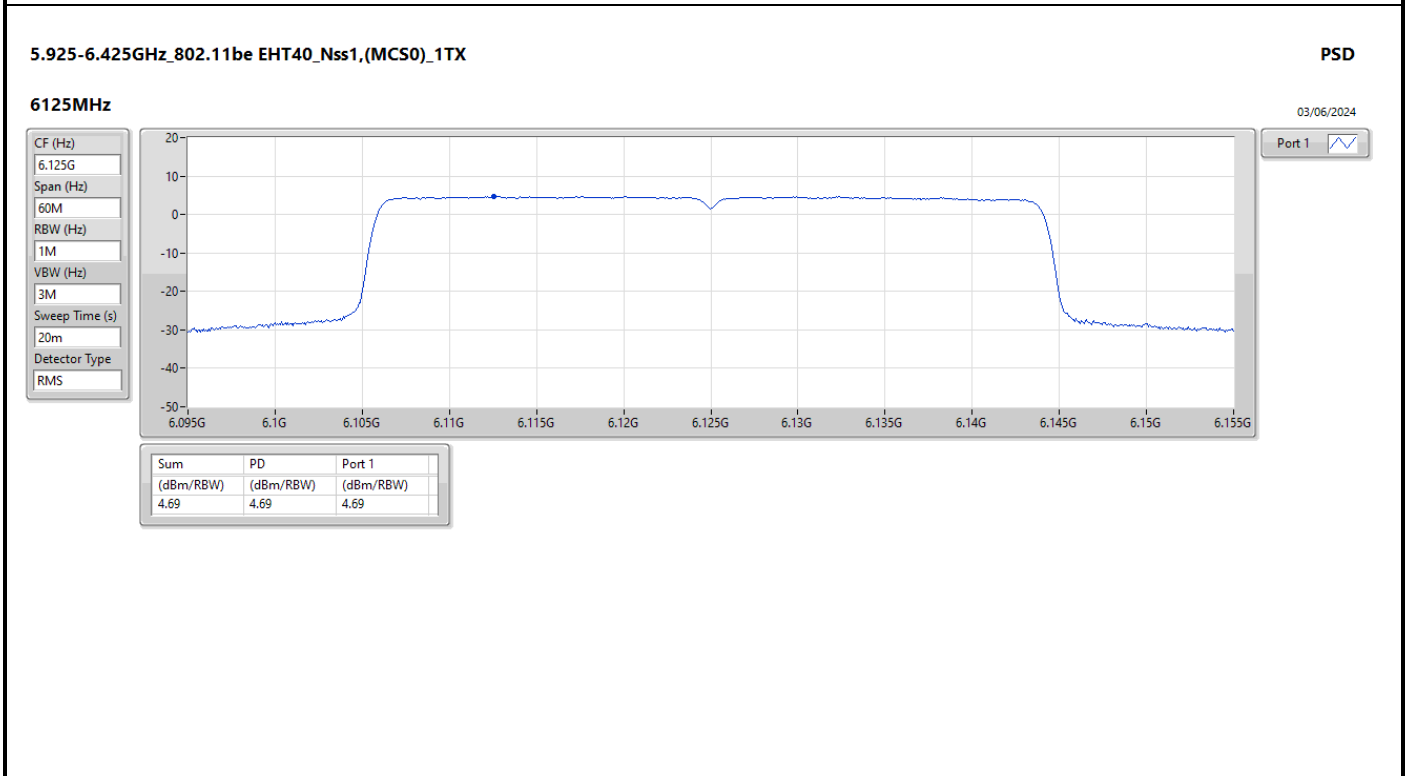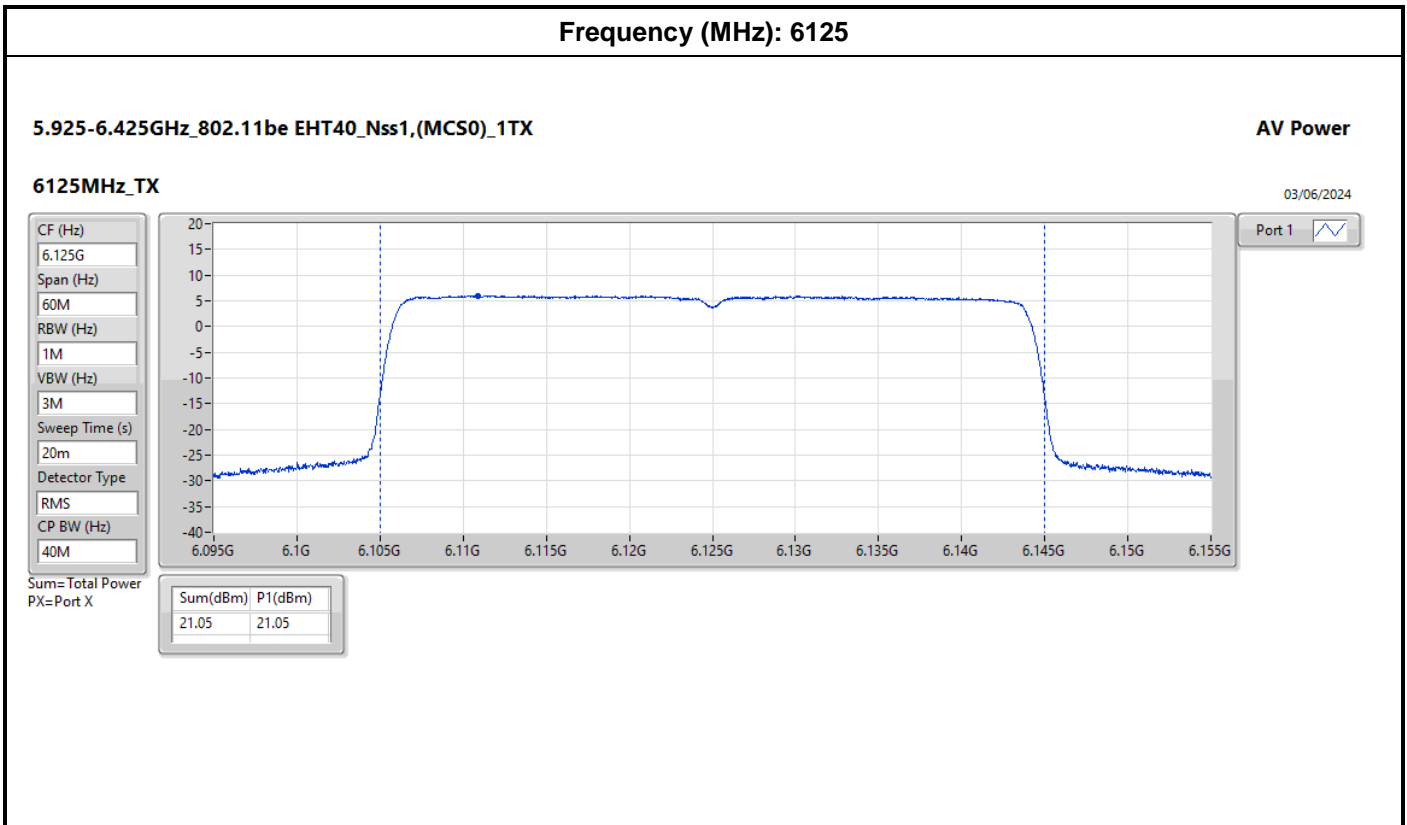



CT\_AFC\_SP\_AP\_AFCRSA31\_FrequencyChannel\_80MHz\_10627\_1

Frequency (MHz): 6785

6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_1TX

AV Power

6785MHz\_TX

03/06/2024

CF (Hz)  
6.785G

Span (Hz)  
120M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m

Detector Type  
RMS

CP BW (Hz)  
80M

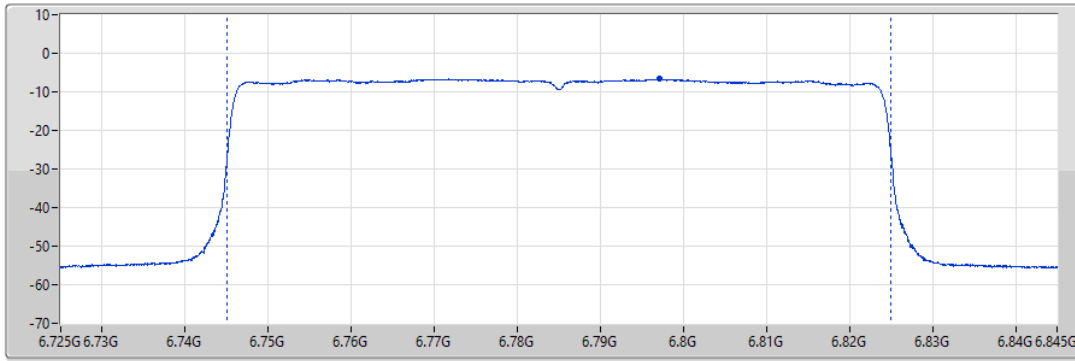

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
11.28	11.28

6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_1TX

PSD

6785MHz

03/06/2024

CF (Hz)  
6.785G


Span (Hz)  
120M

RBW (Hz)  
1M

VBW (Hz)  
3M



Sweep Time (s)  
20m



Detector Type  
RMS

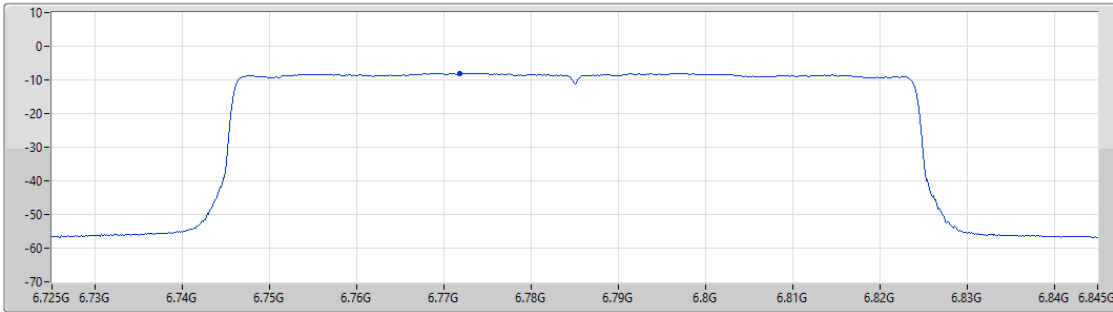

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.97	-7.97	-7.97

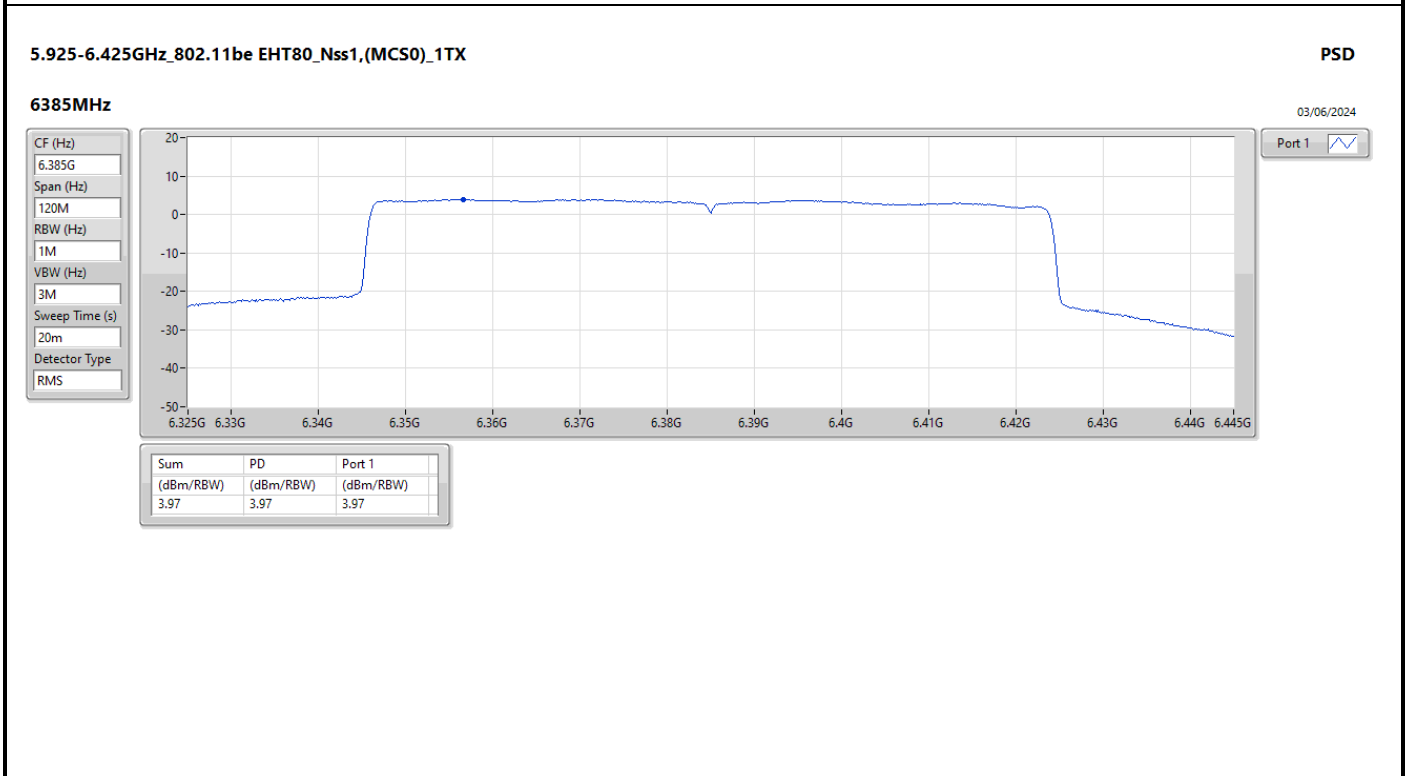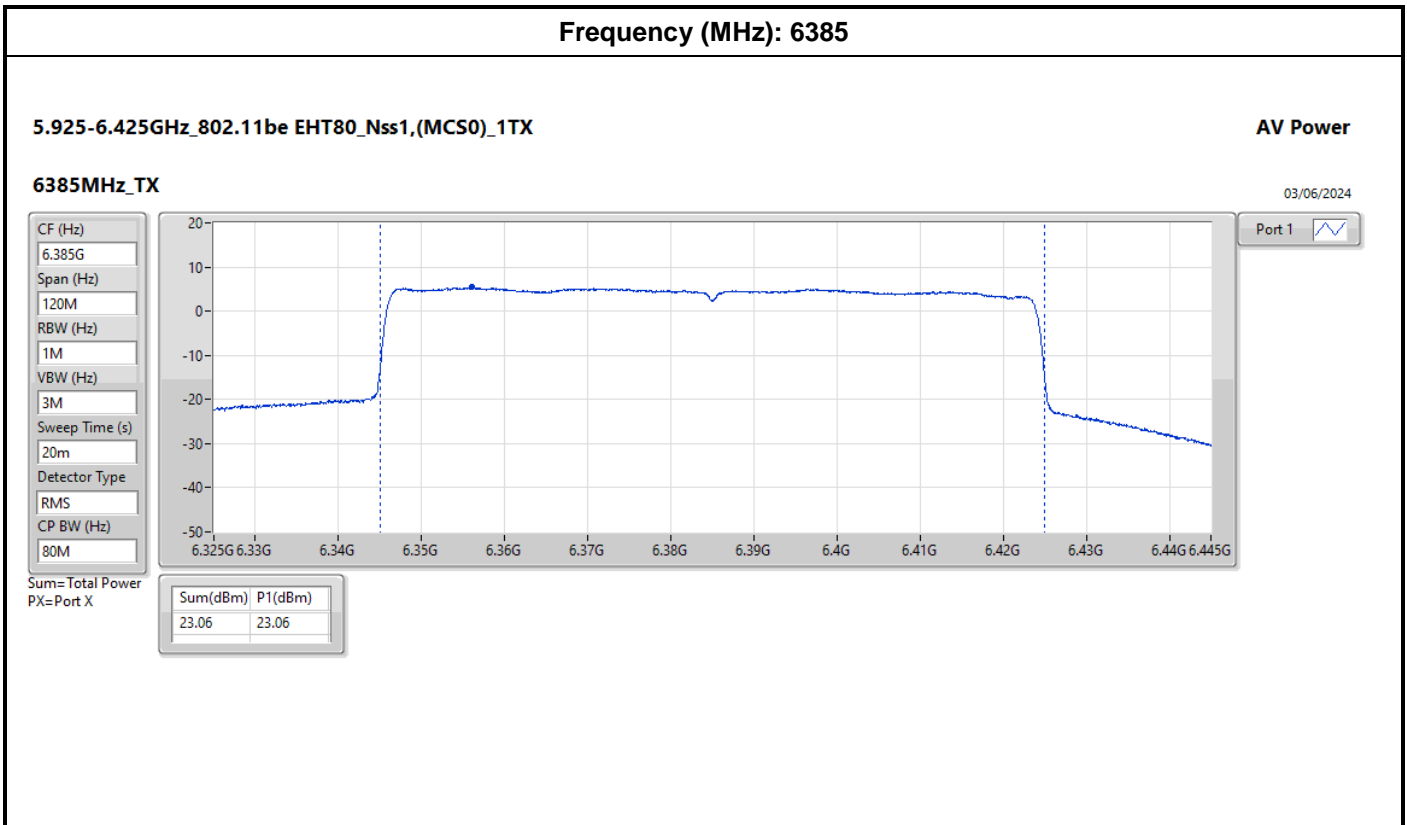

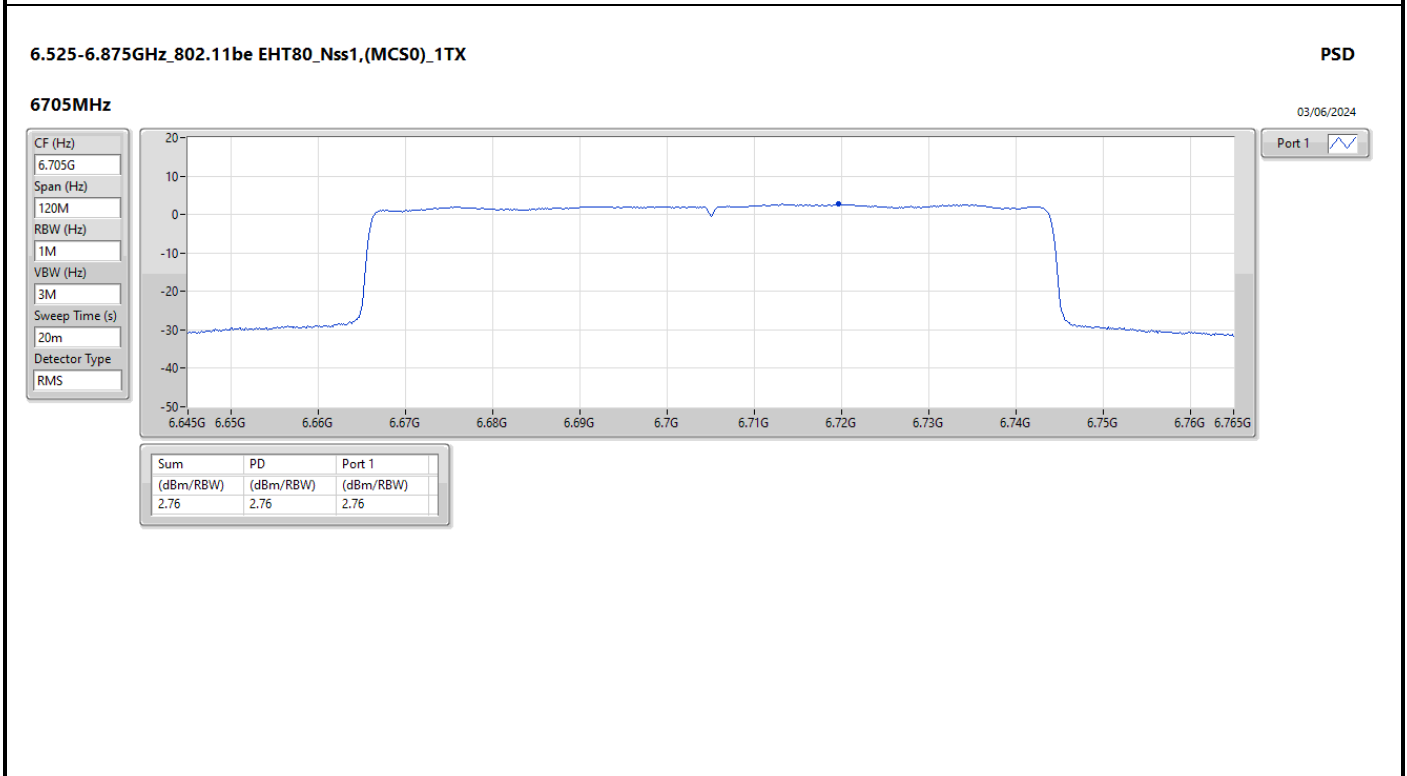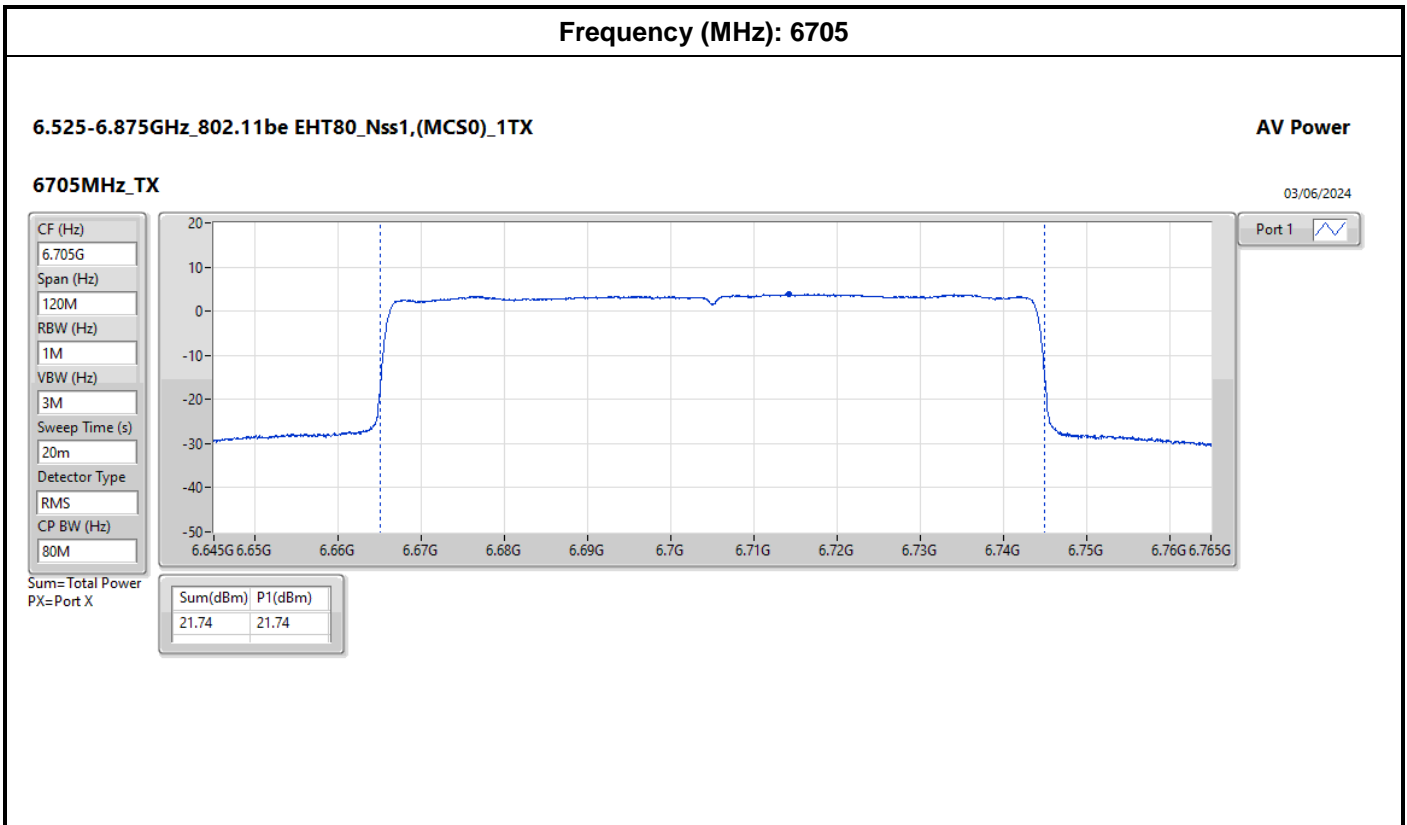

CT\_AFC\_SP\_AP\_AFCDRSA31\_FrequencyChannel\_160MHz\_10628\_1

Frequency (MHz): 6665

6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_1TX

AV Power

6665MHz\_TX

03/06/2024

CF (Hz)  
6.665G

Span (Hz)  
240M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m

Detector Type  
RMS

CP BW (Hz)  
160M

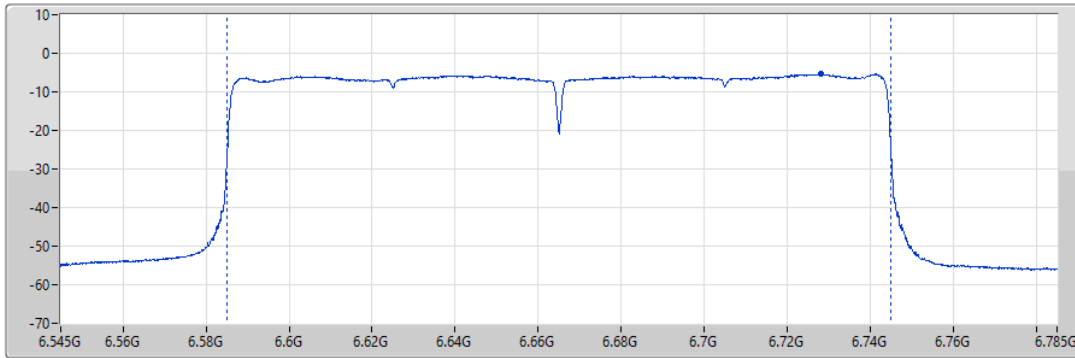

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
15.20	15.20

6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_1TX

PSD

6665MHz

03/06/2024

CF (Hz)  
6.665G


Span (Hz)  
240M

RBW (Hz)  
1M

VBW (Hz)  
3M



Sweep Time (s)  
20m



Detector Type  
RMS

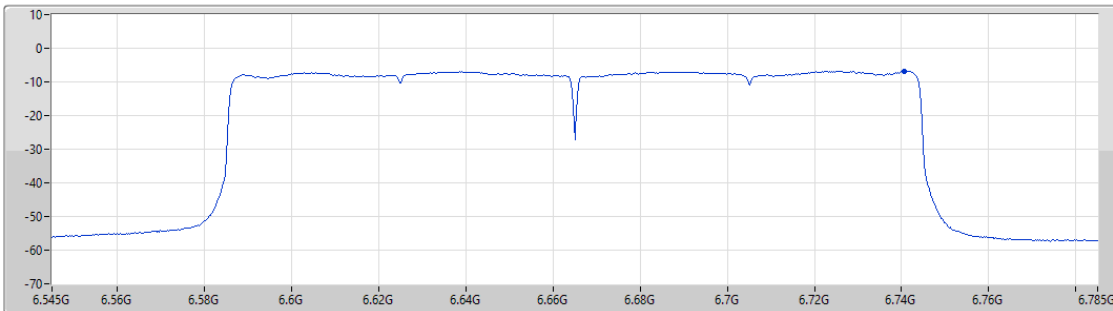

Port 1

Sum	PD	Port 1
(dBm/ RBW)	(dBm/ RBW)	(dBm/ RBW)
-6.82	-6.82	-6.82

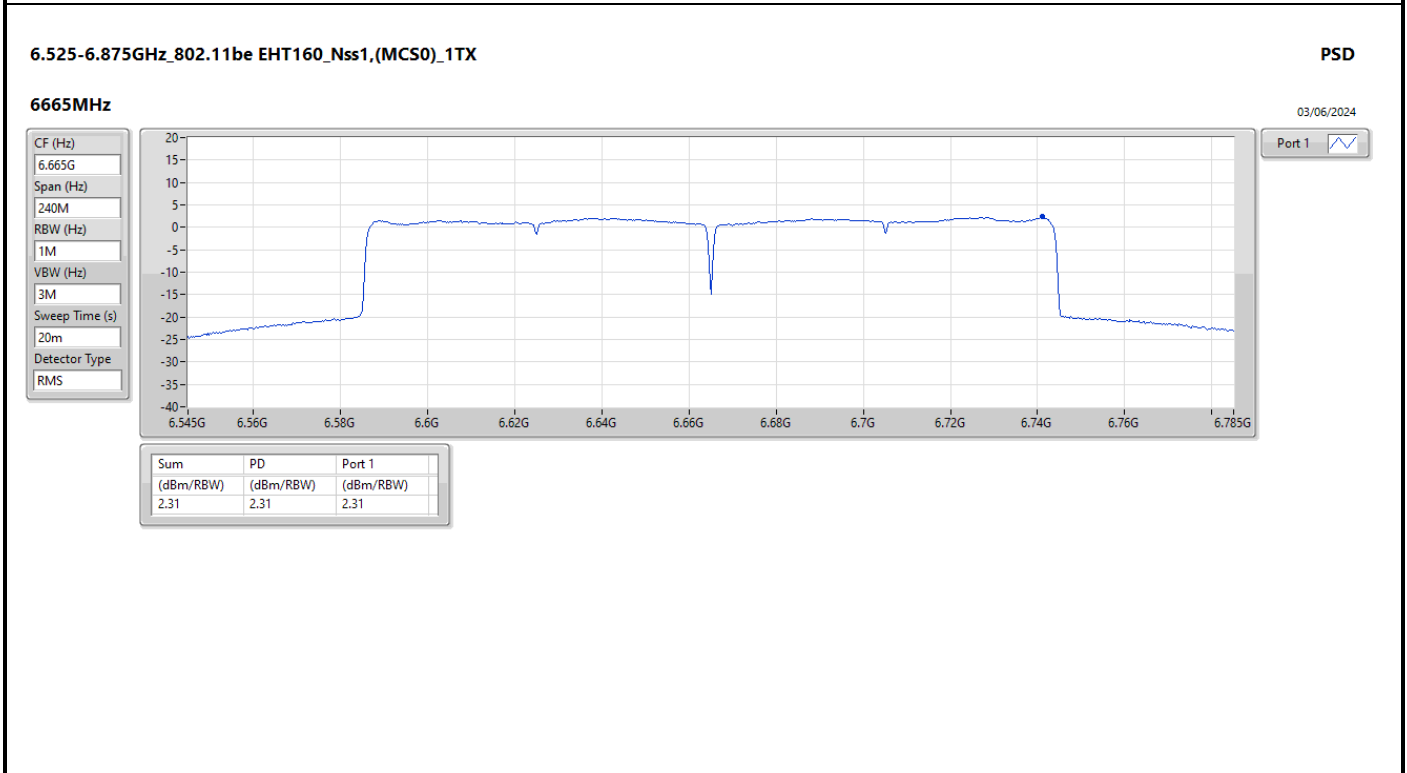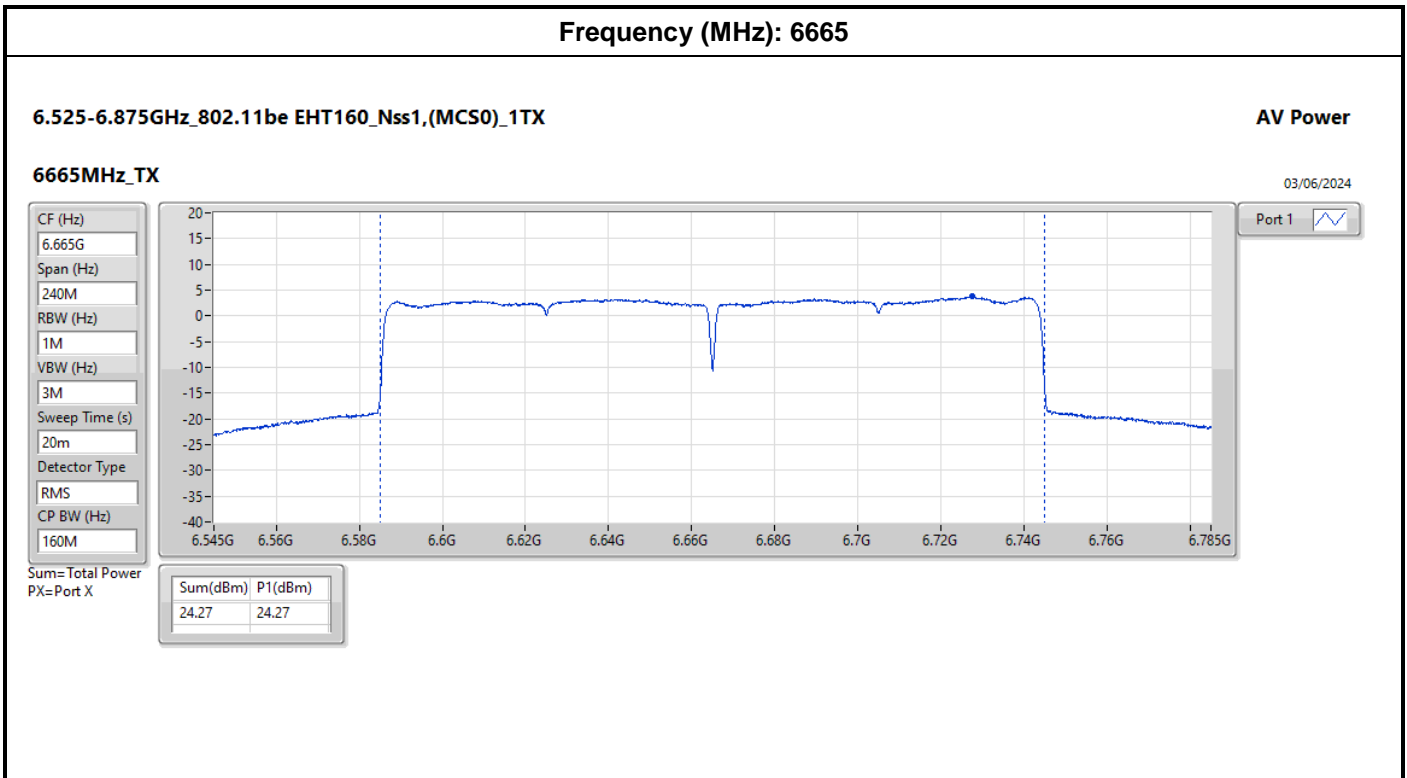

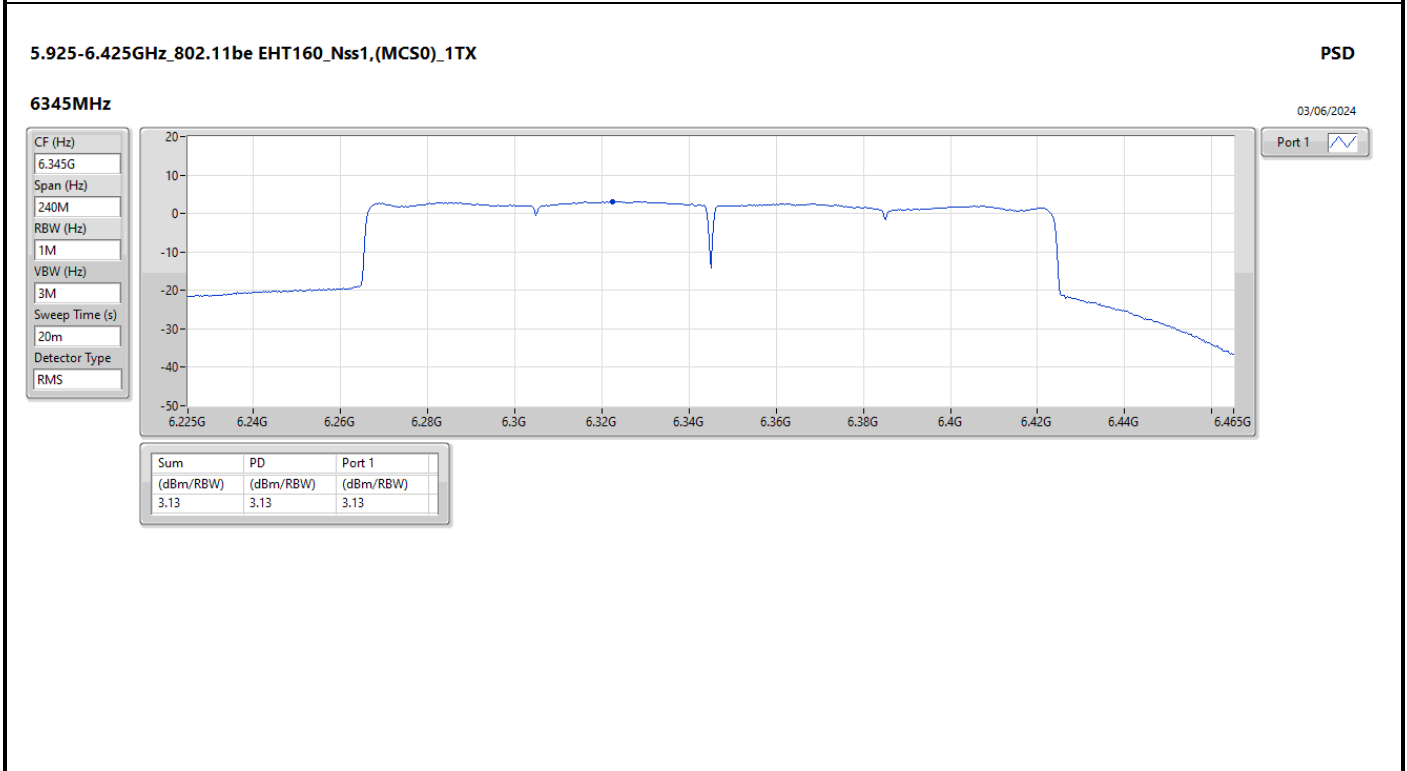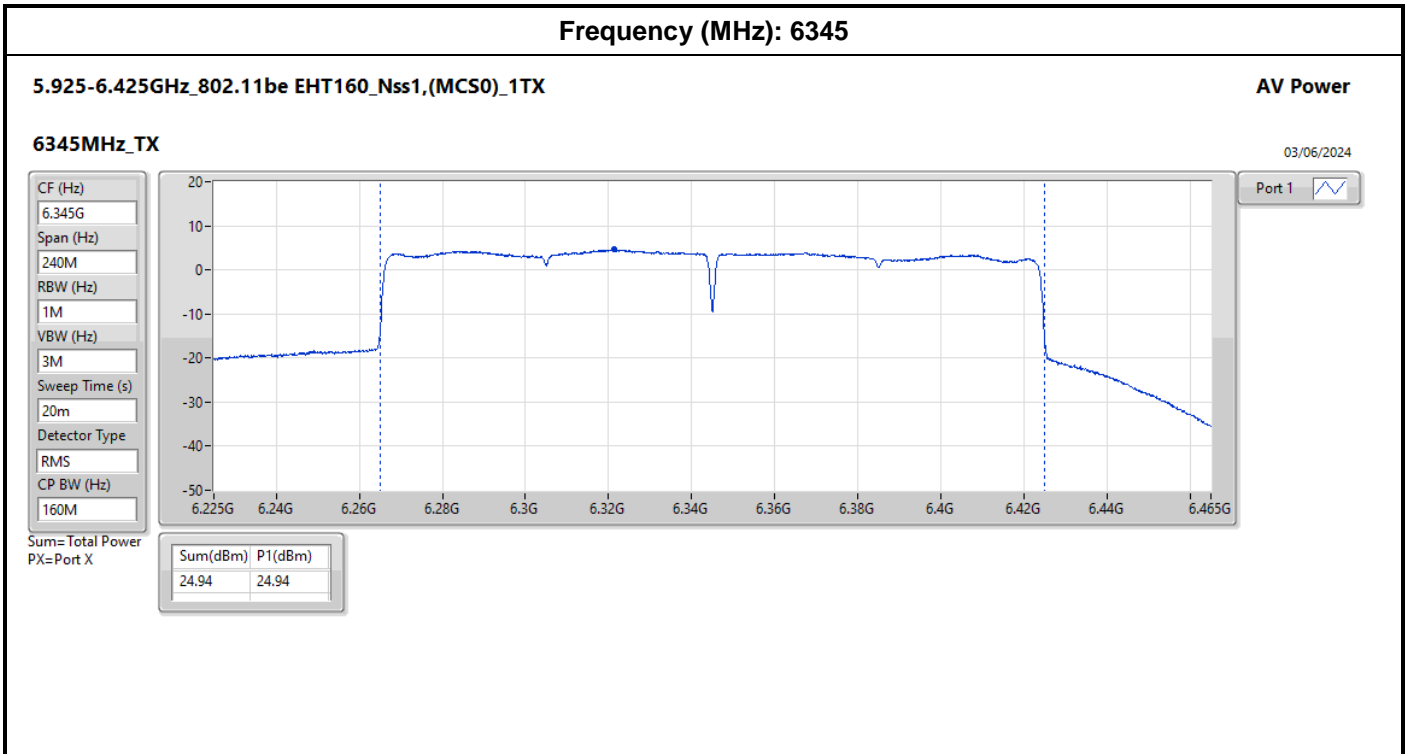

CT\_AFC\_SP\_AP\_AFCDUSA32\_FrequencyChannel\_10629\_1

Frequency (MHz): 6775


6.525-6.875GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

AV Power

6775MHz\_TX

03/06/2024

- CF (Hz)  
6.775G
- Span (Hz)  
30M
- RBW (Hz)  
1M
- VBW (Hz)  
3M
- Sweep Time (s)  
20m
- Detector Type  
RMS
- CP BW (Hz)  
20M

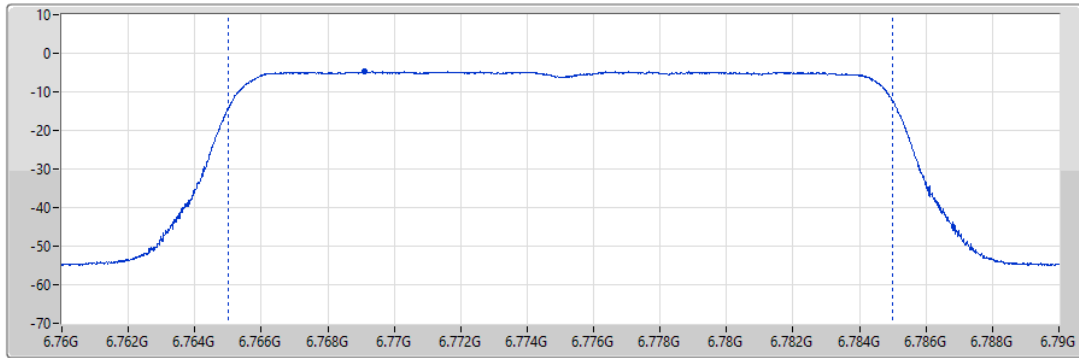

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
7.35	7.35


6.525-6.875GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

PSD

6775MHz

03/06/2024



- CF (Hz)  
6.775G
- Span (Hz)  
30M
- RBW (Hz)  
1M
- VBW (Hz)  
3M
- Sweep Time (s)  
20m
- Detector Type  
RMS

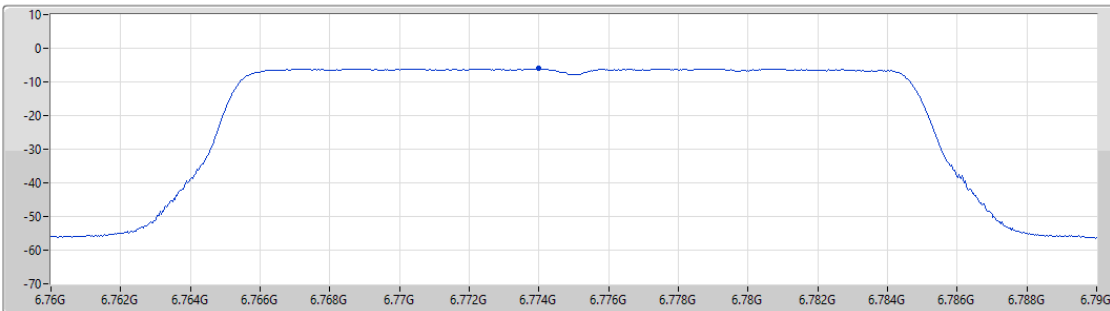

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.07	-6.07	-6.07

Frequency (MHz): 6055

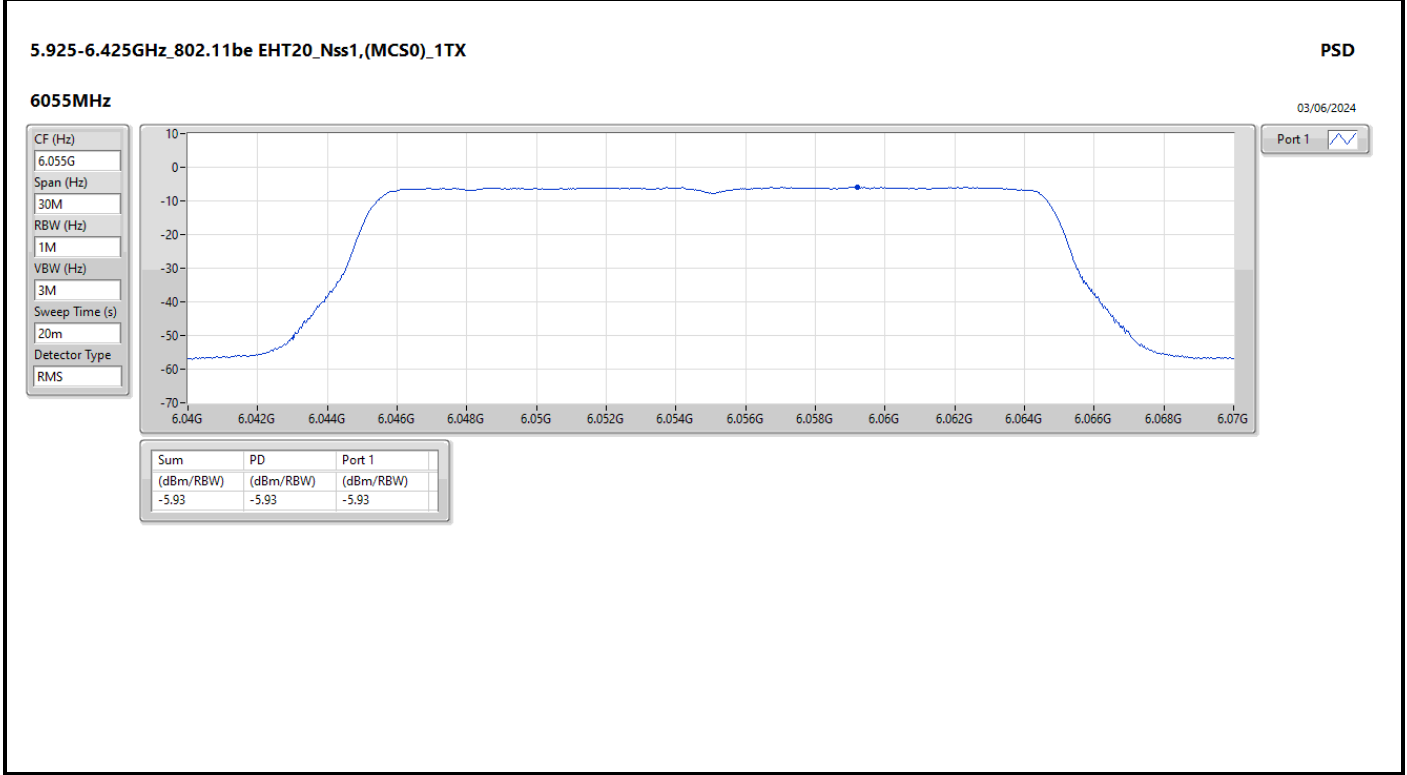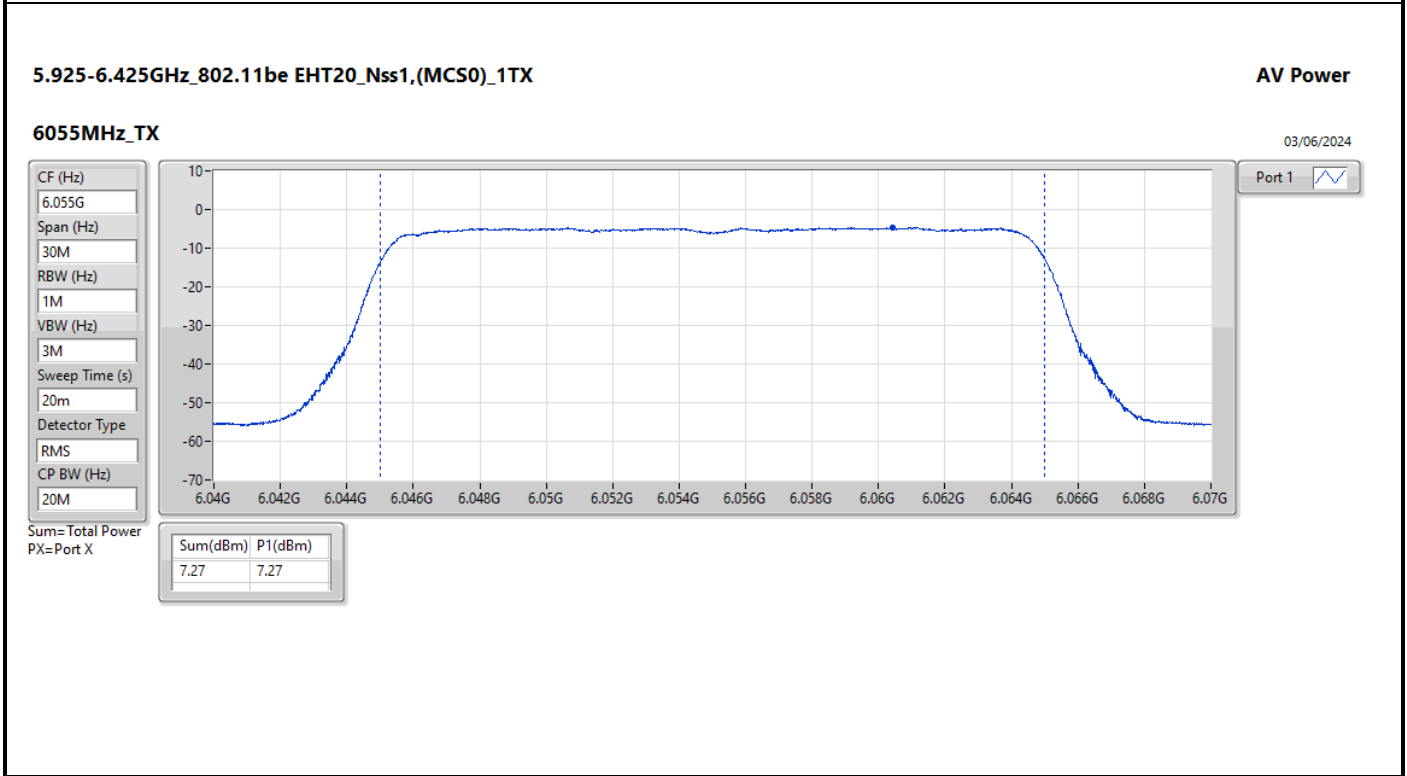



CT\_AFC\_SP\_AP\_AFCDSAU33\_FrequencyChannel\_10630\_1

Frequency (MHz): 6055

5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

AV Power

6055MHz\_TX

03/06/2024

CF (Hz)  
6.055G

Span (Hz)  
30M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m

Detector Type  
RMS

CP BW (Hz)  
20M

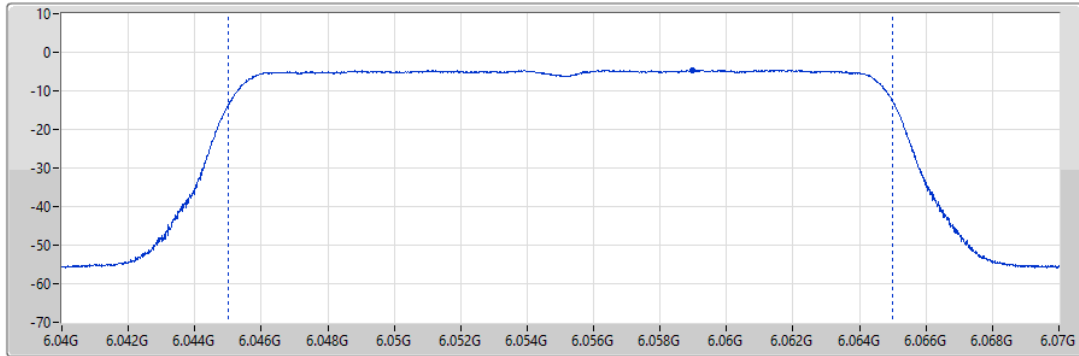

Port 1

Sum= Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
7.44	7.44

5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

PSD

6055MHz

03/06/2024

CF (Hz)  
6.055G


Span (Hz)  
30M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m



Detector Type  
RMS

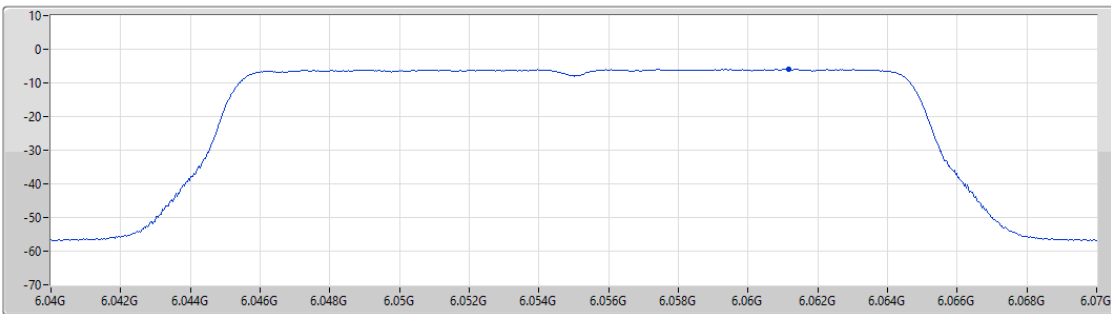


Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.01	-6.01	-6.01

Frequency (MHz): 6135

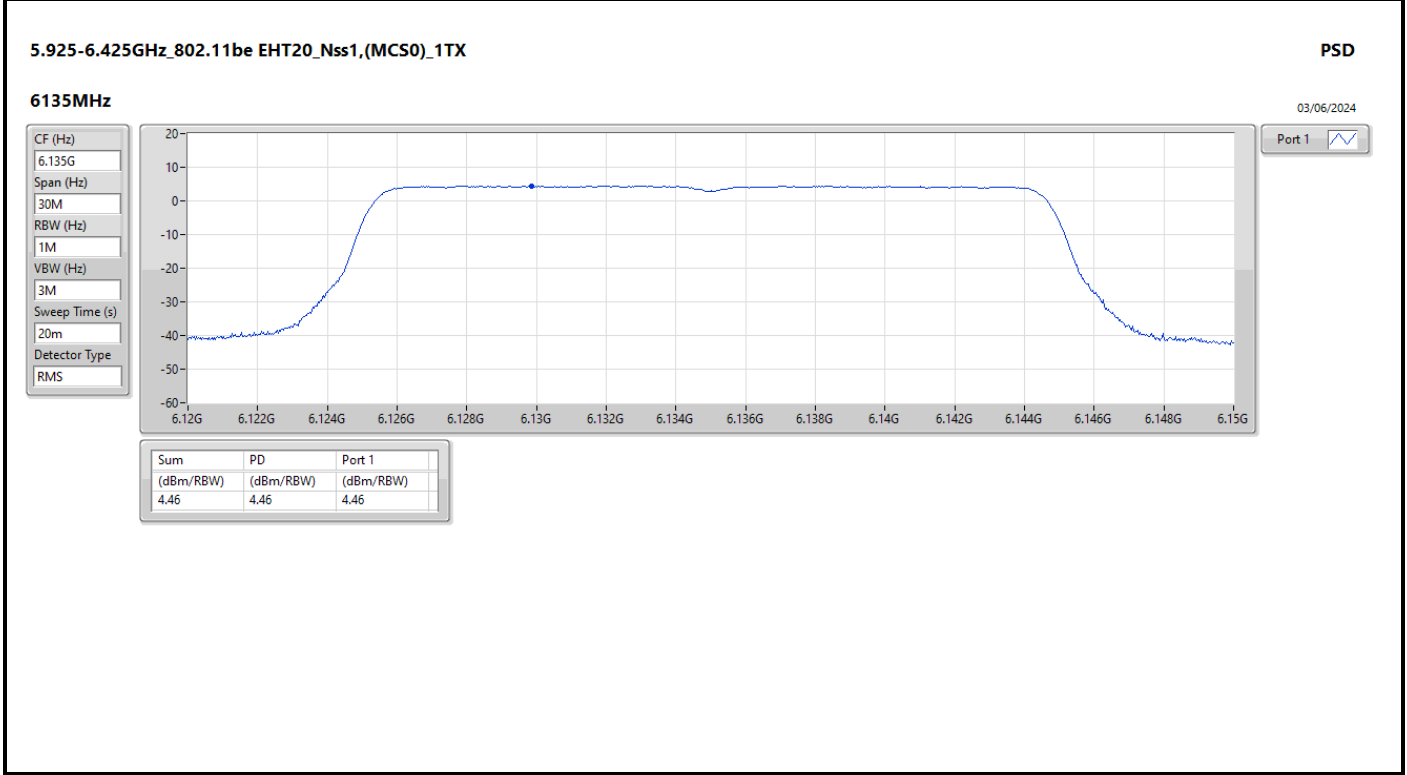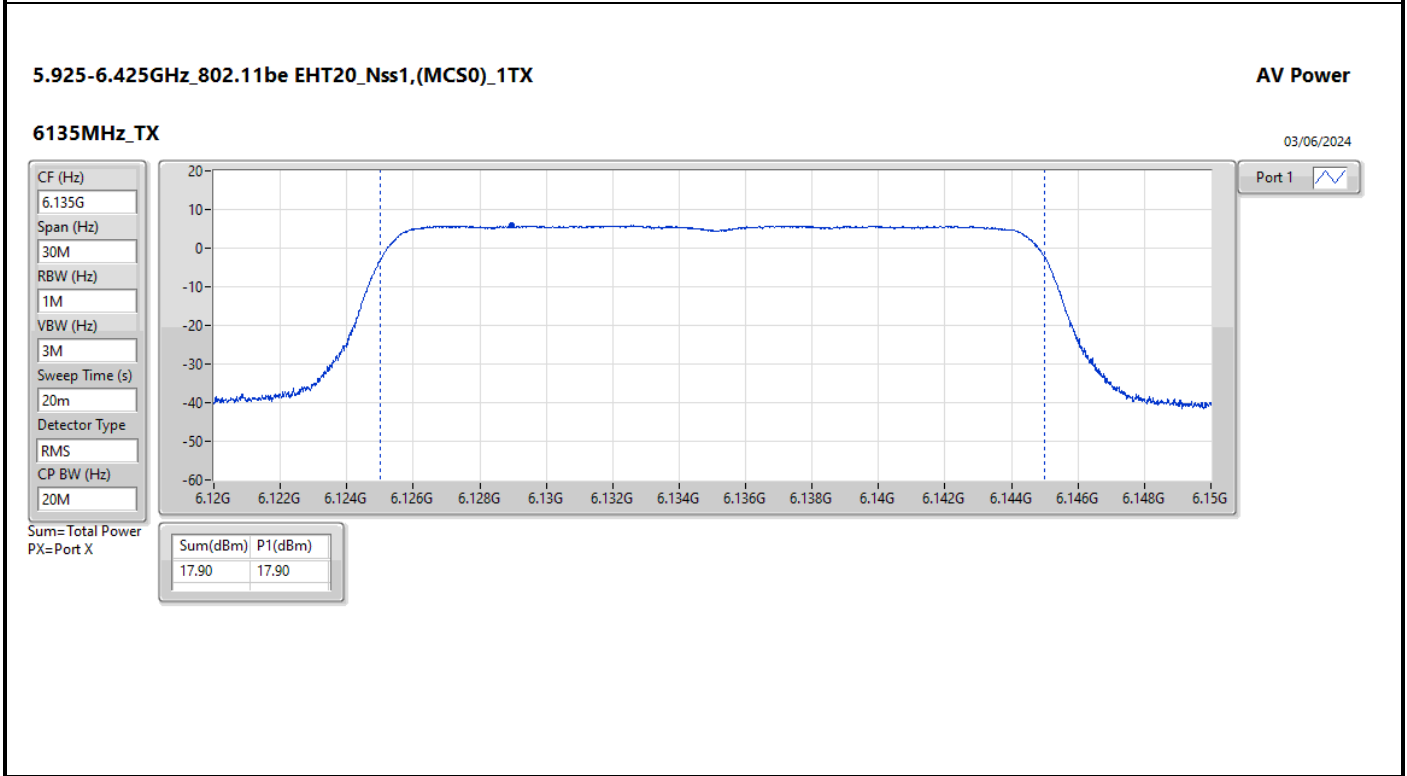

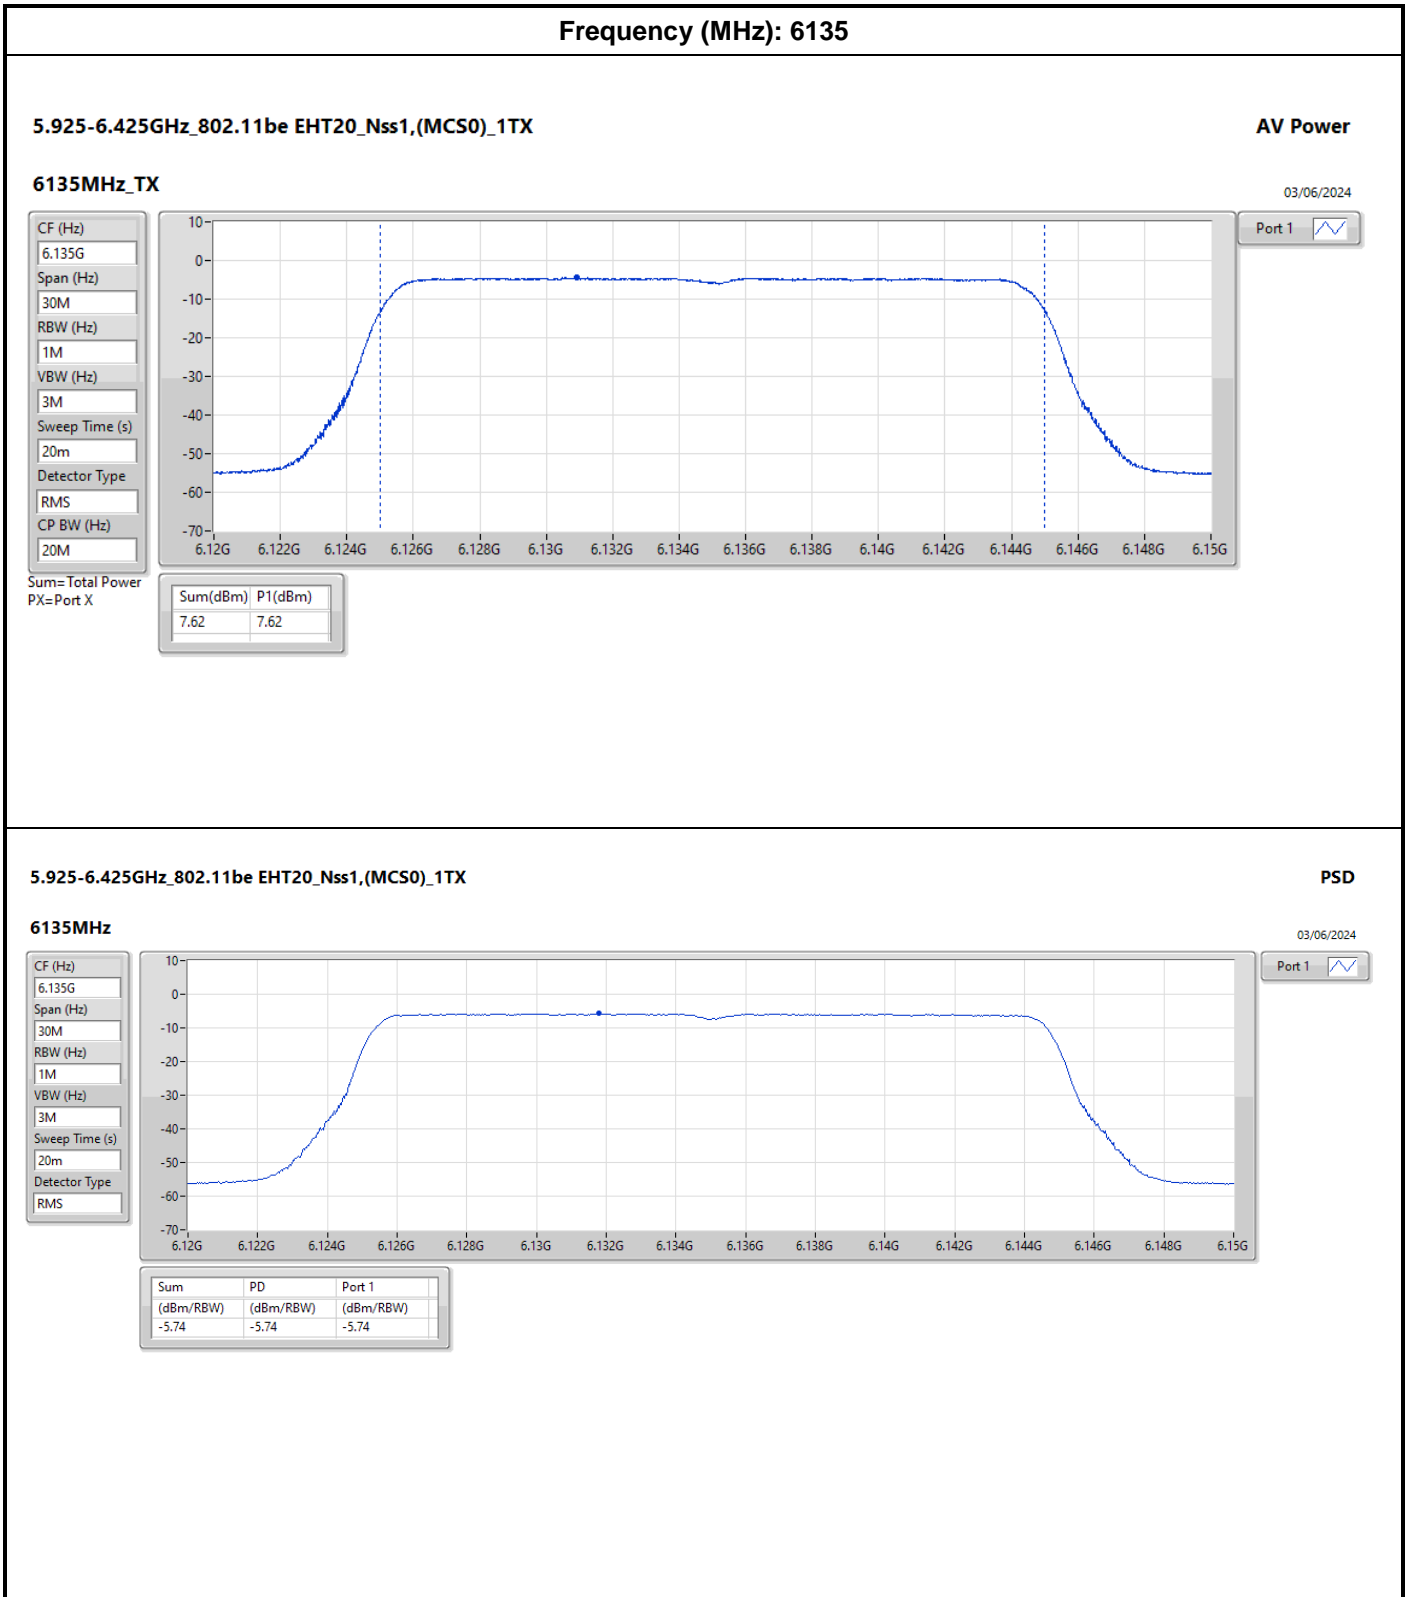

CT\_AFC\_SP\_AP\_AFCDUAU34\_FrequencyChannel\_10631\_1

Frequency (MHz): 6135


5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

AV Power

6135MHz\_TX

03/06/2024

- CF (Hz)  
6.135G
- Span (Hz)  
30M
- RBW (Hz)  
1M
- VBW (Hz)  
3M
- Sweep Time (s)  
20m
- Detector Type  
RMS
- CP BW (Hz)  
20M

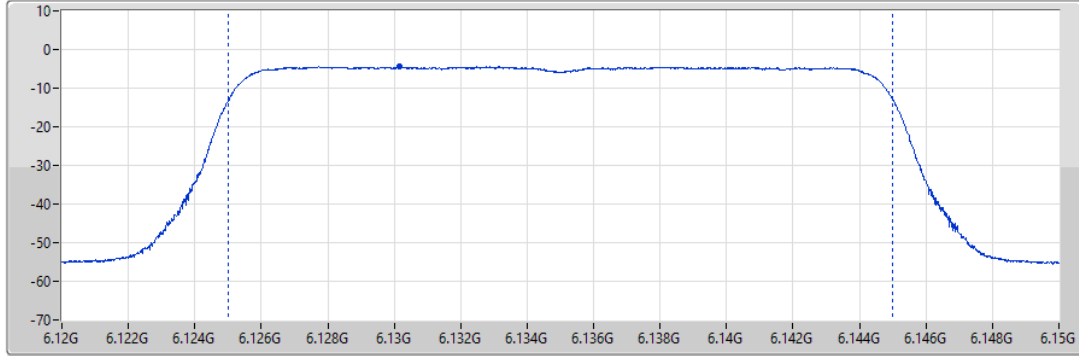

Port 1

Sum= Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
7.63	7.63


5.925-6.425GHz\_802.11be EHT20\_Nss1,(MCS0)\_1TX

PSD

6135MHz

03/06/2024



- CF (Hz)  
6.135G
- Span (Hz)  
30M
- RBW (Hz)  
1M
- VBW (Hz)  
3M
- Sweep Time (s)  
20m
- Detector Type  
RMS

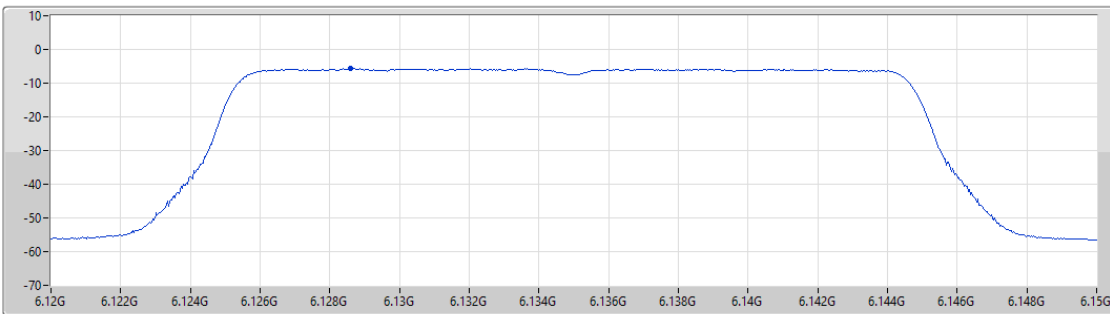



Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.73	-5.73	-5.73

Frequency (MHz): 6615

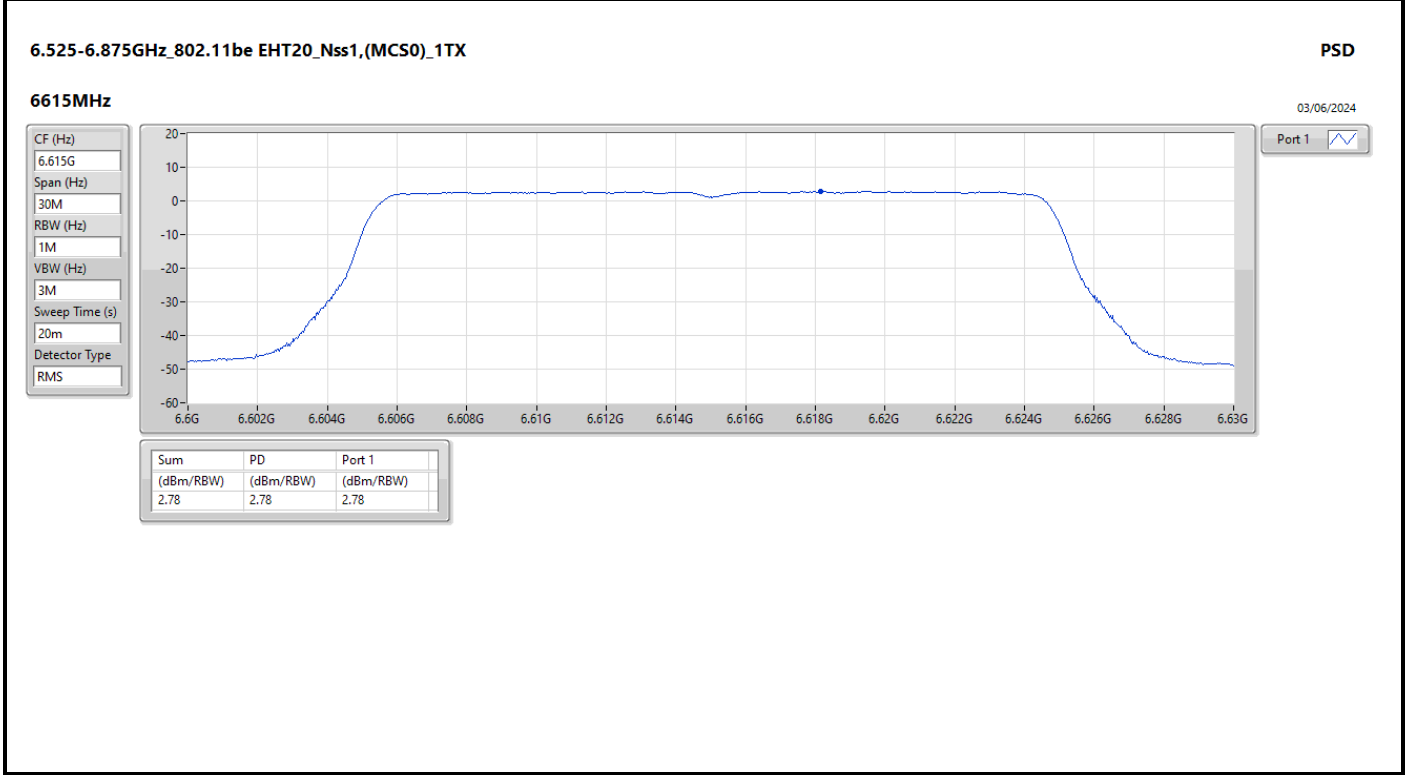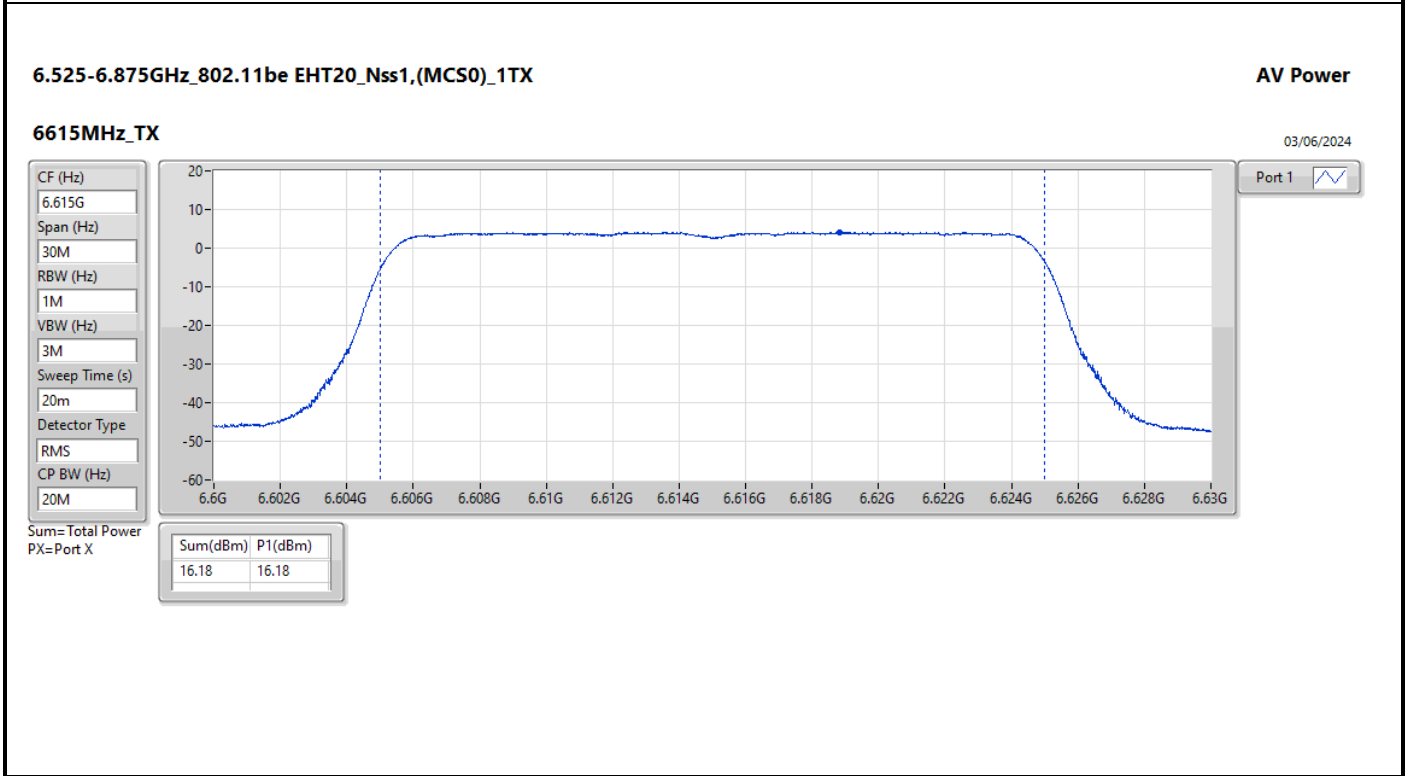


**Frequency (MHz): 6615**

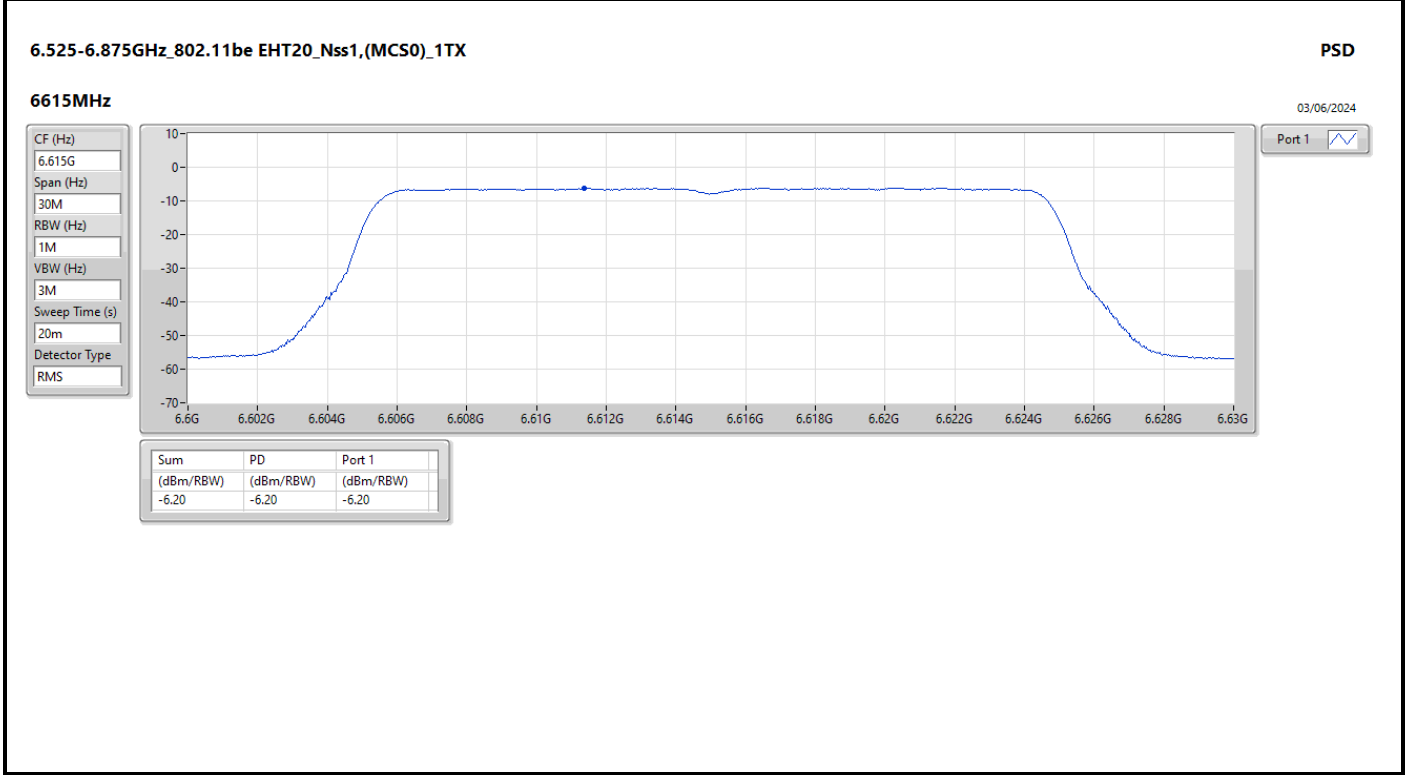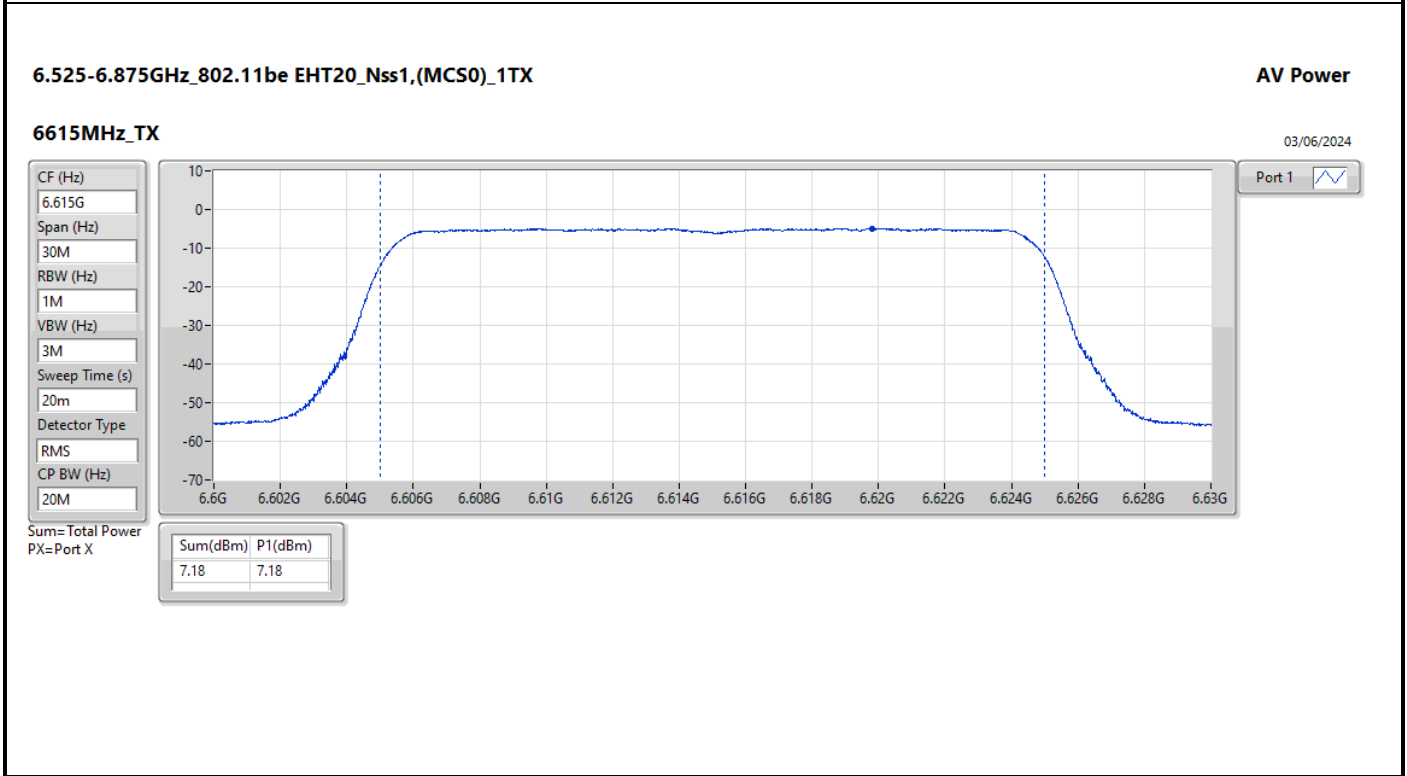

Duty Cycle

Bandwidth: 20MHz


DC;be20;BWch:20

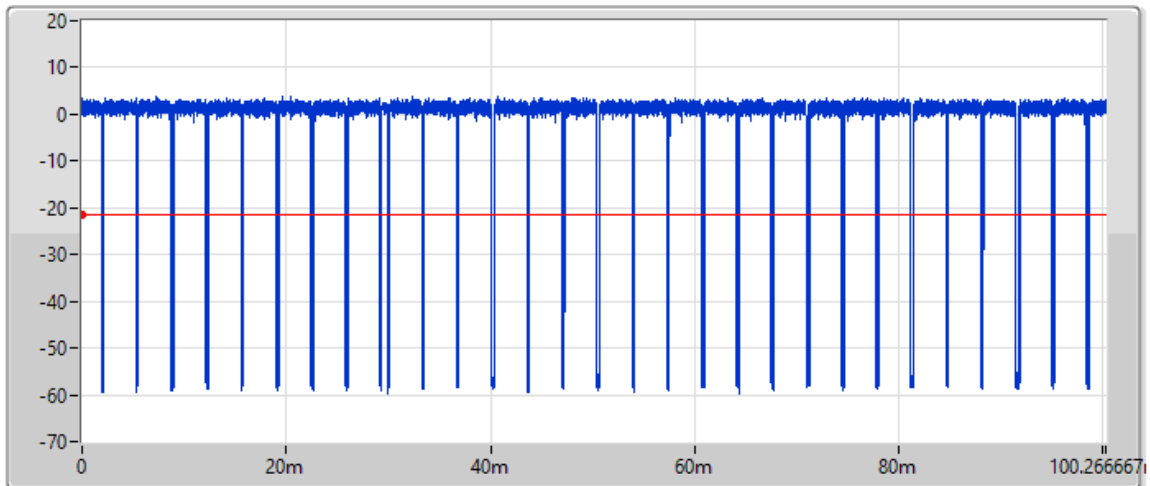



Ch Freq (Hz)	RBW (Hz)	VBW (Hz)	Sweep Time (s)	Total Sample	Sample Time (s)	TX Time (s)	DC
5.975G	8M	8M	100.267m	32001	3.133344u	93.19191m	0.929

Bandwidth: 40MHz

DC;be40;BWch:40

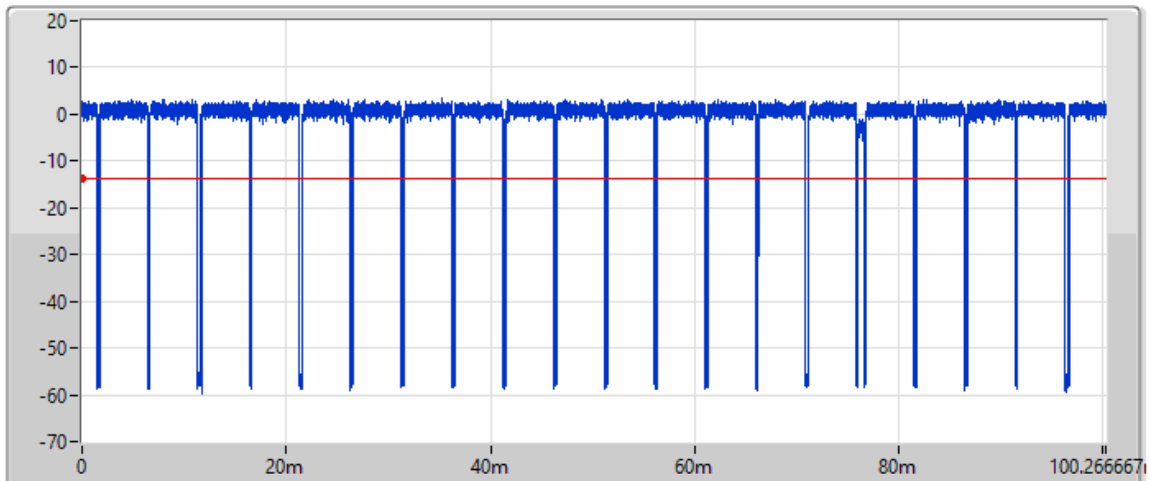

Ch Freq (Hz)	RBW (Hz)	VBW (Hz)	Sweep Time (s)	Total Sample	Sample Time (s)	TX Time (s)	DC
6.205G	8M	8M	100.267m	32001	3.133344u	94.971649m	0.947

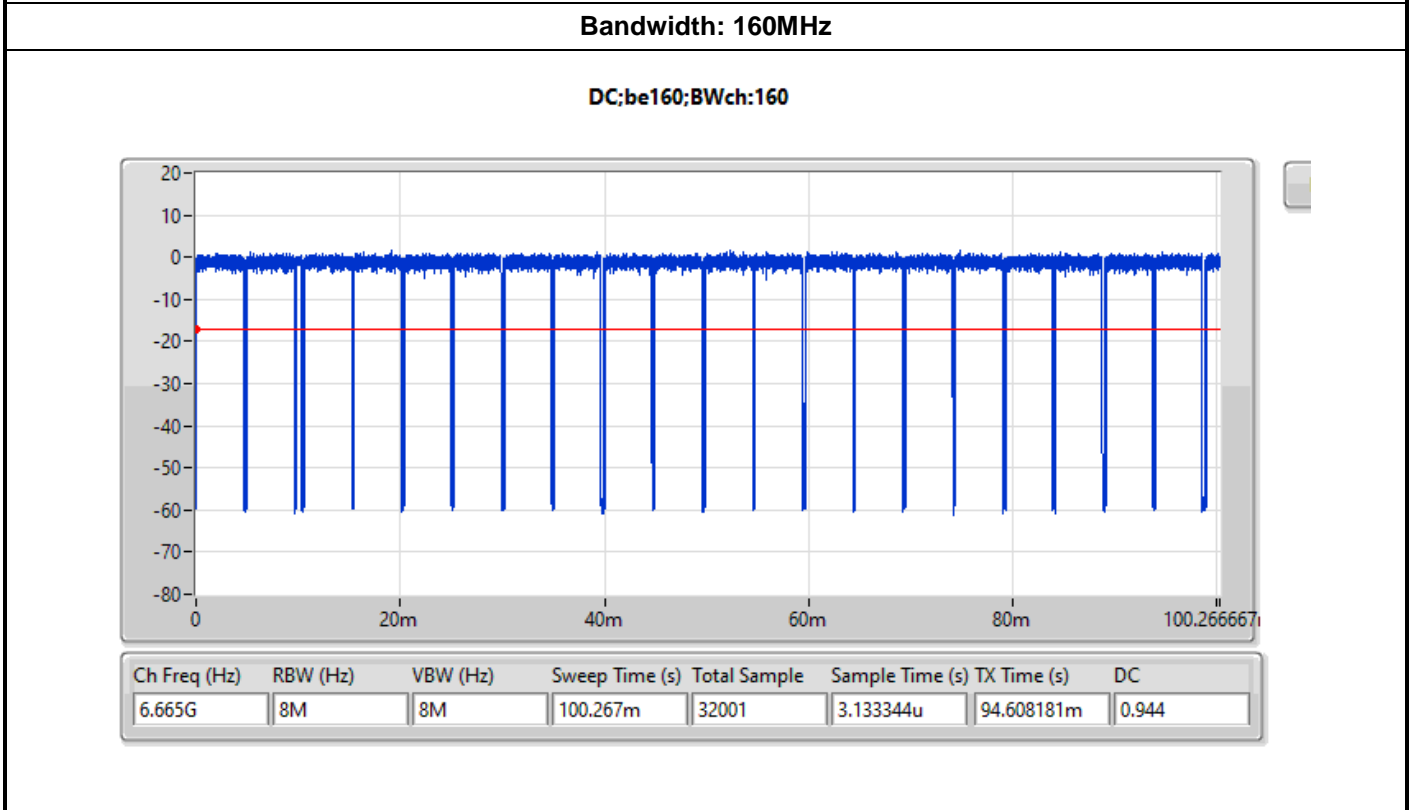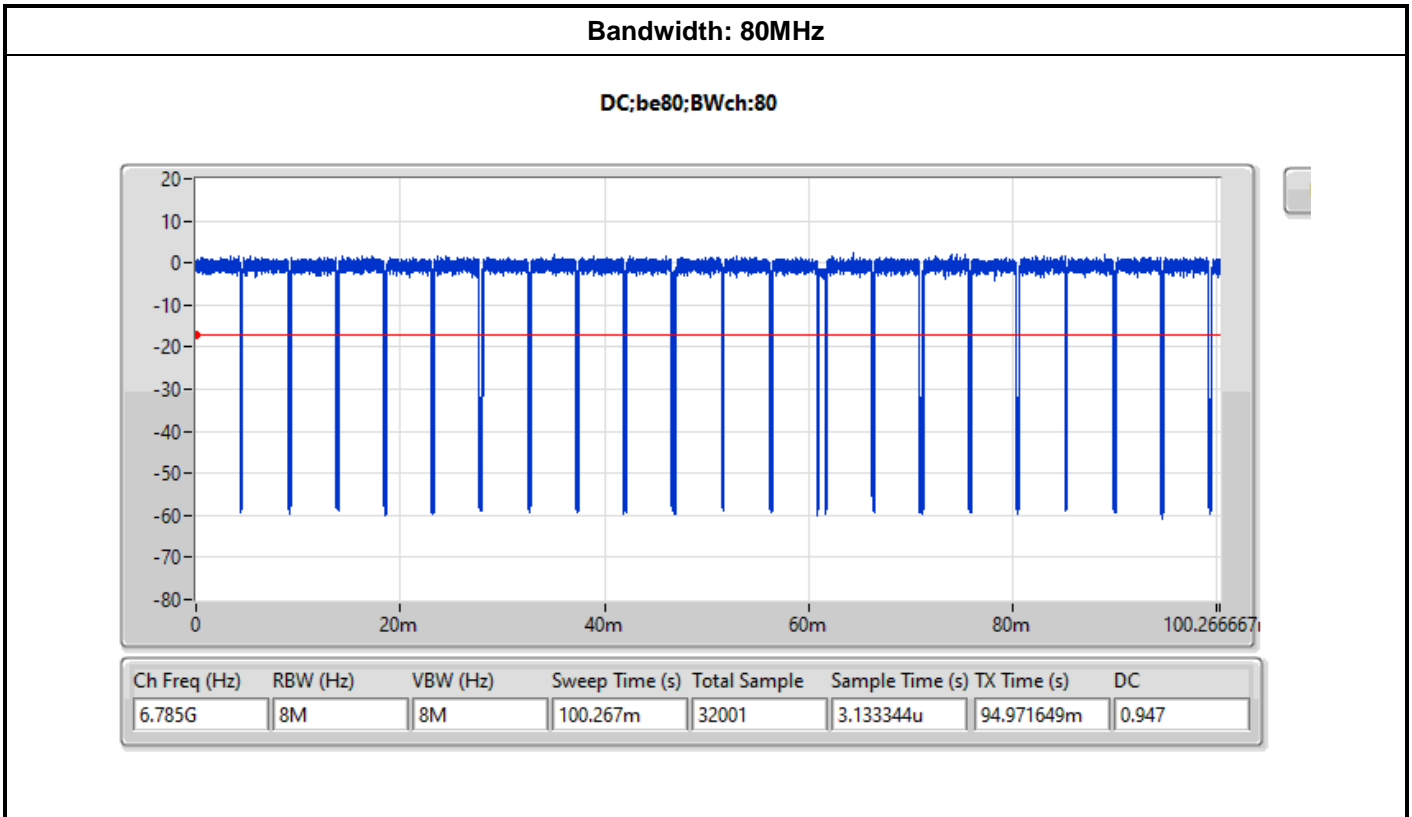

————THE END————