

# TEST REPORT

**Reference No.** ..... : WTF22D09183192W002

**FCC ID** ..... : 2A6J9E120-FCWP

**Applicant** ..... : Bkav corporation

**Address** ..... : 2nd Floor, HH1 Building, Yen Hoa Ward, Cau Giay District, Ha Noi, Vietnam

**Manufacturer** ..... : Bkav corporation

**Address** ..... : 2nd Floor, HH1 Building, Yen Hoa Ward, Cau Giay District, Ha Noi, Vietnam

**Product** ..... : AI Box

**Model(s)** ..... : E120-FCWP

**Standards** ..... : 47CFR FCC Part 15.247

**Date of Receipt sample** ..... : 2022-09-13

**Date of Test** ..... : 2022-09-13 to 2022-09-24

**Date of Issue** ..... : 2022-09-24

**Test Result** ..... : Pass

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

*Estel Qian*

---

Estel Qian / Project Engineer

Approved by:



*Deval Qin*  
Deval Qin / Designated Reviewer

## 2 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS.....</b>	<b>2</b>
<b>3 REVISION HISTORY.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 General Description of E.U.T.....	5
4.2 Details of E.U.T.....	5
4.3 Channel List.....	5
4.4 Test Facility.....	6
4.5 Subcontracted.....	6
4.6 Abnormalities from Standard Conditions.....	6
4.7 Test Mode.....	6
<b>5 TEST SUMMARY .....</b>	<b>7</b>
<b>6 EQUIPMENT USED DURING TEST.....</b>	<b>8</b>
6.1 Equipments List .....	8
6.2 Description of Support Units .....	9
6.3 Measurement Uncertainty .....	9
6.4 Test Equipment Calibration .....	9
<b>7 DUTY CYCLE.....</b>	<b>10</b>
<b>8 CONDUCTED EMISSION .....</b>	<b>11</b>
8.1 E.U.T. Operation.....	11
8.2 EUT Setup .....	11
8.3 Measurement Description.....	11
8.4 Conducted Emission Test Result .....	12
<b>9 RADIATED EMISSIONS .....</b>	<b>14</b>
9.1 EUT Operation.....	14
9.2 Test Setup .....	15
9.3 Spectrum Analyzer Setup.....	16
9.4 Test Procedure .....	17
9.5 Corrected Amplitude & Margin Calculation .....	17
9.6 Summary of Test Results .....	18
<b>10 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>21</b>
10.1 Test Procedure .....	21
10.2 Test Result.....	22
<b>11 BAND EDGE MEASUREMENT.....</b>	<b>26</b>
11.1 Test Produce .....	26
11.2 Test Result.....	27
<b>12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT .....</b>	<b>28</b>
12.1 Test Procedure: .....	28
12.2 Test Result:.....	28
<b>13 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>33</b>
13.1 Test Procedure: .....	33
13.2 Test Result:.....	33
<b>14 POWER SPECTRAL DENSITY .....</b>	<b>36</b>

14.1	Test Procedure:	36
14.2	Test Result:	36
<b>15</b>	<b>ANTENNA REQUIREMENT</b>	<b>39</b>
<b>16</b>	<b>RF EXPOSURE</b>	<b>39</b>
<b>17</b>	<b>PHOTOGRAPHS OF TEST SETUP AND EUT</b>	<b>39</b>

### 3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF22D09183192W002	2022-09-13	2022-09-13 to 2022-09-24	2022-09-24	Original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	AI Box
Model(s):	E120-FCWP
Model Description:	N/A
Bluetooth Version:	Bluetooth v5.0 with BLE
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac (HT20/40/80)
Hardware Version:	V2.0.1
Software Version:	1.0.0.5

### 4.2 Details of E.U.T.

Operation Frequency:	2402~2480MHz
Max. RF output power:	5.98dBm
Type of Modulation:	GFSK
Antenna installation:	External antenna with RP-SMA connector
Antenna Gain:	Max. Peak 2.2dBi
Ratings:	DC12V 1A/PoE
Adapter:	Manufacturer: XING YUAN ELECTRONICS CO., LTD Model No.: XY12J-1201000Q-UW Input: 100-240VAC, 0.5A Max. 50/60Hz Output: 12V --- 1.0A

### 4.3 Channel List

Channel No.	Frequency (MHz)						
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

#### 4.4 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

#### 4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

#### 4.6 Abnormalities from Standard Conditions

None.

#### 4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BLE	1/2 Mbps	0/19/39	TX
Power Spectral Density	BLE	1/2 Mbps	0/19/39	TX
6dB Bandwidth	BLE	1/2 Mbps	0/19/39	TX
Band Edge	BLE	1/2 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BLE	1/2 Mbps	0/19/39	TX

**Note:** Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

## 5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth and 99% Bandwidth Measurement	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2022-08-01	2023-07-31
2.	LISN	R&S	ENV216	100115	2022-08-01	2023-07-31
3.	Cable	Top	TYPE16(3.5M)	-	2022-08-01	2023-07-31
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2022-04-28	2023-04-27
2	Amplifier	Agilent	8447D	2944A10178	2022-08-01	2023-07-31
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2022-08-07	2023-08-06
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2022-04-28	2023-04-27
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2022-04-28	2023-04-27
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2022-07-29	2023-07-28
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2022-04-28	2023-04-27
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2022-08-01	2023-07-31
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2022-04-28	2023-04-27
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-10-31	2022-10-30
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2022-05-02	2023-05-01
4	Amplifier	ANRITSU	MH648A	M43381	2022-04-28	2023-04-27
5	Cable	HUBER+SUHNER	CBL2	525178	2022-04-28	2023-04-27
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSP40	100501	2022-08-01	2023-07-31
2.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2022-04-28	2023-04-27

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz) ± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 <sup>-7</sup> Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

## 7 Duty Cycle


Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
GFSK(1M)	0.3920	1.0230	0.38	38.32	4.17	-8.33
GFSK(2M)	0.2080	0.6320	0.33	32.91	4.83	-9.65

### Remark:


Duty cycle=On Time/period;

Duty cycle factor= $10 \log(1/\text{Duty cycle})$ ;

Average factor= $20 \log_{10} \text{Duty cycle}$

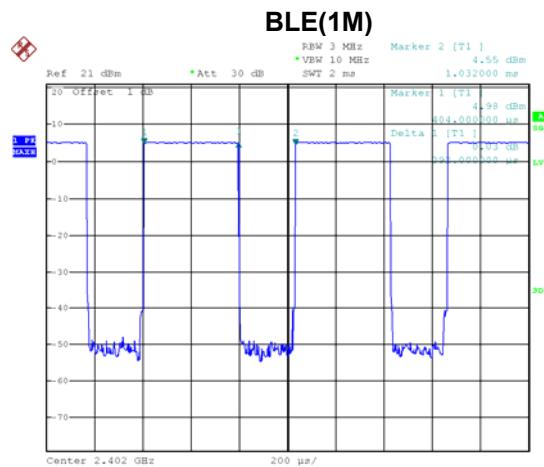

Date: 23.SEP.2022 14:33:33

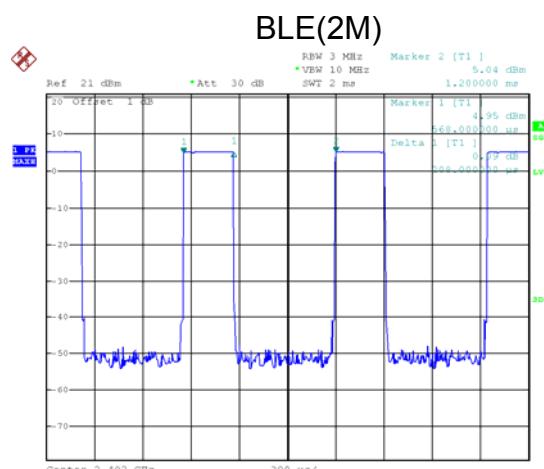

Date: 23.SEP.2022 14:35:15

## 8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:	Frequency (MHz)	Conducted Limit (dB $\mu$ V)	
		Quasi-peak	Average
	0.15 to 0.5	66 to 56*	56 to 46*
	0.5 to 5.0	56	46
	5.0 to 30	60	50

\*Decreases with the logarithm of the frequency.

### 8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C

Humidity: 54.7 % RH


Atmospheric Pressure: 101.6kPa

Test Voltage: AC 120V, 60Hz

EUT Operation: Please refer to 4.7.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

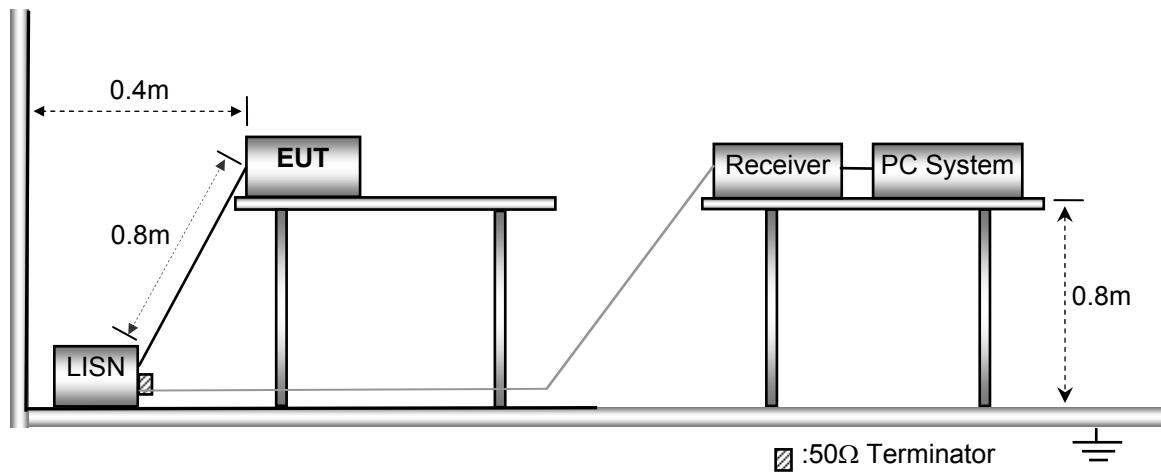


### 8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 8.4 Conducted Emission Test Result


Remark: only the worst data (BLE 1M High channel mode) were reported

Live line:

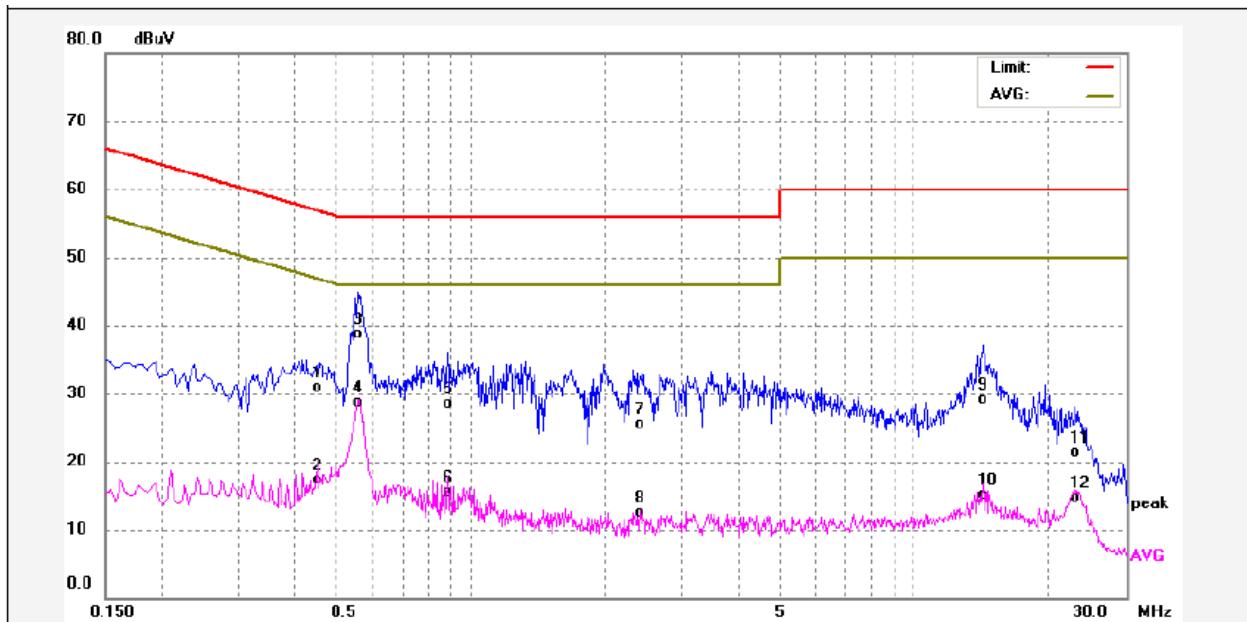

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4500	20.64	10.26	30.90	56.87	-25.97	QP	
2	0.4500	7.14	10.26	17.40	46.87	-29.47	AVG	
3	0.5580	28.42	10.28	38.70	56.00	-17.30	QP	
4	0.5580	18.40	10.28	28.68	46.00	-17.32	AVG	
5	0.8860	18.13	10.35	28.48	56.00	-27.52	QP	
6	0.8860	5.21	10.35	15.56	46.00	-30.44	AVG	
7	2.3980	15.18	10.42	25.60	56.00	-30.40	QP	
8	2.3980	2.07	10.42	12.49	46.00	-33.51	AVG	
9	14.2180	18.60	10.55	29.15	60.00	-30.85	QP	
10	14.2180	4.49	10.55	15.04	50.00	-34.96	AVG	
11	23.1020	10.84	10.43	21.27	60.00	-38.73	QP	
12	23.1020	4.32	10.43	14.75	50.00	-35.25	AVG	

Neutral line:

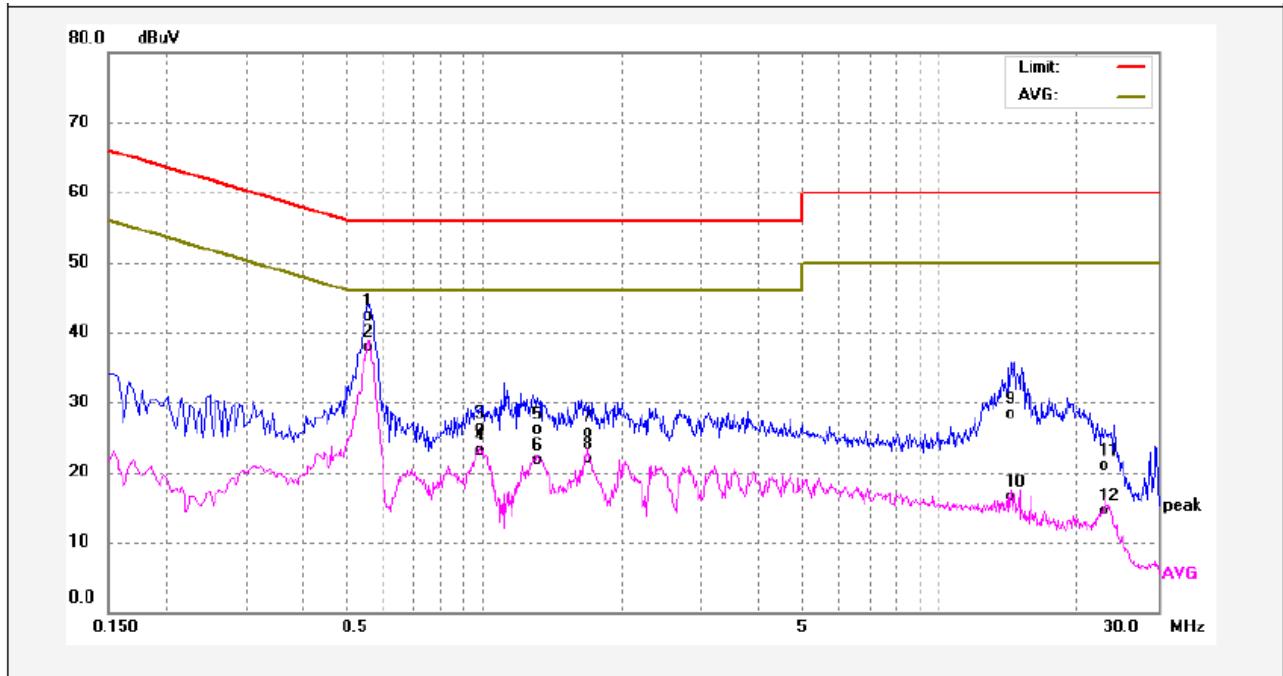

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5620	32.03	10.28	42.31	56.00	-13.69	QP	
2	0.5620	27.53	10.28	37.81	46.00	-8.19	AVG	
3	0.9820	15.87	10.35	26.22	56.00	-29.78	QP	
4	0.9820	12.71	10.35	23.06	46.00	-22.94	AVG	
5	1.3060	15.79	10.36	26.15	56.00	-29.85	QP	
6	1.3060	11.40	10.36	21.76	46.00	-24.24	AVG	
7	1.6900	15.29	10.36	25.65	56.00	-30.35	QP	
8	1.6900	11.60	10.36	21.96	46.00	-24.04	AVG	
9	14.2580	17.85	10.54	28.39	60.00	-31.61	QP	
10	14.2580	6.05	10.54	16.59	50.00	-33.41	AVG	
11	22.8340	10.52	10.43	20.95	60.00	-39.05	QP	
12	22.8340	4.16	10.43	14.59	50.00	-35.41	AVG	

## 9 Radiated Emissions

Test Requirement: 47CFR FCC Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in TX transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

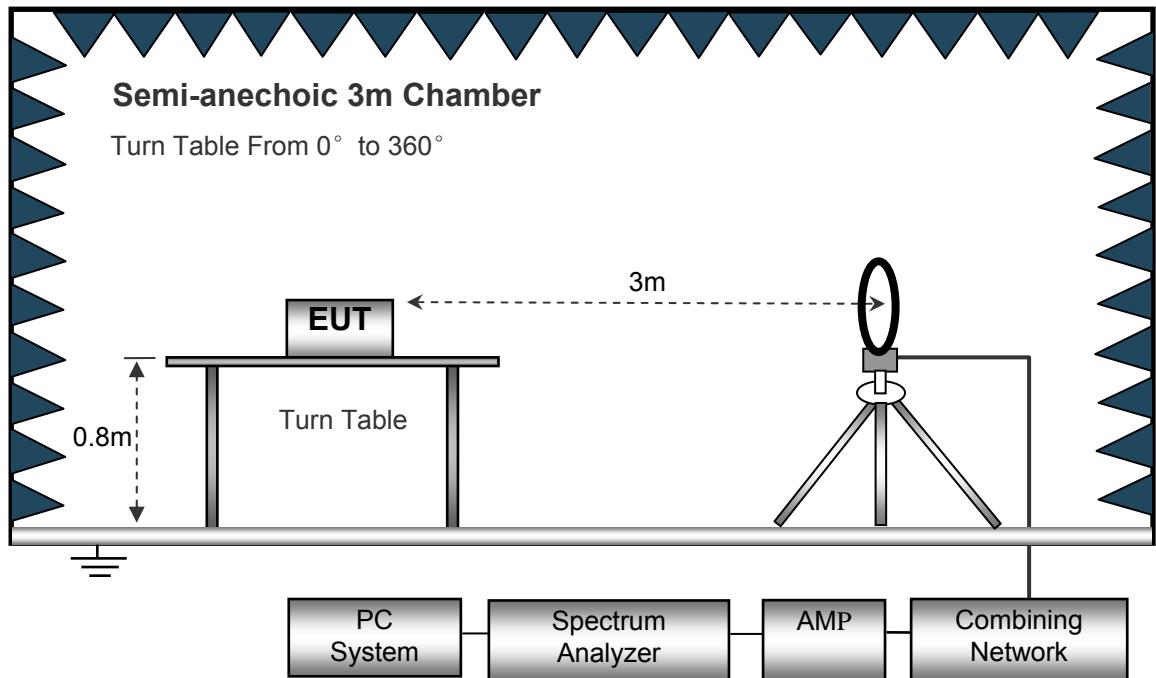

The test setup for emission measurement from 30 MHz to 1 GHz.

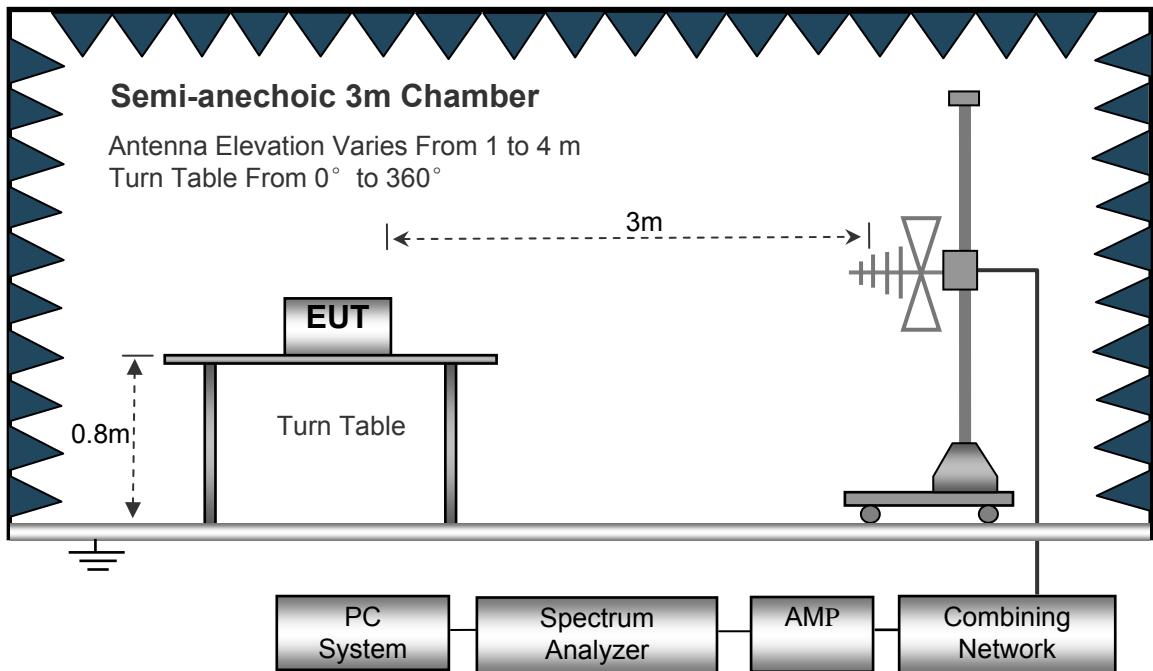

The test setup for emission measurement above 1 GHz.

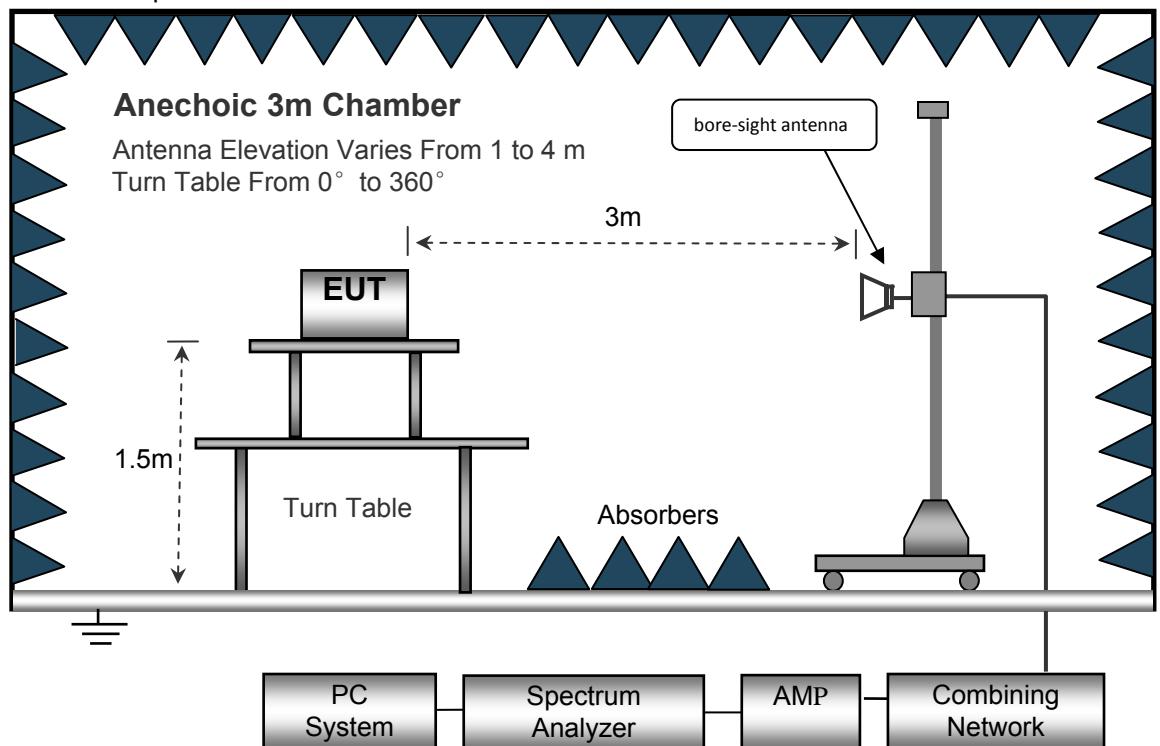

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed .....	Auto
IF Bandwidth.....	10kHz
Video Bandwidth.....	10kHz
Resolution Bandwidth.....	10kHz

30MHz ~ 1GHz

Sweep Speed .....	Auto
Detector .....	PK
Resolution Bandwidth.....	100kHz
Video Bandwidth.....	300kHz

Above 1GHz

Sweep Speed .....	Auto
Detector .....	PK
Resolution Bandwidth.....	1MHz
Video Bandwidth.....	3MHz
Detector .....	Ave.
Resolution Bandwidth.....	1MHz
Video Bandwidth.....	10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

**Note:**

Only the worst-case BLE 2M mode were record in the report.

**Test Frequency: 9KHz~30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency: 30MHz ~ 8GHz**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
				Height (m)	Polar (H/V)				
GFSK Low Channel 2402MHz									
175.62	36.55	QP	211	1.2	H	-13.35	23.20	46.00	-22.80
175.62	41.52	QP	252	1.5	V	-13.35	28.17	46.00	-17.83
4804.00	49.77	PK	83	1.6	V	-1.06	48.71	74.00	-25.29
4804.00	42.43	Ave	83	1.6	V	-1.06	41.37	54.00	-12.63
7206.00	45.33	PK	47	1.8	H	1.33	46.66	74.00	-27.34
7206.00	37.53	Ave	47	1.8	H	1.33	38.86	54.00	-15.14
2346.79	46.62	PK	176	1.3	V	-13.19	33.43	74.00	-40.57
2346.79	37.50	Ave	176	1.3	V	-13.19	24.31	54.00	-29.69
2351.80	44.21	PK	287	1.5	H	-13.14	31.07	74.00	-42.93
2351.80	38.79	Ave	287	1.5	H	-13.14	25.65	54.00	-28.35
2486.93	44.71	PK	6	1.3	V	-13.08	31.63	74.00	-42.37
2486.93	38.96	Ave	6	1.3	V	-13.08	25.88	54.00	-28.12

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
				Height (m)	Polar (H/V)				
GFSK Middle Channel 2440MHz									
175.62	37.30	QP	33	1.6	H	-13.35	23.95	46.00	-22.05
175.62	41.36	QP	151	1.1	V	-13.35	28.01	46.00	-17.99
4880.00	43.46	PK	287	1.6	V	-0.62	42.84	74.00	-31.16
4880.00	43.07	Ave	287	1.6	V	-0.62	42.45	54.00	-11.55
7320.00	45.07	PK	167	1.2	H	2.21	47.28	74.00	-26.72
7320.00	37.21	Ave	167	1.2	H	2.21	39.42	54.00	-14.58
2347.29	45.96	PK	50	1.1	V	-13.19	32.77	74.00	-41.23
2347.29	38.57	Ave	50	1.1	V	-13.19	25.38	54.00	-28.62
2378.51	43.23	PK	144	1.5	H	-13.14	30.09	74.00	-43.91
2378.51	36.65	Ave	144	1.5	H	-13.14	23.51	54.00	-30.49
2491.79	42.60	PK	349	1.8	V	-13.08	29.52	74.00	-44.48
2491.79	37.07	Ave	349	1.8	V	-13.08	23.99	54.00	-30.01

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
				Height (m)	Polar (H/V)				
GFSK High Channel 2480MHz									
175.62	38.13	QP	163	1.3	H	-13.35	24.78	46.00	-21.22
175.62	38.46	QP	322	1.7	V	-13.35	25.11	46.00	-20.89
4960.00	42.38	PK	275	1.6	V	-0.24	42.14	74.00	-31.86
4960.00	44.12	Ave	275	1.6	V	-0.24	43.88	54.00	-10.12
7440.00	46.05	PK	187	1.3	H	2.84	48.89	74.00	-25.11
7440.00	36.29	Ave	187	1.3	H	2.84	39.13	54.00	-14.87
2318.42	46.93	PK	345	1.0	V	-13.19	33.74	74.00	-40.26
2318.42	39.49	Ave	345	1.0	V	-13.19	26.30	54.00	-27.70
2362.98	44.08	PK	145	1.2	H	-13.14	30.94	74.00	-43.06
2362.98	38.13	Ave	145	1.2	H	-13.14	24.99	54.00	-29.01
2485.70	44.95	PK	26	1.0	V	-13.08	31.87	74.00	-42.13
2485.70	38.09	Ave	26	1.0	V	-13.08	25.01	54.00	-28.99

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to \_ 1.5 times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW \_ [3 × RBW].
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

## 10.2 Test Result

### BLE (1M)


9KHz – 30MHz

Mode: channel 0

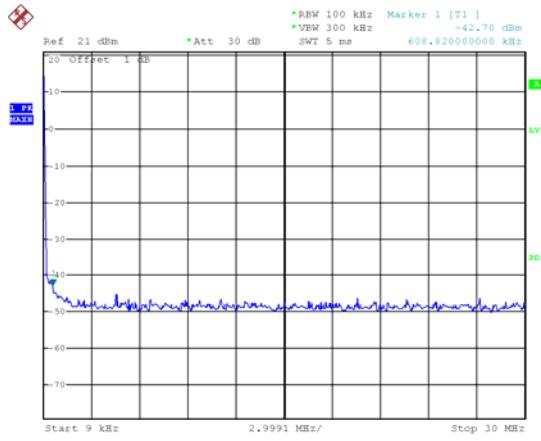


Date: 20.SEP.2022 09:52:55

Mode: channel 19

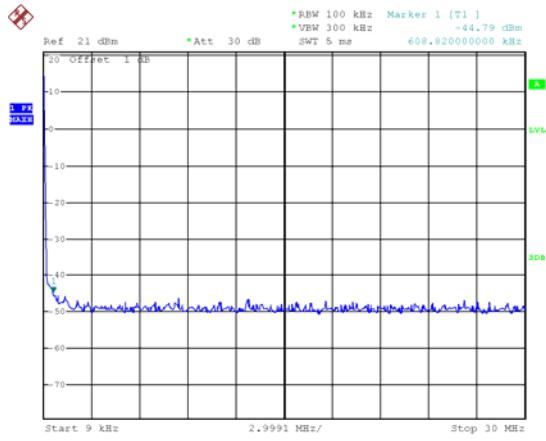

Date: 20.SEP.2022 09:55:31


Mode: channel 39

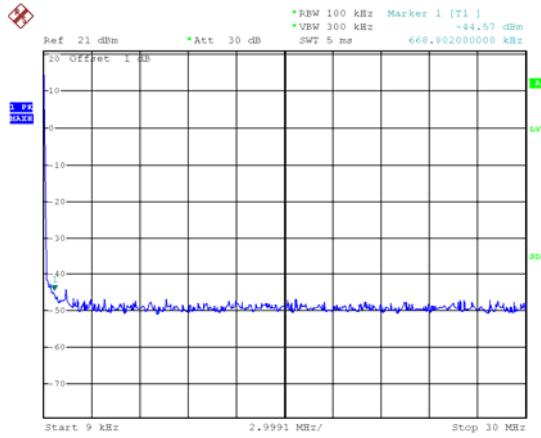


Date: 20.SEP.2022 09:54:50

**Above 30MHz**

Mode: channel 0

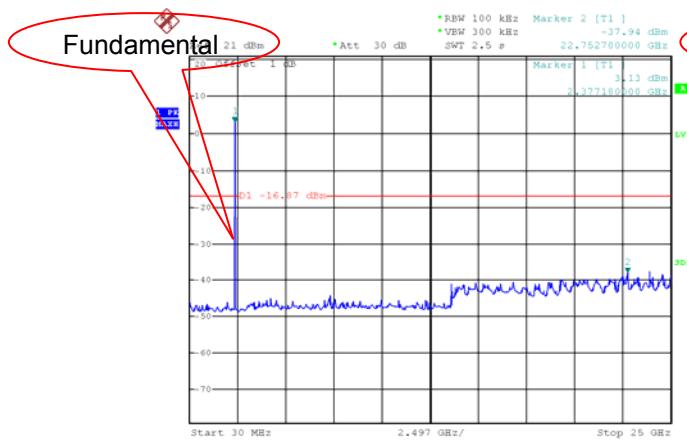


Mode: channel 19

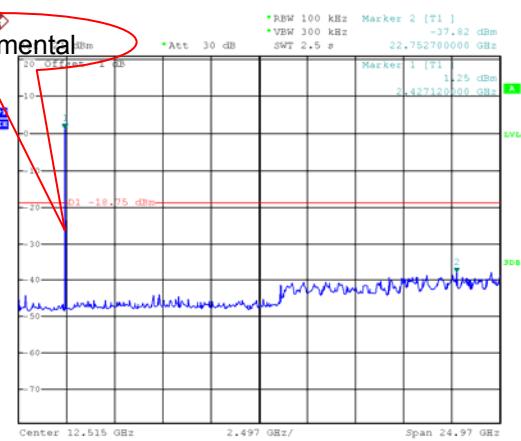

Date: 20.SEP.2022 09:57:48

Date: 20.SEP.2022 09:56:43


Mode: channel 39

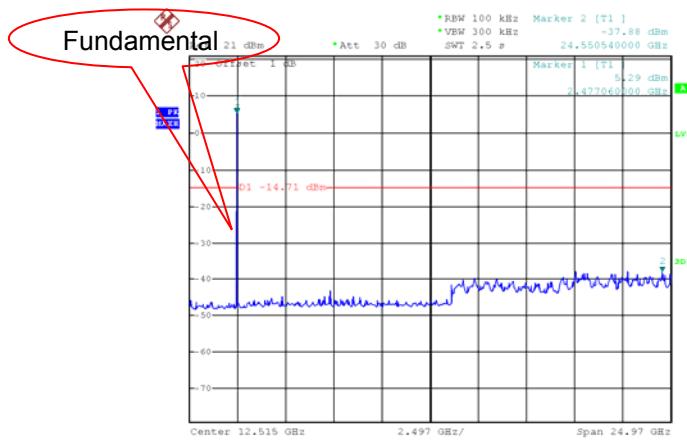


Date: 20.SEP.2022 09:54:28

**BLE (2M)**  
**9KHz – 30MHz**

Mode: channel 0

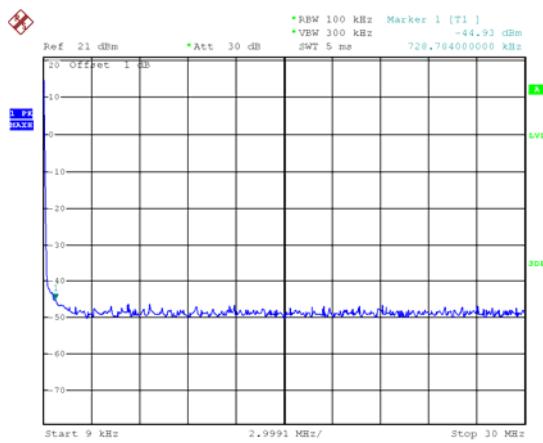


Mode: channel 19

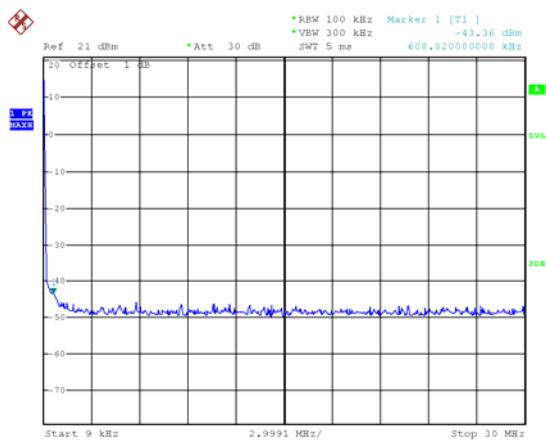

Date: 23.SEP.2022 15:06:32

Date: 23.SEP.2022 15:08:38


Mode: channel 39

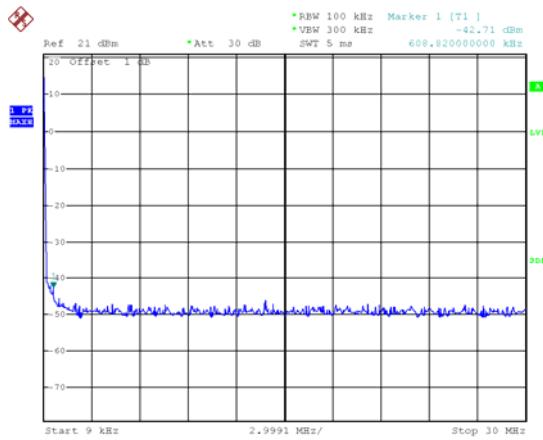


Date: 23.SEP.2022 15:10:57

**Above 30MHz**

Mode: channel 0

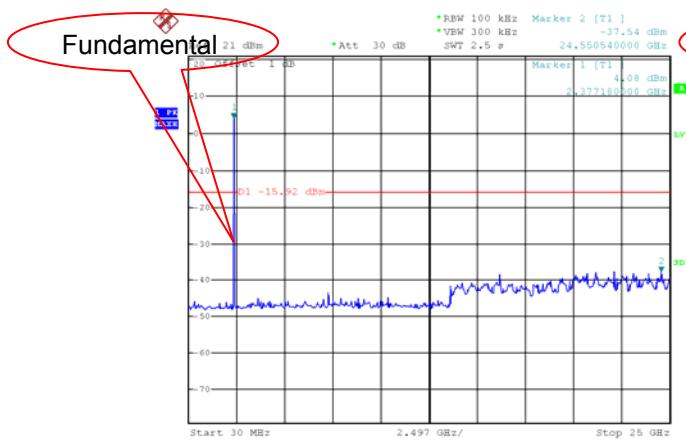


Mode: channel 19

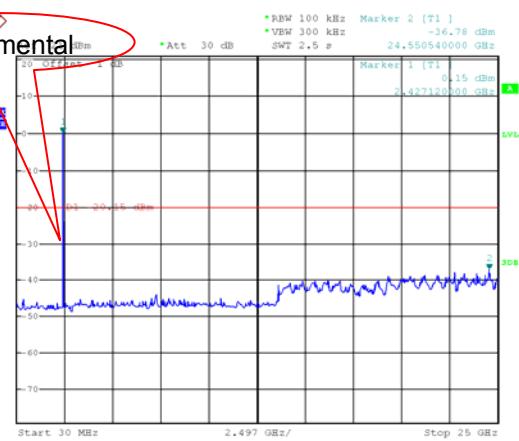

Date: 23.SEP.2022 15:07:51

Date: 23.SEP.2022 15:10:23

Mode: channel 39

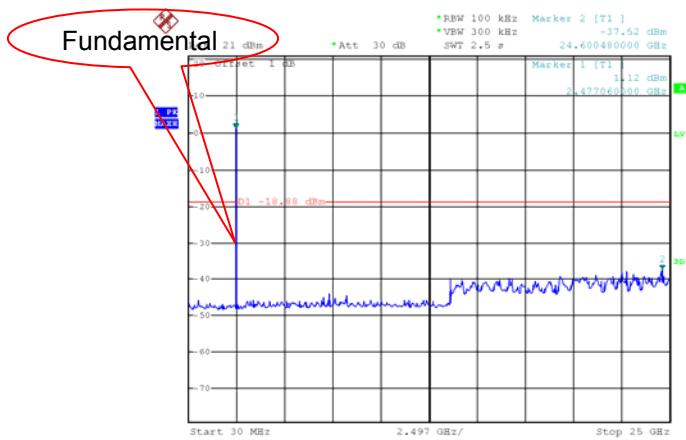

Date: 23.SEP.2022 15:12:11

## 11 Band Edge Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


### 11.1 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

## 11.2 Test Result

Test result plots shown as follows:


BLE: Band edge-left side

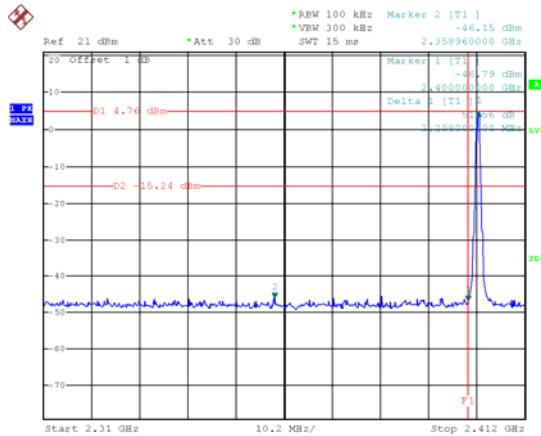

Date: 19.SEP.2022 18:46:18


BLE (1M)

BLE: Band edge-right side

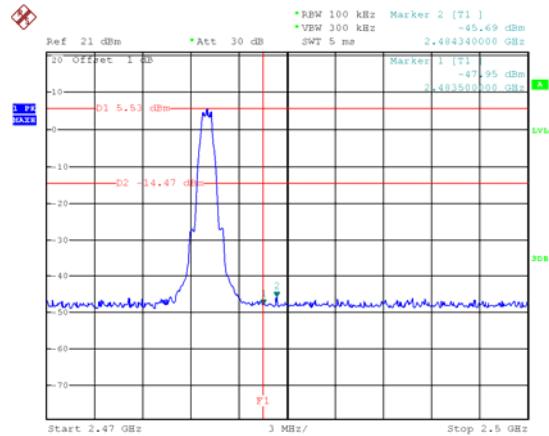

Date: 20.SEP.2022 09:51:56


BLE: Band edge-left side

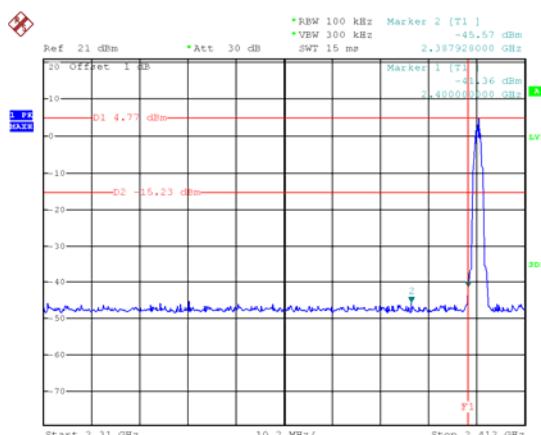

Date: 23.SEP.2022 15:03:04

BLE (2M)

BLE: Band edge-right side

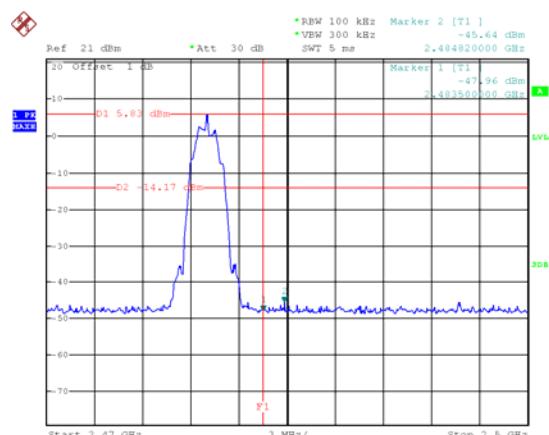

Date: 23.SEP.2022 15:05:14

## 12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247  
 Test Method: ANSI C63.10:2013  
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019  
 Test Limit:  
 §15.247(a)(2)  
 Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.  
 Test Mode: Transmitting

### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 12.2 Test Result:


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
BLE(1M)	Channel 0	0.678	1.038
	Channel 19	0.678	1.038
	Channel 39	0.666	1.038

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
BLE(2M)	Channel 0	1.164	2.040
	Channel 19	1.164	2.040
	Channel 39	1.164	2.040

Note: please refer to next page for test plot.


**Test result plot:****6 dB Bandwidth****BLE (1M)**

Mode: TX GFSK channel 0

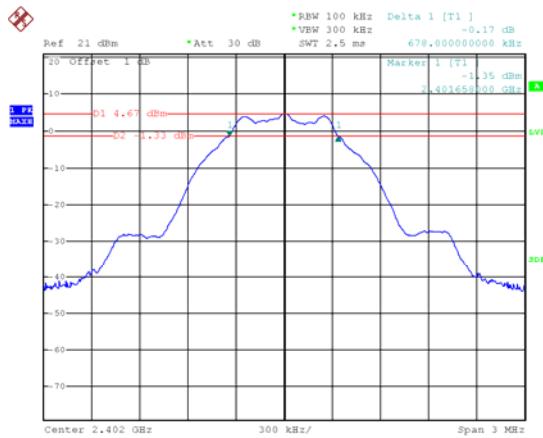


Date: 19.SEP.2022 18:40:36

Mode: TX GFSK channel 19

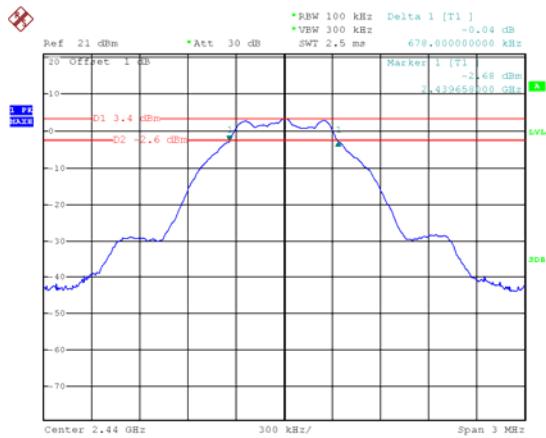

Date: 19.SEP.2022 18:39:29


Mode: TX GFSK channel 39

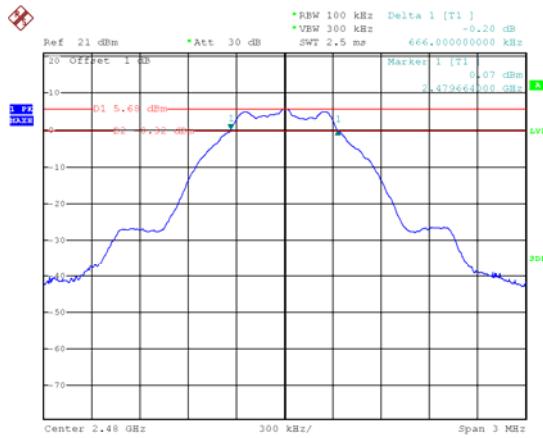

Date: 19.SEP.2022 18:38:16


**BLE (2)**

Mode: TX GFSK channel 0

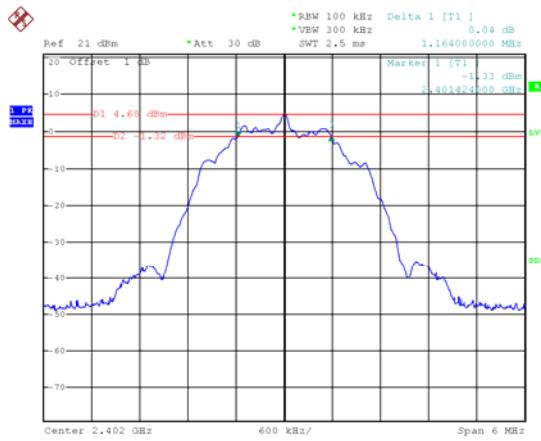


Date: 23.SEP.2022 14:43:27

Mode: TX GFSK channel 19

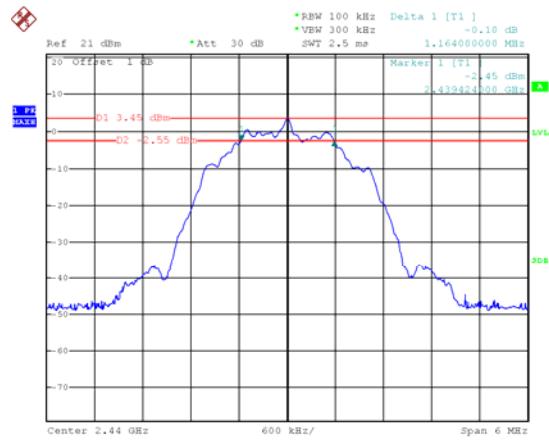

Date: 23.SEP.2022 14:45:09


Mode: TX GFSK channel 39

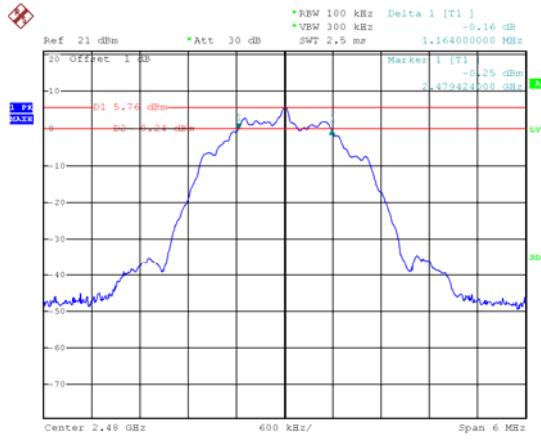

Date: 23.SEP.2022 14:46:27

## 99% Bandwidth


Mode: TX GFSK channel 0

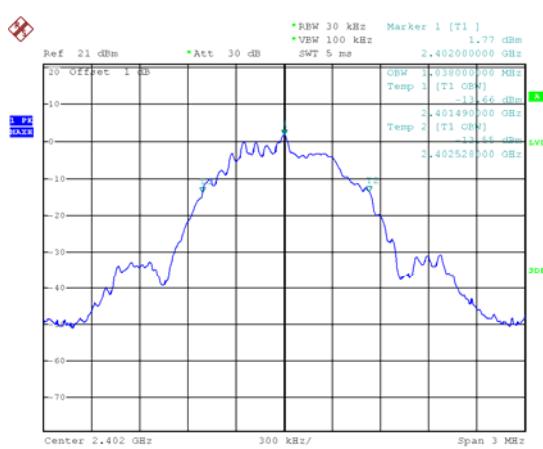

Date: 19.SEP.2022 18:41:42


BLE (1M)

Mode: TX GFSK channel 19

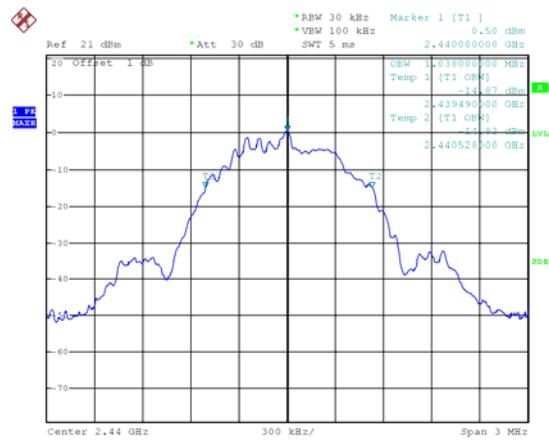

Date: 19.SEP.2022 18:42:14


Mode: TX GFSK channel 39

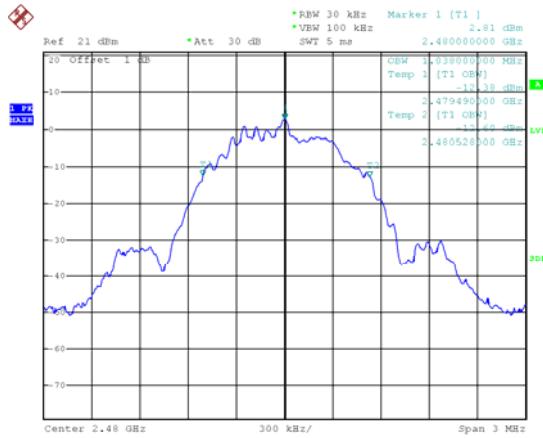

Date: 19.SEP.2022 18:42:45


**BLE (2M)**

Mode: TX GFSK channel 0

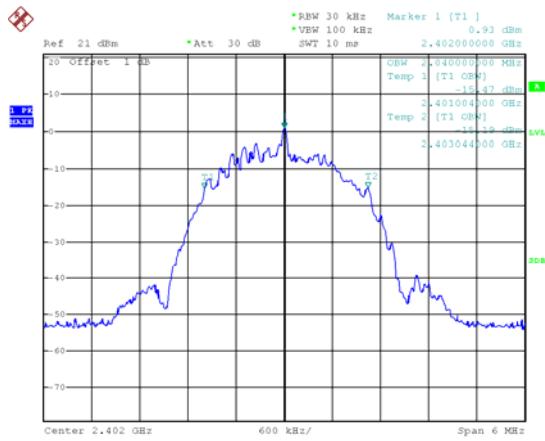


Date: 23.SEP.2022 14:49:05

Mode: TX GFSK channel 19

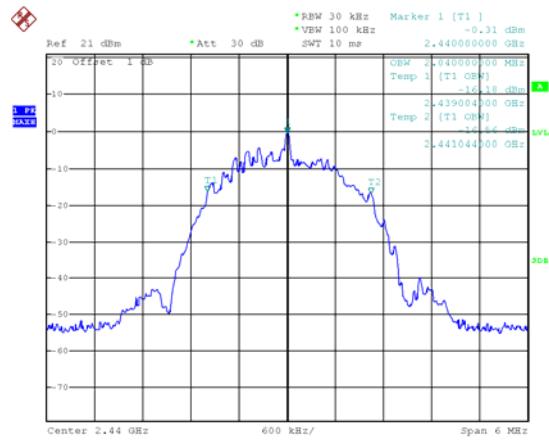

Date: 23.SEP.2022 14:50:06

Mode: TX GFSK channel 39

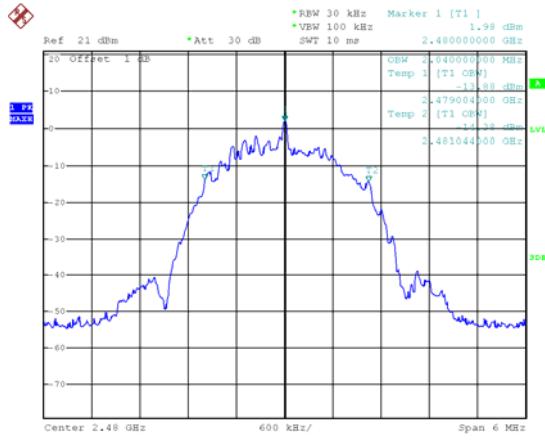

Date: 23.SEP.2022 14:50:45

## 13 Maximum Peak Output Power

Test Requirement: FCC 47CFR Part 15 Section 15.247  
 Test Method: ANSI C63.10:2013  
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019  
 Test Limit: §15.247(b)  
     The maximum peak conducted output power of the intentional radiator shall not exceed 1W.  
 Test Mode: Transmitting

### 13.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

#### **Section 8.3.1.1 RBW ≥ DTS bandwidth**

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

#### **Section 8.3.1.2 Integrated band power method**

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.

Subclause 11.9.2 of ANSI C63.10 is applicable.


### 13.2 Test Result:

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
BLE(1M)	Low-2402	4.94	1W/30dBm
	Middle-2440	3.72	1W/30dBm
	High-2480	<b>5.98</b>	1W/30dBm

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
BLE(2M)	Low-2402	4.98	1W/30dBm
	Middle-2440	3.98	1W/30dBm
	High-2480	<b>5.84</b>	1W/30dBm


**Test Plot****BLE(1M)**

Mode: TX GFSK channel 0

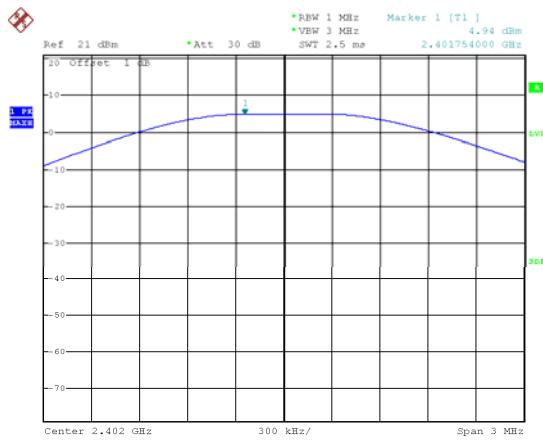


Date: 19.SEP.2022 18:34:45

Mode: TX GFSK channel 19

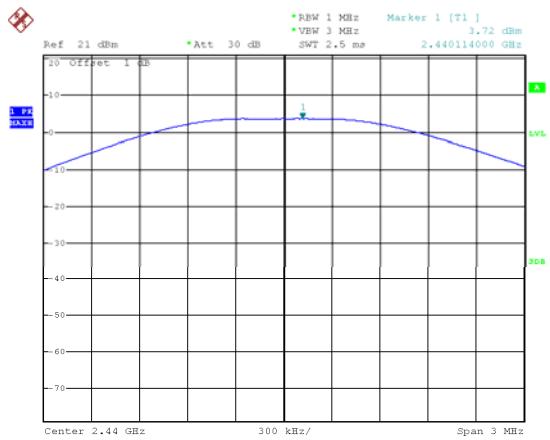

Date: 19.SEP.2022 18:36:02


Mode: TX GFSK channel 39

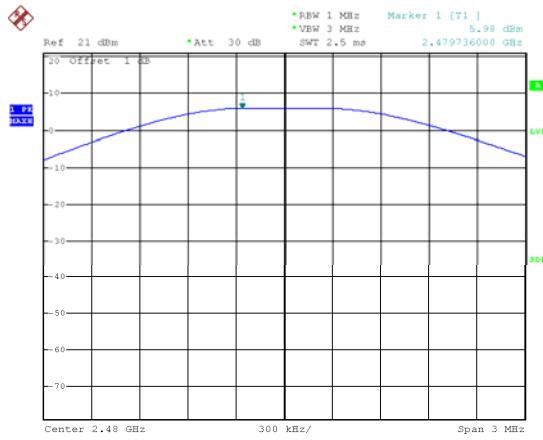

Date: 19.SEP.2022 18:36:39


**BLE(2M)**

Mode: TX GFSK channel 0

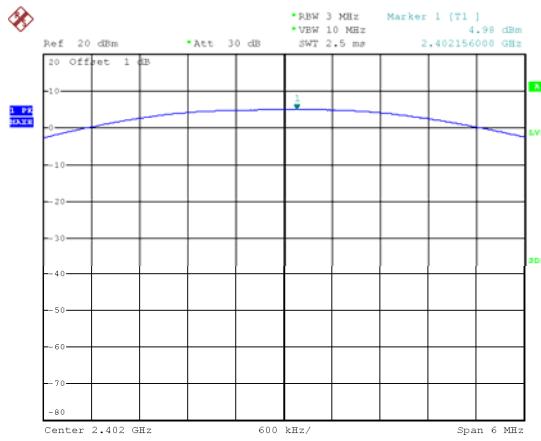


Date: 27.SEP.2022 10:27:27

Mode: TX GFSK channel 19

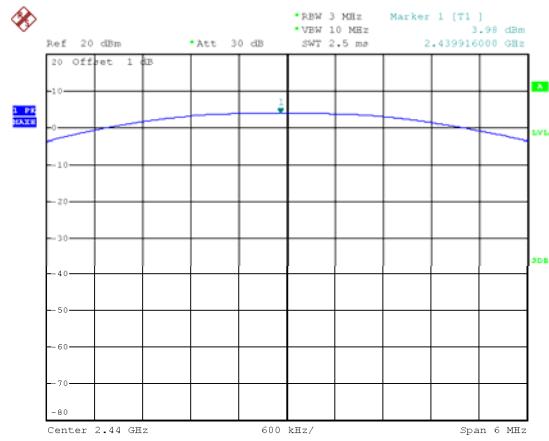

Date: 27.SEP.2022 10:27:01

Mode: TX GFSK channel 39

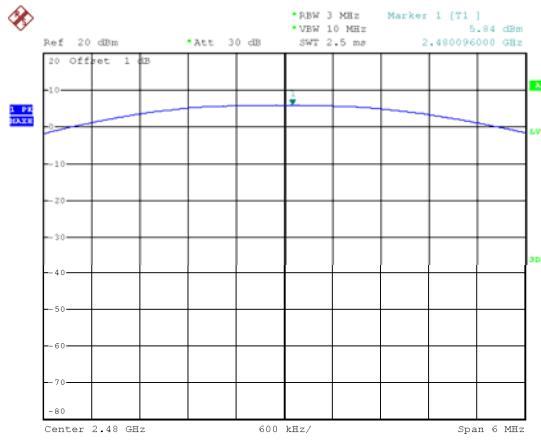

Date: 27.SEP.2022 10:26:36

## 14 Power Spectral density

Test Requirement: FCC 47CFR Part 15 Section 15.247  
 Test Method: ANSI C63.10:2013  
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019  
 Test Limit:  
 §15.247(e)  
 For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.  
 Test Mode: Transmitting

### 14.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

**Subclause 11.10 of ANSI C63.10 is applicable.**

Choose the test procedure according to the product type

#### Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

#### AVG PSD

Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.


### 14.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
BLE(1M)	Low-2402	-10.17	8dBm per 3kHz
	Middle-2440	-11.40	8dBm per 3kHz
	High-2480	-9.14	8dBm per 3kHz

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
BLE(2M)	Low-2402	-13.69	8dBm per 3kHz
	Middle-2440	-14.88	8dBm per 3kHz
	High-2480	-12.55	8dBm per 3kHz


**Test Plot****BLE(1M)**

Mode: TX GFSK channel 0

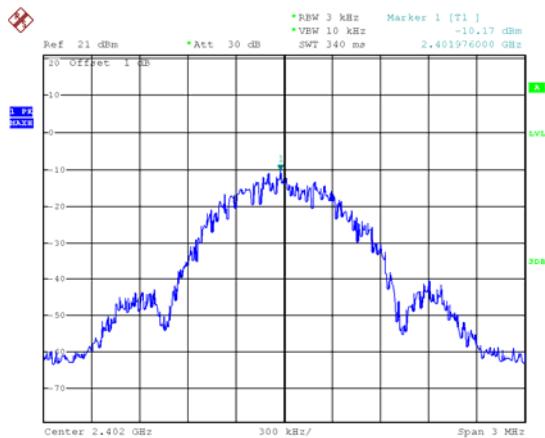


Date: 19.SEP.2022 18:44:45

Mode: TX GFSK channel 19

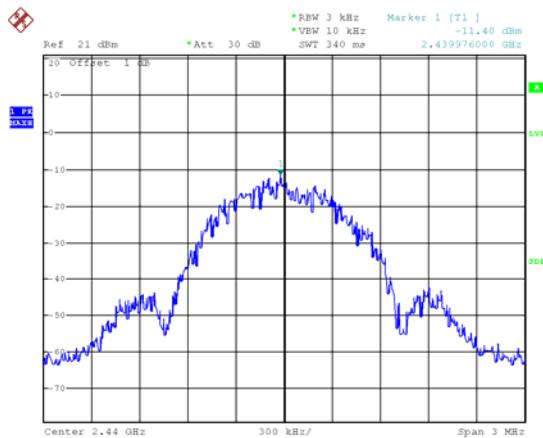

Date: 19.SEP.2022 18:44:13


Mode: TX GFSK channel 39

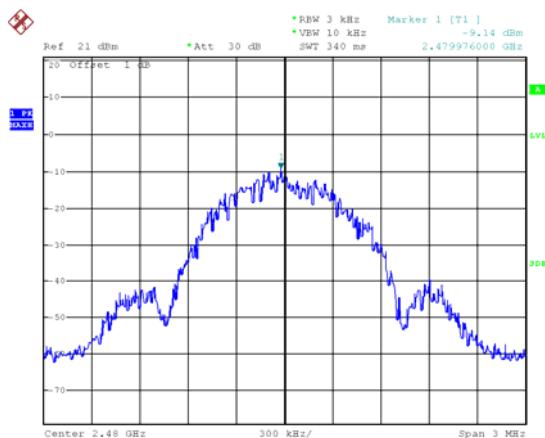

Date: 19.SEP.2022 18:43:47


**BLE(2M)**

Mode: TX GFSK channel 0

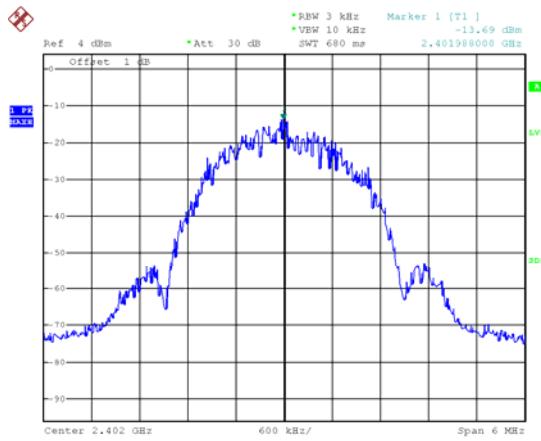


Date: 23.SEP.2022 14:53:43

Mode: TX GFSK channel 19

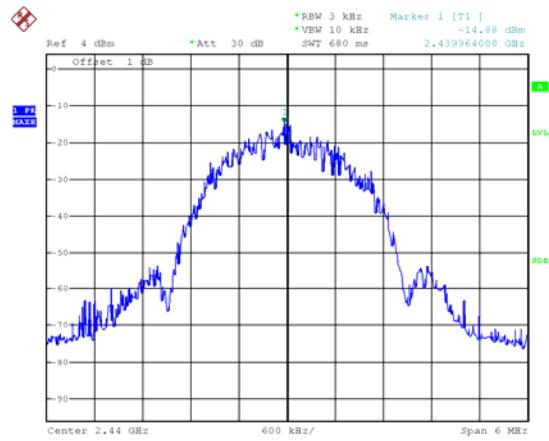

Date: 23.SEP.2022 14:55:10

Mode: TX GFSK channel 39

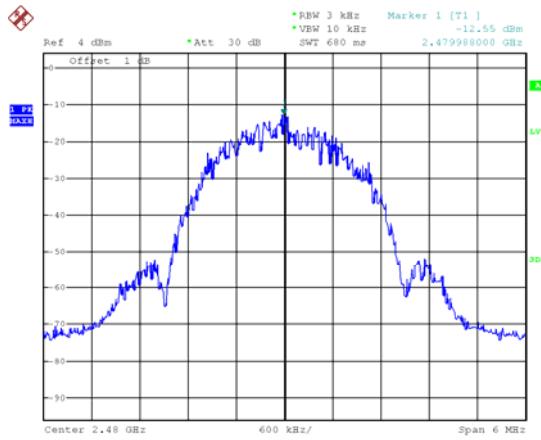

Date: 23.SEP.2022 14:57:19

## 15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an external antenna (with RP-SMA connector) and antenna gain is 2.2dBi fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

## 16 RF Exposure

Remark: Please refer to RF Exposure report: WTF22D09183192W005.

## 17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix- E120-FCWP -Photos.

=====End of Report=====