

SAR Evaluation Report

Applicant : ASUSTeK COMPUTER INC.
Applicant Address : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Product Name : LTE Module
Trade Name : FIBOCOM
Model Number : FM101-GL
Applicable Standard : 47 CFR §2.1093
Received Date : Dec. 25, 2023
Test Period : Jan. 10, 2024 ~ Jan. 23, 2024
Issued Date : Feb. 22, 2024

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Approved By :



Table of Contents

1. General Information	4
1.1 Reference Testing Standards	4
1.2 Testing Location	5
2. Description of Device Under Test (DUT)	6
3. Summary of Maximum Value	9
4. Introduction	10
4.1 SAR Definition	10
4.2 RF Exposure Limits	10
5. System Description	11
5.1 SAR Measurement System	11
5.2 Tissue Simulating Liquids (TSL)	15
6. System Verification	17
6.1 SAR System Verification	17
7. Test Equipment List	18
7.1 SAR Test Equipment List	18
8. Measurement Procedure	19
8.1 SAR Measurement Procedure	19
9. Measurement Uncertainty	22
9.1 SAR Measurement Uncertainty	22
10. Measurement Evaluation	25
10.1 Positioning of the DUT in Relation to the Phantom	25
10.2 SAR Testing Consideration	26
10.3 Conducted Power Measurements	32
10.4 Antenna location	32
10.5 Test Results	33
10.6 Measurement Variability	43
10.7 Simultaneous Transmission Evaluation	44
10.8 Requirements on the Uncertainty Evaluation	47
11. Conclusion	47

Appendix A - Conducted Power Measurements

Appendix B - System Performance Check Plots

Appendix C - Highest Measurement Plots

Appendix D - Calibration Certificates

Appendix E - Test Setup Photographs

Revision History

<i>Rev.</i>	<i>Issued Date</i>	<i>Description</i>	<i>Revised by</i>
00	Feb. 22, 2024	Initial Issue	Rowan Hsieh

1. General Information

1.1 Reference Testing Standards

Standard	Description	Version
47 CFR §2.1093	Radiofrequency radiation exposure evaluation: portable devices	-
IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)	2020
IEEE 1528	Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	2013
IEEE C95.1	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz	1992
KDB 248227 D01	SAR guidance for IEEE 802.11 (Wi-Fi) transmitters	v02r02
KDB 447498 D04	RF exposure procedures and equipment authorization policies for mobile and portable devices	v01
KDB 616217 D04	SAR evaluation considerations for laptop, notebook and tablet computers	v01r02
KDB 865664 D01	SAR measurement requirement for 100 MHz to 6 GHz	v01r04
KDB 865664 D02	RF exposure compliance reporting and documentation considerations	v01r02
KDB 941225 D01	3G SAR measurement procedures	v03r01
KDB 941225 D05	SAR evaluation considerations for LTE devices	v02r05
KDB 941225 D05A	REL. 10 LTE SAR test guidance and KDB inquiries	v01r02

1.2 Testing Location

Test Facilities

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.
 Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan
 Website: <https://www.atl.com.tw>
 Telephone: +886-3-271-0188
 Fax: +886-3-271-0190
 E-mail: infoEETW@eurofins.com

Test Site Location

- No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan
- No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

Laboratory Accreditation

Location	TAF	FCC	ISED
No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan	Accreditation No.: 1330	Designation No.: TW0010	Company No.: 7381A CAB ID: TW1330
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan	Accreditation No.: 1330	Designation No.: TW0034	Company No.: 28922 CAB ID: TW1330

2. Description of Device Under Test (DUT)

Applicant	ASUSTeK COMPUTER INC. 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Product Name	LTE Module
Trade Name	FIBOCOM
Model Number	FM101-GL
FCC ID	MSQFM101GL
Host Information	Product Name: Notebook PC Trade Name: ASUS Model Name: B3402FV, B3402FVA All models are electrically identical, different model names are for marketing purpose.
Frequency Range	WCDMA Band II: 1852.4 - 1907.6 MHz WCDMA Band IV: 1712.4 - 1752.6 MHz WCDMA Band V: 826.4 - 846.6 MHz LTE Band 2: 1850.7 - 1909.3 MHz LTE Band 4: 1710.7 - 1754.3 MHz LTE Band 5: 824.7 - 848.3 MHz LTE Band 7: 2502.5 - 2567.5 MHz LTE Band 12: 699.7 - 715.3 MHz LTE Band 13: 779.5 - 784.5 MHz LTE Band 14: 790.5 - 795.5 MHz LTE Band 17: 706.5 - 713.5 MHz LTE Band 25: 1850.7 - 1914.3 MHz LTE Band 26: 814.7 - 848.3 MHz LTE Band 30: 2307.5 - 2312.5 MHz LTE Band 38: 2572.5 - 2617.5 MHz LTE Band 41: 2498.5 - 2687.5 MHz LTE Band 48: 3552.5 - 3697.5 MHz LTE Band 66: 1710.7 - 1779.3 MHz LTE Band 71: 665.5 - 695.5 MHz WLAN 2.4 GHz Band : 2412 - 2472 MHz WLAN 5.2 GHz Band : 5180 - 5240 MHz WLAN 5.3 GHz Band : 5260 - 5320 MHz WLAN 5.6 GHz Band : 5500 - 5720 MHz WLAN 5.8 GHz Band : 5745 - 5825 MHz WLAN 5.9 GHz Band : 5845 - 5885 MHz Bluetooth : 2402 - 2480 MHz
Supported Modulations	WCDMA: RMC 12.2Kbps / HSPA+
	LTE: QPSK / 16QAM
	WLAN 2.4 GHz : 802.11b / g / n / ax HT20 / HT40 / HE20 / HE40
	WLAN 5 GHz : 802.11a / n / ac / ax HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HE20 / HE40 / HE80 / HE160
	Bluetooth : BR / EDR / LE
Device Category	Portable
Module Name	WWAN Module : FIBOCOM, FM101-GL WLAN Module : Intel, AX201NGW

Note:

1. The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Antenna list :

Antenna Source	ANT	Manufacturer	Part No. (Vendor)	Type	Frequency (MHz)	Max. Gain(dBi)	
						NB	PAD
1	Chain 0	INPAQ	WA-F-S6G2-02-007	PIFA Antenna	B2(1850-1910)	0.63	0.19
					B4(1710-1755)	1.25	0.24
					B5(824-849)	0.85	-1.56
					B7(2500-2570)	2.61	2.97
					B12(699-716)	0.87	-3.09
					B13(777-787)	1.58	-2.92
					B14(788-798)	1.37	-2.65
					B17(704-716)	0.66	-4.11
					B25(1850-1915)	0.63	0.19
					B26(814-849)	0.85	-1.04
					B30(2307-2313)	0.93	0.67
					B38(2570-2620)	2.68	2.95
					B41(2496-2690)	2.98	2.99
					B48(3550-3700)	0.99	0.79
	B66(1710-1780)	1.25	0.24				
	B71(663-698)	0.55	-2.05				
	Chain 1	INPAQ	WA-F-S6G1-02-026	PIFA Antenna	B2(1850-1910)	NA	NA
					B4(1710-1755)	NA	NA
					B5(824-849)	NA	NA
					B7(2500-2570)	NA	NA
					B12(699-716)	NA	NA
					B13(777-787)	NA	NA
					B14(788-798)	NA	NA
					B17(704-716)	NA	NA
					B25(1850-1915)	NA	NA
					B26(814-849)	NA	NA
B30(2307-2313)					NA	NA	
B38(2570-2620)					NA	NA	
B41(2496-2690)	NA	NA					
B48(3550-3700)	NA	NA					
B66(1710-1780)	NA	NA					
B71(663-698)	NA	NA					
Note : 1. The Chain 0 is connected to Main port / Chain 1 is connected to AUX port of module.							

Antenna Source	ANT	Manufacturer	ASUS Part No.	Type	Frequency	Max. Gain (dBi)	
						NB	PAD
1	Chain A	INPAQ	HQ20604969000	PIFA Antenna	2402 - 2480	0.91	0.41
					5150 - 5250	-0.06	-0.56
					5250 - 5350	-0.06	-0.56
					5470 - 5725	1.63	1.13
					5725 - 5850	1.55	1.05
					5850 - 5895	1.71	-1.81
	Chain B	INPAQ	HQ20604968000	PIFA Antenna	2402 - 2480	2.07	1.57
					5150 - 5250	1.73	1.23
					5250 - 5350	1.73	1.23
					5470 - 5725	0.51	0.01
					5725 - 5850	0.51	0.01
					5850 - 5895	1.18	-0.22
2	Chain A	ZTX	HQ20604974000	PIFA Antenna	2402 - 2480	0.66	0.16
					5150 - 5250	-0.31	-0.81
					5250 - 5350	-0.31	-0.81
					5470 - 5725	1.38	0.88
					5725 - 5850	1.3	0.8
	Chain B	ZTX	HQ20604973000	PIFA Antenna	2402 - 2480	1.82	1.32
					5150 - 5250	1.48	0.98
					5250 - 5350	1.48	0.98
					5470 - 5725	0.26	-0.24
					5725 - 5850	0.26	-0.24
Note : 1. Antenna Source 1 (INPAQ antenna) and Antenna Source 2 (ZTX antenna) are the same type of antenna, only different in manufacturer. 2. The Chain A is connected to AUX port / Chain B is connected to Main port of module.							

3. Summary of Maximum Value

Highest Reported SAR			
Equipment Class	Mode	Exposure Condition	
		Laptop (Separation: 0 mm) SAR _{1g} (W/kg)	Tablet (Separation: 0 mm) SAR _{1g} (W/kg)
Licensed	WCDMA Band II	0.79	0.88
	WCDMA Band IV	0.88	0.89
	WCDMA Band V	0.84	0.53
	LTE Band 4	0.90	0.79
	LTE Band 5	0.88	0.63
	LTE Band 7	0.74	0.86
	LTE Band 12/17	0.87	0.63
	LTE Band 13	0.87	0.66
	LTE Band 14	0.82	0.73
	LTE Band 25/2	0.92	0.78
	LTE Band 26	0.90	0.69
	LTE Band 30	0.89	0.93
	LTE Band 38	0.60	0.92
	LTE Band 41	0.57	0.92
	LTE Band 48	0.58	0.95
LTE Band 66	0.87	0.88	
LTE Band 71	0.89	0.95	
DTS	WLAN 2.4 GHz	0.05	0.37
NII	WLAN 5 GHz	0.09	0.37
DSS / DTS	Bluetooth	0.01	0.06
Simultaneous SAR per KDB 690783		0.95	1.39
SAR Limits		1.60	1.60

Note:

1. The SAR limit for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
2. The test procedures, as described in American National Standards, Institute ANSI/IEEE C95.1 ANSI/IEEE C95.3 (For IC) were employed and they specify the maximum exposure limit of tissue for portable devices being used within 20 cm between user and DUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.
3. The evaluation requirements, as described in 47 CFR Part §1.310 were employed and they specify the maximum exposure limit for general population / uncontrolled exposure is 1.0 mW/cm² (equal to 10 W/m²) for 1.5 GHz to 100 GHz.
4. WLAN of the SAR value reference to the FCC ID MSQAX201NG of the report no. 2205FS18. The device evaluated Spot Check, please see 10.5 Test Results for more details.

4. Introduction

4.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

SAR measurement can be related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

SAR is expressed in units of Watts per kilogram (W/kg).

4.2 RF Exposure Limits

Table 1 Safety Limits for Controlled / Uncontrolled Environment Exposure

SAR Exposure Limit		
	General Population / Uncontrolled Exposure 1 (W/kg)	Occupational / Controlled Exposure 2 (W/kg)
Spatial Peak SAR 3 (head or Body)	1.60	8.00
Spatial Peak SAR 4 (Whole Body)	0.08	0.40
Spatial Peak SAR 5 (Hands / Feet / Ankle / Wrist)	4.00	20.00


Notes :

1. **General Population / Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.
2. **Occupational / Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).
3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
4. The Spatial Average value of the SAR averaged over the whole body.
5. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

5. System Description

5.1 SAR Measurement System

The DASY system in SAR Configuration is shown below:

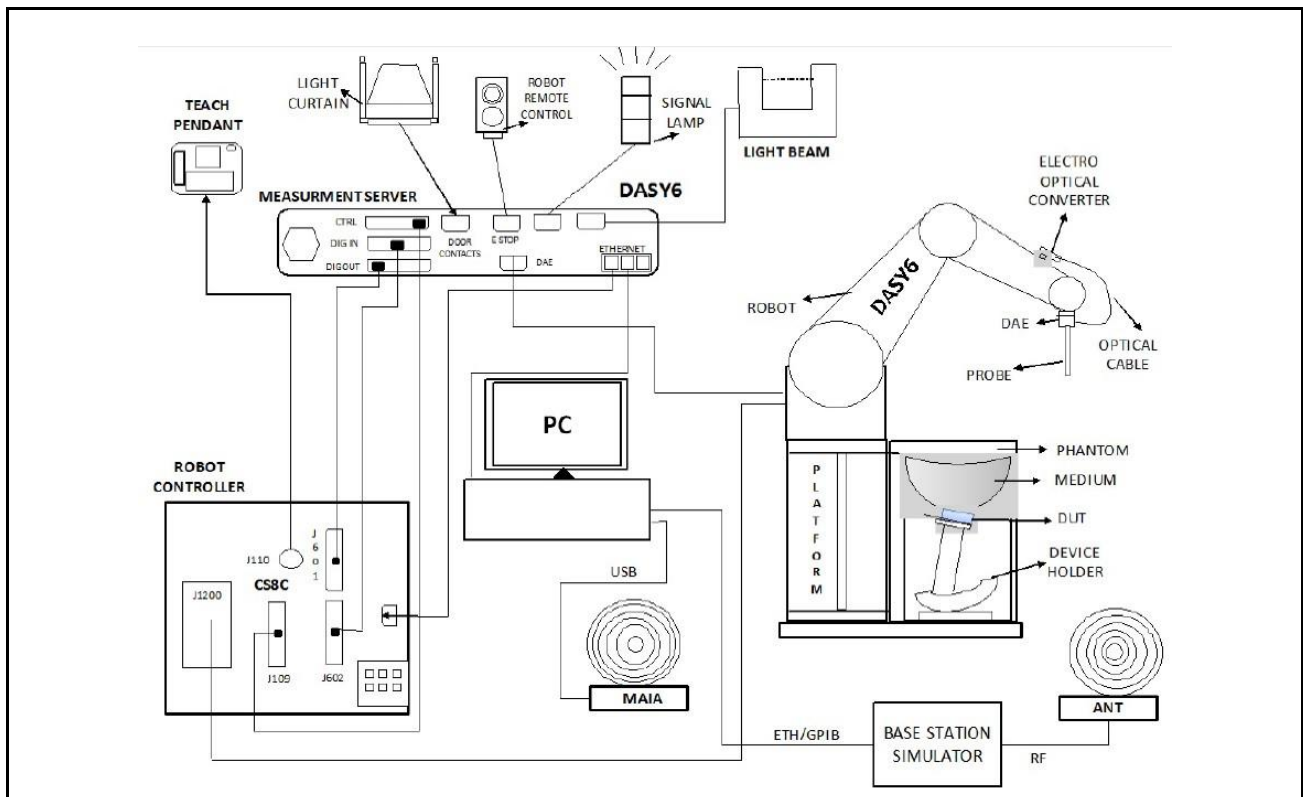

The system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. An isotropic field probe optimized and calibrated for the targeted measurements.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
7. A computer running Win7/Win8/Win10 professional operating system and DASY software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The phantom, the device holder and other accessories according to the targeted measurement.
10. Tissue simulating liquid mixed according to the given recipes.
11. The validation dipole has been calibrated within and the system performance check has been successful.

<DASY E-Field Probe System>

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	4 MHz to 10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Calibration	ISO/IEC 17025 calibration service available




EX3DV4 E-Field Probe




Probe setup on robot

<Data Acquisition Electronic (DAE) System>



Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

<Robot>

Positioner	Stäubli Unimation Corp.	
Robot Model	TX90XL	
Number of Axes	6	
Nominal Load	5 kg	
Reach	1450 mm	
Repeatability	\pm 0.035 mm	


<Device Holder>

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

	
<i>Device Holder 1</i>	<i>Device Holder 2</i>


<Oval Flat Phantom – ELI>

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528, IEC 62209-2 and IEC/IEEE 62209-1528. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm	
Filling Volume	Approx. 30 liters	
Dimensions	190×600×400 mm (H × L × W)	

<SAM Phantom>

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528, IEC 62209-1 and IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

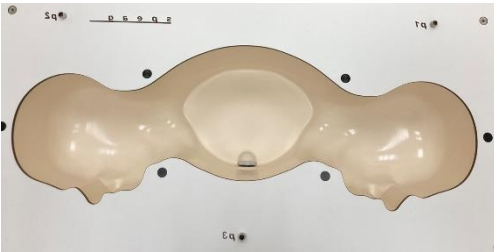Shell Thickness	2 ±0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	

5.2 Tissue Simulating Liquids (TSL)

<Tissue Dielectric Parameters in IEEE 1528-2013 and IEC/IEEE 62209-1528>


The following table incorporates the tissue dielectric parameters of head recommended by IEEE 1528-2013 and IEC/IEEE 62209-1528. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified are derived from the tissue dielectric parameters which computed by the 4-Cole-Cole equation according to the above-mentioned standards.

Table 2 Dielectric properties of the tissue-equivalent liquid material

Frequency (MHz)	Relative Permittivity (ϵ_r)	Conductivity (σ)
30	55.0	0.75
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800	40.0	1.40
1900	40.0	1.40
1950	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48
6500	34.5	6.07
7000	33.9	6.65
7500	33.3	7.24
8000	32.7	7.84
8500	32.1	8.46
9000	31.6	9.08
9500	31.0	9.71
10000	30.4	10.4

<Liquid Depth>

The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm to ensure that the probe is immersed sufficiently in the tissue medium.

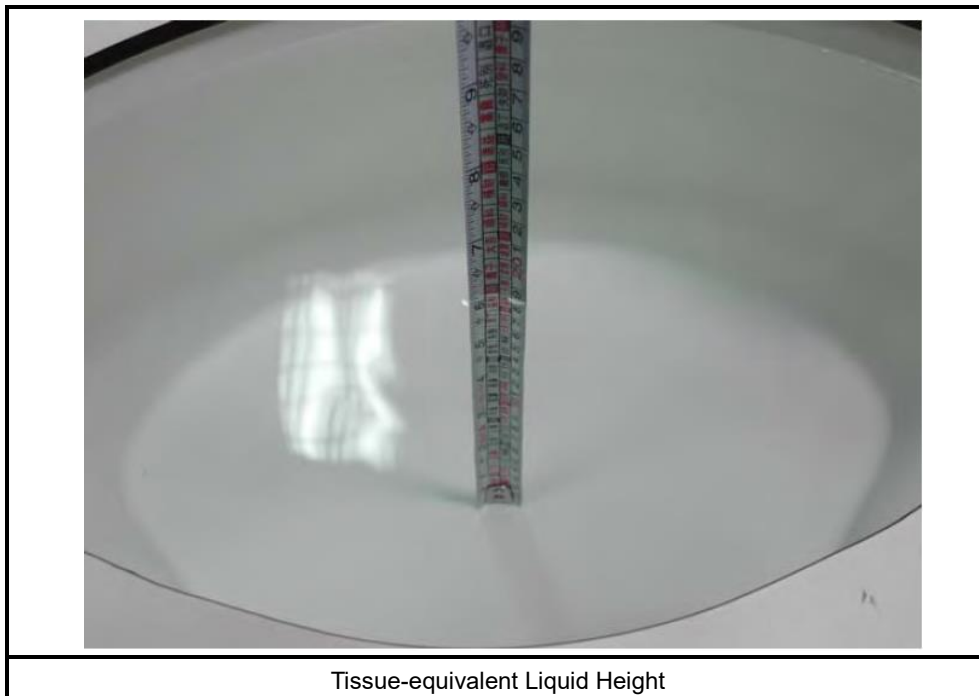

<Test Site Environment>

Item	Requirement	Actual
Temperature (°C)	18 - 25	21 - 23

<Liquid Check>



1. The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAKS 3.5 Probe Kit.
2. The SAR testing with IEC tissue parameters as an alternative option to Head and body parameters. The head TSL were applied to body SAR tests with restrictions below:

Frequency (MHz)	Ambient Temp. (°C)	Tissue Temp. (°C)	Permittivity (ϵ_r)	Conductivity (σ)	Targeted Permittivity (ϵ_r)	Targeted Conductivity (σ)	Deviation Permittivity (ϵ_r) (%)	Deviation Conductivity (σ) (%)	Date
750	23.2	22.4	43.606	0.843	41.9	0.89	4.07	-5.28	Jan. 20, 2024
750	23.3	22.5	43.597	0.845	41.9	0.89	4.05	-5.06	Jan. 21, 2024
900	23.2	22.3	43.115	0.901	41.5	0.97	3.89	-7.11	Jan. 22, 2024
900	23.4	22.5	43.009	0.897	41.5	0.97	3.64	-7.53	Jan. 23, 2024
1800	23.2	22.3	41.270	1.354	40	1.4	3.18	-3.29	Jan. 18, 2024
1800	23	22.1	41.236	1.363	40	1.4	3.09	-2.64	Jan. 19, 2024
1950	23.3	22.4	41.072	1.439	40	1.4	2.68	2.79	Jan. 17, 2024
2300	23.1	22.3	40.669	1.687	39.5	1.67	2.96	1.02	Jan. 16, 2024
2450	22.8	22.1	40.033	1.828	39.2	1.8	2.13	1.56	Jan. 10, 2024
2600	23.2	22.4	40.084	1.906	39	1.96	2.78	-2.76	Jan. 13, 2024
2600	23.5	22.6	39.981	1.892	39	1.96	2.52	-3.47	Jan. 14, 2024
2600	23.3	22.5	40.069	1.916	39	1.96	2.74	-2.24	Jan. 15, 2024
3600	23	22.2	39.089	2.849	37.8	3.02	3.41	-5.66	Jan. 12, 2024
5250	22.8	22.1	35.425	4.594	35.9	4.71	-1.32	-2.46	Jan. 10, 2024
5600	22.8	22.1	34.988	4.929	35.5	5.07	-1.44	-2.78	Jan. 10, 2024
5800	22.8	22.1	34.629	5.158	35.4	5.22	-2.18	-1.19	Jan. 10, 2024

6. System Verification

6.1 SAR System Verification

<Symmetric Dipoles for SAR System Verification>

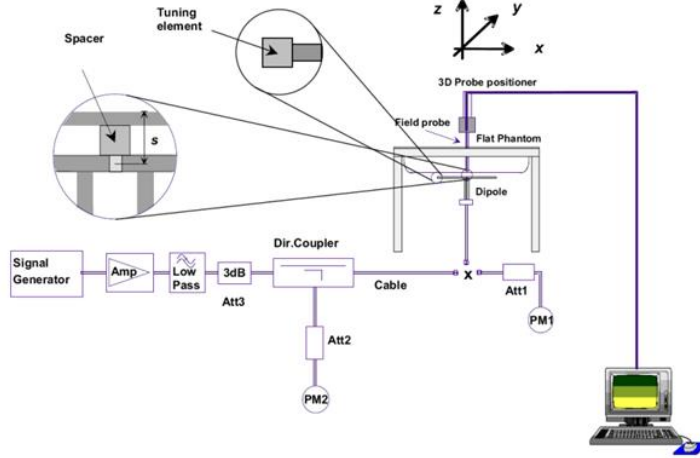Construction	Symmetrical dipole with $\lambda/4$ balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Return Loss	> 20 dB at specified verification position.
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request.
	
	
<div style="display: flex; justify-content: space-around;"> System Verification Setup Diagram Validation Kit </div>	

6.1.1 SAR Verification Summary

Prior to the assessment, the validation data compared to the original value provided by SPEAG should be within its specifications of $\pm 10\%$. The measured SAR will be normalized to 1 W input power. The result indicates the system check can meet the variation criterion and plots can be referred to Appendix B of this report.

Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dBm)
Jan. 20, 2024	750	8.53	0.422	8.42	-1.29	1004	7647	1253	17
Jan. 21, 2024	750	8.53	0.404	8.06	-5.50	1004	7647	1253	17
Jan. 22, 2024	900	11	0.522	10.42	-5.32	073	7647	1253	17
Jan. 23, 2024	900	11	0.524	10.46	-4.95	073	7647	1253	17
Jan. 18, 2024	1800	37.7	1.93	38.51	2.14	265	7647	1253	17
Jan. 19, 2024	1800	37.7	1.9	37.91	0.56	265	7647	1253	17
Jan. 17, 2024	1950	40.1	1.89	37.71	-5.96	1117	7647	1253	17
Jan. 16, 2024	2300	49.1	2.4	47.89	-2.47	1005	7647	1253	17
Jan. 10, 2024	2450	51.7	2.5	49.88	-3.52	712	3847	541	17
Jan. 13, 2024	2600	56.1	2.6	51.88	-7.53	1007	7647	1253	17
Jan. 14, 2024	2600	56.1	2.62	52.28	-6.82	1007	7647	1253	17
Jan. 15, 2024	2600	56.1	2.57	51.28	-8.59	1007	7647	1253	17
Jan. 12, 2024	3600	66.1	3.04	60.66	-8.24	1013	3847	541	17
Jan. 10, 2024	5250	79.7	4.02	80.21	0.64	1358	3847	541	17
Jan. 10, 2024	5600	81.8	3.92	78.21	-4.38	1358	3847	541	17
Jan. 10, 2024	5800	81.5	3.94	78.61	-3.54	1358	3847	541	17

7. Test Equipment List

7.1 SAR Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Cal. Date	Cal.Period
SPEAG	750 MHz System Validation Kit	D750V3	1004	Sep. 21, 2023	1 year
SPEAG	900 MHz System Validation Kit	D900V2	073	Jul. 10, 2023	1 year
SPEAG	1800 MHz System Validation Kit	D1800V2	265	Jul. 12, 2023	1 year
SPEAG	1950 MHz System Validation Kit	D1950V3	1117	Jul. 10, 2023	1 year
SPEAG	2300 MHz System Validation Kit	D2300V2	1005	Jul. 11, 2023	1 year
SPEAG	2450 MHz System Validation Kit	D2450V2	712	Jul. 11, 2023	1 year
SPEAG	2600 MHz System Validation Kit	D2600V2	1007	Sep. 21, 2023	1 year
SPEAG	3500 MHz System Validation Kit	D3500V2	1013	Sep. 20, 2023	1 year
SPEAG	5 GHz System Validation Kit	D5GHzV2	1358	Aug. 22, 2023	1 year
SPEAG	Dosimetric E-Field Probe	EX3DV4	7647	Apr. 26, 2023	1 year
SPEAG	Dosimetric E-Field Probe	EX3DV4	3847	Mar. 23, 2023	1 year
SPEAG	Data Acquisition Electronics	DAE4	1253	Dec. 07, 2023	1 year
SPEAG	Data Acquisition Electronics	DAE4	541	Mar. 22, 2023	1 year
R&S	Spectrum Analyzer	FSV3044	101255	Nov. 30, 2023	1 year
Anritsu	Radio Communication Analyzer	MT8820C	6201060962	Sep. 21, 2023	1 year
Anritsu	Radio Communication Analyzer	MT8821C	6272459653	Aug. 16, 2023	1 year
Anritsu	Radio Communication Analyzer	MT8000A	6272466193	Aug. 16, 2023	1 year
Anritsu	Radio Communication Analyzer	MT8000A	6272524702	Sep. 06, 2023	1 year
Agilent	Wideband Radio Communication Tester	E5515C	GB47020167	Sep. 15, 2023	1 year
SPEAG	Dielectric Probe Kit	DAKS_VNA R140	0010318	May. 22, 2023	1 year
SPEAG	Dielectric Probe Kit	DAKS-3.5	1101	May. 23, 2023	1 year
SPEAG	POWERSOURCE1	SE UMS 160 CA	4283	Aug. 16, 2023	1 year
HILA	Digital Thermometer	TM-905A	2202672	Aug. 02, 2023	1 year
Keysight	Spectrum Analyzer	N9010B	MY59071418	Mar. 20, 2023	1 year
Agilent	Power Sensor	8481H	3318A20779	May. 25, 2023	1 year
Agilent	Power Meter	EDM Series E4418B	GB40206143	May. 25, 2023	1 year
Testo	Thermometer	608-H1	83288313	Jun. 02, 2023	1 year

Testing Engineer: Ryan Chen

8. Measurement Procedure

8.1 SAR Measurement Procedure

The measurement procedures are as follows:

1. The DUT is installed engineering testing software that provides continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

8.1.1 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution.

The measure settings are referred to KDB 865664 D01v01r04 :

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	Graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

8.1.2 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1 g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.1.3 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5 %, the SAR will be retested.

8.1.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values form the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1 g and 10 g

9. Measurement Uncertainty

9.1 SAR Measurement Uncertainty

Measurement Uncertainty (0.3-6 GHz)								
Uncertainty Component	Tol.	Prob. Dist.	Div.	Ci - 1g	Ci - 10g	ui - 1g (%)	ui - 10g (%)	vi
Measurement System								
Probe calibration	12.0	N	2	1	1	6.0	6.0	∞
Probe Calibration Drift	1.7	R	1.732	1	1	1.0	1.0	∞
Other Probe+Electronic	0.7	N	1	1	1	0.7	0.7	∞
Probe Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
Broadband Signal	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Isotropy	7.6	R	1.732	1	1	4.4	4.4	∞
RF Ambient	1.8	N	1	1	1	1.8	1.8	∞
Probe Positioning	0.006 mm	N	1	0.14	0.14	0.1	0.1	∞
Data Processing	1.2	N	1	1	1	1.2	1.2	∞
Phantom and Device Errors								
Conductivity (meas.)DAK	2.5	N	1	0.78	0.71	2.0	1.8	∞
Conductivity (temp.)	3.3	R	1.732	0.78	0.71	1.5	1.4	∞
Phantom Shell Permittivity	14	R	1.732	0	0	0.0	0.0	∞
Distance DUT - TSL	2	N	1	2	2	4.0	4.0	∞
Device Positioning	1	N	1	1	1	1.0	1.0	∞
Device Holder	3.6	N	1	1	1	3.6	3.6	∞
DUT Modulation	2.4	R	1.732	1	1	1.4	1.4	∞
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0	∞
DUT Drift	2.5	N	1	1	1	2.5	2.5	∞
Correction to the SAR Results								
Deviation to Target	1.9	N	1	1	0.84	1.9	1.6	∞
SAR scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Combined Standard Uncertainty					RSS	11.0	10.9	
Expanded Uncertainty (95% confidence interval)					k =2	21.9	21.7	

Measurement Uncertainty (3-6 GHz)								
Uncertainty Component	Tol.	Prob. Dist.	Div.	Ci - 1g	Ci - 10g	ui - 1g (%)	ui - 10g (%)	vi
Measurement System								
Probe Calibration	13.1	N	2	1	1	6.55	6.55	∞
Probe Calibration Drift	1.7	R	1.732	1	1	1.0	1.0	∞
Other Probe+Electronic	1.2	N	1	1	1	1.2	1.2	∞
Probe Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
Broadband Signal	2.6	R	1.732	1	1	1.5	1.5	∞
Probe Isotropy	7.6	R	1.732	1	1	4.4	4.4	∞
RF Ambient	1.8	N	1	1	1	1.8	1.8	∞
Probe Positioning	0.005 mm	N	1	0.29	0.29	0.15	0.15	∞
Data Processing	2.3	N	1	1	1	2.3	2.3	∞
Phantom and Device Errors								
Conductivity (meas.)DAK	2.5	N	1	0.78	0.71	2.0	1.8	∞
Conductivity (temp.)	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Phantom Shell Permittivity	14	R	1.732	0.25	0.25	2.0	2.0	∞
Distance DUT - TSL	2	N	1	2	2	4.0	4.0	∞
Device Positioning	1	N	1	1	1	1.0	1.0	∞
Device Holder	3.6	N	1	1	1	3.6	3.6	∞
DUT Modulation	2.4	R	1.732	1	1	1.4	1.4	∞
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0	∞
DUT Drift	2.5	N	1	1	1	2.5	2.5	∞
Correction to the SAR Results								
Deviation to Target	1.9	N	1	1	0.84	1.9	1.6	∞
SAR scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Combined Standard Uncertainty					RSS	11.6	11.6	
Expanded Uncertainty (95% confidence interval)					k =2	23.2	23.0	

Measurement Uncertainty (6-10 GHz)								
Uncertainty Component	Tol.	Prob. Dist.	Div.	Ci - 1g	Ci - 10g	ui - 1g (%)	ui - 10g (%)	vi
Measurement System								
Probe calibration	18.6	N	2	1	1	9.3	9.3	∞
Probe Calibration Drift	1.7	R	1.732	1	1	1.0	1.0	∞
Other Probe+Electronic	2.4	N	1	1	1	2.4	2.4	∞
Probe Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
Broadband Signal	2.8	R	1.732	1	1	1.6	1.6	∞
Probe Isotropy	7.6	R	1.732	1	1	4.4	4.4	∞
RF Ambient Condition	1.8	N	1	1	1	1.8	1.8	∞
Probe Positioning	0.005mm	N	1	0.50	0.50	0.25	0.25	∞
Data Processing	3.5	N	1	1	1	3.5	3.5	∞
Phantom and Device Errors								
Conductivity (meas.)DAK	2.5	N	1	0.78	0.71	2.0	1.8	∞
Conductivity (temp.)	2.4	R	1.732	0.78	0.71	1.1	1.0	∞
Phantom Shell Permittivity	14.0	R	1.732	0.5	0.5	4.0	4.0	∞
Distance DUT - TSL	2	N	1	2	2	4.0	4.0	∞
Device Positioning	1	N	1	1	1	1.0	1.0	∞
Device Holder	3.6	N	1	1	1	3.6	3.6	∞
DUT Modulation	2.4	R	1.732	1	1	1.4	1.4	∞
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0	∞
DUT Drift	2.5	N	1	1	1	2.5	2.5	∞
Correction to the SAR Results								
Deviation to Target	1.9	N	1	1	0.84	1.9	1.6	∞
SAR scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Combined Standard Uncertainty					RSS	14.2	14.1	
Expanded Uncertainty (95% confidence interval)					k =2	28.4	28.3	

10. Measurement Evaluation

10.1 Positioning of the DUT in Relation to the Phantom

The following measurement procedure shall be according to RSS-102 Supplementary procedures (SPR-001):

Unless the side(s)/edge(s) of the laptop type computer (laptop mode/tablet mode) containing the built-in antenna(s) was already tested against the flat phantom.

Industry Canada requires SAR measurements to be performed with the side(s)/edge(s) of the display screen containing the built-in antenna(s) pointing towards the flat phantom.

1. If the integrated antenna(s) are located in the back side of the display screen, the back side shall be facing towards the flat phantom at a distance not exceeding 25 mm.
2. If the integrated antenna(s) are installed along the edge(s) of the display screen, the edge(s) shall be facing towards the flat phantom at a distance not exceeding 25 mm.

According to KDB 616217 D04:

1. When antennas are incorporated in the keyboard section of a laptop computer, SAR is required for the bottom surface of the keyboard. Provided tablet use conditions are not supported by the laptop computer, SAR tests for bystander exposure from the edges of the keyboard.
2. Some 2-in-1 tablets may operate with the display folded on top of the keyboard. Most recent tablets are designed with an interactive display that may not require a physical keyboard. Both configurations are used in similar manners and require SAR evaluation for the back surface and edges of the tablet. For keyboards that can be unfolded like a laptop, the procedures for laptop platform should also be applied.

According to KDB 616217 D04:

1. SAR evaluation is required for back (bottom) surface and side edges of the devices.
2. Some 2-in-1 tablets may operate with the display folded on top of the keyboard. Most recent tablets are designed with an interactive display that may not require a physical keyboard. Both configurations are used in similar manners and require SAR evaluation for the back surface and edges of the tablet. For keyboards that can be unfolded like a laptop, SAR evaluation is required for the bottom surface of the keyboard.
3. SAR evaluation for the front surface of tablet display screens are generally not necessary, except for tablets that are designed to require continuous operations with the hand(s) next to the antenna.
4. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

10.2 SAR Testing Consideration

10.2.1 SAR Testing with GSM & UMTS

<KDB 941225 D01 General Requirement>

According to 3G SAR test reduction procedure in KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

GSM SAR Measurement

The 3G SAR test reduction procedure is applied to EDGE (8-PSK) with GPRS/EDGE (GMSK) as the primary mode in conjunction with the test reduction procedure in KDB Publication 447498 D01.

WCDMA SAR Measurement

Head SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

Body-Worn Accessory SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Rel. 5 HSDPA SAR Measurement

When voice transmission in next to the ear head exposure conditions is according to the "Head SAR" part in "WCDMA SAR Measurement" of this document. SAR for body exposure configurations is according to the "Body-Worn Accessory SAR" part in "WCDMA SAR Measurement" of this document. The 3G SAR test reduction procedure is applied to HSDPA body SAR with 12.2 kbps RMC as the primary mode. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA.

Rel. 6 HSPA (HSDPA/HSUPA) SAR Measurement

When voice transmission in next to the ear head exposure conditions is according to the "Head SAR" part in "WCDMA SAR Measurement" of this document. SAR for body exposure configurations is according to the the "Body-Worn Accessory SAR" part in "WCDMA SAR Measurement" of this document. The 3G SAR test reduction procedure is applied to HSPA body SAR with 12.2 kbps RMC as the primary mode. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

Rel. 8 DC-HSDPA SAR Measurement

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode.

10.2.2 SAR Testing with LTE

<KDB 941225 D05 General requirements>

1. Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
3. When the highest reported SAR for 1 RB and 50% RB allocation are > 0.8 W/kg, SAR is measured for the highest output power channel in 100%RB.
4. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
5. The procedures required for 1 RB allocation are applied to measure the SAR for QPSK with 50% RB allocation.
6. For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
7. SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
8. According to 5.3 of KDB 941225 D05, that about the test reduction for other channel bandwidth, if the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg, then SAR need to test.
9. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M, and L channels may not fully apply.
10. According to Apr. 2015 TCB workshop, for device supports overlapping bands, and both bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range. This device supports the following bands with overlapping transmission frequency ranges.:
 LTE band 2 and band 25, and LTE Band 2 is covered by LTE Band 25.
 LTE band 12 and band 17, and LTE Band 17 is covered by LTE Band 12.

10.2.3 Proximity Sensor Consideration

10.2.3.1 Proximity Sensor Evaluation

The device supports WWAN, WLAN, and Bluetooth capabilities. It is designed with a proximity sensor which can trigger/not trigger power reduction for WCDMA and LTE on Bottom of Laptop, Right Side of Laptop, Rear Face and Right Side of DUT for SAR compliance. The power reduction is not implemented in the other RF capability.

Due to the proximity sensor and antenna are collocated, the procedure for determining antenna and proximity sensor coverage described in KDB 616217 is not required.

10.2.3.2 Procedures for determining proximity sensor triggering distances

The proximity sensor triggering distance was determined per KDB 616217 for rear face and applicable edge.

Summary for power verification per distance is tabulated in the below table.

Output Power Verification in dBm for DUT Bottom of Laptop											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
WCDMA BandII	17.5	17.9	17.9	17.9	17.8	17.9	24.5	24.4	24.1	24.1	24.0
WCDMA BandIV	16.5	16.9	16.9	16.7	16.7	16.9	24.3	24.3	24.4	24.2	24.2
WCDMA BandV	19.2	19.5	19.2	19.2	19.3	19.5	24.1	24.5	24.2	24.4	24.5
LTE Band 2	18.0	18.2	18.2	18.1	18.0	18.1	23.6	23.8	23.9	23.6	23.8
LTE Band 4	16.8	16.5	17.0	16.9	16.7	16.9	23.9	23.5	23.9	23.7	24.0
LTE Band 5	19.5	19.6	19.5	19.5	19.5	19.5	24.7	24.8	24.6	24.7	25.0
LTE Band 7	15.5	15.9	15.8	16.0	15.7	15.9	23.7	24.0	24.0	23.7	23.7
LTE Band 12	21.4	21.0	21.1	21.1	21.1	21.3	24.5	24.7	25.0	24.5	25.0
LTE Band 13	20.3	20.2	20.5	20.5	20.0	20.1	24.8	24.8	24.7	24.7	25.0
LTE Band 14	19.5	19.8	19.7	19.6	20.0	19.5	24.8	24.6	25.0	24.5	24.5
LTE Band 17	21.1	21.0	21.0	21.4	21.4	21.5	24.8	25.0	24.7	24.5	24.8
LTE Band 25	18.5	18.3	18.1	18.2	18.0	18.0	23.5	24.0	23.9	23.6	23.9
LTE Band 26	19.5	19.8	20.0	19.6	19.9	19.5	24.5	24.6	24.6	24.9	24.7
LTE Band 30	18.3	18.4	18.3	18.1	18.4	18.5	22.7	22.6	22.8	22.8	23.0
LTE Band 38	17.9	18.0	17.5	17.9	17.5	17.7	23.6	24.0	23.9	23.7	23.8
LTE Band 41 PC3	17.6	17.7	17.5	17.6	17.5	17.5	24.0	24.0	24.0	23.7	23.7
LTE Band 41 PC2	19.8	19.6	19.9	20.0	20.0	19.6	27.0	26.5	26.8	27.0	26.9
LTE Band 48	18.0	18.0	17.6	17.6	17.7	17.5	21.7	21.7	21.9	21.6	22.0
LTE Band 66	17.4	17.3	17.4	17.1	17.2	17.3	23.8	23.8	23.7	23.7	24.0
LTE Band 71	22.2	22.1	22.4	22.5	22.3	22.0	24.5	24.5	25.0	25.0	24.9

Output Power Verification in dBm for DUT Right Side of Laptop											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
WCDMA BandII	17.6	17.6	17.7	17.8	17.8	17.5	24.2	24.2	24.0	24.5	24.5
WCDMA BandIV	16.9	16.8	16.5	16.5	16.7	16.7	24.3	24.5	24.1	24.0	24.0
WCDMA BandV	19.0	19.3	19.2	19.3	19.1	19.4	24.4	24.5	24.5	24.1	24.5
LTE Band 2	18.2	18.3	18.5	18.3	18.4	18.2	23.8	23.9	23.8	23.5	24.0
LTE Band 4	16.9	16.6	16.9	16.7	16.7	16.5	23.5	23.7	24.0	23.5	23.6
LTE Band 5	19.5	19.7	19.6	19.5	19.8	20.0	24.9	24.5	25.0	25.0	24.5
LTE Band 7	15.8	15.8	15.8	15.8	15.7	16.0	23.7	23.8	23.5	23.5	23.6
LTE Band 12	21.3	21.0	21.1	21.2	21.5	21.2	24.6	25.0	24.5	24.7	25.0
LTE Band 13	20.3	20.3	20.0	20.1	20.4	20.5	24.8	24.5	24.9	24.9	24.9
LTE Band 14	19.9	19.7	19.9	19.6	19.9	20.0	25.0	24.7	25.0	24.6	24.7
LTE Band 17	21.3	21.5	21.0	21.2	21.2	21.1	24.6	24.5	24.7	24.8	25.0
LTE Band 25	18.4	18.2	18.1	18.2	18.1	18.3	23.7	24.0	23.7	23.5	23.5
LTE Band 26	19.6	19.5	19.7	19.6	19.5	20.0	25.0	24.6	24.9	24.8	24.9
LTE Band 30	18.2	18.3	18.0	18.5	18.5	18.3	22.9	23.0	22.8	22.7	23.0
LTE Band 38	17.9	18.0	17.5	18.0	17.5	17.5	24.0	23.8	23.5	24.0	23.6
LTE Band 41 PC3	17.9	17.6	18.0	17.9	18.0	17.8	23.6	23.7	23.6	23.5	23.5
LTE Band 41 PC2	19.7	19.9	19.7	19.8	19.7	19.5	26.8	26.5	26.5	26.7	26.6
LTE Band 48	17.9	17.5	18.0	17.8	17.6	17.6	21.5	22.0	21.6	21.8	21.5
LTE Band 66	17.4	17.1	17.4	17.0	17.3	17.3	23.5	23.5	24.0	23.7	23.9
LTE Band 71	22.5	22.0	22.3	22.2	22.4	22.2	24.5	24.6	24.5	24.8	24.9


Output Power Verification in dBm for DUT Rear Face											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
WCDMA BandII	17.6	17.8	17.9	17.6	17.8	17.5	24.3	24.2	24.3	24.1	24.2
WCDMA BandIV	17.0	16.9	16.6	16.8	17.0	16.8	24.2	24.5	24.1	24.1	24.5
WCDMA BandV	19.4	19.4	19.4	19.3	19.1	19.3	24.0	24.5	24.3	24.1	24.0
LTE Band 2	18.3	18.4	18.4	18.0	18.2	18.4	23.5	23.7	23.6	23.5	23.8
LTE Band 4	16.6	16.9	16.8	17.0	16.6	16.5	23.9	23.8	24.0	23.7	23.9
LTE Band 5	20.0	19.7	19.9	19.7	20.0	19.8	24.5	24.5	24.6	24.7	24.7
LTE Band 7	15.6	15.7	15.9	16.0	15.9	15.9	23.5	23.6	23.6	23.9	24.0
LTE Band 12	21.3	21.4	21.2	21.4	21.1	21.5	24.5	24.5	24.6	24.5	25.0
LTE Band 13	20.2	20.3	20.0	20.0	20.1	20.1	24.6	24.5	24.8	24.5	24.6
LTE Band 14	19.7	20.0	19.5	19.9	19.5	20.0	24.9	24.9	24.6	24.7	24.6
LTE Band 17	21.4	21.2	21.2	21.1	21.4	21.1	24.6	24.6	24.6	24.8	24.7
LTE Band 25	18.2	18.1	18.5	18.5	18.5	18.2	23.8	24.0	23.5	23.6	23.8
LTE Band 26	19.5	20.0	19.5	19.6	19.7	20.0	24.6	24.5	24.5	24.6	24.6
LTE Band 30	18.1	18.2	18.4	18.5	18.4	18.2	22.9	22.6	22.7	22.8	22.6
LTE Band 38	17.9	17.9	17.9	17.6	17.9	17.6	23.6	23.5	23.9	23.6	23.9
LTE Band 41 PC3	17.7	17.9	17.5	18.0	17.6	17.6	23.5	24.0	23.6	23.9	23.8
LTE Band 41 PC2	19.6	19.8	20.0	19.9	19.9	19.6	26.8	26.8	26.7	27.0	27.0
LTE Band 48	17.5	18.0	17.5	17.5	17.8	17.9	21.9	22.0	21.8	21.8	21.8
LTE Band 66	17.0	17.1	17.2	17.5	17.5	17.3	23.9	24.0	23.6	23.5	23.6
LTE Band 71	22.2	22.1	22.2	22.0	22.3	22.0	24.8	24.5	24.8	24.9	24.6

Output Power Verification in dBm for DUT Right Side											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
WCDMA BandII	17.5	17.8	17.5	17.9	17.5	17.6	24.4	24.3	24.3	24.3	24.5
WCDMA BandIV	17.0	16.8	16.6	16.8	16.9	16.6	24.1	24.3	24.0	24.2	24.0
WCDMA BandV	19.3	19.5	19.5	19.4	19.0	19.2	24.4	24.0	24.2	24.4	24.0
LTE Band 2	18.1	18.1	18.4	18.3	18.0	18.5	23.7	23.7	24.0	24.0	23.6
LTE Band 4	16.8	16.6	16.7	16.7	16.9	16.6	23.9	23.7	23.9	23.8	23.9
LTE Band 5	19.7	19.8	19.6	19.9	19.7	19.7	24.8	24.8	24.8	24.7	25.0
LTE Band 7	15.5	15.5	15.7	15.6	16.0	15.5	24.0	23.6	24.0	23.8	23.6
LTE Band 12	21.2	21.3	21.0	21.3	21.1	21.1	24.7	24.7	24.8	24.8	24.7
LTE Band 13	20.0	20.3	20.2	20.3	20.5	20.2	24.8	24.5	24.6	25.0	24.8
LTE Band 14	19.9	19.6	19.7	19.8	19.9	19.6	24.5	24.7	24.8	25.0	24.7
LTE Band 17	21.3	21.3	21.1	21.2	21.4	21.4	25.0	25.0	25.0	24.9	25.0
LTE Band 25	18.1	18.3	18.4	18.1	18.2	18.0	23.8	23.7	24.0	23.5	23.8
LTE Band 26	19.8	19.9	19.6	19.6	19.9	19.7	25.0	24.7	25.0	24.7	24.8
LTE Band 30	18.5	18.1	18.1	18.2	18.1	18.5	22.5	23.0	22.5	22.6	22.8
LTE Band 38	17.7	17.7	17.9	18.0	17.5	18.0	23.9	23.8	23.6	24.0	24.0
LTE Band 41 PC3	17.9	17.7	17.9	17.5	17.9	18.0	23.6	23.8	23.5	23.5	23.7
LTE Band 41 PC2	19.8	19.6	19.9	19.9	19.5	19.7	26.6	26.5	26.9	26.6	26.6
LTE Band 48	17.7	17.8	17.9	17.7	17.7	18.0	22.0	21.7	22.0	21.5	22.0
LTE Band 66	17.3	17.2	17.5	17.4	17.2	17.4	23.8	23.8	23.8	23.8	23.7
LTE Band 71	22.1	22.0	22.5	22.4	22.2	22.3	24.8	25.0	24.9	24.9	24.8

10.2.3.3 Procedures for determining tablet tilt angle influences to proximity sensor triggering

The influence of table tilt angles to proximity sensor triggering is determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance determined in KDB 616217. Summary for proximity sensor tilt angle influence is shown in below table.

Orientation	Separation Distance (mm)	Tilt Angle										
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Right Side	15	On	On	On	On	On	On	On	On	On	On	On

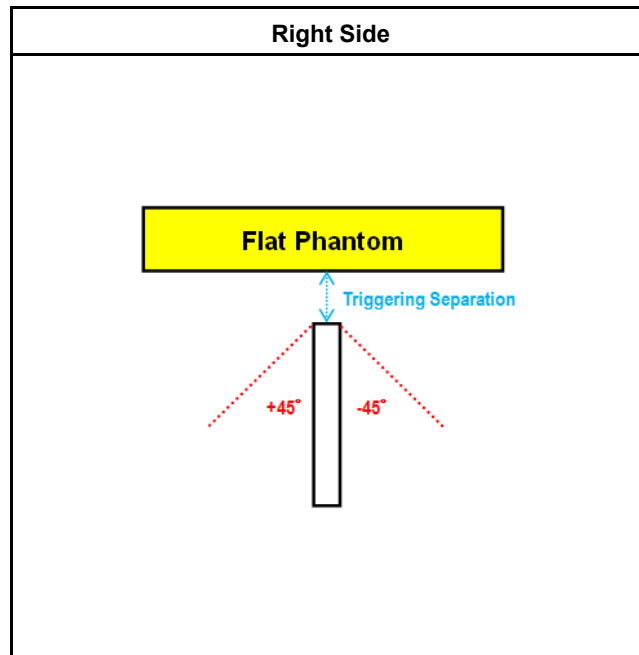

10.2.3.4 Proximity sensor triggering testing summary

The smallest power sensor triggering distance is 15 mm for DUT.

For the influence of tilt angle, test performed at the above separation distance until proximity sensor no longer release and the output power remained in reduced mode. The smallest separation distance for tilt angle influence is 15 mm consequently, and then subtract 1 mm for SAR measurement.

Considering SAR compliance and the conservative distance for sensor triggering, SAR test with power reduction was performed at 0 mm for Bottom Face, Right Side and Bottom of Laptop, and performed without power reduction at 14 mm.

The power reduction is determined by proximity sensor input, and the proximity sensor function is set by manual operation with engineering testing software during SAR measurement.

10.3 Conducted Power Measurements

Refer to Appendix A

10.4 Antenna location

Refer to Appendix E.

10.5 Test Results

10.5.1 SAR Test Result

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)	SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)
	WCDMA Band II	RMC12.2kbps	Bottom of laptop	0	9400	1880	-	-	ANT Main	w/	0.17	17.32	18	0.672	0.79	0.379	0.44
	WCDMA Band II	RMC12.2kbps	Bottom of laptop	14	9400	1880	-	-	ANT Main	w/o	-0.06	24.05	24.5	0.445	0.49	0.278	0.31
	WCDMA Band II	RMC12.2kbps	Right Side of laptop	0	9400	1880	-	-	ANT Main	w/	-0.19	17.32	18	0.334	0.39	0.166	0.19
	WCDMA Band II	RMC12.2kbps	Right Side of laptop	14	9400	1880	-	-	ANT Main	w/o	-0.1	24.05	24.5	0.372	0.41	0.228	0.25
	WCDMA Band II	RMC12.2kbps	Rear Face	0	9400	1880	-	-	ANT Main	w/	-0.08	17.32	18	0.698	0.82	0.359	0.42
	WCDMA Band II	RMC12.2kbps	Rear Face	14	9400	1880	-	-	ANT Main	w/o	-0.12	24.05	24.5	0.45	0.50	0.257	0.29
	WCDMA Band II	RMC12.2kbps	Left Side	0	9400	1880	-	-	ANT Main	w/o	-0.07	24.05	24.5	0.01	0.01	0.01	0.01
	WCDMA Band II	RMC12.2kbps	Right Side	0	9400	1880	-	-	ANT Main	w/	0.02	17.32	18	0.493	0.58	0.224	0.26
	WCDMA Band II	RMC12.2kbps	Right Side	14	9400	1880	-	-	ANT Main	w/o	-0.02	24.05	24.5	0.271	0.30	0.143	0.16
	WCDMA Band II	RMC12.2kbps	Top Side	0	9400	1880	-	-	ANT Main	w/o	-0.15	24.05	24.5	0.106	0.12	0.048	0.05
	WCDMA Band II	RMC12.2kbps	Bottom Side	0	9400	1880	-	-	ANT Main	w/o	0.18	24.05	24.5	0.026	0.03	0.00975	0.01
15	WCDMA Band II	RMC12.2kbps	Rear Face	0	9262	1852.4	-	-	ANT Main	w/	0.04	17.28	18	0.744	0.88	0.398	0.47
	WCDMA Band II	RMC12.2kbps	Rear Face	0	9538	1907.6	-	-	ANT Main	w/	-0.1	17.22	18	0.708	0.85	0.368	0.44
	WCDMA Band IV	RMC12.2kbps	Bottom of laptop	0	1413	1732.6	-	-	ANT Main	w/	0.15	16.29	17	0.699	0.82	0.333	0.39
	WCDMA Band IV	RMC12.2kbps	Bottom of laptop	14	1413	1732.6	-	-	ANT Main	w/o	-0.16	23.84	24.5	0.655	0.76	0.404	0.47
	WCDMA Band IV	RMC12.2kbps	Right Side of laptop	0	1413	1732.6	-	-	ANT Main	w/	-0.05	16.29	17	0.467	0.55	0.219	0.26
	WCDMA Band IV	RMC12.2kbps	Right Side of laptop	14	1413	1732.6	-	-	ANT Main	w/o	0.04	23.84	24.5	0.67	0.78	0.314	0.40
	WCDMA Band IV	RMC12.2kbps	Rear Face	0	1413	1732.6	-	-	ANT Main	w/	0.15	16.29	17	0.732	0.86	0.368	0.43
	WCDMA Band IV	RMC12.2kbps	Rear Face	14	1413	1732.6	-	-	ANT Main	w/o	-0.19	23.84	24.5	0.667	0.78	0.337	0.39
	WCDMA Band IV	RMC12.2kbps	Left Side	0	1413	1732.6	-	-	ANT Main	w/o	0.15	23.84	24.5	0.01	0.01	0.01	0.01
	WCDMA Band IV	RMC12.2kbps	Right Side	0	1413	1732.6	-	-	ANT Main	w/	0.17	16.29	17	0.663	0.78	0.303	0.36
	WCDMA Band IV	RMC12.2kbps	Right Side	14	1413	1732.6	-	-	ANT Main	w/o	0.03	23.84	24.5	0.669	0.78	0.305	0.36
	WCDMA Band IV	RMC12.2kbps	Top Side	0	1413	1732.6	-	-	ANT Main	w/o	-0.05	23.84	24.5	0.099	0.12	0.05	0.06
	WCDMA Band IV	RMC12.2kbps	Bottom Side	0	1413	1732.6	-	-	ANT Main	w/o	0.09	23.84	24.5	0.023	0.03	0.011	0.01
	WCDMA Band IV	RMC12.2kbps	Bottom of laptop	0	1312	1712.4	-	-	ANT Main	w/	0.19	16.26	17	0.744	0.88	0.381	0.45
	WCDMA Band IV	RMC12.2kbps	Bottom of laptop	0	1513	1752.6	-	-	ANT Main	w/	-0.19	16.22	17	0.739	0.88	0.378	0.45
32	WCDMA Band IV	RMC12.2kbps	Rear Face	0	1312	1712.4	-	-	ANT Main	w/	-0.15	16.26	17	0.751	0.89	0.386	0.46
	WCDMA Band IV	RMC12.2kbps	Rear Face	0	1513	1752.6	-	-	ANT Main	w/	0.13	16.22	17	0.738	0.88	0.367	0.44
	WCDMA Band V	RMC12.2kbps	Bottom of laptop	0	4182	836.4	-	-	ANT Main	w/	0.04	19.33	19.5	0.754	0.78	0.376	0.39
	WCDMA Band V	RMC12.2kbps	Bottom of laptop	14	4182	836.4	-	-	ANT Main	w/o	-0.11	23.7	24.5	0.414	0.50	0.264	0.32
	WCDMA Band V	RMC12.2kbps	Right Side of laptop	0	4182	836.4	-	-	ANT Main	w/o	-0.05	23.7	24.5	0.339	0.41	0.19	0.23
	WCDMA Band V	RMC12.2kbps	Rear Face	0	4182	836.4	-	-	ANT Main	w/	0.16	19.33	19.5	0.458	0.48	0.239	0.25
	WCDMA Band V	RMC12.2kbps	Rear Face	14	4182	836.4	-	-	ANT Main	w/o	0.03	23.7	24.5	0.318	0.38	0.203	0.24
	WCDMA Band V	RMC12.2kbps	Left Side	0	4182	836.4	-	-	ANT Main	w/o	-0.02	23.7	24.5	0.00982	0.01	0.00976	0.01
	WCDMA Band V	RMC12.2kbps	Right Side	0	4182	836.4	-	-	ANT Main	w/o	0.15	23.7	24.5	0.437	0.53	0.215	0.26
	WCDMA Band V	RMC12.2kbps	Top Side	0	4182	836.4	-	-	ANT Main	w/o	-0.13	23.7	24.5	0.06	0.07	0.034	0.04
	WCDMA Band V	RMC12.2kbps	Bottom Side	0	4182	836.4	-	-	ANT Main	w/o	0.12	23.7	24.5	0.014	0.02	0.0083	0.01
	WCDMA Band V	RMC12.2kbps	Bottom of laptop	0	4132	826.4	-	-	ANT Main	w/	0.04	18.97	19.5	0.742	0.84	0.425	0.48
53	WCDMA Band V	RMC12.2kbps	Bottom of laptop	0	4233	846.6	-	-	ANT Main	w/	0.06	19.21	19.5	0.786	0.84	0.454	0.49

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{1σ} (W/kg)	Reported SAR _{1σ} (W/kg)	SAR _{10σ} (W/kg)	Reported SAR _{10σ} (W/kg)
	LTE Band 4	QPSK20M	Bottom of laptop	0	20175	1732.5	1	0	ANT Main	w/	-0.1	16.66	17	0.789	0.85	0.434	0.47
	LTE Band 4	QPSK20M	Bottom of laptop	0	20175	1732.5	50	0	ANT Main	w/	0.15	16.63	17	0.787	0.86	0.433	0.47
	LTE Band 4	QPSK20M	Bottom of laptop	0	20175	1732.5	100	0	ANT Main	w/	0.03	16.63	17	0.777	0.85	0.426	0.46
	LTE Band 4	QPSK20M	Bottom of laptop	14	20175	1732.5	1	0	ANT Main	w/o	0.1	23.39	24	0.664	0.76	0.417	0.48
	LTE Band 4	QPSK20M	Bottom of laptop	14	20175	1732.5	50	0	ANT Main	w/o	0.09	22.29	23	0.517	0.61	0.325	0.38
	LTE Band 4	QPSK20M	Right Side of laptop	0	20175	1732.5	1	0	ANT Main	w/	-0.08	16.66	17	0.43	0.47	0.242	0.26
	LTE Band 4	QPSK20M	Right Side of laptop	0	20175	1732.5	50	0	ANT Main	w/	0.04	16.63	17	0.425	0.46	0.237	0.26
	LTE Band 4	QPSK20M	Right Side of laptop	14	20175	1732.5	1	0	ANT Main	w/o	0.17	23.39	24	0.69	0.79	0.424	0.49
	LTE Band 4	QPSK20M	Right Side of laptop	14	20175	1732.5	50	0	ANT Main	w/o	0.02	22.29	23	0.591	0.70	0.386	0.45
	LTE Band 4	QPSK20M	Rear Face	0	20175	1732.5	1	0	ANT Main	w/	0.12	16.66	17	0.701	0.76	0.358	0.39
	LTE Band 4	QPSK20M	Rear Face	0	20175	1732.5	50	0	ANT Main	w/	-0.11	16.63	17	0.648	0.71	0.35	0.38
	LTE Band 4	QPSK20M	Rear Face	14	20175	1732.5	1	0	ANT Main	w/o	-0.01	23.39	24	0.689	0.79	0.42	0.48
	LTE Band 4	QPSK20M	Rear Face	14	20175	1732.5	50	0	ANT Main	w/o	-0.04	22.29	23	0.526	0.62	0.321	0.38
	LTE Band 4	QPSK20M	Left Side	0	20175	1732.5	1	0	ANT Main	w/o	-0.06	23.39	24	0.01	0.01	0.01	0.01
	LTE Band 4	QPSK20M	Left Side	0	20175	1732.5	50	0	ANT Main	w/o	-0.13	22.29	23	0.01	0.01	0.01	0.01
	LTE Band 4	QPSK20M	Right Side	0	20175	1732.5	1	0	ANT Main	w/	-0.03	16.66	17	0.627	0.68	0.294	0.32
	LTE Band 4	QPSK20M	Right Side	0	20175	1732.5	50	0	ANT Main	w/	0.01	16.63	17	0.617	0.67	0.29	0.32
	LTE Band 4	QPSK20M	Right Side	14	20175	1732.5	1	0	ANT Main	w/o	-0.15	23.39	24	0.506	0.58	0.272	0.31
	LTE Band 4	QPSK20M	Right Side	14	20175	1732.5	50	0	ANT Main	w/o	0.05	22.29	23	0.387	0.46	0.208	0.24
	LTE Band 4	QPSK20M	Top Side	0	20175	1732.5	1	0	ANT Main	w/o	-0.19	23.39	24	0.088	0.10	0.048	0.06
	LTE Band 4	QPSK20M	Top Side	0	20175	1732.5	50	0	ANT Main	w/o	-0.17	22.29	23	0.069	0.08	0.037	0.04
	LTE Band 4	QPSK20M	Bottom Side	0	20175	1732.5	1	0	ANT Main	w/o	0.02	23.39	24	0.021	0.02	0.011	0.01
	LTE Band 4	QPSK20M	Bottom Side	0	20175	1732.5	50	0	ANT Main	w/o	0.17	22.29	23	0.019	0.02	0.00967	0.01
703	LTE Band 4	QPSK20M	Bottom of laptop	0	20050	1720	1	0	ANT Main	w/	0	16.51	17	0.807	0.90	0.442	0.49
	LTE Band 4	QPSK20M	Bottom of laptop	0	20050	1720	50	0	ANT Main	w/	-0.07	16.49	17	0.793	0.89	0.434	0.49
	LTE Band 4	QPSK20M	Bottom of laptop	0	20300	1745	1	0	ANT Main	w/	-0.06	16.44	17	0.735	0.84	0.401	0.46
	LTE Band 4	QPSK20M	Bottom of laptop	0	20300	1745	50	0	ANT Main	w/	0.09	16.37	17	0.754	0.87	0.412	0.48
	LTE Band 5	QPSK10M	Bottom of laptop	0	20525	836.5	1	0	ANT Main	w/	-0.06	19.36	20	0.741	0.86	0.428	0.50
	LTE Band 5	QPSK10M	Bottom of laptop	0	20525	836.5	25	0	ANT Main	w/	0.15	19.35	20	0.71	0.82	0.414	0.48
	LTE Band 5	QPSK10M	Bottom of laptop	0	20525	836.5	50	0	ANT Main	w/	0.16	19.32	20	0.727	0.85	0.42	0.49
	LTE Band 5	QPSK10M	Bottom of laptop	14	20525	836.5	1	0	ANT Main	w/o	-0.03	23.78	25	0.451	0.60	0.312	0.41
	LTE Band 5	QPSK10M	Bottom of laptop	14	20525	836.5	25	0	ANT Main	w/o	-0.06	22.76	24	0.371	0.49	0.263	0.35
	LTE Band 5	QPSK10M	Right Side of laptop	0	20525	836.5	1	0	ANT Main	w/o	-0.01	23.78	25	0.37	0.49	0.225	0.30
	LTE Band 5	QPSK10M	Right Side of laptop	0	20525	836.5	25	0	ANT Main	w/o	0.04	22.76	24	0.31	0.41	0.189	0.25
	LTE Band 5	QPSK10M	Rear Face	0	20525	836.5	1	0	ANT Main	w/	-0.16	19.36	20	0.5	0.58	0.282	0.33
	LTE Band 5	QPSK10M	Rear Face	0	20525	836.5	25	0	ANT Main	w/	0.07	19.35	20	0.496	0.58	0.278	0.32
	LTE Band 5	QPSK10M	Rear Face	14	20525	836.5	1	0	ANT Main	w/o	0.15	23.78	25	0.314	0.42	0.203	0.27
	LTE Band 5	QPSK10M	Rear Face	14	20525	836.5	25	0	ANT Main	w/o	-0.15	22.76	24	0.259	0.34	0.167	0.22
	LTE Band 5	QPSK10M	Left Side	0	20525	836.5	1	0	ANT Main	w/o	0.16	23.78	25	0.01	0.01	0.01	0.01
	LTE Band 5	QPSK10M	Left Side	0	20525	836.5	25	0	ANT Main	w/o	0.08	22.76	24	0.01	0.01	0.01	0.01
	LTE Band 5	QPSK10M	Right Side	0	20525	836.5	1	0	ANT Main	w/o	-0.11	23.78	25	0.477	0.63	0.254	0.34
	LTE Band 5	QPSK10M	Right Side	0	20525	836.5	25	0	ANT Main	w/o	-0.1	22.76	24	0.4	0.53	0.214	0.28
	LTE Band 5	QPSK10M	Top Side	0	20525	836.5	1	0	ANT Main	w/o	-0.15	23.78	25	0.066	0.09	0.041	0.05
	LTE Band 5	QPSK10M	Top Side	0	20525	836.5	25	0	ANT Main	w/o	-0.15	22.76	24	0.052	0.07	0.032	0.04
	LTE Band 5	QPSK10M	Bottom Side	0	20525	836.5	1	0	ANT Main	w/o	-0.04	23.78	25	0.016	0.02	0.00979	0.01
	LTE Band 5	QPSK10M	Bottom Side	0	20525	836.5	25	0	ANT Main	w/o	-0.19	22.76	24	0.014	0.02	0.00852	0.01
723	LTE Band 5	QPSK10M	Bottom of laptop	0	20450	829	1	0	ANT Main	w/	-0.02	19.19	20	0.734	0.88	0.424	0.51
	LTE Band 5	QPSK10M	Bottom of laptop	0	20450	829	25	0	ANT Main	w/	-0.17	19.17	20	0.702	0.85	0.412	0.50
	LTE Band 5	QPSK10M	Bottom of laptop	0	20600	844	1	0	ANT Main	w/	0.11	19.25	20	0.729	0.87	0.423	0.50
	LTE Band 5	QPSK10M	Bottom of laptop	0	20600	844	25	0	ANT Main	w/	-0.09	19.22	20	0.714	0.85	0.417	0.50

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{1σ} (W/kg)	Reported SAR _{1σ} (W/kg)	SAR _{10σ} (W/kg)	Reported SAR _{10σ} (W/kg)
	LTE Band 7	QPSK20M	Bottom of laptop	0	21100	2535	1	0	ANT Main	w/	-0.15	15.26	16	0.566	0.67	0.288	0.34
	LTE Band 7	QPSK20M	Bottom of laptop	0	21100	2535	50	0	ANT Main	w/	-0.1	15.25	16	0.561	0.67	0.286	0.34
	LTE Band 7	QPSK20M	Bottom of laptop	14	21100	2535	1	0	ANT Main	w/o	-0.18	22.91	24	0.387	0.50	0.213	0.27
	LTE Band 7	QPSK20M	Bottom of laptop	14	21100	2535	50	0	ANT Main	w/o	0.11	22.01	23	0.314	0.39	0.171	0.21
	LTE Band 7	QPSK20M	Right Side of laptop	0	21100	2535	1	0	ANT Main	w/	0.09	15.26	16	0.512	0.61	0.217	0.26
	LTE Band 7	QPSK20M	Right Side of laptop	0	21100	2535	50	0	ANT Main	w/	0.11	15.25	16	0.505	0.60	0.21	0.25
	LTE Band 7	QPSK20M	Right Side of laptop	14	21100	2535	1	0	ANT Main	w/o	-0.11	22.91	24	0.574	0.74	0.301	0.39
	LTE Band 7	QPSK20M	Right Side of laptop	14	21100	2535	50	0	ANT Main	w/o	-0.17	22.01	23	0.466	0.59	0.244	0.31
	LTE Band 7	QPSK20M	Rear Face	0	21100	2535	1	0	ANT Main	w/	-0.05	15.26	16	0.706	0.84	0.291	0.35
	LTE Band 7	QPSK20M	Rear Face	0	21100	2535	50	0	ANT Main	w/	0	15.25	16	0.704	0.84	0.288	0.34
	LTE Band 7	QPSK20M	Rear Face	0	21100	2535	100	0	ANT Main	w/	-0.19	15.23	16	0.7	0.84	0.284	0.34
	LTE Band 7	QPSK20M	Rear Face	14	21100	2535	1	0	ANT Main	w/o	0.13	22.91	24	0.335	0.43	0.183	0.24
	LTE Band 7	QPSK20M	Rear Face	14	21100	2535	50	0	ANT Main	w/o	-0.07	22.01	23	0.274	0.34	0.15	0.19
	LTE Band 7	QPSK20M	Left Side	0	21100	2535	1	0	ANT Main	w/o	-0.03	22.91	24	0.01	0.01	0.01	0.01
	LTE Band 7	QPSK20M	Left Side	0	21100	2535	50	0	ANT Main	w/o	-0.07	22.01	23	0.01	0.01	0.01	0.01
	LTE Band 7	QPSK20M	Right Side	0	21100	2535	1	0	ANT Main	w/	-0.11	15.26	16	0.477	0.57	0.175	0.21
	LTE Band 7	QPSK20M	Right Side	0	21100	2535	50	0	ANT Main	w/	0.1	15.25	16	0.47	0.56	0.17	0.20
	LTE Band 7	QPSK20M	Right Side	14	21100	2535	1	0	ANT Main	w/o	0.16	22.91	24	0.182	0.23	0.091	0.12
	LTE Band 7	QPSK20M	Right Side	14	21100	2535	50	0	ANT Main	w/o	0.14	22.01	23	0.154	0.19	0.077	0.10
	LTE Band 7	QPSK20M	Top Side	0	21100	2535	1	0	ANT Main	w/o	0.13	22.91	24	0.093	0.12	0.039	0.05
	LTE Band 7	QPSK20M	Top Side	0	21100	2535	50	0	ANT Main	w/o	0.18	22.01	23	0.084	0.11	0.036	0.05
	LTE Band 7	QPSK20M	Bottom Side	0	21100	2535	1	0	ANT Main	w/o	0.19	22.91	24	0.027	0.03	0.01	0.01
	LTE Band 7	QPSK20M	Bottom Side	0	21100	2535	50	0	ANT Main	w/o	-0.04	22.01	23	0.019	0.02	0.01	0.01
	LTE Band 7	QPSK20M	Rear Face	0	20850	2510	1	0	ANT Main	w/	-0.03	15.14	16	0.665	0.81	0.28	0.34
	LTE Band 7	QPSK20M	Rear Face	0	20850	2510	50	0	ANT Main	w/	0.18	15.12	16	0.663	0.81	0.272	0.33
168	LTE Band 7	QPSK20M	Rear Face	0	21350	2560	1	0	ANT Main	w/	0.07	15.19	16	0.711	0.86	0.294	0.35
	LTE Band 7	QPSK20M	Rear Face	0	21350	2560	50	0	ANT Main	w/	0.17	15.17	16	0.703	0.85	0.288	0.35
	LTE Band 12	QPSK10M	Bottom of laptop	0	23095	707.5	1	0	ANT Main	w/	0.06	21.17	21.5	0.699	0.75	0.29	0.31
	LTE Band 12	QPSK10M	Bottom of laptop	0	23095	707.5	25	0	ANT Main	w/	0.11	21.14	21.5	0.675	0.73	0.279	0.30
	LTE Band 12	QPSK10M	Bottom of laptop	14	23095	707.5	1	0	ANT Main	w/o	0.02	23.73	25	0.247	0.33	0.125	0.17
	LTE Band 12	QPSK10M	Bottom of laptop	14	23095	707.5	25	0	ANT Main	w/o	0.14	22.77	24	0.187	0.25	0.095	0.13
	LTE Band 12	QPSK10M	Right Side of laptop	0	23095	707.5	1	0	ANT Main	w/o	0.08	23.73	25	0.316	0.42	0.143	0.19
	LTE Band 12	QPSK10M	Right Side of laptop	0	23095	707.5	25	0	ANT Main	w/o	-0.01	22.77	24	0.263	0.35	0.118	0.16
	LTE Band 12	QPSK10M	Rear Face	0	23095	707.5	1	0	ANT Main	w/	0.06	21.17	21.5	0.58	0.63	0.243	0.26
	LTE Band 12	QPSK10M	Rear Face	0	23095	707.5	25	0	ANT Main	w/	-0.13	21.14	21.5	0.578	0.63	0.242	0.26
	LTE Band 12	QPSK10M	Rear Face	14	23095	707.5	1	0	ANT Main	w/o	-0.19	23.73	25	0.242	0.32	0.08	0.11
	LTE Band 12	QPSK10M	Rear Face	14	23095	707.5	25	0	ANT Main	w/o	0.12	22.77	24	0.2	0.27	0.065	0.09
	LTE Band 12	QPSK10M	Left Side	0	23095	707.5	1	0	ANT Main	w/o	0.02	23.73	25	0.01	0.01	0.01	0.01
	LTE Band 12	QPSK10M	Left Side	0	23095	707.5	25	0	ANT Main	w/o	-0.04	22.77	24	0.01	0.01	0.01	0.01
	LTE Band 12	QPSK10M	Right Side	0	23095	707.5	1	0	ANT Main	w/o	0.18	23.73	25	0.305	0.41	0.112	0.15
	LTE Band 12	QPSK10M	Right Side	0	23095	707.5	25	0	ANT Main	w/o	-0.19	22.77	24	0.241	0.32	0.088	0.12
	LTE Band 12	QPSK10M	Top Side	0	23095	707.5	1	0	ANT Main	w/o	0	23.73	25	0.084	0.11	0.026	0.03
	LTE Band 12	QPSK10M	Top Side	0	23095	707.5	25	0	ANT Main	w/o	-0.16	22.77	24	0.068	0.09	0.02	0.03
	LTE Band 12	QPSK10M	Bottom Side	0	23095	707.5	1	0	ANT Main	w/o	-0.15	23.73	25	0.02	0.03	0.00565	0.01
	LTE Band 12	QPSK10M	Bottom Side	0	23095	707.5	25	0	ANT Main	w/o	-0.13	22.77	24	0.013	0.02	0.00395	0.01
	LTE Band 12	QPSK10M	Bottom of laptop	0	23060	704	1	0	ANT Main	w/	-0.1	21.03	21.5	0.69	0.77	0.285	0.32
785	LTE Band 12	QPSK10M	Bottom of laptop	0	23130	711	1	0	ANT Main	w/	0.03	21.11	21.5	0.796	0.87	0.457	0.50
	LTE Band 17	QPSK10M	Bottom of laptop	0	23790	710	1	0	ANT Main	w/	0.05	21.11	21.5	0.659	0.72	0.266	0.29

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{1σ} (W/kg)	Reported SAR _{1σ} (W/kg)	SAR _{10σ} (W/kg)	Reported SAR _{10σ} (W/kg)
229	LTE Band 13	QPSK10M	Bottom of laptop	0	23230	782	1	0	ANT Main	w/	-0.06	20.27	20.5	0.822	0.87	0.475	0.50
	LTE Band 13	QPSK10M	Bottom of laptop	0	23230	782	25	0	ANT Main	w/	0.02	20.26	20.5	0.805	0.85	0.461	0.49
	LTE Band 13	QPSK10M	Bottom of laptop	0	23230	782	50	0	ANT Main	w/	-0.12	20.24	20.5	0.808	0.86	0.466	0.49
	LTE Band 13	QPSK10M	Bottom of laptop	14	23230	782	1	0	ANT Main	w/o	0	23.75	25	0.334	0.45	0.229	0.31
	LTE Band 13	QPSK10M	Bottom of laptop	14	23230	782	25	0	ANT Main	w/o	0.1	22.77	24	0.304	0.40	0.21	0.28
	LTE Band 13	QPSK10M	Right Side of laptop	0	23230	782	1	0	ANT Main	w/o	-0.05	23.75	25	0.331	0.44	0.206	0.27
	LTE Band 13	QPSK10M	Right Side of laptop	0	23230	782	25	0	ANT Main	w/o	-0.01	22.77	24	0.298	0.40	0.185	0.25
	LTE Band 13	QPSK10M	Rear Face	0	23230	782	1	0	ANT Main	w/	-0.18	20.27	20.5	0.625	0.66	0.366	0.39
	LTE Band 13	QPSK10M	Rear Face	0	23230	782	25	0	ANT Main	w/	0.16	20.26	20.5	0.624	0.66	0.362	0.38
	LTE Band 13	QPSK10M	Rear Face	14	23230	782	1	0	ANT Main	w/o	0.04	23.75	25	0.265	0.35	0.18	0.24
	LTE Band 13	QPSK10M	Rear Face	14	23230	782	25	0	ANT Main	w/o	0	22.77	24	0.242	0.32	0.165	0.22
	LTE Band 13	QPSK10M	Left Side	0	23230	782	1	0	ANT Main	w/o	0.1	23.75	25	0.01	0.01	0.01	0.01
	LTE Band 13	QPSK10M	Left Side	0	23230	782	25	0	ANT Main	w/o	0.07	22.77	24	0.01	0.01	0.01	0.01
	LTE Band 13	QPSK10M	Right Side	0	23230	782	1	0	ANT Main	w/o	-0.02	23.75	25	0.318	0.42	0.153	0.20
	LTE Band 13	QPSK10M	Right Side	0	23230	782	25	0	ANT Main	w/o	-0.01	22.77	24	0.293	0.39	0.142	0.19
	LTE Band 13	QPSK10M	Top Side	0	23230	782	1	0	ANT Main	w/o	-0.15	23.75	25	0.109	0.15	0.047	0.06
	LTE Band 13	QPSK10M	Top Side	0	23230	782	25	0	ANT Main	w/o	0.02	22.77	24	0.087	0.12	0.036	0.05
	LTE Band 13	QPSK10M	Bottom Side	0	23230	782	1	0	ANT Main	w/o	0.04	23.75	25	0.027	0.04	0.01	0.01
	LTE Band 13	QPSK10M	Bottom Side	0	23230	782	25	0	ANT Main	w/o	0.19	22.77	24	0.016	0.02	0.008	0.01
259	LTE Band 14	QPSK10M	Bottom of laptop	0	23330	793	1	0	ANT Main	w/	0.1	19.13	20	0.674	0.82	0.389	0.48
	LTE Band 14	QPSK10M	Bottom of laptop	0	23330	793	25	0	ANT Main	w/	0.15	19.12	20	0.655	0.80	0.378	0.46
	LTE Band 14	QPSK10M	Bottom of laptop	0	23330	793	50	0	ANT Main	w/	0.16	19.1	20	0.658	0.81	0.381	0.47
	LTE Band 14	QPSK10M	Bottom of laptop	14	23330	793	1	0	ANT Main	w/o	0.03	23.64	25	0.393	0.54	0.27	0.37
	LTE Band 14	QPSK10M	Bottom of laptop	14	23330	793	25	0	ANT Main	w/o	-0.11	22.68	24	0.316	0.43	0.216	0.29
	LTE Band 14	QPSK10M	Right Side of laptop	0	23330	793	1	0	ANT Main	w/o	0.19	23.64	25	0.303	0.41	0.183	0.25
	LTE Band 14	QPSK10M	Right Side of laptop	0	23330	793	25	0	ANT Main	w/o	-0.11	22.68	24	0.258	0.35	0.156	0.21
	LTE Band 14	QPSK10M	Rear Face	0	23330	793	1	0	ANT Main	w/	-0.18	19.13	20	0.6	0.73	0.345	0.42
	LTE Band 14	QPSK10M	Rear Face	0	23330	793	25	0	ANT Main	w/	0.15	19.12	20	0.592	0.72	0.337	0.41
	LTE Band 14	QPSK10M	Rear Face	14	23330	793	1	0	ANT Main	w/o	-0.09	23.64	25	0.297	0.41	0.199	0.27
	LTE Band 14	QPSK10M	Rear Face	14	23330	793	25	0	ANT Main	w/o	-0.09	22.68	24	0.24	0.33	0.161	0.22
	LTE Band 14	QPSK10M	Left Side	0	23330	793	1	0	ANT Main	w/o	-0.03	23.64	25	0.01	0.01	0.01	0.01
	LTE Band 14	QPSK10M	Left Side	0	23330	793	25	0	ANT Main	w/o	0.1	22.68	24	0.01	0.01	0.01	0.01
	LTE Band 14	QPSK10M	Right Side	0	23330	793	1	0	ANT Main	w/o	0.12	23.64	25	0.444	0.61	0.214	0.29
	LTE Band 14	QPSK10M	Right Side	0	23330	793	25	0	ANT Main	w/o	0.14	22.68	24	0.375	0.51	0.181	0.25
	LTE Band 14	QPSK10M	Top Side	0	23330	793	1	0	ANT Main	w/o	-0.12	23.64	25	0.091	0.12	0.044	0.06
	LTE Band 14	QPSK10M	Top Side	0	23330	793	25	0	ANT Main	w/o	0.07	22.68	24	0.074	0.10	0.034	0.05
	LTE Band 14	QPSK10M	Bottom Side	0	23330	793	1	0	ANT Main	w/o	-0.09	23.64	25	0.022	0.03	0.01	0.01
	LTE Band 14	QPSK10M	Bottom Side	0	23330	793	25	0	ANT Main	w/o	-0.17	22.68	24	0.013	0.02	0.0067	0.01

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{1σ} (W/kg)	Reported SAR _{1σ} (W/kg)	SAR _{10σ} (W/kg)	Reported SAR _{10σ} (W/kg)
	LTE Band 25	QPSK20M	Bottom of laptop	0	26365	1882.5	1	0	ANT Main	w/	-0.03	17.72	18.5	0.708	0.85	0.407	0.49
	LTE Band 25	QPSK20M	Bottom of laptop	0	26365	1882.5	50	0	ANT Main	w/	0.07	17.7	18.5	0.702	0.84	0.405	0.49
	LTE Band 25	QPSK20M	Bottom of laptop	0	26365	1882.5	100	0	ANT Main	w/	0.17	17.71	18.5	0.672	0.81	0.385	0.46
	LTE Band 25	QPSK20M	Bottom of laptop	14	26365	1882.5	1	0	ANT Main	w/o	-0.14	23.24	24	0.479	0.57	0.3	0.36
	LTE Band 25	QPSK20M	Bottom of laptop	14	26365	1882.5	50	0	ANT Main	w/o	-0.17	22.17	23	0.369	0.45	0.23	0.28
	LTE Band 25	QPSK20M	Right Side of laptop	0	26365	1882.5	1	0	ANT Main	w/	-0.11	17.72	18.5	0.359	0.43	0.179	0.21
	LTE Band 25	QPSK20M	Right Side of laptop	0	26365	1882.5	50	0	ANT Main	w/	-0.08	17.7	18.5	0.353	0.42	0.17	0.20
	LTE Band 25	QPSK20M	Right Side of laptop	14	26365	1882.5	1	0	ANT Main	w/o	-0.17	23.24	24	0.401	0.48	0.245	0.29
	LTE Band 25	QPSK20M	Right Side of laptop	14	26365	1882.5	50	0	ANT Main	w/o	-0.11	22.17	23	0.307	0.37	0.189	0.23
	LTE Band 25	QPSK20M	Rear Face	0	26365	1882.5	1	0	ANT Main	w/	-0.11	17.72	18.5	0.65	0.78	0.348	0.42
	LTE Band 25	QPSK20M	Rear Face	0	26365	1882.5	50	0	ANT Main	w/	-0.12	17.7	18.5	0.618	0.74	0.334	0.40
	LTE Band 25	QPSK20M	Rear Face	14	26365	1882.5	1	0	ANT Main	w/o	0.09	23.24	24	0.485	0.58	0.276	0.33
	LTE Band 25	QPSK20M	Rear Face	14	26365	1882.5	50	0	ANT Main	w/o	-0.16	22.17	23	0.38	0.46	0.217	0.26
	LTE Band 25	QPSK20M	Left Side	0	26365	1882.5	1	0	ANT Main	w/o	0.14	23.24	24	0.01	0.01	0.01	0.01
	LTE Band 25	QPSK20M	Left Side	0	26365	1882.5	50	0	ANT Main	w/o	0	22.17	23	0.01	0.01	0.01	0.01
	LTE Band 25	QPSK20M	Right Side	0	26365	1882.5	1	0	ANT Main	w/	-0.16	17.72	18.5	0.53	0.63	0.241	0.29
	LTE Band 25	QPSK20M	Right Side	0	26365	1882.5	50	0	ANT Main	w/	-0.04	17.7	18.5	0.519	0.62	0.233	0.28
	LTE Band 25	QPSK20M	Right Side	14	26365	1882.5	1	0	ANT Main	w/o	0.05	23.24	24	0.292	0.35	0.154	0.18
	LTE Band 25	QPSK20M	Right Side	14	26365	1882.5	50	0	ANT Main	w/o	-0.07	22.17	23	0.227	0.27	0.119	0.14
	LTE Band 25	QPSK20M	Top Side	0	26365	1882.5	1	0	ANT Main	w/o	0.05	23.24	24	0.115	0.14	0.053	0.06
	LTE Band 25	QPSK20M	Top Side	0	26365	1882.5	50	0	ANT Main	w/o	0.14	22.17	23	0.093	0.11	0.04	0.05
	LTE Band 25	QPSK20M	Bottom Side	0	26365	1882.5	1	0	ANT Main	w/o	0.04	23.24	24	0.028	0.03	0.01	0.01
	LTE Band 25	QPSK20M	Bottom Side	0	26365	1882.5	50	0	ANT Main	w/o	-0.06	22.17	23	0.017	0.02	0.00802	0.01
803	LTE Band 25	QPSK20M	Bottom of laptop	0	26140	1860	1	0	ANT Main	w/	0.04	17.61	18.5	0.753	0.92	0.436	0.54
	LTE Band 25	QPSK20M	Bottom of laptop	0	26140	1860	50	0	ANT Main	w/	0.17	17.57	18.5	0.737	0.91	0.427	0.53
	LTE Band 25	QPSK20M	Bottom of laptop	0	26590	1905	1	0	ANT Main	w/	0.07	17.47	18.5	0.687	0.87	0.392	0.50
	LTE Band 25	QPSK20M	Bottom of laptop	0	26590	1905	50	0	ANT Main	w/	-0.18	17.44	18.5	0.669	0.85	0.383	0.49
	LTE Band 2	QPSK20M	Bottom of laptop	0	18900	1880	1	0	ANT Main	w/	-0.08	17.69	18.5	0.748	0.90	0.429	0.52
	LTE Band 26	QPSK15M	Bottom of laptop	0	26865	831.5	1	0	ANT Main	w/	-0.02	19.11	20	0.724	0.89	0.422	0.52
	LTE Band 26	QPSK15M	Bottom of laptop	0	26865	831.5	36	0	ANT Main	w/	-0.02	19.04	20	0.71	0.89	0.409	0.51
	LTE Band 26	QPSK15M	Bottom of laptop	0	26865	831.5	75	0	ANT Main	w/	0.16	19.07	20	0.715	0.89	0.418	0.52
	LTE Band 26	QPSK15M	Bottom of laptop	14	26865	831.5	1	0	ANT Main	w/o	-0.07	23.7	25	0.437	0.59	0.3	0.40
	LTE Band 26	QPSK15M	Bottom of laptop	14	26865	831.5	36	0	ANT Main	w/o	0.16	22.63	24	0.351	0.48	0.24	0.33
	LTE Band 26	QPSK15M	Right Side of laptop	0	26865	831.5	1	0	ANT Main	w/o	0.18	23.7	25	0.391	0.53	0.253	0.34
	LTE Band 26	QPSK15M	Right Side of laptop	0	26865	831.5	36	0	ANT Main	w/o	0.08	22.63	24	0.32	0.44	0.209	0.29
	LTE Band 26	QPSK15M	Rear Face	0	26865	831.5	1	0	ANT Main	w/	-0.01	19.11	20	0.536	0.66	0.296	0.36
	LTE Band 26	QPSK15M	Rear Face	0	26865	831.5	36	0	ANT Main	w/	-0.07	19.04	20	0.525	0.65	0.286	0.36
	LTE Band 26	QPSK15M	Rear Face	14	26865	831.5	1	0	ANT Main	w/o	0.13	23.7	25	0.309	0.42	0.199	0.27
	LTE Band 26	QPSK15M	Rear Face	14	26865	831.5	36	0	ANT Main	w/o	0.07	22.63	24	0.247	0.34	0.159	0.22
	LTE Band 26	QPSK15M	Left Side	0	26865	831.5	1	0	ANT Main	w/o	0.12	23.7	25	0.01	0.01	0.01	0.01
	LTE Band 26	QPSK15M	Left Side	0	26865	831.5	36	0	ANT Main	w/o	0.15	22.63	24	0.01	0.01	0.01	0.01
	LTE Band 26	QPSK15M	Right Side	0	26865	831.5	1	0	ANT Main	w/o	0.16	23.7	25	0.509	0.69	0.254	0.34
	LTE Band 26	QPSK15M	Right Side	0	26865	831.5	36	0	ANT Main	w/o	0.03	22.63	24	0.458	0.63	0.228	0.31
	LTE Band 26	QPSK15M	Top Side	0	26865	831.5	1	0	ANT Main	w/o	0.03	23.7	25	0.167	0.23	0.121	0.16
	LTE Band 26	QPSK15M	Top Side	0	26865	831.5	36	0	ANT Main	w/o	-0.05	22.63	24	0.163	0.22	0.105	0.14
	LTE Band 26	QPSK15M	Bottom Side	0	26865	831.5	1	0	ANT Main	w/o	-0.02	23.7	25	0.058	0.08	0.027	0.04
	LTE Band 26	QPSK15M	Bottom Side	0	26865	831.5	36	0	ANT Main	w/o	-0.05	22.63	24	0.029	0.04	0.016	0.02
833	LTE Band 26	QPSK15M	Bottom of laptop	0	26765	821.5	1	0	ANT Main	w/	0.05	19.07	20	0.729	0.90	0.426	0.53
	LTE Band 26	QPSK15M	Bottom of laptop	0	26765	821.5	36	0	ANT Main	w/	0.1	18.98	20	0.703	0.89	0.41	0.52
	LTE Band 26	QPSK15M	Bottom of laptop	0	26965	841.5	1	0	ANT Main	w/	-0.15	19.02	20	0.71	0.89	0.411	0.52
	LTE Band 26	QPSK15M	Bottom of laptop	0	26965	841.5	36	0	ANT Main	w/	0.09	18.92	20	0.697	0.89	0.404	0.52

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{1σ} (W/kg)	Reported SAR _{1σ} (W/kg)	SAR _{10σ} (W/kg)	Reported SAR _{10σ} (W/kg)
	LTE Band 30	QPSK10M	Bottom of laptop	0	27710	2310	1	0	ANT Main	w/	0.14	17.61	18.5	0.716	0.88	0.346	0.42
	LTE Band 30	QPSK10M	Bottom of laptop	0	27710	2310	25	0	ANT Main	w/	0.06	17.53	18.5	0.708	0.89	0.343	0.43
	LTE Band 30	QPSK10M	Bottom of laptop	0	27710	2310	50	0	ANT Main	w/	-0.13	17.49	18.5	0.698	0.88	0.339	0.43
	LTE Band 30	QPSK10M	Bottom of laptop	14	27710	2310	1	0	ANT Main	w/o	0.12	22.15	23	0.27	0.33	0.162	0.20
	LTE Band 30	QPSK10M	Bottom of laptop	14	27710	2310	25	0	ANT Main	w/o	-0.07	21.13	22	0.211	0.26	0.127	0.16
	LTE Band 30	QPSK10M	Right Side of laptop	0	27710	2310	1	0	ANT Main	w/	0.05	17.61	18.5	0.444	0.54	0.19	0.23
	LTE Band 30	QPSK10M	Right Side of laptop	0	27710	2310	25	0	ANT Main	w/	0.12	17.53	18.5	0.435	0.54	0.181	0.23
	LTE Band 30	QPSK10M	Right Side of laptop	14	27710	2310	1	0	ANT Main	w/o	-0.07	22.15	23	0.238	0.29	0.141	0.17
	LTE Band 30	QPSK10M	Right Side of laptop	14	27710	2310	25	0	ANT Main	w/o	0.15	21.13	22	0.188	0.23	0.11	0.13
864	LTE Band 30	QPSK10M	Rear Face	0	27710	2310	1	0	ANT Main	w/	-0.04	17.61	18.5	0.755	0.93	0.333	0.41
	LTE Band 30	QPSK10M	Rear Face	0	27710	2310	25	0	ANT Main	w/	-0.05	17.53	18.5	0.727	0.91	0.311	0.39
	LTE Band 30	QPSK10M	Rear Face	0	27710	2310	50	0	ANT Main	w/	0.03	17.49	18.5	0.732	0.92	0.312	0.39
	LTE Band 30	QPSK10M	Rear Face	14	27710	2310	1	0	ANT Main	w/o	0.04	22.15	23	0.207	0.25	0.117	0.14
	LTE Band 30	QPSK10M	Rear Face	14	27710	2310	25	0	ANT Main	w/o	-0.05	21.13	22	0.16	0.20	0.09	0.11
	LTE Band 30	QPSK10M	Left Side	0	27710	2310	1	0	ANT Main	w/o	-0.1	22.15	23	0.01	0.01	0.01	0.01
	LTE Band 30	QPSK10M	Left Side	0	27710	2310	25	0	ANT Main	w/o	0.1	21.13	22	0.01	0.01	0.01	0.01
	LTE Band 30	QPSK10M	Right Side	0	27710	2310	1	0	ANT Main	w/o	-0.04	22.15	23	0.52	0.63	0.209	0.25
	LTE Band 30	QPSK10M	Right Side	0	27710	2310	25	0	ANT Main	w/o	-0.17	21.13	22	0.412	0.50	0.163	0.20
	LTE Band 30	QPSK10M	Top Side	0	27710	2310	1	0	ANT Main	w/o	-0.19	22.15	23	0.169	0.21	0.091	0.11
	LTE Band 30	QPSK10M	Top Side	0	27710	2310	25	0	ANT Main	w/o	0.1	21.13	22	0.152	0.19	0.079	0.10
	LTE Band 30	QPSK10M	Bottom Side	0	27710	2310	1	0	ANT Main	w/o	-0.1	22.15	23	0.044	0.05	0.019	0.02
	LTE Band 30	QPSK10M	Bottom Side	0	27710	2310	25	0	ANT Main	w/o	0.03	21.13	22	0.021	0.03	0.011	0.01

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P. Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	SAR _{1.0} (W/kg)	Reported SAR _{1.0} (W/kg)	SAR _{10.0} (W/kg)	Reported SAR _{10.0} (W/kg)
	LTE Band 48	QPSK20M	Bottom of laptop	0	56207	3646.7	1	0	ANT Main	w/	0.12	17.71	18	63.30	0.478	0.51	0.178	0.19
	LTE Band 48	QPSK20M	Bottom of laptop	0	56207	3646.7	50	0	ANT Main	w/	-0.03	17.69	18	63.30	0.382	0.41	0.142	0.15
	LTE Band 48	QPSK20M	Bottom of laptop	14	56207	3646.7	1	0	ANT Main	w/o	-0.05	21.19	22	63.30	0.115	0.14	0.053	0.06
	LTE Band 48	QPSK20M	Bottom of laptop	14	56207	3646.7	50	0	ANT Main	w/o	0.1	20.23	21	63.30	0.089	0.11	0.04	0.05
	LTE Band 48	QPSK20M	Right Side of laptop	0	56207	3646.7	1	0	ANT Main	w/o	0.11	21.19	22	63.30	0.484	0.58	0.163	0.20
	LTE Band 48	QPSK20M	Right Side of laptop	0	56207	3646.7	50	0	ANT Main	w/o	0.13	20.23	21	63.30	0.381	0.45	0.129	0.15
	LTE Band 48	QPSK20M	Rear Face	0	56207	3646.7	1	0	ANT Main	w/	0.08	17.71	18	63.30	0.779	0.83	0.291	0.31
	LTE Band 48	QPSK20M	Rear Face	0	56207	3646.7	50	0	ANT Main	w/	0	17.69	18	63.30	0.769	0.83	0.288	0.31
	LTE Band 48	QPSK20M	Rear Face	0	56207	3646.7	100	0	ANT Main	w/	0.19	17.66	18	63.30	0.759	0.82	0.276	0.30
	LTE Band 48	QPSK20M	Rear Face	14	56207	3646.7	1	0	ANT Main	w/o	0.01	21.19	22	63.30	0.281	0.34	0.134	0.16
	LTE Band 48	QPSK20M	Rear Face	14	56207	3646.7	50	0	ANT Main	w/o	-0.16	20.23	21	63.30	0.259	0.31	0.123	0.15
	LTE Band 48	QPSK20M	Left Side	0	56207	3646.7	1	0	ANT Main	w/o	-0.05	21.19	22	63.30	0.01	0.01	0.01	0.01
	LTE Band 48	QPSK20M	Left Side	0	56207	3646.7	50	0	ANT Main	w/o	0.12	20.23	21	63.30	0.01	0.01	0.01	0.01
	LTE Band 48	QPSK20M	Right Side	0	56207	3646.7	1	0	ANT Main	w/o	0.18	21.19	22	63.30	0.776	0.94	0.268	0.32
	LTE Band 48	QPSK20M	Right Side	0	56207	3646.7	50	0	ANT Main	w/o	-0.16	20.23	21	63.30	0.658	0.79	0.205	0.24
	LTE Band 48	QPSK20M	Top Side	0	56207	3646.7	1	0	ANT Main	w/o	-0.07	21.19	22	63.30	0.217	0.26	0.08	0.10
	LTE Band 48	QPSK20M	Top Side	0	56207	3646.7	50	0	ANT Main	w/o	-0.01	20.23	21	63.30	0.177	0.21	0.065	0.08
	LTE Band 48	QPSK20M	Bottom Side	0	56207	3646.7	1	0	ANT Main	w/o	-0.08	21.19	22	63.30	0.048	0.06	0.017	0.02
	LTE Band 48	QPSK20M	Bottom Side	0	56207	3646.7	50	0	ANT Main	w/o	0.05	20.23	21	63.30	0.04	0.05	0.01	0.01
1035	LTE Band 48	QPSK20M	Rear Face	0	55340	3560	1	0	ANT Main	w/	-0.02	17.49	18	63.30	0.844	0.95	0.326	0.37
	LTE Band 48	QPSK20M	Rear Face	0	55340	3560	50	0	ANT Main	w/	0.02	17.48	18	63.30	0.833	0.94	0.322	0.36
	LTE Band 48	QPSK20M	Rear Face	0	55773	3603.3	1	0	ANT Main	w/	0.01	17.55	18	63.30	0.781	0.87	0.295	0.33
	LTE Band 48	QPSK20M	Rear Face	0	55773	3603.3	50	0	ANT Main	w/	0.14	17.53	18	63.30	0.772	0.86	0.291	0.32
	LTE Band 48	QPSK20M	Rear Face	0	56640	3690	1	0	ANT Main	w/	-0.04	17.62	18	63.30	0.769	0.84	0.282	0.31
	LTE Band 48	QPSK20M	Rear Face	0	56640	3690	50	0	ANT Main	w/	0.17	17.58	18	63.30	0.755	0.83	0.274	0.30
	LTE Band 48	QPSK20M	Right Side	0	55773	3603.3	1	0	ANT Main	w/	-0.02	17.55	18	63.30	0.771	0.86	0.266	0.30
	LTE Band 48	QPSK20M	Right Side	0	56640	3690	1	0	ANT Main	w/	0.05	17.62	18	63.30	0.783	0.85	0.271	0.295

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	P-Sensor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	SAR _{1σ} (W/kg)	Reported SAR _{1σ} (W/kg)	SAR _{10σ} (W/kg)	Reported SAR _{10σ} (W/kg)
	LTE Band 66	QPSK20M	Bottom of laptop	0	132322	1745	1	0	ANT Main	w/	0.05	16.62	17.5	0.691	0.85	0.388	0.48
	LTE Band 66	QPSK20M	Bottom of laptop	0	132322	1745	50	0	ANT Main	w/	-0.05	16.56	17.5	0.621	0.77	0.382	0.47
	LTE Band 66	QPSK20M	Bottom of laptop	0	132322	1745	100	0	ANT Main	w/	-0.15	16.52	17.5	0.62	0.78	0.382	0.48
	LTE Band 66	QPSK20M	Bottom of laptop	14	132322	1745	1	0	ANT Main	w/o	-0.07	23.11	24	0.643	0.79	0.404	0.50
	LTE Band 66	QPSK20M	Bottom of laptop	14	132322	1745	50	0	ANT Main	w/o	0.05	22.09	23	0.512	0.63	0.322	0.40
	LTE Band 66	QPSK20M	Right Side of laptop	0	132322	1745	1	0	ANT Main	w/	-0.18	16.62	17.5	0.397	0.49	0.217	0.27
	LTE Band 66	QPSK20M	Right Side of laptop	0	132322	1745	50	0	ANT Main	w/	0.07	16.56	17.5	0.396	0.49	0.214	0.27
	LTE Band 66	QPSK20M	Right Side of laptop	14	132322	1745	1	0	ANT Main	w/o	0.17	23.11	24	0.644	0.79	0.409	0.50
	LTE Band 66	QPSK20M	Right Side of laptop	14	132322	1745	50	0	ANT Main	w/o	0.19	22.09	23	0.548	0.68	0.355	0.44
	LTE Band 66	QPSK20M	Rear Face	0	132322	1745	1	0	ANT Main	w/	0.03	16.62	17.5	0.666	0.82	0.343	0.42
	LTE Band 66	QPSK20M	Rear Face	0	132322	1745	50	0	ANT Main	w/	-0.11	16.56	17.5	0.643	0.80	0.336	0.42
	LTE Band 66	QPSK20M	Rear Face	0	132322	1745	100	0	ANT Main	w/	-0.14	16.52	17.5	0.632	0.79	0.33	0.41
	LTE Band 66	QPSK20M	Rear Face	14	132322	1745	1	0	ANT Main	w/o	-0.12	23.11	24	0.639	0.78	0.385	0.47
	LTE Band 66	QPSK20M	Rear Face	14	132322	1745	50	0	ANT Main	w/o	0	22.09	23	0.495	0.61	0.277	0.34
	LTE Band 66	QPSK20M	Left Side	0	132322	1745	1	0	ANT Main	w/o	-0.07	23.11	24	0.01	0.01	0.01	0.01
	LTE Band 66	QPSK20M	Left Side	0	132322	1745	50	0	ANT Main	w/o	0.06	22.09	23	0.01	0.01	0.01	0.01
	LTE Band 66	QPSK20M	Right Side	0	132322	1745	1	0	ANT Main	w/	-0.1	16.62	17.5	0.607	0.74	0.289	0.35
	LTE Band 66	QPSK20M	Right Side	0	132322	1745	50	0	ANT Main	w/	0.03	16.56	17.5	0.59	0.73	0.272	0.34
	LTE Band 66	QPSK20M	Right Side	14	132322	1745	1	0	ANT Main	w/o	0.17	23.11	24	0.513	0.63	0.272	0.33
	LTE Band 66	QPSK20M	Right Side	14	132322	1745	50	0	ANT Main	w/o	-0.03	22.09	23	0.401	0.49	0.214	0.26
	LTE Band 66	QPSK20M	Top Side	0	132322	1745	1	0	ANT Main	w/o	-0.16	23.11	24	0.171	0.21	0.062	0.08
	LTE Band 66	QPSK20M	Top Side	0	132322	1745	50	0	ANT Main	w/o	-0.15	22.09	23	0.14	0.17	0.049	0.06
	LTE Band 66	QPSK20M	Bottom Side	0	132322	1745	1	0	ANT Main	w/o	-0.1	23.11	24	0.041	0.05	0.013	0.02
	LTE Band 66	QPSK20M	Bottom Side	0	132322	1745	50	0	ANT Main	w/o	0.07	22.09	23	0.025	0.03	0.01	0.01
	LTE Band 66	QPSK20M	Bottom of laptop	0	132072	1720	1	0	ANT Main	w/	0.08	16.49	17.5	0.692	0.87	0.392	0.49
	LTE Band 66	QPSK20M	Bottom of laptop	0	132572	1770	1	0	ANT Main	w/	-0.05	16.55	17.5	0.67	0.83	0.379	0.47
998	LTE Band 66	QPSK20M	Rear Face	0	132072	1720	1	0	ANT Main	w/	0.08	16.49	17.5	0.701	0.88	0.365	0.46
	LTE Band 66	QPSK20M	Rear Face	0	132072	1720	50	0	ANT Main	w/	0.14	16.43	17.5	0.675	0.86	0.346	0.44
	LTE Band 66	QPSK20M	Rear Face	0	132572	1770	1	0	ANT Main	w/	-0.19	16.55	17.5	0.602	0.75	0.313	0.39
	LTE Band 66	QPSK20M	Rear Face	0	132572	1770	50	0	ANT Main	w/	-0.17	16.48	17.5	0.599	0.76	0.311	0.39
	LTE Band 71	QPSK20M	Bottom of laptop	0	133322	683	1	0	ANT Main	w/	-0.04	22.11	22.5	0.803	0.88	0.479	0.52
	LTE Band 71	QPSK20M	Bottom of laptop	0	133322	683	50	0	ANT Main	w/	0.13	22.05	22.5	0.76	0.84	0.453	0.50
	LTE Band 71	QPSK20M	Bottom of laptop	0	133322	683	100	0	ANT Main	w/	-0.17	22.03	22.5	0.755	0.84	0.449	0.50
	LTE Band 71	QPSK20M	Bottom of laptop	14	133322	683	1	0	ANT Main	w/o	-0.07	23.96	25	0.269	0.34	0.194	0.25
	LTE Band 71	QPSK20M	Bottom of laptop	14	133322	683	50	0	ANT Main	w/o	-0.13	22.87	24	0.208	0.27	0.15	0.19
	LTE Band 71	QPSK20M	Right Side of laptop	0	133322	683	1	0	ANT Main	w/o	0.01	23.96	25	0.353	0.45	0.211	0.27
	LTE Band 71	QPSK20M	Right Side of laptop	0	133322	683	50	0	ANT Main	w/o	-0.01	22.87	24	0.299	0.39	0.178	0.23
1026	LTE Band 71	QPSK20M	Rear Face	0	133322	683	1	0	ANT Main	w/	-0.11	22.11	22.5	0.869	0.95	0.498	0.54
	LTE Band 71	QPSK20M	Rear Face	0	133322	683	50	0	ANT Main	w/	-0.06	22.05	22.5	0.816	0.91	0.472	0.52
	LTE Band 71	QPSK20M	Rear Face	0	133322	683	100	0	ANT Main	w/	-0.11	22.03	22.5	0.819	0.91	0.476	0.53
	LTE Band 71	QPSK20M	Rear Face	14	133322	683	1	0	ANT Main	w/o	0.14	23.96	25	0.282	0.36	0.185	0.24
	LTE Band 71	QPSK20M	Rear Face	14	133322	683	50	0	ANT Main	w/o	0.19	22.87	24	0.235	0.30	0.154	0.20
	LTE Band 71	QPSK20M	Left Side	0	133322	683	1	0	ANT Main	w/o	0.08	23.96	25	0.01	0.01	0.01	0.01
	LTE Band 71	QPSK20M	Left Side	0	133322	683	50	0	ANT Main	w/o	0.01	22.87	24	0.01	0.01	0.01	0.01
	LTE Band 71	QPSK20M	Right Side	0	133322	683	1	0	ANT Main	w/o	-0.05	23.96	25	0.405	0.51	0.207	0.26
	LTE Band 71	QPSK20M	Right Side	0	133322	683	50	0	ANT Main	w/o	0.1	22.87	24	0.389	0.50	0.191	0.25
	LTE Band 71	QPSK20M	Top Side	0	133322	683	1	0	ANT Main	w/o	-0.1	23.96	25	0.142	0.18	0.048	0.06
	LTE Band 71	QPSK20M	Top Side	0	133322	683	50	0	ANT Main	w/o	0.11	22.87	24	0.116	0.15	0.038	0.05
	LTE Band 71	QPSK20M	Bottom Side	0	133322	683	1	0	ANT Main	w/o	-0.03	23.96	25	0.034	0.04	0.01	0.01
	LTE Band 71	QPSK20M	Bottom Side	0	133322	683	50	0	ANT Main	w/o	-0.14	22.87	24	0.021	0.03	0.01	0.01
	LTE Band 71	QPSK20M	Bottom of laptop	0	133222	673	1	0	ANT Main	w/	0.19	21.94	22.5	0.756	0.86	0.455	0.52
	LTE Band 71	QPSK20M	Bottom of laptop	0	133222	673	50	0	ANT Main	w/	0.1	21.88	22.5	0.741	0.85	0.446	0.51
	LTE Band 71	QPSK20M	Bottom of laptop	0	133372	688	1	0	ANT Main	w/	-0.13	22.02	22.5	0.794	0.89	0.471	0.53
	LTE Band 71	QPSK20M	Bottom of laptop	0	133372	688	50	0	ANT Main	w/	0.15	21.93	22.5	0.781	0.89	0.464	0.53
	LTE Band 71	QPSK20M	Rear Face	0	133222	673	1	0	ANT Main	w/	0.15	21.94	22.5	0.822	0.94	0.48	0.55
	LTE Band 71	QPSK20M	Rear Face	0	133222	673	50	0	ANT Main	w/	-0.18	21.88	22.5	0.813	0.94	0.468	0.54
	LTE Band 71	QPSK20M	Rear Face	0	133372	688	1	0	ANT Main	w/	-0.09	22.02	22.5	0.832	0.93	0.494	0.55
	LTE Band 71	QPSK20M	Rear Face	0	133372	688	50	0	ANT Main	w/	-0.12	21.93	22.5	0.821	0.94	0.481	0.55

Index.	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	Antenna	Antenna Vendor	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Duty Cycle (%)	SAR _{1.0} (W/kg)	Reported SAR _{1.0} (W/kg)	SAR _{10.0} (W/kg)	Reported SAR _{10.0} (W/kg)
2000	WLAN 2.4 GHz	802.11b	Top Side	0	11	2462	ANT Main	INPAQ	-0.04	16.54	17	99.87	0.27	0.30	0.122	0.14
2001	WLAN 2.4 GHz	802.11b	Top Side	0	1	2412	ANT Aux	INPAQ	0.06	16.45	17	99.90	0.256	0.29	0.125	0.14
2002	Bluetooth	GFSK	Top Side	0	39	2441	ANT Aux	INPAQ	-0.02	9.5	10	75.90	0.039	0.06	0.017	0.03
2003	WLAN 5 GHz	802.11ac VHT80	Top Side	0	58	5290	ANT Main	INPAQ	-0.08	13.24	14	97.25	0.127	0.16	0.044	0.05
2004	WLAN 5 GHz	802.11ac VHT80	Top Side	0	58	5290	ANT Aux	INPAQ	-0.05	13.26	14	97.29	0.131	0.16	0.041	0.05
2005	WLAN 5 GHz	802.11ac VHT80	Top Side	0	106	5530	ANT Main	INPAQ	-0.02	13.6	14.5	97.25	0.2	0.25	0.071	0.09
2006	WLAN 5 GHz	802.11ac VHT80	Top Side	0	106	5530	ANT Aux	INPAQ	-0.03	13.53	14.5	97.29	0.152	0.20	0.039	0.05
2007	WLAN 5 GHz	802.11n HT40	Top Side	0	159	5795	ANT Main	INPAQ	-0.05	13.18	14	98.35	0.212	0.26	0.051	0.06
2008	WLAN 5 GHz	802.11n HT40	Top Side	0	159	5795	ANT Aux	INPAQ	0.04	13.23	14	98.31	0.161	0.20	0.038	0.05
	WLAN 5 GHz	802.11ac VHT160	Back of Display Screen	25	163	5815	ANT Main	INPAQ	-0.01	13.72	14	98.29	0.072	0.08	0.044	0.05
	WLAN 5 GHz	802.11ac VHT160	Bottom of laptop	0	163	5815	ANT Main	INPAQ	-0.18	13.72	14	98.29	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Rear Face	0	163	5815	ANT Main	INPAQ	0.06	13.72	14	98.29	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Left Side	0	163	5815	ANT Main	INPAQ	0.02	13.72	14	98.29	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Right Side	0	163	5815	ANT Main	INPAQ	0.15	13.72	14	98.29	0.001	0.00	0.001	0.00
2009	WLAN 5 GHz	802.11ac VHT160	Top Side	0	163	5815	ANT Main	INPAQ	0.06	13.72	14	98.29	0.341	0.37	0.11	0.12
	WLAN 5 GHz	802.11ac VHT160	Bottom Side	0	163	5815	ANT Main	INPAQ	0.13	13.72	14	98.29	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Top Side	0	163	5815	ANT Main	ZTX	0.08	13.72	14	98.29	0.285	0.31	0.0929	0.10
	WLAN 5 GHz	802.11ac VHT160	Back of Display Screen	25	163	5815	ANT Aux	INPAQ	0	13.84	14	98.37	0.039	0.04	0.021	0.02
	WLAN 5 GHz	802.11ac VHT160	Bottom of laptop	0	163	5815	ANT Aux	INPAQ	-0.09	13.84	14	98.37	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Rear Face	0	163	5815	ANT Aux	INPAQ	0.14	13.84	14	98.37	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Left Side	0	163	5815	ANT Aux	INPAQ	-0.03	13.84	14	98.37	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Right Side	0	163	5815	ANT Aux	INPAQ	0.12	13.84	14	98.37	0.001	0.00	0.001	0.00
2010	WLAN 5 GHz	802.11ac VHT160	Top Side	0	163	5815	ANT Aux	INPAQ	0.11	13.84	14	98.37	0.248	0.26	0.089	0.09
	WLAN 5 GHz	802.11ac VHT160	Bottom Side	0	163	5815	ANT Aux	INPAQ	0.19	13.84	14	98.37	0.001	0.00	0.001	0.00
	WLAN 5 GHz	802.11ac VHT160	Top Side	0	163	5815	ANT Aux	ZTX	-0.1	13.84	14	98.37	0.229	0.24	0.073	0.08

10.6 Measurement Variability

According to KDB 865664 D01v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required:

1. The original highest measured Reported SAR 1-g is ≥ 0.80 W/kg, repeated that measurement once.
2. Perform a second repeated measurement the ratio of the largest to the smallest SAR for the original and first repeated measurements is < 1.2 W/kg, or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Frequency (MHz)	RB Size	RB Offset	Antenna	Note	Original SAR _{1g} (W/kg)	First SAR _{1g} (W/kg)	First Ratio SAR _{1g}	Original SAR _{10g} (W/kg)	First SAR _{10g} (W/kg)	First Ratio SAR _{10g}
703	LTE Band 4	QPSK20M	Bottom of laptop	0	20050	1720	1	0	ANT Main	Index. #703_once	0.807	0.788	2.35%	0.442	0.431	2.49%
229	LTE Band 13	QPSK10M	Bottom of laptop	0	23230	782	1	0	ANT Main	Index. #229_once	0.822	0.806	1.95%	0.475	0.465	2.11%
1035	LTE Band 48	QPSK20M	Rear Face	0	55340	3560	1	0	ANT Main	Index. #1035_once	0.844	0.824	2.37%	0.326	0.318	2.45%
1026	LTE Band 71	QPSK20M	Rear Face	0	133322	683	1	0	ANT Main	Index. #1026_once	0.869	0.842	3.11%	0.498	0.483	3.01%

10.7 Simultaneous Transmission Evaluation

10.7.1 Simultaneous Transmission Configurations

Simultaneous Tx Combination	Capable Transmit Configuration
1	WWAN + WLAN 2.4 GHz ANT Main + WLAN 2.4 GHz ANT Aux
2	WWAN + WLAN 2.4 GHz ANT Main + Bluetooth ANT Aux
3	WWAN + WLAN 5 GHz ANT Main + WLAN 5 GHz ANT Aux
4	WWAN + WLAN 5 GHz ANT Main + Bluetooth ANT Aux
5	WWAN + WLAN 5 GHz ANT Aux + Bluetooth ANT Aux
6	WWAN + WLAN 5 GHz ANT Main + WLAN 5 GHz ANT Aux + Bluetooth ANT Aux

10.7.2 Simultaneous Transmission Result

When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

The sum of SAR1g results is shown as below.

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+2+3	1+2+8	1+4+5	1+4+8	1+5+8	1+4+5+8
		WWAN	WLAN 2.4 GHz ANT Main	WLAN 2.4 GHz ANT Aux	WLAN 5 GHz ANT Main	WLAN 5 GHz ANT Aux	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	Bluetooth ANT Aux	Σ SAR _{1g} (W/kg)	Σ SAR _{1g} (W/kg)	Σ SAR _{1g} (W/kg)	Σ SAR _{1g} (W/kg)	Σ SAR _{1g} (W/kg)	Σ SAR _{1g} (W/kg)
		SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)	SAR1g (W/kg)
WCDMA Band II	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.79	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.81	0.81	0.81	0.81	0.81	0.82
	Right Side of laptop	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.41	0.41	0.41	0.41	0.41
	Rear Face	0.88	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.32	1.15	1.22	1.10	1.06	1.25
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.58	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.60	0.60	0.60	0.60	0.60	0.61
	Top Side	0.12	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.84	0.55	0.75	0.55	0.44	0.81
	Bottom Side	0.03	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.05	0.05	0.05	0.05	0.05	0.06
WCDMA Band IV	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.88	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.90	0.90	0.90	0.90	0.90	0.91
	Right Side of laptop	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	0.78	0.78	0.78	0.78	0.78
	Rear Face	0.89	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.33	1.16	1.23	1.11	1.07	1.26
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.78	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.80	0.80	0.80	0.80	0.80	0.81
	Top Side	0.12	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.84	0.55	0.75	0.55	0.44	0.81
	Bottom Side	0.03	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.05	0.05	0.05	0.05	0.05	0.06
WCDMA Band V	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.84	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.86	0.86	0.86	0.86	0.86	0.87
	Right Side of laptop	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.41	0.41	0.41	0.41	0.41
	Rear Face	0.48	0.24	0.20	0.19	0.15	0.00	0.00	0.03	0.92	0.75	0.82	0.70	0.66	0.85
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.53	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.55	0.55	0.55	0.55	0.55	0.56
	Top Side	0.07	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.79	0.50	0.70	0.50	0.39	0.76
	Bottom Side	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.04	0.04	0.04	0.04	0.04	0.05
LTE Band 4	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.90	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.92	0.92	0.92	0.92	0.92	0.93
	Right Side of laptop	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	0.79	0.79	0.79	0.79	0.79
	Rear Face	0.79	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.23	1.06	1.13	1.01	0.97	1.16
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.79	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.81	0.81	0.81	0.81	0.81	0.82
	Top Side	0.10	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.82	0.53	0.73	0.53	0.42	0.79
	Bottom Side	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.04	0.04	0.04	0.04	0.04	0.05

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+2+3	1+2+8	1+4+5	1+4+8	1+5+8	1+4+5+8
		WWAN	WLAN 2.4 GHz ANT Main	WLAN 2.4 GHz ANT Aux	WLAN 5 GHz ANT Main	WLAN 5 GHz ANT Aux	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	Bluetooth ANT Aux	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)
		SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)
LTE Band 5	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.88	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.90	0.90	0.90	0.90	0.90	0.91
	Right Side of laptop	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	0.49	0.49	0.49	0.49	0.49
	Rear Face	0.58	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.02	0.85	0.92	0.80	0.76	0.95
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.63	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.65	0.65	0.65	0.65	0.65	0.66
	Top Side	0.09	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.81	0.52	0.72	0.52	0.41	0.78
LTE Band 7	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.67	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.69	0.69	0.69	0.69	0.69	0.70
	Right Side of laptop	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.74	0.74	0.74	0.74	0.74	0.74
	Rear Face	0.86	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.30	1.13	1.20	1.08	1.04	1.23
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.74	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.76	0.76	0.76	0.76	0.76	0.77
	Top Side	0.12	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.84	0.55	0.75	0.55	0.44	0.81
LTE Band 12	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.87	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.89	0.89	0.89	0.89	0.89	0.90
	Right Side of laptop	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	0.42	0.42	0.42	0.42	0.42
	Rear Face	0.63	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.07	0.90	0.97	0.85	0.81	1.00
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.42	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.44	0.44	0.44	0.44	0.44	0.45
	Top Side	0.11	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.83	0.54	0.74	0.54	0.43	0.80
LTE Band 13	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.87	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.89	0.89	0.89	0.89	0.89	0.90
	Right Side of laptop	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	0.44	0.44	0.44	0.44	0.44
	Rear Face	0.66	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.10	0.93	1.00	0.88	0.84	1.03
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.44	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.46	0.46	0.46	0.46	0.46	0.47
	Top Side	0.15	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.87	0.58	0.78	0.58	0.47	0.84
LTE Band 14	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.82	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.84	0.84	0.84	0.84	0.84	0.85
	Right Side of laptop	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	0.41	0.41	0.41	0.41	0.41
	Rear Face	0.73	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.17	1.00	1.07	0.95	0.91	1.10
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.61	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.63	0.63	0.63	0.63	0.63	0.64
	Top Side	0.12	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.84	0.55	0.75	0.55	0.44	0.81
LTE Band 25	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.92	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.94	0.94	0.94	0.94	0.94	0.95
	Right Side of laptop	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	0.48	0.48	0.48	0.48	0.48
	Rear Face	0.78	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.22	1.05	1.12	1.00	0.96	1.15
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.63	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.65	0.65	0.65	0.65	0.65	0.66
	Top Side	0.14	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.86	0.57	0.77	0.57	0.46	0.83
LTE Band 26	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.90	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.92	0.92	0.92	0.92	0.92	0.93
	Right Side of laptop	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	0.53	0.53	0.53	0.53	0.53
	Rear Face	0.66	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.10	0.93	1.00	0.88	0.84	1.03
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.69	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.71	0.71	0.71	0.71	0.71	0.72
	Top Side	0.23	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.95	0.66	0.86	0.66	0.55	0.92

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+2+3	1+2+8	1+4+5	1+4+8	1+5+8	1+4+5+8
		WWAN	WLAN 2.4 GHz ANT Main	WLAN 2.4 GHz ANT Aux	WLAN 5 GHz ANT Main	WLAN 5 GHz ANT Aux	WLAN 6 GHz ANT Main	WLAN 6 GHz ANT Aux	Bluetooth ANT Aux	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)	ΣSAR_{1g} (W/kg)
		SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)	SAR _{1g} (W/kg)
LTE Band 30	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.89	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.91	0.91	0.91	0.91	0.91	0.92
	Right Side of laptop	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	0.54	0.54	0.54	0.54	0.54
	Rear Face	0.93	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.37	1.20	1.27	1.15	1.11	1.30
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.63	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.65	0.65	0.65	0.65	0.65	0.66
	Top Side	0.21	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.93	0.64	0.84	0.64	0.53	0.90
LTE Band 38	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.60	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.62	0.62	0.62	0.62	0.62	0.63
	Right Side of laptop	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	0.49	0.49	0.49	0.49	0.49
	Rear Face	0.92	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.36	1.19	1.26	1.14	1.10	1.29
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.64	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.66	0.66	0.66	0.66	0.66	0.67
	Top Side	0.14	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.86	0.57	0.77	0.57	0.46	0.83
LTE Band 41	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.57	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.59	0.59	0.59	0.59	0.59	0.60
	Right Side of laptop	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	0.47	0.47	0.47	0.47	0.47
	Rear Face	0.92	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.36	1.19	1.26	1.14	1.10	1.29
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.60	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.62	0.62	0.62	0.62	0.62	0.63
	Top Side	0.14	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.86	0.57	0.77	0.57	0.46	0.83
LTE Band 48	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.51	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.53	0.53	0.53	0.53	0.53	0.54
	Right Side of laptop	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	0.58	0.58	0.58	0.58	0.58
	Rear Face	0.95	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.39	1.22	1.29	1.17	1.13	1.32
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.94	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.96	0.96	0.96	0.96	0.96	0.97
	Top Side	0.26	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.98	0.69	0.89	0.69	0.58	0.95
LTE Band 66	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.87	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.89	0.89	0.89	0.89	0.89	0.90
	Right Side of laptop	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	0.79	0.79	0.79	0.79	0.79
	Rear Face	0.88	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.32	1.15	1.22	1.10	1.06	1.25
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.79	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.81	0.81	0.81	0.81	0.81	0.82
	Top Side	0.21	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.93	0.64	0.84	0.64	0.53	0.90
LTE Band 71	Back of Display Screen	0.00	0.05	0.04	0.09	0.07	0.00	0.00	0.01	0.09	0.06	0.16	0.10	0.08	0.17
	Bottom of laptop	0.89	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.91	0.91	0.91	0.91	0.91	0.92
	Right Side of laptop	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	0.45	0.45	0.45	0.45	0.45
	Rear Face	0.95	0.24	0.20	0.19	0.15	0.00	0.00	0.03	1.39	1.22	1.29	1.17	1.13	1.32
	Left Side	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.03	0.03	0.03	0.03	0.03	0.04
	Right Side	0.51	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.53	0.53	0.53	0.53	0.53	0.54
	Top Side	0.18	0.37	0.35	0.37	0.26	0.00	0.00	0.06	0.90	0.61	0.81	0.61	0.50	0.87

10.7.3 SAR to peak location separation (SPLSR)

According to KDB 447498, when the sum of SAR is greater than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR), and the simultaneously transmitting antennas must be considered one pair at a time. The ratio is determined by $(SAR1+SAR2)1.5 / (\text{separation distance between the peak SAR locations for the antenna pair, mm})$, round to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

The SPLSR hotspot combination procedure in TCB workshop Nov. 2019 was applied when simultaneous transmission SAR is > 1.6 W/kg and antenna pair is co-located.

SPLSR analysis is not required in this report since the sum of SAR is under the SAR limit.

10.8 Requirements on the Uncertainty Evaluation

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

The highest measured 1-g SAR is less than 1.5 W/kg and the highest measured 10-g SAR is less than 3.75 W/kg.

Therefore, per KDB Publication 865664 D01, the extended measurement uncertainty analysis described in IEEE 1528-2013 and IEC/IEEE 62209-1528 is not required.

11. Conclusion

The SAR test values found for the device are below the maximum limit of 1.6 W/kg.

***** End of Report *****