

TABLE OF CONTENTS LIST

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED

FCC ID: MUDFR-140

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED
PAGE 3.....RF POWER OUTPUT
PAGE 4.....MODULATION CHARACTERISTICS
PAGE 5.....OCCUPIED BANDWIDTH AND SPURIOUS EMISSIONS AT
ANTENNA TERMINALS
PAGE 6.....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 7.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 8.....FREQUENCY STABILITY
PAGE 9.....CERTIFICATION OF TECHNICAL DATA
PAGE 10.....LIST OF TEST EQUIPMENT

EXHIBITS:

EXHIBIT 1.....POWER OF ATTORNEY LETTER
EXHIBIT 2.....FCC ID LABEL SAMPLE AND SKETCH OF LOCATION
EXHIBIT 3A.....FRONT VIEW EXTERNAL PHOTOGRAPH
EXHIBIT 3B.....REAR VIEW EXTERNAL PHOTOGRAPH
EXHIBIT 3C.....TOP VIEW EXTERNAL PHOTOGRAPH
EXHIBIT 3D.....SIDE VIEW EXTERNAL PHOTOGRAPH
EXHIBIT 3E.....COPPER SIDE INTERNAL PHOTOGRAPH
EXHIBIT 3F.....COMPONENT SIDE INTERNAL PHOTOGRAPH
EXHIBIT 4.....BLOCK DIAGRAM
EXHIBIT 5.....SCHEMATICS
EXHIBIT 6A-6B.....LIST OF ACTIVE DEVICES
EXHIBIT 7A-7E.....THEORY OF OPERATION
EXHIBIT 8.....TUNING PROCEDURE
EXHIBIT 9A-9H.....USER'S MANUAL
EXHIBIT 10.....AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT 11.....AUDIO INPUT VS DEVIATION GRAPH
EXHIBIT 12.....AUDIO LOW PASS FILTER GRAPH
EXHIBIT 13.....OCCUPIED BANDWIDTH PLOT - CW
EXHIBIT 14.....OCCUPIED BANDWIDTH PLOT - 2500 Hz

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED

FCC ID: MUDFR-140

REPORT #: F:\CUS\K\KACE\KAC241U8.RPT

PAGE: TABLE OF CONTENTS

GENERAL_INFORMATION_REQUIRED
FOR_TYPE_ACCEPTANCE

2.983 (a,b,c) KACE ELECTRONICS(ASIA) INCORPORATED will manufacture the FCC ID: MUDFR-140 FAMILY RADIO SERVICES SINGLE CHANNEL TRANSCEIVER in quantity, for use under FCC RULES PART 95.

2.983 (d) TECHNICAL_DESCRIPTION

2.983 (d) (1) Type of Emission: 9K6F3E

95.629

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 1.8K \\ B_n &= 2(3.0) + 2(1.8) = 9.6K \end{aligned}$$

Authorized Bandwidth 12.5KHz

2.983 (d) (2) Frequency Range: 1. 462.5625 8. 467.5625

95.627 2. 462.5875 9. 467.5875

3. 462.6125 10. 467.6125

4. 462.6375 11. 467.6375

5. 462.6625 12. 467.6625

6. 462.6875 13. 467.6875

7. 462.7125 14. 467.7125 MHz

2.983 (d) (3) Power Output shall not exceed 0.500Watts effective

95.637 radiated power. There can be no provisions for

95.647 increasing the power.

2.983 (d) (4) Maximum Output Power Rating: 350 milliWatts

95.637 effective radiated power.

95.645 The antenna is an intergral part to the unit, it cannot be removed without rendering the unit inoperative. In order to remove the antenna the case must unscrewed, then the PCB assemblies must be removed then the antenna can be removed.

2.983 (d) (5) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

Vce = 4.5 Volts DC Ice = 0.14A.

Pin = 0.67 Watts

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED

FCC ID: MUDFR-140

REPORT #: F:\CUS\K\KACE\KAC241U8.RPT

PAGE #: 1

2.983 (d)(6) Function of each electron tube or semiconductor device or other active circuit device:
SEE PAGE 6A-6B

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 5 of this report. The block diagrams are included as EXHIBIT 4 of this report.

2.983(d) (8) Instruction book. A draft copy of the instruction manual is included as EXHIBIT 9A-9H.

2.983 (d) (9) Tune-up procedure. The tune-up procedure is included as EXHIBIT 8.

(10) Description of all circuitry and devices provided for determining and stabilizing frequency is given in INCLUDED IN USER'S MANUAL. The crystal specifications are included as NA.

2.983 (d)(11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power will be INCLUDED IN USER'S MANUAL.

(12) Digital modulation. This unit does not use digital modulation.


2.983(e) The data required by 2.985 through 2.997 is submitted below.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED
FCC ID: MUDFR-140
REPORT #: F:\CUS\K\KACE\KAC241U8.RPT
PAGE #: 2

2.985(a) RF_power_output.

95.637 RF power is measured by measuring the radiated power at 3 meters and then replacing the transmitter with a signal generator to determine the effective radiated power. The ERP shall not exceed 0.500 Watts.

MEASURED POWER OUTPUT = 350 milliWatts ERP

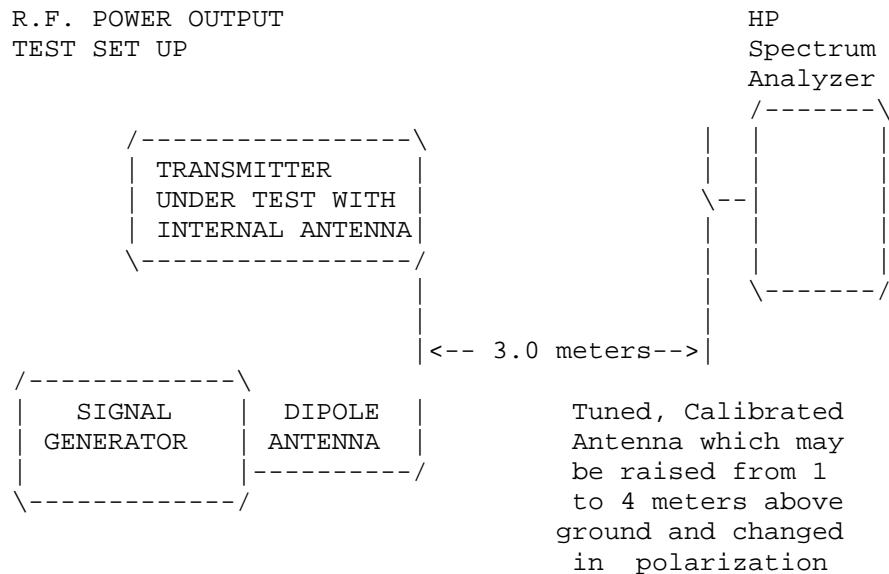

Equipment placed 1 meter above ground
on a rotatable platform.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED
FCC ID: MUDFR-140
REPORT #: F:\CUS\K\KACE\KAC241U8.RPT
PAGE #: 3

2.987(a)(b) Modulation_characteristics:

AUDIO_FREQUENCY_RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. SEE EXHIBIT 10.

2.987(b) 1

Audio_input_versus_modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. SEE EXHIBIT 11.

95.635(b)

Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. SEE EXHIBIT 12.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED

FCC ID: MUDFR-140

REPORT #: F:\CUS\K\KACE\KAC241U8.RPT

PAGE #: 4


2.989(c) EMISSION BANDWIDTH:
95.633(b)(1)(3)(7)

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least $43+\log_{10}(TP)$. The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth PLOTS follow.

Radiotelephone transmitter with modulation limiter.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

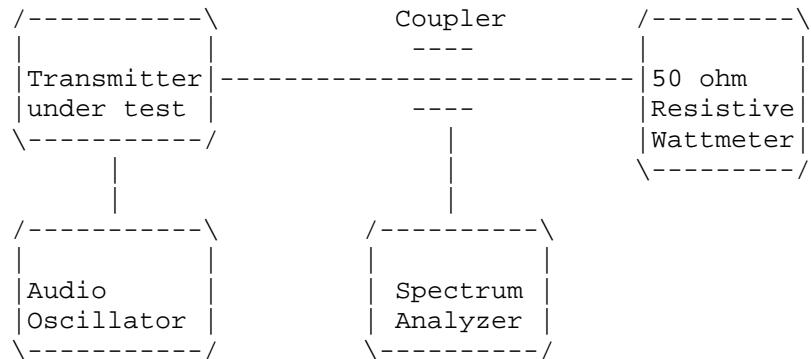

2.991 Not Applicable, no antenna terminal allowed.

2.993(a)(b) UNWANTED_RADIATION:
95.635(b)(7)

REQUIREMENTS: Emissions must be attenuated by at least the following below the output of the transmitter.

$$43 + 10\log(\text{TP}) = 43 + 10\log(0.5) = 40.00\text{dB}$$

TEST DATA:

EMISSION FREQ. MHz	METER READING @ 3m	COAX LOSS dB	ACF dB	FIELD STRNGTH dBuV/m	ATT. dBuV/m	MARGIN dB	ANT.
462.56	101.30	1.60	18.44	121.34	0.0	0.0	V
925.12	36.00	2.90	24.10	63.00	58.34	18.34	V
1387.68	35.80	1.00	25.55	62.35	58.99	18.99	V
1850.24	34.10	1.01	27.40	62.51	58.83	18.83	H
2112.80	25.00	1.05	28.28	54.33	67.01	27.01	V
2312.80	35.80	1.08	28.78	65.66	55.68	15.68	H
2775.36	44.20	1.15	29.94	75.28	46.06	6.06	H
3237.92	32.10	1.22	31.09	64.41	56.93	16.93	H
3700.48	23.20	1.29	32.25	56.74	64.60	24.60	H
4163.04	31.90	1.35	33.18	66.44	54.90	14.90	H
4625.60	29.30	1.42	33.70	64.43	56.91	16.91	V

MARGIN = (Field strength of Fund - 40dB) - FS OF EMISSION


METHOD OF MEASUREMENT: The procedure used was C63.4-1992 for intentional radiators. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 and RGA-180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane, Gainesville, FL. 32605.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED
FCC ID: MUDFR-140
REPORT #: F:\CUS\K\KACE\KAC241U8.RPT
PAGE #: 6

2.993(a)(b) UNWANTED_RADIATION:
95.631(b)(8)(9)

Method of Measuring Radiated Spurious Emissions

Hewlett Packard
Spectrum
Analyzer
HP8566B

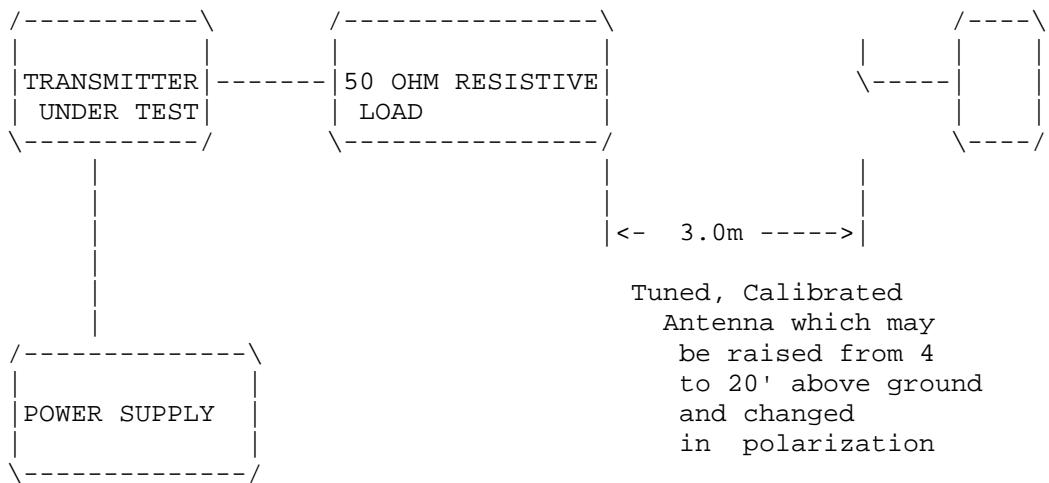

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED
FCC ID: MUDFR-140
REPORT #: F:\CUS\K\KACE\KAC241U8.RPT
PAGE #: 7

2.995(a)(b)(d) Frequency_stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 4.5 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.562 500

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	462.562 500	00.00
-20_____	462.561 650	-1.84
-10_____	462.562 900	+0.85
0_____	462.563 270	+1.66
+10_____	462.563 180	+1.48
+20_____	462.562 800	+0.64
+30_____	462.561 830	-1.44
+40_____	462.561 690	-1.76
+50_____	462.561 920	-1.25
20c BATT. End-Point 4.5V/dc	462.562 700	+0.43

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was 1.48 to -1.85 ppm. The maximum frequency variation with voltage was +0.43ppm.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED

FCC ID: MUDFR-140

REPORT #: F:\CUS\K\KACE\KAC241U8.RPT

PAGE #: 8

2.983(f) Photo_or_Drawing_of_Label:
See EXHIBIT 2.

2.983(g) Photos_of_Equipment:
See EXHIBITS 3A-3F.

2.999 Measurement_Procedures_for_Type_Acceptance:
Measurement techniques have been in accordance with EIA specifications and the FCC requirements.

2.909 Certification_of_Technical_Data_by_Engineers
We, the undersigned, certify that the enclosed measurements and enclosed data are true and correct.

S. S. SANDERS
S.S. Sanders
Engineer

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED
FCC ID: MUDFR-140
REPORT #: F:\CUS\K\KACE\KAC241U8.RPT
PAGE #: 9

LIST_OF_TEST_EQUIPMENT

1. Frequency Counter - Hewlett Packard Model 5383A
S/N 2338A06071
2. SPECTRUM ANALYZER - HP Model 8566B
3. RF PRE-SELECTOR - HP Model 85685A
4. QUASI-PEAK ADAPTER - HP 85650A
5. RF Power Meter - Bird Model 43 Serial 81398
6. RF Attenuators - Narda MOD 766-20
7. Audio Oscillator - Hewlett Packard Model 201C
Serial 351-06107
8. Modulation meter - IFR MODEL AM/FM 500A.
9. Voltmeter - Hewlett Packard Model 427A
Serial Number 731-0751
10. HP Distortion Analyzer Model No. 334A
Serial Number 822-01817
11. Tenney Temperature Chamber
11. Eaton Biconical antenna Model 94455-1 antenna kit 20-200 MHz
12. Electro-Metric Dipole Kit 20-1000MHz, Model TDA 25
13. Electro-Metrics RGA-180 antenna kit 1- 18 GHz
14. HP broadband preamplifier model 8447D, serial no.
1644A00978, 30 - 1000 MHz.

APPLICANT: KACE ELECTRONICS(ASIA) INCORPORATED
FCC ID: MUDFR-140
REPORT #: F:\CUS\K\KACE\KAC241U8.RPT
PAGE #: 10