


VILTROX

User Manual

Sprite 15C

RGB Photography Fill Light

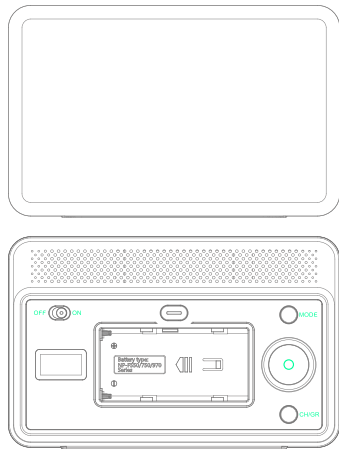

Thanks for choosing VILTROX fill light!
Please read the operating instruction carefully so that you can know about and use all functions of the fill light.



Shenzhen Jueying Technology Co., Ltd. Executive standard: Q/JYKJ002-2019
Tel: +86-755-2877 9024 Fax: 0755-2877 4730
Email: info@viltrox.com Website: www.viltrox.com
Address: 1207, Floor 12, Block B, Chinto Science&Technology Building, Minzhi Street, Longhua, Shenzhen, Guangdong, China
Production Address: Floor 3, Building 1, Simaiou Science Park, No. 52-1, Juyuan Road, Qichang Town, Huiyang District, Huizhou, Guangdong, China

Product Functions

Sprite 15C is a multifunctional RGB fill-in light that features light, handy, portable, matching of 36000 colors, low power consumption, accurate color temperature, high CRI, various remote control modes and user-friendly. It is applicable to still life shooting, live streaming, selfish, e-commerce product shooting and other creative shooting scenes.


Features

- RGB full color mode: HSL/RGBW/COL.
- 0-360° full-color, satisfying various light color requirements.
- 0%-100% high brightness fill-in light.
- Dual-color temperature adjustment range: 2800-6800K.
- Special effect of 26 kinds of FX scenarios: Realize more creative video shooting demands.
- 225 high-quality beads.
- Small and handy.
- 1/4 screw has stronger universality.
- Integrated soft light hood ensures soft and non-dazzling light.
- Applicable various control modes: Control panel, mobile APP and remote control, easier to operate.


Attentions

1. Please keep this product out of children's reach.
2. Do not expose the product to eyes with a short distance.
3. Do not vibrate the product extensively; otherwise, it may become faulty, such as component damage.
4. Do not try to dismantle or repair the product alone; otherwise, it may become faulty.
5. Do not use the product near special substances, such as chemicals, combustible gas, etc. Please pay special attention to relevant warning identifications.
6. The product is not waterproof so please pay special attention to water resistance once being used in rainy and humid environment.
7. Do not cover any object that hinders heat dissipation on the product. A too high temperature may shorten service life of the product.

Check accessories

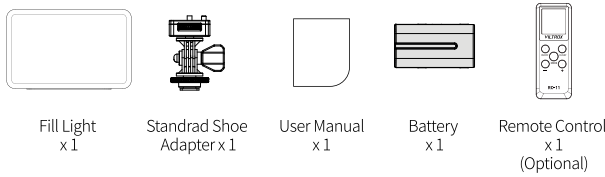

Parts identification

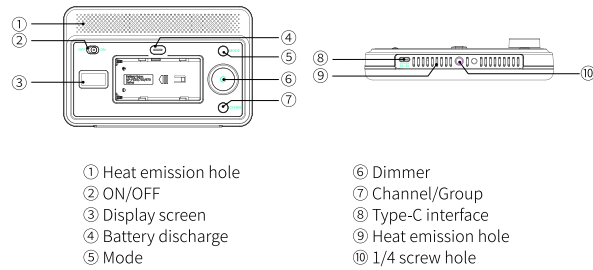

Power Supply Mode

- This equipment adopts the following power supply modes:
1. If the display screen displays < >, it means that this equipment is powered by external batteries.
 2. If the display screen displays < >, it means that this equipment adopts Type-C power supply.
 3. If the display screen displays < >, it means that this equipment adopts quick Type-C power supply.

Operation Instructions


Startup




Turn on < ② ON/OFF >, and the light will be on, and the display screen will be on and display current information.

Switch mode


Short press < ⑤ Mode > to switch among 5 function interfaces;
CCT > HSL > RGBW > COL > Scene.



Parameter Setting




Bluetooth Mode



Short press < ⑦ Channel/Group > to enter Bluetooth mode to set channel number and group number. Short press < ⑥ Dimmer > to select an option to be adjusted and rotate < ⑥ Dimmer > left and right to edit the value.
Short press < ⑦ Channel/Group > to exit from Bluetooth mode.

Installation and Use of Adapter

1. Align the adapter at the 1/4 screw hole of the fill-in light and tighten the adapter clockwise. (①)
2. Install the adapter in the slot and rotate the turntable of the adapter left to the end to firmly fix it on the camera. (②)

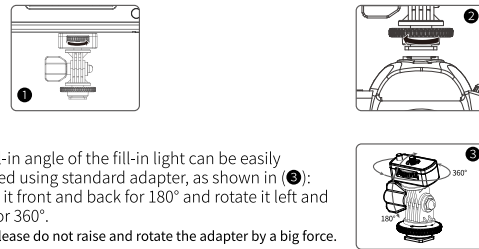

3. The fill-in angle of the fill-in light can be easily adjusted using standard adapter, as shown in (③): Rotate it front and back for 180° and rotate it left and right for 360°.

Note: Please do not raise and rotate the adapter by a big force.

Light Adjustment by APP

1. Apple system: Search "WeeelytePro" in "APP store" and download the APP to mobile phone and install it. You can also scan the QR code for downloading.
2. Android system: Scan the QR code to download the APP.



For Apple system
Scan the QR code for downloading




For Android system
Scan the QR code for downloading


Connection mode:
1. Enable the Bluetooth of mobile phone first and then open "WeeelytePro" of APP.
2. Set the channel No. and group No. of APP in line with those of the product. (If the channel No. and group No. of the product are 1 and A, set the channel and group No. of APP as 1 and A; otherwise, inconsistent parameters will lead to control failure).

Note: Open APP for dimming, with no need for Bluetooth pairing.

APP interface preview

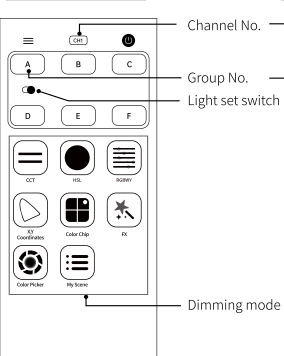



Product interface preview



If operation via APP fails, please execute the operation below:
—Check if the channel No. and group No. of fill light and APP are consistent.
—Check if light set switch is off.
—Restart the mobile phone and fill light.

Dimming via Remote Control (User needs to purchase it separately)

The product supports dimming by "RC-11" remote control. Remember to set channel No. and group No. prior to use (make ensure the channel No. and group No. of light and remote control are consistent).
Note: Operate the remote control by referring to the operating instruction of remote control.

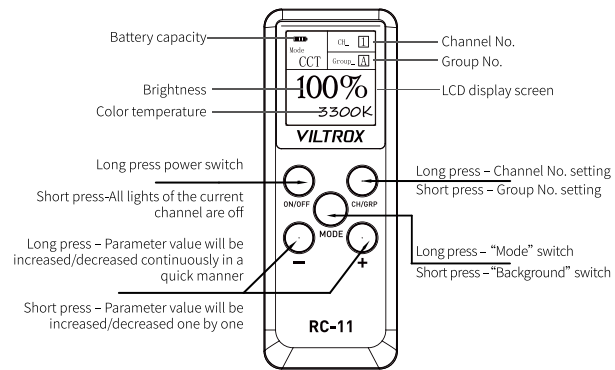

AAA battery compartment

*Please take the battery out of remote control that will not be used for a long time in order to prevent the leaked liquid of battery from damaging components.

Operating Instructions of Remote Control

1. Long press RC-11 "Power switch" for 2 s and RC-11 power supply and display screen will be on.
2. Set the same "channel No." and "group No." by referring to "the controlled photography light". (LED photography light cannot be operated if the "channel No." and "group No." are different). Channel No. setting - Long press CH/GRP for 2 s and choose the channel required by +/- buttons; then press "MODE Button" for confirmation. Group No. setting - Short press "CH/GRP" to choose among A/B/C/D/E/F.
3. Long press "MODE" button to switch among four modes, including CCT/HSL/RGBW/SCENE. ("The remote control has no COL mode, so COL mode of this equipment cannot be controlled")
4. Short press "MODE" to switch among options. Press +/- to set the value of options.
5. The power supply will shut down automatically if RC-11 is not operated 30 min after startup.

Tips:

If several lights are used for shooting, do not change the channels having been set at will after confirming them. Set different lights into groups, such as including Light A into Group A and Light B into Group B... Special remainder: Do not set different lights into different channels. It is troublesome to adjust light by switching among different channels frequently. The method above is wrong, which will also occupy the channels of others and easily lead to mutual interference.

| Model | RC-11 remote control |
|-------------------------------------|--|
| Wireless frequency | 2.4 GHz Bluetooth wireless control system |
| Distance of remote control (vacant) | 30m |
| Group of wireless remote control | A,B,C,D,E and F |
| Channel | 1-19 |
| Standby time | Automatic shutdown, if no operation 30 min after startup |
| Ambient temperature | -10~50°C |
| Power supply | 1.5V AAA battery |
| Dimensions | 101 mm x 38 mm x 18 mm |
| Weight | About 37 g (excluding battery) |

Specification

| | |
|-----------------------------|--|
| Range of color temperature | 2800-6800K (adjustable) |
| Range of brightness | 0%-100% (adjustable) |
| Range of color phase | 0-360° (adjustable) |
| Max. luminous flux | 1350lm |
| Max. illuminance | 1550Lux@0.5m |
| Max. power | 15W |
| Number of beads | Warm white/cold white/RGB 75PCS respectively |
| Group/Channel | A, B, C, D, E, F 1-19 |
| Illumination angle | 120° |
| CRI (color rendering index) | RA ≥ 95, TLCI ≥ 95 |
| Power interface | Type-C 5V/9V |
| Battery series | NP-F550/F750/F970 series |
| Battery endurance | 120 min (4400mAh, 7.4V) According to external battery capacity |
| Remote control | RC-11 remote control (user needs to purchase it separately) |
| Dimensions | 175.8x112.4x39mm |
| Weight | ≈263g (bare light) |

VILTROX

Warranty Card

VILTROX international warranty card is an important file. In case of requiring any warranty services during the warranty period, user needs to show the warranty card and original of invoice, both of which are stamped by the Company's authorized dealer. For any information about the change of our designated maintenance outlets and other information, please visit our website at www.viltrox.com. Please keep the warranty card properly, which will not be reissued once lost.

| Product name | | Dealer's name/seal | |
|------------------|--|--------------------|--|
| Model | | | |
| Warranty period | | | |
| Date of purchase | | | |
| Contact | | | |

FCC ID: 2A6K7-SPRITE15C

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

VILTROX
www.viltrox.com