


ATOMS™

COMPACT • POWERFUL • QUIET
BY SKYLINK GROUP

Garage Door Opener Quick Programming Guide

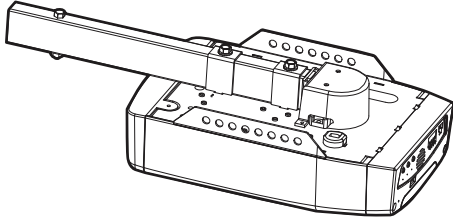

A. Post-Installation Wiring

<p>1. Re-connect the wires of the safety beam sensor to the Atoms opener. Push in tab with a flat head screwdriver and insert the wires.</p>	
<p>2. Re-connect the wires of the wall console to the Atoms opener. Push in tab with a flat head screwdriver and insert the wires.</p>	

B. Setup Travel Limit & Open/Close Force

<p>1. Connect the opener to an approved power source. The green LED stays on.</p>	<p>Green LED</p>
<p>2. Press and hold [Set] button for 5 seconds until the blue LED stays on, red LED flashes quickly. Release the [SET] button.</p> <p>3. Press the [▲] button until the door is in fully open position.</p> <p>4. Press the [Set] button to confirm the door position.</p>	<p>SET DOOR TRAVEL LIMIT (OPEN/CLOSE)</p> <p>Red LED LED</p> <p>Blue LED LED</p>
<p>5. The blue LED stays on, red LED flashes slowly.</p> <p>6. Press the [▼] button until the door is in fully closed position.</p> <p>7. Press the [Set] button again to confirm.</p> <p>8. The blue and red LED stay on. The light will flash 3 times when the travel limit settings are completed.</p>	<p>SET DOOR TRAVEL LIMIT (CLOSE/OPEN)</p> <p>Red LED LED</p> <p>Blue LED LED</p>
<p>9. Press the Wall button to open the garage door to its fully open position.</p> <p>10. The blue and red LED flash slowly.</p> <p>11. The light will flash 3 times again.</p>	<p>LEARN DOOR TRAVEL LIMIT (OPEN/CLOSE)</p> <p>Red LED LED</p> <p>Blue LED LED</p>
<p>12. Press the Wall button again to close the garage door to its fully closed position.</p> <p>13. The blue and red LED will turn off. And emit one beep indicating the programming successfully.</p>	<p>LEARN DOOR TRAVEL LIMIT (CLOSE/OPEN)</p>

C. Programming Remote Control

<p>1. Press the [Set] button for one second, and release the button when the blue LED flashes slowly.</p>	<p>LEARN WIRELESS CONTROL</p>
<p>2. Program a Remote: Within 30 seconds, press any button on the remote that you would like to program to the opener.</p> <p>3. Once the button on the remote is programmed. The blue LED will off indicating the programming successfully.</p>	

D. Erasing all the Remote Control from opener

Note: To erase any unwanted remote control, first erase all remotes.

<p>1. Press the [Set] button for 15 seconds, when the blue LED flashes quickly. Release the [Set] button.</p> <p>2. Press the [Set] button again to confirm erase all the programmed remotes.</p> <p>3. The blue LED stays off and emit one beep indicating the erasing successfully.</p>	<p>ERASE WIRELESS CONTROL</p>
---	--------------------------------------

E. Operation

<p>1. Wall Console Push the button to open/close the garage door opener.</p>	<p>Push button</p>
<p>2. Remote To open/close the opener with remote control, press the button that is programmed to the opener.</p>	

FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



FCC

Ce dispositif est conforme à la partie 15 des règlements de la FCC. Son fonctionnement est soumis aux deux conditions suivantes : 1) Il ne doit pas produire d'interférences nuisibles, et 2) Il doit accepter toute interférence reçue, même si celle-ci est susceptible de compromettre son fonctionnement.

AVERTISSEMENT :

Tout changement ou modification, non expressément approuvé par la partie responsable de la conformité, peut annuler l'autorisation de l'utilisateur à utiliser cet appareil.

Remarque :

Cet équipement a été testé et déclaré conforme aux restrictions prévues dans le cadre de la classe B des appareils numériques, définies par la section 15 du règlement de la FCC. Ces restrictions visent à garantir une protection suffisante contre les interférences nuisibles dans une installation à domicile. Cet appareil utilise et émet de l'énergie de fréquences radio, et s'il n'est pas installé et employé conformément aux consignes, il peut provoquer des interférences nuisibles aux communications radio.

Il n'existe toutefois aucune garantie que de telles interférences ne se produiront pas dans une installation particulière. Si cet appareil occasionne des interférences nuisibles aux réceptions radio ou télévisuelles, ce qui peut être déterminé en mettant l'appareil en arrêt et en marche, l'utilisateur peut corriger cette interférence de l'une des façons suivantes :

- Réorientez ou déplacez l'antenne de réception.
- Augmentez la distance entre l'appareil et le récepteur.
- Branchez l'appareil sur un circuit électrique différent de celui où le récepteur est branché.
- Consultez le fournisseur ou un technicien radio/télévision expérimenté pour obtenir de l'aide.



IC

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux Partie 15 des règlements de la FCC et CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.