

# Test Report of FCC CFR 47 Part 15 Subpart C and Industry Canada RSS-210 Issue 8

On Behalf of

## Mine Site Technologies Pty Ltd.

**FCC ID:** N73-MP10  
**IC ID:** 7449B-MP10  
**Product Description:** MP10 Mine Phone  
**Model No.:** MP10  
**Brand Name:** Mine Site Technologies

**Prepared for:** Mine Site Technologies Pty Ltd.  
113, Wicks Road, Macquarie Park, NSW 2113, AUSTRALIA.


**Prepared by:** Bontek Compliance Testing Laboratory Ltd  
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East  
Road, Nanshan, Shenzhen, China  
Tel: 86-755-86337020  
Fax: 86-755-86337028

**Report No.:** BCT12ER172E  
**Issue Date:** August 16, 2012,  
**Test Date:** June23~August 14, 2012

**Test by:**

**Reviewed By:**

  
\_\_\_\_\_  
Vincent Jiang

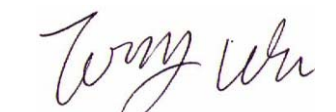  
\_\_\_\_\_  
Tony Wu

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
1.2 TEST STANDARDS AND TEST METHODOLOGY .....	3
1.3 TEST FACILITY .....	4
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
2.1 EUT CONFIGURATION .....	5
2.2 EUT EXERCISE .....	5
2.3 GENERAL TEST PROCEDURES .....	5
2.4 MEASUREMENT UNCERTAINTY .....	5
2.5 LIST OF MEASURING EQUIPMENTS USED .....	6
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>4. TEST OF AC POWER LINE CONDUCTED EMISSION.....</b>	<b>9</b>
4.1 APPLICABLE STANDARD .....	9
4.2 TEST SETUP DIAGRAM .....	9
4.3 TEST RESULT.....	9
<b>5. TEST OF MAXIMUM PEAK OUTPUT POWER.....</b>	<b>12</b>
5.1 APPLICABLE STANDARD .....	12
5.2 EUT SETUP .....	12
5.3 TEST EQUIPMENT LIST AND DETAILS .....	12
5.4 TEST PROCEDURE .....	12
5.5 TEST RESULT.....	12
<b>6. TEST OF PEAK POWER SPECTRAL DENSITY.....</b>	<b>18</b>
6.1 APPLICABLE STANDARD .....	18
6.2 EUT SETUP .....	18
6.3 TEST EQUIPMENT LIST AND DETAILS .....	18
6.4 TEST PROCEDURE .....	18
6.5 TEST RESULT.....	18
<b>7. TEST OF 6DB BANDWIDTH .....</b>	<b>24</b>
7.1 APPLICABLE STANDARD .....	24
7.2 EUT SETUP .....	24
7.3 TEST EQUIPMENT LIST AND DETAILS .....	24
7.4 TEST PROCEDURE .....	24
7.5 TEST RESULT.....	24
<b>8. TEST OF CONDUCTED SPURIOUS EMISSION.....</b>	<b>30</b>
8.1 APPLICABLE STANDARD .....	30
8.2 EUT SETUP .....	30
8.3 TEST EQUIPMENT LIST AND DETAILS .....	30
8.4 TEST PROCEDURE .....	30
8.5 TEST RESULT.....	30
<b>9. TEST OF RADIATED SPURIOUS EMISSION.....</b>	<b>33</b>
9.1 RADIATED SPURIOUS EMISSION.....	33
9.1.1 LIMITS .....	33
9.1.2 EUT SETUP .....	34
9.1.3 TEST PROCEDURE.....	35
9.1.4 TEST RESULT .....	35
9.2 RESTRICTED BAND EDGES .....	43
<b>10. ANTENNA REQUIREMENT.....</b>	<b>48</b>
10.1 STANDARD APPLICABLE .....	48
10.2 ANTENNA CONNECTED CONSTRUCTION.....	48

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: **Mine Site Technologies Pty Ltd.**  
Address of applicant: 113, Wicks Road, Macquarie Park, NSW 2113, AUSTRALIA.  
Manufacturer: **Mine Site Technologies China Co. Ltd.**  
Address of manufacturer: 4F Building 5 1413 Moganshan Road, Hangzhou, CHINA

### General Description of E.U.T

Items	Description
EUT Description:	MP10 Mine Phone
Trade Name:	Mine Site Technologies
Model No.:	MP10
Frequency Band:	IEEE 802.11b/g, 2412MHz~2462MHz
Channel Spacing:	IEEE 802.11b/g: 5MHz
Number of Channels:	IEEE 802.11b/g:11 Channels
Transmit Data Rate:	IEEE802.11b : 11 , 5.5 , 2 , 1 Mbps IEEE802.11g : 54 , 48 , 36 , 24 , 18 , 12 , 9 , 6 Mbps
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Power Supply:	Input: DC3.7V 1200mAh for build-in battery
Adapter Information:	Model: ADS-10A-12/06009GPCU Input: 100V ~240V,50~60Hz 500mA Max Output: 6VDC 1.5A

\* The test data gathered are from the production sample provided by the manufacturer.

## 1.2 Test Standards and Test Methodology.

The tests standards used:

FCC Part 15, Subpart C, section 15.203, 15.207, 15.209 and 15.247 rules,  
FCC publication KDB558074 of Guidance on Measurements for Digital Transmission Systems  
(47 CFR 15.247),  
RSS-210 Issue 8.

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 – 2003 and RSS-GEN Issue 3. Radiated testing was performed at an antenna to EUT distance 3 meters.

### **1.3 Test Facility**

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC – Registration No.: 338263**

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March, 2008.

#### **IC Registration No.: 7631A**

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on August 2009.

#### **CNAS - Registration No.: L3923**

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923,February,2009.

#### **TUV - Registration No.: UA 50145371-0001**

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-001

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### 2.3 General Test Procedures

**Conducted Emissions:** The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 and Clause 4 of RSS-GEN Issue 3. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions:** The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003 and Clause 4 of RSS-GEN Issue 3.

### 2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

## 2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2011-7-25	2012-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Horn Antenna	R/S	CH14-H052	1091698	2012-4-6	2013-4-5
5	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
6	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
7	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
8	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
9	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
10	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2011-4-11	2012-4-10
11	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
12	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2011-6-16	2012-6-15
14	Color TV Pattern Genenerator	PHILIPS	PM5418	TM209947	N/A	N/A
15	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
16	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
17	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2012-11-27
18	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2012-11-27
19	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2012-11-27
20	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
21	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2011-10-24	2012-10-23
22	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
23	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
24	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
25	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
26	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
27	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5

28	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
29	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
30	ISN	TESEQ	ISN-T800	30301	2011-6-23	2012-6-22
31	10KV surge generator	SANKI	SKS-0510M	048110003E321	2011-11-14	2012-11-13
32	HRMONICS&FLICKRE ANALYSER	VOLTECH	PM6000	200006700433	2011-6-27	2012-6-26
33	Spectrum Analyzer	R&S	FSP	100397	2011-11-2	2012-11-1
34	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
35	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207 & IC RSS-GEN Clause 7.2.4	AC Power Line Conducted Emission	Pass
FCC §15.247(b) & IC RSS-210 A8.4	Maximum Peak Output Power	Pass
FCC §15.247(e) & IC RSS-210 A8.2 (b)	Power Spectral Density	Pass
FCC §15.247(a) & IC RSS-210 A8.2 (a)	6dB Bandwidth	Pass
FCC §15.247 (d) & IC RSS-210 A8.5	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209 & IC RSS-210 Clause 2.5 (Transmitter)	Radiated Spurious Emission	Pass
FCC §15.203/15.247(b)/(c) & IC RSS-GEN Clause 7.1.2	Antenna Requirement	Pass



## 4. TEST OF AC POWER LINE CONDUCTED EMISSION


### 4.1 Applicable Standard

Refer to FCC §15.207 and IC RSS-GEN Clause 7.2.4.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

### 4.2 Test Setup Diagram

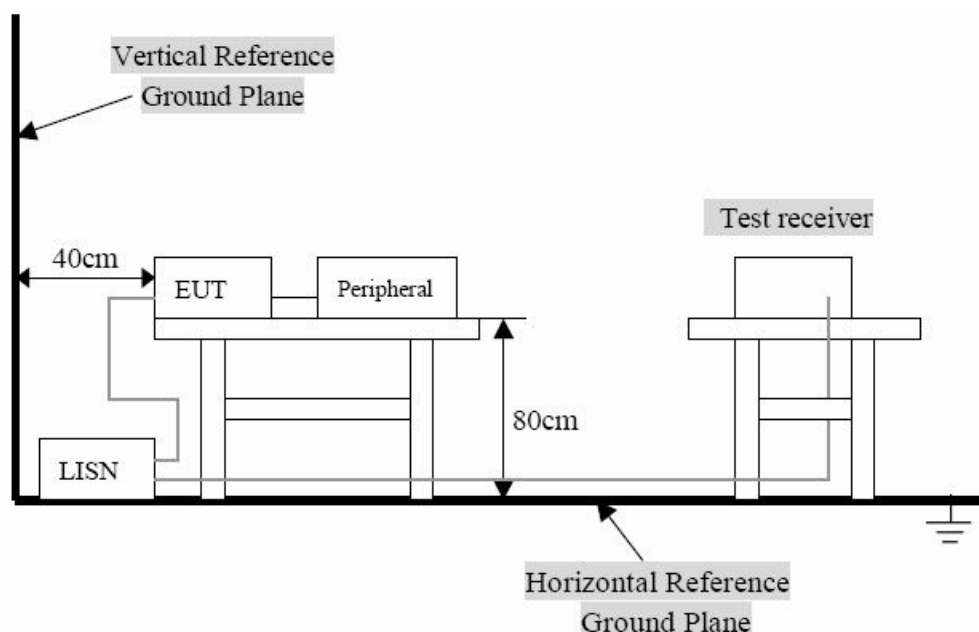

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.

### 4.3 Test Result


Temperature ( °C ) : 23~25	EUT: MP10 Mine Phone
Humidity (%RH ) : 45~58	M/N: MP10
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Normal operation

## Conducted Emission:

EUT: MP10 Mine Phone  
Operating Condition: Normal operation  
Test Site: Shielded Room  
Operator: Andy  
Test Specification: AC/DC adapter (AC 120V/60Hz)  
Comment: Live Line

### SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

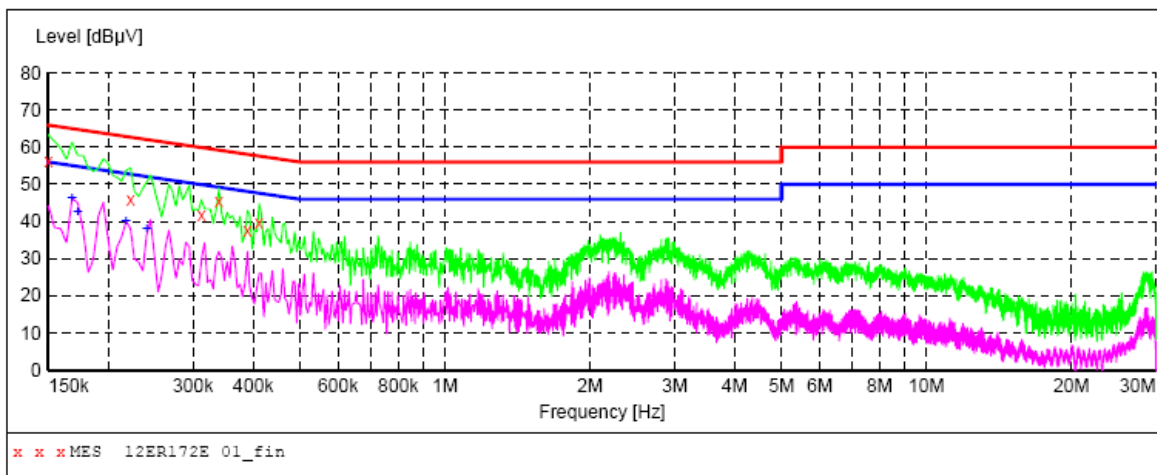

### MEASUREMENT RESULT: "12ER172E 01\_fin"

7/16/2012 2:36PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.50	11.4	66	9.5	QP	L1	GND
0.222000	45.90	10.7	63	16.8	QP	L1	GND
0.312000	41.90	10.5	60	18.0	QP	L1	GND
0.339000	45.40	10.5	59	13.8	QP	L1	GND
0.388500	37.60	10.4	58	20.5	QP	L1	GND
0.411000	39.70	10.4	58	17.9	QP	L1	GND

### MEASUREMENT RESULT: "12ER172E 01\_fin2"

7/16/2012 2:36PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	46.40	11.2	55	8.7	AV	L1	GND
0.172500	42.60	11.1	55	12.2	AV	L1	GND
0.217500	40.20	10.8	53	12.7	AV	L1	GND
0.240000	37.90	10.7	52	14.2	AV	L1	GND

## Conducted Emission:

EUT: MP10 Mine Phones  
Operating Condition: Normal operation  
Test Site: Shielded Room  
Operator: Andy  
Test Specification: AC/DC adapter (AC 120V/60Hz)  
Comment: Neutral Line

### SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

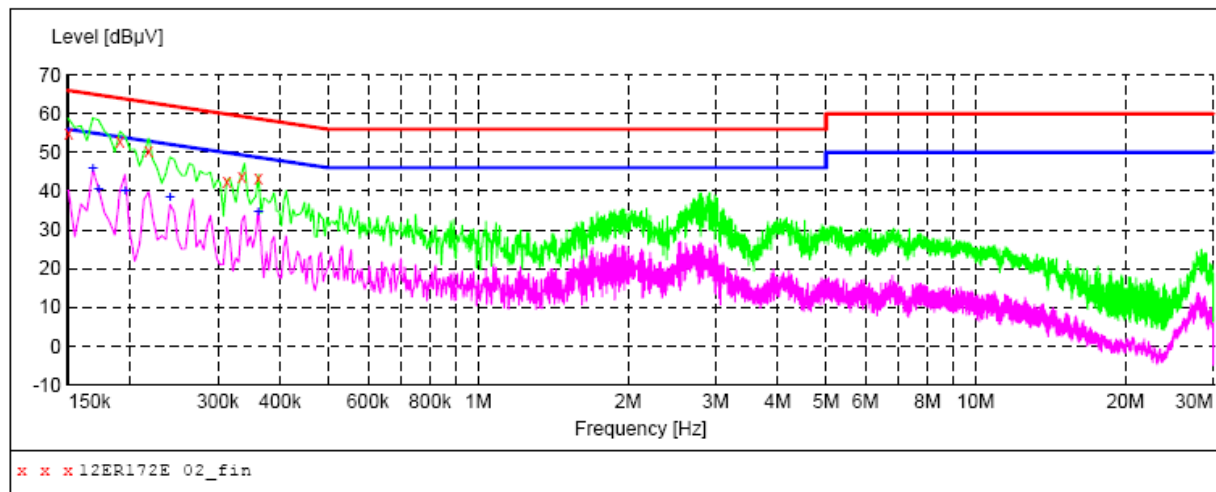

### MEASUREMENT RESULT: "12ER172E 02\_fin"

7/16/2012 2:39PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	54.90	11.4	66	11.1	QP	N	GND
0.190500	52.80	10.9	64	11.2	QP	N	GND
0.217500	50.30	10.8	63	12.6	QP	N	GND
0.312000	42.50	10.5	60	17.4	QP	N	GND
0.334500	44.00	10.5	59	15.3	QP	N	GND
0.361500	43.20	10.4	59	15.5	QP	N	GND

### MEASUREMENT RESULT: "12ER172E 02\_fin2"

7/16/2012 2:39PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	45.80	11.2	55	9.3	AV	N	GND
0.172500	40.70	11.1	55	14.1	AV	N	GND
0.195000	40.20	10.9	54	13.6	AV	N	GND
0.240000	38.40	10.7	52	13.7	AV	N	GND
0.361500	34.80	10.4	49	13.9	AV	N	GND

## 5. Test of Maximum Peak Output Power

### 5.1 Applicable Standard

Refer to FCC §15.247 (b) & IC RSS-210 A8.4

### 5.2 EUT Setup

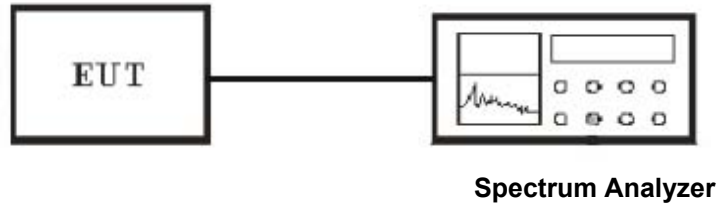

### 5.3 Test Equipment List and Details

See section 2.5.

### 5.4 Test Procedure

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Measurement of Digital Transmission Systems Operating under Section 15.247

**NOTE:** Total peak power calculation formula:  
 $10 \log (10^{\wedge} (\text{Chain A Power} / 10) + 10^{\wedge} (\text{Chain C Power} / 10))$ .

### 5.5 Test Result

Temperature ( °C ) : 22~23	EUT: MP10 Mine Phone
Humidity (%RH ) : 50~54	M/N: MP10
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	7.82	30	PASS
Middle	2437	9.36	30	PASS
High	2462	7.55	30	PASS


**NOTE :** 1. At final test to get the worst-case emission at 11Mbps.

**IEEE 802.11g mode**


Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	7.18	30	PASS
Middle	2437	8.99	30	PASS
High	2462	7.19	30	PASS

**NOTE :** 1. At final test to get the worst-case emission at 6Mbps.


## MAXIMUM PEAK OUTPUT POWER ( 802.11b MODE CH Low)

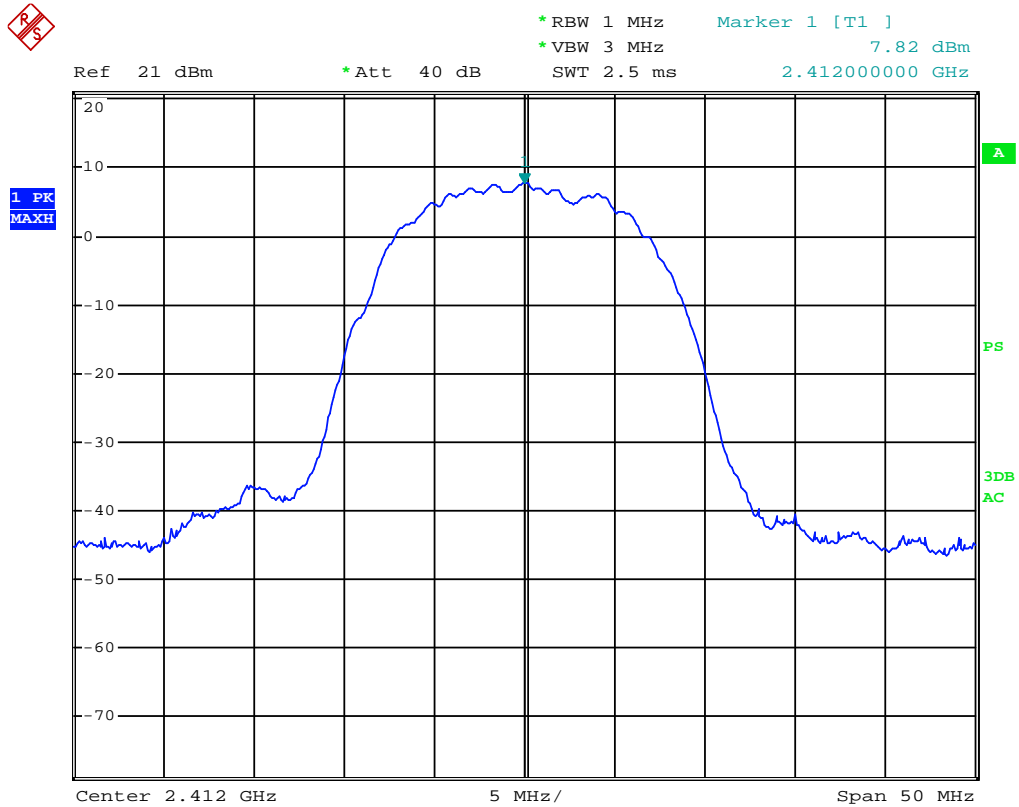


## MAXIMUM PEAK OUTPUT POWER ( 802.11b MODE CH Mid)

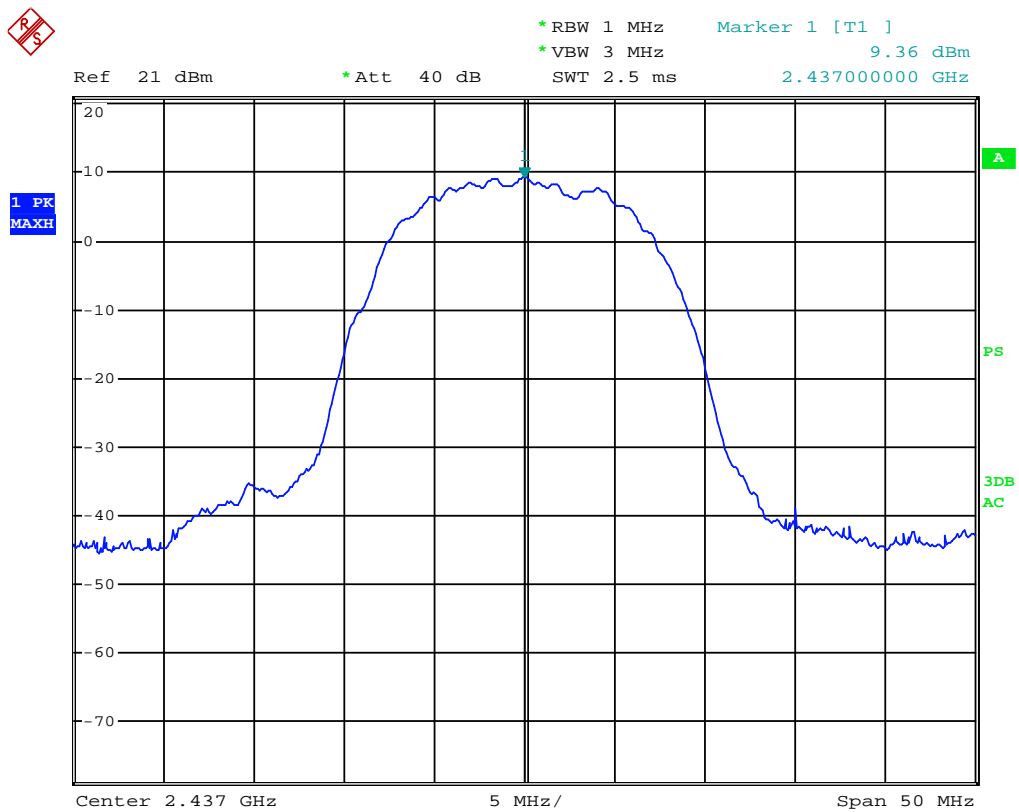


MAXIMUM PEAK OUTPUT POWER ( 802.11b MODE CH High)

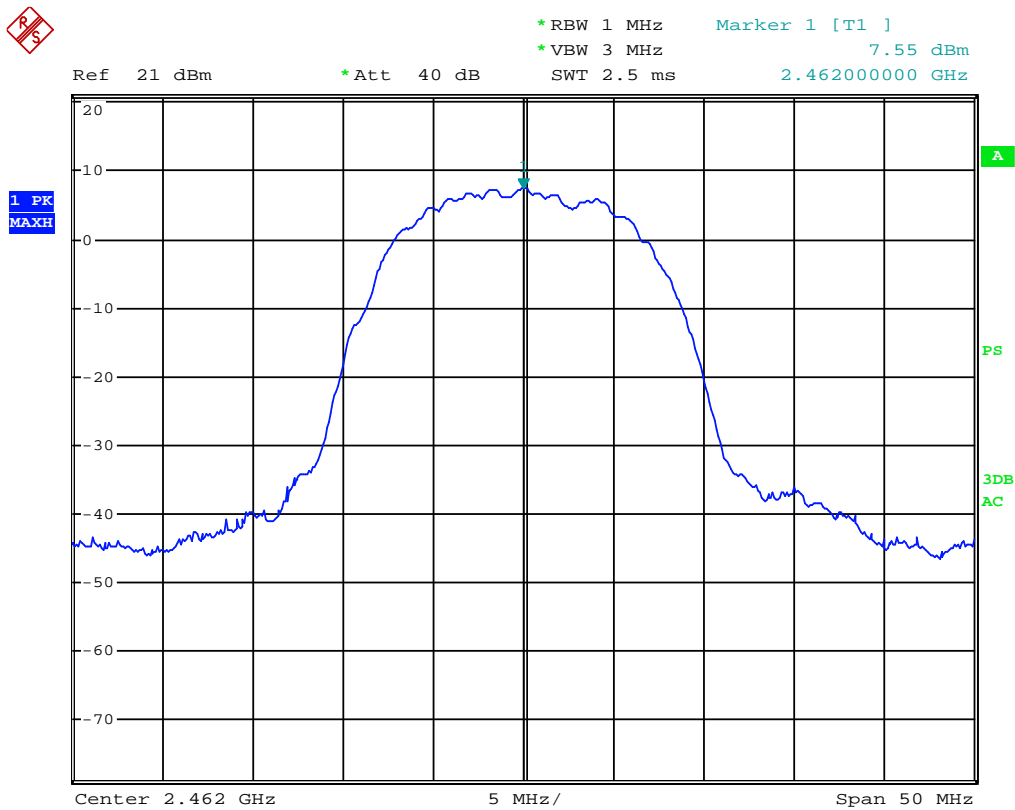

## MAXIMUM PEAK OUTPUT POWER ( 802.11g MODE CH Low)

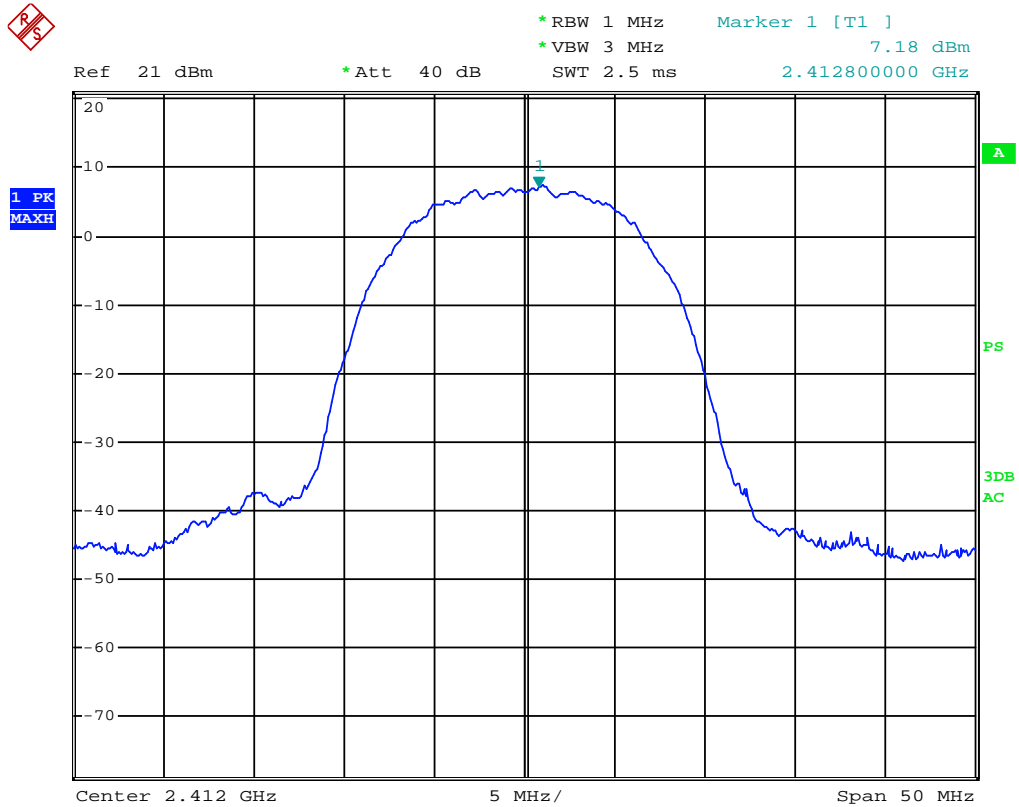


## MAXIMUM PEAK OUTPUT POWER ( 802.11g MODE CH Mid)

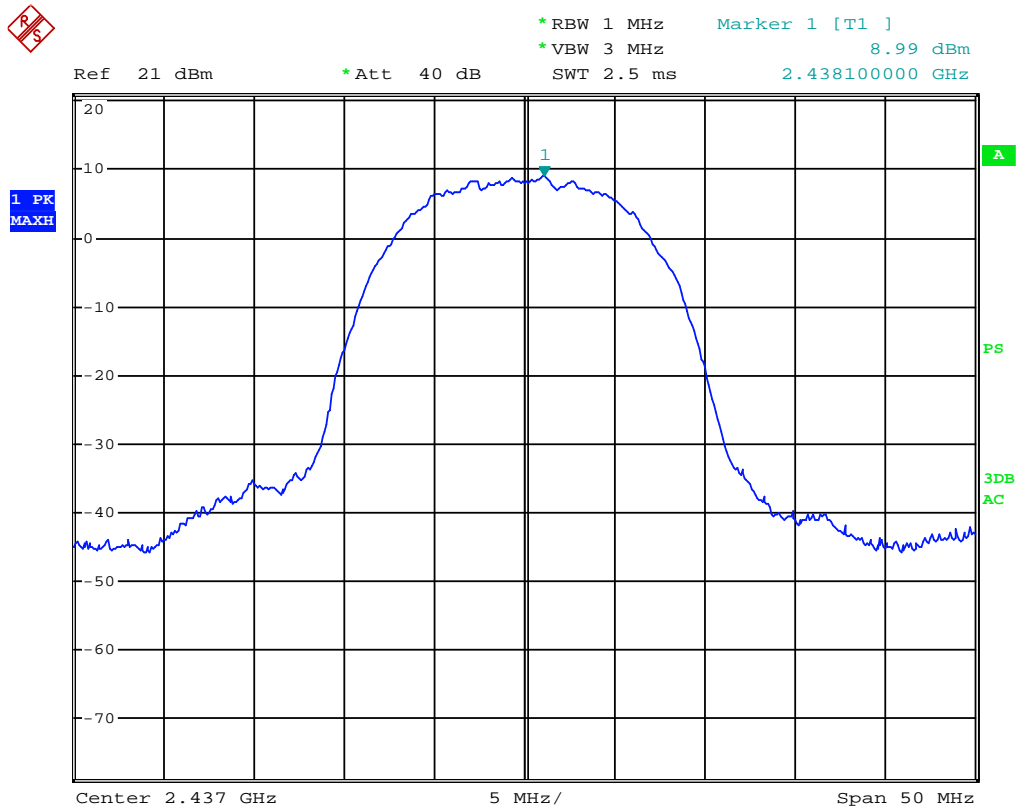



MAXIMUM PEAK OUTPUT POWER ( 802.11g MODE CH High)

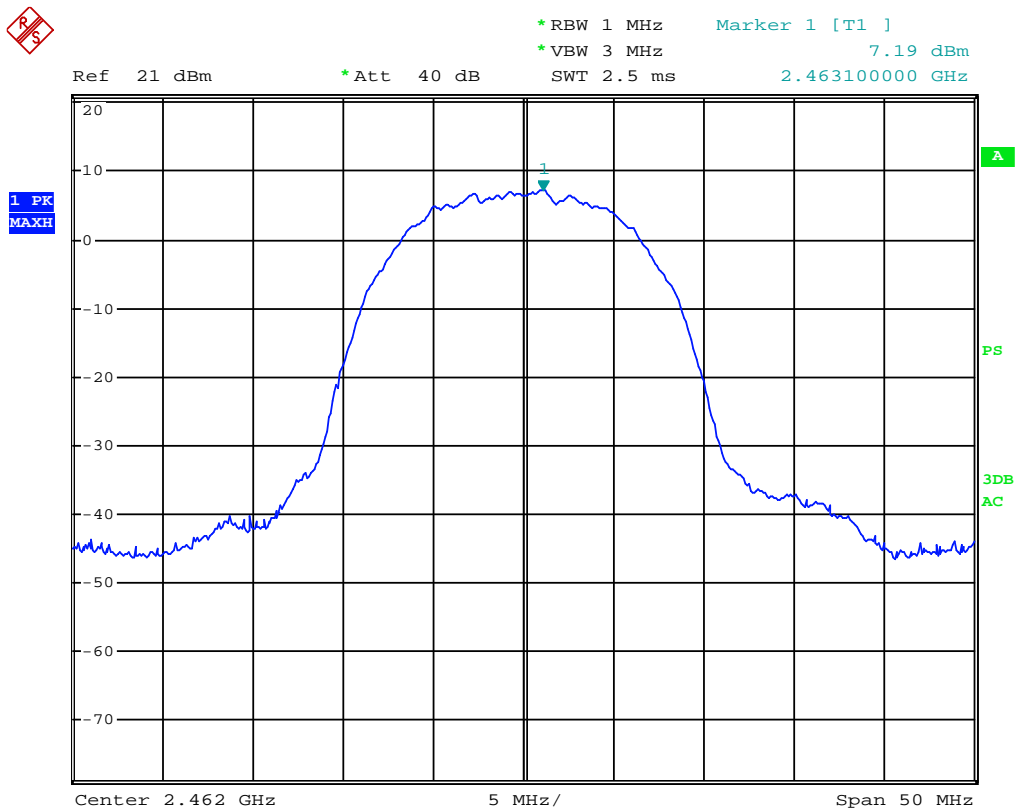


## 6. Test of Peak Power Spectral Density

### 6.1 Applicable Standard

Refer to FCC §15.247 (e) and IC RSS-210 A8.2 (b).

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.2 EUT Setup

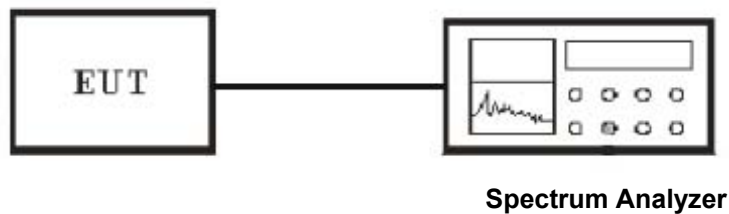

### 6.3 Test Equipment List and Details

See section 2.5.

### 6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=3KHz and VBW  $\geq$  RBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded. The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

NOTE: Total peak power calculation formula:

$$10 \log (10^{\wedge} (\text{Chain A Power} / 10) + 10^{\wedge} (\text{Chain C Power} / 10)).$$

### 6.5 Test Result

Temperature ( °C ) : 22~23	EUT: Mine Site Technologies
Humidity (%RH) : 50~54	M/N: MP10
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	0.73	8	PASS
Middle	2437	1.85	8	PASS
High	2462	0.95	8	PASS


**NOTE :** 1. At final test to get the worst-case emission at 11Mbps.

**IEEE 802.11g mode**


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	1.18	8	PASS
Middle	2437	2.67	8	PASS
High	2462	1.53	8	PASS

**NOTE :** 1. At final test to get the worst-case emission at 6Mbps.

## POWER SPECTRAL DENSITY ( 802.11b MODE CH Low)

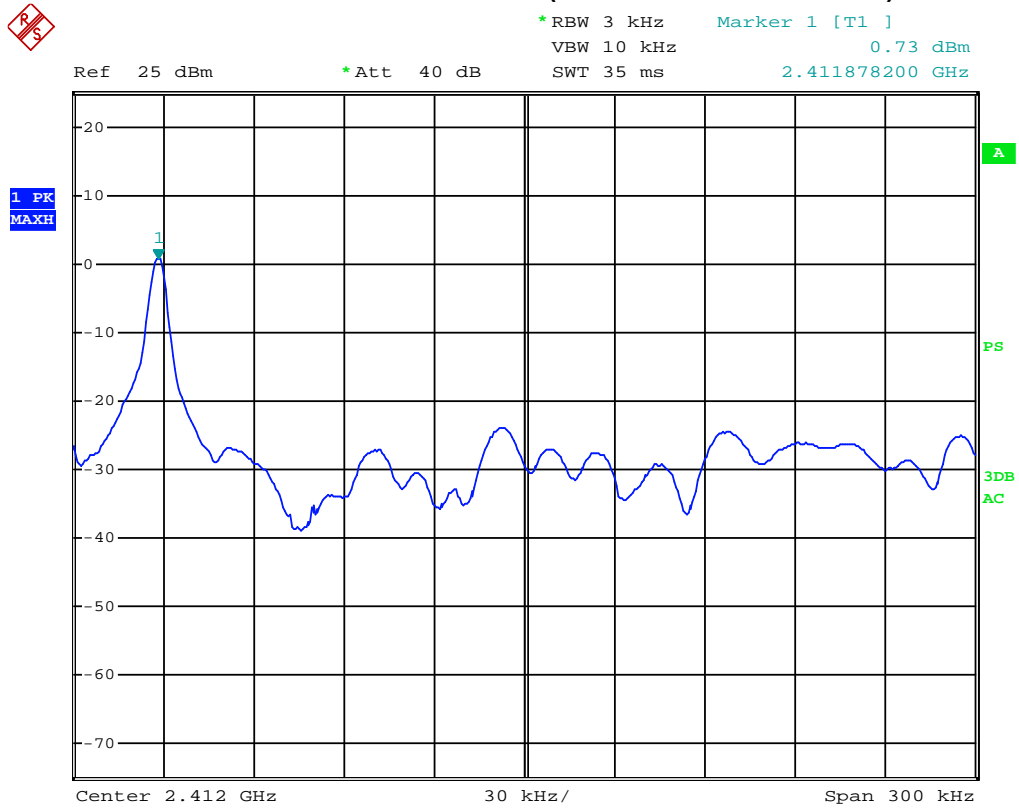

## POWER SPECTRAL DENSITY ( 802.11b MODE CH Mid)

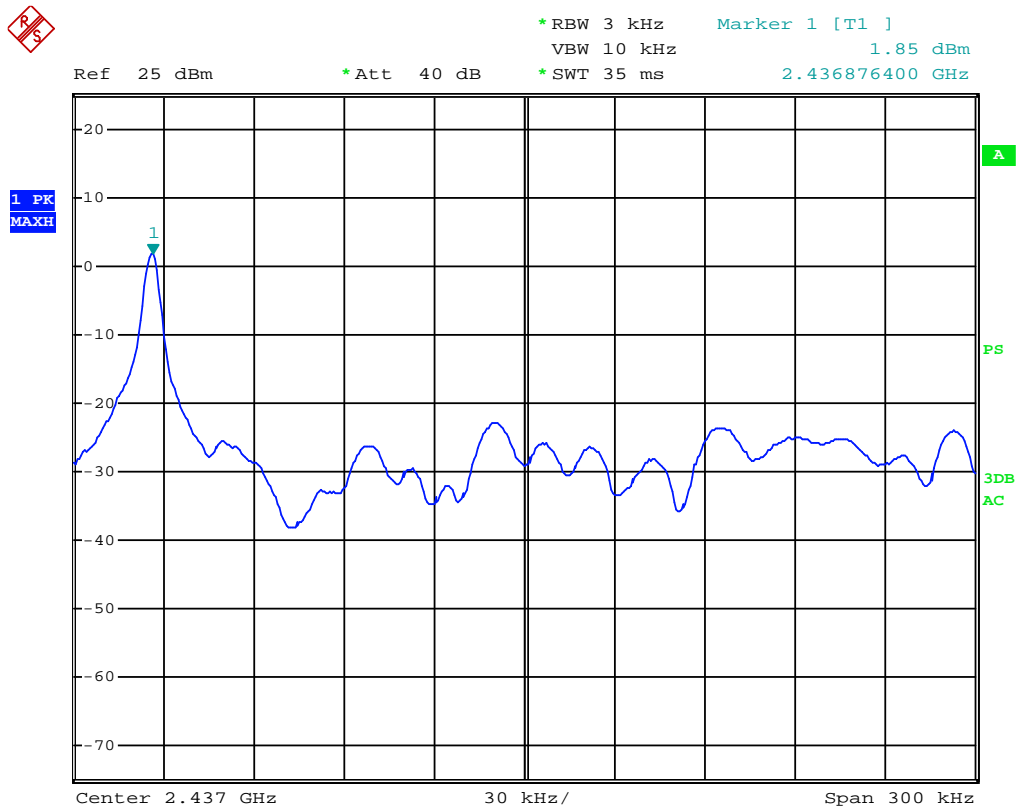

POWER SPECTRAL DENSITY ( 802.11b MODE CH High)




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      0.95 dBm  
\*SWT 35 ms      2.461874600 GHz

Ref 25 dBm

\*Att 40 dB

1 PK  
MAXH

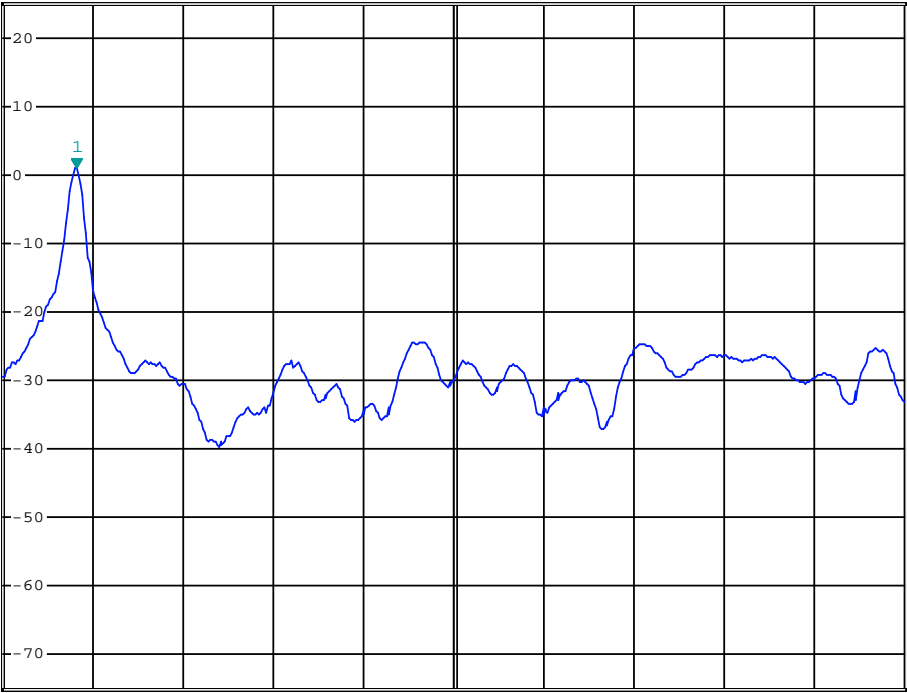

Center 2.462 GHz

30 kHz/

Span 300 kHz


A

PS


3DB

AC


## POWER SPECTRAL DENSITY ( 802.11g MODE CH Low)

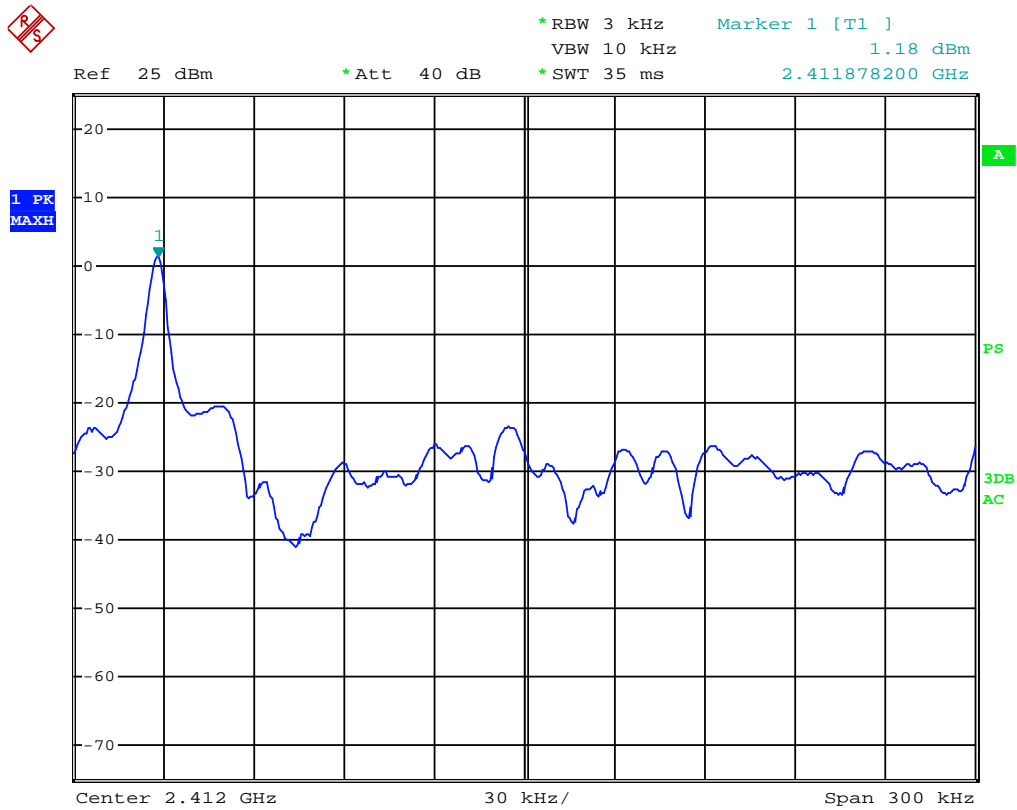

## POWER SPECTRAL DENSITY ( 802.11g MODE CH Mid)

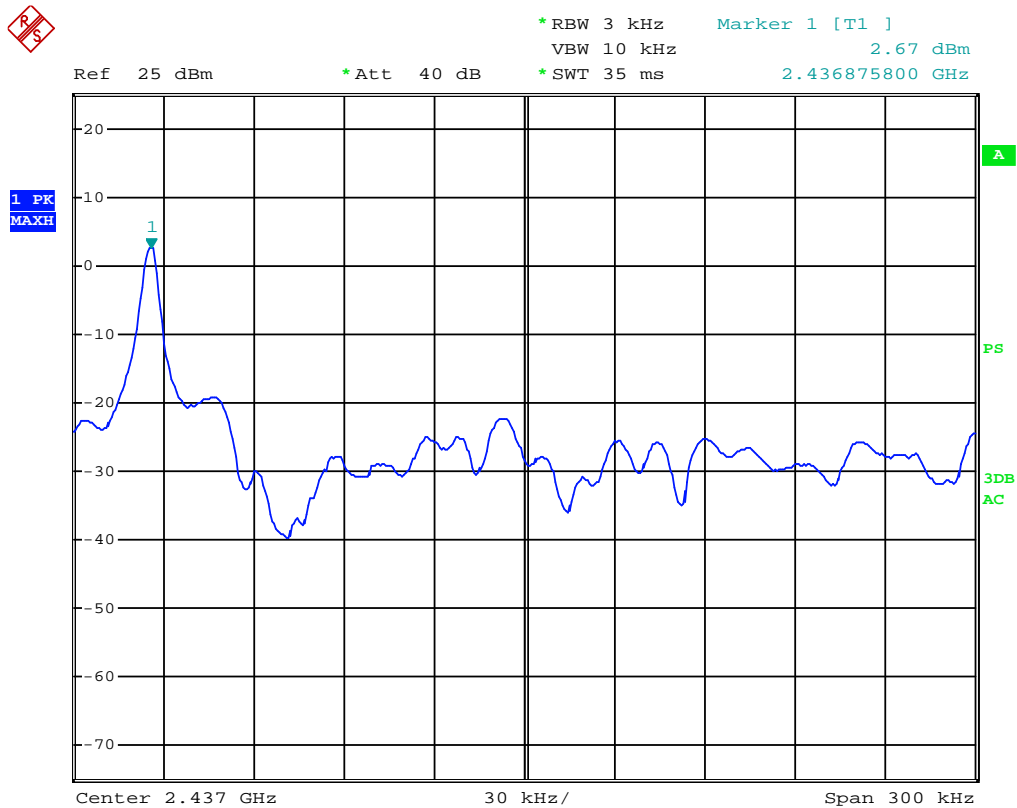

POWER SPECTRAL DENSITY ( 802.11g MODE CH High)

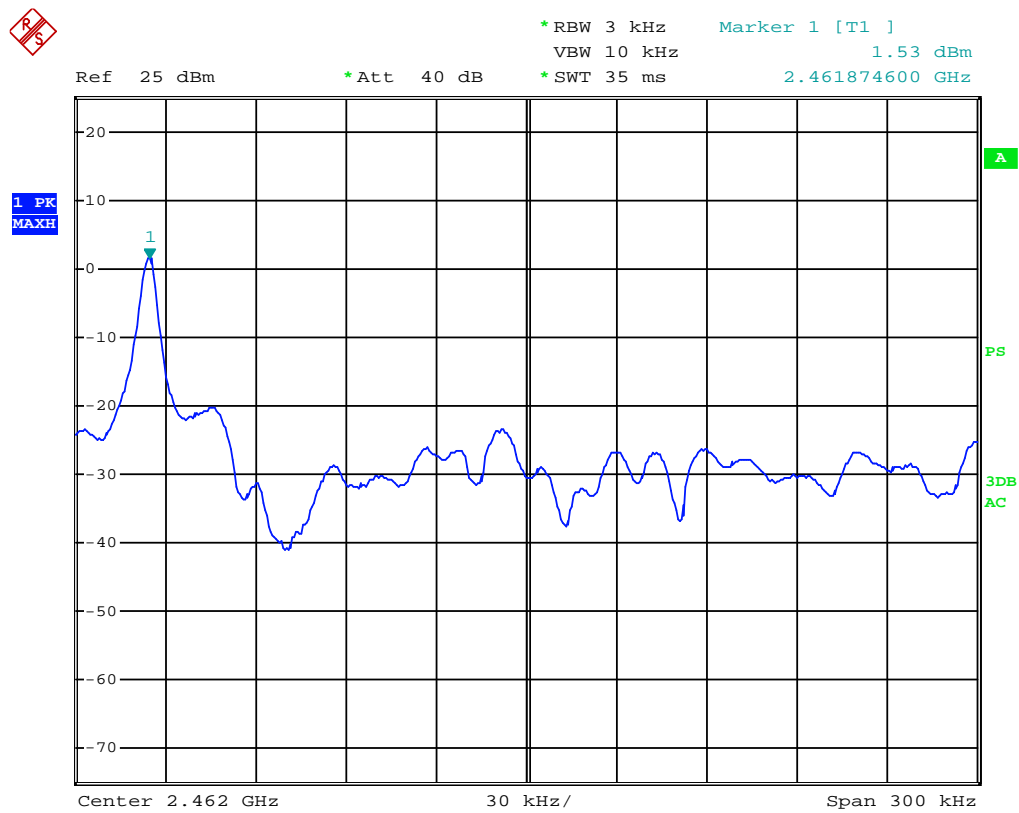


## 7. Test of 6dB Bandwidth

### 7.1 Applicable Standard

Refer to FCC §15.247 (a) (2) and IC RSS-210 A8.2 (a).

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.2 EUT Setup

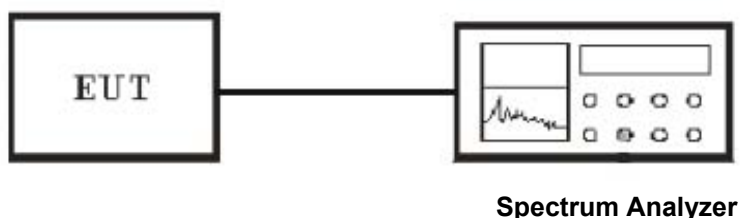

### 7.3 Test Equipment List and Details

See section 2.5.

### 7.4 Test Procedure

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 7.5 Test Result

Temperature ( °C ) : 22~23	EUT: MP10 Mine Phone
Humidity (%RH ) : 50~54	M/N: MP10
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode



**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	9400	500	PASS
Middle	2437	10000	500	PASS
High	2462	10000	500	PASS


**NOTE :** 1. At final test to get the worst-case emission at 11Mbps.

**IEEE 802.11g mode**


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	9300	500	PASS
Middle	2437	10200	500	PASS
High	2462	10200	500	PASS

**NOTE :** 1. At final test to get the worst-case emission at 6Mbps.


## 6dB BANDWIDTH ( 802.11b MODE CH Low)

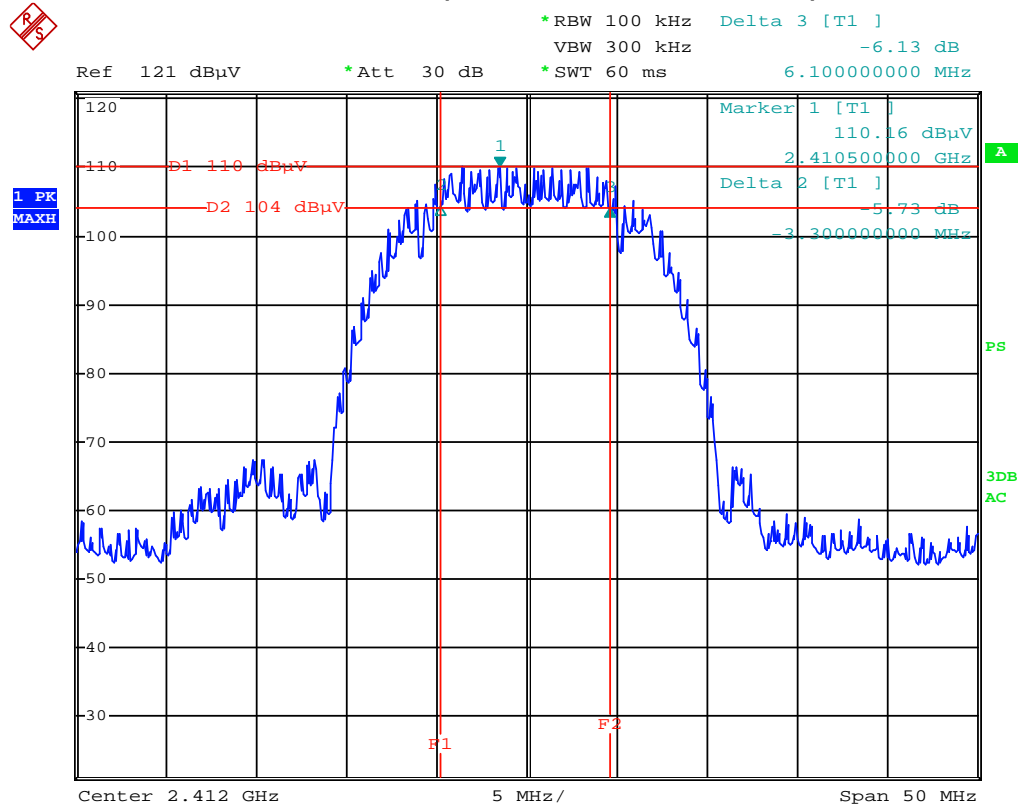


## 6dB BANDWIDTH ( 802.11b MODE CH Mid)

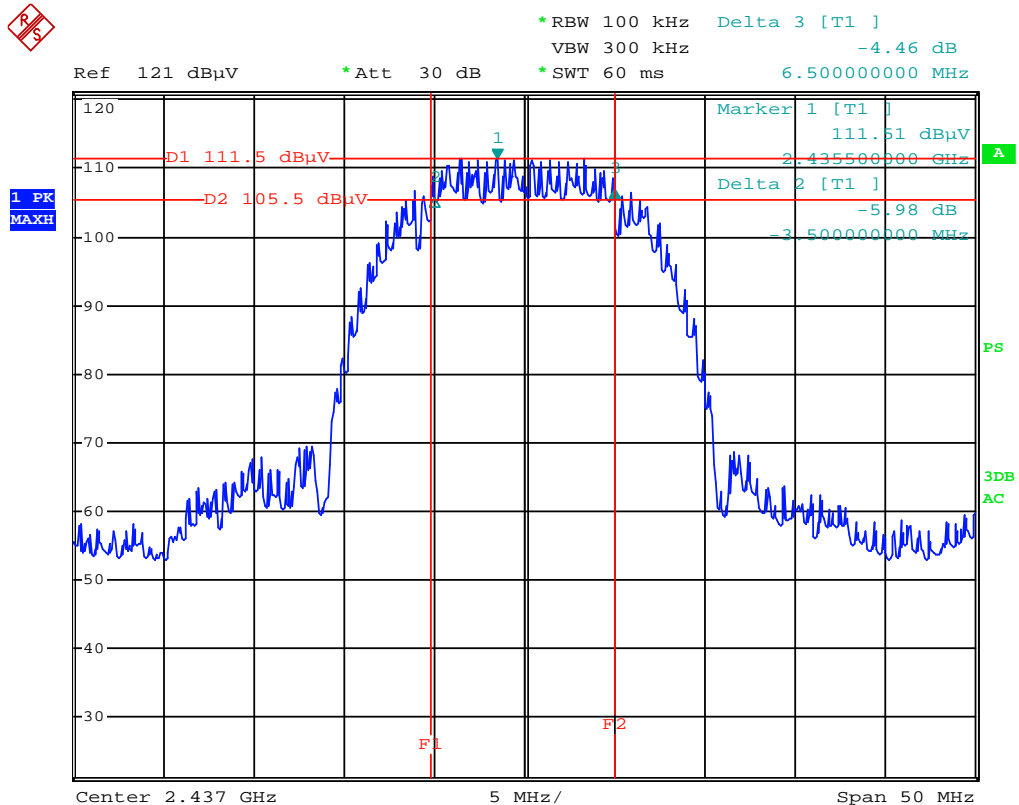


# 6dB BANDWIDTH ( 802.11b MODE CH High)

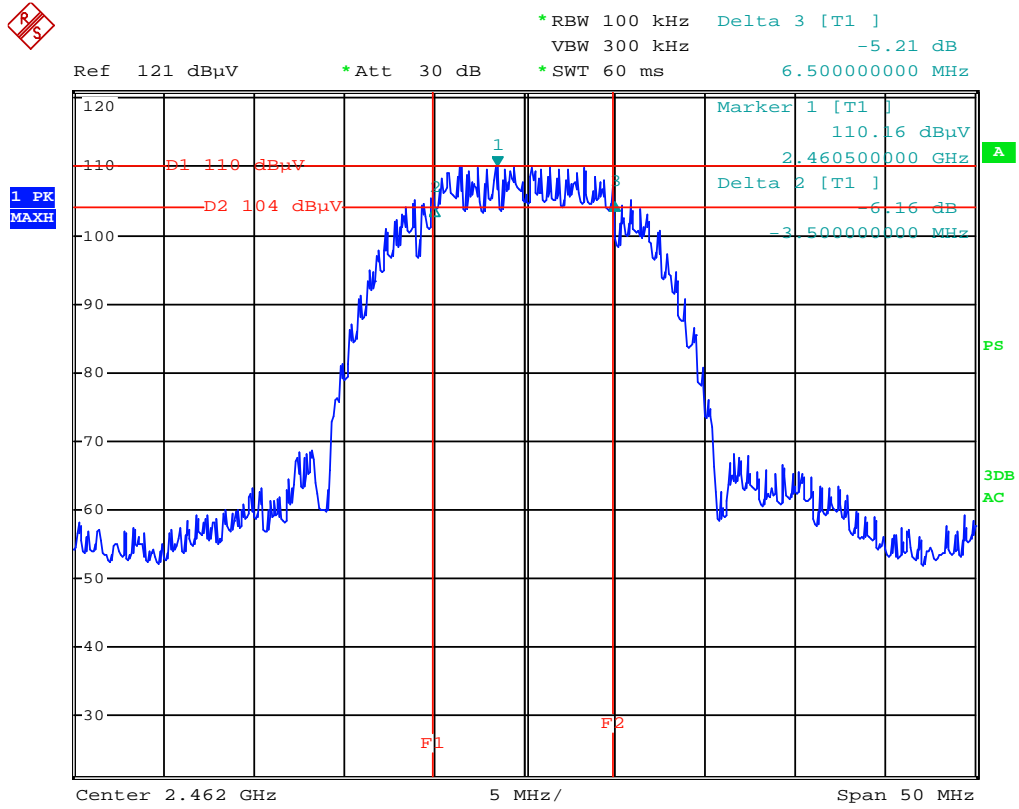

## 6dB BANDWIDTH ( 802.11g MODE CH Low)

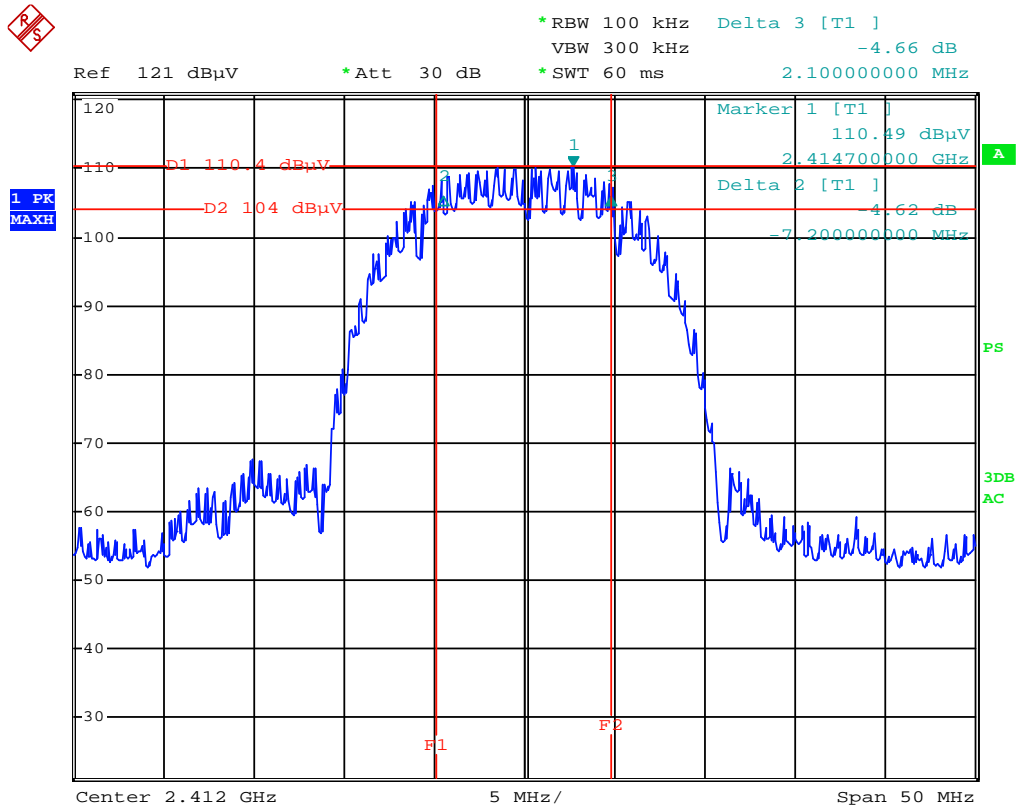

## 6dB BANDWIDTH ( 802.11g MODE CH Mid)

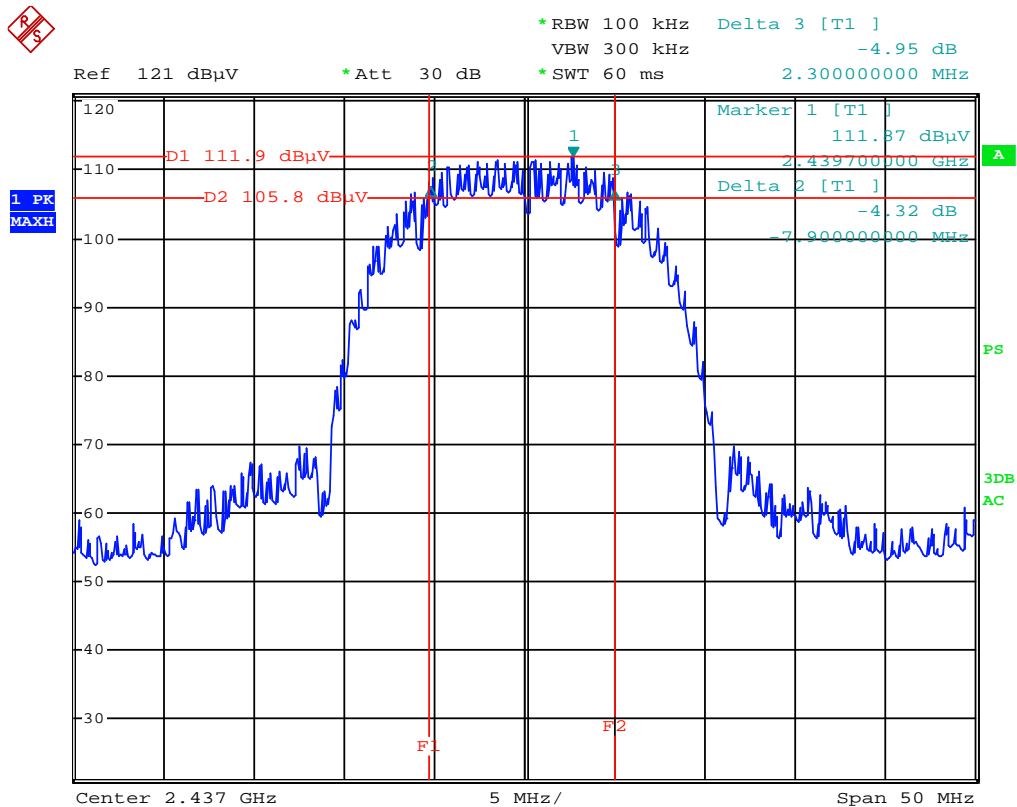


# 6dB BANDWIDTH ( 802.11g MODE CH High)



\*RBW 100 kHz Delta 3 [T1 ]  
 VBW 300 kHz -5.72 dB  
 \*Att 30 dB \*SWT 60 ms 2.300000000 MHz

Ref 121 dBμV

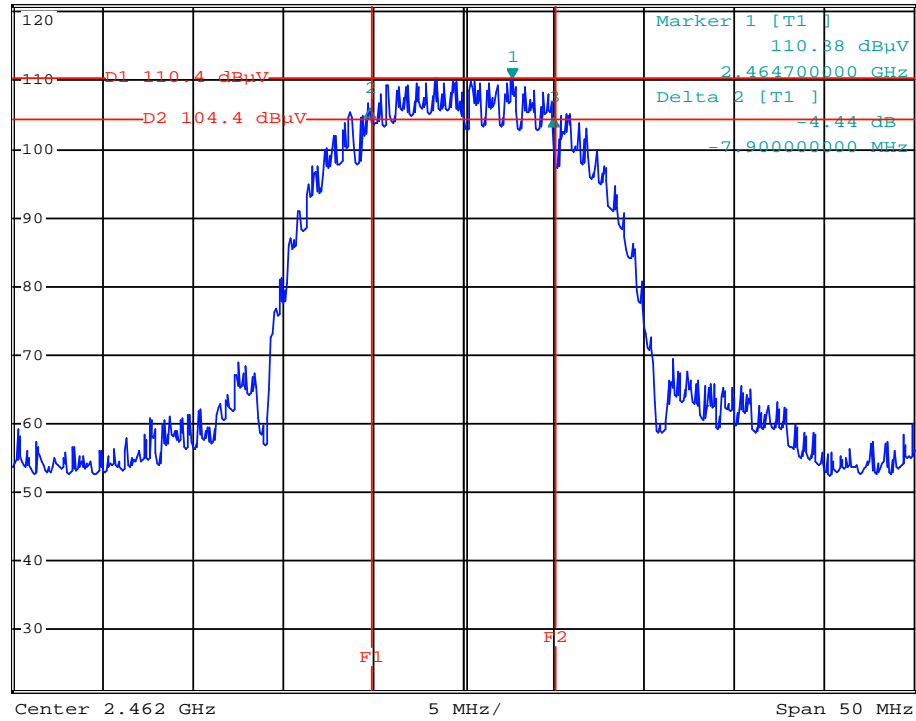


## 8. Test of Conducted Spurious Emission

### 8.1 Applicable Standard

Refer to FCC §15.247 (d) and IC RSS-210 A8.5.

Output power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

### 8.2 EUT Setup

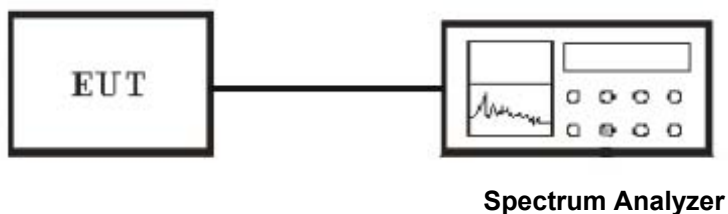

### 8.3 Test Equipment List and Details

See section 2.5.

### 8.4 Test Procedure

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

### 8.5 Test Result

Temperature ( °C ) : 22~23	EUT: MP10 Mine Phone
Humidity (%RH) : 50~54	M/N: MP10
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: TX Mode

**IEEE 802.11b mode****CH Low**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.6535	97.49	109.19	N/A	N/A	
1197.014	40.58	52.28	89.19	-36.91	PASS
4910.2404	42.91	54.61	89.19	-34.58	PASS
6979.038	46.45	58.15	89.19	-31.04	PASS

**CH Mid**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.1524	98.78	110.48	N/A	N/A	
1462.2444	41.28	52.98	90.48	-37.50	PASS
4857.1943	44.06	55.76	90.48	-34.72	PASS
6819.8998	45.76	57.46	90.48	-33.02	PASS

**CH High**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.5352	97.74	109.44	N/A	N/A	
1303.1062	40.93	52.63	89.44	-36.81	PASS
5493.7474	44.02	55.72	89.44	-33.72	PASS
6766.8537	45.39	57.09	89.44	-32.35	PASS

**IEEE 802.11g mode****CH Low**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.6352	93.04	104.74	N/A	N/A	
1409.7984	40.47	52.17	84.74	-32.57	PASS
5865.0701	44.22	55.92	84.74	-28.82	PASS
6713.8076	45.37	57.07	84.74	-27.67	PASS

**CH Mid**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2436.9525	93.81	105.51	N/A	N/A	
1674.4288	41.44	53.14	85.51	-32.37	PASS
5546.7935	43.12	54.82	85.51	-30.69	PASS
6766.8537	45.53	57.23	85.51	-28.28	PASS

**CH High**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2461.5352	92.89	104.59	N/A	N/A	
1780.521	41.29	52.99	84.59	-31.60	PASS
6501.6232	45.57	57.27	84.59	-27.32	PASS
6979.038	45.45	57.15	84.59	-27.44	PASS



## 9. Test of Radiated Spurious Emission

### 9.1 Radiated Spurious Emission

#### 9.1.1 Limits

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### 9.1.2 EUT Setup

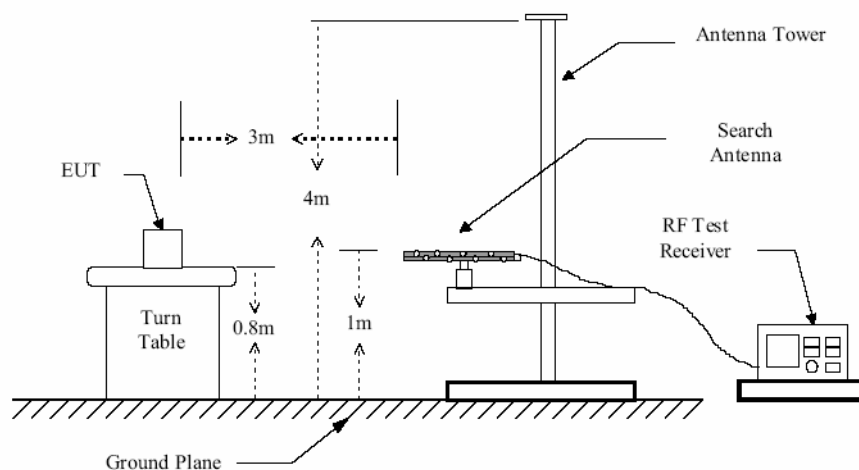


Figure 1 : Frequencies measured below 1 GHz configuration

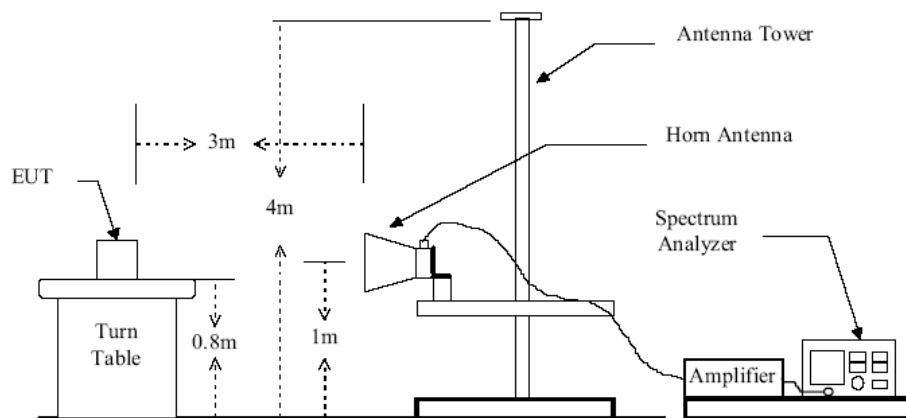


Figure 2 : Frequencies measured above 1 GHz configuration

### 9.1.3 Test Procedure

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 24.8GHz.
9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
10. For emission above 1GHz, Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.
11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

#### NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

### 9.1.4 Test Result

Temperature ( °C ) : 22~23	EUT: MP10 Mine Phone
Humidity (%RH) : 50~54	M/N: MP10
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Normal operation & TX Mode

**WORST-CASE RADIATED EMISSION BELOW 1 GHz**

Normal operating Mode:

Horizontal

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB $\mu$ V)	(dB/M)	(dB)	(dB $\mu$ V/M)	(dB $\mu$ V/M)	(dB)	PK/QP
84.32	26.40	8.98	1.18	36.56	40.00	-3.44	QP
160.01	16.50	12.60	1.59	30.69	43.50	-12.81	QP
402.48	14.50	14.44	2.72	36.66	46.00	-9.34	QP
652.74	14.50	18.00	3.05	35.55	46.00	-10.45	QP
726.46	9.60	20.84	3.84	34.28	46.00	-11.72	QP
823.46	10.30	21.80	4.14	36.24	46.00	-9.76	QP
N/A	----	----	----	----	----	----	----

**Vertical**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB $\mu$ V)	(dB/M)	(dB)	(dB $\mu$ V/M)	(dB $\mu$ V/M)	(dB)	PK/QP
142.52	21.40	7.89	1.01	30.30	40.00	-9.70	QP
191.02	16.10	12.60	1.59	30.29	43.50	-13.21	QP
216.24	25.70	12.20	2.02	39.92	46.00	-6.08	QP
239.52	22.80	14.44	2.72	39.96	46.00	-6.04	QP
503.36	16.50	18.00	3.05	37.55	46.00	-8.45	QP
749.74	13.20	21.80	4.14	39.14	46.00	-6.86	QP
N/A	----	----	----	----	----	----	----

**REMARK:** Emission level (dB $\mu$ V/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB $\mu$ V).**WORST-CASE RADIATED EMISSION BELOW 30 MHz**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB $\mu$ V)	(dB/M)	(dB)	(dB $\mu$ V/M)	(dB $\mu$ V/M)	(dB)	PK/QP
0.510	19.10	7.89	1.02	28.01	67.0	-38.99	QP
15.40	19.50	8.75	1.21	29.46	49.5	-20.04	QP
19.30	16.20	8.73	1.05	25.98	49.5	-23.52	QP
23.20	21.20	7.33	1.68	30.21	49.5	-19.29	QP

## TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

### IEEE 802.11b TX (CH Low)

#### Horizontal

TX / IEEE 802.11b mode / CH Low					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4824.15	51.24	32.81	3.71	41.34	0.69	47.12	74.00	-26.88	P
*	4824.15	39.25	32.81	3.71	41.34	0.69	35.13	54.00	-18.87	A
	7236.35	49.85	38.83	4.93	41.42	1.44	53.62	74.00	-20.38	P
	7236.35	37.49	38.83	4.93	41.42	1.44	41.26	54.00	-12.74	A
	9645.85	48.75	38.75	5.74	38.43	0.61	55.42	74.00	-18.58	P
	9645.85	37.69	38.75	5.74	38.43	0.61	44.36	54.00	-9.64	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

#### Vertical

TX / IEEE 802.11b mode / CH Low					Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4823.85	53.62	32.81	3.70	41.34	0.69	49.49	74.00	-24.51	P
*	4823.85	42.00	32.81	3.70	41.34	0.69	37.87	54.00	-16.13	A
	7236.18	51.42	38.83	4.93	41.42	1.44	55.19	74.00	-18.81	P
	7236.18	39.85	38.83	4.93	41.42	1.44	43.62	54.00	-10.38	A
	9647.94	50.24	38.75	5.74	38.43	0.61	56.92	74.00	-17.08	P
	9647.94	39.68	38.75	5.74	38.43	0.61	46.36	54.00	-7.64	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

#### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

## IEEE 802.11b TX (CH Middle)

### Horizontal

					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4876.53	51.28	32.93	3.73	41.41	0.71	47.24	74.00	-26.76	P
*	4876.53	41.96	32.93	3.73	41.41	0.71	37.92	54.00	-16.08	A
*	7309.41	50.24	38.93	4.96	41.32	1.59	54.40	74.00	-19.60	P
*	7309.41	39.42	38.93	4.96	41.32	1.59	43.58	54.00	-10.42	A
	9747.83	49.85	38.85	5.75	38.24	0.55	56.76	74.00	-17.24	P
	9747.83	38.65	38.85	5.75	38.24	0.55	45.56	54.00	-8.44	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### Vertical

	TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4876.92	53.64	32.93	3.73	41.42	0.71	49.60	74.00	-24.40	P
*	4876.92	43.84	32.93	3.73	41.42	0.71	39.80	54.00	-14.20	A
*	7309.25	51.51	38.93	4.96	41.32	1.59	55.67	74.00	-18.33	P
*	7309.25	40.93	38.93	4.96	41.32	1.59	45.09	54.00	-8.91	A
	9748.35	52.14	38.85	5.75	38.24	0.55	59.05	74.00	-14.95	P
	9748.35	40.57	38.85	5.75	38.24	0.55	47.48	54.00	-6.52	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

## IEEE 802.11b TX (CH High)

### Horizontal

	TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4923.85	52.46	33.03	3.76	41.49	0.73	48.50	74.00	-25.50	P
*	4923.85	42.11	33.03	3.76	41.49	0.73	38.15	54.00	-15.85	A
*	7385.69	51.24	39.04	4.99	41.21	1.76	55.82	74.00	-18.18	P
*	7385.69	39.51	39.04	4.99	41.21	1.76	44.09	54.00	-9.91	A
	9848.15	50.24	38.95	5.76	38.06	0.49	57.39	74.00	-16.61	P
	9848.15	38.96	38.95	5.76	38.06	0.49	46.10	54.00	-7.90	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### Vertical

	TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4924.03	53.84	33.03	3.76	41.49	0.73	49.88	74.00	-24.12	P
*	4924.03	43.45	33.03	3.76	41.49	0.73	39.49	54.00	-14.51	A
*	7386.08	52.41	39.04	4.99	41.21	1.76	56.99	74.00	-17.01	P
*	7386.08	40.57	39.04	4.99	41.21	1.76	45.15	54.00	-8.85	A
	9847.35	52.11	38.95	5.76	38.06	0.49	59.25	74.00	-14.75	P
	9847.35	41.35	38.95	5.76	38.06	0.49	48.49	54.00	-5.51	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

## IEEE 802.11g TX (CH Low)

### Horizontal

TX / IEEE 802.11g mode / CH Low					Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4824.23	52.12	32.81	3.71	41.34	0.69	48.00	74.00	-26.00	P
*	4824.23	42.11	32.81	3.71	41.34	0.69	37.99	54.00	-16.01	A
	7236.00	51.24	38.83	4.93	41.42	1.44	55.01	74.00	-18.99	P
	7236.00	40.35	38.83	4.93	41.42	1.44	44.12	54.00	-9.88	A
	9642.15	50.22	38.74	5.74	38.44	0.61	56.88	74.00	-17.12	P
	9642.15	38.95	38.74	5.74	38.44	0.61	45.61	54.00	-8.39	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### Vertical

TX / IEEE 802.11g mode / CH Low					Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4824.00	54.24	32.81	3.70	41.34	0.69	50.11	74.00	-23.89	P
*	4824.00	43.97	32.81	3.70	41.34	0.69	39.84	54.00	-14.16	A
	7236.39	51.62	38.83	4.93	41.42	1.44	55.39	74.00	-18.61	P
	7236.39	41.52	38.83	4.93	41.42	1.44	45.29	54.00	-8.71	A
	9641.57	52.21	38.74	5.74	38.44	0.62	58.87	74.00	-15.13	P
	9641.57	41.25	38.74	5.74	38.44	0.62	47.91	54.00	-6.09	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



## IEEE 802.11g TX (CH Middle)

### Horizontal

	TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4871.16	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
*	4871.16	41.35	32.92	3.73	41.41	0.71	37.30	54.00	-16.70	A
*	7318.25	49.85	38.95	4.96	41.31	1.61	54.06	74.00	-19.94	P
*	7318.25	40.22	38.95	4.96	41.31	1.61	44.43	54.00	-9.57	A
	9748.35	50.24	38.85	5.75	38.24	0.55	57.15	74.00	-16.85	P
	9748.35	39.58	38.85	5.75	38.24	0.55	46.49	54.00	-7.51	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### Vertical

	TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4871.56	53.62	32.92	3.73	41.41	0.71	49.57	74.00	-24.43	P
*	4871.56	44.17	32.92	3.73	41.41	0.71	40.12	54.00	-13.88	A
*	7317.24	51.24	38.94	4.96	41.31	1.61	55.45	74.00	-18.55	P
*	7317.24	42.33	38.94	4.96	41.31	1.61	46.54	54.00	-7.46	A
	9747.26	52.34	38.85	5.75	38.25	0.55	59.25	74.00	-14.75	P
	9747.26	41.52	38.85	5.75	38.25	0.55	48.43	54.00	-5.57	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

## IEEE 802.11g TX (CH High)

### Horizontal

	TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Horizontal polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4924.35	51.24	33.03	3.76	41.49	0.73	47.28	74.00	-26.72	P
*	4924.35	40.26	33.03	3.76	41.49	0.73	36.30	54.00	-17.70	A
*	7384.86	49.87	39.04	4.99	41.21	1.75	54.44	74.00	-19.56	P
*	7384.86	38.65	39.04	4.99	41.21	1.75	43.22	54.00	-10.78	A
	9847.56	50.14	38.95	5.76	38.06	0.49	57.28	74.00	-16.72	P
	9847.56	39.85	38.95	5.76	38.06	0.49	46.99	54.00	-7.01	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### Vertical

	TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Vertical polarity					
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*	4923.85	53.22	33.03	3.76	41.49	0.73	49.26	74.00	-24.74	P
*	4923.85	42.61	33.03	3.76	41.49	0.73	38.65	54.00	-15.35	A
*	7385.94	51.33	39.04	4.99	41.21	1.76	55.91	74.00	-18.09	P
*	7385.94	40.25	39.04	4.99	41.21	1.76	44.83	54.00	-9.17	A
	9847.59	52.64	38.95	5.76	38.06	0.49	59.78	74.00	-14.22	P
	9847.59	41.24	38.95	5.76	38.06	0.49	48.38	54.00	-5.62	A
	N/A	----	----	----	----	----	----	----	----	P
	N/A	----	----	----	----	----	----	----	----	A

### REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

## 9.2 RESTRICTED BAND EDGES

### TEST RESULT


#### IEEE 802.11b mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	53.92	74	-20.08	Peak
LOW	2390	45.85	54	-9.15	Average
	2483.5	53.35	74	-20.75	Peak
HIGH	2483.5	49.90	54	-4.10	Average


#### IEEE 802.11g mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	51.79	74	-22.21	Peak
LOW	2390	42.96	54	-11.04	Average
	2483.5	53.07	74	-20.93	Peak
HIGH	2483.5	43.57	54	-10.43	Average


### CH Low (802.11b MODE-Peak)

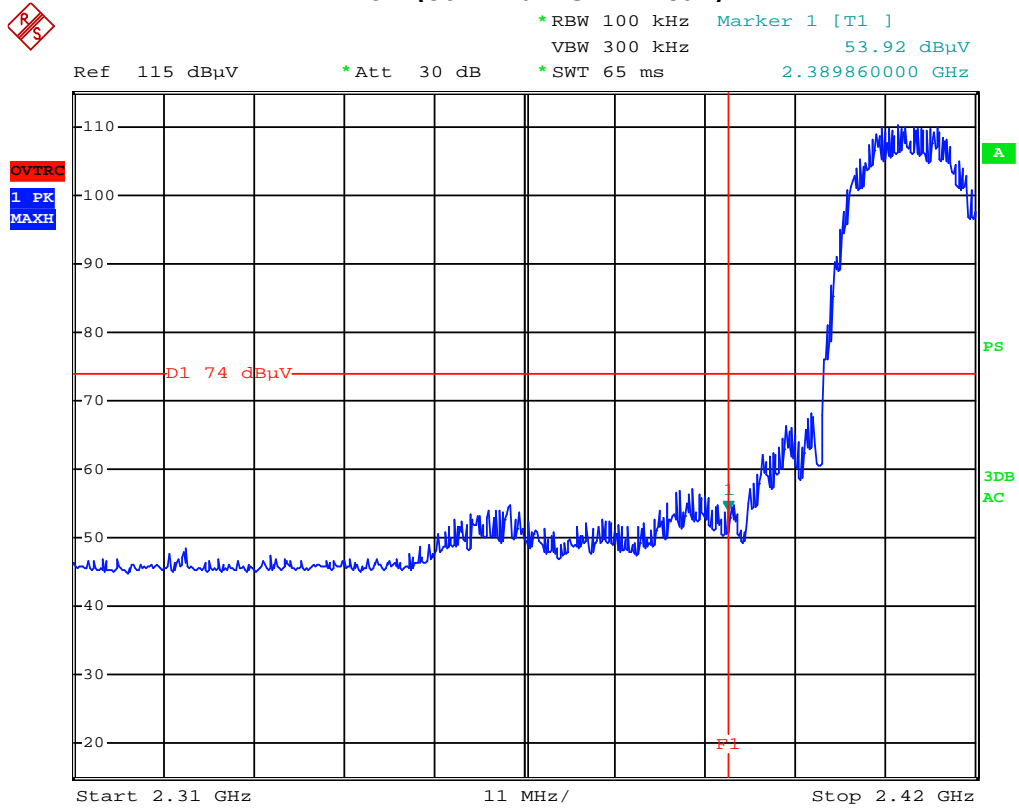


### CH Low (802.11b MODE-Average)

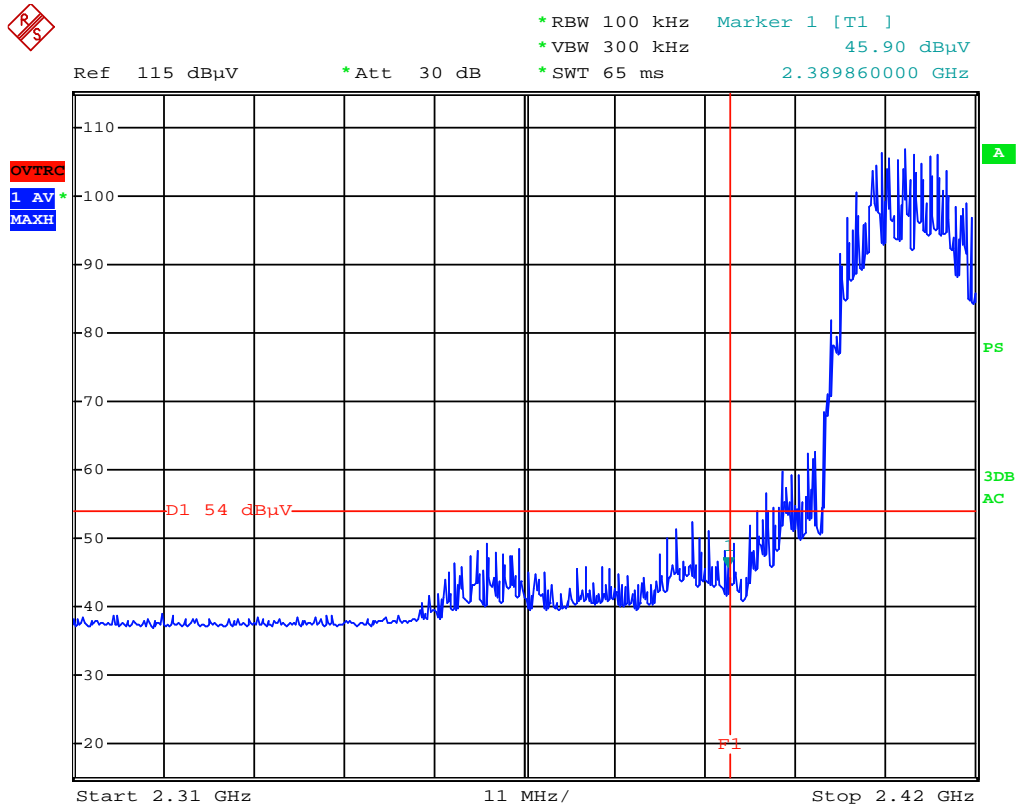

### CH High (802.11b MODE-Peak)

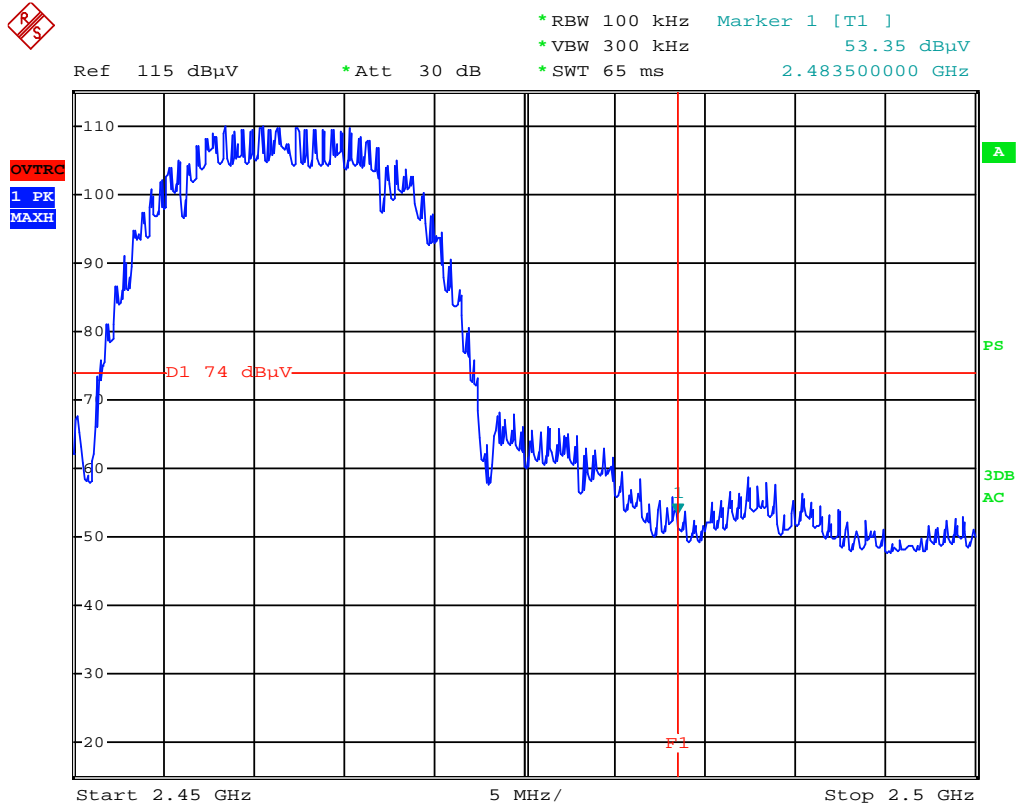

### CH High (802.11b MODE-Average)

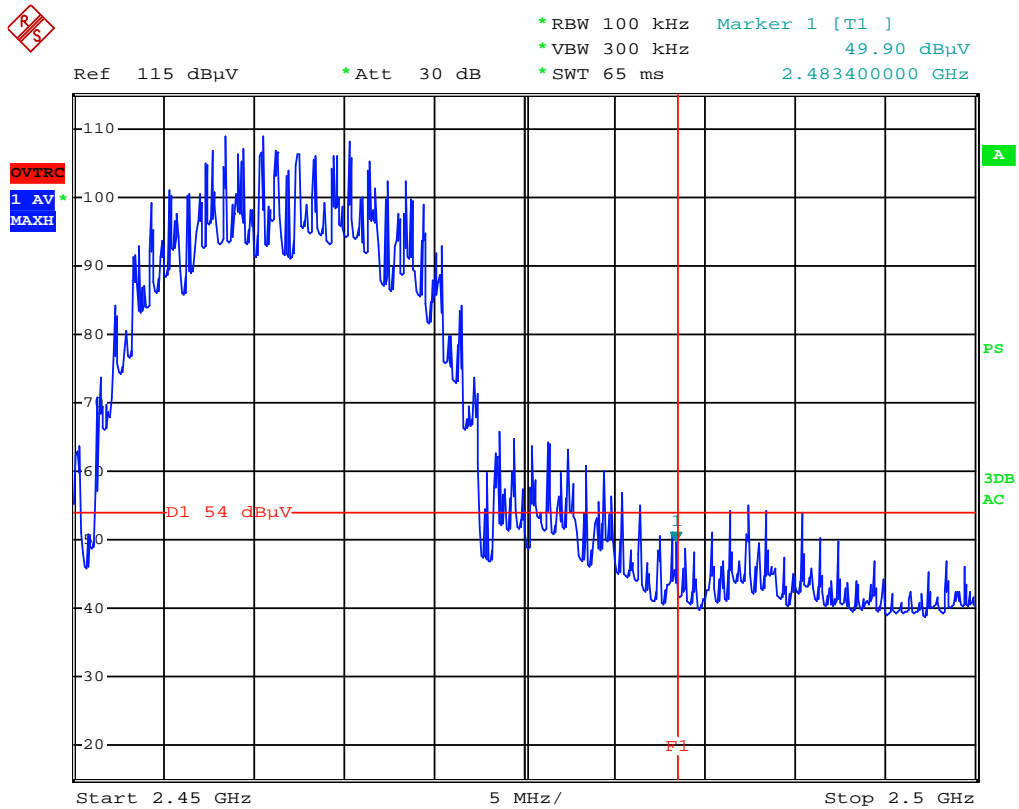

### CH Low (802.11g MODE-Peak)



\*RBW 100 kHz Marker 1 [T1 ]  
 \*VBW 300 kHz 51.79 dBμV  
 \*SWT 65 ms 2.390080000 GHz


Ref 115 dBμV

\*Att 30 dB

\*SWT 65 ms

2.390080000 GHz

OVTRC  
 1 PK  
 MAXH

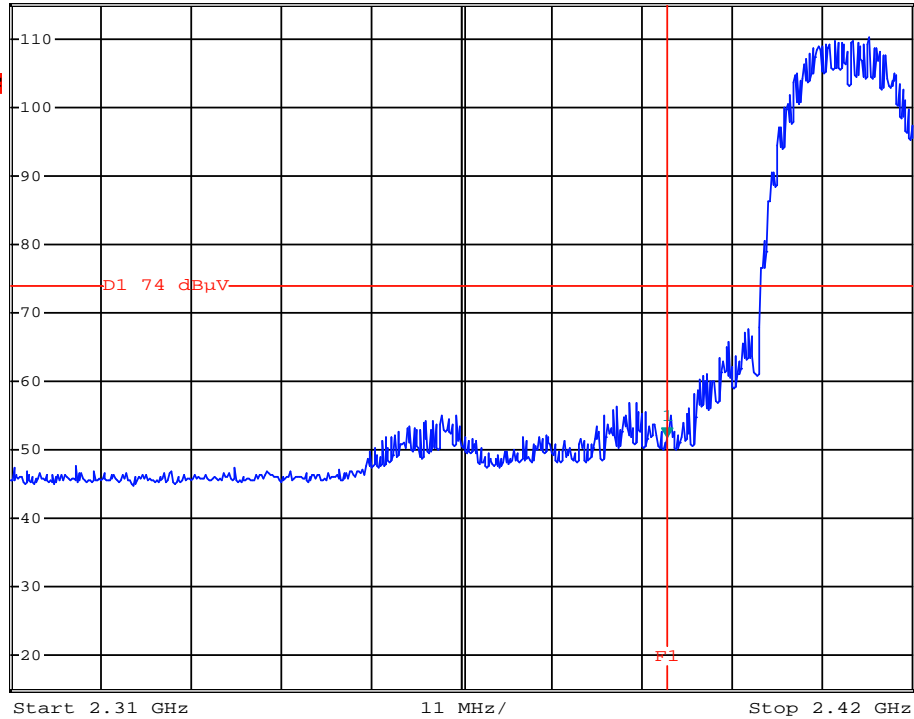

### CH Low (802.11g MODE-Average)



\*RBW 100 kHz Marker 1 [T1 ]  
 \*VBW 300 kHz 42.96 dBμV  
 \*SWT 65 ms 2.390080000 GHz


Ref 115 dBμV

\*Att 30 dB


\*SWT 65 ms

2.390080000 GHz


OVTRC  
 1 AV  
 MAXH

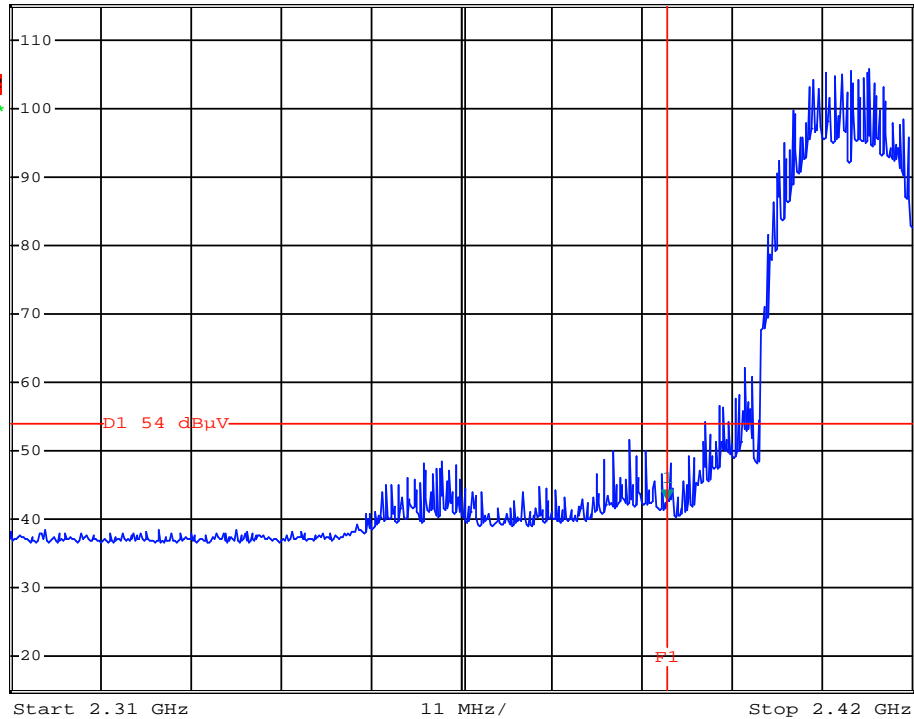

# CH High (802.11g MODE-Peak)

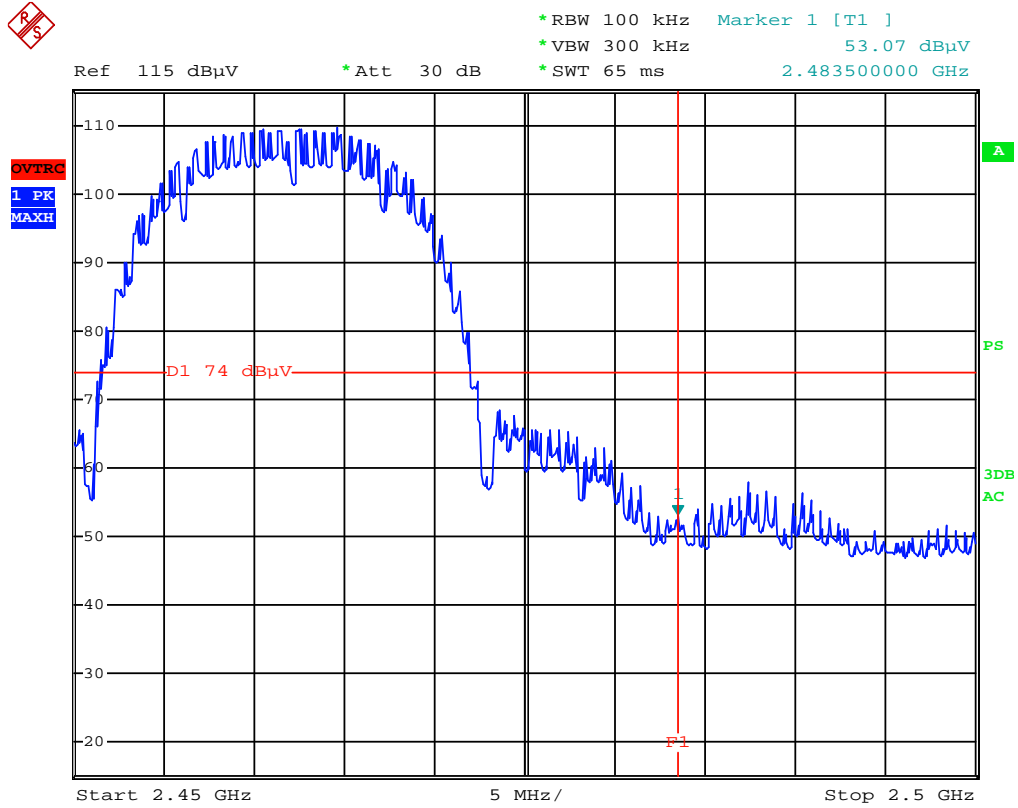

# CH High (802.11g MODE-Average)

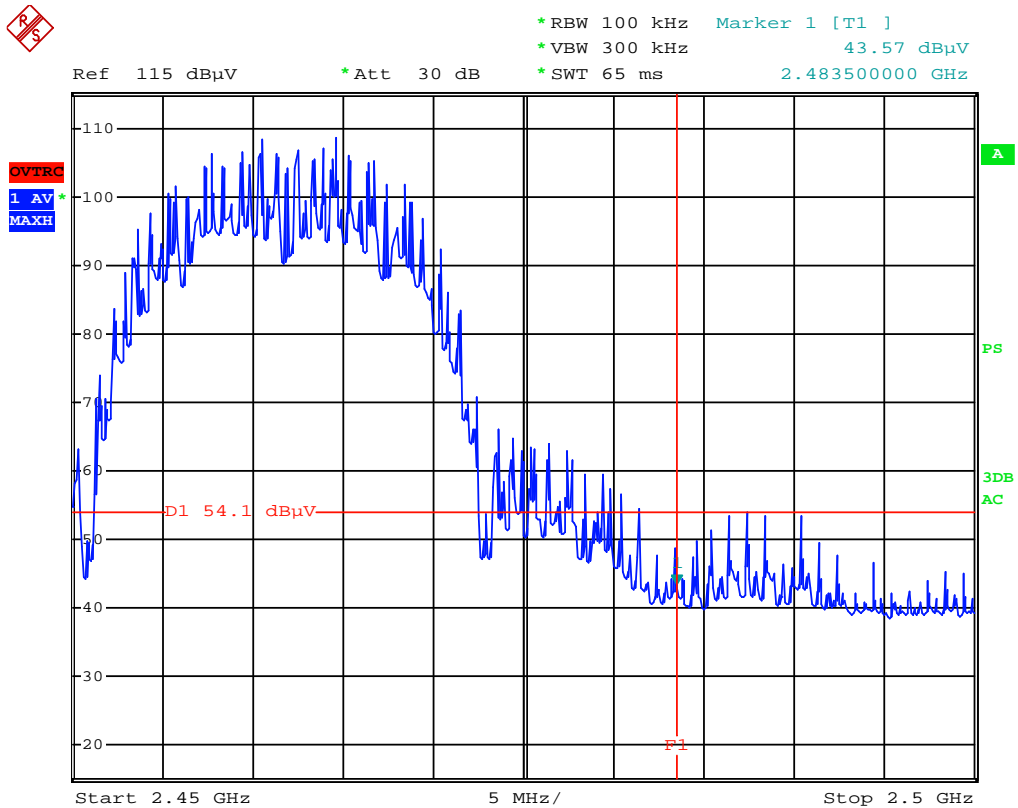

## **10. ANTENNA REQUIREMENT**

### **10.1 Standard Applicable**

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### **10.2 Antenna Connected Construction**

The antenna connector is designed with permanent attachment and no consideration of replacement.