
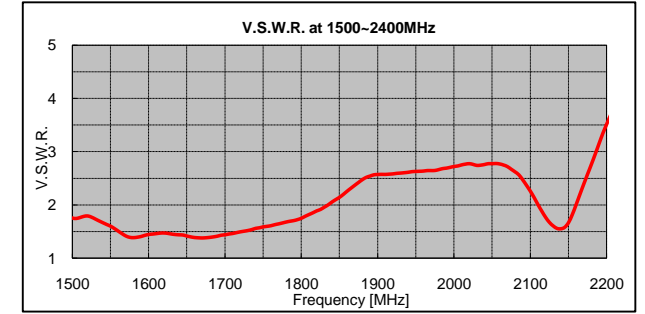
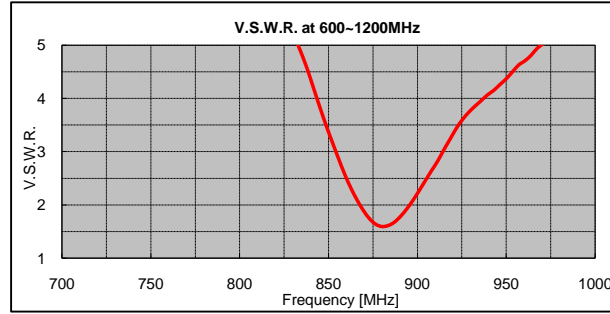



For: Fujitsu
 Model: Seneca Ccfl (Close)
 Type: Aux Antenna Left Side

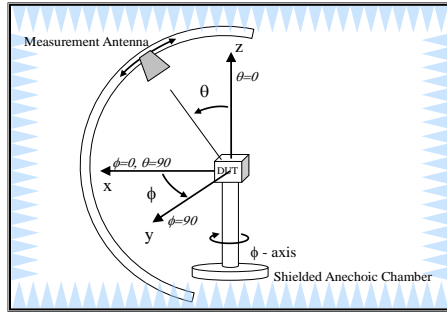

Band	Frequency (MHz)	Total Gain (dBi)	Efficiency (%)	Peak Gain (dBi)
GSM850 Tx	N/A	N/A	N/A	N/A
GSM850 Rx	869	-4.73	33.61	-0.22
	880	-3.98	39.99	0.61
	894	-4.38	36.45	-0.08
GSM900 Tx	N/A	N/A	N/A	N/A
GSM900 Rx	N/A	N/A	N/A	N/A
GSM1800 Tx	N/A	N/A	N/A	N/A
GSM1800 Rx	N/A	N/A	N/A	N/A
GSM1900 Tx	N/A	N/A	N/A	N/A
GSM1900 Rx	1930	-5.18	30.33	-0.91
	1960	-4.50	35.48	-0.83
	1990	-4.13	38.64	-0.55
IMT-2000 Tx	N/A	N/A	N/A	N/A
IMT-2000 Rx	2110	-2.94	50.79	0.84
	2140	-1.87	65.02	2.99
	2170	-3.05	49.56	2.44
GPS	1575	-6.62	21.77	-1.91
DVB-H	N/A	N/A	N/A	N/A

Band	Frequency (MHz)	Total Gain (dBi)	Efficiency (%)	Peak Gain (dBi)
UMTS 2100 Tx (Band I)	N/A	N/A	N/A	N/A
UMTS 2100 Rx (Band I)	2110	-2.94	50.79	0.84
	2120	#N/A	#N/A	#N/A
	2130	#N/A	#N/A	#N/A
	2140	-1.87	65.02	2.99
	2150	#N/A	#N/A	#N/A
	2160	#N/A	#N/A	#N/A
UMTS 1900 Tx (Band II)	N/A	N/A	N/A	N/A
UMTS 1900 Rx (Band II)	1930	-5.18	30.33	-0.91
	1960	-4.50	35.48	-0.83
	1990	-4.13	38.64	-0.55
UMTS 1800 Tx (Band III)	N/A	N/A	N/A	N/A
UMTS 1800 Rx (Band III)	1805	-4.22	37.82	-0.16
	1840	-4.66	34.21	-0.43
	1880	-4.84	32.77	-0.43
UMTS 1700/2100 Tx (Band IV)	N/A	N/A	N/A	N/A
UMTS 1700/2100 Rx (Band IV)	2110	-2.94	50.79	0.84
	2130	#N/A	#N/A	#N/A
	2155	#N/A	#N/A	#N/A

Band	Frequency (MHz)	Total Gain (dBi)	Efficiency (%)	Peak Gain (dBi)
UMTS 850 Tx (Band V)	N/A	N/A	N/A	N/A
UMTS 850 Rx (Babd V)	869	-4.73	33.61	-0.22
	880	-3.98	39.99	0.61
	894	-4.38	36.45	-0.08
UMTS 800 Tx (Band VI)	N/A	N/A	N/A	N/A
UMTS 800 Rx (Band VI)	875	#N/A	#N/A	#N/A
	880	-3.98	39.99	0.61
	885	#N/A	#N/A	#N/A
UMTS 900 Tx (Band VIII)	N/A	N/A	N/A	N/A
UMTS 900 Rx (Band VIII)	925	-6.75	21.13	-2.53
	940	-7.42	18.10	-3.43
	960	-8.26	14.92	-4.91
UMTS 1700 Tx (Band IX)	N/A	N/A	N/A	N/A
UMTS 1700 Rx (Band IX)	1845	#N/A	#N/A	#N/A
	1860	#N/A	#N/A	#N/A
	1880	-4.84	32.77	-0.43
UMTS 1700/2100 Tx (Band X)	N/A	N/A	N/A	N/A
UMTS 1700/2100 Rx (Band X)	2110	-2.94	50.79	0.84
	2140	-1.87	65.02	2.99
	2170	-3.05	49.56	2.44

For: Fujitsu
Model: Seneca Ccfl (Close)
Type: Aux Antenna Left Side

