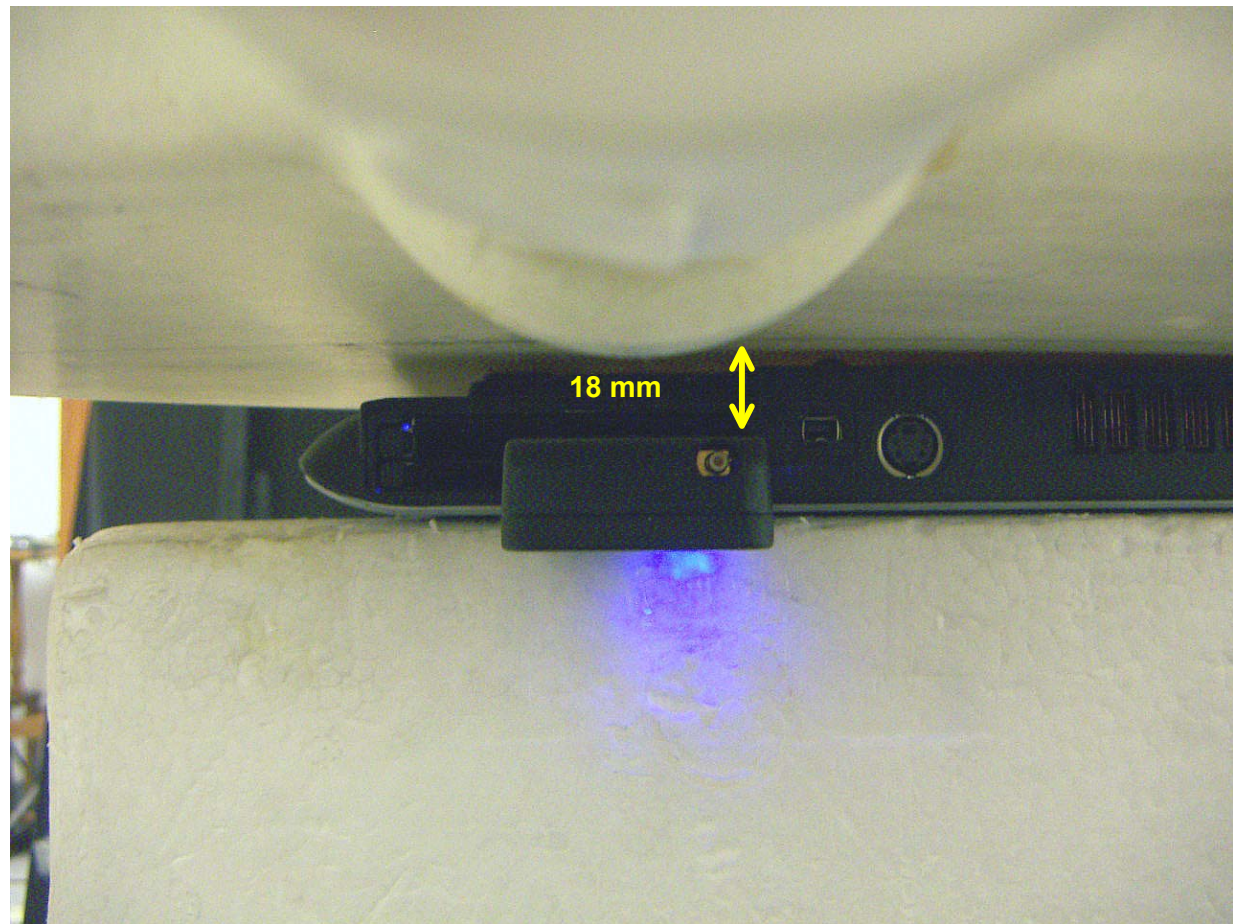


7 SAR MEASUREMENT RESULTS

7.1 HOST # 1 TOSHIBA – 1xRTT



1xRTT RC3, SO32 (+F-SCH) , Cell Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1013	824.70	0.630	-0.246	0.667
384	836.52	0.725	-0.107	0.743
777	848.31	0.637	0.000	0.637

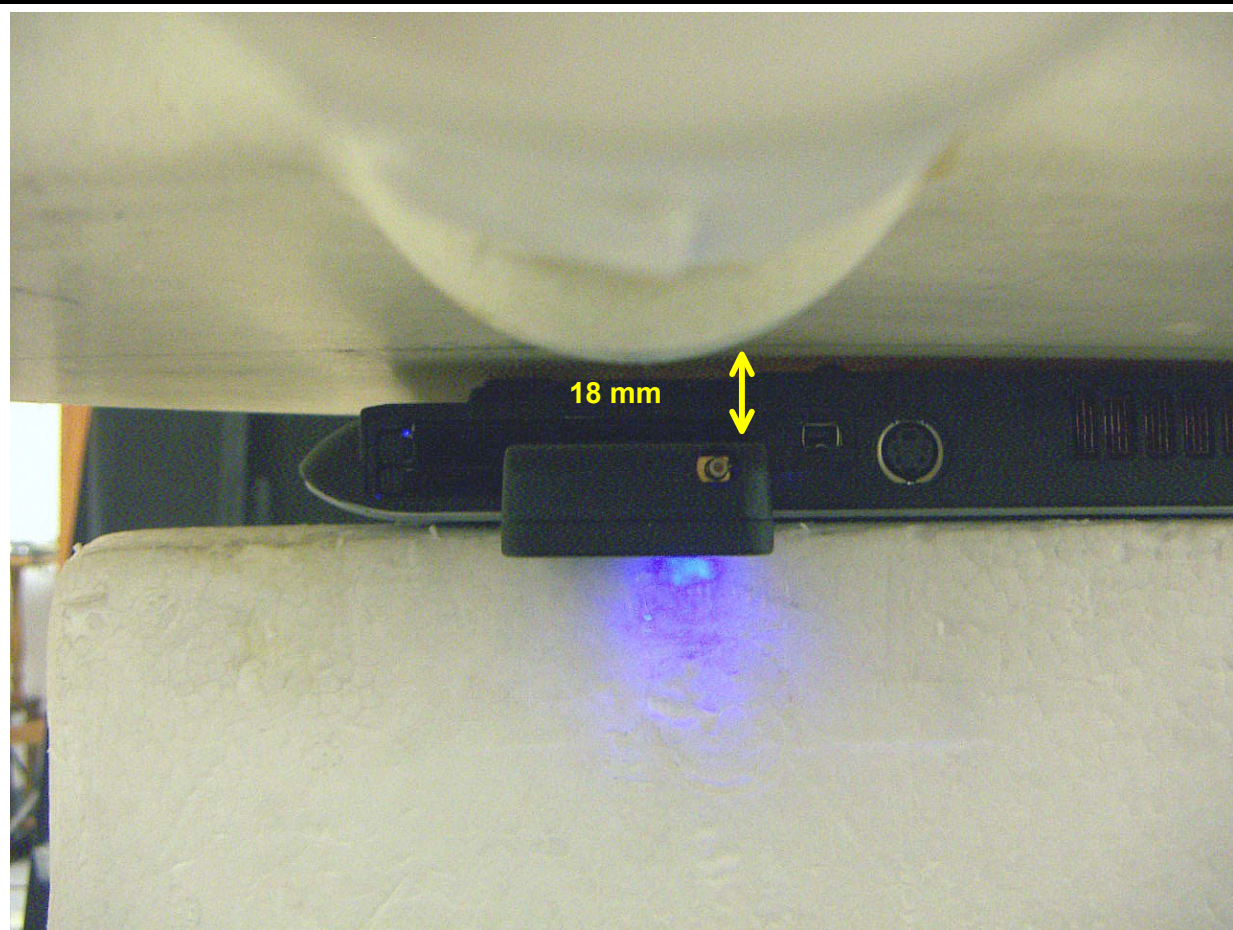
1xRTT RC3, SO32 (+F-SCH) , PCS Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
25	1851.25	0.507	-0.101	0.519
600	1880.00	0.651	-0.078	0.663
1175	1908.75	0.778	-0.172	0.809

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

7.2 HOST # 1 TOSHIBA - 1XEV-DO

**1xEv-Do Rev A, Cell Band**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1013	824.70	0.668	-0.147	0.691
384	836.52	0.928	-0.175	0.966
777	848.31	0.709	0.000	0.709

1xEv-Do Rev A, PCS Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
25	1851.25	0.537	-0.165	0.558
600	1880.00	0.738	-0.129	0.760
1175	1908.75	0.850	-0.137	0.877

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

7.3 HOST # 2 HP - 1XRTT**1xRTT RC3, SO32 (+F-SCH) , Cell Band**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1013	824.70	0.736	-0.169	0.765
384	836.52			
777	848.31			

1xRTT RC3, SO32 (+F-SCH) , PCS Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
25	1851.25	0.751	-0.097	0.768
600	1880.00			
1175	1908.75			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

7.4 HOST # 2 HP - 1XEV-DO**1xEv-Do Rev A, Cell Band**

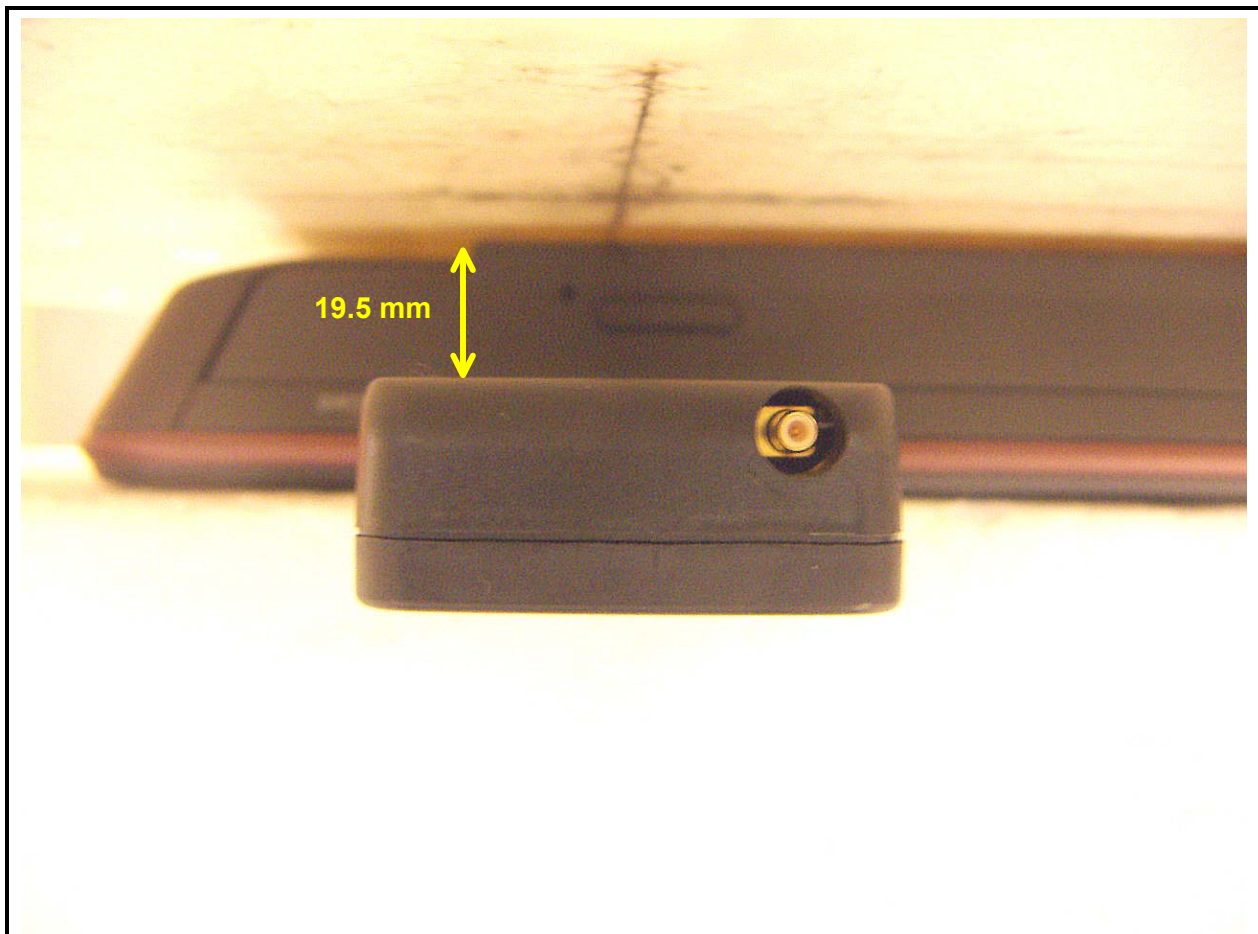
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1013	824.70	0.676	0.000	0.676
384	836.52	0.817	0.000	0.817
777	848.31	0.798	0.000	0.798

1xEv-Do Rev A, PCS Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
25	1851.25	0.689	-0.188	0.719
600	1880.00			
1175	1908.75			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

7.5 HOST # 3 SONY - 1XRTT**1xRTT RC3, SO32 (+F-SCH) , Cell Band**

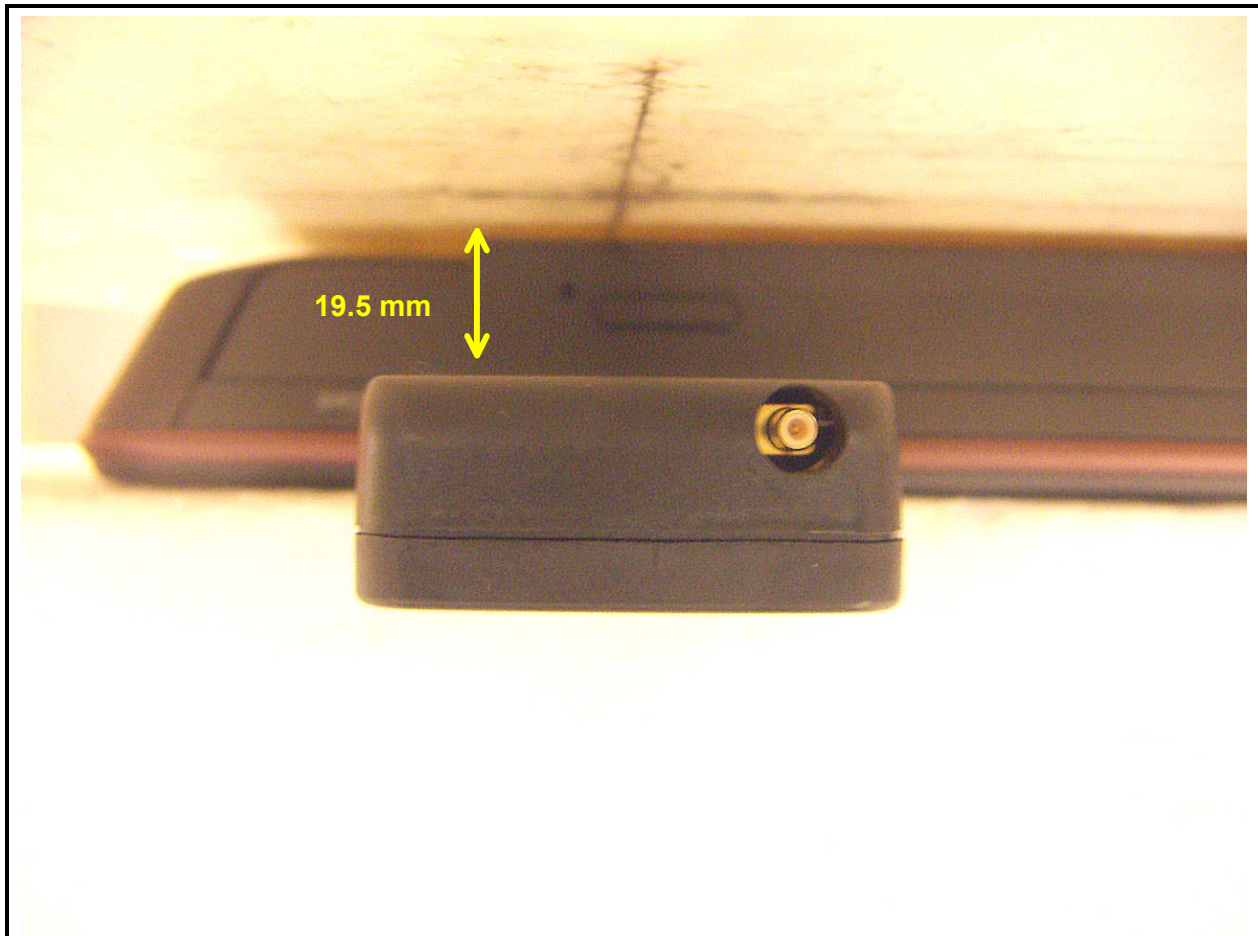
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1013	824.70	0.583	-0.229	0.615
384	836.52			
777	848.31			

1xRTT RC3, SO32 (+F-SCH) , PCS Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
25	1851.25	0.636	0.000	0.636
600	1880.00	0.839	-0.016	0.842
1175	1908.75	0.928	-0.135	0.957

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

7.6 HOST # 3 SONY - 1XEV-DO**1xEv-Do Rev A, Cell Band**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1013	824.70			
384	836.52	0.579	-0.026	0.582
777	848.31			

1xEv-Do Rev A, PCS Band

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
25	1851.25	0.681	-0.078	0.693
600	1880.00	0.923	-0.121	0.949
1175	1908.75	0.975	-0.109	1.000

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.