

FCC Test Report

FCC ID : N7NHL7519
Equipment : Wireless Module
Model No. : HL7519
Brand Name : AirPrime
Applicant : Sierra Wireless Inc.
Address : 13811 Wireless Way Richmond, BC, V6V 3A4
Canada
Standard : 47 CFR FCC Part 24 Subpart E
Received Date : Aug. 18, 2015
Tested Date : Aug. 23 ~ Sep. 04, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

| | | |
|----------|---|-----------|
| 1 | GENERAL DESCRIPTION | 5 |
| 1.1 | Information..... | 5 |
| 1.2 | Local Support Equipment List | 7 |
| 1.3 | Test Setup Chart | 7 |
| 1.4 | The Equipment List | 8 |
| 1.5 | Test Standards | 9 |
| 1.6 | Measurement Uncertainty | 9 |
| 2 | TEST CONFIGURATION | 10 |
| 2.1 | Testing Condition and Location Information..... | 10 |
| 2.2 | The Worst Test Modes and Channel Details | 10 |
| 3 | TEST RESULTS..... | 11 |
| 3.1 | Equivalent Isotropically Radiated Power | 11 |
| 3.2 | Radiated Emissions..... | 18 |
| 3.3 | Conducted Emissions..... | 30 |
| 3.4 | Band Edge..... | 37 |
| 3.5 | Occupied and 26 dB Bandwidth | 62 |
| 3.6 | Peak to Average Ratio | 69 |
| 3.7 | Frequency Stability..... | 76 |
| 4 | TEST LABORATORY INFORMATION | 78 |

Release Record

| Report No. | Version | Description | Issued Date |
|-------------|---------|---------------|---------------|
| FG581801P24 | Rev. 01 | Initial issue | Sep. 16, 2015 |

Summary of Test Results

| FCC Rules | Test Items | Measured | Result |
|--------------------|---|-------------------------------|--------|
| 2.1046 / 24.232(c) | Equivalent Isotropically Radiated Power | Power[dBm]: 25.52 | Pass |
| 2.1053 / 24.238(a) | Radiated Emissions | Meet the requirement of limit | Pass |
| 2.1051 / 24.238(a) | Conducted Emissions | Meet the requirement of limit | Pass |
| 2.1051 / 24.238(a) | Band Edge | Meet the requirement of limit | Pass |
| 2.1049 / 24.238(b) | Occupied Bandwidth | Meet the requirement of limit | Pass |
| 2.1051 / 24.232(d) | Peak to average ratio | Meet the requirement of limit | Pass |
| 2.1055 / 24.235 | Frequency Stability | Meet the requirement of limit | Pass |

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

| | |
|-----------------------------|---|
| Operating Band (MHz) | Channel Bandwidth: 1.4MHz: 1850.7~1909.3 Channel Bandwidth: 3MHz: 1851.5~1908.5 Channel Bandwidth: 5MHz: 1852.5~1907.5 Channel Bandwidth: 10MHz: 1855~1905 Channel Bandwidth: 15MHz: 1857.5~1902.5 Channel Bandwidth: 20MHz: 1860~1900 |
| Modulation | QPSK, 16QAM (Uplink) |
| Release Version | 9 |
| Duplex Mode | FDD |
| UE Category | 4 |
| H/W Version | 1 |
| S/W Version | V.3.2 |

1.1.2 Maximum EIRP and Emission Designator

| Mode | Modulation | Maximum EIRP (W) | Emission Designator |
|------------------------|------------|------------------|---------------------|
| LTE Band 2, CB: 1.4MHz | QPSK | 0.319 | 1M09G7D |
| LTE Band 2, CB: 1.4MHz | 16QAM | 0.272 | 1M09W7D |
| LTE Band 2, CB: 3MHz | QPSK | 0.318 | 2M69G7D |
| LTE Band 2, CB: 3MHz | 16QAM | 0.277 | 2M70W7D |
| LTE Band 2, CB: 5MHz | QPSK | 0.330 | 4M52G7D |
| LTE Band 2, CB: 5MHz | 16QAM | 0.278 | 4M50W7D |
| LTE Band 2, CB: 10MHz | QPSK | 0.348 | 9M03G7D |
| LTE Band 2, CB: 10MHz | 16QAM | 0.286 | 9M00W7D |
| LTE Band 2, CB: 15MHz | QPSK | 0.356 | 13M46G7D |
| LTE Band 2, CB: 15MHz | 16QAM | 0.298 | 13M46W7D |
| LTE Band 2, CB: 20MHz | QPSK | 0.333 | 17M95G7D |
| LTE Band 2, CB: 20MHz | 16QAM | 0.299 | 18M00W7D |

1.1.3 Antenna Details

| Ant. No. | Type | Gain (dBi) | Connector | Remark |
|----------|--------|------------|-----------|--------|
| 1 | Dipole | 2 | R-SMA | --- |

Note: The antenna is for testing use only.

1.1.4 EUT Operational Condition

| | | | |
|-----------------------------|--|--|--|
| Supply Voltage | 3.7 Vdc from host | | |
| Operational Voltage | <input checked="" type="checkbox"/> Vnom (3.7 V) | <input checked="" type="checkbox"/> Vmax (4.5 V) | <input checked="" type="checkbox"/> Vmin (3.2 V) |
| Operational Climatic | <input checked="" type="checkbox"/> Tnom (20°C) | <input checked="" type="checkbox"/> Tmax (55°C) | <input checked="" type="checkbox"/> Tmin (-20°C) |

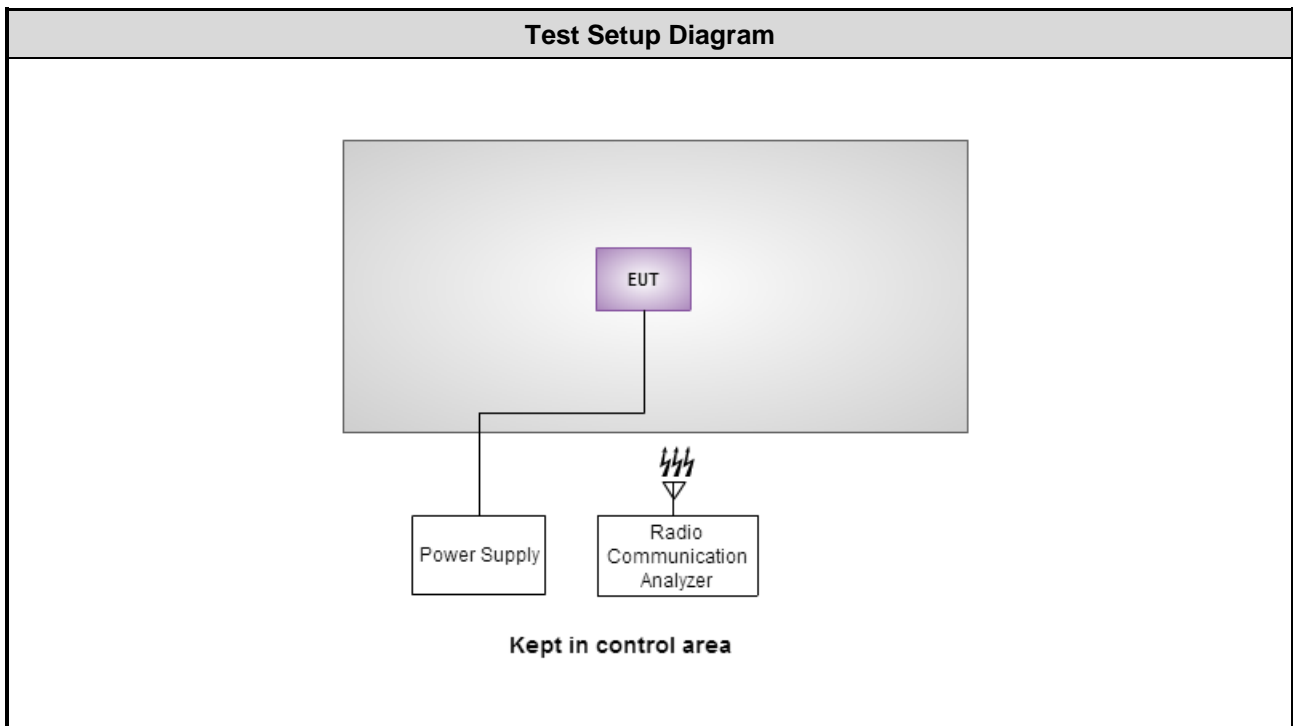
1.1.5 Operating Channel List

| LTE Band 2 | | |
|-------------------------|---------|-----------------|
| Channel Bandwidth (MHz) | Channel | Frequency (MHz) |
| 1.4 | 18607 | 1850.7 |
| 1.4 | 18900 | 1880.0 |
| 1.4 | 19193 | 1909.3 |
| 3 | 18615 | 1851.5 |
| 3 | 18900 | 1880.0 |
| 3 | 19185 | 1908.5 |
| 5 | 18625 | 1852.5 |
| 5 | 18900 | 1880.0 |
| 5 | 19175 | 1907.5 |
| 10 | 18650 | 1855.0 |
| 10 | 18900 | 1880.0 |
| 10 | 19150 | 1905.0 |
| 15 | 18675 | 1857.5 |
| 15 | 18900 | 1880.0 |
| 15 | 19125 | 1902.5 |
| 20 | 18700 | 1860.0 |
| 20 | 18900 | 1880.0 |
| 20 | 19100 | 1900.0 |

1.2 Local Support Equipment List

| Support Equipment List | | | | | | |
|------------------------|--------------|----------|-----------|----------|--------|---------------------------|
| No. | Equipment | Brand | Model | S/N | FCC ID | Signal cable / Length (m) |
| 1 | Power Supply | GWINSTEK | GPC-60300 | EM884797 | --- | --- |

1.3 Test Setup Chart



1.4 The Equipment List

| Test Item | RF Conducted | | | | |
|------------------------------|--------------|------------------|-------------|------------------|-------------------|
| Test Site | (TH01-WS) | | | | |
| Instrument | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer | R&S | FSV40 | 101063 | Feb. 03, 2015 | Feb. 02, 2016 |
| TEMP&HUMIDITY CHAMBER | GIANT FORCE | GCT-225-40-SP-SD | MAF1212-002 | Dec. 03, 2014 | Dec. 02, 2015 |
| Power Meter | Anritsu | ML2495A | 1241002 | Sep. 29, 2014 | Sep. 28, 2015 |
| Power Sensor | Anritsu | MA2411B | 1207366 | Sep. 29, 2014 | Sep. 28, 2015 |
| Radio Communication Analyzer | Anritsu | MT8820C | 6201240341 | Mar. 19, 2015 | Mar. 17, 2016 |
| Measurement Software | Sporton | Sporton_1 | 1.3.30 | NA | NA |

Note: Calibration Interval of instruments listed above is one year.

| Test Item | Radiated Emission | | | | |
|------------------------------|-----------------------------|-------------------|---------------------|------------------|-------------------|
| Test Site | 966 chamber 3 / (03CH03-WS) | | | | |
| Instrument | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer | Agilent | N9010A | MY53400091 | Sep. 16, 2014 | Sep. 15, 2015 |
| Receiver | Agilent | N9038A | MY53290044 | Oct. 21, 2014 | Oct. 20, 2015 |
| Bilog Antenna | SCHWARZBECK | VULB9168 | VULB9168-562 | Jan. 19, 2015 | Jan. 18, 2016 |
| Horn Antenna 1G-18G | SCHWARZBECK | BBHA 9120 D | BBHA 9120 D 1206 | Feb. 03, 2015 | Feb. 02, 2016 |
| Horn Antenna 18G-40G | SCHWARZBECK | BBHA 9170 | BBHA 9170517 | Nov. 10, 2014 | Nov. 09, 2015 |
| Loop Antenna | R&S | HFH2-Z2 | 11900 | Nov. 10, 2014 | Nov. 09, 2015 |
| Preamplifier | EMC | EMC02325 | 980187 | Sep. 26, 2014 | Sep. 25, 2015 |
| Preamplifier | Agilent | 83017A | MY53270014 | Sep. 17, 2014 | Sep. 16, 2015 |
| RF cable-3M | HUBER+SUHNER | SUCOFLEX104 | MY22620/4 | Feb. 09, 2015 | Feb. 08, 2016 |
| RF cable-8M | HUBER+SUHNER | SUCOFLEX104 | MY22601/4 | Feb. 09, 2015 | Feb. 08, 2016 |
| RF cable-1M | HUBER+SUHNER | SUCOFLEX104 | MY22624/4 | Feb. 09, 2015 | Feb. 08, 2016 |
| LF cable-0.8M | EMC | EMC8D-NM-NM-800 | EMC8D-NM-NM-800-001 | Feb. 09, 2015 | Feb. 08, 2016 |
| LF cable-3M | EMC | EMC8D-NM-NM-3000 | 131103 | Feb. 09, 2015 | Feb. 08, 2016 |
| LF cable-13M | EMC | EMC8D-NM-NM-13000 | 131104 | Feb. 09, 2015 | Feb. 08, 2016 |
| Radio Communication Analyzer | Anritsu | MT8820C | 6201240341 | Mar. 19, 2015 | Mar. 17, 2016 |
| Measurement Software | AUDIX | e3 | 6.120210g | NA | NA |

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards.

47 CFR FCC Part 24 Subpart E

ANSI C63.4-2003

ANSI / TIA / EIA-603-D -2010

FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Measurement Uncertainty | |
|--------------------------|-------------|
| Parameters | Uncertainty |
| Bandwidth | ±34.134 Hz |
| Conducted power | ±0.808 dB |
| Frequency error | ±34.134 Hz |
| Temperature | ±0.6 °C |
| Conducted emission | ±2.670 dB |
| AC conducted emission | ±2.92 dB |
| Radiated emission ≤ 1GHz | ±3.99 dB |
| Radiated emission > 1GHz | ±5.52 dB |

2 Test Configuration

2.1 Testing Condition and Location Information

| Test Item | Test Site | Ambient Condition | Tested By |
|--------------------|-----------|-------------------|---------------|
| RF conducted | TH01-WS | 23°C / 64% | Felix Sung |
| Radiated Emissions | 03CH03-WS | 23°C / 66% | Anderson Hung |

➤ FCC site registration No.: 390588

➤ IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

| Test item | Channel Bandwidth | Modulation | Test channel |
|--------------------------|-------------------|--------------|-----------------------|
| E.I.R.P | 1.4 MHz | QPSK / 16QAM | 18607 / 18900 / 19193 |
| Conducted Emissions | 3 MHz | QPSK / 16QAM | 18615 / 18900 / 19185 |
| Occupied Bandwidth | 5 MHz | QPSK / 16QAM | 18625 / 18900 / 19175 |
| Peak to Average Ratio | 10 MHz | QPSK / 16QAM | 18650 / 18900 / 19150 |
| | 15 MHz | QPSK / 16QAM | 18675 / 18900 / 19125 |
| | 20 MHz | QPSK / 16QAM | 18700 / 18900 / 19100 |
| Radiated Emission ≤ 1GHz | 1.4 MHz | QPSK | 19193 |
| | 3 MHz | QPSK | 19185 |
| | 5 MHz | QPSK | 19175 |
| | 10 MHz | QPSK | 19150 |
| | 15 MHz | QPSK | 19125 |
| | 20 MHz | QPSK | 18900 |
| Radiated Emission > 1GHz | 1.4 MHz | QPSK | 18607 / 18900 / 19193 |
| | 3 MHz | QPSK | 18615 / 18900 / 19185 |
| | 5 MHz | QPSK | 18625 / 18900 / 19175 |
| | 10 MHz | QPSK | 18650 / 18900 / 19150 |
| | 15 MHz | QPSK | 18675 / 18900 / 19125 |
| | 20 MHz | QPSK | 18700 / 18900 / 19100 |
| Band Edge | 1.4 MHz | QPSK / 16QAM | 18607 / 19193 |
| | 3 MHz | QPSK / 16QAM | 18615 / 19185 |
| | 5 MHz | QPSK / 16QAM | 18625 / 19175 |
| | 10 MHz | QPSK / 16QAM | 18650 / 19150 |
| | 15 MHz | QPSK / 16QAM | 18675 / 19125 |
| | 20 MHz | QPSK / 16QAM | 18700 / 19100 |
| Frequency Stability | 1.4 MHz | QPSK | 18900 |
| | 3 MHz | QPSK | 18900 |
| | 5 MHz | QPSK | 18900 |
| | 10 MHz | QPSK | 18900 |
| | 15 MHz | QPSK | 18900 |
| | 20 MHz | QPSK | 18900 |

Note:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

3 Test Results

3.1 Equivalent Isotropically Radiated Power

3.1.1 Limit of Equivalent Isotropically Radiated Power

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 Test Procedures

For Conducted power measurement:

1. The EUT links up with simulator and is set to maximum output power level at low / middle / high channel.
2. Measure the output power of low / middle / high channel of the EUT.

For EIRP measurement:

EIPR can be calculated by below formula from KDB 412172 D01.

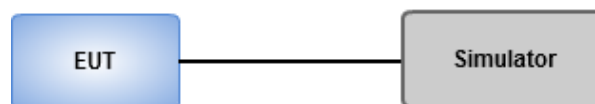
1. $EIRP = P_T + G_T - L_C$

P_T = transmitter output power, in dBm.

G_T = gain of the transmitting antenna, in dBi (EIRP).

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

3.1.3 Test Setup



3.1.4 Test Result of Conducted power (dBm)

| Band / Channel Bandwidth | | | LTE Band 2 / CB: 1.4MHz | | |
|--------------------------|----|-----------|-------------------------|--------|--------------|
| Channel | | | 18607 | 18900 | 19193 |
| Frequency (MHz) | | | 1850.7 | 1880.0 | 1909.3 |
| Mode | RB | RB Offset | Maximum AV Power (dBm) | | |
| QPSK | 1 | 0 | 22.90 | 22.82 | 23.04 |
| | 1 | 2 | 22.78 | 22.66 | 23.01 |
| | 1 | 5 | 22.75 | 22.88 | 22.85 |
| | 3 | 0 | 22.79 | 22.84 | 22.94 |
| | 3 | 1 | 22.66 | 22.85 | 22.88 |
| | 3 | 2 | 22.82 | 22.83 | 22.92 |
| | 6 | 0 | 21.67 | 21.75 | 21.91 |
| 16QAM | 1 | 0 | 22.01 | 22.07 | 22.19 |
| | 1 | 2 | 21.74 | 21.99 | 22.18 |
| | 1 | 5 | 22.02 | 22.21 | 22.35 |
| | 3 | 0 | 21.92 | 22.04 | 22.14 |
| | 3 | 1 | 21.80 | 21.85 | 21.87 |
| | 3 | 2 | 21.99 | 21.96 | 22.06 |
| | 6 | 0 | 20.97 | 21.06 | 20.90 |

| Band / Channel Bandwidth | | | LTE Band 2 / CB: 3MHz | | |
|--------------------------|----|-----------|------------------------|--------|--------------|
| Channel | | | 18615 | 18900 | 19185 |
| Frequency (MHz) | | | 1851.5 | 1880.0 | 1908.5 |
| Mode | RB | RB Offset | Maximum AV Power (dBm) | | |
| QPSK | 1 | 0 | 22.76 | 22.90 | 23.03 |
| | 1 | 7 | 22.61 | 22.72 | 22.90 |
| | 1 | 14 | 22.68 | 22.67 | 22.76 |
| | 8 | 0 | 21.65 | 21.85 | 22.09 |
| | 8 | 4 | 21.78 | 21.83 | 22.04 |
| | 8 | 7 | 21.70 | 21.85 | 21.99 |
| | 15 | 0 | 21.76 | 21.84 | 21.99 |
| 16QAM | 1 | 0 | 22.14 | 21.97 | 22.36 |
| | 1 | 7 | 22.23 | 22.42 | 22.10 |
| | 1 | 14 | 21.71 | 22.03 | 22.02 |
| | 8 | 0 | 20.79 | 20.64 | 20.97 |
| | 8 | 4 | 20.91 | 20.83 | 21.04 |
| | 8 | 7 | 21.02 | 20.99 | 21.03 |
| | 15 | 0 | 20.87 | 20.89 | 21.00 |

| Band / Channel Bandwidth | | | LTE Band 2 / CB: 5MHz | | |
|--------------------------|----|-----------|------------------------|--------|--------------|
| Channel | | | 18625 | 18900 | 19175 |
| Frequency (MHz) | | | 1852.5 | 1880.0 | 1907.5 |
| Mode | RB | RB Offset | Maximum AV Power (dBm) | | |
| QPSK | 1 | 0 | 22.76 | 22.88 | 23.18 |
| | 1 | 12 | 22.57 | 22.95 | 22.92 |
| | 1 | 24 | 22.67 | 22.65 | 22.61 |
| | 12 | 0 | 21.85 | 22.00 | 22.09 |
| | 12 | 6 | 21.66 | 21.87 | 22.07 |
| | 12 | 11 | 21.67 | 21.86 | 21.93 |
| | 25 | 0 | 21.82 | 21.85 | 21.97 |
| 16QAM | 1 | 0 | 22.14 | 22.09 | 22.20 |
| | 1 | 12 | 22.44 | 21.76 | 22.35 |
| | 1 | 24 | 22.37 | 21.99 | 22.10 |
| | 12 | 0 | 21.00 | 20.93 | 21.10 |
| | 12 | 6 | 20.93 | 20.95 | 21.06 |
| | 12 | 11 | 20.87 | 20.96 | 20.85 |
| | 25 | 0 | 20.87 | 20.97 | 20.93 |

| Band / Channel Bandwidth | | | LTE Band 2 / CB: 10MHz | | |
|--------------------------|----|-----------|------------------------|--------|--------------|
| Channel | | | 18650 | 18900 | 19150 |
| Frequency (MHz) | | | 1855.0 | 1880.0 | 1905.0 |
| Mode | RB | RB Offset | Maximum AV Power (dBm) | | |
| QPSK | 1 | 0 | 23.00 | 22.89 | 23.41 |
| | 1 | 24 | 22.62 | 22.88 | 22.88 |
| | 1 | 49 | 22.43 | 22.63 | 22.69 |
| | 25 | 0 | 21.85 | 21.90 | 22.27 |
| | 25 | 12 | 21.72 | 21.85 | 22.06 |
| | 25 | 24 | 21.73 | 21.83 | 22.04 |
| | 50 | 0 | 21.83 | 21.96 | 22.12 |
| 16QAM | 1 | 0 | 22.49 | 22.37 | 22.56 |
| | 1 | 24 | 21.87 | 22.10 | 21.96 |
| | 1 | 49 | 22.32 | 21.94 | 22.40 |
| | 25 | 0 | 21.00 | 20.89 | 21.23 |
| | 25 | 12 | 20.95 | 20.87 | 21.06 |
| | 25 | 24 | 20.95 | 20.83 | 21.01 |
| | 50 | 0 | 21.01 | 20.93 | 21.24 |

| Band / Channel Bandwidth | | | LTE Band 2 / CB: 15MHz | | |
|--------------------------|----|-----------|------------------------|--------|--------------|
| Channel | | | 18675 | 18900 | 19125 |
| Frequency (MHz) | | | 1857.5 | 1880.0 | 1902.5 |
| Mode | RB | RB Offset | Maximum AV Power (dBm) | | |
| QPSK | 1 | 0 | 23.24 | 23.13 | 23.52 |
| | 1 | 37 | 22.71 | 22.76 | 22.97 |
| | 1 | 74 | 22.75 | 22.79 | 22.82 |
| | 36 | 0 | 22.00 | 22.22 | 22.41 |
| | 36 | 18 | 21.84 | 21.99 | 22.21 |
| | 36 | 37 | 21.76 | 21.97 | 21.93 |
| | 75 | 0 | 21.87 | 21.96 | 22.22 |
| 16QAM | 1 | 0 | 22.37 | 22.63 | 22.74 |
| | 1 | 37 | 22.06 | 22.00 | 22.57 |
| | 1 | 74 | 22.36 | 22.26 | 22.50 |
| | 36 | 0 | 21.18 | 21.10 | 21.36 |
| | 36 | 18 | 20.89 | 20.87 | 21.08 |
| | 36 | 37 | 20.80 | 20.84 | 21.04 |
| | 75 | 0 | 20.97 | 20.99 | 21.23 |

| Band / Channel Bandwidth | | | LTE Band 2 / CB: 20MHz | | |
|--------------------------|-----|-----------|------------------------|--------------|--------|
| Channel | | | 18700 | 18900 | 19100 |
| Frequency (MHz) | | | 1860.0 | 1880.0 | 1900.0 |
| Mode | RB | RB Offset | Maximum AV Power (dBm) | | |
| QPSK | 1 | 0 | 22.97 | 23.23 | 23.03 |
| | 1 | 49 | 22.54 | 22.78 | 22.95 |
| | 1 | 99 | 22.40 | 22.66 | 22.36 |
| | 50 | 0 | 22.09 | 22.06 | 22.26 |
| | 50 | 24 | 21.73 | 21.92 | 22.05 |
| | 50 | 49 | 21.63 | 21.95 | 21.86 |
| | 100 | 0 | 21.86 | 21.98 | 22.04 |
| 16QAM | 1 | 0 | 22.50 | 22.50 | 22.76 |
| | 1 | 49 | 22.20 | 22.09 | 22.07 |
| | 1 | 99 | 21.66 | 22.27 | 21.54 |
| | 50 | 0 | 21.14 | 21.12 | 21.26 |
| | 50 | 24 | 20.71 | 20.88 | 21.06 |
| | 50 | 49 | 20.66 | 20.93 | 20.88 |
| | 100 | 0 | 20.87 | 21.02 | 21.01 |

3.1.5 Test Result of Equivalent Isotropically Radiated Power (dBm)

| Mode | LTE Band 2, CB: 1.4MHz, QPSK | | | | | |
|---------|------------------------------|------------------------------|------------------------|--------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18607 | 1850.7 | 22.90 | 2 | 24.90 | 0.309 | 2 |
| 18900 | 1880.0 | 22.88 | 2 | 24.88 | 0.308 | 2 |
| 19193 | 1909.3 | 23.04 | 2 | 25.04 | 0.319 | 2 |

| Mode | LTE Band 2, CB: 1.4MHz, 16QAM | | | | | |
|---------|-------------------------------|------------------------------|------------------------|------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18607 | 1850.7 | 22.02 | 2 | 24.02 | 0.252 | 2 |
| 18900 | 1880.0 | 22.21 | 2 | 24.21 | 0.264 | 2 |
| 19193 | 1909.3 | 22.35 | 2 | 24.35 | 0.272 | 2 |

| Mode | LTE Band 2, CB: 3MHz, QPSK | | | | | |
|---------|----------------------------|------------------------------|------------------------|--------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18615 | 1851.5 | 22.76 | 2 | 24.76 | 0.299 | 2 |
| 18900 | 1880.0 | 22.90 | 2 | 24.9 | 0.309 | 2 |
| 19185 | 1908.5 | 23.03 | 2 | 25.03 | 0.318 | 2 |

| Mode | LTE Band 2, CB: 3MHz, 16QAM | | | | | |
|---------|-----------------------------|------------------------------|------------------------|------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18615 | 1851.5 | 22.23 | 2 | 24.23 | 0.265 | 2 |
| 18900 | 1880.0 | 22.42 | 2 | 24.42 | 0.277 | 2 |
| 19185 | 1908.5 | 22.36 | 2 | 24.36 | 0.273 | 2 |

| Mode | LTE Band 2, CB: 5MHz, QPSK | | | | | |
|---------|----------------------------|------------------------------|------------------------|--------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18625 | 1852.5 | 22.76 | 2 | 24.76 | 0.299 | 2 |
| 18900 | 1880.0 | 22.95 | 2 | 24.95 | 0.313 | 2 |
| 19175 | 1907.5 | 23.18 | 2 | 25.18 | 0.330 | 2 |

| Mode | LTE Band 2, CB: 5MHz, 16QAM | | | | | |
|---------|-----------------------------|------------------------------|------------------------|------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18625 | 1852.5 | 22.44 | 2 | 24.44 | 0.278 | 2 |
| 18900 | 1880.0 | 22.09 | 2 | 24.09 | 0.256 | 2 |
| 19175 | 1907.5 | 22.35 | 2 | 24.35 | 0.272 | 2 |

| Mode | LTE Band 2, CB: 10MHz, QPSK | | | | | |
|---------|-----------------------------|------------------------------|------------------------|--------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18650 | 1855.0 | 23.00 | 2 | 25.00 | 0.316 | 2 |
| 18900 | 1880.0 | 22.89 | 2 | 24.89 | 0.308 | 2 |
| 19150 | 1905.0 | 23.41 | 2 | 25.41 | 0.348 | 2 |

| Mode | LTE Band 2, CB: 10MHz, 16QAM | | | | | |
|---------|------------------------------|------------------------------|------------------------|------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18650 | 1855.0 | 22.49 | 2 | 24.49 | 0.281 | 2 |
| 18900 | 1880.0 | 22.37 | 2 | 24.37 | 0.274 | 2 |
| 19150 | 1905.0 | 22.56 | 2 | 24.56 | 0.286 | 2 |

| Mode | LTE Band 2, CB: 15MHz, QPSK | | | | | |
|---------|-----------------------------|------------------------------|------------------------|--------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18675 | 1857.5 | 23.24 | 2 | 25.24 | 0.334 | 2 |
| 18900 | 1880.0 | 23.13 | 2 | 25.13 | 0.326 | 2 |
| 19125 | 1902.5 | 23.52 | 2 | 25.52 | 0.356 | 2 |

| Mode | LTE Band 2, CB: 15MHz, 16QAM | | | | | |
|---------|------------------------------|------------------------------|------------------------|------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18675 | 1857.5 | 22.37 | 2 | 24.37 | 0.274 | 2 |
| 18900 | 1880.0 | 22.63 | 2 | 24.63 | 0.290 | 2 |
| 19125 | 1902.5 | 22.74 | 2 | 24.74 | 0.298 | 2 |

| Mode | LTE Band 2, CB: 20MHz, QPSK | | | | | |
|---------|-----------------------------|------------------------------|------------------------|--------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18700 | 1860.0 | 22.97 | 2 | 24.97 | 0.314 | 2 |
| 18900 | 1880.0 | 23.23 | 2 | 25.23 | 0.333 | 2 |
| 19100 | 1900.0 | 23.03 | 2 | 25.03 | 0.318 | 2 |

| Mode | LTE Band 2, CB: 20MHz, 16QAM | | | | | |
|---------|------------------------------|------------------------------|------------------------|------------|----------|-----------|
| Channel | Frequency (MHz) | Conducted Output Power (dBm) | Max Antenna Gain (dBi) | EIRP (dBm) | EIRP (W) | Limit (W) |
| 18700 | 1860.0 | 22.50 | 2 | 24.50 | 0.282 | 2 |
| 18900 | 1880.0 | 22.50 | 2 | 24.50 | 0.282 | 2 |
| 19100 | 1900.0 | 22.76 | 2 | 24.76 | 0.299 | 2 |

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions

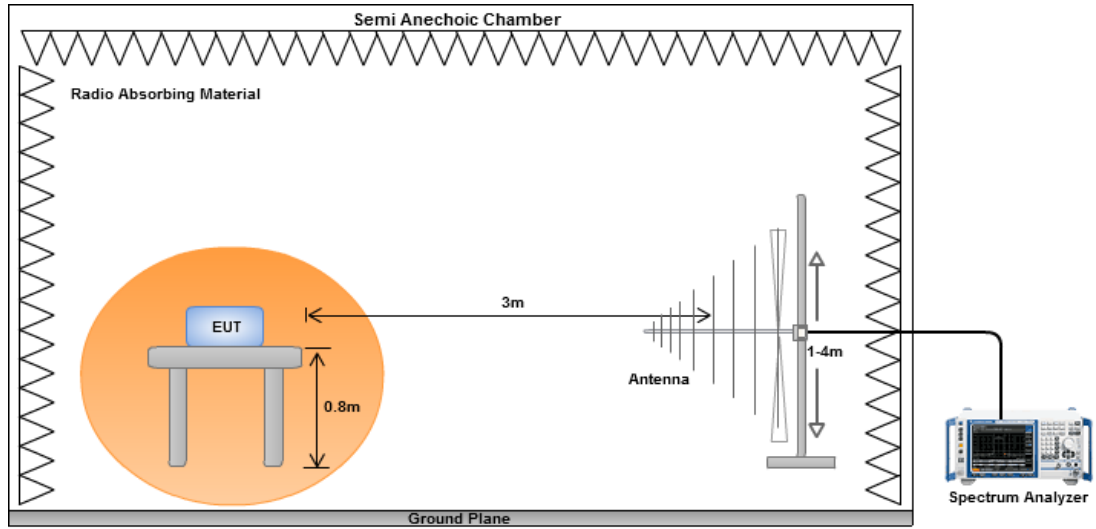
The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable.

3.2.3 Test Setup

Radiated Emissions below 1 GHz



Radiated Emissions above 1 GHz

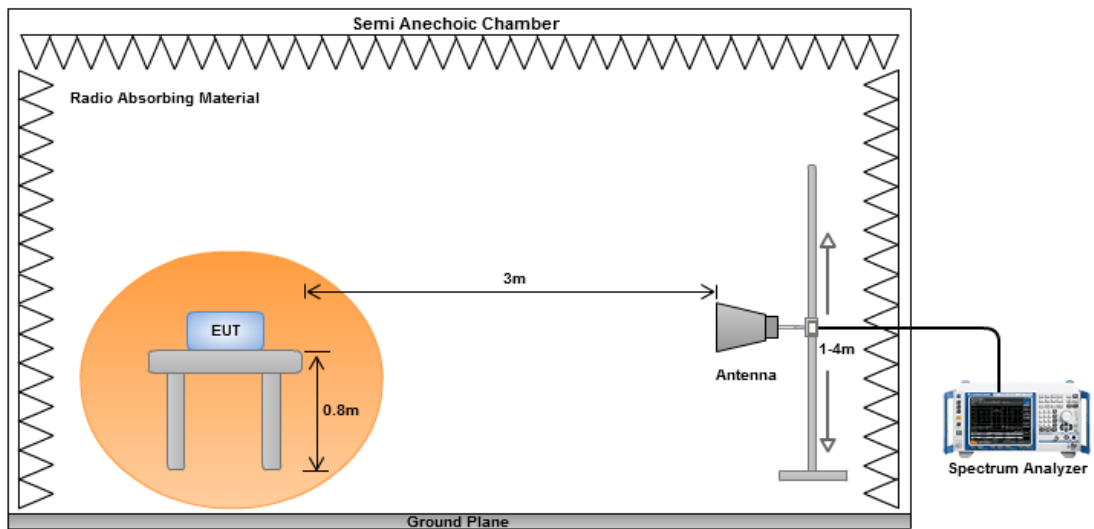

3.2.4 Test Result of Radiated Emissions below 1GHz

| Mode | LTE Band 2, CB: 1.4MHz, 1RB, Offset 0,Channel: 19193 | | | | | | |
|-----------------|--|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 37.76 | H | -58.21 | -13 | -45.21 | -60.52 | -45.6 | -12.61 |
| 103.72 | H | -62.3 | -13 | -49.3 | -55.18 | -62.39 | 0.09 |
| 145.43 | H | -59.13 | -13 | -46.13 | -52.94 | -57.91 | -1.22 |
| 292.87 | H | -54.08 | -13 | -41.08 | -47.15 | -58.3 | 4.22 |
| 644.01 | H | -61.46 | -13 | -48.46 | -61.71 | -65.36 | 3.9 |
| 870.99 | H | -57.81 | -13 | -44.81 | -62.13 | -60.72 | 2.91 |
| 43.58 | V | -53.44 | -13 | -40.44 | -46.64 | -41.66 | -11.78 |
| 93.05 | V | -62.43 | -13 | -49.43 | -56.24 | -62.84 | 0.41 |
| 149.31 | V | -64.99 | -13 | -51.99 | -61.83 | -63.87 | -1.12 |
| 282.2 | V | -57.13 | -13 | -44.13 | -53.82 | -61.39 | 4.26 |
| 511.12 | V | -55.92 | -13 | -42.92 | -56.35 | -60.03 | 4.11 |
| 773.99 | V | -62.11 | -13 | -49.11 | -66.4 | -65.39 | 3.28 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 3MHz, 1RB, Offset 0,Channel: 19185 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 36.79 | H | -54.08 | -13 | -41.08 | -56.41 | -41.33 | -12.75 |
| 111.48 | H | -59.06 | -13 | -46.06 | -51.8 | -58.77 | -0.29 |
| 134.76 | H | -62.22 | -13 | -49.22 | -55.7 | -61.04 | -1.18 |
| 262.8 | H | -63.63 | -13 | -50.63 | -55.6 | -67.96 | 4.33 |
| 605.21 | H | -68.29 | -13 | -55.29 | -68.17 | -72.09 | 3.8 |
| 769.14 | H | -63.61 | -13 | -50.61 | -67.02 | -66.91 | 3.3 |
| 36.79 | V | -57.74 | -13 | -44.74 | -49.25 | -44.99 | -12.75 |
| 102.75 | V | -51.32 | -13 | -38.32 | -45.48 | -51.46 | 0.14 |
| 147.37 | V | -57.29 | -13 | -44.29 | -54.28 | -56.12 | -1.17 |
| 288.99 | V | -64.35 | -13 | -51.35 | -60.99 | -68.59 | 4.24 |
| 483.96 | V | -53.55 | -13 | -40.55 | -52.92 | -57.65 | 4.1 |
| 721.61 | V | -64.33 | -13 | -51.33 | -68.35 | -67.94 | 3.61 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 5MHz, 1RB, Offset 0,Channel: 19175 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 36.79 | H | -58.63 | -13 | -45.63 | -60.96 | -45.88 | -12.75 |
| 145.43 | H | -61.95 | -13 | -48.95 | -55.76 | -60.73 | -1.22 |
| 160.95 | H | -61.73 | -13 | -48.73 | -55.49 | -61.01 | -0.72 |
| 198.78 | H | -60.76 | -13 | -47.76 | -51.41 | -65.01 | 4.25 |
| 249.22 | H | -63.43 | -13 | -50.43 | -54.91 | -67.8 | 4.37 |
| 762.35 | H | -55.29 | -13 | -42.29 | -58.58 | -58.62 | 3.33 |
| 37.76 | V | -56.01 | -13 | -43.01 | -47.73 | -43.4 | -12.61 |
| 70.74 | V | -54.25 | -13 | -41.25 | -46.54 | -49.08 | -5.17 |
| 127.97 | V | -51.8 | -13 | -38.8 | -47.13 | -50.83 | -0.97 |
| 142.52 | V | -44.05 | -13 | -31.05 | -41.4 | -42.76 | -1.29 |
| 345.25 | V | -58.75 | -13 | -45.75 | -55.82 | -63.15 | 4.4 |
| 512.09 | V | -54.33 | -13 | -41.33 | -54.81 | -58.44 | 4.11 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | LTE Band 2, CB: 10MHz, 1RB, Offset 0,Channel: 19150 | | | | | | |
|-----------------|---|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 30 | H | -57.95 | -13 | -44.95 | -61.84 | -43.57 | -14.38 |
| 107.6 | H | -57.56 | -13 | -44.56 | -50.38 | -57.46 | -0.1 |
| 148.34 | H | -61.25 | -13 | -48.25 | -55.07 | -60.1 | -1.15 |
| 284.14 | H | -64.27 | -13 | -51.27 | -57.01 | -68.52 | 4.25 |
| 427.7 | H | -66.72 | -13 | -53.72 | -64.21 | -70.9 | 4.18 |
| 773.99 | H | -63.11 | -13 | -50.11 | -66.6 | -66.39 | 3.28 |
| 38.73 | V | -63.05 | -13 | -50.05 | -54.99 | -50.57 | -12.48 |
| 111.48 | V | -53.23 | -13 | -40.23 | -47.23 | -52.94 | -0.29 |
| 152.22 | V | -56.14 | -13 | -43.14 | -52.75 | -55.09 | -1.05 |
| 281.23 | V | -63.96 | -13 | -50.96 | -60.66 | -68.22 | 4.26 |
| 433.52 | V | -65.86 | -13 | -52.86 | -63.94 | -70.02 | 4.16 |
| 758.47 | V | -64.44 | -13 | -51.44 | -68.71 | -67.79 | 3.35 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | LTE Band 2, CB: 15MHz, 1RB, Offset 0,Channel: 19125 | | | | | | |
|-----------------|---|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 36.79 | H | -58.71 | -13 | -45.71 | -61.04 | -45.96 | -12.75 |
| 74.62 | H | -65.01 | -13 | -52.01 | -58.22 | -61.12 | -3.89 |
| 142.52 | H | -67.72 | -13 | -54.72 | -61.53 | -66.43 | -1.29 |
| 261.83 | H | -67.33 | -13 | -54.33 | -59.26 | -71.66 | 4.33 |
| 392.78 | H | -63.36 | -13 | -50.36 | -60.23 | -67.67 | 4.31 |
| 848.68 | H | -64.37 | -13 | -51.37 | -68.26 | -67.32 | 2.95 |
| 36.79 | V | -58.63 | -13 | -45.63 | -50.14 | -45.88 | -12.75 |
| 47.46 | V | -62.86 | -13 | -49.86 | -55.57 | -51.61 | -11.25 |
| 104.69 | V | -64.47 | -13 | -51.47 | -58.59 | -64.51 | 0.04 |
| 148.34 | V | -64.93 | -13 | -51.93 | -61.84 | -63.78 | -1.15 |
| 235.64 | V | -61.5 | -13 | -48.5 | -57.97 | -65.88 | 4.38 |
| 776.9 | V | -62.02 | -13 | -49.02 | -66.32 | -65.29 | 3.27 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | LTE Band 2, CB: 20MHz, 1RB, Offset 0,Channel: 18900 | | | | | | |
|-----------------|---|-------------|-------------|-------------|-------------------|-----------------------|------------------------|
| Frequency (MHz) | Antenna Polarity | E.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 30.97 | H | -59.05 | -13 | -46.05 | -62.65 | -44.94 | -14.11 |
| 150.28 | H | -62.2 | -13 | -49.2 | -56.03 | -61.1 | -1.1 |
| 282.2 | H | -51.46 | -13 | -38.46 | -44.13 | -55.72 | 4.26 |
| 410.24 | H | -67.25 | -13 | -54.25 | -64.42 | -71.5 | 4.25 |
| 492.69 | H | -68.55 | -13 | -55.55 | -66.69 | -72.65 | 4.1 |
| 772.05 | H | -64.22 | -13 | -51.22 | -67.68 | -67.51 | 3.29 |
| 36.79 | V | -56.46 | -13 | -43.46 | -47.97 | -43.71 | -12.75 |
| 104.69 | V | -53.55 | -13 | -40.55 | -47.67 | -53.59 | 0.04 |
| 149.31 | V | -64.44 | -13 | -51.44 | -61.28 | -63.32 | -1.12 |
| 286.08 | V | -64.13 | -13 | -51.13 | -60.8 | -68.38 | 4.25 |
| 570.29 | V | -64.68 | -13 | -51.68 | -67.28 | -68.68 | 4 |
| 776.9 | V | -62.03 | -13 | -49.03 | -66.33 | -65.3 | 3.27 |

Note: EIRP = S.G Power value + Correction factor.

3.2.5 Test Result of Radiated Emissions above 1GHz

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 1.4MHz, 1RB, Offset 0,Channel: 18607 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3700.5 | H | -54.62 | -13 | -41.62 | -65.94 | -61.2 | 6.58 |
| 5550.75 | H | -51.69 | -13 | -38.69 | -67.37 | -57.57 | 5.88 |
| 7401 | H | -48.62 | -13 | -35.62 | -69.26 | -51.49 | 2.87 |
| 3700.5 | V | -47.24 | -13 | -34.24 | -58.5 | -53.82 | 6.58 |
| 5550.75 | V | -43.54 | -13 | -30.54 | -58.9 | -49.42 | 5.88 |
| 7401 | V | -48.69 | -13 | -35.69 | -67.66 | -51.56 | 2.87 |

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 1.4MHz, 1RB, Offset 0,Channel: 18900 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3759.1 | H | -51.77 | -13 | -38.77 | -63.29 | -58.35 | 6.58 |
| 5638.65 | H | -49.44 | -13 | -36.44 | -65.24 | -55.29 | 5.85 |
| 7518.2 | H | -46.46 | -13 | -33.46 | -67.24 | -49.42 | 2.96 |
| 3759.1 | V | -41.3 | -13 | -28.3 | -28.3 | -47.88 | 6.58 |
| 5638.65 | V | -42.77 | -13 | -29.77 | -29.77 | -48.62 | 5.85 |
| 7518.2 | V | -46.32 | -13 | -33.32 | -65.99 | -49.28 | 2.96 |

| Mode | | | | | | | |
|--|-------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 1.4MHz, 1RB, Offset 0,Channel: 19193 | | | | | | | |
| Frequency (MHz) | Antenna Polarity. | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3817.61 | H | -44.71 | -13 | -31.71 | -56.39 | -51.27 | 6.56 |
| 5726.64 | H | -51.19 | -13 | -38.19 | -67.17 | -57 | 5.81 |
| 7635.06 | H | -47.89 | -13 | -34.89 | -68.84 | -50.77 | 2.88 |
| 3817.61 | V | -40.21 | -13 | -27.21 | -51.74 | -46.77 | 6.56 |
| 5726.64 | V | -47.02 | -13 | -34.02 | -63.28 | -52.83 | 5.81 |
| 7635.06 | V | -48.21 | -13 | -35.21 | -68.18 | -51.09 | 2.88 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 3MHz, 1RB, Offset 0,Channel: 18615 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3700.4 | H | -54.21 | -13 | -41.21 | -65.53 | -60.79 | 6.58 |
| 5550.6 | H | -51.3 | -13 | -38.3 | -66.98 | -57.18 | 5.88 |
| 7400.9 | H | -48.33 | -13 | -35.33 | -68.97 | -51.2 | 2.87 |
| 3700.4 | V | -46.89 | -13 | -33.89 | -58.15 | -53.47 | 6.58 |
| 5550.6 | V | -43.12 | -13 | -30.12 | -58.48 | -49 | 5.88 |
| 7400.9 | V | -48.29 | -13 | -35.29 | -67.26 | -51.16 | 2.87 |

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 3MHz, 1RB, Offset 0,Channel: 18900 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3757.5 | H | -51.12 | -13 | -38.12 | -62.63 | -57.7 | 6.58 |
| 5636.2 | H | -48.91 | -13 | -35.91 | -64.71 | -54.76 | 5.85 |
| 7515.2 | H | -45.88 | -13 | -32.88 | -66.66 | -48.84 | 2.96 |
| 3757.5 | V | -41.02 | -13 | -28.02 | -52.42 | -47.6 | 6.58 |
| 5636.2 | V | -42.35 | -13 | -29.35 | -58.01 | -48.2 | 5.85 |
| 7515.2 | V | -46.06 | -13 | -33.06 | -65.73 | -49.02 | 2.96 |

| Mode | | | | | | | |
|--|-------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 3MHz, 1RB, Offset 0,Channel: 19185 | | | | | | | |
| Frequency (MHz) | Antenna Polarity. | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3814.6 | H | -44.27 | -13 | -31.27 | -55.95 | -50.83 | 6.56 |
| 5721.6 | H | -50.78 | -13 | -37.78 | -66.75 | -56.59 | 5.81 |
| 7629 | H | -47.29 | -13 | -34.29 | -68.22 | -50.2 | 2.91 |
| 3814.6 | V | -39.89 | -13 | -26.89 | -51.41 | -46.45 | 6.56 |
| 5721.6 | V | -46.87 | -13 | -33.87 | -63.09 | -52.68 | 5.81 |
| 7629 | V | -47.78 | -13 | -34.78 | -67.79 | -50.69 | 2.91 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 5MHz, 1RB, Offset 0,Channel: 18625 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3700.6 | H | -54.56 | -13 | -41.56 | -65.88 | -61.14 | 6.58 |
| 5551.1 | H | -51.68 | -13 | -38.68 | -67.36 | -57.56 | 5.88 |
| 7401.5 | H | -48.75 | -13 | -35.75 | -69.39 | -51.62 | 2.87 |
| 3700.6 | V | -47.21 | -13 | -34.21 | -58.47 | -53.79 | 6.58 |
| 5551.1 | V | -43.46 | -13 | -30.46 | -58.82 | -49.34 | 5.88 |
| 7401.5 | V | -48.63 | -13 | -35.63 | -67.6 | -51.5 | 2.87 |

| Mode | | | | | | | |
|--|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 5MHz, 1RB, Offset 0,Channel: 18900 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3755.7 | H | -51.43 | -13 | -38.43 | -62.94 | -58.01 | 6.58 |
| 5633.5 | H | -49.12 | -13 | -36.12 | -64.91 | -54.97 | 5.85 |
| 7511.3 | H | -45.96 | -13 | -32.96 | -66.74 | -48.91 | 2.95 |
| 3755.7 | V | -41.63 | -13 | -28.63 | -53.03 | -48.21 | 6.58 |
| 5633.5 | V | -42.76 | -13 | -29.76 | -58.4 | -48.61 | 5.85 |
| 7511.3 | V | -46.39 | -13 | -33.39 | -66.03 | -49.34 | 2.95 |

| Mode | | | | | | | |
|--|-------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 5MHz, 1RB, Offset 0,Channel: 19175 | | | | | | | |
| Frequency (MHz) | Antenna Polarity. | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3810.7 | H | -44.55 | -13 | -31.55 | -56.22 | -51.11 | 6.56 |
| 5716.1 | H | -50.97 | -13 | -37.97 | -66.92 | -56.78 | 5.81 |
| 7621.4 | H | -47.62 | -13 | -34.62 | -68.53 | -50.56 | 2.94 |
| 3810.7 | V | -40.1 | -13 | -27.1 | -51.62 | -46.66 | 6.56 |
| 5716.1 | V | -47.39 | -13 | -34.39 | -63.58 | -53.2 | 5.81 |
| 7621.4 | V | -47.95 | -13 | -34.95 | -68 | -50.89 | 2.94 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|---|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 10MHz, 1RB, Offset 0,Channel: 18650 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3701.3 | H | -54.08 | -13 | -41.08 | -65.4 | -60.66 | 6.58 |
| 5551.7 | H | -51.29 | -13 | -38.29 | -66.97 | -57.17 | 5.88 |
| 7402.4 | H | -48.36 | -13 | -35.36 | -69 | -51.23 | 2.87 |
| 3701.3 | V | -46.81 | -13 | -33.81 | -58.07 | -53.39 | 6.58 |
| 5551.7 | V | -43 | -13 | -30 | -58.36 | -48.88 | 5.88 |
| 7402.4 | V | -48.32 | -13 | -35.32 | -67.3 | -51.19 | 2.87 |

| Mode | | | | | | | |
|---|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 10MHz, 1RB, Offset 0,Channel: 18900 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3751.3 | H | -51.2 | -13 | -38.2 | -62.69 | -57.78 | 6.58 |
| 5626.7 | H | -48.78 | -13 | -35.78 | -64.56 | -54.64 | 5.86 |
| 7502.3 | H | -45.52 | -13 | -32.52 | -66.28 | -48.47 | 2.95 |
| 3751.3 | V | -41.29 | -13 | -28.29 | -52.68 | -47.87 | 6.58 |
| 5626.7 | V | -42.36 | -13 | -29.36 | -57.96 | -48.22 | 5.86 |
| 7502.3 | V | -45.93 | -13 | -32.93 | -65.51 | -48.88 | 2.95 |

| Mode | | | | | | | |
|---|-------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 10MHz, 1RB, Offset 0,Channel: 19150 | | | | | | | |
| Frequency (MHz) | Antenna Polarity. | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3801.2 | H | -44.27 | -13 | -31.27 | -55.92 | -50.84 | 6.57 |
| 5701.8 | H | -50.43 | -13 | -37.43 | -66.35 | -56.25 | 5.82 |
| 7602.3 | H | -47.35 | -13 | -34.35 | -68.23 | -50.36 | 3.01 |
| 3801.2 | V | -39.96 | -13 | -26.96 | -51.46 | -46.53 | 6.57 |
| 5701.8 | V | -47.04 | -13 | -34.04 | -63.13 | -52.86 | 5.82 |
| 7602.3 | V | -47.49 | -13 | -34.49 | -67.65 | -50.5 | 3.01 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|---|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 15MHz, 1RB, Offset 0,Channel: 18675 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3701.8 | H | -54.21 | -13 | -41.21 | -65.53 | -60.79 | 6.58 |
| 5552.5 | H | -51.39 | -13 | -38.39 | -67.07 | -57.27 | 5.88 |
| 7403.4 | H | -48.15 | -13 | -35.15 | -68.79 | -51.02 | 2.87 |
| 3701.8 | V | -46.96 | -13 | -33.96 | -58.22 | -53.54 | 6.58 |
| 5552.5 | V | -43.19 | -13 | -30.19 | -58.56 | -49.07 | 5.88 |
| 7403.4 | V | -48.12 | -13 | -35.12 | -67.1 | -50.99 | 2.87 |

| Mode | | | | | | | |
|---|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 15MHz, 1RB, Offset 0,Channel: 18900 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3746.8 | H | -51.09 | -13 | -38.09 | -62.56 | -57.67 | 6.58 |
| 5620.2 | H | -48.89 | -13 | -35.89 | -64.65 | -54.75 | 5.86 |
| 7493.2 | H | -45.58 | -13 | -32.58 | -66.33 | -48.52 | 2.94 |
| 3746.8 | V | -41.29 | -13 | -28.29 | -52.65 | -47.87 | 6.58 |
| 5620.2 | V | -42.61 | -13 | -29.61 | -58.17 | -48.47 | 5.86 |
| 7493.2 | V | -46 | -13 | -33 | -65.53 | -48.94 | 2.94 |

| Mode | | | | | | | |
|---|-------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 15MHz, 1RB, Offset 0,Channel: 19125 | | | | | | | |
| Frequency (MHz) | Antenna Polarity. | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3791.7 | H | -44.05 | -13 | -31.05 | -55.67 | -50.62 | 6.57 |
| 5687.7 | H | -50.36 | -13 | -37.36 | -66.25 | -56.19 | 5.83 |
| 7583.3 | H | -47.22 | -13 | -34.22 | -68.07 | -50.23 | 3.01 |
| 3791.7 | V | -39.96 | -13 | -26.96 | -51.44 | -46.53 | 6.57 |
| 5687.7 | V | -47.03 | -13 | -34.03 | -63.03 | -52.86 | 5.83 |
| 7583.3 | V | -47.49 | -13 | -34.49 | -67.55 | -50.5 | 3.01 |

Note: EIRP = S.G Power value + Correction factor.

| Mode | | | | | | | |
|---|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 20MHz, 1RB, Offset 0,Channel: 18700 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3702.3 | H | -54.36 | -13 | -41.36 | -65.68 | -60.94 | 6.58 |
| 5553.3 | H | -51.29 | -13 | -38.29 | -66.98 | -57.17 | 5.88 |
| 7404.3 | H | -48.66 | -13 | -35.66 | -69.31 | -51.53 | 2.87 |
| 3702.3 | V | -46.82 | -13 | -33.82 | -58.08 | -53.4 | 6.58 |
| 5553.3 | V | -43.08 | -13 | -30.08 | -58.45 | -48.96 | 5.88 |
| 7404.3 | V | -48.24 | -13 | -35.24 | -67.23 | -51.11 | 2.87 |

| Mode | | | | | | | |
|---|------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 20MHz, 1RB, Offset 0,Channel: 18900 | | | | | | | |
| Frequency (MHz) | Antenna Polarity | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3742.3 | H | -51.15 | -13 | -38.15 | -62.6 | -57.73 | 6.58 |
| 5613.2 | H | -48.87 | -13 | -35.87 | -64.62 | -54.73 | 5.86 |
| 7484.4 | H | -45.73 | -13 | -32.73 | -66.47 | -48.66 | 2.93 |
| 3742.3 | V | -41.35 | -13 | -28.35 | -52.7 | -47.93 | 6.58 |
| 5613.2 | V | -42.28 | -13 | -29.28 | -57.79 | -48.14 | 5.86 |
| 7484.4 | V | -46.03 | -13 | -33.03 | -65.5 | -48.96 | 2.93 |

| Mode | | | | | | | |
|---|-------------------|---------------|-------------|-------------|-------------------|-----------------------|------------------------|
| LTE Band 2, CB: 20MHz, 1RB, Offset 0,Channel: 19100 | | | | | | | |
| Frequency (MHz) | Antenna Polarity. | E.I.R.P (dBm) | Limit (dBm) | Margin (dB) | S.A Reading (dBm) | S.G Power Vaule (dBm) | Correction Factor (dB) |
| 3782.2 | H | -44.44 | -13 | -31.44 | -56.03 | -51.01 | 6.57 |
| 5673.2 | H | -50.63 | -13 | -37.63 | -66.5 | -56.46 | 5.83 |
| 7564.3 | H | -47.25 | -13 | -34.25 | -68.08 | -50.24 | 2.99 |
| 3782.2 | V | -39.8 | -13 | -26.8 | -51.26 | -46.37 | 6.57 |
| 5673.2 | V | -47.06 | -13 | -34.06 | -62.97 | -52.89 | 5.83 |
| 7564.3 | V | -47.62 | -13 | -34.62 | -67.58 | -50.61 | 2.99 |

Note: EIRP = S.G Power value + Correction factor.

3.3 Conducted Emissions

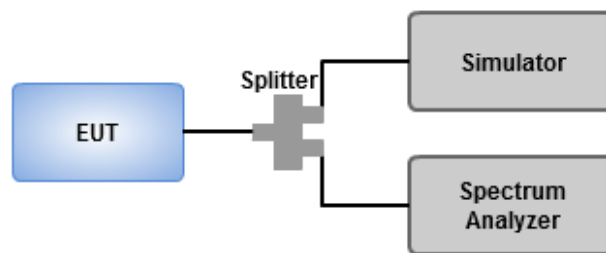
3.3.1 Limit of Conducted Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.


3.3.2 Test Procedures







1. Lowest, middle and highest operating channels are tested for this item.
2. Scan frequency range is from 30 MHz ~ 19.1 GHz.
3. Set RBW = 1 MHz, VBW = 3 MHz, detector = Peak, sweep time = auto.
4. Record the max trace value and capture the test plot of each sub frequency band.


3.3.3 Test Setup









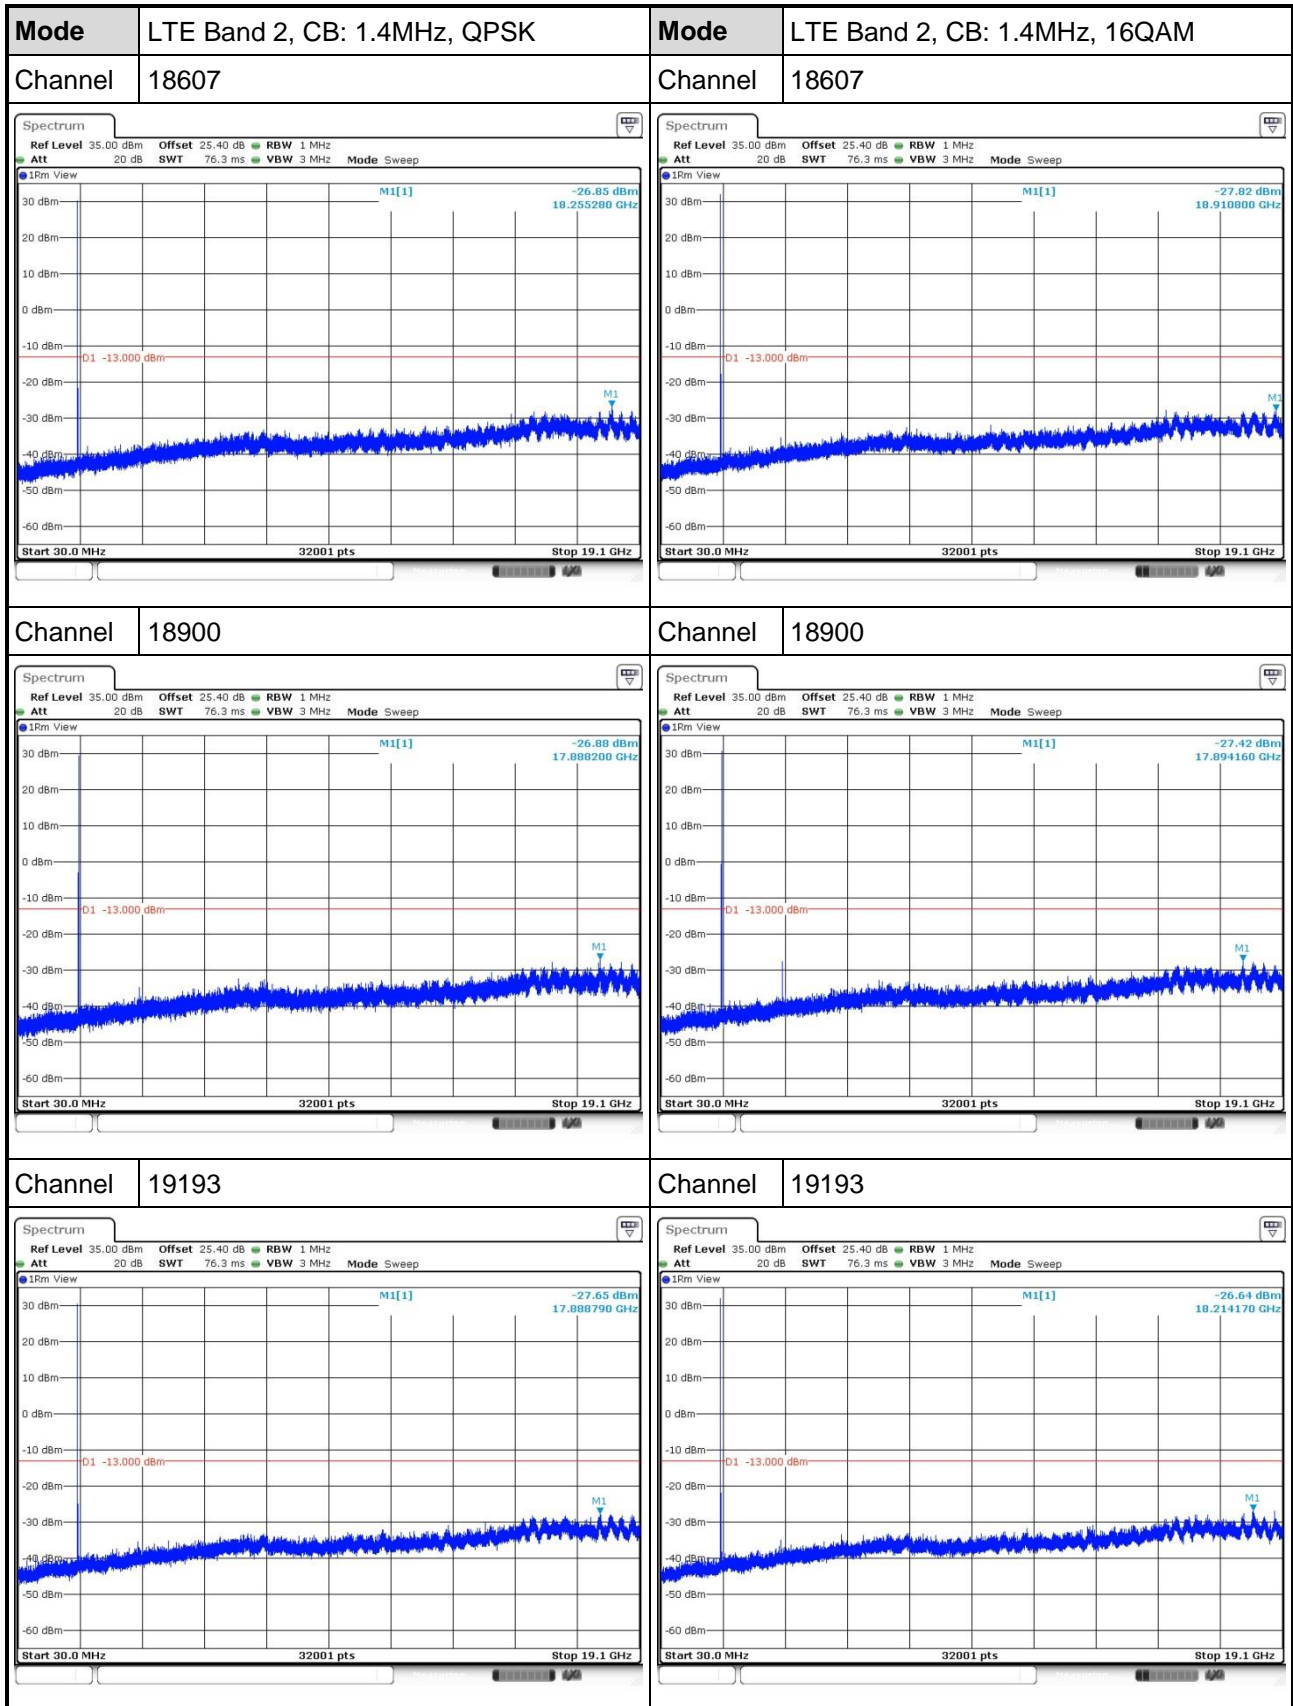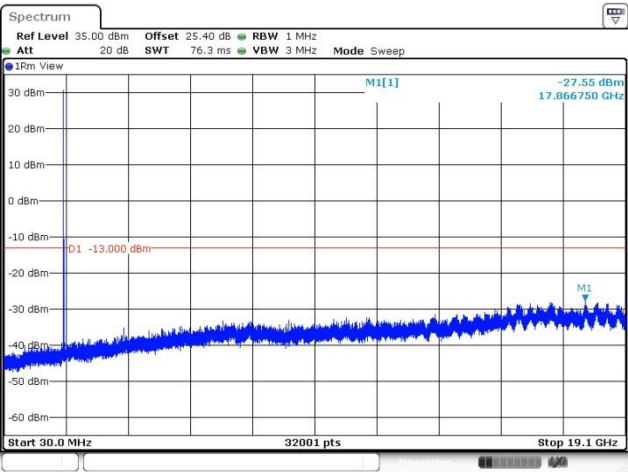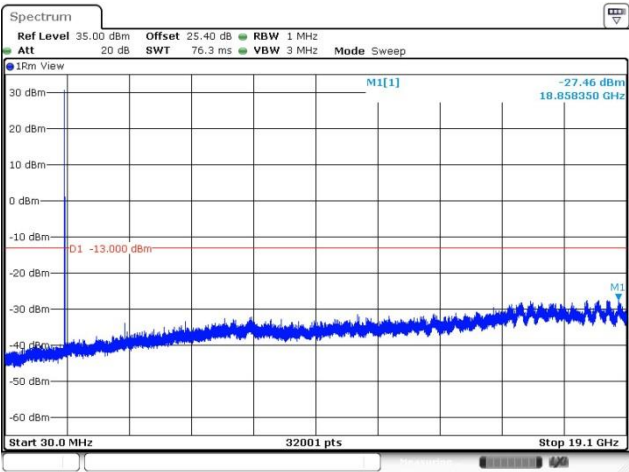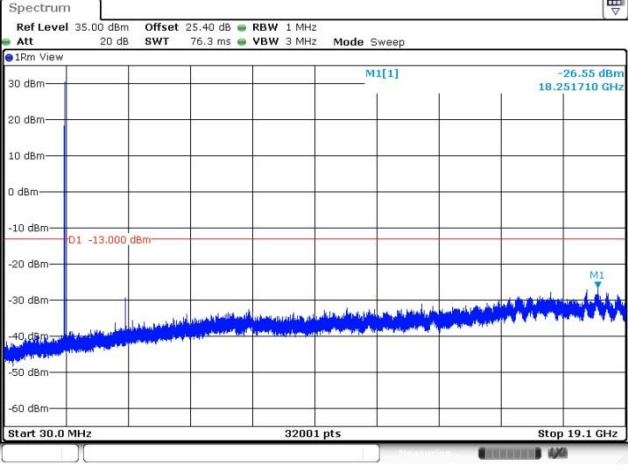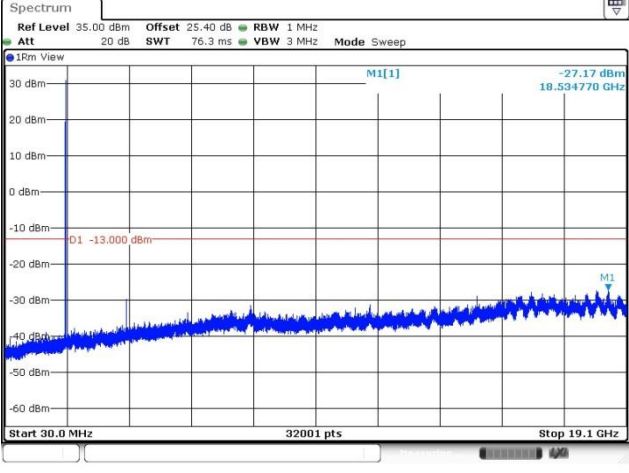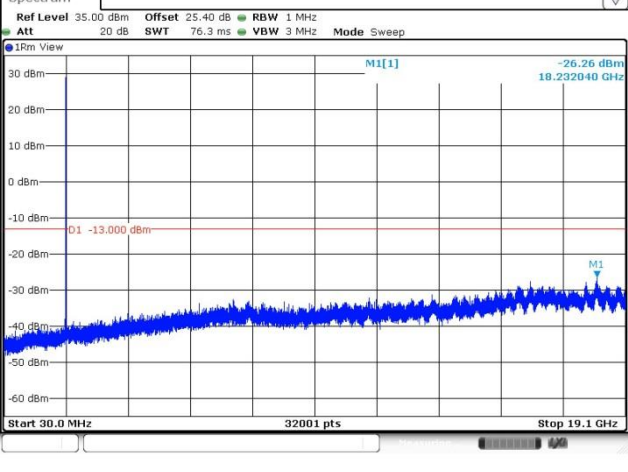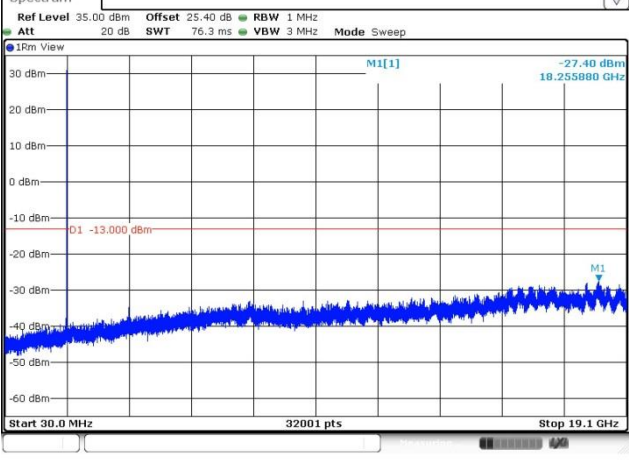
3.3.4 Test Result of Conducted Emissions









| | | | |
|---|----------------------------|--|-----------------------------|
| Mode | LTE Band 2, CB: 3MHz, QPSK | Mode | LTE Band 2, CB: 3MHz, 16QAM |
| Channel | 18615 | Channel | 18615 |
|  | |  | |
| Channel | 18900 | Channel | 18900 |
|  | |  | |
| Channel | 19185 | Channel | 19185 |
|  | |  | |

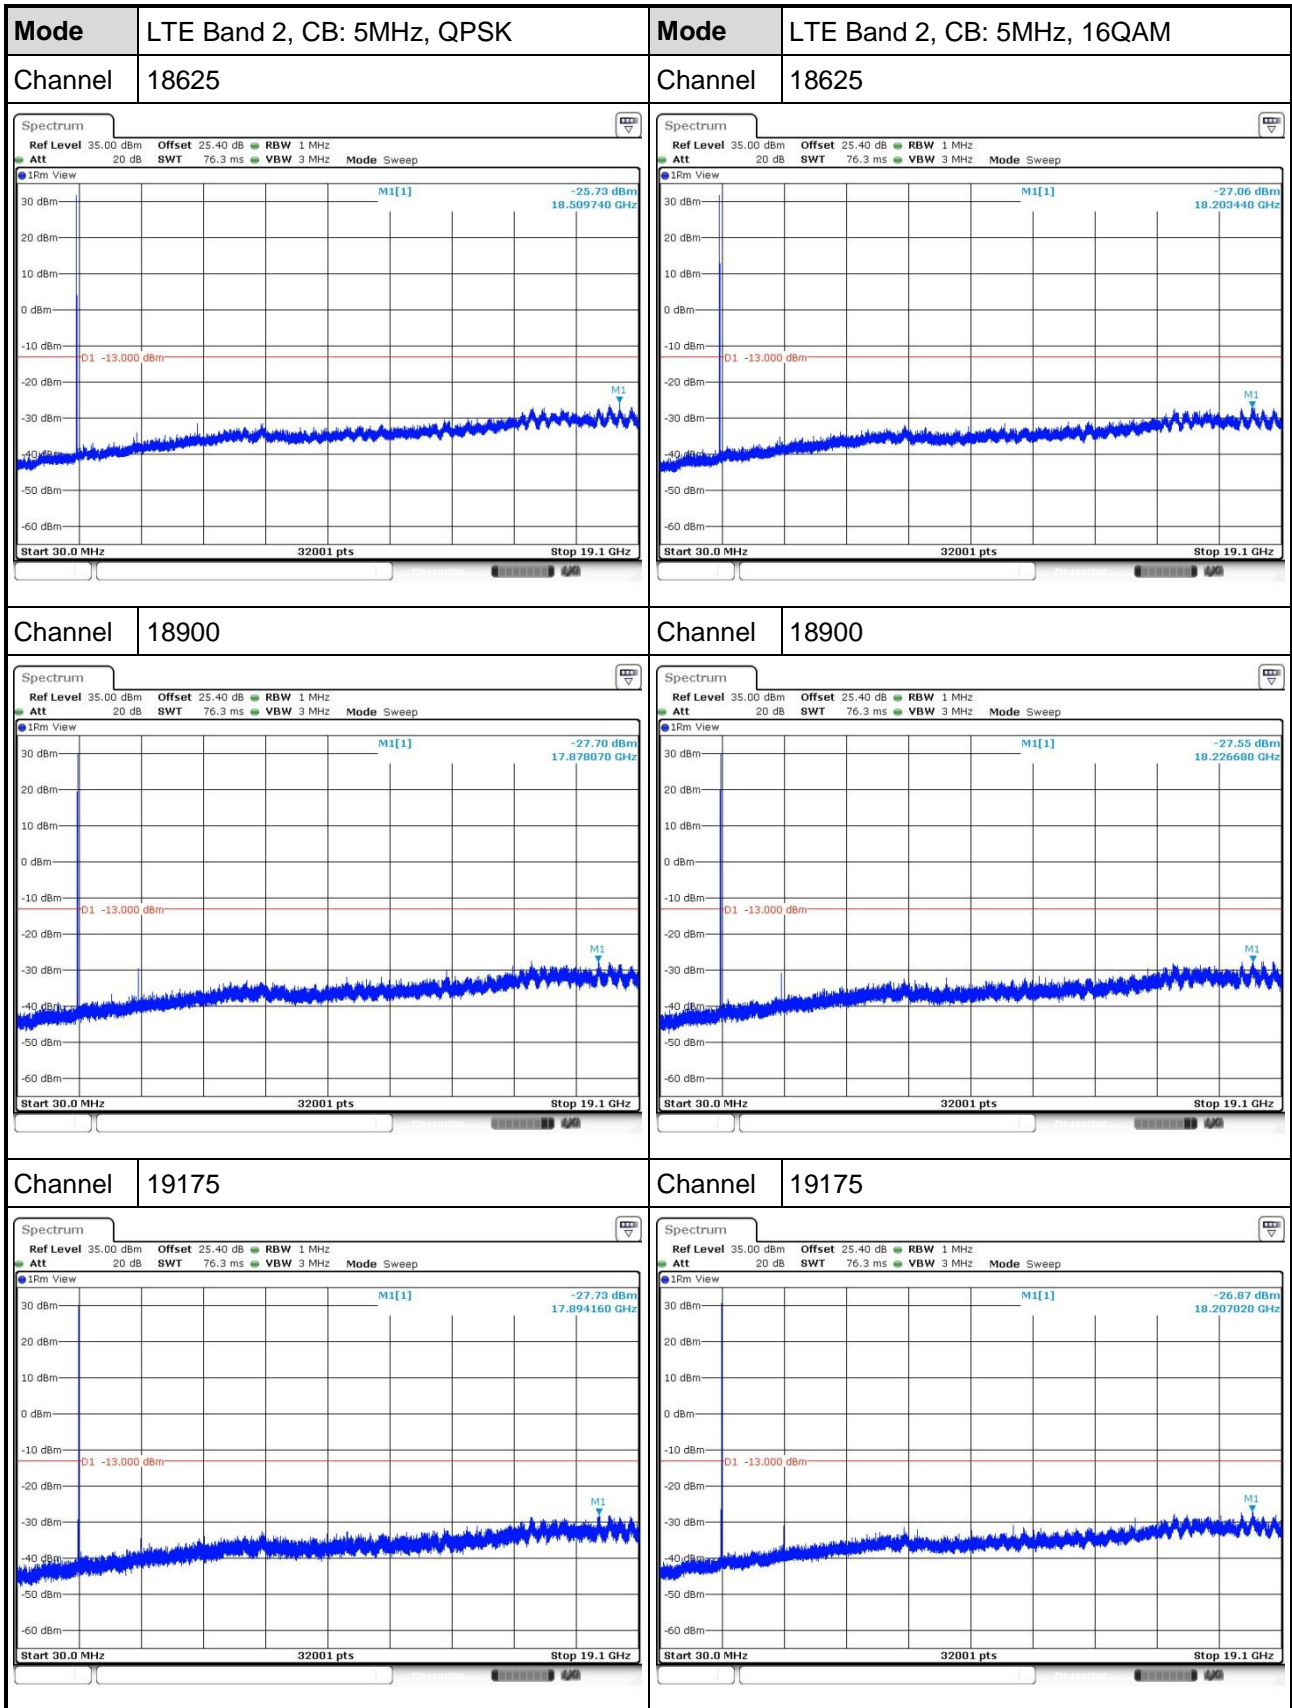
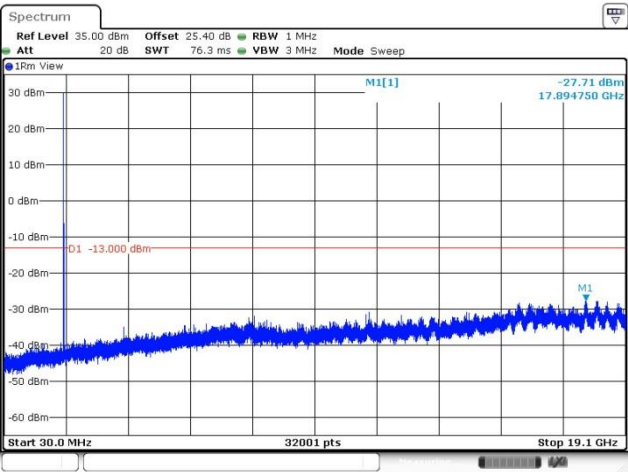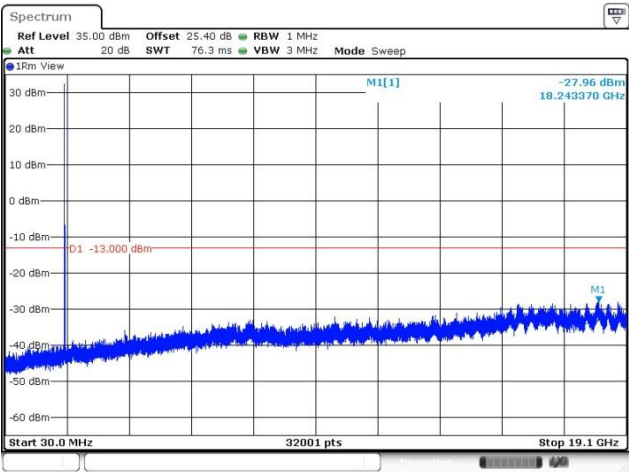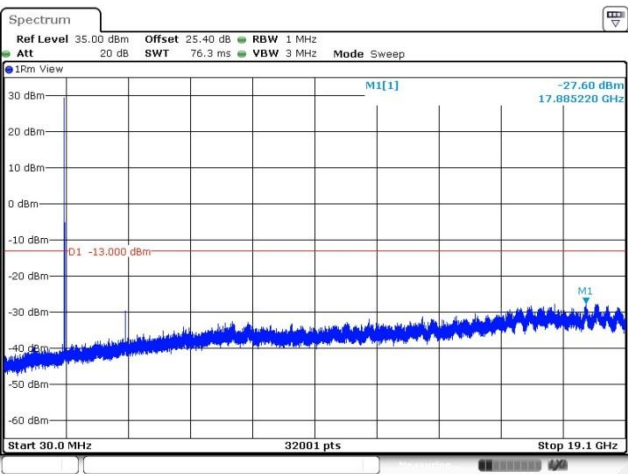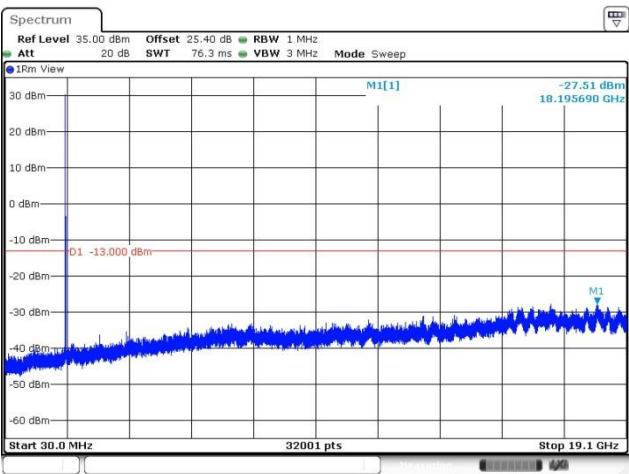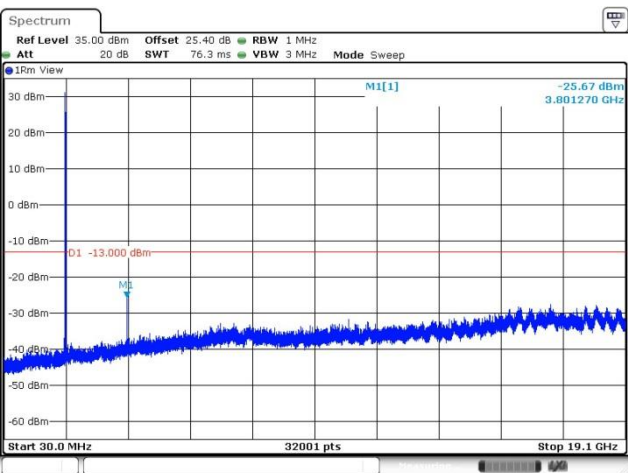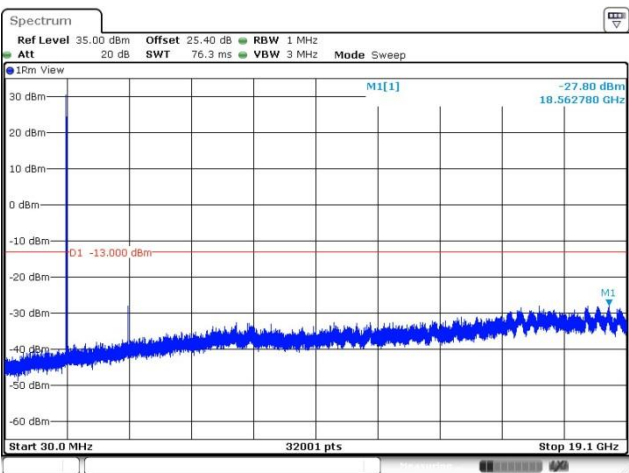
| | | | |
|---|-----------------------------|--|------------------------------|
| Mode | LTE Band 2, CB: 10MHz, QPSK | Mode | LTE Band 2, CB: 10MHz, 16QAM |
| Channel | 18650 | Channel | 18650 |
|  | |  | |
| Channel | 18900 | Channel | 18900 |
|  | |  | |
| Channel | 19150 | Channel | 19150 |
|  | |  | |

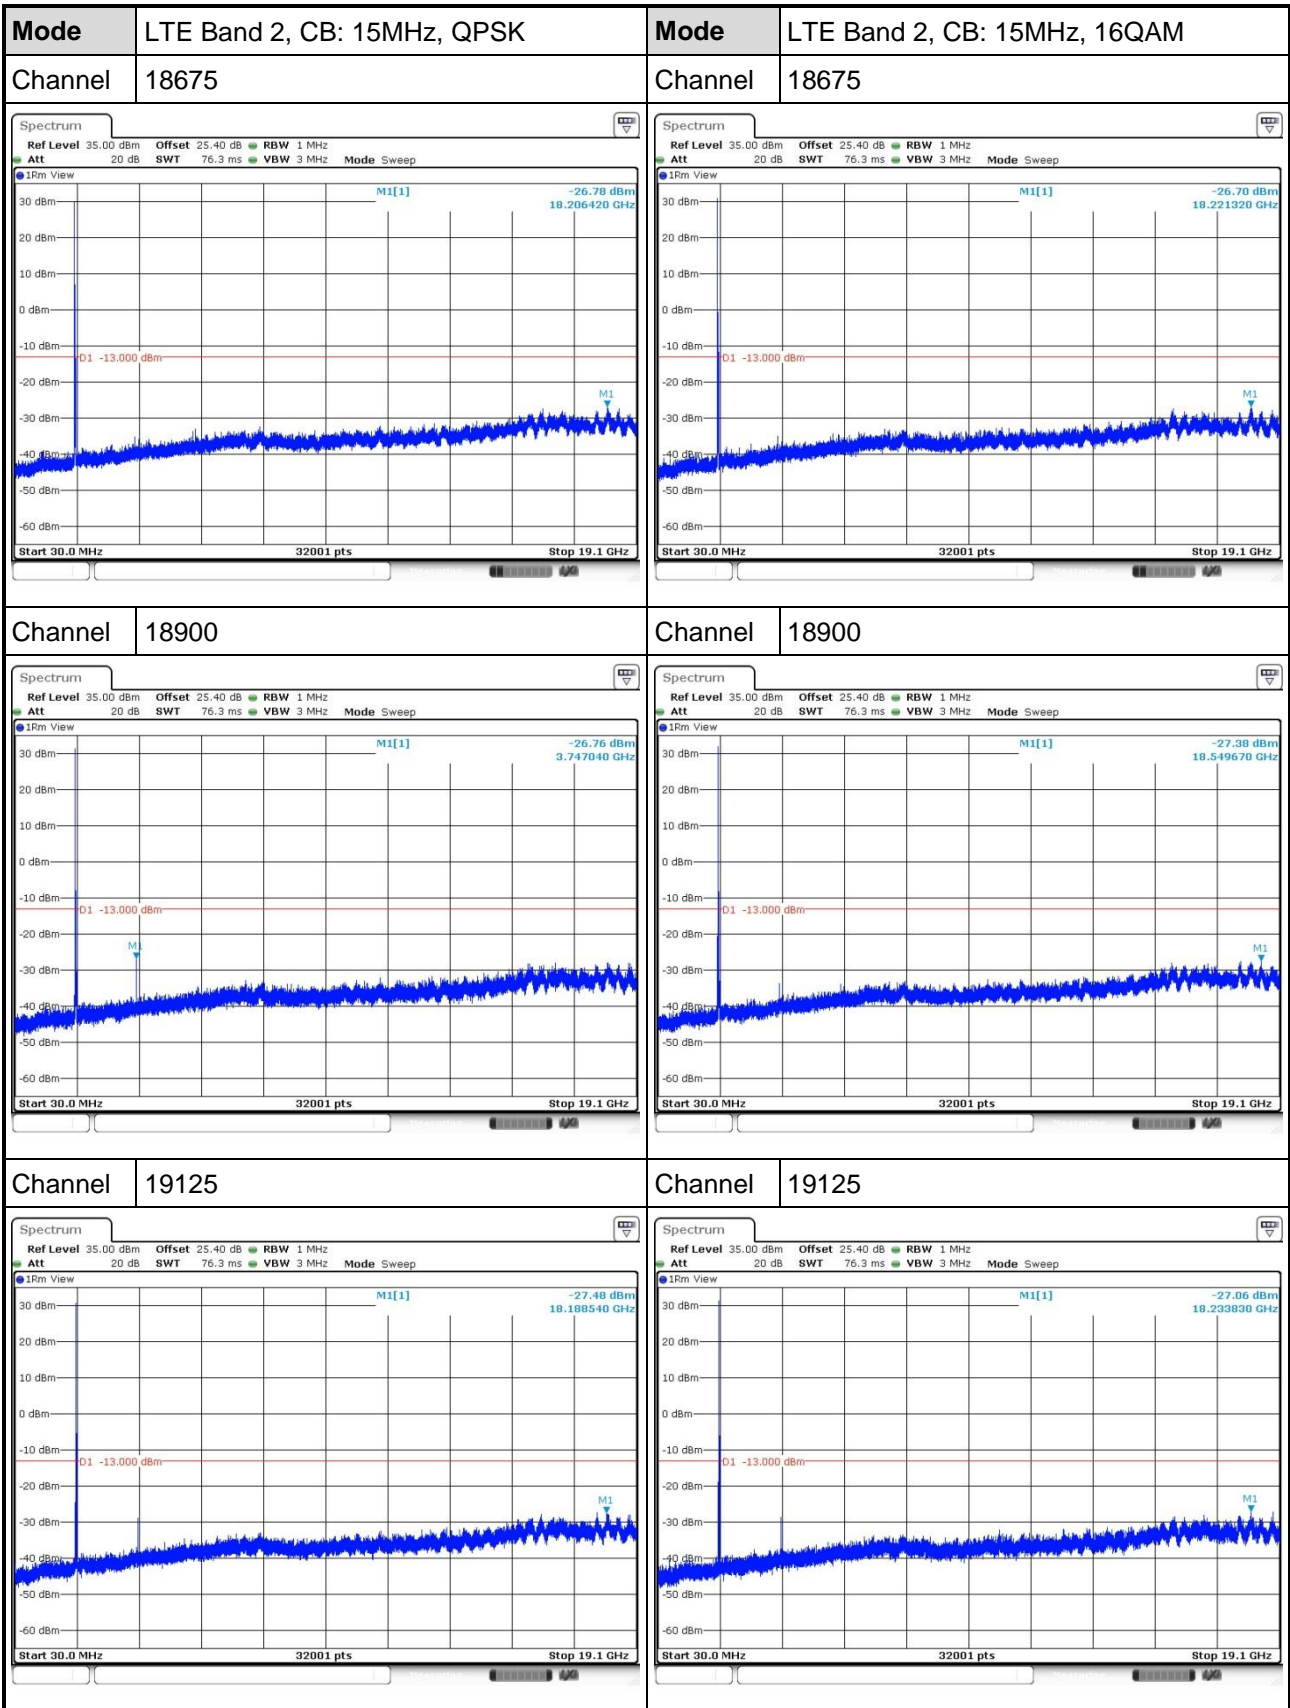
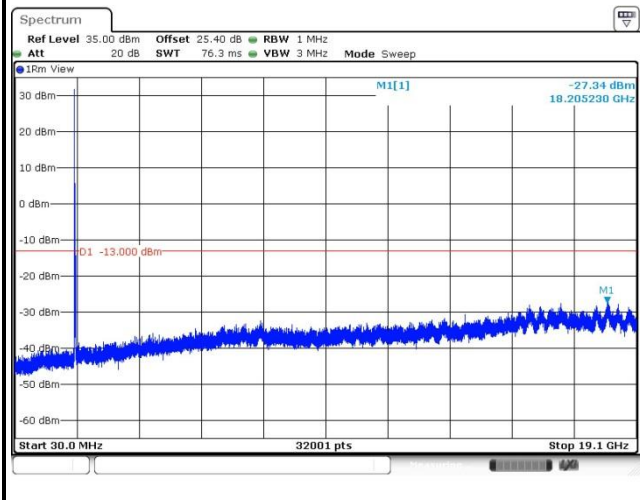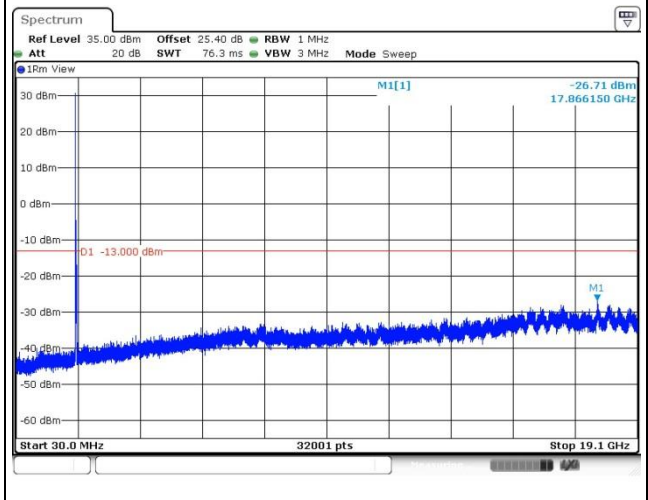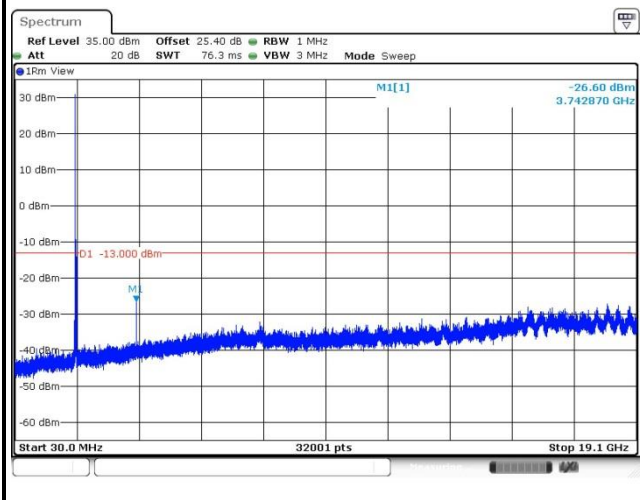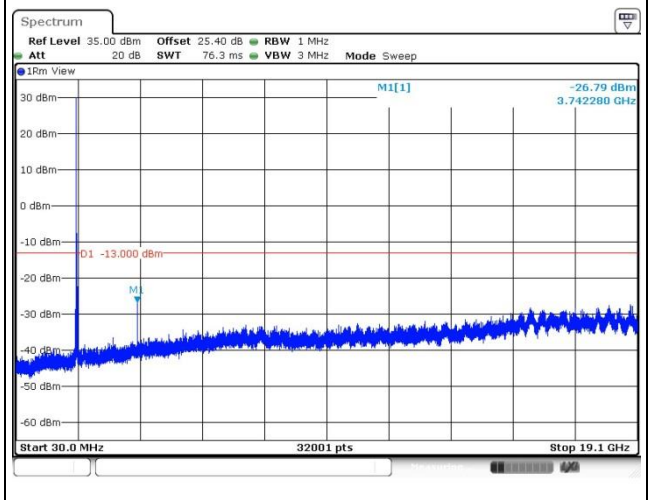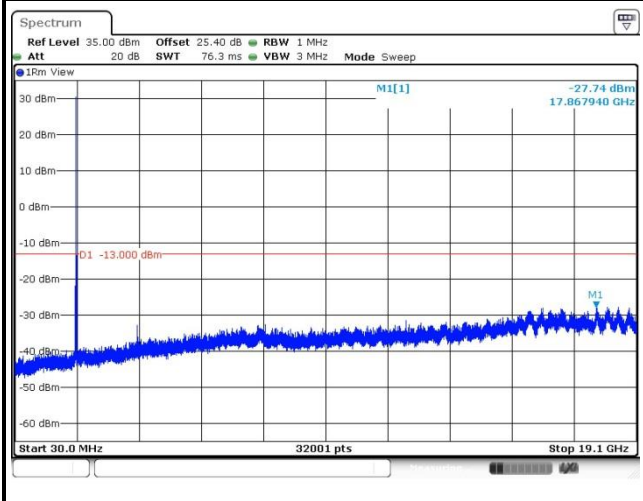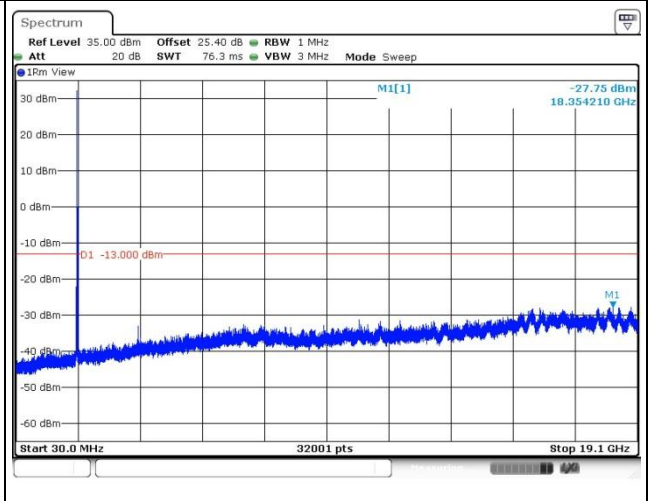
| | |
|---|--|
| Mode LTE Band 2, CB: 20MHz, QPSK | Mode LTE Band 2, CB: 20MHz, 16QAM |
| Channel 18700 | Channel 18700 |
|  |  |
| Channel 18900 | Channel 18900 |
|  |  |
| Channel 19100 | Channel 19100 |
|  |  |

3.4 Band Edge

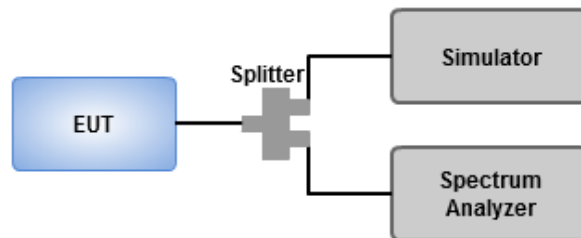
3.4.1 Limit of Band Edge

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

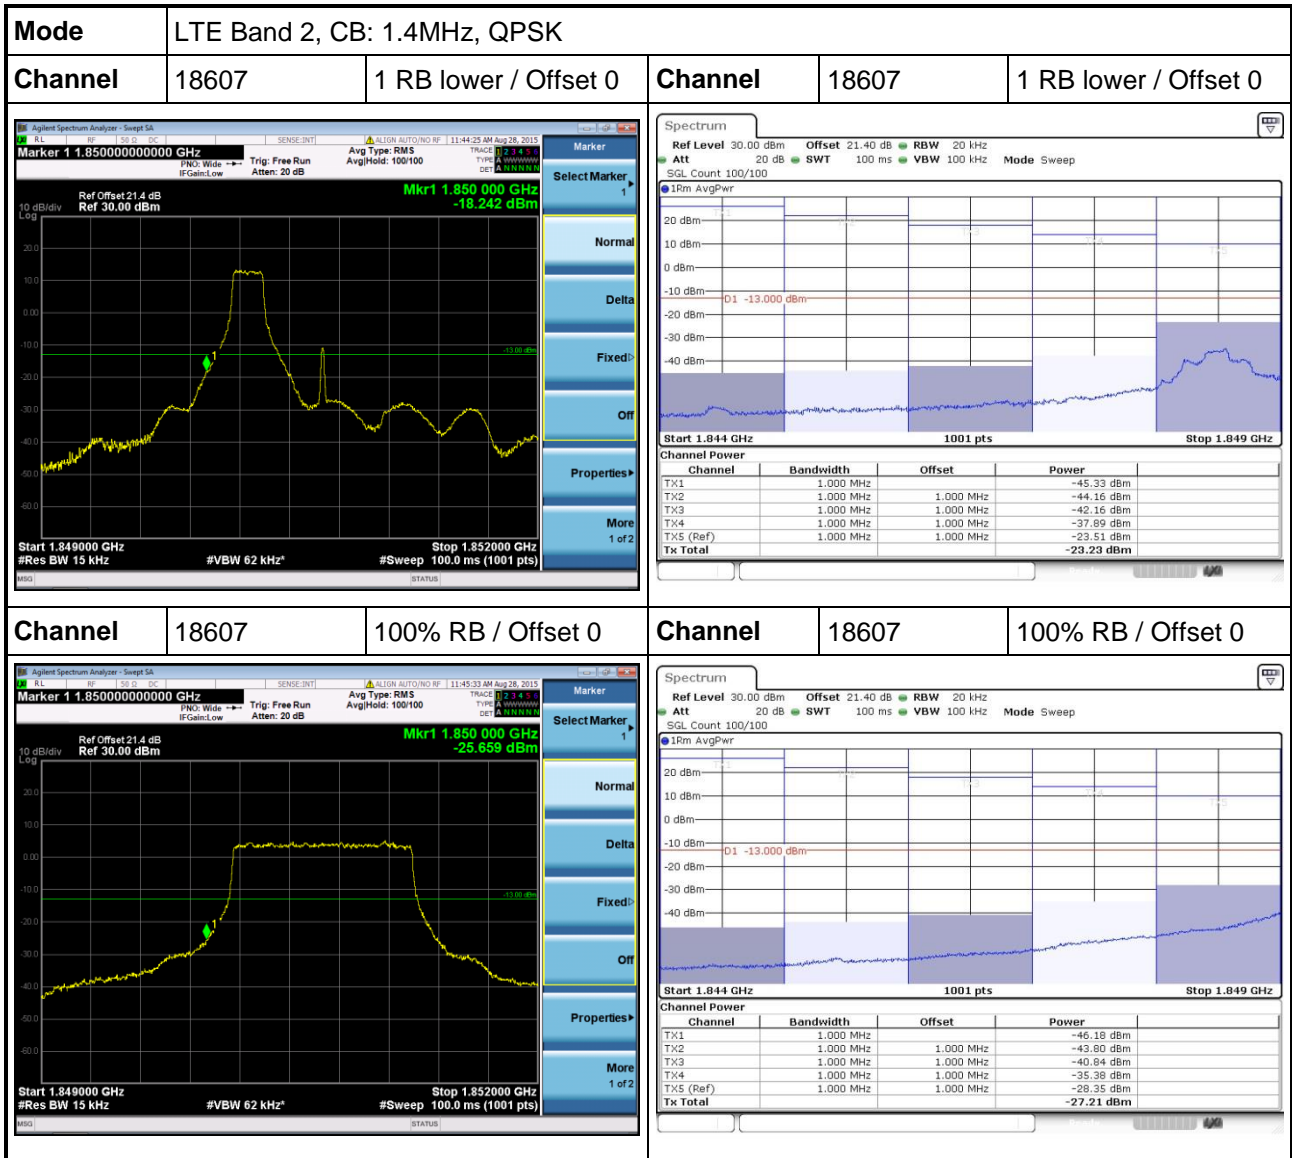
3.4.2 Test Procedures

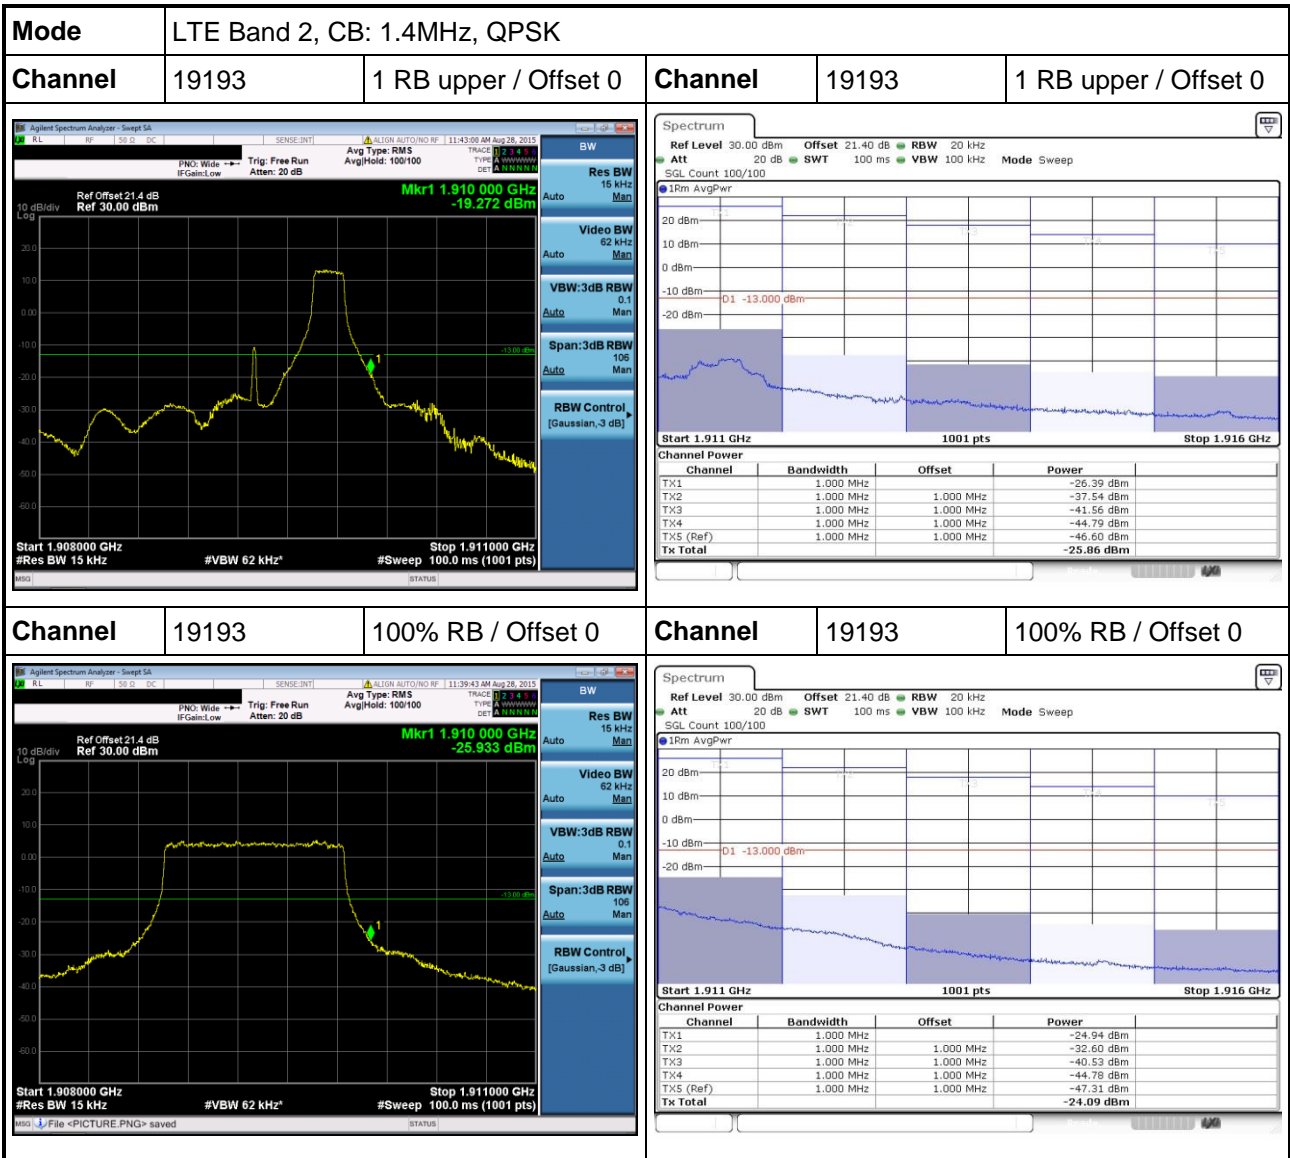
- 1 Lowest and highest operating channels are tested for this item.
- 2 Set RBW = 15 / 39 / 56 / 110 / 160 / 220 kHz, VBW = 62 / 120 / 180 / 330 / 510 / 680 kHz for LTE channel bandwidth 1.4 / 3 / 5 / 10 / 15 / 20 MHz, detector = RMS, sweep time = auto to measure trace.
- 3 Set RBW = 20 / 50 / 100 / 200 / 200 / 300 kHz, VBW = 100 / 200 / 300 / 1000 / 1000 / 1000 kHz for LTE channel bandwidth 1.4 / 3 / 5 / 10 / 15 / 20 MHz, detector = RMS and use channel power measurement function of spectrum analyzer to integrate power over 1MHz.

3.4.3 Test Setup




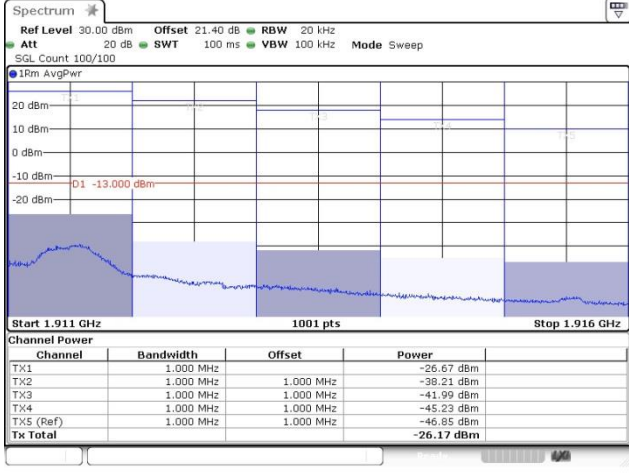
3.4.4 Test Result of Band Edge








| | | | | | |
|----------------|-------------------------------|-----------------------|----------------|-------|-----------------------|
| Mode | LTE Band 2, CB: 1.4MHz, 16QAM | | | | |
| Channel | 19193 | 1 RB upper / Offset 0 | Channel | 19193 | 1 RB upper / Offset 0 |

| | |
|---|--|
|  |  |
|---|--|

| | | | | | |
|----------------|-------|--------------------|----------------|-------|--------------------|
| Channel | 19193 | 100% RB / Offset 0 | Channel | 19193 | 100% RB / Offset 0 |
|----------------|-------|--------------------|----------------|-------|--------------------|
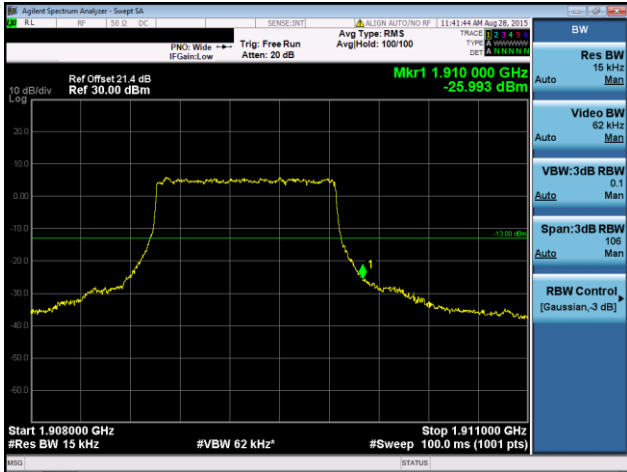
| | |
|--|---|
|  |  |
|--|---|



