

BW 1.400M_CH 19193_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3818.600	-43.76	-13	-30.76	-51.80	12.60	4.57
	5727.900	-37.99	-13	-24.99	-45.34	13.08	5.73
	7637.200	-41.57	-13	-28.57	-46.22	11.24	6.60
	9546.500	-41.45	-13	-28.45	-45.89	11.80	7.35
	11455.800	-41.67	-13	-28.67	-45.68	12.17	8.15
	13365.100	-41.78	-13	-28.78	-46.00	12.98	8.76
V	3818.600	-45.50	-13	-32.50	-53.54	12.60	4.57
	5727.900	-34.41	-13	-21.41	-41.76	13.08	5.73
	7637.200	-33.75	-13	-20.75	-38.40	11.24	6.60
	9546.500	-31.10	-13	-18.10	-35.54	11.80	7.35
	11455.800	-36.78	-13	-23.78	-40.79	12.17	8.15
	13365.100	-39.26	-13	-26.26	-43.48	12.98	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 19193_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3818.600	-49.59	-13	-36.59	-57.63	12.60	4.57
	5727.900	-39.91	-13	-26.91	-47.26	13.08	5.73
	7637.200	-38.50	-13	-25.50	-43.15	11.24	6.60
	9546.500	-32.65	-13	-19.65	-37.09	11.80	7.35
	11455.800	-40.33	-13	-27.33	-44.34	12.17	8.15
	13365.100	-42.26	-13	-29.26	-46.48	12.98	8.76
V	3818.600	-44.20	-13	-31.20	-52.24	12.60	4.57
	5727.900	-32.95	-13	-19.95	-40.30	13.08	5.73
	7637.200	-33.49	-13	-20.49	-38.14	11.24	6.60
	9546.500	-30.93	-13	-17.93	-35.37	11.80	7.35
	11455.800	-37.12	-13	-24.12	-41.13	12.17	8.15
	13365.100	-41.25	-13	-28.25	-45.47	12.98	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 18615_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3703.000	-44.18	-13	-31.18	-52.28	12.61	4.51
	5554.500	-41.19	-13	-28.19	-48.65	13.12	5.67
	7406.000	-36.90	-13	-23.90	-41.61	11.31	6.60
	9257.500	-35.18	-13	-22.18	-39.80	11.83	7.21
	11109.000	-41.91	-13	-28.91	-45.62	11.67	7.96
	12960.500	-42.05	-13	-29.05	-47.03	13.62	8.64
V	3703.000	-41.70	-13	-28.70	-49.80	12.61	4.51
	5554.500	-36.09	-13	-23.09	-43.55	13.12	5.67
	7406.000	-30.69	-13	-17.69	-35.40	11.31	6.60
	9257.500	-36.21	-13	-23.21	-40.83	11.83	7.21
	11109.000	-43.35	-13	-30.35	-47.06	11.67	7.96
	12960.500	-38.19	-13	-25.19	-43.17	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 18615_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3703.000	-40.07	-13	-27.07	-48.17	12.61	4.51
	5554.500	-41.22	-13	-28.22	-48.68	13.12	5.67
	7406.000	-43.23	-13	-30.23	-47.94	11.31	6.60
	9257.500	-36.46	-13	-23.46	-41.08	11.83	7.21
	11109.000	-41.40	-13	-28.40	-45.11	11.67	7.96
	12960.500	-43.04	-13	-30.04	-48.02	13.62	8.64
V	3703.000	-38.70	-13	-25.70	-46.80	12.61	4.51
	5554.500	-38.44	-13	-25.44	-45.90	13.12	5.67
	7406.000	-34.67	-13	-21.67	-39.38	11.31	6.60
	9257.500	-34.47	-13	-21.47	-39.09	11.83	7.21
	11109.000	-37.97	-13	-24.97	-41.68	11.67	7.96
	12960.500	-38.09	-13	-25.09	-43.07	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 18900_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-46.80	-13	-33.80	-54.87	12.60	4.54
	5640.000	-46.38	-13	-33.38	-53.78	13.10	5.70
	7520.000	-35.67	-13	-22.67	-40.29	11.24	6.61
	9400.000	-32.56	-13	-19.56	-37.06	11.79	7.29
	11280.000	-41.55	-13	-28.55	-45.41	11.92	8.06
	13160.000	-41.31	-13	-28.31	-45.93	13.33	8.70
V	3760.000	-40.34	-13	-27.34	-48.41	12.60	4.54
	5640.000	-39.28	-13	-26.28	-46.68	13.10	5.70
	7520.000	-33.00	-13	-20.00	-37.62	11.24	6.61
	9400.000	-30.66	-13	-17.66	-35.16	11.79	7.29
	11280.000	-38.44	-13	-25.44	-42.30	11.92	8.06
	13160.000	-39.21	-13	-26.21	-43.83	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 18900_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-46.46	-13	-33.46	-54.53	12.60	4.54
	5640.000	-45.22	-13	-32.22	-52.62	13.10	5.70
	7520.000	-35.44	-13	-22.44	-40.06	11.24	6.61
	9400.000	-33.10	-13	-20.10	-37.60	11.79	7.29
	11280.000	-41.69	-13	-28.69	-45.55	11.92	8.06
	13160.000	-41.05	-13	-28.05	-45.67	13.33	8.70
V	3760.000	-40.16	-13	-27.16	-48.23	12.60	4.54
	5640.000	-38.86	-13	-25.86	-46.26	13.10	5.70
	7520.000	-32.45	-13	-19.45	-37.07	11.24	6.61
	9400.000	-31.07	-13	-18.07	-35.57	11.79	7.29
	11280.000	-37.61	-13	-24.61	-41.47	11.92	8.06
	13160.000	-38.77	-13	-25.77	-43.39	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 19185_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3817.000	-49.64	-13	-36.64	-57.68	12.60	4.57
	5725.500	-39.45	-13	-26.45	-46.80	13.08	5.73
	7634.000	-40.92	-13	-27.92	-45.56	11.24	6.60
	9542.500	-33.10	-13	-20.10	-37.54	11.79	7.35
	11451.000	-41.33	-13	-28.33	-45.34	12.16	8.15
	13359.500	-41.60	-13	-28.60	-45.83	12.99	8.76
V	3817.000	-46.27	-13	-33.27	-54.31	12.60	4.57
	5725.500	-32.13	-13	-19.13	-39.48	13.08	5.73
	7634.000	-37.75	-13	-24.75	-42.39	11.24	6.60
	9542.500	-38.14	-13	-25.14	-42.58	11.79	7.35
	11451.000	-41.28	-13	-28.28	-45.29	12.16	8.15
	13359.500	-42.08	-13	-29.08	-46.31	12.99	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 19185_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3817.000	-49.21	-13	-36.21	-57.25	12.60	4.57
	5725.500	-39.33	-13	-26.33	-46.68	13.08	5.73
	7634.000	-40.54	-13	-27.54	-45.18	11.24	6.60
	9542.500	-33.07	-13	-20.07	-37.51	11.79	7.35
	11451.000	-41.15	-13	-28.15	-45.16	12.16	8.15
	13359.500	-41.75	-13	-28.75	-45.98	12.99	8.76
V	3817.000	-46.51	-13	-33.51	-54.55	12.60	4.57
	5725.500	-32.01	-13	-19.01	-39.36	13.08	5.73
	7634.000	-35.58	-13	-22.58	-40.22	11.24	6.60
	9542.500	-35.75	-13	-22.75	-40.19	11.79	7.35
	11451.000	-42.39	-13	-29.39	-46.40	12.16	8.15
	13359.500	-42.21	-13	-29.21	-46.44	12.99	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 18625_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3705.000	-45.86	-13	-32.86	-53.95	12.61	4.51
	5557.500	-42.13	-13	-29.13	-49.58	13.12	5.67
	7410.000	-33.72	-13	-20.72	-38.43	11.31	6.60
	9262.500	-39.06	-13	-26.06	-43.67	11.82	7.21
	11115.000	-39.83	-13	-26.83	-43.55	11.68	7.96
	12967.500	-42.03	-13	-29.03	-47.00	13.62	8.64
V	3705.000	-46.05	-13	-33.05	-54.14	12.61	4.51
	5557.500	-40.90	-13	-27.90	-48.35	13.12	5.67
	7410.000	-31.12	-13	-18.12	-35.83	11.31	6.60
	9262.500	-31.93	-13	-18.93	-36.54	11.82	7.21
	11115.000	-36.13	-13	-23.13	-39.85	11.68	7.96
	12967.500	-40.68	-13	-27.68	-45.65	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 18625_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3705.000	-48.87	-13	-35.87	-56.96	12.61	4.51
	5557.500	-43.54	-13	-30.54	-50.99	13.12	5.67
	7410.000	-35.02	-13	-22.02	-39.73	11.31	6.60
	9262.500	-32.51	-13	-19.51	-37.12	11.82	7.21
	11115.000	-39.55	-13	-26.55	-43.27	11.68	7.96
	12967.500	-42.66	-13	-29.66	-47.63	13.62	8.64
V	3705.000	-45.40	-13	-32.40	-53.49	12.61	4.51
	5557.500	-40.13	-13	-27.13	-47.58	13.12	5.67
	7410.000	-29.62	-13	-16.62	-34.33	11.31	6.60
	9262.500	-36.59	-13	-23.59	-41.20	11.82	7.21
	11115.000	-38.01	-13	-25.01	-41.73	11.68	7.96
	12967.500	-40.61	-13	-27.61	-45.58	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 18900_OPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-47.64	-13	-34.64	-55.71	12.60	4.54
	5640.000	-42.88	-13	-29.88	-50.28	13.10	5.70
	7520.000	-33.25	-13	-20.25	-37.87	11.24	6.61
	9400.000	-30.81	-13	-17.81	-35.31	11.79	7.29
	11280.000	-38.45	-13	-25.45	-42.31	11.92	8.06
	13160.000	-40.19	-13	-27.19	-44.81	13.33	8.70
V	3760.000	-41.50	-13	-28.50	-49.57	12.60	4.54
	5640.000	-39.48	-13	-26.48	-46.88	13.10	5.70
	7520.000	-28.59	-13	-15.59	-33.21	11.24	6.61
	9400.000	-29.83	-13	-16.83	-34.33	11.79	7.29
	11280.000	-34.40	-13	-21.40	-38.26	11.92	8.06
	13160.000	-38.78	-13	-25.78	-43.40	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 18900_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-47.82	-13	-34.82	-55.89	12.60	4.54
	5640.000	-42.72	-13	-29.72	-50.12	13.10	5.70
	7520.000	-33.28	-13	-20.28	-37.90	11.24	6.61
	9400.000	-31.05	-13	-18.05	-35.55	11.79	7.29
	11280.000	-39.04	-13	-26.04	-42.90	11.92	8.06
	13160.000	-40.46	-13	-27.46	-45.08	13.33	8.70
V	3760.000	-41.42	-13	-28.42	-49.49	12.60	4.54
	5640.000	-39.30	-13	-26.30	-46.70	13.10	5.70
	7520.000	-28.16	-13	-15.16	-32.78	11.24	6.61
	9400.000	-29.81	-13	-16.81	-34.31	11.79	7.29
	11280.000	-34.74	-13	-21.74	-38.60	11.92	8.06
	13160.000	-38.52	-13	-25.52	-43.14	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 19175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3815.000	-48.73	-13	-35.73	-56.77	12.60	4.57
	5722.500	-41.38	-13	-28.38	-48.73	13.08	5.73
	7630.000	-36.38	-13	-23.38	-41.02	11.24	6.60
	9537.500	-30.20	-13	-17.20	-34.64	11.79	7.35
	11445.000	-39.57	-13	-26.57	-43.57	12.15	8.15
	13352.500	-38.93	-13	-25.93	-43.17	13.00	8.76
V	3815.000	-44.50	-13	-31.50	-52.54	12.60	4.57
	5722.500	-38.37	-13	-25.37	-45.72	13.08	5.73
	7630.000	-30.11	-13	-17.11	-34.75	11.24	6.60
	9537.500	-29.38	-13	-16.38	-33.82	11.79	7.35
	11445.000	-38.95	-13	-25.95	-42.95	12.15	8.15
	13352.500	-34.59	-13	-21.59	-38.83	13.00	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 19175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3815.000	-42.99	-13	-29.99	-51.03	12.60	4.57
	5722.500	-43.56	-13	-30.56	-50.91	13.08	5.73
	7630.000	-38.68	-13	-25.68	-43.32	11.24	6.60
	9537.500	-37.28	-13	-24.28	-41.72	11.79	7.35
	11445.000	-41.10	-13	-28.10	-45.10	12.15	8.15
	13352.500	-37.19	-13	-24.19	-41.43	13.00	8.76
V	3815.000	-43.91	-13	-30.91	-51.95	12.60	4.57
	5722.500	-37.16	-13	-24.16	-44.51	13.08	5.73
	7630.000	-28.48	-13	-15.48	-33.12	11.24	6.60
	9537.500	-29.58	-13	-16.58	-34.02	11.79	7.35
	11445.000	-41.51	-13	-28.51	-45.51	12.15	8.15
	13352.500	-34.65	-13	-21.65	-38.89	13.00	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 18650_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3710.000	-48.35	-13	-35.35	-56.44	12.61	4.51
	5565.000	-39.25	-13	-26.25	-46.70	13.12	5.67
	7420.000	-42.57	-13	-29.57	-47.27	11.30	6.60
	9275.000	-43.75	-13	-30.75	-48.35	11.82	7.22
	11130.000	-41.54	-13	-28.54	-45.27	11.70	7.97
	12985.000	-41.56	-13	-28.56	-46.52	13.61	8.65
V	3710.000	-42.28	-13	-29.28	-50.37	12.61	4.51
	5565.000	-36.24	-13	-23.24	-43.69	13.12	5.67
	7420.000	-39.08	-13	-26.08	-43.78	11.30	6.60
	9275.000	-29.24	-13	-16.24	-33.84	11.82	7.22
	11130.000	-32.07	-13	-19.07	-35.80	11.70	7.97
	12985.000	-38.05	-13	-25.05	-43.01	13.61	8.65

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 18650_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3710.000	-48.05	-13	-35.05	-56.14	12.61	4.51
	5565.000	-39.54	-13	-26.54	-46.99	13.12	5.67
	7420.000	-42.55	-13	-29.55	-47.25	11.30	6.60
	9275.000	-30.69	-13	-17.69	-35.29	11.82	7.22
	11130.000	-37.53	-13	-24.53	-41.26	11.70	7.97
	12985.000	-41.12	-13	-28.12	-46.08	13.61	8.65
V	3710.000	-42.29	-13	-29.29	-50.38	12.61	4.51
	5565.000	-36.41	-13	-23.41	-43.86	13.12	5.67
	7420.000	-39.48	-13	-26.48	-44.18	11.30	6.60
	9275.000	-28.31	-13	-15.31	-32.91	11.82	7.22
	11130.000	-32.46	-13	-19.46	-36.19	11.70	7.97
	12985.000	-37.41	-13	-24.41	-42.37	13.61	8.65

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 18900_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-47.92	-13	-34.92	-55.99	12.60	4.54
	5640.000	-43.65	-13	-30.65	-51.05	13.10	5.70
	7520.000	-34.51	-13	-21.51	-39.13	11.24	6.61
	9400.000	-29.62	-13	-16.62	-34.12	11.79	7.29
	11280.000	-40.54	-13	-27.54	-44.40	11.92	8.06
	13160.000	-40.33	-13	-27.33	-44.95	13.33	8.70
V	3760.000	-49.54	-13	-36.54	-57.61	12.60	4.54
	5640.000	-44.05	-13	-31.05	-51.45	13.10	5.70
	7520.000	-36.16	-13	-23.16	-40.78	11.24	6.61
	9400.000	-29.53	-13	-16.53	-34.03	11.79	7.29
	11280.000	-40.59	-13	-27.59	-44.45	11.92	8.06
	13160.000	-40.64	-13	-27.64	-45.26	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 18900_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-49.57	-13	-36.57	-57.64	12.60	4.54
	5640.000	-43.56	-13	-30.56	-50.96	13.10	5.70
	7520.000	-34.58	-13	-21.58	-39.20	11.24	6.61
	9400.000	-29.80	-13	-16.80	-34.30	11.79	7.29
	11280.000	-39.25	-13	-26.25	-43.11	11.92	8.06
	13160.000	-40.54	-13	-27.54	-45.16	13.33	8.70
V	3760.000	-47.61	-13	-34.61	-55.68	12.60	4.54
	5640.000	-43.66	-13	-30.66	-51.06	13.10	5.70
	7520.000	-34.77	-13	-21.77	-39.39	11.24	6.61
	9400.000	-29.67	-13	-16.67	-34.17	11.79	7.29
	11280.000	-40.33	-13	-27.33	-44.19	11.92	8.06
	13160.000	-40.72	-13	-27.72	-45.34	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 19150_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3810.000	-47.81	-13	-34.81	-55.85	12.60	4.56
	5715.000	-38.77	-13	-25.77	-46.13	13.08	5.72
	7620.000	-44.10	-13	-31.10	-48.74	11.24	6.60
	9525.000	-29.23	-13	-16.23	-33.66	11.78	7.35
	11430.000	-38.98	-13	-25.98	-42.97	12.13	8.14
	13335.000	-39.89	-13	-26.89	-44.17	13.03	8.75
V	3810.000	-46.05	-13	-33.05	-54.09	12.60	4.56
	5715.000	-39.76	-13	-26.76	-47.12	13.08	5.72
	7620.000	-42.78	-13	-29.78	-47.42	11.24	6.60
	9525.000	-38.61	-13	-25.61	-43.04	11.78	7.35
	11430.000	-40.97	-13	-27.97	-44.96	12.13	8.14
	13335.000	-39.51	-13	-26.51	-43.79	13.03	8.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 19150_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3810.000	-46.17	-13	-33.17	-54.21	12.60	4.56
	5715.000	-38.83	-13	-25.83	-46.19	13.08	5.72
	7620.000	-41.43	-13	-28.43	-46.07	11.24	6.60
	9525.000	-29.54	-13	-16.54	-33.97	11.78	7.35
	11430.000	-41.07	-13	-28.07	-45.06	12.13	8.14
	13335.000	-39.93	-13	-26.93	-44.21	13.03	8.75
V	3810.000	-47.55	-13	-34.55	-55.59	12.60	4.56
	5715.000	-37.19	-13	-24.19	-44.55	13.08	5.72
	7620.000	-36.12	-13	-23.12	-40.76	11.24	6.60
	9525.000	-33.46	-13	-20.46	-37.89	11.78	7.35
	11430.000	-41.83	-13	-28.83	-45.82	12.13	8.14
	13335.000	-39.93	-13	-26.93	-44.21	13.03	8.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 18675_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3715.000	-52.07	-13	-39.07	-60.16	12.61	4.52
	5572.500	-42.87	-13	-29.87	-50.31	13.12	5.68
	7430.000	-34.12	-13	-21.12	-38.81	11.29	6.61
	9287.500	-32.79	-13	-19.79	-37.38	11.82	7.23
	11145.000	-40.18	-13	-27.18	-43.92	11.73	7.98
	13002.500	-41.64	-13	-28.64	-46.57	13.60	8.66
V	3715.000	-47.35	-13	-34.35	-55.44	12.61	4.52
	5572.500	-39.79	-13	-26.79	-47.23	13.12	5.68
	7430.000	-28.19	-13	-15.19	-32.88	11.29	6.61
	9287.500	-36.16	-13	-23.16	-40.75	11.82	7.23
	11145.000	-41.60	-13	-28.60	-45.34	11.73	7.98
	13002.500	-40.92	-13	-27.92	-45.85	13.60	8.66

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 18675_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3715.000	-47.61	-13	-34.61	-55.70	12.61	4.52
	5572.500	-40.45	-13	-27.45	-47.89	13.12	5.68
	7430.000	-34.59	-13	-21.59	-39.28	11.29	6.61
	9287.500	-38.85	-13	-25.85	-43.44	11.82	7.23
	11145.000	-41.96	-13	-28.96	-45.70	11.73	7.98
	13002.500	-41.14	-13	-28.14	-46.07	13.60	8.66
V	3715.000	-47.75	-13	-34.75	-55.84	12.61	4.52
	5572.500	-40.23	-13	-27.23	-47.67	13.12	5.68
	7430.000	-29.92	-13	-16.92	-34.61	11.29	6.61
	9287.500	-36.41	-13	-23.41	-41.00	11.82	7.23
	11145.000	-41.71	-13	-28.71	-45.45	11.73	7.98
	13002.500	-41.49	-13	-28.49	-46.42	13.60	8.66

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 18900_ 16-QAM_ 1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-41.63	-13	-28.63	-49.70	12.60	4.54
	5640.000	-44.06	-13	-31.06	-51.46	13.10	5.70
	7520.000	-33.38	-13	-20.38	-38.00	11.24	6.61
	9400.000	-30.25	-13	-17.25	-34.75	11.79	7.29
	11280.000	-39.05	-13	-26.05	-42.91	11.92	8.06
	13160.000	-40.06	-13	-27.06	-44.68	13.33	8.70
V	3760.000	-39.31	-13	-26.31	-47.38	12.60	4.54
	5640.000	-39.73	-13	-26.73	-47.13	13.10	5.70
	7520.000	-30.89	-13	-17.89	-35.51	11.24	6.61
	9400.000	-34.60	-13	-21.60	-39.10	11.79	7.29
	11280.000	-40.01	-13	-27.01	-43.87	11.92	8.06
	13160.000	-40.25	-13	-27.25	-44.87	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 18900_ QPSK_ 1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-41.82	-13	-28.82	-49.89	12.60	4.54
	5640.000	-44.13	-13	-31.13	-51.53	13.10	5.70
	7520.000	-33.74	-13	-20.74	-38.36	11.24	6.61
	9400.000	-30.37	-13	-17.37	-34.87	11.79	7.29
	11280.000	-38.87	-13	-25.87	-42.73	11.92	8.06
	13160.000	-40.25	-13	-27.25	-44.87	13.33	8.70
V	3760.000	-39.71	-13	-26.71	-47.78	12.60	4.54
	5640.000	-40.42	-13	-27.42	-47.82	13.10	5.70
	7520.000	-33.22	-13	-20.22	-37.84	11.24	6.61
	9400.000	-34.97	-13	-21.97	-39.47	11.79	7.29
	11280.000	-39.38	-13	-26.38	-43.24	11.92	8.06
	13160.000	-40.08	-13	-27.08	-44.70	13.33	8.70

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 19125_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3805.000	-42.81	-13	-29.81	-50.85	12.60	4.56
	5707.500	-40.16	-13	-27.16	-47.52	13.08	5.72
	7610.000	-42.50	-13	-29.50	-47.14	11.24	6.60
	9512.500	-39.29	-13	-26.29	-43.72	11.77	7.35
	11415.000	-40.95	-13	-27.95	-44.93	12.11	8.13
	13317.500	-40.22	-13	-27.22	-44.53	13.06	8.75
V	3805.000	-43.78	-13	-30.78	-51.82	12.60	4.56
	5707.500	-37.43	-13	-24.43	-44.79	13.08	5.72
	7610.000	-35.37	-13	-22.37	-40.01	11.24	6.60
	9512.500	-33.56	-13	-20.56	-37.99	11.77	7.35
	11415.000	-41.25	-13	-28.25	-45.23	12.11	8.13
	13317.500	-39.74	-13	-26.74	-44.05	13.06	8.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 19125_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3805.000	-43.45	-13	-30.45	-51.49	12.60	4.56
	5707.500	-32.73	-13	-19.73	-40.09	13.08	5.72
	7610.000	-35.75	-13	-22.75	-40.39	11.24	6.60
	9512.500	-36.73	-13	-23.73	-41.16	11.77	7.35
	11415.000	-38.87	-13	-25.87	-42.85	12.11	8.13
	13317.500	-39.16	-13	-26.16	-43.47	13.06	8.75
V	3805.000	-44.03	-13	-31.03	-52.07	12.60	4.56
	5707.500	-33.13	-13	-20.13	-40.49	13.08	5.72
	7610.000	-35.41	-13	-22.41	-40.05	11.24	6.60
	9512.500	-35.19	-13	-22.19	-39.62	11.77	7.35
	11415.000	-40.12	-13	-27.12	-44.10	12.11	8.13
	13317.500	-40.15	-13	-27.15	-44.46	13.06	8.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 18700_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3720.000	-45.99	-13	-32.99	-54.08	12.61	4.52
	5580.000	-41.65	-13	-28.65	-49.09	13.12	5.68
	7440.000	-33.20	-13	-20.20	-37.88	11.28	6.61
	9300.000	-34.44	-13	-21.44	-39.02	11.82	7.23
	11160.000	-42.31	-13	-29.31	-46.07	11.75	7.99
	13020.000	-40.81	-13	-27.81	-45.71	13.57	8.67
V	3720.000	-48.85	-13	-35.85	-56.94	12.61	4.52
	5580.000	-39.53	-13	-26.53	-46.97	13.12	5.68
	7440.000	-26.93	-13	-13.93	-31.61	11.28	6.61
	9300.000	-35.92	-13	-22.92	-40.50	11.82	7.23
	11160.000	-42.21	-13	-29.21	-45.97	11.75	7.99
	13020.000	-40.81	-13	-27.81	-45.71	13.57	8.67

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 18700_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3720.000	-47.74	-13	-34.74	-55.83	12.61	4.52
	5580.000	-47.88	-13	-34.88	-55.32	13.12	5.68
	7400.000	-34.91	-13	-21.91	-39.63	11.32	6.60
	9300.000	-33.68	-13	-20.68	-38.26	11.82	7.23
	11160.000	-42.40	-13	-29.40	-46.16	11.75	7.99
	13020.000	-40.56	-13	-27.56	-45.46	13.57	8.67
V	3720.000	-47.26	-13	-34.26	-55.35	12.61	4.52
	5580.000	-38.46	-13	-25.46	-45.90	13.12	5.68
	7440.000	-30.66	-13	-17.66	-35.34	11.28	6.61
	9300.000	-31.50	-13	-18.50	-36.08	11.82	7.23
	11160.000	-42.30	-13	-29.30	-46.06	11.75	7.99
	13020.000	-41.40	-13	-28.40	-46.30	13.57	8.67

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 18900_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3720.000	-48.26	-13	-35.26	-56.35	12.61	4.52
	5580.000	-41.86	-13	-28.86	-49.30	13.12	5.68
	7440.000	-34.82	-13	-21.82	-39.50	11.28	6.61
	9300.000	-35.12	-13	-22.12	-39.70	11.82	7.23
	11160.000	-42.37	-13	-29.37	-46.13	11.75	7.99
	13010.000	-40.52	-13	-27.52	-45.44	13.58	8.66
V	3720.000	-42.30	-13	-29.30	-50.39	12.61	4.52
	5580.000	-42.15	-13	-29.15	-49.59	13.12	5.68
	7400.000	-33.78	-13	-20.78	-38.50	11.32	6.60
	9300.000	-33.17	-13	-20.17	-37.75	11.82	7.23
	11160.000	-41.86	-13	-28.86	-45.62	11.75	7.99
	13020.000	-41.69	-13	-28.69	-46.59	13.57	8.67

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 18900_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3720.000	-50.96	-13	-37.96	-59.05	12.61	4.52
	5580.000	-44.96	-13	-31.96	-52.40	13.12	5.68
	7440.000	-34.25	-13	-21.25	-38.93	11.28	6.61
	9300.000	-33.21	-13	-20.21	-37.79	11.82	7.23
	11160.000	-41.62	-13	-28.62	-45.38	11.75	7.99
	13020.000	-40.70	-13	-27.70	-45.60	13.57	8.67
V	3720.000	-47.91	-13	-34.91	-56.00	12.61	4.52
	5580.000	-50.52	-13	-37.52	-57.96	13.12	5.68
	7440.000	-34.23	-13	-21.23	-38.91	11.28	6.61
	9300.000	-33.38	-13	-20.38	-37.96	11.82	7.23
	11160.000	-42.38	-13	-29.38	-46.14	11.75	7.99
	13020.000	-41.32	-13	-28.32	-46.22	13.57	8.67

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 19100_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3800.000	-46.28	-13	-33.28	-54.33	12.60	4.56
	5700.000	-40.18	-13	-27.18	-47.55	13.08	5.72
	7600.000	-36.36	-13	-23.36	-41.00	11.24	6.60
	9500.000	-31.12	-13	-18.12	-35.54	11.77	7.34
	11400.000	-37.30	-13	-24.30	-41.26	12.09	8.12
	13300.000	-40.92	-13	-27.92	-45.27	13.09	8.74
V	3800.000	-43.24	-13	-30.24	-51.29	12.60	4.56
	5700.000	-35.56	-13	-22.56	-42.93	13.08	5.72
	7600.000	-30.46	-13	-17.46	-35.10	11.24	6.60
	9500.000	-31.36	-13	-18.36	-35.78	11.77	7.34
	11400.000	-39.21	-13	-26.21	-43.17	12.09	8.12
	13300.000	-41.77	-13	-28.77	-46.12	13.09	8.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 19100_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3800.000	-47.18	-13	-34.18	-55.23	12.60	4.56
	5700.000	-40.36	-13	-27.36	-47.73	13.08	5.72
	7600.000	-35.49	-13	-22.49	-40.13	11.24	6.60
	9500.000	-35.95	-13	-22.95	-40.37	11.77	7.34
	11400.000	-37.38	-13	-24.38	-41.34	12.09	8.12
	13300.000	-41.17	-13	-28.17	-45.52	13.09	8.74
V	3800.000	-44.45	-13	-31.45	-52.50	12.60	4.56
	5700.000	-37.62	-13	-24.62	-44.99	13.08	5.72
	7600.000	-30.12	-13	-17.12	-34.76	11.24	6.60
	9500.000	-31.85	-13	-18.85	-36.27	11.77	7.34
	11400.000	-32.29	-13	-19.29	-36.25	12.09	8.12
	13300.000	-36.13	-13	-23.13	-40.48	13.09	8.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 2: LTE Band 4		
Date of Test	2019/08/08	Test Site	SR10-H

BW 1.400M_CH 19957_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3421.400	-43.14	-13	-30.14	-51.23	12.44	4.35
	5132.100	-39.94	-13	-26.94	-47.33	12.78	5.39
	6842.800	-34.54	-13	-21.54	-40.02	11.84	6.36
	8553.500	-34.97	-13	-21.97	-39.93	11.87	6.91
	10264.200	-38.52	-13	-25.52	-42.77	11.86	7.61
	11974.900	-40.73	-13	-27.73	-45.64	13.13	8.22
V	3421.400	-41.64	-13	-28.64	-49.73	12.44	4.35
	5132.100	-37.78	-13	-24.78	-45.17	12.78	5.39
	6842.800	-30.07	-13	-17.07	-35.55	11.84	6.36
	8553.500	-30.03	-13	-17.03	-34.99	11.87	6.91
	10264.200	-33.38	-13	-20.38	-37.63	11.86	7.61
	11974.900	-39.60	-13	-26.60	-44.51	13.13	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 19957_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3421.400	-45.90	-13	-32.90	-53.99	12.44	4.35
	5132.100	-43.47	-13	-30.47	-50.86	12.78	5.39
	6842.800	-36.79	-13	-23.79	-42.27	11.84	6.36
	8553.500	-38.61	-13	-25.61	-43.57	11.87	6.91
	10264.200	-41.61	-13	-28.61	-45.86	11.86	7.61
	11974.900	-40.42	-13	-27.42	-45.33	13.13	8.22
V	3421.400	-41.40	-13	-28.40	-49.49	12.44	4.35
	5132.100	-37.72	-13	-24.72	-45.11	12.78	5.39
	6842.800	-30.58	-13	-17.58	-36.06	11.84	6.36
	8553.500	-31.09	-13	-18.09	-36.05	11.87	6.91
	10264.200	-33.97	-13	-20.97	-38.22	11.86	7.61
	11974.900	-40.86	-13	-27.86	-45.77	13.13	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-45.92	-13	-32.92	-54.07	12.53	4.38
	5197.500	-42.31	-13	-29.31	-49.72	12.84	5.43
	6930.000	-38.53	-13	-25.53	-43.80	11.73	6.46
	8662.500	-42.91	-13	-29.91	-47.83	11.87	6.95
	10395.000	-39.50	-13	-26.50	-43.57	11.75	7.68
	12127.500	-39.92	-13	-26.92	-45.01	13.35	8.26
V	3465.000	-42.51	-13	-29.51	-50.66	12.53	4.38
	5197.500	-38.06	-13	-25.06	-45.47	12.84	5.43
	6930.000	-33.99	-13	-20.99	-39.26	11.73	6.46
	8662.500	-34.33	-13	-21.33	-39.25	11.87	6.95
	10395.000	-35.04	-13	-22.04	-39.11	11.75	7.68
	12127.500	-39.22	-13	-26.22	-44.31	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-46.26	-13	-33.26	-54.41	12.53	4.38
	5197.500	-44.32	-13	-31.32	-51.73	12.84	5.43
	6930.000	-39.21	-13	-26.21	-44.48	11.73	6.46
	8662.500	-40.02	-13	-27.02	-44.94	11.87	6.95
	10395.000	-41.44	-13	-28.44	-45.51	11.75	7.68
	12127.500	-40.63	-13	-27.63	-45.72	13.35	8.26
V	3465.000	-41.81	-13	-28.81	-49.96	12.53	4.38
	5197.500	-36.34	-13	-23.34	-43.75	12.84	5.43
	6930.000	-34.27	-13	-21.27	-39.54	11.73	6.46
	8662.500	-35.48	-13	-22.48	-40.40	11.87	6.95
	10395.000	-36.37	-13	-23.37	-40.44	11.75	7.68
	12127.500	-39.76	-13	-26.76	-44.85	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20393_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3508.600	-44.90	-13	-31.90	-53.10	12.61	4.41
	5262.900	-47.20	-13	-34.20	-54.63	12.91	5.48
	7017.200	-34.13	-13	-21.13	-39.23	11.64	6.54
	8771.500	-37.54	-13	-24.54	-42.43	11.88	6.99
	10525.800	-33.90	-13	-20.90	-37.80	11.65	7.75
	12280.100	-40.32	-13	-27.32	-45.57	13.56	8.31
V	3508.600	-45.64	-13	-32.64	-53.84	12.61	4.41
	5262.900	-41.10	-13	-28.10	-48.53	12.91	5.48
	7017.200	-30.17	-13	-17.17	-35.27	11.64	6.54
	8771.500	-31.22	-13	-18.22	-36.11	11.88	6.99
	10525.800	-29.84	-13	-16.84	-33.74	11.65	7.75
	12280.100	-40.32	-13	-27.32	-45.57	13.56	8.31

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20393_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3508.600	-44.97	-13	-31.97	-53.17	12.61	4.41
	5262.900	-47.30	-13	-34.30	-54.73	12.91	5.48
	7017.200	-33.29	-13	-20.29	-38.39	11.64	6.54
	8771.500	-36.69	-13	-23.69	-41.58	11.88	6.99
	10525.800	-32.76	-13	-19.76	-36.66	11.65	7.75
	12280.100	-40.78	-13	-27.78	-46.03	13.56	8.31
V	3508.600	-45.68	-13	-32.68	-53.88	12.61	4.41
	5262.900	-40.98	-13	-27.98	-48.41	12.91	5.48
	7017.200	-28.80	-13	-15.80	-33.90	11.64	6.54
	8771.500	-29.29	-13	-16.29	-34.18	11.88	6.99
	10525.800	-29.51	-13	-16.51	-33.41	11.65	7.75
	12280.100	-40.38	-13	-27.38	-45.63	13.56	8.31

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 19965_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3423.000	-45.38	-13	-32.38	-53.47	12.44	4.35
	5134.500	-43.65	-13	-30.65	-51.04	12.78	5.39
	6846.000	-35.07	-13	-22.07	-40.54	11.83	6.37
	8557.500	-35.98	-13	-22.98	-40.94	11.87	6.91
	10269.000	-38.83	-13	-25.83	-43.07	11.86	7.62
	11980.500	-40.93	-13	-27.93	-45.85	13.14	8.22
V	3423.000	-41.26	-13	-28.26	-49.35	12.44	4.35
	5134.500	-39.03	-13	-26.03	-46.42	12.78	5.39
	6846.000	-30.53	-13	-17.53	-36.00	11.83	6.37
	8557.500	-30.99	-13	-17.99	-35.95	11.87	6.91
	10269.000	-34.46	-13	-21.46	-38.70	11.86	7.62
	11980.500	-39.99	-13	-26.99	-44.91	13.14	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 19965_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3423.000	-45.87	-13	-32.87	-53.96	12.44	4.35
	5134.500	-44.40	-13	-31.40	-51.79	12.78	5.39
	6846.000	-36.39	-13	-23.39	-41.86	11.83	6.37
	8557.500	-38.58	-13	-25.58	-43.54	11.87	6.91
	10269.000	-42.60	-13	-29.60	-46.84	11.86	7.62
	11980.500	-40.37	-13	-27.37	-45.29	13.14	8.22
V	3423.000	-41.40	-13	-28.40	-49.49	12.44	4.35
	5134.500	-39.17	-13	-26.17	-46.56	12.78	5.39
	6846.000	-31.48	-13	-18.48	-36.95	11.83	6.37
	8557.500	-38.45	-13	-25.45	-43.41	11.87	6.91
	10269.000	-36.73	-13	-23.73	-40.97	11.86	7.62
	11980.500	-39.79	-13	-26.79	-44.71	13.14	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-47.06	-13	-34.06	-55.21	12.53	4.38
	5197.500	-42.65	-13	-29.65	-50.06	12.84	5.43
	6930.000	-38.69	-13	-25.69	-43.96	11.73	6.46
	8662.500	-39.90	-13	-26.90	-44.82	11.87	6.95
	10395.000	-43.63	-13	-30.63	-47.70	11.75	7.68
	12127.500	-40.76	-13	-27.76	-45.85	13.35	8.26
V	3465.000	-42.21	-13	-29.21	-50.36	12.53	4.38
	5197.500	-36.58	-13	-23.58	-43.99	12.84	5.43
	6930.000	-34.81	-13	-21.81	-40.08	11.73	6.46
	8662.500	-36.91	-13	-23.91	-41.83	11.87	6.95
	10395.000	-37.66	-13	-24.66	-41.73	11.75	7.68
	12127.500	-39.09	-13	-26.09	-44.18	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-47.85	-13	-34.85	-56.00	12.53	4.38
	5197.500	-45.18	-13	-32.18	-52.59	12.84	5.43
	6930.000	-43.54	-13	-30.54	-48.81	11.73	6.46
	8662.500	-40.26	-13	-27.26	-45.18	11.87	6.95
	10395.000	-41.95	-13	-28.95	-46.02	11.75	7.68
	12127.500	-40.76	-13	-27.76	-45.85	13.35	8.26
V	3465.000	-42.34	-13	-29.34	-50.49	12.53	4.38
	5197.500	-36.66	-13	-23.66	-44.07	12.84	5.43
	6930.000	-34.71	-13	-21.71	-39.98	11.73	6.46
	8662.500	-36.30	-13	-23.30	-41.22	11.87	6.95
	10395.000	-39.35	-13	-26.35	-43.42	11.75	7.68
	12127.500	-39.11	-13	-26.11	-44.20	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20385_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3507.000	-44.66	-13	-31.66	-52.86	12.61	4.41
	5260.500	-46.87	-13	-33.87	-54.30	12.91	5.48
	7014.000	-34.58	-13	-21.58	-39.68	11.64	6.54
	8767.500	-38.63	-13	-25.63	-43.52	11.88	6.99
	10521.000	-34.32	-13	-21.32	-38.23	11.65	7.75
	12274.500	-41.36	-13	-28.36	-46.61	13.55	8.31
V	3507.000	-43.97	-13	-30.97	-52.17	12.61	4.41
	5260.500	-44.68	-13	-31.68	-52.11	12.91	5.48
	7014.000	-31.61	-13	-18.61	-36.71	11.64	6.54
	8767.500	-37.74	-13	-24.74	-42.63	11.88	6.99
	10521.000	-31.35	-13	-18.35	-35.26	11.65	7.75
	12274.500	-40.14	-13	-27.14	-45.39	13.55	8.31

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20385_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3507.000	-45.11	-13	-32.11	-53.31	12.61	4.41
	5260.500	-47.36	-13	-34.36	-54.79	12.91	5.48
	7014.000	-36.98	-13	-23.98	-42.08	11.64	6.54
	8767.500	-41.35	-13	-28.35	-46.24	11.88	6.99
	10521.000	-34.93	-13	-21.93	-38.84	11.65	7.75
	12274.500	-40.99	-13	-27.99	-46.24	13.55	8.31
V	3507.000	-43.97	-13	-30.97	-52.17	12.61	4.41
	5260.500	-41.05	-13	-28.05	-48.48	12.91	5.48
	7014.000	-31.48	-13	-18.48	-36.58	11.64	6.54
	8767.500	-33.87	-13	-20.87	-38.76	11.88	6.99
	10521.000	-32.32	-13	-19.32	-36.23	11.65	7.75
	12274.500	-40.19	-13	-27.19	-45.44	13.55	8.31

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 19975_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3425.000	-52.14	-13	-39.14	-60.23	12.45	4.36
	5137.500	-44.95	-13	-31.95	-52.34	12.78	5.39
	6850.000	-36.02	-13	-23.02	-41.48	11.83	6.37
	8562.500	-36.93	-13	-23.93	-41.88	11.87	6.91
	10275.000	-40.47	-13	-27.47	-44.70	11.85	7.62
	11987.500	-40.81	-13	-27.81	-45.74	13.16	8.22
V	3425.000	-41.62	-13	-28.62	-49.71	12.45	4.36
	5137.500	-41.47	-13	-28.47	-48.86	12.78	5.39
	6850.000	-31.07	-13	-18.07	-36.53	11.83	6.37
	8562.500	-30.85	-13	-17.85	-35.80	11.87	6.91
	10275.000	-36.43	-13	-23.43	-40.66	11.85	7.62
	11987.500	-39.47	-13	-26.47	-44.40	13.16	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 19975_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3425.000	-45.47	-13	-32.47	-53.56	12.45	4.36
	5137.500	-44.31	-13	-31.31	-51.70	12.78	5.39
	6850.000	-36.31	-13	-23.31	-41.77	11.83	6.37
	8562.500	-36.31	-13	-23.31	-41.26	11.87	6.91
	10275.000	-39.82	-13	-26.82	-44.05	11.85	7.62
	11987.500	-40.01	-13	-27.01	-44.94	13.16	8.22
V	3425.000	-41.62	-13	-28.62	-49.71	12.45	4.36
	5137.500	-41.75	-13	-28.75	-49.14	12.78	5.39
	6850.000	-31.20	-13	-18.20	-36.66	11.83	6.37
	8562.500	-31.29	-13	-18.29	-36.24	11.87	6.91
	10275.000	-34.66	-13	-21.66	-38.89	11.85	7.62
	11987.500	-39.42	-13	-26.42	-44.35	13.16	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-46.21	-13	-33.21	-54.36	12.53	4.38
	5197.500	-44.89	-13	-31.89	-52.30	12.84	5.43
	6930.000	-38.40	-13	-25.40	-43.67	11.73	6.46
	8662.500	-40.57	-13	-27.57	-45.49	11.87	6.95
	10395.000	-41.93	-13	-28.93	-46.00	11.75	7.68
	12127.500	-40.40	-13	-27.40	-45.49	13.35	8.26
V	3465.000	-42.51	-13	-29.51	-50.66	12.53	4.38
	5197.500	-36.67	-13	-23.67	-44.08	12.84	5.43
	6930.000	-34.61	-13	-21.61	-39.88	11.73	6.46
	8662.500	-36.56	-13	-23.56	-41.48	11.87	6.95
	10395.000	-39.09	-13	-26.09	-43.16	11.75	7.68
	12127.500	-37.67	-13	-24.67	-42.76	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-47.95	-13	-34.95	-56.10	12.53	4.38
	5197.500	-45.18	-13	-32.18	-52.59	12.84	5.43
	6930.000	-39.31	-13	-26.31	-44.58	11.73	6.46
	8662.500	-39.30	-13	-26.30	-44.22	11.87	6.95
	10395.000	-42.32	-13	-29.32	-46.39	11.75	7.68
	12127.500	-39.92	-13	-26.92	-45.01	13.35	8.26
V	3465.000	-42.60	-13	-29.60	-50.75	12.53	4.38
	5197.500	-37.05	-13	-24.05	-44.46	12.84	5.43
	6930.000	-36.06	-13	-23.06	-41.33	11.73	6.46
	8662.500	-35.76	-13	-22.76	-40.68	11.87	6.95
	10395.000	-39.04	-13	-26.04	-43.11	11.75	7.68
	12127.500	-39.29	-13	-26.29	-44.38	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20375_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3505.000	-43.49	-13	-30.49	-51.69	12.61	4.41
	5257.500	-46.93	-13	-33.93	-54.36	12.90	5.48
	7010.000	-38.80	-13	-25.80	-43.90	11.64	6.54
	8762.500	-40.62	-13	-27.62	-45.51	11.88	6.98
	10515.000	-37.63	-13	-24.63	-41.54	11.66	7.75
	12267.500	-41.47	-13	-28.47	-46.71	13.54	8.30
V	3505.000	-43.01	-13	-30.01	-51.21	12.61	4.41
	5257.500	-40.00	-13	-27.00	-47.43	12.90	5.48
	7010.000	-30.17	-13	-17.17	-35.27	11.64	6.54
	8762.500	-36.07	-13	-23.07	-40.96	11.88	6.98
	10515.000	-31.11	-13	-18.11	-35.02	11.66	7.75
	12267.500	-41.26	-13	-28.26	-46.50	13.54	8.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20375_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3505.000	-43.02	-13	-30.02	-51.22	12.61	4.41
	5257.500	-46.76	-13	-33.76	-54.19	12.90	5.48
	7010.000	-35.82	-13	-22.82	-40.92	11.64	6.54
	8762.500	-41.45	-13	-28.45	-46.34	11.88	6.98
	10515.000	-35.56	-13	-22.56	-39.47	11.66	7.75
	12267.500	-41.66	-13	-28.66	-46.90	13.54	8.30
V	3505.000	-43.02	-13	-30.02	-51.22	12.61	4.41
	5257.500	-39.94	-13	-26.94	-47.37	12.90	5.48
	7010.000	-30.26	-13	-17.26	-35.36	11.64	6.54
	8762.500	-32.33	-13	-19.33	-37.22	11.88	6.98
	10515.000	-30.47	-13	-17.47	-34.38	11.66	7.75
	12267.500	-40.97	-13	-27.97	-46.21	13.54	8.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20000_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3430.000	-44.06	-13	-31.06	-52.16	12.46	4.36
	5145.000	-44.01	-13	-31.01	-51.41	12.79	5.40
	6860.000	-35.82	-13	-22.82	-41.26	11.82	6.38
	8575.000	-37.40	-13	-24.40	-42.35	11.87	6.92
	10290.000	-41.95	-13	-28.95	-46.16	11.84	7.63
	12005.000	-40.18	-13	-27.18	-45.14	13.19	8.23
V	3430.000	-41.07	-13	-28.07	-49.17	12.46	4.36
	5145.000	-39.76	-13	-26.76	-47.16	12.79	5.40
	6860.000	-29.66	-13	-16.66	-35.10	11.82	6.38
	8575.000	-30.27	-13	-17.27	-35.22	11.87	6.92
	10290.000	-34.16	-13	-21.16	-38.37	11.84	7.63
	12005.000	-39.37	-13	-26.37	-44.33	13.19	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20000_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3430.000	-44.89	-13	-31.89	-52.99	12.46	4.36
	5145.000	-43.29	-13	-30.29	-50.69	12.79	5.40
	6860.000	-35.35	-13	-22.35	-40.79	11.82	6.38
	8575.000	-35.65	-13	-22.65	-40.60	11.87	6.92
	10290.000	-39.46	-13	-26.46	-43.67	11.84	7.63
	12005.000	-40.16	-13	-27.16	-45.12	13.19	8.23
V	3430.000	-41.18	-13	-28.18	-49.28	12.46	4.36
	5145.000	-39.81	-13	-26.81	-47.21	12.79	5.40
	6860.000	-29.87	-13	-16.87	-35.31	11.82	6.38
	8575.000	-30.40	-13	-17.40	-35.35	11.87	6.92
	10290.000	-34.08	-13	-21.08	-38.29	11.84	7.63
	12005.000	-39.03	-13	-26.03	-43.99	13.19	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-46.79	-13	-33.79	-54.94	12.53	4.38
	5197.500	-43.29	-13	-30.29	-50.70	12.84	5.43
	6930.000	-38.11	-13	-25.11	-43.38	11.73	6.46
	8662.000	-42.51	-13	-29.51	-47.43	11.87	6.95
	10395.000	-42.68	-13	-29.68	-46.75	11.75	7.68
	12127.500	-40.06	-13	-27.06	-45.15	13.35	8.26
V	3465.000	-42.07	-13	-29.07	-50.22	12.53	4.38
	5197.000	-39.46	-13	-26.46	-46.87	12.84	5.43
	6930.000	-37.11	-13	-24.11	-42.38	11.73	6.46
	8662.500	-35.49	-13	-22.49	-40.41	11.87	6.95
	10395.000	-37.46	-13	-24.46	-41.53	11.75	7.68
	12127.500	-38.59	-13	-25.59	-43.68	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-46.99	-13	-33.99	-55.14	12.53	4.38
	5197.500	-43.40	-13	-30.40	-50.81	12.84	5.43
	6930.000	-38.17	-13	-25.17	-43.44	11.73	6.46
	8662.500	-42.31	-13	-29.31	-47.23	11.87	6.95
	10395.000	-43.19	-13	-30.19	-47.26	11.75	7.68
	12127.500	-40.15	-13	-27.15	-45.24	13.35	8.26
V	3465.000	-42.64	-13	-29.64	-50.79	12.53	4.38
	5197.500	-39.38	-13	-26.38	-46.79	12.84	5.43
	6930.000	-37.18	-13	-24.18	-42.45	11.73	6.46
	8662.500	-35.53	-13	-22.53	-40.45	11.87	6.95
	10395.000	-37.55	-13	-24.55	-41.62	11.75	7.68
	12127.500	-38.82	-13	-25.82	-43.91	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20350_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3500.000	-40.39	-13	-27.39	-48.59	12.61	4.41
	5250.000	-48.36	-13	-35.36	-55.78	12.89	5.47
	7000.000	-38.37	-13	-25.37	-43.48	11.65	6.54
	8750.000	-36.93	-13	-23.93	-41.83	11.88	6.98
	10500.000	-35.05	-13	-22.05	-38.97	11.66	7.74
	12250.000	-40.53	-13	-27.53	-45.75	13.52	8.30
V	3500.000	-41.04	-13	-28.04	-49.24	12.61	4.41
	5250.000	-41.32	-13	-28.32	-48.74	12.89	5.47
	7000.000	-34.42	-13	-21.42	-39.53	11.65	6.54
	8750.000	-30.30	-13	-17.30	-35.20	11.88	6.98
	10500.000	-31.55	-13	-18.55	-35.47	11.66	7.74
	12250.000	-36.87	-13	-23.87	-42.09	13.52	8.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20350_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3500.000	-48.59	-13	-35.59	-56.79	12.61	4.41
	5250.000	-47.67	-13	-34.67	-55.09	12.89	5.47
	7000.000	-37.78	-13	-24.78	-42.89	11.65	6.54
	8750.000	-38.71	-13	-25.71	-43.61	11.88	6.98
	10500.000	-38.83	-13	-25.83	-42.75	11.66	7.74
	12250.000	-40.50	-13	-27.50	-45.72	13.52	8.30
V	3500.000	-41.11	-13	-28.11	-49.31	12.61	4.41
	5250.000	-40.62	-13	-27.62	-48.04	12.89	5.47
	7000.000	-33.00	-13	-20.00	-38.11	11.65	6.54
	8750.000	-34.13	-13	-21.13	-39.03	11.88	6.98
	10500.000	-29.79	-13	-16.79	-33.71	11.66	7.74
	12250.000	-36.99	-13	-23.99	-42.21	13.52	8.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 2025_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3435.000	-47.82	-13	-34.82	-55.93	12.47	4.36
	5152.500	-45.12	-13	-32.12	-52.52	12.80	5.40
	6870.000	-37.88	-13	-24.88	-43.29	11.81	6.39
	8587.500	-43.82	-13	-30.82	-48.77	11.87	6.92
	10305.000	-40.64	-13	-27.64	-44.83	11.83	7.64
	12022.500	-38.12	-13	-25.12	-43.10	13.21	8.23
V	3435.000	-45.24	-13	-32.24	-53.35	12.47	4.36
	5152.500	-43.21	-13	-30.21	-50.61	12.80	5.40
	6870.000	-26.00	-13	-13.00	-31.41	11.81	6.39
	8587.500	-39.12	-13	-26.12	-44.07	11.87	6.92
	10305.000	-38.55	-13	-25.55	-42.74	11.83	7.64
	12022.500	-37.78	-13	-24.78	-42.76	13.21	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 2025_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3435.000	-46.85	-13	-33.85	-54.96	12.47	4.36
	5152.500	-44.85	-13	-31.85	-52.25	12.80	5.40
	6870.000	-47.18	-13	-34.18	-52.59	11.81	6.39
	8587.500	-43.76	-13	-30.76	-48.71	11.87	6.92
	10305.000	-39.73	-13	-26.73	-43.92	11.83	7.64
	12022.500	-37.52	-13	-24.52	-42.50	13.21	8.23
V	3435.000	-45.68	-13	-32.68	-53.79	12.47	4.36
	5152.500	-49.88	-13	-36.88	-57.28	12.80	5.40
	6870.000	-38.62	-13	-25.62	-44.03	11.81	6.39
	8587.500	-43.31	-13	-30.31	-48.26	11.87	6.92
	10305.000	-39.88	-13	-26.88	-44.07	11.83	7.64
	12022.500	-37.27	-13	-24.27	-42.25	13.21	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 20175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3464.000	-47.86	-13	-34.86	-56.01	12.53	4.38
	5196.000	-41.97	-13	-28.97	-49.38	12.84	5.43
	6928.000	-43.22	-13	-30.22	-48.50	11.74	6.46
	8660.000	-44.26	-13	-31.26	-49.19	11.87	6.95
	10392.000	-40.01	-13	-27.01	-44.08	11.75	7.68
	12124.000	-38.47	-13	-25.47	-43.56	13.35	8.26
V	3464.000	-47.05	-13	-34.05	-55.20	12.53	4.38
	5196.000	-39.44	-13	-26.44	-46.85	12.84	5.43
	6928.000	-29.06	-13	-16.06	-34.34	11.74	6.46
	8660.000	-40.14	-13	-27.14	-45.07	11.87	6.95
	10392.000	-40.55	-13	-27.55	-44.62	11.75	7.68
	12124.000	-38.54	-13	-25.54	-43.63	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 20175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3464.000	-47.15	-13	-34.15	-55.30	12.53	4.38
	5196.000	-41.52	-13	-28.52	-48.93	12.84	5.43
	6928.000	-39.92	-13	-26.92	-45.20	11.74	6.46
	8660.000	-43.45	-13	-30.45	-48.38	11.87	6.95
	10392.000	-40.20	-13	-27.20	-44.27	11.75	7.68
	12124.000	-38.45	-13	-25.45	-43.54	13.35	8.26
V	3464.000	-47.01	-13	-34.01	-55.16	12.53	4.38
	5196.000	-39.28	-13	-26.28	-46.69	12.84	5.43
	6928.000	-26.71	-13	-13.71	-31.99	11.74	6.46
	8660.000	-37.81	-13	-24.81	-42.74	11.87	6.95
	10392.000	-39.22	-13	-26.22	-43.29	11.75	7.68
	12124.000	-38.15	-13	-25.15	-43.24	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 20325_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3495.000	-45.87	-13	-32.87	-54.06	12.60	4.41
	5425.000	-44.83	-13	-31.83	-52.30	13.07	5.60
	6990.000	-41.61	-13	-28.61	-46.75	11.66	6.53
	8737.500	-43.08	-13	-30.08	-47.98	11.88	6.97
	10485.000	-39.70	-13	-26.70	-43.64	11.67	7.73
	12232.500	-37.59	-13	-24.59	-42.79	13.50	8.29
V	3495.000	-47.49	-13	-34.49	-55.68	12.60	4.41
	5242.500	-41.40	-13	-28.40	-48.82	12.89	5.47
	6990.000	-28.81	-13	-15.81	-33.95	11.66	6.53
	8737.500	-39.61	-13	-26.61	-44.51	11.88	6.97
	10485.000	-40.14	-13	-27.14	-44.08	11.67	7.73
	12232.500	-38.69	-13	-25.69	-43.89	13.50	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 20325_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3495.000	-45.40	-13	-32.40	-53.59	12.60	4.41
	5242.500	-44.83	-13	-31.83	-52.25	12.89	5.47
	6990.000	-40.47	-13	-27.47	-45.61	11.66	6.53
	8737.500	-42.59	-13	-29.59	-47.49	11.88	6.97
	10485.000	-39.05	-13	-26.05	-42.99	11.67	7.73
	12232.500	-39.29	-13	-26.29	-44.49	13.50	8.29
V	3495.000	-47.66	-13	-34.66	-55.85	12.60	4.41
	5242.500	-41.34	-13	-28.34	-48.76	12.89	5.47
	6990.000	-28.86	-13	-15.86	-34.00	11.66	6.53
	8737.500	-38.14	-13	-25.14	-43.04	11.88	6.97
	10485.000	-39.56	-13	-26.56	-43.50	11.67	7.73
	12232.500	-38.46	-13	-25.46	-43.66	13.50	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 20050_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3440.000	-47.15	-13	-34.15	-55.26	12.48	4.37
	5160.000	-44.94	-13	-31.94	-52.34	12.81	5.41
	6880.000	-38.75	-13	-25.75	-44.14	11.79	6.40
	8600.000	-43.89	-13	-30.89	-48.83	11.87	6.93
	10320.000	-40.25	-13	-27.25	-44.42	11.81	7.64
	12040.000	-38.28	-13	-25.28	-43.28	13.23	8.24
V	3440.000	-46.50	-13	-33.50	-54.61	12.48	4.37
	5160.000	-44.20	-13	-31.20	-51.60	12.81	5.41
	6880.000	-26.69	-13	-13.69	-32.08	11.79	6.40
	8600.000	-39.55	-13	-26.55	-44.49	11.87	6.93
	10320.000	-40.66	-13	-27.66	-44.83	11.81	7.64
	12040.000	-38.42	-13	-25.42	-43.42	13.23	8.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 20050_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3440.000	-47.31	-13	-34.31	-55.42	12.48	4.37
	5160.000	-44.54	-13	-31.54	-51.94	12.81	5.41
	6880.000	-36.48	-13	-23.48	-41.87	11.79	6.40
	8600.000	-42.90	-13	-29.90	-47.84	11.87	6.93
	10320.000	-41.10	-13	-28.10	-45.27	11.81	7.64
	12040.000	-37.70	-13	-24.70	-42.70	13.23	8.24
V	3440.000	-49.91	-13	-36.91	-58.02	12.48	4.37
	5160.000	-44.15	-13	-31.15	-51.55	12.81	5.41
	6880.000	-23.89	-13	-10.89	-29.28	11.79	6.40
	8600.000	-36.44	-13	-23.44	-41.38	11.87	6.93
	10320.000	-40.97	-13	-27.97	-45.14	11.81	7.64
	12040.000	-38.76	-13	-25.76	-43.76	13.23	8.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 20175_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-48.54	-13	-35.54	-56.69	12.53	4.38
	5197.500	-42.64	-13	-29.64	-50.05	12.84	5.43
	6930.000	-42.45	-13	-29.45	-47.72	11.73	6.46
	8662.500	-44.62	-13	-31.62	-49.54	11.87	6.95
	10395.000	-40.10	-13	-27.10	-44.17	11.75	7.68
	12127.500	-38.50	-13	-25.50	-43.59	13.35	8.26
V	3465.000	-48.30	-13	-35.30	-56.45	12.53	4.38
	5197.500	-39.88	-13	-26.88	-47.29	12.84	5.43
	6930.000	-29.10	-13	-16.10	-34.37	11.73	6.46
	8662.500	-42.09	-13	-29.09	-47.01	11.87	6.95
	10395.000	-40.79	-13	-27.79	-44.86	11.75	7.68
	12127.500	-38.90	-13	-25.90	-43.99	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 20175_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3465.000	-48.28	-13	-35.28	-56.43	12.53	4.38
	5197.500	-41.37	-13	-28.37	-48.78	12.84	5.43
	6930.000	-39.22	-13	-26.22	-44.49	11.73	6.46
	8662.500	-44.40	-13	-31.40	-49.32	11.87	6.95
	10395.000	-40.68	-13	-27.68	-44.75	11.75	7.68
	12127.500	-39.27	-13	-26.27	-44.36	13.35	8.26
V	3465.000	-45.55	-13	-32.55	-53.70	12.53	4.38
	5197.500	-39.60	-13	-26.60	-47.01	12.84	5.43
	6930.000	-28.47	-13	-15.47	-33.74	11.73	6.46
	8662.500	-35.09	-13	-22.09	-40.01	11.87	6.95
	10395.000	-40.02	-13	-27.02	-44.09	11.75	7.68
	12127.500	-38.08	-13	-25.08	-43.17	13.35	8.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 20300_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-45.04	-13	-32.04	-53.23	12.59	4.40
	5235.000	-44.09	-13	-31.09	-51.51	12.88	5.46
	6980.000	-40.66	-13	-27.66	-45.82	11.67	6.51
	8725.000	-43.17	-13	-30.17	-48.08	11.88	6.97
	10470.000	-39.44	-13	-26.44	-43.40	11.69	7.73
	12215.000	-38.73	-13	-25.73	-43.91	13.47	8.29
V	3490.000	-46.95	-13	-33.95	-55.14	12.59	4.40
	5235.000	-38.94	-13	-25.94	-46.36	12.88	5.46
	6980.000	-28.86	-13	-15.86	-34.02	11.67	6.51
	8725.000	-40.13	-13	-27.13	-45.04	11.88	6.97
	10470.000	-40.21	-13	-27.21	-44.17	11.69	7.73
	12215.000	-38.29	-13	-25.29	-43.47	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 20300_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-44.57	-13	-31.57	-52.76	12.59	4.40
	5235.000	-43.46	-13	-30.46	-50.88	12.88	5.46
	6980.000	-40.43	-13	-27.43	-45.59	11.67	6.51
	8725.000	-44.08	-13	-31.08	-48.99	11.88	6.97
	10470.000	-40.33	-13	-27.33	-44.29	11.69	7.73
	12215.000	-39.37	-13	-26.37	-44.55	13.47	8.29
V	3490.000	-46.82	-13	-33.82	-55.01	12.59	4.40
	5235.000	-39.48	-13	-26.48	-46.90	12.88	5.46
	6980.000	-29.22	-13	-16.22	-34.38	11.67	6.51
	8725.000	-40.49	-13	-27.49	-45.40	11.88	6.97
	10470.000	-39.86	-13	-26.86	-43.82	11.69	7.73
	12215.000	-38.73	-13	-25.73	-43.91	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 3: LTE Band 5		
Date of Test	2019/08/03	Test Site	SR10-H

BW 1.400M_CH 20407_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1649.400	-49.13	-13	-36.13	-55.43	9.29	2.99
	2474.100	-45.67	-13	-32.67	-52.57	10.59	3.68
	3298.800	-52.58	-13	-39.58	-60.49	12.17	4.26
	4123.500	-49.32	-13	-36.32	-57.19	12.61	4.74
	4948.200	-46.89	-13	-33.89	-54.28	12.65	5.26
	5772.900	-46.38	-13	-33.38	-53.70	13.06	5.74
V	1649.400	-40.70	-13	-27.70	-47.00	9.29	2.99
	2474.100	-45.41	-13	-32.41	-52.31	10.59	3.68
	3298.800	-52.62	-13	-39.62	-60.53	12.17	4.26
	4123.500	-49.83	-13	-36.83	-57.70	12.61	4.74
	4948.200	-46.92	-13	-33.92	-54.31	12.65	5.26
	5772.900	-46.24	-13	-33.24	-53.56	13.06	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20407_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1649.400	-49.11	-13	-36.11	-55.41	9.29	2.99
	2474.100	-44.41	-13	-31.41	-51.31	10.59	3.68
	3298.800	-51.69	-13	-38.69	-59.60	12.17	4.26
	4123.500	-49.57	-13	-36.57	-57.44	12.61	4.74
	4948.200	-46.95	-13	-33.95	-54.34	12.65	5.26
	5772.900	-46.34	-13	-33.34	-53.66	13.06	5.74
V	1649.400	-42.29	-13	-29.29	-48.59	9.29	2.99
	2474.100	-45.68	-13	-32.68	-52.58	10.59	3.68
	3298.800	-51.98	-13	-38.98	-59.89	12.17	4.26
	4123.500	-49.95	-13	-36.95	-57.82	12.61	4.74
	4948.200	-47.05	-13	-34.05	-54.44	12.65	5.26
	5772.900	-46.15	-13	-33.15	-53.47	13.06	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20525_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-50.44	-13	-37.44	-56.79	9.36	3.01
	2509.500	-50.68	-13	-37.68	-57.59	10.62	3.71
	3346.000	-52.91	-13	-39.91	-60.89	12.27	4.30
	4182.500	-50.53	-13	-37.53	-58.37	12.62	4.78
	5019.000	-48.35	-13	-35.35	-55.71	12.67	5.31
	5855.500	-47.10	-13	-34.10	-54.37	13.04	5.77
V	1673.000	-48.17	-13	-35.17	-54.52	9.36	3.01
	2509.500	-50.04	-13	-37.04	-56.95	10.62	3.71
	3346.000	-52.03	-13	-39.03	-60.01	12.27	4.30
	4182.500	-50.50	-13	-37.50	-58.34	12.62	4.78
	5019.000	-48.31	-13	-35.31	-55.67	12.67	5.31
	5855.500	-47.13	-13	-34.13	-54.40	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20525_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-51.83	-13	-38.83	-58.18	9.36	3.01
	2509.500	-49.88	-13	-36.88	-56.79	10.62	3.71
	3346.000	-53.30	-13	-40.30	-61.28	12.27	4.30
	4182.500	-50.28	-13	-37.28	-58.12	12.62	4.78
	5019.000	-48.18	-13	-35.18	-55.54	12.67	5.31
	5855.500	-47.19	-13	-34.19	-54.46	13.04	5.77
V	1673.000	-49.42	-13	-36.42	-55.77	9.36	3.01
	2509.500	-50.02	-13	-37.02	-56.93	10.62	3.71
	3346.000	-51.94	-13	-38.94	-59.92	12.27	4.30
	4182.500	-50.33	-13	-37.33	-58.17	12.62	4.78
	5019.000	-48.25	-13	-35.25	-55.61	12.67	5.31
	5855.500	-47.16	-13	-34.16	-54.43	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20643_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1696.600	-50.60	-13	-37.60	-57.00	9.43	3.03
	2544.900	-46.06	-13	-33.06	-53.01	10.68	3.73
	3393.200	-52.17	-13	-39.17	-60.22	12.38	4.33
	4241.500	-50.01	-13	-37.01	-57.82	12.63	4.82
	5089.800	-47.74	-13	-34.74	-55.12	12.74	5.36
	5938.100	-47.26	-13	-34.26	-54.48	13.02	5.80
V	1696.600	-46.47	-13	-33.47	-52.87	9.43	3.03
	2544.900	-44.91	-13	-31.91	-51.86	10.68	3.73
	3393.200	-51.17	-13	-38.17	-59.22	12.38	4.33
	4241.500	-51.09	-13	-38.09	-58.90	12.63	4.82
	5089.800	-47.71	-13	-34.71	-55.09	12.74	5.36
	5938.100	-47.27	-13	-34.27	-54.49	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 20643_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1696.600	-50.20	-13	-37.20	-56.60	9.43	3.03
	2544.900	-46.96	-13	-33.96	-53.91	10.68	3.73
	3393.200	-52.96	-13	-39.96	-61.01	12.38	4.33
	4241.500	-50.72	-13	-37.72	-58.53	12.63	4.82
	5089.800	-47.72	-13	-34.72	-55.10	12.74	5.36
	5938.100	-47.29	-13	-34.29	-54.51	13.02	5.80
V	1696.600	-46.66	-13	-33.66	-53.06	9.43	3.03
	2544.900	-46.24	-13	-33.24	-53.19	10.68	3.73
	3393.200	-51.80	-13	-38.80	-59.85	12.38	4.33
	4241.500	-48.88	-13	-35.88	-56.69	12.63	4.82
	5089.800	-47.77	-13	-34.77	-55.15	12.74	5.36
	5938.100	-47.28	-13	-34.28	-54.50	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20415_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1651.000	-50.48	-13	-37.48	-56.79	9.30	2.99
	2476.500	-47.40	-13	-34.40	-54.30	10.59	3.69
	3302.000	-54.76	-13	-41.76	-62.67	12.18	4.26
	4127.500	-52.05	-13	-39.05	-59.92	12.62	4.74
	4953.000	-49.12	-13	-36.12	-56.51	12.65	5.26
	5778.500	-47.55	-13	-34.55	-54.87	13.06	5.74
V	1651.000	-45.76	-13	-32.76	-52.07	9.30	2.99
	2476.500	-46.99	-13	-33.99	-53.89	10.59	3.69
	3302.000	-54.72	-13	-41.72	-62.63	12.18	4.26
	4127.500	-52.08	-13	-39.08	-59.95	12.62	4.74
	4953.000	-49.19	-13	-36.19	-56.58	12.65	5.26
	5778.500	-47.51	-13	-34.51	-54.83	13.06	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20415_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1651.000	-50.11	-13	-37.11	-56.42	9.30	2.99
	2476.500	-45.37	-13	-32.37	-52.27	10.59	3.69
	3302.000	-54.71	-13	-41.71	-62.62	12.18	4.26
	4127.500	-52.12	-13	-39.12	-59.99	12.62	4.74
	4953.000	-49.24	-13	-36.24	-56.63	12.65	5.26
	5778.500	-47.49	-13	-34.49	-54.81	13.06	5.74
V	1651.000	-44.99	-13	-31.99	-51.30	9.30	2.99
	2476.500	-47.48	-13	-34.48	-54.38	10.59	3.69
	3302.000	-54.65	-13	-41.65	-62.56	12.18	4.26
	4127.500	-52.12	-13	-39.12	-59.99	12.62	4.74
	4953.000	-49.24	-13	-36.24	-56.63	12.65	5.26
	5778.500	-47.53	-13	-34.53	-54.85	13.06	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20525_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-54.80	-13	-41.80	-61.15	9.36	3.01
	2509.500	-52.56	-13	-39.56	-59.47	10.62	3.71
	3346.000	-54.36	-13	-41.36	-62.34	12.27	4.30
	4182.500	-52.29	-13	-39.29	-60.13	12.62	4.78
	5019.000	-48.55	-13	-35.55	-55.91	12.67	5.31
	5855.500	-47.49	-13	-34.49	-54.76	13.04	5.77
V	1673.000	-47.63	-13	-34.63	-53.98	9.36	3.01
	2509.500	-52.27	-13	-39.27	-59.18	10.62	3.71
	3346.000	-54.34	-13	-41.34	-62.32	12.27	4.30
	4182.500	-52.27	-13	-39.27	-60.11	12.62	4.78
	5019.000	-48.53	-13	-35.53	-55.89	12.67	5.31
	5855.500	-47.47	-13	-34.47	-54.74	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20525_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-54.03	-13	-41.03	-60.38	9.36	3.01
	2509.500	-52.42	-13	-39.42	-59.33	10.62	3.71
	3346.000	-54.28	-13	-41.28	-62.26	12.27	4.30
	4182.500	-52.22	-13	-39.22	-60.06	12.62	4.78
	5019.000	-48.48	-13	-35.48	-55.84	12.67	5.31
	5855.500	-47.42	-13	-34.42	-54.69	13.04	5.77
V	1673.000	-47.11	-13	-34.11	-53.46	9.36	3.01
	2509.500	-52.01	-13	-39.01	-58.92	10.62	3.71
	3346.000	-54.31	-13	-41.31	-62.29	12.27	4.30
	4182.500	-52.25	-13	-39.25	-60.09	12.62	4.78
	5019.000	-48.51	-13	-35.51	-55.87	12.67	5.31
	5855.500	-47.45	-13	-34.45	-54.72	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20635_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1695.000	-52.35	-13	-39.35	-58.75	9.43	3.03
	2542.500	-53.67	-13	-40.67	-60.62	10.68	3.73
	3390.000	-53.94	-13	-40.94	-61.98	12.37	4.33
	4237.500	-51.69	-13	-38.69	-59.50	12.63	4.82
	5085.000	-48.26	-13	-35.26	-55.64	12.73	5.35
	5932.500	-47.62	-13	-34.62	-54.84	13.02	5.80
V	1695.000	-47.39	-13	-34.39	-53.79	9.43	3.03
	2542.500	-53.54	-13	-40.54	-60.49	10.68	3.73
	3390.000	-53.96	-13	-40.96	-62.00	12.37	4.33
	4237.500	-51.71	-13	-38.71	-59.52	12.63	4.82
	5085.000	-48.28	-13	-35.28	-55.66	12.73	5.35
	5932.500	-47.64	-13	-34.64	-54.86	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 20635_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1695.000	-52.20	-13	-39.20	-58.60	9.43	3.03
	2542.500	-54.86	-13	-41.86	-61.81	10.68	3.73
	3390.000	-53.99	-13	-40.99	-62.03	12.37	4.33
	4237.500	-51.75	-13	-38.75	-59.56	12.63	4.82
	5085.000	-48.32	-13	-35.32	-55.70	12.73	5.35
	5932.500	-47.68	-13	-34.68	-54.90	13.02	5.80
V	1695.000	-46.99	-13	-33.99	-53.39	9.43	3.03
	2542.500	-54.07	-13	-41.07	-61.02	10.68	3.73
	3390.000	-53.98	-13	-40.98	-62.02	12.37	4.33
	4237.500	-51.73	-13	-38.73	-59.54	12.63	4.82
	5085.000	-48.30	-13	-35.30	-55.68	12.73	5.35
	5932.500	-47.66	-13	-34.66	-54.88	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20425_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1653.000	-50.60	-13	-37.60	-56.91	9.30	2.99
	2479.500	-45.99	-13	-32.99	-52.89	10.59	3.69
	3306.000	-54.63	-13	-41.63	-62.55	12.19	4.27
	4132.500	-51.03	-13	-38.03	-58.90	12.62	4.75
	4959.000	-48.09	-13	-35.09	-55.47	12.65	5.27
	5785.500	-47.22	-13	-34.22	-54.53	13.06	5.75
V	1653.000	-43.94	-13	-30.94	-50.25	9.30	2.99
	2479.500	-47.24	-13	-34.24	-54.14	10.59	3.69
	3306.000	-54.65	-13	-41.65	-62.57	12.19	4.27
	4132.500	-51.05	-13	-38.05	-58.92	12.62	4.75
	4959.000	-48.11	-13	-35.11	-55.49	12.65	5.27
	5785.500	-47.24	-13	-34.24	-54.55	13.06	5.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20425_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1653.000	-50.15	-13	-37.15	-56.46	9.30	2.99
	2479.500	-44.89	-13	-31.89	-51.79	10.59	3.69
	3306.000	-54.69	-13	-41.69	-62.61	12.19	4.27
	4132.500	-51.09	-13	-38.09	-58.96	12.62	4.75
	4959.000	-48.15	-13	-35.15	-55.53	12.65	5.27
	5785.500	-47.28	-13	-34.28	-54.59	13.06	5.75
V	1653.000	-42.52	-13	-29.52	-48.83	9.30	2.99
	2479.500	-46.39	-13	-33.39	-53.29	10.59	3.69
	3306.000	-54.67	-13	-41.67	-62.59	12.19	4.27
	4132.500	-51.07	-13	-38.07	-58.94	12.62	4.75
	4959.000	-48.13	-13	-35.13	-55.51	12.65	5.27
	5785.500	-47.26	-13	-34.26	-54.57	13.06	5.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20525_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-53.89	-13	-40.89	-60.24	9.36	3.01
	2509.500	-51.46	-13	-38.46	-58.37	10.62	3.71
	3346.000	-53.91	-13	-40.91	-61.89	12.27	4.30
	4182.500	-51.16	-13	-38.16	-59.00	12.62	4.78
	5019.000	-48.79	-13	-35.79	-56.15	12.67	5.31
	5855.500	-47.33	-13	-34.33	-54.60	13.04	5.77
V	1673.000	-49.46	-13	-36.46	-55.81	9.36	3.01
	2509.500	-52.54	-13	-39.54	-59.45	10.62	3.71
	3346.000	-53.89	-13	-40.89	-61.87	12.27	4.30
	4182.500	-51.14	-13	-38.14	-58.98	12.62	4.78
	5019.000	-48.77	-13	-35.77	-56.13	12.67	5.31
	5855.500	-47.31	-13	-34.31	-54.58	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20525_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-53.74	-13	-40.74	-60.09	9.36	3.01
	2509.500	-52.79	-13	-39.79	-59.70	10.62	3.71
	3346.000	-53.85	-13	-40.85	-61.83	12.27	4.30
	4182.500	-51.10	-13	-38.10	-58.94	12.62	4.78
	5019.000	-48.73	-13	-35.73	-56.09	12.67	5.31
	5855.500	-47.27	-13	-34.27	-54.54	13.04	5.77
V	1673.000	-48.65	-13	-35.65	-55.00	9.36	3.01
	2509.500	-51.99	-13	-38.99	-58.90	10.62	3.71
	3346.000	-53.87	-13	-40.87	-61.85	12.27	4.30
	4182.500	-51.12	-13	-38.12	-58.96	12.62	4.78
	5019.000	-48.75	-13	-35.75	-56.11	12.67	5.31
	5855.500	-47.29	-13	-34.29	-54.56	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20625_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1693.000	-52.97	-13	-39.97	-59.36	9.42	3.03
	2539.500	-53.97	-13	-40.97	-60.91	10.67	3.73
	3386.000	-53.69	-13	-40.69	-61.72	12.36	4.33
	4232.500	-51.72	-13	-38.72	-59.53	12.63	4.82
	5079.000	-47.92	-13	-34.92	-55.30	12.73	5.35
	5925.500	-47.05	-13	-34.05	-54.28	13.02	5.79
V	1693.000	-48.46	-13	-35.46	-54.85	9.42	3.03
	2539.500	-53.12	-13	-40.12	-60.06	10.67	3.73
	3386.000	-53.71	-13	-40.71	-61.74	12.36	4.33
	4232.500	-51.74	-13	-38.74	-59.55	12.63	4.82
	5079.000	-47.94	-13	-34.94	-55.32	12.73	5.35
	5925.500	-47.07	-13	-34.07	-54.30	13.02	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 20625_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1693.000	-53.27	-13	-40.27	-59.66	9.42	3.03
	2539.500	-53.01	-13	-40.01	-59.95	10.67	3.73
	3386.000	-53.75	-13	-40.75	-61.78	12.36	4.33
	4232.500	-51.78	-13	-38.78	-59.59	12.63	4.82
	5079.000	-47.98	-13	-34.98	-55.36	12.73	5.35
	5925.500	-47.11	-13	-34.11	-54.34	13.02	5.79
V	1693.000	-45.49	-13	-32.49	-51.88	9.42	3.03
	2539.500	-53.28	-13	-40.28	-60.22	10.67	3.73
	3386.000	-53.73	-13	-40.73	-61.76	12.36	4.33
	4232.500	-51.76	-13	-38.76	-59.57	12.63	4.82
	5079.000	-47.96	-13	-34.96	-55.34	12.73	5.35
	5925.500	-47.09	-13	-34.09	-54.32	13.02	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20450_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1658.000	-51.07	-13	-38.07	-57.39	9.32	3.00
	2487.000	-44.14	-13	-31.14	-51.04	10.59	3.69
	3316.000	-53.57	-13	-40.57	-61.50	12.21	4.28
	4145.000	-52.09	-13	-39.09	-59.95	12.62	4.76
	4974.000	-48.14	-13	-35.14	-55.51	12.65	5.28
	5803.000	-46.80	-13	-33.80	-54.10	13.06	5.75
V	1658.000	-45.40	-13	-32.40	-51.72	9.32	3.00
	2487.000	-47.09	-13	-34.09	-53.99	10.59	3.69
	3316.000	-53.55	-13	-40.55	-61.48	12.21	4.28
	4145.000	-52.07	-13	-39.07	-59.93	12.62	4.76
	4974.000	-48.12	-13	-35.12	-55.49	12.65	5.28
	5803.000	-46.78	-13	-33.78	-54.08	13.06	5.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20450_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1658.000	-51.75	-13	-38.75	-58.07	9.32	3.00
	2487.000	-43.59	-13	-30.59	-50.49	10.59	3.69
	3316.000	-53.51	-13	-40.51	-61.44	12.21	4.28
	4145.000	-52.05	-13	-39.05	-59.91	12.62	4.76
	4974.000	-48.10	-13	-35.10	-55.47	12.65	5.28
	5803.000	-46.76	-13	-33.76	-54.06	13.06	5.75
V	1658.000	-44.28	-13	-31.28	-50.60	9.32	3.00
	2487.000	-45.26	-13	-32.26	-52.16	10.59	3.69
	3316.000	-53.61	-13	-40.61	-61.54	12.21	4.28
	4145.000	-52.15	-13	-39.15	-60.01	12.62	4.76
	4974.000	-48.20	-13	-35.20	-55.57	12.65	5.28
	5803.000	-46.86	-13	-33.86	-54.16	13.06	5.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20525_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-54.20	-13	-41.20	-60.55	9.36	3.01
	2509.500	-52.35	-13	-39.35	-59.26	10.62	3.71
	3346.000	-53.42	-13	-40.42	-61.40	12.27	4.30
	4182.500	-51.59	-13	-38.59	-59.43	12.62	4.78
	5019.000	-47.45	-13	-34.45	-54.81	12.67	5.31
	5855.500	-47.25	-13	-34.25	-54.52	13.04	5.77
V	1673.000	-48.77	-13	-35.77	-55.12	9.36	3.01
	2509.500	-51.89	-13	-38.89	-58.80	10.62	3.71
	3346.000	-53.44	-13	-40.44	-61.42	12.27	4.30
	4182.500	-51.61	-13	-38.61	-59.45	12.62	4.78
	5019.000	-47.47	-13	-34.47	-54.83	12.67	5.31
	5855.500	-47.27	-13	-34.27	-54.54	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20525_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-54.11	-13	-41.11	-60.46	9.36	3.01
	2509.500	-52.26	-13	-39.26	-59.17	10.62	3.71
	3346.000	-53.40	-13	-40.40	-61.38	12.27	4.30
	4182.500	-51.57	-13	-38.57	-59.41	12.62	4.78
	5019.000	-47.43	-13	-34.43	-54.79	12.67	5.31
	5855.500	-47.23	-13	-34.23	-54.50	13.04	5.77
V	1673.000	-46.13	-13	-33.13	-52.48	9.36	3.01
	2509.500	-51.52	-13	-38.52	-58.43	10.62	3.71
	3346.000	-53.38	-13	-40.38	-61.36	12.27	4.30
	4182.500	-51.55	-13	-38.55	-59.39	12.62	4.78
	5019.000	-47.41	-13	-34.41	-54.77	12.67	5.31
	5855.500	-47.21	-13	-34.21	-54.48	13.04	5.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20600_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1688.000	-50.03	-13	-37.03	-56.41	9.41	3.02
	2532.000	-50.29	-13	-37.29	-57.22	10.66	3.73
	3376.000	-53.70	-13	-40.70	-61.72	12.34	4.32
	4220.000	-51.43	-13	-38.43	-59.25	12.63	4.81
	5064.000	-48.08	-13	-35.08	-55.45	12.71	5.34
	5908.000	-46.74	-13	-33.74	-53.98	13.03	5.79
V	1688.000	-45.03	-13	-32.03	-51.41	9.41	3.02
	2532.000	-49.74	-13	-36.74	-56.67	10.66	3.73
	3376.000	-53.68	-13	-40.68	-61.70	12.34	4.32
	4220.000	-51.41	-13	-38.41	-59.23	12.63	4.81
	5064.000	-48.06	-13	-35.06	-55.43	12.71	5.34
	5908.000	-46.72	-13	-33.72	-53.96	13.03	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 20600_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1688.000	-51.14	-13	-38.14	-57.52	9.41	3.02
	2532.000	-50.82	-13	-37.82	-57.75	10.66	3.73
	3376.000	-53.72	-13	-40.72	-61.74	12.34	4.32
	4220.000	-51.45	-13	-38.45	-59.27	12.63	4.81
	5064.000	-48.10	-13	-35.10	-55.47	12.71	5.34
	5908.000	-46.76	-13	-33.76	-54.00	13.03	5.79
V	1688.000	-41.71	-13	-28.71	-48.09	9.41	3.02
	2532.000	-50.39	-13	-37.39	-57.32	10.66	3.73
	3376.000	-53.74	-13	-40.74	-61.76	12.34	4.32
	4220.000	-51.47	-13	-38.47	-59.29	12.63	4.81
	5064.000	-48.12	-13	-35.12	-55.49	12.71	5.34
	5908.000	-46.78	-13	-33.78	-54.02	13.03	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 4: LTE Band 12		
Date of Test	2019/08/06	Test Site	SR10-H

BW 1.400M_CH 23017_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1399.400	-43.58	-13	-30.58	-49.10	8.26	2.74
	2099.100	-53.36	-13	-40.36	-60.36	10.40	3.40
	2798.800	-52.58	-13	-39.58	-59.82	11.15	3.91
	3498.500	-46.37	-13	-33.37	-54.57	12.61	4.41
	4198.200	-38.16	-13	-25.16	-45.99	12.62	4.79
	4897.900	-48.89	-13	-35.89	-56.31	12.65	5.23
V	1399.400	-33.96	-13	-20.96	-39.48	8.26	2.74
	2099.100	-40.20	-13	-27.20	-47.20	10.40	3.40
	2798.800	-52.41	-13	-39.41	-59.65	11.15	3.91
	3498.500	-46.72	-13	-33.72	-54.92	12.61	4.41
	4198.200	-38.50	-13	-25.50	-46.33	12.62	4.79
	4897.900	-48.66	-13	-35.66	-56.08	12.65	5.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 23017_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1399.400	-43.70	-13	-30.70	-49.22	8.26	2.74
	2099.100	-53.78	-13	-40.78	-60.78	10.40	3.40
	2798.800	-52.48	-13	-39.48	-59.72	11.15	3.91
	3498.500	-45.65	-13	-32.65	-53.85	12.61	4.41
	4198.200	-37.64	-13	-24.64	-45.47	12.62	4.79
	4897.900	-48.70	-13	-35.70	-56.12	12.65	5.23
V	1399.400	-33.55	-13	-20.55	-39.07	8.26	2.74
	2099.100	-40.56	-13	-27.56	-47.56	10.40	3.40
	2798.800	-52.34	-13	-39.34	-59.58	11.15	3.91
	3498.500	-46.64	-13	-33.64	-54.84	12.61	4.41
	4198.200	-38.04	-13	-25.04	-45.87	12.62	4.79
	4897.900	-48.68	-13	-35.68	-56.10	12.65	5.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 23095_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-46.55	-13	-33.55	-52.15	8.35	2.75
	2122.500	-54.23	-13	-41.23	-61.22	10.41	3.42
	2830.000	-53.45	-13	-40.45	-60.73	11.21	3.93
	3537.500	-49.30	-13	-36.30	-57.48	12.61	4.43
	4245.000	-42.12	-13	-29.12	-49.92	12.63	4.83
	4952.500	-46.51	-13	-33.51	-53.90	12.65	5.26
V	1415.000	-41.04	-13	-28.04	-46.64	8.35	2.75
	2122.500	-47.78	-13	-34.78	-54.77	10.41	3.42
	2830.000	-53.88	-13	-40.88	-61.16	11.21	3.93
	3537.500	-50.54	-13	-37.54	-58.72	12.61	4.43
	4245.000	-46.29	-13	-33.29	-54.09	12.63	4.83
	4952.500	-46.45	-13	-33.45	-53.84	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 23095_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-46.10	-13	-33.10	-51.70	8.35	2.75
	2122.500	-55.01	-13	-42.01	-62.00	10.41	3.42
	2830.000	-52.60	-13	-39.60	-59.88	11.21	3.93
	3537.500	-49.68	-13	-36.68	-57.86	12.61	4.43
	4245.000	-42.57	-13	-29.57	-50.37	12.63	4.83
	4952.500	-46.49	-13	-33.49	-53.88	12.65	5.26
V	1415.000	-38.83	-13	-25.83	-44.43	8.35	2.75
	2122.500	-46.66	-13	-33.66	-53.65	10.41	3.42
	2830.000	-52.74	-13	-39.74	-60.02	11.21	3.93
	3537.500	-49.54	-13	-36.54	-57.72	12.61	4.43
	4245.000	-44.74	-13	-31.74	-52.54	12.63	4.83
	4952.500	-46.47	-13	-33.47	-53.86	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 23173_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1430.600	-42.17	-13	-29.17	-47.84	8.44	2.77
	2145.900	-54.79	-13	-41.79	-61.78	10.42	3.43
	2861.200	-52.29	-13	-39.29	-59.61	11.26	3.95
	3576.500	-39.78	-13	-26.78	-47.94	12.61	4.45
	4291.800	-45.72	-13	-32.72	-53.50	12.64	4.86
	5007.100	-48.17	-13	-35.17	-55.53	12.66	5.30
V	1430.600	-33.25	-13	-20.25	-38.92	8.44	2.77
	2145.900	-48.21	-13	-35.21	-55.20	10.42	3.43
	2861.200	-51.74	-13	-38.74	-59.06	11.26	3.95
	3576.500	-40.86	-13	-27.86	-49.02	12.61	4.45
	4291.800	-47.58	-13	-34.58	-55.36	12.64	4.86
	5007.100	-48.08	-13	-35.08	-55.44	12.66	5.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 23173_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1430.600	-41.24	-13	-28.24	-46.91	8.44	2.77
	2145.900	-55.86	-13	-42.86	-62.85	10.42	3.43
	2861.200	-52.25	-13	-39.25	-59.57	11.26	3.95
	3576.500	-39.70	-13	-26.70	-47.86	12.61	4.45
	4291.800	-44.73	-13	-31.73	-52.51	12.64	4.86
	5007.100	-48.14	-13	-35.14	-55.50	12.66	5.30
V	1430.600	-32.93	-13	-19.93	-38.60	8.44	2.77
	2145.900	-48.45	-13	-35.45	-55.44	10.42	3.43
	2861.200	-51.79	-13	-38.79	-59.11	11.26	3.95
	3576.500	-40.96	-13	-27.96	-49.12	12.61	4.45
	4291.800	-46.37	-13	-33.37	-54.15	12.64	4.86
	5007.100	-48.11	-13	-35.11	-55.47	12.66	5.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 23025_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1401.000	-41.35	-13	-28.35	-46.88	8.27	2.74
	2101.500	-53.03	-13	-40.03	-60.03	10.40	3.40
	2802.000	-51.93	-13	-38.93	-59.18	11.16	3.91
	3502.500	-45.68	-13	-32.68	-53.88	12.61	4.41
	4203.000	-35.41	-13	-22.41	-43.24	12.62	4.80
	4903.500	-46.69	-13	-33.69	-54.11	12.65	5.24
V	1401.000	-34.05	-13	-21.05	-39.58	8.27	2.74
	2101.500	-42.45	-13	-29.45	-49.45	10.40	3.40
	2802.000	-52.16	-13	-39.16	-59.41	11.16	3.91
	3502.500	-47.00	-13	-34.00	-55.20	12.61	4.41
	4203.000	-37.16	-13	-24.16	-44.99	12.62	4.80
	4903.500	-46.60	-13	-33.60	-54.02	12.65	5.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 23025_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1401.000	-42.74	-13	-29.74	-48.27	8.27	2.74
	2101.500	-52.76	-13	-39.76	-59.76	10.40	3.40
	2802.000	-52.41	-13	-39.41	-59.66	11.16	3.91
	3502.500	-46.86	-13	-33.86	-55.06	12.61	4.41
	4203.000	-36.55	-13	-23.55	-44.38	12.62	4.80
	4903.500	-46.66	-13	-33.66	-54.08	12.65	5.24
V	1401.000	-34.12	-13	-21.12	-39.65	8.27	2.74
	2101.500	-41.91	-13	-28.91	-48.91	10.40	3.40
	2802.000	-52.23	-13	-39.23	-59.48	11.16	3.91
	3502.500	-48.20	-13	-35.20	-56.40	12.61	4.41
	4203.000	-38.65	-13	-25.65	-46.48	12.62	4.80
	4903.500	-46.63	-13	-33.63	-54.05	12.65	5.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 23095_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-47.54	-13	-34.54	-53.14	8.35	2.75
	2122.500	-54.56	-13	-41.56	-61.55	10.41	3.42
	2830.000	-54.11	-13	-41.11	-61.39	11.21	3.93
	3537.500	-50.37	-13	-37.37	-58.55	12.61	4.43
	4245.000	-40.91	-13	-27.91	-48.71	12.63	4.83
	4952.500	-45.57	-13	-32.57	-52.96	12.65	5.26
V	1415.000	-40.86	-13	-27.86	-46.46	8.35	2.75
	2122.500	-46.48	-13	-33.48	-53.47	10.41	3.42
	2830.000	-53.12	-13	-40.12	-60.40	11.21	3.93
	3537.500	-49.75	-13	-36.75	-57.93	12.61	4.43
	4245.000	-43.04	-13	-30.04	-50.84	12.63	4.83
	4952.500	-45.47	-13	-32.47	-52.86	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 23095_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-46.94	-13	-33.94	-52.54	8.35	2.75
	2122.500	-54.79	-13	-41.79	-61.78	10.41	3.42
	2830.000	-53.60	-13	-40.60	-60.88	11.21	3.93
	3537.500	-49.74	-13	-36.74	-57.92	12.61	4.43
	4245.000	-42.28	-13	-29.28	-50.08	12.63	4.83
	4952.500	-45.54	-13	-32.54	-52.93	12.65	5.26
V	1415.000	-39.67	-13	-26.67	-45.27	8.35	2.75
	2122.500	-46.61	-13	-33.61	-53.60	10.41	3.42
	2830.000	-53.54	-13	-40.54	-60.82	11.21	3.93
	3537.500	-49.73	-13	-36.73	-57.91	12.61	4.43
	4245.000	-43.35	-13	-30.35	-51.15	12.63	4.83
	4952.500	-45.51	-13	-32.51	-52.90	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 23165_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1429.000	-42.03	-13	-29.03	-47.69	8.43	2.77
	2143.500	-55.30	-13	-42.30	-62.29	10.42	3.43
	2858.000	-52.84	-13	-39.84	-60.15	11.26	3.95
	3572.500	-39.87	-13	-26.87	-48.03	12.61	4.45
	4287.000	-42.84	-13	-29.84	-50.62	12.63	4.85
	5001.500	-46.23	-13	-33.23	-53.59	12.65	5.29
V	1429.000	-33.09	-13	-20.09	-38.75	8.43	2.77
	2143.500	-46.04	-13	-33.04	-53.03	10.42	3.43
	2858.000	-53.06	-13	-40.06	-60.37	11.26	3.95
	3572.500	-41.92	-13	-28.92	-50.08	12.61	4.45
	4287.000	-44.39	-13	-31.39	-52.17	12.63	4.85
	5001.500	-46.33	-13	-33.33	-53.69	12.65	5.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 23165_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1429.000	-41.09	-13	-28.09	-46.75	8.43	2.77
	2143.500	-55.38	-13	-42.38	-62.37	10.42	3.43
	2858.000	-53.50	-13	-40.50	-60.81	11.26	3.95
	3572.500	-41.54	-13	-28.54	-49.70	12.61	4.45
	4287.000	-42.87	-13	-29.87	-50.65	12.63	4.85
	5001.500	-46.26	-13	-33.26	-53.62	12.65	5.29
V	1429.000	-33.43	-13	-20.43	-39.09	8.43	2.77
	2143.500	-45.41	-13	-32.41	-52.40	10.42	3.43
	2858.000	-52.79	-13	-39.79	-60.10	11.26	3.95
	3572.500	-42.86	-13	-29.86	-51.02	12.61	4.45
	4287.000	-44.31	-13	-31.31	-52.09	12.63	4.85
	5001.500	-46.29	-13	-33.29	-53.65	12.65	5.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23035_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1403.000	-40.84	-13	-27.84	-46.38	8.28	2.74
	2104.500	-53.26	-13	-40.26	-60.26	10.40	3.40
	2806.000	-52.12	-13	-39.12	-59.37	11.16	3.91
	3507.500	-47.31	-13	-34.31	-55.51	12.61	4.41
	4209.000	-36.47	-13	-23.47	-44.29	12.63	4.80
	4910.500	-46.70	-13	-33.70	-54.11	12.65	5.24
V	1403.000	-32.65	-13	-19.65	-38.19	8.28	2.74
	2104.500	-42.28	-13	-29.28	-49.28	10.40	3.40
	2806.000	-53.00	-13	-40.00	-60.25	11.16	3.91
	3507.500	-47.24	-13	-34.24	-55.44	12.61	4.41
	4209.000	-37.91	-13	-24.91	-45.73	12.63	4.80
	4910.500	-46.79	-13	-33.79	-54.20	12.65	5.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23035_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1403.000	-40.10	-13	-27.10	-45.64	8.28	2.74
	2104.500	-53.63	-13	-40.63	-60.63	10.40	3.40
	2806.000	-52.82	-13	-39.82	-60.07	11.16	3.91
	3507.500	-47.25	-13	-34.25	-55.45	12.61	4.41
	4209.000	-35.89	-13	-22.89	-43.71	12.63	4.80
	4910.500	-46.73	-13	-33.73	-54.14	12.65	5.24
V	1403.000	-32.99	-13	-19.99	-38.53	8.28	2.74
	2104.500	-42.03	-13	-29.03	-49.03	10.40	3.40
	2806.000	-52.56	-13	-39.56	-59.81	11.16	3.91
	3507.500	-48.04	-13	-35.04	-56.24	12.61	4.41
	4209.000	-38.76	-13	-25.76	-46.58	12.63	4.80
	4910.500	-46.76	-13	-33.76	-54.17	12.65	5.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23095_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-47.19	-13	-34.19	-52.79	8.35	2.75
	2122.500	-55.29	-13	-42.29	-62.28	10.41	3.42
	2830.000	-53.35	-13	-40.35	-60.63	11.21	3.93
	3537.500	-50.38	-13	-37.38	-58.56	12.61	4.43
	4245.000	-41.54	-13	-28.54	-49.34	12.63	4.83
	4952.500	-45.75	-13	-32.75	-53.14	12.65	5.26
V	1415.000	-40.09	-13	-27.09	-45.69	8.35	2.75
	2122.500	-47.35	-13	-34.35	-54.34	10.41	3.42
	2830.000	-53.02	-13	-40.02	-60.30	11.21	3.93
	3537.500	-50.05	-13	-37.05	-58.23	12.61	4.43
	4245.000	-42.80	-13	-29.80	-50.60	12.63	4.83
	4952.500	-45.66	-13	-32.66	-53.05	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23095_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-46.96	-13	-33.96	-52.56	8.35	2.75
	2122.500	-54.46	-13	-41.46	-61.45	10.41	3.42
	2830.000	-53.11	-13	-40.11	-60.39	11.21	3.93
	3537.500	-50.65	-13	-37.65	-58.83	12.61	4.43
	4245.000	-40.92	-13	-27.92	-48.72	12.63	4.83
	4952.500	-45.72	-13	-32.72	-53.11	12.65	5.26
V	1415.000	-39.10	-13	-26.10	-44.70	8.35	2.75
	2122.500	-46.82	-13	-33.82	-53.81	10.41	3.42
	2830.000	-52.18	-13	-39.18	-59.46	11.21	3.93
	3537.500	-49.60	-13	-36.60	-57.78	12.61	4.43
	4245.000	-43.46	-13	-30.46	-51.26	12.63	4.83
	4952.500	-45.69	-13	-32.69	-53.08	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23155_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1427.000	-41.15	-13	-28.15	-46.80	8.42	2.77
	2140.500	-52.63	-13	-39.63	-59.62	10.42	3.43
	2854.000	-51.80	-13	-38.80	-59.11	11.25	3.94
	3567.500	-41.34	-13	-28.34	-49.50	12.61	4.44
	4281.000	-40.48	-13	-27.48	-48.26	12.63	4.85
	4994.500	-45.89	-13	-32.89	-53.25	12.65	5.29
V	1427.000	-33.23	-13	-20.23	-38.88	8.42	2.77
	2140.500	-43.31	-13	-30.31	-50.30	10.42	3.43
	2854.000	-52.88	-13	-39.88	-60.19	11.25	3.94
	3567.500	-43.37	-13	-30.37	-51.53	12.61	4.44
	4281.000	-43.02	-13	-30.02	-50.80	12.63	4.85
	4994.500	-45.80	-13	-32.80	-53.16	12.65	5.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23155_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1427.000	-42.23	-13	-29.23	-47.88	8.42	2.77
	2140.500	-52.16	-13	-39.16	-59.15	10.42	3.43
	2854.000	-53.57	-13	-40.57	-60.88	11.25	3.94
	3567.500	-43.31	-13	-30.31	-51.47	12.61	4.44
	4281.000	-41.22	-13	-28.22	-49.00	12.63	4.85
	4994.500	-45.86	-13	-32.86	-53.22	12.65	5.29
V	1427.000	-33.67	-13	-20.67	-39.32	8.42	2.77
	2140.500	-42.60	-13	-29.60	-49.59	10.42	3.43
	2854.000	-52.74	-13	-39.74	-60.05	11.25	3.94
	3567.500	-44.83	-13	-31.83	-52.99	12.61	4.44
	4281.000	-42.88	-13	-29.88	-50.66	12.63	4.85
	4994.500	-45.83	-13	-32.83	-53.19	12.65	5.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23060_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1408.000	-39.01	-13	-26.01	-44.57	8.31	2.75
	2112.000	-52.72	-13	-39.72	-59.72	10.41	3.41
	2816.000	-53.09	-13	-40.09	-60.35	11.18	3.92
	3520.000	-44.52	-13	-31.52	-52.71	12.61	4.42
	4224.000	-39.63	-13	-26.63	-47.45	12.63	4.81
	4928.000	-46.74	-13	-33.74	-54.14	12.65	5.25
V	1408.000	-31.00	-13	-18.00	-36.56	8.31	2.75
	2112.000	-43.86	-13	-30.86	-50.86	10.41	3.41
	2816.000	-53.15	-13	-40.15	-60.41	11.18	3.92
	3520.000	-44.69	-13	-31.69	-52.88	12.61	4.42
	4224.000	-41.58	-13	-28.58	-49.40	12.63	4.81
	4928.000	-46.65	-13	-33.65	-54.05	12.65	5.25

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23060_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1408.000	-40.09	-13	-27.09	-45.65	8.31	2.75
	2112.000	-54.21	-13	-41.21	-61.21	10.41	3.41
	2816.000	-53.68	-13	-40.68	-60.94	11.18	3.92
	3520.000	-45.98	-13	-32.98	-54.17	12.61	4.42
	4224.000	-39.61	-13	-26.61	-47.43	12.63	4.81
	4928.000	-46.71	-13	-33.71	-54.11	12.65	5.25
V	1408.000	-31.42	-13	-18.42	-36.98	8.31	2.75
	2112.000	-42.71	-13	-29.71	-49.71	10.41	3.41
	2816.000	-53.80	-13	-40.80	-61.06	11.18	3.92
	3520.000	-46.00	-13	-33.00	-54.19	12.61	4.42
	4224.000	-41.53	-13	-28.53	-49.35	12.63	4.81
	4928.000	-46.68	-13	-33.68	-54.08	12.65	5.25

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23095_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-46.87	-13	-33.87	-52.47	8.35	2.75
	2122.500	-54.19	-13	-41.19	-61.18	10.41	3.42
	2830.000	-53.03	-13	-40.03	-60.31	11.21	3.93
	3537.500	-49.45	-13	-36.45	-57.63	12.61	4.43
	4245.000	-43.58	-13	-30.58	-51.38	12.63	4.83
	4952.500	-46.67	-13	-33.67	-54.06	12.65	5.26
V	1415.000	-40.00	-13	-27.00	-45.60	8.35	2.75
	2122.500	-47.83	-13	-34.83	-54.82	10.41	3.42
	2830.000	-52.85	-13	-39.85	-60.13	11.21	3.93
	3537.500	-50.47	-13	-37.47	-58.65	12.61	4.43
	4245.000	-45.45	-13	-32.45	-53.25	12.63	4.83
	4952.500	-46.79	-13	-33.79	-54.18	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23095_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1415.000	-46.22	-13	-33.22	-51.82	8.35	2.75
	2122.500	-53.12	-13	-40.12	-60.11	10.41	3.42
	2830.000	-53.57	-13	-40.57	-60.85	11.21	3.93
	3537.500	-49.43	-13	-36.43	-57.61	12.61	4.43
	4245.000	-42.81	-13	-29.81	-50.61	12.63	4.83
	4952.500	-46.71	-13	-33.71	-54.10	12.65	5.26
V	1415.000	-39.16	-13	-26.16	-44.76	8.35	2.75
	2122.500	-47.32	-13	-34.32	-54.31	10.41	3.42
	2830.000	-52.87	-13	-39.87	-60.15	11.21	3.93
	3537.500	-49.92	-13	-36.92	-58.10	12.61	4.43
	4245.000	-44.95	-13	-31.95	-52.75	12.63	4.83
	4952.500	-46.75	-13	-33.75	-54.14	12.65	5.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23130_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1422.000	-44.73	-13	-31.73	-50.36	8.39	2.76
	2133.000	-51.38	-13	-38.38	-58.37	10.42	3.42
	2844.000	-52.07	-13	-39.07	-59.37	11.23	3.94
	3555.000	-43.20	-13	-30.20	-51.37	12.61	4.44
	4266.000	-41.17	-13	-28.17	-48.96	12.63	4.84
	4977.000	-46.09	-13	-33.09	-53.46	12.65	5.28
V	1422.000	-36.89	-13	-23.89	-42.52	8.39	2.76
	2133.000	-39.63	-13	-26.63	-46.62	10.42	3.42
	2844.000	-50.52	-13	-37.52	-57.82	11.23	3.94
	3555.000	-43.47	-13	-30.47	-51.64	12.61	4.44
	4266.000	-43.10	-13	-30.10	-50.89	12.63	4.84
	4977.000	-46.29	-13	-33.29	-53.66	12.65	5.28

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23130_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1422.000	-45.76	-13	-32.76	-51.39	8.39	2.76
	2133.000	-52.71	-13	-39.71	-59.70	10.42	3.42
	2844.000	-53.44	-13	-40.44	-60.74	11.23	3.94
	3555.000	-47.30	-13	-34.30	-55.47	12.61	4.44
	4266.000	-42.61	-13	-29.61	-50.40	12.63	4.84
	4977.000	-46.14	-13	-33.14	-53.51	12.65	5.28
V	1422.000	-37.81	-13	-24.81	-43.44	8.39	2.76
	2133.000	-41.22	-13	-28.22	-48.21	10.42	3.42
	2844.000	-52.84	-13	-39.84	-60.14	11.23	3.94
	3555.000	-46.95	-13	-33.95	-55.12	12.61	4.44
	4266.000	-43.80	-13	-30.80	-51.59	12.63	4.84
	4977.000	-46.19	-13	-33.19	-53.56	12.65	5.28

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 5: LTE Band 13		
Date of Test	2019/08/14	Test Site	SR10-H

BW 5.000M_CH 23205_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1559.000	-61.92	-13	-48.92	-68.04	9.02	2.90
	2338.500	-60.26	-13	-47.26	-67.20	10.52	3.58
	3118.000	-56.98	-13	-43.98	-64.63	11.78	4.13
	3897.500	-55.77	-13	-42.77	-63.77	12.60	4.61
	4677.000	-53.71	-13	-40.71	-61.26	12.66	5.10
	5456.500	-52.13	-13	-39.13	-59.61	13.10	5.62
V	1559.000	-57.05	-13	-44.05	-63.17	9.02	2.90
	2338.500	-59.28	-13	-46.28	-66.22	10.52	3.58
	3118.000	-54.38	-13	-41.38	-62.03	11.78	4.13
	3897.500	-56.20	-13	-43.20	-64.20	12.60	4.61
	4677.000	-53.31	-13	-40.31	-60.86	12.66	5.10
	5456.500	-51.99	-13	-38.99	-59.47	13.10	5.62

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23205_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1559.000	-64.50	-13	-51.50	-70.62	9.02	2.90
	2338.500	-60.20	-13	-47.20	-67.14	10.52	3.58
	3118.000	-56.92	-13	-43.92	-64.57	11.78	4.13
	3897.500	-55.81	-13	-42.81	-63.81	12.60	4.61
	4677.000	-53.44	-13	-40.44	-60.99	12.66	5.10
	5456.500	-52.36	-13	-39.36	-59.84	13.10	5.62
V	1559.000	-56.59	-13	-43.59	-62.71	9.02	2.90
	2338.500	-59.38	-13	-46.38	-66.32	10.52	3.58
	3118.000	-55.65	-13	-42.65	-63.30	11.78	4.13
	3897.500	-55.81	-13	-42.81	-63.81	12.60	4.61
	4677.000	-54.00	-13	-41.00	-61.55	12.66	5.10
	5456.500	-52.02	-13	-39.02	-59.50	13.10	5.62

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23230_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1564.000	-60.89	-13	-47.89	-67.02	9.03	2.91
	2346.000	-57.12	-13	-44.12	-64.06	10.52	3.59
	3128.000	-57.41	-13	-44.41	-65.07	11.80	4.14
	3910.000	-55.67	-13	-42.67	-63.66	12.60	4.61
	4692.000	-53.85	-13	-40.85	-61.39	12.66	5.11
	5474.000	-52.63	-13	-39.63	-60.11	13.11	5.63
V	1564.000	-55.91	-13	-42.91	-62.04	9.03	2.91
	2346.000	-57.41	-13	-44.41	-64.35	10.52	3.59
	3128.000	-57.21	-13	-44.21	-64.87	11.80	4.14
	3910.000	-55.56	-13	-42.56	-63.55	12.60	4.61
	4692.000	-53.17	-13	-40.17	-60.71	12.66	5.11
	5474.000	-51.78	-13	-38.78	-59.26	13.11	5.63

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23230_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1564.000	-61.23	-13	-48.23	-67.36	9.03	2.91
	2346.000	-57.62	-13	-44.62	-64.56	10.52	3.59
	3128.000	-57.40	-13	-44.40	-65.06	11.80	4.14
	3910.000	-55.68	-13	-42.68	-63.67	12.60	4.61
	4692.000	-53.68	-13	-40.68	-61.22	12.66	5.11
	5474.000	-52.17	-13	-39.17	-59.65	13.11	5.63
V	1564.000	-55.01	-13	-42.01	-61.14	9.03	2.91
	2346.000	-57.29	-13	-44.29	-64.23	10.52	3.59
	3128.000	-56.49	-13	-43.49	-64.15	11.80	4.14
	3910.000	-55.62	-13	-42.62	-63.61	12.60	4.61
	4692.000	-53.96	-13	-40.96	-61.50	12.66	5.11
	5474.000	-51.57	-13	-38.57	-59.05	13.11	5.63

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23255_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1569.000	-57.82	-13	-44.82	-63.96	9.05	2.91
	2353.500	-58.45	-13	-45.45	-65.38	10.53	3.59
	3138.000	-57.28	-13	-44.28	-64.96	11.82	4.14
	3922.500	-56.19	-13	-43.19	-64.17	12.60	4.62
	4707.000	-53.74	-13	-40.74	-61.27	12.66	5.12
	5416.500	-52.60	-13	-39.60	-60.07	13.06	5.59
V	1569.000	-52.56	-13	-39.56	-58.70	9.05	2.91
	2353.500	-57.53	-13	-44.53	-64.46	10.53	3.59
	3138.000	-58.23	-13	-45.23	-65.91	11.82	4.14
	3922.500	-56.06	-13	-43.06	-64.04	12.60	4.62
	4707.000	-54.10	-13	-41.10	-61.63	12.66	5.12
	5491.500	-52.12	-13	-39.12	-59.61	13.13	5.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 23255_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1569.000	-56.85	-13	-43.85	-62.99	9.05	2.91
	2353.500	-58.71	-13	-45.71	-65.64	10.53	3.59
	3138.000	-57.81	-13	-44.81	-65.49	11.82	4.14
	3922.500	-56.05	-13	-43.05	-64.03	12.60	4.62
	4707.000	-54.08	-13	-41.08	-61.61	12.66	5.12
	5491.500	-52.38	-13	-39.38	-59.87	13.13	5.64
V	1569.000	-51.91	-13	-38.91	-58.05	9.05	2.91
	2353.500	-57.36	-13	-44.36	-64.29	10.53	3.59
	3138.000	-57.25	-13	-44.25	-64.93	11.82	4.14
	3922.500	-56.01	-13	-43.01	-63.99	12.60	4.62
	4707.000	-53.99	-13	-40.99	-61.52	12.66	5.12
	5416.500	-52.11	-13	-39.11	-59.58	13.06	5.59

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23230_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1564.000	-63.36	-13	-50.36	-69.49	9.03	2.91
	2346.000	-59.69	-13	-46.69	-66.63	10.52	3.59
	3128.000	-56.84	-13	-43.84	-64.50	11.80	4.14
	3910.000	-55.42	-13	-42.42	-63.41	12.60	4.61
	4692.000	-53.24	-13	-40.24	-60.78	12.66	5.11
	5474.000	-51.56	-13	-38.56	-59.04	13.11	5.63
V	1564.000	-51.74	-13	-38.74	-57.87	9.03	2.91
	2346.000	-57.95	-13	-44.95	-64.89	10.52	3.59
	3128.000	-56.28	-13	-43.28	-63.94	11.80	4.14
	3910.000	-55.80	-13	-42.80	-63.79	12.60	4.61
	4692.000	-53.61	-13	-40.61	-61.15	12.66	5.11
	5474.000	-52.61	-13	-39.61	-60.09	13.11	5.63

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 23230_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1564.000	-56.78	-13	-43.78	-62.91	9.03	2.91
	2364.000	-57.08	-13	-44.08	-64.01	10.53	3.60
	3128.000	-56.97	-13	-43.97	-64.63	11.80	4.14
	3910.000	-55.40	-13	-42.40	-63.39	12.60	4.61
	4692.000	-53.29	-13	-40.29	-60.83	12.66	5.11
	5474.000	-52.27	-13	-39.27	-59.75	13.11	5.63
V	1564.000	-50.81	-13	-37.81	-56.94	9.03	2.91
	2346.000	-57.79	-13	-44.79	-64.73	10.52	3.59
	3128.000	-56.40	-13	-43.40	-64.06	11.80	4.14
	3910.000	-55.34	-13	-42.34	-63.33	12.60	4.61
	4692.000	-53.48	-13	-40.48	-61.02	12.66	5.11
	5474.000	-50.01	-13	-37.01	-57.49	13.11	5.63

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 6: LTE Band 25		
Date of Test	2019/08/16	Test Site	SR10-H

BW 1.400M_CH 26047_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3701.400	-41.15	-13	-28.15	-49.25	12.61	4.51
	5521.000	-40.66	-13	-27.66	-48.14	13.13	5.66
	7402.800	-37.10	-13	-24.10	-41.81	11.32	6.60
	9253.500	-42.90	-13	-29.90	-47.52	11.83	7.21
	11104.200	-40.66	-13	-27.66	-44.37	11.67	7.96
	12954.900	-42.65	-13	-29.65	-47.64	13.62	8.64
V	3701.400	-45.04	-13	-32.04	-53.14	12.61	4.51
	5552.100	-38.58	-13	-25.58	-46.04	13.13	5.67
	7402.800	-28.52	-13	-15.52	-33.23	11.32	6.60
	9253.500	-39.41	-13	-26.41	-44.03	11.83	7.21
	11104.200	-38.98	-13	-25.98	-42.69	11.67	7.96
	12954.900	-41.76	-13	-28.76	-46.75	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26047_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3701.400	-41.89	-13	-28.89	-49.99	12.61	4.51
	5552.100	-41.32	-13	-28.32	-48.78	13.13	5.67
	7402.800	-39.47	-13	-26.47	-44.18	11.32	6.60
	9253.500	-43.61	-13	-30.61	-48.23	11.83	7.21
	11104.200	-41.69	-13	-28.69	-45.40	11.67	7.96
	12954.900	-42.36	-13	-29.36	-47.35	13.62	8.64
V	3701.400	-45.14	-13	-32.14	-53.24	12.61	4.51
	5552.100	-38.77	-13	-25.77	-46.23	13.13	5.67
	7402.800	-29.23	-13	-16.23	-33.94	11.32	6.60
	9253.500	-39.51	-13	-26.51	-44.13	11.83	7.21
	11104.200	-38.94	-13	-25.94	-42.65	11.67	7.96
	12954.900	-42.62	-13	-29.62	-47.61	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26365_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-42.47	-13	-29.47	-50.53	12.60	4.54
	5647.500	-42.40	-13	-29.40	-49.80	13.10	5.70
	7530.000	-37.69	-13	-24.69	-42.31	11.24	6.61
	9412.500	-41.04	-13	-28.04	-45.53	11.79	7.29
	11295.000	-40.66	-13	-27.66	-44.53	11.94	8.07
	13177.500	-40.43	-13	-27.43	-45.02	13.30	8.71
V	3765.000	-42.43	-13	-29.43	-50.49	12.60	4.54
	5647.500	-41.30	-13	-28.30	-48.70	13.10	5.70
	7530.000	-27.88	-13	-14.88	-32.50	11.24	6.61
	9412.500	-37.93	-13	-24.93	-42.42	11.79	7.29
	11295.000	-40.32	-13	-27.32	-44.19	11.94	8.07
	13177.500	-38.51	-13	-25.51	-43.10	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26365_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-42.05	-13	-29.05	-50.11	12.60	4.54
	5647.500	-42.53	-13	-29.53	-49.93	13.10	5.70
	7530.000	-40.01	-13	-27.01	-44.63	11.24	6.61
	9412.500	-41.44	-13	-28.44	-45.93	11.79	7.29
	11295.000	-40.63	-13	-27.63	-44.50	11.94	8.07
	13177.500	-40.40	-13	-27.40	-44.99	13.30	8.71
V	3765.000	-42.64	-13	-29.64	-50.70	12.60	4.54
	5647.500	-41.59	-13	-28.59	-48.99	13.10	5.70
	7530.000	-31.21	-13	-18.21	-35.83	11.24	6.61
	9412.500	-38.14	-13	-25.14	-42.63	11.79	7.29
	11295.000	-40.50	-13	-27.50	-44.37	11.94	8.07
	13177.500	-39.54	-13	-26.54	-44.13	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26683_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3828.600	-42.80	-13	-29.80	-50.83	12.60	4.57
	5742.900	-42.56	-13	-29.56	-49.90	13.07	5.73
	7657.200	-42.25	-13	-29.25	-46.90	11.24	6.59
	9571.500	-38.77	-13	-25.77	-43.22	11.81	7.36
	11485.800	-42.10	-13	-29.10	-46.14	12.21	8.17
	13400.100	-40.52	-13	-27.52	-44.67	12.92	8.77
V	3828.600	-43.54	-13	-30.54	-51.57	12.60	4.57
	5742.900	-41.01	-13	-28.01	-48.35	13.07	5.73
	7657.200	-33.14	-13	-20.14	-37.79	11.24	6.59
	9571.500	-30.51	-13	-17.51	-34.96	11.81	7.36
	11485.800	-39.67	-13	-26.67	-43.71	12.21	8.17
	13400.100	-39.92	-13	-26.92	-44.07	12.92	8.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26683_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3828.600	-42.02	-13	-29.02	-50.05	12.60	4.57
	5742.900	-42.76	-13	-29.76	-50.10	13.07	5.73
	7657.200	-44.14	-13	-31.14	-48.79	11.24	6.59
	9571.500	-38.66	-13	-25.66	-43.11	11.81	7.36
	11485.800	-41.78	-13	-28.78	-45.82	12.21	8.17
	13400.100	-40.01	-13	-27.01	-44.16	12.92	8.77
V	3828.600	-43.22	-13	-30.22	-51.25	12.60	4.57
	5742.900	-40.94	-13	-27.94	-48.28	13.07	5.73
	7657.200	-36.51	-13	-23.51	-41.16	11.24	6.59
	9571.500	-30.32	-13	-17.32	-34.77	11.81	7.36
	11485.800	-39.67	-13	-26.67	-43.71	12.21	8.17
	13400.100	-39.25	-13	-26.25	-43.40	12.92	8.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26055_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3703.000	-41.14	-13	-28.14	-49.24	12.61	4.51
	5554.500	-40.47	-13	-27.47	-47.93	13.12	5.67
	7406.000	-38.76	-13	-25.76	-43.47	11.31	6.60
	9257.500	-42.87	-13	-29.87	-47.49	11.83	7.21
	11109.000	-41.45	-13	-28.45	-45.16	11.67	7.96
	12960.500	-42.55	-13	-29.55	-47.53	13.62	8.64
V	3703.000	-45.06	-13	-32.06	-53.16	12.61	4.51
	5554.500	-37.82	-13	-24.82	-45.28	13.12	5.67
	7406.000	-27.95	-13	-14.95	-32.66	11.31	6.60
	9257.500	-38.38	-13	-25.38	-43.00	11.83	7.21
	11109.000	-39.38	-13	-26.38	-43.09	11.67	7.96
	12960.500	-41.69	-13	-28.69	-46.67	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26055_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3703.000	-41.92	-13	-28.92	-50.02	12.61	4.51
	5554.500	-40.94	-13	-27.94	-48.40	13.12	5.67
	7406.000	-39.47	-13	-26.47	-44.18	11.31	6.60
	9257.500	-42.46	-13	-29.46	-47.08	11.83	7.21
	11109.000	-41.75	-13	-28.75	-45.46	11.67	7.96
	12960.500	-42.45	-13	-29.45	-47.43	13.62	8.64
V	3703.000	-44.61	-13	-31.61	-52.71	12.61	4.51
	5554.500	-38.10	-13	-25.10	-45.56	13.12	5.67
	7406.000	-30.36	-13	-17.36	-35.07	11.31	6.60
	9257.500	-38.81	-13	-25.81	-43.43	11.83	7.21
	11109.000	-39.37	-13	-26.37	-43.08	11.67	7.96
	12960.500	-42.14	-13	-29.14	-47.12	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26365_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-42.45	-13	-29.45	-50.51	12.60	4.54
	5647.500	-41.96	-13	-28.96	-49.36	13.10	5.70
	7530.000	-37.89	-13	-24.89	-42.51	11.24	6.61
	9412.500	-42.45	-13	-29.45	-46.94	11.79	7.29
	11295.000	-40.61	-13	-27.61	-44.48	11.94	8.07
	13177.500	-40.63	-13	-27.63	-45.22	13.30	8.71
V	3765.000	-42.80	-13	-29.80	-50.86	12.60	4.54
	5647.500	-41.77	-13	-28.77	-49.17	13.10	5.70
	7530.000	-28.17	-13	-15.17	-32.79	11.24	6.61
	9412.500	-38.56	-13	-25.56	-43.05	11.79	7.29
	11295.000	-39.12	-13	-26.12	-42.99	11.94	8.07
	13177.500	-40.28	-13	-27.28	-44.87	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26365_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-42.22	-13	-29.22	-50.28	12.60	4.54
	5647.500	-42.58	-13	-29.58	-49.98	13.10	5.70
	7530.000	-39.83	-13	-26.83	-44.45	11.24	6.61
	9412.500	-42.72	-13	-29.72	-47.21	11.79	7.29
	11295.000	-40.96	-13	-27.96	-44.83	11.94	8.07
	13177.500	-40.52	-13	-27.52	-45.11	13.30	8.71
V	3765.000	-42.65	-13	-29.65	-50.71	12.60	4.54
	5647.500	-41.94	-13	-28.94	-49.34	13.10	5.70
	7530.000	-31.64	-13	-18.64	-36.26	11.24	6.61
	9412.500	-38.59	-13	-25.59	-43.08	11.79	7.29
	11295.000	-39.96	-13	-26.96	-43.83	11.94	8.07
	13177.500	-40.17	-13	-27.17	-44.76	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26675_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3827.000	-43.72	-13	-30.72	-51.75	12.60	4.57
	5740.500	-39.12	-13	-26.12	-46.46	13.07	5.73
	7654.000	-45.14	-13	-32.14	-49.79	11.24	6.59
	9567.500	-38.36	-13	-25.36	-42.81	11.81	7.36
	11481.000	-41.72	-13	-28.72	-45.75	12.20	8.17
	13394.500	-40.77	-13	-27.77	-44.93	12.93	8.77
V	3827.000	-41.66	-13	-28.66	-49.69	12.60	4.57
	5740.500	-38.16	-13	-25.16	-45.50	13.07	5.73
	7654.000	-39.40	-13	-26.40	-44.05	11.24	6.59
	9567.500	-30.60	-13	-17.60	-35.05	11.81	7.36
	11481.000	-39.64	-13	-26.64	-43.67	12.20	8.17
	13394.500	-39.52	-13	-26.52	-43.68	12.93	8.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26675_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3827.000	-40.70	-13	-27.70	-48.73	12.60	4.57
	5740.500	-41.54	-13	-28.54	-48.88	13.07	5.73
	7654.000	-43.56	-13	-30.56	-48.21	11.24	6.59
	9567.500	-37.37	-13	-24.37	-41.82	11.81	7.36
	11481.000	-41.44	-13	-28.44	-45.47	12.20	8.17
	13394.500	-40.55	-13	-27.55	-44.71	12.93	8.77
V	3827.000	-42.05	-13	-29.05	-50.08	12.60	4.57
	5740.500	-39.96	-13	-26.96	-47.30	13.07	5.73
	7654.000	-36.73	-13	-23.73	-41.38	11.24	6.59
	9567.500	-29.72	-13	-16.72	-34.17	11.81	7.36
	11481.000	-38.57	-13	-25.57	-42.60	12.20	8.17
	13394.500	-37.87	-13	-24.87	-42.03	12.93	8.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26065_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3705.000	-40.30	-13	-27.30	-48.39	12.61	4.51
	5557.500	-38.90	-13	-25.90	-46.35	13.12	5.67
	7410.000	-38.63	-13	-25.63	-43.34	11.31	6.60
	9262.500	-40.97	-13	-27.97	-45.58	11.82	7.21
	11115.000	-41.56	-13	-28.56	-45.28	11.68	7.96
	12967.500	-42.47	-13	-29.47	-47.44	13.62	8.64
V	3705.000	-43.90	-13	-30.90	-51.99	12.61	4.51
	5557.500	-36.46	-13	-23.46	-43.91	13.12	5.67
	7410.000	-29.96	-13	-16.96	-34.67	11.31	6.60
	9262.500	-38.33	-13	-25.33	-42.94	11.82	7.21
	11115.000	-39.05	-13	-26.05	-42.77	11.68	7.96
	12967.500	-41.16	-13	-28.16	-46.13	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26065_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3705.000	-40.74	-13	-27.74	-48.83	12.61	4.51
	5557.500	-39.54	-13	-26.54	-46.99	13.12	5.67
	7410.000	-38.45	-13	-25.45	-43.16	11.31	6.60
	9262.500	-41.27	-13	-28.27	-45.88	11.82	7.21
	11115.000	-41.10	-13	-28.10	-44.82	11.68	7.96
	12967.500	-42.50	-13	-29.50	-47.47	13.62	8.64
V	3705.000	-43.92	-13	-30.92	-52.01	12.61	4.51
	5557.500	-36.90	-13	-23.90	-44.35	13.12	5.67
	7410.000	-30.26	-13	-17.26	-34.97	11.31	6.60
	9262.500	-38.42	-13	-25.42	-43.03	11.82	7.21
	11115.000	-38.68	-13	-25.68	-42.40	11.68	7.96
	12967.500	-40.92	-13	-27.92	-45.89	13.62	8.64

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26365_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.67	-13	-28.67	-49.73	12.60	4.54
	5647.500	-42.45	-13	-29.45	-49.85	13.10	5.70
	7530.000	-38.77	-13	-25.77	-43.39	11.24	6.61
	9412.500	-42.10	-13	-29.10	-46.59	11.79	7.29
	11295.000	-40.65	-13	-27.65	-44.52	11.94	8.07
	13177.500	-40.31	-13	-27.31	-44.90	13.30	8.71
V	3765.000	-42.59	-13	-29.59	-50.65	12.60	4.54
	5647.500	-40.90	-13	-27.90	-48.30	13.10	5.70
	7530.000	-29.05	-13	-16.05	-33.67	11.24	6.61
	9412.500	-37.62	-13	-24.62	-42.11	11.79	7.29
	11295.000	-39.58	-13	-26.58	-43.45	11.94	8.07
	13177.500	-38.99	-13	-25.99	-43.58	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26365_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.86	-13	-28.86	-49.92	12.60	4.54
	5647.500	-42.63	-13	-29.63	-50.03	13.10	5.70
	7530.000	-38.85	-13	-25.85	-43.47	11.24	6.61
	9412.500	-42.32	-13	-29.32	-46.81	11.79	7.29
	11295.000	-40.86	-13	-27.86	-44.73	11.94	8.07
	13177.500	-39.55	-13	-26.55	-44.14	13.30	8.71
V	3765.000	-42.74	-13	-29.74	-50.80	12.60	4.54
	5647.500	-40.99	-13	-27.99	-48.39	13.10	5.70
	7530.000	-29.25	-13	-16.25	-33.87	11.24	6.61
	9412.500	-37.81	-13	-24.81	-42.30	11.79	7.29
	11295.000	-39.75	-13	-26.75	-43.62	11.94	8.07
	13177.500	-39.02	-13	-26.02	-43.61	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26665_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3825.000	-42.69	-13	-29.69	-50.72	12.60	4.57
	5737.500	-38.96	-13	-25.96	-46.30	13.07	5.73
	7650.000	-45.02	-13	-32.02	-49.67	11.24	6.59
	9562.500	-37.09	-13	-24.09	-41.54	11.81	7.36
	11475.000	-41.42	-13	-28.42	-45.45	12.19	8.17
	13387.500	-39.77	-13	-26.77	-43.95	12.94	8.77
V	3825.000	-42.28	-13	-29.28	-50.31	12.60	4.57
	5737.500	-38.40	-13	-25.40	-45.74	13.07	5.73
	7650.000	-40.26	-13	-27.26	-44.91	11.24	6.59
	9562.500	-29.50	-13	-16.50	-33.95	11.81	7.36
	11475.000	-38.53	-13	-25.53	-42.56	12.19	8.17
	13387.500	-38.44	-13	-25.44	-42.62	12.94	8.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26665_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3825.000	-42.92	-13	-29.92	-50.95	12.60	4.57
	5737.500	-39.09	-13	-26.09	-46.43	13.07	5.73
	7650.000	-45.21	-13	-32.21	-49.86	11.24	6.59
	9562.500	-37.21	-13	-24.21	-41.66	11.81	7.36
	11475.000	-41.56	-13	-28.56	-45.59	12.19	8.17
	13387.500	-39.89	-13	-26.89	-44.07	12.94	8.77
V	3825.000	-42.35	-13	-29.35	-50.38	12.60	4.57
	5737.500	-38.68	-13	-25.68	-46.02	13.07	5.73
	7650.000	-40.59	-13	-27.59	-45.24	11.24	6.59
	9562.500	-29.69	-13	-16.69	-34.14	11.81	7.36
	11475.000	-38.68	-13	-25.68	-42.71	12.19	8.17
	13387.500	-38.69	-13	-25.69	-42.87	12.94	8.77

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26090_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3710.000	-40.51	-13	-27.51	-48.60	12.61	4.51
	5565.000	-37.96	-13	-24.96	-45.41	13.12	5.67
	7420.000	-38.59	-13	-25.59	-43.29	11.30	6.60
	9275.000	-40.43	-13	-27.43	-45.03	11.82	7.22
	11130.000	-42.41	-13	-29.41	-46.14	11.70	7.97
	12985.000	-41.61	-13	-28.61	-46.57	13.61	8.65
V	3710.000	-43.39	-13	-30.39	-51.48	12.61	4.51
	5565.000	-35.45	-13	-22.45	-42.90	13.12	5.67
	7420.000	-31.03	-13	-18.03	-35.73	11.30	6.60
	9275.000	-37.46	-13	-24.46	-42.06	11.82	7.22
	11130.000	-40.66	-13	-27.66	-44.39	11.70	7.97
	12985.000	-41.29	-13	-28.29	-46.25	13.61	8.65

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26090_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3710.000	-40.71	-13	-27.71	-48.80	12.61	4.51
	5565.000	-37.99	-13	-24.99	-45.44	13.12	5.67
	7420.000	-38.62	-13	-25.62	-43.32	11.30	6.60
	9275.000	-40.56	-13	-27.56	-45.16	11.82	7.22
	11130.000	-42.59	-13	-29.59	-46.32	11.70	7.97
	12985.000	-41.55	-13	-28.55	-46.51	13.61	8.65
V	3710.000	-43.57	-13	-30.57	-51.66	12.61	4.51
	5565.000	-35.66	-13	-22.66	-43.11	13.12	5.67
	7420.000	-31.33	-13	-18.33	-36.03	11.30	6.60
	9275.000	-37.61	-13	-24.61	-42.21	11.82	7.22
	11130.000	-40.78	-13	-27.78	-44.51	11.70	7.97
	12985.000	-41.45	-13	-28.45	-46.41	13.61	8.65

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26365_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.78	-13	-28.78	-49.84	12.60	4.54
	5647.500	-41.73	-13	-28.73	-49.13	13.10	5.70
	7530.000	-36.71	-13	-23.71	-41.33	11.24	6.61
	9412.500	-41.58	-13	-28.58	-46.07	11.79	7.29
	11295.000	-40.41	-13	-27.41	-44.28	11.94	8.07
	13177.500	-39.18	-13	-26.18	-43.77	13.30	8.71
V	3765.000	-42.48	-13	-29.48	-50.54	12.60	4.54
	5647.500	-40.87	-13	-27.87	-48.27	13.10	5.70
	7530.000	-27.78	-13	-14.78	-32.40	11.24	6.61
	9412.500	-37.58	-13	-24.58	-42.07	11.79	7.29
	11295.000	-40.91	-13	-27.91	-44.78	11.94	8.07
	13177.500	-39.05	-13	-26.05	-43.64	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26365_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.88	-13	-28.88	-49.94	12.60	4.54
	5647.500	-41.86	-13	-28.86	-49.26	13.10	5.70
	7530.000	-36.93	-13	-23.93	-41.55	11.24	6.61
	9412.500	-41.69	-13	-28.69	-46.18	11.79	7.29
	11295.000	-40.52	-13	-27.52	-44.39	11.94	8.07
	13177.500	-39.15	-13	-26.15	-43.74	13.30	8.71
V	3765.000	-42.56	-13	-29.56	-50.62	12.60	4.54
	5647.500	-40.98	-13	-27.98	-48.38	13.10	5.70
	7530.000	-27.86	-13	-14.86	-32.48	11.24	6.61
	9412.500	-37.67	-13	-24.67	-42.16	11.79	7.29
	11295.000	-40.97	-13	-27.97	-44.84	11.94	8.07
	13177.500	-39.21	-13	-26.21	-43.80	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26640_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3820.000	-42.72	-13	-29.72	-50.76	12.60	4.57
	5730.000	-38.21	-13	-25.21	-45.56	13.08	5.73
	7640.000	-43.47	-13	-30.47	-48.12	11.24	6.60
	9550.000	-37.91	-13	-24.91	-42.35	11.80	7.36
	11460.000	-41.83	-13	-28.83	-45.85	12.17	8.16
	13370.000	-40.47	-13	-27.47	-44.68	12.97	8.76
V	3820.000	-42.73	-13	-29.73	-50.77	12.60	4.57
	5730.000	-39.46	-13	-26.46	-46.81	13.08	5.73
	7640.000	-37.81	-13	-24.81	-42.46	11.24	6.60
	9550.000	-30.86	-13	-17.86	-35.30	11.80	7.36
	11460.000	-39.46	-13	-26.46	-43.48	12.17	8.16
	13370.000	-39.47	-13	-26.47	-43.68	12.97	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26640_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3820.000	-42.86	-13	-29.86	-50.90	12.60	4.57
	5730.000	-38.42	-13	-25.42	-45.77	13.08	5.73
	7640.000	-43.56	-13	-30.56	-48.21	11.24	6.60
	9550.000	-37.99	-13	-24.99	-42.43	11.80	7.36
	11460.000	-41.89	-13	-28.89	-45.91	12.17	8.16
	13370.000	-40.63	-13	-27.63	-44.84	12.97	8.76
V	3820.000	-42.82	-13	-29.82	-50.86	12.60	4.57
	5730.000	-39.56	-13	-26.56	-46.91	13.08	5.73
	7640.000	-37.92	-13	-24.92	-42.57	11.24	6.60
	9550.000	-30.91	-13	-17.91	-35.35	11.80	7.36
	11460.000	-39.57	-13	-26.57	-43.59	12.17	8.16
	13370.000	-39.49	-13	-26.49	-43.70	12.97	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26115_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3715.000	-39.98	-13	-26.98	-48.07	12.61	4.52
	5572.500	-37.56	-13	-24.56	-45.00	13.12	5.68
	7430.000	-40.77	-13	-27.77	-45.46	11.29	6.61
	9287.500	-42.15	-13	-29.15	-46.74	11.82	7.23
	11145.000	-42.06	-13	-29.06	-45.80	11.73	7.98
	13002.500	-41.48	-13	-28.48	-46.41	13.60	8.66
V	3715.000	-42.30	-13	-29.30	-50.39	12.61	4.52
	5572.500	-34.58	-13	-21.58	-42.02	13.12	5.68
	7430.000	-34.01	-13	-21.01	-38.70	11.29	6.61
	9287.500	-36.83	-13	-23.83	-41.42	11.82	7.23
	11145.000	-38.48	-13	-25.48	-42.22	11.73	7.98
	13002.500	-41.40	-13	-28.40	-46.33	13.60	8.66

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26115_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3715.000	-40.05	-13	-27.05	-48.14	12.61	4.52
	5572.500	-37.69	-13	-24.69	-45.13	13.12	5.68
	7430.000	-40.89	-13	-27.89	-45.58	11.29	6.61
	9287.500	-42.32	-13	-29.32	-46.91	11.82	7.23
	11145.000	-42.25	-13	-29.25	-45.99	11.73	7.98
	13002.500	-41.45	-13	-28.45	-46.38	13.60	8.66
V	3715.000	-42.45	-13	-29.45	-50.54	12.61	4.52
	5572.500	-34.69	-13	-21.69	-42.13	13.12	5.68
	7430.000	-34.24	-13	-21.24	-38.93	11.29	6.61
	9287.500	-36.96	-13	-23.96	-41.55	11.82	7.23
	11145.000	-38.67	-13	-25.67	-42.41	11.73	7.98
	13002.500	-41.63	-13	-28.63	-46.56	13.60	8.66

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26365_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.87	-13	-28.87	-49.93	12.60	4.54
	5647.500	-41.88	-13	-28.88	-49.28	13.10	5.70
	7530.000	-37.64	-13	-24.64	-42.26	11.24	6.61
	9412.500	-41.49	-13	-28.49	-45.98	11.79	7.29
	11295.000	-40.87	-13	-27.87	-44.74	11.94	8.07
	13177.500	-38.86	-13	-25.86	-43.45	13.30	8.71
V	3765.000	-42.49	-13	-29.49	-50.55	12.60	4.54
	5647.500	-41.01	-13	-28.01	-48.41	13.10	5.70
	7530.000	-28.42	-13	-15.42	-33.04	11.24	6.61
	9412.500	-37.87	-13	-24.87	-42.36	11.79	7.29
	11295.000	-39.89	-13	-26.89	-43.76	11.94	8.07
	13177.500	-38.60	-13	-25.60	-43.19	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26365_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.96	-13	-28.96	-50.02	12.60	4.54
	5647.500	-41.97	-13	-28.97	-49.37	13.10	5.70
	7530.000	-37.85	-13	-24.85	-42.47	11.24	6.61
	9412.500	-41.63	-13	-28.63	-46.12	11.79	7.29
	11295.000	-40.98	-13	-27.98	-44.85	11.94	8.07
	13177.500	-38.91	-13	-25.91	-43.50	13.30	8.71
V	3765.000	-42.59	-13	-29.59	-50.65	12.60	4.54
	5647.500	-41.18	-13	-28.18	-48.58	13.10	5.70
	7530.000	-28.63	-13	-15.63	-33.25	11.24	6.61
	9412.500	-37.96	-13	-24.96	-42.45	11.79	7.29
	11295.000	-40.11	-13	-27.11	-43.98	11.94	8.07
	13177.500	-38.83	-13	-25.83	-43.42	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26615_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3815.000	-42.87	-13	-29.87	-50.91	12.60	4.57
	5722.500	-40.75	-13	-27.75	-48.10	13.08	5.73
	7630.000	-40.74	-13	-27.74	-45.38	11.24	6.60
	9537.500	-36.86	-13	-23.86	-41.30	11.79	7.35
	11445.000	-41.70	-13	-28.70	-45.70	12.15	8.15
	13352.500	-39.85	-13	-26.85	-44.09	13.00	8.76
V	3815.000	-43.55	-13	-30.55	-51.59	12.60	4.57
	5722.500	-41.67	-13	-28.67	-49.02	13.08	5.73
	7630.000	-32.94	-13	-19.94	-37.58	11.24	6.60
	9537.500	-30.46	-13	-17.46	-34.90	11.79	7.35
	11445.000	-41.50	-13	-28.50	-45.50	12.15	8.15
	13352.500	-39.71	-13	-26.71	-43.95	13.00	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26615_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3815.000	-42.95	-13	-29.95	-50.99	12.60	4.57
	5722.500	-40.89	-13	-27.89	-48.24	13.08	5.73
	7630.000	-40.86	-13	-27.86	-45.50	11.24	6.60
	9537.500	-36.96	-13	-23.96	-41.40	11.79	7.35
	11445.000	-41.86	-13	-28.86	-45.86	12.15	8.15
	13352.500	-39.77	-13	-26.77	-44.01	13.00	8.76
V	3815.000	-43.87	-13	-30.87	-51.91	12.60	4.57
	5722.500	-41.82	-13	-28.82	-49.17	13.08	5.73
	7630.000	-33.06	-13	-20.06	-37.70	11.24	6.60
	9537.500	-30.61	-13	-17.61	-35.05	11.79	7.35
	11445.000	-41.67	-13	-28.67	-45.67	12.15	8.15
	13352.500	-39.74	-13	-26.74	-43.98	13.00	8.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 26140_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3720.000	-38.42	-13	-25.42	-46.51	12.61	4.52
	5580.000	-37.62	-13	-24.62	-45.06	13.12	5.68
	7440.000	-42.13	-13	-29.13	-46.81	11.28	6.61
	9300.000	-41.53	-13	-28.53	-46.11	11.82	7.23
	11160.000	-39.64	-13	-26.64	-43.40	11.75	7.99
	13020.000	-40.70	-13	-27.70	-45.60	13.57	8.67
V	3720.000	-40.31	-13	-27.31	-48.40	12.61	4.52
	5580.000	-34.43	-13	-21.43	-41.87	13.12	5.68
	7440.000	-37.10	-13	-24.10	-41.78	11.28	6.61
	9300.000	-36.85	-13	-23.85	-41.43	11.82	7.23
	11160.000	-36.29	-13	-23.29	-40.05	11.75	7.99
	13020.000	-41.29	-13	-28.29	-46.19	13.57	8.67

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 26140_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3720.000	-38.62	-13	-25.62	-46.71	12.61	4.52
	5580.000	-37.76	-13	-24.76	-45.20	13.12	5.68
	7440.000	-42.31	-13	-29.31	-46.99	11.28	6.61
	9300.000	-41.62	-13	-28.62	-46.20	11.82	7.23
	11160.000	-39.85	-13	-26.85	-43.61	11.75	7.99
	13020.000	-40.81	-13	-27.81	-45.71	13.57	8.67
V	3720.000	-40.48	-13	-27.48	-48.57	12.61	4.52
	5580.000	-34.62	-13	-21.62	-42.06	13.12	5.68
	7440.000	-37.31	-13	-24.31	-41.99	11.28	6.61
	9300.000	-36.99	-13	-23.99	-41.57	11.82	7.23
	11160.000	-36.42	-13	-23.42	-40.18	11.75	7.99
	13020.000	-41.35	-13	-28.35	-46.25	13.57	8.67

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 26365_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.68	-13	-28.68	-49.74	12.60	4.54
	5647.500	-41.66	-13	-28.66	-49.06	13.10	5.70
	7530.000	-37.56	-13	-24.56	-42.18	11.24	6.61
	9412.500	-41.32	-13	-28.32	-45.81	11.79	7.29
	11295.000	-40.90	-13	-27.90	-44.77	11.94	8.07
	13177.500	-39.29	-13	-26.29	-43.88	13.30	8.71
V	3765.000	-42.67	-13	-29.67	-50.73	12.60	4.54
	5647.500	-40.75	-13	-27.75	-48.15	13.10	5.70
	7530.000	-28.27	-13	-15.27	-32.89	11.24	6.61
	9412.500	-37.50	-13	-24.50	-41.99	11.79	7.29
	11295.000	-40.14	-13	-27.14	-44.01	11.94	8.07
	13177.500	-39.17	-13	-26.17	-43.76	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 26365_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3765.000	-41.77	-13	-28.77	-49.83	12.60	4.54
	5647.500	-41.75	-13	-28.75	-49.15	13.10	5.70
	7530.000	-37.69	-13	-24.69	-42.31	11.24	6.61
	9412.500	-41.48	-13	-28.48	-45.97	11.79	7.29
	11295.000	-40.99	-13	-27.99	-44.86	11.94	8.07
	13177.500	-39.25	-13	-26.25	-43.84	13.30	8.71
V	3765.000	-42.78	-13	-29.78	-50.84	12.60	4.54
	5647.500	-40.88	-13	-27.88	-48.28	13.10	5.70
	7530.000	-28.35	-13	-15.35	-32.97	11.24	6.61
	9412.500	-37.69	-13	-24.69	-42.18	11.79	7.29
	11295.000	-40.25	-13	-27.25	-44.12	11.94	8.07
	13177.500	-39.21	-13	-26.21	-43.80	13.30	8.71

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 26590_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3810.000	-43.53	-13	-30.53	-51.57	12.60	4.56
	5715.000	-43.87	-13	-30.87	-51.23	13.08	5.72
	7620.000	-40.01	-13	-27.01	-44.65	11.24	6.60
	9525.000	-38.38	-13	-25.38	-42.81	11.78	7.35
	11430.000	-41.38	-13	-28.38	-45.37	12.13	8.14
	13335.000	-39.73	-13	-26.73	-44.01	13.03	8.75
V	3810.000	-43.35	-13	-30.35	-51.39	12.60	4.56
	5715.000	-44.13	-13	-31.13	-51.49	13.08	5.72
	7620.000	-32.41	-13	-19.41	-37.05	11.24	6.60
	9525.000	-31.97	-13	-18.97	-36.40	11.78	7.35
	11430.000	-40.81	-13	-27.81	-44.80	12.13	8.14
	13335.000	-39.63	-13	-26.63	-43.91	13.03	8.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 26590_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3810.000	-43.69	-13	-30.69	-51.73	12.60	4.56
	5715.000	-43.92	-13	-30.92	-51.28	13.08	5.72
	7620.000	-40.15	-13	-27.15	-44.79	11.24	6.60
	9525.000	-38.46	-13	-25.46	-42.89	11.78	7.35
	11430.000	-41.52	-13	-28.52	-45.51	12.13	8.14
	13335.000	-39.79	-13	-26.79	-44.07	13.03	8.75
V	3810.000	-43.49	-13	-30.49	-51.53	12.60	4.56
	5715.000	-44.26	-13	-31.26	-51.62	13.08	5.72
	7620.000	-32.58	-13	-19.58	-37.22	11.24	6.60
	9525.000	-32.12	-13	-19.12	-36.55	11.78	7.35
	11430.000	-40.95	-13	-27.95	-44.94	12.13	8.14
	13335.000	-39.67	-13	-26.67	-43.95	13.03	8.75

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions (Part 22)		
Test Mode	Mode 7: LTE Band 26		
Date of Test	2019/08/15	Test Site	SR10-H

BW 1.400M_CH 26797_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1649.400	-54.63	-13	-41.63	-60.91	9.26	2.98
	2474.100	-52.96	-13	-39.96	-59.87	10.57	3.66
	3298.800	-57.08	-13	-44.08	-64.93	12.08	4.23
	4123.500	-55.07	-13	-42.07	-62.97	12.61	4.71
	4948.200	-52.88	-13	-39.88	-60.31	12.65	5.23
	5772.900	-51.51	-13	-38.51	-58.87	13.08	5.72
V	1649.400	-50.98	-13	-37.98	-57.24	9.23	2.97
	2474.100	-53.46	-13	-40.46	-60.37	10.57	3.66
	3298.800	-57.11	-13	-44.11	-64.96	12.08	4.23
	4123.500	-55.05	-13	-42.05	-62.95	12.61	4.71
	4948.200	-52.98	-13	-39.98	-60.41	12.65	5.23
	5772.900	-51.84	-13	-38.84	-59.20	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26797_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1649.400	-57.05	-13	-44.05	-63.31	9.23	2.97
	2474.100	-52.36	-13	-39.36	-59.27	10.57	3.66
	3298.800	-56.38	-13	-43.38	-64.23	12.08	4.23
	4123.500	-55.14	-13	-42.14	-63.04	12.61	4.71
	4948.200	-52.97	-13	-39.97	-60.40	12.65	5.23
	5772.900	-50.83	-13	-37.83	-58.19	13.08	5.72
V	1649.400	-50.43	-13	-37.43	-56.69	9.23	2.97
	2474.100	-52.19	-13	-39.19	-59.10	10.57	3.66
	3298.800	-56.88	-13	-43.88	-64.73	12.08	4.23
	4123.500	-54.36	-13	-41.36	-62.26	12.61	4.71
	4948.200	-53.02	-13	-40.02	-60.45	12.65	5.23
	5772.900	-51.57	-13	-38.57	-58.93	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26915_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-53.06	-13	-40.06	-59.39	9.33	3.00
	2509.500	-48.12	-13	-35.12	-55.02	10.60	3.70
	3346.000	-57.59	-13	-44.59	-65.54	12.23	4.28
	4182.500	-54.69	-13	-41.69	-62.54	12.62	4.76
	5019.000	-53.08	-13	-40.08	-60.44	12.65	5.29
	5855.500	-52.24	-13	-39.24	-59.53	13.05	5.76
V	1673.000	-51.25	-13	-38.25	-57.58	9.33	3.00
	2509.500	-49.42	-13	-36.42	-56.32	10.60	3.70
	3346.000	-57.61	-13	-44.61	-65.56	12.23	4.28
	4182.500	-55.08	-13	-42.08	-62.93	12.62	4.76
	5019.000	-52.51	-13	-39.51	-59.87	12.65	5.29
	5855.500	-51.58	-13	-38.58	-58.87	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26915_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-52.97	-13	-39.97	-59.30	9.33	3.00
	2509.500	-48.05	-13	-35.05	-54.95	10.60	3.70
	3346.000	-57.07	-13	-44.07	-65.02	12.23	4.28
	4182.500	-54.82	-13	-41.82	-62.67	12.62	4.76
	5019.000	-53.51	-13	-40.51	-60.87	12.65	5.29
	5855.500	-51.12	-13	-38.12	-58.41	13.05	5.76
V	1673.000	-51.14	-13	-38.14	-57.47	9.33	3.00
	2509.500	-49.70	-13	-36.70	-56.60	10.60	3.70
	3346.000	-57.49	-13	-44.49	-65.44	12.23	4.28
	4182.500	-55.12	-13	-42.12	-62.97	12.62	4.76
	5019.000	-52.64	-13	-39.64	-60.00	12.65	5.29
	5855.500	-52.18	-13	-39.18	-59.47	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 27033_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1696.600	-54.31	-13	-41.31	-60.71	9.43	3.03
	2544.900	-53.50	-13	-40.50	-60.45	10.68	3.73
	3393.200	-57.74	-13	-44.74	-65.79	12.38	4.33
	4241.500	-54.45	-13	-41.45	-62.26	12.63	4.82
	5089.800	-52.59	-13	-39.59	-59.97	12.74	5.36
	5938.100	-50.42	-13	-37.42	-57.64	13.02	5.80
V	1696.600	-50.67	-13	-37.67	-57.07	9.43	3.03
	2544.900	-53.89	-13	-40.89	-60.84	10.68	3.73
	3393.200	-57.41	-13	-44.41	-65.46	12.38	4.33
	4241.500	-54.77	-13	-41.77	-62.58	12.63	4.82
	5089.800	-52.46	-13	-39.46	-59.84	12.74	5.36
	5938.100	-51.31	-13	-38.31	-58.53	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 27033_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1696.600	-54.10	-13	-41.10	-60.50	9.43	3.03
	2544.900	-53.94	-13	-40.94	-60.89	10.68	3.73
	3393.200	-57.19	-13	-44.19	-65.24	12.38	4.33
	4241.500	-54.89	-13	-41.89	-62.70	12.63	4.82
	5089.800	-52.36	-13	-39.36	-59.74	12.74	5.36
	5938.100	-51.64	-13	-38.64	-58.86	13.02	5.80
V	1696.600	-51.96	-13	-38.96	-58.36	9.43	3.03
	2544.900	-53.49	-13	-40.49	-60.44	10.68	3.73
	3393.200	-57.61	-13	-44.61	-65.66	12.38	4.33
	4241.500	-54.16	-13	-41.16	-61.97	12.63	4.82
	5089.800	-52.64	-13	-39.64	-60.02	12.74	5.36
	5938.100	-50.34	-13	-37.34	-57.56	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26805_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1651.000	-47.60	-13	-34.60	-53.87	9.24	2.97
	2476.500	-47.50	-13	-34.50	-54.41	10.57	3.66
	3302.000	-54.34	-13	-41.34	-62.20	12.09	4.24
	4127.500	-54.40	-13	-41.40	-62.30	12.61	4.71
	4953.000	-52.51	-13	-39.51	-59.93	12.65	5.23
	5778.500	-51.38	-13	-38.38	-58.74	13.08	5.72
V	1651.000	-39.92	-13	-26.92	-46.19	9.24	2.97
	2476.500	-47.85	-13	-34.85	-54.76	10.57	3.66
	3302.000	-53.20	-13	-40.20	-61.06	12.09	4.24
	4127.500	-54.16	-13	-41.16	-62.06	12.61	4.71
	4953.000	-52.61	-13	-39.61	-60.03	12.65	5.23
	5778.500	-51.85	-13	-38.85	-59.21	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26805_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1651.000	-47.59	-13	-34.59	-53.86	9.24	2.97
	2476.500	-47.99	-13	-34.99	-54.90	10.57	3.66
	3302.000	-54.45	-13	-41.45	-62.31	12.09	4.24
	4127.500	-54.51	-13	-41.51	-62.41	12.61	4.71
	4953.000	-52.62	-13	-39.62	-60.04	12.65	5.23
	5778.500	-51.44	-13	-38.44	-58.80	13.08	5.72
V	1651.000	-39.86	-13	-26.86	-46.13	9.24	2.97
	2476.500	-46.61	-13	-33.61	-53.52	10.57	3.66
	3302.000	-53.31	-13	-40.31	-61.17	12.09	4.24
	4127.500	-54.22	-13	-41.22	-62.12	12.61	4.71
	4953.000	-52.71	-13	-39.71	-60.13	12.65	5.23
	5778.500	-51.91	-13	-38.91	-59.27	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26915_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-47.03	-13	-34.03	-53.36	9.33	3.00
	2509.500	-46.42	-13	-33.42	-53.32	10.60	3.70
	3346.000	-52.35	-13	-39.35	-60.30	12.23	4.28
	4182.500	-53.71	-13	-40.71	-61.56	12.62	4.76
	5019.000	-52.29	-13	-39.29	-59.65	12.65	5.29
	5855.500	-51.72	-13	-38.72	-59.01	13.05	5.76
V	1673.000	-38.16	-13	-25.16	-44.49	9.33	3.00
	2509.500	-46.29	-13	-33.29	-53.19	10.60	3.70
	3346.000	-54.74	-13	-41.74	-62.69	12.23	4.28
	4182.500	-53.61	-13	-40.61	-61.46	12.62	4.76
	5019.000	-52.15	-13	-39.15	-59.51	12.65	5.29
	5855.500	-51.68	-13	-38.68	-58.97	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26915_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-43.08	-13	-30.08	-49.41	9.33	3.00
	2509.500	-42.23	-13	-29.23	-49.13	10.60	3.70
	3346.000	-52.21	-13	-39.21	-60.16	12.23	4.28
	4182.500	-53.65	-13	-40.65	-61.50	12.62	4.76
	5019.000	-52.22	-13	-39.22	-59.58	12.65	5.29
	5855.500	-51.79	-13	-38.79	-59.08	13.05	5.76
V	1673.000	-34.68	-13	-21.68	-41.01	9.33	3.00
	2509.500	-43.87	-13	-30.87	-50.77	10.60	3.70
	3346.000	-53.29	-13	-40.29	-61.24	12.23	4.28
	4182.500	-53.65	-13	-40.65	-61.50	12.62	4.76
	5019.000	-52.22	-13	-39.22	-59.58	12.65	5.29
	5855.500	-51.71	-13	-38.71	-59.00	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 27025_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1695.000	-47.20	-13	-34.20	-53.60	9.43	3.03
	2542.500	-52.51	-13	-39.51	-59.46	10.68	3.73
	3390.000	-55.38	-13	-42.38	-63.42	12.37	4.33
	4237.500	-54.22	-13	-41.22	-62.03	12.63	4.82
	5085.000	-51.22	-13	-38.22	-58.60	12.73	5.35
	5932.500	-51.12	-13	-38.12	-58.34	13.02	5.80
V	1695.000	-41.11	-13	-28.11	-47.51	9.43	3.03
	2542.500	-51.22	-13	-38.22	-58.17	10.68	3.73
	3390.000	-56.18	-13	-43.18	-64.22	12.37	4.33
	4237.500	-54.56	-13	-41.56	-62.37	12.63	4.82
	5085.000	-51.25	-13	-38.25	-58.63	12.73	5.35
	5932.500	-51.34	-13	-38.34	-58.56	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 27025_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1695.000	-43.99	-13	-30.99	-50.39	9.43	3.03
	2542.500	-53.65	-13	-40.65	-60.60	10.68	3.73
	3390.000	-55.75	-13	-42.75	-63.79	12.37	4.33
	4237.500	-54.18	-13	-41.18	-61.99	12.63	4.82
	5085.000	-51.47	-13	-38.47	-58.85	12.73	5.35
	5932.500	-51.21	-13	-38.21	-58.43	13.02	5.80
V	1695.000	-41.17	-13	-28.17	-47.57	9.43	3.03
	2542.500	-53.23	-13	-40.23	-60.18	10.68	3.73
	3390.000	-56.25	-13	-43.25	-64.29	12.37	4.33
	4237.500	-54.69	-13	-41.69	-62.50	12.63	4.82
	5085.000	-51.34	-13	-38.34	-58.72	12.73	5.35
	5932.500	-51.39	-13	-38.39	-58.61	13.02	5.80

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26815_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1653.000	-48.44	-13	-35.44	-54.71	9.24	2.97
	2479.500	-48.24	-13	-35.24	-55.15	10.57	3.67
	3306.000	-54.07	-13	-41.07	-61.93	12.10	4.24
	4132.500	-53.82	-13	-40.82	-61.72	12.61	4.71
	4959.000	-53.33	-13	-40.33	-60.75	12.65	5.23
	5785.500	-51.80	-13	-38.80	-59.16	13.08	5.72
V	1653.000	-40.78	-13	-27.78	-47.05	9.24	2.97
	2479.500	-48.45	-13	-35.45	-55.36	10.57	3.67
	3306.000	-54.17	-13	-41.17	-62.03	12.10	4.24
	4132.500	-53.73	-13	-40.73	-61.63	12.61	4.71
	4959.000	-53.24	-13	-40.24	-60.66	12.65	5.23
	5785.500	-51.71	-13	-38.71	-59.07	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26815_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1653.000	-48.47	-13	-35.47	-54.74	9.24	2.97
	2479.500	-48.31	-13	-35.31	-55.22	10.57	3.67
	3306.000	-54.17	-13	-41.17	-62.03	12.10	4.24
	4132.500	-53.79	-13	-40.79	-61.69	12.61	4.71
	4959.000	-53.30	-13	-40.30	-60.72	12.65	5.23
	5785.500	-51.77	-13	-38.77	-59.13	13.08	5.72
V	1653.000	-40.78	-13	-27.78	-47.05	9.24	2.97
	2479.500	-48.55	-13	-35.55	-55.46	10.57	3.67
	3306.000	-54.29	-13	-41.29	-62.15	12.10	4.24
	4132.500	-53.76	-13	-40.76	-61.66	12.61	4.71
	4959.000	-53.27	-13	-40.27	-60.69	12.65	5.23
	5785.500	-51.74	-13	-38.74	-59.10	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26915_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-46.97	-13	-33.97	-53.30	9.33	3.00
	2509.500	-46.77	-13	-33.77	-53.67	10.60	3.70
	3346.000	-52.47	-13	-39.47	-60.42	12.23	4.28
	4182.500	-54.71	-13	-41.71	-62.56	12.62	4.76
	5019.000	-52.19	-13	-39.19	-59.55	12.65	5.29
	5855.500	-51.60	-13	-38.60	-58.89	13.05	5.76
V	1673.000	-38.35	-13	-25.35	-44.68	9.33	3.00
	2509.500	-46.52	-13	-33.52	-53.42	10.60	3.70
	3346.000	-53.86	-13	-40.86	-61.81	12.23	4.28
	4182.500	-54.55	-13	-41.55	-62.40	12.62	4.76
	5019.000	-52.06	-13	-39.06	-59.42	12.65	5.29
	5855.500	-51.39	-13	-38.39	-58.68	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26915_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-47.06	-13	-34.06	-53.39	9.33	3.00
	2509.500	-46.82	-13	-33.82	-53.72	10.60	3.70
	3346.000	-52.53	-13	-39.53	-60.48	12.23	4.28
	4182.500	-54.74	-13	-41.74	-62.59	12.62	4.76
	5019.000	-52.22	-13	-39.22	-59.58	12.65	5.29
	5855.500	-51.63	-13	-38.63	-58.92	13.05	5.76
V	1673.000	-38.44	-13	-25.44	-44.77	9.33	3.00
	2509.500	-46.63	-13	-33.63	-53.53	10.60	3.70
	3346.000	-53.99	-13	-40.99	-61.94	12.23	4.28
	4182.500	-54.68	-13	-41.68	-62.53	12.62	4.76
	5019.000	-52.16	-13	-39.16	-59.52	12.65	5.29
	5855.500	-51.57	-13	-38.57	-58.86	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 27015_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1693.000	-46.74	-13	-33.74	-53.13	9.42	3.03
	2539.500	-53.33	-13	-40.33	-60.27	10.67	3.73
	3386.000	-55.33	-13	-42.33	-63.36	12.36	4.33
	4232.500	-54.46	-13	-41.46	-62.27	12.63	4.82
	5079.000	-52.16	-13	-39.16	-59.54	12.73	5.35
	5925.500	-51.18	-13	-38.18	-58.41	13.02	5.79
V	1693.000	-40.38	-13	-27.38	-46.77	9.42	3.03
	2539.500	-52.11	-13	-39.11	-59.05	10.67	3.73
	3386.000	-55.36	-13	-42.36	-63.39	12.36	4.33
	4232.500	-54.37	-13	-41.37	-62.18	12.63	4.82
	5079.000	-52.07	-13	-39.07	-59.45	12.73	5.35
	5925.500	-51.09	-13	-38.09	-58.32	13.02	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 27015_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1693.000	-46.85	-13	-33.85	-53.24	9.42	3.03
	2539.500	-53.47	-13	-40.47	-60.41	10.67	3.73
	3386.000	-55.49	-13	-42.49	-63.52	12.36	4.33
	4232.500	-54.43	-13	-41.43	-62.24	12.63	4.82
	5079.000	-52.13	-13	-39.13	-59.51	12.73	5.35
	5925.500	-51.15	-13	-38.15	-58.38	13.02	5.79
V	1693.000	-40.47	-13	-27.47	-46.86	9.42	3.03
	2539.500	-52.21	-13	-39.21	-59.15	10.67	3.73
	3386.000	-55.48	-13	-42.48	-63.51	12.36	4.33
	4232.500	-54.40	-13	-41.40	-62.21	12.63	4.82
	5079.000	-52.10	-13	-39.10	-59.48	12.73	5.35
	5925.500	-51.12	-13	-38.12	-58.35	13.02	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26840_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1658.000	-48.51	-13	-35.51	-54.78	9.24	2.97
	2487.000	-47.89	-13	-34.89	-54.80	10.58	3.67
	3316.000	-52.57	-13	-39.57	-60.43	12.10	4.24
	4145.000	-53.12	-13	-40.12	-61.02	12.61	4.71
	4974.000	-53.75	-13	-40.75	-61.17	12.65	5.23
	5803.000	-51.98	-13	-38.98	-59.33	13.08	5.72
V	1658.000	-41.13	-13	-28.13	-47.40	9.24	2.97
	2487.000	-47.39	-13	-34.39	-54.30	10.58	3.67
	3316.000	-53.43	-13	-40.43	-61.29	12.10	4.24
	4145.000	-53.06	-13	-40.06	-60.96	12.61	4.71
	4974.000	-53.69	-13	-40.69	-61.11	12.65	5.23
	5803.000	-51.92	-13	-38.92	-59.27	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26840_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1658.000	-48.62	-13	-35.62	-54.89	9.24	2.97
	2487.000	-47.98	-13	-34.98	-54.89	10.58	3.67
	3316.000	-52.75	-13	-39.75	-60.61	12.10	4.24
	4145.000	-53.09	-13	-40.09	-60.99	12.61	4.71
	4974.000	-53.78	-13	-40.78	-61.20	12.65	5.23
	5803.000	-51.88	-13	-38.88	-59.23	13.08	5.72
V	1658.000	-41.32	-13	-28.32	-47.59	9.24	2.97
	2487.000	-47.52	-13	-34.52	-54.43	10.58	3.67
	3316.000	-53.61	-13	-40.61	-61.47	12.10	4.24
	4145.000	-53.15	-13	-40.15	-61.05	12.61	4.71
	4974.000	-53.72	-13	-40.72	-61.14	12.65	5.23
	5803.000	-51.95	-13	-38.95	-59.30	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26915_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-47.36	-13	-34.36	-53.69	9.33	3.00
	2509.500	-46.34	-13	-33.34	-53.24	10.60	3.70
	3346.000	-51.93	-13	-38.93	-59.88	12.23	4.28
	4182.500	-54.80	-13	-41.80	-62.65	12.62	4.76
	5019.000	-52.45	-13	-39.45	-59.81	12.65	5.29
	5855.500	-51.22	-13	-38.22	-58.51	13.05	5.76
V	1673.000	-38.06	-13	-25.06	-44.39	9.33	3.00
	2509.500	-46.38	-13	-33.38	-53.28	10.60	3.70
	3346.000	-54.25	-13	-41.25	-62.20	12.23	4.28
	4182.500	-54.71	-13	-41.71	-62.56	12.62	4.76
	5019.000	-52.36	-13	-39.36	-59.72	12.65	5.29
	5855.500	-51.13	-13	-38.13	-58.42	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26915_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-47.53	-13	-34.53	-53.86	9.33	3.00
	2509.500	-46.47	-13	-33.47	-53.37	10.60	3.70
	3346.000	-51.99	-13	-38.99	-59.94	12.23	4.28
	4182.500	-54.77	-13	-41.77	-62.62	12.62	4.76
	5019.000	-52.42	-13	-39.42	-59.78	12.65	5.29
	5855.500	-51.19	-13	-38.19	-58.48	13.05	5.76
V	1673.000	-38.17	-13	-25.17	-44.50	9.33	3.00
	2509.500	-46.46	-13	-33.46	-53.36	10.60	3.70
	3346.000	-54.42	-13	-41.42	-62.37	12.23	4.28
	4182.500	-54.74	-13	-41.74	-62.59	12.62	4.76
	5019.000	-52.39	-13	-39.39	-59.75	12.65	5.29
	5855.500	-51.16	-13	-38.16	-58.45	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26990_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1688.000	-45.27	-13	-32.27	-51.65	9.41	3.02
	2532.000	-50.48	-13	-37.48	-57.41	10.66	3.73
	3376.000	-55.47	-13	-42.47	-63.49	12.34	4.32
	4220.000	-54.09	-13	-41.09	-61.91	12.63	4.81
	5064.000	-52.65	-13	-39.65	-60.02	12.71	5.34
	5908.000	-51.45	-13	-38.45	-58.69	13.03	5.79
V	1688.000	-37.97	-13	-24.97	-44.35	9.41	3.02
	2532.000	-49.84	-13	-36.84	-56.77	10.66	3.73
	3376.000	-55.38	-13	-42.38	-63.40	12.34	4.32
	4220.000	-54.03	-13	-41.03	-61.85	12.63	4.81
	5064.000	-52.59	-13	-39.59	-59.96	12.71	5.34
	5908.000	-51.37	-13	-38.37	-58.61	13.03	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26990_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1688.000	-45.38	-13	-32.38	-51.76	9.41	3.02
	2532.000	-50.56	-13	-37.56	-57.49	10.66	3.73
	3376.000	-55.62	-13	-42.62	-63.64	12.34	4.32
	4220.000	-54.12	-13	-41.12	-61.94	12.63	4.81
	5064.000	-52.69	-13	-39.69	-60.06	12.71	5.34
	5908.000	-51.42	-13	-38.42	-58.66	13.03	5.79
V	1688.000	-38.12	-13	-25.12	-44.50	9.41	3.02
	2532.000	-49.99	-13	-36.99	-56.92	10.66	3.73
	3376.000	-55.47	-13	-42.47	-63.49	12.34	4.32
	4220.000	-54.06	-13	-41.06	-61.88	12.63	4.81
	5064.000	-52.62	-13	-39.62	-59.99	12.71	5.34
	5908.000	-51.41	-13	-38.41	-58.65	13.03	5.79

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26865_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1663.000	-47.31	-13	-34.31	-53.60	9.27	2.98
	2494.500	-45.57	-13	-32.57	-52.48	10.58	3.68
	3326.000	-53.02	-13	-40.02	-60.91	12.14	4.25
	4157.500	-54.47	-13	-41.47	-62.35	12.61	4.73
	4989.000	-52.71	-13	-39.71	-60.11	12.65	5.25
	5820.500	-51.25	-13	-38.25	-58.58	13.07	5.74
V	1663.000	-39.95	-13	-26.95	-46.24	9.27	2.98
	2494.500	-46.09	-13	-33.09	-53.00	10.58	3.68
	3326.000	-53.61	-13	-40.61	-61.50	12.14	4.25
	4157.500	-54.38	-13	-41.38	-62.26	12.61	4.73
	4989.000	-52.62	-13	-39.62	-60.02	12.65	5.25
	5820.500	-51.16	-13	-38.16	-58.49	13.07	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26865_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1663.000	-47.42	-13	-34.42	-53.71	9.27	2.98
	2494.500	-45.66	-13	-32.66	-52.57	10.58	3.68
	3326.000	-53.11	-13	-40.11	-61.00	12.14	4.25
	4157.500	-54.44	-13	-41.44	-62.32	12.61	4.73
	4989.000	-52.68	-13	-39.68	-60.08	12.65	5.25
	5820.500	-51.22	-13	-38.22	-58.55	13.07	5.74
V	1663.000	-40.12	-13	-27.12	-46.41	9.27	2.98
	2494.500	-46.25	-13	-33.25	-53.16	10.58	3.68
	3326.000	-53.78	-13	-40.78	-61.67	12.14	4.25
	4157.500	-54.41	-13	-41.41	-62.29	12.61	4.73
	4989.000	-52.65	-13	-39.65	-60.05	12.65	5.25
	5820.500	-51.19	-13	-38.19	-58.52	13.07	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26915_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-46.67	-13	-33.67	-53.00	9.33	3.00
	2509.500	-46.69	-13	-33.69	-53.59	10.60	3.70
	3346.000	-53.00	-13	-40.00	-60.95	12.23	4.28
	4182.500	-54.40	-13	-41.40	-62.25	12.62	4.76
	5019.000	-52.23	-13	-39.23	-59.59	12.65	5.29
	5855.500	-51.85	-13	-38.85	-59.14	13.05	5.76
V	1673.000	-38.15	-13	-25.15	-44.48	9.33	3.00
	2509.500	-46.74	-13	-33.74	-53.64	10.60	3.70
	3346.000	-53.96	-13	-40.96	-61.91	12.23	4.28
	4182.500	-54.33	-13	-41.33	-62.18	12.62	4.76
	5019.000	-52.20	-13	-39.20	-59.56	12.65	5.29
	5855.500	-51.77	-13	-38.77	-59.06	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26915_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.000	-46.79	-13	-33.79	-53.12	9.33	3.00
	2509.500	-46.82	-13	-33.82	-53.72	10.60	3.70
	3346.000	-53.21	-13	-40.21	-61.16	12.23	4.28
	4182.500	-54.48	-13	-41.48	-62.33	12.62	4.76
	5019.000	-52.31	-13	-39.31	-59.67	12.65	5.29
	5855.500	-51.89	-13	-38.89	-59.18	13.05	5.76
V	1673.000	-38.35	-13	-25.35	-44.68	9.33	3.00
	2509.500	-46.88	-13	-33.88	-53.78	10.60	3.70
	3346.000	-54.05	-13	-41.05	-62.00	12.23	4.28
	4182.500	-54.36	-13	-41.36	-62.21	12.62	4.76
	5019.000	-52.25	-13	-39.25	-59.61	12.65	5.29
	5855.500	-51.80	-13	-38.80	-59.09	13.05	5.76

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26965_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1683.000	-44.81	-13	-31.81	-51.18	9.39	3.02
	2524.500	-47.85	-13	-34.85	-54.77	10.65	3.72
	3366.000	-54.18	-13	-41.18	-62.19	12.32	4.31
	4207.500	-54.11	-13	-41.11	-61.94	12.62	4.80
	5049.000	-52.49	-13	-39.49	-59.86	12.70	5.33
	5890.500	-50.47	-13	-37.47	-57.72	13.03	5.78
V	1683.000	-36.69	-13	-23.69	-43.06	9.39	3.02
	2524.500	-47.52	-13	-34.52	-54.44	10.65	3.72
	3366.000	-54.94	-13	-41.94	-62.95	12.32	4.31
	4207.500	-54.00	-13	-41.00	-61.83	12.62	4.80
	5049.000	-52.39	-13	-39.39	-59.76	12.70	5.33
	5890.500	-50.37	-13	-37.37	-57.62	13.03	5.78

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 26965_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1683.000	-44.95	-13	-31.95	-51.32	9.39	3.02
	2524.500	-47.98	-13	-34.98	-54.90	10.65	3.72
	3366.000	-54.32	-13	-41.32	-62.33	12.32	4.31
	4207.500	-54.08	-13	-41.08	-61.91	12.62	4.80
	5049.000	-52.46	-13	-39.46	-59.83	12.70	5.33
	5890.500	-50.43	-13	-37.43	-57.68	13.03	5.78
V	1683.000	-36.83	-13	-23.83	-43.20	9.39	3.02
	2524.500	-47.71	-13	-34.71	-54.63	10.65	3.72
	3366.000	-55.02	-13	-42.02	-63.03	12.32	4.31
	4207.500	-54.05	-13	-41.05	-61.88	12.62	4.80
	5049.000	-52.43	-13	-39.43	-59.80	12.70	5.33
	5890.500	-50.40	-13	-37.40	-57.65	13.03	5.78

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions (Part 90)		
Test Mode	Mode 7: LTE Band 26		
Date of Test	2019/08/14	Test Site	SR10-H

BW 1.400M_CH 26697_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1629.400	-58.42	-13	-45.42	-64.68	9.23	2.97
	2444.100	-53.02	-13	-40.02	-59.93	10.57	3.66
	3258.800	-57.15	-13	-44.15	-65.00	12.08	4.23
	4073.500	-55.16	-13	-42.16	-63.06	12.61	4.71
	4888.200	-52.90	-13	-39.90	-60.33	12.65	5.23
	5702.900	-51.47	-13	-38.47	-58.83	13.08	5.72
V	1629.400	-51.62	-13	-38.62	-57.88	9.23	2.97
	2444.100	-53.62	-13	-40.62	-60.53	10.57	3.66
	3258.800	-56.95	-13	-43.95	-64.80	12.08	4.23
	4073.500	-54.96	-13	-41.96	-62.86	12.61	4.71
	4888.200	-53.01	-13	-40.01	-60.44	12.65	5.23
	5702.900	-51.43	-13	-38.43	-58.79	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26697_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1629.400	-57.69	-13	-44.69	-63.95	9.23	2.97
	2444.100	-52.27	-13	-39.27	-59.18	10.57	3.66
	3258.800	-56.71	-13	-43.71	-64.56	12.08	4.23
	4073.500	-55.55	-13	-42.55	-63.45	12.61	4.71
	4888.200	-53.36	-13	-40.36	-60.79	12.65	5.23
	5702.900	-51.40	-13	-38.40	-58.76	13.08	5.72
V	1629.400	-50.57	-13	-37.57	-56.83	9.23	2.97
	2444.100	-52.31	-13	-39.31	-59.22	10.57	3.66
	3258.800	-56.90	-13	-43.90	-64.75	12.08	4.23
	4073.500	-54.42	-13	-41.42	-62.32	12.61	4.71
	4888.200	-52.96	-13	-39.96	-60.39	12.65	5.23
	5702.900	-51.43	-13	-38.43	-58.79	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26740_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1629.400	-58.40	-13	-45.40	-64.66	9.23	2.97
	2444.100	-53.12	-13	-40.12	-60.03	10.57	3.66
	3258.800	-57.11	-13	-44.11	-64.96	12.08	4.23
	4073.500	-55.56	-13	-42.56	-63.46	12.61	4.71
	4888.200	-53.16	-13	-40.16	-60.59	12.65	5.23
	5702.900	-51.50	-13	-38.50	-58.86	13.08	5.72
V	1629.400	-51.93	-13	-38.93	-58.19	9.23	2.97
	2444.100	-54.01	-13	-41.01	-60.92	10.57	3.66
	3258.800	-56.41	-13	-43.41	-64.26	12.08	4.23
	4073.500	-55.14	-13	-42.14	-63.04	12.61	4.71
	4888.200	-53.56	-13	-40.56	-60.99	12.65	5.23
	5702.900	-51.54	-13	-38.54	-58.90	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26740_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1629.400	-58.31	-13	-45.31	-64.57	9.23	2.97
	2444.100	-53.16	-13	-40.16	-60.07	10.57	3.66
	3258.800	-57.14	-13	-44.14	-64.99	12.08	4.23
	4073.500	-55.79	-13	-42.79	-63.69	12.61	4.71
	4888.200	-54.11	-13	-41.11	-61.54	12.65	5.23
	5702.900	-51.48	-13	-38.48	-58.84	13.08	5.72
V	1629.400	-50.92	-13	-37.92	-57.18	9.23	2.97
	2444.100	-53.62	-13	-40.62	-60.53	10.57	3.66
	3258.800	-57.50	-13	-44.50	-65.35	12.08	4.23
	4073.500	-54.94	-13	-41.94	-62.84	12.61	4.71
	4888.200	-53.46	-13	-40.46	-60.89	12.65	5.23
	5702.900	-52.43	-13	-39.43	-59.79	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26783_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1646.600	-53.36	-13	-40.36	-59.66	9.28	2.99
	2469.900	-50.69	-13	-37.69	-57.59	10.58	3.68
	3293.200	-57.32	-13	-44.32	-65.22	12.16	4.26
	4116.500	-54.82	-13	-41.82	-62.70	12.61	4.74
	4939.800	-53.16	-13	-40.16	-60.55	12.65	5.26
	5763.100	-51.65	-13	-38.65	-58.98	13.07	5.74
V	1646.600	-50.31	-13	-37.31	-56.61	9.28	2.99
	2469.900	-51.59	-13	-38.59	-58.49	10.58	3.68
	3293.200	-57.25	-13	-44.25	-65.15	12.16	4.26
	4116.500	-54.67	-13	-41.67	-62.55	12.61	4.74
	4939.800	-52.97	-13	-39.97	-60.36	12.65	5.26
	5763.100	-50.84	-13	-37.84	-58.17	13.07	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 26783_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1646.600	-56.42	-13	-43.42	-62.72	9.28	2.99
	2469.900	-50.60	-13	-37.60	-57.50	10.58	3.68
	3293.200	-57.44	-13	-44.44	-65.34	12.16	4.26
	4116.500	-55.49	-13	-42.49	-63.37	12.61	4.74
	4939.800	-52.58	-13	-39.58	-59.97	12.65	5.26
	5763.100	-51.34	-13	-38.34	-58.67	13.07	5.74
V	1646.600	-50.19	-13	-37.19	-56.49	9.28	2.99
	2469.900	-51.22	-13	-38.22	-58.12	10.58	3.68
	3293.200	-57.30	-13	-44.30	-65.20	12.16	4.26
	4116.500	-54.36	-13	-41.36	-62.24	12.61	4.74
	4939.800	-53.03	-13	-40.03	-60.42	12.65	5.26
	5763.100	-50.58	-13	-37.58	-57.91	13.07	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26705_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1631.000	-55.32	-13	-42.32	-61.59	9.24	2.97
	2446.500	-52.76	-13	-39.76	-59.67	10.57	3.66
	3262.000	-57.77	-13	-44.77	-65.63	12.09	4.24
	4077.500	-55.43	-13	-42.43	-63.33	12.61	4.71
	4893.000	-53.87	-13	-40.87	-61.29	12.65	5.23
	5708.500	-51.35	-13	-38.35	-58.71	13.08	5.72
V	1631.000	-51.19	-13	-38.19	-57.46	9.24	2.97
	2446.500	-53.92	-13	-40.92	-60.83	10.57	3.66
	3262.000	-57.40	-13	-44.40	-65.26	12.09	4.24
	4077.500	-54.96	-13	-41.96	-62.86	12.61	4.71
	4893.000	-53.34	-13	-40.34	-60.76	12.65	5.23
	5708.500	-51.70	-13	-38.70	-59.06	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26705_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1631.000	-55.40	-13	-42.40	-61.67	9.24	2.97
	2446.500	-52.84	-13	-39.84	-59.75	10.57	3.66
	3262.000	-57.56	-13	-44.56	-65.42	12.09	4.24
	4077.500	-55.50	-13	-42.50	-63.40	12.61	4.71
	4893.000	-53.67	-13	-40.67	-61.09	12.65	5.23
	5708.500	-51.80	-13	-38.80	-59.16	13.08	5.72
V	1631.000	-50.40	-13	-37.40	-56.67	9.24	2.97
	2446.500	-52.25	-13	-39.25	-59.16	10.57	3.66
	3262.000	-57.75	-13	-44.75	-65.61	12.09	4.24
	4077.500	-55.31	-13	-42.31	-63.21	12.61	4.71
	4893.000	-53.63	-13	-40.63	-61.05	12.65	5.23
	5708.500	-49.58	-13	-36.58	-56.94	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26740_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-57.88	-13	-44.88	-64.16	9.26	2.98
	2457.000	-51.32	-13	-38.32	-58.23	10.58	3.67
	3276.000	-57.62	-13	-44.62	-65.50	12.12	4.25
	4095.000	-55.08	-13	-42.08	-62.97	12.61	4.72
	4914.000	-53.58	-13	-40.58	-60.99	12.65	5.24
	5733.000	-50.99	-13	-37.99	-58.34	13.07	5.73
V	1638.000	-53.23	-13	-40.23	-59.51	9.26	2.98
	2457.000	-48.88	-13	-35.88	-55.79	10.58	3.67
	3276.000	-57.44	-13	-44.44	-65.32	12.12	4.25
	4095.000	-54.71	-13	-41.71	-62.60	12.61	4.72
	4914.000	-52.98	-13	-39.98	-60.39	12.65	5.24
	5733.000	-48.82	-13	-35.82	-56.17	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26740_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-58.00	-13	-45.00	-64.28	9.26	2.98
	2457.000	-53.90	-13	-40.90	-60.81	10.58	3.67
	3276.000	-57.76	-13	-44.76	-65.64	12.12	4.25
	4095.000	-55.47	-13	-42.47	-63.36	12.61	4.72
	4914.000	-52.61	-13	-39.61	-60.02	12.65	5.24
	5733.000	-50.26	-13	-37.26	-57.61	13.07	5.73
V	1638.000	-52.81	-13	-39.81	-59.09	9.26	2.98
	2457.000	-49.51	-13	-36.51	-56.42	10.58	3.67
	3276.000	-57.43	-13	-44.43	-65.31	12.12	4.25
	4095.000	-55.60	-13	-42.60	-63.49	12.61	4.72
	4914.000	-53.82	-13	-40.82	-61.23	12.65	5.24
	5733.000	-50.70	-13	-37.70	-58.05	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26775_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1683.000	-57.46	-13	-44.46	-63.83	9.39	3.02
	2457.000	-51.40	-13	-38.40	-58.31	10.58	3.67
	3276.000	-57.45	-13	-44.45	-65.33	12.12	4.25
	4095.000	-55.28	-13	-42.28	-63.17	12.61	4.72
	4914.000	-52.92	-13	-39.92	-60.33	12.65	5.24
	5733.000	-50.38	-13	-37.38	-57.73	13.07	5.73
V	1638.000	-53.21	-13	-40.21	-59.49	9.26	2.98
	2457.000	-48.85	-13	-35.85	-55.76	10.58	3.67
	3276.000	-57.66	-13	-44.66	-65.54	12.12	4.25
	4095.000	-55.37	-13	-42.37	-63.26	12.61	4.72
	4914.000	-53.70	-13	-40.70	-61.11	12.65	5.24
	5733.000	-51.22	-13	-38.22	-58.57	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 26775_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-58.37	-13	-45.37	-64.65	9.26	2.98
	2457.000	-51.73	-13	-38.73	-58.64	10.58	3.67
	3276.000	-57.47	-13	-44.47	-65.35	12.12	4.25
	4095.000	-54.60	-13	-41.60	-62.49	12.61	4.72
	4914.000	-53.33	-13	-40.33	-60.74	12.65	5.24
	5733.000	-50.37	-13	-37.37	-57.72	13.07	5.73
V	1638.000	-53.23	-13	-40.23	-59.51	9.26	2.98
	2457.000	-48.59	-13	-35.59	-55.50	10.58	3.67
	3276.000	-57.59	-13	-44.59	-65.47	12.12	4.25
	4095.000	-55.68	-13	-42.68	-63.57	12.61	4.72
	4914.000	-53.73	-13	-40.73	-61.14	12.65	5.24
	5733.000	-50.45	-13	-37.45	-57.80	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26715_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1633.000	-56.88	-13	-43.88	-63.15	9.24	2.97
	2449.500	-54.59	-13	-41.59	-61.50	10.57	3.67
	3266.000	-56.99	-13	-43.99	-64.85	12.10	4.24
	4082.500	-55.38	-13	-42.38	-63.28	12.61	4.71
	4899.000	-53.81	-13	-40.81	-61.23	12.65	5.23
	5715.500	-50.67	-13	-37.67	-58.03	13.08	5.72
V	1633.000	-52.42	-13	-39.42	-58.69	9.24	2.97
	2449.500	-53.73	-13	-40.73	-60.64	10.57	3.67
	3266.000	-58.01	-13	-45.01	-65.87	12.10	4.24
	4082.500	-55.58	-13	-42.58	-63.48	12.61	4.71
	4899.000	-54.22	-13	-41.22	-61.64	12.65	5.23
	5715.500	-50.25	-13	-37.25	-57.61	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26715_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1633.000	-55.57	-13	-42.57	-61.84	9.24	2.97
	2449.500	-53.42	-13	-40.42	-60.33	10.57	3.67
	3266.000	-56.78	-13	-43.78	-64.64	12.10	4.24
	4082.500	-55.49	-13	-42.49	-63.39	12.61	4.71
	4899.000	-53.39	-13	-40.39	-60.81	12.65	5.23
	5715.500	-51.52	-13	-38.52	-58.88	13.08	5.72
V	1633.000	-51.45	-13	-38.45	-57.72	9.24	2.97
	2449.500	-54.34	-13	-41.34	-61.25	10.57	3.67
	3266.000	-57.07	-13	-44.07	-64.93	12.10	4.24
	4082.500	-54.94	-13	-41.94	-62.84	12.61	4.71
	4899.000	-54.14	-13	-41.14	-61.56	12.65	5.23
	5715.500	-50.64	-13	-37.64	-58.00	13.08	5.72

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26740_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-57.58	-13	-44.58	-63.86	9.26	2.98
	2457.000	-50.32	-13	-37.32	-57.23	10.58	3.67
	3276.000	-57.90	-13	-44.90	-65.78	12.12	4.25
	4095.000	-55.01	-13	-42.01	-62.90	12.61	4.72
	4914.000	-52.87	-13	-39.87	-60.28	12.65	5.24
	5733.000	-50.75	-13	-37.75	-58.10	13.07	5.73
V	1638.000	-53.53	-13	-40.53	-59.81	9.26	2.98
	2457.000	-49.21	-13	-36.21	-56.12	10.58	3.67
	3276.000	-57.36	-13	-44.36	-65.24	12.12	4.25
	4095.000	-55.18	-13	-42.18	-63.07	12.61	4.72
	4914.000	-52.65	-13	-39.65	-60.06	12.65	5.24
	5733.000	-49.56	-13	-36.56	-56.91	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26740_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-56.67	-13	-43.67	-62.95	9.26	2.98
	2457.000	-51.18	-13	-38.18	-58.09	10.58	3.67
	3276.000	-57.96	-13	-44.96	-65.84	12.12	4.25
	4095.000	-55.08	-13	-42.08	-62.97	12.61	4.72
	4914.000	-54.05	-13	-41.05	-61.46	12.65	5.24
	5733.000	-49.96	-13	-36.96	-57.31	13.07	5.73
V	1638.000	-52.59	-13	-39.59	-58.87	9.26	2.98
	2457.000	-48.66	-13	-35.66	-55.57	10.58	3.67
	3276.000	-57.21	-13	-44.21	-65.09	12.12	4.25
	4095.000	-55.49	-13	-42.49	-63.38	12.61	4.72
	4914.000	-53.58	-13	-40.58	-60.99	12.65	5.24
	5733.000	-51.32	-13	-38.32	-58.67	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26765_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1643.000	-55.48	-13	-42.48	-61.77	9.27	2.98
	2464.500	-48.46	-13	-35.46	-55.37	10.58	3.68
	3286.000	-57.59	-13	-44.59	-65.48	12.14	4.25
	4107.500	-55.30	-13	-42.30	-63.18	12.61	4.73
	4929.000	-53.06	-13	-40.06	-60.46	12.65	5.25
	5750.500	-46.87	-13	-33.87	-54.20	13.07	5.74
V	1643.000	-45.25	-13	-32.25	-51.54	9.27	2.98
	2464.500	-49.04	-13	-36.04	-55.95	10.58	3.68
	3286.000	-57.31	-13	-44.31	-65.20	12.14	4.25
	4107.500	-54.56	-13	-41.56	-62.44	12.61	4.73
	4929.000	-52.24	-13	-39.24	-59.64	12.65	5.25
	5750.500	-50.07	-13	-37.07	-57.40	13.07	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 26765_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1643.000	-56.12	-13	-43.12	-62.41	9.27	2.98
	2464.500	-52.75	-13	-39.75	-59.66	10.58	3.68
	3286.000	-57.85	-13	-44.85	-65.74	12.14	4.25
	4107.500	-55.82	-13	-42.82	-63.70	12.61	4.73
	4929.000	-53.18	-13	-40.18	-60.58	12.65	5.25
	5750.500	-47.96	-13	-34.96	-55.29	13.07	5.74
V	1643.000	-52.61	-13	-39.61	-58.90	9.27	2.98
	2464.500	-49.40	-13	-36.40	-56.31	10.58	3.68
	3286.000	-57.17	-13	-44.17	-65.06	12.14	4.25
	4107.500	-54.78	-13	-41.78	-62.66	12.61	4.73
	4929.000	-49.62	-13	-36.62	-57.02	12.65	5.25
	5750.500	-50.43	-13	-37.43	-57.76	13.07	5.74

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26740_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-54.95	-13	-41.95	-61.23	9.26	2.98
	2457.000	-49.76	-13	-36.76	-56.67	10.58	3.67
	3276.000	-57.66	-13	-44.66	-65.54	12.12	4.25
	4095.000	-55.30	-13	-42.30	-63.19	12.61	4.72
	4914.000	-53.02	-13	-40.02	-60.43	12.65	5.24
	5733.000	-50.60	-13	-37.60	-57.95	13.07	5.73
V	1638.000	-48.12	-13	-35.12	-54.40	9.26	2.98
	2457.000	-54.27	-13	-41.27	-61.18	10.58	3.67
	3276.000	-57.48	-13	-44.48	-65.36	12.12	4.25
	4095.000	-55.02	-13	-42.02	-62.91	12.61	4.72
	4914.000	-53.20	-13	-40.20	-60.61	12.65	5.24
	5733.000	-50.35	-13	-37.35	-57.70	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 26740_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1638.000	-50.32	-13	-37.32	-56.60	9.26	2.98
	2457.000	-53.83	-13	-40.83	-60.74	10.58	3.67
	3276.000	-57.61	-13	-44.61	-65.49	12.12	4.25
	4095.000	-55.39	-13	-42.39	-63.28	12.61	4.72
	4914.000	-53.66	-13	-40.66	-61.07	12.65	5.24
	5733.000	-51.57	-13	-38.57	-58.92	13.07	5.73
V	1638.000	-50.32	-13	-37.32	-56.60	9.26	2.98
	2457.000	-53.83	-13	-40.83	-60.74	10.58	3.67
	3276.000	-57.61	-13	-44.61	-65.49	12.12	4.25
	4095.000	-55.39	-13	-42.39	-63.28	12.61	4.72
	4914.000	-53.66	-13	-40.66	-61.07	12.65	5.24
	5733.000	-51.57	-13	-38.57	-58.92	13.07	5.73

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 8: LTE Band 66		
Date of Test	2019/08/14	Test Site	SR10-H

BW 1.400M_CH 131979_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3421.400	-44.03	-13	-31.03	-52.12	12.44	4.35
	5132.100	-40.20	-13	-27.20	-47.59	12.78	5.39
	6842.800	-32.08	-13	-19.08	-37.56	11.84	6.36
	8553.500	-41.98	-13	-28.98	-46.94	11.87	6.91
	10264.200	-37.99	-13	-24.99	-42.24	11.86	7.61
	11974.900	-36.74	-13	-23.74	-41.65	13.13	8.22
V	3421.400	-44.68	-13	-31.68	-52.77	12.44	4.35
	5132.100	-39.46	-13	-26.46	-46.85	12.78	5.39
	6842.800	-18.45	-13	-5.45	-23.93	11.84	6.36
	8553.500	-35.06	-13	-22.06	-40.02	11.87	6.91
	10264.200	-37.70	-13	-24.70	-41.95	11.86	7.61
	11974.900	-35.92	-13	-22.92	-40.83	13.13	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 131979_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3421.400	-44.18	-13	-31.18	-52.27	12.44	4.35
	5132.100	-39.96	-13	-26.96	-47.35	12.78	5.39
	6842.800	-32.55	-13	-19.55	-38.03	11.84	6.36
	8553.500	-41.57	-13	-28.57	-46.53	11.87	6.91
	10264.200	-37.80	-13	-24.80	-42.05	11.86	7.61
	11974.900	-36.65	-13	-23.65	-41.56	13.13	8.22
V	3421.400	-45.60	-13	-32.60	-53.69	12.44	4.35
	5132.100	-40.70	-13	-27.70	-48.09	12.78	5.39
	6842.800	-19.48	-13	-6.48	-24.96	11.84	6.36
	8553.500	-35.99	-13	-22.99	-40.95	11.87	6.91
	10264.200	-37.97	-13	-24.97	-42.22	11.86	7.61
	11974.900	-36.35	-13	-23.35	-41.26	13.13	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 132322_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-41.83	-13	-28.83	-50.02	12.59	4.40
	5235.000	-37.89	-13	-24.89	-45.31	12.88	5.46
	6980.000	-32.53	-13	-19.53	-37.69	11.67	6.51
	8725.000	-41.88	-13	-28.88	-46.79	11.88	6.97
	10470.000	-38.01	-13	-25.01	-41.97	11.69	7.73
	12215.000	-36.55	-13	-23.55	-41.73	13.47	8.29
V	3490.000	-43.25	-13	-30.25	-51.44	12.59	4.40
	5235.000	-36.80	-13	-23.80	-44.22	12.88	5.46
	6980.000	-22.26	-13	-9.26	-27.42	11.67	6.51
	8725.000	-33.06	-13	-20.06	-37.97	11.88	6.97
	10470.000	-34.18	-13	-21.18	-38.14	11.69	7.73
	12215.000	-35.87	-13	-22.87	-41.05	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 132322_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-41.56	-13	-28.56	-49.75	12.59	4.40
	5235.000	-38.07	-13	-25.07	-45.49	12.88	5.46
	6980.000	-33.42	-13	-20.42	-38.58	11.67	6.51
	8725.000	-41.45	-13	-28.45	-46.36	11.88	6.97
	10470.000	-37.92	-13	-24.92	-41.88	11.69	7.73
	12215.000	-36.86	-13	-23.86	-42.04	13.47	8.29
V	3490.000	-43.38	-13	-30.38	-51.57	12.59	4.40
	5235.000	-36.97	-13	-23.97	-44.39	12.88	5.46
	6980.000	-23.70	-13	-10.70	-28.86	11.67	6.51
	8725.000	-33.25	-13	-20.25	-38.16	11.88	6.97
	10470.000	-34.34	-13	-21.34	-38.30	11.69	7.73
	12215.000	-35.93	-13	-22.93	-41.11	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 132665_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3558.600	-44.63	-13	-31.63	-52.80	12.61	4.44
	5337.900	-40.19	-13	-27.19	-47.64	12.98	5.53
	7117.200	-31.58	-13	-18.58	-36.58	11.55	6.56
	8896.500	-40.11	-13	-27.11	-44.96	11.88	7.03
	10675.800	-36.36	-13	-23.36	-40.17	11.61	7.80
	12455.100	-37.61	-13	-24.61	-43.05	13.80	8.36
V	3558.600	-44.76	-13	-31.76	-52.93	12.61	4.44
	5337.900	-37.80	-13	-24.80	-45.25	12.98	5.53
	7117.200	-20.96	-13	-7.96	-25.96	11.55	6.56
	8896.500	-32.84	-13	-19.84	-37.69	11.88	7.03
	10675.800	-33.78	-13	-20.78	-37.59	11.61	7.80
	12455.100	-37.61	-13	-24.61	-43.05	13.80	8.36

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 1.400M_CH 132665_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3558.600	-44.88	-13	-31.88	-53.05	12.61	4.44
	5337.900	-40.35	-13	-27.35	-47.80	12.98	5.53
	7117.200	-31.79	-13	-18.79	-36.79	11.55	6.56
	8896.500	-40.39	-13	-27.39	-45.24	11.88	7.03
	10675.800	-36.64	-13	-23.64	-40.45	11.61	7.80
	12455.100	-37.85	-13	-24.85	-43.29	13.80	8.36
V	3558.600	-45.55	-13	-32.55	-53.72	12.61	4.44
	5337.900	-37.95	-13	-24.95	-45.40	12.98	5.53
	7117.200	-22.86	-13	-9.86	-27.86	11.55	6.56
	8896.500	-32.99	-13	-19.99	-37.84	11.88	7.03
	10675.800	-33.89	-13	-20.89	-37.70	11.61	7.80
	12455.100	-37.75	-13	-24.75	-43.19	13.80	8.36

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 131987_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3423.000	-44.21	-13	-31.21	-52.30	12.44	4.35
	5134.500	-40.48	-13	-27.48	-47.87	12.78	5.39
	6846.000	-33.59	-13	-20.59	-39.06	11.83	6.37
	8557.500	-41.71	-13	-28.71	-46.67	11.87	6.91
	10269.000	-37.69	-13	-24.69	-41.93	11.86	7.62
	11980.500	-36.80	-13	-23.80	-41.72	13.14	8.22
V	3423.000	-45.19	-13	-32.19	-53.28	12.44	4.35
	5134.500	-39.72	-13	-26.72	-47.11	12.78	5.39
	6846.000	-20.55	-13	-7.55	-26.02	11.83	6.37
	8557.500	-35.11	-13	-22.11	-40.07	11.87	6.91
	10269.000	-37.01	-13	-24.01	-41.25	11.86	7.62
	11980.500	-36.01	-13	-23.01	-40.93	13.14	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 131987_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3423.000	-44.69	-13	-31.69	-52.78	12.44	4.35
	5134.500	-40.74	-13	-27.74	-48.13	12.78	5.39
	6846.000	-33.82	-13	-20.82	-39.29	11.83	6.37
	8557.500	-41.95	-13	-28.95	-46.91	11.87	6.91
	10269.000	-37.79	-13	-24.79	-42.03	11.86	7.62
	11980.500	-36.95	-13	-23.95	-41.87	13.14	8.22
V	3423.000	-45.39	-13	-32.39	-53.48	12.44	4.35
	5134.500	-39.92	-13	-26.92	-47.31	12.78	5.39
	6846.000	-21.02	-13	-8.02	-26.49	11.83	6.37
	8557.500	-35.38	-13	-22.38	-40.34	11.87	6.91
	10269.000	-37.28	-13	-24.28	-41.52	11.86	7.62
	11980.500	-36.34	-13	-23.34	-41.26	13.14	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 132322_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-41.92	-13	-28.92	-50.11	12.59	4.40
	5235.000	-38.75	-13	-25.75	-46.17	12.88	5.46
	6980.000	-35.62	-13	-22.62	-40.78	11.67	6.51
	8725.000	-40.67	-13	-27.67	-45.58	11.88	6.97
	10470.000	-37.02	-13	-24.02	-40.98	11.69	7.73
	12215.000	-36.24	-13	-23.24	-41.42	13.47	8.29
V	3490.000	-43.52	-13	-30.52	-51.71	12.59	4.40
	5235.000	-37.20	-13	-24.20	-44.62	12.88	5.46
	6980.000	-25.42	-13	-12.42	-30.58	11.67	6.51
	8725.000	-34.67	-13	-21.67	-39.58	11.88	6.97
	10470.000	-33.83	-13	-20.83	-37.79	11.69	7.73
	12215.000	-36.94	-13	-23.94	-42.12	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 132322_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.14	-13	-29.14	-50.33	12.59	4.40
	5235.000	-38.95	-13	-25.95	-46.37	12.88	5.46
	6980.000	-35.85	-13	-22.85	-41.01	11.67	6.51
	8725.000	-40.79	-13	-27.79	-45.70	11.88	6.97
	10470.000	-37.25	-13	-24.25	-41.21	11.69	7.73
	12215.000	-36.32	-13	-23.32	-41.50	13.47	8.29
V	3490.000	-43.79	-13	-30.79	-51.98	12.59	4.40
	5235.000	-37.35	-13	-24.35	-44.77	12.88	5.46
	6980.000	-25.57	-13	-12.57	-30.73	11.67	6.51
	8725.000	-34.89	-13	-21.89	-39.80	11.88	6.97
	10470.000	-33.99	-13	-20.99	-37.95	11.69	7.73
	12215.000	-37.05	-13	-24.05	-42.23	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 132657_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3557.000	-45.28	-13	-32.28	-53.45	12.61	4.44
	5335.500	-40.73	-13	-27.73	-48.18	12.98	5.53
	7114.000	-31.84	-13	-18.84	-36.84	11.56	6.56
	8892.500	-40.55	-13	-27.55	-45.41	11.88	7.03
	10671.000	-35.72	-13	-22.72	-39.54	11.61	7.80
	12449.500	-37.58	-13	-24.58	-43.01	13.79	8.36
V	3557.000	-45.07	-13	-32.07	-53.24	12.61	4.44
	5335.500	-36.73	-13	-23.73	-44.18	12.98	5.53
	7114.000	-20.84	-13	-7.84	-25.84	11.56	6.56
	8892.500	-33.95	-13	-20.95	-38.81	11.88	7.03
	10671.000	-34.06	-13	-21.06	-37.88	11.61	7.80
	12449.500	-37.45	-13	-24.45	-42.88	13.79	8.36

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 3.000M_CH 132657_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3557.000	-45.49	-13	-32.49	-53.66	12.61	4.44
	5335.500	-40.95	-13	-27.95	-48.40	12.98	5.53
	7114.000	-31.99	-13	-18.99	-36.99	11.56	6.56
	8892.500	-40.74	-13	-27.74	-45.60	11.88	7.03
	10671.000	-35.93	-13	-22.93	-39.75	11.61	7.80
	12449.500	-37.76	-13	-24.76	-43.19	13.79	8.36
V	3557.000	-45.25	-13	-32.25	-53.42	12.61	4.44
	5335.500	-36.89	-13	-23.89	-44.34	12.98	5.53
	7114.000	-20.99	-13	-7.99	-25.99	11.56	6.56
	8892.500	-34.21	-13	-21.21	-39.07	11.88	7.03
	10671.000	-34.31	-13	-21.31	-38.13	11.61	7.80
	12449.500	-37.69	-13	-24.69	-43.12	13.79	8.36

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 131997_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3425.000	-43.88	-13	-30.88	-51.97	12.45	4.36
	5137.500	-41.63	-13	-28.63	-49.02	12.78	5.39
	6850.000	-33.40	-13	-20.40	-38.86	11.83	6.37
	8562.500	-42.13	-13	-29.13	-47.08	11.87	6.91
	10275.000	-37.37	-13	-24.37	-41.60	11.85	7.62
	11987.500	-36.13	-13	-23.13	-41.06	13.16	8.22
V	3425.000	-45.22	-13	-32.22	-53.31	12.45	4.36
	5137.500	-40.26	-13	-27.26	-47.65	12.78	5.39
	6850.000	-21.68	-13	-8.68	-27.14	11.83	6.37
	8562.500	-35.81	-13	-22.81	-40.76	11.87	6.91
	10275.000	-37.26	-13	-24.26	-41.49	11.85	7.62
	11987.500	-35.44	-13	-22.44	-40.37	13.16	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 131997_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3425.000	-44.11	-13	-31.11	-52.20	12.45	4.36
	5137.500	-41.86	-13	-28.86	-49.25	12.78	5.39
	6850.000	-33.68	-13	-20.68	-39.14	11.83	6.37
	8562.500	-42.37	-13	-29.37	-47.32	11.87	6.91
	10275.000	-37.62	-13	-24.62	-41.85	11.85	7.62
	11987.500	-36.44	-13	-23.44	-41.37	13.16	8.22
V	3425.000	-45.48	-13	-32.48	-53.57	12.45	4.36
	5137.500	-40.64	-13	-27.64	-48.03	12.78	5.39
	6850.000	-21.88	-13	-8.88	-27.34	11.83	6.37
	8562.500	-35.99	-13	-22.99	-40.94	11.87	6.91
	10275.000	-37.48	-13	-24.48	-41.71	11.85	7.62
	11987.500	-35.71	-13	-22.71	-40.64	13.16	8.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 132322_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-41.95	-13	-28.95	-50.14	12.59	4.40
	5235.000	-38.61	-13	-25.61	-46.03	12.88	5.46
	6980.000	-35.89	-13	-22.89	-41.05	11.67	6.51
	8725.000	-41.03	-13	-28.03	-45.94	11.88	6.97
	10470.000	-37.38	-13	-24.38	-41.34	11.69	7.73
	12215.000	-36.43	-13	-23.43	-41.61	13.47	8.29
V	3490.000	-43.45	-13	-30.45	-51.64	12.59	4.40
	5235.000	-37.57	-13	-24.57	-44.99	12.88	5.46
	6980.000	-25.23	-13	-12.23	-30.39	11.67	6.51
	8725.000	-34.68	-13	-21.68	-39.59	11.88	6.97
	10470.000	-35.17	-13	-22.17	-39.13	11.69	7.73
	12215.000	-36.76	-13	-23.76	-41.94	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 132322_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.15	-13	-29.15	-50.34	12.59	4.40
	5235.000	-38.92	-13	-25.92	-46.34	12.88	5.46
	6980.000	-36.06	-13	-23.06	-41.22	11.67	6.51
	8725.000	-41.37	-13	-28.37	-46.28	11.88	6.97
	10470.000	-37.66	-13	-24.66	-41.62	11.69	7.73
	12215.000	-36.67	-13	-23.67	-41.85	13.47	8.29
V	3490.000	-43.68	-13	-30.68	-51.87	12.59	4.40
	5235.000	-37.79	-13	-24.79	-45.21	12.88	5.46
	6980.000	-25.51	-13	-12.51	-30.67	11.67	6.51
	8725.000	-34.82	-13	-21.82	-39.73	11.88	6.97
	10470.000	-35.25	-13	-22.25	-39.21	11.69	7.73
	12215.000	-36.91	-13	-23.91	-42.09	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 132647_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3555.000	-45.62	-13	-32.62	-53.79	12.61	4.44
	5332.500	-39.73	-13	-26.73	-47.18	12.98	5.53
	7110.000	-32.10	-13	-19.10	-37.10	11.56	6.55
	8887.500	-40.93	-13	-27.93	-45.79	11.88	7.03
	10665.000	-36.18	-13	-23.18	-40.00	11.61	7.79
	12442.500	-36.79	-13	-23.79	-42.22	13.78	8.36
V	3555.000	-46.24	-13	-33.24	-54.41	12.61	4.44
	5332.500	-36.17	-13	-23.17	-43.62	12.98	5.53
	7110.000	-20.86	-13	-7.86	-25.86	11.56	6.55
	8887.500	-33.27	-13	-20.27	-38.13	11.88	7.03
	10665.000	-33.60	-13	-20.60	-37.42	11.61	7.79
	12442.500	-37.38	-13	-24.38	-42.81	13.78	8.36

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 132647_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3555.000	-45.89	-13	-32.89	-54.06	12.61	4.44
	5332.500	-39.99	-13	-26.99	-47.44	12.98	5.53
	7110.000	-32.35	-13	-19.35	-37.35	11.56	6.55
	8887.500	-41.12	-13	-28.12	-45.98	11.88	7.03
	10665.000	-36.42	-13	-23.42	-40.24	11.61	7.79
	12442.500	-36.98	-13	-23.98	-42.41	13.78	8.36
V	3555.000	-46.47	-13	-33.47	-54.64	12.61	4.44
	5332.500	-36.41	-13	-23.41	-43.86	12.98	5.53
	7110.000	-21.11	-13	-8.11	-26.11	11.56	6.55
	8887.500	-33.46	-13	-20.46	-38.32	11.88	7.03
	10665.000	-33.88	-13	-20.88	-37.70	11.61	7.79
	12442.500	-37.55	-13	-24.55	-42.98	13.78	8.36

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 132022_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3430.000	-43.98	-13	-30.98	-52.08	12.46	4.36
	5145.000	-41.27	-13	-28.27	-48.67	12.79	5.40
	6860.000	-33.35	-13	-20.35	-38.79	11.82	6.38
	8575.000	-42.32	-13	-29.32	-47.27	11.87	6.92
	10290.000	-37.12	-13	-24.12	-41.33	11.84	7.63
	12005.000	-36.11	-13	-23.11	-41.07	13.19	8.23
V	3430.000	-45.41	-13	-32.41	-53.51	12.46	4.36
	5145.000	-39.67	-13	-26.67	-47.07	12.79	5.40
	6860.000	-20.29	-13	-7.29	-25.73	11.82	6.38
	8575.000	-37.26	-13	-24.26	-42.21	11.87	6.92
	10290.000	-37.36	-13	-24.36	-41.57	11.84	7.63
	12005.000	-36.38	-13	-23.38	-41.34	13.19	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 132022_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3430.000	-44.13	-13	-31.13	-52.23	12.46	4.36
	5145.000	-41.47	-13	-28.47	-48.87	12.79	5.40
	6860.000	-33.56	-13	-20.56	-39.00	11.82	6.38
	8575.000	-42.51	-13	-29.51	-47.46	11.87	6.92
	10290.000	-37.32	-13	-24.32	-41.53	11.84	7.63
	12005.000	-36.33	-13	-23.33	-41.29	13.19	8.23
V	3430.000	-45.63	-13	-32.63	-53.73	12.46	4.36
	5145.000	-39.85	-13	-26.85	-47.25	12.79	5.40
	6860.000	-20.52	-13	-7.52	-25.96	11.82	6.38
	8575.000	-37.47	-13	-24.47	-42.42	11.87	6.92
	10290.000	-37.55	-13	-24.55	-41.76	11.84	7.63
	12005.000	-36.57	-13	-23.57	-41.53	13.19	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 132322_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.15	-13	-29.15	-50.34	12.59	4.40
	5235.000	-38.61	-13	-25.61	-46.03	12.88	5.46
	6980.000	-35.67	-13	-22.67	-40.83	11.67	6.51
	8725.000	-41.15	-13	-28.15	-46.06	11.88	6.97
	10470.000	-37.27	-13	-24.27	-41.23	11.69	7.73
	12215.000	-36.99	-13	-23.99	-42.17	13.47	8.29
V	3490.000	-43.29	-13	-30.29	-51.48	12.59	4.40
	5235.000	-37.31	-13	-24.31	-44.73	12.88	5.46
	6980.000	-25.00	-13	-12.00	-30.16	11.67	6.51
	8725.000	-33.97	-13	-20.97	-38.88	11.88	6.97
	10470.000	-34.49	-13	-21.49	-38.45	11.69	7.73
	12215.000	-37.14	-13	-24.14	-42.32	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 132322_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.37	-13	-29.37	-50.56	12.59	4.40
	5235.000	-38.89	-13	-25.89	-46.31	12.88	5.46
	6980.000	-35.89	-13	-22.89	-41.05	11.67	6.51
	8725.000	-41.34	-13	-28.34	-46.25	11.88	6.97
	10470.000	-37.47	-13	-24.47	-41.43	11.69	7.73
	12215.000	-37.21	-13	-24.21	-42.39	13.47	8.29
V	3490.000	-43.53	-13	-30.53	-51.72	12.59	4.40
	5235.000	-37.57	-13	-24.57	-44.99	12.88	5.46
	6980.000	-25.26	-13	-12.26	-30.42	11.67	6.51
	8725.000	-34.15	-13	-21.15	-39.06	11.88	6.97
	10470.000	-34.66	-13	-21.66	-38.62	11.69	7.73
	12215.000	-37.38	-13	-24.38	-42.56	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 132622_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3550.000	-45.35	-13	-32.35	-53.52	12.61	4.44
	5325.000	-37.41	-13	-24.41	-44.85	12.97	5.53
	7100.000	-31.46	-13	-18.46	-36.47	11.57	6.55
	8875.000	-40.37	-13	-27.37	-45.23	11.88	7.02
	10650.000	-36.07	-13	-23.07	-39.90	11.62	7.79
	12425.000	-37.53	-13	-24.53	-42.94	13.76	8.35
V	3550.000	-47.20	-13	-34.20	-55.37	12.61	4.44
	5325.000	-34.02	-13	-21.02	-41.46	12.97	5.53
	7100.000	-20.14	-13	-7.14	-25.15	11.57	6.55
	8875.000	-31.83	-13	-18.83	-36.69	11.88	7.02
	10650.000	-35.05	-13	-22.05	-38.88	11.62	7.79
	12425.000	-37.61	-13	-24.61	-43.02	13.76	8.35

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 132622_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3550.000	-45.57	-13	-32.57	-53.74	12.61	4.44
	5325.000	-37.66	-13	-24.66	-45.10	12.97	5.53
	7100.000	-31.66	-13	-18.66	-36.67	11.57	6.55
	8875.000	-40.58	-13	-27.58	-45.44	11.88	7.02
	10650.000	-36.29	-13	-23.29	-40.12	11.62	7.79
	12425.000	-37.73	-13	-24.73	-43.14	13.76	8.35
V	3550.000	-47.48	-13	-34.48	-55.65	12.61	4.44
	5325.000	-34.27	-13	-21.27	-41.71	12.97	5.53
	7100.000	-20.33	-13	-7.33	-25.34	11.57	6.55
	8875.000	-32.02	-13	-19.02	-36.88	11.88	7.02
	10650.000	-35.21	-13	-22.21	-39.04	11.62	7.79
	12425.000	-37.89	-13	-24.89	-43.30	13.76	8.35

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 132047_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3435.000	-44.16	-13	-31.16	-52.27	12.47	4.36
	5152.500	-40.62	-13	-27.62	-48.02	12.80	5.40
	6870.000	-35.00	-13	-22.00	-40.41	11.81	6.39
	8587.500	-38.26	-13	-25.26	-43.21	11.87	6.92
	10305.000	-32.39	-13	-19.39	-36.58	11.83	7.64
	12022.500	-30.86	-13	-17.86	-35.84	13.21	8.23
V	3435.000	-44.34	-13	-31.34	-52.45	12.47	4.36
	5152.500	-38.98	-13	-25.98	-46.38	12.80	5.40
	6870.000	-22.73	-13	-9.73	-28.14	11.81	6.39
	8587.500	-34.96	-13	-21.96	-39.91	11.87	6.92
	10305.000	-33.54	-13	-20.54	-37.73	11.83	7.64
	12022.500	-31.30	-13	-18.30	-36.28	13.21	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 132047_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3435.000	-44.95	-13	-31.95	-53.06	12.47	4.36
	5152.500	-41.70	-13	-28.70	-49.10	12.80	5.40
	6870.000	-33.41	-13	-20.41	-38.82	11.81	6.39
	8587.500	-39.40	-13	-26.40	-44.35	11.87	6.92
	10305.000	-36.11	-13	-23.11	-40.30	11.83	7.64
	12022.500	-33.90	-13	-20.90	-38.88	13.21	8.23
V	3435.000	-44.56	-13	-31.56	-52.67	12.47	4.36
	5152.500	-40.23	-13	-27.23	-47.63	12.80	5.40
	6870.000	-20.24	-13	-7.24	-25.65	11.81	6.39
	8587.500	-35.45	-13	-22.45	-40.40	11.87	6.92
	10305.000	-36.22	-13	-23.22	-40.41	11.83	7.64
	12022.500	-34.17	-13	-21.17	-39.15	13.21	8.23

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 132322_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.28	-13	-29.28	-50.47	12.59	4.40
	5235.000	-41.51	-13	-28.51	-48.93	12.88	5.46
	6980.000	-36.03	-13	-23.03	-41.19	11.67	6.51
	8725.000	-40.80	-13	-27.80	-45.71	11.88	6.97
	10470.000	-35.33	-13	-22.33	-39.29	11.69	7.73
	12215.000	-35.09	-13	-22.09	-40.27	13.47	8.29
V	3490.000	-42.87	-13	-29.87	-51.06	12.59	4.40
	5235.000	-35.41	-13	-22.41	-42.83	12.88	5.46
	6980.000	-24.00	-13	-11.00	-29.16	11.67	6.51
	8725.000	-35.48	-13	-22.48	-40.39	11.88	6.97
	10470.000	-32.17	-13	-19.17	-36.13	11.69	7.73
	12215.000	-31.46	-13	-18.46	-36.64	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 132322_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-41.31	-13	-28.31	-49.50	12.59	4.40
	5235.000	-39.47	-13	-26.47	-46.89	12.88	5.46
	6980.000	-34.86	-13	-21.86	-40.02	11.67	6.51
	8725.000	-37.53	-13	-24.53	-42.44	11.88	6.97
	10470.000	-31.78	-13	-18.78	-35.74	11.69	7.73
	12215.000	-31.57	-13	-18.57	-36.75	13.47	8.29
V	3490.000	-43.02	-13	-30.02	-51.21	12.59	4.40
	5235.000	-35.62	-13	-22.62	-43.04	12.88	5.46
	6980.000	-23.85	-13	-10.85	-29.01	11.67	6.51
	8725.000	-35.59	-13	-22.59	-40.50	11.88	6.97
	10470.000	-31.59	-13	-18.59	-35.55	11.69	7.73
	12215.000	-31.33	-13	-18.33	-36.51	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 132597_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3545.000	-44.44	-13	-31.44	-52.62	12.61	4.43
	5317.500	-41.74	-13	-28.74	-49.18	12.96	5.52
	7090.000	-41.73	-13	-28.73	-46.75	11.58	6.55
	8862.500	-40.75	-13	-27.75	-45.61	11.88	7.02
	10635.000	-35.30	-13	-22.30	-39.14	11.62	7.78
	12407.500	-34.20	-13	-21.20	-39.59	13.73	8.35
V	3545.000	-43.94	-13	-30.94	-52.12	12.61	4.43
	5317.500	-38.69	-13	-25.69	-46.13	12.96	5.52
	7090.000	-31.79	-13	-18.79	-36.81	11.58	6.55
	8862.500	-40.23	-13	-27.23	-45.09	11.88	7.02
	10635.000	-35.28	-13	-22.28	-39.12	11.62	7.78
	12407.500	-34.39	-13	-21.39	-39.78	13.73	8.35

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 132597_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3545.000	-44.32	-13	-31.32	-52.50	12.61	4.43
	5317.500	-47.35	-13	-34.35	-54.79	12.96	5.52
	7090.000	-40.21	-13	-27.21	-45.23	11.58	6.55
	8862.500	-40.94	-13	-27.94	-45.80	11.88	7.02
	10635.000	-34.79	-13	-21.79	-38.63	11.62	7.78
	12407.500	-34.07	-13	-21.07	-39.46	13.73	8.35
V	3545.000	-43.93	-13	-30.93	-52.11	12.61	4.43
	5317.500	-38.65	-13	-25.65	-46.09	12.96	5.52
	7090.000	-30.08	-13	-17.08	-35.10	11.58	6.55
	8862.500	-38.40	-13	-25.40	-43.26	11.88	7.02
	10635.000	-33.76	-13	-20.76	-37.60	11.62	7.78
	12407.500	-34.19	-13	-21.19	-39.58	13.73	8.35

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 132072_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3440.000	-49.54	-13	-36.54	-57.65	12.48	4.37
	5160.000	-42.36	-13	-29.36	-49.76	12.81	5.41
	6880.000	-36.20	-13	-23.20	-41.59	11.79	6.40
	8600.000	-41.04	-13	-28.04	-45.98	11.87	6.93
	10320.000	-36.12	-13	-23.12	-40.29	11.81	7.64
	12040.000	-34.40	-13	-21.40	-39.40	13.23	8.24
V	3440.000	-46.14	-13	-33.14	-54.25	12.48	4.37
	5160.000	-41.90	-13	-28.90	-49.30	12.81	5.41
	6880.000	-23.36	-13	-10.36	-28.75	11.79	6.40
	8600.000	-37.90	-13	-24.90	-42.84	11.87	6.93
	10320.000	-36.24	-13	-23.24	-40.41	11.81	7.64
	12040.000	-34.27	-13	-21.27	-39.27	13.23	8.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 132072_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3440.000	-43.40	-13	-30.40	-51.51	12.48	4.37
	5160.000	-42.27	-13	-29.27	-49.67	12.81	5.41
	6880.000	-33.79	-13	-20.79	-39.18	11.79	6.40
	8600.000	-39.70	-13	-26.70	-44.64	11.87	6.93
	10320.000	-36.73	-13	-23.73	-40.90	11.81	7.64
	12040.000	-34.35	-13	-21.35	-39.35	13.23	8.24
V	3440.000	-43.63	-13	-30.63	-51.74	12.48	4.37
	5160.000	-42.12	-13	-29.12	-49.52	12.81	5.41
	6880.000	-35.33	-13	-22.33	-40.72	11.79	6.40
	8600.000	-39.09	-13	-26.09	-44.03	11.87	6.93
	10320.000	-36.75	-13	-23.75	-40.92	11.81	7.64
	12040.000	-33.87	-13	-20.87	-38.87	13.23	8.24

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 132322_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.75	-13	-29.75	-50.94	12.59	4.40
	5235.000	-41.77	-13	-28.77	-49.19	12.88	5.46
	6980.000	-36.52	-13	-23.52	-41.68	11.67	6.51
	8725.000	-41.36	-13	-28.36	-46.27	11.88	6.97
	10470.000	-35.17	-13	-22.17	-39.13	11.69	7.73
	12215.000	-33.96	-13	-20.96	-39.14	13.47	8.29
V	3490.000	-43.83	-13	-30.83	-52.02	12.59	4.40
	5235.000	-35.07	-13	-22.07	-42.49	12.88	5.46
	6980.000	-25.50	-13	-12.50	-30.66	11.67	6.51
	8725.000	-40.42	-13	-27.42	-45.33	11.88	6.97
	10470.000	-35.09	-13	-22.09	-39.05	11.69	7.73
	12215.000	-34.31	-13	-21.31	-39.49	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 132322_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3490.000	-42.04	-13	-29.04	-50.23	12.59	4.40
	5235.000	-41.60	-13	-28.60	-49.02	12.88	5.46
	6980.000	-36.88	-13	-23.88	-42.04	11.67	6.51
	8725.000	-41.41	-13	-28.41	-46.32	11.88	6.97
	10470.000	-35.61	-13	-22.61	-39.57	11.69	7.73
	12215.000	-34.66	-13	-21.66	-39.84	13.47	8.29
V	3490.000	-44.19	-13	-31.19	-52.38	12.59	4.40
	5235.000	-34.97	-13	-21.97	-42.39	12.88	5.46
	6980.000	-25.15	-13	-12.15	-30.31	11.67	6.51
	8725.000	-37.34	-13	-24.34	-42.25	11.88	6.97
	10470.000	-35.30	-13	-22.30	-39.26	11.69	7.73
	12215.000	-34.29	-13	-21.29	-39.47	13.47	8.29

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 132572_16QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3540.000	-44.90	-13	-31.90	-53.08	12.61	4.43
	5310.000	-41.75	-13	-28.75	-49.19	12.95	5.51
	7080.000	-41.71	-13	-28.71	-46.74	11.58	6.55
	8850.000	-40.35	-13	-27.35	-45.22	11.88	7.01
	10620.000	-35.18	-13	-22.18	-39.03	11.63	7.78
	12390.000	-33.98	-13	-20.98	-39.35	13.71	8.34
V	3540.000	-44.48	-13	-31.48	-52.66	12.61	4.43
	5310.000	-38.09	-13	-25.09	-45.53	12.95	5.51
	7080.000	-32.70	-13	-19.70	-37.73	11.58	6.55
	8860.000	-40.38	-13	-27.38	-45.25	11.88	7.02
	10620.000	-35.13	-13	-22.13	-38.98	11.63	7.78
	12390.000	-34.06	-13	-21.06	-39.43	13.71	8.34

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 132572_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3540.000	-44.16	-13	-31.16	-52.34	12.61	4.43
	5310.000	-40.66	-13	-27.66	-48.10	12.95	5.51
	7080.000	-41.34	-13	-28.34	-46.37	11.58	6.55
	8850.000	-40.06	-13	-27.06	-44.93	11.88	7.01
	10620.000	-34.94	-13	-21.94	-38.79	11.63	7.78
	12390.000	-33.48	-13	-20.48	-38.85	13.71	8.34
V	3540.000	-49.14	-13	-36.14	-57.32	12.61	4.43
	5310.000	-37.43	-13	-24.43	-44.87	12.95	5.51
	7080.000	-32.70	-13	-19.70	-37.73	11.58	6.55
	8850.000	-39.80	-13	-26.80	-44.67	11.88	7.01
	10620.000	-34.40	-13	-21.40	-38.25	11.63	7.78
	12390.000	-33.26	-13	-20.26	-38.63	13.71	8.34

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	Module		
Test Item	Radiated Spurious Emissions		
Test Mode	Mode 9: LTE Band 71		
Date of Test	2019/08/24	Test Site	SR10-H

BW 5.000M_CH 133147_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1331.000	-50.97	-13	-37.97	-56.17	7.87	2.67
	1996.500	-49.80	-13	-36.80	-56.82	10.34	3.32
	2662.000	-55.36	-13	-42.36	-62.44	10.90	3.81
	3327.500	-53.15	-13	-40.15	-61.10	12.23	4.28
	3993.000	-51.73	-13	-38.73	-59.68	12.60	4.65
	4658.500	-49.99	-13	-36.99	-57.55	12.66	5.09
V	1331.000	-50.17	-13	-37.17	-55.37	7.87	2.67
	1996.500	-39.06	-13	-26.06	-46.08	10.34	3.32
	2662.000	-53.31	-13	-40.31	-60.39	10.90	3.81
	3327.500	-52.94	-13	-39.94	-60.89	12.23	4.28
	3993.000	-51.40	-13	-38.40	-59.35	12.60	4.65
	4658.500	-49.72	-13	-36.72	-57.28	12.66	5.09

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 133147_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1331.000	-49.51	-13	-36.51	-54.71	7.87	2.67
	1996.500	-49.25	-13	-36.25	-56.27	10.34	3.32
	2662.000	-55.10	-13	-42.10	-62.18	10.90	3.81
	3327.500	-53.04	-13	-40.04	-60.99	12.23	4.28
	3993.000	-51.62	-13	-38.62	-59.57	12.60	4.65
	4658.500	-49.94	-13	-36.94	-57.50	12.66	5.09
V	1331.000	-48.15	-13	-35.15	-53.35	7.87	2.67
	1996.500	-37.92	-13	-24.92	-44.94	10.34	3.32
	2662.000	-52.56	-13	-39.56	-59.64	10.90	3.81
	3327.500	-52.99	-13	-39.99	-60.94	12.23	4.28
	3993.000	-51.51	-13	-38.51	-59.46	12.60	4.65
	4658.500	-49.83	-13	-36.83	-57.39	12.66	5.09

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 133297_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-51.30	-13	-38.30	-56.65	8.04	2.70
	2041.500	-50.82	-13	-37.82	-57.84	10.37	3.35
	2722.000	-55.45	-13	-42.45	-62.60	11.01	3.85
	3402.500	-53.44	-13	-40.44	-61.50	12.40	4.34
	4083.000	-52.92	-13	-39.92	-60.82	12.61	4.71
	4763.500	-48.55	-13	-35.55	-56.05	12.65	5.15
V	1361.000	-48.68	-13	-35.68	-54.03	8.04	2.70
	2041.500	-40.93	-13	-27.93	-47.95	10.37	3.35
	2722.000	-52.62	-13	-39.62	-59.77	11.01	3.85
	3402.500	-53.77	-13	-40.77	-61.83	12.40	4.34
	4083.000	-53.17	-13	-40.17	-61.07	12.61	4.71
	4763.500	-48.88	-13	-35.88	-56.38	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 133297_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-50.02	-13	-37.02	-55.37	8.04	2.70
	2041.500	-49.37	-13	-36.37	-56.39	10.37	3.35
	2722.000	-55.56	-13	-42.56	-62.71	11.01	3.85
	3402.500	-53.55	-13	-40.55	-61.61	12.40	4.34
	4083.000	-52.99	-13	-39.99	-60.89	12.61	4.71
	4763.500	-48.66	-13	-35.66	-56.16	12.65	5.15
V	1361.000	-46.50	-13	-33.50	-51.85	8.04	2.70
	2041.500	-39.63	-13	-26.63	-46.65	10.37	3.35
	2722.000	-53.21	-13	-40.21	-60.36	11.01	3.85
	3402.500	-53.66	-13	-40.66	-61.72	12.40	4.34
	4083.000	-53.06	-13	-40.06	-60.96	12.61	4.71
	4763.500	-48.77	-13	-35.77	-56.27	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 133447_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1391.000	-53.68	-13	-40.68	-59.17	8.21	2.73
	2086.500	-43.20	-13	-30.20	-50.20	10.39	3.39
	2782.000	-53.94	-13	-40.94	-61.16	11.12	3.89
	3477.500	-53.17	-13	-40.17	-61.34	12.56	4.39
	4173.000	-51.93	-13	-38.93	-59.78	12.62	4.78
	4868.500	-48.87	-13	-35.87	-56.31	12.65	5.22
V	1391.000	-50.00	-13	-37.00	-55.49	8.21	2.73
	2086.500	-35.97	-13	-22.97	-42.97	10.39	3.39
	2782.000	-50.78	-13	-37.78	-58.00	11.12	3.89
	3477.500	-52.94	-13	-39.94	-61.11	12.56	4.39
	4173.000	-51.60	-13	-38.60	-59.45	12.62	4.78
	4868.500	-48.54	-13	-35.54	-55.98	12.65	5.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 5.000M_CH 133447_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1391.000	-52.46	-13	-39.46	-57.95	8.21	2.73
	2086.500	-43.98	-13	-30.98	-50.98	10.39	3.39
	2782.000	-53.79	-13	-40.79	-61.01	11.12	3.89
	3477.500	-53.06	-13	-40.06	-61.23	12.56	4.39
	4173.000	-51.82	-13	-38.82	-59.67	12.62	4.78
	4868.500	-48.76	-13	-35.76	-56.20	12.65	5.22
V	1391.000	-49.08	-13	-36.08	-54.57	8.21	2.73
	2086.500	-36.52	-13	-23.52	-43.52	10.39	3.39
	2782.000	-51.55	-13	-38.55	-58.77	11.12	3.89
	3477.500	-52.99	-13	-39.99	-61.16	12.56	4.39
	4173.000	-51.71	-13	-38.71	-59.56	12.62	4.78
	4868.500	-48.65	-13	-35.65	-56.09	12.65	5.22

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 133172_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1336.000	-52.27	-13	-39.27	-57.50	7.90	2.67
	2004.000	-53.44	-13	-40.44	-60.47	10.35	3.33
	2672.000	-55.63	-13	-42.63	-62.73	10.92	3.82
	3340.000	-53.68	-13	-40.68	-61.65	12.26	4.29
	4008.000	-52.16	-13	-39.16	-60.10	12.60	4.66
	4676.000	-50.06	-13	-37.06	-57.61	12.66	5.10
V	1336.000	-51.53	-13	-38.53	-56.76	7.90	2.67
	2004.000	-44.31	-13	-31.31	-51.34	10.35	3.33
	2672.000	-53.61	-13	-40.61	-60.71	10.92	3.82
	3340.000	-53.35	-13	-40.35	-61.32	12.26	4.29
	4008.000	-51.91	-13	-38.91	-59.85	12.60	4.66
	4676.000	-49.77	-13	-36.77	-57.32	12.66	5.10

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 133172_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1336.000	-51.46	-13	-38.46	-56.69	7.90	2.67
	2004.000	-52.86	-13	-39.86	-59.89	10.35	3.33
	2672.000	-55.74	-13	-42.74	-62.84	10.92	3.82
	3340.000	-53.57	-13	-40.57	-61.54	12.26	4.29
	4008.000	-52.05	-13	-39.05	-59.99	12.60	4.66
	4676.000	-49.99	-13	-36.99	-57.54	12.66	5.10
V	1336.000	-50.80	-13	-37.80	-56.03	7.90	2.67
	2004.000	-43.91	-13	-30.91	-50.94	10.35	3.33
	2672.000	-53.11	-13	-40.11	-60.21	10.92	3.82
	3340.000	-53.46	-13	-40.46	-61.43	12.26	4.29
	4008.000	-51.99	-13	-38.99	-59.93	12.60	4.66
	4676.000	-49.88	-13	-36.88	-57.43	12.66	5.10

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 133297_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-51.47	-13	-38.47	-56.82	8.04	2.70
	2041.500	-50.72	-13	-37.72	-57.74	10.37	3.35
	2722.000	-54.11	-13	-41.11	-61.26	11.01	3.85
	3402.500	-53.86	-13	-40.86	-61.92	12.40	4.34
	4083.000	-52.99	-13	-39.99	-60.89	12.61	4.71
	4763.500	-49.76	-13	-36.76	-57.26	12.65	5.15
V	1361.000	-48.94	-13	-35.94	-54.29	8.04	2.70
	2041.500	-40.71	-13	-27.71	-47.73	10.37	3.35
	2722.000	-52.58	-13	-39.58	-59.73	11.01	3.85
	3402.500	-53.53	-13	-40.53	-61.59	12.40	4.34
	4083.000	-52.71	-13	-39.71	-60.61	12.61	4.71
	4763.500	-49.43	-13	-36.43	-56.93	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 133297_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-50.68	-13	-37.68	-56.03	8.04	2.70
	2041.500	-49.62	-13	-36.62	-56.64	10.37	3.35
	2722.000	-54.00	-13	-41.00	-61.15	11.01	3.85
	3402.500	-53.75	-13	-40.75	-61.81	12.40	4.34
	4083.000	-52.93	-13	-39.93	-60.83	12.61	4.71
	4763.500	-49.65	-13	-36.65	-57.15	12.65	5.15
V	1361.000	-48.13	-13	-35.13	-53.48	8.04	2.70
	2041.500	-39.34	-13	-26.34	-46.36	10.37	3.35
	2722.000	-52.59	-13	-39.59	-59.74	11.01	3.85
	3402.500	-53.64	-13	-40.64	-61.70	12.40	4.34
	4083.000	-52.82	-13	-39.82	-60.72	12.61	4.71
	4763.500	-49.54	-13	-36.54	-57.04	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 133422_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1386.000	-55.57	-13	-42.57	-61.03	8.19	2.72
	2079.000	-43.09	-13	-30.09	-50.10	10.39	3.38
	2772.000	-54.17	-13	-41.17	-61.38	11.10	3.89
	3465.000	-53.30	-13	-40.30	-61.45	12.53	4.38
	4158.000	-51.69	-13	-38.69	-59.54	12.62	4.77
	4851.000	-48.77	-13	-35.77	-56.22	12.65	5.21
V	1386.000	-49.58	-13	-36.58	-55.04	8.19	2.72
	2079.000	-36.09	-13	-23.09	-43.10	10.39	3.38
	2772.000	-51.04	-13	-38.04	-58.25	11.10	3.89
	3465.000	-53.63	-13	-40.63	-61.78	12.53	4.38
	4158.000	-51.99	-13	-38.99	-59.84	12.62	4.77
	4851.000	-49.08	-13	-36.08	-56.53	12.65	5.21

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 10.000M_CH 133422_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1386.000	-54.88	-13	-41.88	-60.34	8.19	2.72
	2079.000	-43.64	-13	-30.64	-50.65	10.39	3.38
	2772.000	-54.00	-13	-41.00	-61.21	11.10	3.89
	3465.000	-53.41	-13	-40.41	-61.56	12.53	4.38
	4158.000	-51.80	-13	-38.80	-59.65	12.62	4.77
	4851.000	-48.88	-13	-35.88	-56.33	12.65	5.21
V	1386.000	-49.74	-13	-36.74	-55.20	8.19	2.72
	2079.000	-35.93	-13	-22.93	-42.94	10.39	3.38
	2772.000	-52.43	-13	-39.43	-59.64	11.10	3.89
	3465.000	-53.52	-13	-40.52	-61.67	12.53	4.38
	4158.000	-51.91	-13	-38.91	-59.76	12.62	4.77
	4851.000	-48.99	-13	-35.99	-56.44	12.65	5.21

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 133197_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1341.000	-52.27	-13	-39.27	-57.52	7.93	2.68
	2011.500	-52.25	-13	-39.25	-59.27	10.36	3.33
	2682.000	-54.99	-13	-41.99	-62.10	10.93	3.83
	3352.500	-53.83	-13	-40.83	-61.82	12.29	4.30
	4023.000	-52.36	-13	-39.36	-60.29	12.60	4.67
	4693.500	-50.05	-13	-37.05	-57.59	12.66	5.11
V	1341.000	-50.82	-13	-37.82	-56.07	7.93	2.68
	2011.500	-42.68	-13	-29.68	-49.70	10.36	3.33
	2682.000	-53.64	-13	-40.64	-60.75	10.93	3.83
	3352.500	-53.50	-13	-40.50	-61.49	12.29	4.30
	4023.000	-52.03	-13	-39.03	-59.96	12.60	4.67
	4693.500	-49.82	-13	-36.82	-57.36	12.66	5.11

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 133197_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1341.000	-51.68	-13	-38.68	-56.93	7.93	2.68
	2011.500	-52.07	-13	-39.07	-59.09	10.36	3.33
	2682.000	-54.91	-13	-41.91	-62.02	10.93	3.83
	3352.500	-53.72	-13	-40.72	-61.71	12.29	4.30
	4023.000	-52.25	-13	-39.25	-60.18	12.60	4.67
	4693.500	-49.99	-13	-36.99	-57.53	12.66	5.11
V	1341.000	-50.70	-13	-37.70	-55.95	7.93	2.68
	2011.500	-41.85	-13	-28.85	-48.87	10.36	3.33
	2682.000	-53.99	-13	-40.99	-61.10	10.93	3.83
	3352.500	-53.61	-13	-40.61	-61.60	12.29	4.30
	4023.000	-52.14	-13	-39.14	-60.07	12.60	4.67
	4693.500	-49.93	-13	-36.93	-57.47	12.66	5.11

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 133297_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-52.05	-13	-39.05	-57.40	8.04	2.70
	2041.500	-50.48	-13	-37.48	-57.50	10.37	3.35
	2722.000	-55.13	-13	-42.13	-62.28	11.01	3.85
	3402.500	-53.72	-13	-40.72	-61.78	12.40	4.34
	4083.000	-52.53	-13	-39.53	-60.43	12.61	4.71
	4763.500	-48.71	-13	-35.71	-56.21	12.65	5.15
V	1361.000	-50.40	-13	-37.40	-55.75	8.04	2.70
	2041.500	-40.32	-13	-27.32	-47.34	10.37	3.35
	2722.000	-53.30	-13	-40.30	-60.45	11.01	3.85
	3402.500	-53.94	-13	-40.94	-62.00	12.40	4.34
	4083.000	-52.75	-13	-39.75	-60.65	12.61	4.71
	4763.500	-48.93	-13	-35.93	-56.43	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 133297_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-51.39	-13	-38.39	-56.74	8.04	2.70
	2041.500	-48.81	-13	-35.81	-55.83	10.37	3.35
	2722.000	-55.02	-13	-42.02	-62.17	11.01	3.85
	3402.500	-53.61	-13	-40.61	-61.67	12.40	4.34
	4083.000	-52.42	-13	-39.42	-60.32	12.61	4.71
	4763.500	-48.60	-13	-35.60	-56.10	12.65	5.15
V	1361.000	-49.62	-13	-36.62	-54.97	8.04	2.70
	2041.500	-39.08	-13	-26.08	-46.10	10.37	3.35
	2722.000	-53.35	-13	-40.35	-60.50	11.01	3.85
	3402.500	-53.83	-13	-40.83	-61.89	12.40	4.34
	4083.000	-52.64	-13	-39.64	-60.54	12.61	4.71
	4763.500	-48.82	-13	-35.82	-56.32	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 133397_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1381.000	-53.58	-13	-40.58	-59.02	8.16	2.72
	2071.500	-46.60	-13	-33.60	-53.61	10.39	3.38
	2762.000	-54.90	-13	-41.90	-62.10	11.08	3.88
	3452.500	-53.41	-13	-40.41	-61.54	12.51	4.38
	4143.000	-51.92	-13	-38.92	-59.78	12.62	4.75
	4833.500	-49.26	-13	-36.26	-56.72	12.65	5.20
V	1381.000	-49.75	-13	-36.75	-55.19	8.16	2.72
	2071.500	-40.18	-13	-27.18	-47.19	10.39	3.38
	2762.000	-52.18	-13	-39.18	-59.38	11.08	3.88
	3452.500	-53.63	-13	-40.63	-61.76	12.51	4.38
	4143.000	-52.05	-13	-39.05	-59.91	12.62	4.75
	4833.500	-49.48	-13	-36.48	-56.94	12.65	5.20

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 15.000M_CH 133397_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1381.000	-53.99	-13	-40.99	-59.43	8.16	2.72
	2071.500	-48.07	-13	-35.07	-55.08	10.39	3.38
	2762.000	-54.79	-13	-41.79	-61.99	11.08	3.88
	3452.500	-53.30	-13	-40.30	-61.43	12.51	4.38
	4143.000	-51.81	-13	-38.81	-59.67	12.62	4.75
	4833.500	-49.15	-13	-36.15	-56.61	12.65	5.20
V	1381.000	-49.69	-13	-36.69	-55.13	8.16	2.72
	2071.500	-40.70	-13	-27.70	-47.71	10.39	3.38
	2762.000	-52.57	-13	-39.57	-59.77	11.08	3.88
	3452.500	-53.52	-13	-40.52	-61.65	12.51	4.38
	4143.000	-51.99	-13	-38.99	-59.85	12.62	4.75
	4833.500	-49.37	-13	-36.37	-56.83	12.65	5.20

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 133222_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1346.000	-51.78	-13	-38.78	-57.05	7.96	2.68
	2019.000	-49.61	-13	-36.61	-56.63	10.36	3.34
	2692.000	-54.95	-13	-41.95	-62.07	10.95	3.83
	3365.000	-53.97	-13	-40.97	-61.97	12.32	4.31
	4038.000	-51.45	-13	-38.45	-59.37	12.60	4.68
	4711.000	-49.57	-13	-36.57	-57.10	12.66	5.12
V	1346.000	-49.67	-13	-36.67	-54.94	7.96	2.68
	2019.000	-40.08	-13	-27.08	-47.10	10.36	3.34
	2692.000	-51.90	-13	-38.90	-59.02	10.95	3.83
	3365.000	-54.24	-13	-41.24	-62.24	12.32	4.31
	4038.000	-51.78	-13	-38.78	-59.70	12.60	4.68
	4711.000	-49.90	-13	-36.90	-57.43	12.66	5.12

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 133222_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1346.000	-50.39	-13	-37.39	-55.66	7.96	2.68
	2019.000	-48.87	-13	-35.87	-55.89	10.36	3.34
	2692.000	-54.99	-13	-41.99	-62.11	10.95	3.83
	3365.000	-54.02	-13	-41.02	-62.02	12.32	4.31
	4038.000	-51.56	-13	-38.56	-59.48	12.60	4.68
	4711.000	-49.68	-13	-36.68	-57.21	12.66	5.12
V	1346.000	-49.40	-13	-36.40	-54.67	7.96	2.68
	2019.000	-39.47	-13	-26.47	-46.49	10.36	3.34
	2692.000	-51.78	-13	-38.78	-58.90	10.95	3.83
	3365.000	-54.13	-13	-41.13	-62.13	12.32	4.31
	4038.000	-51.67	-13	-38.67	-59.59	12.60	4.68
	4711.000	-49.79	-13	-36.79	-57.32	12.66	5.12

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 133297_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-51.99	-13	-38.99	-57.34	8.04	2.70
	2041.500	-49.84	-13	-36.84	-56.86	10.37	3.35
	2722.000	-55.14	-13	-42.14	-62.29	11.01	3.85
	3402.500	-53.50	-13	-40.50	-61.56	12.40	4.34
	4083.000	-52.72	-13	-39.72	-60.62	12.61	4.71
	4763.500	-48.63	-13	-35.63	-56.13	12.65	5.15
V	1361.000	-50.60	-13	-37.60	-55.95	8.04	2.70
	2041.500	-40.11	-13	-27.11	-47.13	10.37	3.35
	2722.000	-52.43	-13	-39.43	-59.58	11.01	3.85
	3402.500	-53.83	-13	-40.83	-61.89	12.40	4.34
	4083.000	-52.99	-13	-39.99	-60.89	12.61	4.71
	4763.500	-48.96	-13	-35.96	-56.46	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 133297_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1361.000	-50.96	-13	-37.96	-56.31	8.04	2.70
	2041.500	-49.42	-13	-36.42	-56.44	10.37	3.35
	2722.000	-54.80	-13	-41.80	-61.95	11.01	3.85
	3402.500	-53.61	-13	-40.61	-61.67	12.40	4.34
	4083.000	-52.83	-13	-39.83	-60.73	12.61	4.71
	4763.500	-48.74	-13	-35.74	-56.24	12.65	5.15
V	1361.000	-49.81	-13	-36.81	-55.16	8.04	2.70
	2041.500	-39.08	-13	-26.08	-46.10	10.37	3.35
	2722.000	-53.02	-13	-40.02	-60.17	11.01	3.85
	3402.500	-53.72	-13	-40.72	-61.78	12.40	4.34
	4083.000	-52.94	-13	-39.94	-60.84	12.61	4.71
	4763.500	-48.85	-13	-35.85	-56.35	12.65	5.15

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

BW 20.000M_CH 133372_QPSK_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1376.000	-54.04	-13	-41.04	-59.46	8.13	2.71
	2064.000	-49.55	-13	-36.55	-56.56	10.38	3.37
	2752.000	-54.58	-13	-41.58	-61.77	11.06	3.87
	3440.000	-53.39	-13	-40.39	-61.50	12.48	4.37
	4128.000	-51.68	-13	-38.68	-59.55	12.62	4.74
	4816.000	-48.88	-13	-35.88	-56.35	12.65	5.18
V	1376.000	-50.87	-13	-37.87	-56.29	8.13	2.71
	2064.000	-43.07	-13	-30.07	-50.08	10.38	3.37
	2752.000	-52.65	-13	-39.65	-59.84	11.06	3.87
	3440.000	-53.72	-13	-40.72	-61.83	12.48	4.37
	4128.000	-51.99	-13	-38.99	-59.86	12.62	4.74
	4816.000	-49.16	-13	-36.16	-56.63	12.65	5.18

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.


BW 20.000M_CH 133372_16-QAM_1RB0

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1376.000	-54.17	-13	-41.17	-59.59	8.13	2.71
	2064.000	-50.56	-13	-37.56	-57.57	10.38	3.37
	2752.000	-54.72	-13	-41.72	-61.91	11.06	3.87
	3440.000	-53.50	-13	-40.50	-61.61	12.48	4.37
	4128.000	-51.79	-13	-38.79	-59.66	12.62	4.74
	4816.000	-48.99	-13	-35.99	-56.46	12.65	5.18
V	1376.000	-50.04	-13	-37.04	-55.46	8.13	2.71
	2064.000	-43.49	-13	-30.49	-50.50	10.38	3.37
	2752.000	-52.44	-13	-39.44	-59.63	11.06	3.87
	3440.000	-53.61	-13	-40.61	-61.72	12.48	4.37
	4128.000	-51.90	-13	-38.90	-59.77	12.62	4.74
	4816.000	-49.05	-13	-36.05	-56.52	12.65	5.18

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

7. Spurious Emissions at Antenna Terminals

7.1. Test Setup

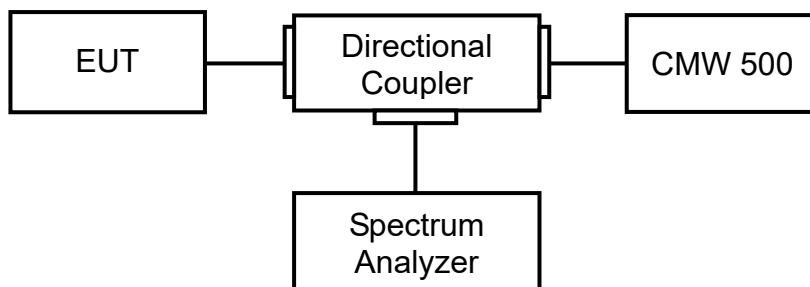

7.2. Test Procedure

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c) EUT Communicate with CMW500, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.


7.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 6.1
 ANSI C63.26: 2015 Sub-clause 5.7

7.4. Test Result


Product	Module		
Test Item	Spurious Emissions at Antenna Terminals		
Test Mode	Mode 1: LTE Band 2		
Date of Test	2019/08/16	Test Site	SR10-H

LTE_B2_CH18607_1.4M_QPSK_1RB0

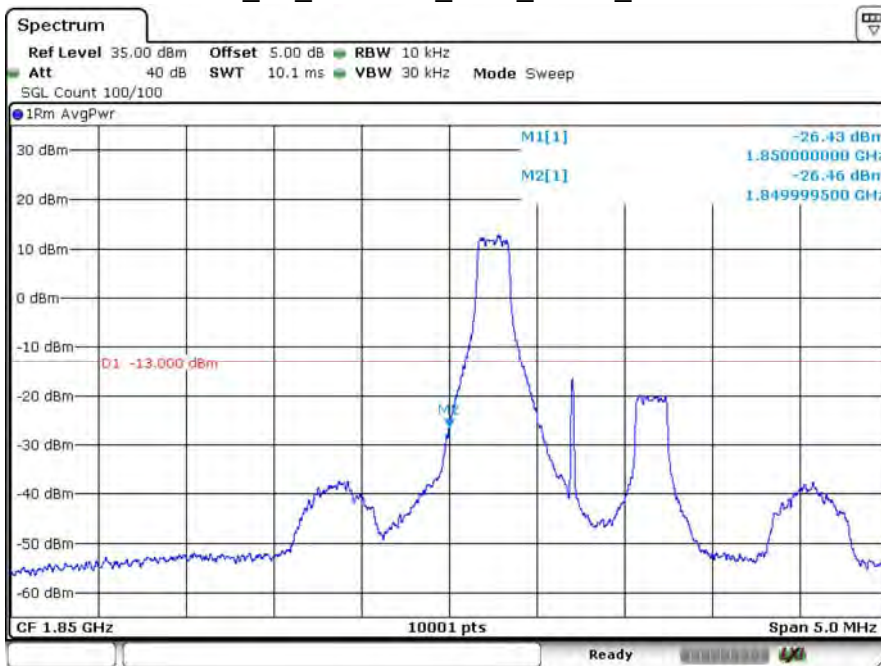

Date: 16 AUG 2019 14:59:21

LTE_B2_CH18607_1.4M_QPSK_6RB0

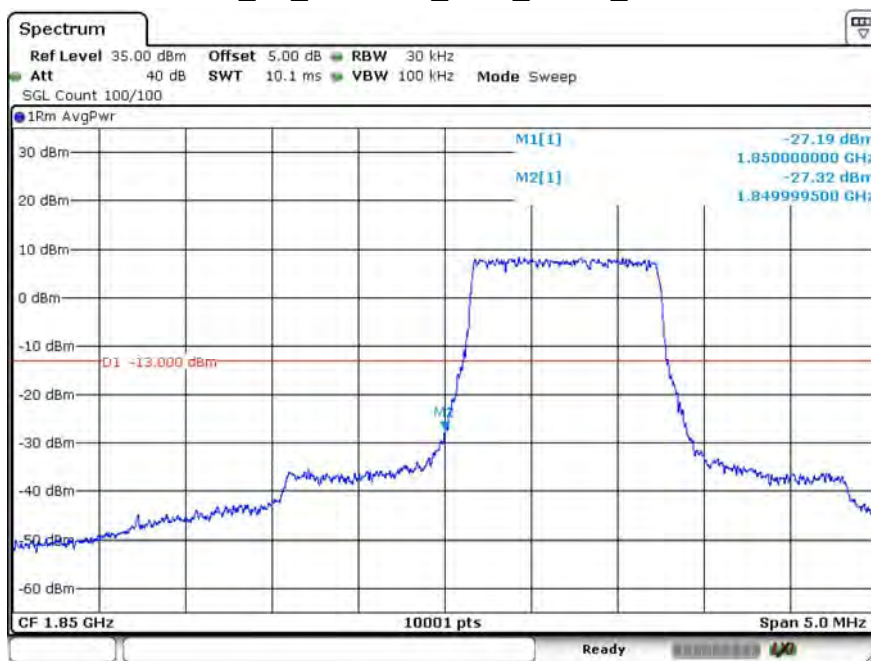


Date: 16 AUG 2019 15:01:58

LTE_B2_CH18607_1.4M_16-QAM_1RB0




Date: 16.AUG.2019 15:00:04

LTE_B2_CH18607_1.4M_16-QAM_6RB0

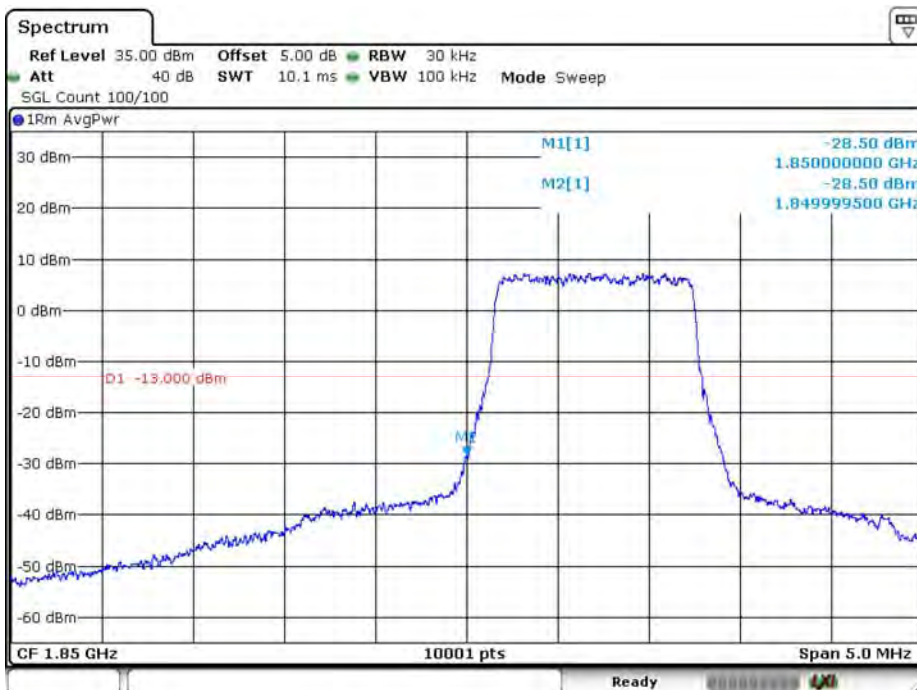


Date: 16.AUG.2019 15:01:04

LTE_B2_CH19193_1.4M_QPSK_1RB5

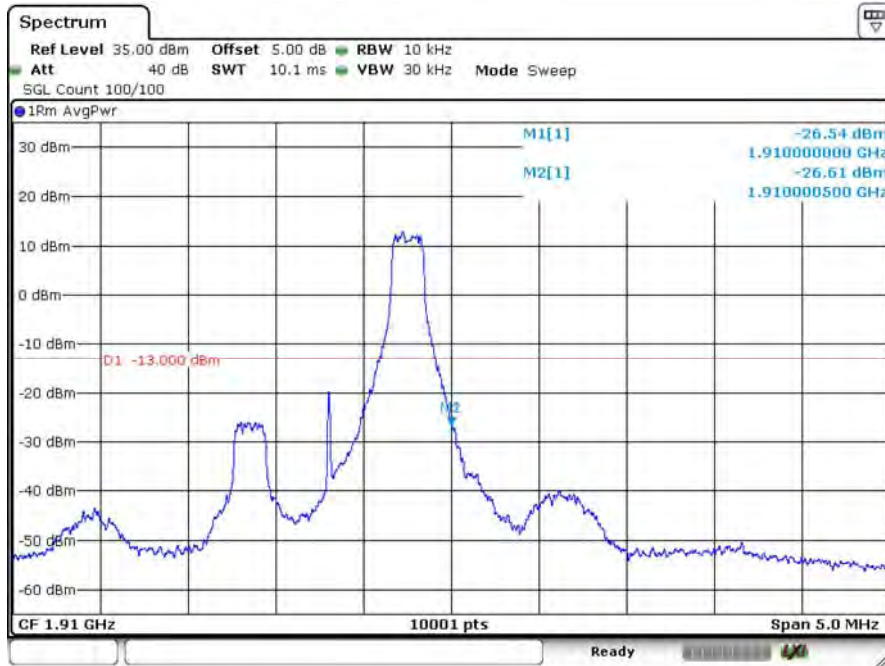


Date: 16 AUG 2019 16:05:06

LTE_B2_CH19193_1.4M_QPSK_6RB0

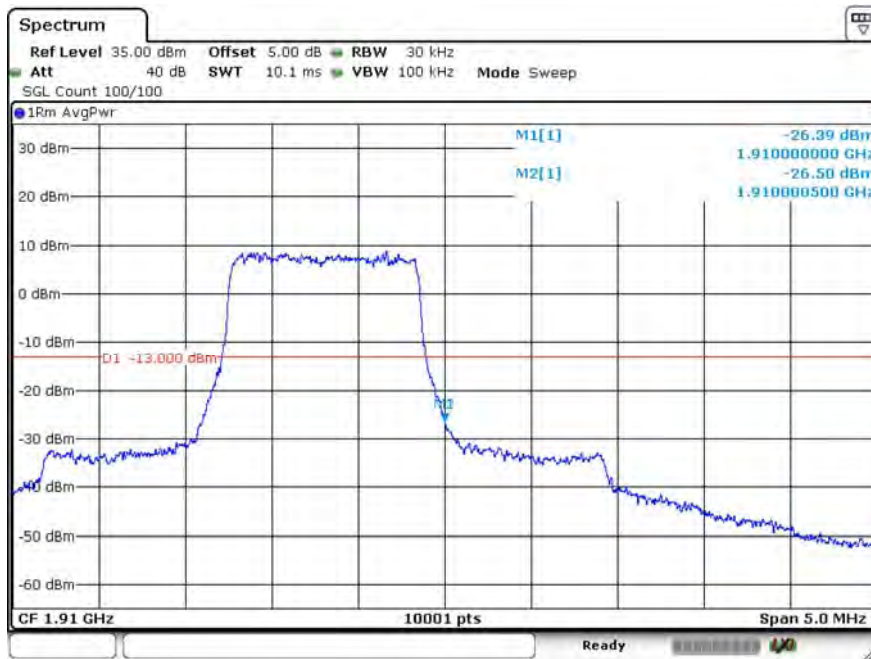


Date: 16 AUG 2019 16:03:39

LTE_B2_CH19193_1.4M_16-QAM_1RB5

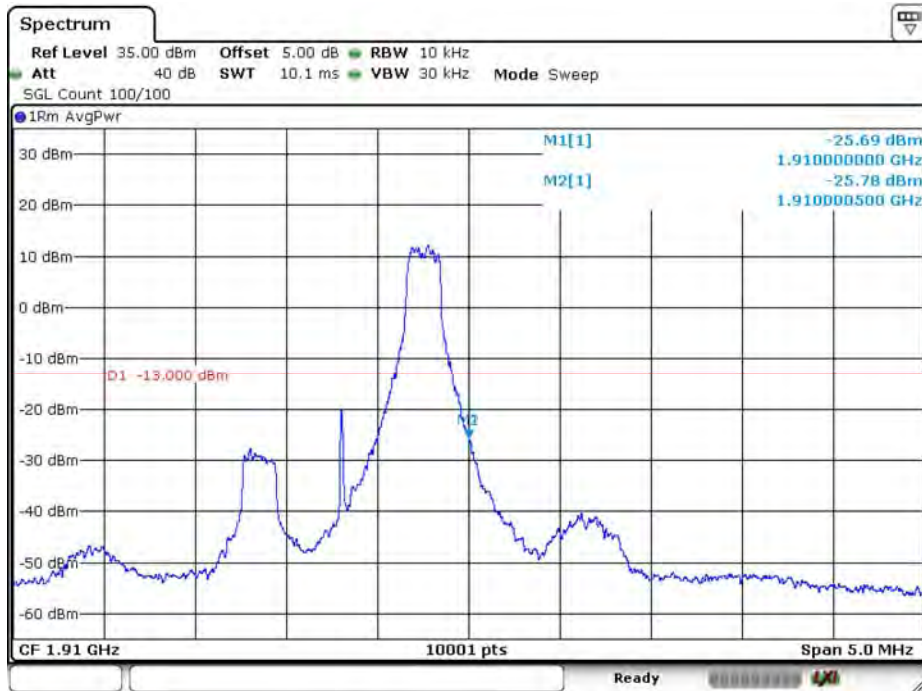


Date: 16.AUG.2019 16:04:34

LTE_B2_CH19193_1.4M_16-QAM_6RB0

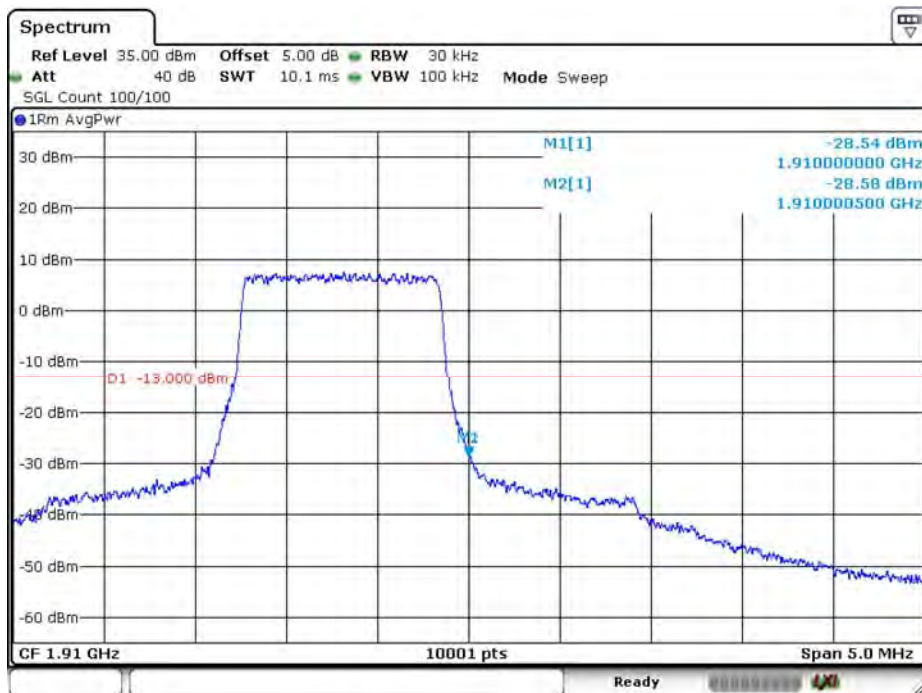


Date: 16.AUG.2019 16:04:05

LTE_B2_CH18615_3M_QPSK_1RB0

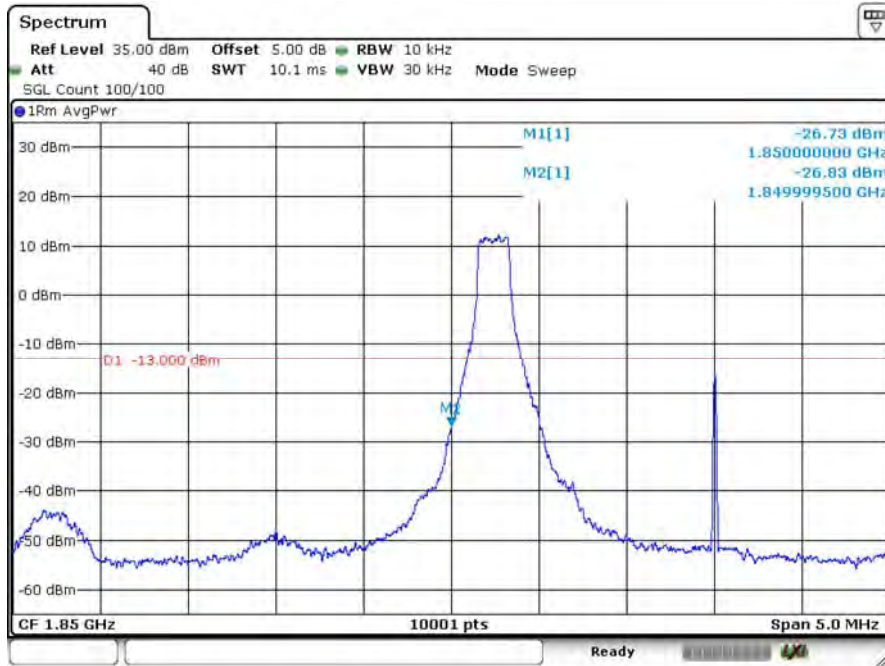


Date: 16 AUG 2019 15:05:05

LTE_B2_CH18615_3M_QPSK_15RB0

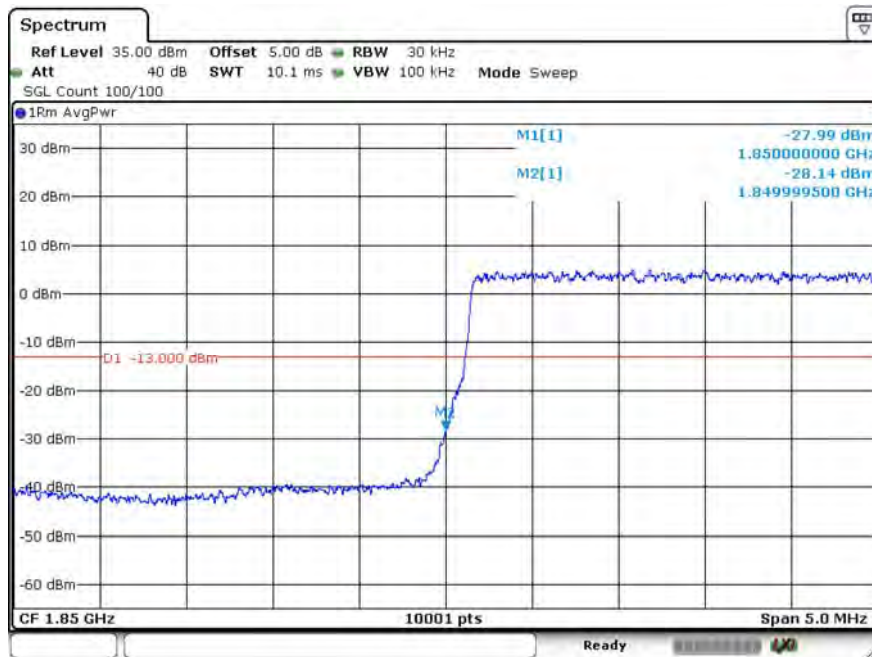


Date: 16 AUG 2019 15:03:34

LTE_B2_CH18615_3M_16-QAM_1RB0

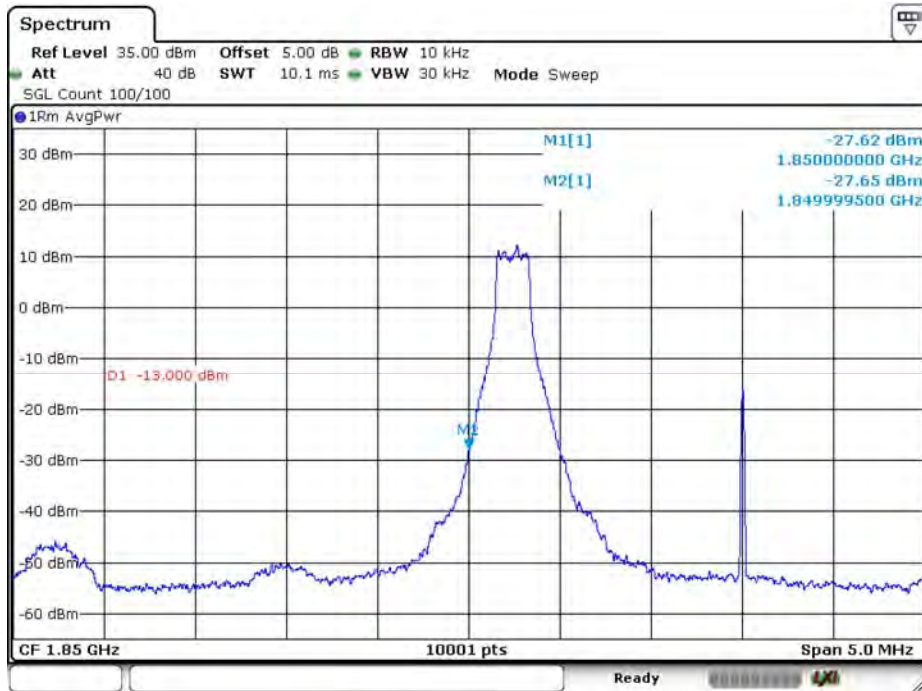


Date: 16.AUG.2019 15:04:41

LTE_B2_CH18615_3M_16-QAM_15RB0

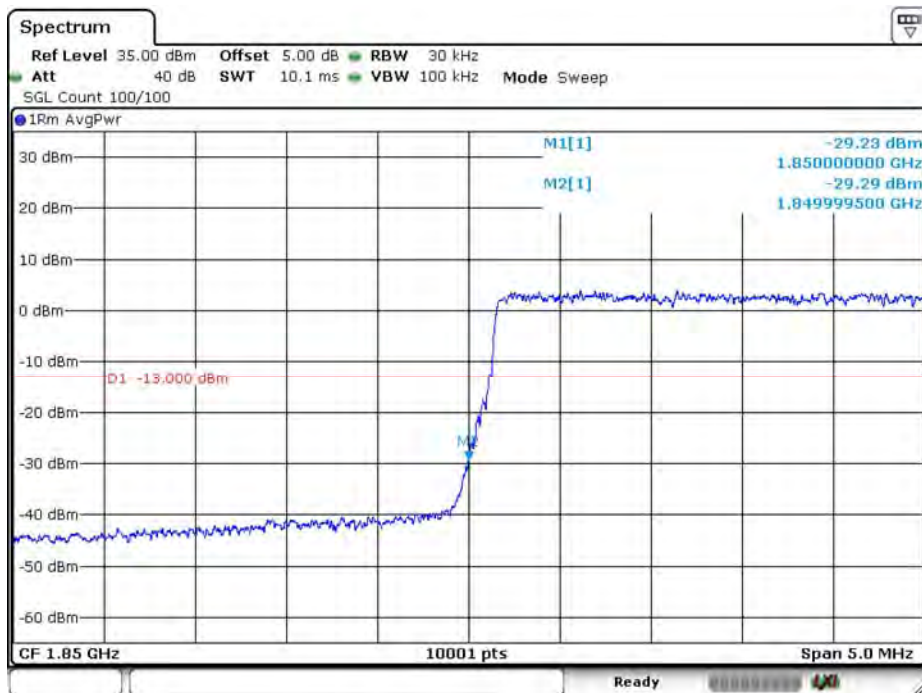


Date: 16.AUG.2019 15:04:09

LTE_B2_CH19185_3M_QPSK_1RB14

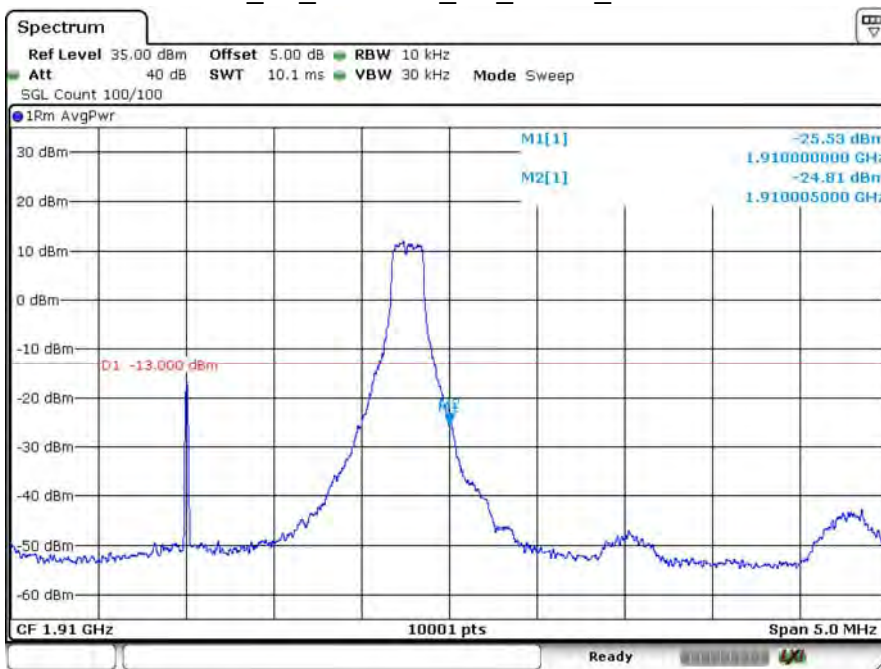


Date: 16 AUG 2019 16:00:53

LTE_B2_CH19185_3M_QPSK_15RB0

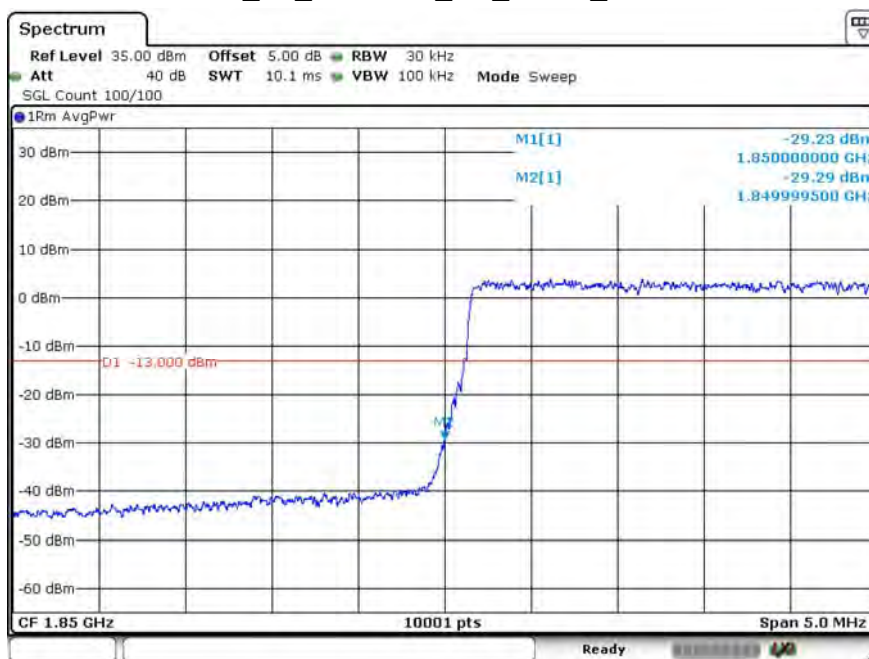


Date: 16 AUG 2019 15:04:09

LTE_B2_CH19185_3M_16-QAM_1RB14

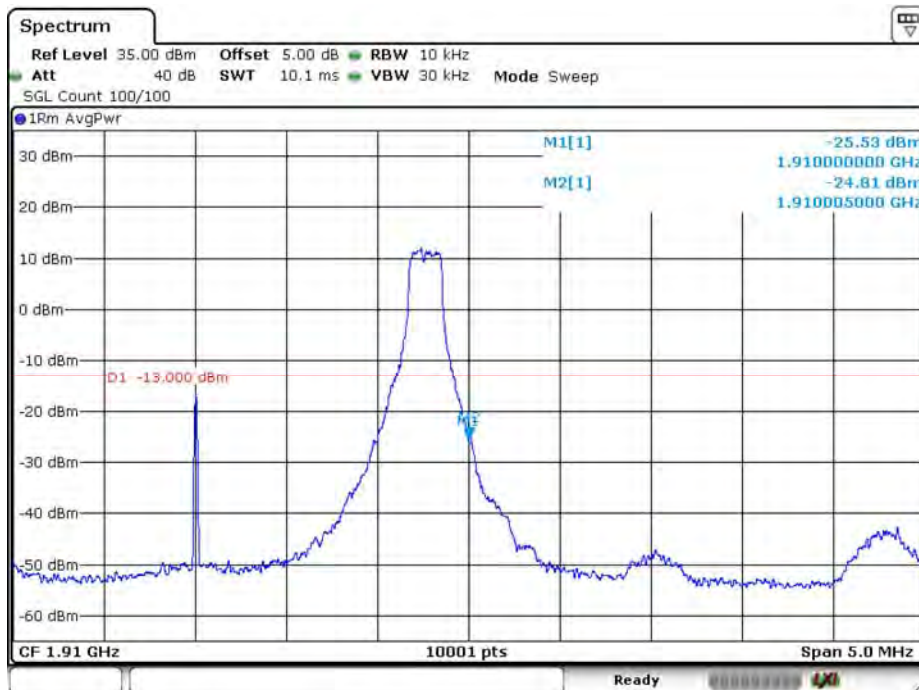


Date: 16.AUG.2019 16:00:53

LTE_B2_CH19185_3M_16-QAM_15RB0

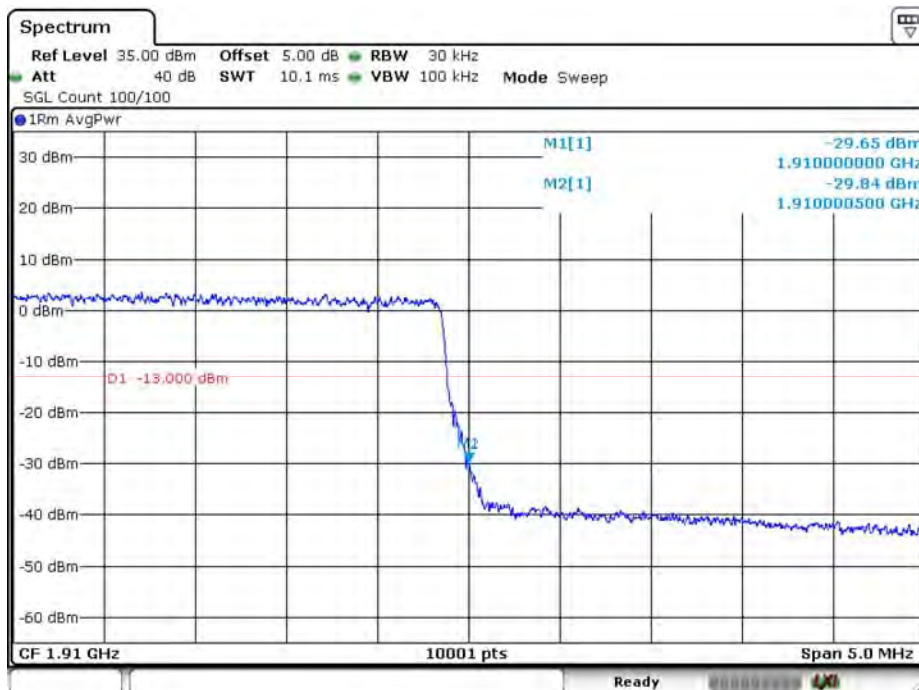


Date: 16.AUG.2019 16:02:16

LTE_B2_CH18625_5M_QPSK_1RB0

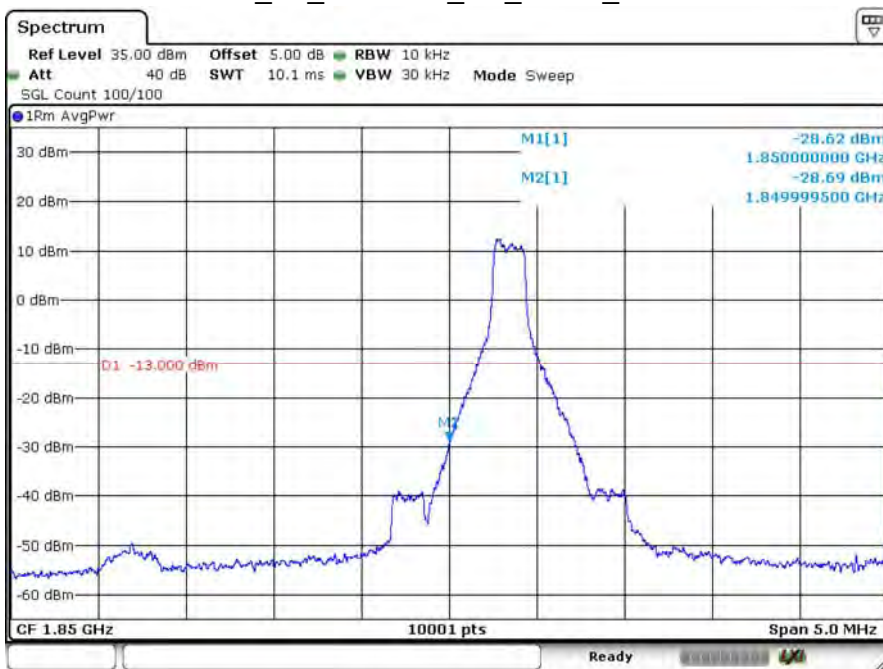


Date: 16 AUG 2019 15:13:07

LTE_B2_CH18625_5M_QPSK_25RB0

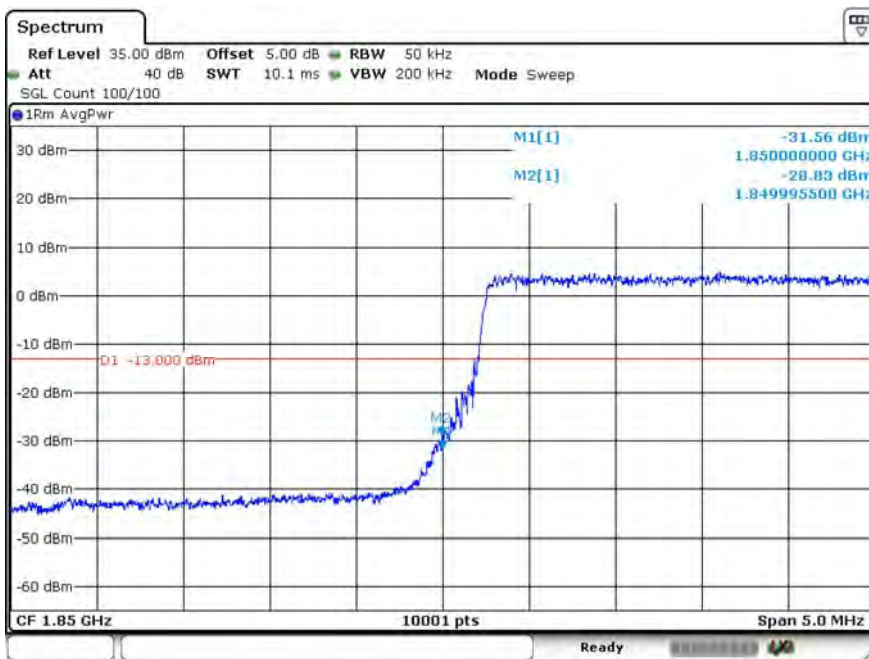


Date: 16 AUG 2019 15:14:49

LTE_B2_CH18625_5M_16-QAM_1RB0

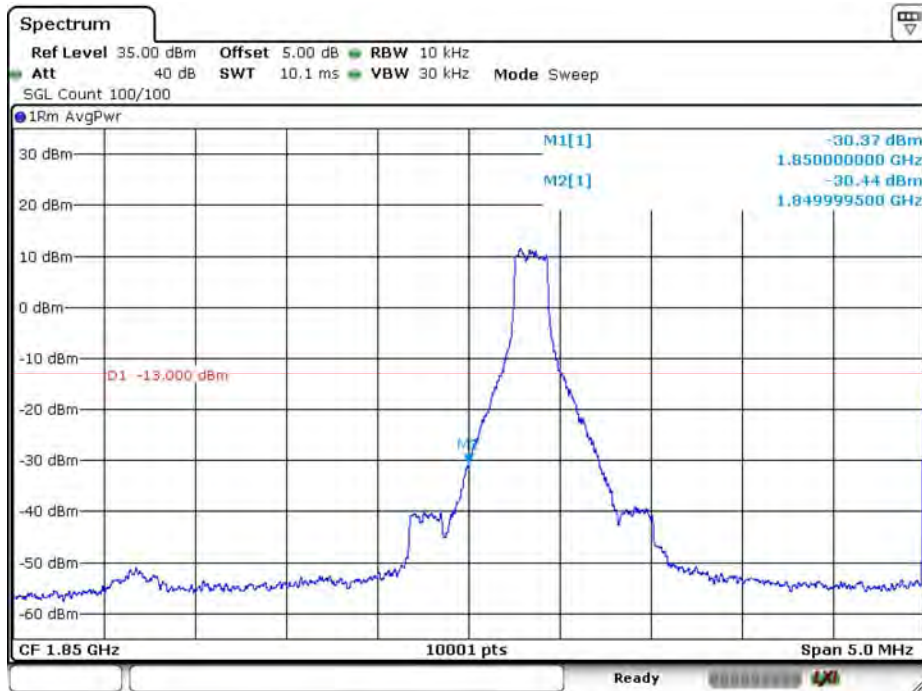


Date: 16.AUG.2019 15:13:36

LTE_B2_CH18625_5M_16-QAM_25RB0

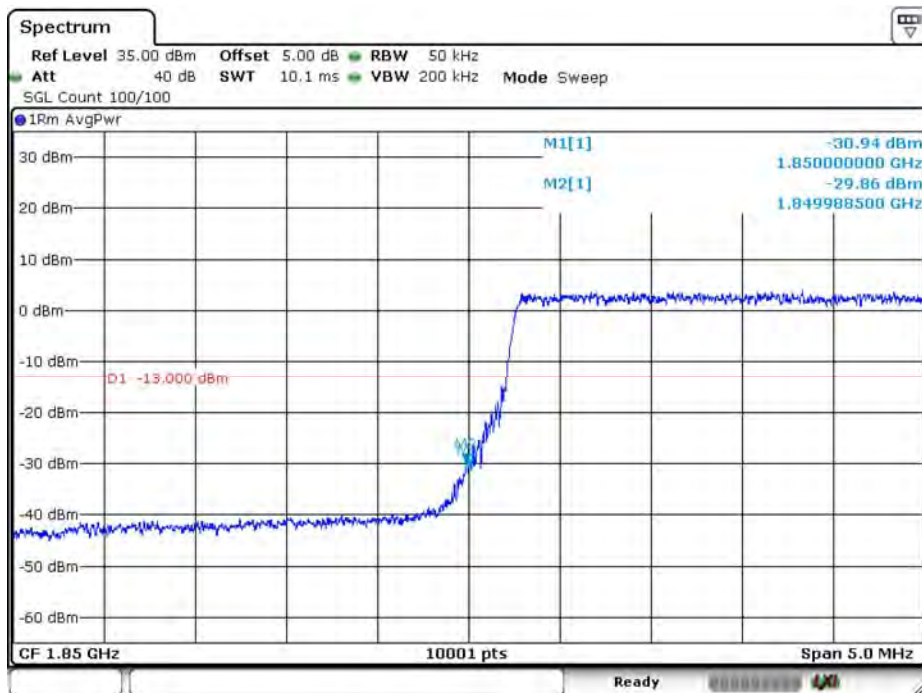


Date: 16.AUG.2019 15:14:08

LTE_B2_CH19175_5M_QPSK_1RB24

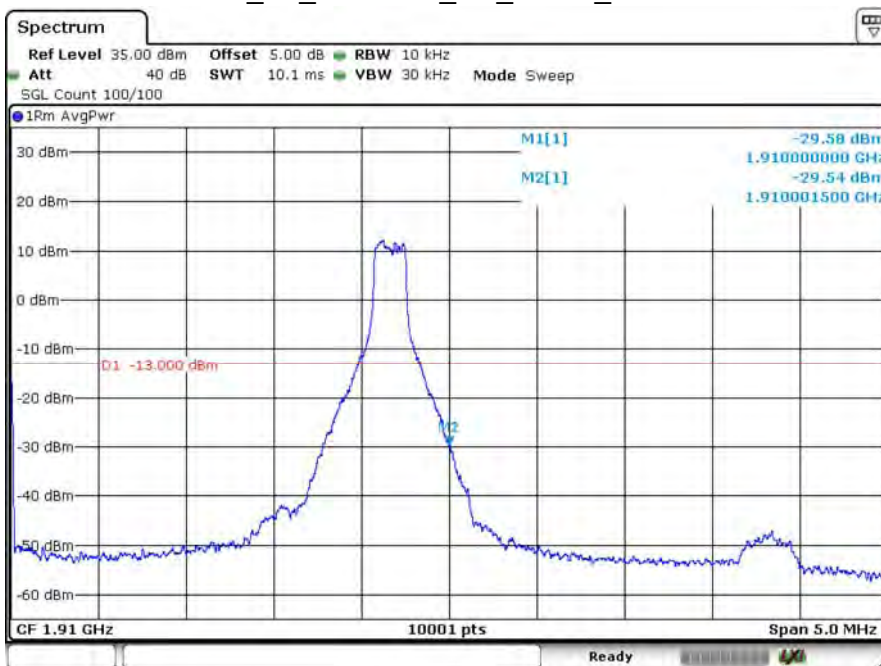


Date: 16 AUG 2019 15:45:56

LTE_B2_CH19175_5M_QPSK_25RB0

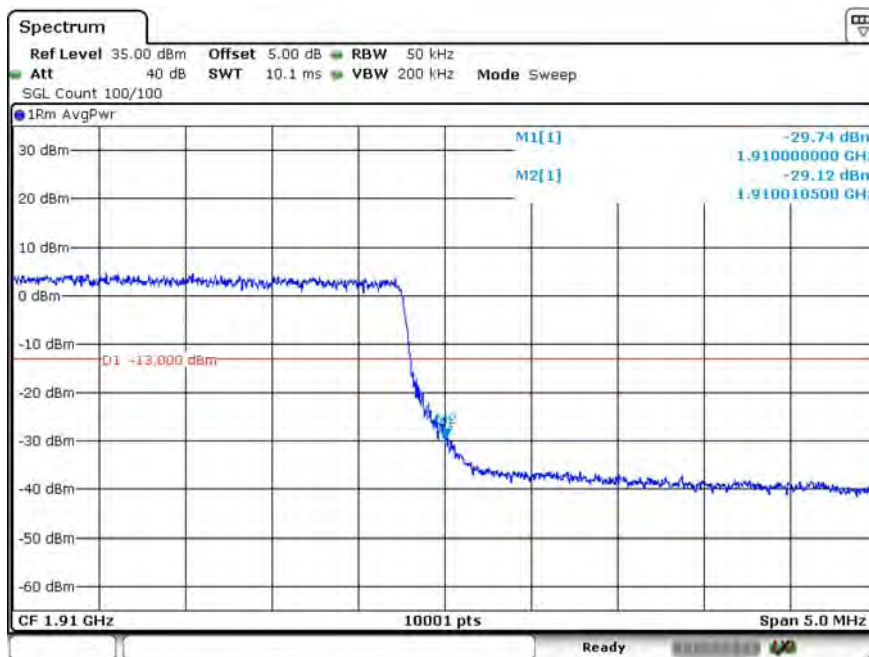


Date: 16 AUG 2019 15:43:36

LTE_B2_CH19175_5M_16-QAM_1RB24

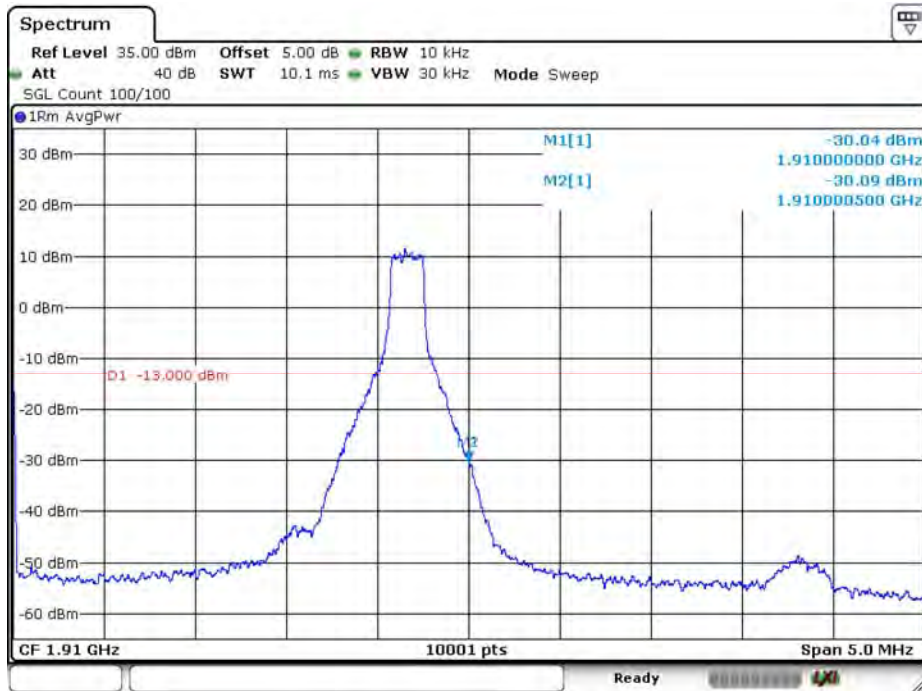


Date: 16 AUG 2019 15:45:28

LTE_B2_CH19175_5M_16-QAM_25RB0

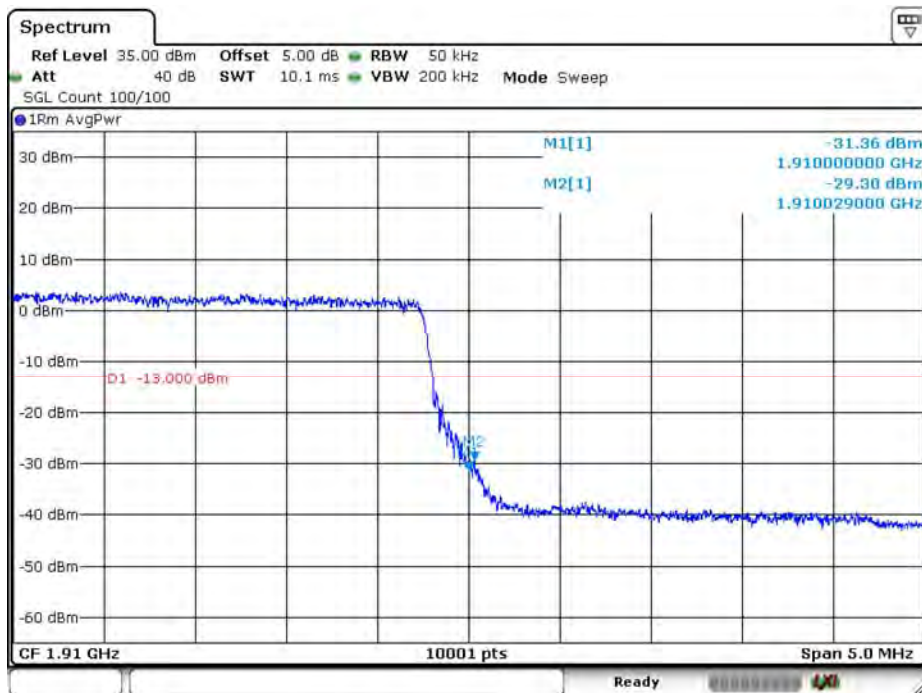


Date: 16 AUG 2019 15:44:02

LTE_B2_CH18650_10M_QPSK_1RB0

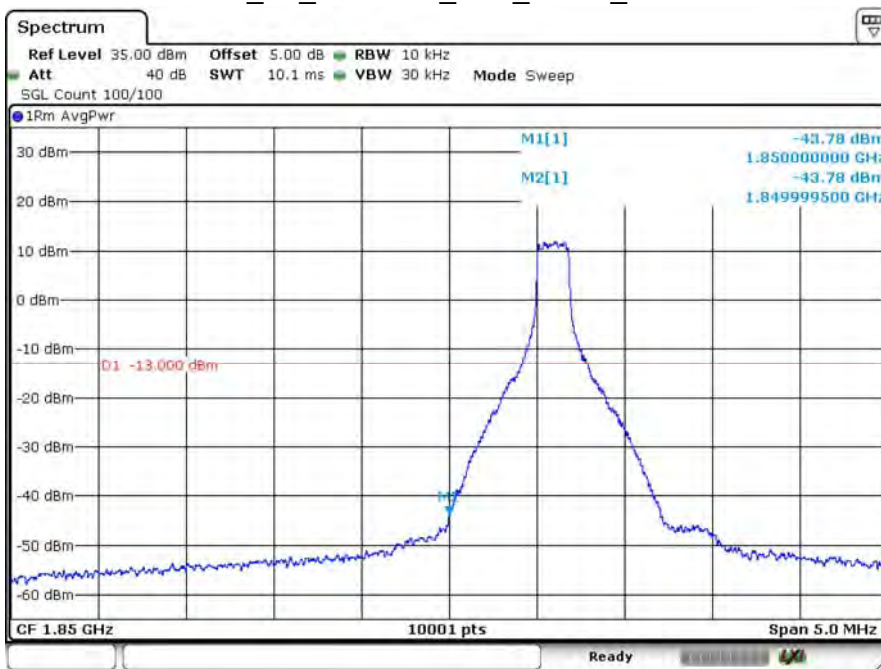


Date: 16 AUG 2019 15:32:37

LTE_B2_CH18650_10M_QPSK_50RB0

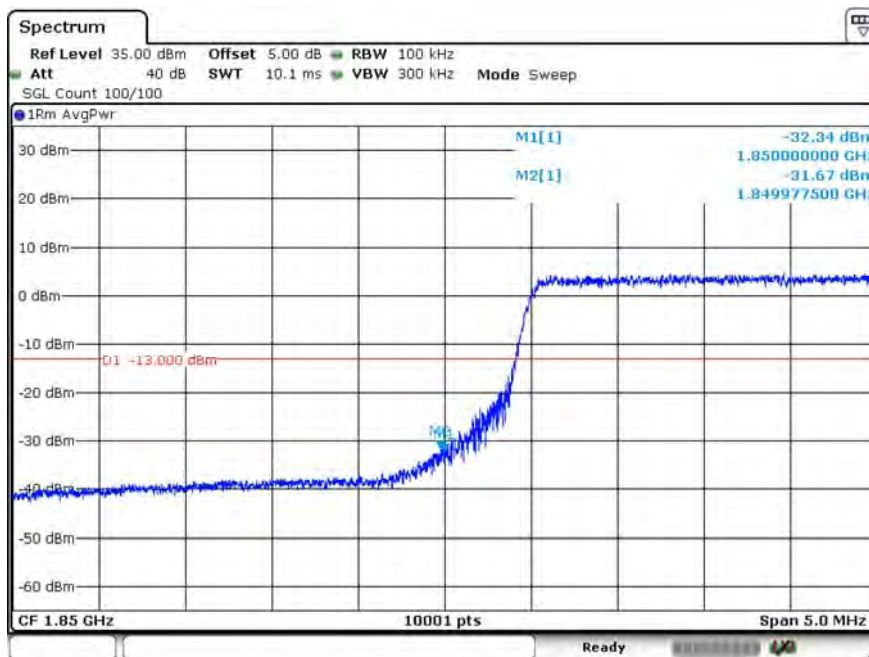


Date: 16 AUG 2019 15:31:13

LTE_B2_CH18650_10M_16-QAM_1RB0

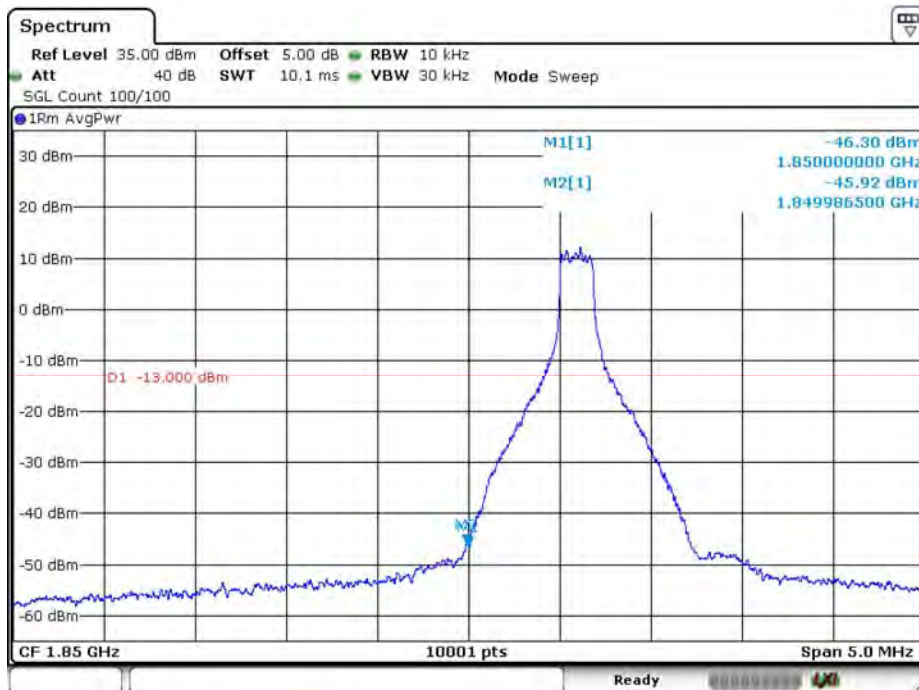


Date: 16 AUG 2019 15:32:16

LTE_B2_CH18650_10M_16-QAM_50RB0

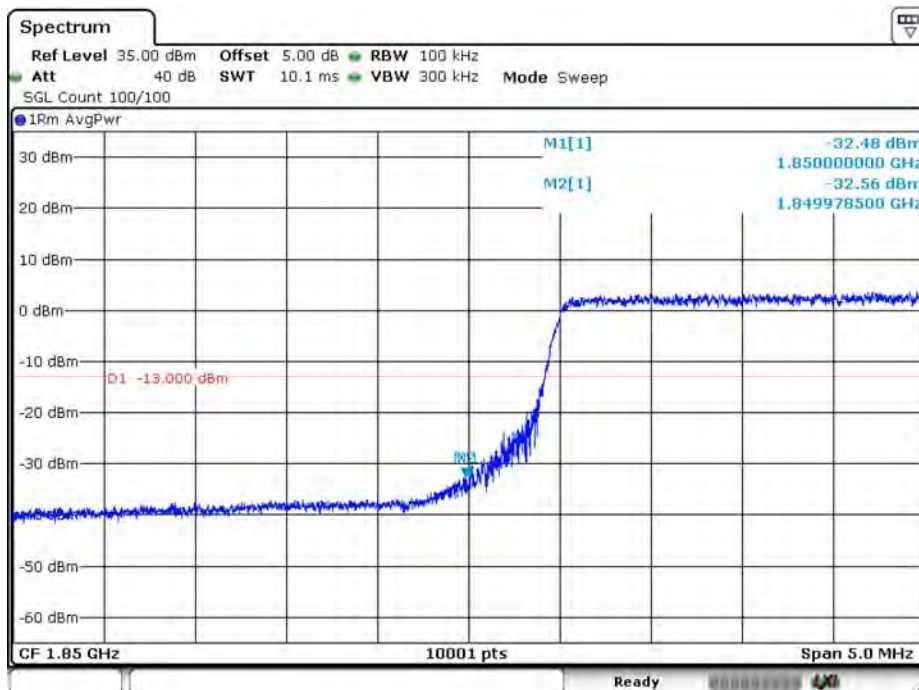


Date: 16 AUG 2019 15:31:49

LTE_B2_CH19150_10M_QPSK_1RB49

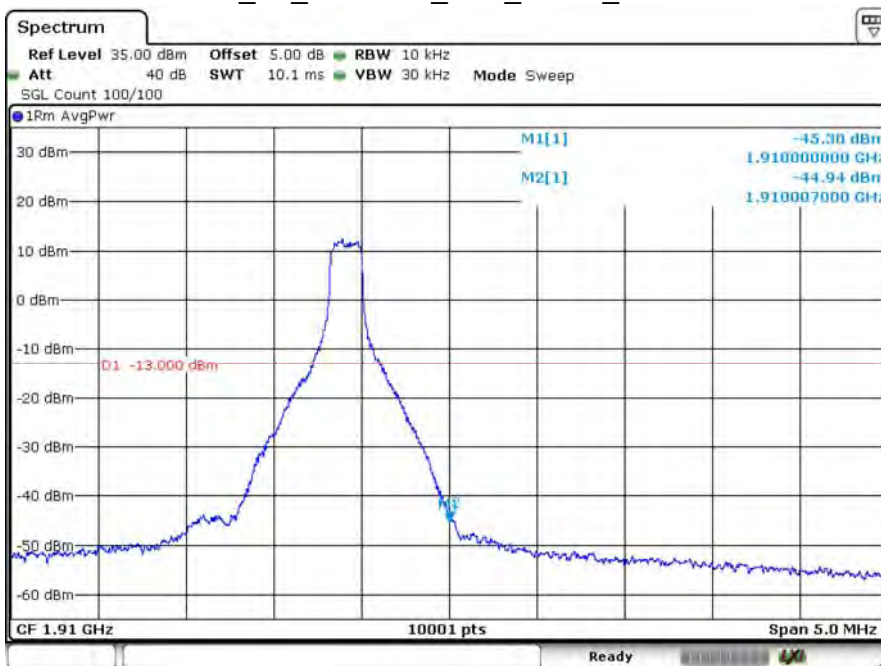


Date: 16 AUG 2019 15:40:39

LTE_B2_CH19150_10M_QPSK_50RB0

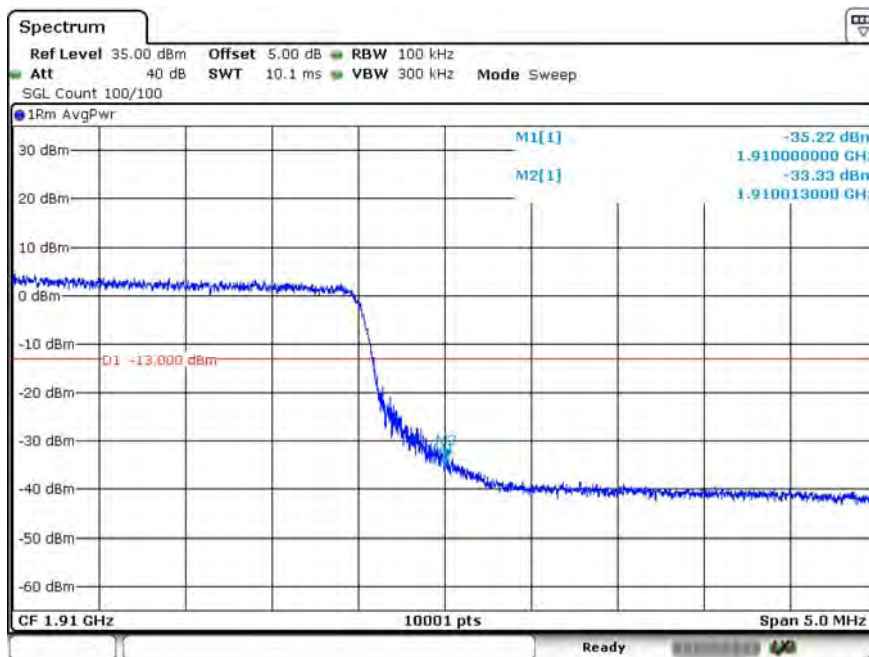


Date: 16 AUG 2019 15:42:37

LTE_B2_CH19150_10M_16-QAM_1RB49

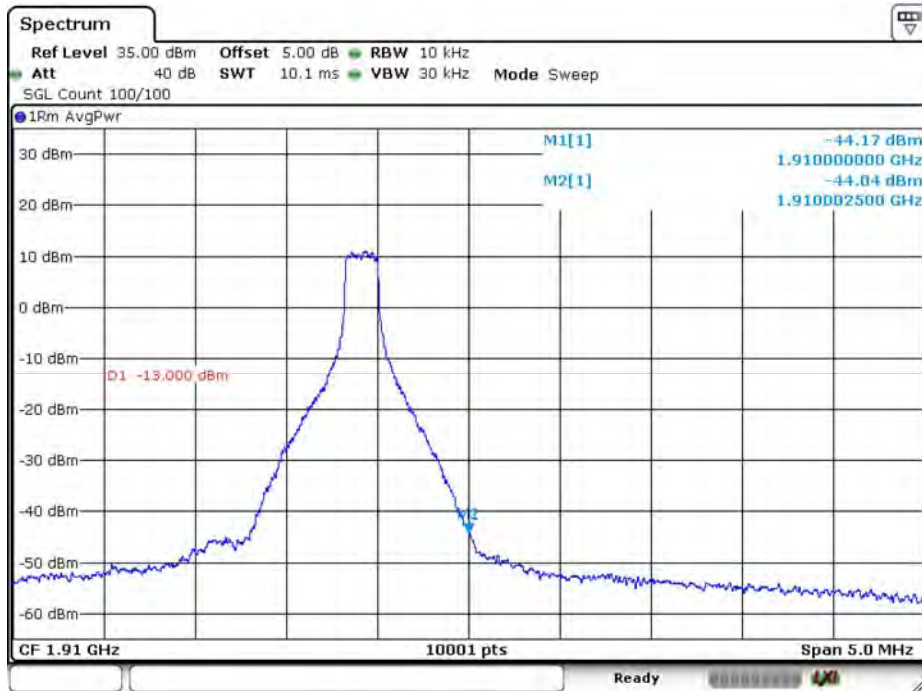


Date: 16.AUG.2019 15:41:14

LTE_B2_CH19150_10M_16-QAM_50RB0

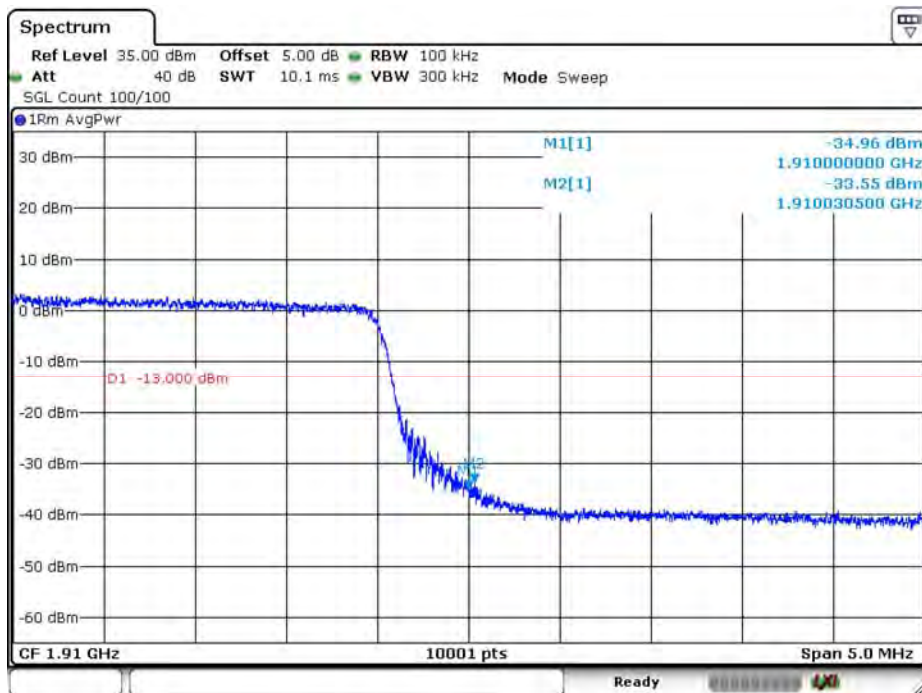


Date: 16.AUG.2019 15:42:07

LTE_B2_CH18675_15M_QPSK_1RB0

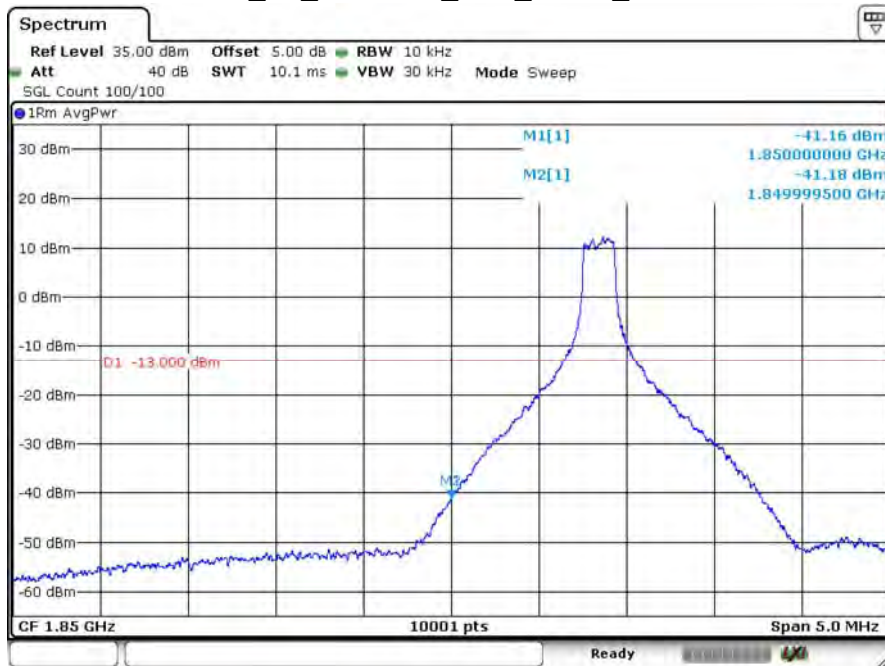


Date: 16 AUG 2019 15:36:08

LTE_B2_CH18675_15M_QPSK_75RB0

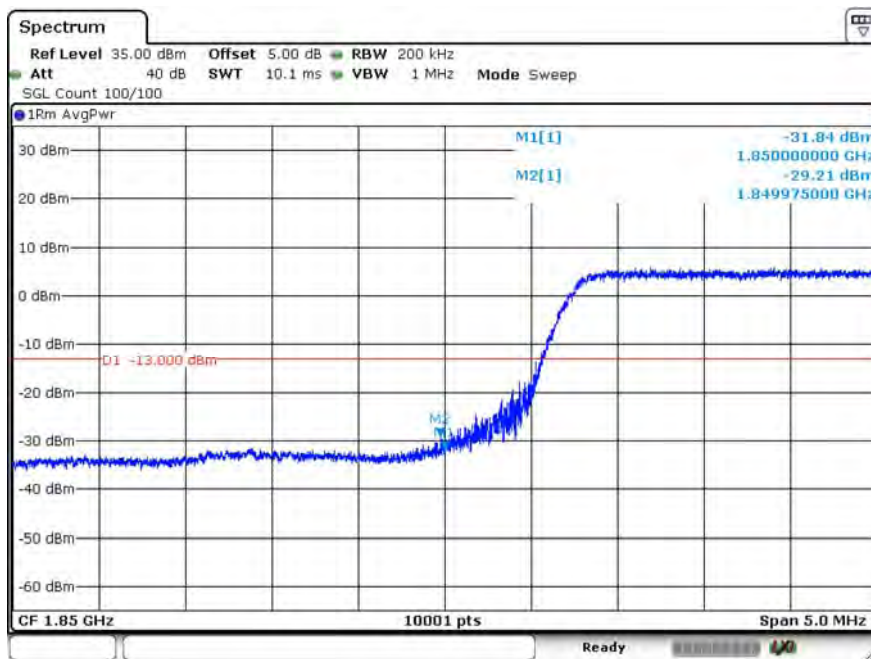


Date: 16 AUG 2019 15:37:30

LTE_B2_CH18675_15M_16-QAM_1RB0

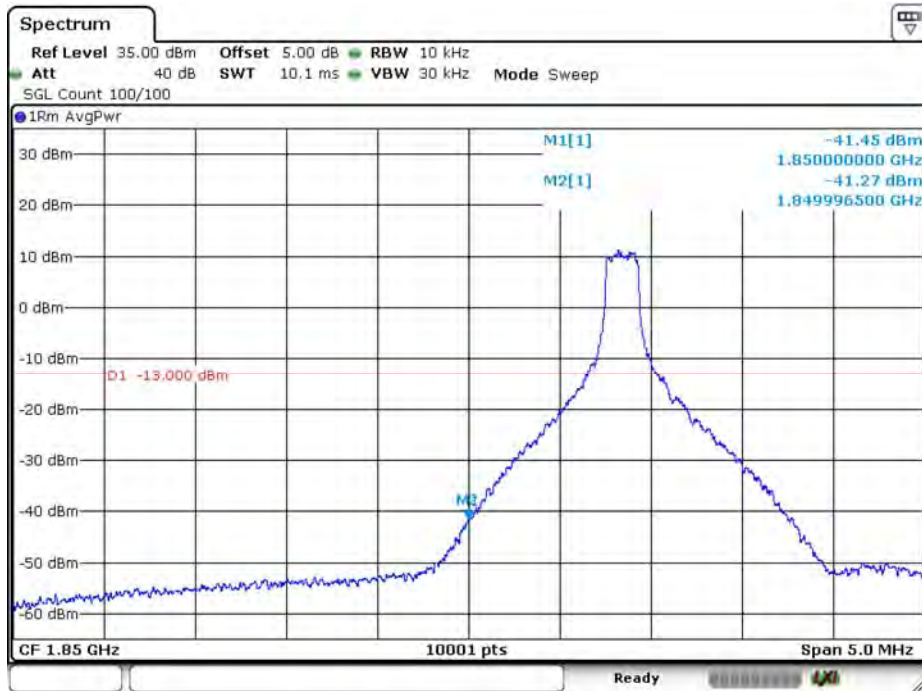


Date: 16 AUG 2019 15:36:38

LTE_B2_CH18675_15M_16-QAM_75RB0

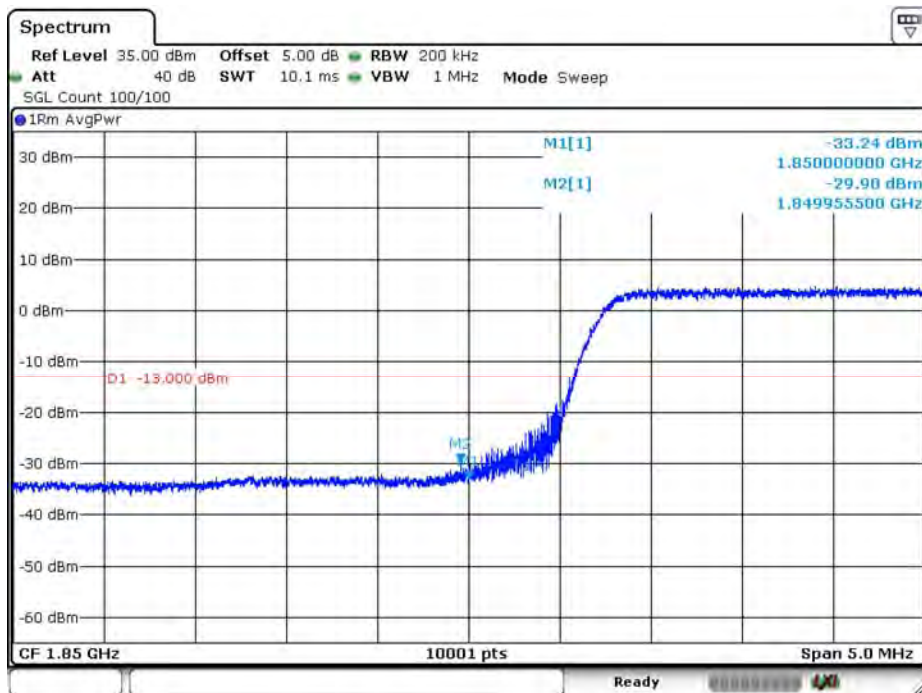


Date: 16 AUG 2019 15:37:09

LTE_B2_CH19125_15M_QPSK_1RB74

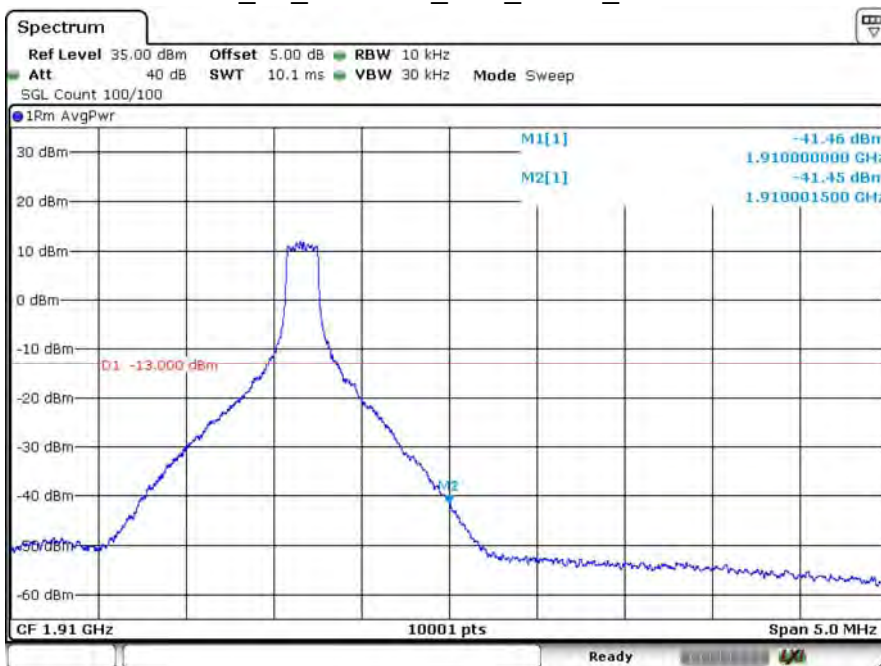


Date: 16 AUG 2019 15:39:41

LTE_B2_CH19125_15M_QPSK_75RB0

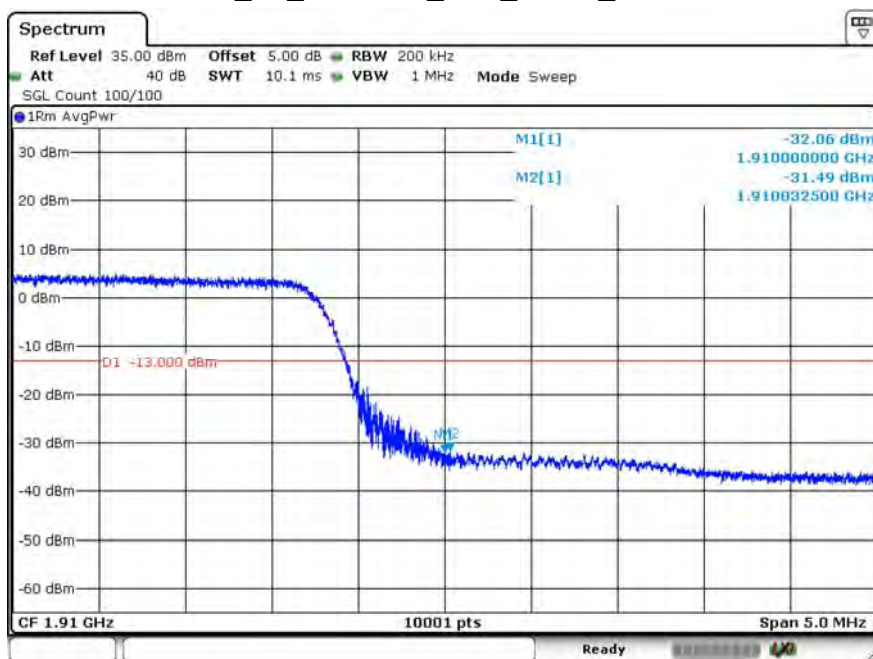


Date: 16 AUG 2019 15:38:07

LTE_B2_CH19125_15M_16-QAM_1RB74

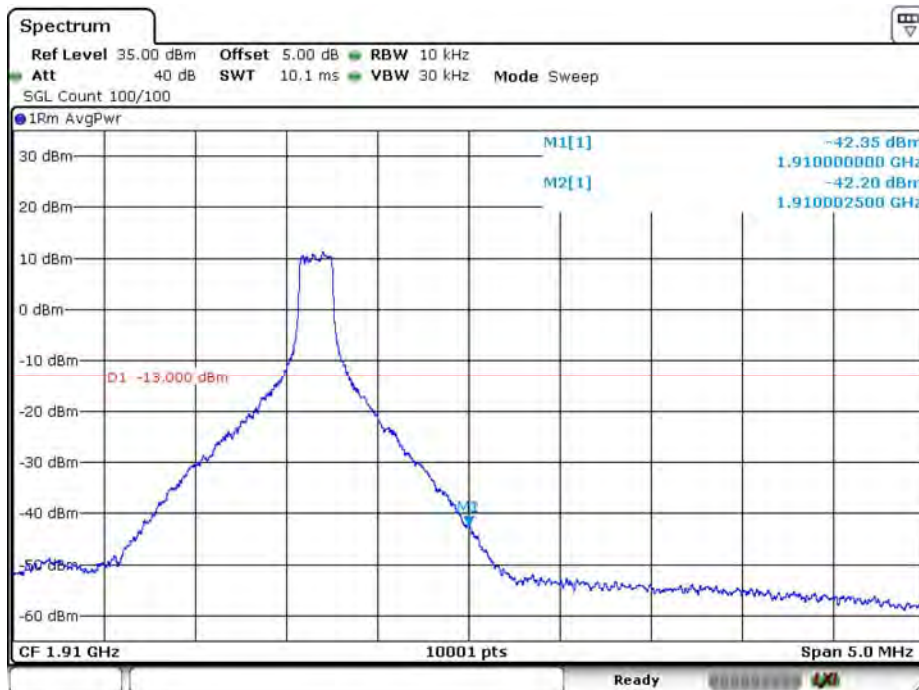


Date: 16.AUG.2019 15:39:16

LTE_B2_CH19125_15M_16-QAM_75RB0

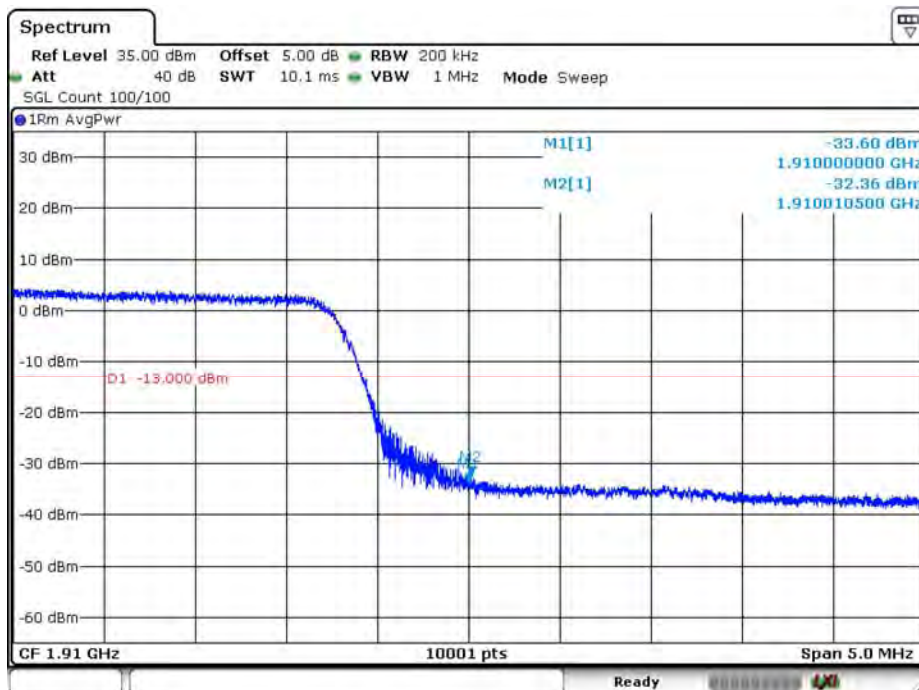


Date: 16.AUG.2019 15:38:42

LTE_B2_CH18700_20M_QPSK_1RB0

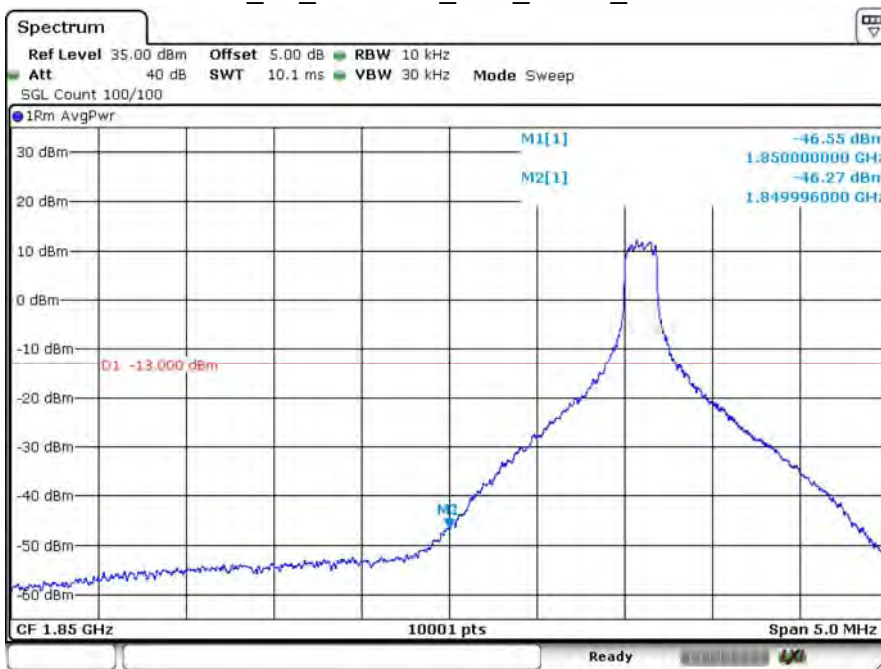


Date: 16.AUG.2019 14:47:47

LTE_B2_CH18700_20M_QPSK_100RB0

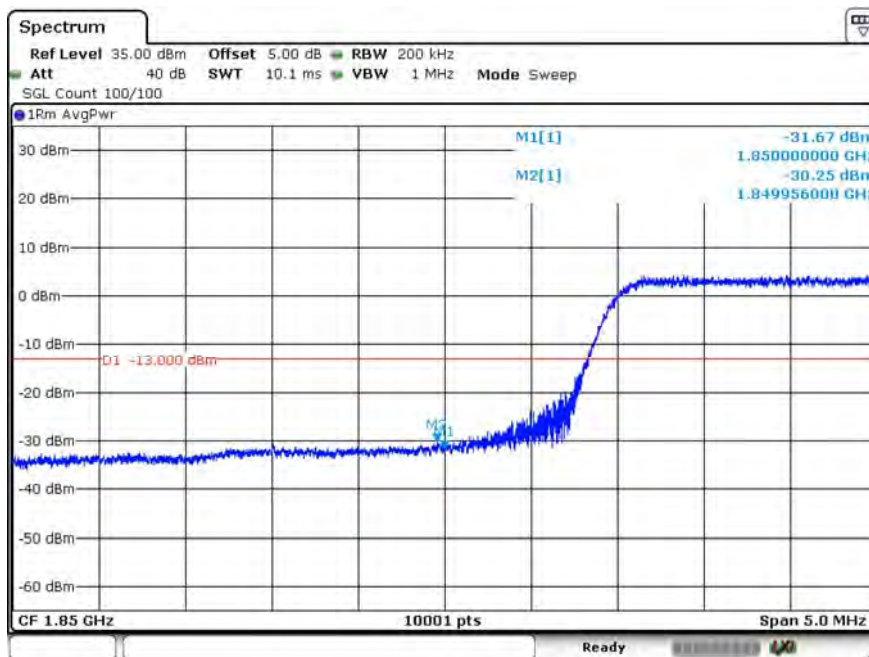


Date: 16.AUG.2019 14:51:25

LTE_B2_CH18700_20M_16-QAM_1RB0

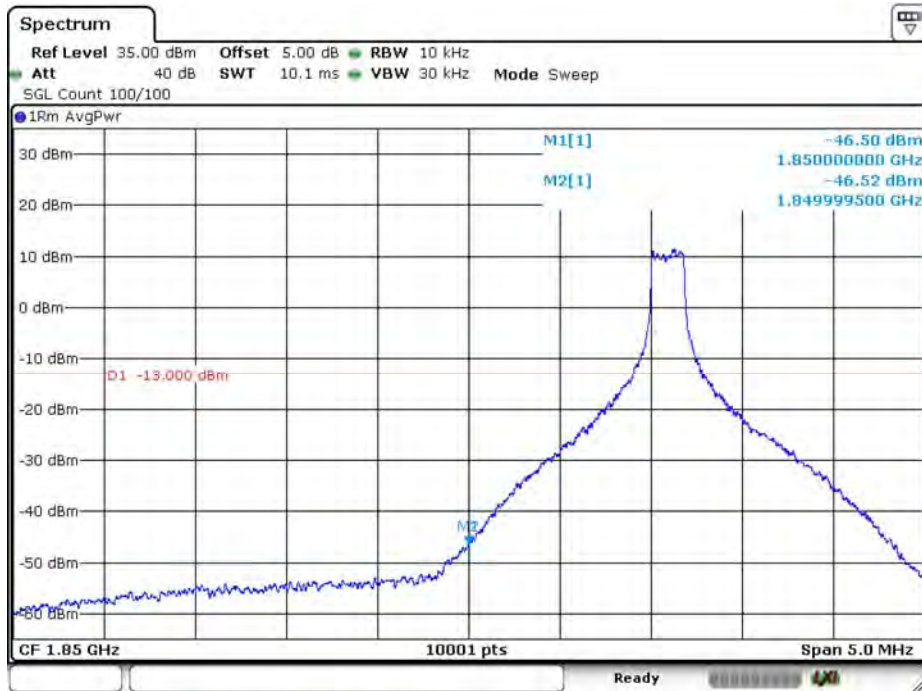


Date: 16.AUG.2019 14:48:49

LTE_B2_CH18700_20M_16-QAM_100RB0

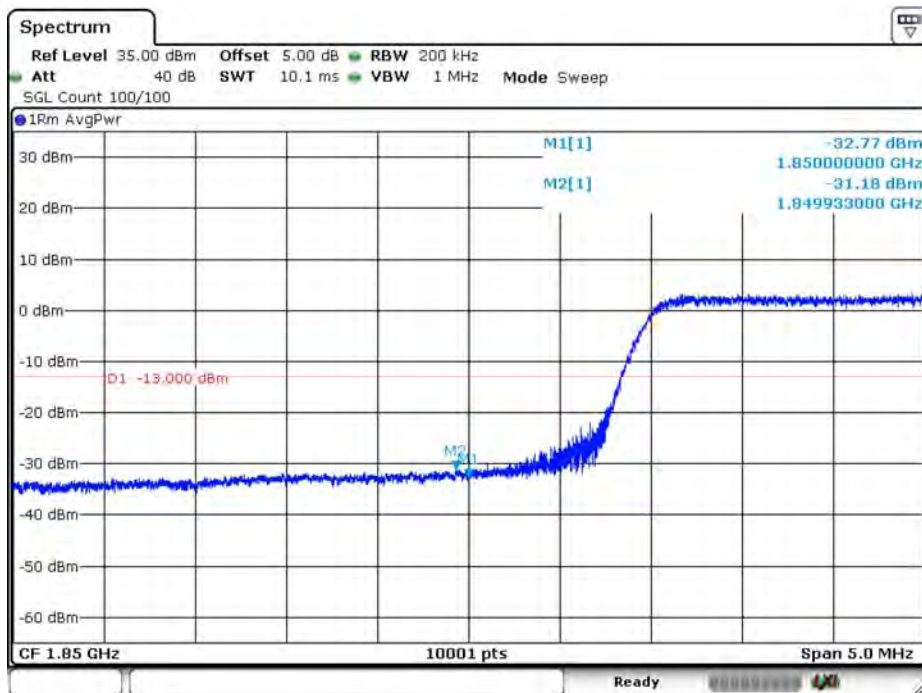


Date: 16.AUG.2019 14:50:54

LTE_B2_CH19100_20M_QPSK_1RB99

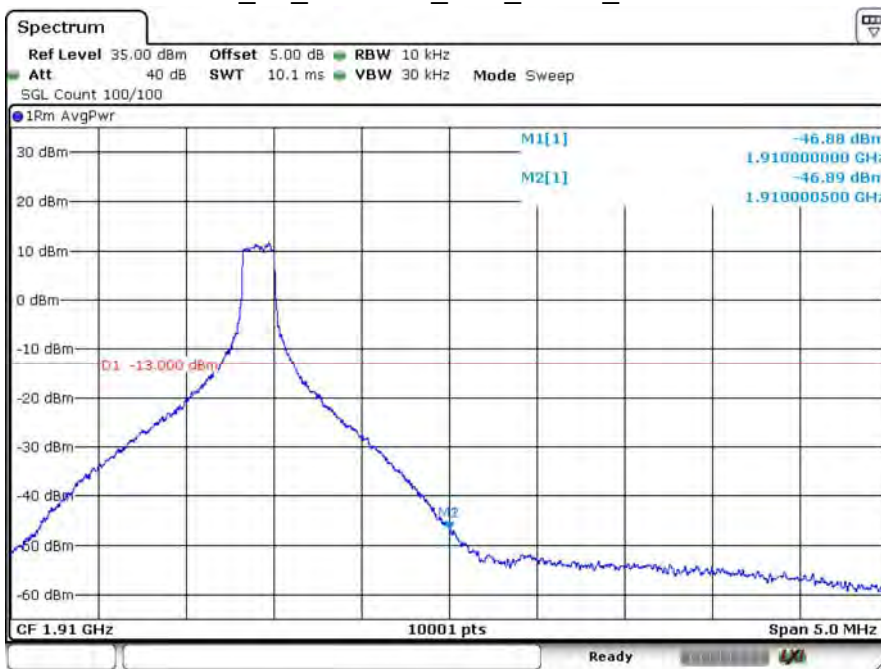


Date: 16 AUG 2019 14:54:42

LTE_B2_CH19100_20M_QPSK_100RB0

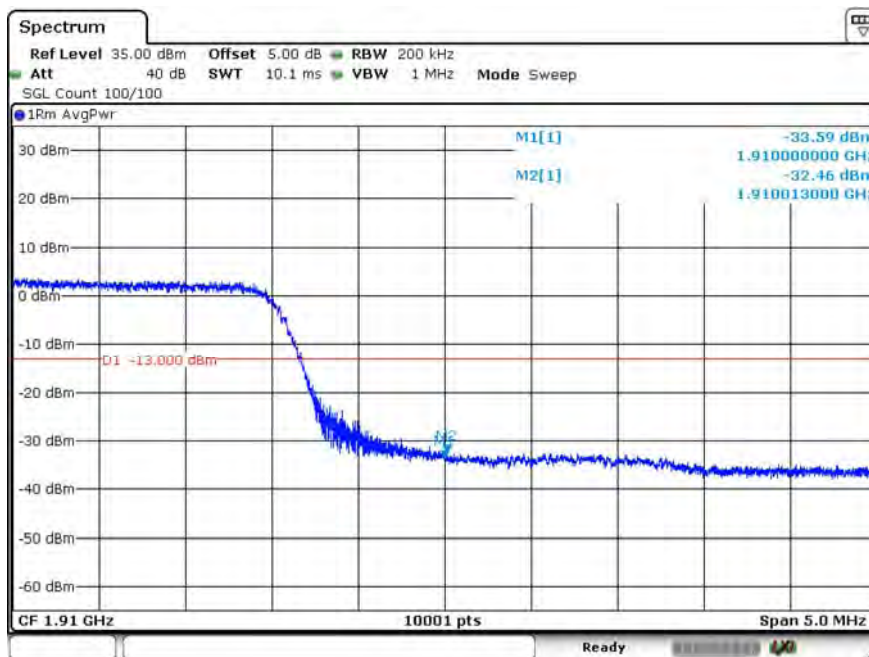


Date: 16 AUG 2019 14:52:58

LTE_B2_CH19100_20M_16-QAM_1RB99

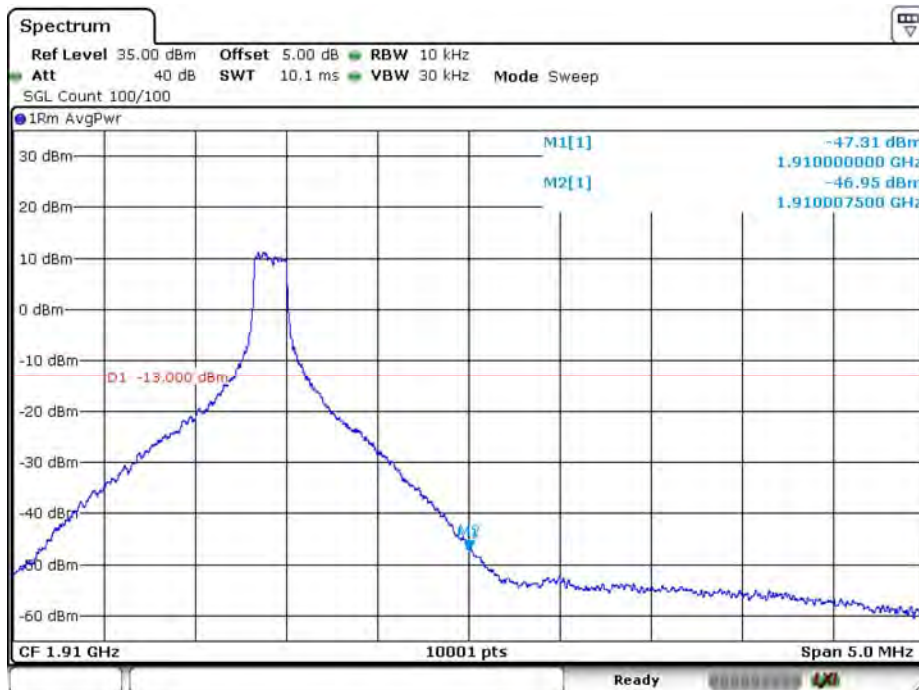

Date: 16.AUG.2019 14:54:12

LTE_B2_CH19100_20M_16-QAM_100RB0

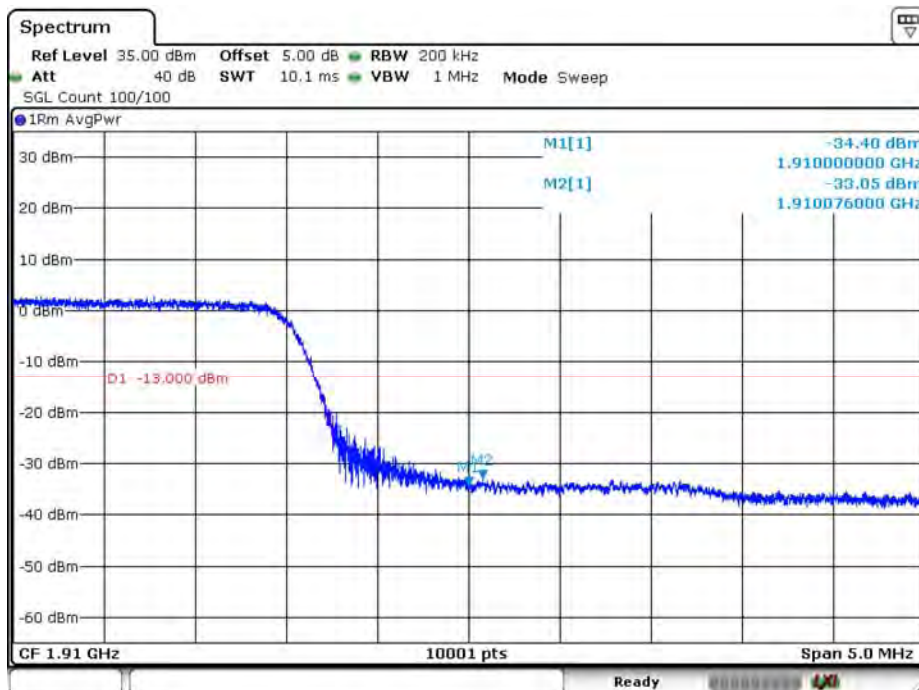

Date: 16.AUG.2019 14:53:28


Product	Module		
Test Item	Spurious Emissions at Antenna Terminals		
Test Mode	Mode 2: LTE Band 4		
Date of Test	2019/08/16~2019/08/17	Test Site	SR10-H

LTE_B4_CH19957_1.4M_QPSK_1RB0




Date: 16 AUG 2019 23:09:52

LTE_B4_CH19957_1.4M_QPSK_6RB0

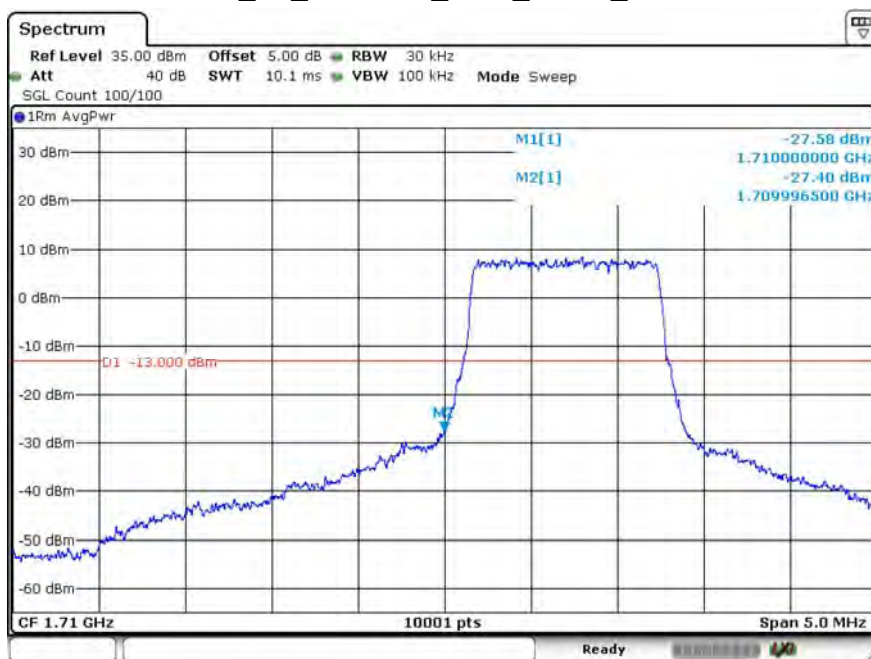


Date: 16 AUG 2019 23:11:22

LTE_B4_CH19957_1.4M_16-QAM_1RB0

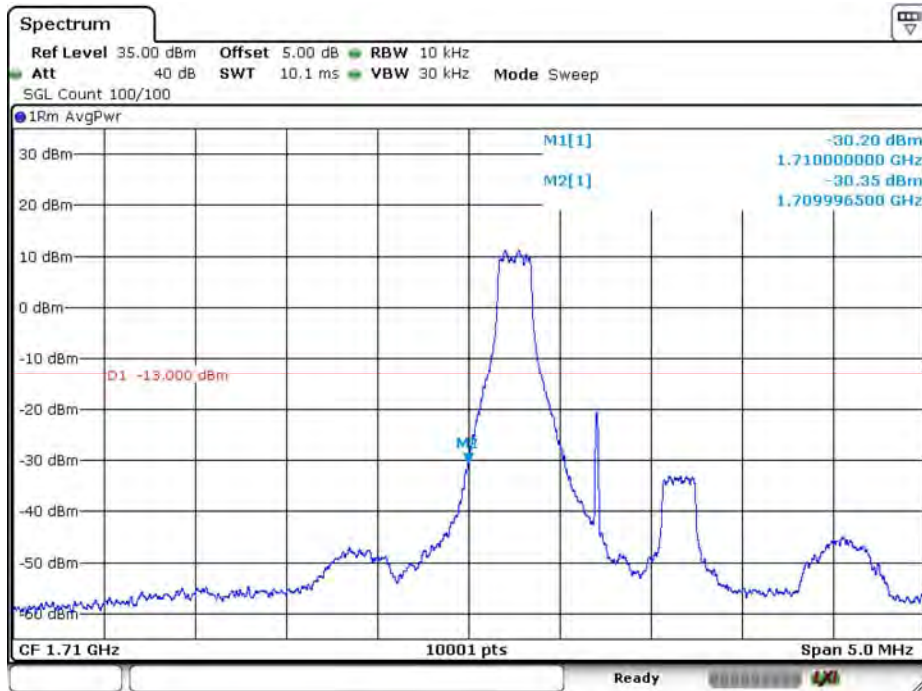


Date: 16.AUG.2019 23:13:10

LTE_B4_CH19957_1.4M_16-QAM_6RB0

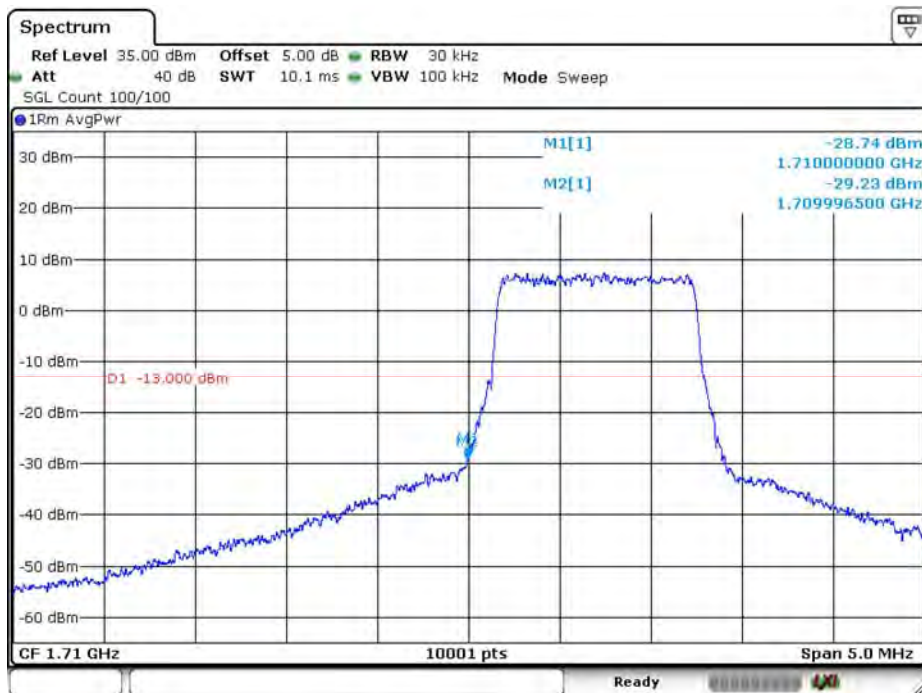


Date: 16.AUG.2019 23:12:31

LTE_B4_CH20393_1.4M_QPSK_1RB5

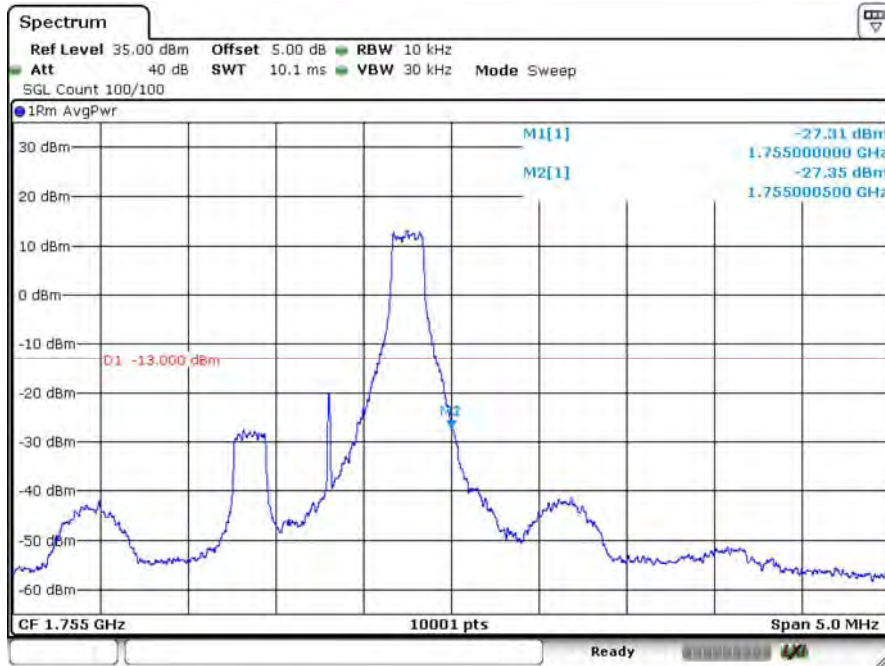

Date: 16 AUG 2019 23:16:42

LTE_B4_CH20393_1.4M_QPSK_6RB0

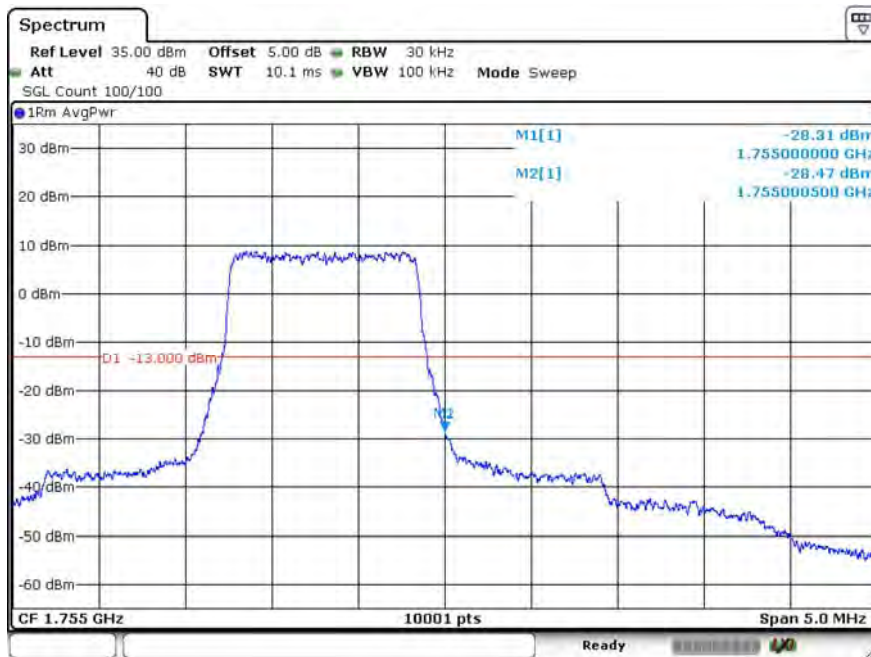


Date: 16 AUG 2019 23:21:30

LTE_B4_CH20393_1.4M_16-QAM_1RB5




Date: 16.AUG.2019 23:20:10

LTE_B4_CH20393_1.4M_16-QAM_6RB0

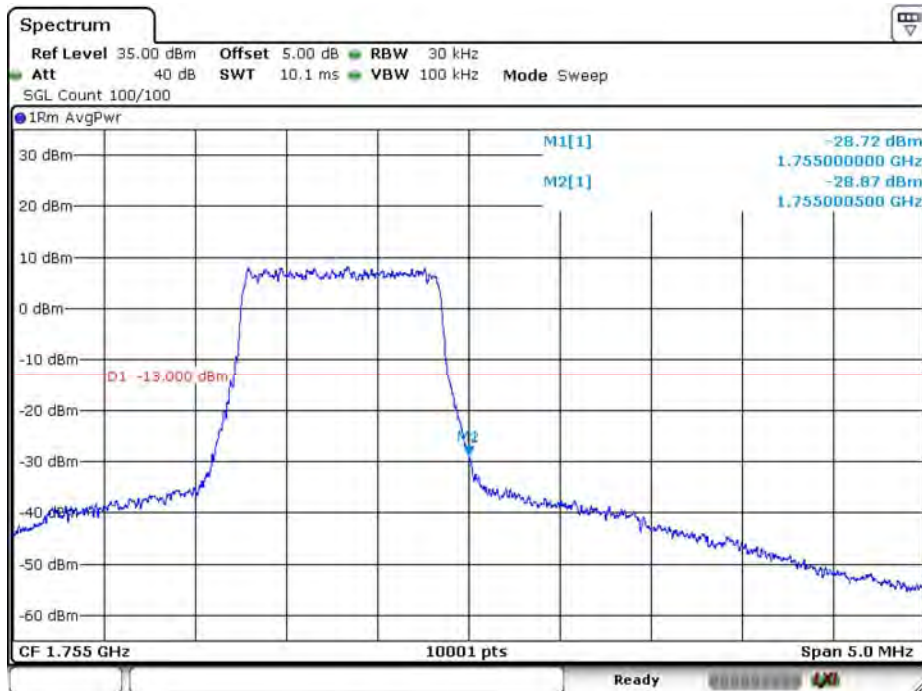


Date: 16.AUG.2019 23:20:57

LTE_B4_CH19965_3M_QPSK_1RB0

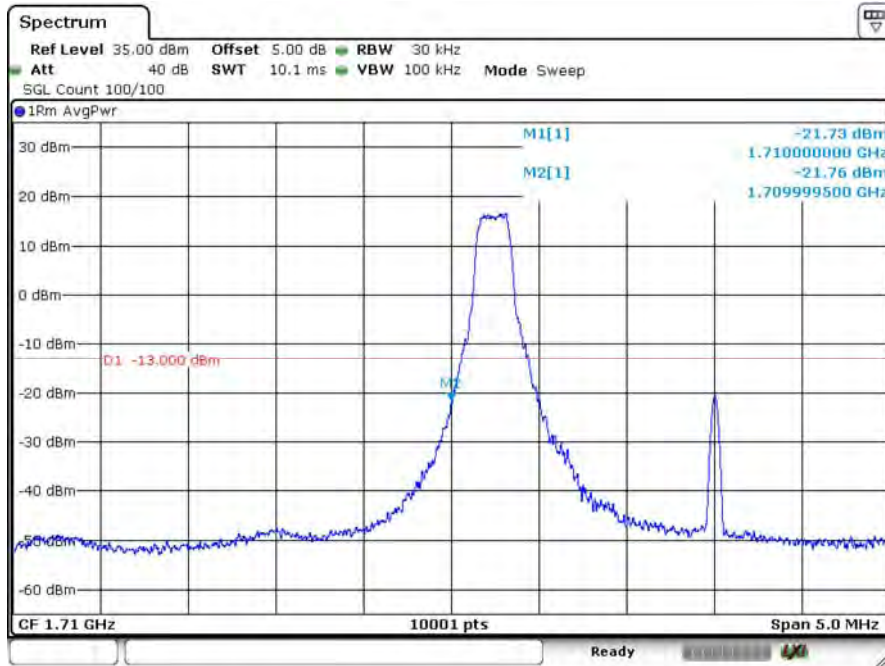


Date: 16 AUG 2019 23:25:59

LTE_B4_CH19965_3M_QPSK_15RB0

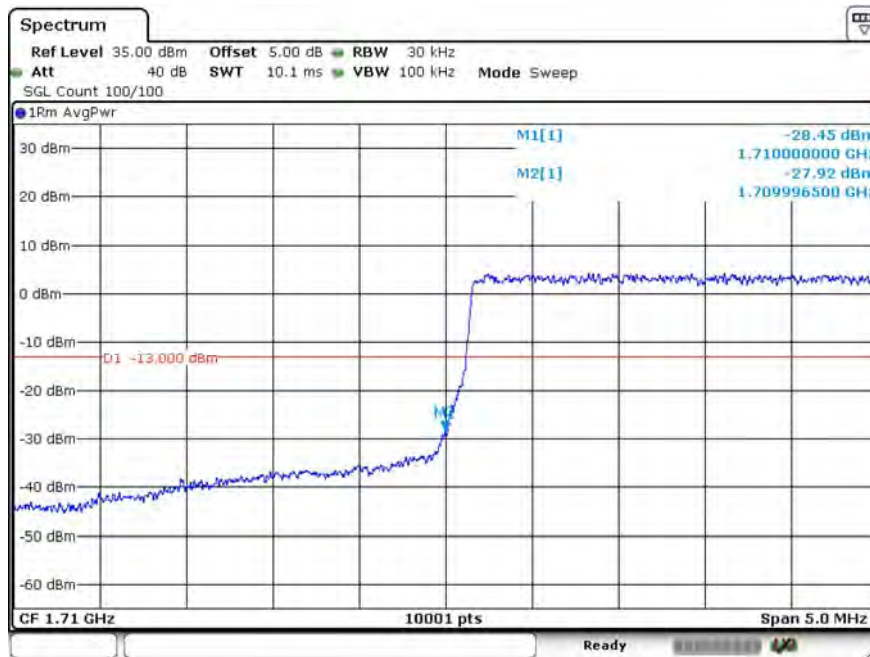


Date: 16 AUG 2019 23:28:55

LTE_B4_CH19965_3M_16-QAM_1RB0

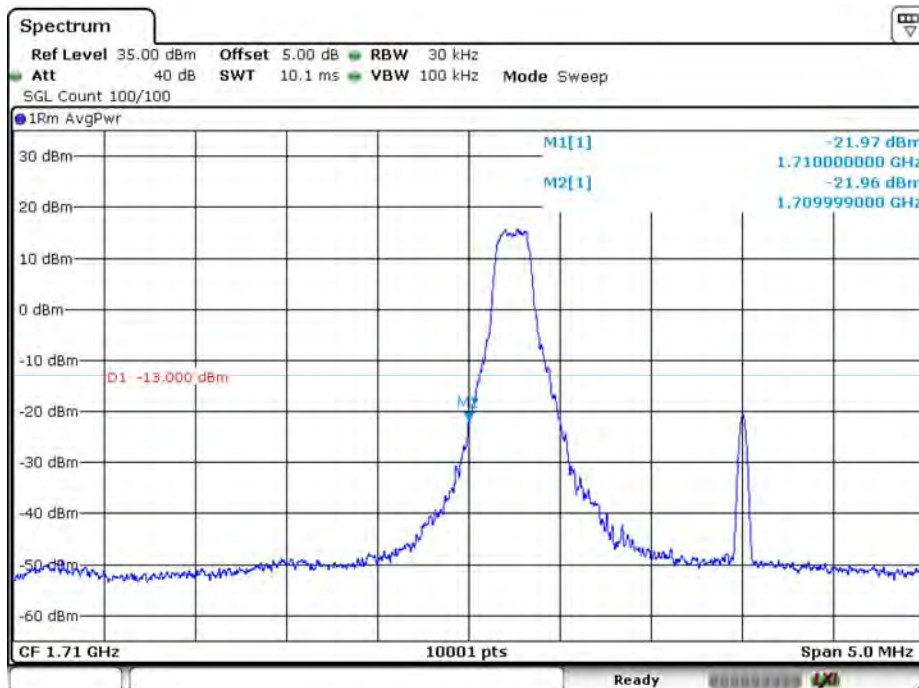


Date: 16 AUG 2019 23:27:01

LTE_B4_CH19965_3M_16-QAM_15RB0

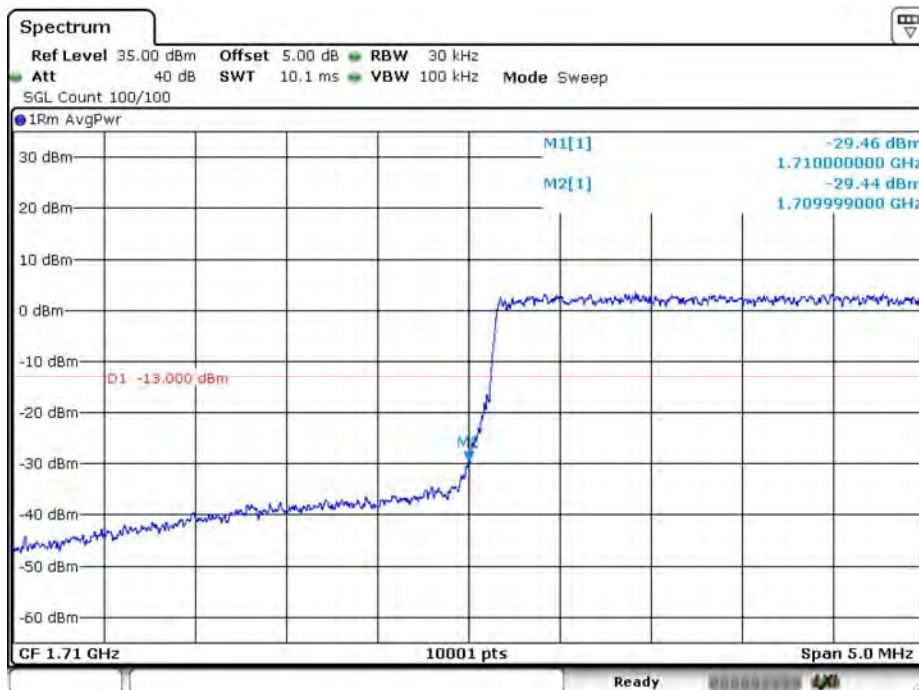


Date: 16 AUG 2019 23:28:27

LTE_B4_CH20385_3M_QPSK_1RB14

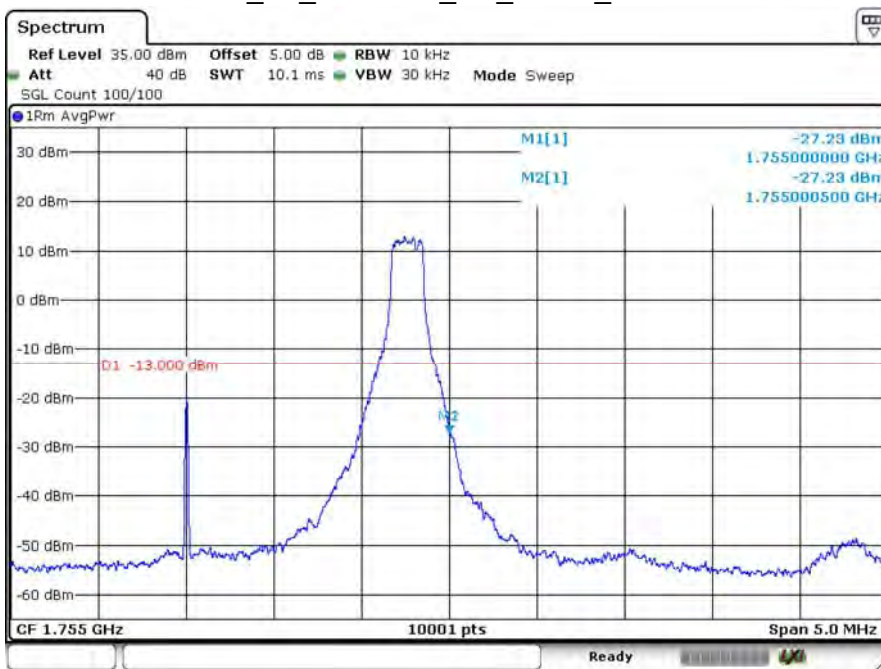


Date: 16 AUG 2019 23:31:00

LTE_B4_CH20385_3M_QPSK_15RB0

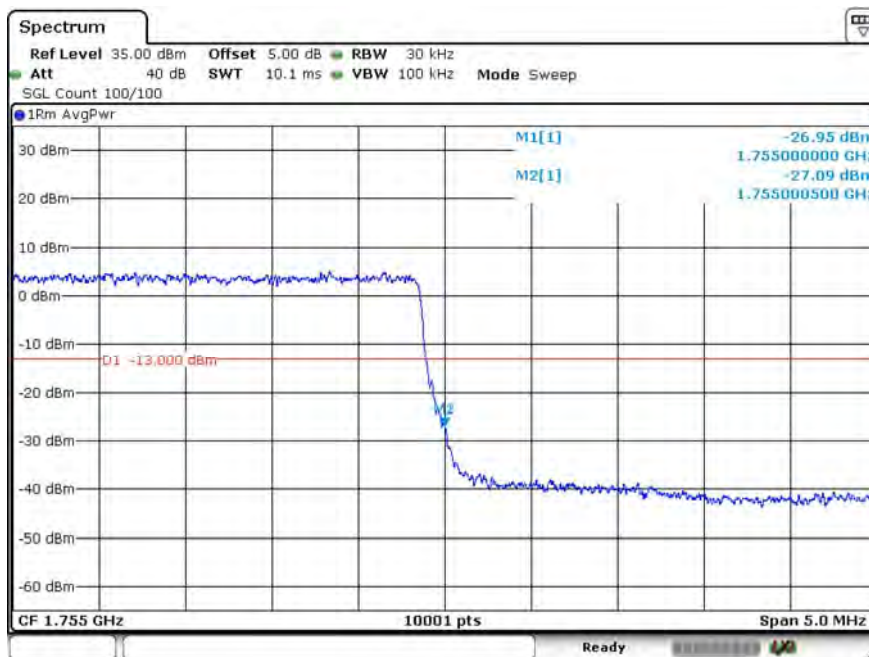


Date: 16 AUG 2019 23:33:23

LTE_B4_CH20385_3M_16-QAM_1RB14

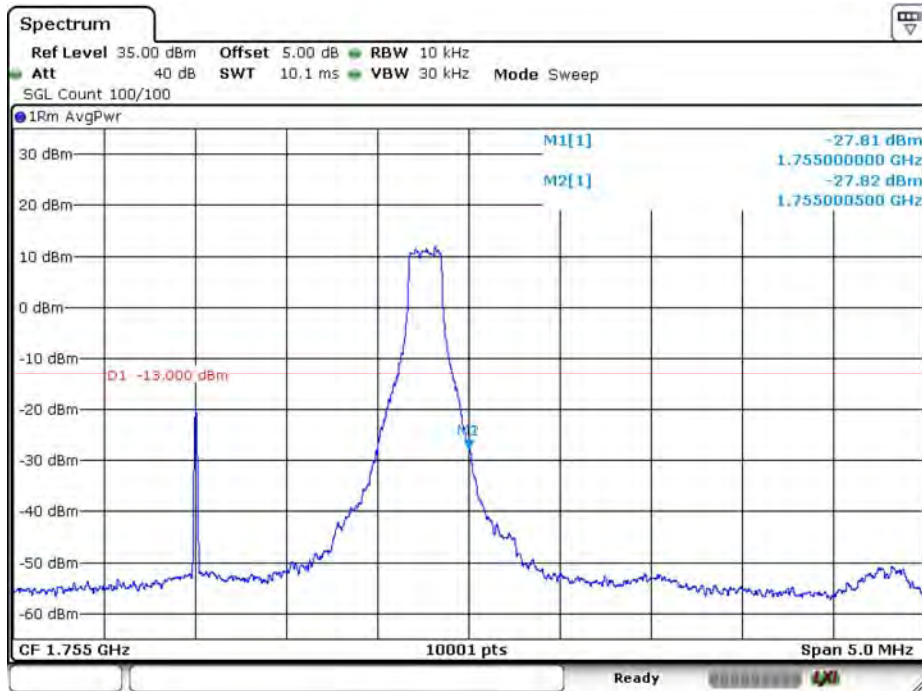


Date: 16.AUG.2019 23:31:52

LTE_B4_CH20385_3M_16-QAM_15RB0

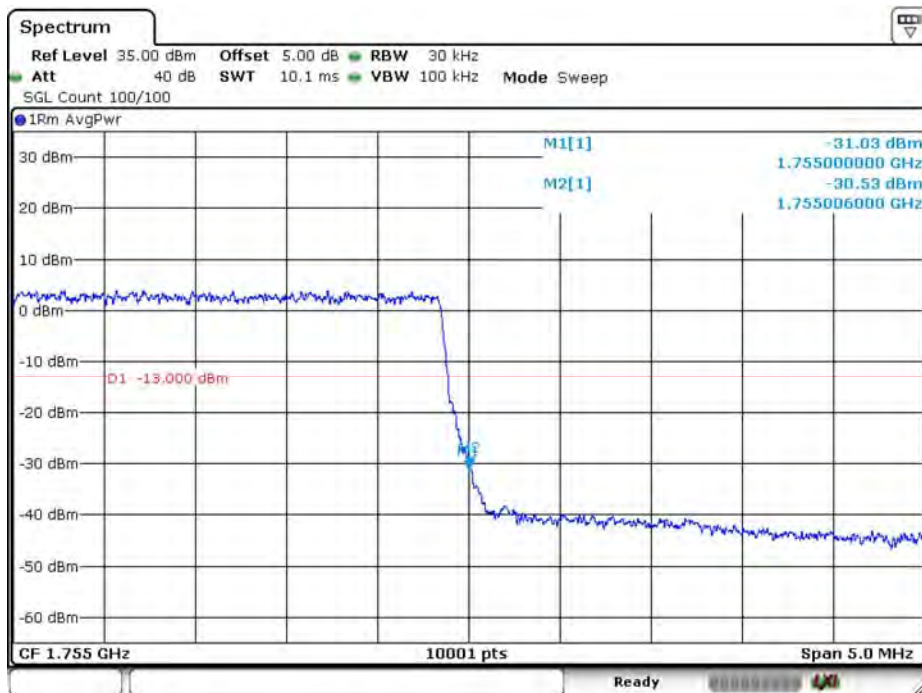


Date: 16.AUG.2019 23:33:01

LTE_B4_CH19975_5M_QPSK_1RB0

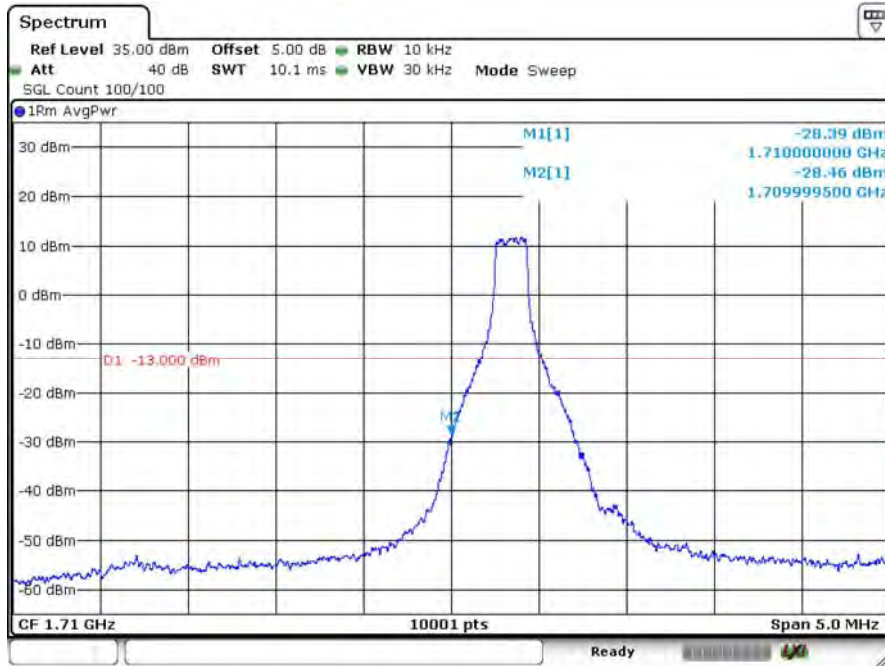


Date: 16 AUG 2019 23:42:52

LTE_B4_CH19975_5M_QPSK_25RB0

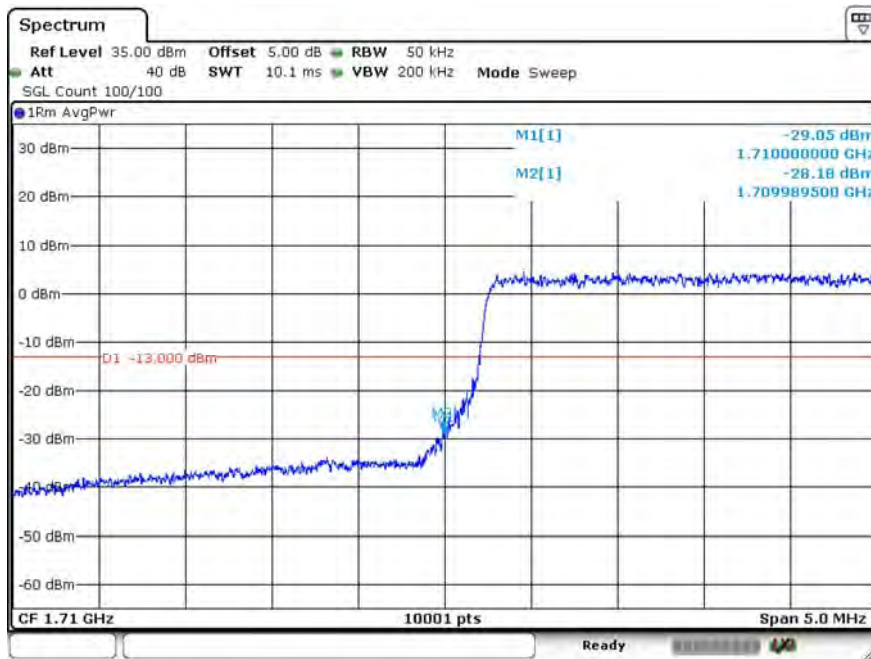


Date: 16 AUG 2019 23:40:48

LTE_B4_CH19975_5M_16-QAM_1RB0

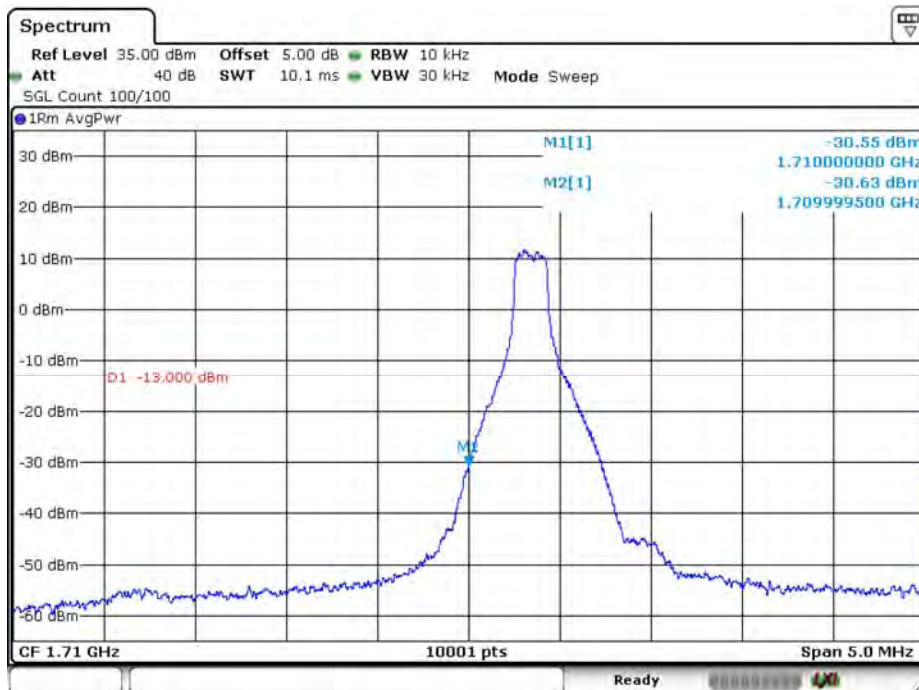


Date: 16 AUG 2019 23:42:34

LTE_B4_CH19975_5M_16-QAM_25RB0

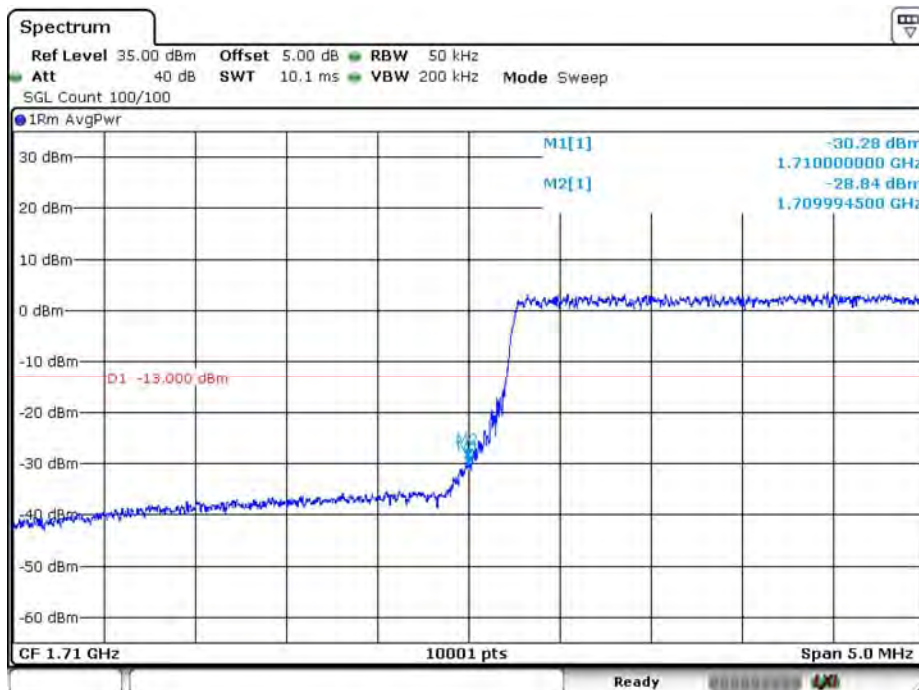


Date: 16 AUG 2019 23:41:35

LTE_B4_CH20375_5M_QPSK_1RB24

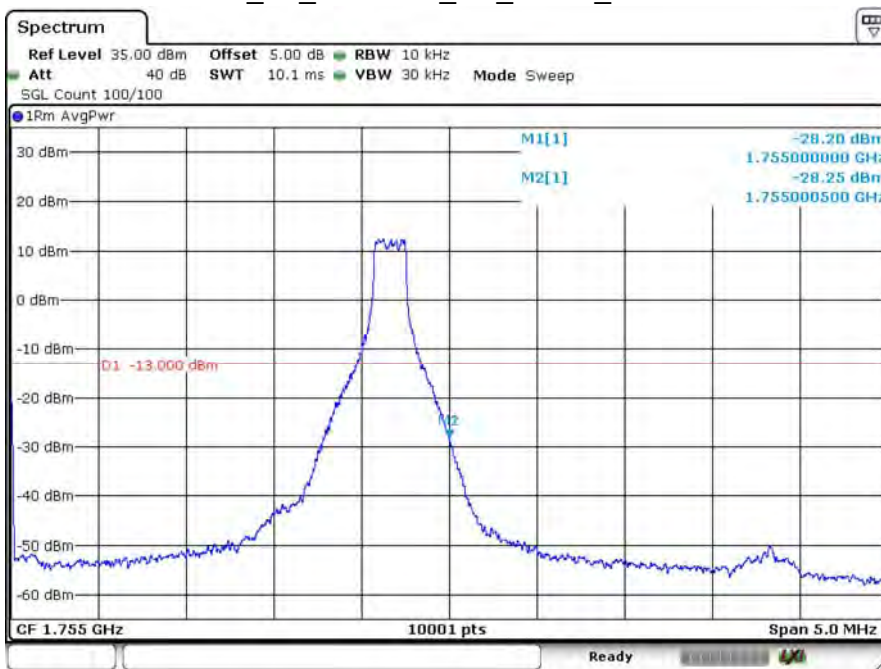


Date: 16 AUG 2019 23:35:19

LTE_B4_CH20375_5M_QPSK_25RB0

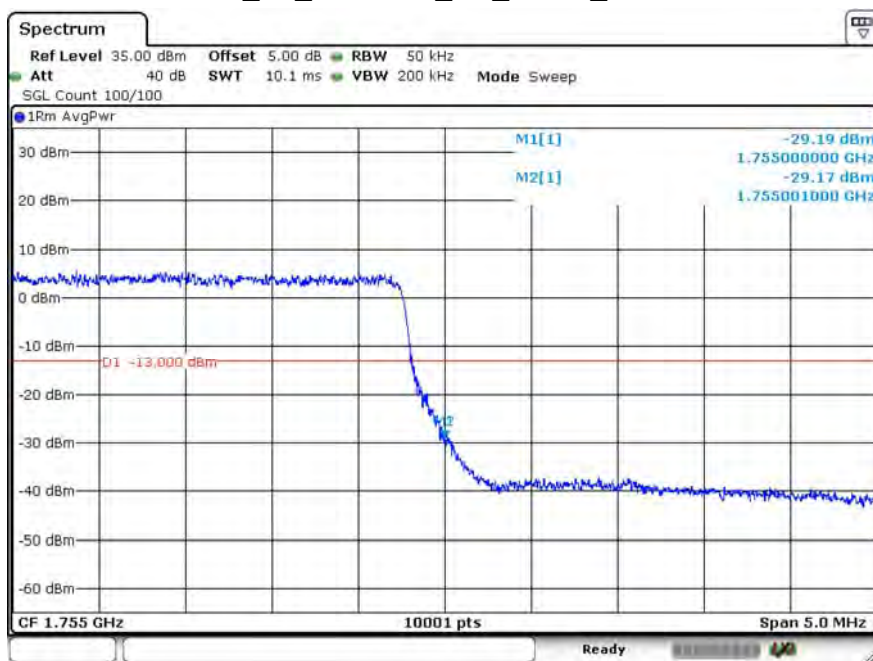


Date: 16 AUG 2019 23:39:49

LTE_B4_CH20375_5M_16-QAM_1RB24

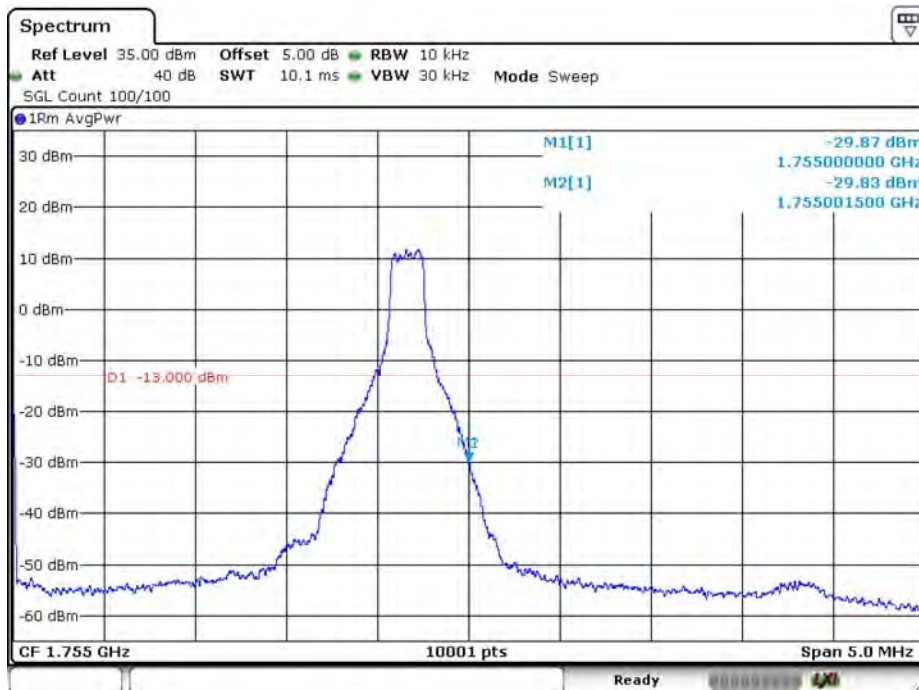


Date: 16.AUG.2019 23:36:01

LTE_B4_CH20375_5M_16-QAM_25RB0

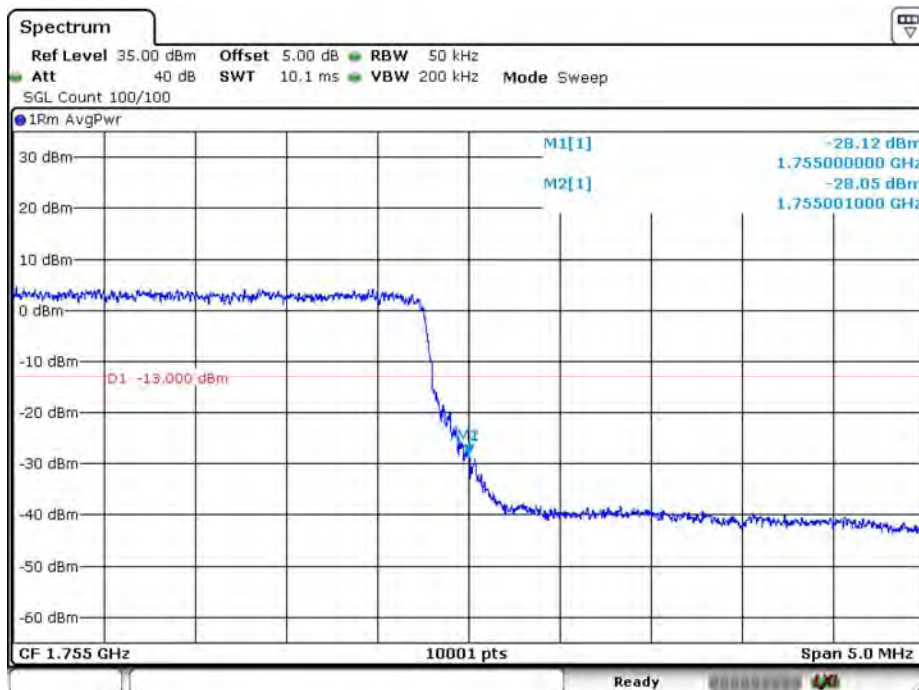


Date: 16.AUG.2019 23:39:24

LTE_B4_CH20000_10M_QPSK_1RB0

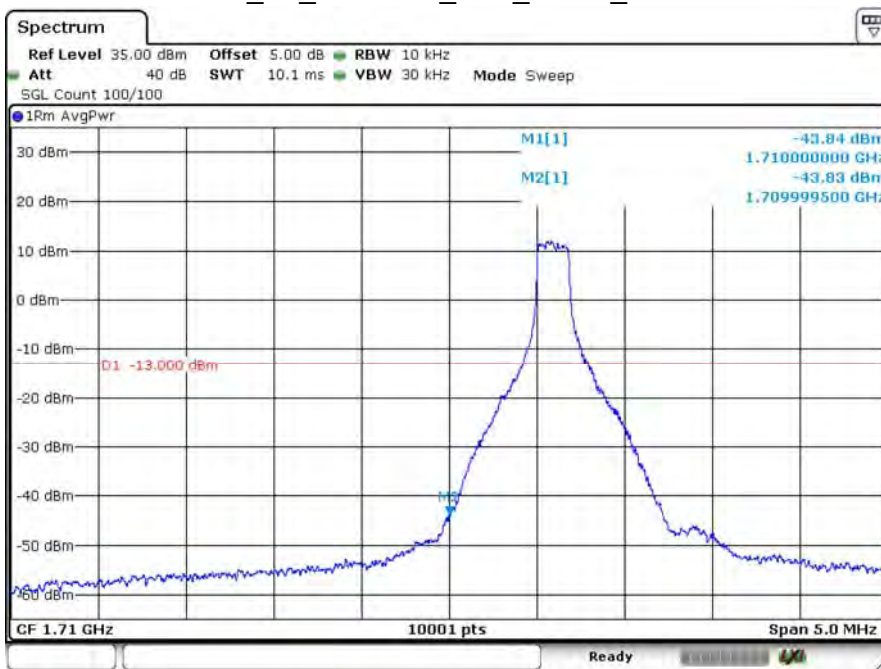


Date: 16 AUG 2019 23:47:15

LTE_B4_CH20000_10M_QPSK_50RB0

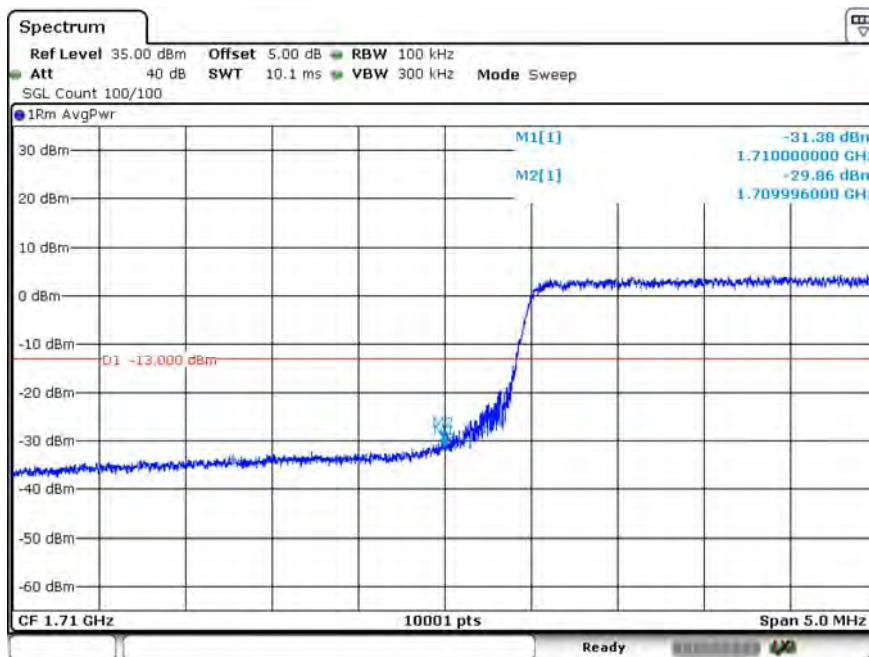


Date: 16 AUG 2019 23:50:37

LTE_B4_CH20000_10M_16-QAM_1RB0

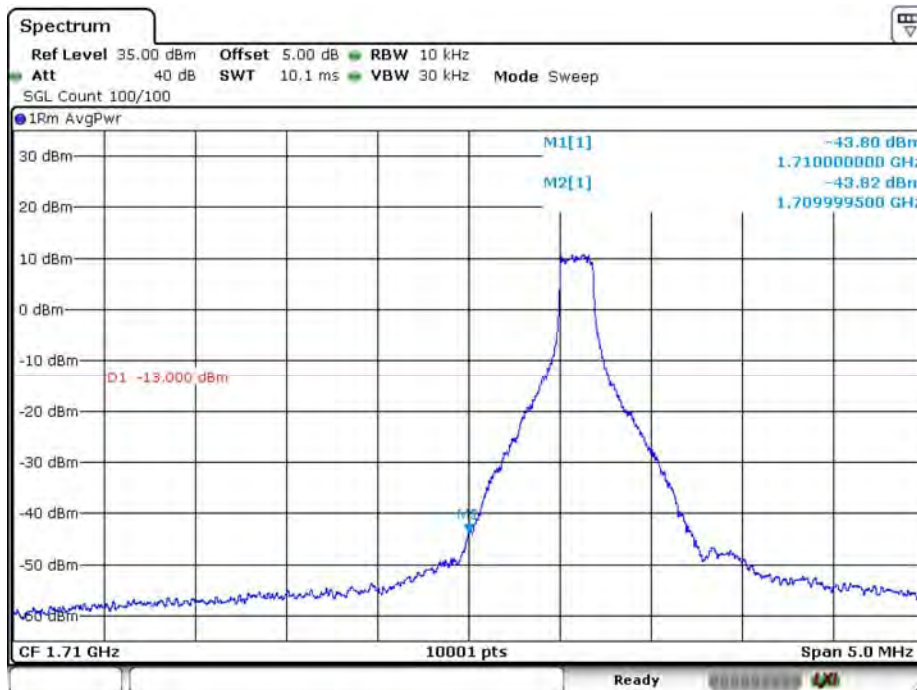


Date: 16.AUG.2019 23:48:05

LTE_B4_CH20000_10M_16-QAM_50RB0

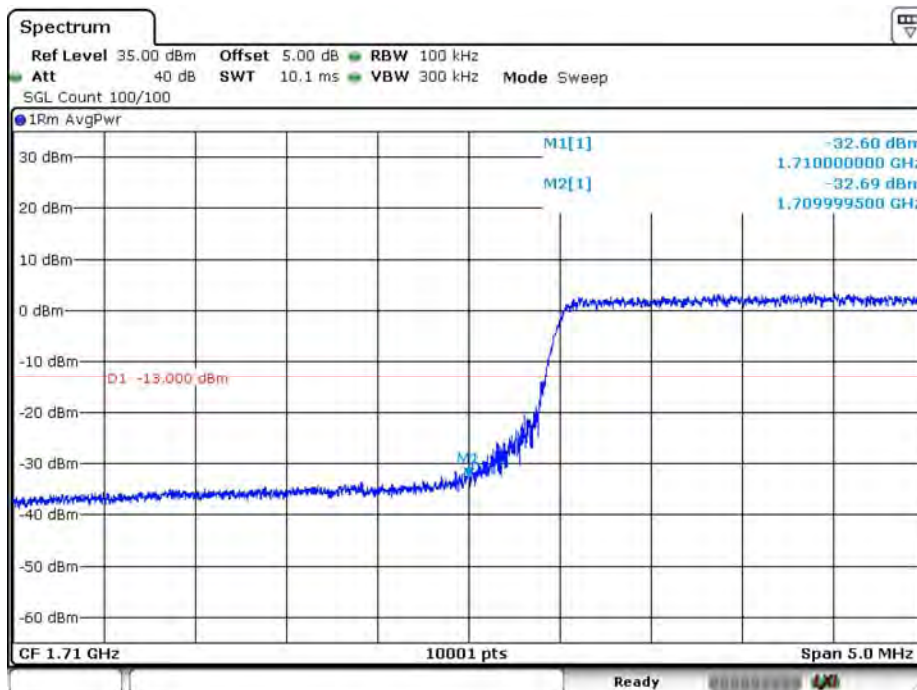


Date: 16.AUG.2019 23:50:11

LTE_B4_CH20350_10M_QPSK_1RB49

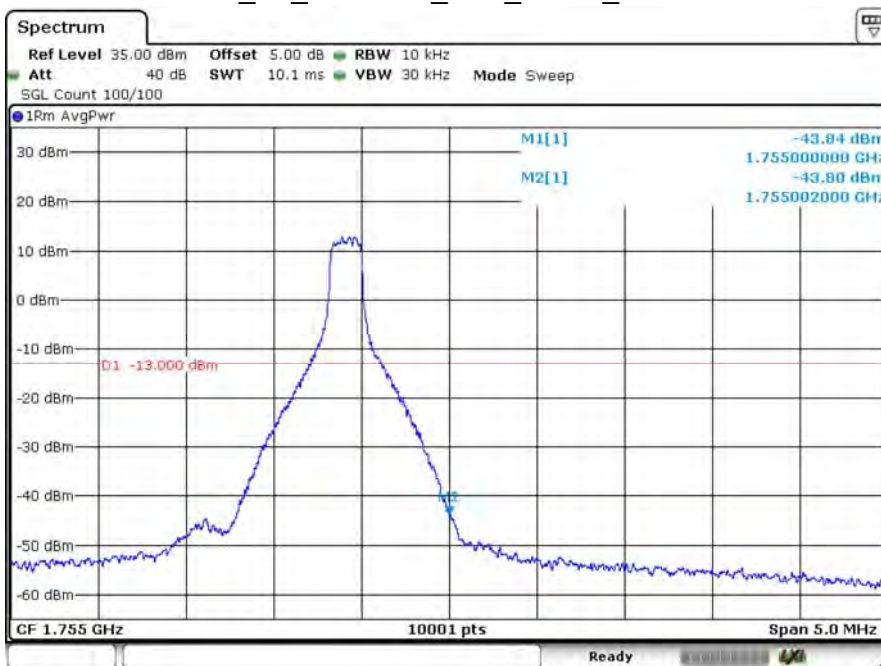


Date: 16 AUG 2019 23:57:10

LTE_B4_CH20350_10M_QPSK_50RB0

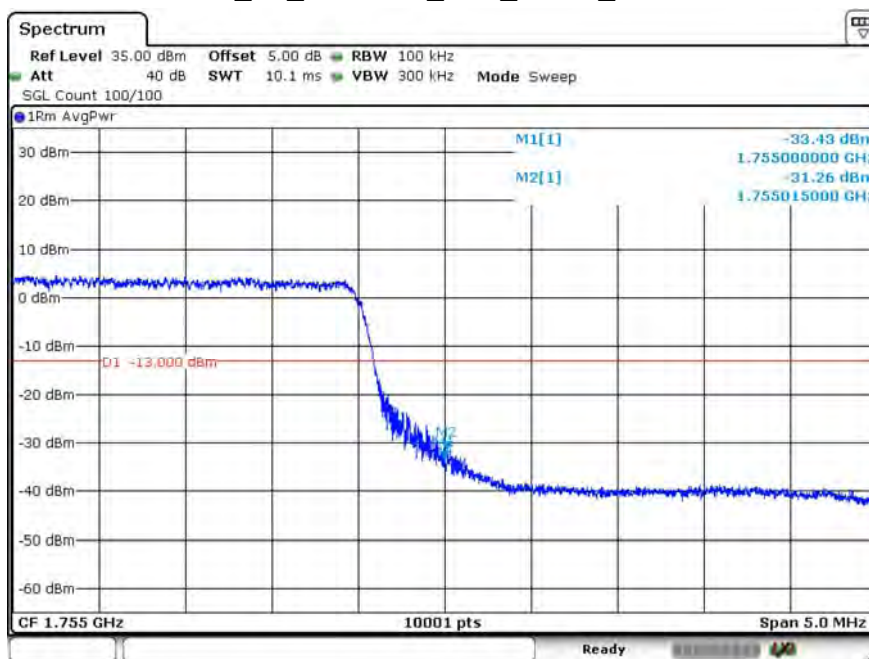


Date: 16 AUG 2019 23:51:11

LTE_B4_CH20350_10M_16-QAM_1RB49

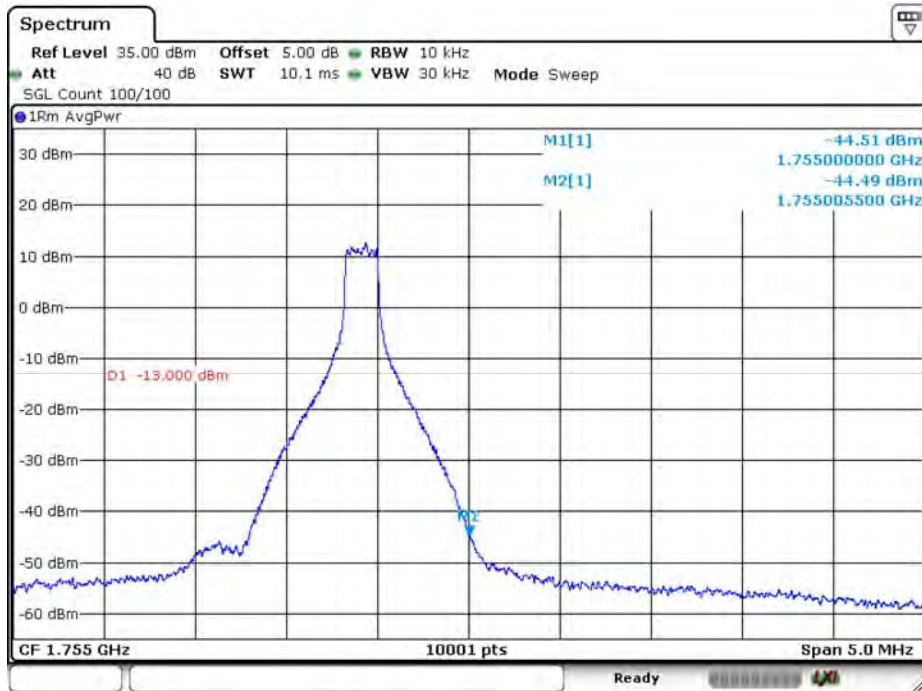


Date: 16.AUG.2019 23:54:37

LTE_B4_CH20350_10M_16-QAM_50RB0

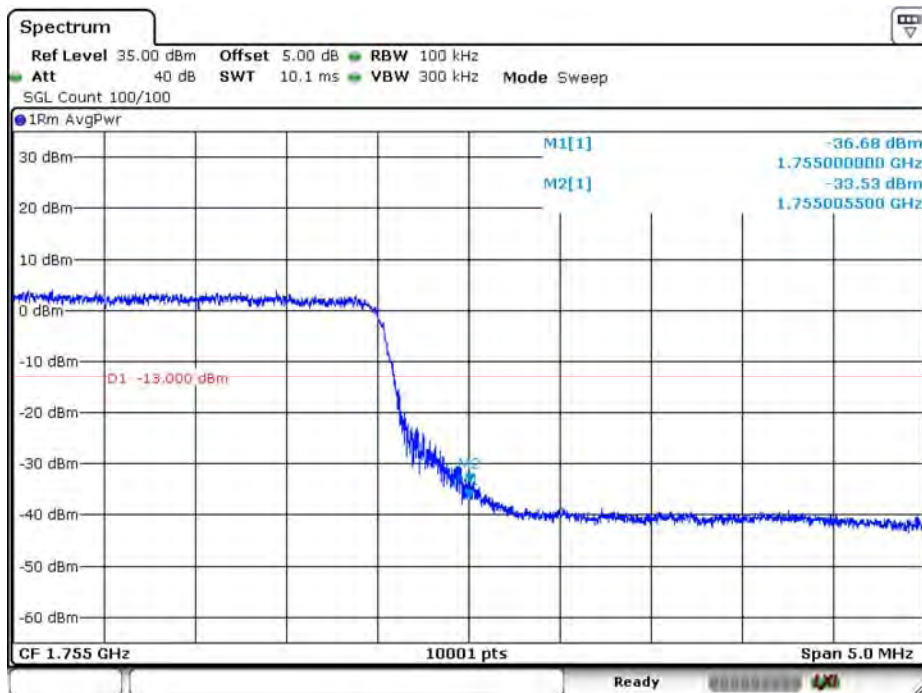


Date: 16.AUG.2019 23:51:43

LTE_B4_CH20025_15M_QPSK_1RB0

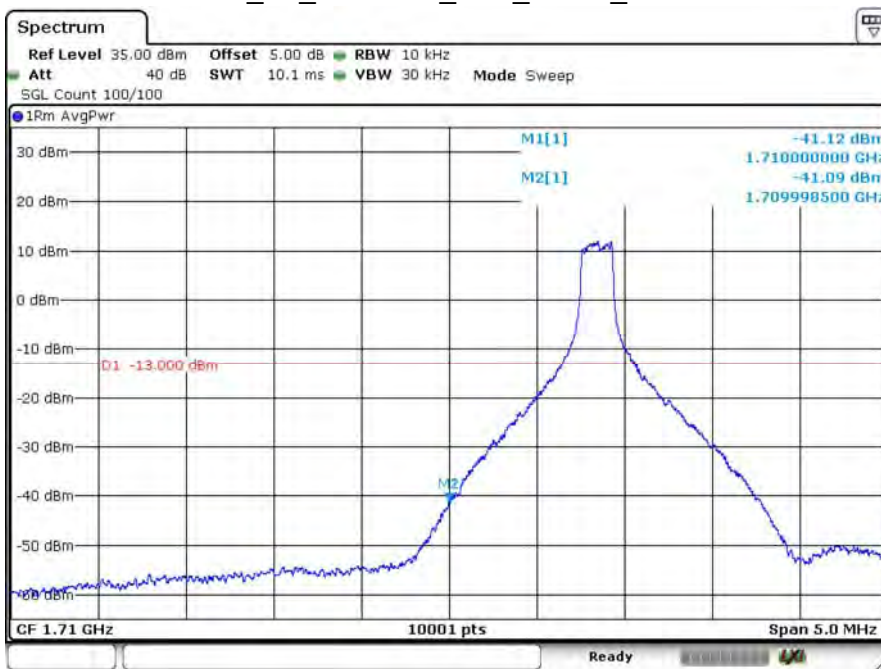


Date: 17.AUG.2019 00:55:35

LTE_B4_CH20025_15M_QPSK_75RB0

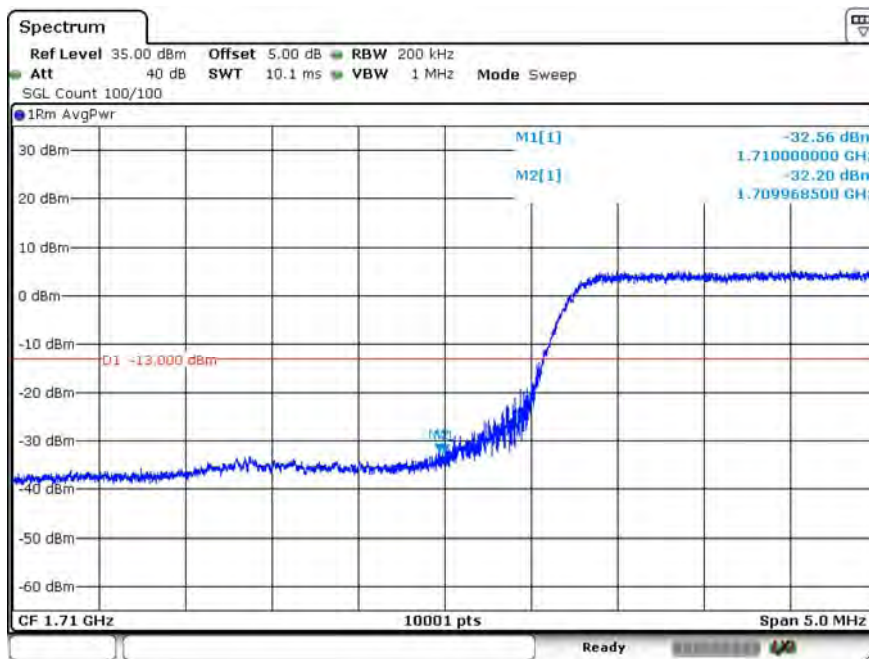


Date: 17.AUG.2019 00:57:42

LTE_B4_CH20025_15M_16-QAM_1RB0

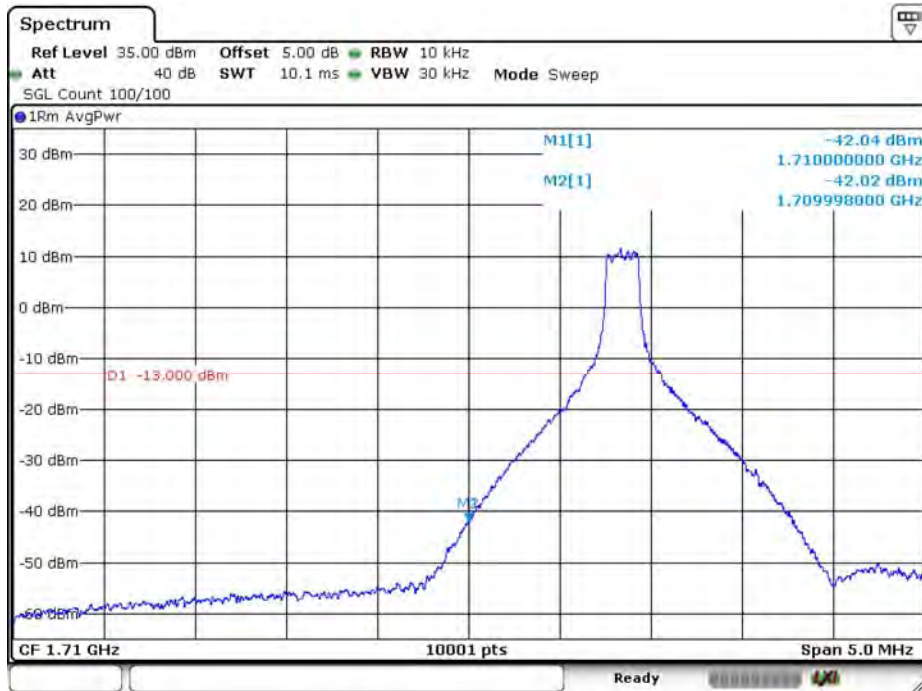


Date: 17.AUG.2019 00:56:05

LTE_B4_CH20025_15M_16-QAM_75RB0

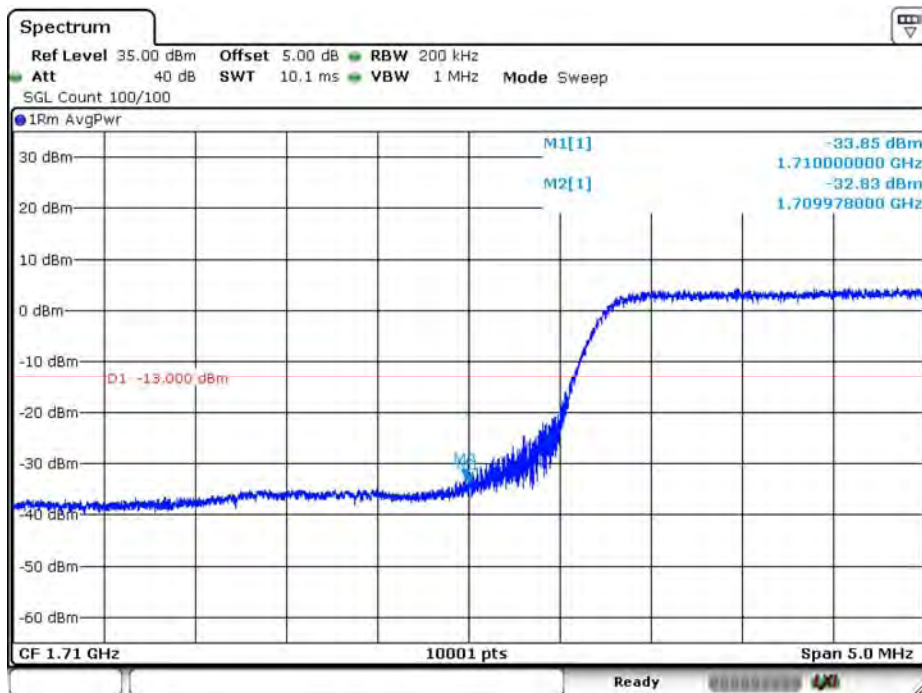


Date: 17.AUG.2019 00:57:19

LTE_B4_CH20325_15M_QPSK_1RB74

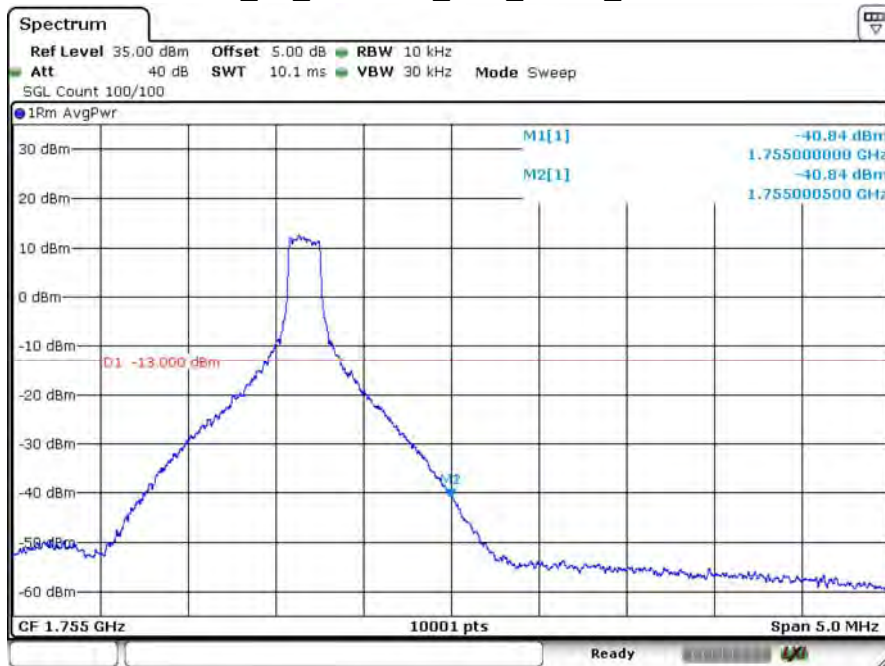


Date: 17.AUG.2019 01:02:35

LTE_B4_CH20325_15M_QPSK_75RB0

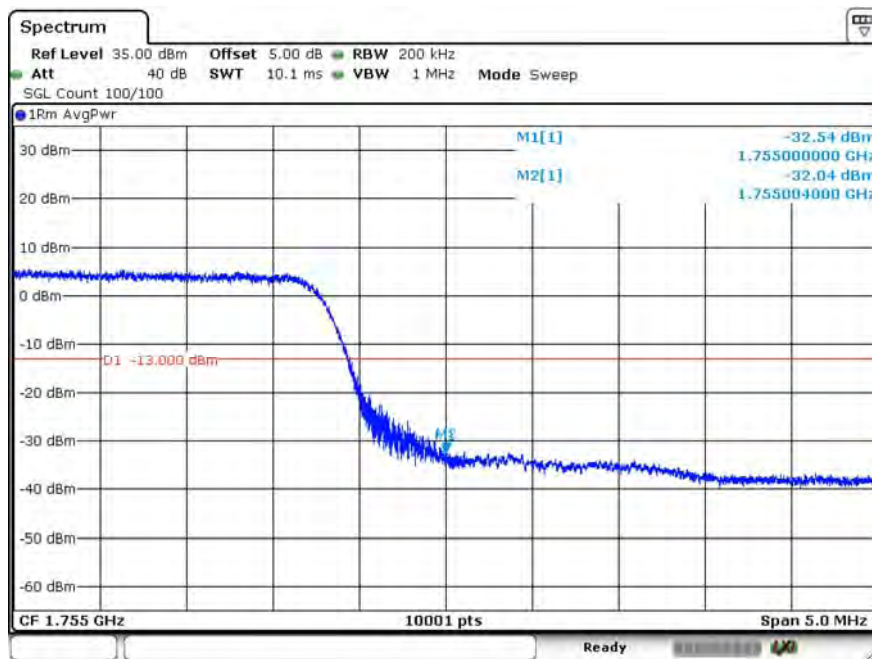


Date: 17.AUG.2019 00:58:19

LTE_B4_CH20325_15M_16-QAM_1RB74

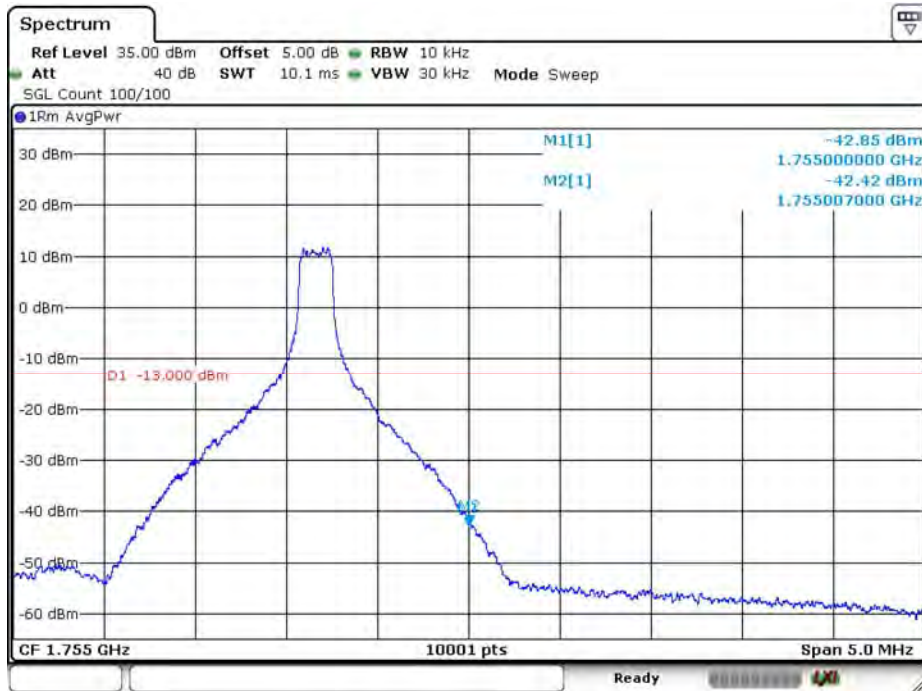


Date: 17.AUG.2019 01:03:11

LTE_B4_CH20325_15M_16-QAM_75RB0

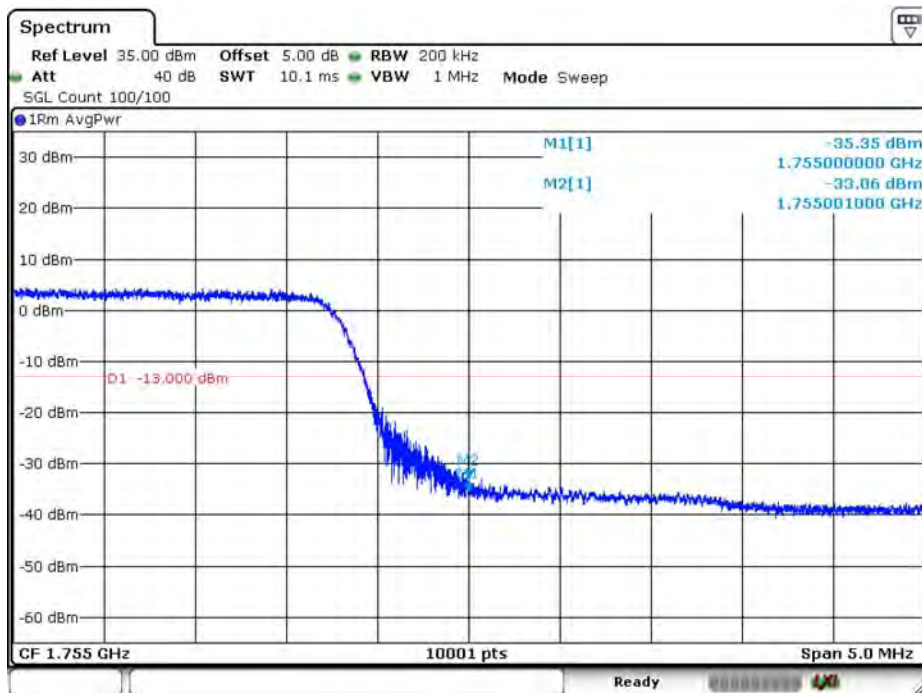


Date: 17.AUG.2019 00:58:59

LTE_B4_CH20050M_QPSK_1RB0

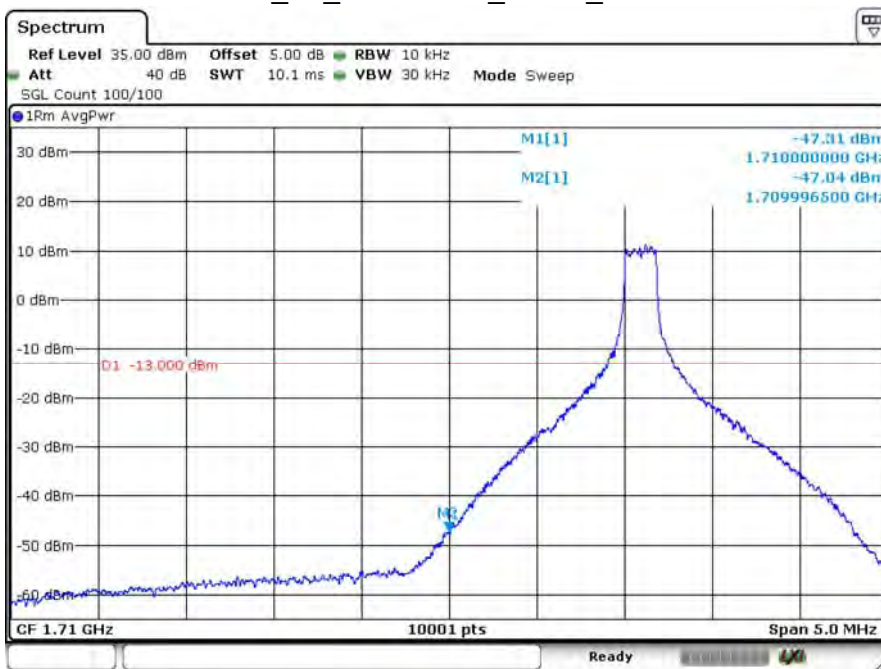


Date: 17.AUG.2019 01:14:07

LTE_B4_CH20050M_QPSK_100RB0

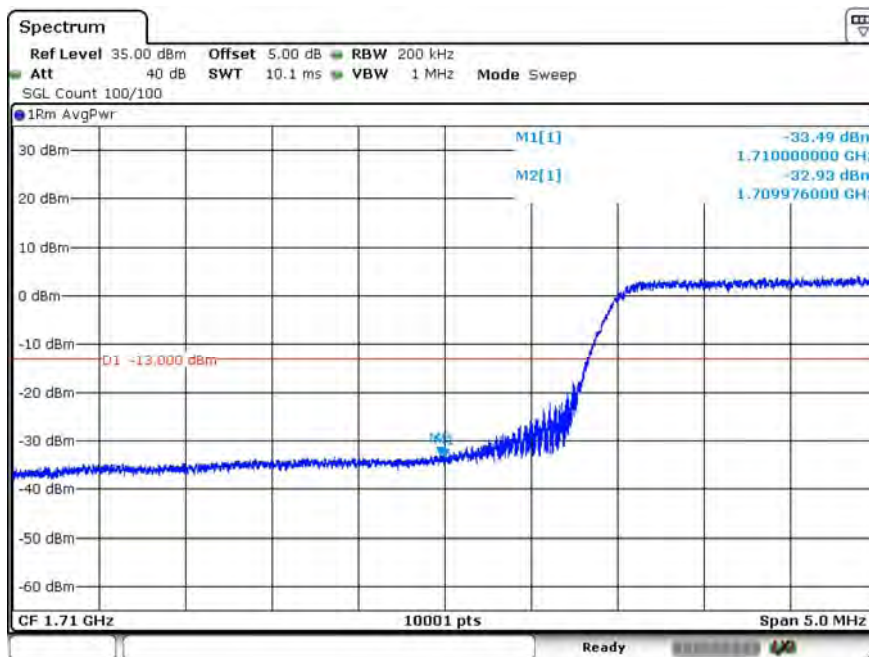


Date: 17.AUG.2019 01:08:03

LTE_B4_CH20050M_16-QAM_1RB0

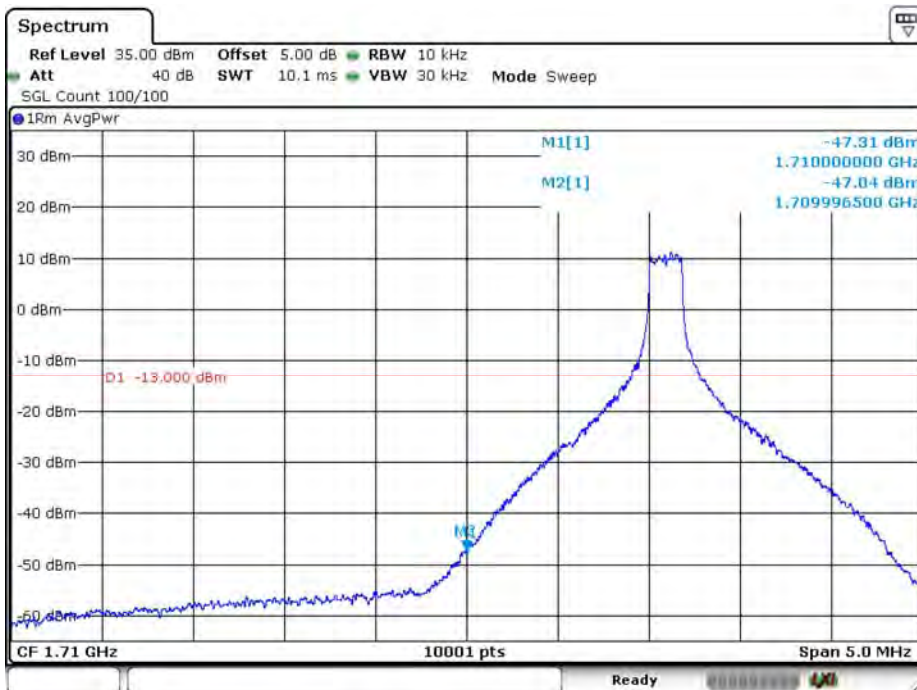


Date: 17.AUG.2019 01:13:50

LTE_B4_CH20050M_16-QAM_100RB0

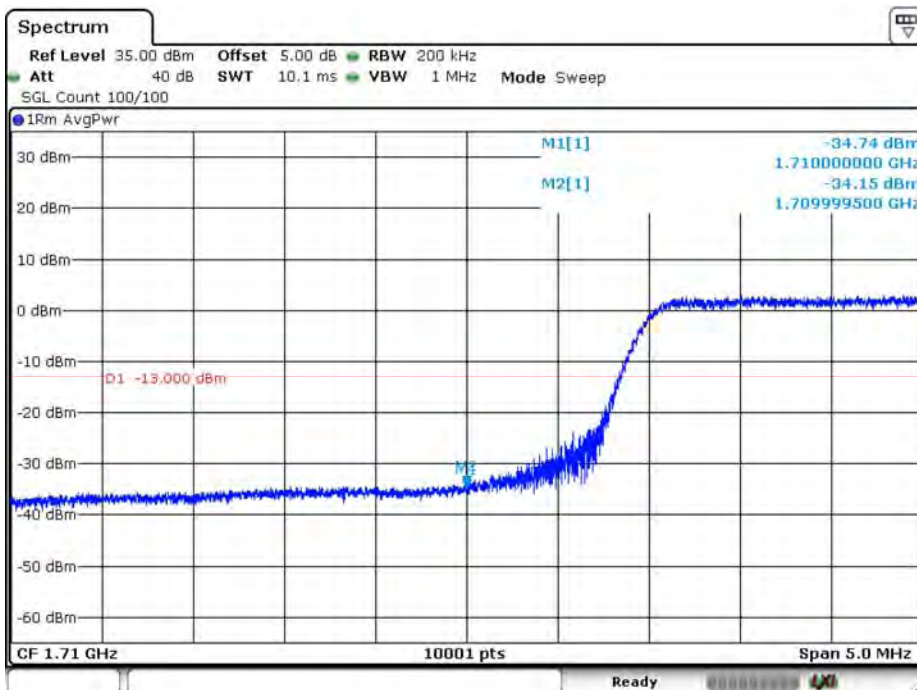


Date: 17.AUG.2019 01:13:15

LTE_B4_CH20300_20M_QPSK_1RB99

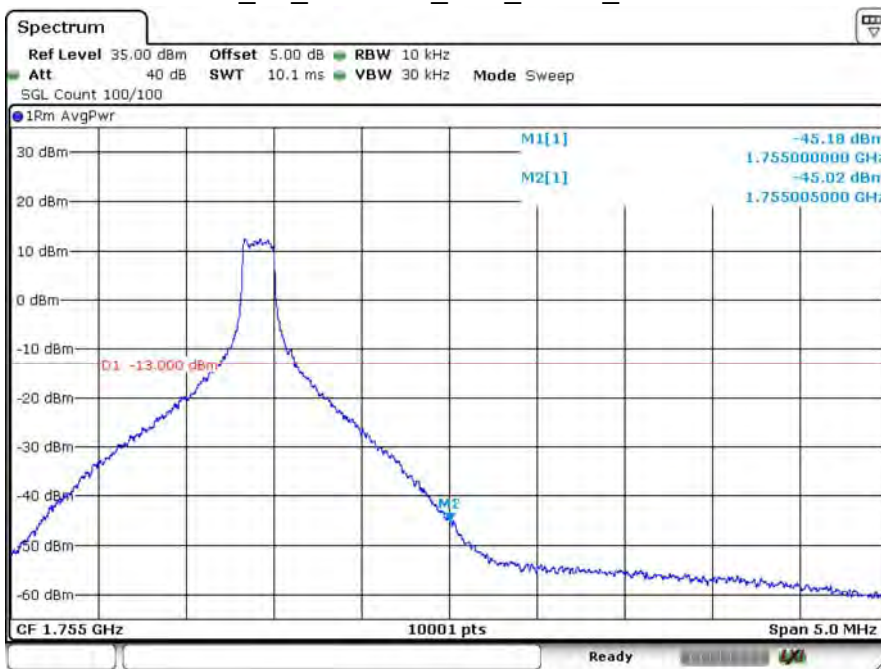


Date: 17.AUG.2019 01:04:50

LTE_B4_CH20300_20M_QPSK_100RB0

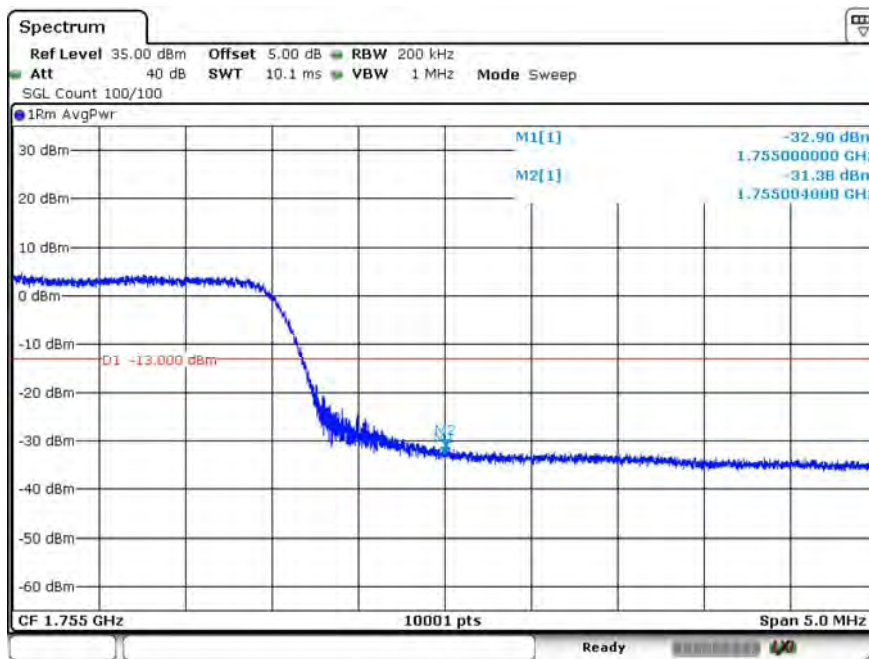


Date: 17.AUG.2019 01:06:35

LTE_B4_CH20300_20M_16-QAM_1RB99

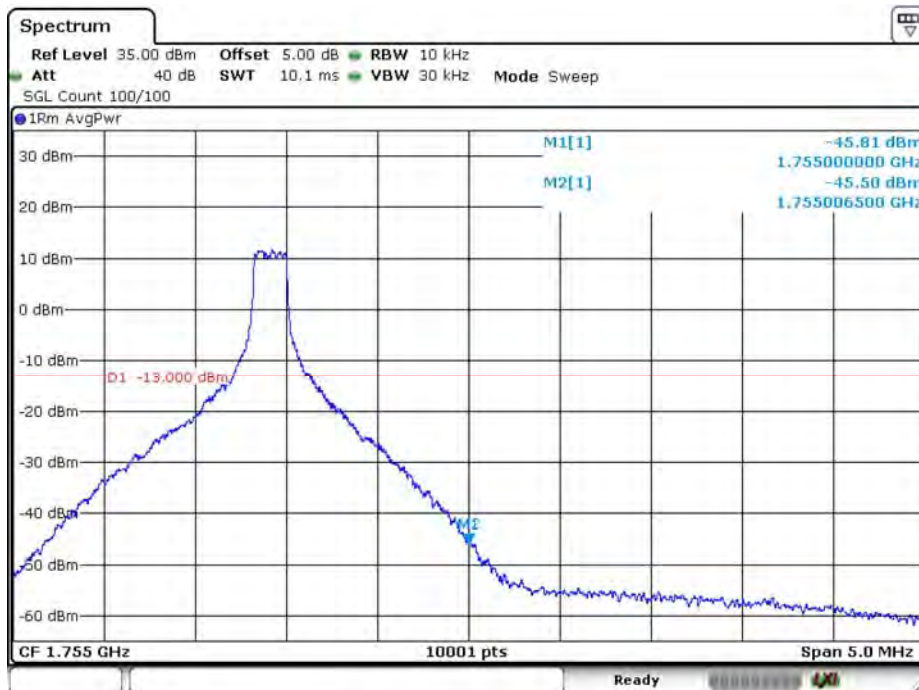

Date: 17.AUG.2019 01:05:25


LTE_B4_CH20300_20M_16-QAM_100RB0

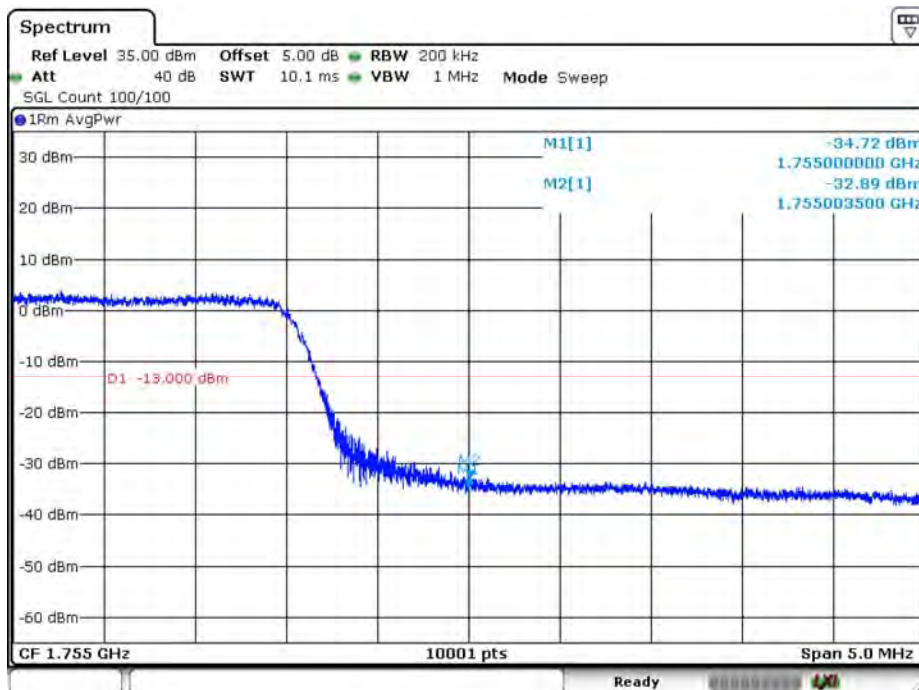

Date: 17.AUG.2019 01:06:16


Product	Module		
Test Item	Spurious Emissions at Antenna Terminals		
Test Mode	Mode 3: LTE Band 5		
Date of Test	2019/08/05	Test Site	SR10-H

LTE_B5_CH20407_1.4M_QPSK_1RB0

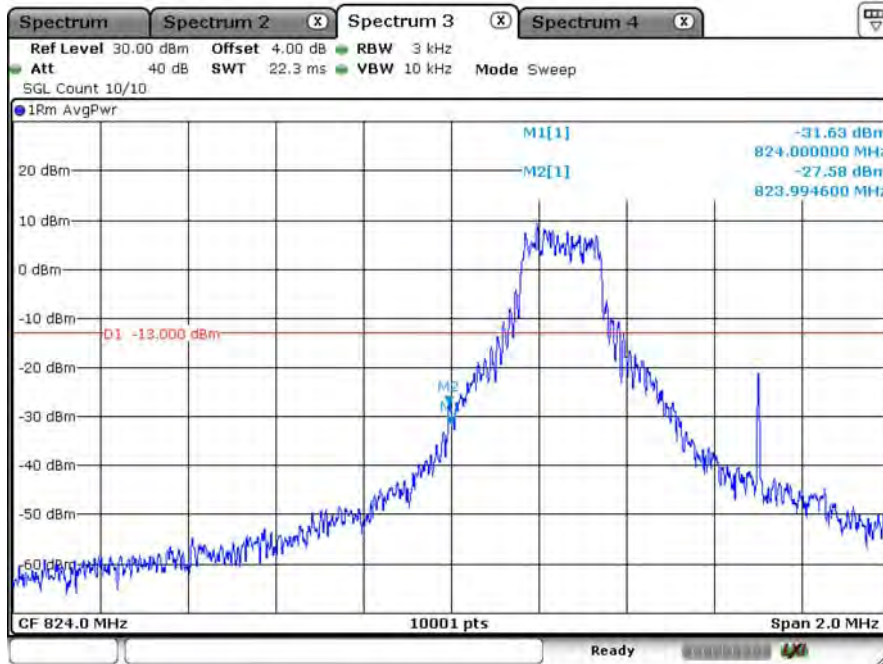


Date: 5.AUG.2019 13:30:07

LTE_B5_CH20407_1.4M_QPSK_6RB0

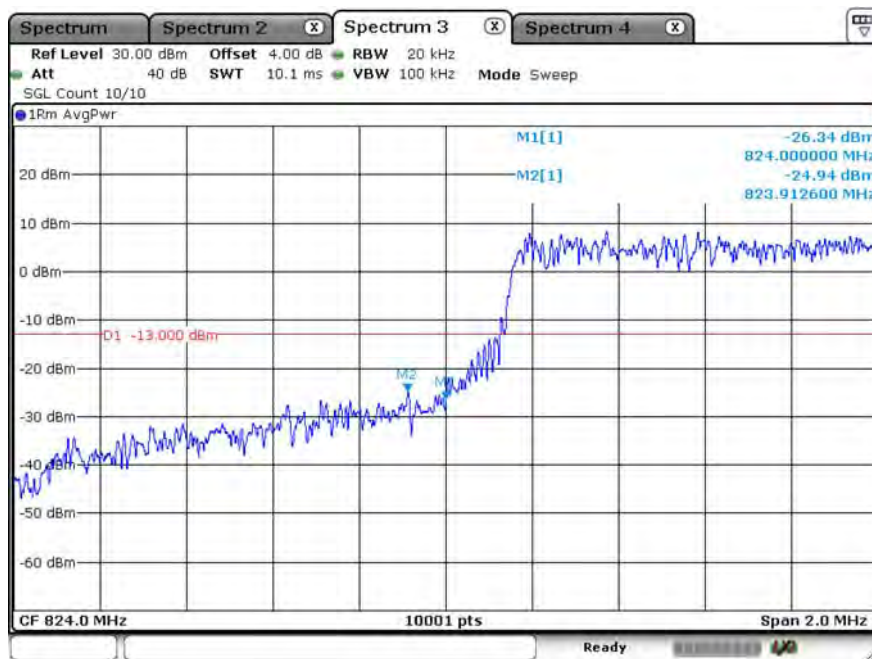


Date: 5.AUG.2019 14:16:17

LTE_B5_CH20407_1.4M_16-QAM_1RB0

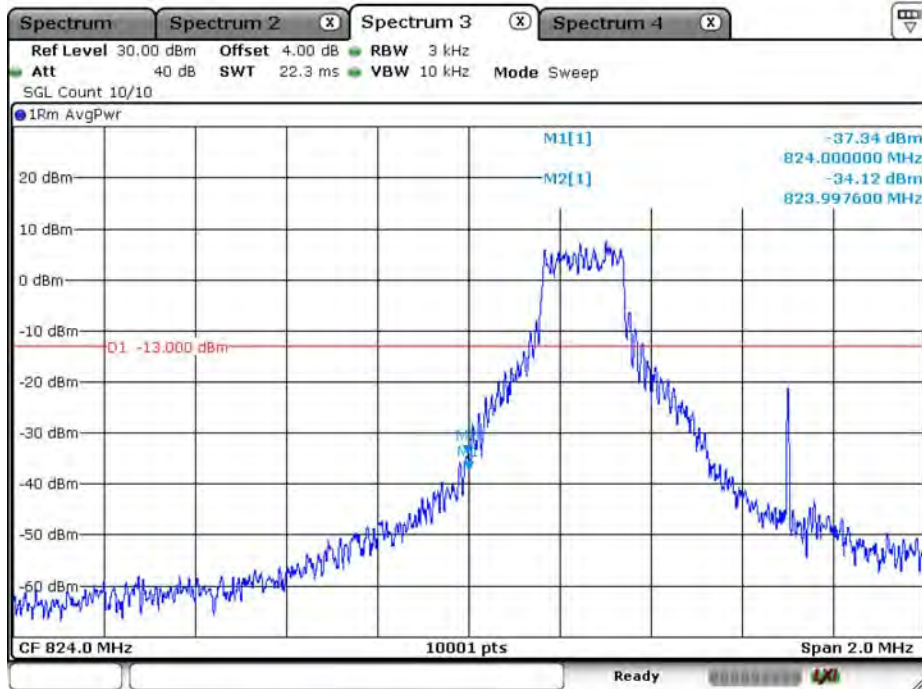


Date: 5.AUG.2019 13:35:45

LTE_B5_CH20407_1.4M_16-QAM_6RB0

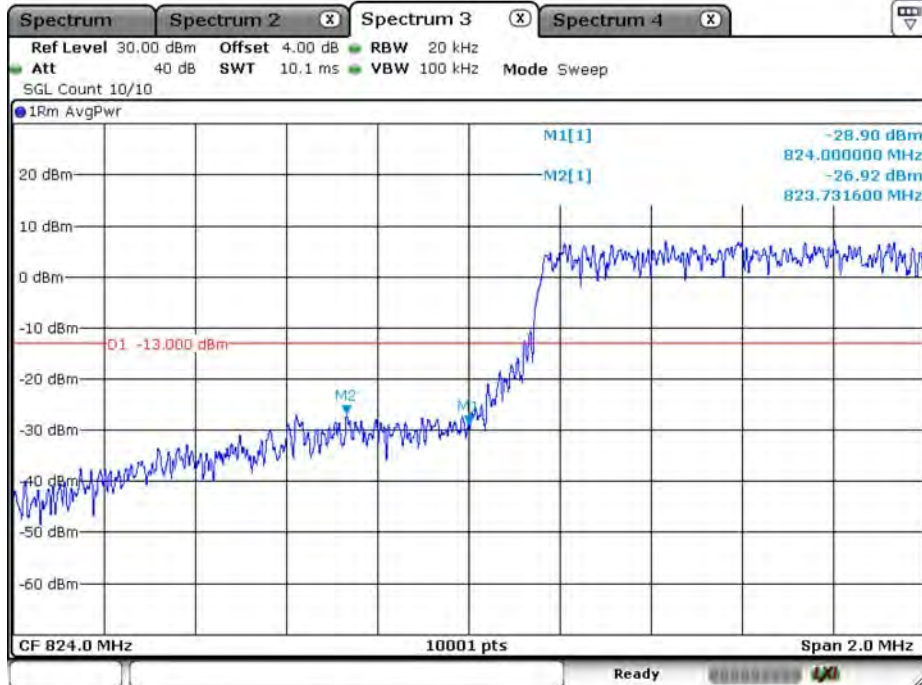


Date: 5.AUG.2019 14:19:08

LTE_B5_CH20643_1.4M_QPSK_1RB5

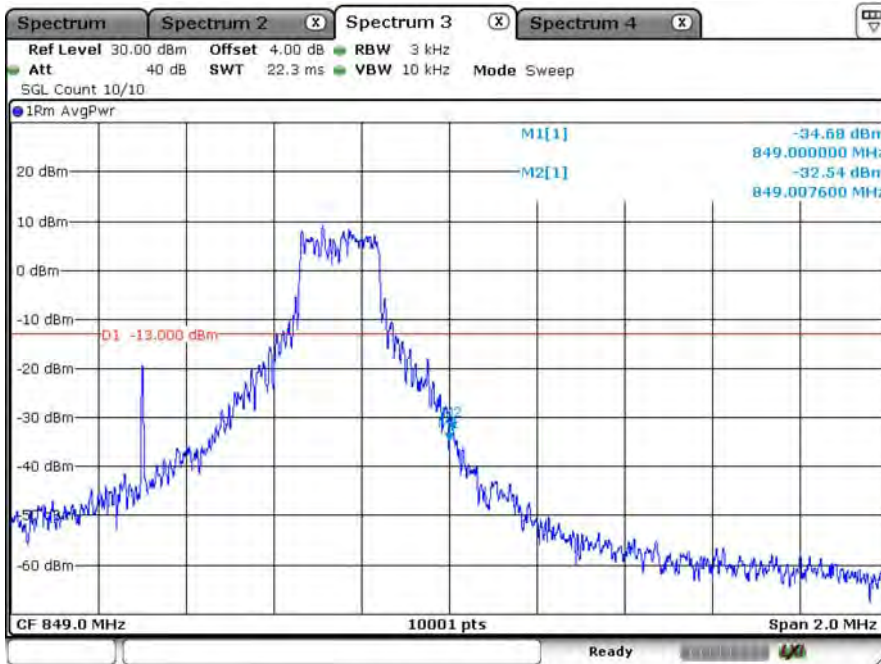


Date: 5.AUG.2019 13:54:28

LTE_B5_CH20643_1.4M_QPSK_6RB0

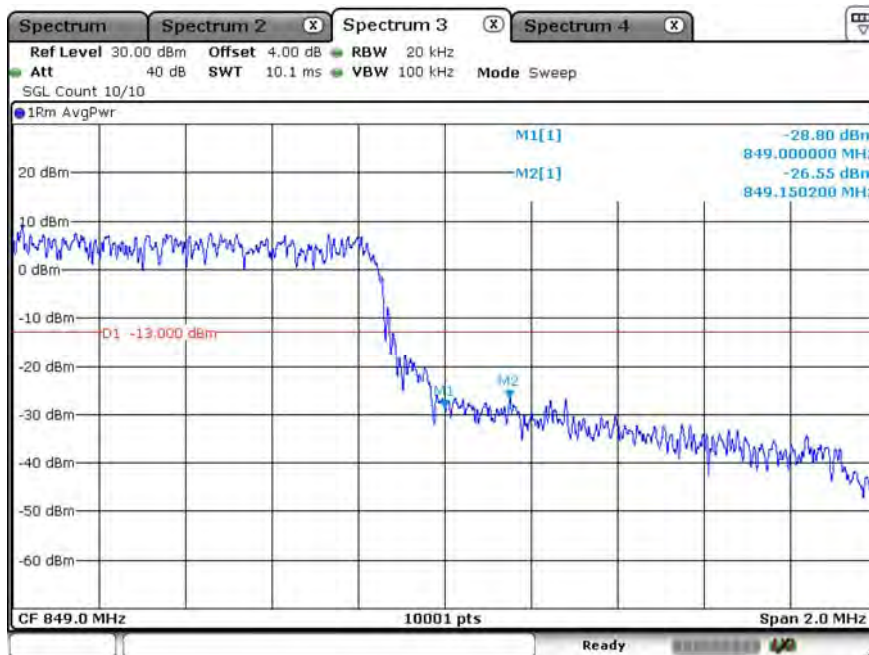


Date: 5.AUG.2019 14:03:31

LTE_B5_CH20643_1.4M_16-QAM_1RB5

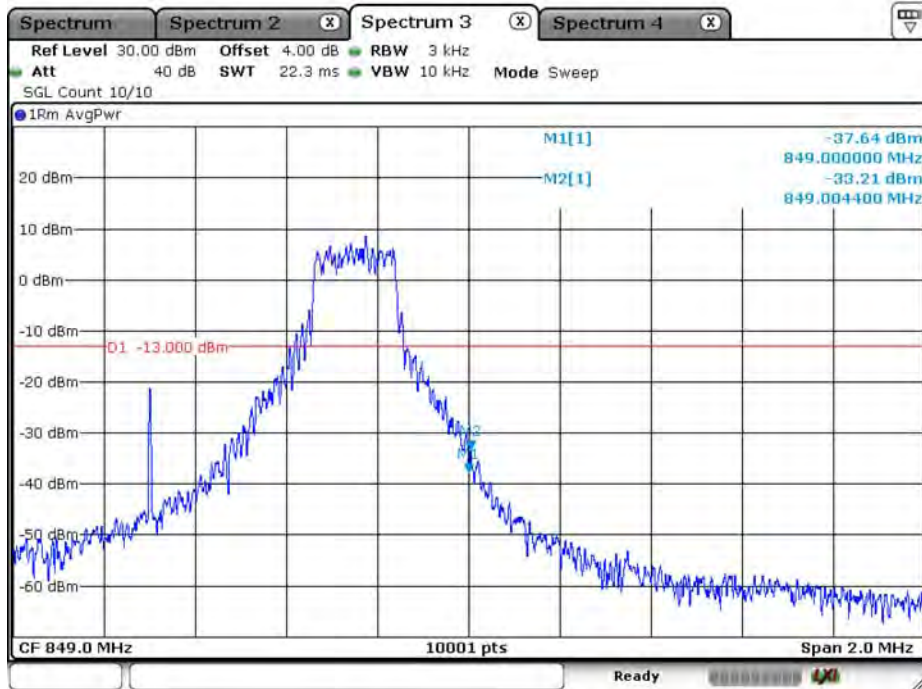


Date: 5.AUG.2019 13:56:26

LTE_B5_CH20643_1.4M_16-QAM_6RB0

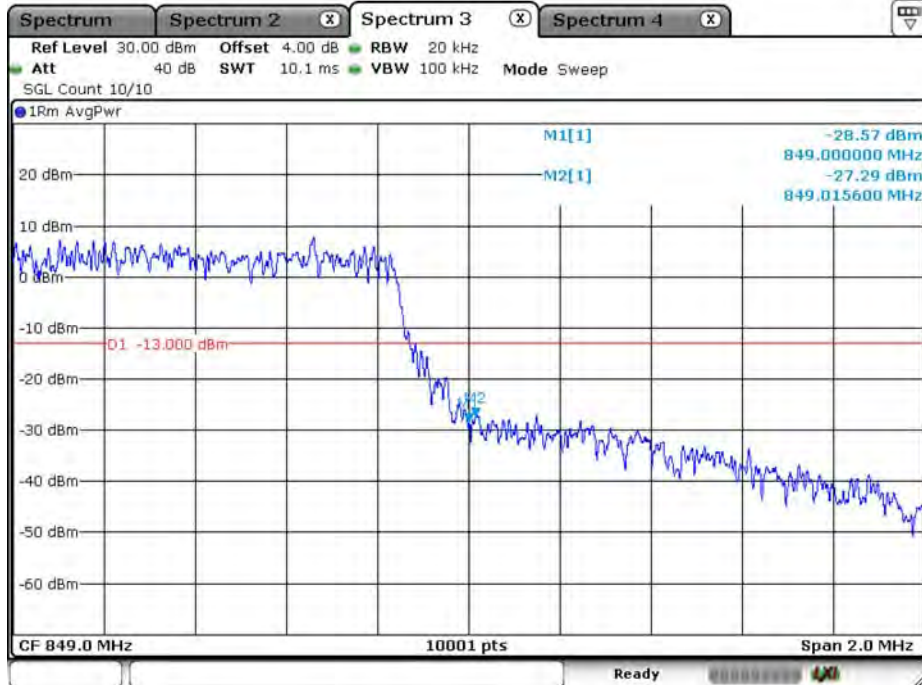


Date: 5.AUG.2019 14:07:27

LTE_B5_CH20415_3M_QPSK_1RB0

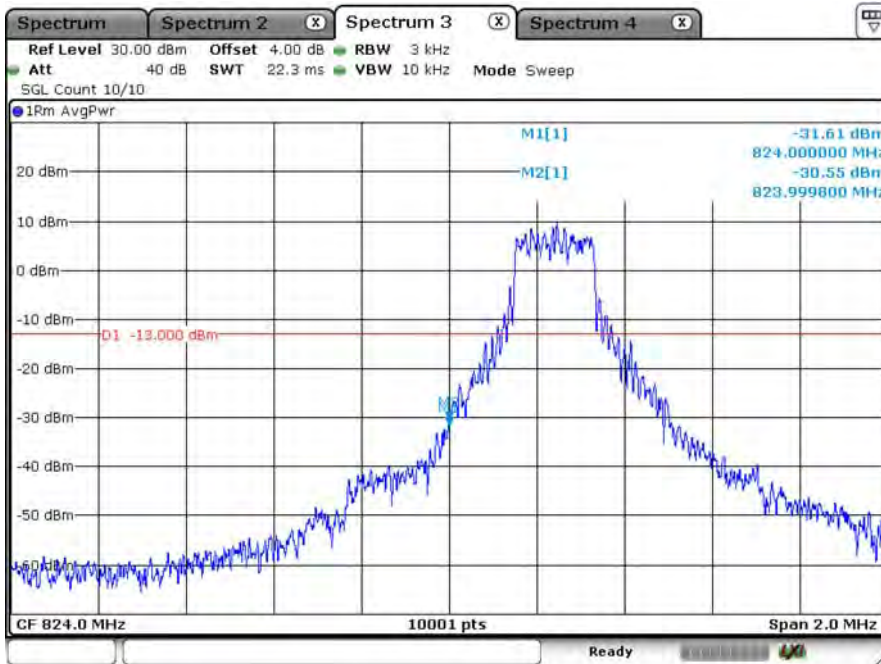


Date: 5.AUG.2019 14:26:59

LTE_B5_CH20415_3M_QPSK_15RB0

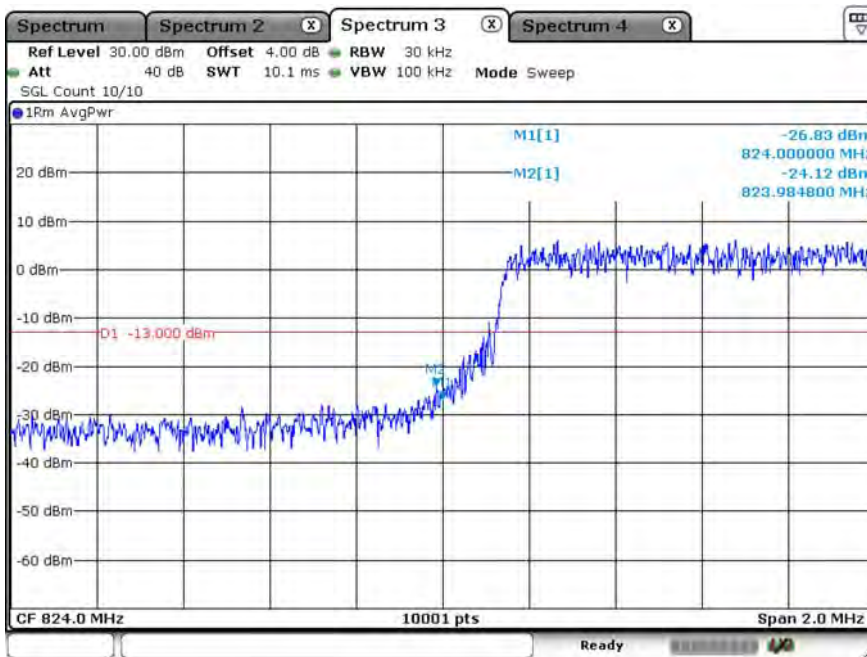


Date: 5.AUG.2019 15:15:01

LTE_B5_CH20415_3M_16-QAM_1RB0

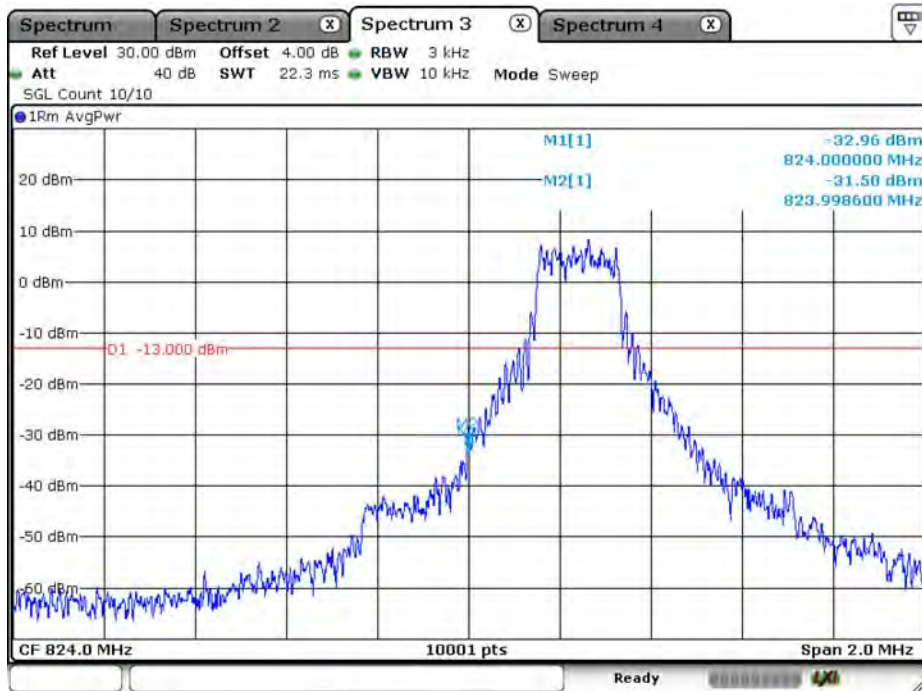


Date: 5.AUG.2019 14:27:42

LTE_B5_CH20415_3M_16-QAM_15RB0

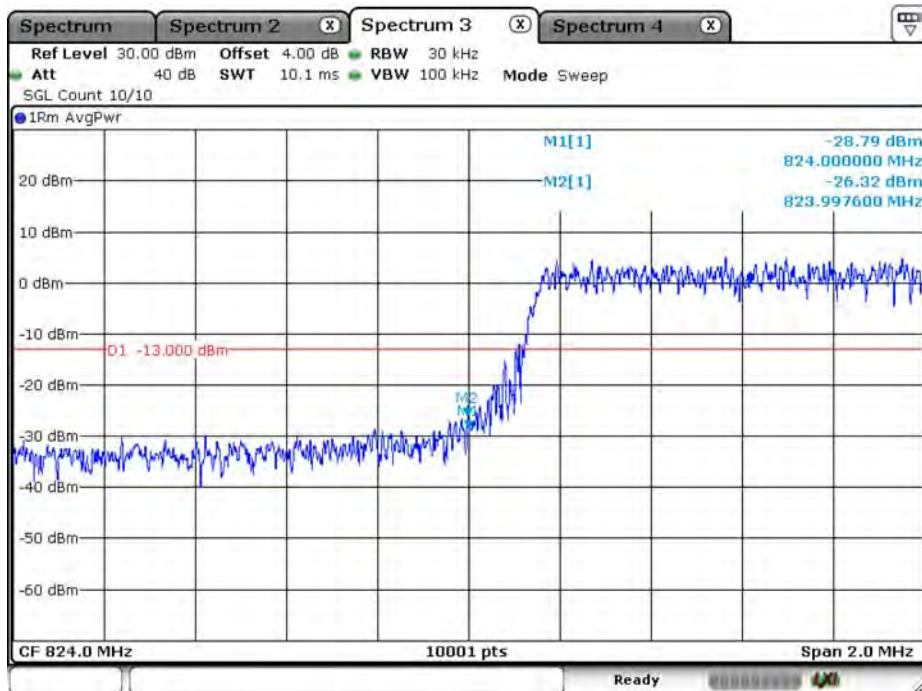


Date: 5.AUG.2019 15:09:11

LTE_B5_CH20635_3M_QPSK_1RB14

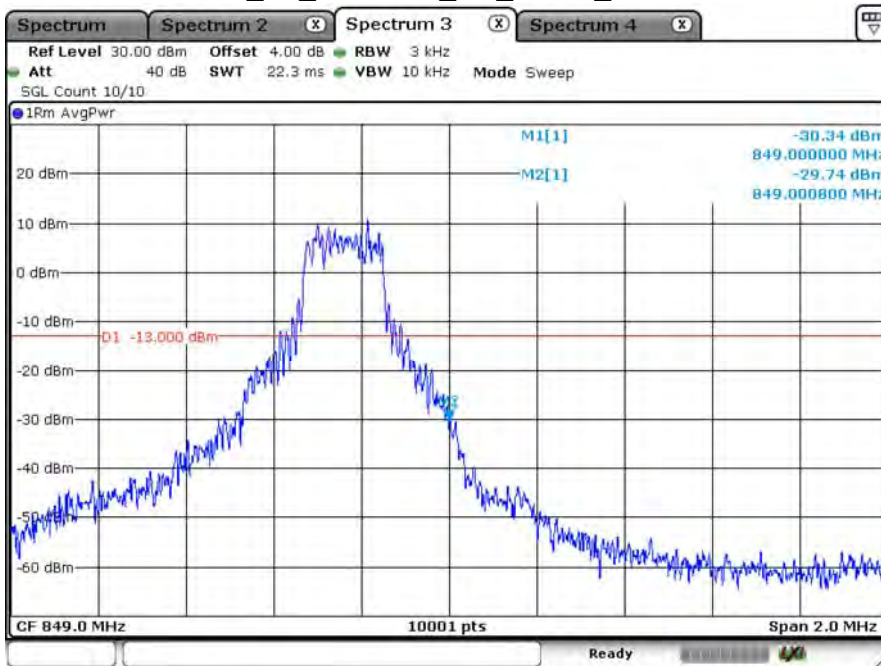


Date: 5.AUG.2019 14:41:37

LTE_B5_CH20635_3M_QPSK_15RB0

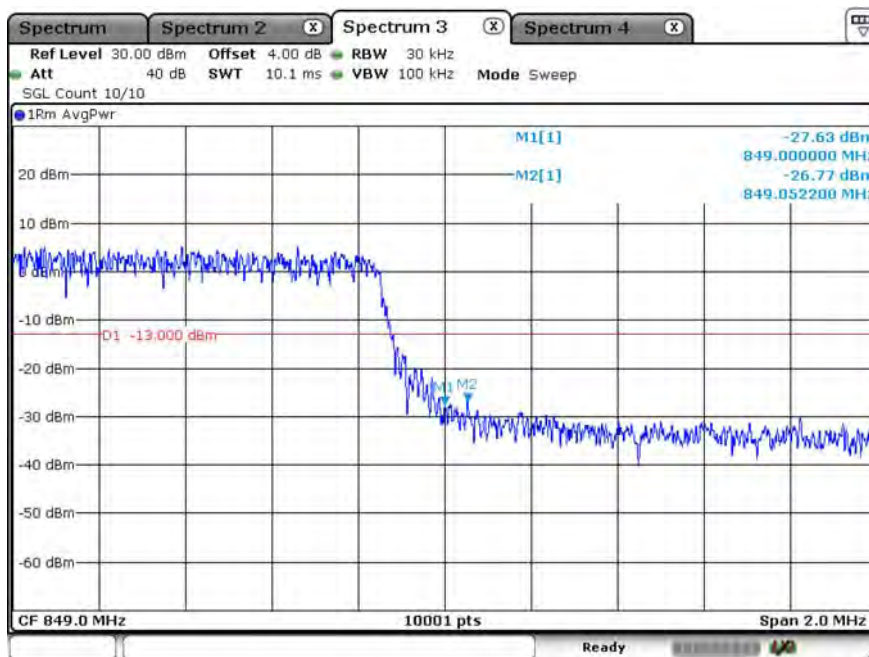


Date: 5.AUG.2019 14:56:00

LTE_B5_CH20635_3M_16-QAM_1RB14

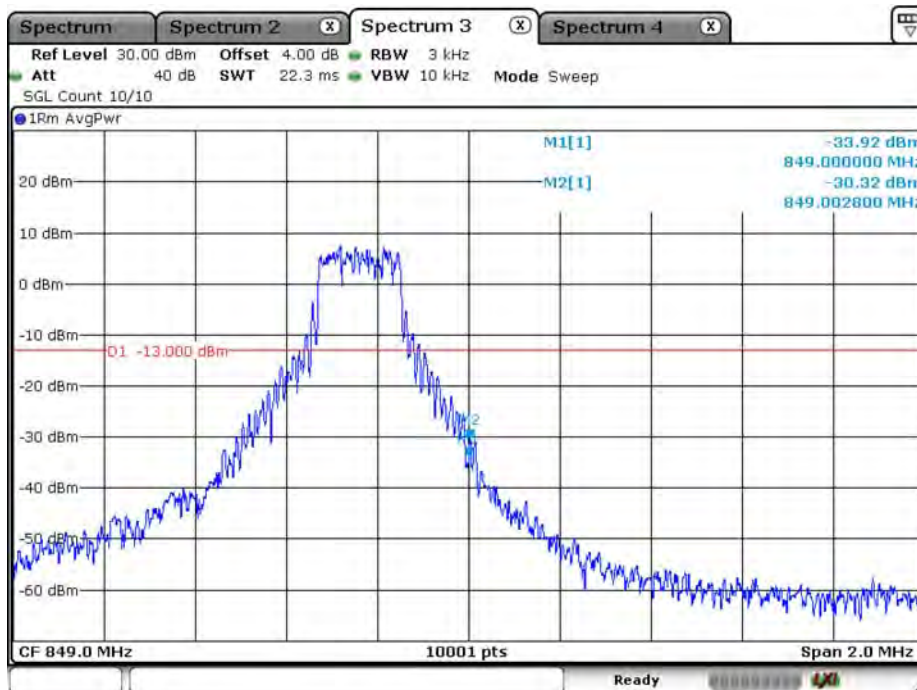


Date: 5.AUG.2019 14:45:52

LTE_B5_CH20635_3M_16-QAM_15RB0

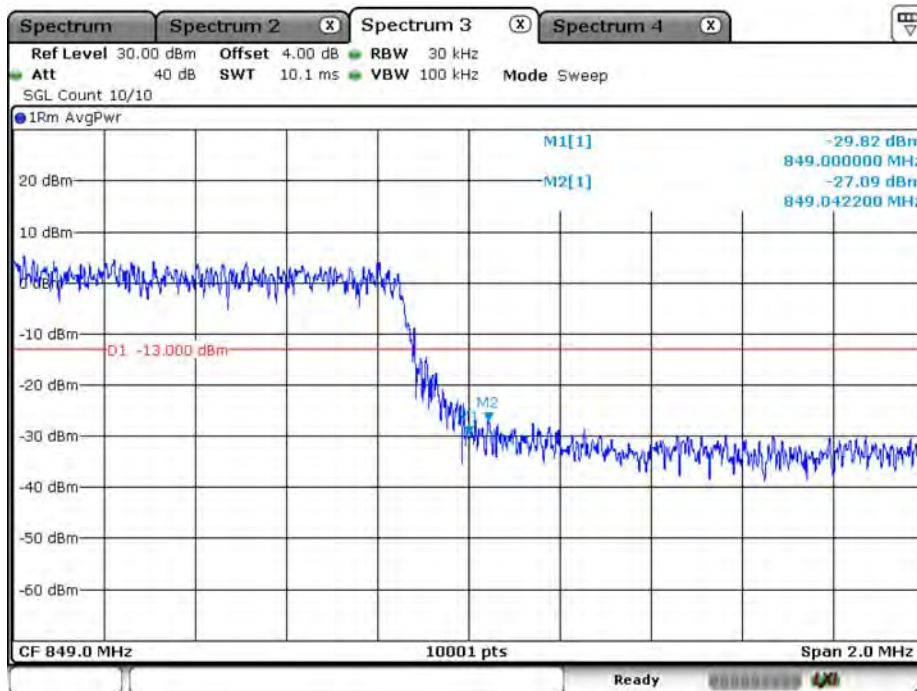


Date: 5.AUG.2019 14:49:25

LTE_B5_CH20425_5M_QPSK_1RB0

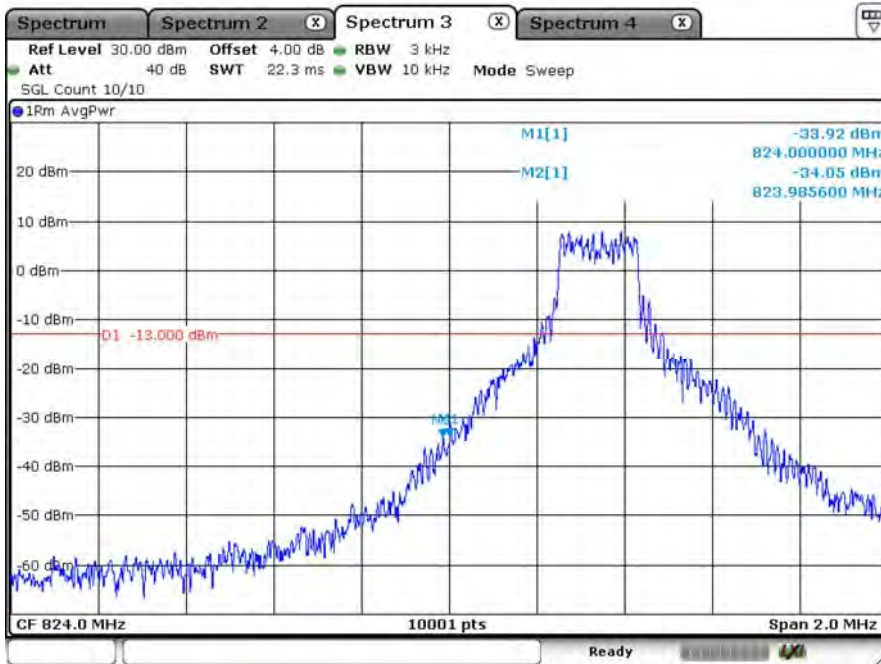


Date: 5.AUG.2019 15:22:30

LTE_B5_CH20425_5M_QPSK_25RB0

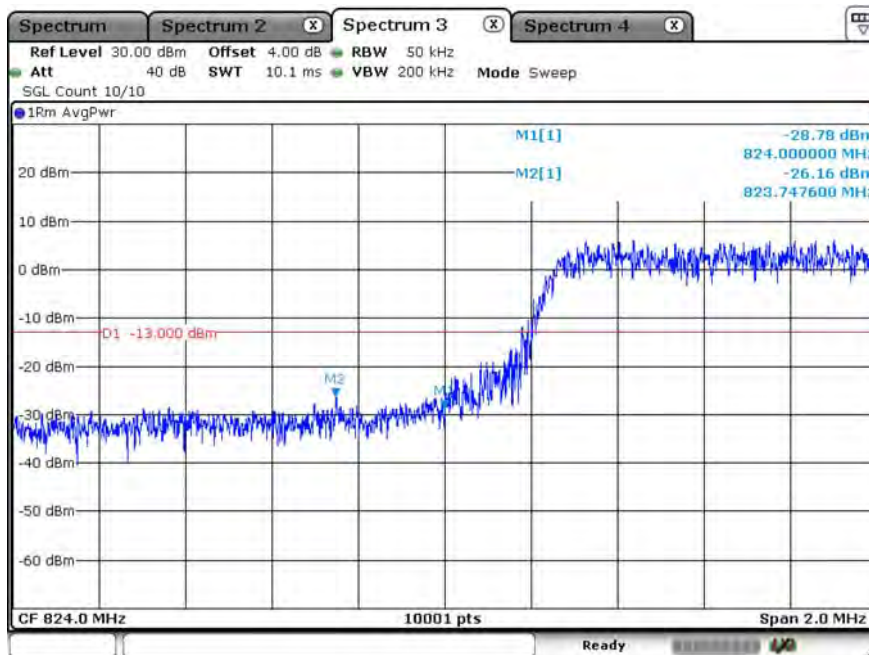


Date: 5.AUG.2019 16:57:26

LTE_B5_CH20425_5M_16-QAM_1RB0

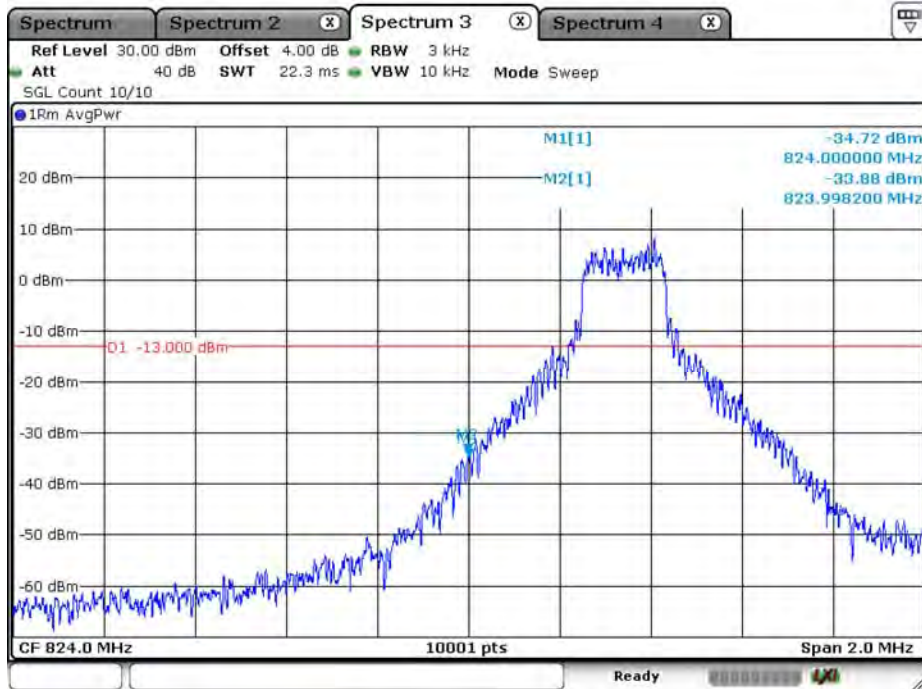


Date: 5.AUG.2019 15:22:56

LTE_B5_CH20425_5M_16-QAM_25RB0

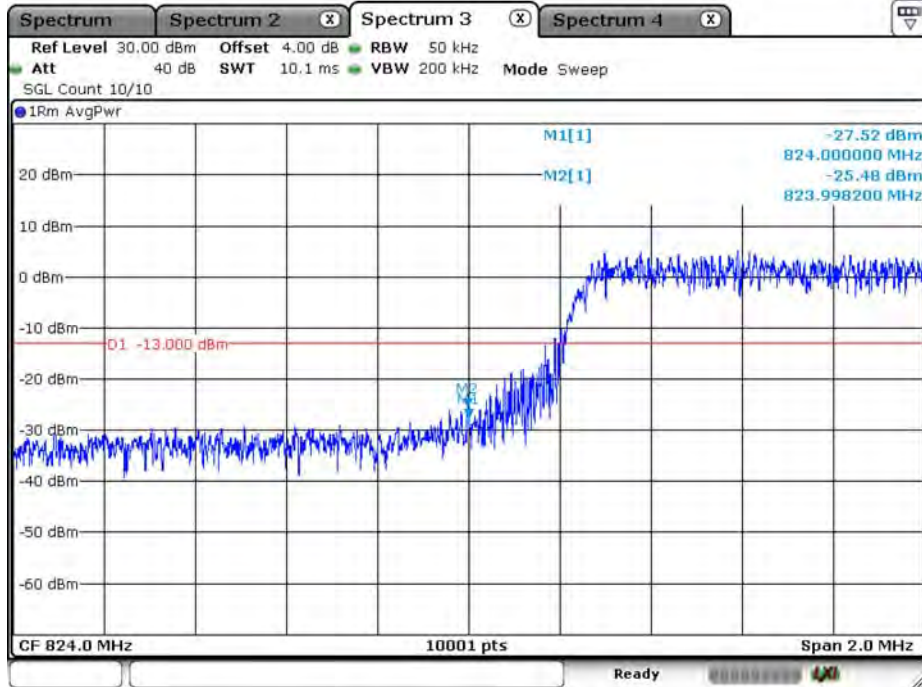


Date: 5.AUG.2019 16:58:17

LTE_B5_CH20625_5M_QPSK_1RB24

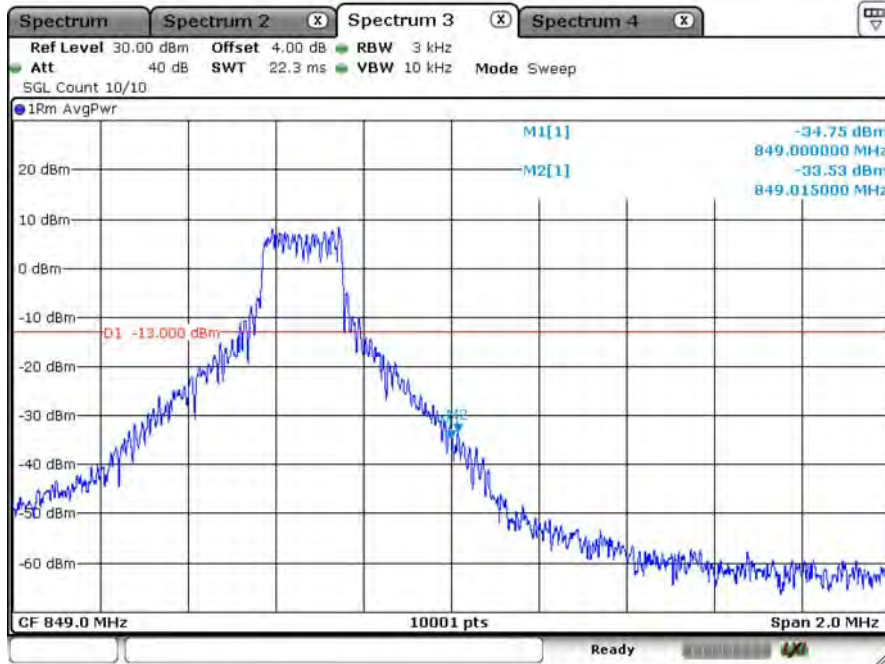


Date: 5.AUG.2019 16:03:19

LTE_B5_CH20625_5M_QPSK_25RB0

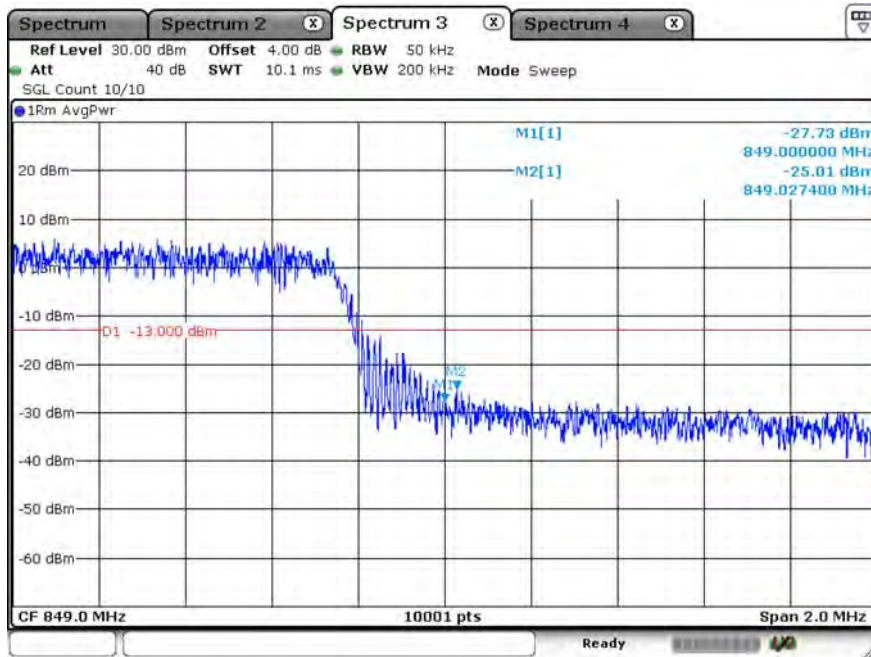


Date: 5.AUG.2019 16:19:15

LTE_B5_CH20625_5M_16-QAM_1RB24

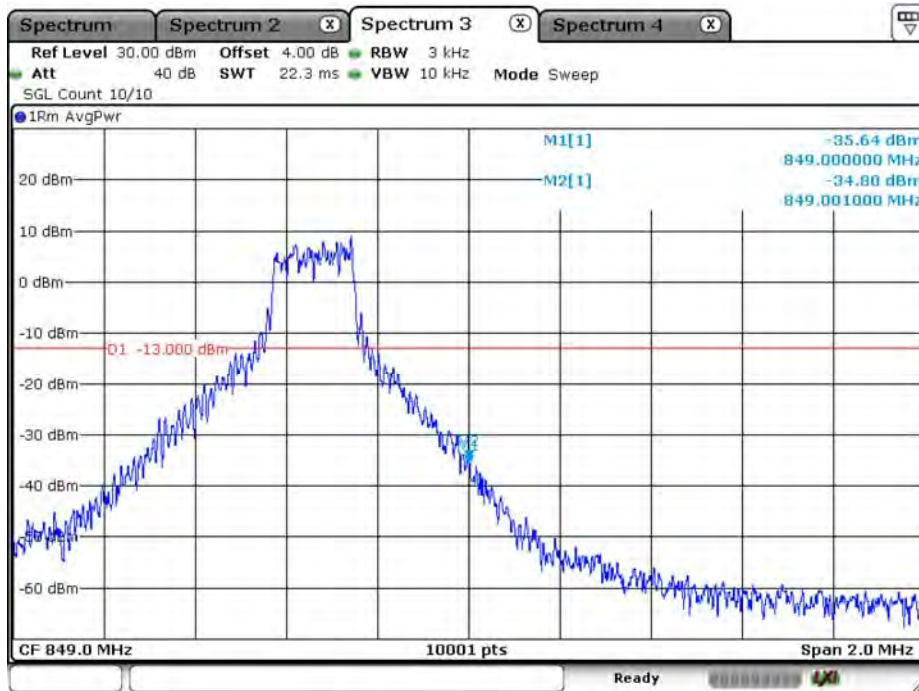


Date: 5.AUG.2019 16:04:17

LTE_B5_CH20625_5M_16-QAM_25RB0

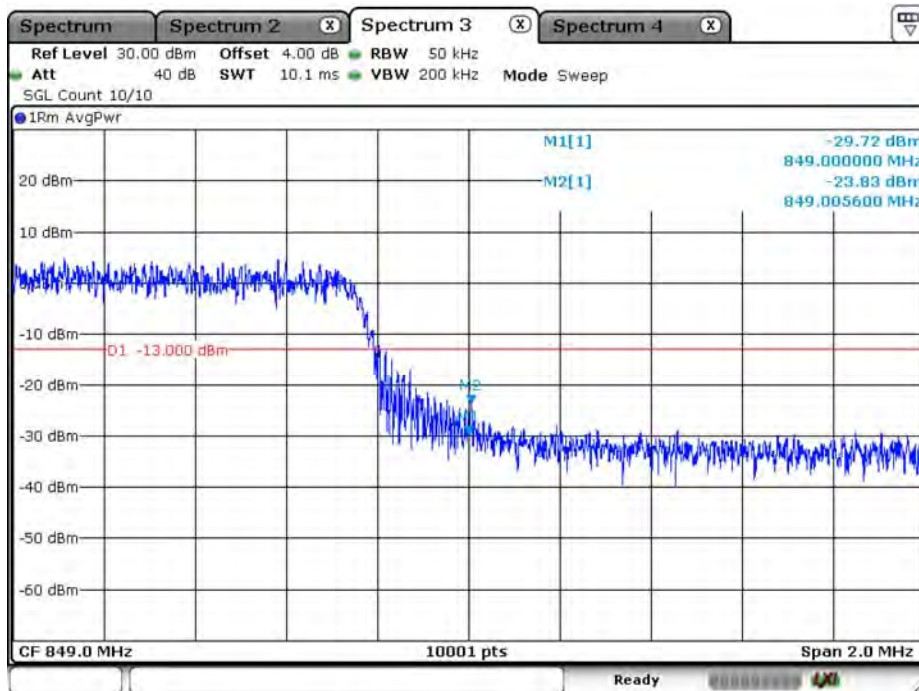


Date: 5.AUG.2019 16:29:42

LTE_B5_CH20450_10M_QPSK_1RB0

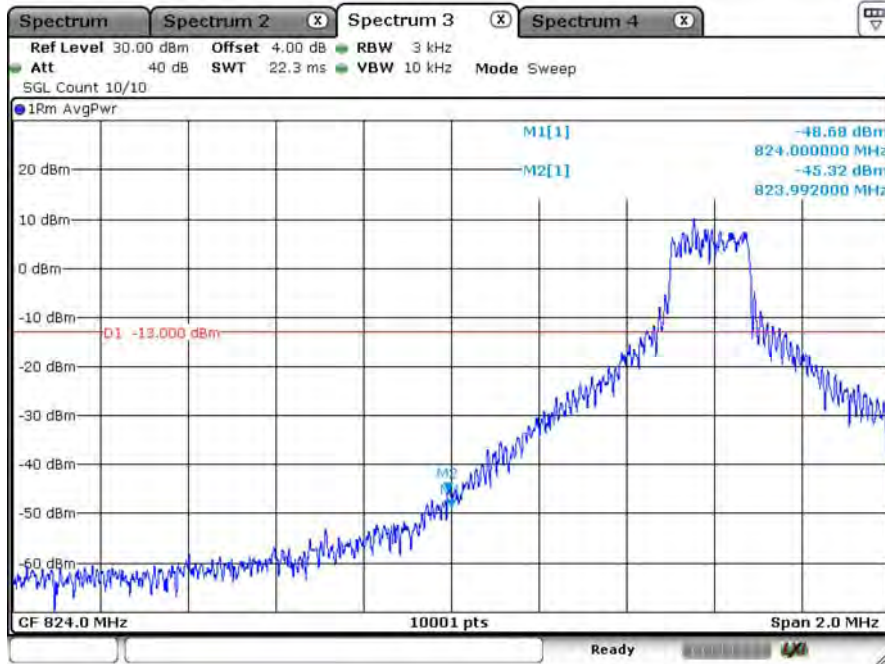


Date: 5.AUG.2019 17:11:46

LTE_B5_CH20450_10M_QPSK_50RB0

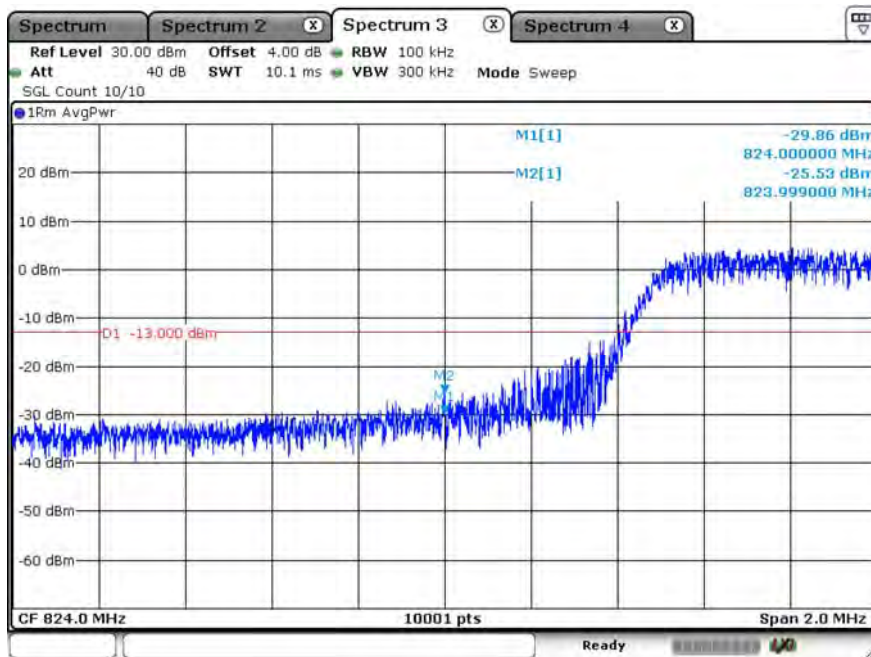


Date: 5.AUG.2019 17:43:24

LTE_B5_CH20450_10M_16-QAM_1RB0

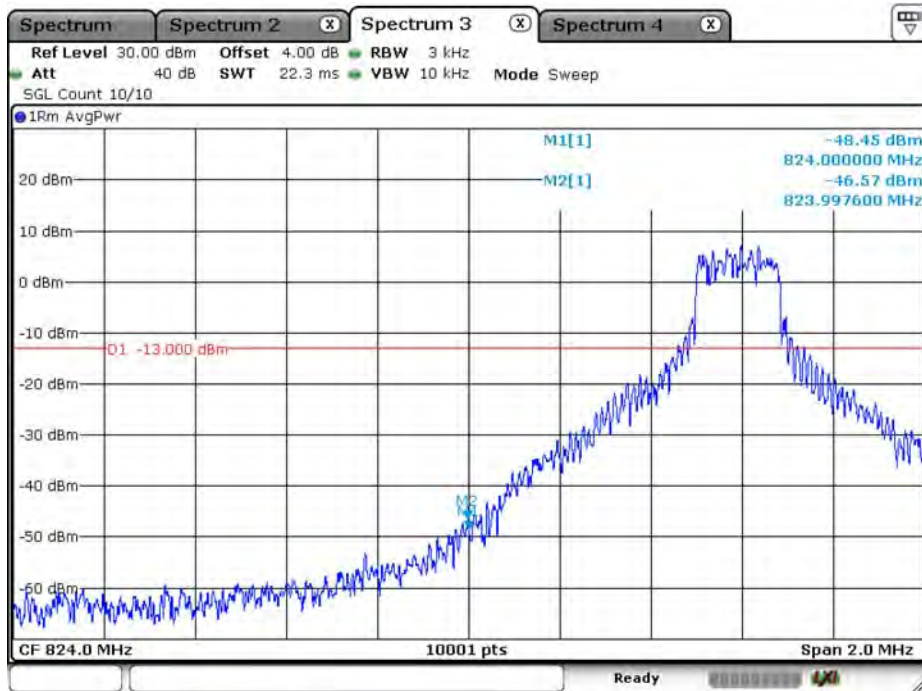


Date: 5.AUG.2019 17:12:23

LTE_B5_CH20450_10M_16-QAM_50RB0

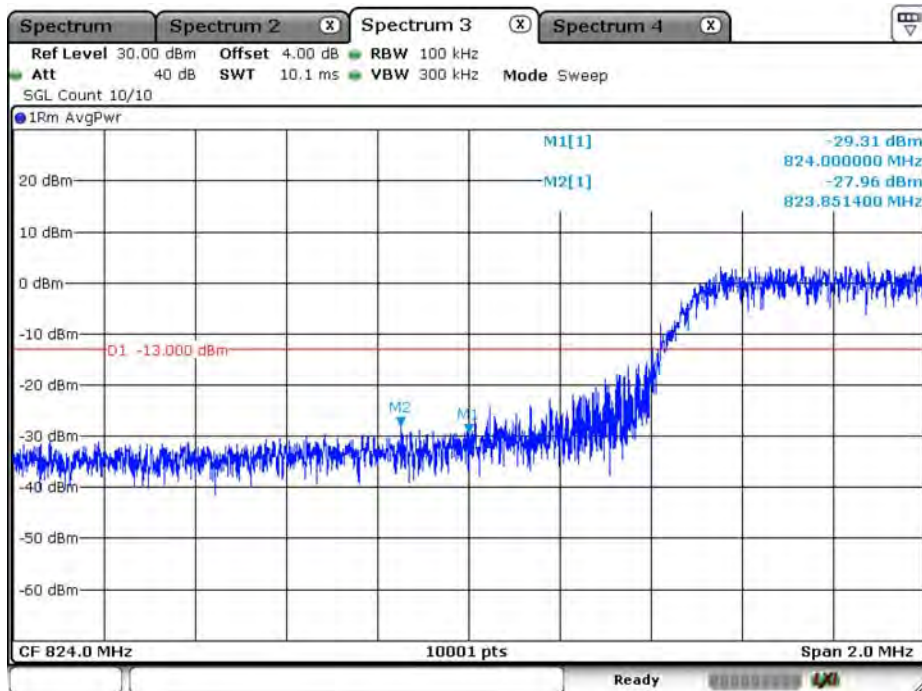


Date: 5.AUG.2019 17:40:25

LTE_B5_CH20600_10M_QPSK_1RB49

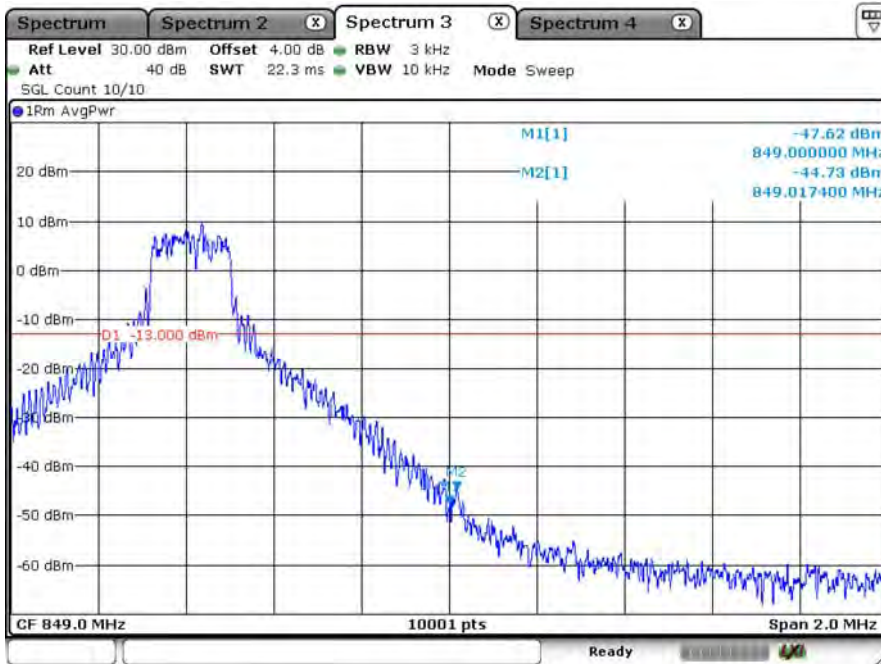


Date: 5.AUG.2019 17:24:06

LTE_B5_CH20600_10M_QPSK_50RB0

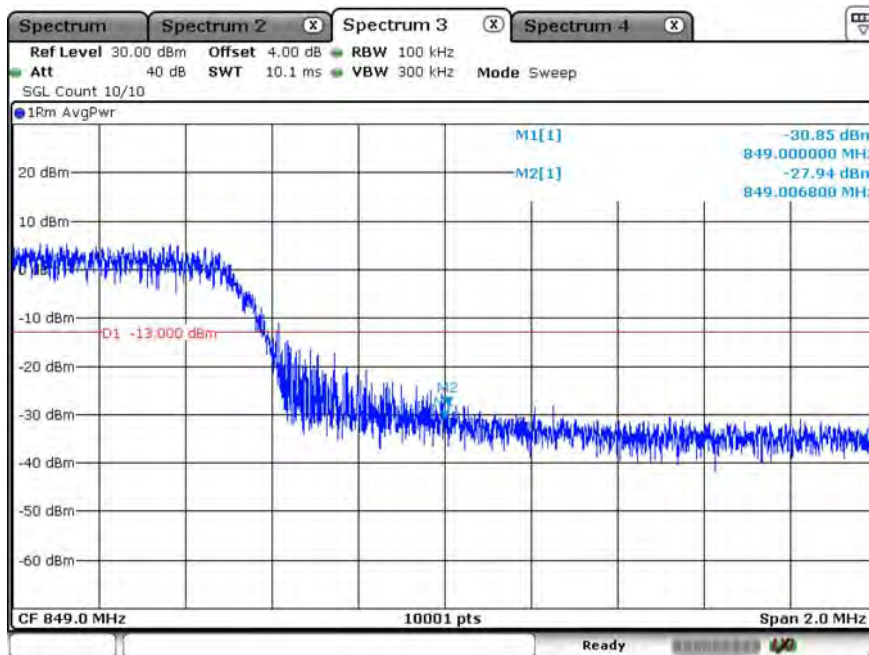


Date: 5.AUG.2019 17:34:15

LTE_B5_CH20600_10M_16-QAM_1RB49

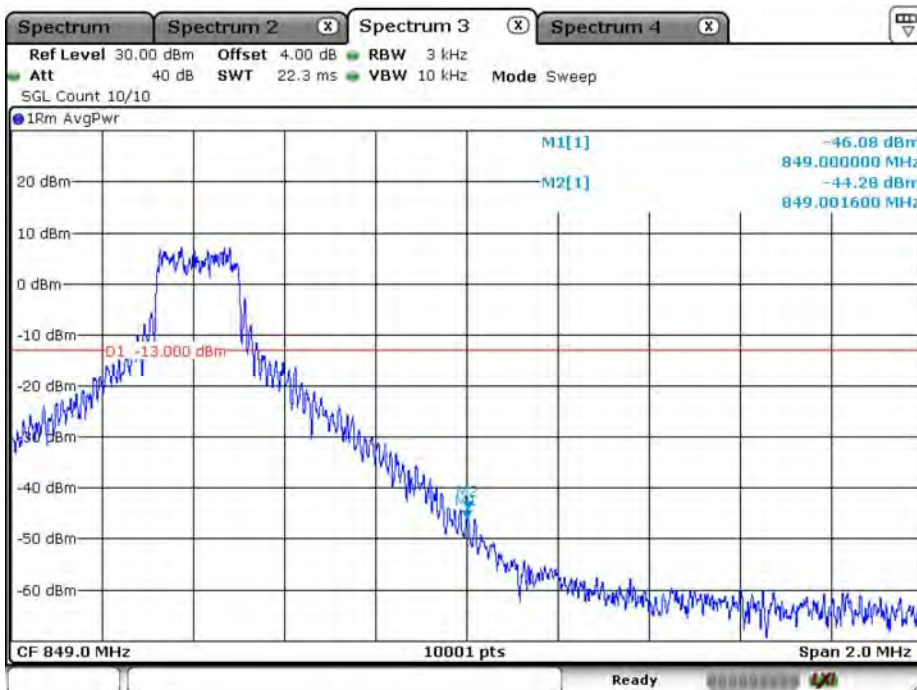

Date: 5.AUG.2019 17:29:18


LTE_B5_CH20600_10M_16-QAM_50RB0

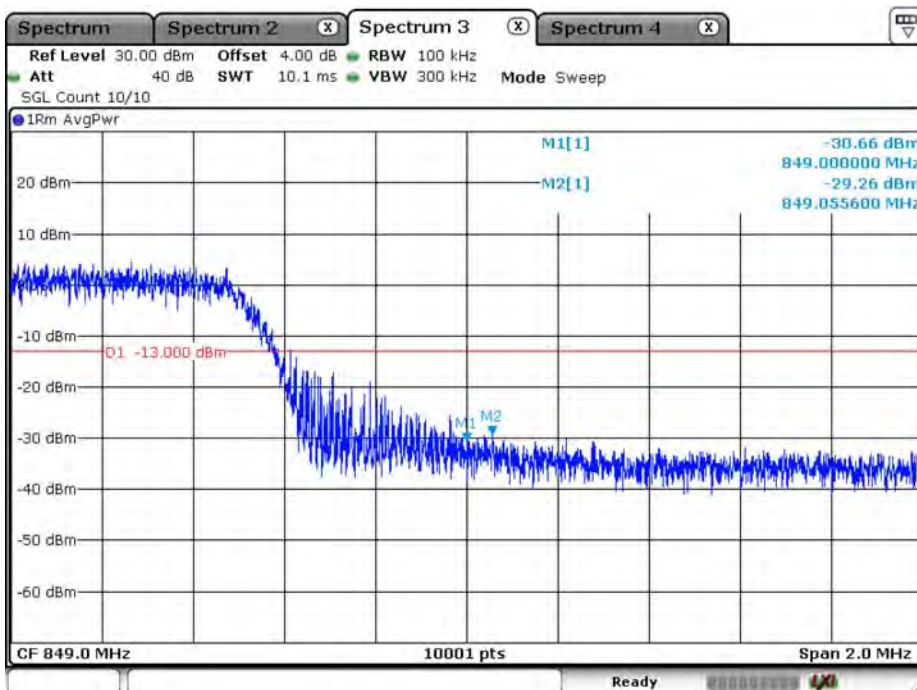

Date: 5.AUG.2019 17:33:34


Product	Module		
Test Item	Spurious Emissions at Antenna Terminals		
Test Mode	Mode 4: LTE Band 12		
Date of Test	2019/11/13~2019/11/19	Test Site	SR10-H

B12_CH23017_1.4M_QPSK_1RB0_150k

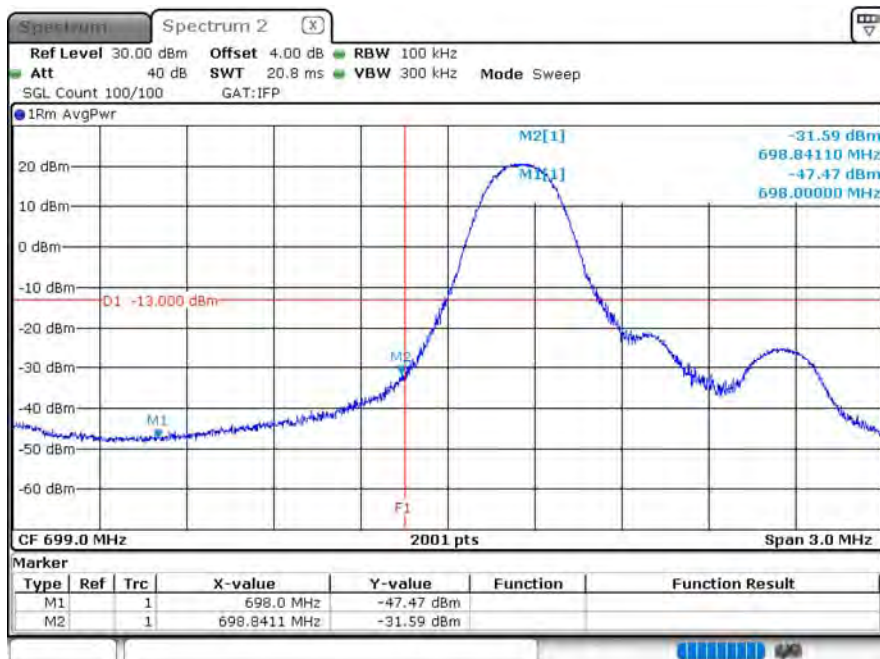


Date: 19.NOV.2019 19:36:34

LTE_B12_CH23017_1.4M_QPSK_1RB0_15k

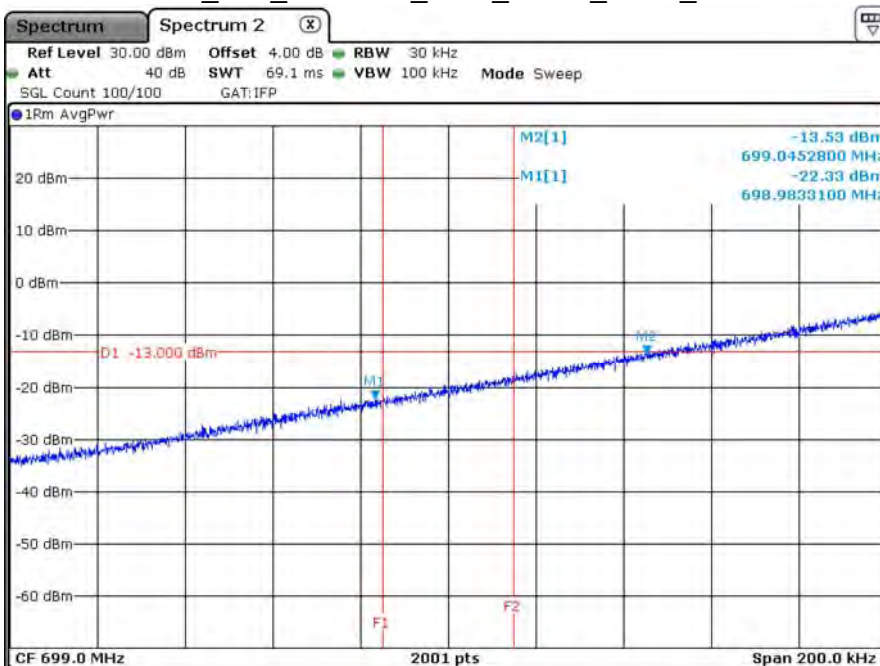


Date: 13.NOV.2019 19:13:49

B12_CH23017_1.4M_QPSK_6RB0_150k

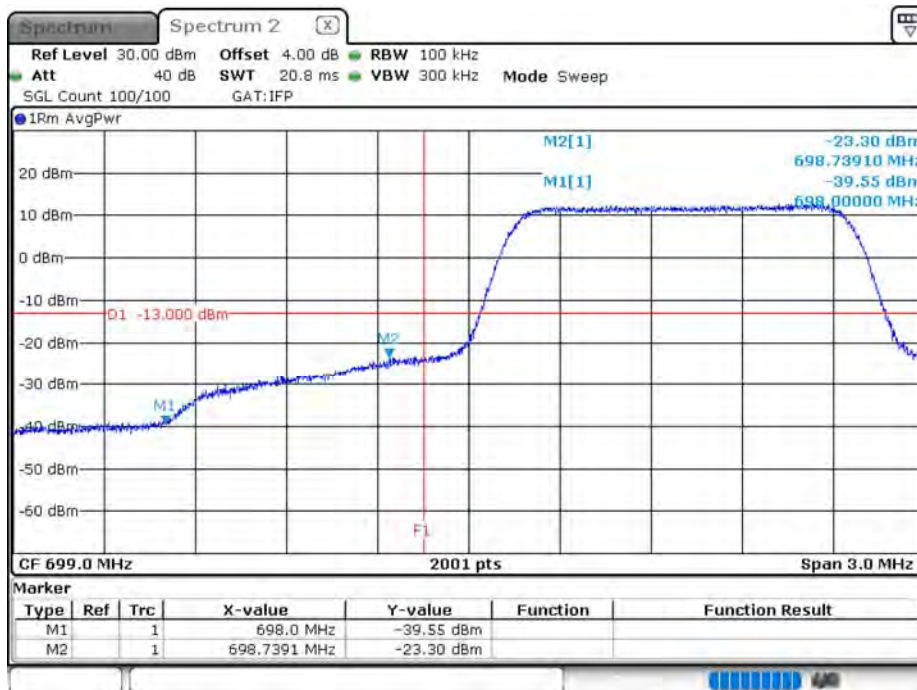

B12_CH23017_1.4M_QPSK_6RB0_15k

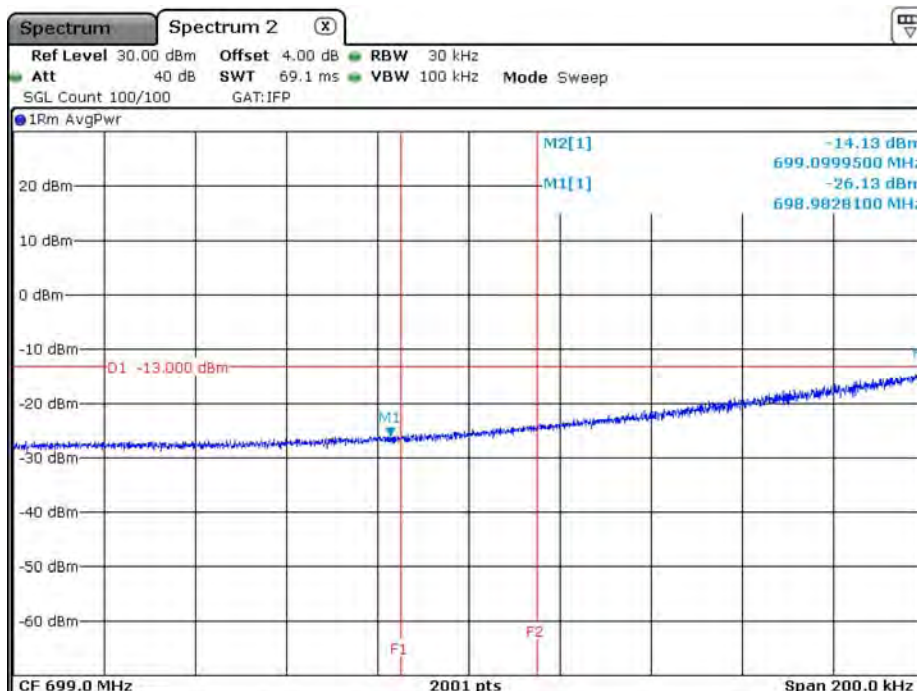


B12_CH23173_1.4M_QPSK_1RB5_150k




Date: 13 NOV 2019 20:51:09

B12_CH23173_1.4M_QPSK_1RB5_15k

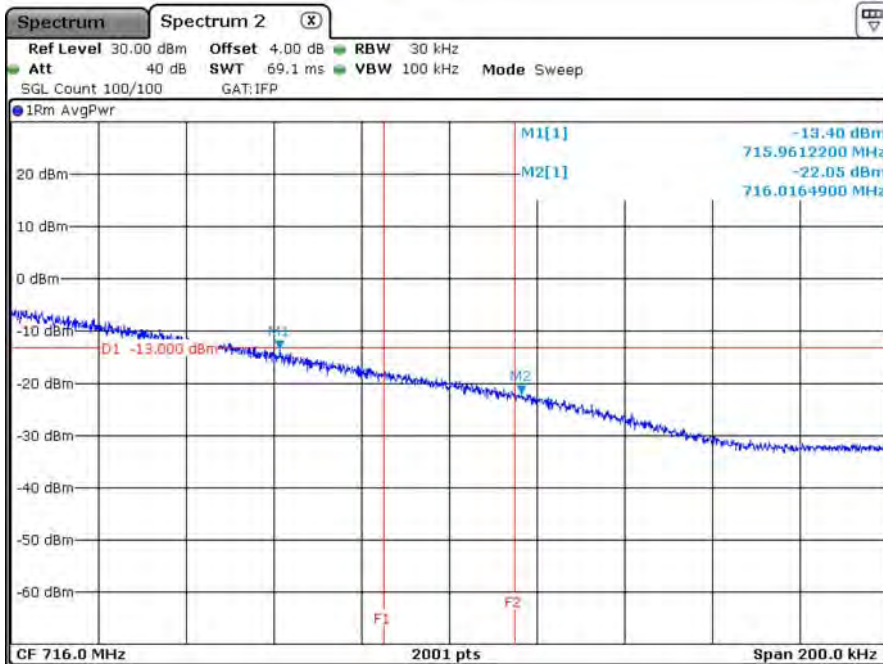


Date: 13 NOV 2019 20:52:36

B12_CH23173_1.4M_QPSK_6RB0_150k

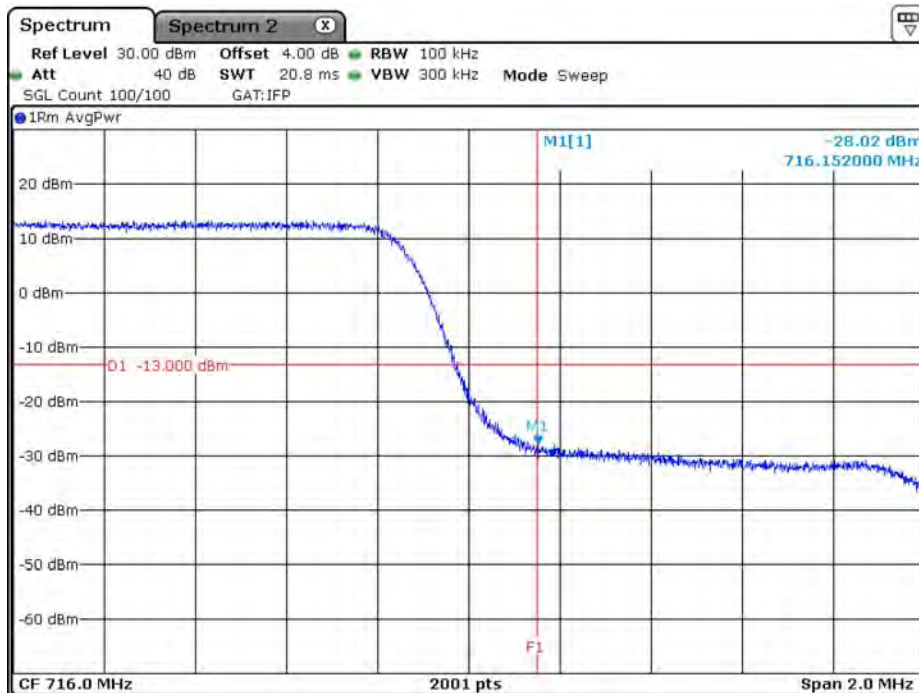


Date: 13.NOV.2019 20:56:48

B12_CH23173_1.4M_QPSK_6RB0_15k

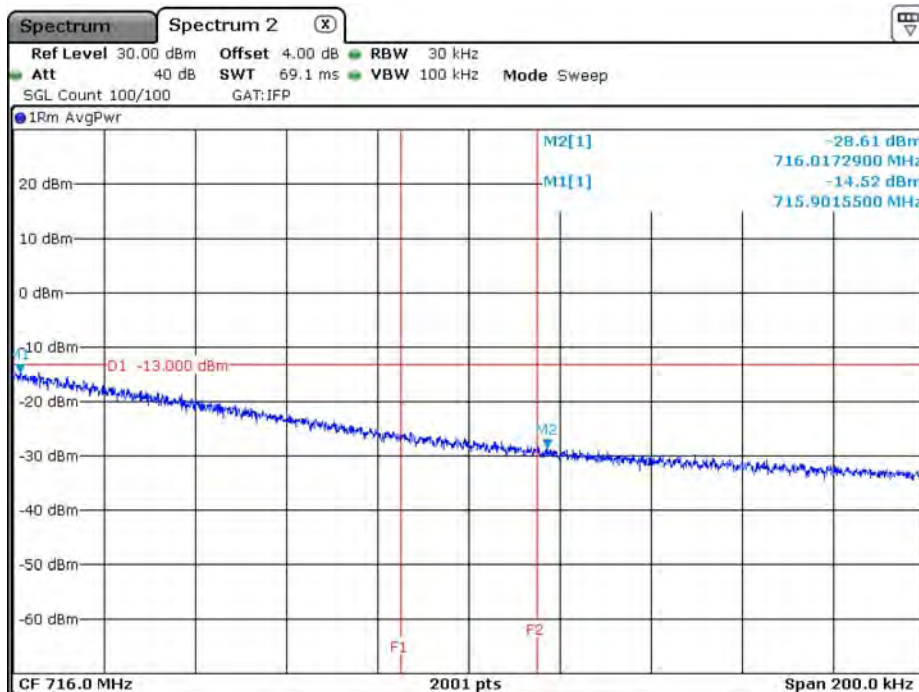


Date: 13.NOV.2019 20:57:15

B12_CH23017_1.4M_16-QAM_1RB0_150k

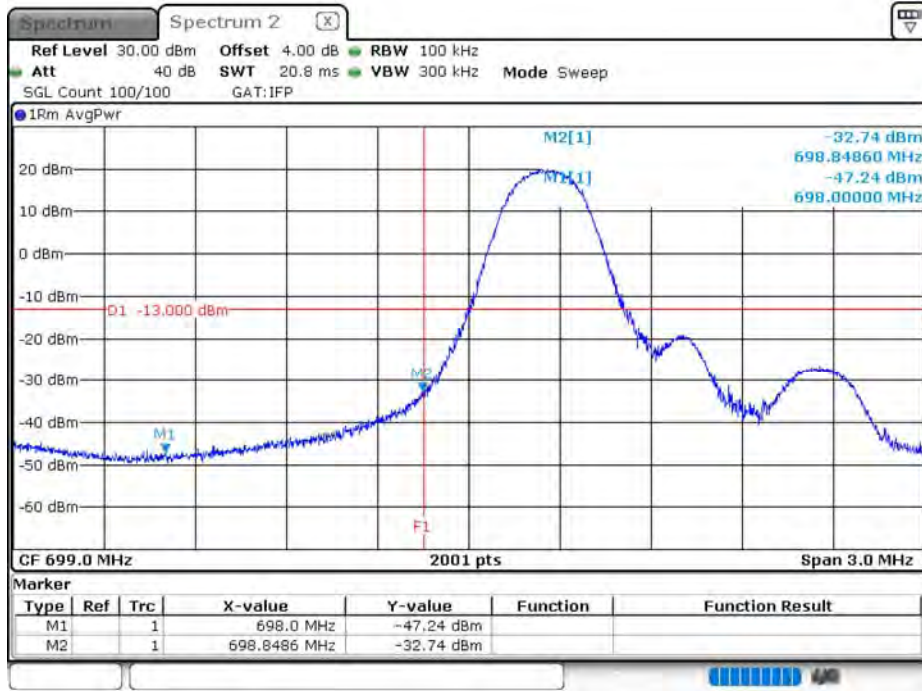


Date: 19.NOV.2019 19:37:29

B12_CH23017_1.4M_16-QAM_1RB0_15k

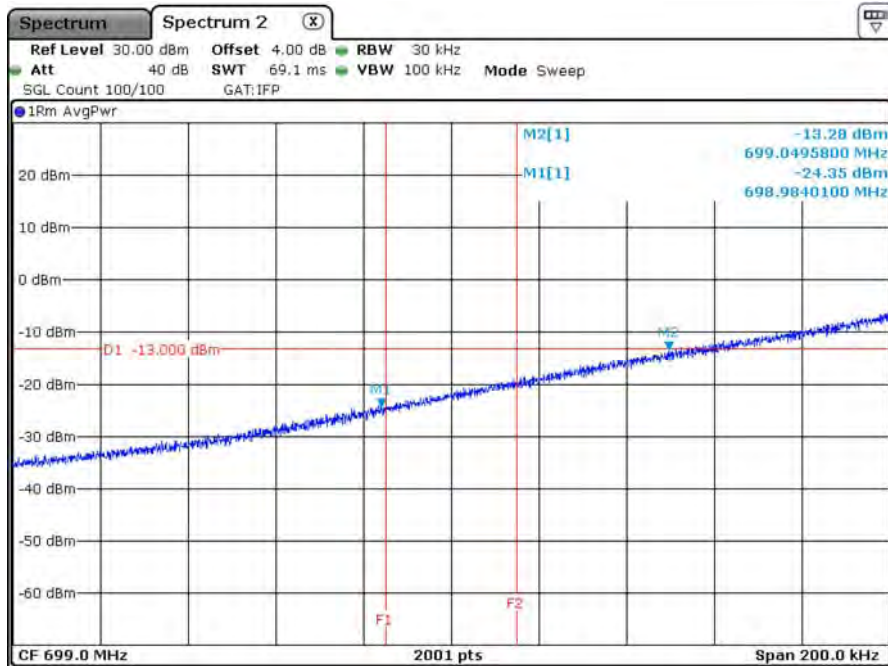


Date: 13.NOV.2019 19:15:16


B12_CH23017_1.4M_16-QAM_6RB0_150k

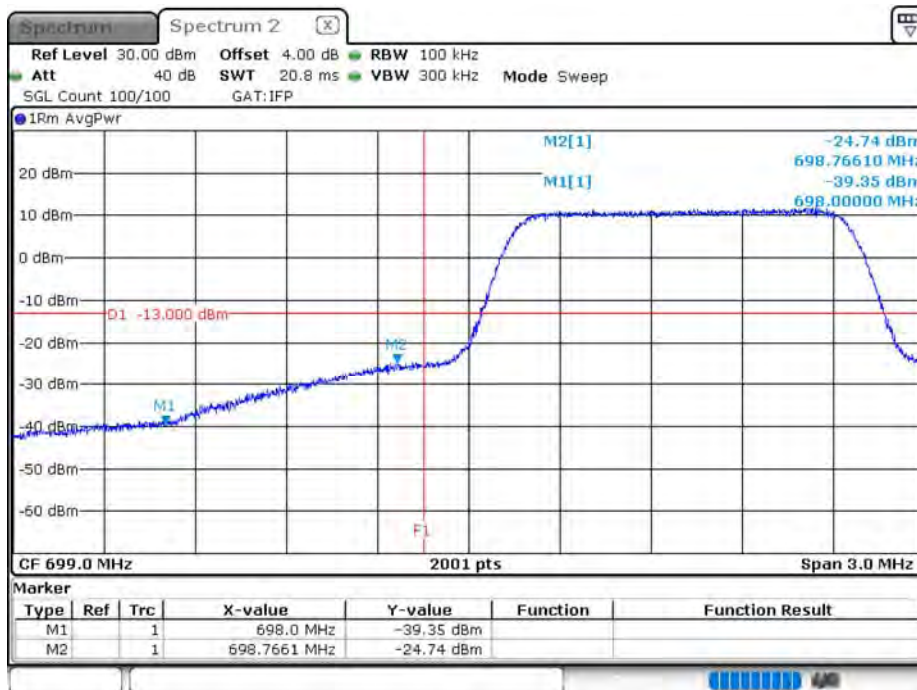

B12_CH23017_1.4M_16-QAM_6RB0_15k

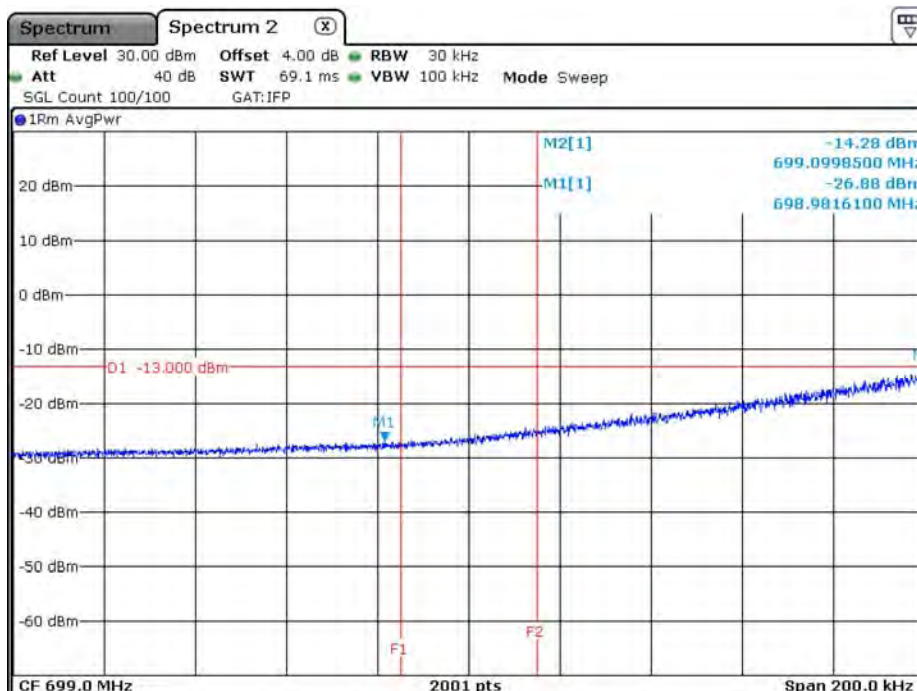


B12_CH23173_1.4M_16-QAM_1RB5_150k

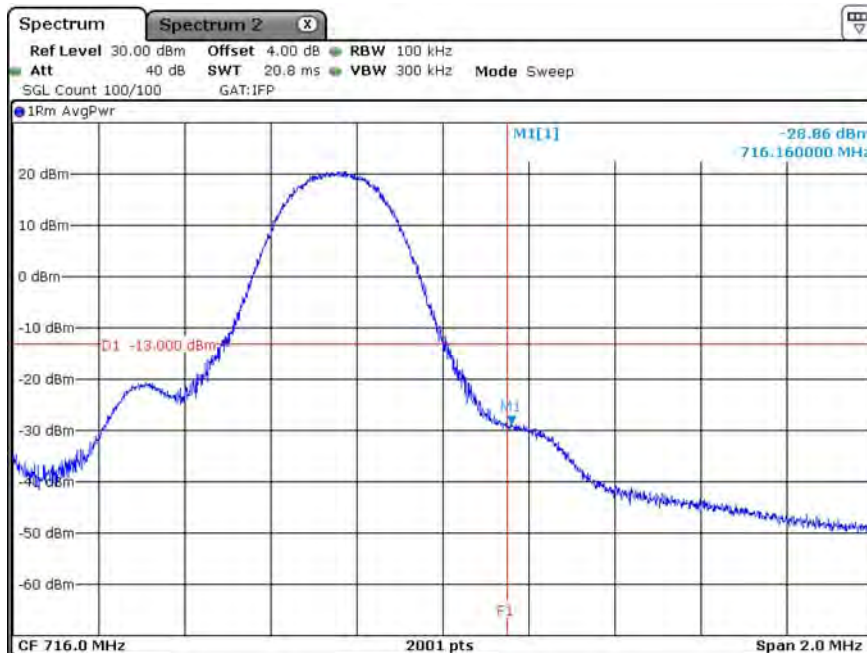


Date: 13 NOV 2019 20:54:26

B12_CH23173_1.4M_16-QAM_1RB5_15k

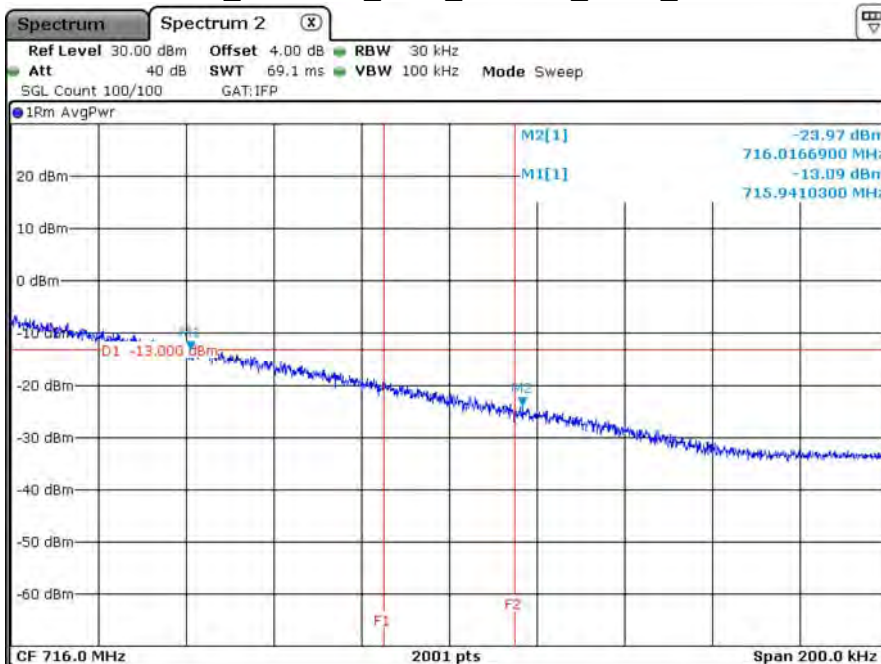


Date: 13 NOV 2019 20:53:40

B12_CH23173_1.4M_16-QAM_6RB0_150k

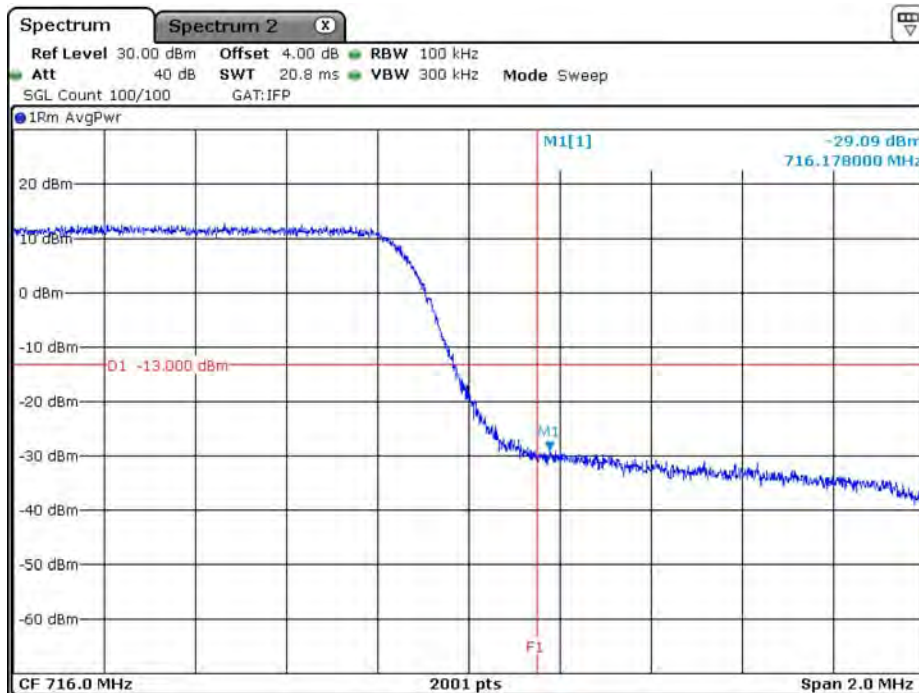


Date: 13.NOV.2019 20:54:51

B12_CH23173_1.4M_16-QAM_6RB0_15k

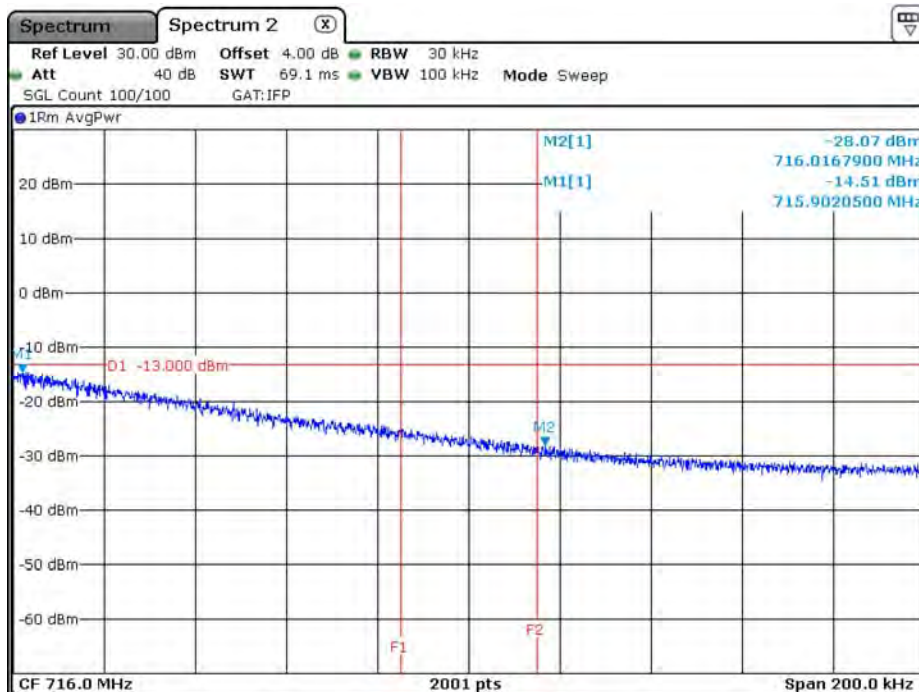


Date: 13.NOV.2019 20:55:38


B12_CH23025_3M_QPSK_1RB0_150k

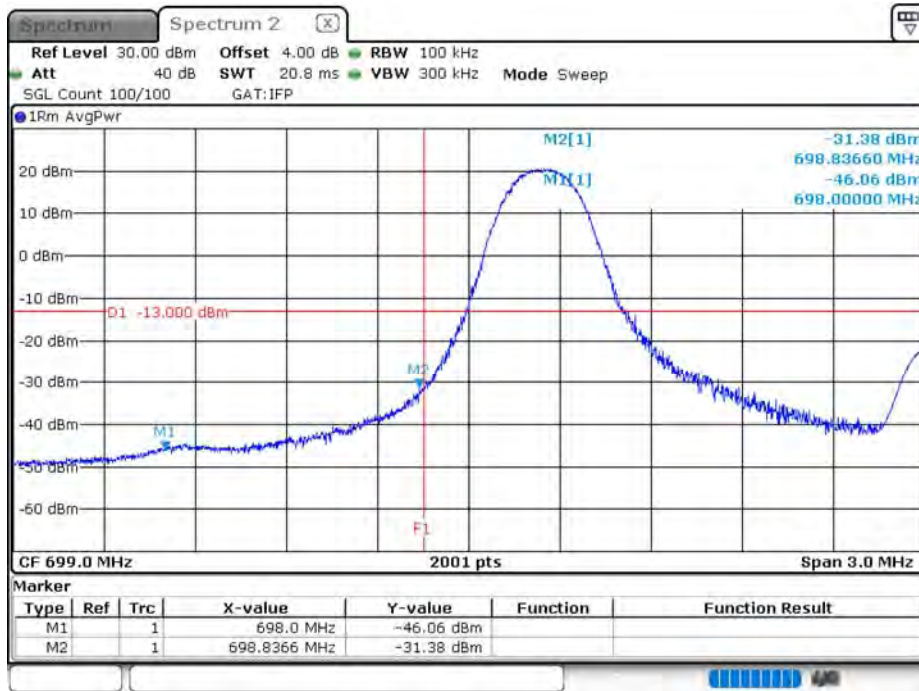

B12_CH23025_3M_QPSK_1RB0_15k

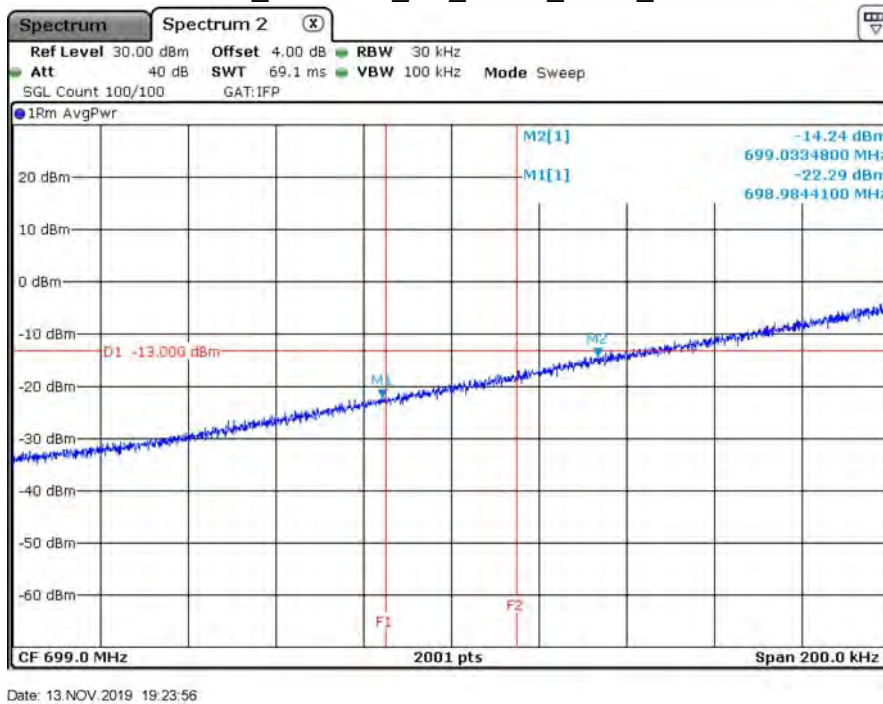


B12_CH23025_3M_QPSK_15RB0_150k

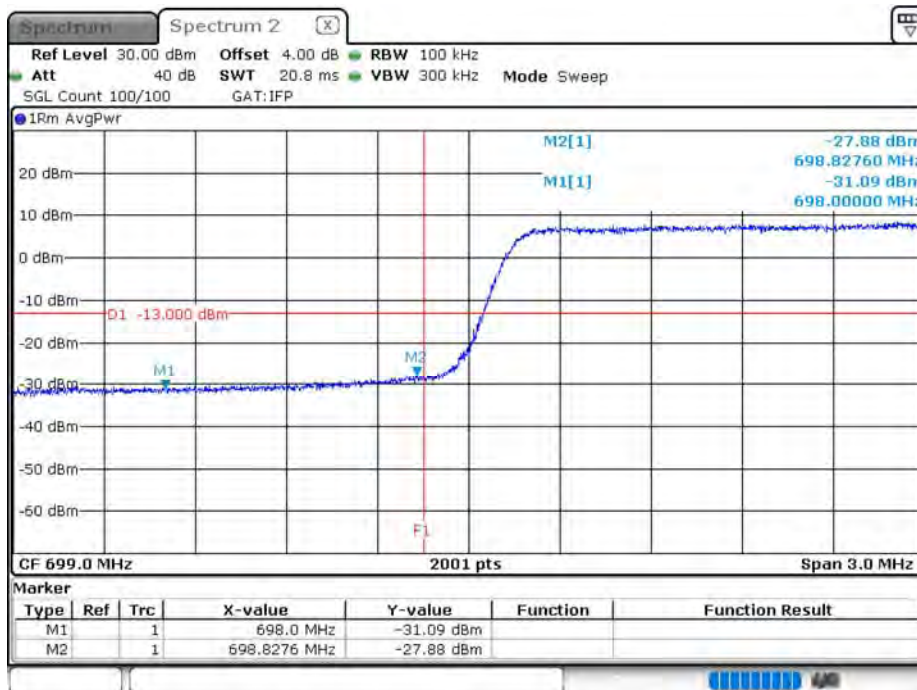


Date: 19.NOV.2019 19:39:06

B12_CH23025_3M_QPSK_15RB0_15k

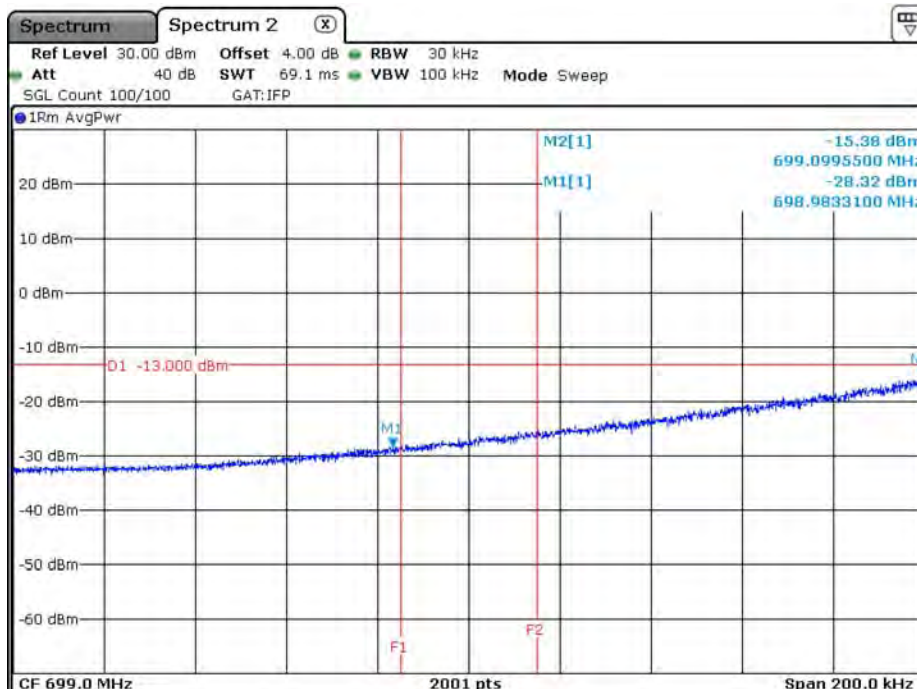


Date: 13.NOV.2019 19:44:01

B12_CH23165_3M_QPSK_1RB14_150k

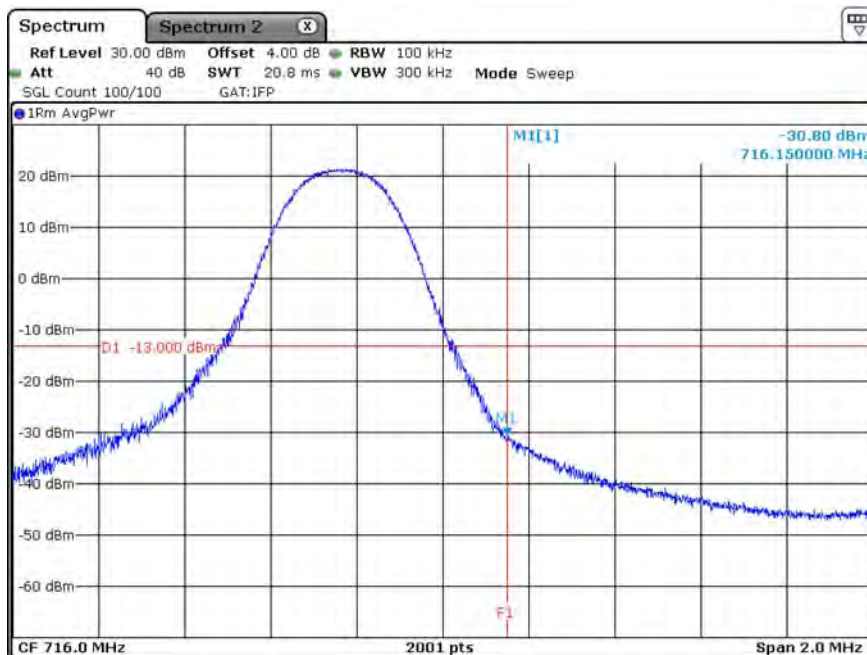


Date: 13 NOV 2019 20:40:08

B12_CH23165_3M_QPSK_1RB14_15k

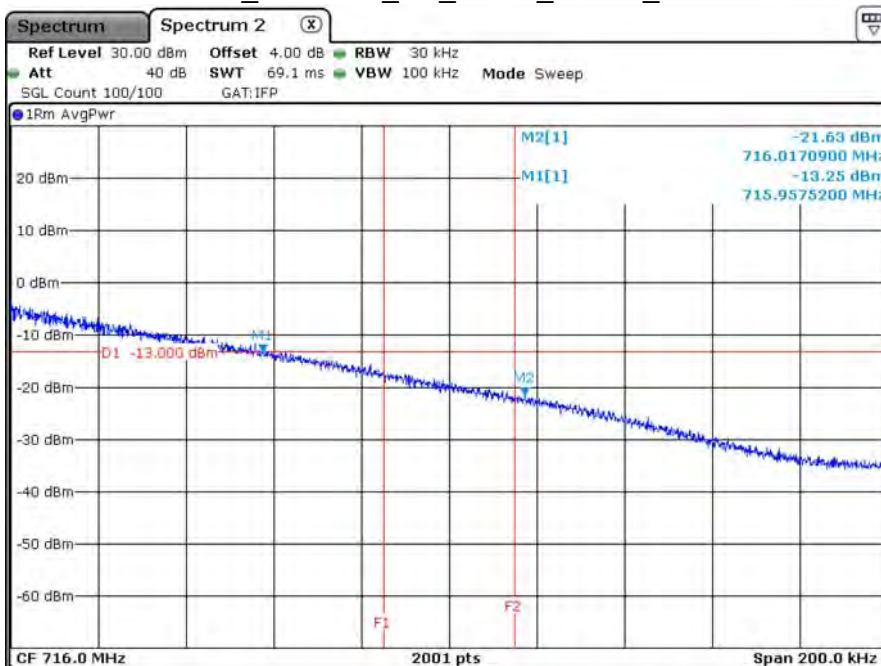


Date: 13 NOV 2019 20:41:30

B12_CH23165_3M_QPSK_15RB0_150k

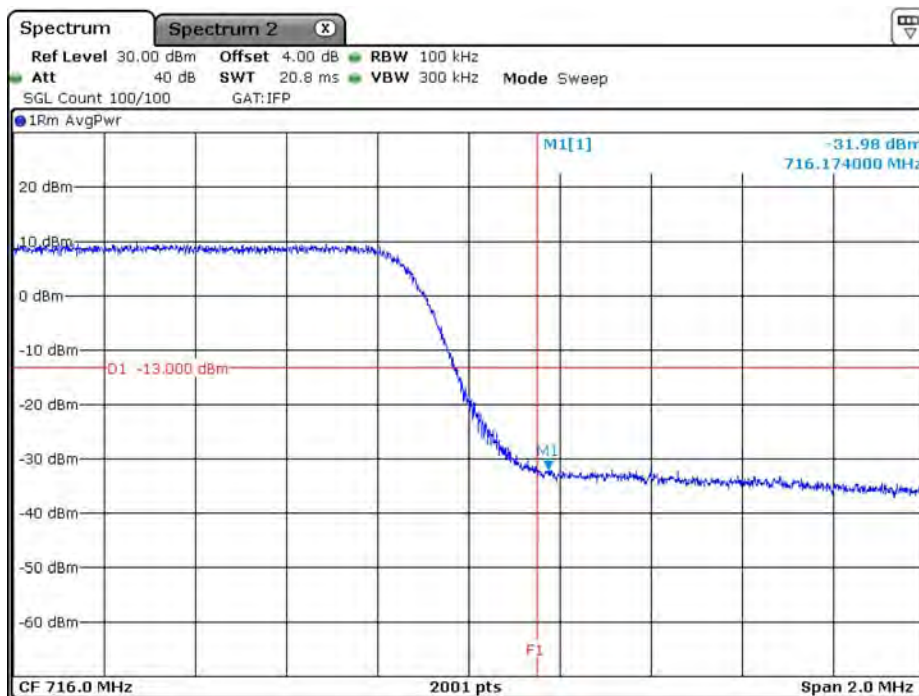


Date: 13.NOV.2019 20:46:13

B12_CH23165_3M_QPSK_15RB0_15k

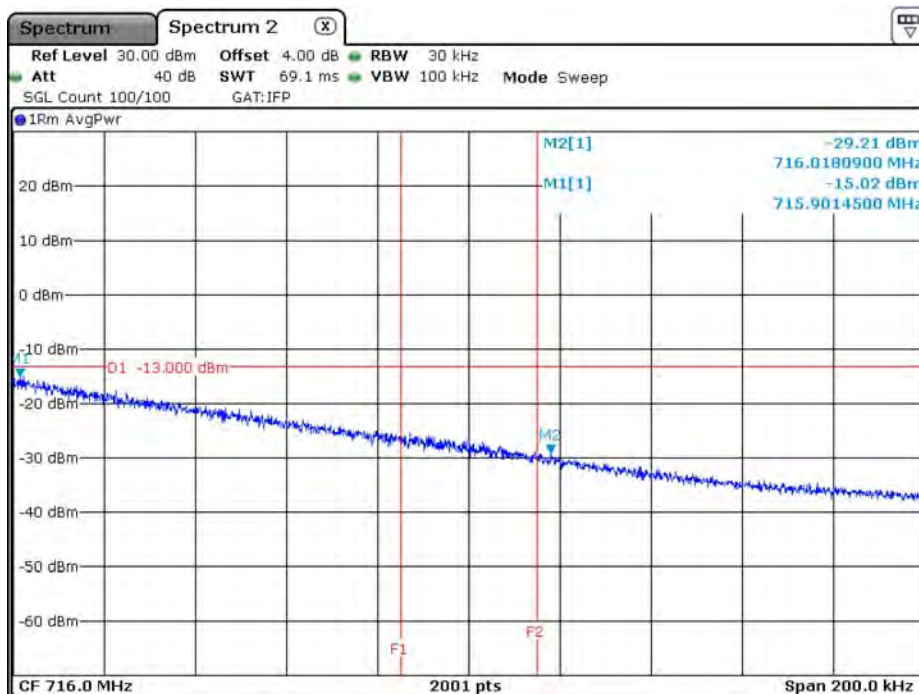


Date: 13.NOV.2019 20:44:58

B12_CH23025_3M_16-QAM_1RB0_150k

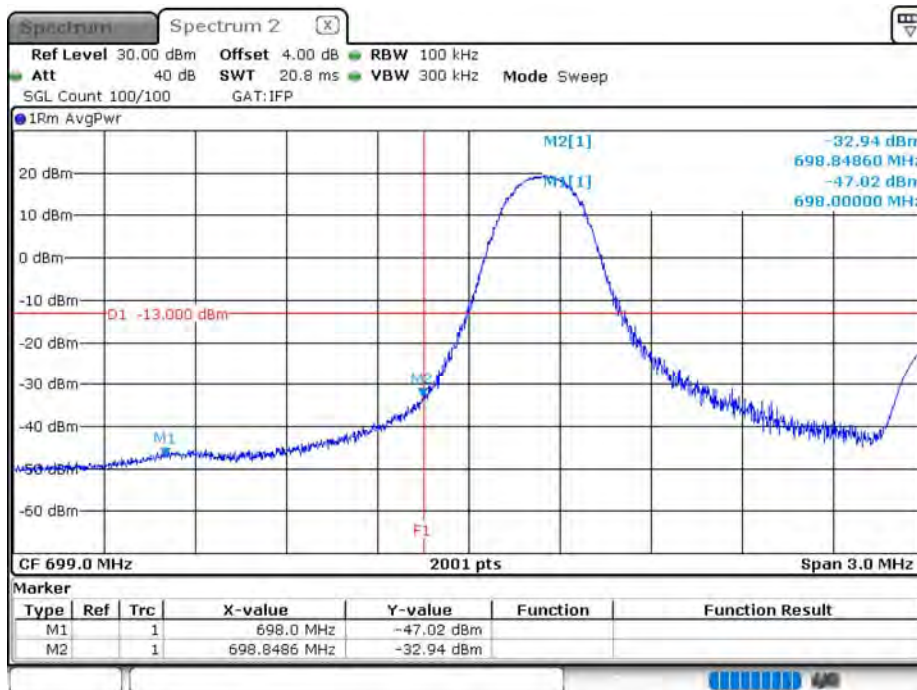


Date: 19.NOV.2019 19:41:31

B12_CH23025_3M_16-QAM_1RB0_15k

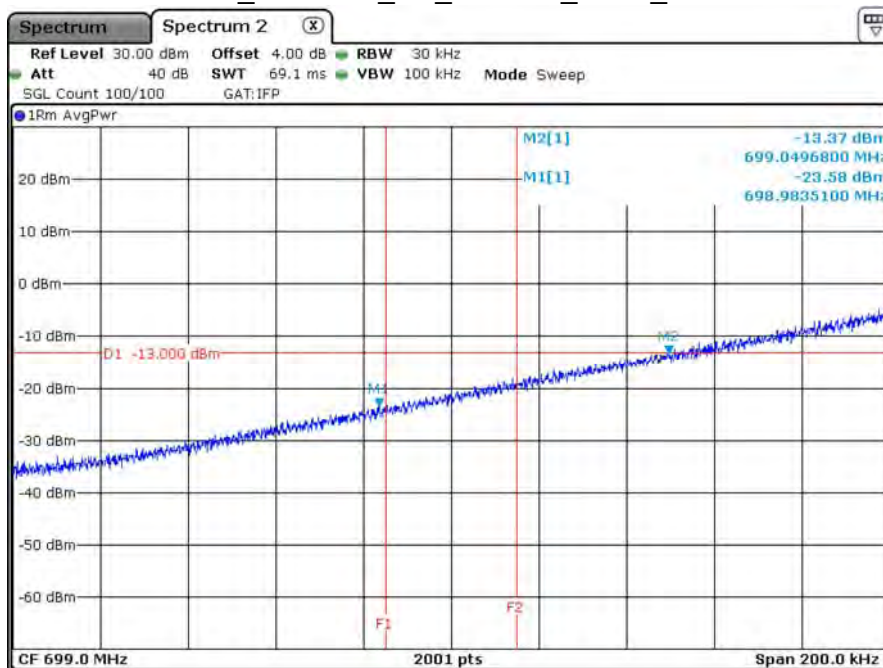


Date: 13.NOV.2019 20:59:30

B12_CH23025_3M_16-QAM_15RB0_150k

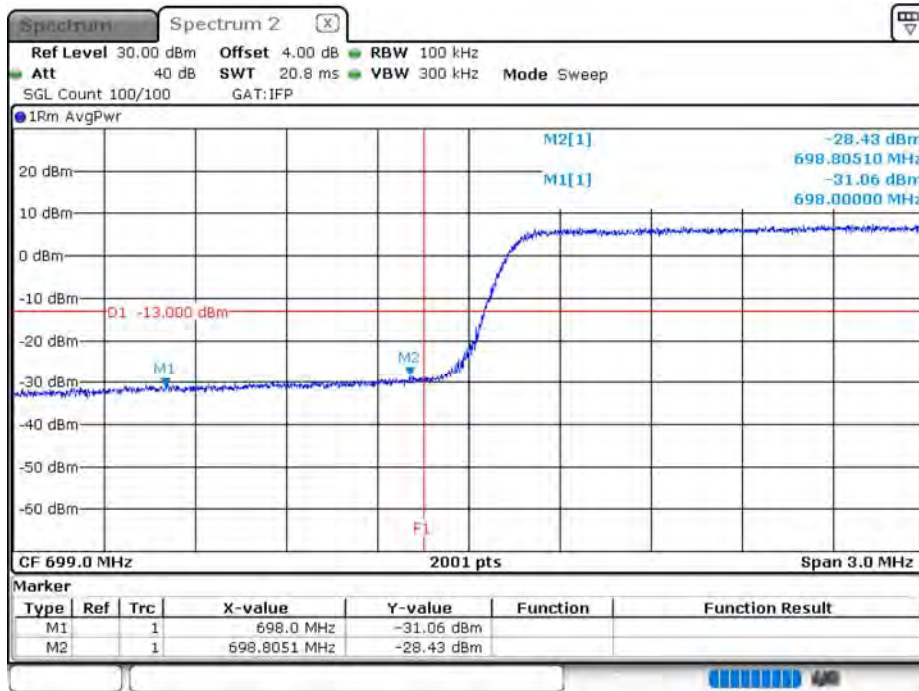


Date: 19.NOV.2019 19:40:19

B12_CH23025_3M_16-QAM_15RB0_15k

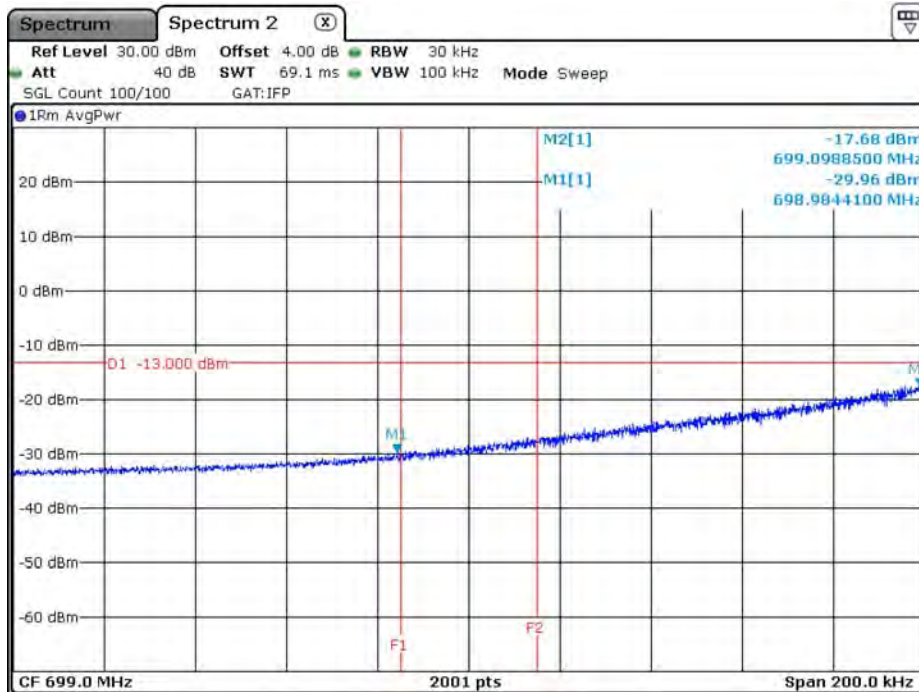


Date: 13.NOV.2019 19:25:49

B12_CH23165_3M_16-QAM_1RB14_150k

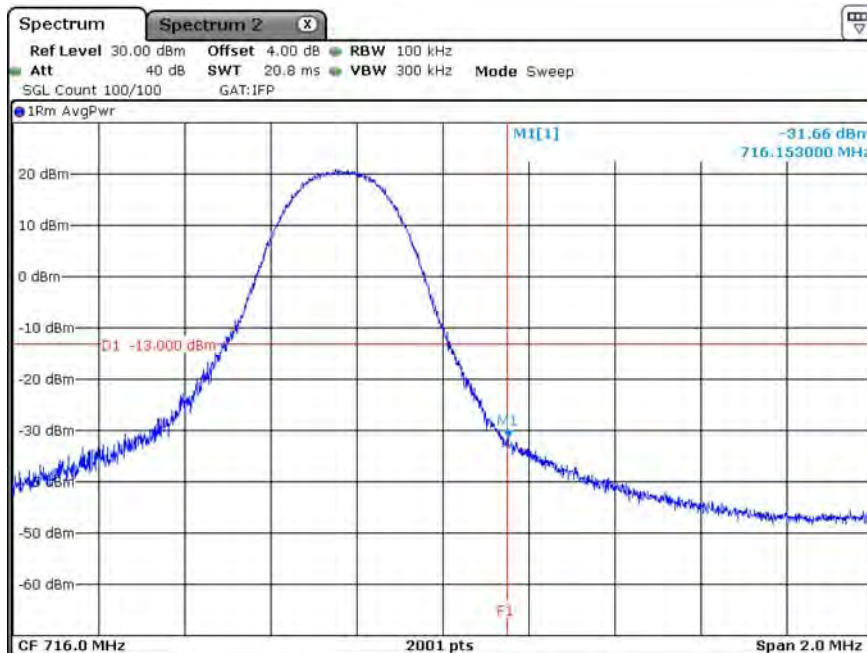

Date: 13 NOV 2019 20:42:51

B12_CH23165_3M_16-QAM_1RB14_15k

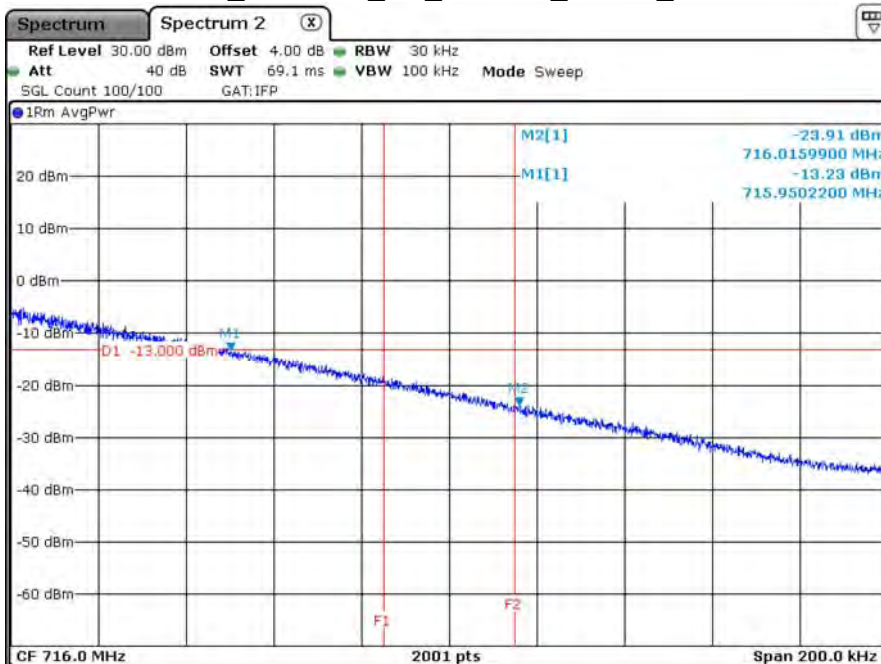


Date: 13 NOV 2019 20:42:27

B12_CH23165_3M_16-QAM_15RB0_150k




Date: 13.NOV.2019 20:43:30

B12_CH23165_3M_16-QAM_15RB0_15k

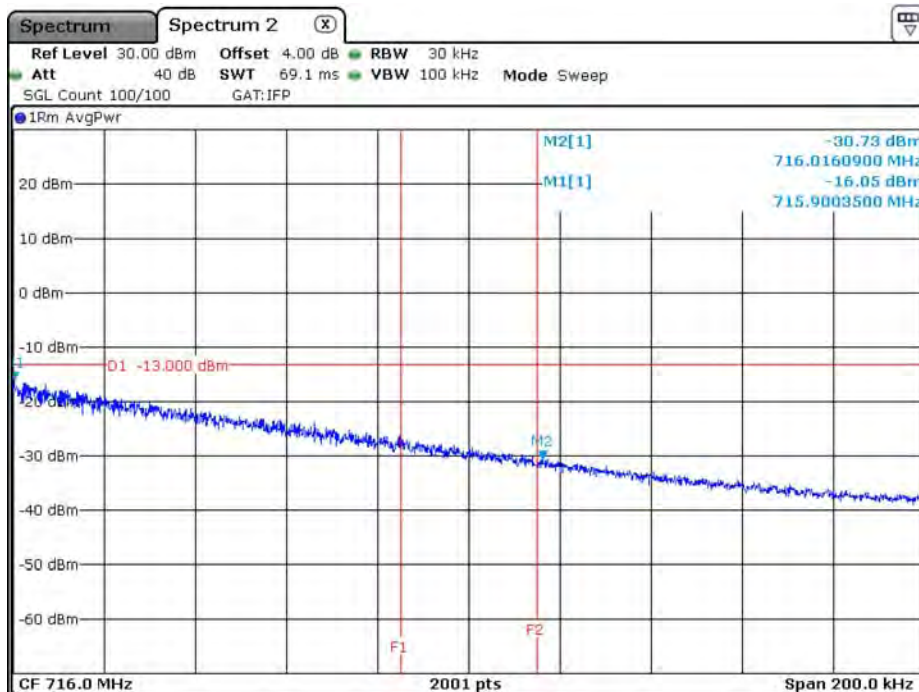


Date: 13.NOV.2019 20:44:13

B12_CH23035_5M_QPSK_1RB0_150k

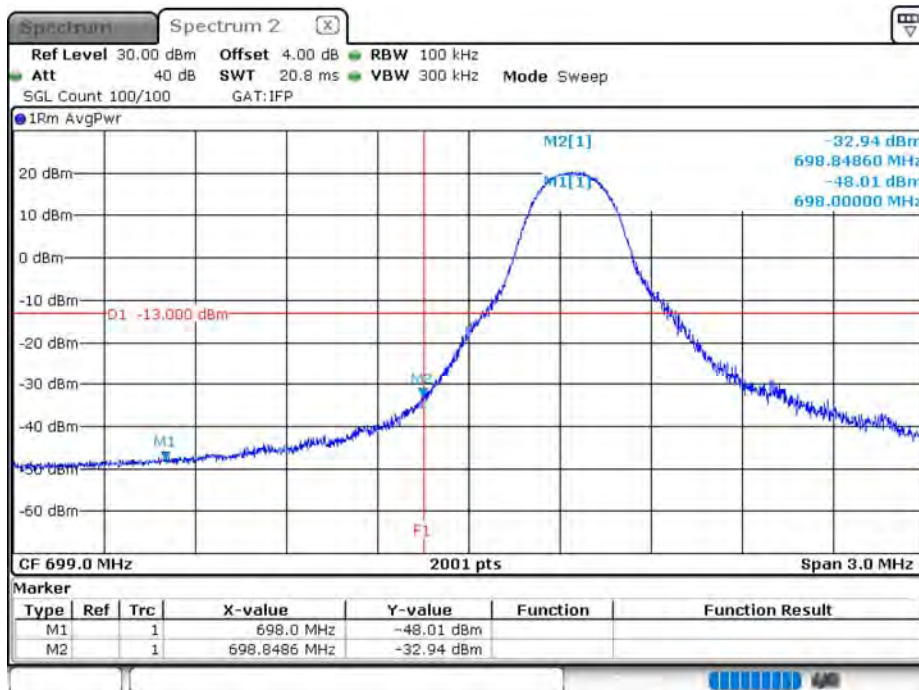


Date: 19.NOV.2019 19:49:33

B12_CH23035_5M_QPSK_1RB0_15k

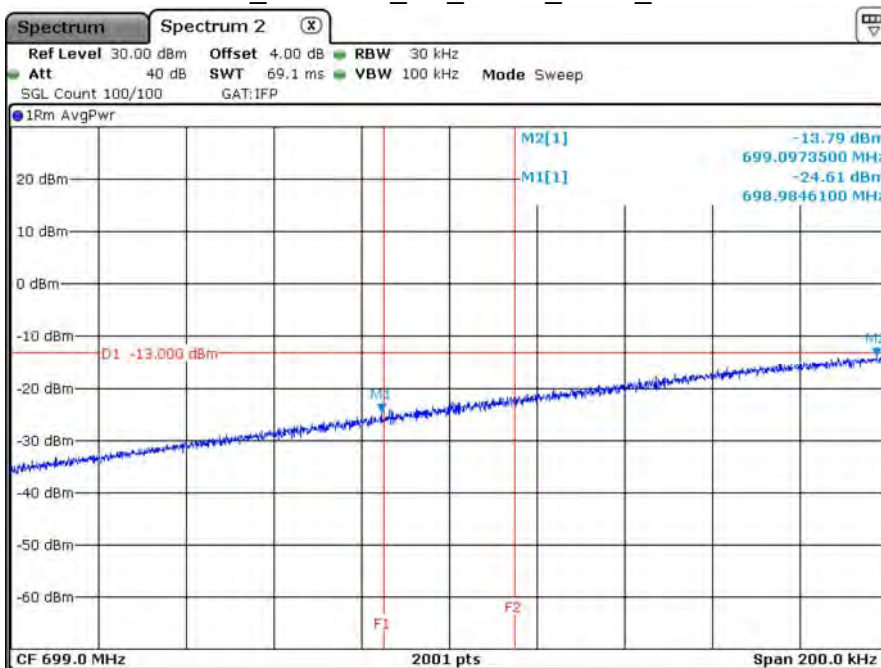


Date: 13.NOV.2019 19:45:13

B12_CH23035_5M_QPSK_25RB0_150k

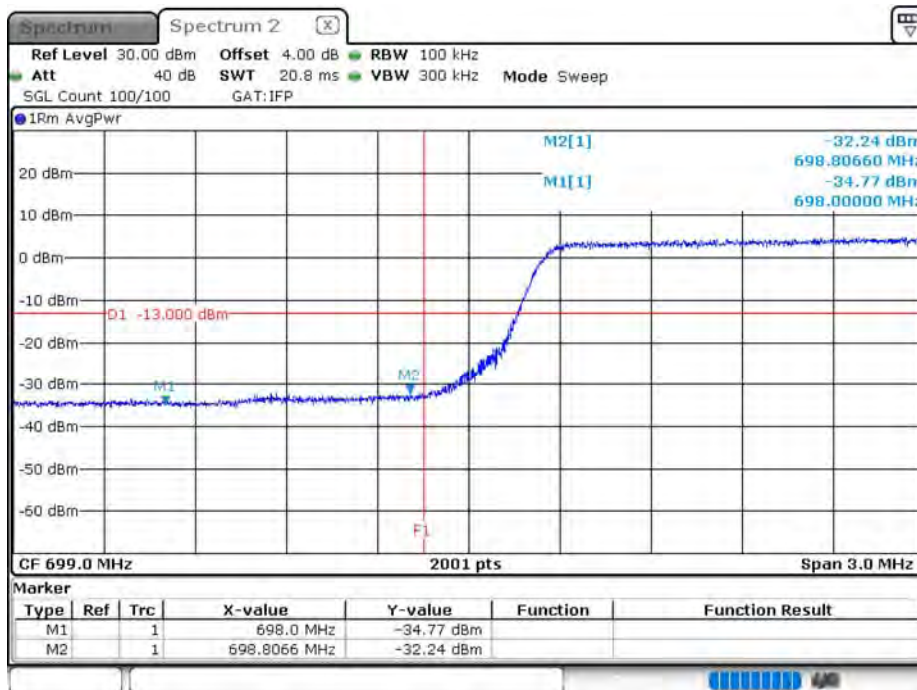

Date: 19.NOV.2019 19:48:54

B12_CH23035_5M_QPSK_25RB0_15k

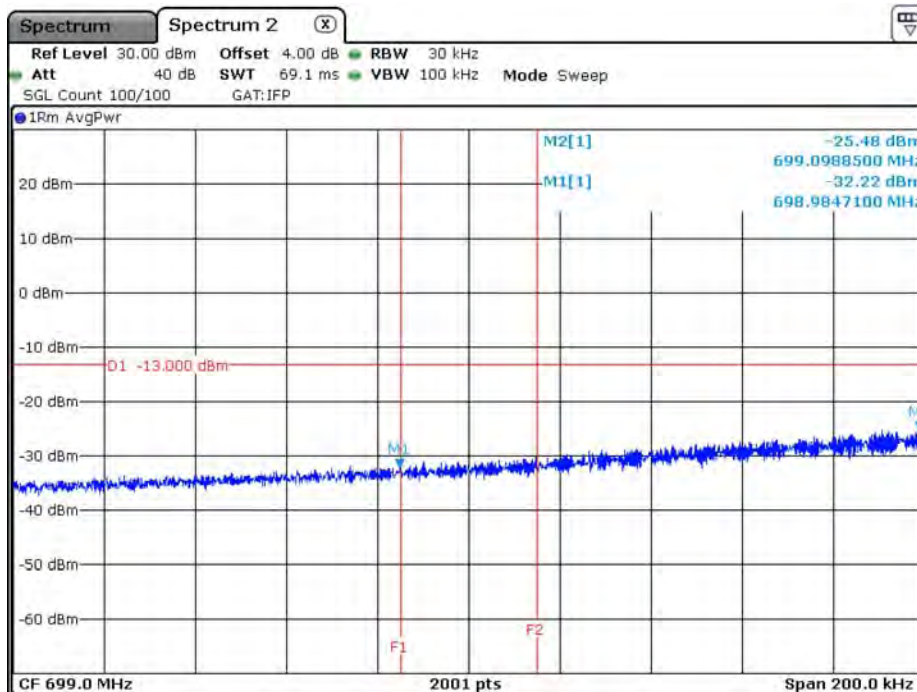


Date: 13.NOV.2019 19:50:06

B12_CH23155_5M_QPSK_1RB24_150k




Date: 13 NOV 2019 20:15:33

B12_CH23155_5M_QPSK_1RB24_15k

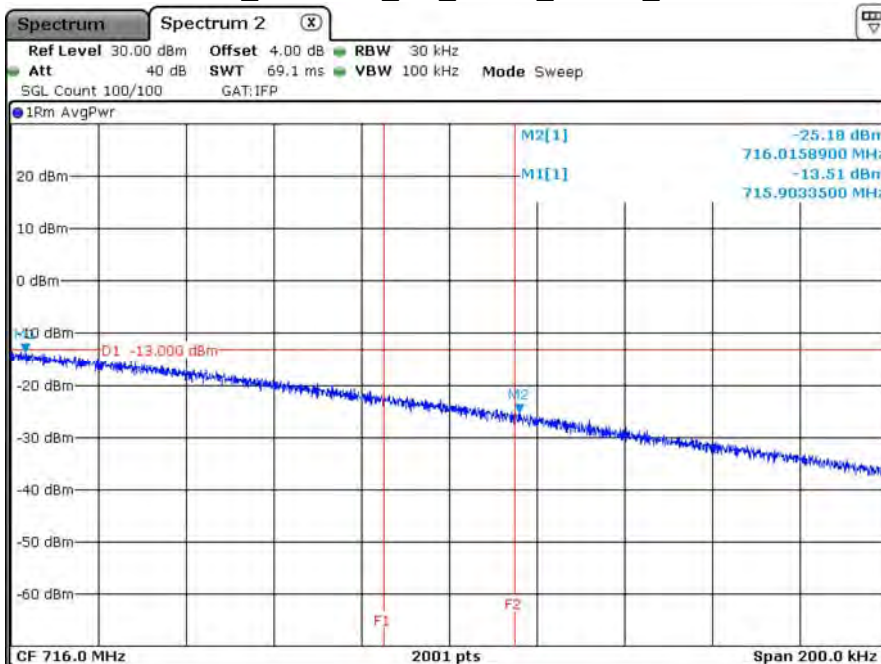


Date: 13 NOV 2019 20:16:45

B12_CH23155_5M_QPSK_25RB0_150k

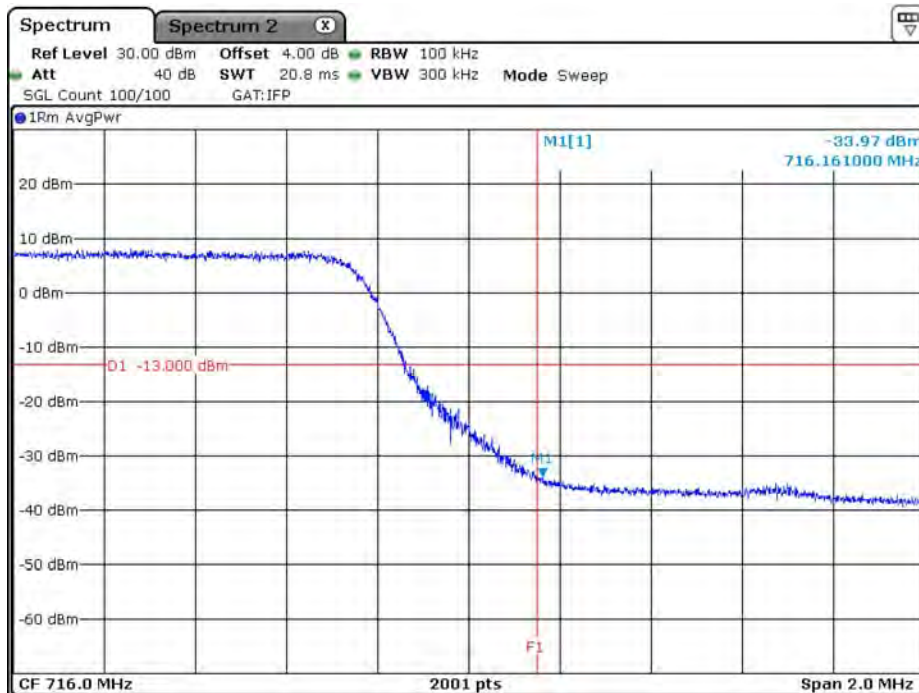

Date: 13.NOV.2019 20:38:06

_LTE_B12_CH23155_5M_QPSK_25RB0_15k

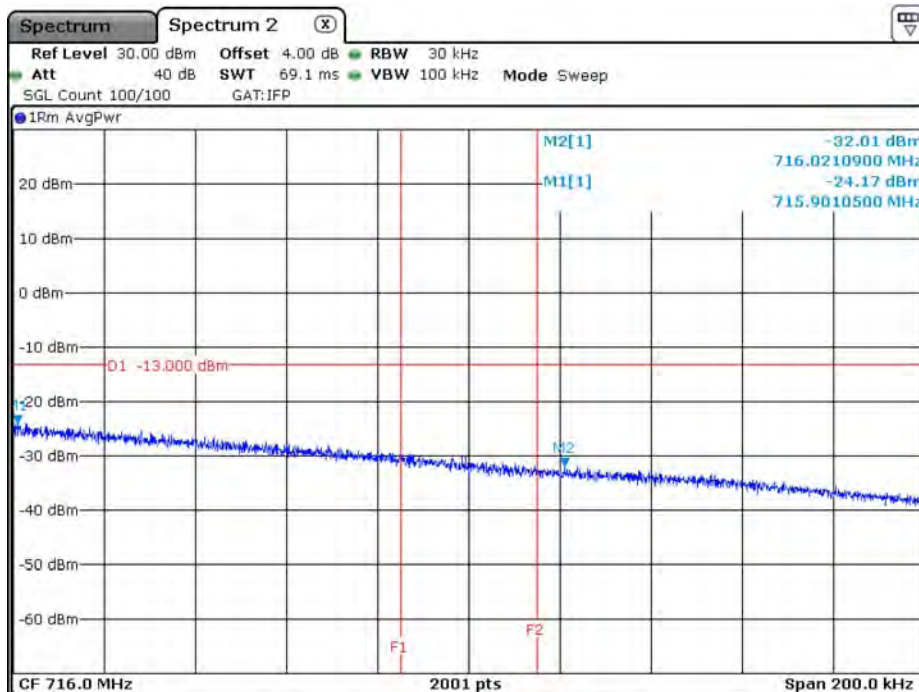

Date: 13.NOV.2019 20:37:35