

TEST REPORT No.: 2-20773496b/09

According to:
FCC Regulations
Part 22 & Part 24 & Part15.209C
IC Regulations
RSS-132e
RSS-133e

for
IREX Technologies

E-Reader with integrated Option Wireless PCI Express Mini Card
DR800SG
contains FCC ID: NCMOMO0491-I
contains IC ID: 2734A-MO0491

Laboratory Accreditation and Listings			
 Deutscher Akkreditierungs Rat DAT-P176/94-02	 FEDERAL COMMUNICATIONS COMMISSION USA Reg. No.: 99538 MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-1 3462D-2	 Reg. No.: R-2665, R-2666 C-2914, T-339
accredited according to DIN EN ISO/IEC 17025			
CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.de • Internet: www.cetecom.com			

Table of contents

1. SUMMARY OF TEST RESULTS.....	3
1.1. TESTS OVERVIEW FCC Part 15B/C, Part 22/24 and Kanada IC Standards (RSS)	3
2. ADMINISTRATIVE DATA	5
2.1. Identification of the testing laboratory.....	5
2.2. Test location	5
2.3. Organizational items.....	5
2.4. Customer's details	6
2.5. Applicant's details (accord. FCC FORM 731 application).....	6
2.6. Manufacturer's details	6
3. EQUIPMENT UNDER TEST (EUT).....	7
3.1. Additional declaration and description of main EUT	7
3.2. Configuration of cables used for testing	8
3.3. EUT: Type, S/N etc. and short descriptions used in this test report	8
3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	8
3.5. EUT set-ups	9
3.6. EUT operating modes	9
3.7. Parameter Settings on mobile phone and base station CMU200	10
4. DESCRIPTION OF TEST SET-UP'S.....	11
4.1. Test set-up for radiated measurements	11
5. MEASUREMENTS	12
5.1. RF power output (Conducted and Radiated).....	12
5.2. Occupied bandwidth	14
5.3. Radiated emissions, below 30 MHz, §15.205 and §15.209, RSS210, RSS310, RSS-gen.....	15
5.4. Emission limits (Spurious emission radiated) $f > 30$ MHz.....	17
5.5. Frequency stability on temperature and voltage variations.....	22
6. MEASUREMENT UNCERTAINTIES.....	23
7. CALIBRATION METHOD OF ANECHOIC CHAMBER.....	24
7.1. Measurement uncertainties	25
8. INSTRUMENTS AND ANCILLARY.....	26
8.1. Used equipment "CTC"	26

Table of annex

	Total pages
SEPARATE DOCUMENT B_2_20773496B_09_A1.PDF: DIAGRAMS OF TESTING	61
SEPARATE DOCUMENT B_2_20773496B_09_A2.PDF: PHOTOS OF EUT	4
SEPARATE DOCUMENT B_2_20773496B_09_A3.PDF: PHOTOS OF MEASUREMENT SET-UP	3

1. Summary of test results

The test results apply exclusively to the test samples as presented in chapter 3.1. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The presented device incorporates a Gobi2000 PCI Express Mini Card, already approved under ID No. NCMOMO0491-I. On NCMOMO0491-I origin is Gobi2000 Module with FCC ID J9CGOBI2000. Only radiated test cases have been performed.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H, Part 24, Subpart E (Broadband PCS) and Part 15.209 of the FCC CFR 47 (2008-10-01) and Industry Canada RSS-Gen, Issue 2 regulations.

1.1. TESTS OVERVIEW FCC Part 15B/C, Part 22/24 and Kanada IC Standards (RSS)

TEST CASES	PORT	REFERENCES & LIMITS			EUT set-up	EUT operating mode	Result
		FCC Standard	RSS Section	TEST LIMIT			
TX-Mode							
RF POWER (conducted)	Antenna terminal (conducted)	§2.1046	--	N/A	--	--	Not performed, remark 1
RF-POWER radiated (ERP/EIRP)	Cabinet	§2.1046 §22.913(a)(2)	RSS-132: 4.4 SRSP-503: 5.1.3	< 7 Watt (ERP)	3	6	Passed
			RSS-133:6.4 SRSP-510: 5.1.2		1	4	
					3	2+5	
SPURIOUS EMISSIONS (conducted)	Antenna terminal (conducted)	§2.1051 §22.917(a)(b) §24.238(a)(b)	RSS-132: 4.5.1 RSS-133: 6.5.1	43+10log(P) dBc	--	--	Not performed, remark 1
99% OCCUPIED BANDWIDTH	Antenna terminal (conducted)	§2.202 §2.1049 §22.917(a) §24.238(a)	RSS Gen:4.6.1	99% Power	--	--	Not performed, remark 1
SPURIOUS EMISSIONS (radiated)	Cabinet + Interconnecting cables (radiated)	§15.209(a)	RSS-Gen: 4.11 RSS-210: Table 3 RSS-310: Table 4	2400/F(kHz) μV/m 24000/F(kHz) μV/m 30 μV/m	2	4+7	Passed
			§2.1053(a) §22.917(a)(b) §24.238(a)(b)	RSS-132: 4.5.1 RSS-133: 6.5.1	43+10log(P) dBc	3	2
						1	4
FREQUENCY STABILITY	Antenna terminal (conducted)	§22.355, table C-1 §24.235 §2.1055	RSS-132: 4.3 RSS-133: 6.3	< 2.5ppm <0.1 ppm	--	--	Not performed, remark 1

RX Mode							
AC-Power Lines Conducted Emissions	AC-Power lines	§ 15.107 § 15.207	RSS-Gen, Issue 2: Chapter 7.2.2	FCC § 15.107 class B limits § 15.207 limits IC: Table 2, Chapter 7.2.2	--	--	Not performed, remark 2
RECEIVER Radiated emissions	Cabinet + Interconnecting cables (radiated)	§ 15.109 § 15.33 § 15.35	RSS-132, Issue 2: 4.6 RSS-Gen, Issue 2: 6(a) RSS-133, Issue 3: 6.7(a)	FCC 15.109 class B limits IC-limits: Table 1, Chapter 6	--	--	Not performed, remark 2
Conducted emissions	Antenna terminal (conducted)	§ 2.1051	RSS-Gen: 6(b) RSS-132: 4.6 RSS-133: 6.7(b)	43+10log(P) dBc IC: < 2 nW/4kHz (30<F<1000MHz) < 5nW/4kHz (F> 1GHz)	--	--	Not applicable

Remark: 1.) tests performed on initial certification of the GSM/FDD module see conducted test report FCC Part 22&24: **80-VN379-203 Rev. A**, December 19, 2008

2.) See separate test reports (CETECOM: B_2_20773496c_09.pdf) for applicable measurements according Part 15.107/15.109 Subpart B.


.....
D. Franke
Responsible for test section


GmbH
Im Teelbruch 116
45219 Essen
Tel.: + 49 (0) 20 54 / 95 19 - 0
Fax: + 49 (0) 20 54 / 95 19 - 097


.....
Dipl.-Ing. C. Lorenz
Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Laboratory accreditations/Listings:	DAR-Registration No. DAT-P176/94-02 FCC-Registration No. 99538, MRA US-EU 0003 IC-Registration No. 3462D-1, 3462D-2 VCCI Registration No. R-2665,R-2666,C-2914,T-339
Responsible for testing laboratory:	Dipl.-Ing. W. Richter
Deputies:	D. Franke

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

2.3. Organizational items

Order No.:	20773496
Responsible for test report and project leader:	Dipl.-Ing. C. Lorenz
Receipt of EUT:	2009-09-10
Date(s) of test:	2009-09-10 – 2009-09-30
Date of report:	2009-10-06

Version of template:	09.06 _All.Dotm

2.4. Customer's details

The test report as such refers only to the device tested, information stated are given by the company who ordered the tests, not the country approvals, as this is out of scope of the evaluation of the test lab.

Customer's name:	Option N.V.
Address:	Gaston Geenslan 14 3001 Leuven
Contact person:	Belgium Mr. Thomas Gulinck

2.5. Applicant's details (accord. FCC FORM 731 application)

Applicant's name:	IREX Technologies
Address:	High Tech Campus 9 5656 Eindhoven
Contact person:	The Netherlands Mr. Harald van Veghel

2.6. Manufacturer's details

Manufacturer's name:	Prodrive B.V.
Address:	Science Park Eindhoven 5709 5692 EP son
	The Netherlands

3. Equipment under test (EUT)

3.1. Additional declaration and description of main EUT

(Applicant's declaration)

Main function	E-Reader with integrated wireless GSM/GPRS/UMTS/CDMA2000 PCI Express Mini card		
Type	DR800SG		
Applicant/Grant holder of the module	Option N.V., Gaston Geenslan 14, 3001 Leuven, Belgium		
Frequency ranges	GSM 850: 824–849MHz (Uplink), 869-894MHz (Downlink) GSM1900: 1850-1910MHz (Uplink), 1930-1990MHz (Downlink) FDD Band 1: 1920-1980 MHz (Uplink), 2110-2170 MHz (Downlink) FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990MHz (Downlink) FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894MHz (Downlink) FDD Band 8: 880-915 MHz (Uplink), 925-960MHz (Downlink) CDMA2000–850MHz: 824–849MHz (Uplink) CDMA2000–1900MHz: 1850–1910MHz (Uplink)		
Type of modulation	GSM-mode: GMSK GPRS-Mode: 8-PSK FDD-Mode Release99: QPSK FDD Mode Release 5+6: 16QAM additionally CDMA2000: QPSK, 8-PSK, 16-QAM		
Number of channels	GSM 850: 128 – 251, 125 channels GSM1900: 512 – 810, 300 channels FDD-Band 1: UARFCN range: 9612 – 9750 – 9888 FDD Band 2: UARFCN range 9262 – 9400 – 9538 FDD Band 5: UARFCN range 4132 – 4183 – 4233 FDD Band 8: UARFCN range 2712 – 2788 – 2863 CDMA2000: --		
EMISSION DESIGNATOR(S)	248KGXW (GSM/GPRS-Mode) 250KG7W (EDGE-Mode) FDD Mode: 4M19F9W CDMA2000: 1M28F9W		
Antenna Type	☒ Integrated ☐ External, no RF- connector ☐ External, separate RF-connector		
Antenna Gain	☐ conducted: Max. xxx dBi gain at GSM850 ☒ radiated: Max. 3dBi gain at GSM850/FDD 5, declared by applicant ☒ radiated: Max. 4dBi gain at GSM1900/FDD 2, declared by applicant		
MAX PEAK Output Power: GSM 1900 Radiated	28.61 dBm (726mW) - measured 25.26 dBm (336mW) - measured		
MAX PEAK Output Power: GSM 1900 Conducted	Not tested, compare initial certification report 80-VN379-203 Rev. A Not tested, compare initial certification report 80-VN379-203 Rev. A		
FCC-ID	contains FCC ID NCMOMO0491-I		
IC	contains IC ID 2734A-MO0491		
Installed option	--		
Special EMI components	--		
EUT sample type	☐ Production	☒ Pre-Production	☐ Engineering

3.2. Configuration of cables used for testing

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	USB cable	Micro USB connection cable	--	--	Approx. 1.3m

Reamrk:

3.3. EUT: Type, S/N etc. and short descriptions used in this test report

(Applicant's declaration)

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	E-Reader with integrated Option Wireless PCI Express Mini Card	DR800SG	IMEI: 352111030013 501	E-Reader:1.0 Module: Rev. D1025-STUTABGD-3574 1	1.0
EUT B	E-Reader with integrated Option Wireless PCI Express Mini Card	DR800SG	IMEI: 352111030013 527	E-Reader:1.0 Module: Rev. D1025-STUTABGD-3574 1	1.0
EUT C	E-Reader with integrated Option Wireless PCI Express Mini Card	DR800SG	IMEI: 352111030014 210	E-Reader:1.0 Module: Rev. D1025-STUTABGD-3574 1	1.0

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

(Applicant's declaration)

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	UE Switching mode adaptor (AC/DC Adaptor)	UE05WCP-050100SPA	UE080710HK ATS1-R	Input: 100-240V AC, 50/60Hz, 0.2A max. Output: 5.0V DC, 1A	--
AE 2	USB cable	Micro USB	--	0.97m long	--
AE 3	Notebook	Dell Latitude D610	PC4	--	Windows XP

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.5.EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
Set. 1	EUT A + AE 2 + AE 3	Set-up with notebook
Set. 2	EUT B + AE 1 + AE 2	Set-up with AC/DC Adaptor
Set. 3	EUT C + AE 1 + AE 2	Set-up with AC/DC Adaptor

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.6. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	GSM 850 Idle mode BCCH 50	The mobile station is synchronized to the Broadcast Control Channel (BCCH) and listening to the Common Control Channel (CCCH). Periodic location update is disabled.
op. 2	GSM 850 TCH mode TCH=128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 3	GSM 1900 Idle mode BCCH 651	The mobile station is synchronized to the Broadcast Control Channel (BCCH) and listening to the Common Control Channel (CCCH).
op. 4	GSM 1900 TCH mode TCH=512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 5	E-GPRS 850 TCH Mode PCL=0 (max. power) TCH=128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8-PSK modulation, slot 3 active, uplink gamma: 33dBm. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 6	E-GPRS 1900 TCH Mode PCL=0 (max. power) TCH=512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8-PSK modulation, slot 3 active, uplink gamma: 3 (30dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 7	Charging battery	Charging standard battery. This operating mode is combined with other op. modes.

*) EUT operating mode no. is used to simplify the test report.

3.7. Parameter Settings on mobile phone and base station CMU200

Following settings apply to the MS during the measurements in **GSM/(E)GPRS-Mode** only:

Parameter	Traffic Mode	Idle Mode
Traffic Channels mobile station (EUT)	GSM 850 TCH _{MS} = 128 / 192 / 251 GSM 1900 TCH _{MS} = 512 / 681 / 810	--
maximum power level (PCL)	GSM 850: PCL = 5 (2 Watt) GSM 1900: PCL = 0 (1 Watt)	--
Modulation	GSM: GMSK-Modulation Scheme EDGE: 8-PSK Modulation Scheme	--
DTX	off	--
Bitstream	PRBS 2E9-1 (pseudo-random-sequence) – CCITT 0.153	
Timeslot	3	
Hopping	off	
Timeslot (slot mode)	GSM-Mode: single GPRS-Mode: maximum allowed uplink slots no. according MS class	
MS slot class	Class 10	
Maximum data transmission rate, single time slot	GSM: 17,6 kBit/s Slot EDGE: 59,2 kBit/s Slot	
Speech transcoding (Traffic Mode)	Full rate Version 1	
Mode	BCCH and TCH	
BCCH – base station (CMU,CMD)	GSM 850: 180 GSM 1900: 651	
TCH – base station (CMD, CMU)	auto	
Power level TCH – base station (used timeslot level)	- 70 dBm	
Power level BCCH – base station (control channel level)	- 80 dBm	
External attenuation RF/AF-Input/Output	Accord. calibration prior to measurements	
Mobile Country Code	310	310
BS_AG_BLK_RES	Not applicable	0
Paging reorganisation		Off (0)
Signalling channel		SDCCH
Location Update		Auto
Cell access		Disabled (barred)

Settings for CMU (general)

Repetition	Continuous	
Stop condition	None	
Display mode	Max./Min	
Statistic Count	1000 Bursts	
Decoder	Standard	

Additional settings on the base stations CMU200 for frequency stability measurements

4. DESCRIPTION OF TEST SET-UP's

4.1. Test set-up for radiated measurements


The radiated emissions from the test device are measured first as exploratory measurement in a FCC recognized semi anechoic chamber (registration no 99538) or fully anechoic chamber with the dimensions of 8.05m x 6.85m x 5.48m. Very critical frequencies within a defined range, can be re-checked on CETECOM's Open Area Test side, recognized by the FCC to be compliant with ANSI 63.4: 2001 according registration no. 99538.

The EUT and accessories are placed on a non-conducting tipping table of 0.8 meter height (semi-anechoic chamber) or 1.55m height (fully-anechoic chamber) which is situated in the middle of the turntable. The turntable can rotate the device under test 360 degree, the tipping table can rotate the device from laid to standing position. This way the device under test can be rotated in all three orthogonal planes in order to maximize the detected emissions. The turn- and tipping table are controlled by a controller unit. All positions manipulations are software controlled from a operator PC.

The measurements are performed for both receiving antenna polarisations: vertical and horizontal.

Up to 18GHz a measurement distance of 3 meters is used, above 18GHz the distance is 1meter. A biconical-logarithmic antenna up to 1 GHz and a horn antenna for frequencies above 1 GHz used. (see equipment list)

The EUT is powered either by a external DC-supply with nominal voltage or a AC/DC power supply as accessory. The communication signalling is performed from outside the chamber with a communication test simulator by airlink.

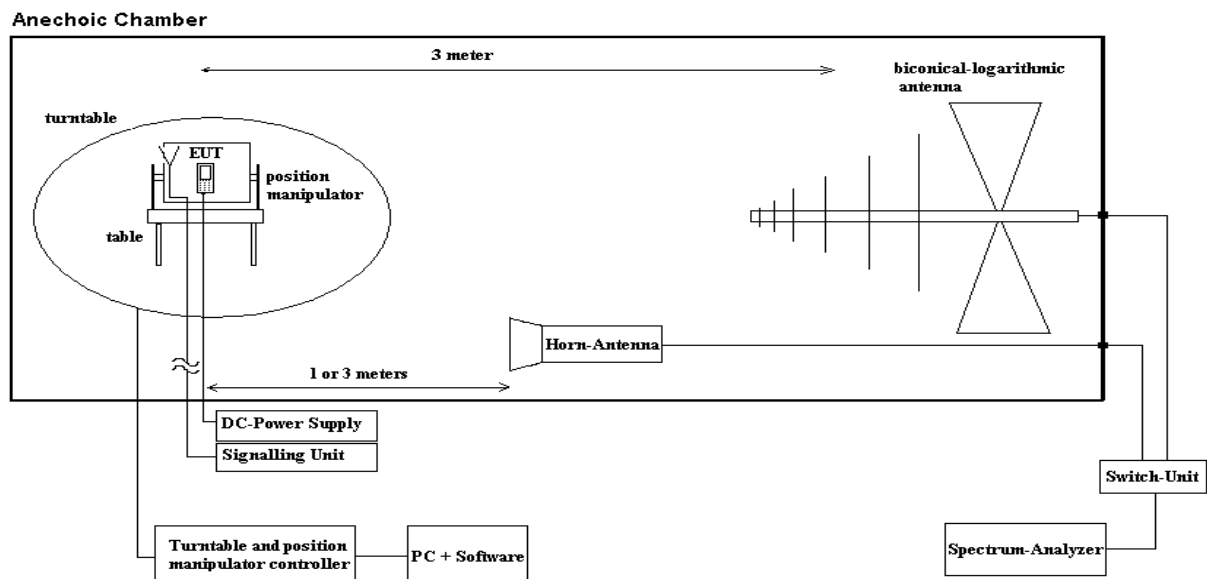

Schematic: radiated measurements test set-up

5. Measurements

5.1. RF power output (Conducted and Radiated)

REFERENCES

FCC: §2.1046 (conducted), §22.913(a)(2), § 24.232(c)

IC: RSS-132:4.4 + SRSP 503:5.1.3 for GSM 850; RSS-133:6.4 + SRSP-510:5.1.2 for GSM 1900

- Maximum Power Output of the mobile phone should be determined while measured conducted and radiated way.
- Limit: 30dBm±2dB Tolerance

5.1.1. CONDUCTED RF-POWER

Tests not performed, pls. compare original results from initial device certification, conducted test report FCC Part 22&24: **80-VN379-203 Rev. A, December 19, 2008**

5.1.2. RADIATED RF-POWER

TEST METHOD

The measurements were made at the upper, center, and lower carrier traffic frequencies of the PCS band. Choosing three TX-carrier frequencies of the mobile phone (1850.2 MHz, 1880 MHz and 1909.8 MHz), should be sufficient to demonstrate compliance.

The measurements were performed by using the **substitution method** (ANSI/TIA/EIA 603) with a spectrum-analyzer. This method can be described like follows:

- 1.) choosing of suitable spectrum-analyzer settings for performing the measurements. This settings of the spectrum analyzer must be maintained for both stages of the measurements: EUT emission measurements and also for measurements of the substituted level.

Parameter	Setting for GSM measurements	Settings for UTRA/FDD measurements
RBW	1 MHz	10 MHz
VBW	10 MHz	10 MHz
Span	8 MHz	8 MHz
Detector Mode	Positive max-hold	Positive max-hold
Average	off	off
Sweep Time	coupled	coupled

- 2.) The maximum level of the peak power was recorded, while the emissions were maximized by rotating the EUT in three orthogonal axes, which was situated on a non-conductive turntable of 1.55 m height ($P_{MEAS,1}$). This was performed for both measuring antenna polarisations (vertical/horizontal), the maximum of both values is used for further measurements and final substitution ($P_{MEAS,1,MAX}$).
- 3.) As the maximum emission is recorded, the EUT is replaced by a frequency dependant suitable antenna, which is connected to a RF-signal generator, which is transmitting on the determined worst-case frequency as determined in step 2.
- 4.) The RF-signal level of the signal generator is adjusted as long the same worst-case level determined first step is measured at the spectrum analyzer ($P_{SMHU}=P_{MEAS,1,MAX}$)
- 5.) Than the RF-signal cable is disconnected from the antenna and connected to a power-level meter. The level is determined ($P_{MEAS,2}$).
- 6.) The final result is calculated by adding the ERP/EIRP gain of the antenna which substitutes the EUT.

$$P_{EUT,SUBST} = P_{MEAS,2} + G_{Antenna}$$

RESULTS (RADIATED)

GSM850

Channel/ Frequency (MHz)		Peak Output Power (dBm)			Antenna Polarisation for maximum Power	Verdict
		PK	AV			
GSM 850	Channel 128/ 824.2 MHz	25.26	1.)	ERP-Value	V/H	Passed
	Channel 192/ 837.0 MHz	24.94				
	Channel 251/ 848.8 MHz	23.33				
E-GPRS 850	Channel 128/ 824.2 MHz	23.53	1.)	ERP-Value	V/H	Passed
	Channel 192/ 837.0 MHz	24.68				
	Channel 251/ 848.8 MHz	24.37				

Remark: 1.) compare initial conducted test report FCC Part 22&24: **80-VN379-203 Rev. A**, December 19, 2008 for Peak to AV ratio. Typical values for GMSK modulation max. 0.2dB and for 8-PSK: max 4dB

GSM1900

Channel/ Frequency (MHz)		Peak Output Power (dBm)			Antenna Polarisation for maximum Power	Verdict
		PK	AV			
GSM 1900	Channel 512/ 1850.2 MHz	28.61	1.)	EIRP-Value	V/H	Passed
	Channel 661/ 1880.0 MHz	27.49				
	Channel 810/ 1909.8 MHz	24.14				
E-GPRS 1900	Channel 512/ 1850.2 MHz	27.01	1.)	EIRP-Value	V/H	Passed
	Channel 661/ 1880.0 MHz	26.02				
	Channel 810/ 1909.8 MHz	23.26				

Remark: 1.) compare initial conducted test report FCC Part 22&24: **80-VN379-203 Rev. A**, December 19, 2008 for Peak to AV ratio. Typical values for GMSK modulation max. 0.2dB and for 8-PSK: max 4dB

AMBIENT ENVIRONMENTAL CONDITIONS

Temperature	23 °C
Relative Humidity	53 %
Air pressure	1004 hPa

TEST EQUIPMENT

Used equipment (see reference in the annex)
016, 133, 262, 439, 264, 460, 443

5.2. Occupied bandwidth

REFERENCES

FCC: §2.1049; §22.917(a), §24.238(a)

IC:RSS-Gen:4.6.1

„the **occupied bandwidth** is the frequency bandwidth, such that, below it lower and above it upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated.

Tests not performed, pls. compare original results from initial device certification, conducted test report
FCC Part 22&24: **80-VN379-203 Rev. A, December 19, 2008**

5.3. Radiated emissions, below 30 MHz, §15.205 and §15.209, RSS210, RSS310, RSS-gen

TEST LOCATION AND EQUIPMENT (for reference numbers please see chapter 'List of test equipment')

test location	☒ CETECOM Essen (Chapter. 2.2.1)	☐ Please see Chapter. 2.2.2	☐ Please see Chapter. 2.2.3
test site	☒ 441 EMI SAR	☐ 487 SAR NSA	☐ 337 OATS
receiver	☐ 377 ESCS30	☒ 001 ESS	☐ 347 Radio.lab.
spectr. analys.	☐ 381 380 FSBS	☐ 120 FSEM	☐ 264 FSEK
antenna	☐ 048 EMCO3143	☐ 133 EMCO3115	☐ 302 BBHA9170
signaling	☐ 298 CMU	☐ 460 CMU	☐ 289 CBL 6141
power supply	☐ 456 EA 3013A	☐ 457 EA 3013A	☒ 030 HFH-Z2
otherwise	☐ 400 FTC40x15E	☐ 401 FTC40x15E	☐ 477 GPS
	☐ 459 EA 2032-50	☐ 268 EA- 3050	☐ 494 AG6632A
	☐ 498 NGPE 40	☐ 482 Filter Matrix	

STANDARDS AND LIMITS: CFR 47, PART 15, SUBPART B, §15.205, §15.209, ANSI C63.4

Frequency [MHz]	Field strength		Measurement distance [meters]	Remarks
	[µV/m]	[dBuV/m]		
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3m
0.490 – 1.705	24000/f (kHz)	87.6 – 20 Log(f) (kHz)	30	Correction factor used due to measurement distance of 3m
1.705 – 30	30	29.54	30	Correction factor used due to measurement distance of 3m

Remark: * decreases with the logarithm of the frequency

TEST CONDITION AND MEASUREMENT TEST SET-UP

link to test system (if used):	☒ air link	☐ cable connection	☐
EUT-grounding	☒ none	☐ with power supply	☐ additional connection
Equipment set up	☒ table top	☐ floor standing	
Climatic conditions	Temperature: (24°C)		Rel. humidity: (42)%
EMI-Receiver (Analyzer) Settings	Span/Range: 9kHz to 150kHz; 150 kHz to 30 MHz RBW/VBW: 200Hz/auto; 10 kHz/ auto (CISPR#16) Detector/ Mode: PEAK, TRACE max-hold mode, repetitive scan for exploratory measurements Quasi-Peak, for final measurement on critical frequencies (f<1GHz)		

GENERAL MEASUREMENT PROCEDURES:

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.4: 2003

The **Equipment under Test** (EUT) was set-up to defined operating mode and installed (connected) to accessory equipment according the general description of use given by the applicant.

The measurement loop antenna was situated in 3m distance to the EUT. Radiated magnetic emission measurements were made with the antenna situated in 1 meter height. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions, the EUT itself either over 3-orthogonal axes (no defined usage position) or 2-orthogonal axis (defined usage position) by the position manipulator.

According the standard the compliance should be checked in 30m and 300m measurement distance. Therefore a additional extrapolation factor was used in order to normalize the measurement data. The frequency dependent extrapolation factor used for this reduced measurement distance, can be found in the chapter annexes.

MEASUREMENT RESULTS

Set-up No.		2								
Operating Mode		4								
Diagram no.	Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB) (C _F)	Margin (dB) (M)	Limit (dBμV/m) (L _T)
3.01	-- ^{1.)}	< 20.00	10.00	9/150kHz	1.00	H/V	0..360°	--	--	--
3.02	-- ^{1.)}	< 20.00	10.00		1.00	H/V				
3.03	-- ^{1.)}	< 22.00	10.00		1.00	H/V				

Remark: 1.) noise level, no specific emissions discovered

*.) see also plots enclosed in annex A1

Margin to Limit:

$$M = L_T - R_R + C_F + D_F$$

$$= L_T - R_R + (AF_{ANTENNA} + Cable_{LOSS}) + D_F$$

Remark: positive margin means passed result

Abbreviations used:

- R_R : Receiver readings in dBμV/m
- C_F: Transducer in dB = AF (antenna factor) + CL (cable loss)
- D_F: distance correction factor (if different measurement distance used than specified in the standard)
- L_T : Limit in dBμV/m

VERDICT

Summary of measurement results for radiated frequencies below 30 MHz: passed

5.4. Emission limits (Spurious emission radiated) $f > 30$ MHz

REFERENCES

FCC: §2.1051-conducted, §2.1053(a)-radiated, §22.917(a)(b); §24.238(a)(b) §2.1057(1)

IC: RSS-132:4.5.1, RSS-133:6.5.1 - TX-mode

RSS-132:4.6, RSS-133: 6.7(b) – RX-mode

„the power of emissions shall be attenuated below the transmitter output power (p) by at least least $43 + 10 \log(P)$ dB“

FREQUENCY RANGE

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The detector used was Peak.

The specification that all emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range of the mobile phone (1 to 0.001 W) to a constant limit of -13 dBm.

DESCRIPTION OF SET-UP

- see radiated set-up in chapter 4.1

SETTINGS ON MOBILE PHONE

The measurements were made at the upper, middle, and lower carrier frequencies of the operating band. Choosing three representative TX-carrier frequencies of the mobile phone within each operable GSM band, should be sufficient to demonstrate compliance with the emissions limits outside and adjacent to the frequency blocks.

The individual settings were made according chapter 3.7

TEST METHOD RADIATED:

By rotating the EUT in three orthogonal planes, the emissions were recorded with Peak-Detector and Hold-Max function of the spectrum-analyzer. If the harmonic could not be detected above the noise floor, the ambient level was recorded. Measurement distance is 3m for frequencies up to 18GHz and 1m for frequencies greater than 18GHz. The readings on the spectrum analyzer are corrected with annually performed chamber path calibration values (see chapter 7), so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 as described in chapter 5.1

SETTINGS OF SPECTRUM-ANALYSER

Frequency range	RBW (resolution bandwidth)	VBW (video bandwidth)
BAND-EDGE compliance: 1MHz immediately adjacent to the frequency blocks	1% from applicants stated/measured emission bandwidth	3..10 times the RBW
More than 1 MHz outside and adjacent the frequency blocks	1 MHz	3..10 MHz

RESULTS (CONDUCTED)

Tests not performed, pls. compare original results from initial device certification, conducted test report FCC Part 22&24: **80-VN379-203 Rev. A, December 19, 2008**

RESULTS (RADIATED)

5.4.1. GMSK 850 Mode: Op. Mode 4, Set-up 3

Lowest channel: 128

Transmitting channel/ frequency: TX = 824.2 MHz							
Sweep frequency range: [MHz]	Diagram number (H/V)	Frequency of emission [MHz]	Worst-Level Polarisation	Transducer factor [dB]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1 ^{2.)}	8.50	978.62	H	--	-28.65	-13	Passed ^{2.)}
	8.51	988.34	V	--	-28.66		
Sweep 2 ^{4.)}	8.52	824.00	H	--	-21.00		Passed ^{4.)}
	8.53	824.00	V	--	-25.00		
Sweep 4	8.54	2590.8	H	--	-23.57		Passed
	8.55	2623.2	V	--	-23.15		
Sweep 5	8.56	11889.0	H	--	-34.66		Passed
	8.57	11885.0	V	--	-34.65		Passed

Remarks: see diagrams enclosed in annex A1

- 1.) only results near 20dB to the limit are referenced or noise level
- 2.) TX-carrier on the diagram
- 4.) Band-Block Edge compliance

Middle channel: 192

Transmitting channel/ frequency: TX = 837 MHz							
Sweep frequency range: [MHz]	Diagram number (H/V)	Frequency of emission [MHz]	Worst-Level Polarisation	Transducer factor [dB]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1 ^{2.)}	8.58	976.67	H	--	-28.85	-13	Passed ^{2.)}
	8.59	982.46	V	--	-28.95		
Sweep 4	8.60	2648.4	H	--	-23.30		Passed
	8.61	2662.9	V	--	-23.63		
Sweep 5	8.62	11834.0	H	--	-34.66		Passed
	8.63	11889.0	V	--	-34.33		Passed

Remarks: see diagrams enclosed in annex A1

- 1.) only results near 20dB to the limit are referenced or noise level
- 2.) TX-carrier on the diagram

Highest channel: 251

Transmitting channel/ frequency: TX = 849.8 MHz							
Sweep frequency range: [MHz]	Diagram number (H/V)	Frequency of emission [MHz]	Worst-Level Polarisation	Transducer factor [dB]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1 ^{2.)}	8.64	933.91	H	--	-29.14	-13	Passed ^{2.)}
	8.65	959.18	V		-29.48		
Sweep 3 ^{4.)}	8.66	849.02	H	--	-19.10		Passed ^{4.)}
	8.67	849.02	V		-24.66		
Sweep 4	8.68	2442.8	H	--	-24.38		Passed
	8.69	2756.6	V		-23.43		
Sweep 5	8.70	11797.0	H	--	-34.81		Passed
	8.71	11888.0	V		-35.14		Passed

Remarks: see diagrams enclosed in annex A1

1.) only results near 20dB to the limit are referenced or noise level

2.) TX-carrier on the diagram

4.) Band-Block Edge compliance

5.4.0.1. GSM 1900 Mode: Op. Mode 4, Set-up 1**Lowest channel: 512**

Transmitting channel/ frequency: TX = 1850,2 MHz							
Sweep frequency range: [MHz]	Diagram number (H/V)	Frequency of emission [MHz]	Worst-Level Polarisation	Transducer factor [dB]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1	8.01	998.06	H	--	-29.67	-13	Passed
	8.02	904.69			-29.96		
Sweep 2	8.07	2634.1	V	--	-21.72		Passed ^{2.)}
	8.08	2652.1			-21.46		
Sweep 3	8.13	1850.0	H	--	-16.43		Passed ^{4.)}
	8.14	1850.0			-20.92		
Sweep 5	8.17	3685.0	V	--	-45.0		Passed
		5547.0			-35.2		
		9253.0			-38.2		
	8.18	3685.0	H	--	-46.3		
Sweep 6	8.23	16954.0	V	--	-29.50		Passed
	8.24	17952.0			-24.40		
Sweep 7	8.29			--			Passed

Remark: see diagrams for more details, only worst-case polarisation mentioned

2.) Peaks from Set-up, TCH&BCCH of EUT and base station signals

4.) Band-Block Edge compliance

Middle channel: 661

Transmitting channel/ frequency: TX = 1880,0 MHz							
Sweep frequency range: [MHz]	Diagram number (H/V)	Frequency of emission [MHz]	Worst-Level Polarisation	Transducer factor [dB]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1	8.03 8.04	949.4 961.12	V	--	-29.95 -29.68	-13	Passed
Sweep 2	8.09 8.10	2673.7 2641.1	V	--	-21.41 -21.50		Passed 2.)
Sweep 5	8.19	3758.0 5639.0 9400.0	H	--	-41.7 -31.7 -40.6		Passed
	8.20	3759.0 5639.0 9400.0	V	--	-44.1 -36.5 -39.4		
Sweep 6	8.25 8.26	17868.0 17916.0	V	--	-25.93 -24.73		Passed
Sweep 7	8.30			--			Passed

Remark: see diagrams for more details, only worst-case polarisation mentioned

2.) Peaks from Set-up, TCH&BCCH of EUT and base station signals

Highest channel: 810

Transmitting channel/ frequency: TX = 1908,8 MHz							
Sweep frequency range: [MHz]	Diagram number (H/V)	Frequency of emission [MHz]	Worst-Level Polarisation	Transducer factor [dB]	Result [dBm]	Limit [dBm]	Verdict
Sweep 1	8.05	990.28		--	-30.26	-13	Passed
	8.06	990.28			-29.97		
Sweep 2 ^{2.)}	8.11	2637.3		--	-21.62		Passed ^{2.)}
	8.12	2551.1			-22.04		
Sweep 4 ^{4.)}	8.15	1910.0		--	-21.61		Passed ^{4.)}
	8.16	1910.0			-24.60		
Sweep 5	8.21	3814.0		--	-41.8		Passed
		5731.0			-35.7		
	8.22	3814.0		--	-44.0		
		5731.0			-38.8		
Sweep 6	8.27	17879.0		--	-25.89		Passed
	8.28	17844.0			-24.81		
Sweep 7	8.31			--			Passed

Remark: see diagrams for more details, only worst-case polarisation mentioned

2.) Peaks from Set-up, TCH&BCCH of EUT and base station signals

4.) Band-Block Edge compliance

AMBIENT ENVIRONMENTAL CONDITIONS

Temperature	24 °C
Relative Humidity	49 %
Air pressure	1005 hPa

TEST EQUIPMENT

Used equipment (see reference in the annex)
016, 133, 262, 302, 264, 439, 460, Switch Unit FAR

5.5. Frequency stability on temperature and voltage variations

REFERENCES

FCC: §2.1055, §22.355, §24.235

§22.355 Table C-1; § 24.235

“The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block”

§ 2.1055

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

**Tests not performed, pls. compare original results from initial device certification, conducted test report
FCC Part 22&24: 80-VN379-203 Rev. A, December 19, 2008**

6. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Thus, following table shows expectable uncertainties for each measurement type performed.

Measurement	Frequency range	Calculated uncertainty based on a confidence level of 95%	Remarks:
RF-Power Output conducted	9 kHz .. 20 GHz	1 dB	--
RF-Power Output radiated	30 MHz .. 4 GHz	3,17 dB	Substitution method
Conducted RF-emissions on antenna ports	9 kHz .. 20 GHz	1 dB	--
Radiated RF-emissions enclosure	150 kHz .. 30 MHz	5 dB	Magnetic field
	30 MHz .. 1 GHz	4,2 dB	E-Field
	1GHz .. 19 GHz	3.17 dB	Substitution method
Occupied bandwidth	9 kHz .. 4 GHz	0,1272 ppm (Delta Marker method)	Frequency error
		1 dB	Power
Emission bandwidth	9 kHz .. 4 GHz	0,1272 ppm (Delta Marker method)	Frequency error
		1 dB	Power
Frequency stability	9 kHz .. 20 GHz	0,0636 ppm	--
Conducted emission on AC-mains port (U _{CISPR})	9 kHz .. 150 kHz	4 dB	--
	150 kHz .. 30 MHz	3.6 dB	

Table : measurement uncertainties valid for conducted/radiated measurements

7. Calibration method of anechoic chamber

For non-critical frequencies a pre-calibration method was used for determining the relevant radiated field-strength of radiated spurious in the anechoic chamber.

Generally the measured value is influenced by the characteristics of the used cables, filters, antenna, but also by the characteristic of the anechoic chamber.

By defining a **transducer** value, which include all characteristics of the signal propagation path (used equipment, cables, properties of anechoic chamber, etc..) from the source of radiation to the final reading equipment (spectrum-analyzer), the measured value can be corrected in order to get the real value of the device under test.

The method resumes as follows:

- 1.) determination of the path-loss of all cables used on the TX- and RX-side, which are used for the radiated measurement in the specific set-up for 1 meter and 3 meter distance.
- 2.) connection of the cables to the relevant antennas used for calibration.
- 3.) determination of the **space attenuation loss** (G) in the anechoic-chamber for both horizontal and vertical antenna polarisations:

A signal generator connected to the TX-antenna sweeps the frequency range of interest (30 MHz to 19.5 GHz) with a level of -30dBm - the readings on the RX-side on the spectrum analyzer gives the **space attenuation loss**. The distance between RX- and TX-antenna is 3 meter for frequencies below 18 GHz, and 1 meter for frequencies above 18 GHz.

- 4.) Mathematical determination of the frequency dependant transducer values ($TD_{H/V}$):

$$TD_{H/V} = G_{H/V} + B_{H/V} - 10 \cdot \log_{10}(1,64) + D + E - F$$

Abbreviations:

$TD_{H/V}$ = $\lambda/2$ transducer values for horizontal /vertical antenna polarisations

$G_{H/V}$ = space attenuation loss horizontal/ vertical

$B_{H/V}$ = Gain of TX-antenna

$10 \cdot \log_{10}(1,64)$ = Gain in dB of $\lambda/2$ Dipole relative to isotropic radiator

D = insertion losses of RX cable

E = Loss of filters in signal path (not used for FCC measurements)

F = Gain of pre-amplifiers in signal path

- 5.) The tables below are showing the transducer values for horizontal and vertical polarisation in two reference distances (1 meter and 3 meter). EIRP can be calculated from ERP by adding the gain of the $\lambda/2$ dipole
 $EIRP = ERP + 2,14 \text{ dBi}$
- 6.) Definition of transducer tables which are programmed/ loaded in the spectrum analyzer. The readings on the spectrum-analyzer are automatically corrected by this values and can directly be compared with the limits as given in the relevant standards.

Used equipment for calibration (3 meter distance)

Used equipment (see reference)
264, 133, 020, 140, 484, 490

Used equipment for calibration (1 meter distance)

Used equipment (see reference)
302, 303, 140, 264

7.1. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

Measurement	Frequency range	Calculated uncertainty based on a confidence level of 95%	Remarks:
RF-Power Output conducted	9 kHz .. 20 GHz	1.0 dB	--
RF-Power Output radiated	30 MHz .. 4 GHz	3.17 dB	Substitution method
Conducted RF-emissions on antenna ports	9 kHz .. 20 GHz	1.0 dB	--
Radiated RF-emissions enclosure	150 kHz .. 30 MHz	5.0 dB	Magnetic field
	30 MHz .. 1 GHz	4.2 dB	E-Field
	1 GHz .. 18GHz	4.8 dB	E-Field
	1 GHz .. 20 GHz	3.17 dB	Substitution method
Occupied bandwidth	9 kHz .. 4 GHz	0.1272 ppm (Delta Marker method)	Frequency error
		1 dB	Power
Emission bandwidth	9 kHz .. 4 GHz	0.1272 ppm (Delta Marker method)	Frequency error
		1 dB	Power
Frequency stability	9 kHz .. 20 GHz	0.0636 ppm	--
Conducted emissions on AC-mains port (U _{CISPR})	9 kHz .. 150 kHz	4.0 dB	--
	150 kHz .. 30 MHz	3.6 dB	

Table : measurement uncertainties, valid for conducted/radiated measurements

8. Instruments and Ancillary

8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

8.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	emi test receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	signal generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	power meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Communication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT Firmware D2.87
053	audio analyzer	UPA3	860612/022	Firm. V 4.3
119	RT harmonics analyser/dig. flickermeter	B10	G60547	Firm.= V 3.1DHG
120	spectrum analyzer	FSEM 30	845538/011	Bios=2.1, Analyzer-Firmware= 3.30.3
140	signal generator	SMHU	831314/006	Firm.= 3.21
261	thermal power sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	power meter	NRV-S	825770/0010	Firm.= 2.6
263	signal generator	SMP 04	826190/0007	Firm.=3.21
264	spectrum analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
277	Vector-Networkanalyzer	ZVC	831363/0005	Bios= 3.3, Analyzer=3.52
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04,
298	Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f.
323	Communication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
331	climatic test chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	System-CTC-EMS-Conducted	System EMS Conducted	-	EMS-K1 Immunity Test-Software 1.20SR10
340	Communication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	power meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V4.6.1 + SW-Option K55
377	emi test receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	broadband RF field monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
383	signal generator	SME 03	842 828 /034	Firm.= 4.61
389	digital multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001,
420	System CTC CTIA-OTA	System CTC CTIA-OTA	-	EMQuest EMQ-100 Ver. 1.05
436	Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.01, Mess-Software=
441	System CTC-SAR-EMI	System EMI field (SAR)	-	EMC 32 Version 8.20,
442	System CTC-SAR-EMS	System EMS field (SAR)	-	EMS-K1 Immunity-Software 1.20SR10
443	System CTC-FAR-EMI-Spuri	System CTC-FAR-EMI-	-	Spuri 6.4a und Spuri 7.0
444	System CTC FAR-EMS	System EMS-Field (FAR)	-	EMS-K1 Immunity-Software 1.20SR10
460	Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.01/Messsoftware=
489	emi test receiver	ESU40	1000-30	Firmware=4.33, Bios=V5.1-16-3, Specification=01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
547	Universal Radiocommunication Tester	CMU 200	835390/014	R&S Test Firmware =V5.03 (current Testsoftw. f. all
551	System CTC Conducted Voltage	System Conducted Voltage	-	EMC 32 Version 8.20

8.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer
001	emi test receiver	ESS	825132/017	Rohde & Schwarz
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz
007	DC - LISN (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz
009	power meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz
012	signal generator (EMS-cond.)	SMY 01	839069/027	Rohde & Schwarz
013	power meter (EMS cond.)	NRVD	839111/003	Rohde & Schwarz
014	insertion unit (EMS cond.)	URV5-Z2	838519/029	Rohde & Schwarz
015	insertion unit (EMS cond.)	URV5-Z4	838570/024	Rohde & Schwarz
016	line impedance simulating network	Op. 24-D	B6366	Spitzenberger+Spies
017	Communication Tester	CMD 60 M	844365/014	Rohde & Schwarz
020	horn antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO
021	loop antenna (H-Field)	6502	9206-2770	EMCO
022	audio measurement amplifier	2636C	1537643	Brüel & Kjaer
030	loop antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz
031	absorbing clamp	MDS-21	863325/015	Rohde & Schwarz
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz
048	bicon. - log. antenna (SAR)	3143	1108	EMCO
049	current clamp (injection)	F-120-2	48	FCC
050	3-ph coupling-decoupling-netw. (Burst)	CDN 300	176	Schaffner
051	VHF-current probe 20-300 MHz	ESV-Z1	872421	Rohde & Schwarz
052	notch filter DECT	WRCB 1887,82/1889,55SS	12	Wainwright Industries
053	audio analyzer	UPA3	860612/022	Rohde & Schwarz
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz
058	capacitive clamp (Burst)	IP 4	99	Hafely
059	ferrite tube	FGZ 40 X 15 E	4225	Lüthi
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies
061	ferrite tube	FGZ 40 X 15 E	4250	Lüthi
063	log.-per. antenna (Subst 1)	3146	860941/007	EMCO
065	attenuator, (6 dB) 50 Ohm, 250W	AT 50-6-250	521057	BNOS Electronics
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-	5	Wainwright GmbH
067	coupling decoupling-network	CDN801-M2/M3	272	Lüthi
068	coupling decoupling-network	CDN 801-M5	95226	Lüthi
069	EM - clamp	EM101	9535159	Lüthi
070	ferrite tube	FTC101	4199	Lüthi
071	biconical antenna (Subst 1)	HUF-Z2	863 029/010	Rohde & Schwarz
072	coupling decoupling-network	CDN801-M2/M3	276	Lüthi
083	AC - power supply, 0-10 A	EAC/MT 27010	910502096	EURO TEST
084	AC - power supply, 0-5 A	ELABO-8-34214	-	ELABO
085	AC - power supply, 0-10 A	R250	-	Schunterm.&Benningh.
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik
090	Helmholtz coil: 2x10 coils in series	-	-	RWTÜV
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba
094	artificial head (No.1)	4905	1566990	Brüel & Kjaer
098	Wireless Protocol Tester	PTW70Wlan	100093	Rohde&Schwarz
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck
110	USB-LWL-Converter	OLS-1	-	Extreme USB
119	RT harmonics analyser/dig. flickermeter	B10	G60547	BOCONSULT
120	spectrum analyzer	FSEM 30	845538/011	Rohde & Schwarz
121	notch filter GSM 1900	WRCB 1879,5/1880,5EE	15	Wainwright GmbH
122	notch filter GSM 1800	WRCB 1747/1748	12	Wainwright GmbH
123	biconical antenna (Subst 2)	HUF-Z2	860941/007	Rohde & Schwarz
131	RF-Current Probe	F-52	19	FCC
132	log.-per. antenna (Subst 2)	HUF-Z3	860862/014	Rohde & Schwarz
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO
140	signal generator	SMHU	831314/006	Rohde & Schwarz
142	attenuator (6 dB) 2 W, 8 GHz	DGL N	-	Radiall
248	attenuator	SMA 6dB 2W	-	Radiall
249	attenuator	SMA 10dB 10W	-	Radiall
252	attenuator	N 6dB 12W	-	Radiall
254	high pass GSM1800/1900/DECT	SHC 2600/12750-1,5KK	23042	Trilithic
256	attenuator	SMA 3dB 2W	-	Radiall
257	hybrid	4031C	04491	Narda
260	hybrid coupler	4032C	11342	Narda
261	thermal power sensor	NRV-Z55	825083/0008	Rohde & Schwarz
262	power meter	NRV-S	825770/0010	Rohde & Schwarz
263	signal generator	SMP 04	826190/0007	Rohde & Schwarz
264	spectrum analyzer	FSEK 30	826939/005	Rohde & Schwarz
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz
266	peak power sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH
268	AC/DC power supply	EA 3050-A	9823636	-
270	termination	1418 N	BB6935	Weinschel
271	termination	1418 N	BE6384	Weinschel
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel
273	attenuator, (10 dB) 100 W	Model 48	BF9229	Weinschel

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel
275	DC-Block	Model 7003 (N)	C5129	Weinschel
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel
277	Vector-Networkanalyzer	ZVC	831363/0005	Rohde & Schwarz
279	power divider	1515 (SMA)	LH855	Weinschel
284	coupling decoupling network	CDN 801-M1	1661	Lüthi
285	coupling decoupling network	CDN 801-S1	1642	Lüthi
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq
289	bicon. - log. antenna (OATS)	CBL 6141	4107	Schaffner Chase
290	notch filter GSM 900	WRCA 901.9/903,1SS	3RR	Wainwright GmbH
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH
295	Racal Digital Radio Test Set	6103	1572	Racal
298	Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz
299	audio microphone	134	-	Brüel & Kjaer
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck
304	fix dipole antenna 1,6 GHz	EMCO 3125-307	9907-1001	ETS
305	fix dipole antenna 1.8-2,0 GHz	EMCO 3125-306	9907-1001	ETS
306	fix dipole antenna 2,45 GHz	EMCO 3125-308	9907-1001	ETS
307	fix dipole antenna 3 GHz	EMCO 3125-309	9907-1001	ETS
312	Switch unit	TS-RSP	1000147	R&S
317	1000 Hz calibrator 94 dB SPL	4230 94dB	1542286	Brüel & Kjaer
323	Communication Tester	CMD 55	825878/0034	Rohde & Schwarz
331	climatic test chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch
335	System-CTC-EMS-Conducted	System EMS Conducted	-	Rohde & Schwarz
340	Communication Tester	CMD 55	849709/037	Rohde & Schwarz
341	digital multimeter	Fluke 112	81650455	Fluke
342	digital multimeter	Voltcraft M-4660A	IB 255466	Voltcraft
344	adaptor 150/50 Ohm	150/50	-	Krohne
345	adaptor 150/50 Ohm	150/50	-	Krohne
347	laboratory site	radio lab.	-	-
348	laboratory site	EMI conducted	-	-
349	car battery 12 V	car battery 12 V	without	-
350	car battery 12 V	car battery 12 V	without	-
354	DC - power supply 40A	NGPE 40/40	448	Rohde & Schwarz
355	power meter	URV 5	891310/027	Rohde & Schwarz
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz
358	Power Amplifier 10 kHz-220MHz	AR75A220M1	15860	Amplifier Research
362	TOSM Calibration Kit 50 Ohm	ZV-Z21/ZV-Z11	without	Rohde&Schwarz
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Rohde & Schwarz
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	EM-Test
367	audio measurement amplifier	2636	316832/001	Brüel & Kjaer
369	insertion unit (SAR-EMS, Ch. A)	URV5-Z2	100301	Rohde & Schwarz
370	insertion unit (SAR-EMS, Ch. B)	URV5-Z2	100302	Rohde & Schwarz
371	Bluetooth Tester	CBT32	100153	R&S
373	V-Network 5µH/50 Ohm	ESH3-Z6	100535	Rohde & Schwarz
374	power amplifier 0,8-3 GHz	60S1G3	306528	Amplifier Research
375	directional coupler	DC7144M1	306498	Amplifier Research
376	horn antenna 6 GHz	BBHA9120 E	BBHA 9120 E 179	Schwarzbeck
377	emi test receiver	ESCS 30	100160	Rohde & Schwarz
378	broadband RF field monitor	RadiSense III	03D00013SNO-08	DARE B.V.
383	signal generator	SME 03	842 828 /034	Rohde & Schwarz
386	coupling decoupling network	CDN USB/p	19397	Schaffner
387	coupling decoupling network	CDN L-801 M2	2051	Lüthi
388	coupling decoupling network	CDN L-801 T2	1929	Lüthi
389	digital multimeter	Keithley 2000	0583926	Keithley
390	Industry Acoustic System	MO 2000 Set	2127100123	Sennheiser
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu
394	power amplifier 80-1000 MHz	BLWA 0810-250/200	045610	Bonn-Elektronik
399	Sound Calibrator	Sound Calibrator 4231	2665101	Brüel & Kjaer
400	ferrite tube (>15 dB, EN 55022)	FTC 40 X 15 E	5559	Lüthi
401	ferrite tube (>15 dB, EN 55022)	FTC 40 X 15 E	5560	Lüthi
411	Test Cable Kit N 50 Ohm (male)	ZV-Z11	100200	R&S / Rosenberger
413	Quad-Ridge Horn Antenna	3164-04	00090667	ETS-Lindgren
414	Circularly polarized com. Antenna	3102	00033734	EMCO
415	Antenna Position Controller	2090	00035634	ETS-Lindgren
416	MAPS Positioner (light duty)	2010	-	ETS-Lindgren
420	System CTC CTIA-OTA	System CTC CTIA-OTA	-	ETS-Lindgren/Cetecom
429	MAPS-Positionier (medium duty)	2015	-	ETS-Lindgren
430	Thermo-Hygrometer	H270	54476	Dostmann electronic
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO
432	pre-amplifier 100MHz-26GHz	JS4-00102600-38-5P	1030896	Miteq USA
436	Radio Communication Tester	CMU 200	103083	Rohde & Schwarz
439	UltraLog-Antenna	HL 562	100248	Rohde + Schwarz
440	CDN for Datacable	CDN-UTP	CDN-UTP 029	EMC Partner AG,
441	System CTC-SAR-EMI	System EMI field (SAR)	-	ETS
442	System CTC-SAR-EMS	System EMS field (SAR)	-	ETS-Lindgren/Cetecom
443	System CTC-FAR-EMI-Spuri	System CTC-FAR-EMI-	-	ETS-Lindgren/Cetecom
444	System CTC FAR-EMS	System EMS-Field (FAR)	-	ETS Lindgren/Cetecom
448	notch filter WCDMA FDD II	WRCT 1850.0/2170.0-	5	Wainwright Instruments
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-	1	Wainwright Instruments
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer
455	Oscilloscope	HP 54602B	US 350 336 45	Hawlett Packard
456	DC-Power supply 0-5A	EA 3013 S	207810	Elektro Automatik
457	DC-Power supply, 0-5A	EA-3013 S	9624680	Elektro Automatik
459	DC -power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik
460	Radio Communication Tester	CMU 200	108901	Rohde & Schwarz
462	AF-Generator	MX-2020	-	Conrad
463	Universal source	HP3245A	2831A03472	Agilent
464	Thermo-Hygro-Monitor	WS-9400	without	Europe Supplies Ltd.
465	Thermo-Hygro-Monitor	WS-9400	without	Europe Supplies Ltd.
466	digital multimeter	Fluke 112	89210157	Fluke USA
467	digital multimeter	Fluke 112	89680306	Fluke USA
468	digital multimeter	Fluke 112	90090455	Fluke USA
470	Thermo-Hygro-Monitor	WS-9400	-	distr. by Conrad
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink
482	filtermatrix	FilterMatrix SAR 1	-	CETECOM (Brl)
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-	1244554	Miteq
487	NSA-Verification of CTC-SAR-EMI	System EMI field (SAR)	-	ETS
489	emi test receiver	ESU40	1000-30	Rohde & Schwarz
490	high pass 2,65 GHz>18GHz	6HC 2650/18000-3-KK	200709138	Trilithic
491	ESD Simulator dito	ESD dito	307022	EM-Test
494	power supply (GPIB)	Agilent 66332A	US 37474017	Agilent
498	Power Supply	NGPE 40/40	402	Rohde & Schwarz
500	industry Acoustic System	MO 2000 Set	100048	Sennheiser
502	band reject filter	WRCG 1709/1786-	SN 9	Wainwright
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright
517	relais swite matrix	HF Relais Box Keithley	SE 04	-
522	electronical load	EL 9000	-	ELV
523	Digitalmultimeter	L4411A	MY46000154	Agilent
524	Voltage Drop Simulator	VDS 200	0196-16	EM Test
525	Koppelnetzwerk	CNA 200	1196-01	EM Test
526	Burst Generator	EFT 200 A	0496-06	EM Test
527	Micro Pulse Generator	MPG 200 B	0496-05	EM Test
528	Load Dump Simulator	LD 200B	0496-06	EM Test
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-
531	H-field system	Lackman System	without	Lackmann
533	Impedance Stabilization Network	ISN T200A	25706	Teseq
534	Impedance Stabilization Network	ISN T400A	24881	Teseq
535	Impedance Stabilization Network	ISN T800	26321	Teseq
536	Impedance Stabilization Network	ISN ST08	25867	Teseq
541	Impedance Stabilization Network	ISN T8-Cat6	26373	Teseq Berlin
547	Universal Radiocommunication Tester	CMU 200	835390/014	Rohde & Schwarz
548	Digital-Barometer	GBP 2300	without	Greisinger GmbH
551	System CTC Conducted Voltage	System Conducted Voltage	-	-