



Prüfbericht - Nr.:		14005578 002		Seite 1 von 11 Page 1 of 11	
<i>Test Report No.</i>					
Auftraggeber: <i>Client:</i>		Lucky Plastic Factory Ltd. Suite 907-908 Chinachem Golden Plaza 77 Mody Road T.S.T. East, Kowloon Hong Kong			
Gegenstand der Prüfung: <i>Test item:</i>		Superregenerative Receiver			
Bezeichnung: <i>Identification:</i>		Refer to section 3.1		Serien-Nr.: <i>Serial No.</i>	
				Engineering Sample	
Wareneingangs-Nr.: <i>Receipt No.:</i>		040127026		Eingangsdatum: <i>Date of receipt:</i>	
				27.01.2004	
Prüfart: <i>Testing location:</i>		Refer to section 2.1			
Prüfgrundlage: <i>Test specification:</i>		FCC Part 15, Subpart B			
Prüfresultat: <i>Test Result</i>		Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The a. m. test item passed.			
geprüft / tested by: P.Poon		kontrolliert / reviewed by T.Berns			
<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> 15.05.2004 <i>Datum</i> Date </div> <div style="text-align: center;">  Unterschrift Signature </div> </div>		<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> 15.05.2004 <i>Datum</i> Date </div> <div style="text-align: center;">  Unterschrift Signature </div> </div>			
Sonstiges / Other Aspects: FCC ID: NEX-9405-49RX					
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> Abkürzungen: OK, Pass = entspricht Prüfgrundlage Fail = entspricht nicht Prüfgrundlage N/A = nicht anwendbar </div> <div style="width: 45%;"> Abbreviations: OK, Pass = passed Fail = failed N/A = not applicable </div> </div>					
Dieser Prüfbericht bezieht sich nur auf den o.g. Prüfgegenstand und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test item. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. <small>Authorized format 16.12.1996, R.M.</small>					

Prüfbericht - Nr.:

14005578 002

Test Report No.

Seite 2 von 11

Page 2 of 11

TEST SUMMARY

7.1.1 SPURIOUS RADIATED EMISSIONS

Result: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
3	GENERAL PRODUCT INFORMATION	6
3.1	PRODUCT FUNCTION AND INTENDED USE	6
3.2	CIRCUIT DESCRIPTION	6
3.3	RATINGS AND SYSTEM DETAILS.....	6
3.4	INDEPENDENT OPERATION MODES.....	7
3.5	SUBMITTED DOCUMENTS.....	7
3.6	RELATED SUBMITTAL(S) GRANTS.....	7
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION	8
4.2	TEST OPERATION AND TEST SOFTWARE	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
5	TEST METHODOLOGY.....	9
6	FIELD STRENGTH CALCULATION	9
7	TEST RESULTS.....	10
7.1.1	<i>Spurious Radiated Emissions</i>	<i>10</i>

Prüfbericht - Nr.:

14005578 002

Test Report No.

Seite 4 von 11

Page 4 of 11

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test Results

Appendix 2: Test Setup

Appendix 3: External Photographs of EUT

Appendix 4: Internal Photographs of EUT

Appendix 5: FCCID Label, Block Diagram, Schematics and User Manual

2 Test Sites

2.1 Test Facilities

Hong Kong Productivity Council
HKPC Building
78 Tat Chee Avenue
Kowloon
Hong Kong

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

	Kind of Equipment	Manufacturer	Type	S/N
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESH-3	890173/033
<input type="checkbox"/>	L/I/S/N	Rohde & Schwarz	ESH 3-Z5	849876/026
<input type="checkbox"/>	Oscilloscope	HP	54713B	US34510455
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVP	882402/033
<input type="checkbox"/>	Absorbing Clamp	Rohde & Schwarz	MDS-21	979 3/4
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVS30	842807/009
<input checked="" type="checkbox"/>	Biconical Antenna	Rohde & Schwarz	HK116	841489/015
<input checked="" type="checkbox"/>	Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
<input type="checkbox"/>	Universal Power Analyzer	Voltech	PM3000A	9915
<input type="checkbox"/>	Reference Impedance Network	Voltech	IEC 555 Standard	9946
<input type="checkbox"/>	AC Power Source	California Instr.	4500L	HK51895
<input type="checkbox"/>	Trip-Loop Antenna	Chase	LLA6142	1019
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3351
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3116	9002-3347
<input type="checkbox"/>	RF Comms Test Set	HP	8920B	US36492628
<input type="checkbox"/>	Spectrum Analyser + Tracking Gen.	HP	8596E	3639A00758
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/024
<input checked="" type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/023
<input type="checkbox"/>	BiLog Antenna	EMCO	3143	9607-1287
<input type="checkbox"/>	Isotropic Field Probe	Holladay	HI-4422	90956
<input type="checkbox"/>	Power Amplifier	Kalmus	757-LC	7620-1
<input type="checkbox"/>	Power Amplifier	Kalmus	122-FC	7620-2
<input type="checkbox"/>	Coupling Clamp	Schaffner	CDN 126	312
<input type="checkbox"/>	Couple Device Network	Fischer	CDN-M2	9604
<input type="checkbox"/>	Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30
<input type="checkbox"/>	Temperature Chamber	Binder	MK 240	9020-0028
<input type="checkbox"/>	EFT,ESD,SURGE, DIPS tester	Schaffner	Best 96	IN3796-011

3 General Product Information

3.1 Product Function and Intended Use

The equipment under test (EUT) is a RC toy car operating at 49.860MHz. The forward, backward, left and right movement are controlled by the associated transmitter.

After construction checking and declaration from the manufacturer, it is deemed that that 9389, 9406, 9407 and 9408 are same in circuit design and PCB layout as 9405, they only differ in the cosmetic design. Hence, all testing was conducted on the representative model: 9405.

FCCID: NEX-9405-49RX

Model	Product description
9389	3" R/C Smart
9405	Micro Subaru
9406	Micro Mitsubishi
9407	3" R/C Roadster
9408	Micro Citroen

3.2 Circuit Description

- 1) Q1 and the associated circuit act as a RF-receiver.
- 2) IC1 and the associated circuit act as an AF amplifier.
- 3) Q2-Q7 and the associated circuit act as a power amplifier for DC motor.

3.3 Ratings and System Details

	Receiver
Frequency range	: 49.860MHz
Number of channels	: 1
Type of antenna	: Permanently attached receiving antenna.
Power supply	: Rechargeable battery 2.4V.
Ports	: none
Protection Class	: III

3.4 Independent Operation Modes

The basic operation modes are:

- Power: On and Off
- Motor movement: left and right, forward and backward.

For further information refer to User Manual

3.5 Submitted Documents

The submitted documents are listed as follow:

- Circuit diagram
- Block diagram
- Rating lable
- User manual

3.6 Related Submittal(s) Grants

This is a single application for certification of the receiver, the transmitter for this receiver is authorized by the Certification procedure.

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation should refer to Section 5 and 7.

- There was no special software to exercise the device.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- none

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Circuit Diagram or the Technical Construction File. No additional measures were employed to achieve compliance.

5 Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.4-2001.

The equipment under test (EUT) was placed at the middle of the 80cm height turntable, and the turntable is 3 meters far from the measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360° , the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

The frequency range scanned is from the lowest radio frequency signal generated in the device which greater than 9 KHz to the tenth harmonic of the highest fundamental frequency or 40GHz, whichever is lower.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in section 7.1.1 of this test report.

6 Field Strength Calculation

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB/m.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Prüfbericht - Nr.:
Test Report No.

14005578 002

Seite 10 von 11
 Page 10 of 11

7 Test Results

7.1.1 Spurious Radiated Emissions

RESULT:

Pass

Test Specification : FCC Part 15 section 15.109
 Test Method : ANSI 63.4-2001
 Measurement Location : Semi Anechoic Chamber
 Measurement Distance : 3m
 Detector Function : Quasi Peak
 Measurement BW : 100KHz
 Supply Voltage : DC 2.4V
 Measuring Frequency Range : 30-1000MHz

Polarization: Vertical

Frequency	Reading	Antenna Factor	Attenuation of cable	Field strength at 3m	Limit at 3m	Delta to Limit
(MHz)	(dBuV)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
33.08	0.30	17.30	0.40	18.00	40.00	-22.00
34.40	0.20	16.10	0.40	16.70	40.00	-23.30
36.08	0.40	16.10	0.40	16.90	40.00	-23.10
42.20	1.60	15.00	0.40	17.00	40.00	-23.00
138.08	3.60	13.60	0.90	18.10	43.50	-25.40
186.02	1.60	15.80	1.00	18.40	43.50	-25.10
296.00	4.60	13.00	1.30	18.90	46.00	-27.10
415.28	1.40	16.10	1.60	19.10	46.00	-26.90
492.32	0.10	17.60	2.00	19.70	46.00	-26.30
720.68	0.30	20.80	2.40	23.50	46.00	-22.50
862.30	0.40	22.20	2.60	25.20	46.00	-20.80

For test results refer to Appendix 1, page 1-4

Prüfbericht - Nr.:
Test Report No.

14005578 002

Seite 11 von 11
 Page 11 of 11

Polarization: Horizontal

Frequency	Reading	Antenna Factor	Attenuation of cable	Field strength at 3m	Limit at 3m	Delta to Limit
(MHz)	(dBuV)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
33.98	0.10	15.00	0.40	15.50	40.00	-24.50
37.82	0.80	15.00	0.40	16.20	40.00	-23.80
38.18	0.90	15.00	0.40	16.30	40.00	-23.70
143.18	0.50	13.60	0.90	15.00	43.50	-28.50
176.60	0.05	15.35	1.00	16.40	43.50	-27.10
196.70	0.25	16.15	1.10	17.50	43.50	-26.00
246.98	6.00	11.65	1.15	18.80	46.00	-27.20
278.64	4.10	12.20	1.30	17.60	46.00	-28.40
341.12	4.00	13.90	1.40	19.30	46.00	-26.70
471.08	3.85	17.20	1.95	23.00	46.00	-23.00

For test results refer to Appendix 1, page 1-4

Limit

Subclause 15.109


The field strength of radiated emissions from unintentional radiators at a distance of 3 meters :

Frequency (MHz)	Field strength (microvolts/meter)	Field strength (dB μ V/m)	Measurement distance (meters)
30-88	100	$20 \cdot \log(100) = 40.0$	3
88-216	150	$20 \cdot \log(150) = 43.5$	3
216-960	200	$20 \cdot \log(200) = 46.0$	3
Above 960	500	$20 \cdot \log(500) = 54.0$	3

Prüfbericht - Nr.:
Test Report No.

14005578 002

Seite 1 von 4
Page 1 of 4

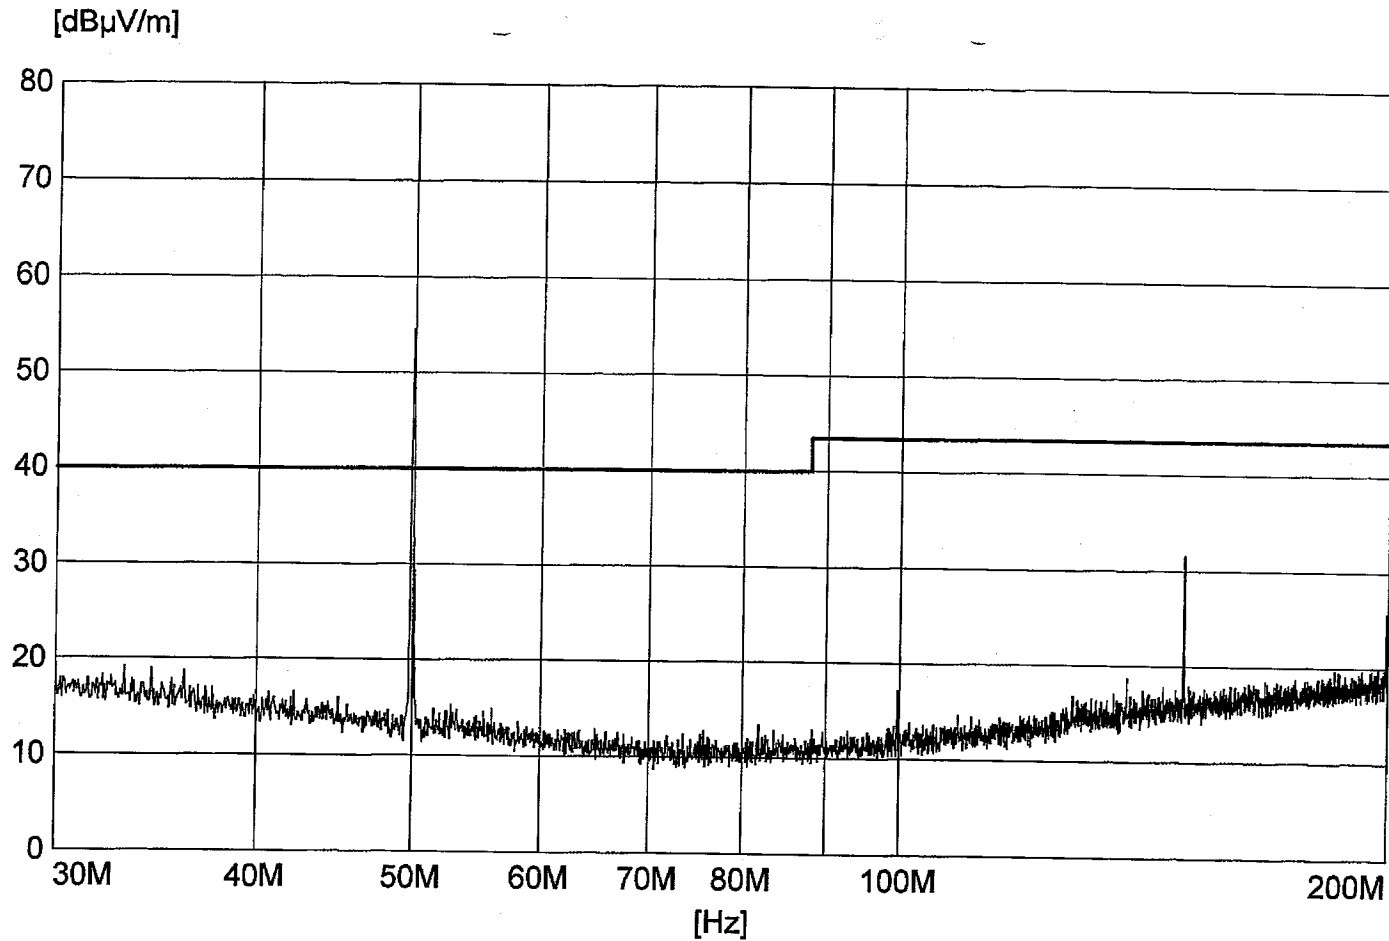

Model: 9405
- receiver on

Remark: The
narrow band signal
was generated
by generator.

— MES TUV120304B13.PK
— LIM FCC P15.109 Class B


Freq	QP	Freq	QP
33.08	18.0	186.02	18.4
34.40	16.7		
36.08	16.9		
42.20	17.0		
138.08	18.1		

Vent. Rx
motor off
49 MHz

Prüfbericht - Nr.:
Test Report No.

14005578 002

Seite 2 von 4
Page 2 of 4

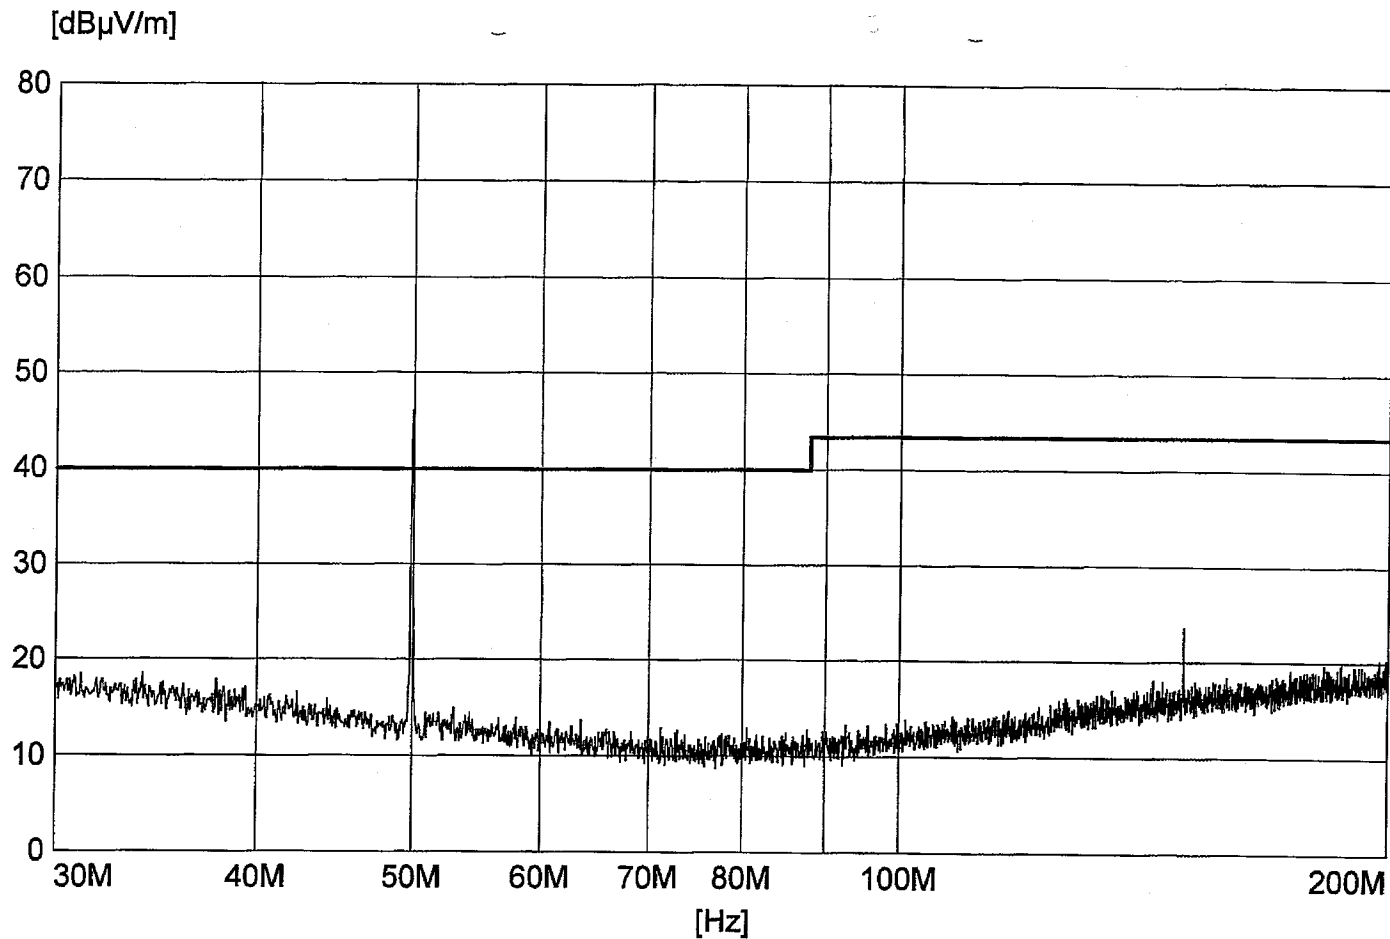

Model: 9405

- receiver on

Remark: The
narrow band signal
was generated
by generator.

— MES TUV120304B14.PK
— LIM FCC P15.109 Class B

Freq	QP	Freq	QP
33.98	15.5	176.6	16.4
37.82	16.2	186.7	17.5
38.18	16.3		
143.18	15.0		


Rx 49MHz FCC

170h.
motor off

Prüfbericht - Nr.:
Test Report No.

14005578 002

Seite 3 von 4
Page 3 of 4

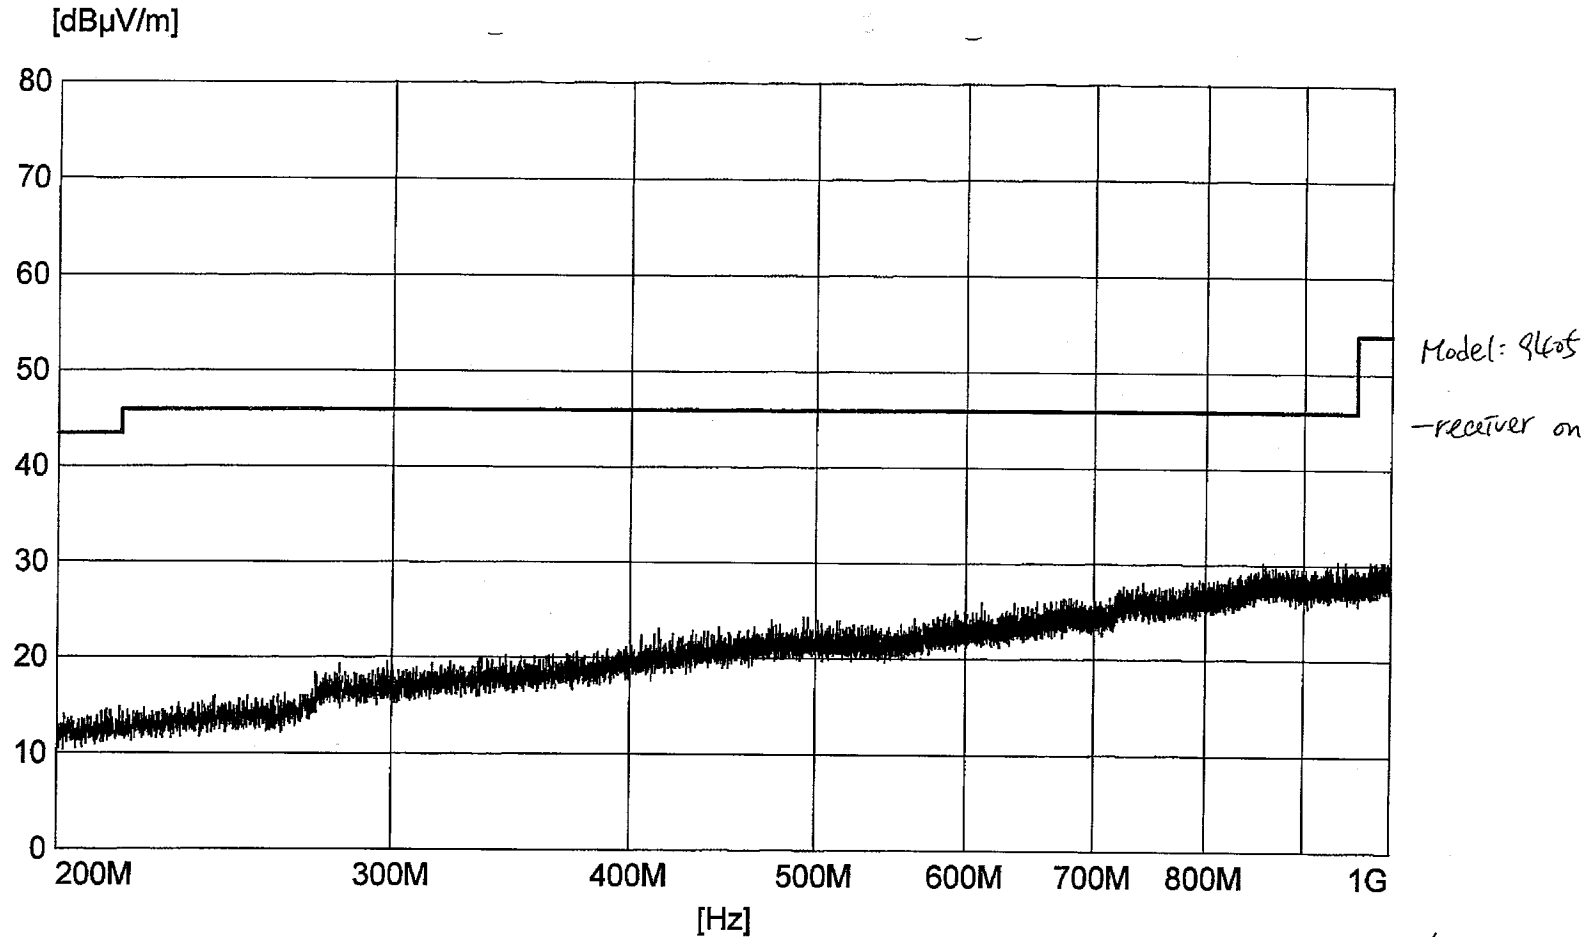

— MES TUV120304B15.PK
— LIM FCC P15.109 Class B


Freq	Qp	Freq
296.00	18.9	720.08
415.28	19.1	862.30
492.32	19.7	

fce
CEPAC RX
Vert.
motor off

Prüfbericht - Nr.:
Test Report No.

14005578 002

Seite 4 von 4
Page 4 of 4

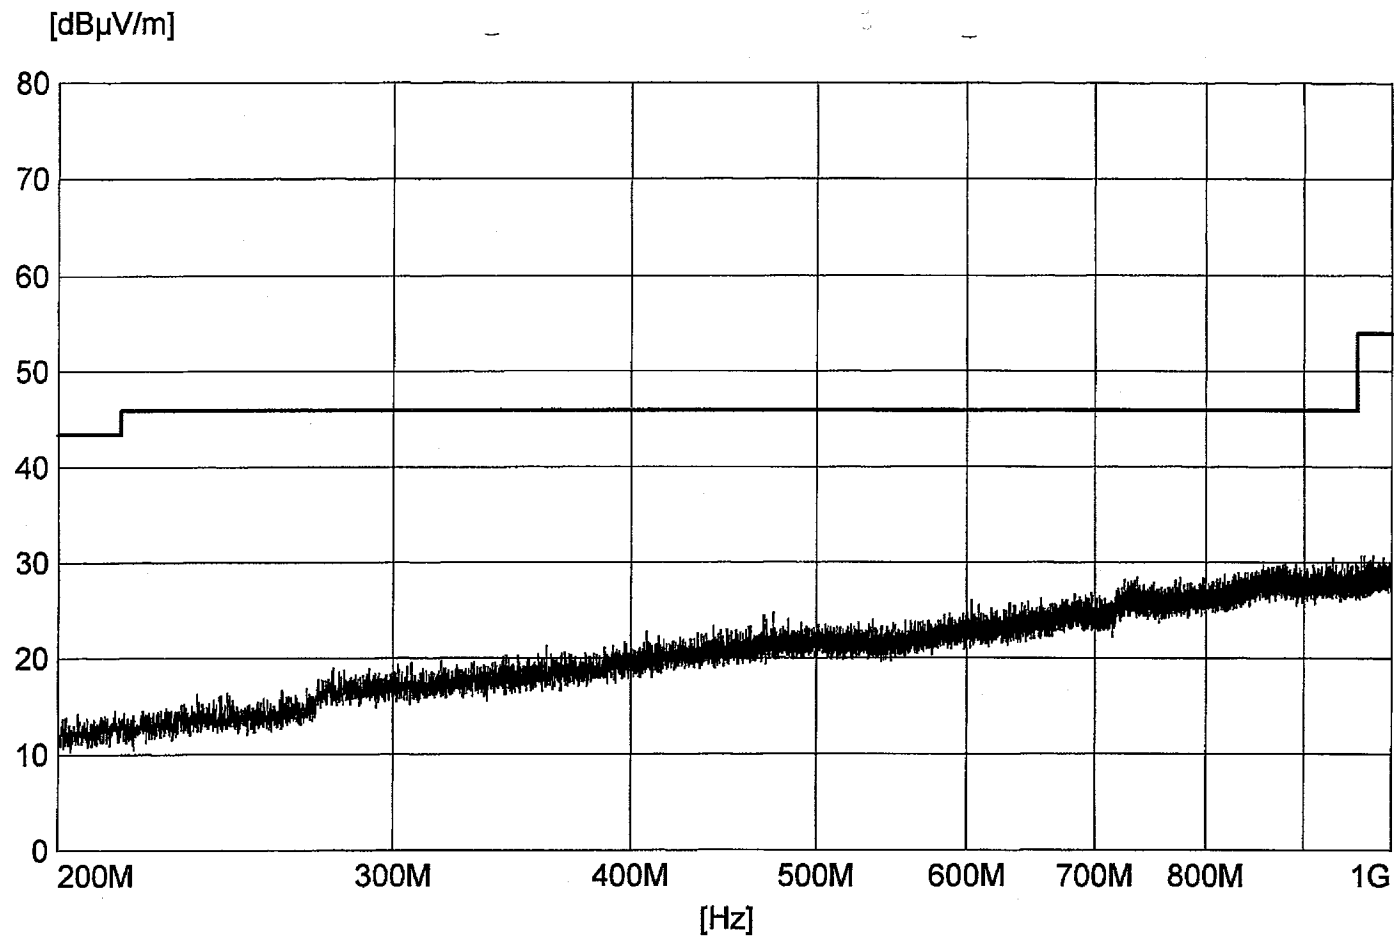

— MES TUV120304B16.PK
— LIM FCC P15.109 Class B

Freq	OP
266.88	18.8
278.64	17.6
341.12	19.3
471.08	23.0

PCC
Rx 48MHz
170m
motor off