

# FCC TEST REPORT (PART 24)

**REPORT NO.:** RF131023C29-6

MODEL NO.: 0P6B200 FCC ID: NM80P6B200

**RECEIVED:** Oct. 23, 2013

- **TESTED:** Dec. 18, 2013 ~ Dec. 28, 2013
- ISSUED: Jan. 09, 2014

**APPLICANT:** HTC Corporation

ADDRESS: No. 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

- **ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
- LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)
- **TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



## TABLE OF CONTENTS

RE	ELEASE CONTROL RECORD	3			
	CERTIFICATION				
2	SUMMARY OF TEST RESULTS	5			
	2.1 MEASUREMENT UNCERTAINTY	5			
	2.2 TEST SITE AND INSTRUMENTS	6			
3	GENERAL INFORMATION	7			
•	3.1 GENERAL DESCRIPTION OF EUT	7			
	3.2 CONFIGURATION OF SYSTEM UNDER TEST	, 8			
	3.3 DESCRIPTION OF SUPPORT UNITS	U			
	3.4 TEST ITEM AND TEST CONFIGURATION				
	3.5 EUT OPERATING CONDITIONS				
	3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	11			
	3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	11			
4	TEST TYPES AND RESULTS	12			
	4.1 OUTPUT POWER MEASUREMENT	12			
	4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT				
	4.1.2 TEST PROCEDURES				
	4.1.3 TEST SETUP				
	4.1.4 TEST RESULTS				
	4.2 FREQUENCY STABILITY MEASUREMENT	18			
	4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	18			
	4.2.2 TEST PROCEDURE	18			
	4.2.3 TEST SETUP	18			
	4.2.4 TEST RESULTS				
	4.3 OCCUPIED BANDWIDTH MEASUREMENT				
	4.3.1 TEST PROCEDURES				
	4.3.2 TEST SETUP				
	4.3.3 TEST RESULTS				
	4.3.3 TEST RESULTS				
	4.4 PEAK TO AVERAGE RATIO 4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT				
	4.4.2 TEST SETUP				
	4.4.3 TEST PROCEDURES				
	4.4.4 TEST RESULTS				
	4.5 BAND EDGE MEASUREMENT	24			
	4.5.1 LIMITS OF BAND EDGE MEASUREMENT	24			
	4.5.2 TEST SETUP	24			
	4.5.3 TEST PROCEDURES	24			
	4.5.4 TEST RESULTS				
	4.6 CONDUCTED SPURIOUS EMISSIONS	27			
	4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT				
	4.6.2 TEST PROCEDURE				
	4.6.3 TEST SETUP				
	4.6.4 TEST RESULTS				
	4.7 RADIATED EMISSION MEASUREMENT				
	4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT				
	4.7.2 TEST PROCEDURES				
	4.7.2 TEST PROCEDURES 4.7.3 DEVIATION FROM TEST STANDARD				
	4.7.4 TEST SETUP				
_	4.7.5 TEST RESULTS				
	PHOTOGRAPHS OF THE TEST CONFIGURATION				
	INFORMATION ON THE TESTING LABORATORIES				
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT E				
	THE LAB				



## **RELEASE CONTROL RECORD**

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131023C29-6	Original release	Jan. 09, 2014



## 1 CERTIFICATION

PRODUCT:SmartphoneMODEL:0P6B200BRAND:HTCAPPLICANT:HTC CorporationTESTED:Dec. 18, 2013 ~ Dec. 28, 2013TEST SAMPLE:Production UnitSTANDARDS:FCC Part 24, Subpart E

The above equipment (model: 0P6B200) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch,** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY

**, DATE :** Jan. 09, 2014

Ivonne Wu / Supervisor

APPROVED BY

chen

DATE : Jan. 09, 2014

Sam Chen / Senior Project Engineer



## 2 SUMMARY OF TEST RESULTS

	APPLIED STANDARD: FCC Part 24 & Part 2					
STANDARD SECTION	TEST TYPE	RESULT REMARK				
2.1046 24.232	24.232 power PASS Meet the requirement of limit 2.1055		Meet the requirement of limit.			
			Meet the requirement of limit.			
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.			
24.232(d)	32(d) Peak to average ratio		Meet the requirement of limit.			
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.			
2.1051 24.238 Conducted Spurious Emissions		PASS	Meet the requirement of limit.			
2.1053 24.238	Radiated Spurious Emissions		Meet the requirement of limit. Minimum passing margin is -18.69dB at 5640.00MHz.			

The EUT has been tested according to the following specifications:

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
	30MHz ~ 200MHz	2.93 dB
Radiated emissions	200MHz ~1000MHz	2.95 dB
Raulaleu emissions	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



#### 2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2013	Dec. 20, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 18, 2013	Dec. 17, 2014
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 330H	980112	Dec. 27, 2013	Dec. 26, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2013	Oct. 17, 2014
RF signal cable Worken	RG-213	NA	Nov. 07, 2013	Nov. 06, 2014
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jul. 18, 2013	Jul. 17, 2014
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY52102544	Sep. 05, 2012	Sep. 04, 2014
Radio Communication Analyzer	MT8820C	6201300640	Aug. 01, 2013	Jul. 31, 2014

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The test was performed in HwaYa Chamber 10.
- 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 4. The FCC Site Registration No. is 690701.
- 5. The IC Site Registration No. is IC 7450F-10.



## **3 GENERAL INFORMATION**

#### 3.1 GENERAL DESCRIPTION OF EUT


EUT	Smartphone		
MODEL NO.	0P6B200		
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.8Vdc (battery)		
	GSM/GPRS	GMSK	
MODULATION TYPE	EDGE	GMSK, 8PSK	
MODULATION TIPE	WCDMA	BPSK	
	CDMA	QPSK, OQPSK, HPSK	
	GSM/GPRS/EDGE	1850.2MHz ~ 1909.8MHz	
FREQUENCY RANGE	WCDMA	1852.4MHz ~ 1907.6MHz	
	CDMA	1851.3MHz ~ 1908.8MHz	
	GSM	1009.25mW	
MAX. EIRP POWER	EDGE	446.68mW	
MAA. EIRF FOWER	WCDMA	207.01mW	
	CDMA	151.01mW	
	GSM	246KGXW	
EMISSION	EDGE	249KG7W	
DESIGNATOR	WCDMA	4M19F9W	
	CDMA	1M27F9W	
ANTENNA TYPE	Fixed Internal Antenna		
I/O PORTS	Refer to users' manual		
DATA CABLE	Refer to NOTE as below		
ACCESSORY DEVICES	Refer to NOTE as below		

#### NOTE:

- 1. The EUT's accessories list refers to Ext. Pho.
- 2. There're 2 configurations for the EUT listed as below.
  - Main Sample (A): Battery 1 + LCD Panel 1
  - 2<sup>nd</sup> Sample (B): Battery 2 + LCD Panel 2
  - $\diamond$  Only the worst test data was presented in the report.
- 3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



## 3.2 CONFIGURATION OF SYSTEM UNDER TEST

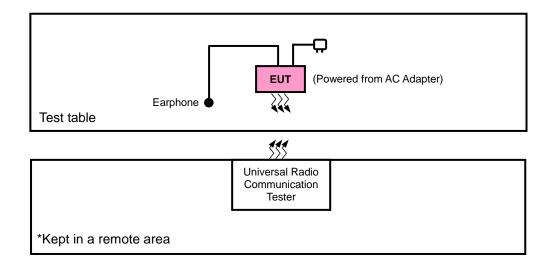

## 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.



## 3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
А	Main sample
В	2 <sup>nd</sup> sample

#### **GSM MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
А	EIRP	512 to 810	512, 661, 810	GSM, EDGE
В	EIRP	512 to 810	661	GSM
А	FREQUENCY STABILITY	512 to 810	661	GSM, EDGE
А	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
А	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM, EDGE
А	BAND EDGE	512 to 810	512, 810	GSM, EDGE
А	CONDCUDETED EMISSION	512 to 810	661	GSM, EDGE
А	RADIATED EMISSION	512 to 810	661	GSM, EDGE

#### **CDMA MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
А	EIRP	25 to 1175	25, 600, 1175	1xRTT
А	FREQUENCY STABILITY	25 to 1175	600	1xRTT
А	OCCUPIED BANDWIDTH	25 to 1175	25, 600, 1175	1xRTT
А	PEAK TO AVERAGE RATIO	25 to 1175	25, 600, 1175	1xRTT
А	BAND EDGE	25 to 1175	25, 1175	1xRTT
А	CONDCUDETED EMISSION	25 to 1175	600	1xRTT
A	RADIATED EMISSION	25 to 1175	600	1xRTT



#### WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
А	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
А	FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
А	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
А	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
А	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
А	CONDCUDETED EMISSION	9262 to 9538	9400	WCDMA
А	RADIATED EMISSION	9262 to 9538	9400	WCDMA

#### **TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	26deg. C, 58%RH	3.8Vdc	Howard Kao
FREQUENCY STABILITY	26deg. C, 58%RH	3.8Vdc	Howard Kao
OCCUPIED BANDWIDTH	26deg. C, 58%RH	3.8Vdc	Howard Kao
BAND EDGE	26deg. C, 58%RH	3.8Vdc	Howard Kao
CONDCUDETED EMISSION	26deg. C, 58%RH	3.8Vdc	Howard Kao
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu



## 3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2 FCC 47 CFR Part 24 ANSI/TIA/EIA-603-C 2004

**NOTE:** All test items have been performed and recorded as per the above standards.



## 4 TEST TYPES AND RESULTS

#### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

### 4.1.2 TEST PROCEDURES

#### EIRP MEASUREMENT:

- a. The EUT was place on a turntable with 1.727 meter height in a fully anechoic chamber.
- b. The EUT was set at 4.858 meters from the receiving antenna, which was mounted on the antenna tower.
- c. The EUT was rotated along 2 axis: Theta-axis: 180 degree and Phi-axis: 360 degree, Step Size: 15 degree.
- d. The height of the receiving antenna is fixed.
- e. Taking the record of received power.
- f. A dipole antenna was used in place of the EUT for pathloss calibration with a network analyzer.
- g. The gain of the dipole antenna and the insertion loss of the connected RF cable were applied into the pathloss calibration.
- h. The maximum ERP/EIRP was calculated with received power and pathloss.

i. ERP/EIRP = Ps + Et - Es + Gs = Ps + Rt - Rs + Gs

Ps (dBm) : Input power to subsitution antenna.

Gs (dBi or dBd) : Substitution antenna Gain.

Et = Rt + AF

Es = Rs + AF

- AF (dB/m) : Receiver antenna factor
- Rt: The highest received signal in spectrum analyzer for EUT.
- Rs: The highest received signal in spectrum analyzer for substitution antenna.


#### CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM, GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




### 4.1.3 TEST SETUP

#### EIRP MEASUREMENT:

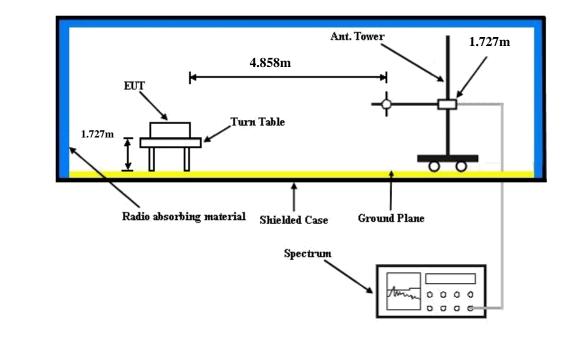

#### CONDUCTED POWER MEASUREMENT:





## 4.1.4 TEST RESULTS

#### CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM (1 Uplink)	29.93	30.05	30.22
GPRS 8 (GMSK, 1 slot)	29.91	30.03	30.20
GPRS 10 (GMSK, 2 slot)	29.76	29.88	30.05
GPRS 11 (GMSK, 3 slot)	29.66	29.78	29.95
GPRS 12 (GMSK, 4 slot)	29.49	29.61	29.78
EDGE 8 (GMSK, 1 Uplink)	29.93	30.04	30.21
EDGE 10 (GMSK, 2 Uplink)	29.75	29.87	30.04
EDGE 11 (GMSK, 3 Uplink)	29.58	29.70	29.87
EDGE 12 (GMSK, 4 Uplink)	29.43	29.55	29.72
EDGE 8 (8PSK, 1 Uplink)	26.03	26.15	26.32
EDGE 10 (8PSK, 2 Uplink)	25.96	26.08	26.25
EDGE 11 (8PSK, 3 Uplink)	25.79	25.91	26.08
EDGE 12 (8PSK, 4 Uplink)	25.59	25.71	25.88

Band		WCDMA II	
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.55	23.23	23.47
HSDPA Subtest-1	22.42	22.10	22.34
HSDPA Subtest-2	20.88	20.56	20.80
HSDPA Subtest-3	19.40	19.08	19.32
HSDPA Subtest-4	19.20	18.88	19.12
HSUPA Subtest-1	22.55	22.23	22.47
HSUPA Subtest-2	21.13	20.81	21.05
HSUPA Subtest-3	20.84	20.52	20.76
HSUPA Subtest-4	22.12	21.80	22.04
HSUPA Subtest-5	22.70	22.38	22.62

Band	CDMA					
Channel	25	600	1175			
Frequency (MHz)	1851.25	1880	1908.75			
RC1+SO55	24.21	24.15	24.37			
RC3+SO55	24.24	24.18	24.40			
RC3+SO32(+ F-SCH)	24.20	24.14	24.36			
RC3+SO32(+SCH)	24.19	24.13	24.35			
RTAP 153.6	24.01	23.95	24.17			
RETAP 4096	24.04	23.98	24.20			



#### EIRP POWER (dBm)

#### **TEST MODE A**

#### GSM

	GSM Radiated Power EIRP										
	Horizontal Polarization										
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP					
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)					
1850.2	-24.07	-51.88	0.00	1.96	29.77	948.42					
1880.0	-25.58	-52.99	0.00	2.00	29.41	872.97					
1909.8	-26.22	-54.28	0.00	1.98	30.04	1009.25					
		Ver	tical Polarizati	ion							
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP					
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)					
1850.2	-26.40	-52.13	0.00	1.96	27.69	587.49					
1880.0	-28.24	-53.17	0.00	2.00	26.93	493.17					
1909.8	-28.02	-54.13	0.00	1.98	28.09	644.17					

#### EDGE

	EDGE Radiated Power EIRP										
	Horizontal Polarization										
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP					
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)					
1850.2	-27.34	-51.88	0.00	1.96	26.50	446.68					
1880.0	-29.38	-52.99	0.00	2.00	25.61	363.92					
1909.8	-30.14	-54.28	0.00	1.98	26.12	409.26					
		Ver	tical Polarizati	ion							
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP					
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)					
1850.2	-30.21	-52.13	0.00	1.96	23.88	244.34					
1880.0	-32.17	-53.17	0.00	2.00	23.00	199.53					
1909.8	-32.04	-54.13	0.00	1.98	24.07	255.27					



#### WCDMA

	WCDMA Radiated Power EIRP											
	Horizontal Polarization											
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP						
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)						
1852.4	-30.68	-51.88	0.00	1.96	23.16	207.01						
1880.0	-32.09	-52.99	0.00	2.00	22.90	194.98						
1907.6	-33.20	-54.28	0.00	1.98	23.06	202.30						
		Ver	tical Polarizati	ion								
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP						
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)						
1852.4	-31.66	-52.13	0.00	1.96	22.43	174.98						
1880.0	-33.32	-53.17	0.00	2.00	21.85	153.11						
1907.6	-34.23	-54.13	0.00	1.98	21.88	154.17						

#### **CDMA**

	CDMA Radiated Power EIRP										
	Horizontal Polarization										
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP					
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)					
1851.25	-32.49	-51.88	0.00	1.96	21.35	136.46					
1880.00	-33.42	-52.99	0.00	2.00	21.57	143.55					
1908.75	-34.47	-54.28	0.00	1.98	21.79	151.01					
		Ver	tical Polarizati	ion							
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP					
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)					
1851.25	-34.94	-52.13	0.00	1.96	19.15	82.22					
1880.00	-36.65	-53.17	0.00	2.00	18.52	71.12					
1908.75	-37.47	-54.13	0.00	1.98	18.64	73.11					



#### **TEST MODE B**

#### GSM

GSM Radiated Power EIRP										
		Horiz	zontal Polariza	ition						
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP				
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)				
1880.0	-17.83	-48.12	0.00	-1.08	29.21	833.68				
		Ver	tical Polarizati	ion						
Frequency	Rt	Rs	Ps	Gs	EIRP	EIRP				
(MHz)	(dBm)	(dBm)	(dBm)	(dBd)	(dBm)	(mW)				
1880.0	-21.24	-48.28	0.00	-0.93	26.11	408.32				



## 4.2 FREQUENCY STABILITY MEASUREMENT

#### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}$ C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 TEST SETUP

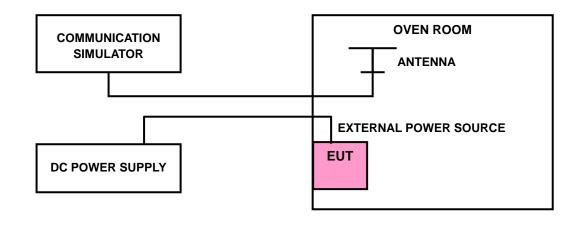



#### 4.2.4 TEST RESULTS

#### FREQUENCY ERROR vs. VOLTAGE

VOLTAGE (Volts)	GSM	EDGE	WCDMA	CDMA	LIMIT (ppm)
3.8	-0.011	0.014	-0.004	0.002	2.5
3.6	-0.009	0.010	-0.005	0.002	2.5
4.35	-0.011	0.010	-0.005	0.002	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.35Vdc.

#### FREQUENCY ERROR vs. TEMPERATURE

<b>TEMP. (℃)</b>		LIMIT (ppm)			
TEMP. (C)	GSM	EDGE	WCDMA	CDMA	
-30	-0.01	0.02	-0.005	0.002	2.5
-20	-0.01	0.02	-0.004	0.002	2.5
-10	-0.01	0.02	-0.005	0.002	2.5
0	-0.01	0.02	-0.005	0.002	2.5
10	-0.01	0.02	-0.005	0.002	2.5
20	-0.01	0.02	-0.005	0.002	2.5
30	-0.01	0.01	-0.005	0.002	2.5
40	-0.01	0.01	-0.005	0.002	2.5
50	-0.01	0.01	-0.004	0.002	2.5




## 4.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.3.2 TEST SETUP

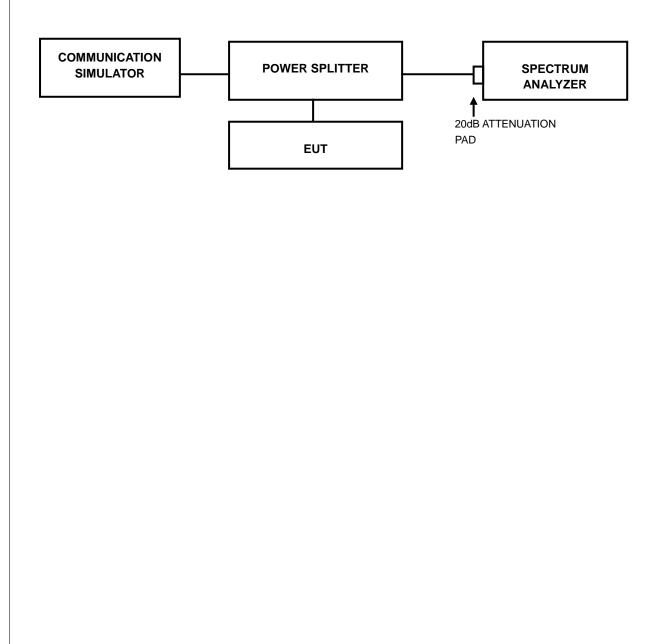




#### 4.3.3 TEST RESULTS

CHANNEL	FREQUENCY	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY	99% OCCUPIED BANDWIDTH (MHz)
		GSM	EDGE			WCDMA
512	1850.2	243.71	241.47	9262	1852.4	4.1815
661	1880.0	246.05	248.95	9400	1880.0	4.1911
810	1909.8	243.30	242.45	9538	1907.6	4.1944

CHANNEL	FREQUENCY	99% OCCUPIED BANDWIDTH (MHz)
		CDMA
25	1851.25	1.2715
600	1880.00	1.2727
1175 1908.75		1.2735

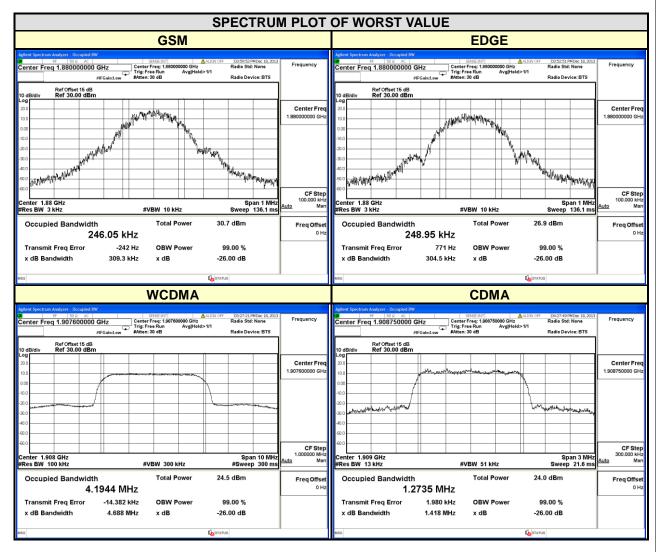




## 4.4 PEAK TO AVERAGE RATIO

### 4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.4.2 TEST SETUP

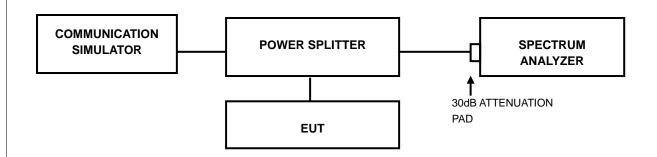

#### 4.4.3 TEST PROCEDURES


- 1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Record the maximum PAPR level associated with a probability of 0.1%.



#### 4.4.4 TEST RESULTS

CHANNEL	FREQUENCY	PEAK TO RATIO	AVERAGE D (dB)	CHANNEL	FREQUENCY	PEAK TO AVERAGE RATIO (dB)
	(MHz)	GSM	EDGE		(MHz)	WCDMA
512	1850.2	0.17	3.23	9262	1852.4	3.04
661	1880.0	0.17	3.22	9400	1880.0	2.94
810	1909.8	0.20	3.25	9538	1907.6	2.84

CHANNEL	FREQUENCY	PEAK TO AVERAGE RATIO (dB)
	(MHz)	CDMA
25	1851.25	2.96
600	1880.00	3.28
1175	1908.75	3.09

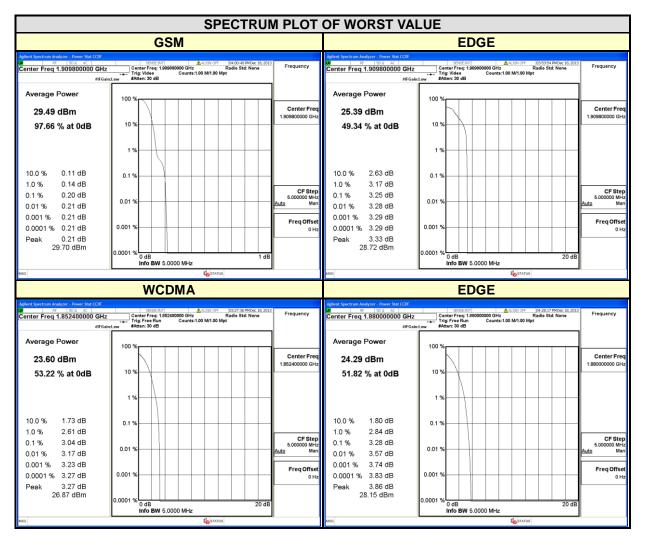




### 4.5 BAND EDGE MEASUREMENT

#### 4.5.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

## 4.5.2 TEST SETUP

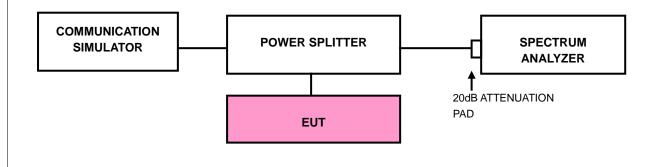


### 4.5.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (CDMA).
- e. Record the max trace plot into the test report.



## 4.5.4 TEST RESULTS

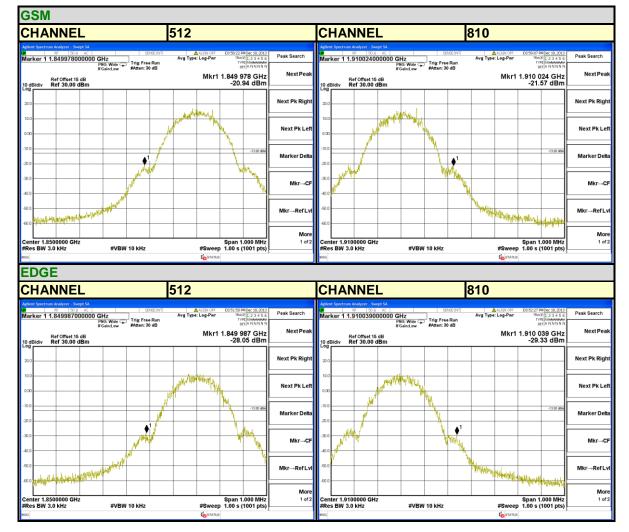



CHANNEL			926	2				CHANNEL		9538			
Agilent Spectrum Analyzer - Swept 5 Marker 1 1.85000000000		SENSE:0		ALIGN OFF	03:24:38 PM De TRACE 1	ec 18, 2013 2 3 4 5 6 WWWWWW	Peak Search	Agilent Spectrum Analyzer - Swept SA       Control Spectrum Analyzer - Swept SA       Marker 1 1.9100000000000	GHz Several Se	ALIGN OFF	03:26:19 PM Dec 18, 2013 TRACE 1 2 3 4 5 6 TVPE WWWWWWWW DET A N N N N N	Peak Search	
Ref Offset 15 dB 10 dB/div Ref 30.00 dBr	I Galit.Com	Trig: Free Run #Atten: 30 dB	in I	Mkr1	1.850 000 -26.44	GHZ	Next Peak	Ref Offset 15 dB 10 dB/div Ref 30.00 dBm	PNO: Wide Trig: Free Run IFGain:Low #Atten: 30 dB	Mkr	1 1.910 000 GHz -21.11 dBm	NextPe	
20.0							Next Pk Right	20.0			[	Next Pk Rig	
0.00			/		******		Next Pk Left	0.00	and the second sec			Next Pk L	
20.0		_/				-13.00 dBm	Marker Delta	-10.0	1		-13.00 dBn	Marker De	
30.0		~					Mkr→CF	-30.0				Mkr→	
50.0							Mkr→RefLvl	-50.0			[	Mkr→Refi	
g 🔂 STATUS							More 1 of 2	Center 1.910000 GHz			Span 5.000 MHz ep 1.00 s (1001 pts)		
8G	#VBW	300 kHz				101 pts)		#Res BW 100 kHz	#VBW 300 kHz	#Swe tostar			
DMA	#VBW	300 kHz	25			01 pts)		#Res BW 100 kHz	#VBW 300 KH2				
SO CDMA CHANNEL Stert Spectrum Analyzer Swept S	A C 1000 GHz PN0: W6/4	SENSE:0	NT Avg Ty in Avg[Ho		04:24:30 PMD	ec 18,2013	Peak Search	MSG	GHz DIT Wildo the Trig: Free Run	<b>K</b> STAT	US	Peak Search	
BE CDMA CHANNEL DEN EXPENSION DEN EXPENSION DE	A C D <b>00 GHz</b> IFGain:Low	SENSE:	NT Avg Ty in Avg[Ho	ALIGN OFF pe: RMS id: 100/100	04:24:30 PMD	ec 18, 2013 12 2 4 5 6 NNNN N 4 GHz	Peak Search Next Peak	CHANNEL	58XE947	Avg Type: RMS Avg[Hold: 100700	us		
10 dB/div Ref 30.00 dBr	A C D <b>00 GHz</b> IFGain:Low	SENSE:0	NT Avg Ty in Avg[Ho	ALIGN OFF pe: RMS id: 100/100	04:24:30 PMD TRACE 1 TYPE UPIA 1.850 044	ec 19, 2013 2 2 3 4 5 6 NNNNN 4 GHz 5 dBm		CHANNEL CHANNEL Marker 1 1.90995600000 Marker 1 1.90995600000 Columnation of the state of th	GHz DIT Wildo the Trig: Free Run	Avg Type: RMS Avg[Hold: 100700	042855 FM242 18, 2010 IPAGE 32 21 4 5 6 IPAGE 32	Peak Search Next Pe Next Pk Rig	
CDMA CHANNEL C	A C D <b>00 GHz</b> IFGain:Low	SENSE:0	NT Avg Ty in Avg[Ho	ALIGN OFF pe: RMS id: 100/100	04:24:30 PMD TRACE 1 TYPE UPIA 1.850 044	ec 19, 2013 2 2 3 4 5 6 NNNNN 4 GHz 5 dBm	Next Peak	CHANNEL Aller Sectors Address Sector Stress Marker 11.90995000000 Ref Offset 15 dB to gBidly Ref 30.00 dBm	GHz DIT Wildo the Trig: Free Run	Avg Type: RMS Avg[Hold: 100700	042855 FM242 18, 2010 IPAGE 32 21 4 5 6 IPAGE 32	NextPe	
CDMA CHANNEL BE CONTROLOGY CHANNEL CHANNEL CHANNEL CONTROLOGY CONT	n	SENSE:0	NT Avg Ty in Avg[Ho	ALIGN OFF pe: RMS id: 100/100	DR24:30PMD TRACE TOTAL 1.850 044 -30.946	ec 19, 2013 2 2 3 4 5 6 NNNNN 4 GHz 5 dBm	Next Peak Next Pk Right	CHANNEL Adent Section Andrers Sector M Marker 1 1.9099500 AC Marker 11.90995000000 Ref Offset 15 dB to dBidly Ref 30.00 dBm	GHz DIT Wildo the Trig: Free Run	Avg Type: RMS Avg[Hold: 100700	042855 FM242 18, 2010 IPAGE 32 21 4 5 6 IPAGE 32	Next Pe Next Pk Ri Next Pk L	
00       CDMA       CHANNEL       Charker 1 1.8500440000       0 dBddv       Ref Offset 15 dB       0 dBddv       0 dBddv       0 dBddv       0 dBddv	A C D <b>00 GHz</b> IFGain:Low	SENSE:0	NT Avg Ty in Avg[Ho	ALIGN OFF pe: RMS id: 100/100	DR24:30PMD TRACE TOTAL 1.850 044 -30.946	e: 19, 2013 [2 3 4 5 6 [2 3 4 5 6] [2 3 4 5 6] [2 3 4 5 6] [2 3 4 5 6] [2 4	Next Peak	CHANNEL Alter beatrin Autors, Sept M Barrier 11,9099560000000 Ref Offset 15 dB 10 eBladiv Ref 30.00 dBm	GHz DIT Wildo the Trig: Free Run	Avg Type: RMS Avg[Hold: 100700	Pears 8 Mice al, 2013 Mice 12 2 3 5 0 19 10 10 2 3 5 0 19 10 10 95 95 6 GHz -32,277 dBm	Next Pk Ri Next Pk Ri Next Pk L	
CDMA CHANNEL C	n	SENSE:0	NT Avg Ty in Avg[Ho	ALIGN OFF pe: RMS id: 100/100	DR24:30PMD TRACE TOTAL 1.850 044 -30.946	e: 19, 2013 [2 3 4 5 6 [2 3 4 5 6] [2 3 4 5 6] [2 3 4 5 6] [2 3 4 5 6] [2 4	Next Peak	CHANNEL Chanter 1 1.90995600000 definition Ref offset 15 dB cdf gelder Ref 30.00 dBm definition Ref 30.00 dBm	GHz DIT Wildo the Trig: Free Run	Avg Type: RMS Avg[Hold: 100700	Pears 8 Mice al, 2013 Mice 12 2 3 5 0 19 10 10 2 3 5 0 19 10 10 95 95 6 GHz -32,277 dBm	Next Pe Next Pk Ri	



## 4.6 CONDUCTED SPURIOUS EMISSIONS


#### 4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P) dB$ . The emission limit equal to -13dBm.

#### 4.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 4.6.3 TEST SETUP

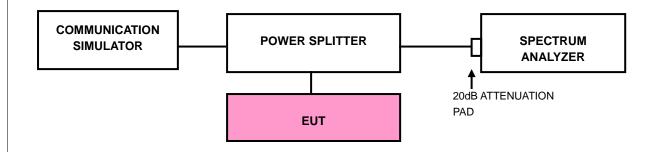



### 4.6.4 TEST RESULTS

GS											EDG									
CH	ANN	EL 66	51								CHA	NEL	661							
R	EQUE	ENCY	' RA	NGE	: 30	)MH	z~19	9.1G	Hz		FREG	QUEN	ICY R	ANG	GE:3	<b>OMH</b>	ا	9.10	Hz	
Ngilent Sp	pectrum Analyzer	- Swept SA									Agilent Spectrum	n Analyzer - Swep	ot SA							
Marke	er 1 5.68644		PNO: East	Trig: Free	Run	Avg Type	ALIGN OFF e: Log-Pwr	TRAC	I 2 3 4 5 6 MMMMMM P NNNN	Peak Search	Marker 1 5	.58536876	PNO-1	Cast ( Tris	SENSE:INT	Avg Ty	Alian Officer	U3:55:20 TRJ T	ACE 1 2 3 4 5 6 VPE MWWWWW DET P NNNNN	Peak Search
10 dB/d	Ref Offs liv Ref 35.		IFGain:Low	#Atten: 30	dB		Mk	(r1 5.68)	6 4 GHz 69 dBm	Next Peak	10 dB/div	Ref Offset 15 d Ref 35.00 dE	1B	Low #At	ten: 30 dB		м	kr1 5.58	85 4 GHz 57 dBm	NextPea
25.0										Next Pk Right	25.0									Next Pk Rig
5.00										Next Pk Left	5.00									Next Pk Le
5.00									-13.00 dBm	Marker Delta	-5.00								-13.00 dBm	Marker Del
-15.0			<b>↓</b> <sup>1</sup>	~		فالانتحر			فينتجيها	Mkr→CF	-25.0		<b>1</b>		مینخور اندر . مینخور اندر .	_				Mkr→C
-45.0										Mkr→RefLvl	-35.0									Mkr→RefL
55.0	30 MHz							Stop 19	.100 GHz	More 1 of 2	-55.0 Start 30 MH	17						Stop 1	9.100 GHz	Moi 1 of
	30 19172									1012										
#Res E	BW 1.0 MHz		#VBV	V 3.0 MHz		#	Sweep 5	505 ms (2	0000 pts)	1 012	#Res BW 1.	0 MHz		#VBW 3.0	MHz		#Sweep		(20000 pts)	
#Res E			#VBV	V 3.0 MHz		#		505 ms (2	0000 pts)	1 012	#Res BW 1			#VBW 3.0	MHz				(20000 pts)	
#Res E	BW 1.0 MHz			V 3.0 MHz		#		505 ms (2	0000 pts)	1012	#Res BW 1.	A		#VBW 3.0	MHz				(20000 pts)	
NC CH	DMA	EL 94	00		: 30		<b>K</b> STATUS	505 ms (2	:0000 pts)	1 012	#Res BW 1.	A NNEL	. <mark>600</mark>				K STATU	5		
Res E	BW 1.0 MHz	EL 94	00		: 30	ОМН	لله المعالي الم 2~19	9.1G	in Hz	1 01 2	#Res BW 1.	A NNEL	. <mark>600</mark>			80M⊦	€statu	9.1C	GHz	
Res E	DMA	EL 94 ENCY - Swept SA 50 2 AC	00 7 RAI		NSE:INT	омн	Z~19	505 mis (2 ) 9.1G ) ) ) ) ) ) ) ) ) ) ) ) )	100000 pts)	Peak Search	#Res BW 1. CDM/ CHAN FREC	A NNEL	. 600 CY R		E:3	OMF	Log-Pwr	9.1C	CH2 23456 PMDec 18, 2013 ACE [1 23456 DET [P NNNN DET [P NNNN	Peak Search
	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC   11010551 (	00 7 RAI		NSE:INT	омн	Z~19	9.1G	100000 pts)		#Res BW 1.	A NNEL QUEN	600 CYR ac 4691 GHz PNO: 1 IFGain: 18	RANG	E:3	OMF	Log-Pwr	9.1 C	SHz PMDet 18 2013	
	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC 11010551	00 7 RAI		NSE:INT	омн	Z~19	9.1G	0000 pts)	Peak Search	#Res BW 1.	A NNEL QUEN Manalyzer - Swep RF 50 2 .72649382	600 CYR ac 4691 GHz PNO: 1 IFGain: 18	RANG	E:3	OMF	Log-Pwr	9.1 C	<b>GHZ</b>	NextPe
	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC 11010551	00 7 RAI		NSE:INT	омн	Z~19	9.1G	0000 pts)	Peak Search Next Peak	#Res BW 1. Mas CDM/ CHAN FREG	A NNEL QUEN Manalyzer - Swep RF 50 2 .72649382	600 CYR ac 4691 GHz PNO: 1 IFGain: 18	RANG	E:3	OMF	Log-Pwr	9.1 C	<b>GHZ</b>	Pesk Search Next Pet Next Pk Rig Next Pk Li
	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC 11010551	IOO 7 RAI GHz IFGainLow		NSE:INT	омн	Z~19	9.1G	0000 pts)	Peak Search Next Peak Next Pk Right	Res BW 1.	A NNEL QUEN Manalyzer - Swep RF 50 2 .72649382	600 CY R 4691 GHz PHO: IFGain: 8 8 m	RANG	E:3	OMF	Log-Pwr	9.1 C	<b>GHZ</b>	Next Pe Next Pk Rig Next Pk L
	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC 11010551	00 7 RAI		NSE:INT	омн	Z~19	9.1G	HZ 112345 11235 11235 11235 11235 112555 112555 112555 112555 112555 112555 112555 112555 11	Peak Search Next Peak Next Pk Right Next Pk Left	FRes BW 1, INTO CDM/ CHAN FRECO Marker 15 10 dB/div 50 50 50 50 50 50 50 50 50 50	A NNEL QUEN Manalyzer - Swep RF 50 2 .72649382	600 CYR ac 4691 GHz PNO: 1 IFGain: 18	RANG	E:3	OMF	Log-Pwr	9.1 C	CH2 PHORE 18, 2013 ACT [23 4 5 0 VIENTIAL CONTRACTOR CONTRACT	Next Pe Next Pk Rig
Res E A VC CH R CH R CH CH CH CH CH CH CH CH CH CH	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC 11010551	IOO 7 RAI GHz IFGainLow		NSE:INT	омн	Z~19	9.1G	HZ 112345 11235 11235 11235 11235 112555 112555 112555 112555 112555 112555 112555 112555 11	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta	Res BW 1.	A NNEL QUEN Manalyzer - Swep RF 50 2 .72649382	600 CY R 4691 GHz PHO: IFGain: 8 8 m	RANG	E:3	OMF	Log-Pwr	9.1 C	CH2 PHORE 18, 2013 ACT [23 4 5 0 VIENTIAL CONTRACTOR CONTRACT	Next Pe Next Pk Rig Next Pk L Marker De Mkr
	BW 1.0 MHZ	EL 94 ENCY - Swept SA 50 2 AC 11010551	IOO 7 RAI GHz IFGainLow		NSE:INT	омн	Z~19	D2 2020 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	HZ 112345 11235 11235 11235 11235 112555 112555 112555 112555 112555 112555 112555 112555 11	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta MkrCF	FRes BW 1, INTO CDM/ CHAN FREC Marker 15 10 dB/dt/ 50 50 50 50 50 50 50 50 50 50	A UEN UEN COTSET 15 d Ref 015set 15 d Ref 015set 15 d Cotset 15	600 CY R 4691 GHz PHO: IFGain: 8 8 m	RANG	E:3	OMF	Log-Pwr	9.10 9.10 9.10 9.10 9.10 9.10 9.10 9.10	CH2 PHORE 18, 2013 ACT [23 4 5 0 VIENTIAL CONTRACTOR CONTRACT	Next Pe Next Pk Rig Next Pk Li Marker De



### 4.7 RADIATED EMISSION MEASUREMENT

#### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P) dB$ . The emission limit equal to -13dBm.

#### 4.7.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15dBi.


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 4.7.3 DEVIATION FROM TEST STANDARD

No deviation



## 4.7.4 TEST SETUP

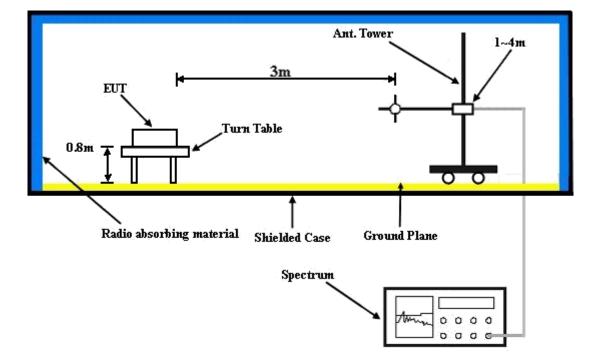


For the actual test configuration, please refer to the attached file (Test Setup Photo).




#### 4.7.5 TEST RESULTS

GSM:

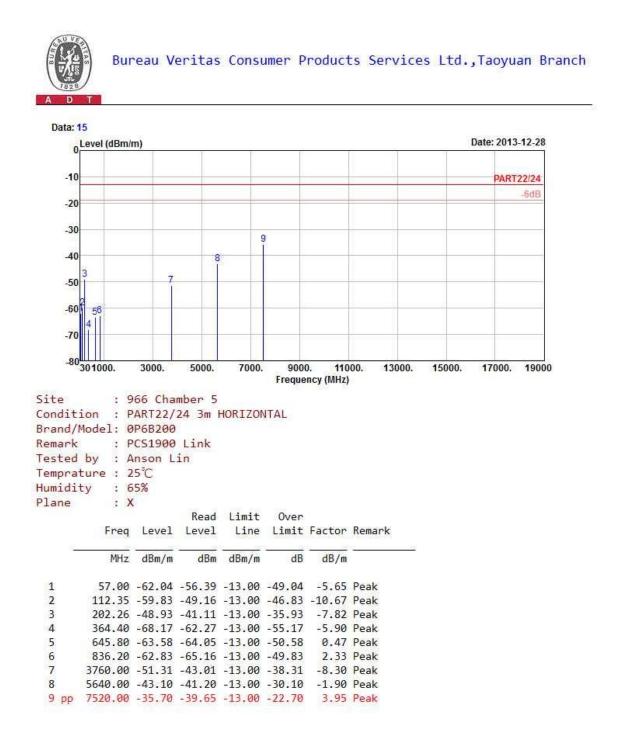






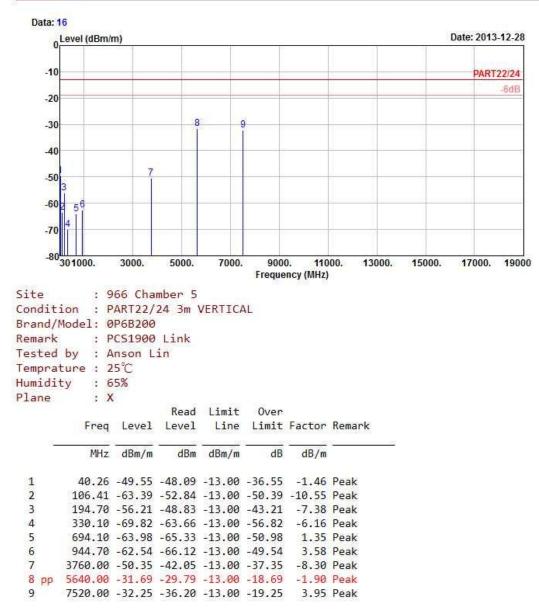




#### EDGE:



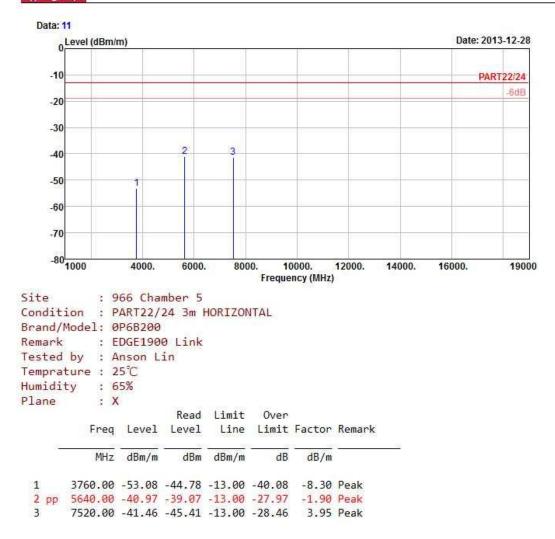






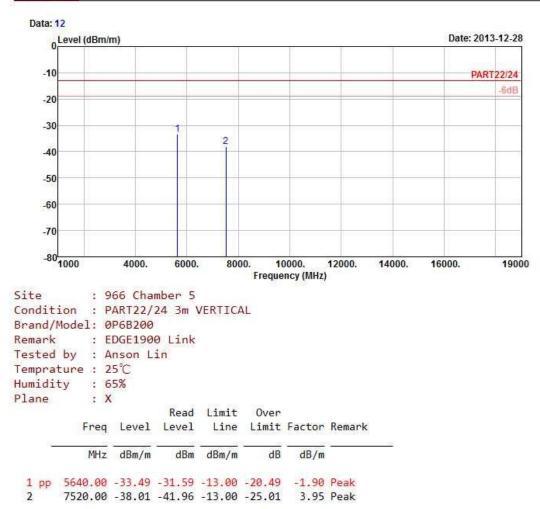




#### WCDMA:



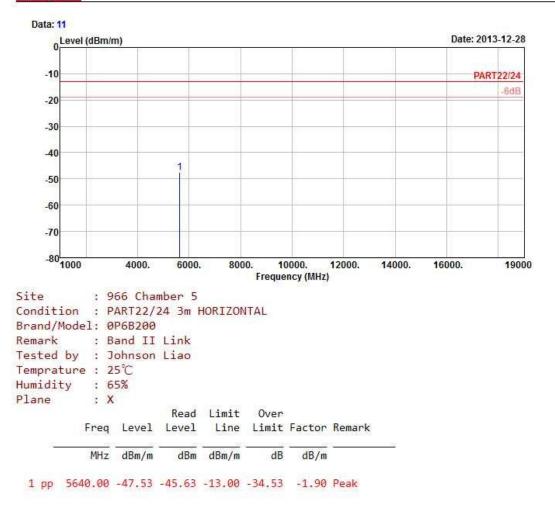






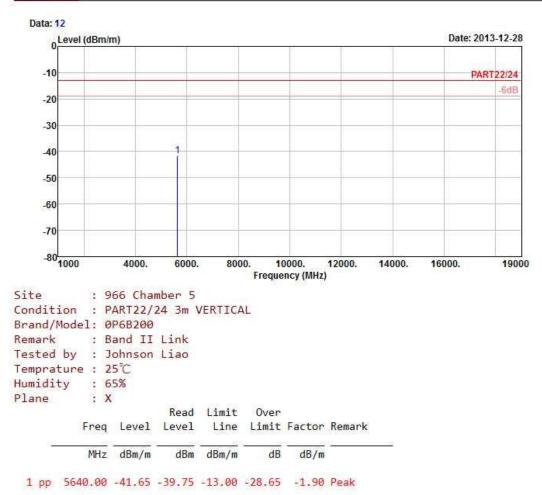




#### CDMA:



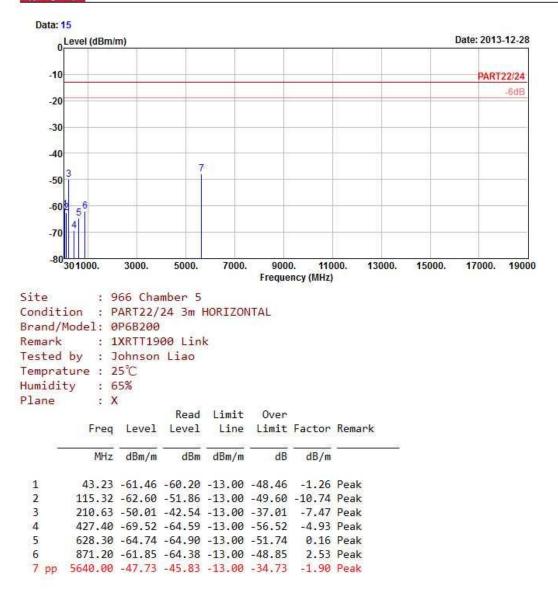





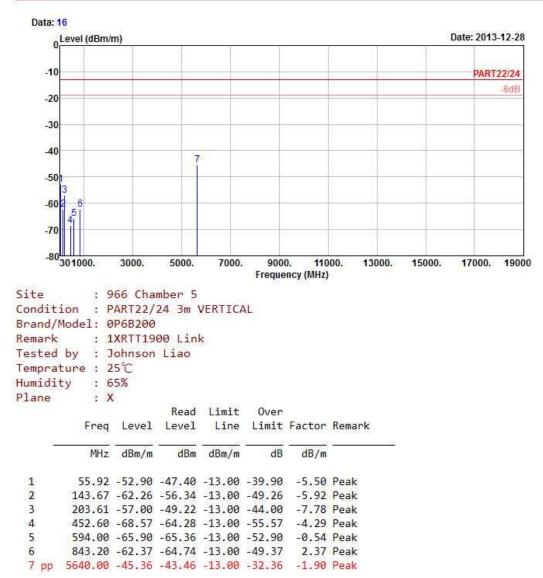



## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Tel: 886-2-26052180 Fax: 886-2-26051924 Hsin Chu EMC/RF Lab: Tel: 886-3-5935343 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab: Tel: 886-3-3183232 Fax: 886-3-3270892

Email: <u>service.adt@tw.bureauveritas.com</u> Web Site: <u>www.bureauveritas-adt.com</u>

The address and road map of all our labs can be found in our web site also.



## 7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END----