


# FCC SAR Test Report

**APPLICANT** : HTC Corporation  
**EQUIPMENT** : Tablet PC  
**MODEL NAME** : PG41120  
**FCC ID** : NM8PG41120  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
IEEE C95.1-1991  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was received on Jan. 21, 2011 and completely tested on May. 31, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed

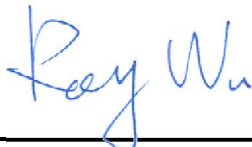

Roy Wu / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

Revision History .....	3
1. Statement of Compliance .....	4
2. Administration Data .....	5
2.1 Testing Laboratory .....	5
2.2 Applicant .....	5
2.3 Manufacturer .....	5
2.4 Application Details .....	5
3. General Information .....	6
3.1 Description of Device Under Test (DUT) .....	6
3.2 Applied Standards .....	7
3.3 Device Category and SAR Limits .....	7
3.4 Test Conditions .....	7
3.4.1 Ambient Condition .....	7
3.4.2 Test Configuration .....	8
4. Specific Absorption Rate (SAR) .....	11
4.1 Introduction .....	11
4.2 SAR Definition .....	11
5. SAR Measurement System .....	12
5.1 E-Field Probe .....	13
5.1.1 E-Field Probe Specification .....	13
5.1.2 E-Field Probe Calibration .....	14
5.2 Data Acquisition Electronics (DAE) .....	14
5.3 Robot .....	14
5.4 Measurement Server .....	15
5.5 Phantom .....	16
5.6 Device Holder .....	17
5.7 Data Storage and Evaluation .....	19
5.7.1 Data Storage .....	19
5.7.2 Data Evaluation .....	19
5.8 Test Equipment List .....	21
6. Tissue Simulating Liquids .....	22
7. Uncertainty Assessment .....	24
8. SAR Measurement Evaluation .....	26
8.1 Purpose of System Performance check .....	26
8.2 System Setup .....	26
8.3 Validation Results .....	28
9. DUT Testing Position .....	29
10. Measurement Procedures .....	30
10.1 Spatial Peak SAR Evaluation .....	30
10.2 Area & Zoom Scan Procedures .....	31
10.3 Volume Scan Procedures .....	31
10.4 SAR Averaged Methods .....	31
10.5 Power Drift Monitoring .....	31
11. SAR Test Configurations .....	32
11.1 Exposure Positions Consideration .....	32
11.2 Simultaneous Transmitting Configurations .....	33
12. SAR Test Results .....	34
12.1 Conducted Power – (Unit: dBm) .....	34
12.2 Simultaneous Transmission SAR Analysis and Measurements .....	39
13. References .....	41
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. Product Photos	
Appendix E. Test Setup Photos	
Appendix F. FCC 3G SAR Measurement Procedures	





### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **HTC Corporation Tablet PC PG41120** are as follows (with expanded uncertainty 21.4 % for 300 MHz to 3 GHz).

Band	Position	SAR <sub>1g</sub> (W/kg)
GSM850	Body (0 cm Gap)	0.497
	Body (1 cm Gap)	0.871
GSM1900	Body (0 cm Gap)	0.498
	Body (1 cm Gap)	0.627
WCDMA Band IV	Body (0 cm Gap)	1.15
	Body (1 cm Gap)	0.509

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



## 2. Administration Data

### 2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

### 2.2 Applicant

Company Name	HTC Corporation
Address	No. 23, Xinghua Road, Taoyuan City, Taoyuan County 330, Taiwan

### 2.3 Manufacturer

Company Name	HTC Corporation
Address	No. 23, Xinghua Road, Taoyuan City, Taoyuan County 330, Taiwan

### 2.4 Application Details

Date of Receipt of Application	Jan. 21, 2011
Date of Start during the Test	Feb. 26, 2011
Date of End during the Test	May. 31, 2011



### 3. General Information

#### 3.1 Description of Device Under Test (DUT)

Product Feature & Specification	
DUT Type	Tablet PC
Model Name	PG41120
FCC ID	NM8PG41120
Sample 1 (SN:HTIILTY00033)	DUT with Photo Camera 1 and Video Camera 1
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz
Maximum Burst Output Power to Antenna	GSM850 : 32.92 dBm GSM1900 : 30.00 dBm WCDMA Band IV : 22.94 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM HSUPA : QPSK
DUT Stage	Identical Prototype

**Remark:**

1. This DUT supports (E)GPRS multi-slot class 10 (max. 2 uplink, 4 downlink, total 5 slots).
2. This DUT has two WWAN antennas. The WWAN main antenna supports transmitting and receiving, and the WWAN aux antenna supports receiving only.
3. This DUT does not support voice mode.



**3.2 Applied Standards**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- IEEE C95.1-1991
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 648474 D01 v01r05
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D02 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D04 v01
- FCC KDB 447498 D01 v04

**3.3 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

**3.4 Test Conditions**

**3.4.1 Ambient Condition**


<b>Ambient Temperature</b>	20 to 24 °C
<b>Humidity</b>	< 60 %

**3.4.2 Test Configuration**



The device is 7" mini-tablet PC which supports WWAN, WLAN, Bluetooth, and wireless hotspot capabilities. The SAR test configurations for this device were determined by consultation with FCC since Feb. 2011 via KDB inquiry 385027. Per last guidance in KDB inquiry 385027, the DUT SAR testing follows KDB 447498 D01v04; only the Rear Face and the Edge with antenna within 5cm closer to the user needs to be evaluated. Furthermore, the DUT only supports 2 orientations, the logo upward towards the sky, and the logo towards the left side; only the Left Side and Bottom Side need to be evaluated. The detailed test positions are defined in Section.11 in the report.

This device has proximity sensor located on the rear face. If the sensor is activated then it can enable WWAN power reduction. WLAN and BT have no power reduction. The power vs distance plots is shown as below, and the sensor design specification and supporting data can be found in a separate exhibit, Technical Description.

Distance (mm)	Condition of sensor in the back of device
7	on
8	on
9	on
10	on
11	on
12	off
13	off
14	off

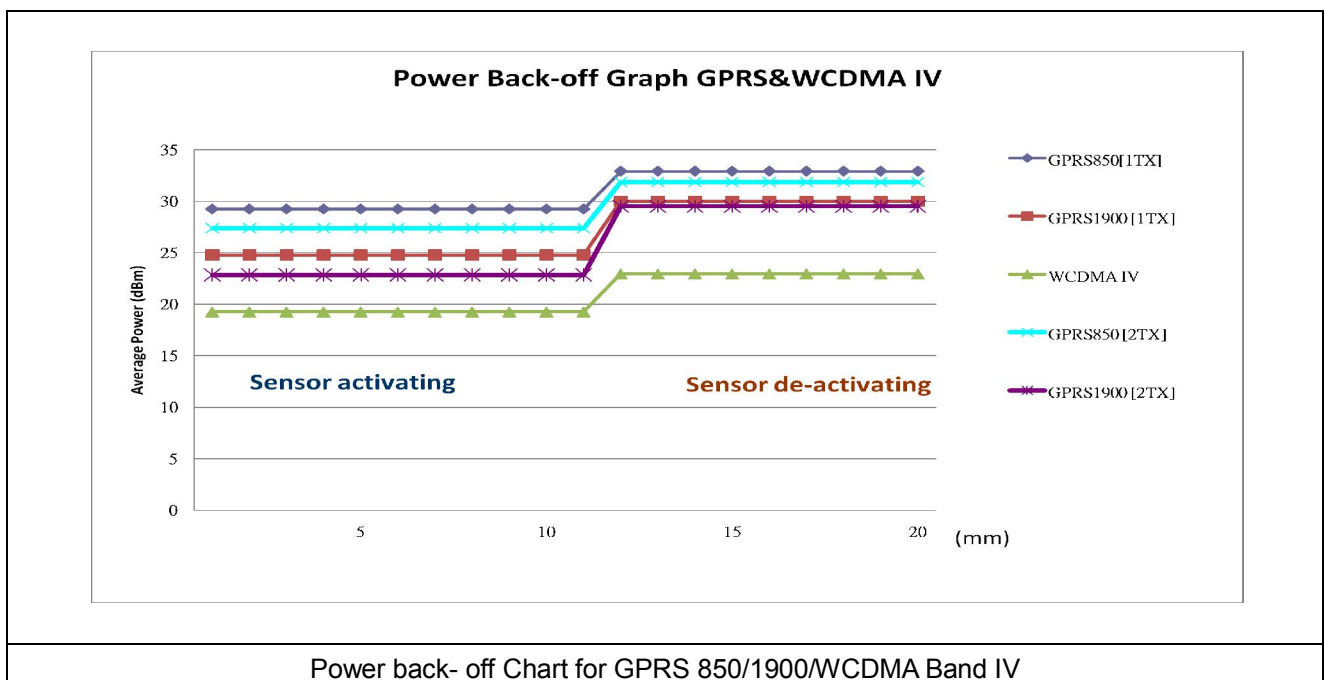



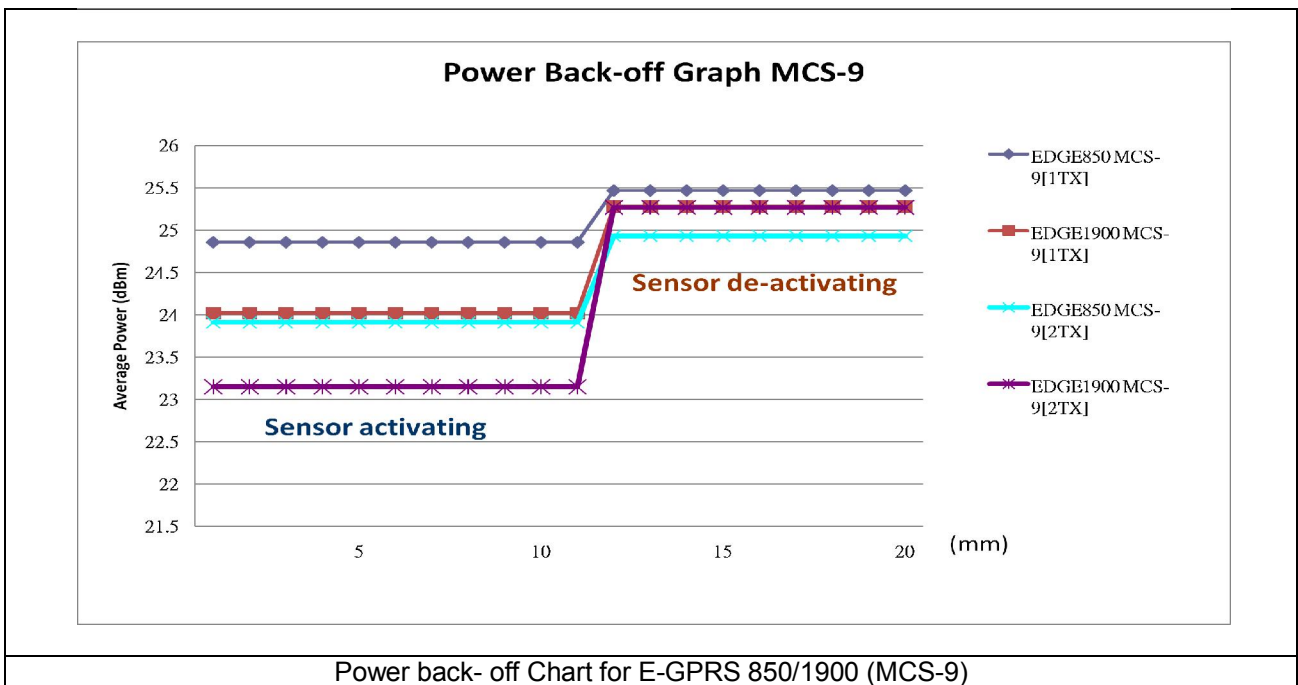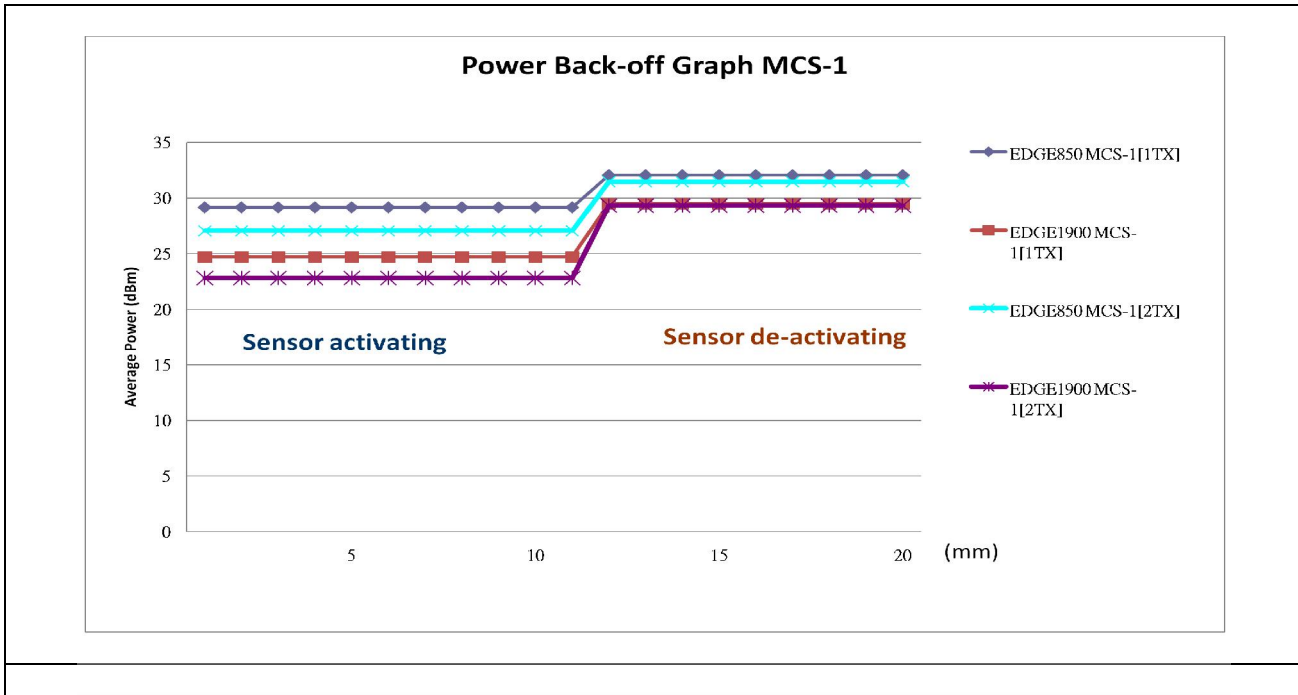

Power back- off Chart for E-GPRS 850/1900 (MCS-9)

Based on the separation distance for the sensor activating / de-activating, the device was tested at 0 mm in power reduction mode (Sensor Activating), and tested at conservative distance 10 mm in full power mode (Sensor deactivating).

From the figures above, the trigger distance is 11mm. Therefore, SAR tests at 10mm distance, with full power enabled which achieved via engineering control software (not for public), were also performed, according to Apr. 2011 FCC-TCB conference notes Chan, RF Exposure Procedures Update, page 15.



The power reduction only applies to GPRS/EDGE/WCDMA/HSDPA/HSUPA wireless modes, and the proximity sensor will activate for only Rear Face, and the power reduction level and activated exposure positions as below:

Reduction Power Level (dB)

Mode	850 band	1900 band
GPRS 8 (1 Uplink)	4	5
GPRS 10 (2 Uplink)	5	7
EDGE 8 (1 Uplink) – MCS1- 4	3	5
EDGE 10 (2 Uplink) – MCS1-4	4	7
EDGE 8 (1 Uplink) – MCS 5 - 9	0.5	1
EDGE 10 (2 Uplink) – MCS 5- 9	1	2

Mode	Power Reduction (dB)
AWS UMTS/HSPA (Band 4)	4
WIFI	0

During SAR tests, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = c \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## **5. SAR Measurement System**

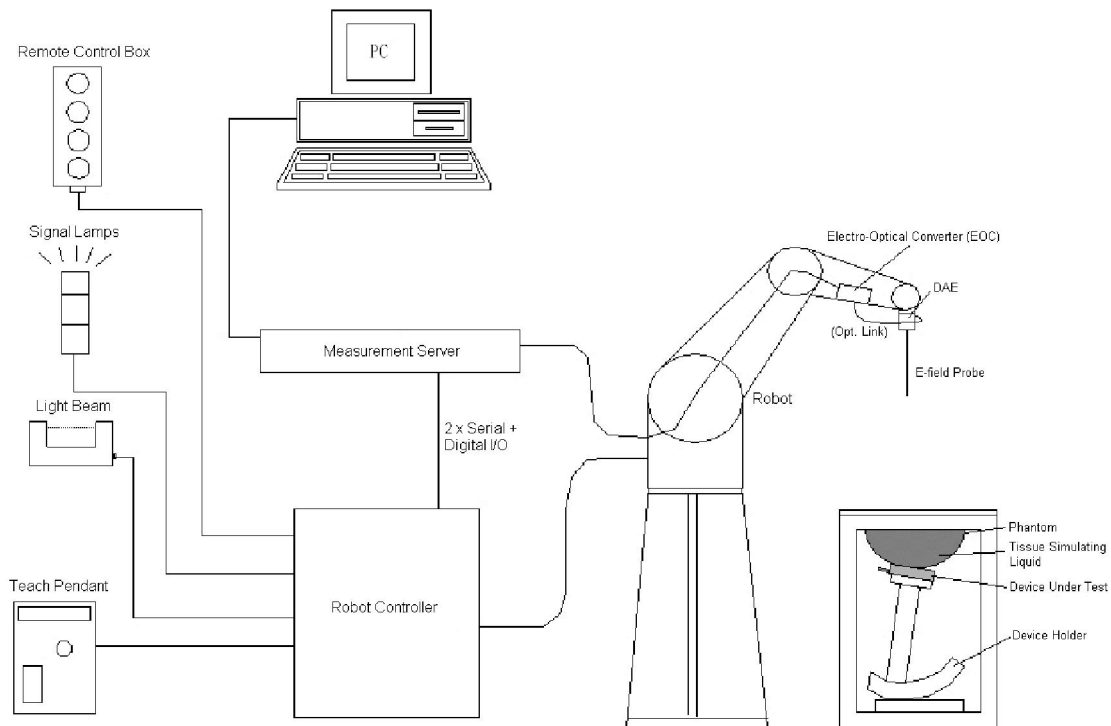

**Fig 5.1 SPEAG DASY4 or DASY5 System Configurations**

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

### 5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

#### 5.1.1 E-Field Probe Specification

##### <ET3DV6>

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm

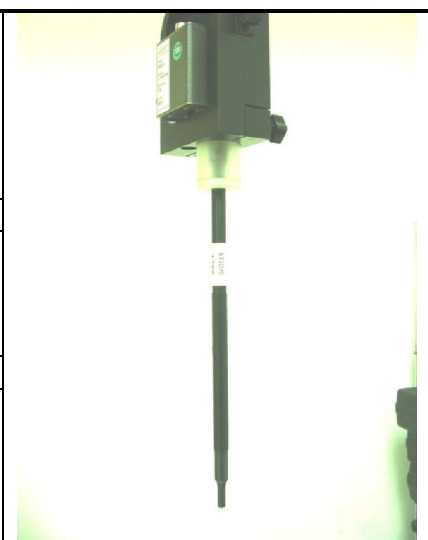


Fig 5.2 Photo of ET3DV6

##### <EX3DV4 Probe>

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

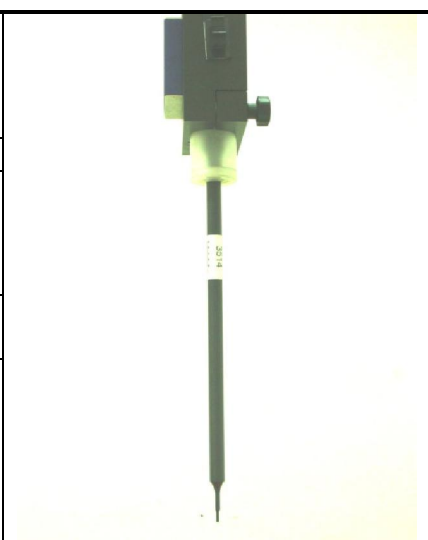


Fig 5.3 Photo of EX3DV4

**5.1.2 E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

**5.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.




**Fig 5.4 Photo of DAE**

**5.3 Robot**

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

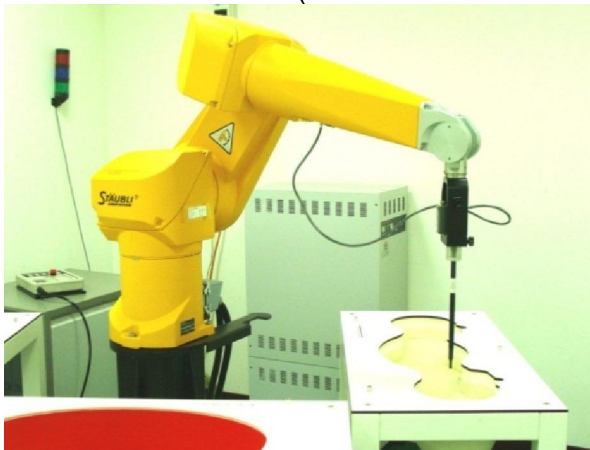

**Fig 5.5 Photo of DASY4**



**Fig 5.6 Photo of DASY5**

### **5.4 Measurement Server**

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig 5.7 Photo of Server for DASY4**




**Fig 5.8 Photo of Server for DASY5**

**5.5 Phantom**

**<SAM Twin Phantom>**


<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom

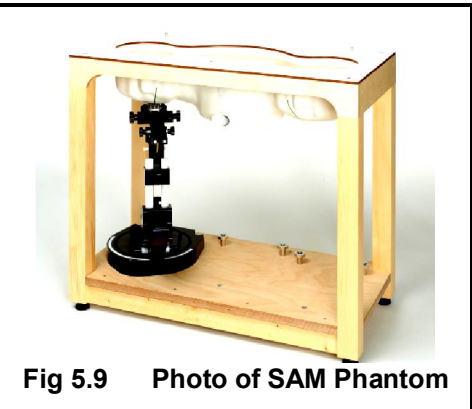

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI4 Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm

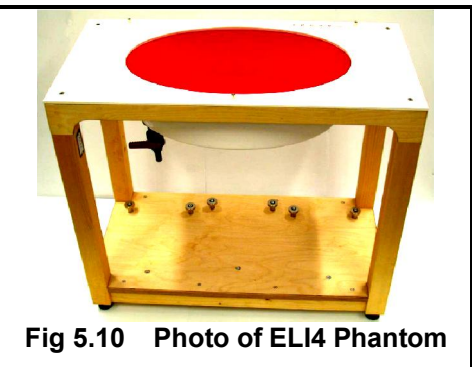

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.



## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.


The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

**<Laptop Extension Kit>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

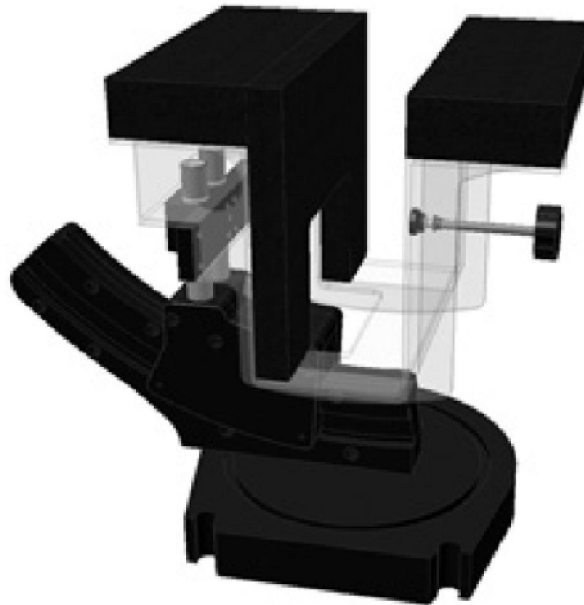

**Fig 5.12**      **Laptop Extension Kit**



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>10</sub> , a <sub>11</sub> , a <sub>12</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 Norm<sub>i</sub> = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 a<sub>ij</sub> = sensor sensitivity factors for H-field probes  
 f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	ET3DV6	1787(*)	May 18, 2010	May 17, 2011
SPEAG	Dosimetric E-Field Probe	ES3DV3	3071	Jun.22,2010	Jun.21, 2011
SPEAG	835MHz System Validation Kit	D835V2	4d082	Jul. 20, 2010	Jul. 19, 2012
SPEAG	1800MHz System Validation Kit	D1800V2	2d052	Jun. 15, 2010	Jun. 14, 2012
SPEAG	1900MHz System Validation Kit	D1900V2	5d018	Jun. 15, 2010	Jun. 14, 2012
SPEAG	Data Acquisition Electronics	DAE3	577	Jan. 13, 2011	Jan. 12, 2012
SPEAG	Data Acquisition Electronics	DAE4	778	Oct. 22, 2010	Oct. 21, 2011
SPEAG	Data Acquisition Electronics	DAE3	495	Apr. 28, 2011	Apr. 27, 2012
SPEAG	Data Acquisition Electronics	DAE4	1249	Feb. 21, 2011	Feb. 20, 2012
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1446	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1478	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	1026	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BA	1029	NCR	NCR
Agilent	Network Analyzer	E5071C	MY46101588	Apr. 20, 2011	Apr. 19, 2012
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 12, 2010	Jan. 11, 2012
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 23, 2011	Mar. 22, 2013
R&S	Universal Radio Communication Tester	CMU200	114256	Feb. 08, 2010	Feb. 07, 2012
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
AR	Power Amplifier	5S1G4M2	0328767	NCR	NCR

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. For SAR tests after 2011/5/17, Probe ES3DV3, SN-3071, was used.
3. Referring to KDB 450824, the justification of dipole extended calibration would be performed, once dipoles are beyond one year period.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

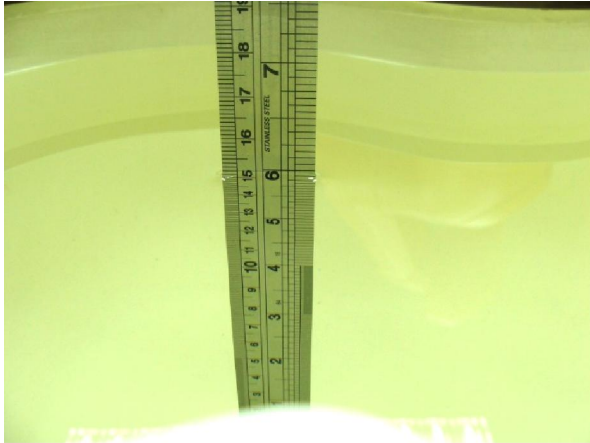


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The following table gives the targets for tissue simulating liquid.

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon_r$ )	$\pm 5\%$ Range
835	Head	0.90	0.86 ~ 0.95	41.5	39.4 ~ 43.6
1800, 1900, 2000	Head	1.40	1.33 ~ 1.47	40.0	38.0 ~ 42.0
835	Body	0.97	0.92 ~ 1.02	55.2	52.4 ~ 58.0
900	Body	1.05	1.00 ~ 1.10	55.0	52.3 ~ 57.8
1800, 1900, 2000	Body	1.52	1.44 ~ 1.60	53.3	50.6 ~ 56.0

**Table 6.2 Targets of Tissue Simulating Liquid**

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Temperature ( $^{\circ}\text{C}$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Measurement Date
835	Body	21.3	0.965	54.4	Mar. 05, 2011
1900	Body	21.4	1.55	52.1	Apr. 06, 2011
835	Body	21.6	0.994	56	May. 31, 2011
1800	Body	21.3	1.56	52.2	May. 31, 2011
1900	Body	21.4	1.53	52.5	May. 31, 2011

**Table 6.3 Measuring Results for Simulating Liquid**

## **7. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacturer's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 7.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2.





Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
<b>Measurement System</b>					
Probe Calibration	5.5	Normal	1	1	± 5.5 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	± 0.6 %
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	± 1.5 %
<b>Combined Standard Uncertainty</b>					± 10.7 %
<b>Coverage Factor for 95 %</b>					K = 2
<b>Expanded Uncertainty</b>					± 21.4 %

Table 7.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz

## 8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:


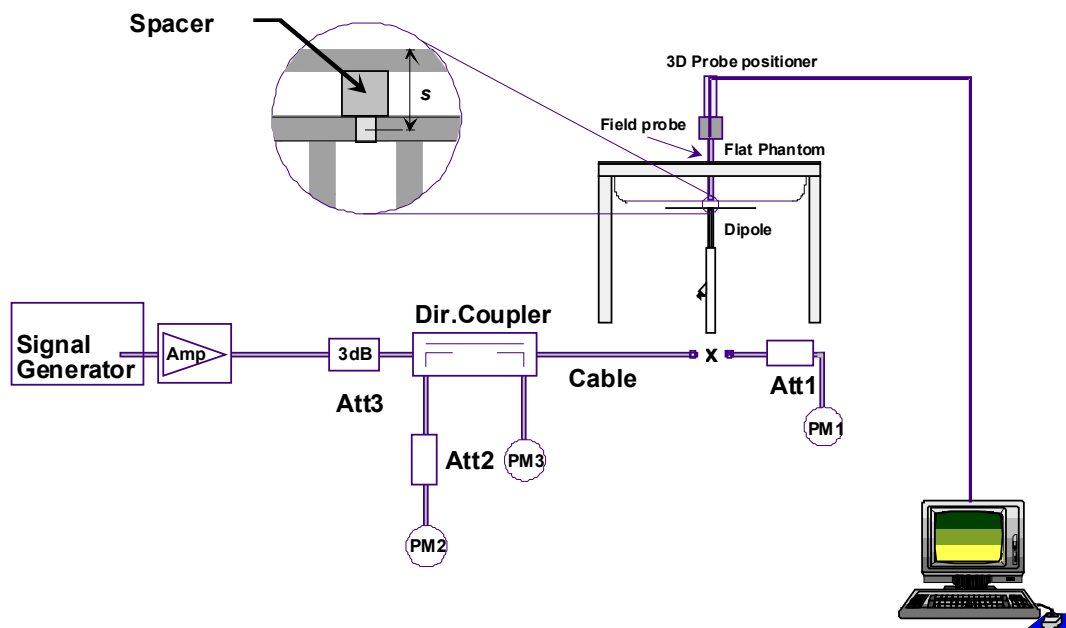


Fig 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

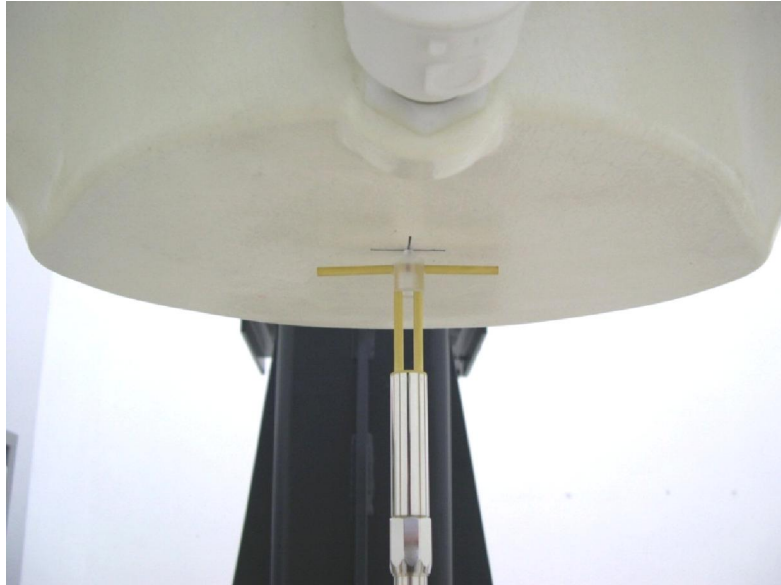

**Fig 8.2 Photo of Dipole Setup**



### 8.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Targeted SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	Normalized SAR <sub>1g</sub> (W/kg)	Deviation (%)
Mar. 05, 2011	835	10.00	2.63	10.52	5.20
Mar. 05, 2011	1800	38.90	9.80	39.20	0.77
Apr. 06, 2011	1900	40.90	10.00	40.00	-2.20
May. 31, 2011	835	10.00	2.70	10.80	8.00
May. 31, 2011	1800	38.90	10.50	42.00	7.97
May. 31, 2011	1900	40.90	10.80	43.20	5.62

Table 8.1 Target and Measurement SAR after Normalized



## **9. DUT Testing Position**

This DUT was tested in two different positions which are Rear Face and Left Side. Please refer to Appendix E for the test setup photos.

## **10. Measurement Procedures**

The measurement procedures are as follows:

- For WWAN function, link DUT with base station emulator in highest power channel
- Set base station emulator to allow DUT to radiate maximum output power
- Measure output power through RF cable and power meter
- Place the DUT in the positions described in the last section
- Set scan area, grid size and other setting on the DASY software
- Taking data for the middle channel on each testing position
- Find out the largest SAR result on these testing positions of each band
- Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **10.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



## **10.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

## **10.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## **10.4 SAR Averaged Methods**

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## **10.5 Power Drift Monitoring**

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.


## 11. SAR Test Configurations

### 11.1 Exposure Positions Consideration

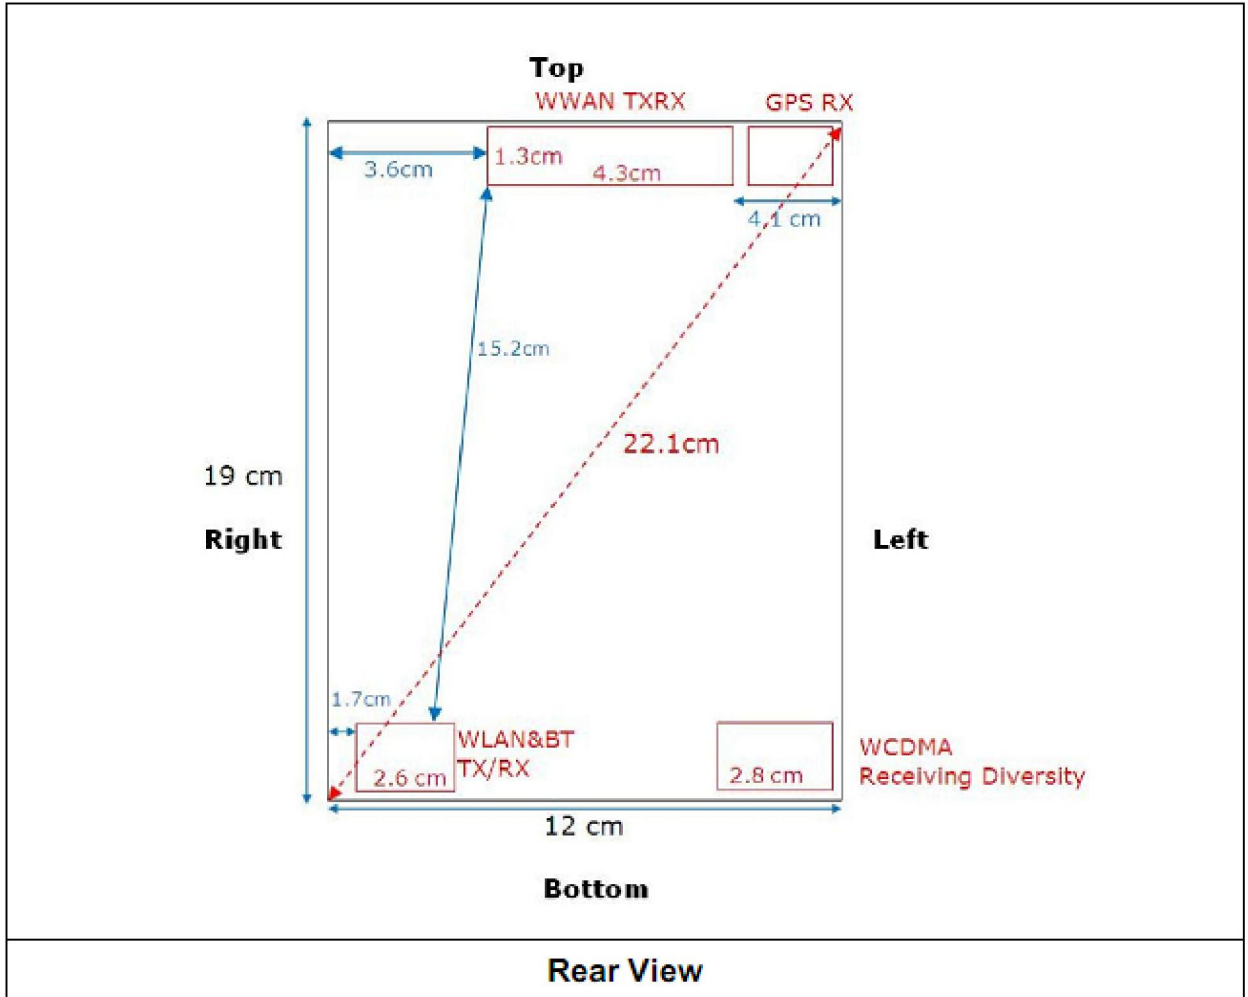



Front View

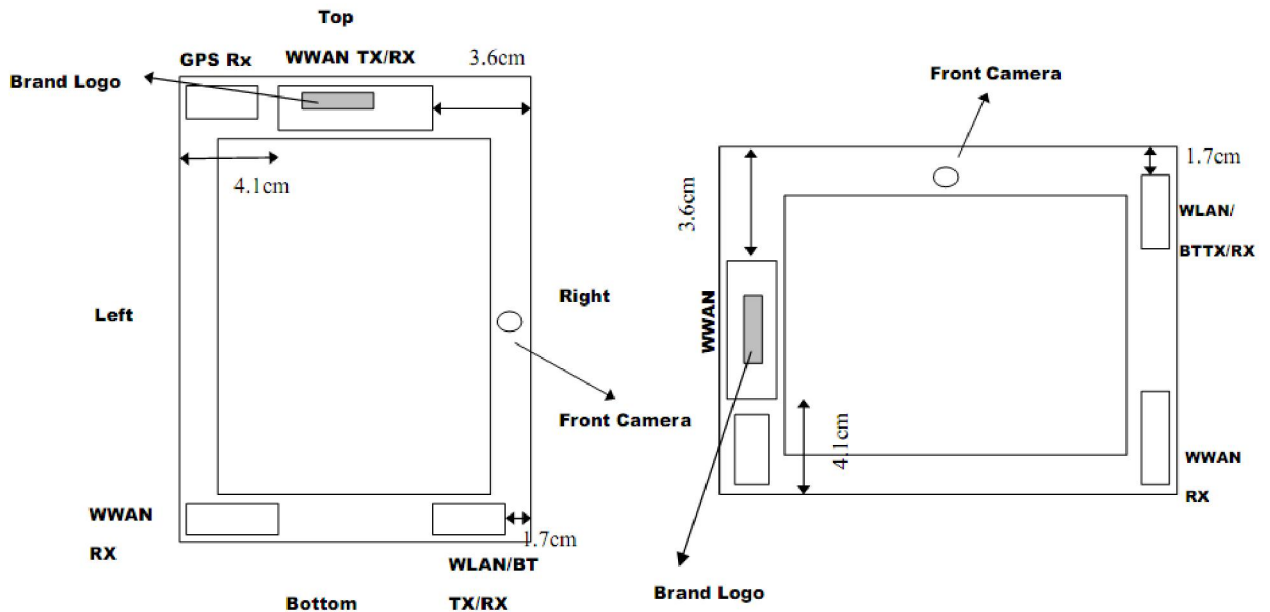

For normal usage, the screen will automatically rotate for 2 orientations, the logo upward towards the sky, and the logo towards the left side. When the SAR test was performed, the display screen stayed at the fixed user orientation position. For example, the display screen was rotated to the logo towards the left side, and fixed this position for Left side SAR testing. For details of display orientations mechanism, it can be found in separate exhibit, Technical Description.

Sides for SAR testing - Tablet						
	Rear Face	Front Face	Top	Bottom	Right	Left
GPRS/EDGE 850/1900 WCDMA Band 4	✓ (0/10mm)	x	x	x	x	✓ (0mm)
WLAN 11b/g/n 2.4GHz	✓ (0mm)	x	x	✓ (0mm)	x	x

Note:

- For each wireless mode, SAR tests for bottom and edges are required, if the transmitting antenna is within 5cm from that bottom or edge according to KDB447498. In case, the rear face is performed by 0 mm (with power reduction), and 10mm (without power reduction); left side is performed 0mm (without power reduction) for WWAN.
- Please refer to Appendix D for proximity sensor location.

11.2 Simultaneous Transmitting Configurations

	TX combinations	Simultaneous Transmitter	Remark
1	GPRS/DGGE 850/1900 / WCDMA Band 4 WLAN/BT 2.4GHz	✓	

According to the FCC KDB 447798 (b) (4) (iii), simultaneous transmission is not required when the simultaneous transmitting antennas along that edge are located less than 5 cm from edge, and sum of stand-alone 1-g SAR is < 1.6W/kg, or SPLSR is < 0.3.

The BT standalone SAR and simultaneous transmission SAR for WLAN and BT were not required, because the BT maximum power is less than 60/f. The GPRS/EDGE and WCDMA share the same WWAN transmitting antenna, and GPRS/EDGE will not transmit simultaneously with WCDMA.

## 12. SAR Test Results

### 12.1 Conducted Power – (Unit: dBm)

<DUT without Power Reduction>

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) – CS1	32.77	32.89	32.92	29.03	29.87	30.00
GPRS 10 (2 Uplink) – CS1	31.67	31.87	31.63	28.60	29.51	29.50
EDGE 8 (1 Uplink) – MCS1	31.98	32.09	31.56	29.08	29.48	29.48
EDGE 10 (2 Uplink) – MCS1	31.48	31.46	31.1	28.35	29.32	29.33
EDGE 8 (1 Uplink) – MCS9	25.24	25.47	25.25	24.5	25.23	25.28
EDGE 10 (2 Uplink) – MCS9	24.71	24.93	24.73	24.5	25.23	25.27

Note:

1. Maximum burst average power in the table above.
2. EDGE tests with MCS1 setting, GMSK modulation. Burst average power with MCS9 setting is also provided.
3. Referring to KDB 941225 D03, for GPRS/EDGE body SAR testing, the DUT was set in GPRS multi-slot class 10 with 2 uplink slots due to maximum source-based time-averaged output power as following table:

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
GPRS 8 (1 Uplink)	23.77	23.89	23.92	20.03	20.87	21.00
GPRS 10 (2 Uplink)	25.67	25.87	25.63	22.60	23.51	23.50
EDGE 8 (1 Uplink) - MCS1	22.98	23.09	22.56	20.08	20.48	20.48
EDGE 10 (2 Uplink) - MCS1	25.48	25.46	25.10	22.35	23.32	23.33
EDGE 8 (1 Uplink) – MCS9	16.24	16.47	16.25	15.50	16.23	16.28
EDGE 10 (2 Uplink) – MCS9	18.71	18.93	18.73	18.50	19.23	19.27

Note:

The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots, averaged over 1 TDMA frame.

The calculated method are shown as below:

Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6 dB

<DUT with Power Reduction >  
Burst Average Power

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) – CS1	29.11	29.20	29.25	24.40	24.59	24.78
GPRS 10 (2 Uplink) – CS1	27.11	27.40	27.36	22.07	22.85	22.14
EDGE 8 (1 Uplink) – MCS1	29.08	29.18	29.22	24.32	24.50	24.71
EDGE 10 (2 Uplink) – MCS1	27.08	27.32	27.36	22.11	22.23	22.82
EDGE 8 (1 Uplink) – MCS9	24.82	24.86	24.95	23.79	23.85	24.02
EDGE 10 (2 Uplink) – MCS9	23.84	23.91	23.96	22.81	22.84	23.15

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
GPRS 8 (1 Uplink)	20.11	20.20	20.25	15.40	15.59	15.78
GPRS 10 (2 Uplink)	21.11	21.40	21.36	16.07	16.85	16.14
EDGE 8 (1 Uplink) - MCS1	20.08	20.18	20.22	15.32	15.50	15.71
EDGE 10 (2 Uplink) - MCS1	21.08	21.32	21.36	16.11	16.23	16.82
EDGE 8 (1 Uplink) – MCS9	15.82	15.86	15.95	14.79	14.85	15.02
EDGE 10 (2 Uplink) – MCS9	17.84	17.91	17.96	16.81	16.84	17.15

Note: In power reduction mode, SAR tests with GPRS10 due to the highest source-based time-averaged power.

Power Reduction Level

Band	GSM850				GSM1900			
Channel	128	189	251	Target (dB)	512	661	810	Target (dB)
Frequency (MHz)	824.2	836.4	848.8		1850.2	1880	1909.8	
GPRS 8 (1 Uplink) – CS1	3.66	3.69	3.67	4	4.63	5.28	5.22	5
GPRS 10 (2 Uplink) – CS1	4.56	4.47	4.27	5	6.53	6.66	7.36	7
EDGE 8 (1 Uplink) – MCS1	2.90	2.91	2.34	3	4.76	4.98	4.77	5
EDGE 10 (2 Uplink) – MCS1	4.40	4.14	3.74	4	6.24	7.09	6.51	7
EDGE 8 (1 Uplink) – MCS9	0.42	0.61	0.30	0.5	0.71	1.38	1.26	1
EDGE 10 (2 Uplink) – MCS9	0.87	1.02	0.77	1	1.69	2.39	2.12	2

Note:

1. Burst average output power here
2. The target power reduction value is listed in sec. 3.4.2. The deviation from the specification is due to the tolerance in the measurement.
3. The power reduction only occurs when DUT Rear Face with 10mm or less to the user.



<DUT without Power Reduction >

Band	WCDMA Band IV		
	1312	1413	1513
Channel	1712.4	1732.6	1752.6
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	22.82	22.94	22.69
HSDPA Subtest-1	22.86	22.84	22.68
HSDPA Subtest-2	22.93	22.89	22.66
HSDPA Subtest-3	21.87	21.93	21.77
HSDPA Subtest-4	21.76	21.78	21.72
HSUPA Subtest-1	22.81	22.93	22.59
HSUPA Subtest-2	21.27	21.14	20.03
HSUPA Subtest-3	20.26	20.16	19.82
HSUPA Subtest-4	20.67	20.60	20.29
HSUPA Subtest-5	22.81	22.84	22.36

MPR				
0	HSDPA Subtest-1	0.07	0.05	-0.02
0	HSDPA Subtest-2	0.00	0.00	0.00
0.5	HSDPA Subtest-3	1.06	0.96	0.89
0.5	HSDPA Subtest-4	1.17	1.11	0.94
0	HSUPA Subtest-1	0.12	-0.04	0.07
2	HSUPA Subtest-2	1.66	1.75	2.63
2	HSUPA Subtest-3	2.67	2.73	2.84
2	HSUPA Subtest-4	2.26	2.29	2.37
0	HSUPA Subtest-5	0.12	0.05	0.30

**Note:**

1. Referring to KDB 941225 D01, RMC 12.2kbps setting is used for all SAR tests. If HSDPA and HSUPA output power is less than 1/4 dB higher than RMC 12.2kbps, SAR tests for HSDPA and HSUPA can be excluded.
2. DUT is declared to follow the MPR of 3GPP Table 5.2B.1 specification, and the specification will set during the production. Since there is tolerance in measuring 3G output power, the difference between the measured value and the specification is treated as tolerance. According to KDB 941225 D02 v02, 1)b), the MPR implementation information is provided here.

<DUT with Power Reduction>

Band	WCDMA Band IV						
	Reduced Power (dBm)			Reduction level (dB)			Target (dB)
Channel	1312	1413	1513	1312	1413	1513	
Frequency (MHz)	1712.4	1732.6	1752.6	1712.4	1732.6	1752.6	
RMC 12.2K	19.23	19.25	19.12	3.59	3.69	3.57	4
HSDPA Subtest-1	19.23	19.09	19.13	3.63	3.75	3.55	4
HSDPA Subtest-2	19.12	19.05	19.12	3.81	3.84	3.54	4
HSDPA Subtest-3	18.23	18.31	18.13	3.64	3.62	3.64	4
HSDPA Subtest-4	18.12	18.22	18.01	3.64	3.56	3.71	4
HSUPA Subtest-1	19.12	18.85	18.56	3.69	4.08	4.03	4
HSUPA Subtest-2	17.33	17.2	16.34	3.94	3.94	3.69	4
HSUPA Subtest-3	16.27	16.28	16.23	3.99	3.88	3.59	4
HSUPA Subtest-4	17.11	16.99	16.42	3.56	3.61	3.87	4
HSUPA Subtest-5	18.8	18.63	18.67	4.01	4.21	3.69	4

Note:

1. Referring to KDB 941225 D01, RMC 12.2kbps setting is used for all SAR tests. If HSDPA and HSUPA output power is less than 1/4 dB higher than RMC 12.2kbps, SAR tests for HSDPA and HSUPA can be excluded.
2. In power reduction mode, testing SAR only in RMC 12.2kbps is still applicable.
3. The target power reduction value is listed in sec. 3.4.2. The deviation from the specification is due to the tolerance in the measurement.

**12.2 Test Records for Body SAT Test**

***Rear face for 2G/3G —Proximity sensor de-activated without power reduction***

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	average Power (dBm)	SAR <sub>1g</sub> (W/kg)	SAR <sub>10g</sub> (W/kg)
43	GSM850	GPRS10	Rear Face	10	189	25.87	<b>0.871</b>	0.557
49	GSM850	GPRS10	Rear Face	10	128	25.67	0.685	0.447
50	GSM850	GPRS10	Rear Face	10	251	25.63	0.784	0.508
44	GSM850	EDGE10	Rear Face	10	189	25.46	0.612	0.397
68	GSM1900	GPRS10	Rear Face	10	661	23.51	0.627	0.395
37	WCDMA IV	RMC12.2K	Rear Face	10	1413	22.94	0.509	0.316

***Rear face for 2G/3G –Proximity sensor activated with power reduction***

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	average Power (dBm)	SAR <sub>1g</sub> (W/kg)	SAR <sub>10g</sub> (W/kg)
1	GSM850	GPRS10	Rear Face	0	189	21.40	0.497	0.291
2	GSM1900	GPRS10	Rear Face	0	661	16.85	0.498	0.275
3	WCDMA IV	RMC12.2K	Rear Face	0	1413	19.25	0.957	0.562
4	WCDMA IV	RMC12.2K	Rear Face	0	1312	19.23	1.08	0.633
5	WCDMA IV	RMC12.2K	Rear Face	0	1513	19.12	<b>1.15</b>	0.67

***Left side for 2G/3G – Without proximity sensor (Full Power)***

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	average Power (dBm)	SAR <sub>1g</sub> (W/kg)	SAR <sub>10g</sub> (W/kg)
12	GSM850	GPRS10	Left Side	0	189	25.87	0.451	0.248
63	GSM1900	GPRS10	Left Side	0	661	23.51	0.147	0.094
20	WCDMA IV	RMC12.2K	Left Side	0	1413	22.94	0.042	0.023

**Note:**

- Per 2011/4 TCB workshop, the SAR tests are necessary for DUT full-power at the trigger distance. The test distance is set to 10mm.
- SAR tested with Earphone.
- For GPRS/EDGE body SAR testing, the DUT was set in GPRS multi-slot class 10 with 2 uplink slots due to maximum source-based time-averaged output power.
- For SAR at Rear Face, the middle channel of GSM 850 and GSM 1900 SAR <0.8W/kg, thus H/L channels SAR can be excluded.
- For SAR at Left Side, the middle channel of GSM 1900, and WCDMA IV SAR <0.8W/kg, thus H/L channels SAR can be excluded
- MCS1 is used for EDGE SAR testing.
- Proximity sensor activated for Rear Face SAR tests, the power reduction level is indicated in Section 12.1.
- Per latest comment in KDB inquiry 385027, the test setup should follow Tablet mode in KDB 447498:
  - Considering the screen orientation and the antenna-to-user distance 5cm, only Rear Face and Left Side need to be evaluated. Rear Face: Test distance 0 mm.
  - Left Side: Test distance 0mm. When the DUT turned into landscape position (brand logo leftward), the WWAN antenna is 4.1cm to the user.

**Test Engineer :** Eric Huang, and Robert Liu



12.3 Simultaneous Transmission SAR Analysis and Measurements

According to the FCC KDB 447798 (b) (4) (iii), simultaneous transmission is not required when the simultaneous transmitting antennas along that edge are located less than 5 cm from edge, and sum of stand-alone 1-g SAR is < 1.6W/kg, or SPLSR is < 0.3.

<SPLSR calculation procedure>

- 1) Use DASY software to open SAR data file with zoom scan results.
2) Export data file to SEMCAD using 'Field Data Export' function.
3) Search for highest SAR based on the imported measured/interpolated data and identify the X, Y, and Z coordinates.
4) Calculate the peak SAR separation distances using the Pythagoras' theorem where Peak SAR separation distance = sqrt((X1 - X2)^2 + (Y1 - Y2)^2 + (Z1 - Z2)^2)
5) Calculate SPLSR = (SAR1 + SAR2) / Peak SAR separation distance.
6) The SPLSR calculation plots shown in test report are for reference only as the images were generated in a separate software program to add the antenna and arrow references.


<Maximum SAR list for DUT, 0mm test distance>

Table with 7 columns: GPRS 850, GPRS 1900, WCDMA Band IV, 802.11b/g, Max. SAR Summation, SPLSR. Rows include Rear Face, Left Side, and Bottom Side.

Note: The maximum SAR summation is calculated based on the same configuration and test position.

Note: The calculation of SPLSR is as follows. No SPLSR >0.3, thus volume scan is not necessary.


The calculation of SPLSR for (Rear Face 0mm: WCDMA IV + WLAN) is as below:

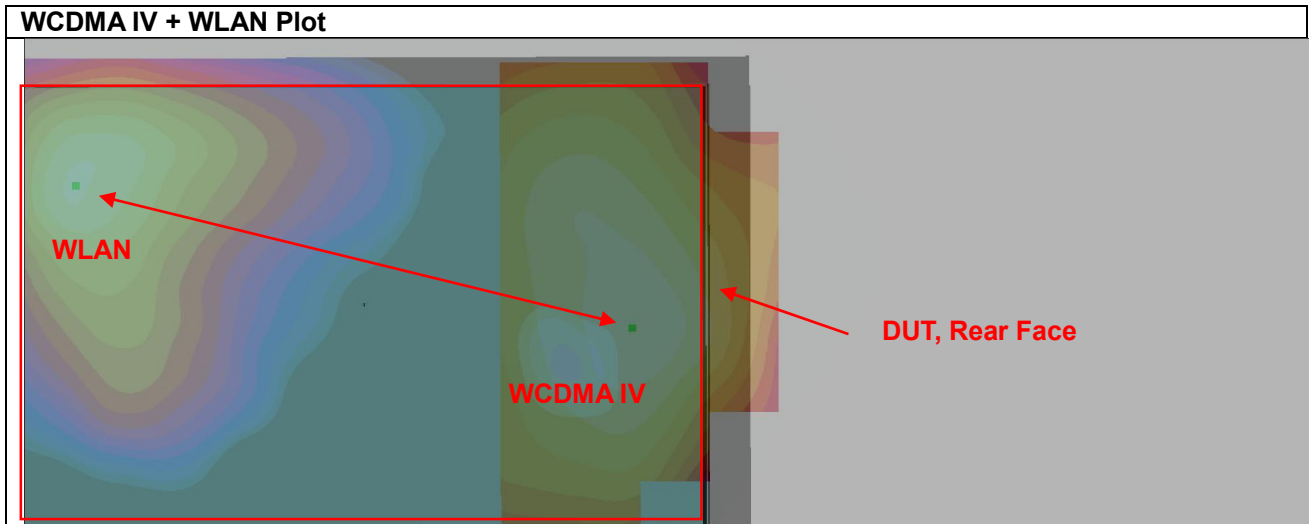

Coordinate of Peak SAR Location (X, Y, Z) : WCDMA IV (0.1744, 0.08219, -0.205), WLAN (0.01463, 0.04176, -0.204), Peak Location Spacing = 16.46 cm, SPLSR (SAR to Peak Location Spacing Ratio) = (1.15 + 0.926) / 16.46 = 0.13.

The worst case of simultaneous transmitting calculation is 0mm above plot (WCDMA band V and WLAN); the SPLSR = 0.10 for GPRS 850 at 10mm, and WLAN at 0mm is submitted voluntarily as shown below plot.

The calculation of SPLSR for (Rear Face: GPRS850 (at 10mm) + WLAN (at 0mm) is as below:

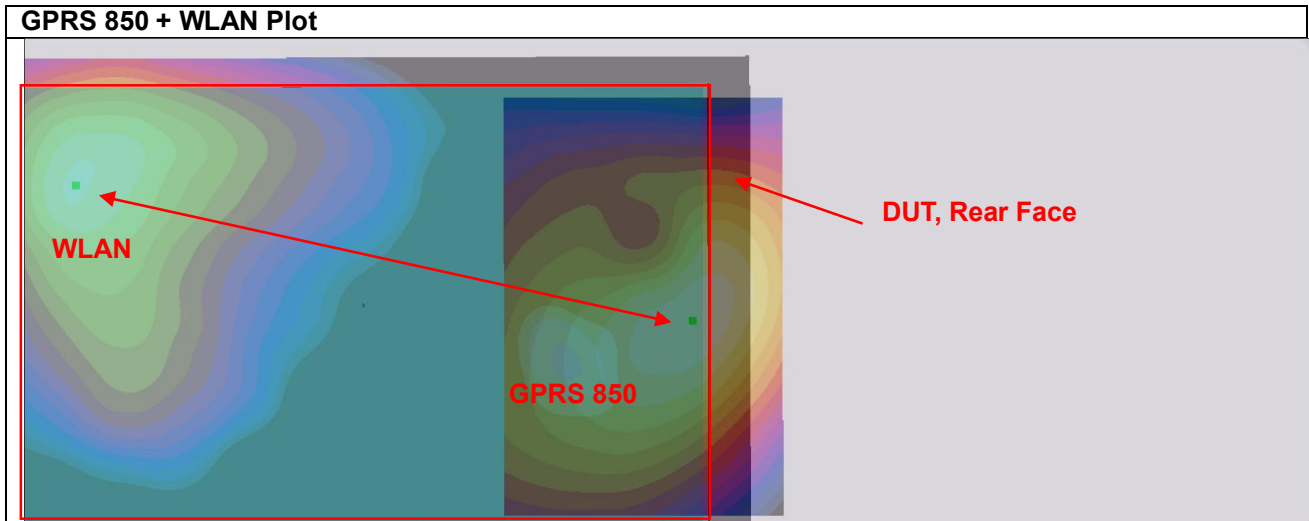

Coordinate of Peak SAR Location (X, Y, Z) : GPRS 850 (0.1729, 0.0865, -0.205), WLAN (0.01463, 0.04176, -0.204), Peak Location Spacing = 16.41 cm, SPLSR (SAR to Peak Location Spacing Ratio) = (0.784 + 0.926) / 16.41 = 0.10.





### **13. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] IEEE Std. C95.1-1991, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, 1991
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007
- [7] FCC KDB 447498 D01 v04, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, November 2009
- [8] FCC KDB 447498 D02 v02, “SAR Measurement Procedures for USB Dongle Transmitters”, November 2009
- [9] FCC KDB 616217 D01 v01r01, “SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens”, November 2009
- [10] FCC KDB 616217 D03 v01, “SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers”, November 2009
- [11] FCC KDB 648474 D01 v01r05, “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”, September 2008
- [12] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007
- [13] FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [14] FCC KDB 941225 D04 v01, “Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode”, January 27 2010



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.



## **Appendix C. DAS Y Calibration Certificate**

The DAS Y calibration certificates are shown as follows.