



# HAC (RF Emission) TEST REPORT

**Summary Result: M-Rating Category = M3**

**REPORT NO.:** SA110805C09

**MODEL NO.:** PI86100

**FCC ID:** NM8PI86100

**RECEIVED:** Aug. 05, 2011

**TESTED:** Aug. 25 ~ Sep. 29, 2011

**ISSUED:** Oct. 07, 2011

**APPLICANT:** HTC Corporation

**ADDRESS:** 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Dist., New Taipei City 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan,  
R.O.C.

This test report consists of 28 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by any government agency. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	3
1. CERTIFICATION .....	4
2. GENERAL INFORMATION.....	5
2.1 GENERAL DESCRIPTION OF EUT.....	5
2.2 DESCRIPTION OF SUPPORT UNITS.....	7
2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3. GENERAL INFORMATION OF THE DASY5 SYSTEM.....	8
3.1. GENERAL INFORMATION OF TEST EQUIPMENT.....	8
3.2. TEST EQUIPMENT LIST .....	11
3.3. MEASUREMENT UNCERTAINTY .....	12
3.4. GENERAL DESCRIPTION OF THE HAC EVALUATION.....	13
4. PERFORMANCE CATEGORIES .....	15
5. SYSTEM CHECK .....	17
5.1. VALIDATION STRUCTURE .....	17
5.2. SYSTEM CHECK PROCEDURE .....	18
5.3. VALIDATION RESULTS .....	19
6. MODULATION FACTOR .....	20
6.1 MODULATION FACTOR TEST RESULTS.....	21
7. RF EMISSION TEST PROCEDURES.....	23
7.1. TEST INSTRUCTION.....	23
7.2. TEST PROCEDURES.....	24
7.3. DESCRIPTION OF TEST POSITION AND CONFIGURATIONS.....	25
7.4. SUMMARY OF MEASURED HAC RESULTS.....	26
8. INFORMATION ON THE TESTING LABORATORIES.....	28
APPENDIX A: TEST CONFIGURATIONS AND TEST DATA	
APPENDIX B: SYSTEM CERTIFICATE & CALIBRATION	



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Oct. 07, 2011



## 1. CERTIFICATION

**PRODUCT** : Windows Phone  
**MODEL NO.** : PI86100  
**BRAND** : HTC  
**APPLICANT** : HTC Corporation  
**TESTED** : Aug. 25 ~ Sep. 29, 2011  
**STANDARDS** : FCC 47 CFR Part 20.19  
ANSI C63.19-2007  
**TEST ITEM**: RF emissions

The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's characteristics under the conditions specified in this report.

**PREPARED BY** : Ivonne Wu , **DATE**: Oct. 07, 2011  
Ivonne Wu / Senior Specialist

**APPROVED BY** : Gary Chang , **DATE**: Oct. 07, 2011  
Gary Chang / Technical Manager



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Windows Phone
<b>MODEL NO.</b>	PI86100
<b>CLASSIFICATION</b>	Production Unit
<b>MODULATION TYPE</b>	GSM: GMSK WCDMA: QPSK
<b>FREQUENCY RANGE</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>ANTENNA TYPE</b>	Fixed internal antenna
<b>ACCESSORY DEVICES</b>	Refer to Note as below

Air Interfaces/Bands List						
Air Interface	Band	Type	C63.19 Tested	Simultaneous Transmissions	Reduced Power	VOIP
GSM	850	Voice	Yes	WLAN+BT	N/A	N/A
	1900	Voice	Yes	WLAN+BT	N/A	N/A
WCDMA	850	Voice	Yes	WLAN+BT	N/A	N/A
	1900	Voice	Yes	WLAN+BT	N/A	N/A
GSM	850	Data	N/A	WLAN+BT	N/A	Yes
	1900	Data	N/A	WLAN+BT	N/A	Yes
WCDMA	850	Data	N/A	WLAN+BT	N/A	Yes
	1900	Data	N/A	WLAN+BT	N/A	Yes
WLAN	2450	Data	N/A	WCDMA	N/A	Yes
BT	2450	Data	N/A	WCDMA	N/A	N/A

**Note: The HAC rating was evaluated for voice mode only.**



**NOTE:**

1. The EUT's accessories list refers to Ext Pho\_NM8PI86100.pdf.
2. Conducted power list as below:

Band	GSM850			GSM1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM	33.87	33.77	33.91	30.53	30.64	30.61
GPRS 8	33.63	33.47	33.66	30.55	30.69	30.62
GPRS 10	32.75	32.94	32.57	29.47	29.60	29.75
EDGE 8	26.98	27.04	27.03	25.75	25.72	25.64
EDGE 10	25.74	25.75	25.92	24.60	24.62	24.53

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	23.07	23.47	23.37	23.28	23.53	23.54
HSDPA Subtest-1	21.90	22.09	22.20	22.00	22.30	22.16
HSDPA Subtest-2	20.47	20.66	20.76	20.72	20.74	20.62
HSDPA Subtest-3	19.14	19.38	19.55	19.41	19.53	19.57
HSDPA Subtest-4	18.96	19.19	19.34	19.33	19.35	19.36
HSUPA Subtest-1	21.56	21.99	22.39	22.15	22.58	22.37
HSUPA Subtest-2	21.27	21.44	21.52	21.34	21.53	21.35
HSUPA Subtest-3	21.51	21.57	21.39	21.51	21.53	21.63
HSUPA Subtest-4	21.26	21.53	21.61	21.32	21.53	21.46
HSUPA Subtest-5	22.37	22.54	22.62	22.35	22.54	22.49

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



## 2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	101095

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

**FCC 47 CFR Part 20.19**

**ANSI C63.19 – 2007**

All test items have been performed and recorded as per the above standards.



### 3. GENERAL INFORMATION OF THE DASY5SYSTEM

#### 3.1. GENERAL INFORMATION OF TEST EQUIPMENT

DASY5 consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY5 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

#### ER3DV6 E-FIELD PROBE

<b>CONSTRUCTION</b>	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
<b>CALIBRATION</b>	In air from 100MHz to 3.0GHz (absolute accuracy $\pm 6.0\%$ , $k = 2$ )
<b>FREQUENCY</b>	100MHz to > 6GHz; Linearity: $\pm 0.2\text{dB}$ (100MHz to 3GHz)
<b>DIRECTIVITY</b>	$\pm 0.2\text{dB}$ in air (rotation around probe axis) $\pm 0.4\text{dB}$ in air (rotation normal to probe axis)
<b>DYNAMIC RANGE</b>	2V/m to > 1000V/m (M3 or better device readings fall well below diode compression point) Linearity: $\pm 0.2\text{dB}$
<b>DIMENSIONS</b>	Overall length: 330mm (Tip: 16mm) Tip diameter: 8mm (Body: 12mm) Distance from probe tip to dipole centers: 2.5mm


#### H3DV6 H-FIELD PROBE

<b>CONSTRUCTION</b>	Three concentric loop sensors with 3.8mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges
<b>FREQUENCY</b>	200MHz to 3GHz (absolute accuracy $\pm 6.0\%$ , $k = 2$ ); Output linearized
<b>DIRECTIVITY</b>	$\pm 0.25\text{dB}$ (spherical isotropy error)
<b>DYNAMIC RANGE</b>	10mA/m to 2A/m at 1GHz (M3 or better device readings fall well below diode compression point)
<b>DIMENSIONS</b>	Overall length: 330mm (Tip: 40mm) Tip diameter: 6mm (Body: 12mm) Distance from probe tip to dipole centers: 3mm
<b>E-FIELD INTERFERENCE</b>	< 10% at 3GHz (for plane wave)

**NOTE:** The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.



## HAC ARCH

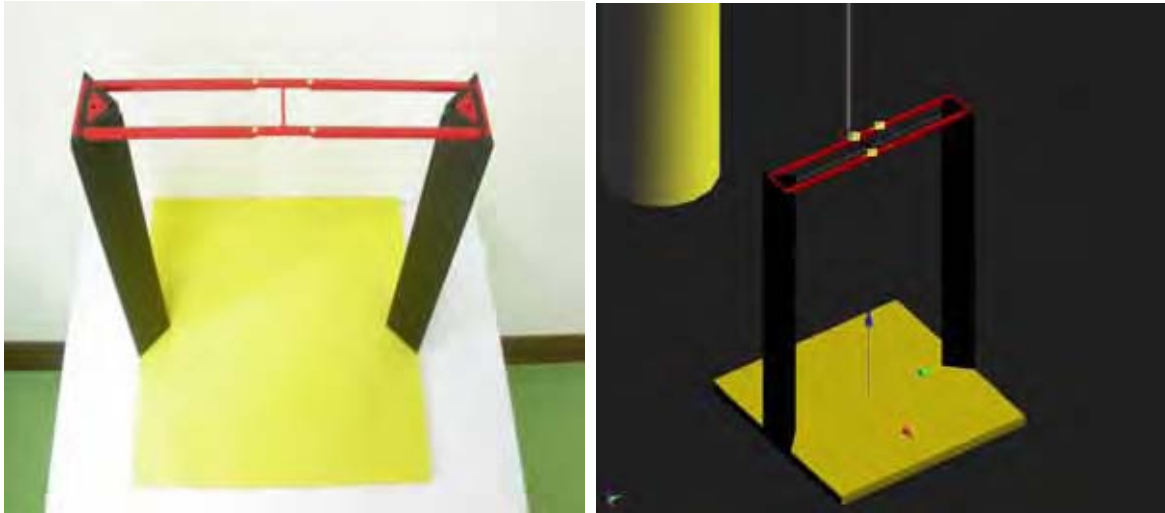

**DIMENSIONS**      370 x 370 x 370mm

### SYSTEM VALIDATION KITS:

**CD835V3**    **Frequency Band:** 800 ~ 960MHz (free space)  
**Return Loss:** > 15dB  
**Calibrated at:** 835MHz  
**Power Capability:** 50W continuous  
**Length & Height:** 166 x 330mm

**CD1880V3** **Frequency Band:** 1710 ~ 2000MHz (free space)  
**Return Loss:** > 18dB  
**Calibrated at:** 1880MHz  
**Power Capability:** 50W continuous  
**Length & Height:** 80.8 x 330mm



## DEVICE HOLDER



**CONSTRUCTION** Supports accurate and reliable positioning of any phone effect on near field  $\pm 0.5\text{dB}$

## DATA ACQUISITION ELECTRONICS ( DAE )



**CONSTRUCTION** The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is  $200\text{M}\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



### 3.2. TEST EQUIPMENT LIST

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Signal Generator	Agilent	E8257C	MY43320668	Dec. 27, 2010	Dec. 26, 2011
2	E-Field Probe	Speag	ER3DV6	2293	Jan. 24, 2011	Jan. 23, 2012
3	H-Field Probe	Speag	H3DV6	6124	Jan. 14, 2011	Jan. 13, 2012
4	DAE	S & P	DAE3	579	Sep. 20, 2010	Sep. 19, 2011
5	DAE	S & P	DAE4	861	Aug. 29, 2011	Aug. 28, 2012
6	Validation Dipole	S & P	CD835V3	1041	Mar. 15, 2011	Mar. 14, 2012
7	Validation Dipole	S & P	CD1880V3	1032	Apr. 12, 2011	Apr. 11, 2012

**NOTE:** Before starting the measurement, all test equipment shall be warmed up for 30min.



### 3.3. MEASUREMENT UNCERTAINTY

HAC UNCERTAINTY BUDGET ACCORDING TO ANSI C63.19[1]							
ERROR DESCRIPTION	UNCERTAINTY VALUE	PROBABILITY DISTRIBUTION	DIVISOR	(Ci) E	(Ci) H	STD. UNC. E (%)	STD. UNC. H (%)
<b>MEASUREMENT SYSTEM</b>							
Probe calibration	5.1	Normal	1	1	1	5.1	5.1
Axial isotropy	0.5	Rectangular	$\sqrt{3}$	1	1	0.3	0.3
Sensor Displacement	16.5	Rectangular	$\sqrt{3}$	1	0.145	9.5	1.4
Boundary Effects	2.4	Rectangular	$\sqrt{3}$	1	1	1.4	1.4
Linearity	0.6	Rectangular	$\sqrt{3}$	1	1	0.3	0.3
Scaling to Peak Envelope Power	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2
System Detection Limit	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	0.3	Rectangular	$\sqrt{3}$	1	1	0.2	0.2
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5
RF Ambient Condition	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7
RF Reflections	12.0	Rectangular	$\sqrt{3}$	1	1	6.9	6.9
Probe Positioner	1.2	Rectangular	$\sqrt{3}$	1	0.67	0.7	0.5
Probe Positioning	4.7	Rectangular	$\sqrt{3}$	1	0.67	2.7	1.8
Extrap. And Interpolation	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
<b>TEST SAMPLE RELATED</b>							
Device Positioning Vertical	2.6	Normal	1	1	1	2.6	2.6
Device Positioning Lateral	2.6	Normal	1	1	1	2.6	2.6
Device Holder and Phantom	2.4	Rectangular	$\sqrt{3}$	1	1	1.4	1.4
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9
<b>PHANTOM AND SETUP RELATED</b>							
Phantom Thickness	2.4	Rectangular	$\sqrt{3}$	1	0.67	1.4	0.9
<b>COMBINED STD. UNCERTAINTY</b>						14.4	10.7
<b>EXPANDED STD. UNCERTAINTY ON POWER</b>						28.8	21.3
<b>EXPANDED STD. UNCERTAINTY ON FIELD</b>						14.4	10.7

**NOTE:** Worst-case uncertainty budget for HAC free field assessment according to ANSI C63.19 [1]. The budget is valid for the frequency range 800MHz ~ 3GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

### 3.4. GENERAL DESCRIPTION OF THE HAC EVALUATION

The DASY5 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
- Conversion factor	ConvF <sub>i</sub>
- Diode compression point	dcp <sub>i</sub>
Device parameters: - Frequency	F
- Crest factor	Cf

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

V <sub>i</sub> = compensated signal of channel i	(i = x, y, z)
U <sub>i</sub> = input signal of channel i	(i = x, y, z)
Cf = crest factor of exciting field	(DASY parameter)
dcp <sub>i</sub> = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\textit{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{Conv}F}}$$

$$\textit{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

$V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

$\text{Norm}_i$  = sensor sensitivity of channel  $i$   $\mu\text{V}/(\text{V/m})^2$  for E-field Probes ( $i = x, y, z$ )

$\text{Conv}F$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$F$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$E$  = field strength in V/m

$E_{tot}$  = total field strength in V/m

**NOTE:** The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500ms and a probe response time of < 5ms. In the current implementation, DASY5 waits longer than 100ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

## 4. PERFORMANCE CATEGORIES

The ANSI Standard presents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

CATEGORY NEAR FIELD	TELEPHONE RF PARAMETERS < 960MHz				
	AWF	E-FIELD EMISSION CW (dBV/m)	E-FIELD EMISSION CW (V/m)	H-FIELD EMISSION CW (dBA/m)	H-FIELD EMISSION CW (A/m)
M1	0	56.0 to 61.0	631.0 to 1122.0	5.6 to 10.6	1.91 to 3.39
	-5	53.5 to 58.5	473.2 to 841.4	3.1 to 8.1	1.43 to 2.54
M2	0	51.0 to 56.0	354.8 to 631.0	0.6 to 5.6	1.07 to 1.91
	-5	48.5 to 53.5	266.1 to 473.2	-1.9 to 3.1	0.80 to 1.43
M3	0	46.0 to 51.0	199.5 to 354.8	-4.4 to 0.6	0.60 to 1.07
	-5	43.5 to 48.5	149.6 to 266.1	-6.9 to -1.9	0.45 to 0.80
M4	0	< 46.0	< 199.5	< -4.4	< 0.60
	-5	< 43.5	< 149.6	< -6.9	< 0.45

CATEGORY NEAR FIELD	TELEPHONE RF PARAMETERS > 960MHz				
	AWF	E-FIELD EMISSION CW (dBV/m)	E-FIELD EMISSION CW (V/m)	H-FIELD EMISSION CW (dBA/m)	H-FIELD EMISSION CW (A/m)
M1	0	46.0 to 51.0	199.5 to 354.8	-4.4 to 0.6	0.60 to 1.07
	-5	43.5 to 48.5	149.6 to 266.1	-6.9 to -1.9	0.45 to 0.80
M2	0	41.0 to 46.0	112.2 to 199.5	-9.4 to -4.4	0.34 to 0.60
	-5	48.5 to 53.5	84.1 to 149.6	-11.9 to -6.9	0.25 to 0.45
M3	0	36.0 to 41.0	63.1 to 112.2	-14.4 to -9.4	0.19 to 0.34
	-5	33.5 to 38.5	47.3 to 84.1	-16.9 to -11.9	0.14 to 0.25
M4	0	< 36.0	< 63.1	< -14.4	< 0.19
	-5	< 33.5	< 47.3	< -16.9	< 0.14



## ARTICULATION WEIGHING FACTOR (AWF)

The following AWF factors shall be used for the standard transmission protocols:

STANDARD	TECHNOLOGY	AWF (dB)
TIA/EIA/IS-2000	CDMA	0
TIA/EIA-136	TDMA (50Hz)	0
iDENTM	TDMA (22 and 11Hz)	0
J-STD-007	GSM (217)	-5
T1/T1P1/3GPP	UMTS (WCDMA)	0




## 5. SYSTEM CHECK

The measured values (E-field and H-field) were compared with the values provided by the probe manufacturer and must within the allowed tolerance of **25%**.

### 5.1. VALIDATION STRUCTURE

The input signal was an un-modulated continuous wave. The following points were taken into consideration in performing this check:


- Average Input Power  $P = 100\text{mW RMS}$  ( $20\text{dBm RMS}$ ) after adjustment for return loss
- The test fixture must meet the 2 wavelength separation criterion
- The proper measurement of the 1cm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:

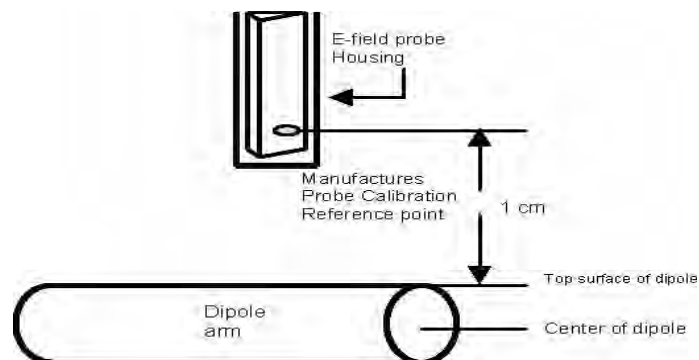

## 5.2. SYSTEM CHECK PROCEDURE

1. Before you start the system performance check, need only to tell the system with which components (probe type, validation dipole and HAC arch) are performing the system performance check; the system will take care of all parameters.

The system check configuration is shown in the following figure:

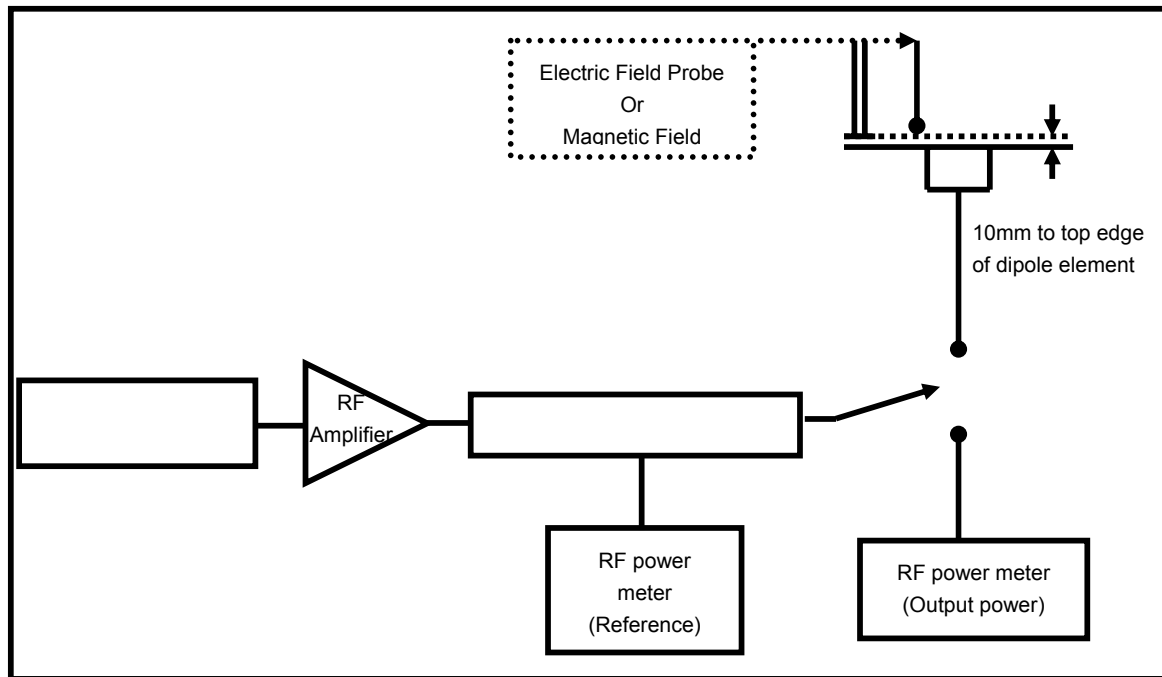

2. The dipole was energized with a 20dBm un-modulated continuous-wave signal.
3. The length of the dipole was scanned with both E-field and H-field probes and the maximum values for each were recorded.



### 5.3. VALIDATION RESULTS

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E-Field 1 (V/m)	E-Field 2 (V/m)	Average Value (V/m)	Deviation (%)	Date
835	20	168	146.8	153.1	149.95	-10.74	Aug. 25, 2011
835	20	168	163.1	164.8	163.95	-2.41	Sep. 16, 2011
835	20	168	159.2	164.4	161.8	-3.69	Sep. 29, 2011
1880	20	142.1	123.6	126.0	124.80	-12.17	Aug. 25, 2011
1880	20	142.1	129.7	132.0	130.85	-7.92	Sep. 16, 2011
1880	20	142.1	126.6	126.9	126.75	-10.80	Sep. 29, 2011
Frequency (MHz)	Input Power (dBm)	Target Value (A/m)	H-Field (A/m)		Deviation (%)	Date	
835	20	0.471	0.467		-0.85	Aug. 25, 2011	
835	20	0.471	0.453		-3.82	Sep. 16, 2011	
835	20	0.471	0.474		0.64	Sep. 29, 2011	
1880	20	0.471	0.484		2.76	Aug. 25, 2011	
1880	20	0.471	0.478		1.49	Sep. 16, 2011	
1880	20	0.471	0.424		-9.98	Sep. 29, 2011	

**NOTE:** Please see Appendix for the system validation test data.

## 6. MODULATION FACTOR

A calibration was made of the modulation response of the probe and its instrumentation chain. This calibration was performed with the field probe, attached to its instrumentation. The response of the probe system to a CW field at the frequency of interest is compared to its response to a modulated signal with equal peak amplitude to that of a CW signal. The field level of the test signals are ensured to be more than 10dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated reading was applied to the DUT measurements.

### **This was done using the following procedure:**

1. Fixing the probe in a set location relative to a field generating device, such as a reference dipole antenna, as illustrated in the system check procedure.
2. Illuminate the probe using the wireless device connected to the reference dipole with a test signal at the intended measurement frequency, Ensure there is sufficient field coupling between the probe and the antenna so the resulting reading is greater than 10dB above the probe system noise floor but within the systems operating range.
3. Record the amplitude applied to the antenna during transmission and the field strength measured by the E-field probe located near the tip of the dipole antenna.
4. Replace the wireless device with an RF signal generator producing an unmodulated CW signal and set to the wireless device operating frequency.
5. Set the amplitude of the unmodulated signal to equal that recorded from the wireless device.
6. Record the reading of the probe measurement system of the unmodulated signal.
7. The RF signal generator producing an 80%AM signal and set to the wireless device operating frequency. Set the amplitude of the signal to equal that recorded from the wireless device.
8. Record the reading of the probe measurement system of the 80%AM signal.
9. The ratio, in linear units, of the probe reading in Step 3) or 8) to the reading in Step 6) is the E-field modulation factor.
10. Steps 1-9 were repeated at all frequency bands and for both E and H field probes.

**NOTE:** The ratio of the CW to modulated signal reading is the modulation factor. The modulation factors obtained were applied to readings taken of the actual wireless device, in order to obtain an accurate peak field reading using the formula:

$$\text{Peak} = 20 \cdot \log(\text{Raw} \cdot \text{ProbeModulationFactor})$$



## 6.1 MODULATION FACTOR TEST RESULTS

TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED E-FILED (V/m)	E-FILED MODULATION FACTOR
835	CW	34.0	854.0	NA
	80% AM		529.0	1.61
	GSM		331.0	2.58
TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED H-FILED (A/m)	H-FILED MODULATION FACTOR
835	CW	34.0	2.313	NA
	80% AM		1.892	1.22
	GSM		1.776	1.30

TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED E-FILED (V/m)	E-FILED MODULATION FACTOR
1880	CW	30.5	532.7	NA
	80% AM		330.8	1.61
	GSM		199.9	2.66
TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED H-FILED (A/m)	H-FILED MODULATION FACTOR
1880	CW	30.5	1.753	NA
	80% AM		1.471	1.19
	GSM		1.470	1.19




TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED E-FILED (V/m)	E-FILED MODULATION FACTOR
835	CW	23.5	318.5	NA
	80% AM		201.3	1.58
	WCDMA		324.7	0.98
TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED H-FILED (A/m)	H-FILED MODULATION FACTOR
835	CW	23.5	0.659	NA
	80% AM		0.447	1.47
	WCDMA		0.823	0.80

TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED E-FILED (V/m)	E-FILED MODULATION FACTOR
1880	CW	23.5	228.5	-
	80% AM		155.7	1.47
	WCDMA		233.9	0.98
TEST FREQUENCY (MHz)	PROTOCOL	REFERENCE LEVEL (dBm)	MEASURED H-FILED (A/m)	H-FILED MODULATION FACTOR
1880	CW	23.5	0.751	-
	80% AM		0.628	1.20
	WCDMA		1.459	0.51

## 7. RF EMISSION TEST PROCEDURES

### 7.1. TEST INSTRUCTION

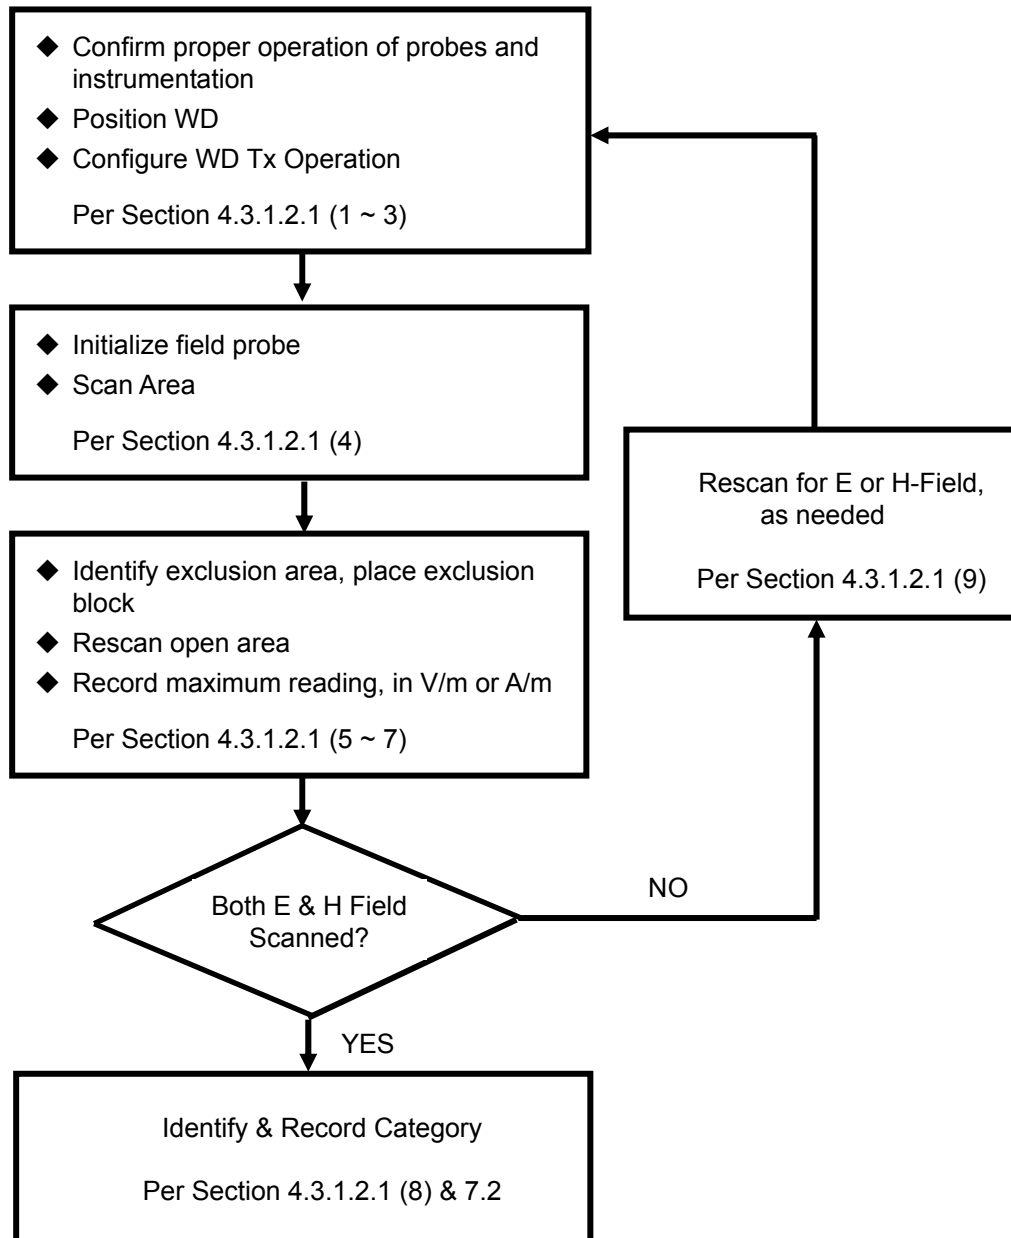

## 7.2. TEST PROCEDURES


The EUT makes a phone call to the GSM base station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel.

The recommended procedure for assessing the RF emission value consists of the following steps:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
4. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC arch.
5. The measurement system measured the field strength at the reference location.
6. Measurements at 2mm increments in the 5 x 5cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
7. Steps 1-6 were done for both the E and H-Field measurements.



### 7.3. DESCRIPTION OF TEST POSITION AND CONFIGURATIONS

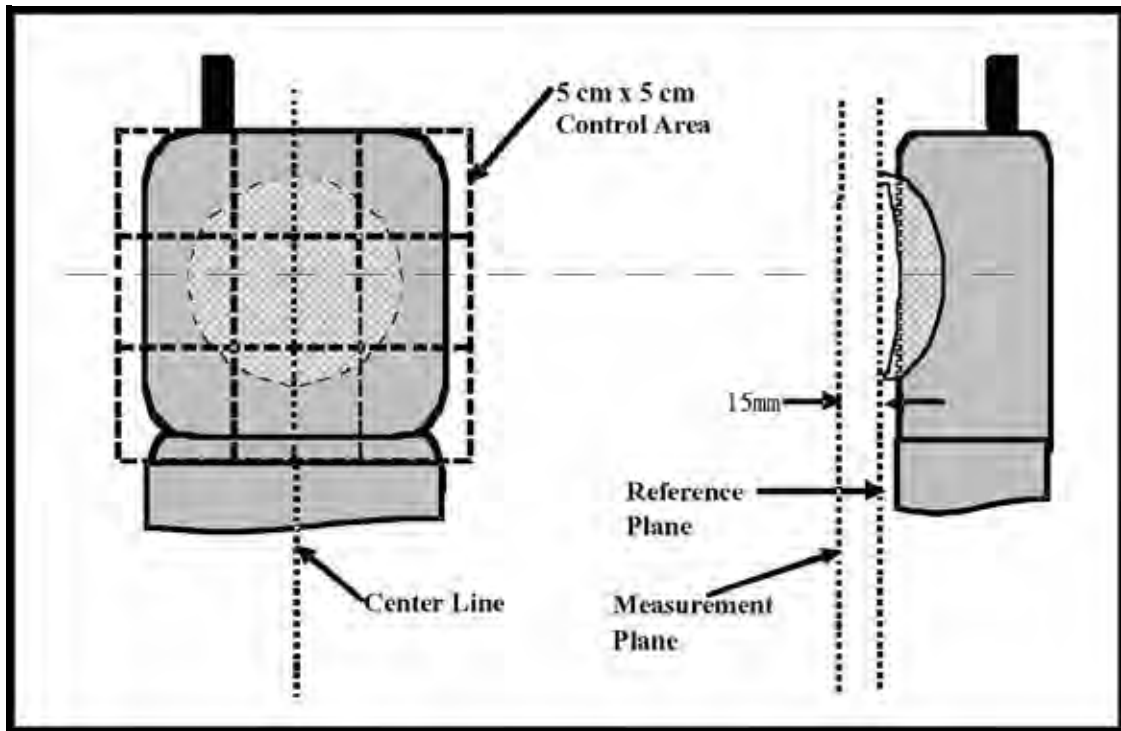



## 7.4. SUMMARY OF MEASURED HAC RESULTS

### E-FIELD EMISSION

Plot No.	Band	Mode	Channel	Sample	Battery	Peak E-Field (V/m)	E-Field M Rating
1	GSM850	GSM	128	1	1	139.5	M4
29	GSM850	GSM	189	1	1	<b>164.8</b>	<b>M3</b>
3	GSM850	GSM	251	1	1	135.7	M4
25	GSM850	GSM	189	1	2	153.8	M3
41	GSM850	GSM	189	2	1	159.8	M3
4	GSM1900	GSM	512	1	1	51.72	M3
5	GSM1900	GSM	661	1	1	54.42	M3
30	GSM1900	GSM	810	1	1	<b>57.233</b>	<b>M3</b>
26	GSM1900	GSM	810	1	2	54.154	M3
42	GSM1900	GSM	810	2	1	54.918	M3
7	WCDMA V	RMC	4132	1	1	48.708	M4
8	WCDMA V	RMC	4182	1	1	46.383	M4
31	WCDMA V	RMC	4233	1	1	<b>52.862</b>	<b>M4</b>
27	WCDMA V	RMC	4233	1	2	42.552	M4
43	WCDMA V	RMC	4233	2	1	51.22	M4
32	WCDMA II	RMC	9262	1	1	29.546	M4
11	WCDMA II	RMC	9400	1	1	26.601	M4
12	WCDMA II	RMC	9538	1	1	26.855	M4
28	WCDMA II	RMC	9262	1	2	<b>30.57</b>	<b>M4</b>
44	WCDMA II	RMC	9262	2	2	27.956	M4

**NOTE:**

1. Please see the Appendix A for the measured data and test plots.



### H-FIELD EMISSION

Plot No.	Band	Mode	Channel	Sample	Battery	Peak H-Field (A/m)	H-Field M Rating
13	GSM850	GSM	128	1	1	0.104	M4
37	GSM850	GSM	189	1	1	0.118	M4
15	GSM850	GSM	251	1	1	0.114	M4
33	GSM850	GSM	189	1	2	0.108	M4
45	GSM850	GSM	189	2	1	<b>0.129</b>	<b>M4</b>
16	GSM1900	GSM	512	1	1	0.077	M4
17	GSM1900	GSM	661	1	1	0.079	M4
18	GSM1900	GSM	810	1	1	0.083	M4
34	GSM1900	GSM	810	1	2	0.079	M4
46	GSM1900	GSM	810	2	1	<b>0.102</b>	<b>M4</b>
19	WCDMA V	RMC	4132	1	1	0.06	M4
20	WCDMA V	RMC	4182	1	1	0.057	M4
21	WCDMA V	RMC	4233	1	1	0.066	M4
35	WCDMA V	RMC	4233	1	2	<b>0.067</b>	<b>M4</b>
47	WCDMA V	RMC	4233	2	2	0.06	M4
40	WCDMA II	RMC	9262	1	1	0.05	M4
23	WCDMA II	RMC	9400	1	1	0.044	M4
24	WCDMA II	RMC	9538	1	1	0.044	M4
36	WCDMA II	RMC	9262	1	2	<b>0.051</b>	<b>M4</b>
48	WCDMA II	RMC	9262	2	2	0.047	M4

**NOTE:**

- Please see the Appendix A for the measured data and test plots.



## 8. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

---END---

**System Check\_E-Field\_835\_110825**

**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ;

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 153.1 V/m



Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 100.8 V/m; Power Drift = -0.09 dB

Peak E-field in V/m

Grid 1 <b>143.5 M4</b>	Grid 2 <b>146.8 M4</b>	Grid 3 <b>143.3 M4</b>
Grid 4 <b>79.672 M4</b>	Grid 5 <b>81.190 M4</b>	Grid 6 <b>78.096 M4</b>
Grid 7 <b>151.0 M4</b>	Grid 8 <b>153.1 M4</b>	Grid 9 <b>145.1 M4</b>

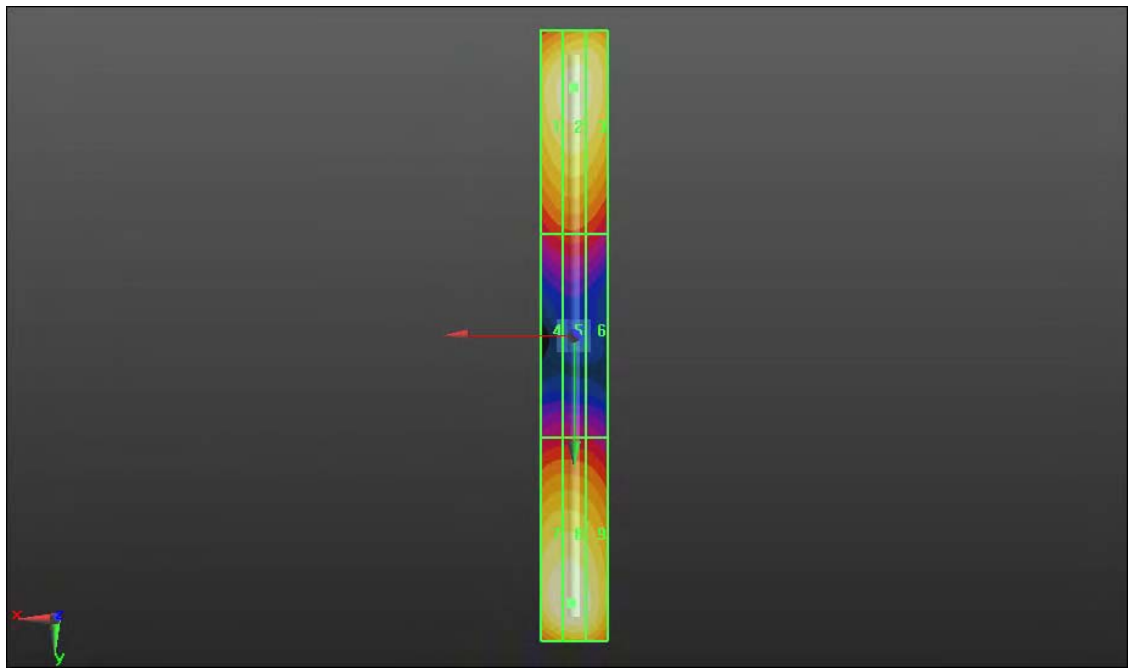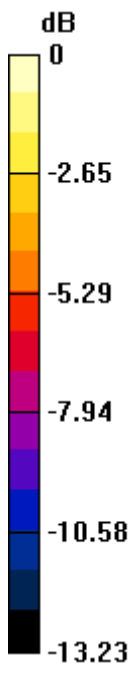

0 dB = 153.1V/m

**System Check\_E-Field\_835\_110916**

**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ;

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 164.8 V/m



Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 105.6 V/m; Power Drift = 0.0057 dB

Peak E-field in V/m

Grid 1 <b>162.2 M4</b>	Grid 2 <b>163.1 M4</b>	Grid 3 <b>153.9 M4</b>
Grid 4 <b>89.312 M4</b>	Grid 5 <b>89.984 M4</b>	Grid 6 <b>84.518 M4</b>
Grid 7 <b>163.6 M4</b>	Grid 8 <b>164.8 M4</b>	Grid 9 <b>154.0 M4</b>

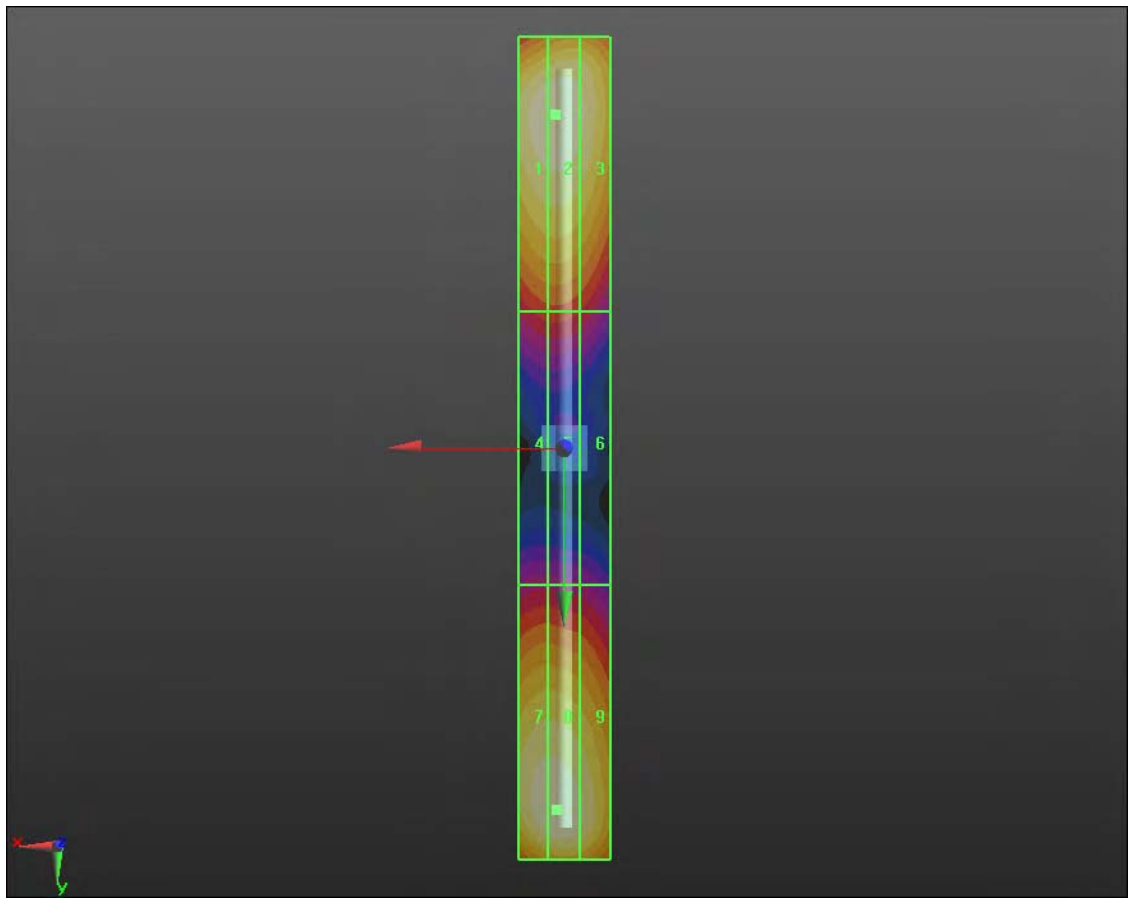

0 dB = 164.8V/m



### System Check\_E-Field\_835\_110929

#### DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

#### DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn861; Calibrated: 2011/8/29

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

#### Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 164.4 V/m


Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 109.2 V/m; Power Drift = 0.05 dB

Peak E-field in V/m

Grid 1 <b>157.2 M4</b>	Grid 2 <b>159.2 M4</b>	Grid 3 <b>154.3 M4</b>
Grid 4 <b>85.107 M4</b>	Grid 5 <b>86.582 M4</b>	Grid 6 <b>82.924 M4</b>
Grid 7 <b>160.9 M4</b>	Grid 8 <b>164.4 M4</b>	Grid 9 <b>156.5 M4</b>

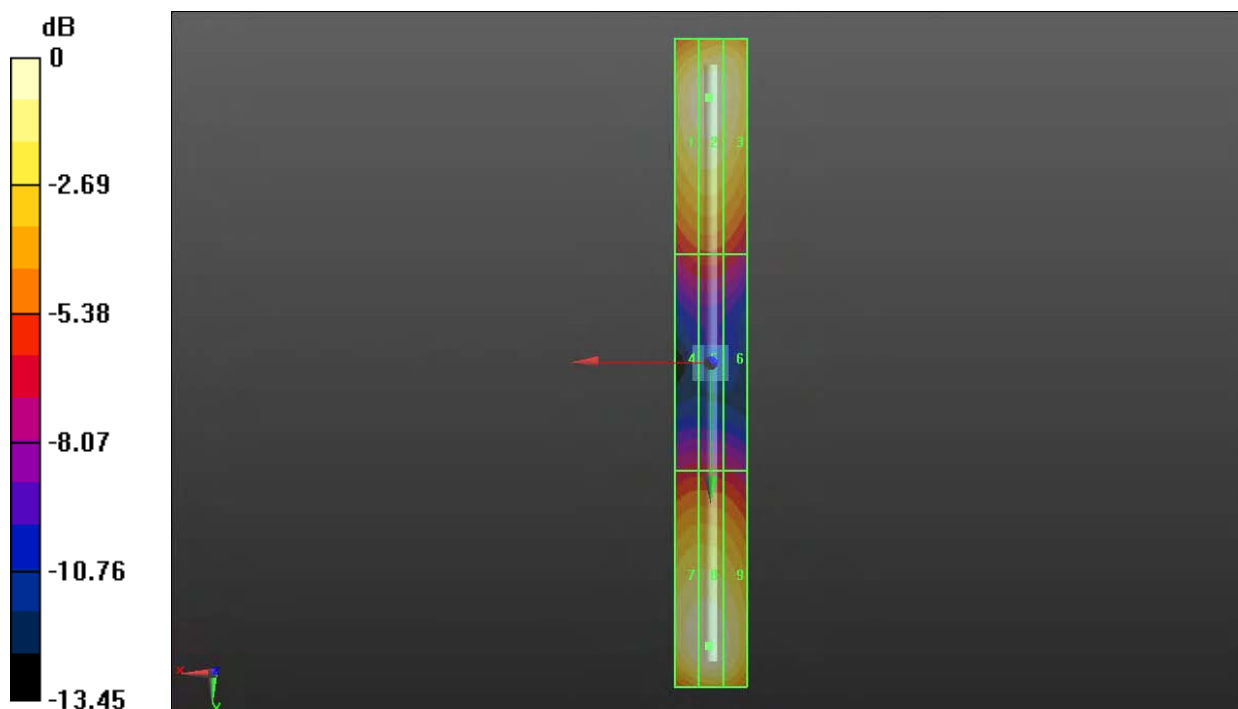

0 dB = 164.4V/m

## System Check\_E-Field\_1880\_110825

### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ;

#### DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

### Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 126.0 V/m



Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 142.4 V/m; Power Drift = -0.05 dB

Peak E-field in V/m

Grid 1 <b>120.9 M2</b>	Grid 2 <b>123.6 M2</b>	Grid 3 <b>120.1 M2</b>
Grid 4 <b>81.621 M3</b>	Grid 5 <b>83.320 M3</b>	Grid 6 <b>79.549 M3</b>
Grid 7 <b>121.1 M2</b>	Grid 8 <b>126.0 M2</b>	Grid 9 <b>122.8 M2</b>

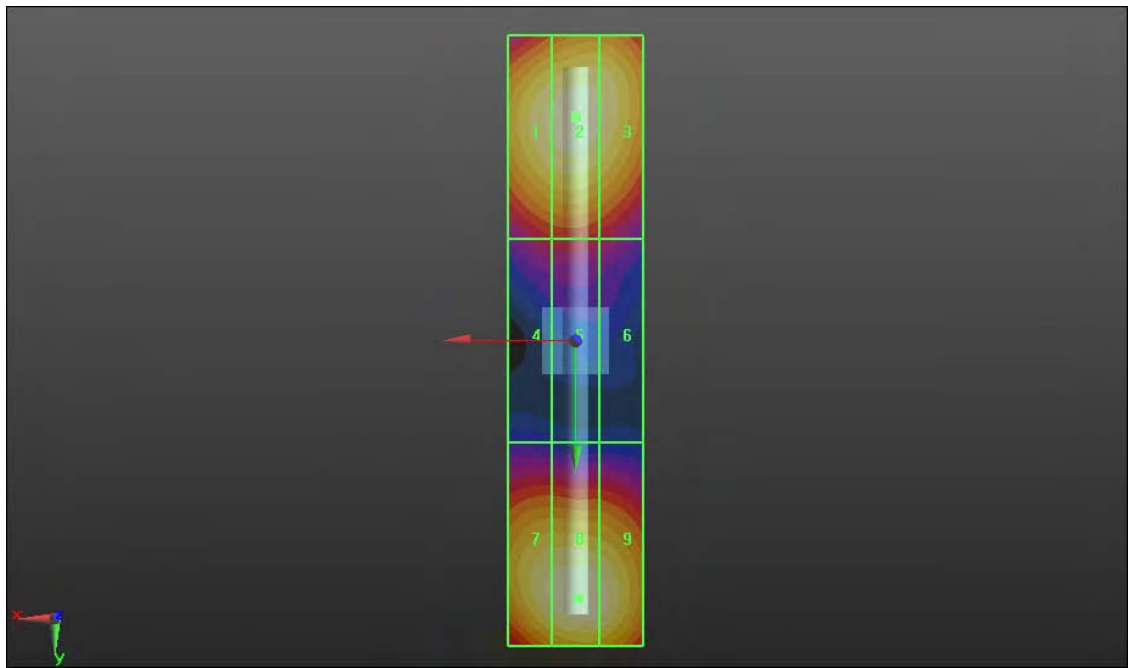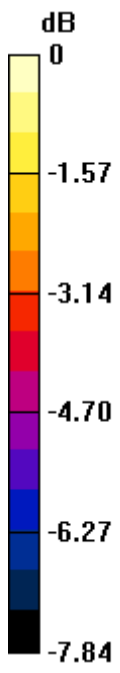

0 dB = 126.0V/m

## System Check\_E-Field\_1880\_110916

### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C;

#### DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

### Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 132.0 V/m


Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 148.7 V/m; Power Drift = -0.02 dB

Peak E-field in V/m

Grid 1 <b>127.5 M2</b>	Grid 2 <b>129.7 M2</b>	Grid 3 <b>125.8 M2</b>
Grid 4 <b>86.528 M3</b>	Grid 5 <b>87.707 M3</b>	Grid 6 <b>83.334 M3</b>
Grid 7 <b>128.9 M2</b>	Grid 8 <b>132.0 M2</b>	Grid 9 <b>124.7 M2</b>

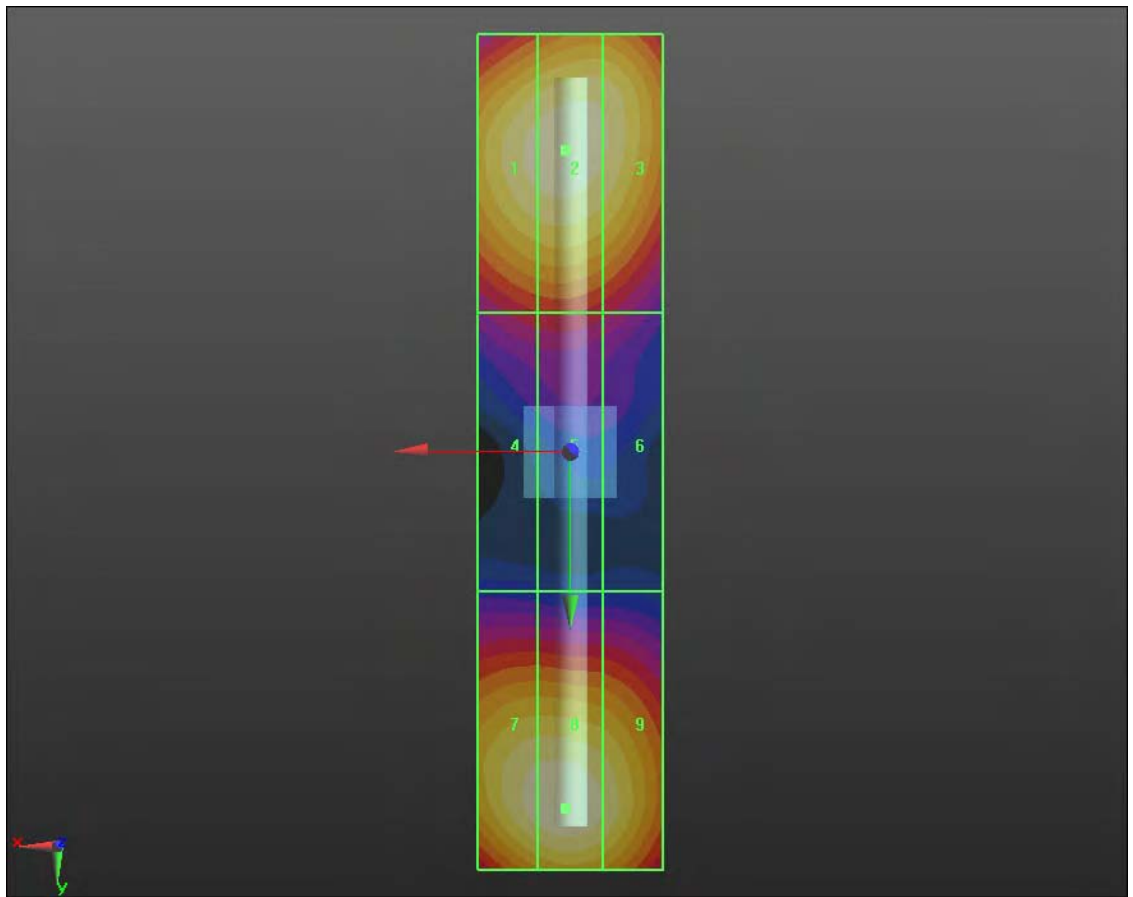

0 dB = 132.0V/m

### System Check\_E-Field\_1880\_110929

#### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

#### DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn861; Calibrated: 2011/8/29

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

#### Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 126.9 V/m


Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 141.9 V/m; Power Drift = 0.03 dB

Peak E-field in V/m

Grid 1 <b>124.0 M2</b>	Grid 2 <b>126.6 M2</b>	Grid 3 <b>123.2 M2</b>
Grid 4 <b>82.938 M3</b>	Grid 5 <b>84.348 M3</b>	Grid 6 <b>80.301 M3</b>
Grid 7 <b>121.9 M2</b>	Grid 8 <b>126.9 M2</b>	Grid 9 <b>123.0 M2</b>

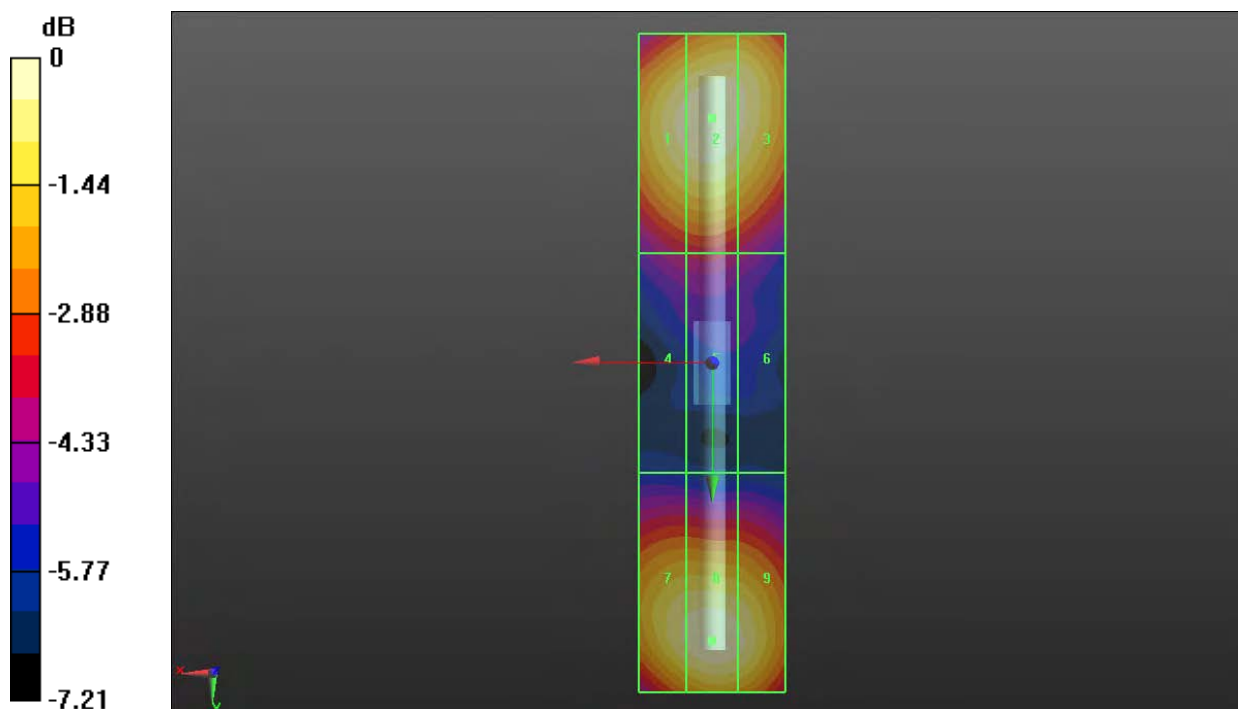

0 dB = 126.9V/m

**System Check\_H-Field\_835\_110825**

**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

**DASY5 Configuration:**

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.467 A/m



Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.409 A/m; Power Drift = -0.17 dB

Peak H-field in A/m

Grid 1 <b>0.372 M4</b>	Grid 2 <b>0.412 M4</b>	Grid 3 <b>0.401 M4</b>
Grid 4 <b>0.430 M4</b>	Grid 5 <b>0.467 M4</b>	Grid 6 <b>0.453 M4</b>
Grid 7 <b>0.380 M4</b>	Grid 8 <b>0.408 M4</b>	Grid 9 <b>0.393 M4</b>

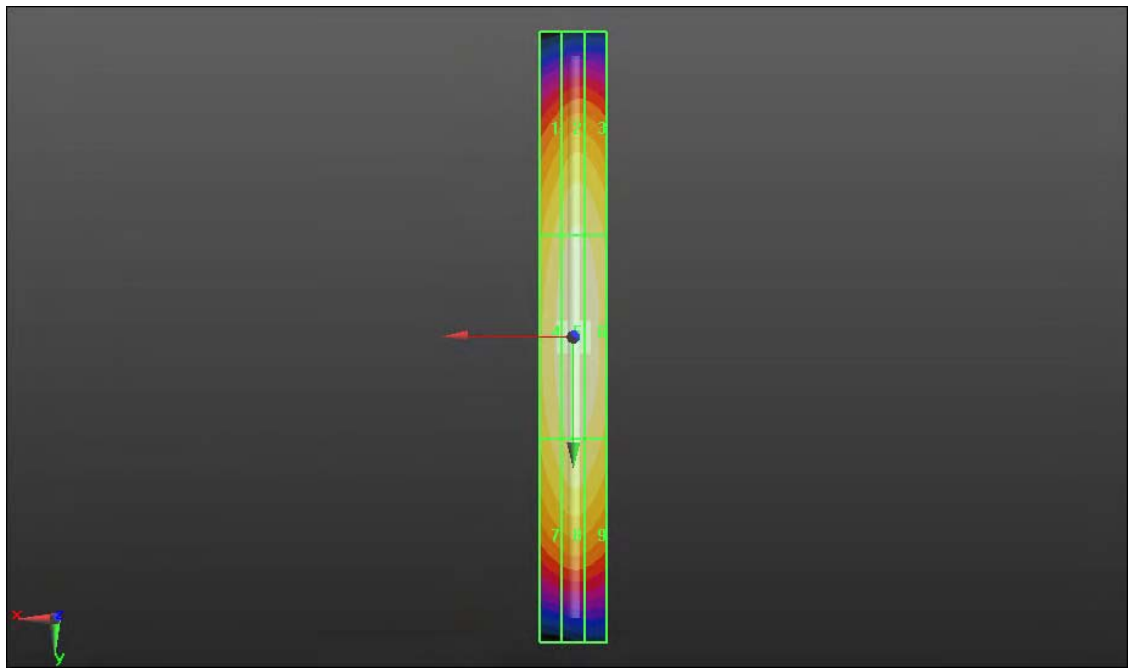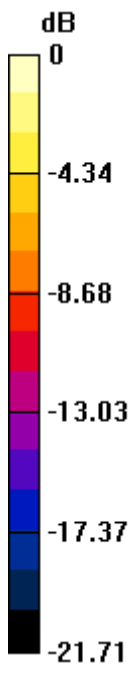

0 dB = 0.470A/m



**System Check\_H-Field\_835\_110916**

**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Ambient Temperature : 22.7 °C;

**DASY5 Configuration:**



- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.453 A/m  
 Probe Modulation Factor = 1.000  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 0.386 A/m; Power Drift = -0.03 dB

Peak H-field in A/m

Grid 1 <b>0.373 M4</b>	Grid 2 <b>0.400 M4</b>	Grid 3 <b>0.384 M4</b>
Grid 4 <b>0.421 M4</b>	Grid 5 <b>0.453 M4</b>	Grid 6 <b>0.436 M4</b>
Grid 7 <b>0.363 M4</b>	Grid 8 <b>0.391 M4</b>	Grid 9 <b>0.379 M4</b>

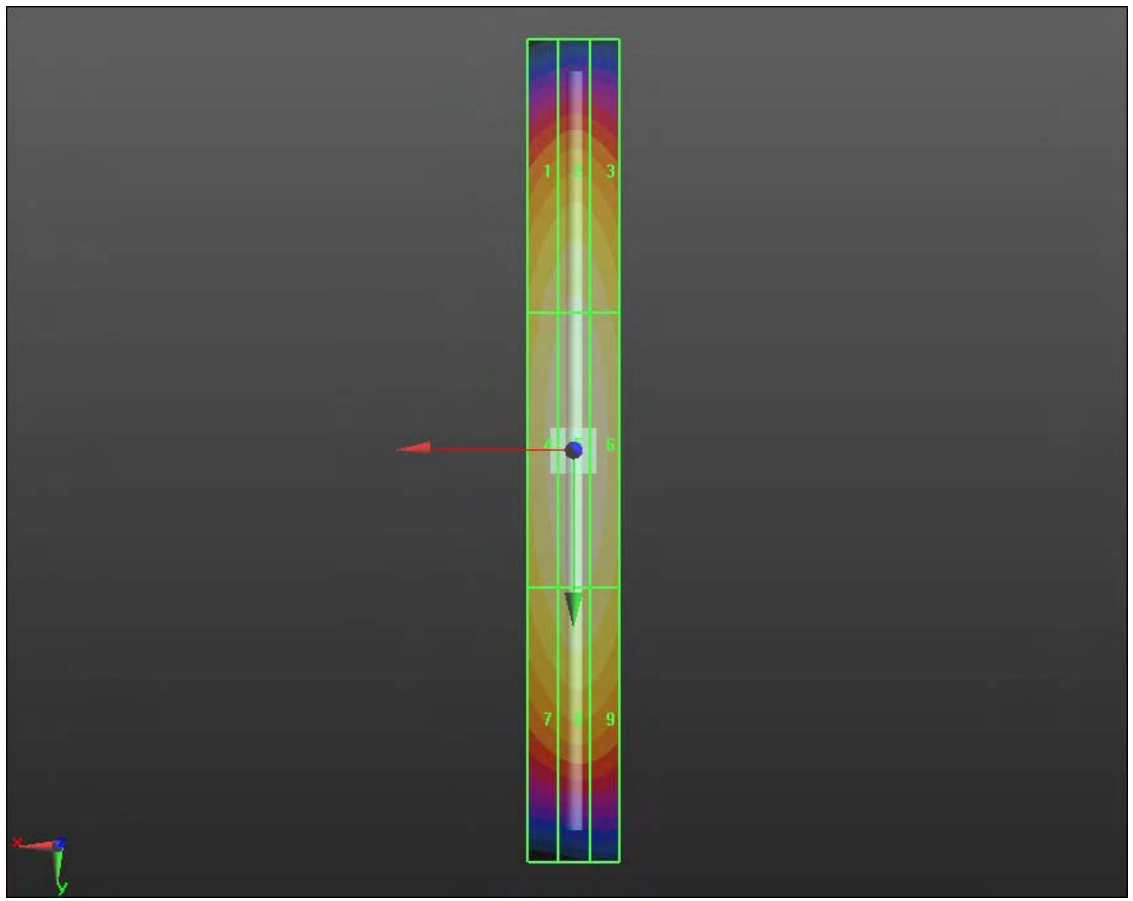

0 dB = 0.450A/m

## System Check\_H-Field\_835\_110929

### DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.474 A/m


Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.504 A/m; Power Drift = 0.0036 dB

Peak H-field in A/m

Grid 1 <b>0.381 M4</b>	Grid 2 <b>0.409 M4</b>	Grid 3 <b>0.399 M4</b>
Grid 4 <b>0.444 M4</b>	Grid 5 <b>0.474 M4</b>	Grid 6 <b>0.459 M4</b>
Grid 7 <b>0.398 M4</b>	Grid 8 <b>0.424 M4</b>	Grid 9 <b>0.406 M4</b>

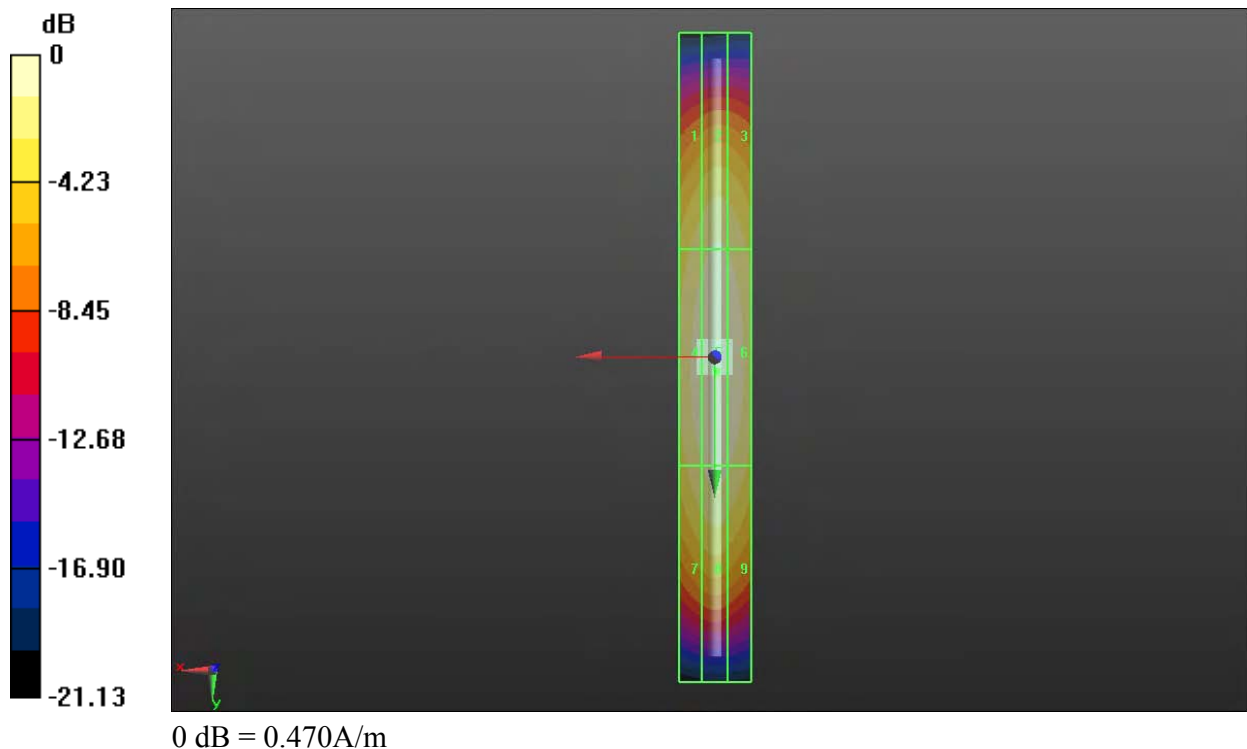

## System Check\_H-Field\_1880\_110825

### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

#### DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

### Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.484 A/m



Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.515 A/m; Power Drift = -0.04 dB

Peak H-field in A/m

Grid 1 <b>0.411 M2</b>	Grid 2 <b>0.453 M2</b>	Grid 3 <b>0.440 M2</b>
Grid 4 <b>0.446 M2</b>	Grid 5 <b>0.484 M2</b>	Grid 6 <b>0.471 M2</b>
Grid 7 <b>0.404 M2</b>	Grid 8 <b>0.439 M2</b>	Grid 9 <b>0.426 M2</b>

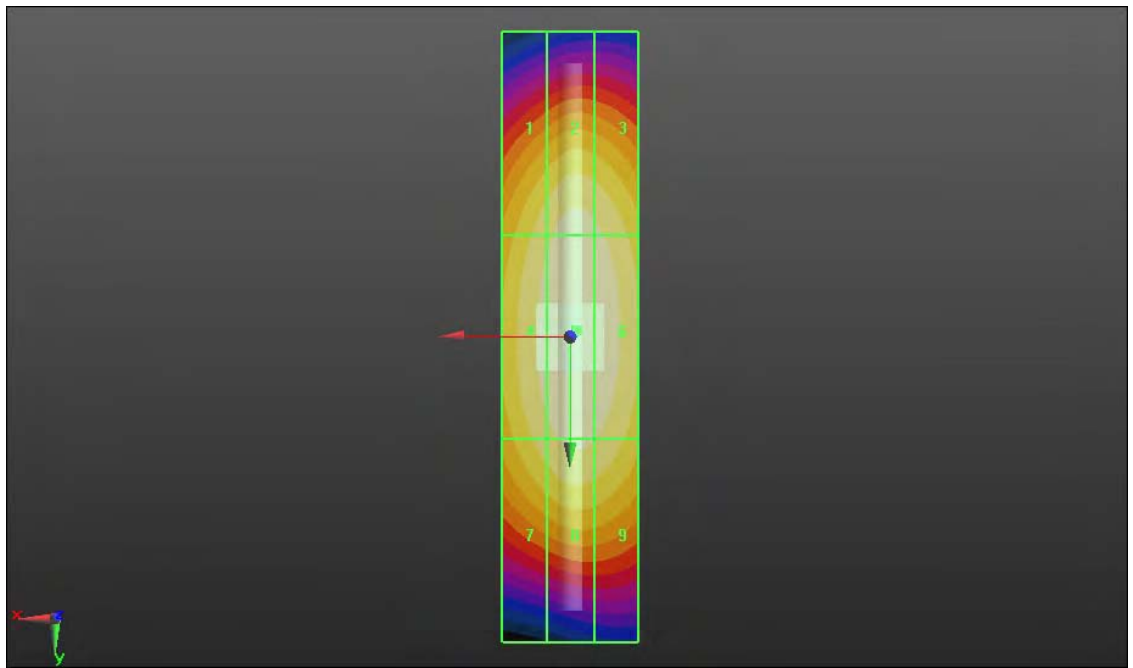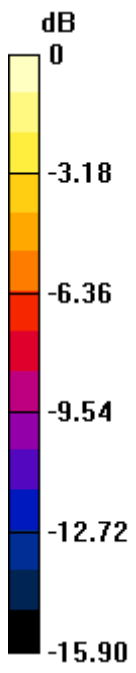

0 dB = 0.480A/m

## System Check\_H-Field\_1880\_110916

### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.7 °C;

#### DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

### Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.478 A/m



Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.509 A/m; Power Drift = -0.07 dB

Peak H-field in A/m

Grid 1 <b>0.407 M2</b>	Grid 2 <b>0.442 M2</b>	Grid 3 <b>0.426 M2</b>
Grid 4 <b>0.444 M2</b>	Grid 5 <b>0.478 M2</b>	Grid 6 <b>0.462 M2</b>
Grid 7 <b>0.400 M2</b>	Grid 8 <b>0.429 M2</b>	Grid 9 <b>0.415 M2</b>

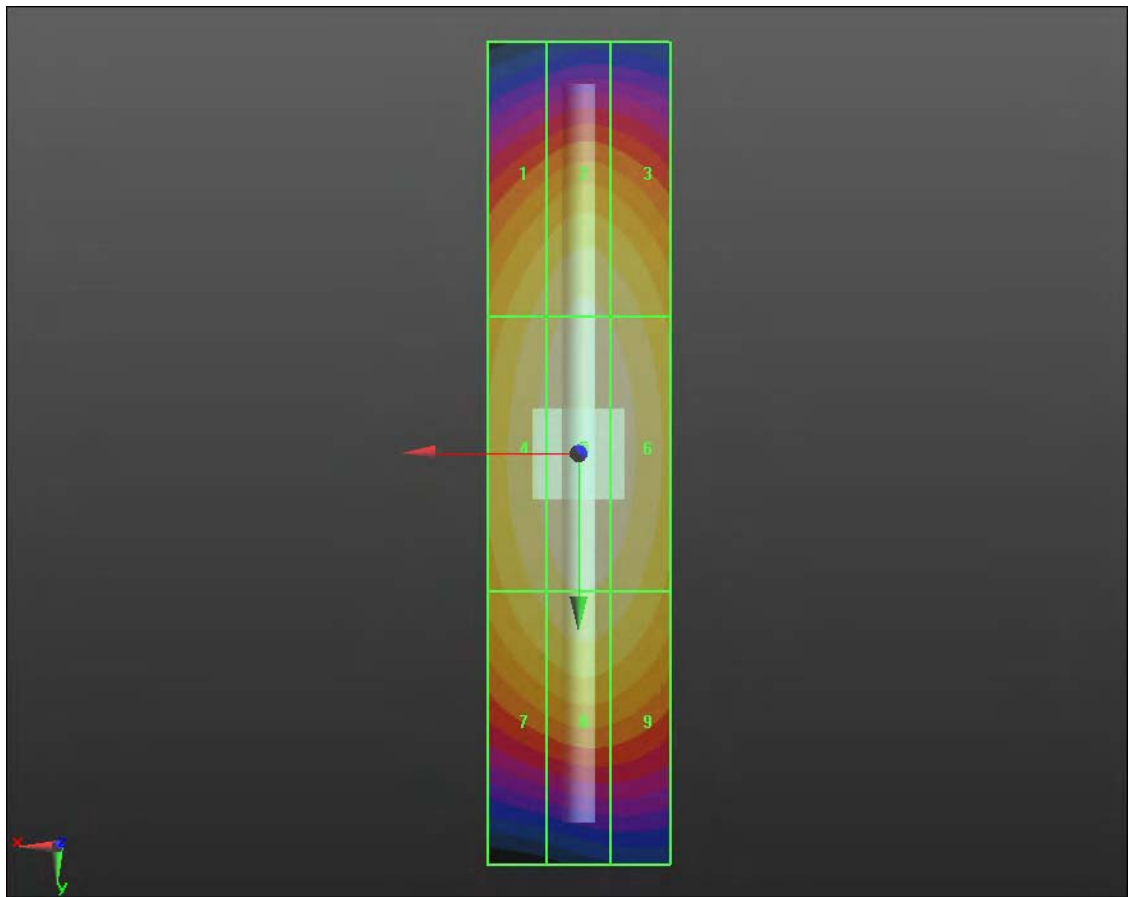

0 dB = 0.480A/m

### System Check\_H-Field\_1880\_110929

#### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Ambient Temperature : 22.9 °C;

#### DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

#### Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.424 A/m


Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.449 A/m; Power Drift = -0.0078 dB

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.365 M2</b>	<b>0.391 M2</b>	<b>0.384 M2</b>
Grid 4	Grid 5	Grid 6
<b>0.399 M2</b>	<b>0.424 M2</b>	<b>0.413 M2</b>
Grid 7	Grid 8	Grid 9
<b>0.370 M2</b>	<b>0.393 M2</b>	<b>0.378 M2</b>

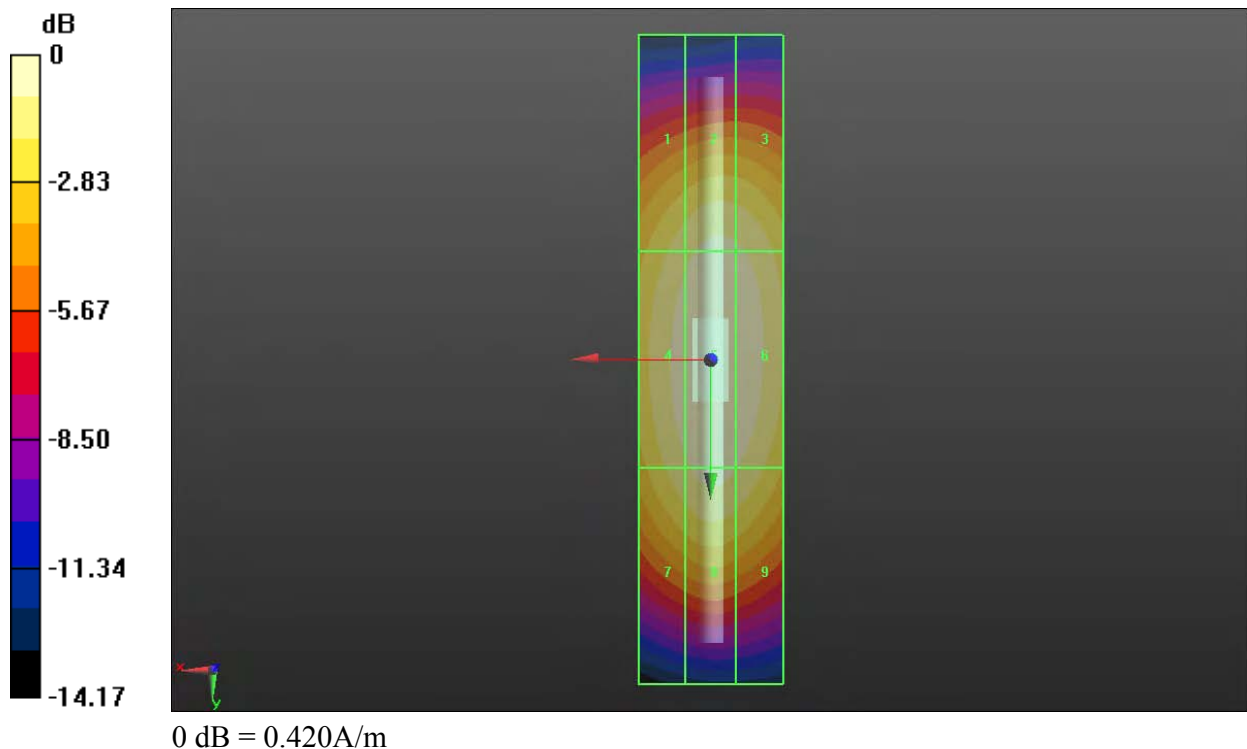



**P01 E-Field\_GSM850\_Ch128\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch128/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 139.5 V/m

Probe Modulation Factor = 2.580


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.291 V/m; Power Drift = -0.09 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>136.4 M4</b>	Grid 2 <b>139.8 M4</b>	Grid 3 <b>129.2 M4</b>
Grid 4 <b>133.8 M4</b>	Grid 5 <b>139.5 M4</b>	Grid 6 <b>129.7 M4</b>
Grid 7 <b>128.9 M4</b>	Grid 8 <b>135.3 M4</b>	Grid 9 <b>125.9 M4</b>

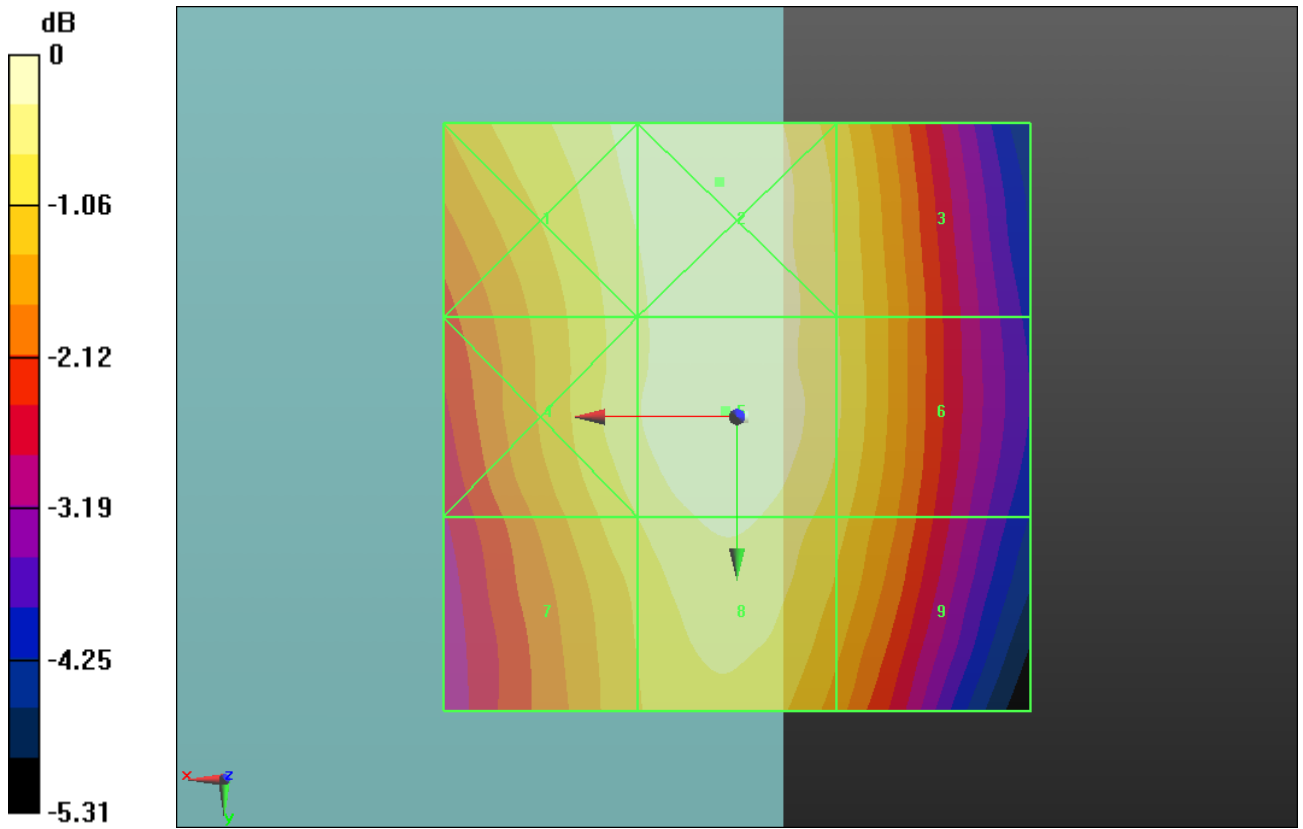

0 dB = 139.8V/m

**P29 E-Field\_GSM850\_Ch189\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch189/Hearing Aid Compatibility Test(101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 164.8 V/m

Probe Modulation Factor = 2.580

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 83.836 V/m; Power Drift = -0.12 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

"

Peak E-field in V/m

Grid 1 <b>161.0 M3</b>	Grid 2 <b>164.7 M3</b>	Grid 3 <b>151.2 M3</b>
Grid 4 <b>157.8 M3</b>	Grid 5 <b>164.8 M3</b>	Grid 6 <b>151.7 M3</b>
Grid 7 <b>153.2 M3</b>	Grid 8 <b>159.6 M3</b>	Grid 9 <b>146.9 M4</b>

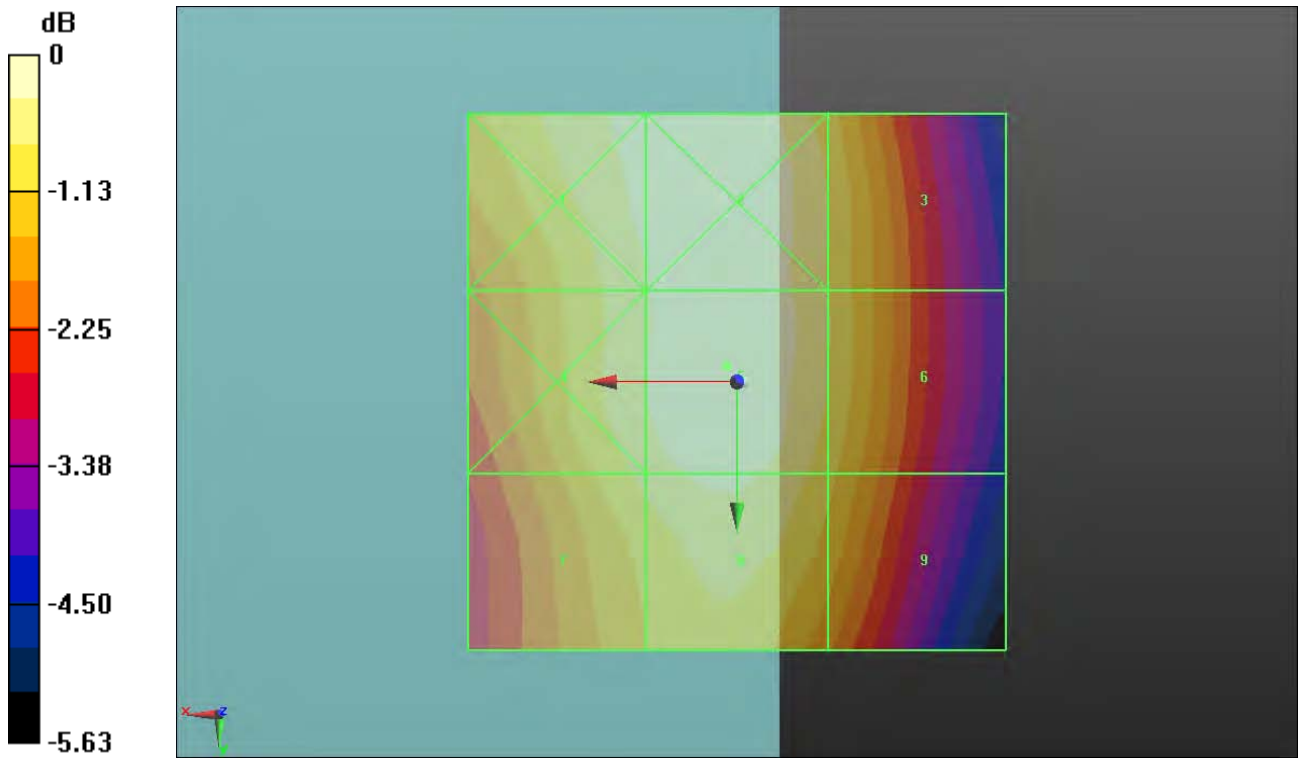

0 dB = 164.8V/m

**P03 E-Field\_GSM850\_Ch251\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 848.6 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 135.7 V/m

Probe Modulation Factor = 2.580



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 68.657 V/m; Power Drift = 0.0032 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>127.8 M4</b>	Grid 2 <b>134.4 M4</b>	Grid 3 <b>127.5 M4</b>
Grid 4 <b>127.6 M4</b>	Grid 5 <b>135.7 M4</b>	Grid 6 <b>128.1 M4</b>
Grid 7 <b>123.8 M4</b>	Grid 8 <b>132.6 M4</b>	Grid 9 <b>125.2 M4</b>

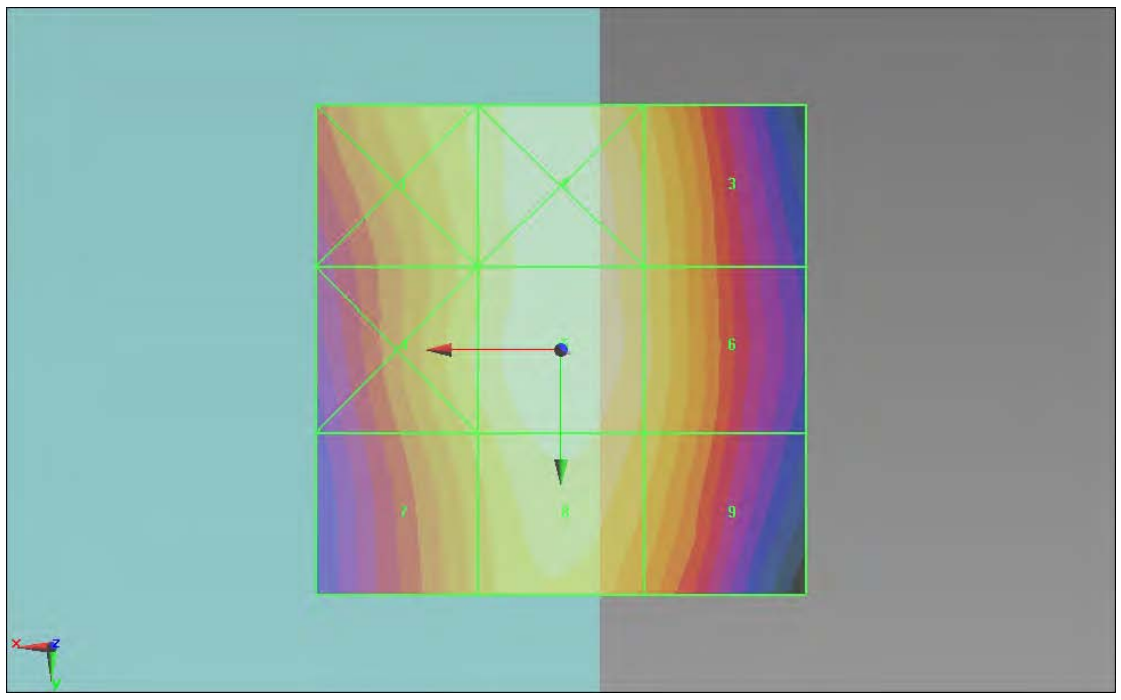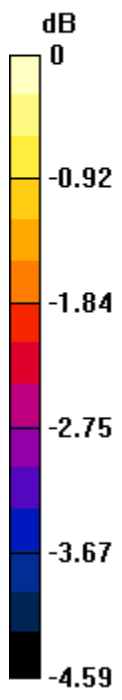

0 dB = 135.7V/m

**P25 E-Field\_GSM850\_Ch189\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch190/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 153.8 V/m

Probe Modulation Factor = 2.580



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 77.838 V/m; Power Drift = 0.10 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>151.3 M3</b>	Grid 2 <b>154.9 M3</b>	Grid 3 <b>142.9 M4</b>
Grid 4 <b>146.8 M4</b>	Grid 5 <b>153.8 M3</b>	Grid 6 <b>143.4 M4</b>
Grid 7 <b>141.3 M4</b>	Grid 8 <b>148.7 M4</b>	Grid 9 <b>138.0 M4</b>

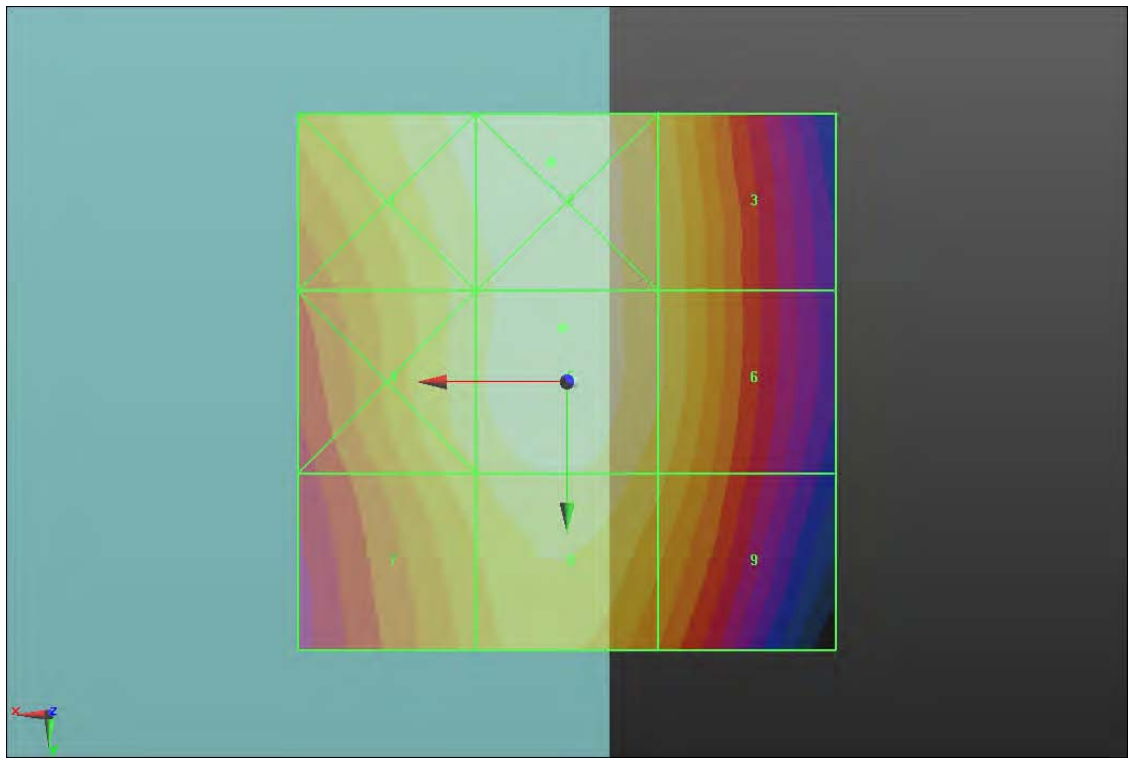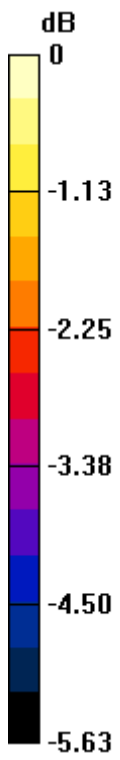

0 dB = 154.9V/m



### P41 E-Field\_GSM850\_Ch189\_Sample2\_Battery1

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch189/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 159.8 V/m

Probe Modulation Factor = 2.580


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 79.862 V/m; Power Drift = -0.04 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>160.1 M3</b>	Grid 2 <b>161.9 M3</b>	Grid 3 <b>144.3 M4</b>
Grid 4 <b>154.7 M3</b>	Grid 5 <b>159.8 M3</b>	Grid 6 <b>143.3 M4</b>
Grid 7 <b>147.2 M4</b>	Grid 8 <b>151.8 M3</b>	Grid 9 <b>136.6 M4</b>

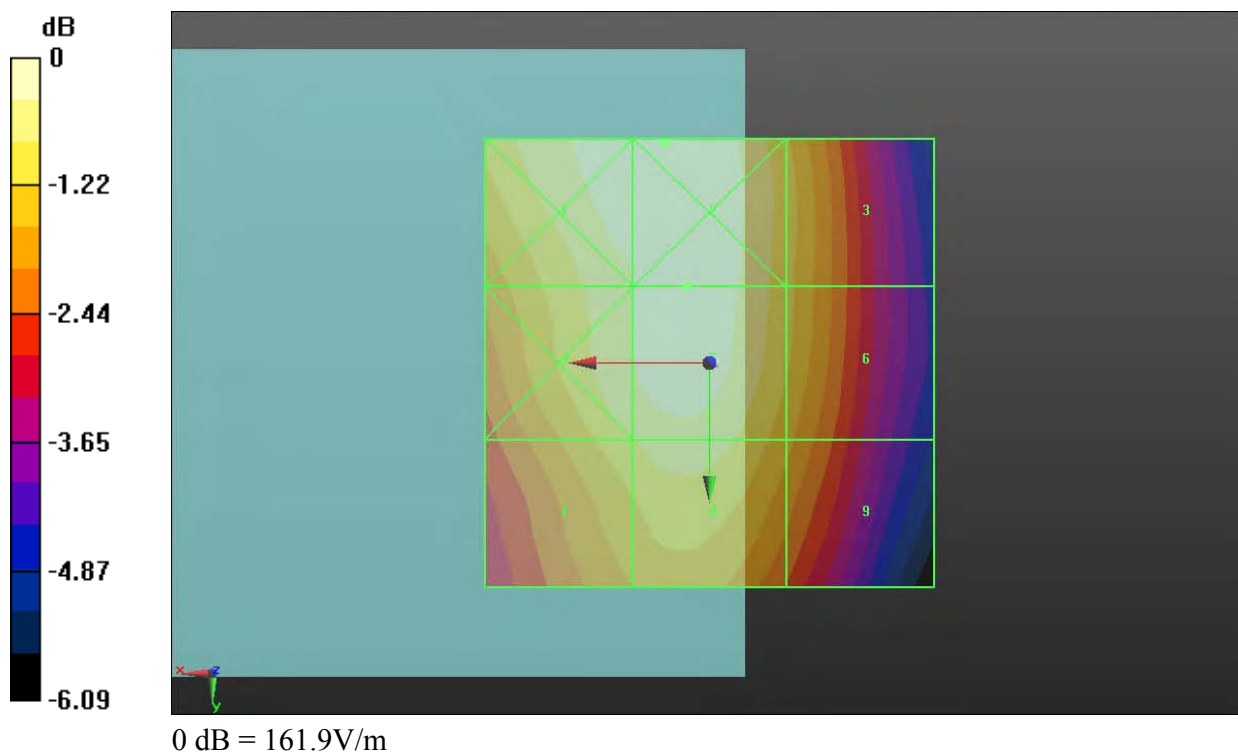

**P04 E-Field\_GSM1900\_Ch512\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch512/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 51.720 V/m

Probe Modulation Factor = 2.660


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.135 V/m; Power Drift = -0.02 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>52.915 M3</b>	Grid 2 <b>62.982 M3</b>	Grid 3 <b>61.629 M3</b>
Grid 4 <b>38.483 M4</b>	Grid 5 <b>51.720 M3</b>	Grid 6 <b>51.637 M3</b>
Grid 7 <b>49.609 M3</b>	Grid 8 <b>47.404 M3</b>	Grid 9 <b>43.309 M4</b>

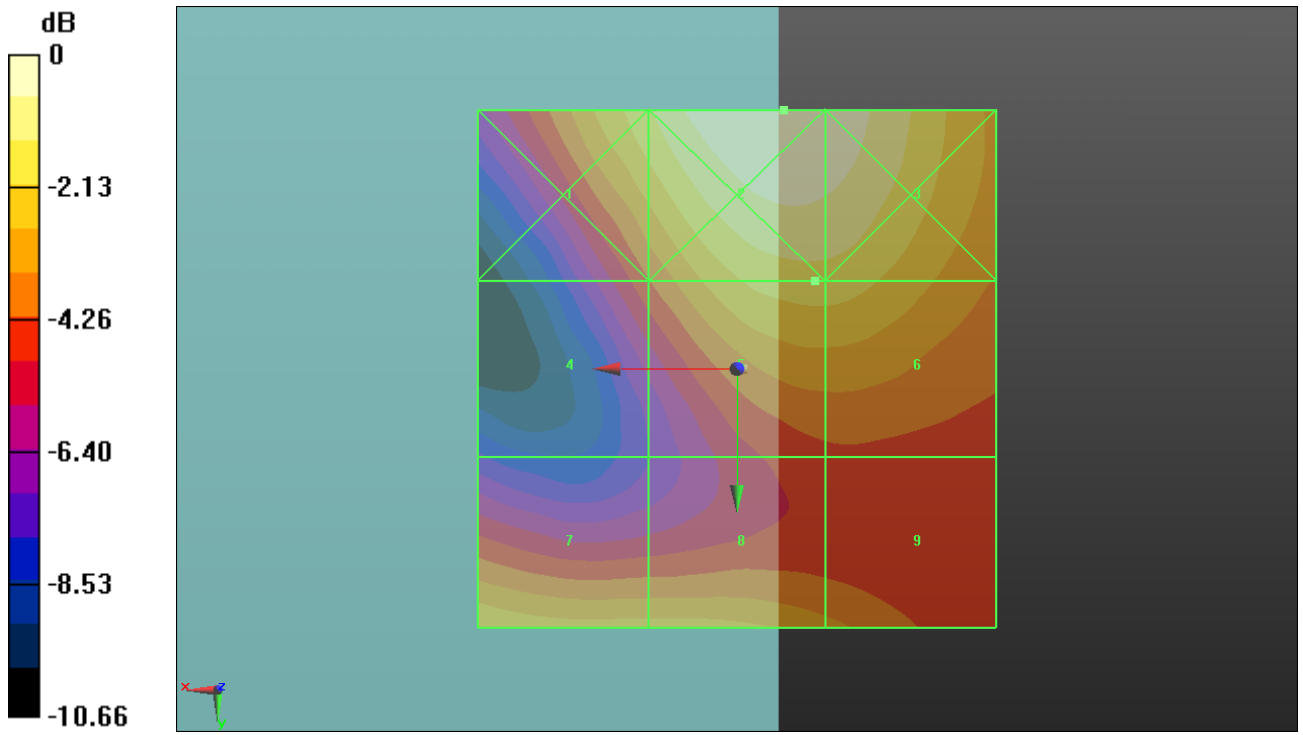

0 dB = 62.980V/m

**P05 E-Field\_GSM1900\_Ch661\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch661/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.420 V/m

Probe Modulation Factor = 2.660



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.879 V/m; Power Drift = 0.05 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>55.268 M3</b>	<b>68.851 M3</b>	<b>67.901 M3</b>
Grid 4	Grid 5	Grid 6
<b>38.308 M4</b>	<b>54.420 M3</b>	<b>54.406 M3</b>
Grid 7	Grid 8	Grid 9
<b>50.710 M3</b>	<b>51.054 M3</b>	<b>45.591 M4</b>

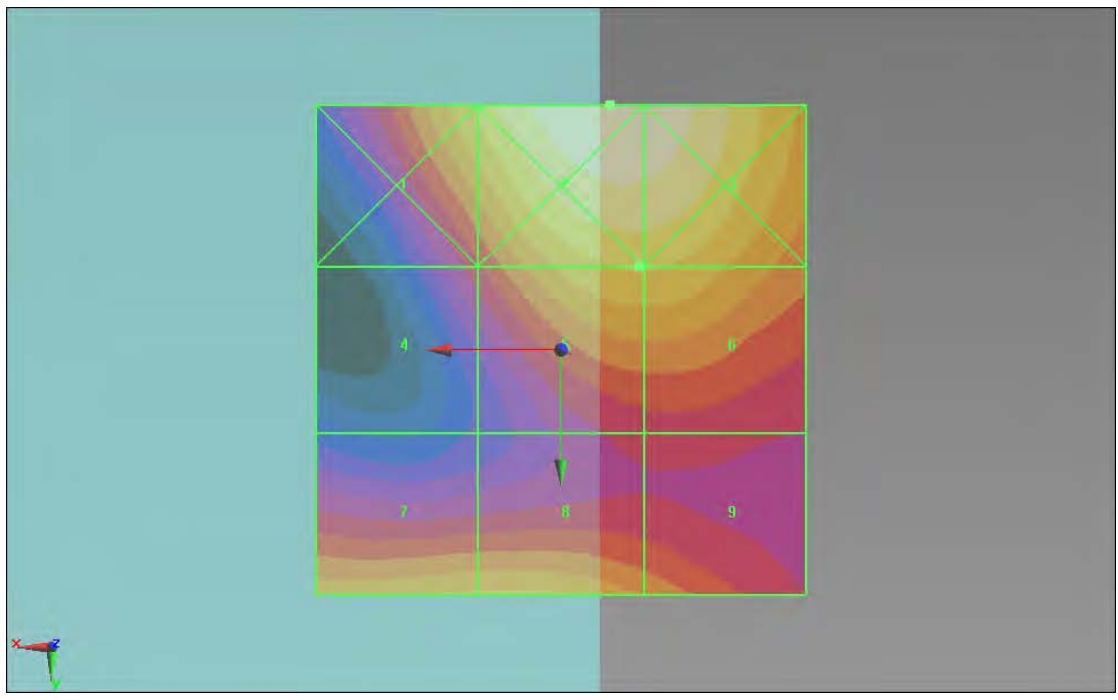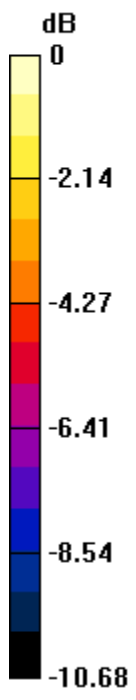

0 dB = 68.850V/m

**P30 E-Field\_GSM1900\_Ch810\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 57.233 V/m

Probe Modulation Factor = 2.660


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 21.004 V/m; Power Drift = -0.05 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>60.422 M3</b>	Grid 2 <b>68.684 M3</b>	Grid 3 <b>66.533 M3</b>
Grid 4 <b>44.868 M4</b>	Grid 5 <b>57.233 M3</b>	Grid 6 <b>56.766 M3</b>
Grid 7 <b>53.235 M3</b>	Grid 8 <b>50.159 M3</b>	Grid 9 <b>43.919 M4</b>

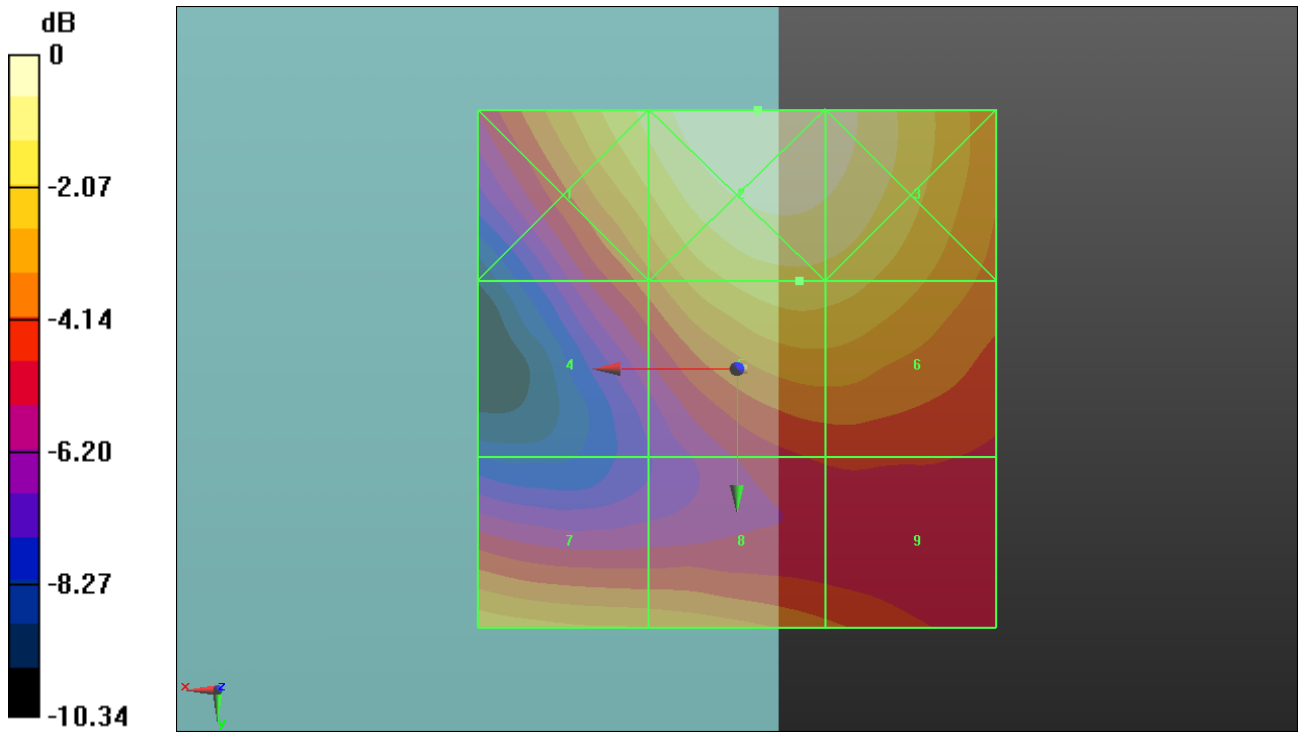

0 dB = 68.680V/m

**P26 E-Field\_GSM1900\_Ch810\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.154 V/m

Probe Modulation Factor = 2.660

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 19.998 V/m; Power Drift = 0.05 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>55.044 M3</b>	Grid 2 <b>64.385 M3</b>	Grid 3 <b>62.927 M3</b>
Grid 4 <b>40.700 M4</b>	Grid 5 <b>54.154 M3</b>	Grid 6 <b>53.762 M3</b>
Grid 7 <b>46.108 M4</b>	Grid 8 <b>44.356 M4</b>	Grid 9 <b>40.221 M4</b>



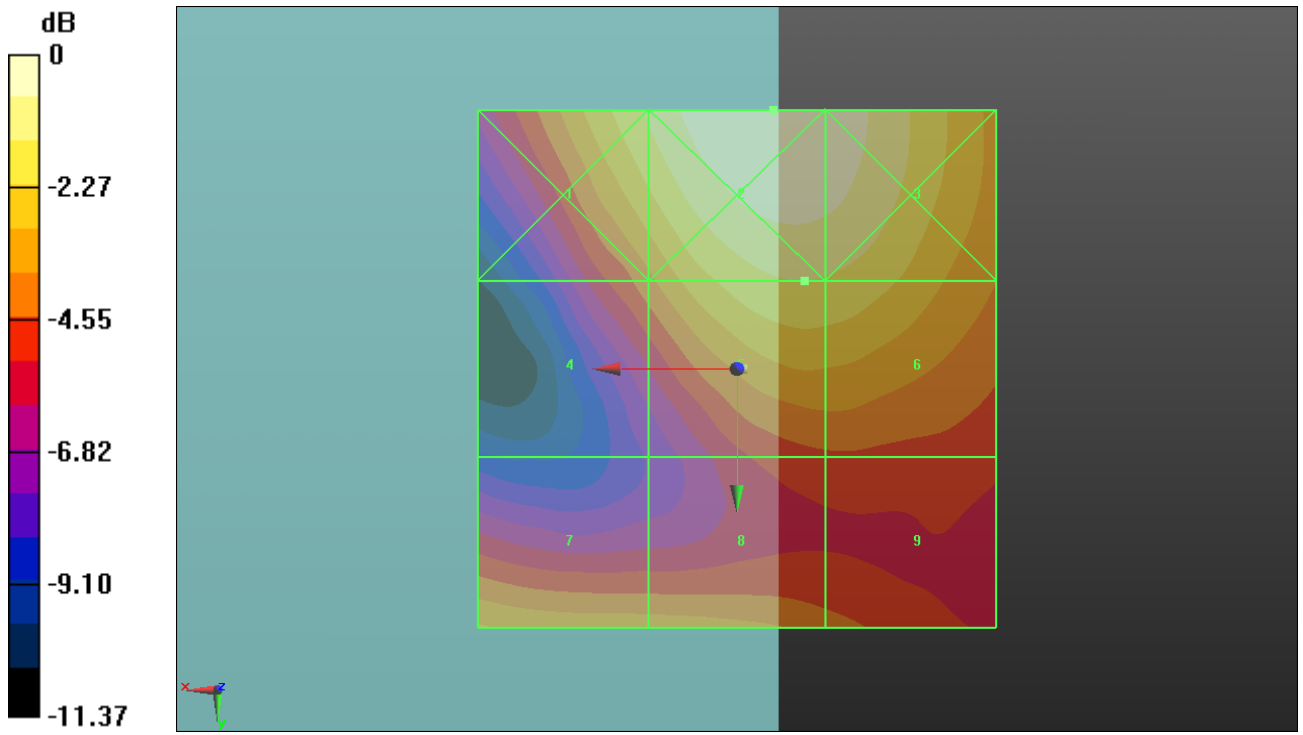

0 dB = 64.390V/m

### P42 E-Field\_GSM1900\_Ch810\_Sample2\_Battery1

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn861; Calibrated: 2011/8/29

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.918 V/m

Probe Modulation Factor = 2.660


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.827 V/m; Power Drift = 0.12 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m

Grid 1 <b>55.990 M3</b>	Grid 2 <b>66.640 M3</b>	Grid 3 <b>65.766 M3</b>
Grid 4 <b>39.994 M4</b>	Grid 5 <b>54.918 M3</b>	Grid 6 <b>54.867 M3</b>
Grid 7 <b>49.290 M3</b>	Grid 8 <b>47.497 M3</b>	Grid 9 <b>46.791 M4</b>

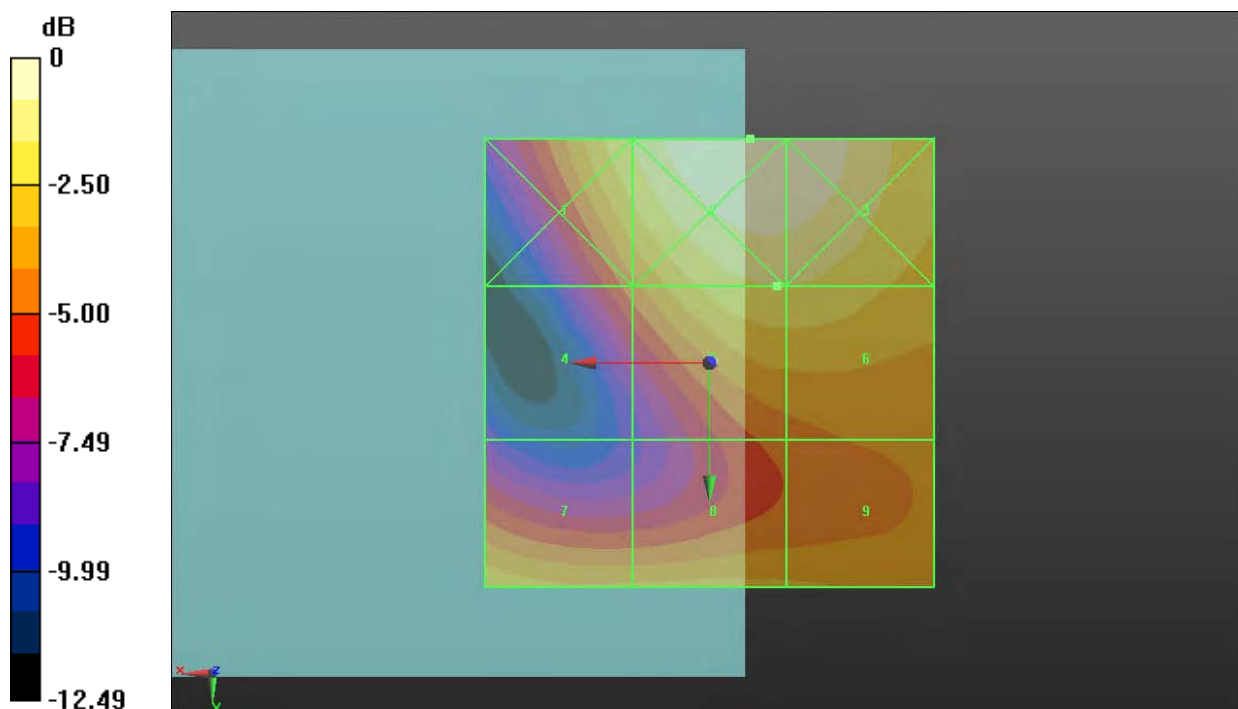

0 dB = 66.640V/m

**P07 E-Field\_WCDMA V\_RMC12.2K\_Ch4132\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 48.708 V/m

Probe Modulation Factor = 1.000


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 63.617 V/m; Power Drift = 0.04 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>48.903 M4</b>	Grid 2 <b>49.885 M4</b>	Grid 3 <b>45.690 M4</b>
Grid 4 <b>46.957 M4</b>	Grid 5 <b>48.708 M4</b>	Grid 6 <b>45.512 M4</b>
Grid 7 <b>44.688 M4</b>	Grid 8 <b>46.674 M4</b>	Grid 9 <b>43.958 M4</b>

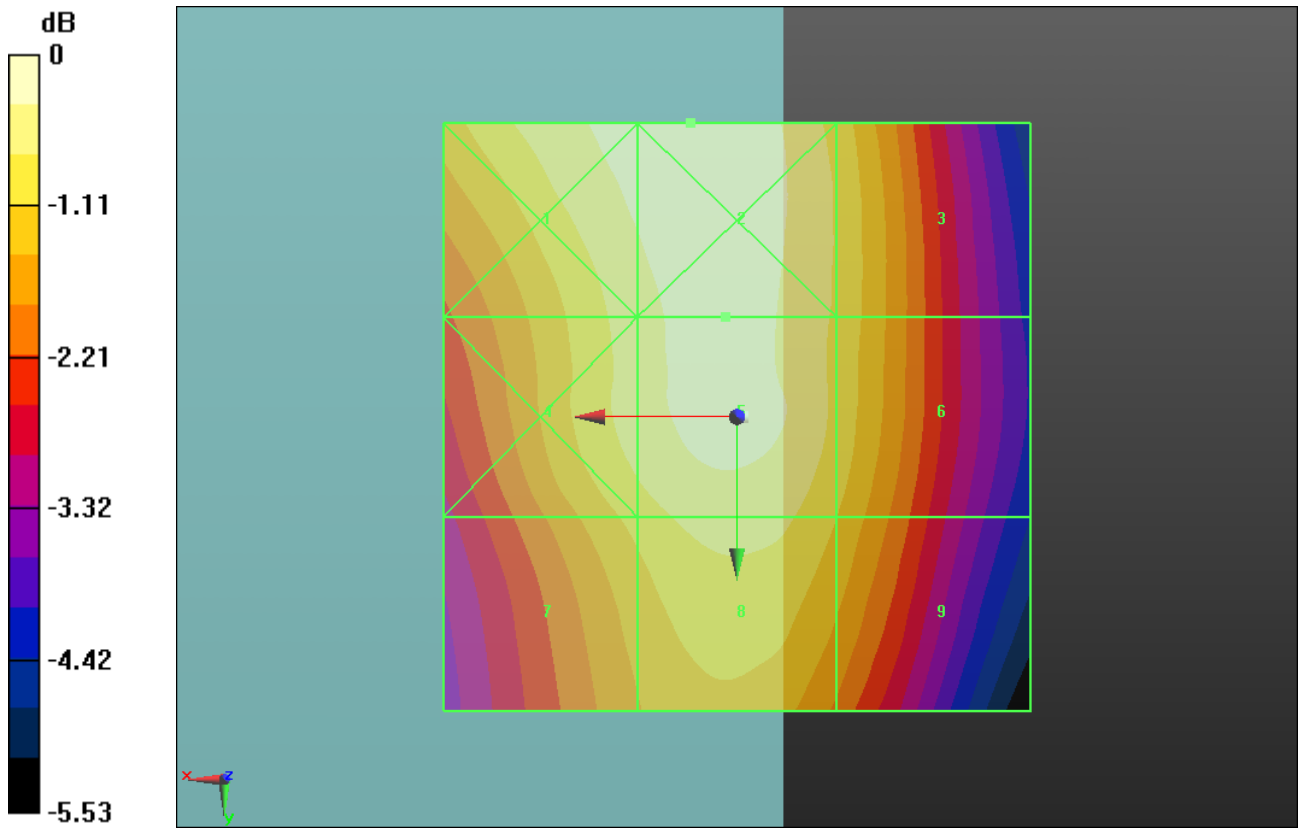

0 dB = 49.890V/m

**P08 E-Field\_WCDMA V\_RMC12.2K\_Ch4182\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 46.383 V/m

Probe Modulation Factor = 0.980


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 62.222 V/m; Power Drift = -0.05 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>46.119 M4</b>	Grid 2 <b>47.392 M4</b>	Grid 3 <b>43.321 M4</b>
Grid 4 <b>44.354 M4</b>	Grid 5 <b>46.383 M4</b>	Grid 6 <b>42.809 M4</b>
Grid 7 <b>41.905 M4</b>	Grid 8 <b>43.975 M4</b>	Grid 9 <b>40.821 M4</b>

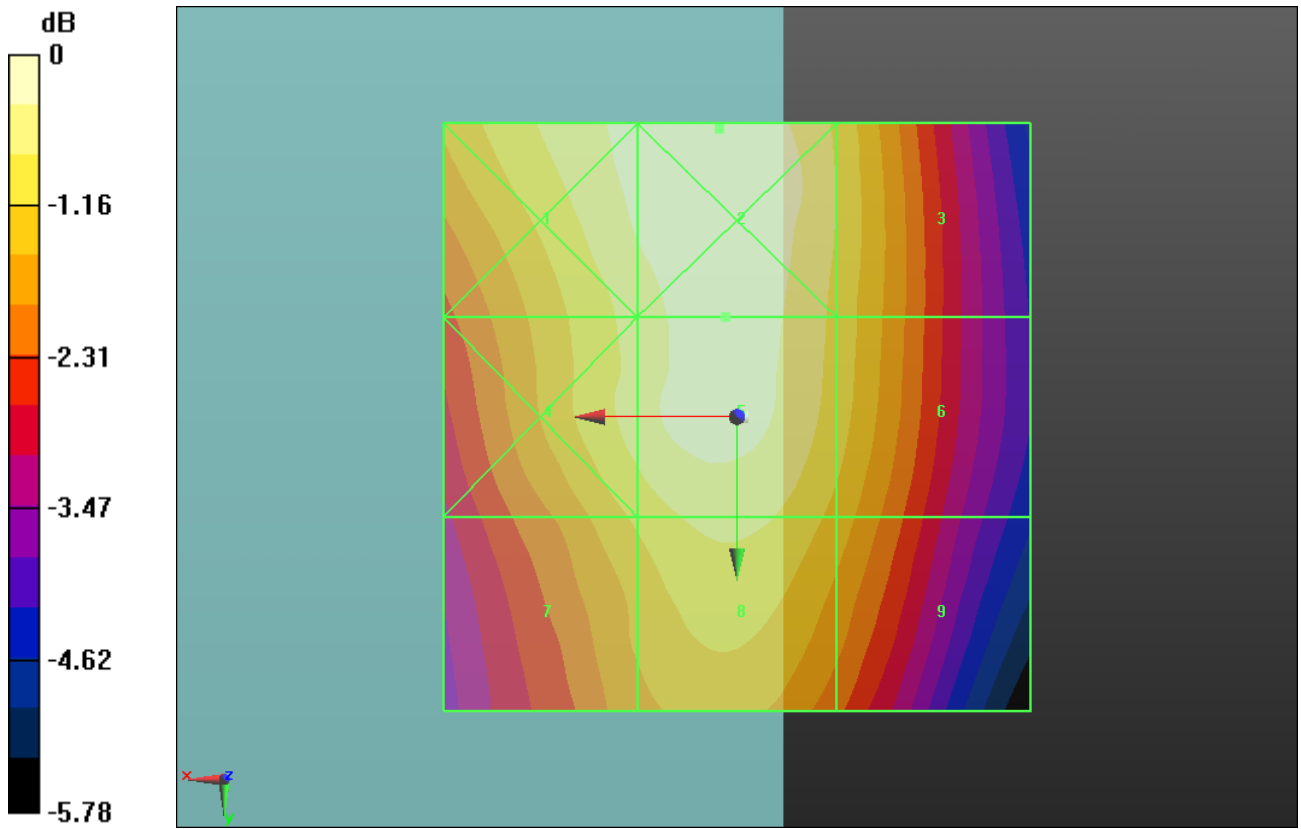

0 dB = 47.390V/m

**P31 E-Field\_WCDMA V\_RMC12.2K\_Ch4233\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 22.7 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 52.862 V/m

Probe Modulation Factor = 0.980


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.148 V/m; Power Drift = 0.12 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>52.107 M4</b>	Grid 2 <b>53.111 M4</b>	Grid 3 <b>48.454 M4</b>
Grid 4 <b>50.672 M4</b>	Grid 5 <b>52.862 M4</b>	Grid 6 <b>48.247 M4</b>
Grid 7 <b>48.822 M4</b>	Grid 8 <b>50.768 M4</b>	Grid 9 <b>46.502 M4</b>

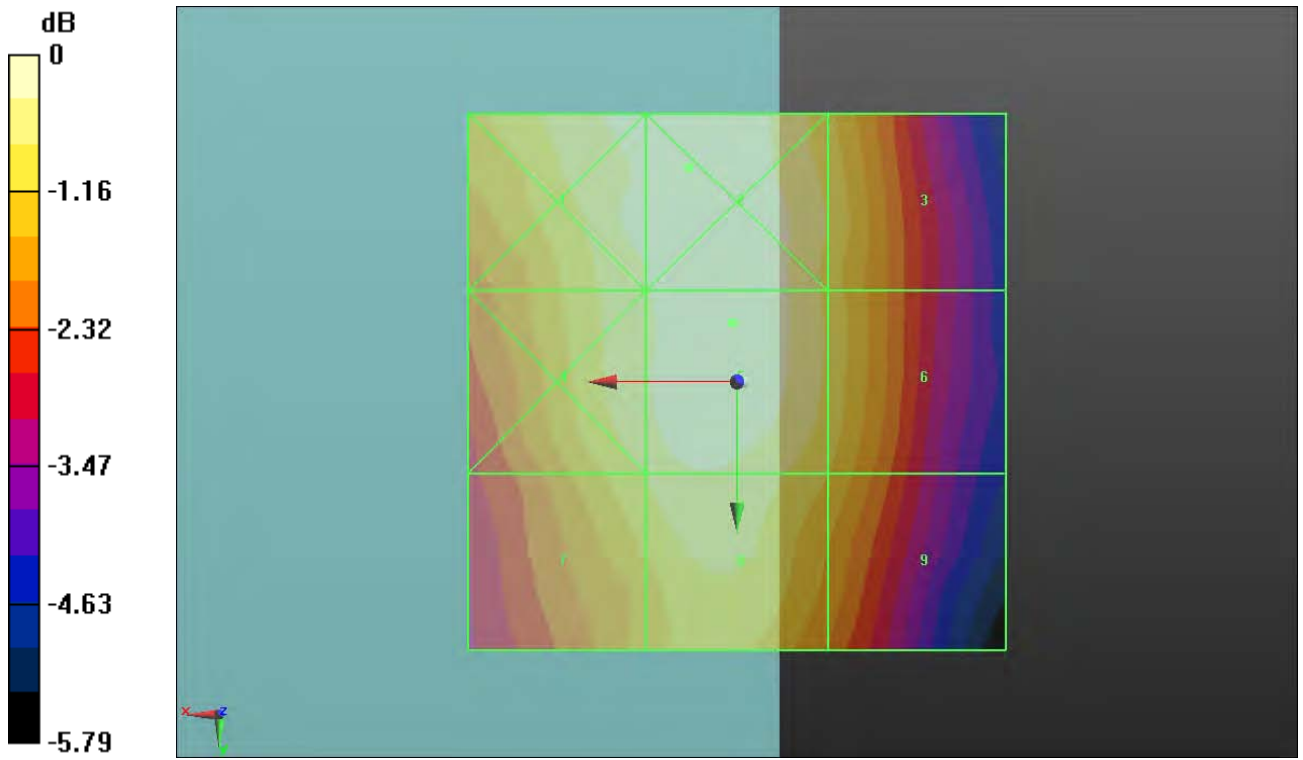

0 dB = 53.110V/m



**P27 E-Field\_WCDMA V\_RMC12.2K\_Ch4233\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 22.8 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 42.552 V/m

Probe Modulation Factor = 0.980


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 57.014 V/m; Power Drift = 0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>42.097 M4</b>	Grid 2 <b>43.138 M4</b>	Grid 3 <b>38.575 M4</b>
Grid 4 <b>41.166 M4</b>	Grid 5 <b>42.552 M4</b>	Grid 6 <b>39.211 M4</b>
Grid 7 <b>39.379 M4</b>	Grid 8 <b>40.783 M4</b>	Grid 9 <b>37.178 M4</b>

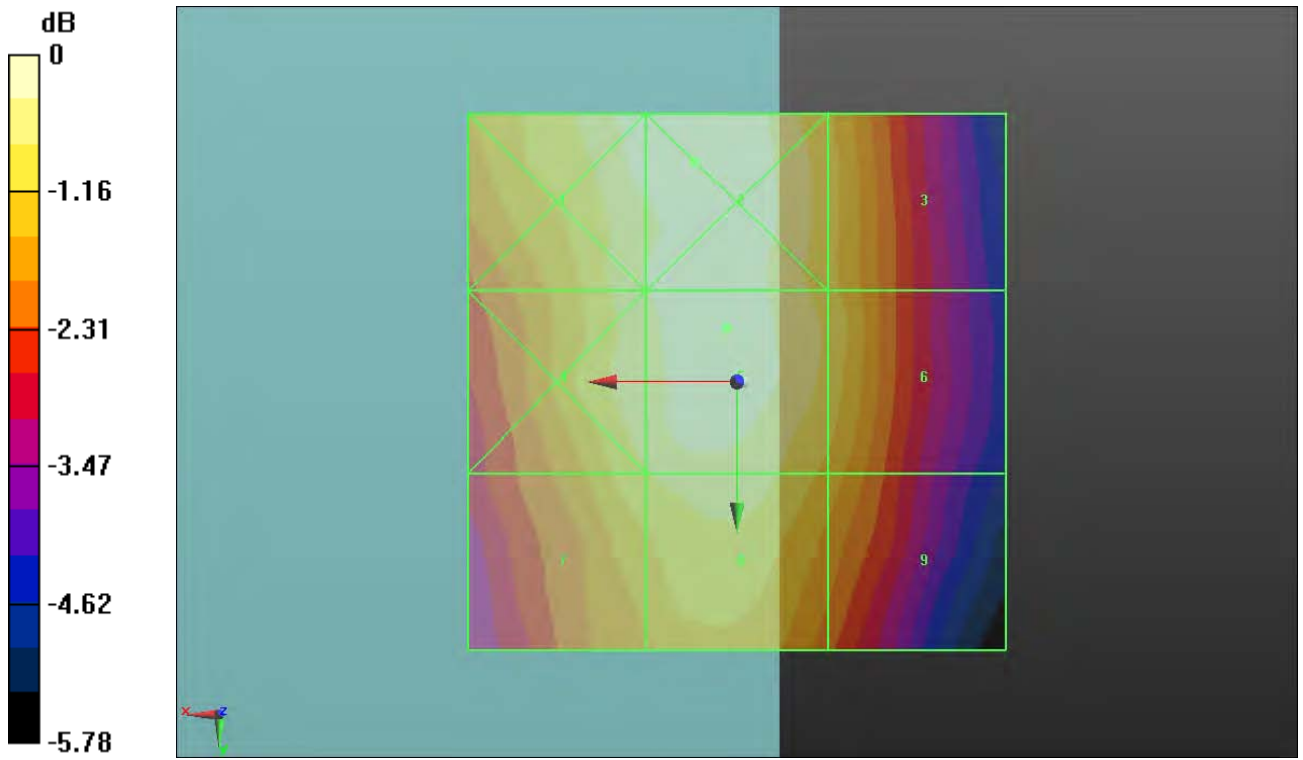

0 dB = 43.140V/m

### P43 E-Field\_WCDMA V\_RMC 12.2K\_Ch4233\_Sample2\_Battery1

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn861; Calibrated: 2011/8/29

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 51.220 V/m

Probe Modulation Factor = 0.980


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 67.879 V/m; Power Drift = 0.14 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>49.984 M4</b>	Grid 2 <b>51.115 M4</b>	Grid 3 <b>46.303 M4</b>
Grid 4 <b>49.582 M4</b>	Grid 5 <b>51.220 M4</b>	Grid 6 <b>46.277 M4</b>
Grid 7 <b>47.844 M4</b>	Grid 8 <b>49.364 M4</b>	Grid 9 <b>44.691 M4</b>

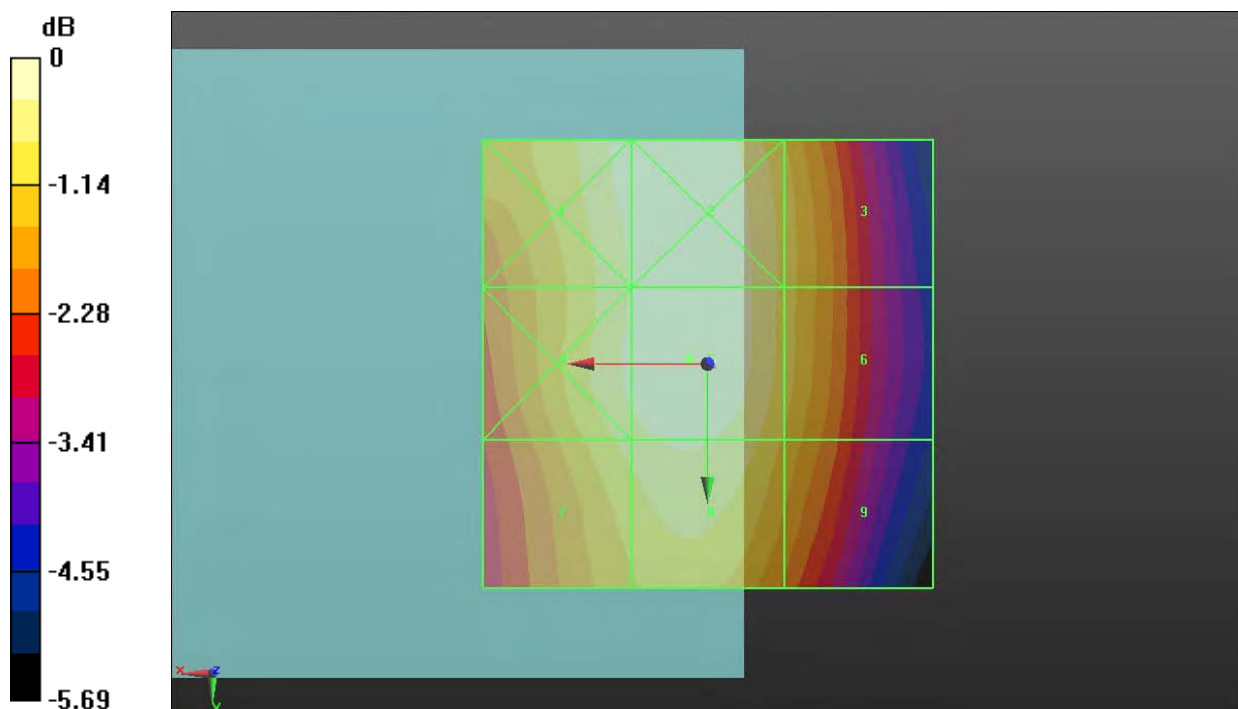

0 dB = 51.220V/m

**P32 E-Field\_WCDMA II\_RMC12.2K\_Ch9262\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 29.546 V/m

Probe Modulation Factor = 0.980



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.866 V/m; Power Drift = -0.0086 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>31.613 M4</b>	Grid 2 <b>35.977 M4</b>	Grid 3 <b>34.658 M4</b>
Grid 4 <b>23.379 M4</b>	Grid 5 <b>29.546 M4</b>	Grid 6 <b>29.322 M4</b>
Grid 7 <b>28.371 M4</b>	Grid 8 <b>26.529 M4</b>	Grid 9 <b>23.099 M4</b>

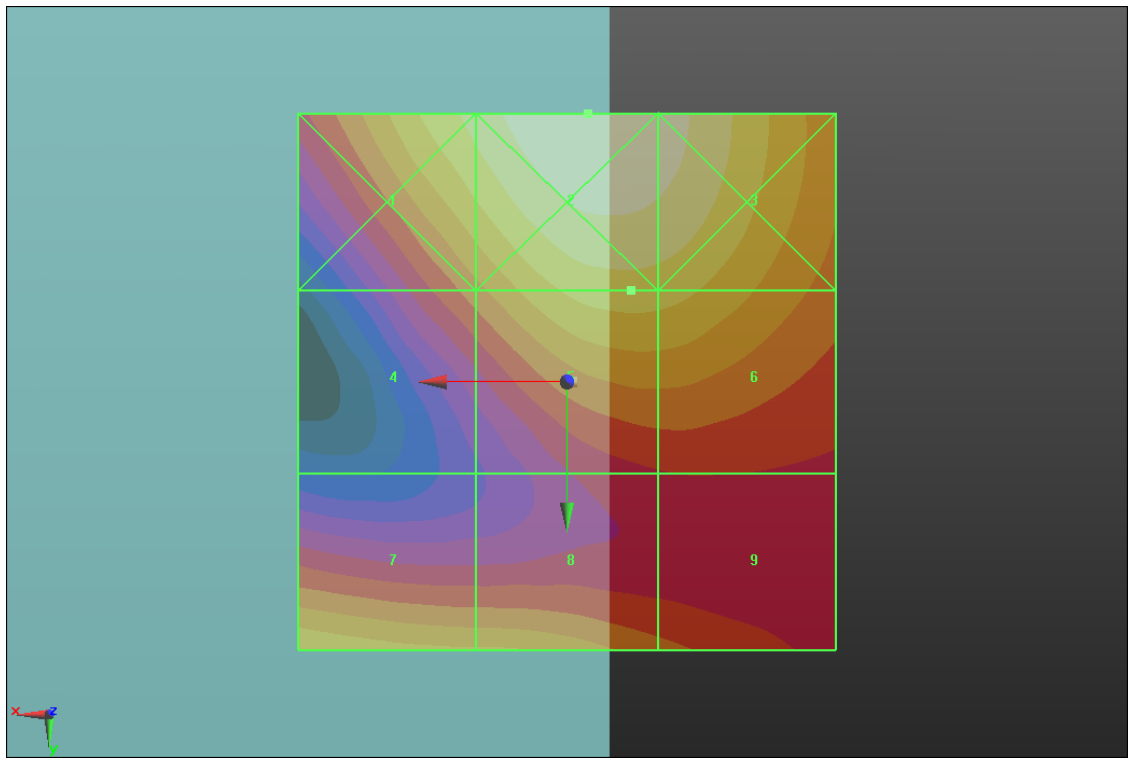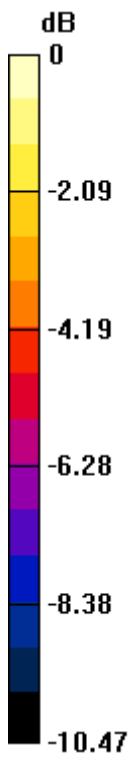

0 dB = 35.980V/m

**P11 E-field\_WCDMA II\_RMC12.2K\_Ch9400\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9400/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 26.601 V/m

Probe Modulation Factor = 0.980



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.463 V/m; Power Drift = -0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>27.250 M4</b>	Grid 2 <b>33.696 M4</b>	Grid 3 <b>33.130 M4</b>
Grid 4 <b>18.735 M4</b>	Grid 5 <b>26.601 M4</b>	Grid 6 <b>26.580 M4</b>
Grid 7 <b>24.963 M4</b>	Grid 8 <b>25.030 M4</b>	Grid 9 <b>22.165 M4</b>

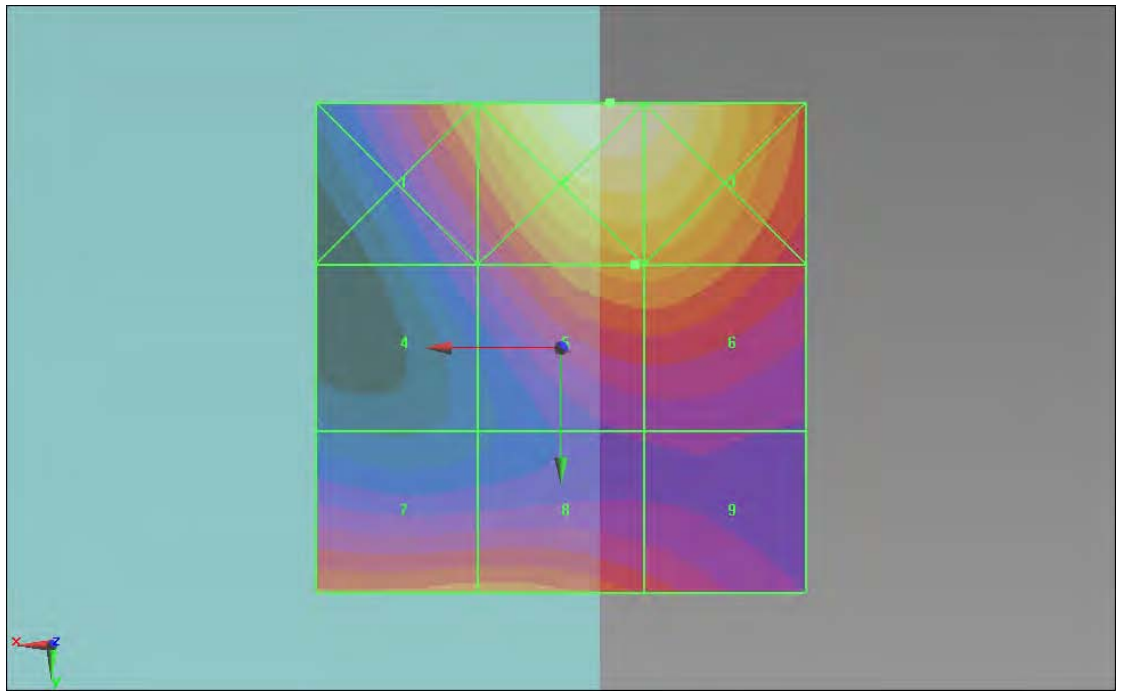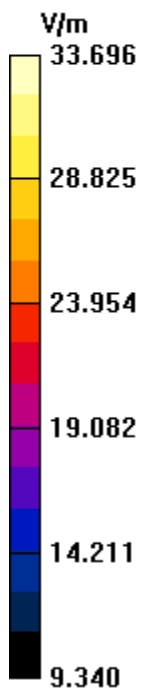

**P12 E-Field\_WCDMA II\_RMC\_Ch9538\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9538/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 26.855 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm



Reference Value = 24.324 V/m; Power Drift = 0.08 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>25.869 M4</b>	Grid 2 <b>32.521 M4</b>	Grid 3 <b>32.227 M4</b>
Grid 4 <b>18.403 M4</b>	Grid 5 <b>26.845 M4</b>	Grid 6 <b>26.855 M4</b>
Grid 7 <b>22.766 M4</b>	Grid 8 <b>22.222 M4</b>	Grid 9 <b>21.365 M4</b>



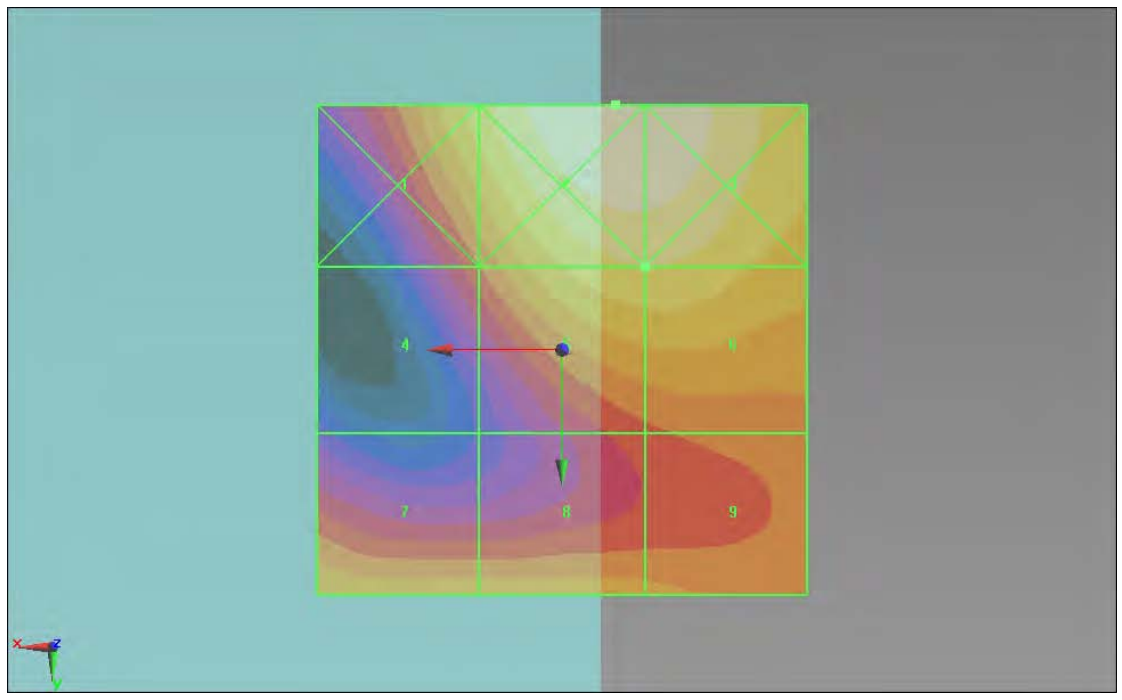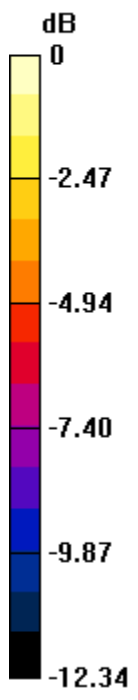

0 dB = 32.520V/m

**P28 E-Field\_WCDMA II\_RMC12.2K\_Ch9262\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C ;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 30.570 V/m

Probe Modulation Factor = 0.980



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.437 V/m; Power Drift = 0.13 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>31.951 M4</b>	Grid 2 <b>37.038 M4</b>	Grid 3 <b>35.686 M4</b>
Grid 4 <b>23.660 M4</b>	Grid 5 <b>30.570 M4</b>	Grid 6 <b>30.288 M4</b>
Grid 7 <b>29.357 M4</b>	Grid 8 <b>27.311 M4</b>	Grid 9 <b>24.223 M4</b>

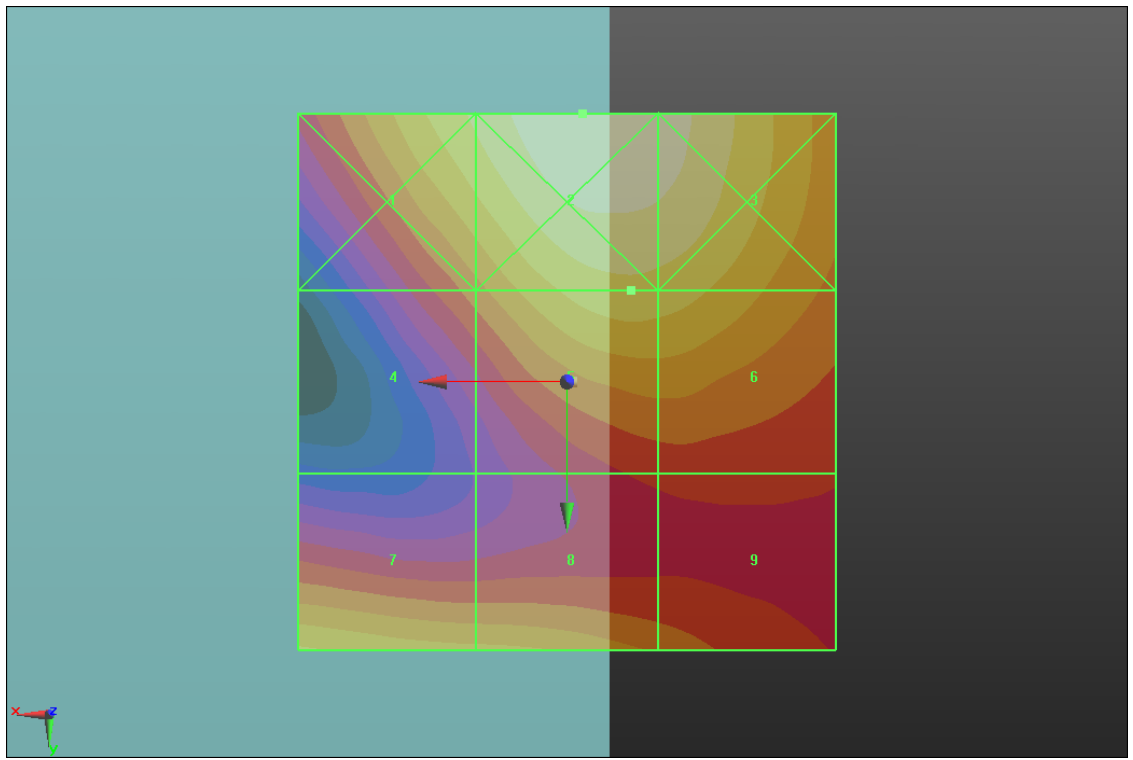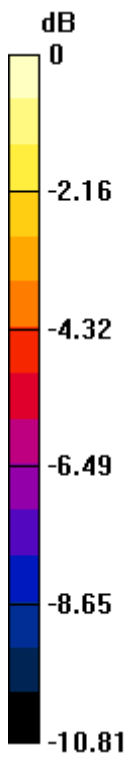

0 dB = 37.040V/m

### P44 E-Field\_WCDMA II\_RMC 12.2K\_Ch9262\_Sample2\_Battery2

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2293; ConvF(1, 1, 1); Calibrated: 2011/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 27.956 V/m

Probe Modulation Factor = 0.980


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.988 V/m; Power Drift = 0.08 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>28.517 M4</b>	Grid 2 <b>32.056 M4</b>	Grid 3 <b>30.415 M4</b>
Grid 4 <b>21.201 M4</b>	Grid 5 <b>26.172 M4</b>	Grid 6 <b>25.650 M4</b>
Grid 7 <b>27.956 M4</b>	Grid 8 <b>27.085 M4</b>	Grid 9 <b>23.366 M4</b>

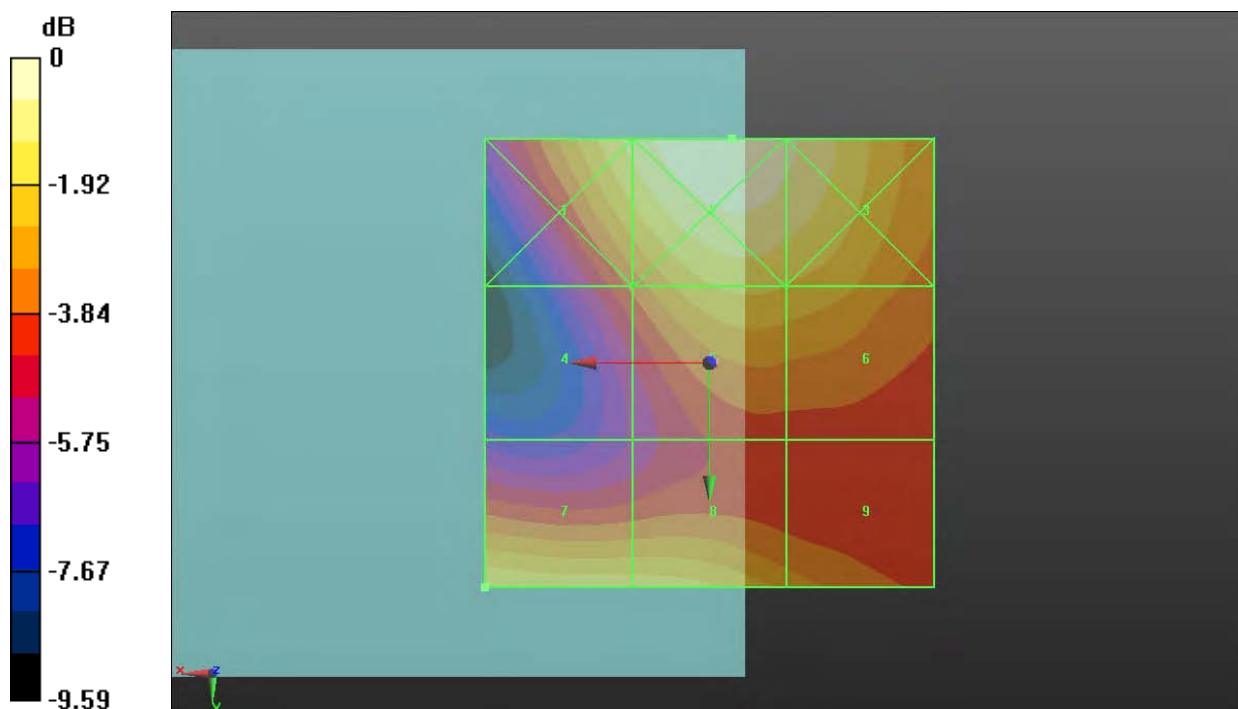

0 dB = 32.060V/m

**P13 H-Field\_GSM850\_Ch128\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch128/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.104 A/m

Probe Modulation Factor = 1.300


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.060 A/m; Power Drift = -0.17 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.154 M4</b>	Grid 2 <b>0.102 M4</b>	Grid 3 <b>0.061 M4</b>
Grid 4 <b>0.140 M4</b>	Grid 5 <b>0.097 M4</b>	Grid 6 <b>0.059 M4</b>
Grid 7 <b>0.149 M4</b>	Grid 8 <b>0.104 M4</b>	Grid 9 <b>0.063 M4</b>

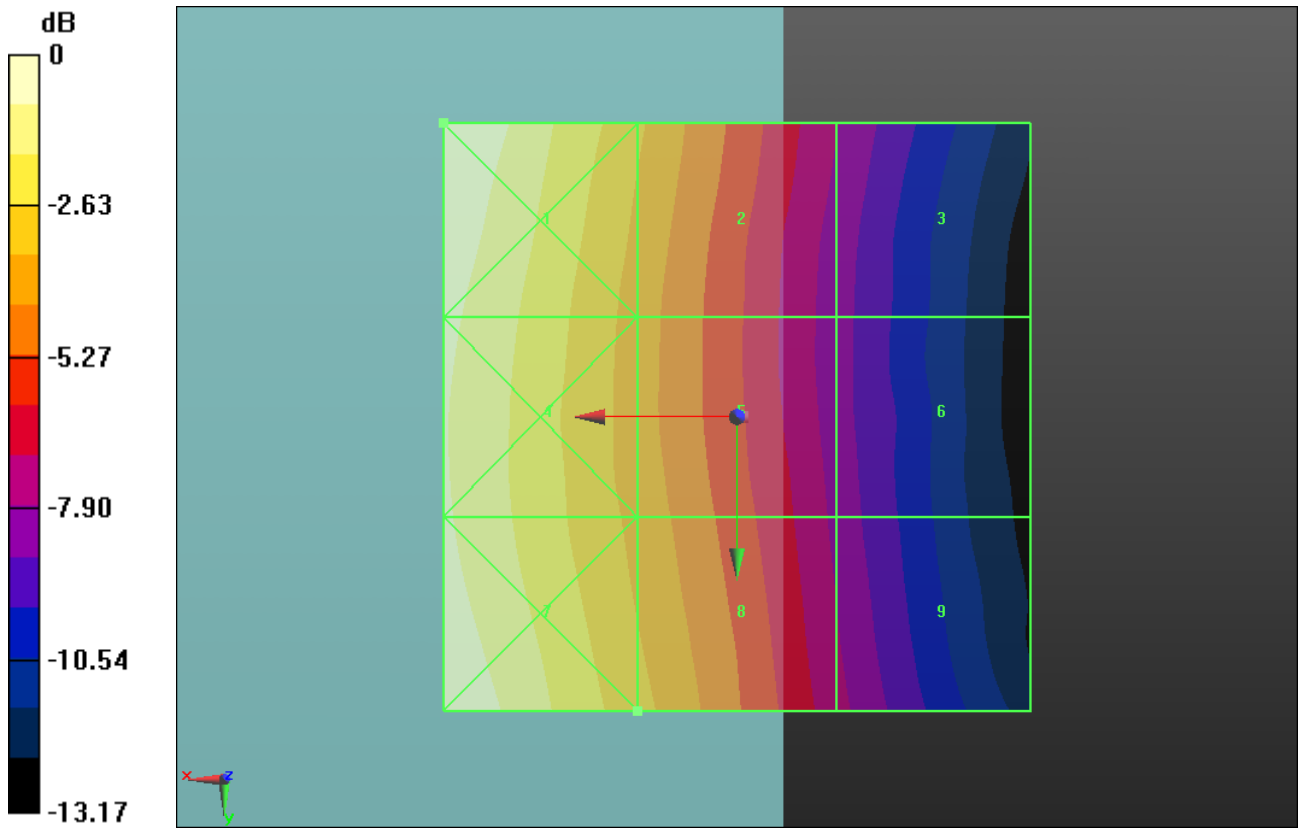

0 dB = 0.150A/m

**P37 H-Field\_GSM850\_Ch189\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.7 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch190/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.118 A/m

Probe Modulation Factor = 1.300



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.066 A/m; Power Drift = -0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.175 M4</b>	Grid 2 <b>0.118 M4</b>	Grid 3 <b>0.071 M4</b>
Grid 4 <b>0.156 M4</b>	Grid 5 <b>0.109 M4</b>	Grid 6 <b>0.066 M4</b>
Grid 7 <b>0.167 M4</b>	Grid 8 <b>0.117 M4</b>	Grid 9 <b>0.071 M4</b>

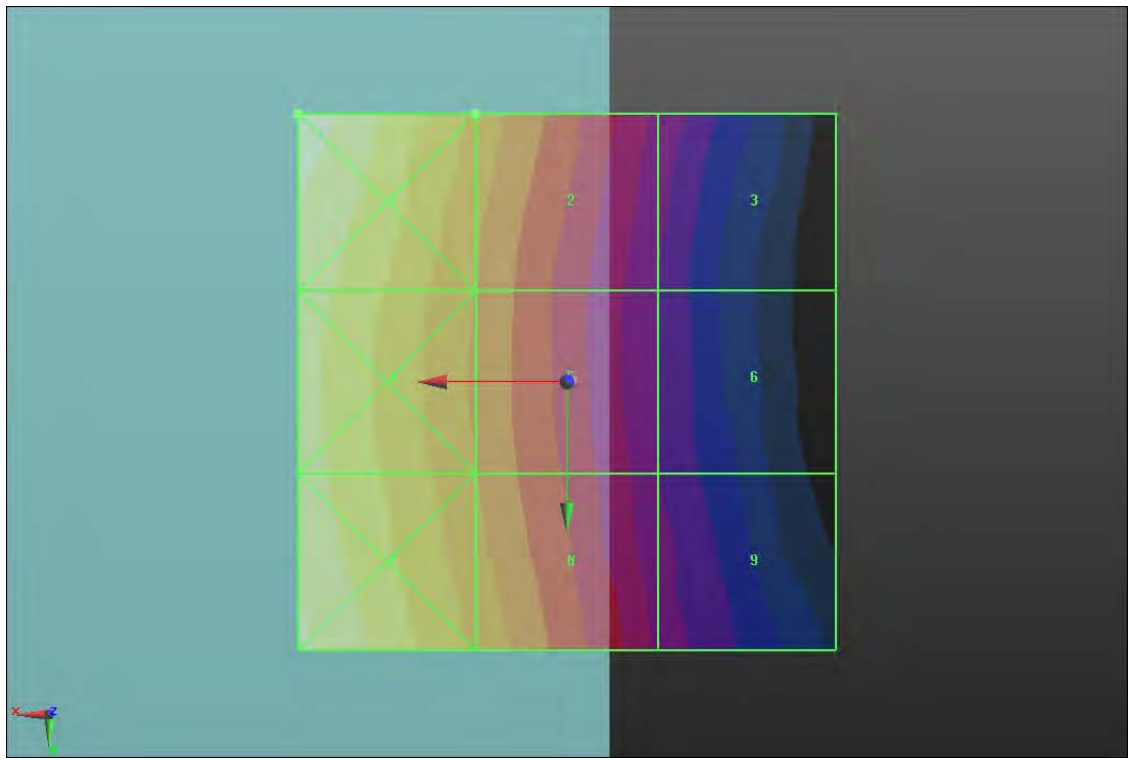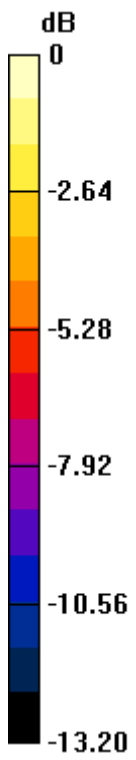

0 dB = 0.180A/m



**P15 H-Field\_GSM850\_Ch251\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 848.6 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.114 A/m

Probe Modulation Factor = 1.300


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.065 A/m; Power Drift = -0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.161 M4</b>	Grid 2 <b>0.114 M4</b>	Grid 3 <b>0.072 M4</b>
Grid 4 <b>0.145 M4</b>	Grid 5 <b>0.106 M4</b>	Grid 6 <b>0.067 M4</b>
Grid 7 <b>0.151 M4</b>	Grid 8 <b>0.109 M4</b>	Grid 9 <b>0.068 M4</b>

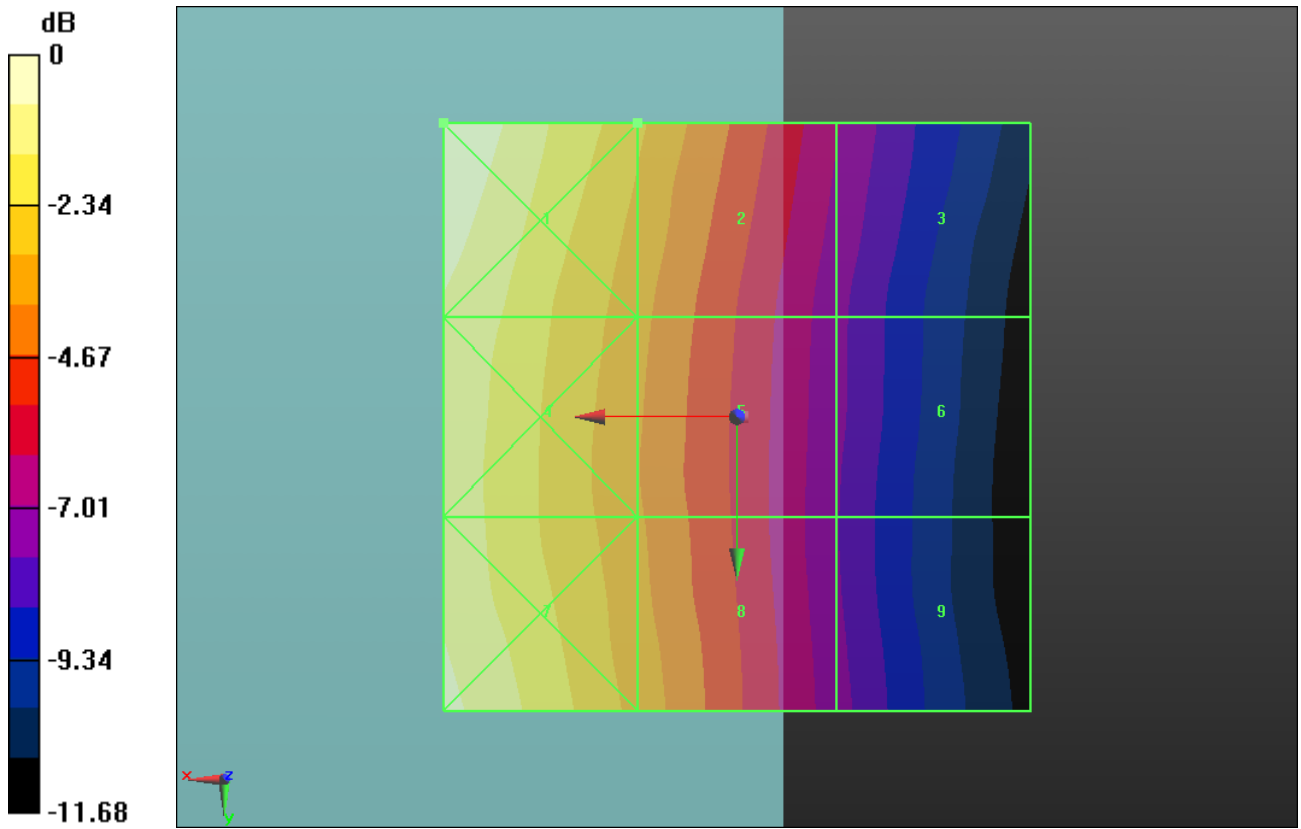

0 dB = 0.160A/m

**P33 H-Field\_GSM850\_Ch189\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch190/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.108 A/m

Probe Modulation Factor = 1.300


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.061 A/m; Power Drift = -0.11 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.158 M4</b>	Grid 2 <b>0.108 M4</b>	Grid 3 <b>0.067 M4</b>
Grid 4 <b>0.141 M4</b>	Grid 5 <b>0.099 M4</b>	Grid 6 <b>0.062 M4</b>
Grid 7 <b>0.153 M4</b>	Grid 8 <b>0.107 M4</b>	Grid 9 <b>0.066 M4</b>

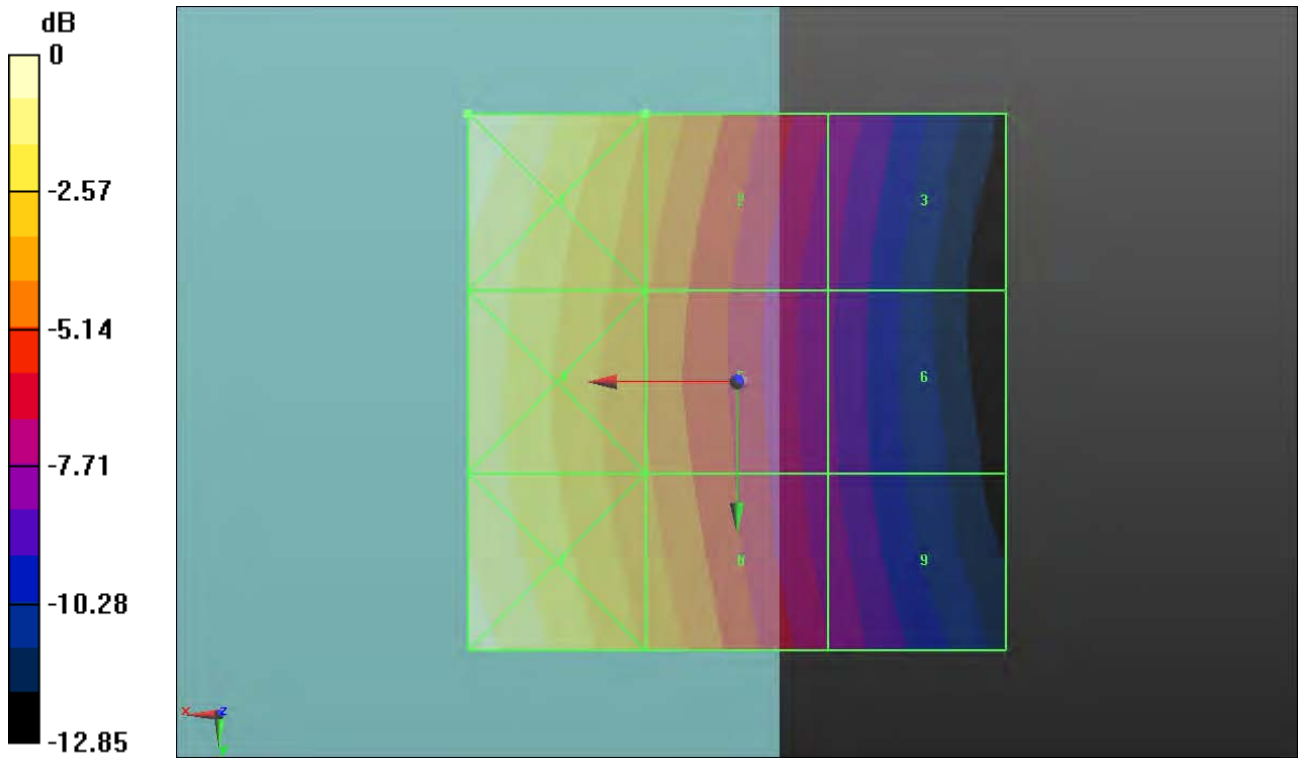

0 dB = 0.160A/m

### P45 H-Field\_GSM850\_Ch189\_Sample2\_Battery1

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.129 A/m

Probe Modulation Factor = 1.300


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.078 A/m; Power Drift = -0.06 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.188 M4</b>	Grid 2 <b>0.129 M4</b>	Grid 3 <b>0.078 M4</b>
Grid 4 <b>0.171 M4</b>	Grid 5 <b>0.122 M4</b>	Grid 6 <b>0.074 M4</b>
Grid 7 <b>0.179 M4</b>	Grid 8 <b>0.127 M4</b>	Grid 9 <b>0.078 M4</b>

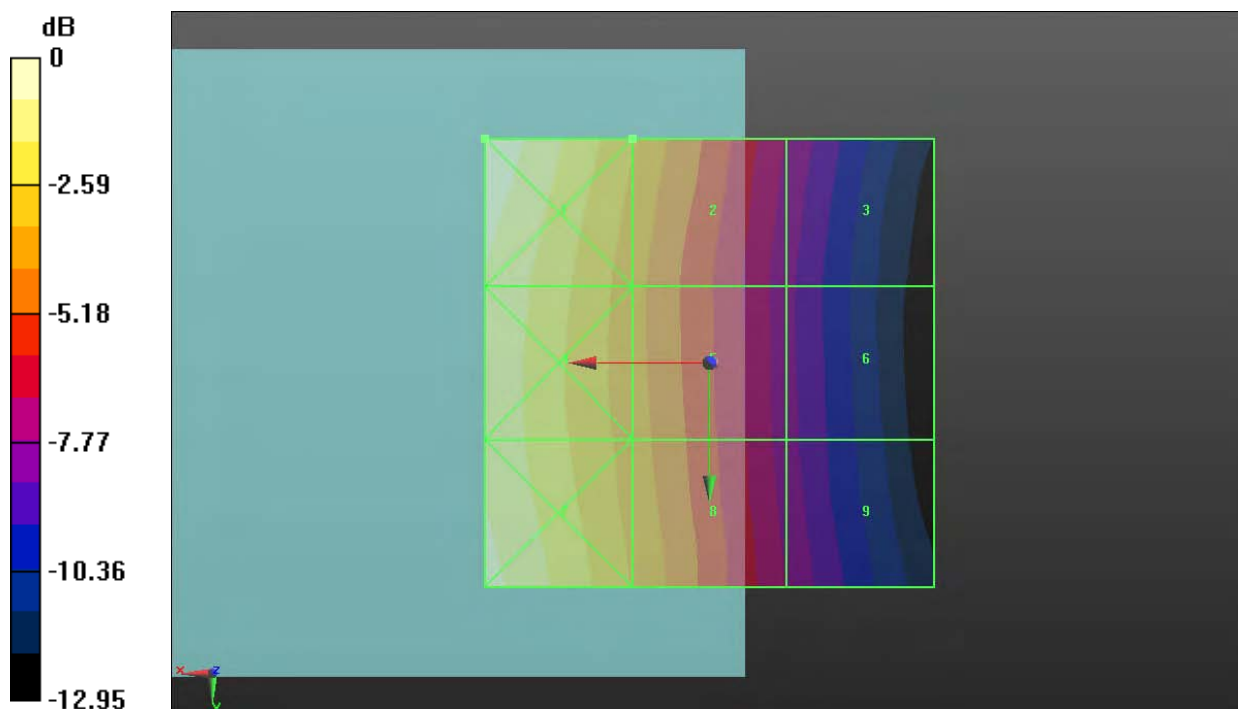

0 dB = 0.190A/m

**P16 H-Field\_GSM1900\_Ch512\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn579; Calibrated: 2010/9/20

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch512/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.077 A/m

Probe Modulation Factor = 1.190



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.071 A/m; Power Drift = 0.03 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.079 M4</b>	Grid 2 <b>0.068 M4</b>	Grid 3 <b>0.060 M4</b>
Grid 4 <b>0.073 M4</b>	Grid 5 <b>0.076 M4</b>	Grid 6 <b>0.073 M4</b>
Grid 7 <b>0.076 M4</b>	Grid 8 <b>0.077 M4</b>	Grid 9 <b>0.073 M4</b>

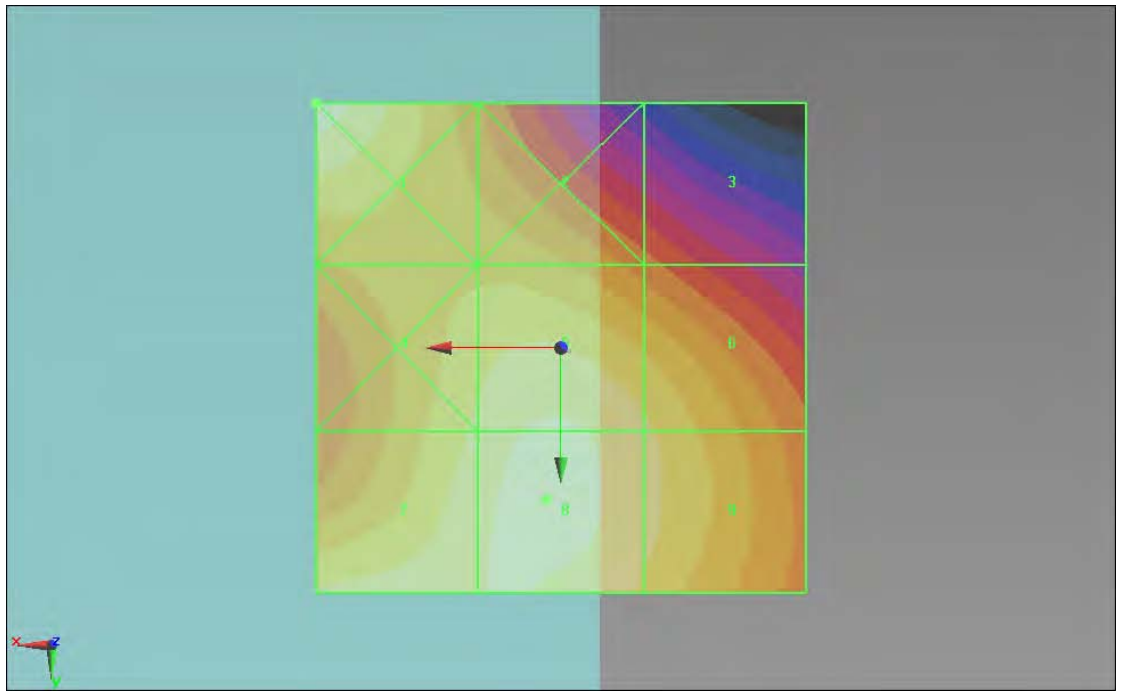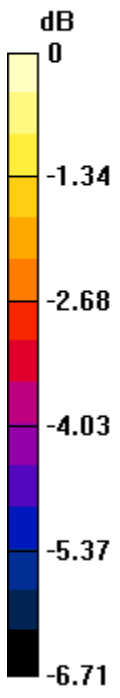

0 dB = 0.080A/m

**P17 H-Field\_GSM1900\_Ch661\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn579; Calibrated: 2010/9/20

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch661/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.079 A/m

Probe Modulation Factor = 1.190

Device Reference Point: 0, 0, -6.3 mm



Reference Value = 0.072 A/m; Power Drift = 0.03 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.081 M4</b>	Grid 2 <b>0.068 M4</b>	Grid 3 <b>0.066 M4</b>
Grid 4 <b>0.069 M4</b>	Grid 5 <b>0.079 M4</b>	Grid 6 <b>0.078 M4</b>
Grid 7 <b>0.073 M4</b>	Grid 8 <b>0.079 M4</b>	Grid 9 <b>0.078 M4</b>



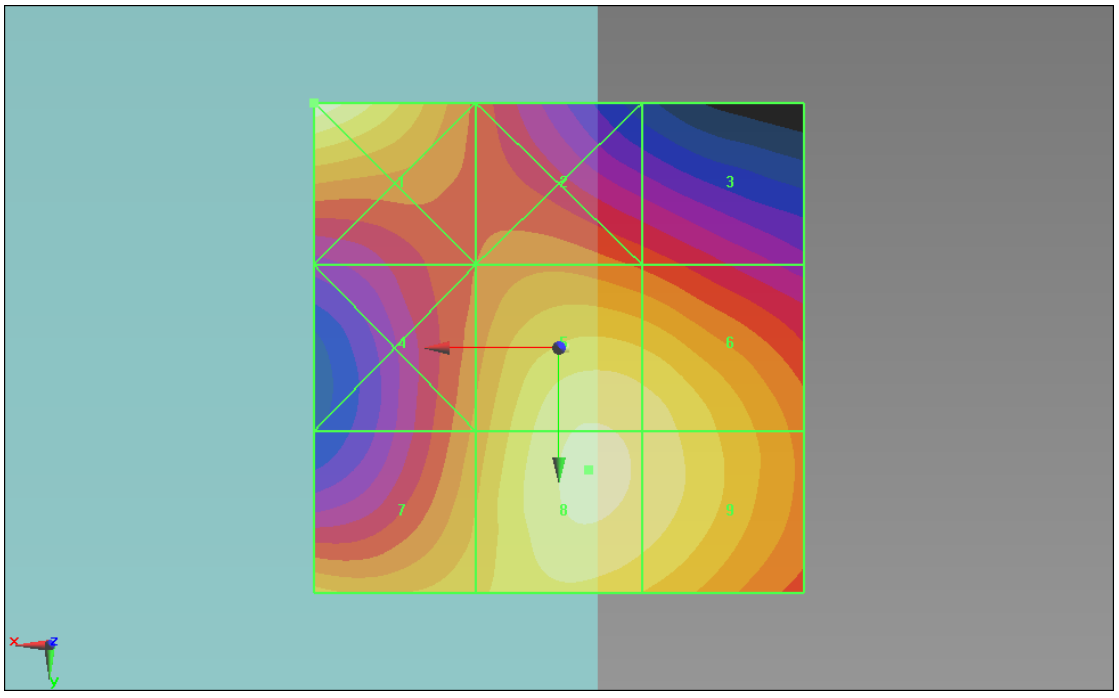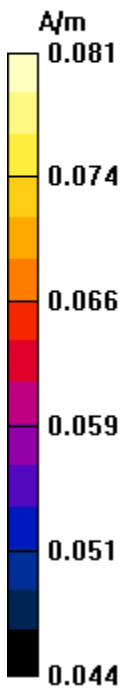

**P18 H-Field\_GSM1900\_Ch810\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.083 A/m

Probe Modulation Factor = 1.190


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.075 A/m; Power Drift = 0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.089 M4</b>	Grid 2 <b>0.074 M4</b>	Grid 3 <b>0.066 M4</b>
Grid 4 <b>0.076 M4</b>	Grid 5 <b>0.082 M4</b>	Grid 6 <b>0.079 M4</b>
Grid 7 <b>0.079 M4</b>	Grid 8 <b>0.083 M4</b>	Grid 9 <b>0.079 M4</b>

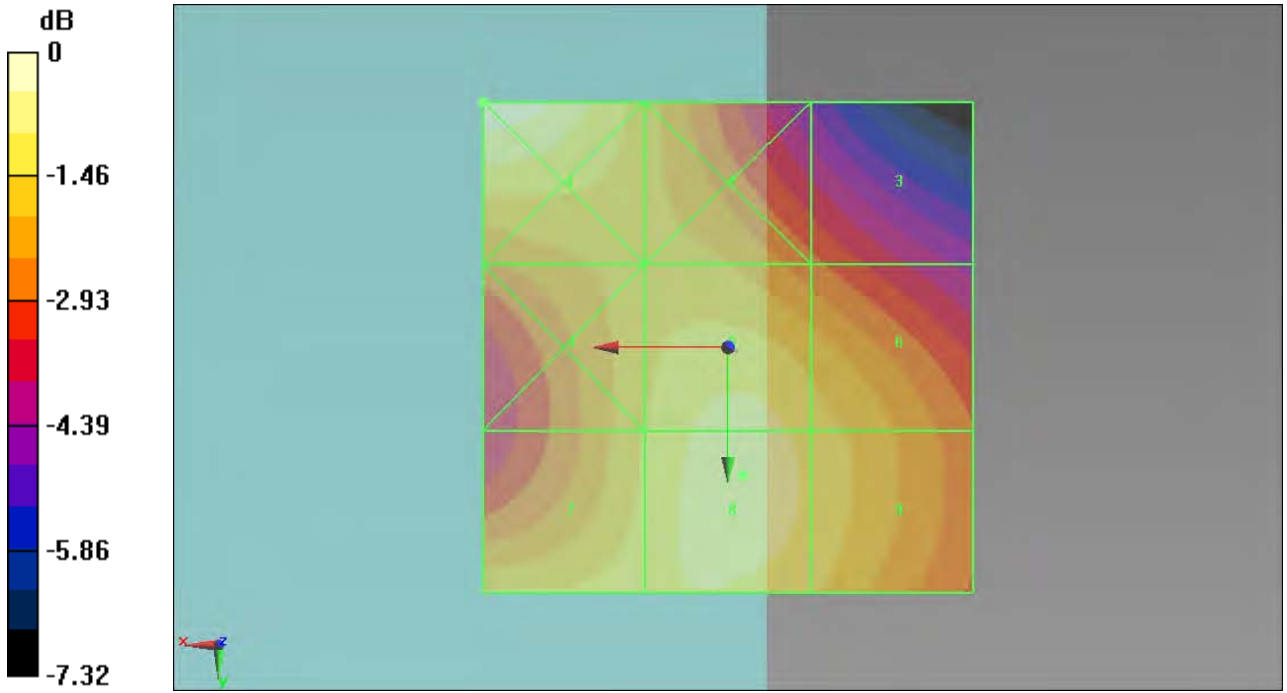

0 dB = 0.090A/m

**P34 H-Field\_GSM1900\_Ch810\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.079 A/m

Probe Modulation Factor = 1.190


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.070 A/m; Power Drift = 0.13 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.076 M4</b>	Grid 2 <b>0.067 M4</b>	Grid 3 <b>0.063 M4</b>
Grid 4 <b>0.072 M4</b>	Grid 5 <b>0.078 M4</b>	Grid 6 <b>0.076 M4</b>
Grid 7 <b>0.074 M4</b>	Grid 8 <b>0.079 M4</b>	Grid 9 <b>0.077 M4</b>

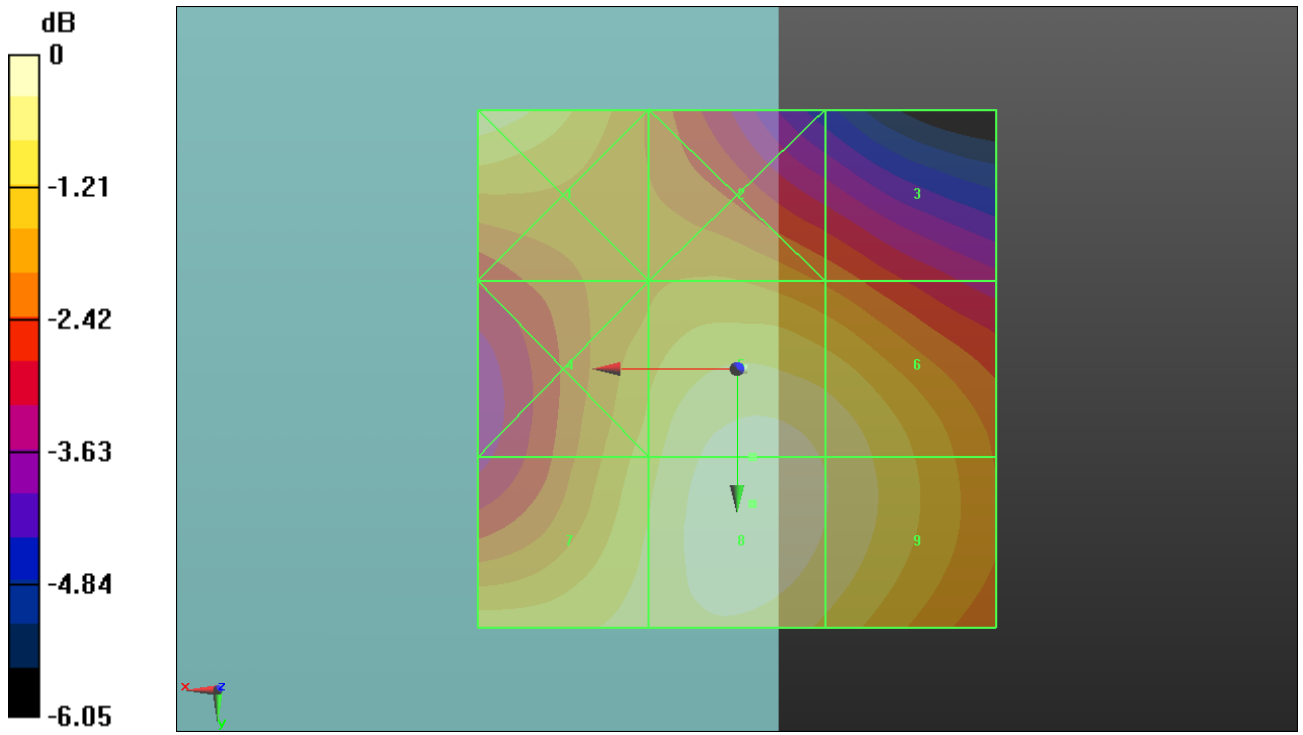

0 dB = 0.080A/m

### P46 H-Field\_GSM1900\_Ch810\_Sample2\_Battery1

**DUT: 110805C09**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.102 A/m

Probe Modulation Factor = 1.190


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.086 A/m; Power Drift = -0.10 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

Grid 1 <b>0.110 M4</b>	Grid 2 <b>0.091 M4</b>	Grid 3 <b>0.074 M4</b>
Grid 4 <b>0.097 M4</b>	Grid 5 <b>0.100 M4</b>	Grid 6 <b>0.091 M4</b>
Grid 7 <b>0.102 M4</b>	Grid 8 <b>0.102 M4</b>	Grid 9 <b>0.093 M4</b>

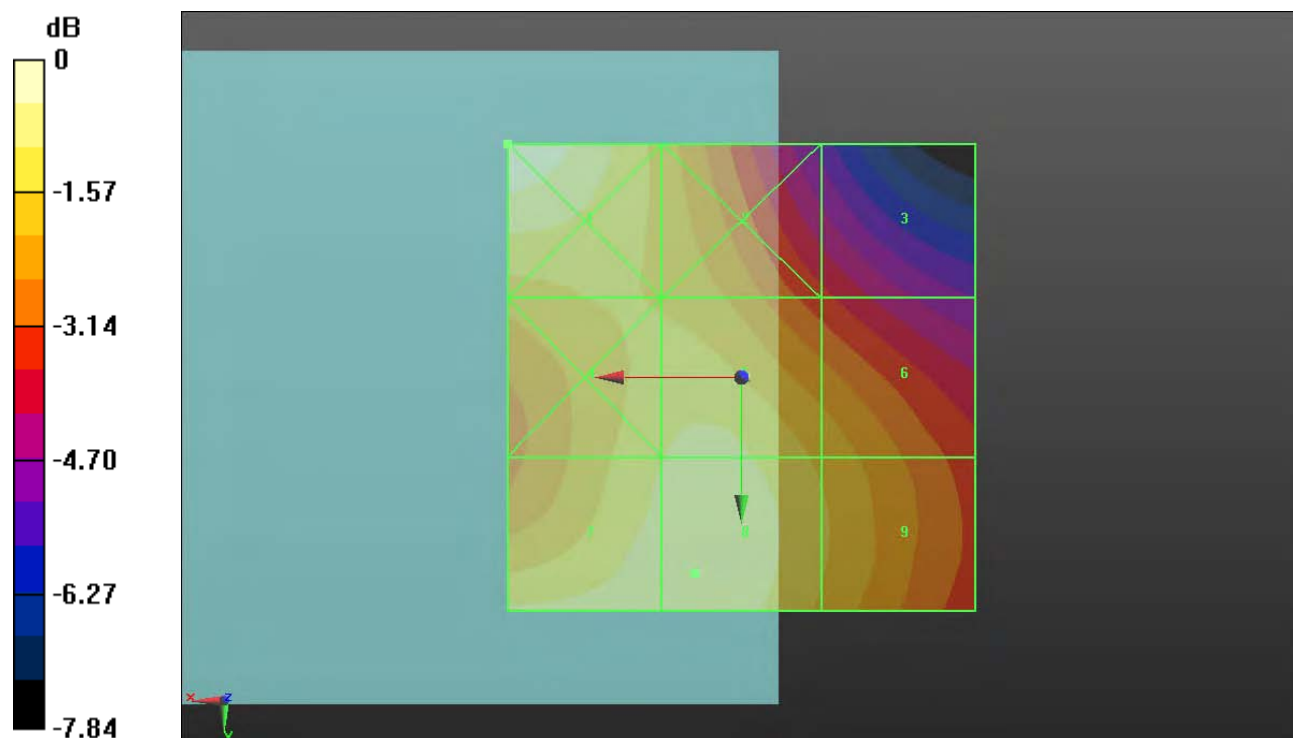

0 dB = 0.110A/m

**P19 H-Field\_WCDMA V\_RMC12.2K\_Ch4132\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.060 A/m

Probe Modulation Factor = 0.830


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.060 A/m; Power Drift = 0.07 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.084 M4</b>	Grid 2 <b>0.058 M4</b>	Grid 3 <b>0.036 M4</b>
Grid 4 <b>0.077 M4</b>	Grid 5 <b>0.057 M4</b>	Grid 6 <b>0.037 M4</b>
Grid 7 <b>0.081 M4</b>	Grid 8 <b>0.060 M4</b>	Grid 9 <b>0.039 M4</b>

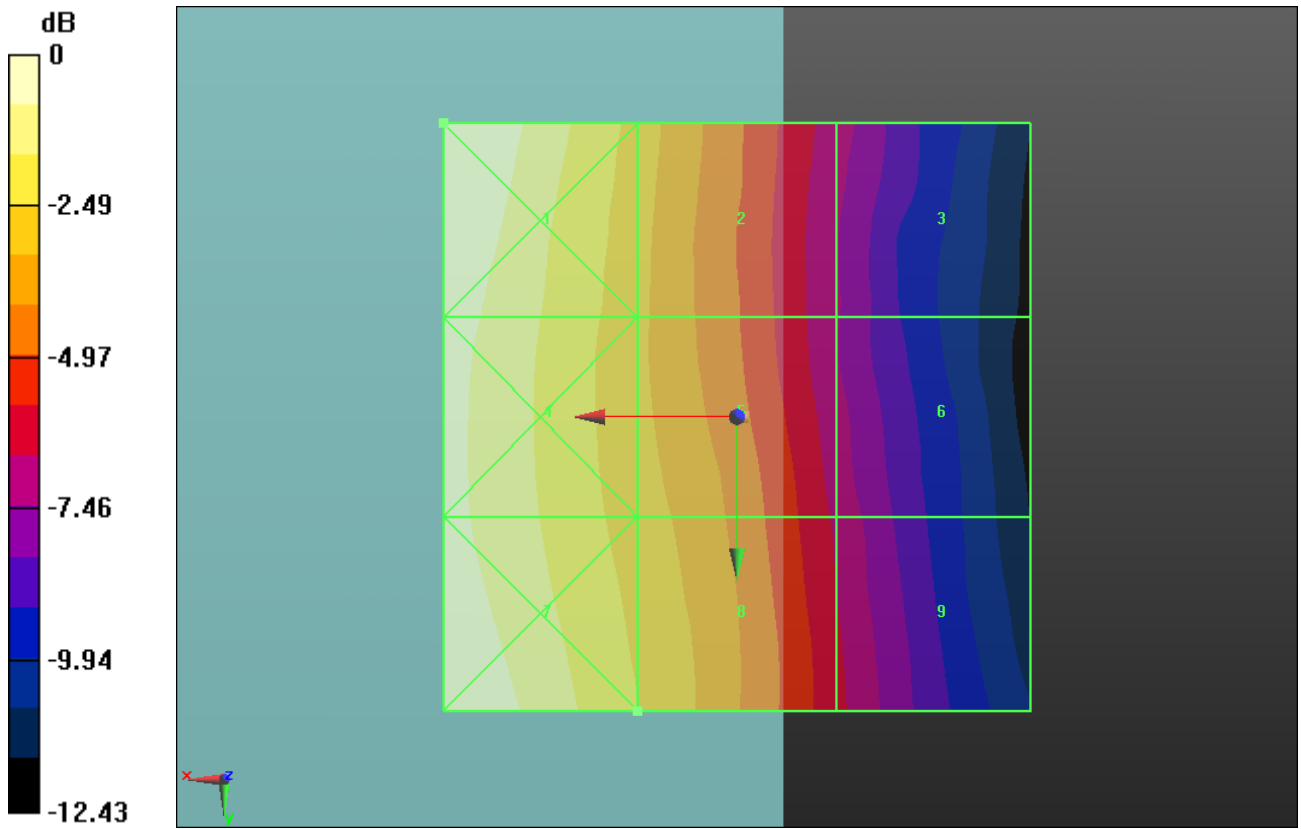



**P20 H-Field\_WCDMA V\_RMC12.2K\_Ch4182\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.057 A/m

Probe Modulation Factor = 0.800


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.061 A/m; Power Drift = -0.05 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.081 M4</b>	Grid 2 <b>0.056 M4</b>	Grid 3 <b>0.035 M4</b>
Grid 4 <b>0.074 M4</b>	Grid 5 <b>0.055 M4</b>	Grid 6 <b>0.036 M4</b>
Grid 7 <b>0.076 M4</b>	Grid 8 <b>0.057 M4</b>	Grid 9 <b>0.037 M4</b>

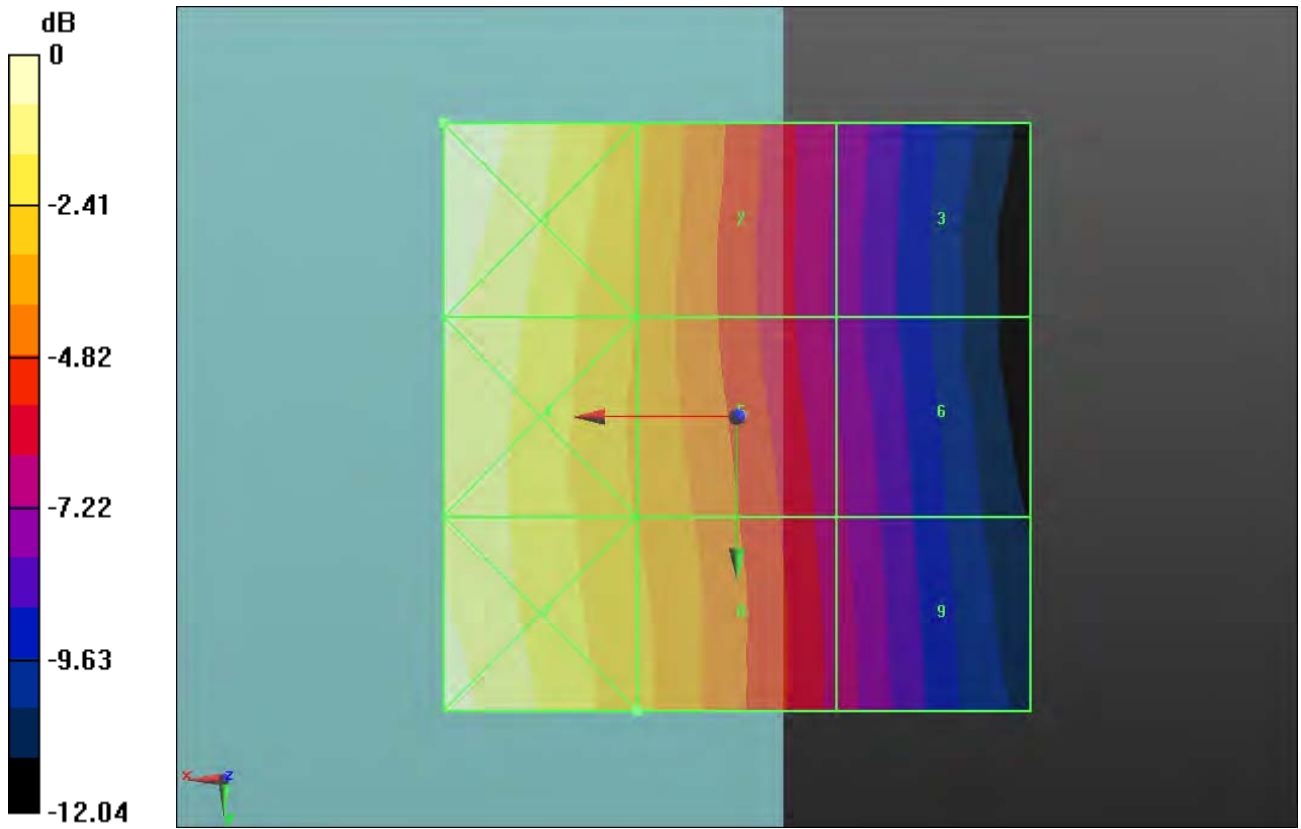

0 dB = 0.080A/m

**P21 H-Field\_WCDMA V\_RMC12.2K\_Ch4233\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.066 A/m

Probe Modulation Factor = 0.800


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.067 A/m; Power Drift = -0.15 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.093 M4</b>	Grid 2 <b>0.066 M4</b>	Grid 3 <b>0.041 M4</b>
Grid 4 <b>0.085 M4</b>	Grid 5 <b>0.062 M4</b>	Grid 6 <b>0.040 M4</b>
Grid 7 <b>0.086 M4</b>	Grid 8 <b>0.064 M4</b>	Grid 9 <b>0.041 M4</b>

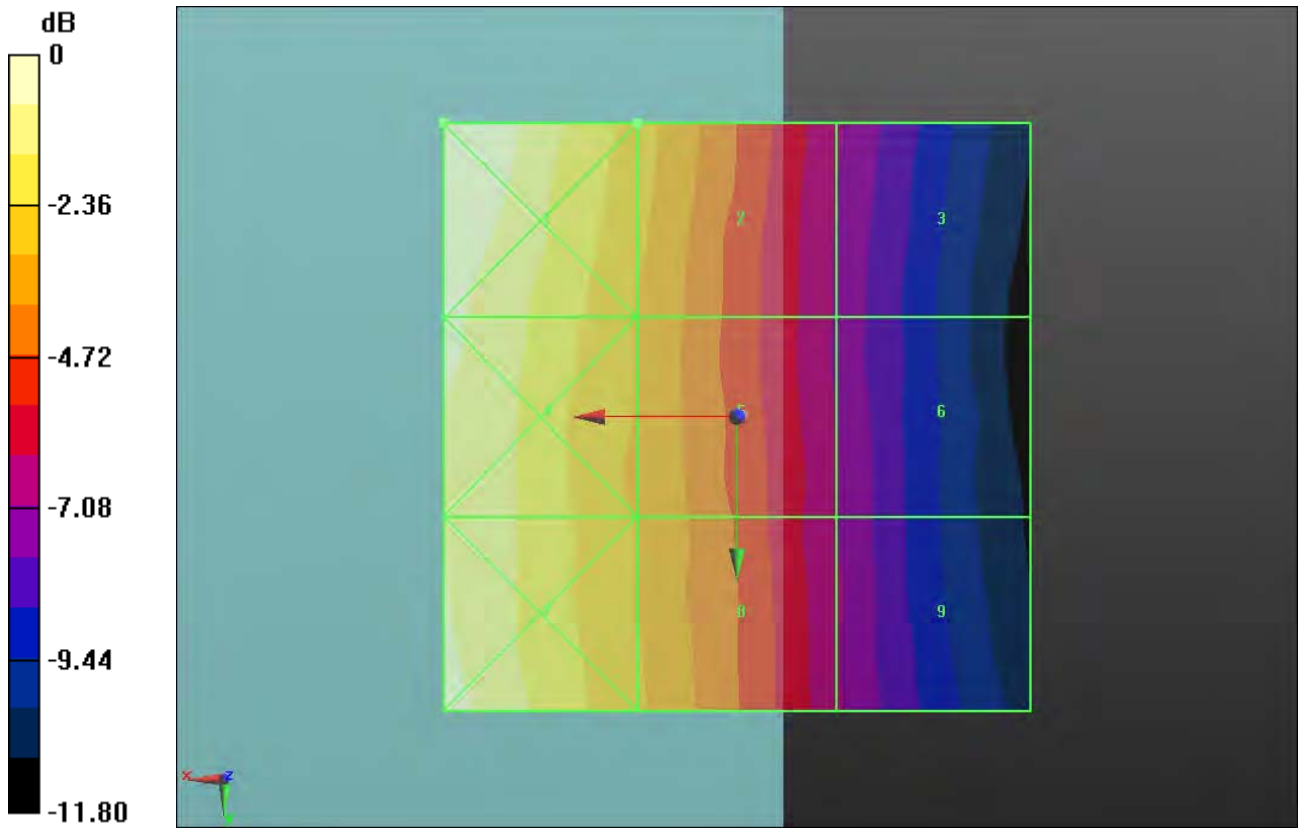

0 dB = 0.090A/m

**P35 H-Field\_WCDMA V\_RMC12.2K\_Ch4233\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.067 A/m

Probe Modulation Factor = 0.800



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.064 A/m; Power Drift = 0.08 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.095 M4</b>	Grid 2 <b>0.067 M4</b>	Grid 3 <b>0.043 M4</b>
Grid 4 <b>0.084 M4</b>	Grid 5 <b>0.062 M4</b>	Grid 6 <b>0.039 M4</b>
Grid 7 <b>0.084 M4</b>	Grid 8 <b>0.061 M4</b>	Grid 9 <b>0.038 M4</b>

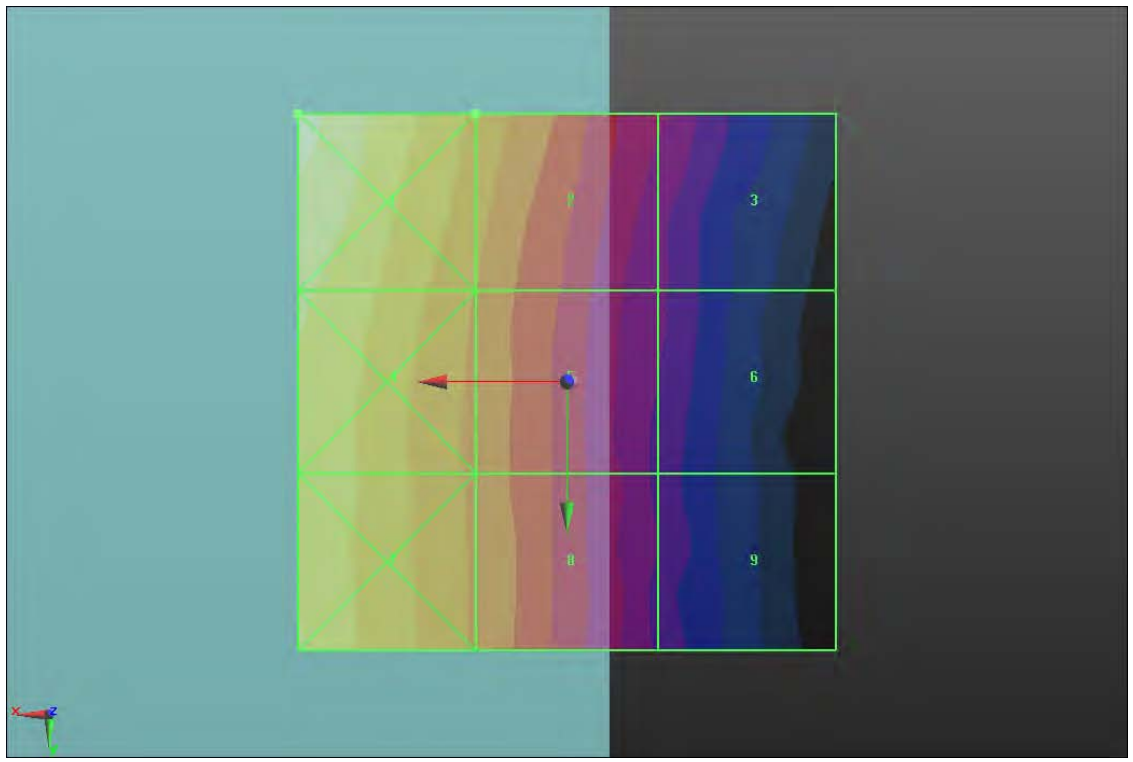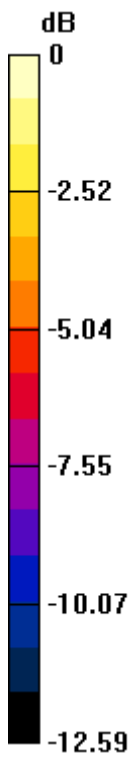

0 dB = 0.100A/m

### P47 H-Field\_WCDMA V\_RMC 12.2K\_Ch4233\_Sample2\_Battery2

**DUT: 110805C09**

Communication System: WCDMA V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.060 A/m

Probe Modulation Factor = 0.800


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.057 A/m; Power Drift = -0.07 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.085 M4</b>	Grid 2 <b>0.060 M4</b>	Grid 3 <b>0.037 M4</b>
Grid 4 <b>0.076 M4</b>	Grid 5 <b>0.055 M4</b>	Grid 6 <b>0.034 M4</b>
Grid 7 <b>0.078 M4</b>	Grid 8 <b>0.055 M4</b>	Grid 9 <b>0.034 M4</b>

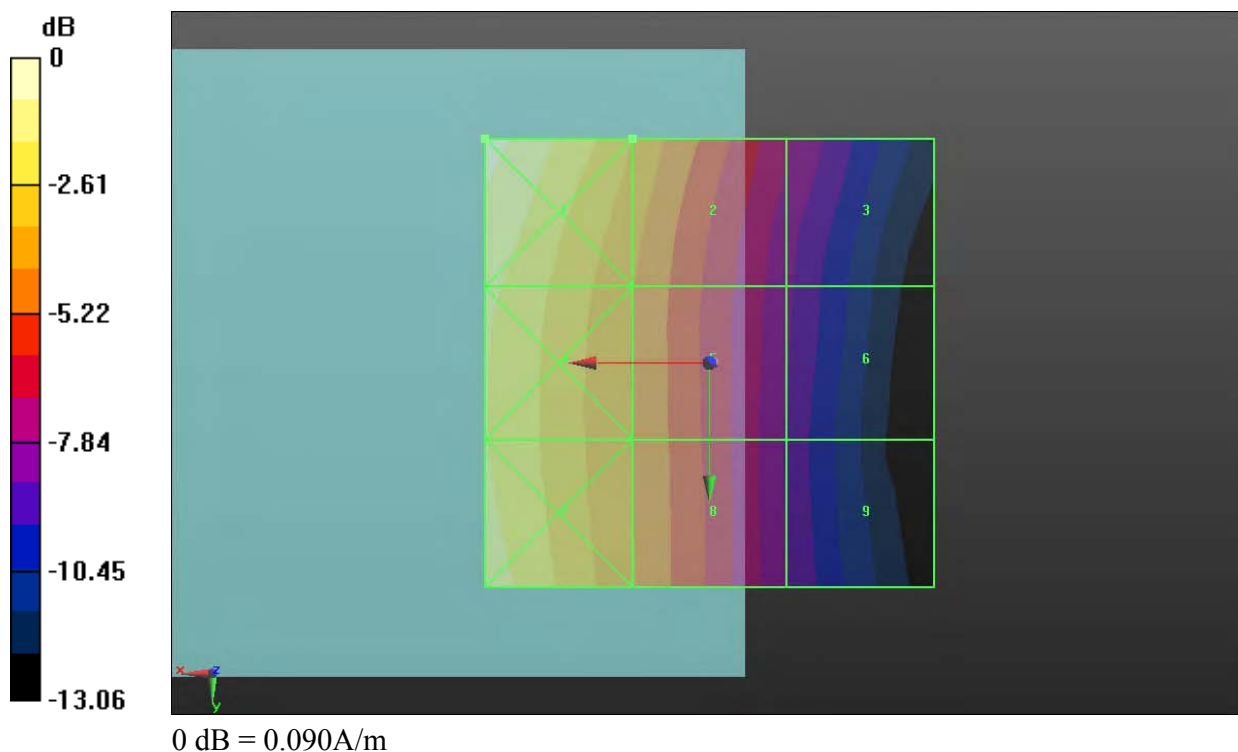

**P40 H-Field\_WCDMA II\_RMC12.2K\_Ch9262\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.050 A/m

Probe Modulation Factor = 0.510

Device Reference Point: 0, 0, -6.3 mm


Reference Value = 0.106 A/m; Power Drift = 0.12 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.045 M4</b>	Grid 2 <b>0.043 M4</b>	Grid 3 <b>0.040 M4</b>
Grid 4 <b>0.047 M4</b>	Grid 5 <b>0.050 M4</b>	Grid 6 <b>0.047 M4</b>
Grid 7 <b>0.048 M4</b>	Grid 8 <b>0.050 M4</b>	Grid 9 <b>0.047 M4</b>



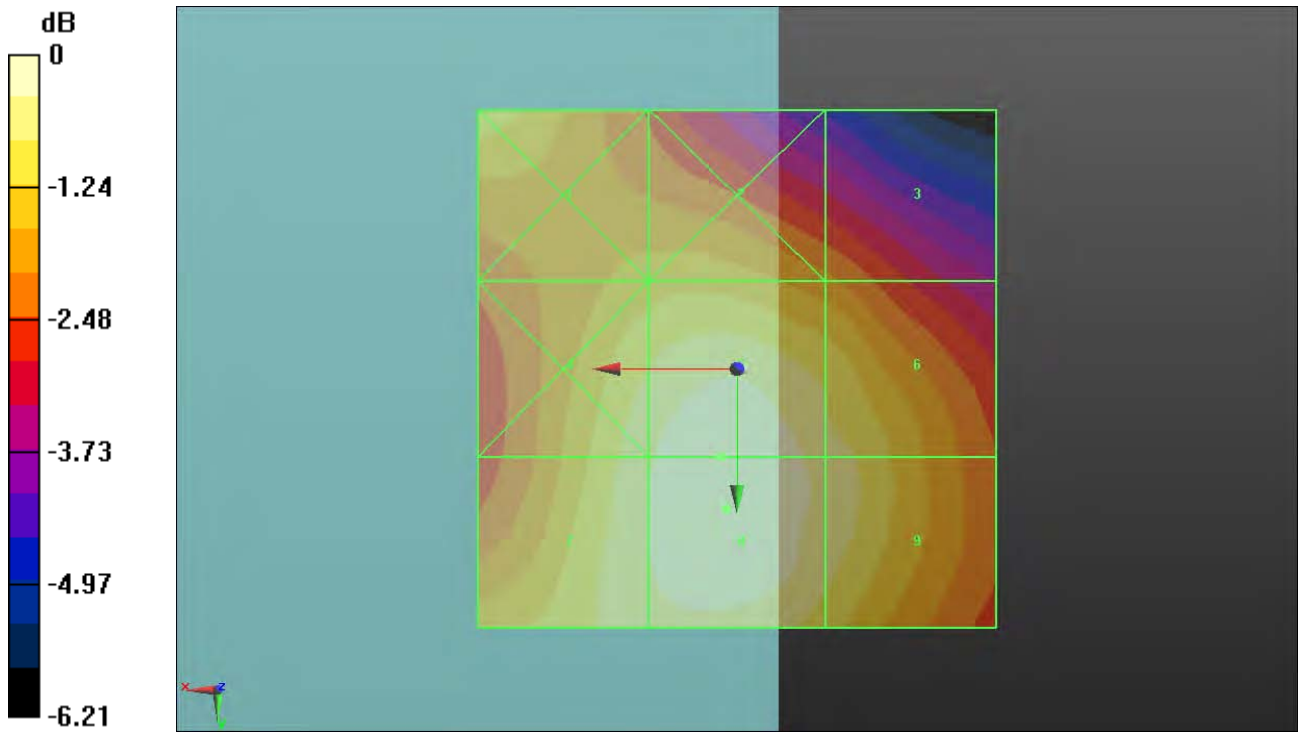

0 dB = 0.050A/m

**P23 H-Field\_WCDMA II\_RMC12.2K\_Ch9400\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.7 °C ;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9400/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.044 A/m

Probe Modulation Factor = 0.510


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.093 A/m; Power Drift = -0.0051 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.044 M4</b>	<b>0.038 M4</b>	<b>0.036 M4</b>
Grid 4	Grid 5	Grid 6
<b>0.039 M4</b>	<b>0.043 M4</b>	<b>0.043 M4</b>
Grid 7	Grid 8	Grid 9
<b>0.040 M4</b>	<b>0.044 M4</b>	<b>0.043 M4</b>

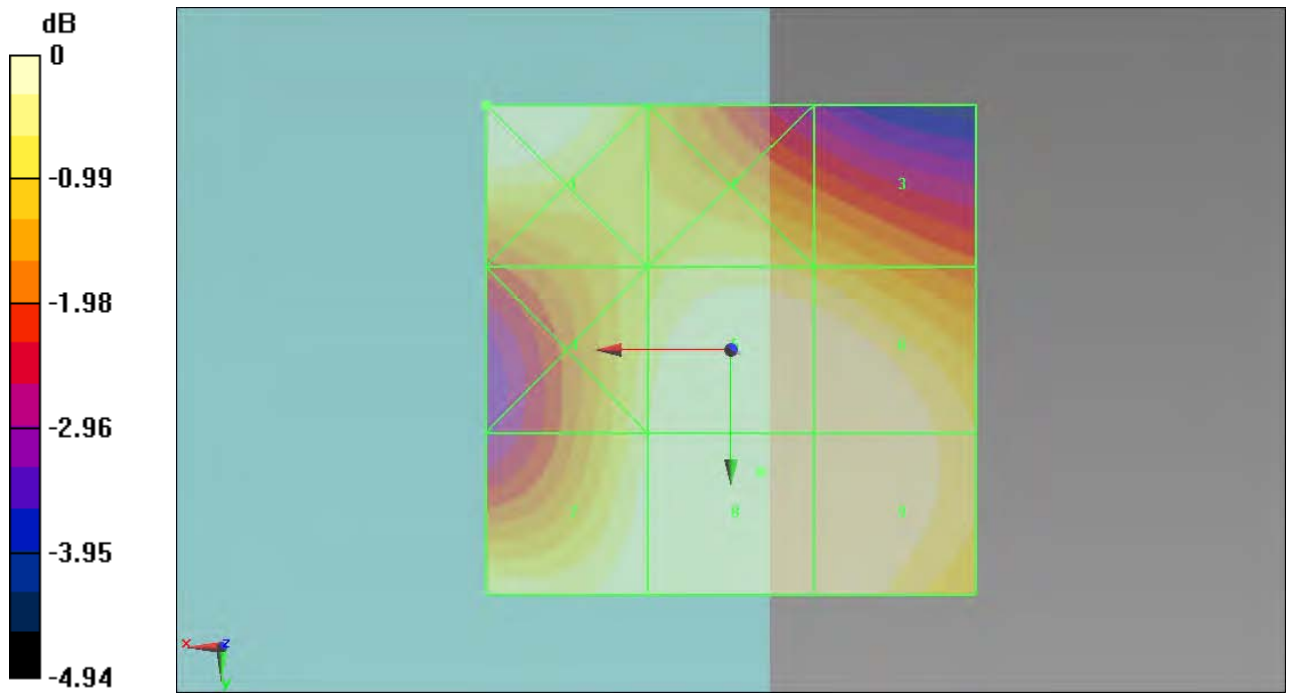

0 dB = 0.040A/m

**P24 H-Field\_WCDMA II\_RMC12.2K\_Ch9538\_Sample1\_Battery1**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.7 °C;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn579; Calibrated: 2010/9/20

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9538/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.044 A/m

Probe Modulation Factor = 0.510



Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.092 A/m; Power Drift = 0.11 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.047 M4</b>	Grid 2 <b>0.039 M4</b>	Grid 3 <b>0.035 M4</b>
Grid 4 <b>0.041 M4</b>	Grid 5 <b>0.043 M4</b>	Grid 6 <b>0.042 M4</b>
Grid 7 <b>0.042 M4</b>	Grid 8 <b>0.044 M4</b>	Grid 9 <b>0.042 M4</b>

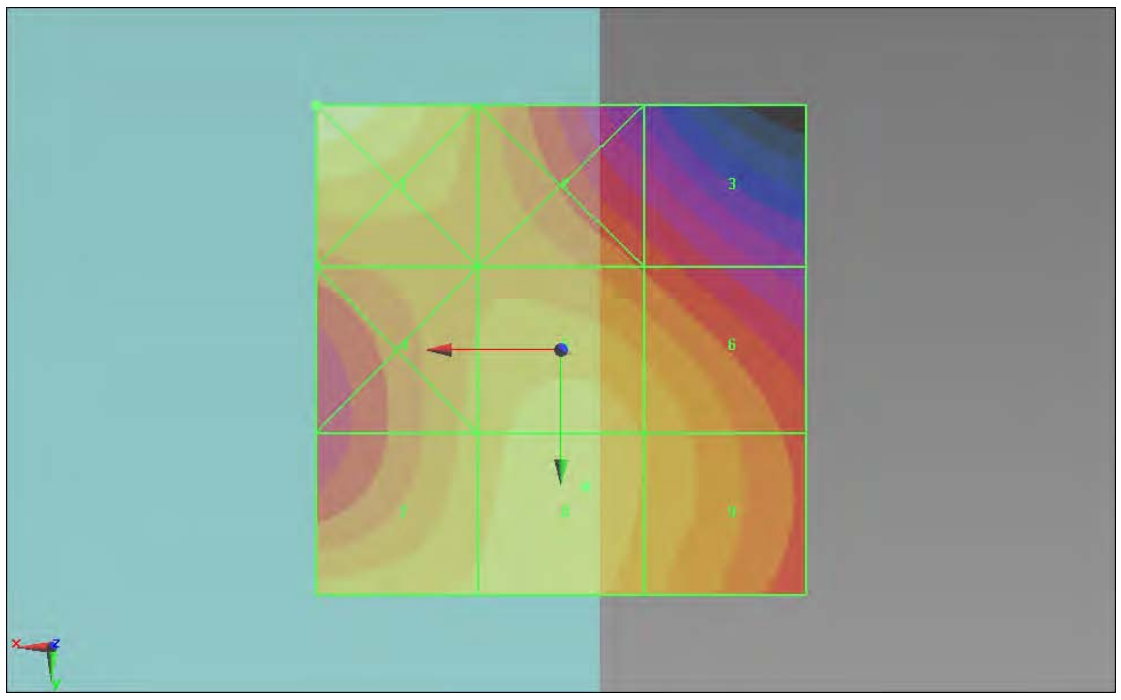

0 dB = 0.050A/m

**P36 H-Field\_WCDMA II\_RMC12.2K\_Ch9262\_Sample1\_Battery2**

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.051 A/m

Probe Modulation Factor = 0.510


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.107 A/m; Power Drift = 0.06 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.045 M4</b>	Grid 2 <b>0.043 M4</b>	Grid 3 <b>0.040 M4</b>
Grid 4 <b>0.048 M4</b>	Grid 5 <b>0.050 M4</b>	Grid 6 <b>0.048 M4</b>
Grid 7 <b>0.048 M4</b>	Grid 8 <b>0.051 M4</b>	Grid 9 <b>0.048 M4</b>

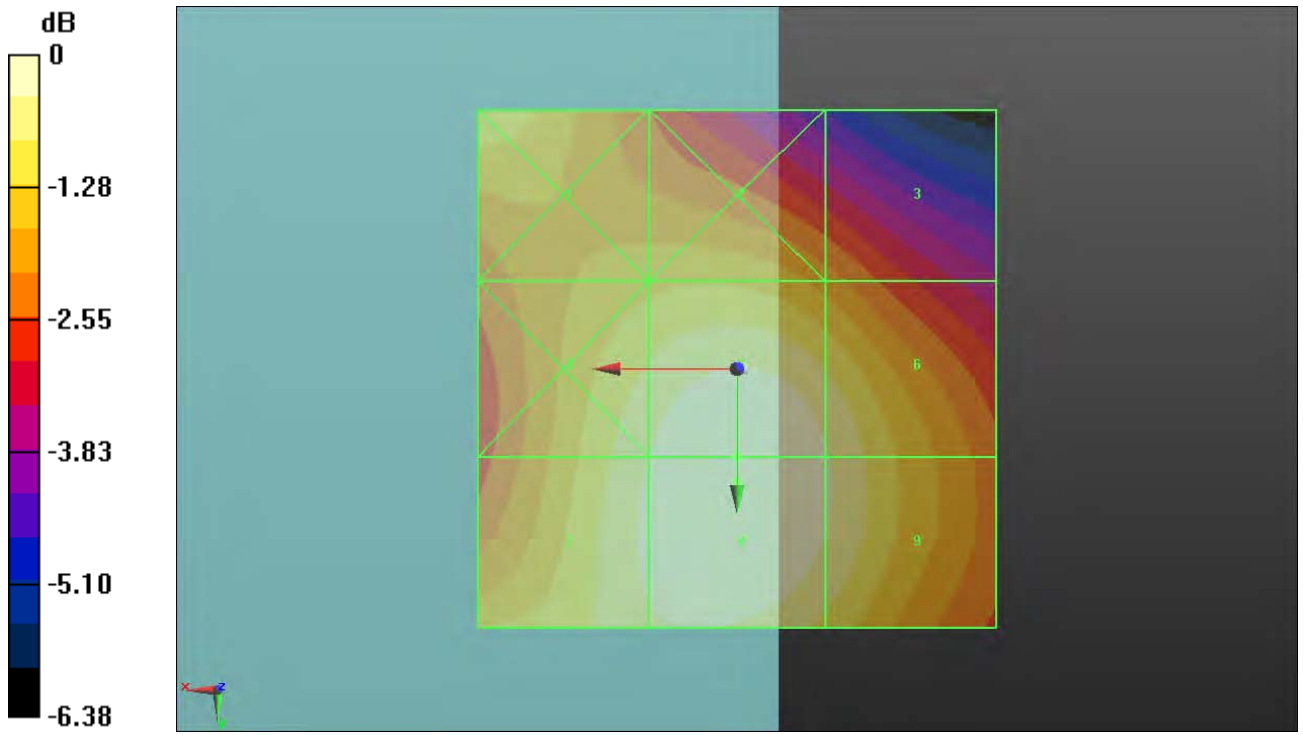

0 dB = 0.050A/m

### P48 H-Field\_WCDMA II\_RMC 12.2K\_Ch9262\_Sample2\_Battery2

**DUT: 110805C09**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C;

DASY5 Configuration:

- Probe: H3DV6 - SN6124; ; Calibrated: 2011/1/14
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn861; Calibrated: 2011/8/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.047 A/m

Probe Modulation Factor = 0.510


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.097 A/m; Power Drift = 0.15 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.043 M4</b>	Grid 2 <b>0.042 M4</b>	Grid 3 <b>0.036 M4</b>
Grid 4 <b>0.046 M4</b>	Grid 5 <b>0.047 M4</b>	Grid 6 <b>0.043 M4</b>
Grid 7 <b>0.046 M4</b>	Grid 8 <b>0.047 M4</b>	Grid 9 <b>0.043 M4</b>

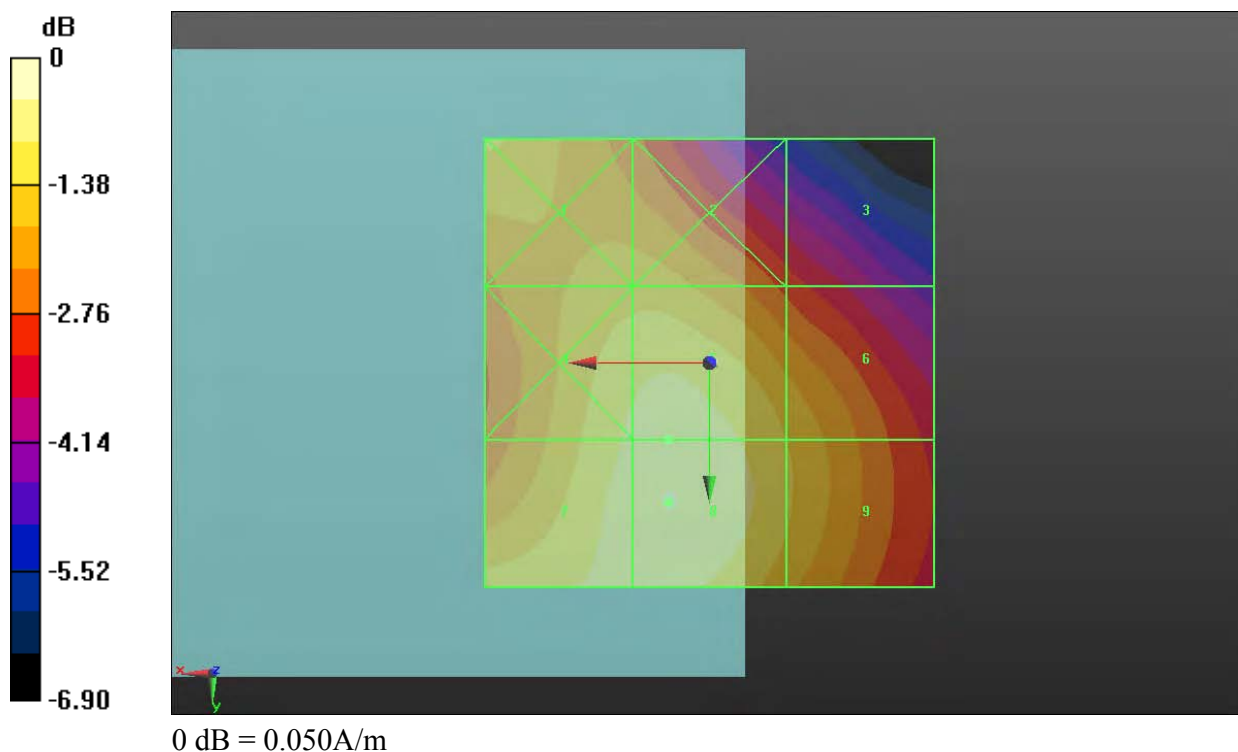





## APPENDIX B: SYSTEM CERTIFICATE & CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **ER3-2293\_Jan11**

## CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2293**

Calibration procedure(s) **QA CAL-02.v6, QA CAL-25.v3**  
Calibration procedure for E-field probes optimized for close near field  
evaluations in air



Calibration date: **January 24, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ER3DV6	SN: 2328	4-Oct-10 (No. ER3-2328_Oct10)	Oct-11
DAE4	SN: 789	31-Aug-10 (No. DAE4-789_Aug10)	Aug-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name <b>Katja Pokovic</b>	Function Technical Manager	Signature 
Approved by:	Name <b>Fin Bomholt</b>	Function R&D Director	Signature 

Issued: January 24, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>*: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- NORM(f)<sub>x,y,z</sub>* = *NORM<sub>x,y,z</sub>* \* *frequency\_response* (see Frequency Response Chart).
- DCP<sub>x,y,z</sub>*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A<sub>x,y,z</sub>*; *B<sub>x,y,z</sub>*; *C<sub>x,y,z</sub>*; *VR<sub>x,y,z</sub>*: *A*, *B*, *C* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the *NORM<sub>x</sub>* (no uncertainty required).

# Probe ER3DV6

## SN:2293

Manufactured: October 2, 2002  
Calibrated: January 24, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ER3DV6 - SN:2293

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ )	1.28	1.08	1.41	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	102.1	101.1	99.7	

### Modulation Calibration Parameters


UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	141.0	$\pm 2.4 \%$
			Y	0.00	0.00	1.00	118.1	
			Z	0.00	0.00	1.00	124.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.


### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

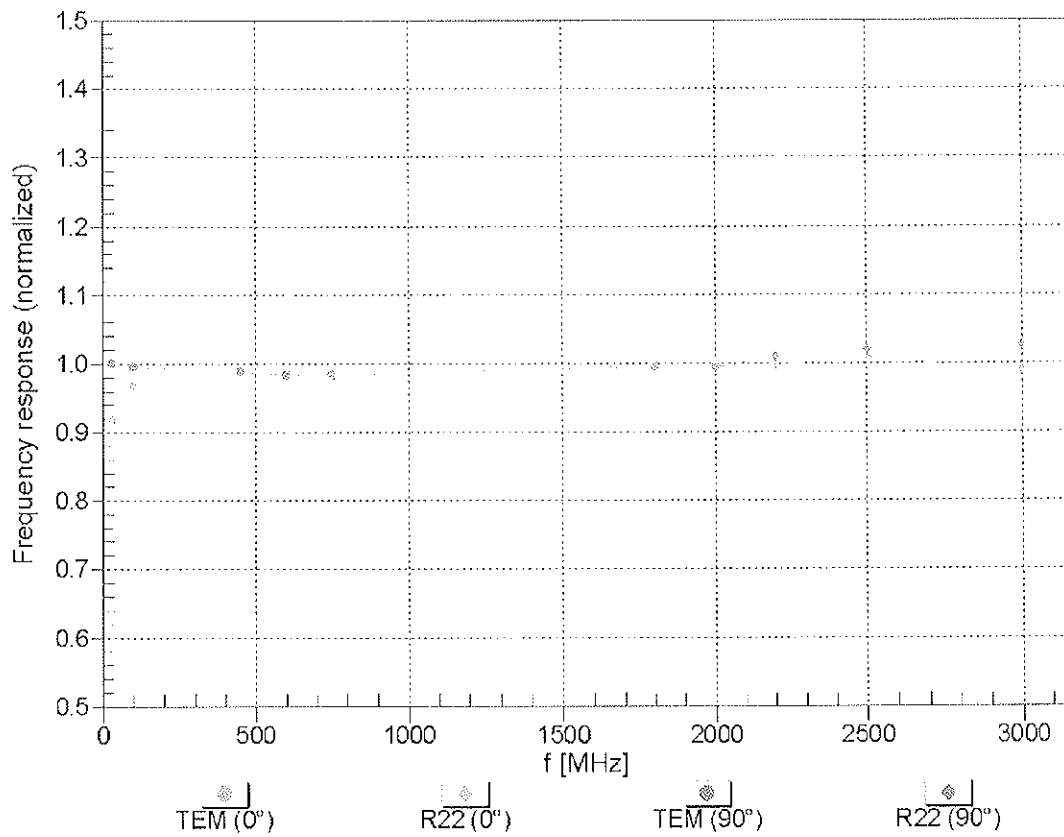


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM,0°

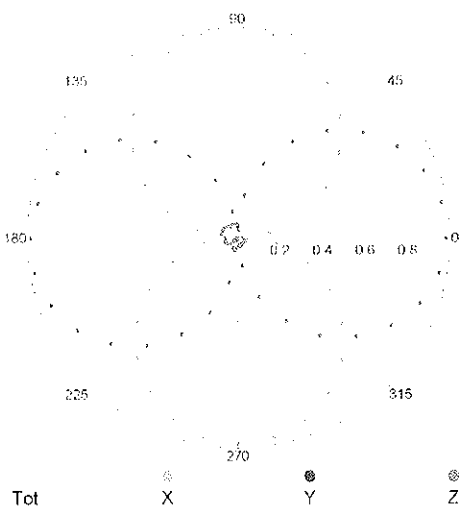


f=2500 MHz,R22,0°

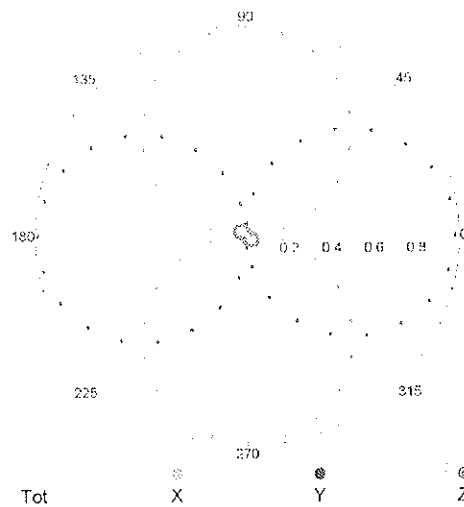


### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$


f=600 MHz,TEM,90°

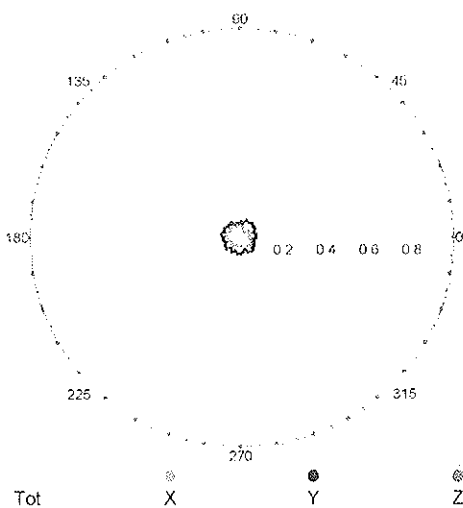

f=2500 MHz,R22,90°

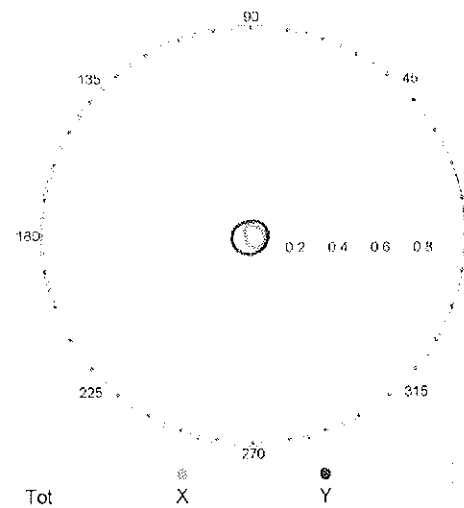


### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

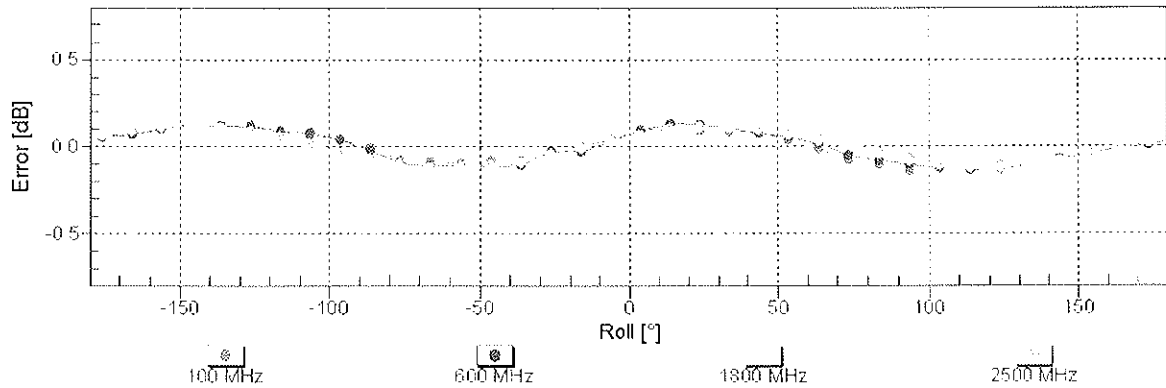

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$


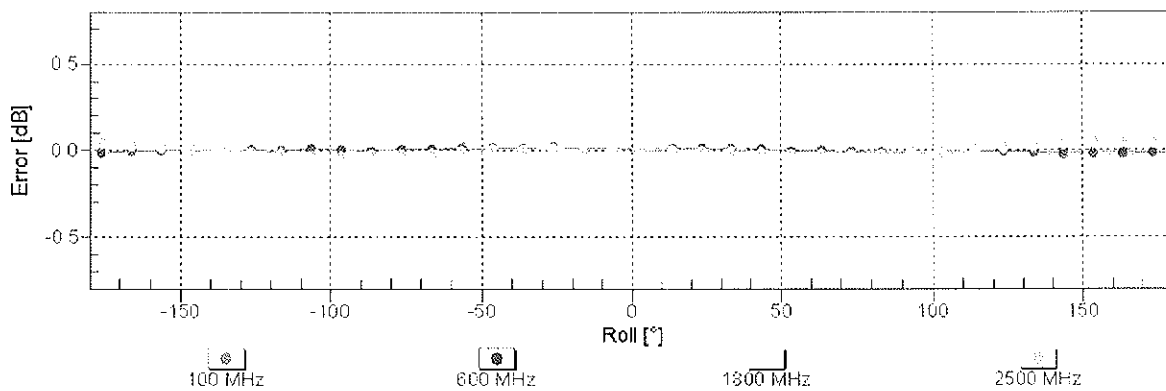


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)



# Dynamic Range f(E-field)


(TEM cell , f = 900 MHz)

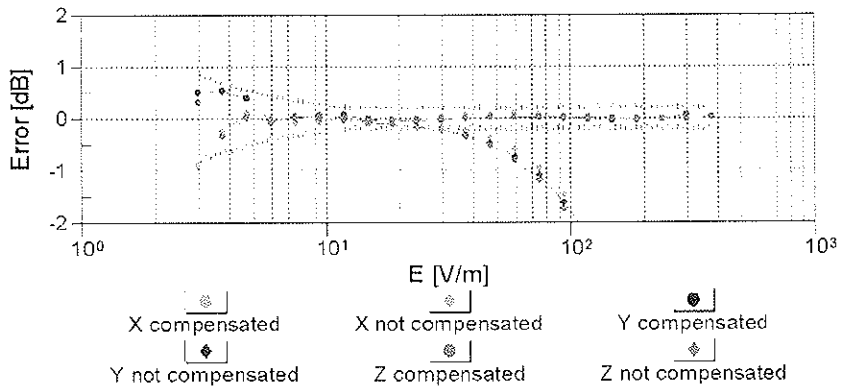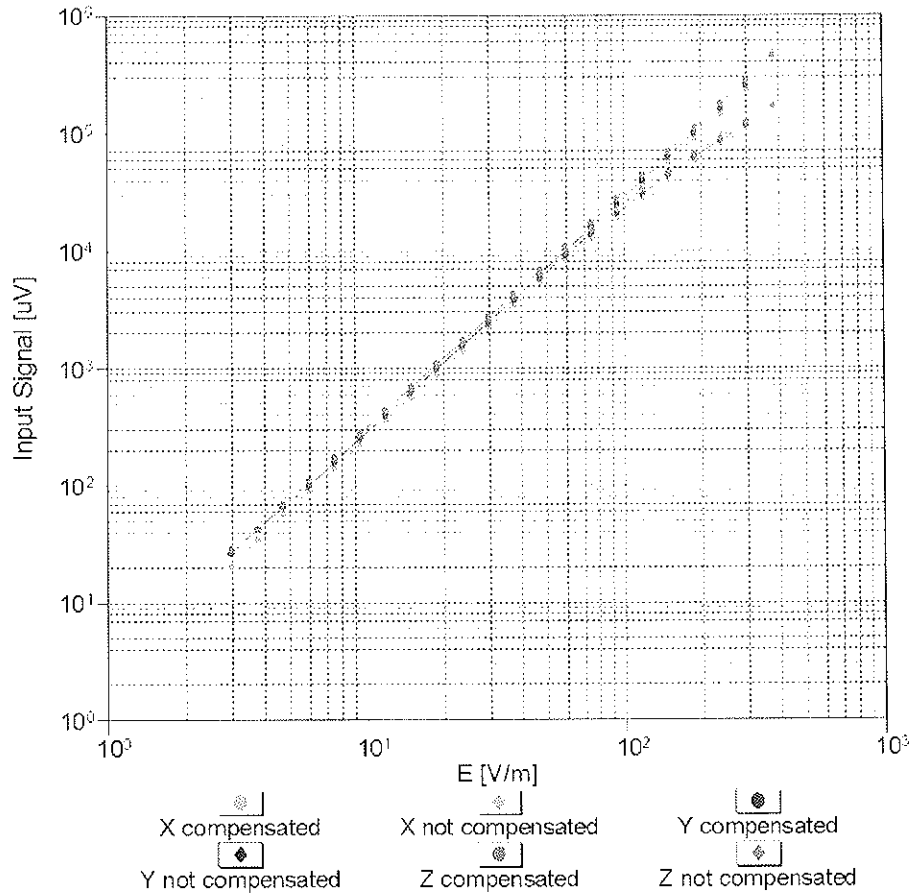

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

# Deviation from Isotropy in Air

Error ( $\phi$ ,  $\theta$ ),  $f = 900$  MHz

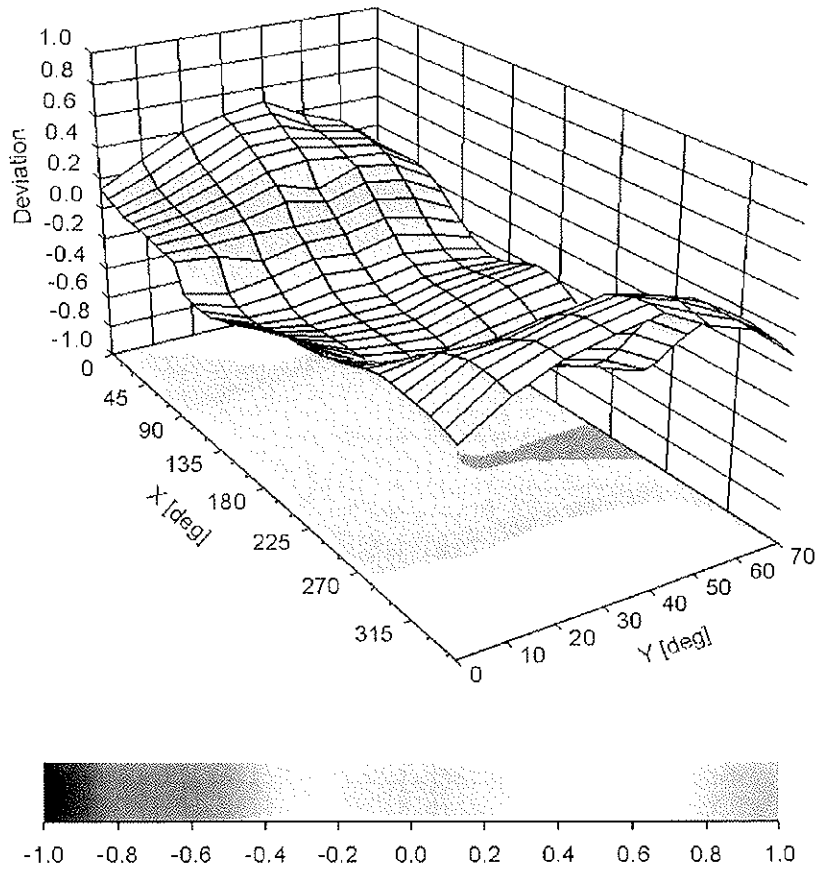

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

## DASY/EASY - Parameters of Probe: ER3DV6 - SN:2293

### Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	163.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	8 mm
Probe Tip to Sensor X Calibration Point	2.5 mm
Probe Tip to Sensor Y Calibration Point	2.5 mm
Probe Tip to Sensor Z Calibration Point	2.5 mm



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **H3-6124\_Jan11**

## CALIBRATION CERTIFICATE

Object **H3DV6 - SN:6124**

Calibration procedure(s) **QA CAL-03.v6, QA CAL-25.v3  
Calibration procedure for H-field probes optimized for close near field  
evaluations in air**

Calibration date: **January 14, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe H3DV6	SN: 6182	4-Oct-10 (No. H3-6182_Oct10)	Oct-11
DAE4	SN: 789	31-Aug-10 (No. DAE4-789_Aug10)	Aug-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: January 25, 2011
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>*: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- X, Y, Z(f)  $_a0a1a2$*  = *X, Y, Z  $_a0a1a2$  \* frequency\_response* (see Frequency Response Chart).
- DCP<sub>x,y,z</sub>*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>*: *A, B, C* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the *X  $_a0a1a2$*  (no uncertainty required).

# Probe H3DV6

## SN:6124

Manufactured: June 8, 2002  
Calibrated: January 14, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: H3DV6 - SN:6124

### Basic Calibration Parameters

		Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (A/m / $\sqrt{\text{mV}}$ )	a0	2.84E-003	2.94E-003	3.18E-003	$\pm 5.1 \%$
Norm (A/m / $\sqrt{\text{mV}}$ )	a1	-2.51E-004	-3.82E-004	-3.47E-004	$\pm 5.1 \%$
Norm (A/m / $\sqrt{\text{mV}}$ )	a2	9.03E-005	6.51E-005	5.46E-005	$\pm 5.1 \%$
DCP (mV) <sup>B</sup>		92.7	92.3	95.4	

### Modulation Calibration Parameters


UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	236.8	$\pm 1.9 \%$
			Y	0.00	0.00	1.00	237.5	
			Z	0.00	0.00	1.00	240.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

### Frequency Response of H-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

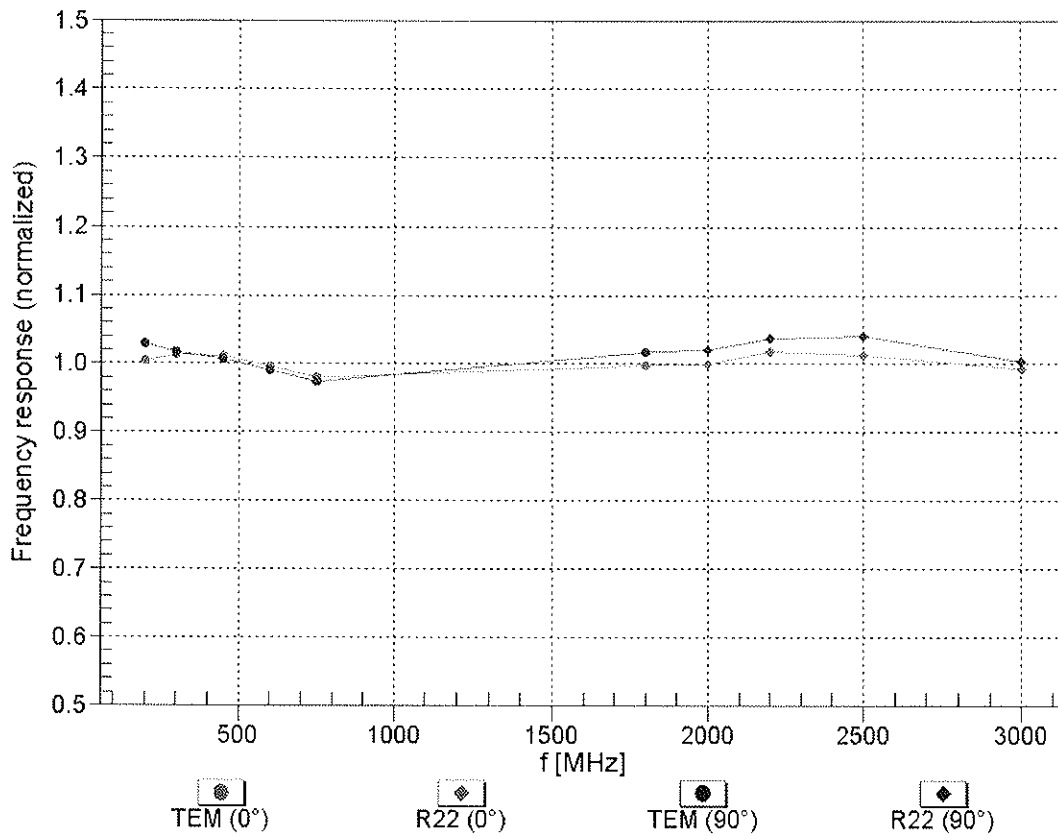


Uncertainty of Frequency Response of H-field:  $\pm 6.3\%$  (k=2)




### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM,0°

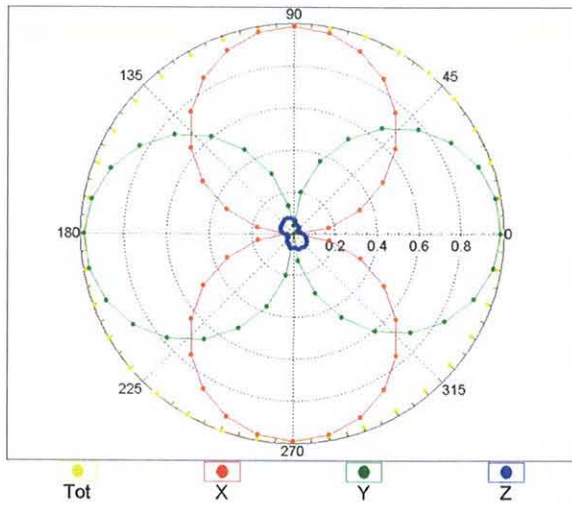


f=2500 MHz,R22,0°

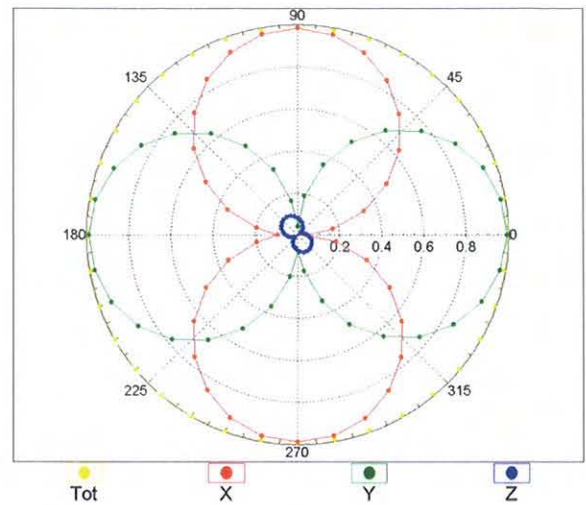


### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$


f=600 MHz,TEM,90°

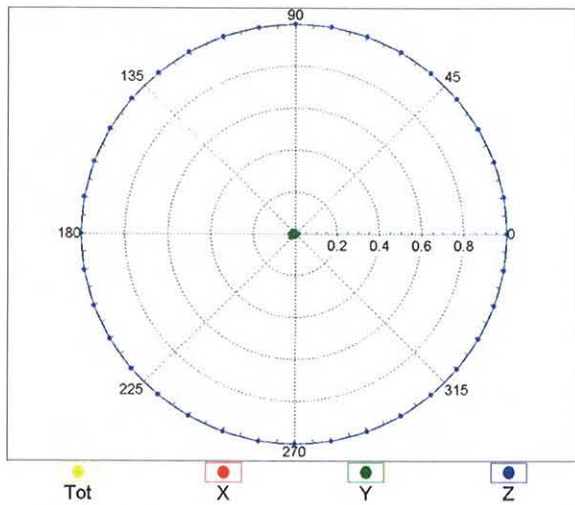

f=2500 MHz,R22,90°

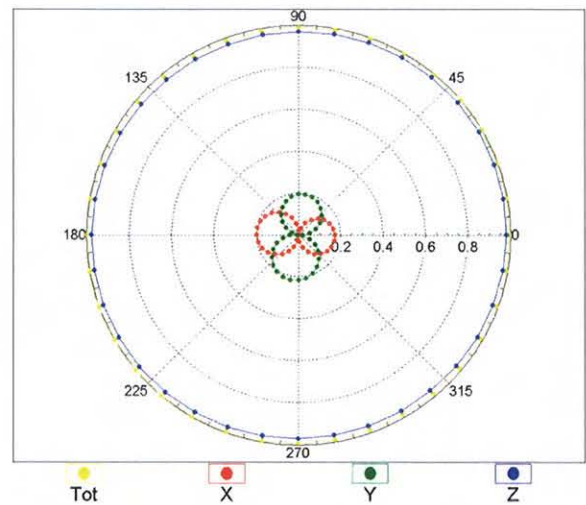


### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

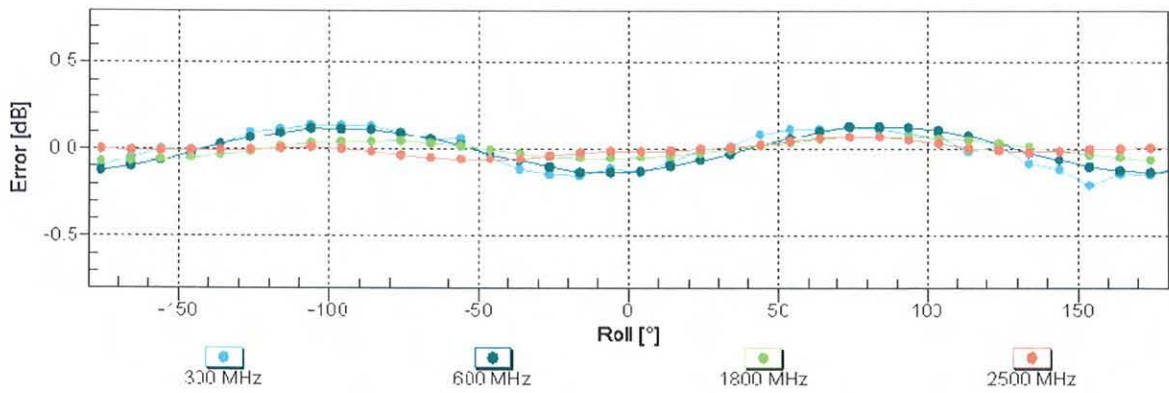

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )



### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$

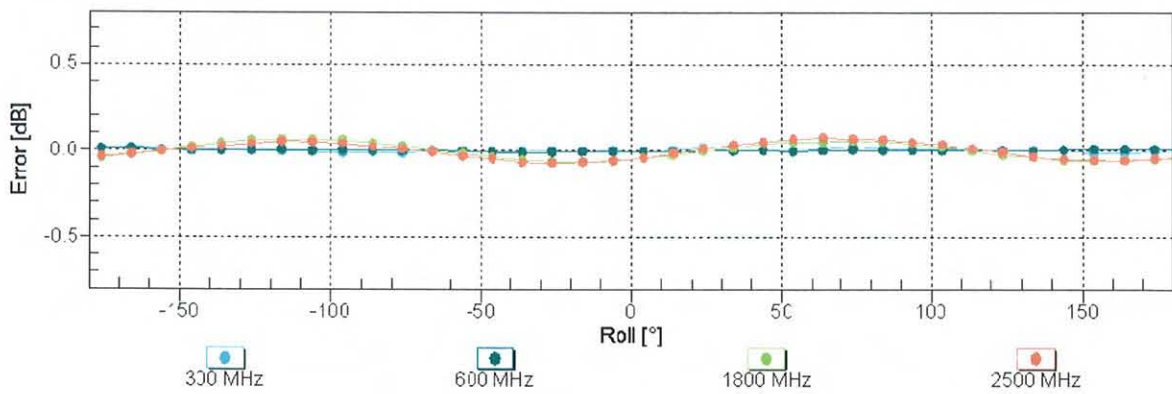

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range f(H-field)


(TEM cell, f = 900 MHz)

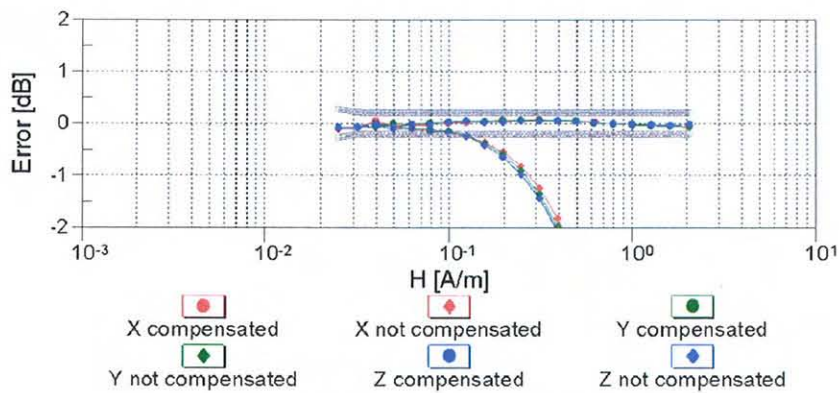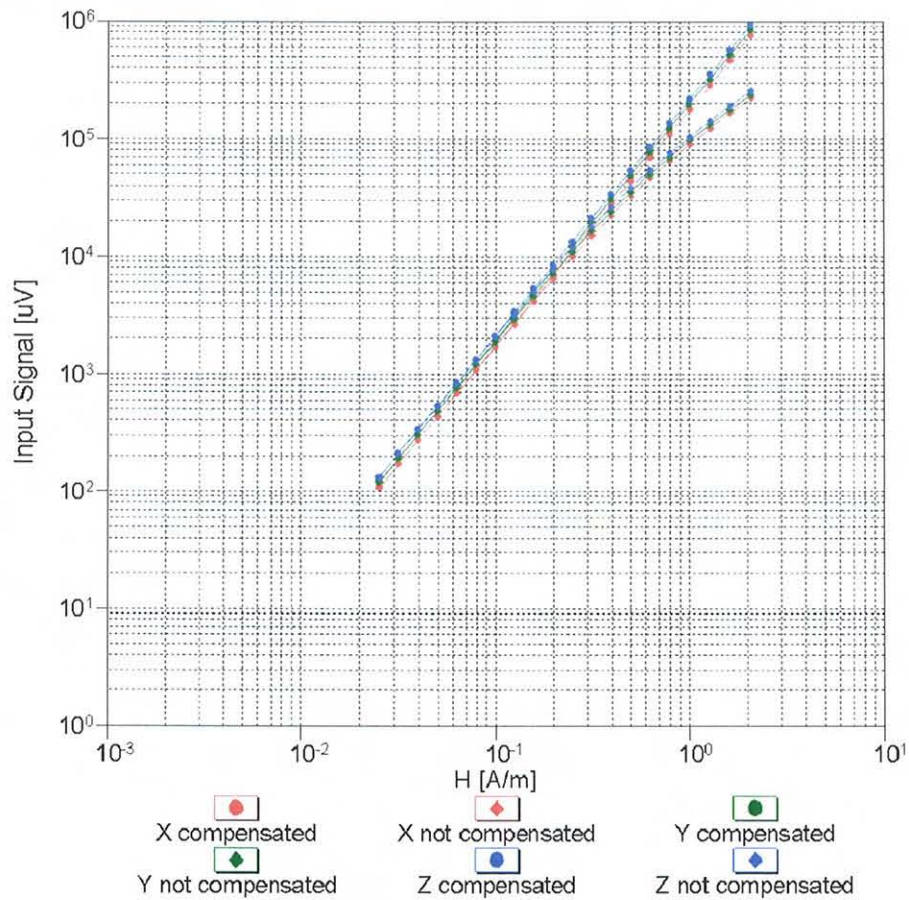

**Uncertainty of Linearity Assessment: ± 0.6% (k=2)**

# Deviation from Isotropy in Air

Error ( $\phi, \vartheta$ ),  $f = 900 \text{ MHz}$

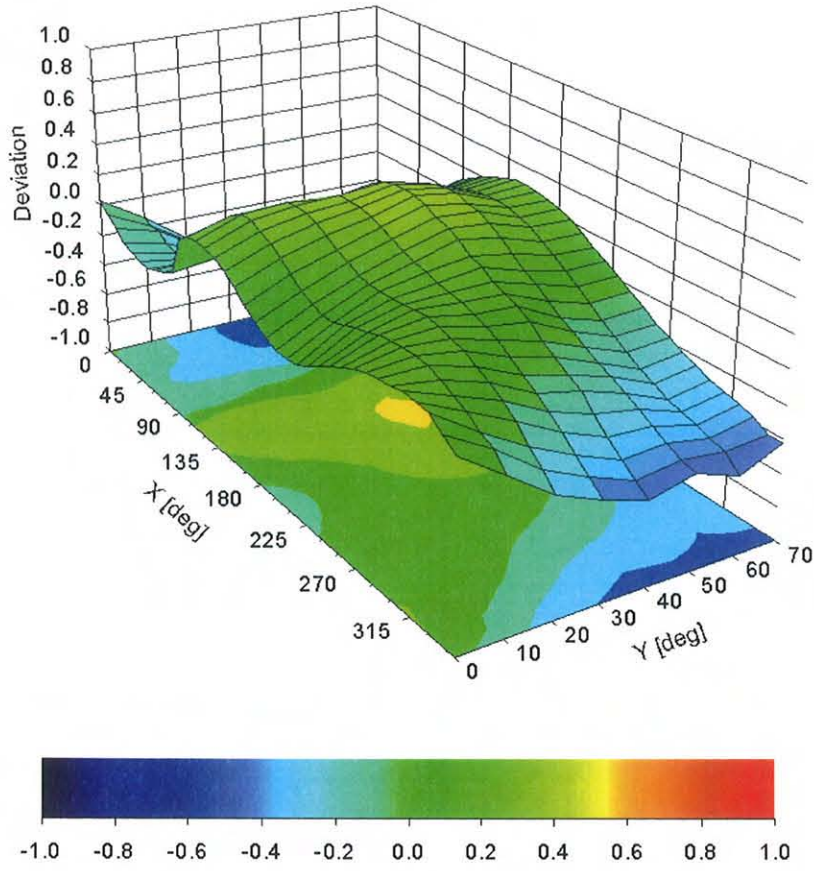

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

## DASY/EASY - Parameters of Probe: H3DV6 - SN:6124

### Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	-146.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	20 mm
Tip Diameter	6 mm
Probe Tip to Sensor X Calibration Point	3 mm
Probe Tip to Sensor Y Calibration Point	3 mm
Probe Tip to Sensor Z Calibration Point	3 mm





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BV-ADT (Auden)**

Certificate No: **DAE3-579\_Sep10**

## CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 579**

Calibration procedure(s) **QA CAL-06.v22  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **September 20, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	1-Oct-09 (No: 9055)	Oct-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	
Approved by:	Fin Bomholt	R&D Director	

Issued: September 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption*: Typical value for information. Supply currents in various operating modes.

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.327 $\pm$ 0.1% (k=2)	404.379 $\pm$ 0.1% (k=2)	404.160 $\pm$ 0.1% (k=2)
Low Range	3.98675 $\pm$ 0.7% (k=2)	3.99301 $\pm$ 0.7% (k=2)	3.94834 $\pm$ 0.7% (k=2)

## Connector Angle

Connector Angle to be used in DASY system	358.0 $\circ \pm 1 \circ$
---	---------------------------



## Appendix

### 1. DC Voltage Linearity

High Range		Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X	+ Input	200003.9	0.96	0.00
Channel X	+ Input	20003.19	3.09	0.02
Channel X	- Input	-19994.55	4.75	-0.02
Channel Y	+ Input	199992.4	-0.09	-0.00
Channel Y	+ Input	19999.51	0.41	0.00
Channel Y	- Input	-19997.22	3.18	-0.02
Channel Z	+ Input	200002.0	0.91	0.00
Channel Z	+ Input	20001.93	2.03	0.01
Channel Z	- Input	-19997.58	2.82	-0.01

Low Range		Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X	+ Input	2000.0	0.02	0.00
Channel X	+ Input	199.82	0.12	0.06
Channel X	- Input	-200.46	-0.56	0.28
Channel Y	+ Input	2000.3	0.47	0.02
Channel Y	+ Input	199.12	-0.78	-0.39
Channel Y	- Input	-201.36	-1.16	0.58
Channel Z	+ Input	1999.9	-0.07	-0.00
Channel Z	+ Input	199.18	-0.72	-0.36
Channel Z	- Input	-201.47	-1.47	0.73

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	7.07	5.75
	- 200	-4.60	-6.25
Channel Y	200	9.48	9.62
	- 200	-10.39	-10.96
Channel Z	200	8.79	8.42
	- 200	-9.64	-9.80

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	0.03	0.35
Channel Y	200	1.14	-	2.31
Channel Z	200	2.01	0.80	-

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16343	16314
Channel Y	16194	16427
Channel Z	15816	16265

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	-0.70	-1.94	0.80	0.49
Channel Y	-1.55	-2.12	-0.66	0.27
Channel Z	0.57	-0.11	5.61	0.62

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **DAE4-861\_Aug11**

## CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 861**

Calibration procedure(s) **QA CAL-06.v23  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **August 29, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	08-Jun-11 (in house check)	In house check: Jun-12

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	
Approved by:	Fin Bornholt	R&D Director	

Issued: August 29, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.369 $\pm$ 0.1% (k=2)	404.758 $\pm$ 0.1% (k=2)	405.720 $\pm$ 0.1% (k=2)
Low Range	4.01191 $\pm$ 0.7% (k=2)	4.00807 $\pm$ 0.7% (k=2)	4.02061 $\pm$ 0.7% (k=2)

## Connector Angle

Connector Angle to be used in DASY system	126.0 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	-------------------------------------

## Appendix

### 1. DC Voltage Linearity

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	200003.7	2.18	0.00
Channel X + Input	19998.70	-2.10	-0.01
Channel X - Input	-20000.72	-0.82	0.00
Channel Y + Input	200003.3	3.09	0.00
Channel Y + Input	19997.06	-2.54	-0.01
Channel Y - Input	-20001.61	-1.81	0.01
Channel Z + Input	200001.0	1.32	0.00
Channel Z + Input	19998.31	-1.39	-0.01
Channel Z - Input	-20000.55	-0.75	0.00

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2000.2	0.12	0.01
Channel X + Input	200.25	0.05	0.02
Channel X - Input	-198.30	1.80	-0.90
Channel Y + Input	2000.4	0.44	0.02
Channel Y + Input	198.69	-1.21	-0.60
Channel Y - Input	-200.48	-0.48	0.24
Channel Z + Input	2000.1	0.13	0.01
Channel Z + Input	199.88	-0.22	-0.11
Channel Z - Input	-201.71	-1.81	0.91

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	5.00	3.52
	- 200	-2.54	-4.10
Channel Y	200	0.95	1.43
	- 200	-2.77	-2.63
Channel Z	200	-9.47	-9.71
	- 200	7.61	7.59

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	4.12	-0.79
Channel Y	200	2.04	-	4.95
Channel Z	200	1.95	-0.33	-

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15976	16003
Channel Y	16064	16134
Channel Z	16042	16211

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	-0.28	-2.06	1.31	0.64
Channel Y	-0.44	-1.89	2.45	0.60
Channel Z	-1.18	-2.63	1.47	0.74

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **CD835V3-1041\_Mar11**

**CALIBRATION CERTIFICATE**

Object **CD835V3 - SN: 1041**

Calibration procedure(s) **QA CAL-20.v5  
Calibration procedure for dipoles in air**

Calibration date: **March 15, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Probe ER3DV6	SN: 2336	29-Dec-10 (No. ER3-2336_Dec10)	Dec-11
Probe H3DV6	SN: 6065	29-Dec-10 (No. H3-6065_Dec10)	Dec-11
DAE4	SN: 781	20-Oct-10 (No. DAE4-781_Oct10)	Oct-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
RF generator E4433B	MY 41000675	03-Nov-04 (in house check Oct-09)	In house check: Oct-11

Calibrated by: **Claudio Leubler**      Name: Claudio Leubler      Function: Laboratory Technician

Approved by: **Fin Bomholt**      Name: Fin Bomholt      Function: Technical Director

Signature

Issued: March 16, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

## Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

## 1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6.2 (424)
<b>DASY PP Version</b>	SEMCAD X	V14.4.4 (2829)
<b>Phantom</b>	HAC Test Arch	SD HAC P01 BA, #1070
<b>Distance Dipole Top - Probe Center</b>	10 mm	
<b>Scan resolution</b>	dx, dy = 5 mm	area = 20 x 180 mm
<b>Frequency</b>	<b>835 MHz ± 1 MHz</b>	
<b>Forward power at dipole connector</b>	20.0 dBm = 100mW	
<b>Input power drift</b>	< 0.05 dB	

## 2 Maximum Field values

<b>H-field 10 mm above dipole surface</b>	condition	<b>interpolated maximum</b>
Maximum measured	100 mW forward power	<b>0.471 A/m</b>

Uncertainty for H-field measurement: 8.2% (k=2)

<b>E-field 10 mm above dipole surface</b>	condition	<b>Interpolated maximum</b>
Maximum measured above high end-	100 mW forward power	170.8 V/m
Maximum measured above low end	100 mW forward power	163.2 V/m
Averaged maximum above arm	100 mW forward power	<b>168.0 V/m</b>

Uncertainty for E-field measurement: 12.8% (k=2)

## 3 Appendix

### 3.1 Antenna Parameters

<b>Frequency</b>	<b>Return Loss</b>	<b>Impedance</b>
800 MHz	15.8 dB	( 42.4 – j13.1 ) Ohm
<b>835 MHz</b>	<b>26.7 dB</b>	<b>( 47.1 + j3.4 ) Ohm</b>
900 MHz	17.1 dB	( 57.3 – j13.3 ) Ohm
950 MHz	17.8 dB	( 47.6 + j12.4 ) Ohm
960 MHz	13.9 dB	( 56.7 + j20.9 ) Ohm

### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

### 3.3 Measurement Sheets


#### 3.3.1 Return Loss and Smith Chart

15 Mar 2011 16:17:56  
 CH1 S11 LOG 5 dB/REF -15 dB 21-26.665 dB 835.000 000 MHz

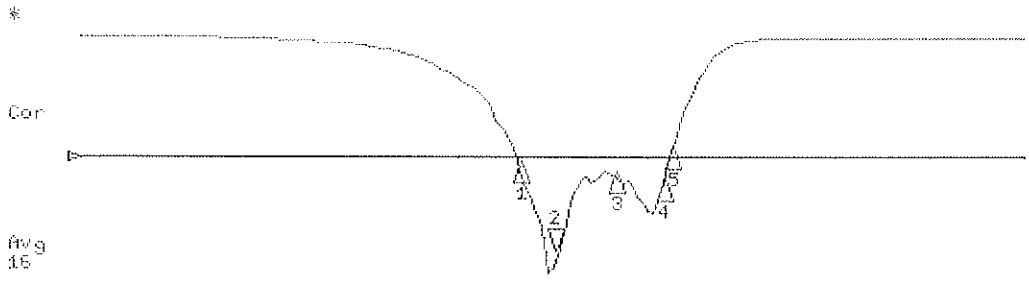

CH1 Markers  
 1: -15.832 dB  
 800.000 MHz  
 3: -17.063 dB  
 900.000 MHz  
 4: -17.947 dB  
 950.000 MHz  
 5: -13.896 dB  
 960.000 MHz

CH2 S11 1 U FS 2: 47.064  $\Omega$  3: 42.19  $\Omega$  652.23  $\mu$ H 835.000 000 MHz

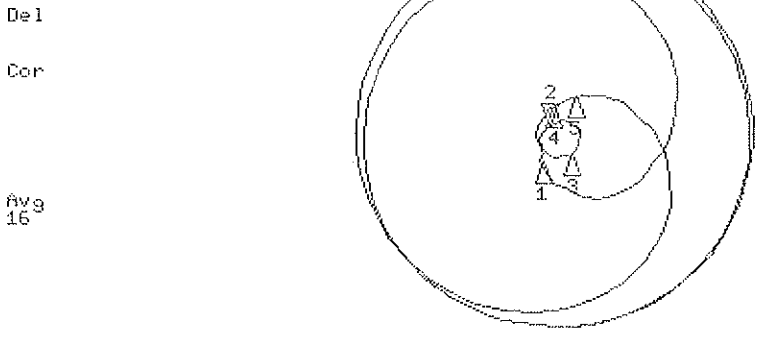

CH2 Markers  
 1: 42.447  $\Omega$   
 -13.061  $\mu$ H  
 800.000 MHz  
 3: 57.330  $\Omega$   
 -13.271  $\mu$ H  
 900.000 MHz  
 4: 47.574  $\Omega$   
 12.365  $\mu$ H  
 950.000 MHz  
 5: 56.738  $\Omega$   
 20.904  $\mu$ H  
 960.000 MHz

START 335.000 000 MHz STOP 1 335.000 000 MHz

### 3.3.3 DASY4 H-field Result

Date/Time: 15.03.2011 10:09:03

Test Laboratory: SPEAG Lab2

**HAC RF\_CD835\_1041\_H\_110315\_CL**

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1041**

Communication System: CW; Frequency: 835 MHz

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.10.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY52, V52.6 Build 2, Version 52.6.2 (424)
- Postprocessing SW: SEMCAD X, V14.4 Build 4, Version 14.4.4 (2829)

**Dipole H-Field measurement @ 835MHz/H Scan - measurement distance from the probe sensor center to CD835**

**Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.471 A/m

Probe Modulation Factor = 1.000


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.502 A/m; Power Drift = 0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.390</b> <b>M4</b>	Grid 2 <b>0.413</b> <b>M4</b>	Grid 3 <b>0.392</b> <b>M4</b>
Grid 4 <b>0.449</b> <b>M4</b>	Grid 5 <b>0.471</b> <b>M4</b>	Grid 6 <b>0.442</b> <b>M4</b>
Grid 7 <b>0.398</b> <b>M4</b>	Grid 8 <b>0.414</b> <b>M4</b>	Grid 9 <b>0.385</b> <b>M4</b>

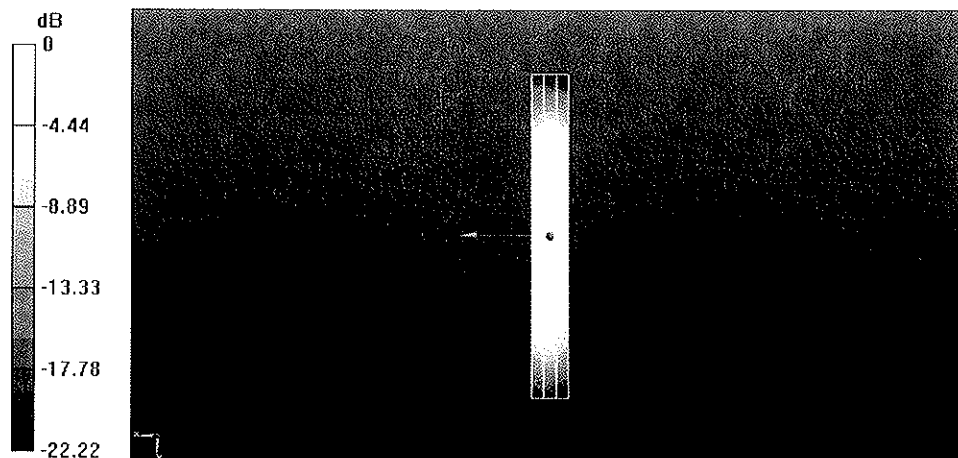

0 dB = 0.470A/m

### 3.3.2 DASY4 E-field Result

Date/Time: 15.03.2011 12:53:58

Test Laboratory: SPEAG Lab2

**HAC RF\_CD835\_1041\_E\_110315\_CL**

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1041**

Communication System: CW; Frequency: 835 MHz  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.10.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY52, V52.6 Build 2, Version 52.6.2 (424)
- Postprocessing SW: SEMCAD X, V14.4 Build 4, Version 14.4.4 (2829)


**Dipole E-Field measurement @ 835MHz/E Scan - measurement distance from the probe sensor center to CD835**

**Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):**

Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 170.8 V/m  
 Probe Modulation Factor = 1.000  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 124.9 V/m; Power Drift = -0.02 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>158.6</b> <b>M4</b>	Grid 2 <b>170.8</b> <b>M4</b>	Grid 3 <b>167.4</b> <b>M4</b>
Grid 4 <b>86.752</b> <b>M4</b>	Grid 5 <b>90.542</b> <b>M4</b>	Grid 6 <b>88.762</b> <b>M4</b>
Grid 7 <b>158.6</b> <b>M4</b>	Grid 8 <b>163.2</b> <b>M4</b>	Grid 9 <b>158.5</b> <b>M4</b>

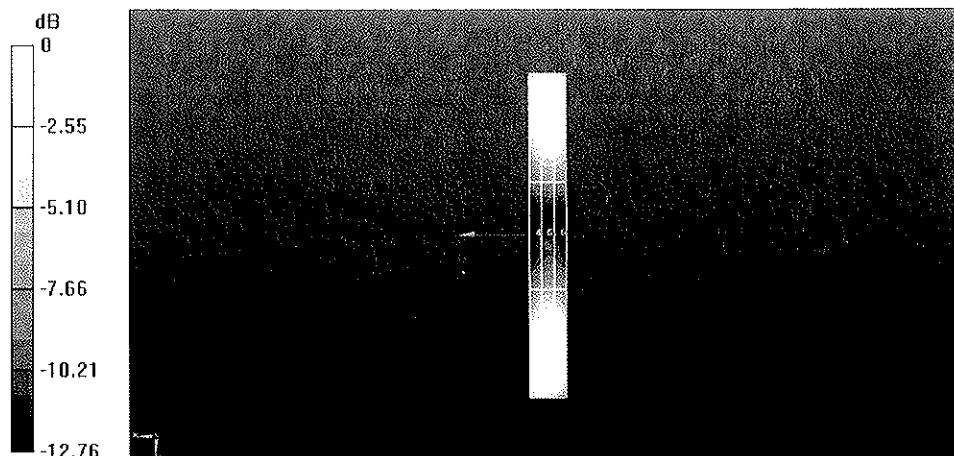

0 dB = 170.8V/m



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **CD1880V3-1032\_Apr11**

## CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1032**

Calibration procedure(s) **QA CAL-20.v5  
 Calibration procedure for dipoles in air**

Calibration date: **April 12, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Probe ER3DV6	SN: 2336	29-Dec-10 (No. ER3-2336_Dec10)	Dec-11
Probe H3DV6	SN: 6065	29-Dec-10 (No. H3-6065_Dec10)	Dec-11
DAE4	SN: 781	20-Oct-10 (No. DAE4-781_Oct10)	Oct-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Power sensor HP 8482H	SN: 3318A09450	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-10)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
RF generator E4433B	MY 41000675	03-Nov-04 (in house check Oct-09)	In house check: Oct-11

Calibrated by:	Name <b>Claudio Leubler</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Fin Bornholt</b>	Function <b>R&amp;D Director</b>	Signature 

Issued: April 12, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

## Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASYS5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

## 1. Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6.2 (424)
<b>DASY PP Version</b>	SEMCAD X	V14.4.4 (2829)
<b>Phantom</b>	HAC Test Arch	SD HAC P01 BA, #1070
<b>Distance Dipole Top - Probe Center</b>	10 mm	
<b>Scan resolution</b>	dx, dy = 5 mm	area = 20 x 90 mm
<b>Frequency</b>	<b>1880 MHz</b> ± 1 MHz	
<b>Forward power at dipole connector</b>	20.0 dBm = 100mW	
<b>Input power drift</b>	< 0.05 dB	

## 2. Maximum Field values

<b>H-field 10 mm above dipole surface</b>	condition	<b>Interpolated maximum</b>
Maximum measured	100 mW forward power	<b>0.471 A/m</b>

Uncertainty for H-field measurement: 8.2% (k=2)

<b>E-field 10 mm above dipole surface</b>	condition	<b>Interpolated maximum</b>
Maximum measured above high end	100 mW forward power	143.9 V/m
Maximum measured above low end	100 mW forward power	140.3 V/m
Averaged maximum above arm	100 mW forward power	<b>142.1 V/m</b>

Uncertainty for E-field measurement: 12.8% (k=2)

## 3. Appendix

### 3.1 Antenna Parameters

<b>Frequency</b>	<b>Return Loss</b>	<b>Impedance</b>
1730 MHz	25.8 dB	( 51.2 + j5.1 ) Ohm
<b>1880 MHz</b>	<b>21.1 dB</b>	<b>( 51.2 + j8.9 ) Ohm</b>
1900 MHz	21.2 dB	( 53.5 + j8.4 ) Ohm
1950 MHz	27.3 dB	( 54.5 – j0.1 ) Ohm
2000 MHz	22.8 dB	( 43.5 + j1.9 ) Ohm

### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



### 3.3 Measurement Sheets

#### 3.3.1 Return Loss and Smith Chart

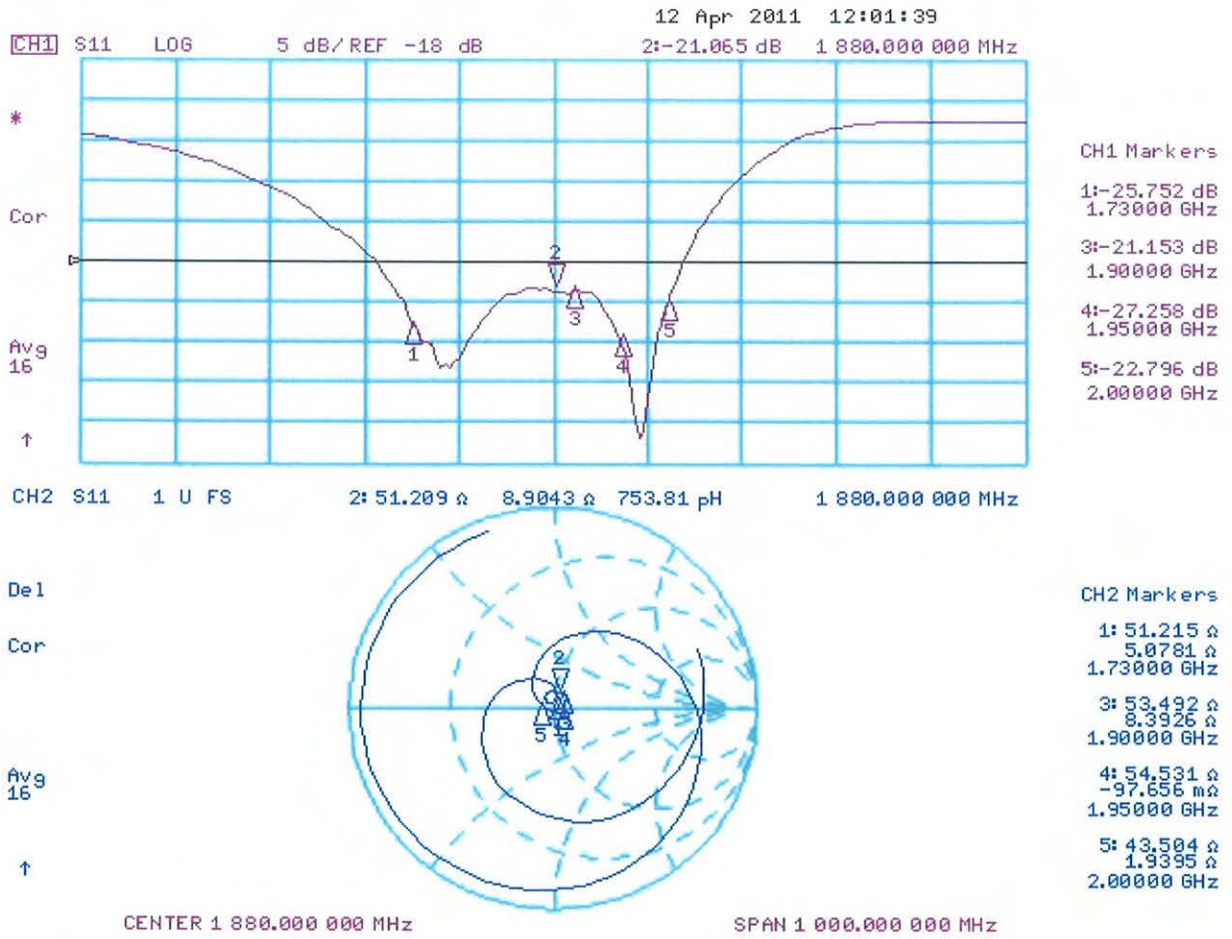

### 3.3.2 DASY4 H-Field Result

Date/Time: 12.04.2011 12:39:46

Test Laboratory: SPEAG Lab2

**HAC\_RF\_CD1880\_1032\_H\_110412\_CL**

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1032**

Communication System: CW; Frequency: 1880 MHz

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.10.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY52, V52.6 Build 2, Version 52.6.2 (424)
- Postprocessing SW: SEMCAD X, V14.4 Build 4, Version 14.4.4 (2829)

**Dipole H-Field measurement @ 1880MHz/H Scan - measurement distance from the probe sensor center to CD1880**

**Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.471 A/m

Probe Modulation Factor = 1.000


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.500 A/m; Power Drift = -0.0016 dB

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.406</b> M2	Grid 2 <b>0.432</b> M2	Grid 3 <b>0.416</b> M2
Grid 4 <b>0.441</b> M2	Grid 5 <b>0.471</b> M2	Grid 6 <b>0.457</b> M2
Grid 7 <b>0.401</b> M2	Grid 8 <b>0.433</b> M2	Grid 9 <b>0.421</b> M2

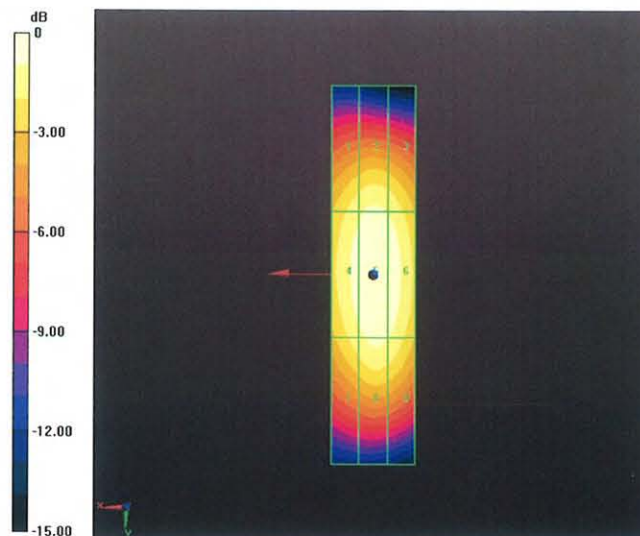

0 dB = 0.470A/m

**3.3.3 DASY4 E-Field Result**

Date/Time: 12.04.2011 15:07:52

Test Laboratory: SPEAG Lab2

**HAC\_RF\_CD1880\_1032\_E\_110412\_CL**

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1032**

Communication System: CW; Frequency: 1880 MHz  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 29.12.2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.10.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY52, V52.6 Build 2, Version 52.6.2 (424)
- Postprocessing SW: SEMCAD X, V14.4 Build 4, Version 14.4.4 (2829)


**Dipole E-Field measurement @ 1880MHz/E Scan - measurement distance from the probe sensor center to CD1880**

**Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):**

Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 143.9 V/m  
 Probe Modulation Factor = 1.000  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 144.4 V/m; Power Drift = -0.0043 dB  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>131.8</b> M2	Grid 2 <b>143.9</b> M2	Grid 3 <b>141.3</b> M2
Grid 4 <b>86.926</b> M3	Grid 5 <b>92.728</b> M3	Grid 6 <b>91.584</b> M3
Grid 7 <b>133.8</b> M2	Grid 8 <b>140.3</b> M2	Grid 9 <b>137.0</b> M2

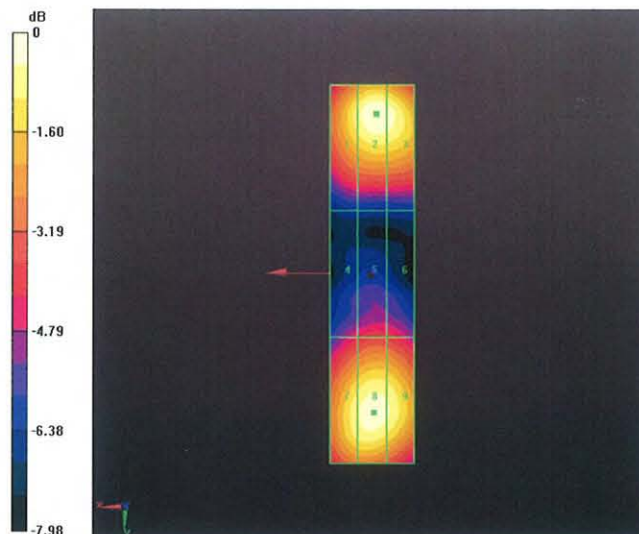

0 dB = 143.9V/m