



FCC TEST REPORT

FCC ID: 2A6NV-PF-S02B

On Behalf of

Dongguan Dirui Electronic Technology Co., Ltd.

Pet Fountain

Model No.: PF-S02B, PF-S02W

Prepared for : Dongguan Dirui Electronic Technology Co., Ltd.
Address : Room 501, Building 7, Tailian lane No.1, Chang An Town, Dongguan City,
Guangdong Province

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Report Number : psi2402001-C01-R09
Date of Receipt : February 22, 2024
Date of Test : February 22, 2024-March 4, 2024
Date of Report : March 4, 2024
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Test Result Summary	5
2. General Information.....	6
2.1. DESCRIPTION OF DEVICE (EUT).....	6
2.2. ACCESSORIES OF DEVICE (EUT).....	7
2.3. TESTED SUPPORTING SYSTEM DETAILS	7
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS	7
2.5. DESCRIPTION OF TEST MODES.....	7
2.6. TEST CONDITIONS	7
2.7. TEST FACILITY	8
2.8. MEASUREMENT UNCERTAINTY	8
2.9. TEST EQUIPMENT LIST.....	9
3. Test Results and Measurement Data	10
3.1. CONDUCTED EMISSION	10
3.2. RADIATED SPURIOUS EMISSION MEASUREMENT	14
3.3. TEST SPECIFICATION	22
4. Photos of test setup	24
5. Photos of EUT.....	24



TEST REPORT DECLARATION

Applicant : Dongguan Dirui Electronic Technology Co., Ltd.
 Address : Room 501, Building 7, Tailian lane No.1, Chang An Town, Dongguan City, Guangdong Province
 Manufacturer : Dongguan Dirui Electronic Technology Co., Ltd.
 Address : Room 501, Building 7, Tailian lane No.1, Chang An Town, Dongguan City, Guangdong Province
 EUT Description : Pet Fountain
 (A) Model No. : PF-S02B, PF-S02W
 (B) Trademark : N/A

Measurement Standard Used:
FCC CFR Title 47 Part 15 Subpart C
ANSI C63.10:2013

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:	Jensen Wang Test Engineer	
Approved by (name + signature).....:	Simple Guan Project Manager	
Date of issue.....:	March 4, 2024	

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 4, 2024	Initial released Issue	Jensen Wang

1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*
5. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. General Information

2.1. Description of Device (EUT)

EUT Name : Pet Fountain
Model No. : PF-S02B, PF-S02W
DIFF. : There is no difference between the models except the appearance color.
So all the test were performed on the model PF-S02B.
Power supply : DC 5V from adapter, DC 3.7V from battery.

Radio Technology : Wireless power transmission systems

Operation frequency : 115KHz -205KHz

Modulation : ASK

Antenna Type : Coil Antenna

Connector cable loss : 0.5dB

Software version : V1.0

Hardware version : V1.0

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.


2.2. Accessories of Device (EUT)

Accessories	:	Adapter
Manufacturer	:	Bazhong Chuanyuan Technology Co., Ltd
Model	:	CY-01050100UU
specifications	:	Input: AC100-240V~ 50/60Hz 0.3A Output: 5.0V=1.0A 5.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1	N/A	N/A	N/A	N/A	N/A
2	N/A	N/A	N/A	N/A	N/A
3	N/A	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Description of Test Modes

Number	Modes
※1	TX
2	Standby

Note: All test modes has been tested, ※ is worst case mode.

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB

2.9. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2023.12.19	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2023.12.19	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2023.12.19	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2023.04.03	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2022.12.26	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2023.12.19	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2022.12.26	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK2022032901	/	2023.12.19	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2022.12.25	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK2020010801	/	2023.12.19	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2023.12.19	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EMC-I	SKET	V1.5.0.3
CE	EMC-I	SKET	V1.5.0.3
RF	RTS	TACHOY	V1.0.0

3. Test Results and Measurement Data

3.1. Conducted Emission

3.1.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Transmitting Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														

3.1.2. Test data

Please refer to following diagram for individual

Test Mode	: TX
Test Results	: PASS
Note:	<p>The test results are listed in next pages.</p> <p>All test modes has been tested, this report only reflected the worst mode.</p> <p>If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.</p> <p>If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>


EUT Description	Pet Fountain	Model No.	PF-S02B
Temperature	26°C	Humidity	54%
Test Voltage	AC 120V/60Hz		
Pol	Line		

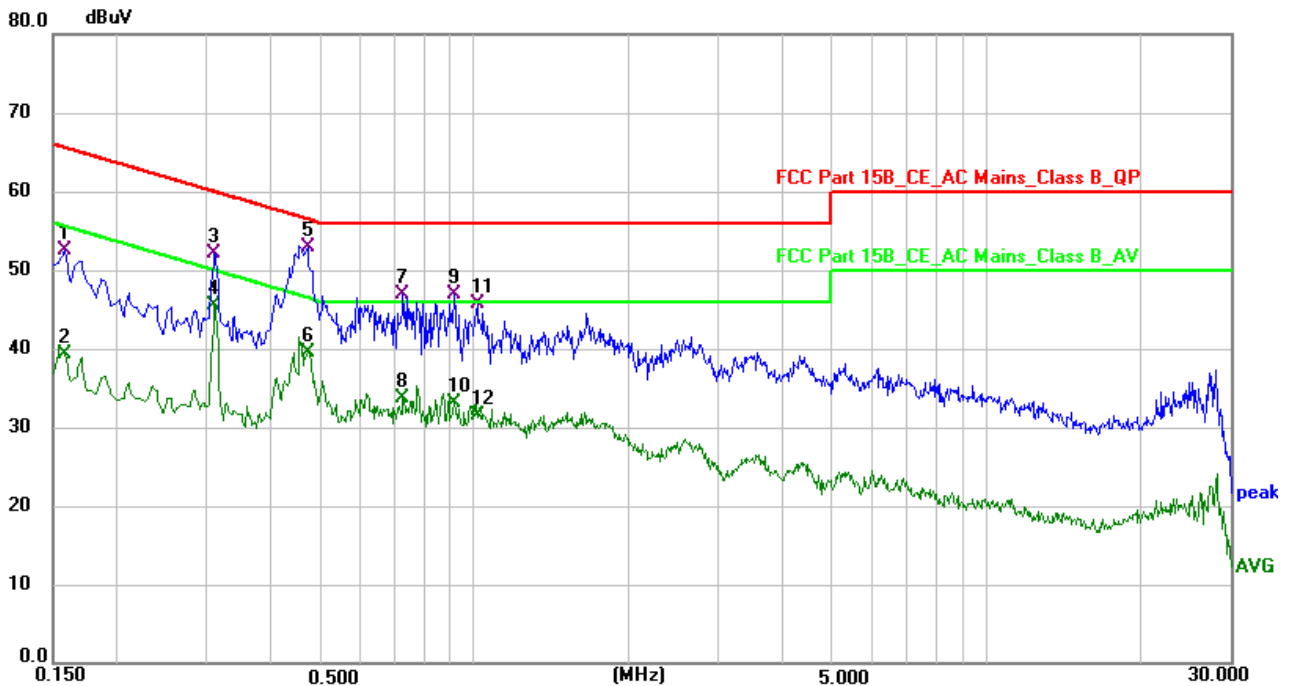

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1580	42.65	9.94	52.59	65.57	-12.98	QP	P
2	0.1580	29.46	9.94	39.40	55.57	-16.17	AVG	P
3	0.3100	42.09	9.95	52.04	59.97	-7.93	QP	P
4	0.3100	35.55	9.95	45.50	49.97	-4.47	AVG	P
5 *	0.4700	43.12	9.82	52.94	56.51	-3.57	QP	P
6	0.4700	29.72	9.82	39.54	46.51	-6.97	AVG	P
7	0.7260	37.46	9.43	46.89	56.00	-9.11	QP	P
8	0.7260	24.19	9.43	33.62	46.00	-12.38	AVG	P
9	0.9180	37.50	9.42	46.92	56.00	-9.08	QP	P
10	0.9180	23.71	9.42	33.13	46.00	-12.87	AVG	P
11	1.0140	36.26	9.41	45.67	56.00	-10.33	QP	P
12	1.0140	22.10	9.41	31.51	46.00	-14.49	AVG	P

Level = Reading + Factor Margin = Level - Limit

Pol	Neutral
-----	---------

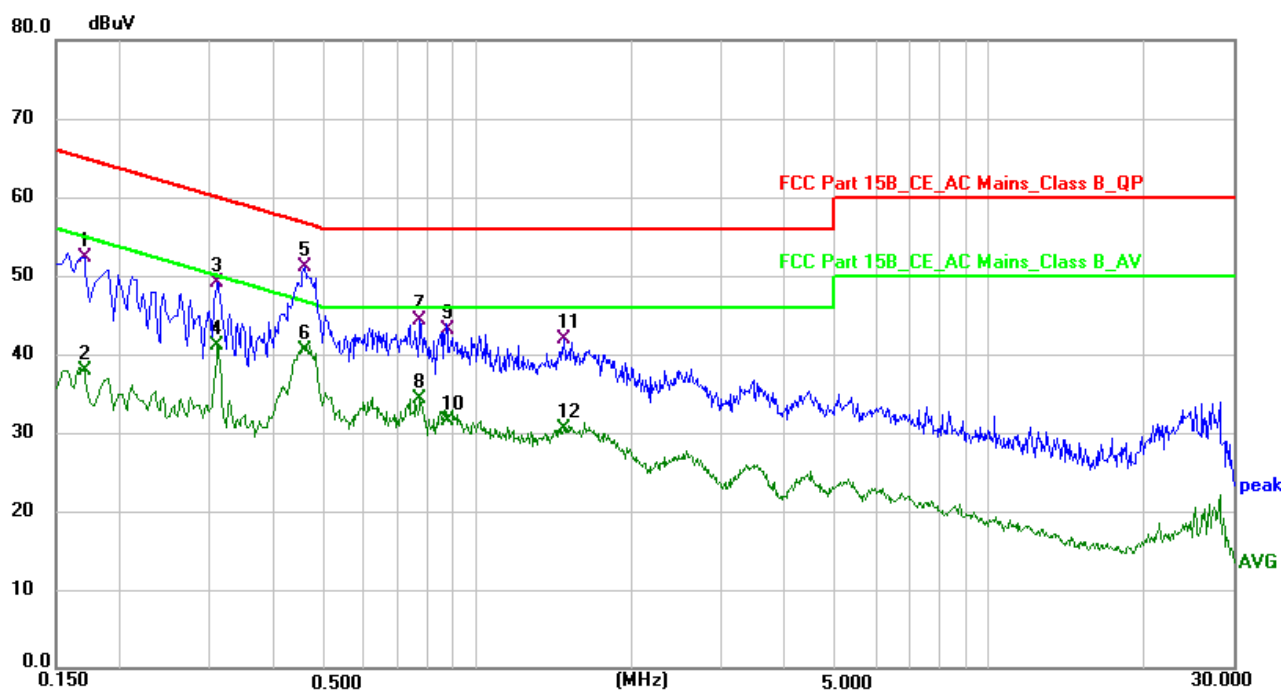



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	42.44	9.88	52.32	64.96	-12.64	QP
2	0.1700	28.00	9.88	37.88	54.96	-17.08	AVG
3	0.3100	39.37	9.76	49.13	59.97	-10.84	QP
4	0.3100	31.35	9.76	41.11	49.97	-8.86	AVG
5 *	0.4580	41.34	9.68	51.02	56.73	-5.71	QP
6	0.4580	30.88	9.68	40.56	46.73	-6.17	AVG
7	0.7740	34.62	9.71	44.33	56.00	-11.67	QP
8	0.7740	24.53	9.71	34.24	46.00	-11.76	AVG
9	0.8740	33.46	9.62	43.08	56.00	-12.92	QP
10	0.8740	21.84	9.62	31.46	46.00	-14.54	AVG
11	1.4740	32.47	9.39	41.86	56.00	-14.14	QP
12	1.4740	21.20	9.39	30.59	46.00	-15.41	AVG

Level = Reading + Factor Margin = Level - Limit

3.2. Radiated Spurious Emission Measurement

3.2.1. Test Specification

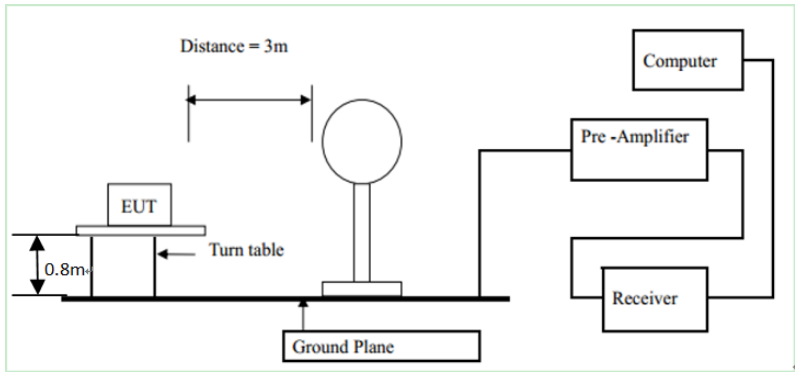
Test Requirement:	FCC Part15 C Section 15.209																								
Test Method:	ANSI C63.10: 2013																								
Frequency Range:	9 kHz to 1 GHz																								
Measurement Distance:	3 m																								
Antenna Polarization:	Coaxial & Coplanar(9KHz-30MHz) Horizontal & Vertical(30MHz-1GHz)																								
Operation mode:	Refer to item 4.1																								
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz-30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> </tbody> </table> <p>Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 KHz, 110-490 KHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>	Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value				
Frequency	Detector	RBW	VBW	Remark																					
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																					
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																							
0.009-0.490	2400/F(KHz)	300																							
0.490-1.705	24000/F(KHz)	30																							
1.705-30	30	30																							
30-88	100	3																							
88-216	150	3																							
216-960	200	3																							
Above 960	500	3																							
Test setup:	<p>For radiated emissions below 30MHz</p>  <p>30MHz to 1GHz</p>																								

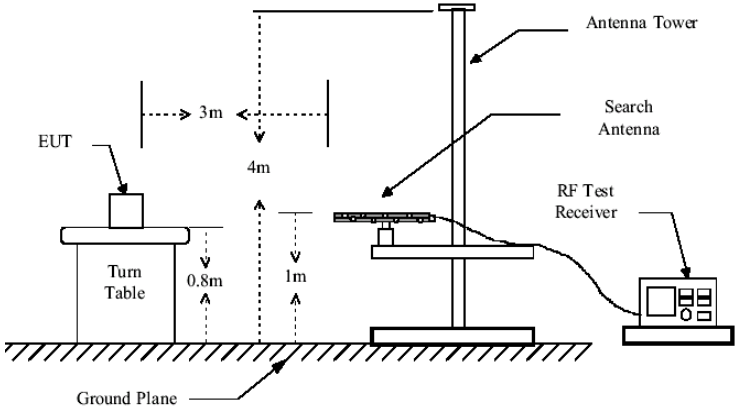	
Test Procedure:	<ol style="list-style-type: none"> 1. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. 2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: <ol style="list-style-type: none"> (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold; For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

3.2.2. Test Data


Please refer to following diagram for individual

Frequency Range	: 9KHz~30MHz
Test Mode	: TX
Test Results	: PASS
Note:	<ol style="list-style-type: none">1. The test results are listed in next pages.2. This mode is worst case mode, so this report only reflected the worst mode.3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.

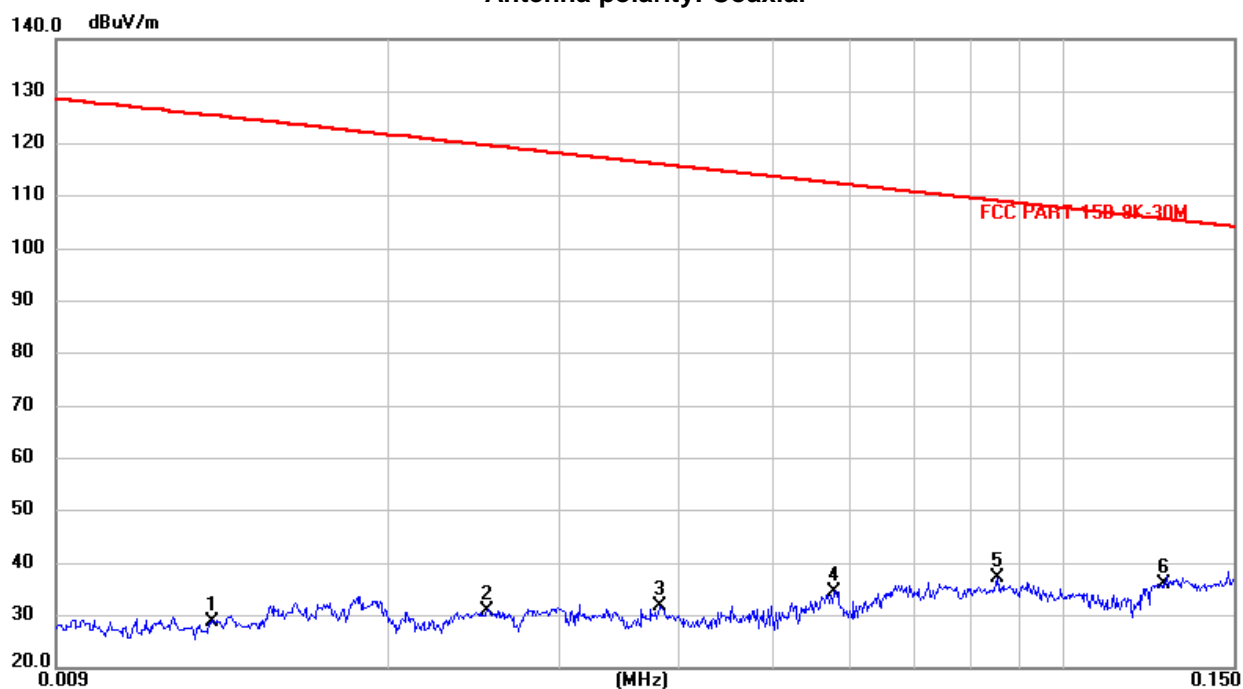For signal coil:**Antenna polarity: Coaxial**

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0131	7.37	21.42	28.79	125.36	-96.57	peak
2	0.0252	9.72	21.12	30.84	119.69	-88.85	peak
3	0.0381	11.44	20.55	31.99	116.11	-84.12	peak
4	0.0580	14.59	20.02	34.61	112.47	-77.86	peak
5	0.0854	17.35	19.97	37.32	109.13	-71.81	peak
6 *	0.1270	16.10	19.87	35.97	105.69	-69.72	peak

Level = Reading + Factor Margin = Level – Limit

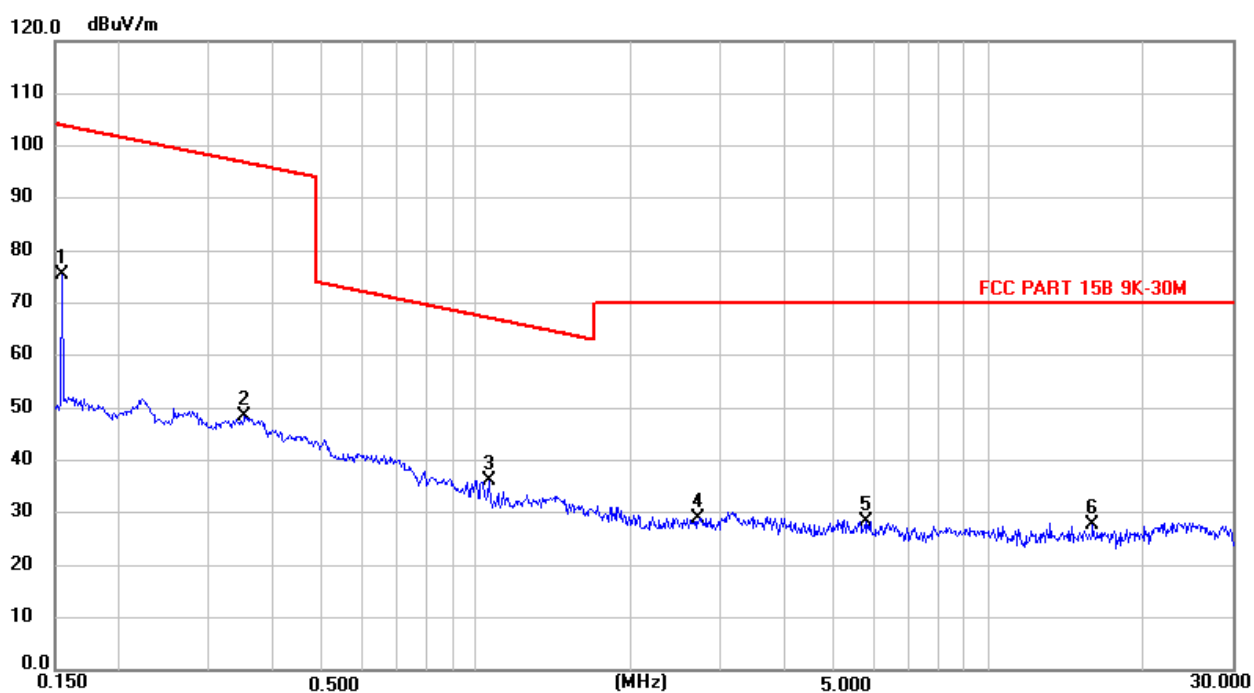

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.1554	55.14	20.19	75.33	103.94	-28.61	peak
2	0.3528	28.48	19.91	48.39	96.84	-48.45	peak
3	1.0583	16.00	20.01	36.01	67.21	-31.20	peak
4	2.7220	8.59	20.43	29.02	70.00	-40.98	peak
5	5.7477	6.38	22.01	28.39	70.00	-41.61	peak
6	16.0177	6.35	21.31	27.66	70.00	-42.34	peak


Level = Reading + Factor Margin = Level - Limit

Note: All polarization has been tested and only the worst polarization direction data is displayed.

Frequency Range	: 30MHz~1000MHz
Test Mode	: TX
Test Results	: PASS
Note:	<ol style="list-style-type: none">1. The test results are listed in next pages.2. All test modes has been tested, this report only reflected the worst mode.3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.


30MHz-1GHz

EUT Description	Pet Fountain	Model No.	PF-S02B
Temperature	26°C	Humidity	54%
Test Voltage	AC 120V/60Hz		
Pol	Vertical		

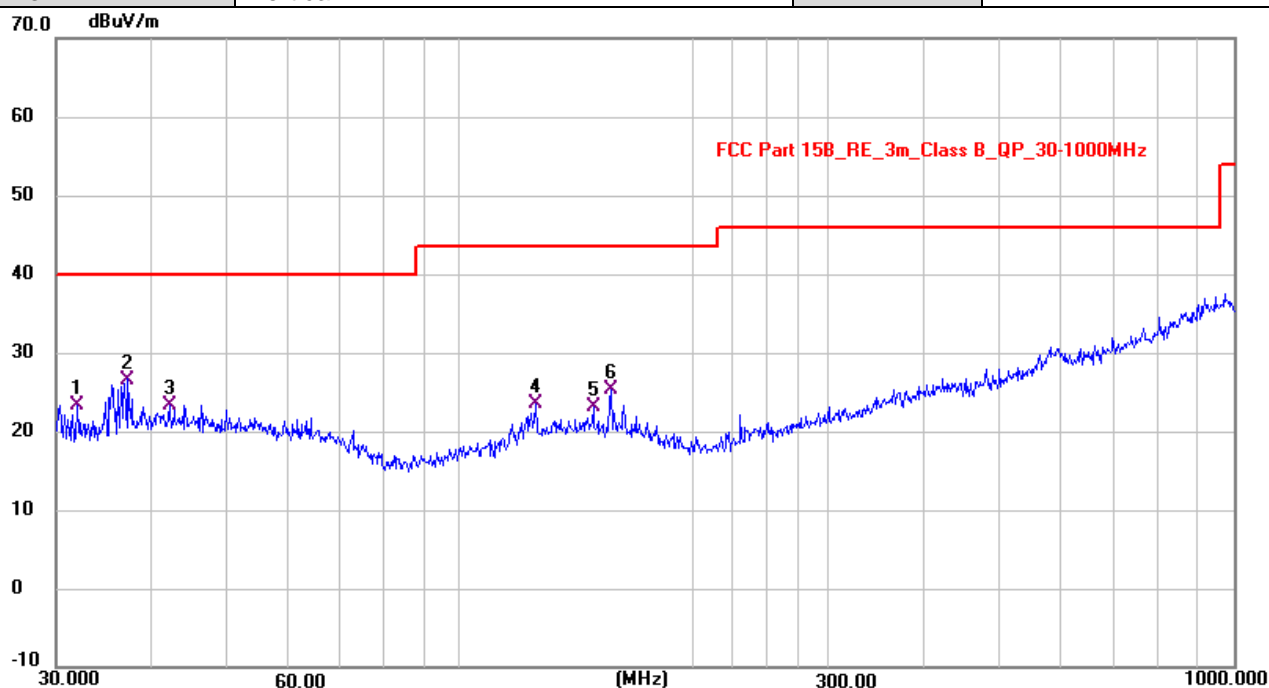


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.0528	10.89	12.43	23.32	40.00	-16.68	QP
2 *	37.2364	13.36	13.24	26.60	40.00	-13.40	QP
3	42.0619	9.75	13.56	23.31	40.00	-16.69	QP
4	125.0614	11.64	11.82	23.46	43.50	-20.04	QP
5	148.7667	10.11	13.02	23.13	43.50	-20.37	QP
6	157.0074	12.14	13.19	25.33	43.50	-18.17	QP

Pol	Horizontal
-----	------------

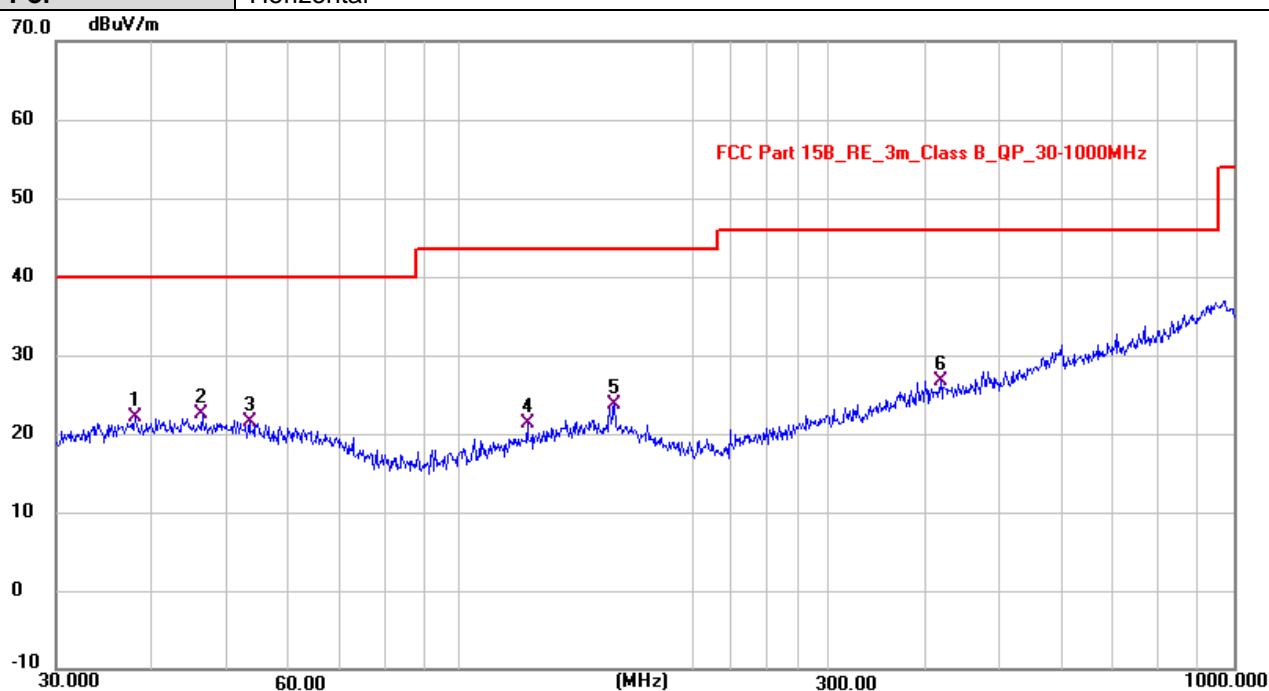

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.9616	8.75	13.34	22.09	40.00	-17.91	QP
2 *	46.4419	9.16	13.36	22.52	40.00	-17.48	QP
3	53.4115	8.65	12.84	21.49	40.00	-18.51	QP
4	122.2432	9.64	11.63	21.27	43.50	-22.23	QP
5	158.1817	10.44	13.21	23.65	43.50	-19.85	QP
6	418.1906	10.20	16.57	26.77	46.00	-19.23	QP

3.3. Test Specification


Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW\geq1% of the 20 dB bandwidth; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 <p>The diagram illustrates the test setup. On the left is a Spectrum Analyzer, represented by a green rectangle with a blue screen and two red dots. A grey cable connects the Spectrum Analyzer to a yellow rectangle on the right, which is labeled 'EUT'. A small white square is positioned between the two devices, representing a connector or adapter. Below the Spectrum Analyzer is the text 'Spectrum Analyzer' and below the EUT is the text 'EUT'.</p>
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

3.3.1. Test data

Test Mode: Water spray

Frequency(kHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
155	0.414	---	Pass

Test plots as follows:

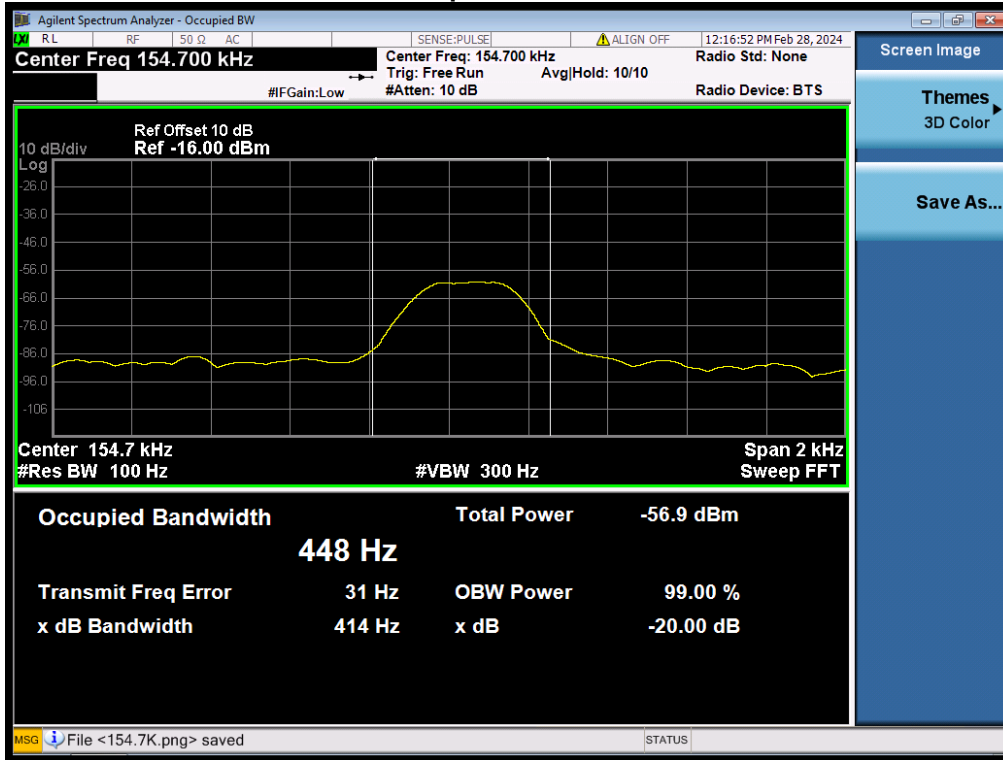

4. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

5. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----