

DATARADIO COR Ltd.
Corporate Headquarters and Manufacturing Operations
299 Johnson Avenue, Suite 110
Waseca, MN 56093-0833 USA
Phone: 507-833-8819
Fax: 507-833-6748

FCC Part 90 Certification Application

FCC Form 731

For The

**ViPR
VHF RADIO MODEM**

FCC ID: NP4-5018-500

TABLE OF CONTENTS

	Page #
Test 1: Transmitter Rated Output Power	3
Test 2: Transmitter Spurious and Harmonic Output	4
Test 3: Transient Frequency Behavior	9
Test 4: Frequency Stability with Variation in Supply Voltage	12
Test 5: Frequency Stability with Variation in Ambient Temperature	14
Test 6: Transmitter Occupied Bandwidth - Mask D	16
6.25 kHz Quarter Channel Mask E	19
12.5 kHz Half Channel Mask D	22
25 kHz Full Channel Mask C	25
Test 7: Field Strength of Spurious Radiation	28

NAME OF TEST: Transmitter Rated Power Output


RULE PART NUMBER: FCC: 2.1046 (a) (c)
IC: RSS-119 5.4

TEST RESULTS: See results below

TEST CONDITIONS: Standard Test Conditions

TEST EQUIPMENT: 50-Ohm Atten, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Atten, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
Power Supply, Instek Model GPS-2303
Digital Multimeter, Fluke 8012A
Power Meter, Model HP436A

TEST SET-UP:

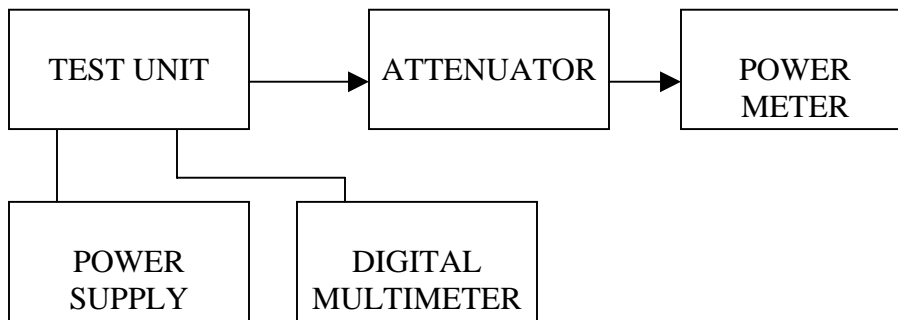

TEST RESULTS:

Frequency (MHz)	DC Voltage at Final (Vdc)	DC Current into Final (Adc)	DC Power into Final (W)	RF Power Output (W)
155.1	12.9	2.3	29.7	12.0
155.1	8.3	0.63	5.2	1.0

NAME OF TEST: Transmitter Spurious and Harmonic Outputs

RULE PART NUMBER: FCC: 2.1051, 90.210 (c,3)(d,3)(e,3)
IC: RSS-119 5.8.2, 5.8.3, 5.8.4

MINIMUM STANDARDS: For 12 Watts: $55+10\text{Log}_{10}(12 \text{ Watts}) = -65.8 \text{ dBc}$
or -65dBc , whichever is the lesser attenuation.

For 1 Watt: $55+10\text{Log}_{10}(1 \text{ Watt}) = -55 \text{ dBc}$
or -65 dBc , whichever is the lesser attenuation.


TEST RESULTS: Meets minimum standards (see data on following pages)

TEST CONDITIONS: Standard Test Conditions, 25 C
RF Voltage measured at antenna terminals

TEST PROCEDURE: TIA/EIA – 603-B, 2.2.13

TEST EQUIPMENT: 50-Ohm Atten, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Atten, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
Power Supply, Instek Model GPS-2303
Spectrum Analyzer, HP8561B
Power Meter, Model HP436A
Reference Generator, Agilent E8257D
High Pass Filter, Mini Circuits BHP-300

TEST SET-UP:

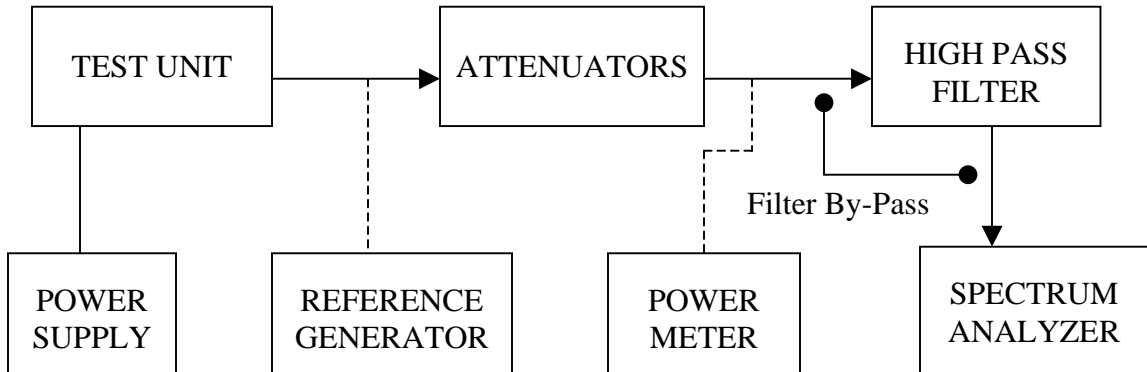

MEASUREMENT PROCEDURE:

1. The transmitter carrier output frequency is 136.025, 138.025, 150.1, 173.975MHz. The reference oscillator frequency is 23.040 MHz. The power amplifier has voltage levels at 12.9 Volts and 8.3 Volts for 12 watts and 1 watt, respectively.
2. The carrier reference was established on the spectrum analyzer with the filter by-pass in place. Then the spectrum was scanned from DC to 2 Fc. Finally, the high pass filter was inserted to null the carrier fundamental and extend the range of the spectrum analyzer for harmonic measurements above 2 Fc.
3. At each spurious frequency, generation substitution was used to establish the true spurious level.
4. The spectrum was scanned to the 10th harmonic of the highest internally generated frequency.

Tuned Frequency	136.025	MHz
Power	12.0	Watts
	40.8	dBm
Min Specification	-65.0	dBc
Worse Case	-68.8	dBc
Spurious Frequency (MHz)	Harmonic	Relative to Carrier (dBc)
272.050	2	-68.8
408.075	3	-98.8
544.100	4	-115.8
680.125	5	-104.8
816.150	6	-120.8
952.175	7	-116.8
1088.200	8	-126.8
1224.225	9	-126.8
1360.250	10	-126.8
1496.275	11	-126.8
1632.300	12	-126.8
1768.325	13	-126.8
1904.350	14	-126.8
2040.375	15	-126.8
2176.400	16	-126.8
2312.425	17	-126.8
2448.450	18	-126.8
2584.475	19	-126.8
2720.500	20	-126.8

Tuned Frequency	136.025	MHz
Power	1.0	Watts
	30.0	dBm
Min Specification	-55.0	dBc
Worse Case	-67.0	dBc
Spurious Frequency (MHz)	Harmonic	Relative to Carrier (dBc)
272.050	2	-67.0
408.075	3	-74.0
544.100	4	-116.0
680.125	5	-116.0
816.150	6	-116.0
952.175	7	-116.0
1088.200	8	-116.0
1224.225	9	-116.0
1360.250	10	-116.0
1496.275	11	-116.0
1632.300	12	-116.0
1768.325	13	-116.0
1904.350	14	-116.0
2040.375	15	-116.0
2176.400	16	-116.0
2312.425	17	-116.0
2448.450	18	-116.0
2584.475	19	-116.0
2720.500	20	-116.0

Tuned		
Frequency	138.025	MHz
Power	12.0	Watts
	40.8	dBm
Min		
Specification	-65.0	dBc
Worse Case	-73	dBc
Spurious Frequency (MHz)	Harmonic	Relative to Carrier (dBc)
276.050	2	-73.0
414.075	3	-91.2
552.100	4	-119.8
690.125	5	-105.6
828.150	6	-123.2
966.175	7	-117.5
1104.200	8	-124.6
1242.225	9	-126.8
1380.250	10	-126.8
1518.275	11	-126.8
1656.300	12	-126.8
1794.325	13	-126.8
1932.350	14	-126.8
2070.375	15	-126.8
2208.400	16	-126.8
2346.425	17	-126.8
2484.450	18	-126.8
2622.475	19	-126.8
2760.500	20	-126.8

Tuned		
Frequency	138.025	MHz
Power	1.0	Watts
	30.0	dBm
Min		
Specification	-55.0	dBc
Worse Case	-69.2	dBc
Spurious Frequency (MHz)	Harmonic	Relative to Carrier (dBc)
276.050	2	-69.2
414.075	3	-101.8
552.100	4	-116.0
690.125	5	-116.0
828.150	6	-116.0
966.175	7	-116.0
1104.200	8	-116.0
1242.225	9	-116.0
1380.250	10	-116.0
1518.275	11	-116.0
1656.300	12	-116.0
1794.325	13	-116.0
1932.350	14	-116.0
2070.375	15	-116.0
2208.400	16	-116.0
2346.425	17	-116.0
2484.450	18	-116.0
2622.475	19	-116.0
2760.500	20	-116.0

Tuned			
Frequency	150.1	MHz	
Power	12.0	Watts	
	40.8	dBm	
Min			
Specification	-65.0	dBc	
Worse Case	-86.3	dBc	
Spurious		Relative to	
Frequency		Carrier	
(MHz)	Harmonic	(dBc)	
300.200	2	-101.5	
450.300	3	-86.3	
600.400	4	-113.7	
750.500	5	-109.0	
900.600	6	-118.5	
1050.700	7	-117.0	
1200.800	8	-126.8	
1350.900	9	-126.8	
1501.000	10	-126.8	
1651.100	11	-126.8	
1801.200	12	-126.8	
1951.300	13	-126.8	
2101.400	14	-126.8	
2251.500	15	-126.8	
2401.600	16	-126.8	
2551.700	17	-126.8	
2701.800	18	-126.8	
2851.900	19	-126.8	
3002.000	20	-126.8	

Tuned			
Frequency	150.1	MHz	
Power	1.0	Watts	
	30.0	dBm	
Min			
Specification	-55.0	dBc	
Worse Case	-91.7	dBc	
Spurious		Relative to	
Frequency		Carrier	
(MHz)	Harmonic	(dBc)	
300.200	2	-91.7	
450.300	3	-100.1	
600.400	4	-116.0	
750.500	5	-116.0	
900.600	6	-116.0	
1050.700	7	-116.0	
1200.800	8	-116.0	
1350.900	9	-116.0	
1501.000	10	-116.0	
1651.100	11	-116.0	
1801.200	12	-116.0	
1951.300	13	-116.0	
2101.400	14	-116.0	
2251.500	15	-116.0	
2401.600	16	-116.0	
2551.700	17	-116.0	
2701.800	18	-116.0	
2851.900	19	-116.0	
3002.000	20	-116.0	

Tuned		
Frequency	173.975	MHz
Power	12.0	Watts
	40.8	dBm
Min		
Specification	-65.0	dBc
Worse Case	-88	dBc
Spurious Frequency (MHz)	Harmonic	Relative to Carrier (dBc)
347.950	2	-101.3
521.925	3	-88.0
695.900	4	-108.8
869.875	5	-108.8
1043.850	6	-108.8
1217.825	7	-108.8
1391.800	8	-108.8
1565.775	9	-108.8
1739.750	10	-108.8
1913.725	11	-108.8
2087.700	12	-108.8
2261.675	13	-108.8
2435.650	14	-108.8
2609.625	15	-108.8
2783.600	16	-108.8
2957.575	17	-108.8
3131.550	18	-108.8
3305.525	19	-108.8
3479.500	20	-108.8


Tuned		
Frequency	173.975	MHz
Power	1.0	Watts
	30.0	dBm
Min		
Specification	-55.0	dBc
Worse Case	-99.7	dBc
Spurious Frequency (MHz)	Harmonic	Relative to Carrier (dBc)
347.950	2	-100.6
521.925	3	-99.7
695.900	4	-108.0
869.875	5	-108.0
1043.850	6	-108.0
1217.825	7	-108.0
1391.800	8	-108.0
1565.775	9	-108.0
1739.750	10	-108.0
1913.725	11	-108.0
2087.700	12	-108.0
2261.675	13	-108.0
2435.650	14	-108.0
2609.625	15	-108.0
2783.600	16	-108.0
2957.575	17	-108.0
3131.550	18	-108.0
3305.525	19	-108.0
3479.500	20	-108.0

NAME OF TEST: Transient Frequency Behavior

RULE PART NUMBER: FCC: 90.214
IC: RSS-119 5.9

MINIMUM STANDARD: 6.25 kHz channel (used worst case numbers from 136 to 174 MHz)

<u>TIME INTERVAL</u>	<u>MAXIMUM FREQUENCY DIFFERENCE (kHz)</u>	<u>TIME (ms)</u>
T1	+/- 6.25	10
T2	+/- 3.125	25
T3	+/- 6.25	10

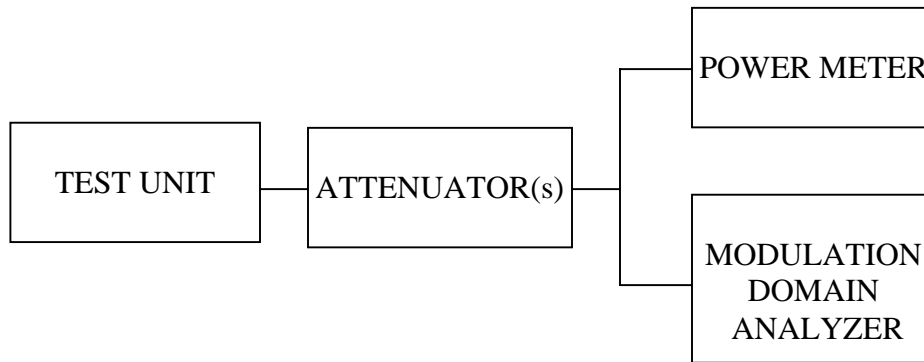

TEST RESULTS: Meets minimum standards, see data on following pages

TEST CONDITIONS: RF Power Level = 12 Watts and 1.0 Watt
Standard Test Conditions, 25 C


TEST PROCEDURE: TIA/EIA – 603-B, 2.2.19.2

TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
Power Supply, Instek Model GPS-2303
Modulation Domain Analyzer, HP-53310A
Power Meter, Model HP436A

Frequency : 155.100000 MHz
Power: 12 W

Key-Down

(hp) Freq C rem t1k
stopped

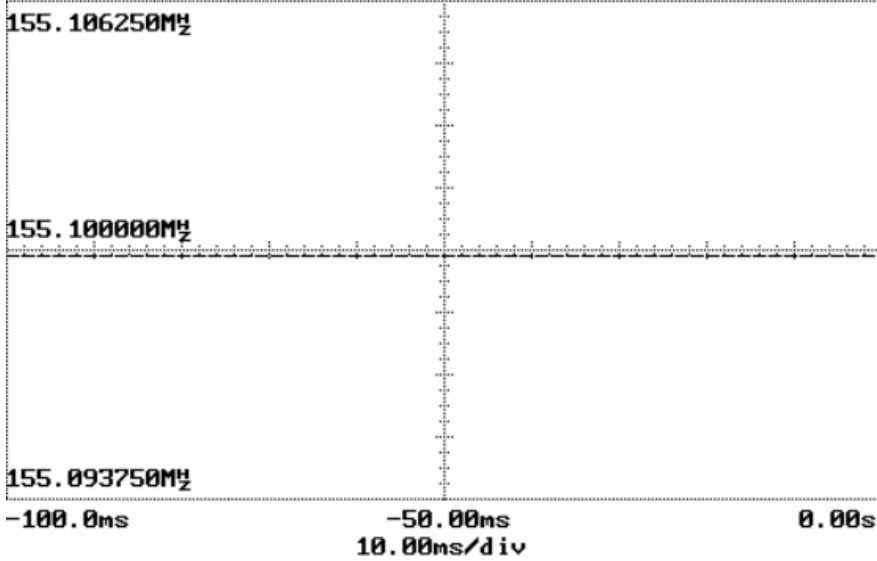

TIMEBASE

10.00ms/div

Reference
Left Ctr **Right**


Delay
0.00s

Panorama
Off On

ref ext fine

Key-up

(hp) Freq C rem t1k
stopped

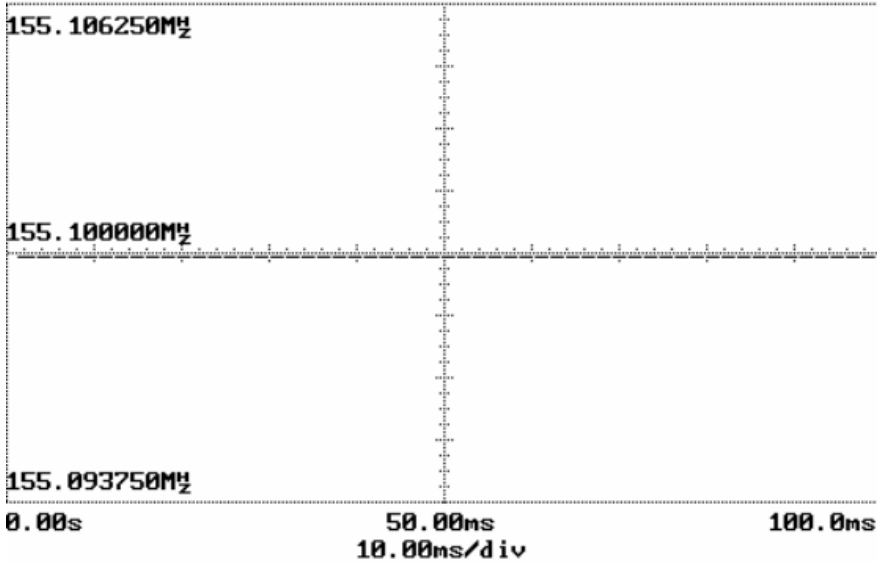

TRIGGER

Triggered
Auto

Ext Freq **RF**
Edge Value **Env**

Time Ref Only


↶ **↷**

ref ext fine

Frequency : 155.100000 MHz
Power: 1.0 W

Key-Down

(hp) Freq C rem t1k
stopped

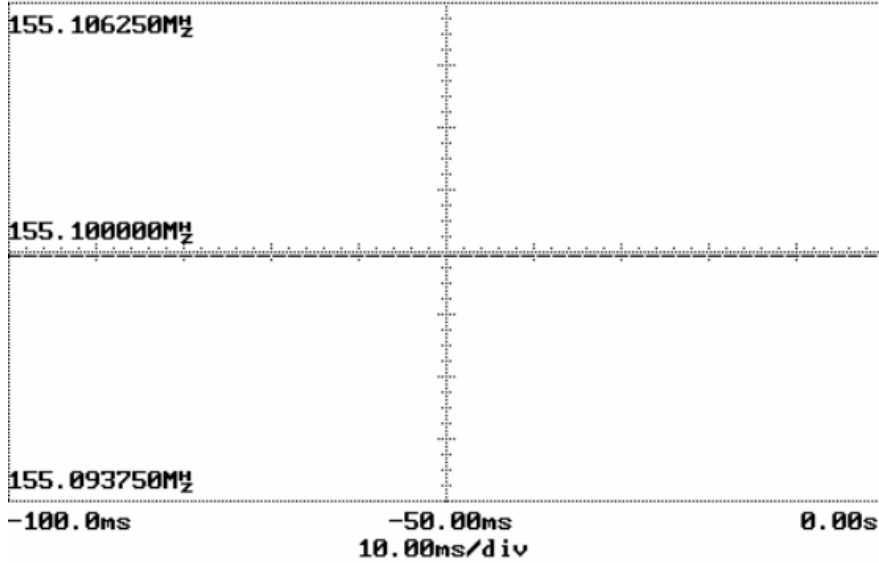

TRIGGER
Triggered
Auto

Ext Freq RF
Edge Value Env


Arm Only

↵ ↻

ref ext fine

Key-up

(hp) Freq C rem t1k
stopped

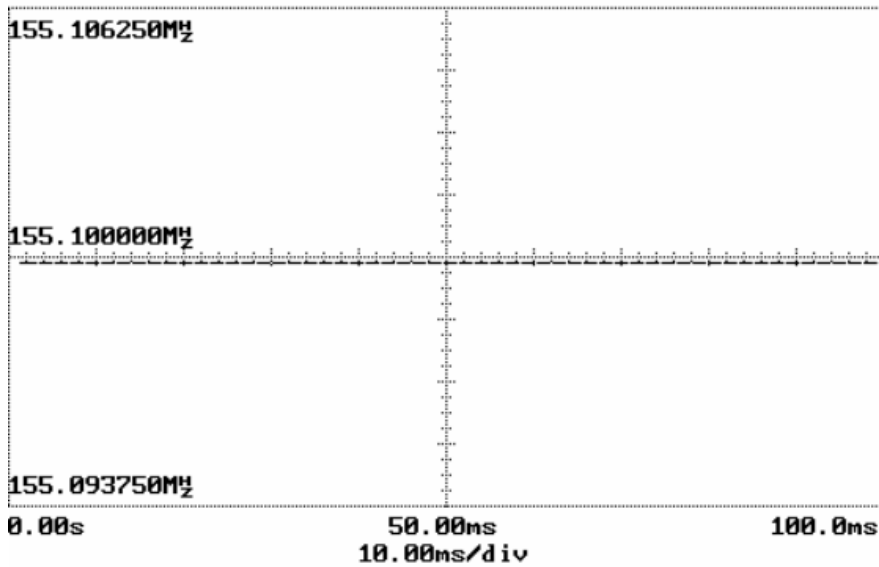

TRIGGER
Triggered
Auto

Ext Freq RF
Edge Value Env

Time Ref Only

↵ ↻

ref ext fine

NAME OF TEST: Frequency Stability with Variation in Supply Voltage

RULE PART NUMBER: FCC: 2.1055 (d)(1), 90.213 (a)
IC: RSS-119 5.3


MINIMUM STANDARD: Shall not exceed 1.0 ppm.

TEST RESULTS: Meets minimum standard, see data on following page

TEST CONDITIONS: Standard Test Conditions, 25 C

TEST EQUIPMENT: Frequency Counter, Fluke 7220A
DC Power Supply, Instek Model GPS-2303
Digital Voltmeter, Fluke Model 8012A
50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)

TEST SET-UP:

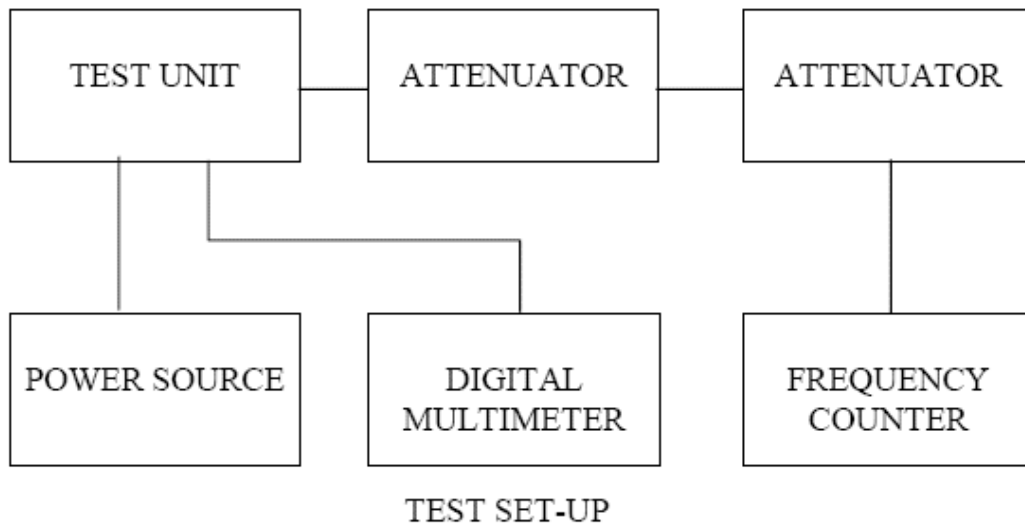

Channel Frequency: 155.1 MHz Tolerance Requirements: 1.0 ppm Highest Variation: 0.13 Spec: <1.0ppm			
Input Voltage (Vdc)	Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
10	155.100010	10	0.06
20	155.100010	10	0.06
30	155.100020	20	0.13

NAME OF TEST: Frequency Stability with Variation in Ambient Temperature

RULE PART NUMBER: FCC: 2.1055 (a) (b), 90.213 (a)
IC: RSS-119 5.3


MINIMUM STANDARD: Shall not exceed 1.0 ppm from test frequency

TEST RESULTS: Meets minimum standard, see data on following page

TEST CONDITIONS: Standard Test Conditions

TEST EQUIPMENT: Frequency Counter, Fluke 7220A
DC Power Supply, Instek Model GPS-2303
Digital Voltmeter, Fluke Model 8012A
50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
Climate Chamber, Test Equity Half Cube Model 105

TEST SET-UP:

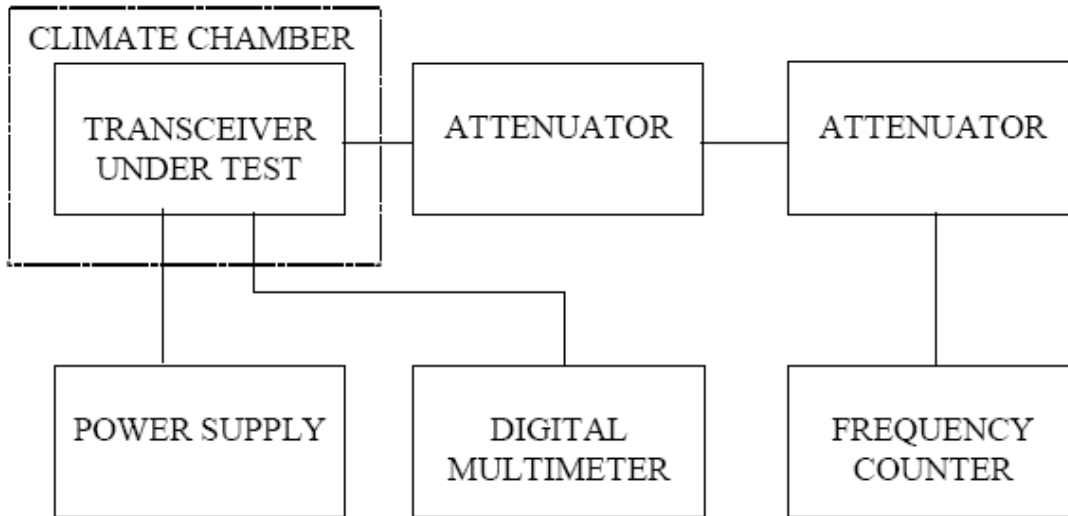

Channel Frequency: 155.1 MHz			
Voltage & Power Level: 20 Volts @ 12 Watts			
Highest Variation: -0.26			
Spec: < 1.0 ppm			
Temperature (Deg C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
-30	155.100040	40	0.26
-20	155.100060	60	0.39
-10	155.100060	60	0.39
0	155.100060	60	0.39
10	155.100030	30	0.19
20	155.100030	30	0.19
30	155.100000	0	0.00
40	155.100000	0	0.00
50	155.100020	20	0.13
60	155.100020	20	0.13

Channel Frequency: 155.1 MHz			
Voltage & Power Level: 20 Volts @ 1 Watts			
Highest Variation: -0.30			
Temperature (Deg C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)
-30	155.100050	50	0.32
-20	155.100060	60	0.39
-10	155.100060	60	0.39
0	155.100060	60	0.39
10	155.100030	30	0.19
20	155.100030	30	0.19
30	155.100000	0	0.00
40	155.100000	0	0.00
50	155.100020	20	0.13
60	155.100010	10	0.06

NAME OF TEST: Transmitter Occupied Bandwidth

RULE PART NUMBER: FCC: 2.201, 2.202, 2.1033 (c)(14), 2.1049 (h), 2.1041;90.203(j)(3)
IC: RSS-Gen 4.4.1

Necessary Bandwidth Measurement

This radio modem uses digital modulation signals, passing through a Squared Root Raised Cosine $\alpha=0.2$ DSP implemented low-pass filter to an FM transceiver. The digital modulation is based on SRRC4FSK allows a SRRC2FSK subset to be used for lower bit rate with a better sensitivity reception. The necessary bandwidth calculation for this type of modulation is not covered by paragraphs (1), (2) or (3) from 2.202(c). Therefore, the approach outlined in (2.202(c)(4)) is applicable in this case.

The measurement explanations are provided below.

Necessary Bandwidth Measurement:

Channel Spacing	6.25 kHz	6.25 kHz	12.5 kHz	12.5 kHz	25 kHz	25 kHz
Emission Type	3K30 F1D	3K55 F1D	8K20 F1D	8K30 F1D	16K5 F1D	16K8 F1D
Data Rate	4 kbps	8 kbps	8 kbps	16 kbps	16 kbps	32 kbps
Baud Rate	4000	1.04 kHz	8000	8000	16000	16000
Measured Peak Deviation	1.03 kHz	970 Hz	3.00 kHz	3.50 kHz	6.26 kHz	7.21 kHz
Measured 99% Occupied BW	3.3 kHz	3.55 kHz	8.20 kHz	8.30 kHz	16.5 kHz	16.8 kHz

MODEM SETUP:

For 2 FSK Modulation (3K30F1D, 8K20F1D, 16K5F1D) :
200-dsp.par.setup.deviation= 01 c2 01 f4 05 dc 07 6c 0c 80 0f 3c
200-dsp.par.setup.softSyncAmplitude= 32767 (0x7fff)

For 4 FSK Modulation (3K55F1D, 8K30F1D, 16K8F1D) :
200-dsp.par.setup.deviation= 01 c2 01 f4 05 dc 07 6c 0c 80 0f 3c
200-dsp.par.setup.softSyncAmplitude= 26200 (0x6658)

THEORY OF MEASUREMENT

The way to define the Occupied Bandwidth is “the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission” (FCC 2.202), the mathematics are as follows:

$$0.005*TP=P_{(f1)}=\int_0^{f1} PSD_{(f)}df$$

$$0.995*TP=P_{(f2)}=\int_0^{f2} PSD_{(f)}df$$

$$OBW=f2-f1$$

where TP (total mean power) is

$$TP = \int_0^{+\infty} PSD(f) df = (1/T) \int_{-\infty}^{+\infty} |z(t)|^2 dt$$

and PSD (power spectral distribution) is

$$PSD(f) = |Z(f)|^2 + |Z(-f)|^2 \quad 0 \leq f < \infty$$

and expresses the positive frequency representation of the transmitter output power for z(t) signal.

By applying these mathematics to the measurements, it is possible to measure the Occupied Bandwidth using a digital spectrum analyzer.


The Occupied Bandwidth measurement is in two parts relatively independent of each other. The first gives the RF spectrum profile, and the second calculates the frequency limits and they result in the Occupied bandwidth. While the first involves RF measurement instrumentation, the second is strictly a computational part related to measured trace.

TEST EQUIPMENT:

- 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
- 50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
- DC Power Supply, Instek Model GPS-2303
- Spectrum Analyzer, Hewlett Packard Model HP8563E
- Modulation Analyzer, Hewlett Packard Model HP8901B

TEST SET-UP:

For the above requirements, the occupied bandwidth of a transmitter was measured using an HP8563E using the following settings:
 Occupied BW % Power: 99%
 Trace: Max Hold A
 RBW: 100 Hz (6.25 and 12.5 kHz channels)
 RBW: 300 Hz (25 kHz channels)
 VBW: 3 kHz
 SPAN: 100 kHz (6.25 and 12.5 kHz channels)
 SPAN: 150 kHz (25 kHz channels)

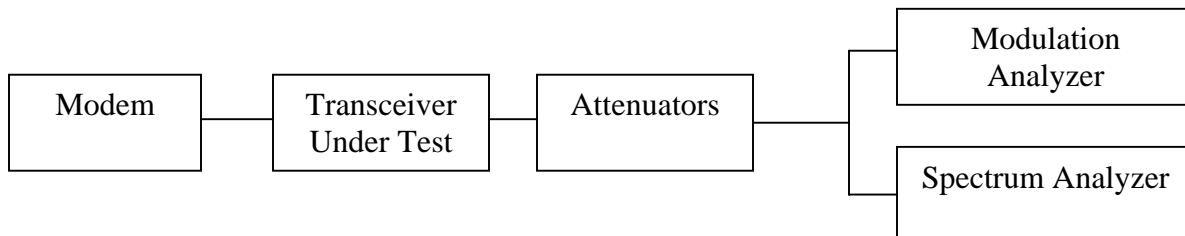

MODULATION SOURCE DESCRIPTION:

The 4-level signaling transmits two information bits per symbol (baud), which yields a bit rate of twice the on-air baud rate. Hence the 8, 16, or 32 kbps references in the Installation Guide correspond to a transmitter baud rate of 4000, 8000 or 16000 baud. That digital signal is digitally filtered (Square Root Raised Cosine pulse shaping with $\alpha=0.2$) by the DSP and converted to I&Q components, then fed to the digital to analog converter. This SRRC4FSK wave shape applied to the FM modulator will then produce a compact RF spectrum, when using proper frequency deviation, to fit inside the restrictive masks inherent to the intended channel bandwidth.

TX Data Test Pattern:

The transmit “test data” pattern command produces a 107,3741,823 bit pseudo- random pattern. This pattern is generated by the DSP. The 107,3741,823 bit sequence is repeated thereafter as long is necessary to complete the test duration, this sequence lasts 67,109 seconds at 16 kbps. Commonly this is longer than the test duration. This pattern is applied to the DSP modulator for mapping to 4-FSK and pulse shaping with SRRC $\alpha=0.2$. This data follows same modulation process as described in MODULATION SOURCE DESCRIPTION and the resulting base band signal feeds the modulator's input of the transceiver.

NAME OF TEST: Transmitter Occupied Bandwidth for Emission Designators
3K55F1D and **3K30F1D**

RULE PART NUMBER: FCC: 2.202, 90.209 (b)(5), 90.210(e), 2.1049 (c) (1)
IC: RSS-119 5.8.4

MINIMUM STANDARDS: **Mask E**
Sidebands and Spurious [Rule 90.210 (e), 5.8.4, P = 12 Watts and P=1 Watt]
Authorized Bandwidth = 6 kHz [Rule 90.209(b) (5), 5.8.4]
From Fo to 3 kHz, down 0 dB.
Greater than 3 kHz to 4.6 kHz, down 30 +16.67(fd-3 kHz) dB or 55 +10 log(P) or 65 dB, whichever is the lesser attenuation.
Greater than 12.5 kHz, at least 50+10log₁₀(P) or 70 dB, whichever is the lesser attenuation.

Attenuation = 0 dB at Fo to 3 kHz
Attenuation = 30 dB at 3 kHz and 56.7 dB at 4.6 kHz @ 12 Watts
Attenuation = 65 dB at frequencies greater than 4.6 kHz @ 12 Watts
Attenuation = 30 dB at 3 kHz and 50 dB at 4.2 kHz and 55 dB at 4.6 kHz @ 1 Watt
Attenuation = 55 dB at frequencies greater than 4.6 kHz @ 1 Watt


TEST RESULTS: Meets minimum standards (see data on following page)

TEST CONDITIONS: Standard Test Conditions, 25 C
RF Power Level = 1 Watt and 12 Watts
Voltage = 20VDC

TEST PROCEDURE: TIA/EIA – 603-B, 2.2.13, 3.2.11.2


TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
50-Ohm Attenuator, Pasternack Model PE7002-10 (10dB)
DC Power Supply, Instek Model GPS-2303
Spectrum Analyzer, Hewlett Packard Model HP8563E
Modulation Analyzer, Hewlett Packard Model HP8901B

TEST SET-UP:

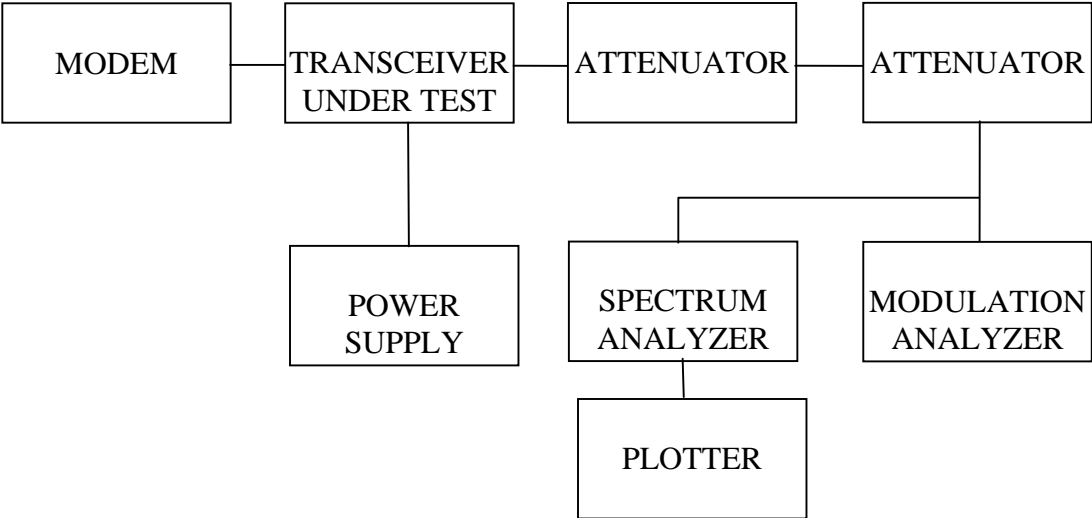


Mask: E, 1W
Output Power = 1 Watt

Spectrum for Emission: 3K30 FID
Data Rate: 4 kbps Peak Deviation with Data: 1.03kHz

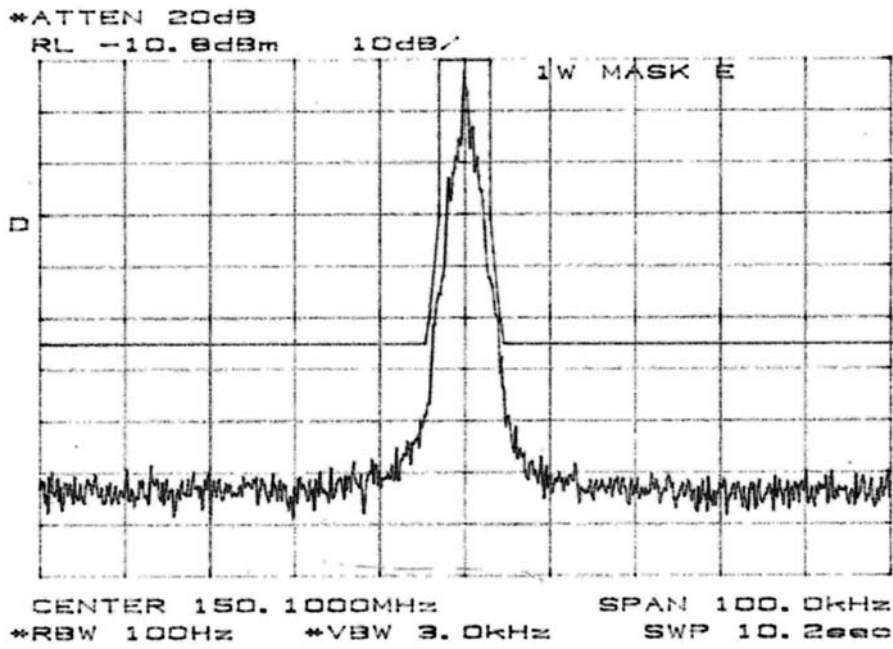


Output Power = 12 Watt

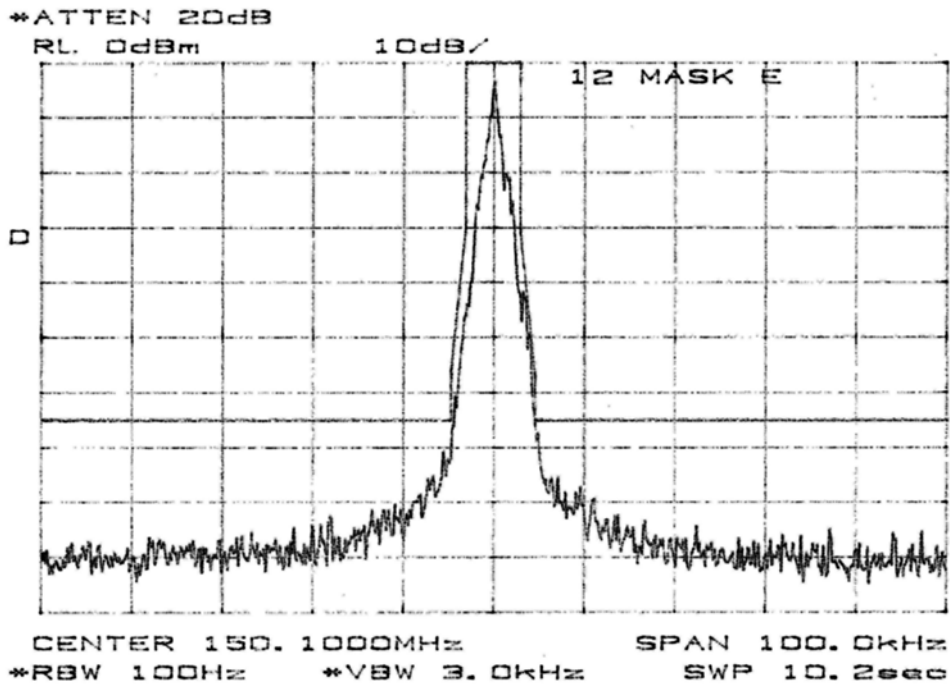


Mask: E, 1W
Output Power = 1 Watt

Spectrum for Emission: 3K55 F1D
Data Rate: 8 kbps Peak Deviation with Data: 1.04kHz

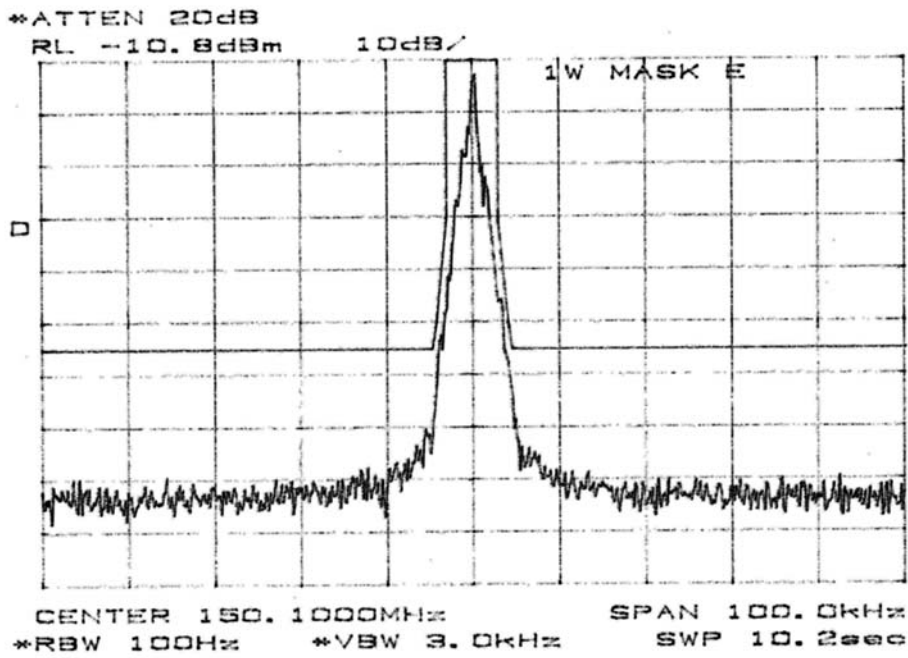

Output Power = 12 Watt

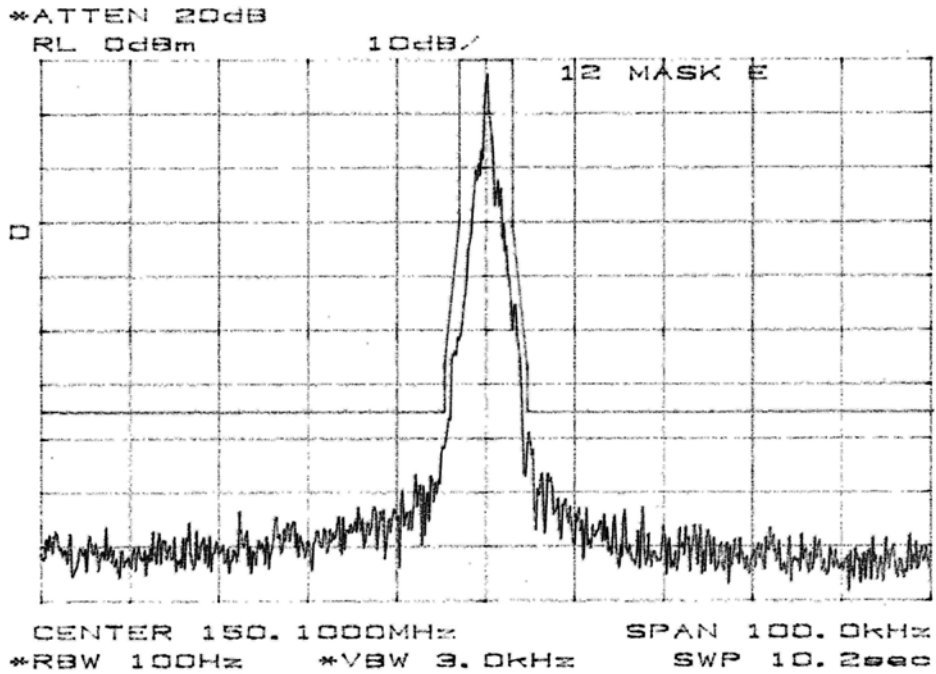

NAME OF TEST: Transmitter Occupied Bandwidth for Emission Designators
8K20F1D and **8K30F1D**

RULE PART NUMBER: FCC: 2.202, 90.209 (b)(5), 90.210(d), 2.1049 (c) (1)
IC: RSS-119 5.8.3

MINIMUM STANDARDS: **Mask D**
Sidebands and Spurious [Rule 90.210 (d), 5.8.3, P = 12 Watts and P=1 Watt]
Authorized Bandwidth = 11.25 kHz [Rule 90.209(b) (5), 5.8.3]
From Fo to 5.625 kHz, down 0 dB.
Greater than 5.625 kHz to 12.5 kHz, down 7.27($f_d-2.88\text{kHz}$) dB.
Greater than 12.5 kHz, at least 50+10log₁₀(P) or 70 dB, whichever is the lesser attenuation.

Attenuation = 0 dB at Fo to 5.625 kHz
Attenuation = 20 dB at 5.625 kHz and 70 dB at 12.5 kHz
Attenuation = 60.8 dB at frequencies greater than 12.5 kHz @ 12 W
Attenuation = 50 dB at frequencies greater than 12.5 kHz @ 1 W


TEST RESULTS: Meets minimum standards (see data on following page)

TEST CONDITIONS: Standard Test Conditions, 25 C
RF Power Level = 1 Watt and 12 Watts
Voltage = 20VDC

TEST PROCEDURE: TIA/EIA – 603-B, 2.2.13, 3.2.11.2


TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
50-Ohm Attenuator, Pasternack Model PE7002-10 (10dB)
DC Power Supply, Instek Model GPS-2303
Spectrum Analyzer, Hewlett Packard Model HP8563E
Modulation Analyzer, Hewlett Packard Model HP8901B

TEST SET-UP:

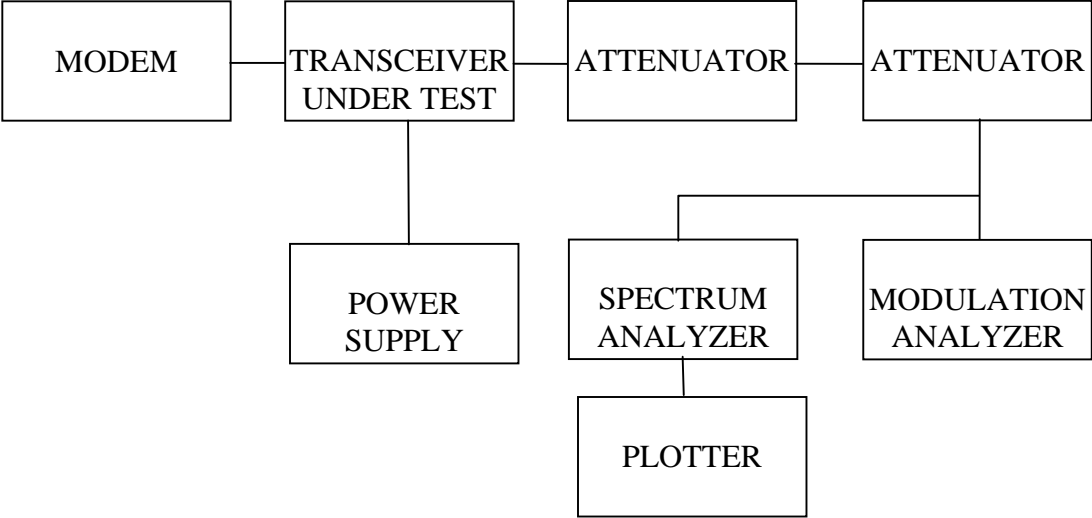


Mask: D, 1W
Output Power = 1 Watt

Spectrum for Emission: 8K20 F1D
Data Rate: 8 kbps Peak Deviation with Data: 3.00 kHz

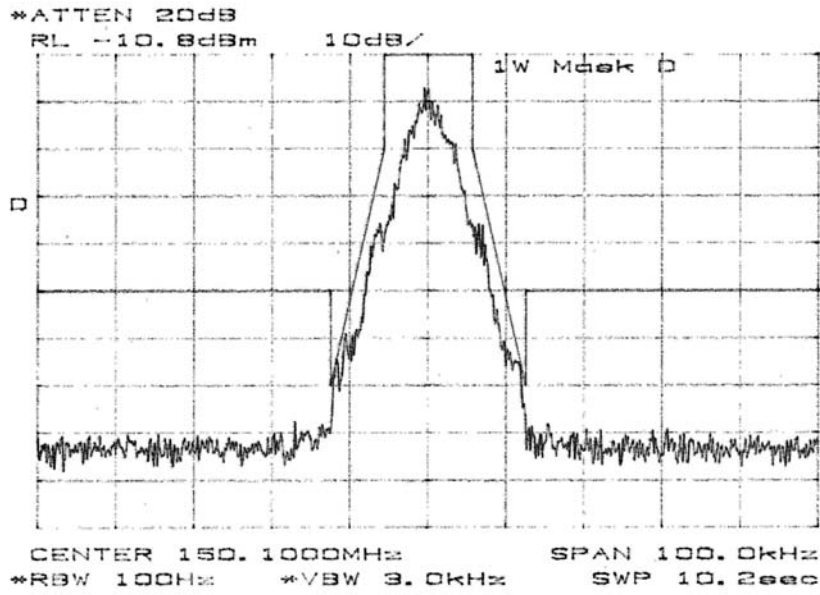


Output Power = 12 Watts

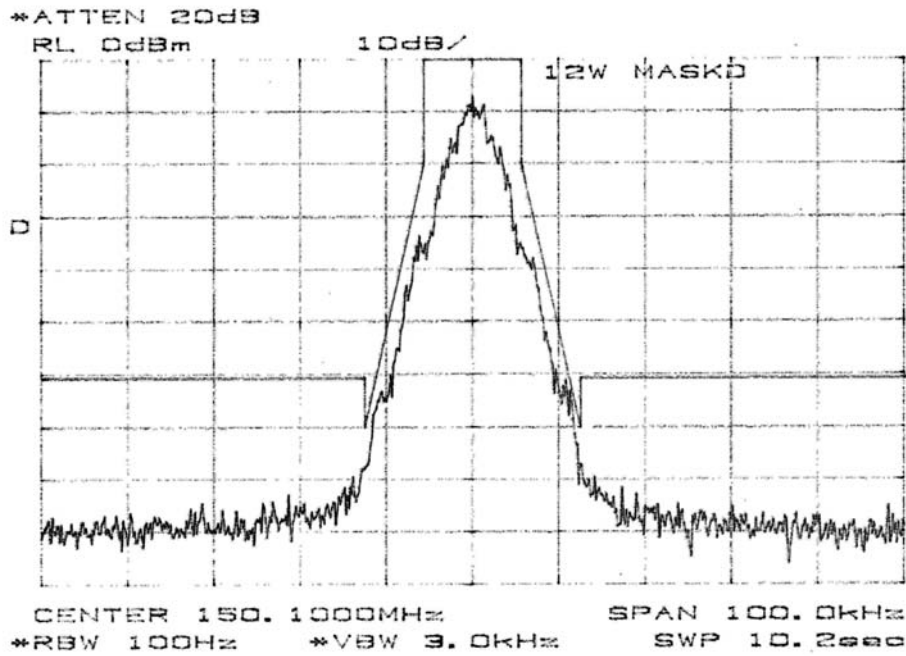


Mask: D, 1W
Output Power = 1 Watt

Spectrum for Emission: 8K30 F1D
Data Rate: 16 kbps Peak Deviation with Data: 3.50 kHz

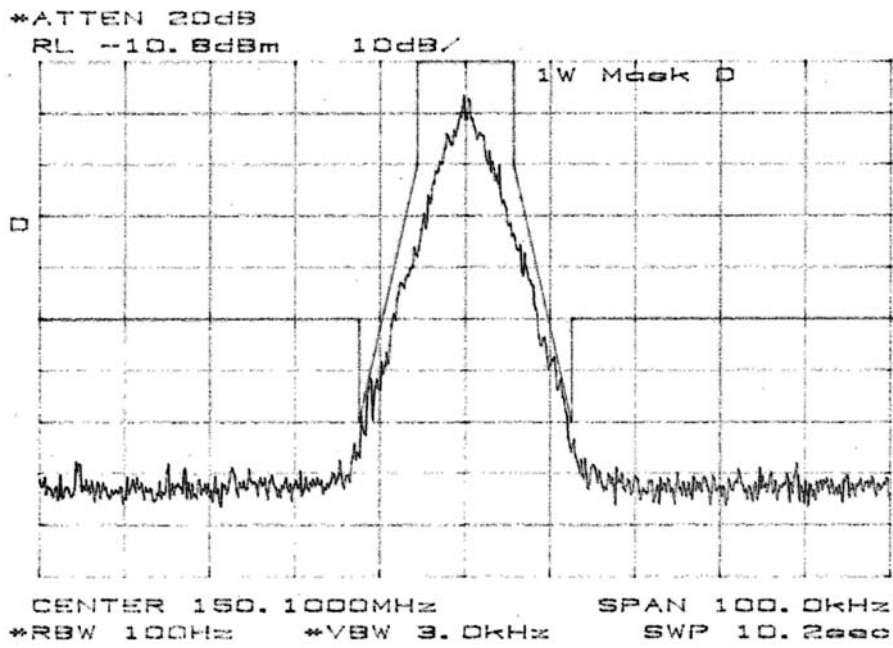

Output Power = 12 Watts

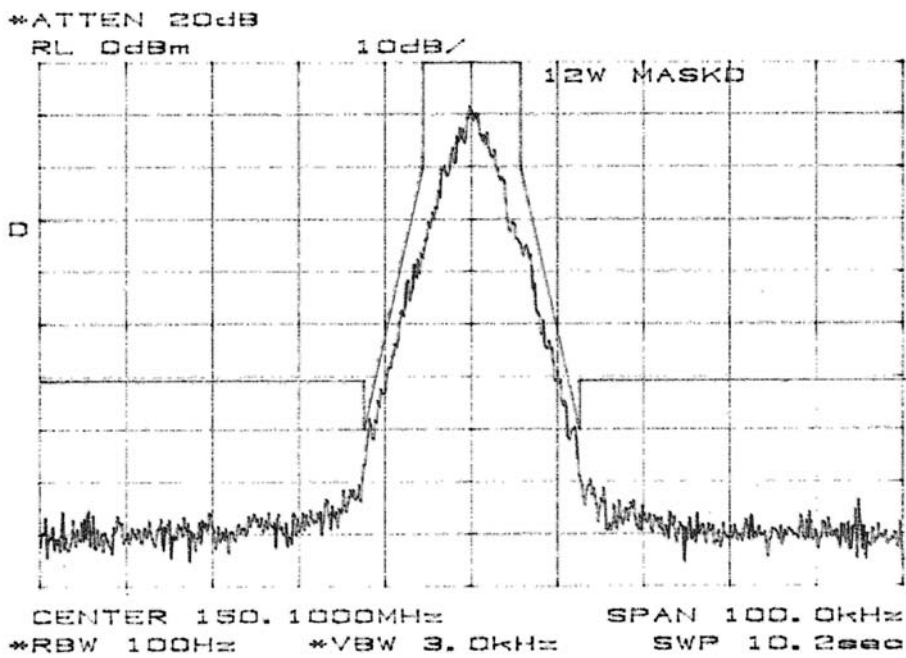

NAME OF TEST: Transmitter Occupied Bandwidth for Emission Designators **16K5F1D** and **16K8F1D**

RULE PART NUMBER: FCC: 2.202, 90.209 (b)(5), 90.210(c), 2.1049 (c) (1)
IC: RSS-119 5.8.2

MINIMUM STANDARDS: **Mask C**
Sidebands and Spurious [Rule 90.210 (c), 5.8.2, P = 12 Watts and P=1 Watt]
Authorized Bandwidth = 20 kHz [Rule 90.209(b) (5), 5.8.2]
From Fo to 5 kHz, down 0 dB.
Greater than 5 kHz to 10 kHz, down $83 * \log_{10}(f_d / 5)$ dB.
Greater than 10 kHz to 250% of authorized BW, at least $29 * \log_{10}(f_d^2 / 11)$ or 50 dB, whichever is the lesser attenuation
Greater than 250% of authorized BW, $43 + 10\log_{10}(P)$

Attenuation = 0 dB at Fo to 5 kHz
Attenuation = 25 dB at 10 kHz
Attenuation = 50 dB at 24.1 kHz
Attenuation = 50 dB at 50 kHz
Attenuation = 53.8 dB at frequencies greater than 50 kHz @ 12 W
Attenuation = 43 dB at frequencies greater than 50 kHz @ 1 W


TEST RESULTS: Meets minimum standards (see data on following page)

TEST CONDITIONS: Standard Test Conditions, 25 C
RF Power Level = 1 Watt and 12 Watts
Voltage = 20VDC

TEST PROCEDURE: TIA/EIA – 603-B, 2.2.13, 3.2.11.2


TEST EQUIPMENT: 50-Ohm Attenuator, Bird Electronics Model 50-A-FFN-20 (20dB, 50W)
50-Ohm Attenuator, Bird Electronics Model 10-A-MFN-10 (10dB, 10W)
50-Ohm Attenuator, Pasternack Model PE7002-10 (10dB)
DC Power Supply, Instek Model GPS-2303
Spectrum Analyzer, Hewlett Packard Model HP8563E
Modulation Analyzer, Hewlett Packard Model HP8901B

TEST SET-UP:

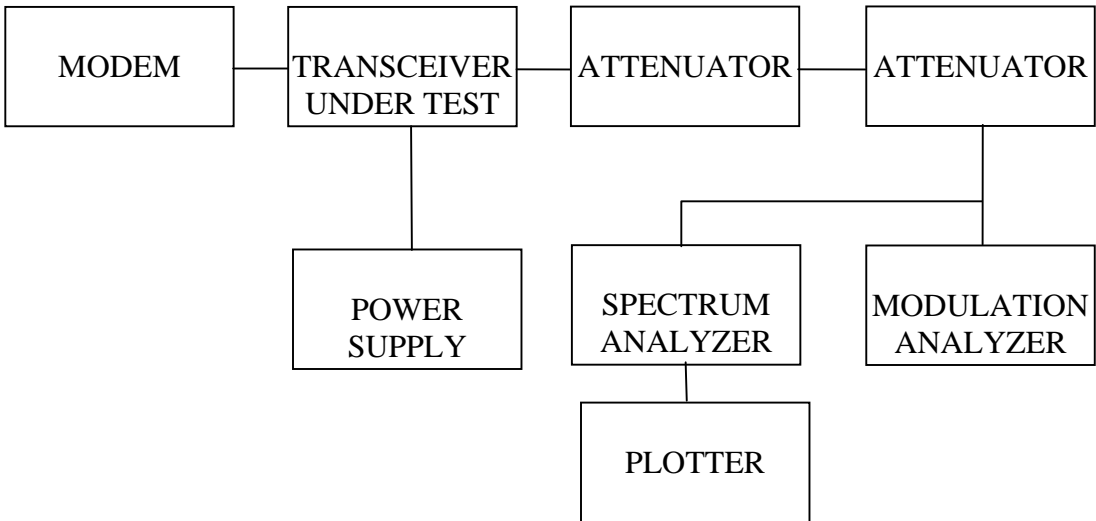


Mask: C, 1W
Output Power = 1 Watt

Spectrum for Emission: 16K5 F1D
Data Rate: 16 kbps Peak Deviation with Data: 6.26 kHz

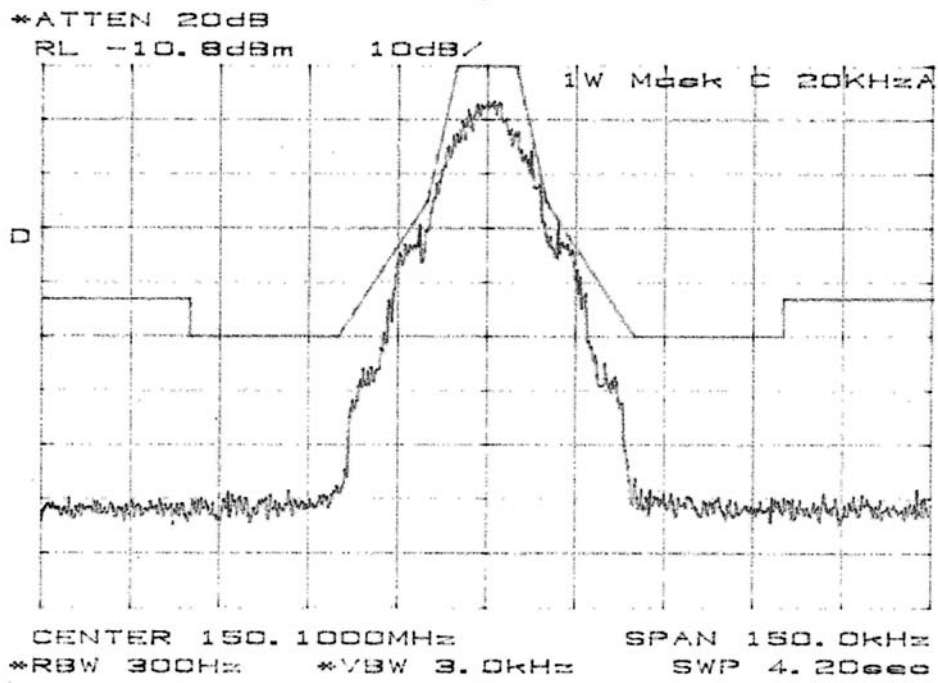


Output Power = 12 Watt

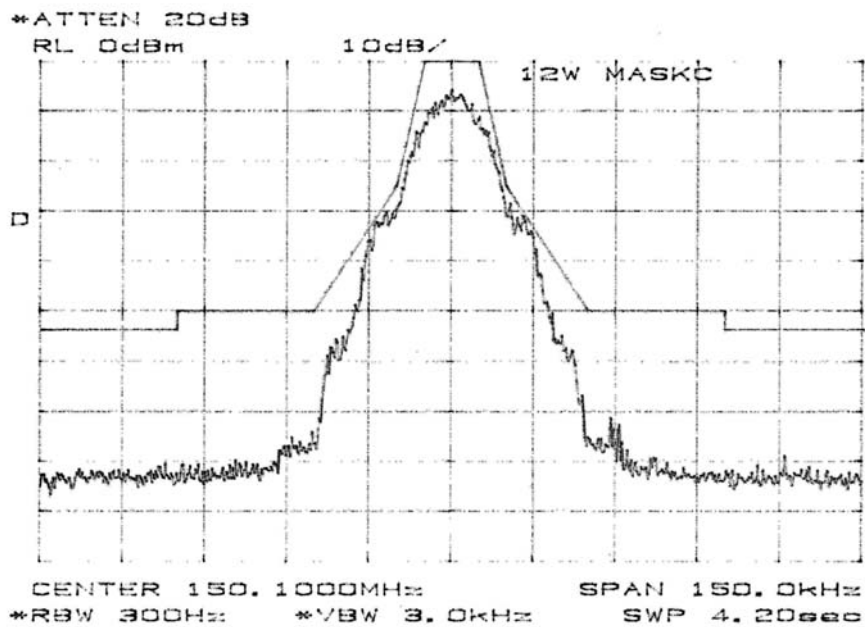


Mask: C, 1W
Output Power = 1 Watt

Spectrum for Emission: 16K8 F1D
Data Rate: 32 kbps Peak Deviation with Data: 7.21 kHz

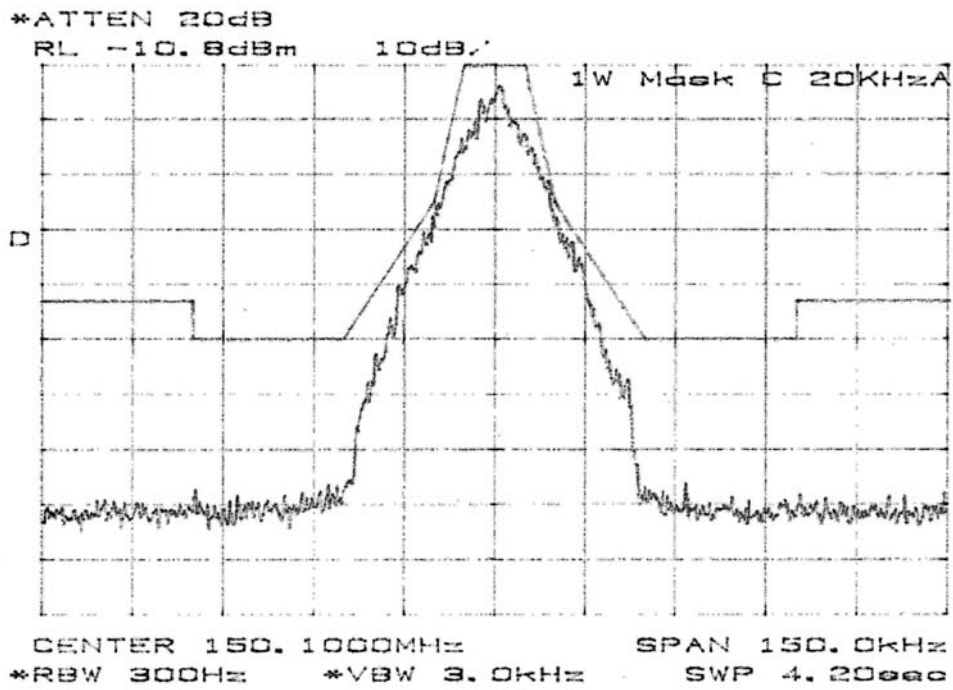

Output Power = 12 Watts

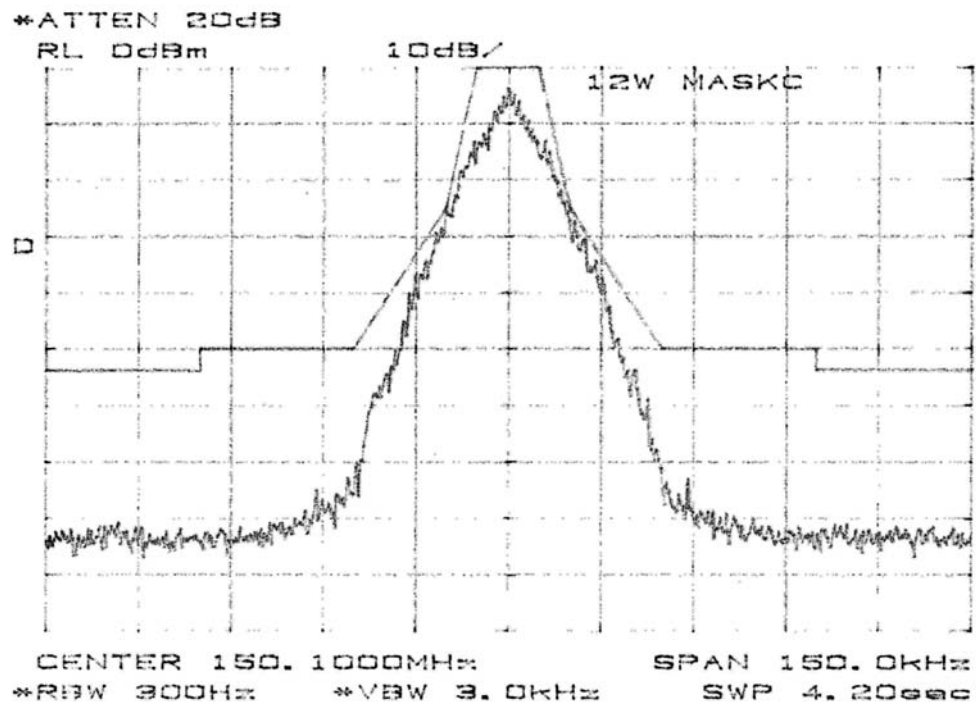

NAME OF TEST: Field Strength of Spurious Radiation

RULE PART NUMBER: FCC: 2.1053, 90.210 (c,3)(d,3)(e,3)
IC: RSS-119 5.8.2, 5.8.3, 5.8.4

MINIMUM STANDARDS: For 12 Watts: $55+10\text{Log}_{10}(12 \text{ Watts}) = -65.8 \text{ dBc}$
or -65dBc , whichever is the lesser attenuation.

For 1 Watt: $55+10\text{Log}_{10}(1 \text{ Watt}) = -55 \text{ dBc}$
or -65dBc , whichever is the lesser attenuation.

TEST RESULTS: Meets minimum standards (see data on following page)


TEST CONDITIONS: Standard Test Conditions, 25 C
RF Power Level = 1 Watt and 12 Watts
Voltage = 20VDC

TEST PROCEDURE: TIA/EIA – 603-B, 2.2.12

TEST EQUIPMENT: Waveguide Horn Antenna, EMCO Model 3115
Log Periodic Linear Polarization Antenna, AILTECH Model 94612-1
Bilog Antenna, Chase Model CBL6111B
Dipole Antenna, Electro-Metrics Model EM-6924
Power Supply, Model Instek GPS-3303
Spectrum Analyzer, Model HP-8561B
Reference Generator, Agilent Model E82570
Power Meter, Model HP436A
50-Ohm Attenuator, Bird Electronics 50-A-FFN-20 (20dB, 50W)
50-Ohm Load, Lucas Weinschel 58-30-43

MEASUREMENT PROCEDURE: Radiated spurious attenuation was measured according to TIA/EIA Standard 603-B Section 2.2.12

TEST SET-UP:

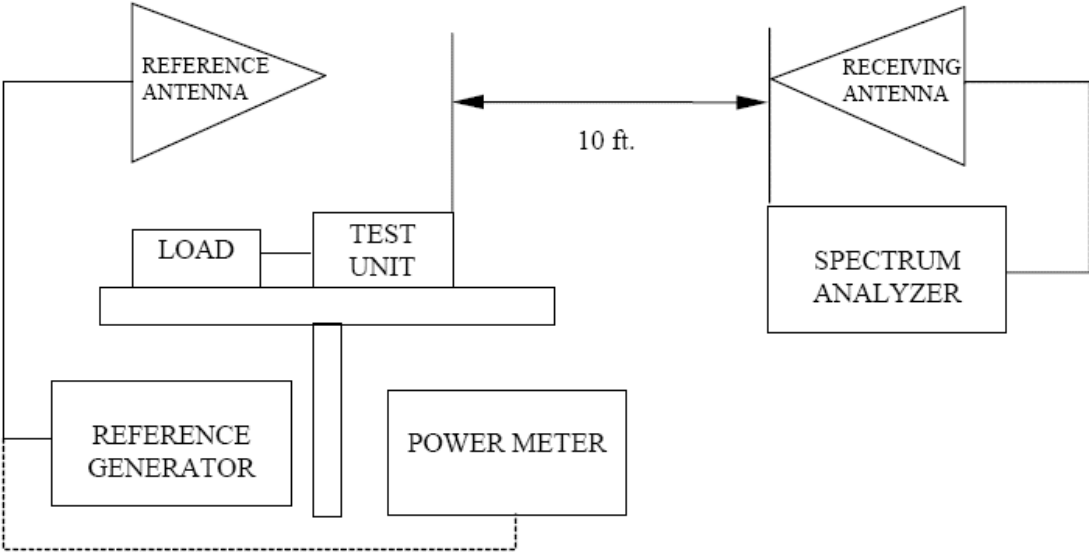

Half Duplex Radio

Frequency: 136.025 MHz

Spec = -65.0

Power: 12 Watts
40.8 dBm

Spur = -100.8

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
272.05	H	-96.5	-74.2	1.00	-0.47	-116.4
	V	-98.3	-72.0	1.00	-0.47	-114.3
408.075	H	-104.0	-66.0	3.83	-0.46	-111.1
	V	-105.8	-75.6	3.83	-0.46	-120.7
544.1	H	-107.5	-75.8	3.17	-0.49	-120.3
	V	-107.8	-64.0	3.17	-0.49	-108.5
680.125	H	-107.5	-63.5	3.00	-0.51	-107.8
	V	-107.2	-73.5	3.00	-0.51	-117.8
816.15	H	-107.0	-71.5	3.67	-0.47	-116.4
	V	-106.3	-62.3	3.67	-0.47	-107.2
952.175	H	-107.0	-69.2	3.17	-0.54	-113.7
	V	-103.0	-62.2	3.17	-0.54	-106.7
1088.2	H	-107.5	-73.8	3.00	2.55	-115.1
	V	-105.8	-68.8	3.00	2.55	-110.0
1224.225	H	-107.0	-70.2	3.17	4.73	-109.4
	V	-108.0	-73.2	3.17	4.73	-112.4
1360.25	H	-107.2	-71.4	3.33	4.73	-110.8
	V	-107.5	-70.2	3.33	4.73	-109.6
1496.275	H	-107.8	-71.1	3.33	4.03	-111.2
	V	-108.0	-72.8	3.33	4.03	-112.9
1632.3	H	-108.0	-71.2	3.33	4.03	-111.3
	V	-107.8	-70.1	3.33	4.03	-110.2
1768.325	H	-106.8	-67.0	3.67	3.09	-108.3
	V	-107.0	-69.3	3.67	3.09	-110.7
1904.35	H	-108.0	-65.7	5.50	5.05	-106.9
	V	-107.0	-62.7	5.50	5.05	-103.9
2040.375	H	-106.5	-63.5	4.50	5.05	-103.7
	V	-106.7	-64.5	4.50	5.05	-104.8
2176.4	H	-106.8	-65.3	4.67	5.05	-105.7
	V	-107.8	-66.1	4.67	5.05	-106.5
2312.425	H	-108.0	-65.0	5.33	4.47	-106.7
	V	-105.8	-61.6	5.33	4.47	-103.3
2448.45	H	-108.0	-61.8	5.50	2.33	-105.8
	V	-107.5	-63.7	5.50	2.33	-107.6
2584.475	H	-108.5	-64.8	5.17	2.33	-108.5
	V	-107.8	-62.5	5.17	2.33	-106.1

2720.5	H	-107.8	-59.3	5.17	4.48	-100.8
	V	-107.7	-64.5	5.17	4.48	-106.0

Frequency: 136.025 MHz Spec = -55.0
Highest
Power: 1 Watts Spur = -95.1
30.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
272.05	H	-100.2	-77.9	1.00	-0.47	-109.3
	V	-101.7	-75.4	1.00	-0.47	-106.8
408.075	H	-107.5	-69.5	3.83	-0.46	-103.8
	V	-107.8	-77.6	3.83	-0.46	-111.9
544.1	H	-106.2	-74.5	3.17	-0.49	-108.2
	V	-107.3	-63.5	3.17	-0.49	-97.2
680.125	H	-107.3	-63.3	3.00	-0.51	-96.8
	V	-106.5	-72.8	3.00	-0.51	-106.3
816.15	H	-106.7	-71.2	3.67	-0.47	-105.3
	V	-106.8	-62.8	3.67	-0.47	-96.9
952.175	H	-106.5	-68.7	3.17	-0.54	-102.4
	V	-102.2	-61.4	3.17	-0.54	-95.1
1088.2	H	-107.2	-73.5	3.00	-2.15	-108.7
	V	-106.5	-69.5	3.00	-2.15	-104.7
1224.225	H	-107.8	-71.0	3.17	-2.15	-106.3
	V	-107.8	-73.0	3.17	-2.15	-108.3
1360.25	H	-107.2	-71.4	3.33	-2.15	-106.9
	V	-107.2	-69.9	3.33	-2.15	-105.4
1496.275	H	-108.0	-71.3	3.33	-2.15	-106.8
	V	-107.0	-71.8	3.33	-2.15	-107.3
1632.3	H	-107.5	-70.7	3.33	-2.15	-106.2
	V	-107.5	-69.8	3.33	-2.15	-105.3
1768.325	H	-107.0	-67.2	3.67	-2.15	-103.0
	V	-106.5	-68.8	3.67	-2.15	-104.7
1904.35	H	-108.0	-65.7	5.50	-2.15	-103.3
	V	-107.5	-63.2	5.50	-2.15	-100.8
2040.375	H	-108.0	-65.0	4.50	-2.15	-101.7
	V	-107.7	-65.5	4.50	-2.15	-102.2
2176.4	H	-106.8	-65.3	4.67	-2.15	-102.1
	V	-107.2	-65.5	4.67	-2.15	-102.4
2312.425	H	-107.3	-64.3	5.33	-2.15	-101.8
	V	-107.5	-63.3	5.33	-2.15	-100.8
2448.45	H	-107.3	-61.1	5.50	-2.15	-98.8
	V	-107.3	-63.5	5.50	-2.15	-101.1

2584.475	H	-108.3	-64.6	5.17	-2.15	-102.0
	V	-108.0	-62.7	5.17	-2.15	-100.0
2720.5	H	-108.5	-60.0	5.17	-2.15	-97.3
	V	-107.3	-64.1	5.17	-2.15	-101.5

Full Duplex Radio

Frequency: 138.025 MHz Spec = -65.0
Highest
Power: 12 Watts Spur = -104.5
40.8 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
276.05	H	-101.2	-78.9	0.67	-0.47	-120.8
	V	-99.3	-73.0	0.67	-0.47	-114.9
414.075	H	-102.3	-64.3	4.17	-0.46	-109.7
	V	-103.8	-73.6	4.17	-0.46	-119.0
552.1	H	-103.3	-71.6	2.83	-0.49	-115.7
	V	-104.2	-60.4	2.83	-0.49	-104.5
690.125	H	-106.3	-62.3	3.00	-0.51	-106.6
	V	-106.5	-72.8	3.00	-0.51	-117.1
828.15	H	-105.3	-69.8	3.50	-0.47	-114.6
	V	-105.5	-61.5	3.50	-0.47	-106.3
966.175	H	-106.5	-68.7	2.83	-0.54	-112.9
	V	-106.7	-65.9	2.83	-0.54	-110.1
1104.2	H	-107.5	-73.8	2.67	-2.15	-119.4
	V	-105.8	-68.8	2.67	-2.15	-114.4
1242.225	H	-107.0	-70.2	3.00	-2.15	-116.1
	V	-108.0	-73.2	3.00	-2.15	-119.1
1380.25	H	-107.2	-71.4	3.00	-2.15	-117.3
	V	-107.5	-70.2	3.00	-2.15	-116.1
1518.275	H	-107.8	-71.1	2.83	-2.15	-116.9
	V	-108.0	-72.8	2.83	-2.15	-118.6
1656.3	H	-108.0	-71.2	3.17	-2.15	-117.3
	V	-107.8	-70.1	3.17	-2.15	-116.2
1794.325	H	-106.8	-67.0	3.67	-2.15	-113.6
	V	-107.0	-69.3	3.67	-2.15	-115.9
1932.35	H	-108.0	-65.7	5.17	-2.15	-113.8
	V	-107.0	-62.7	5.17	-2.15	-110.8
2070.375	H	-106.5	-63.5	6.50	-2.15	-112.9
	V	-106.7	-64.5	6.50	-2.15	-114.0
2208.4	H	-106.8	-65.3	5.00	-2.15	-113.2
	V	-107.8	-66.1	5.00	-2.15	-114.1

2346.425	H	-108.0	-65.0	5.83	-2.15	-113.8
	V	-105.8	-61.6	5.83	-2.15	-110.4
2484.45	H	-108.0	-61.8	5.67	-2.15	-110.4
	V	-107.5	-63.7	5.67	-2.15	-112.3
2622.475	H	-108.5	-64.8	4.67	-2.15	-112.4
	V	-107.8	-62.5	4.67	-2.15	-110.1
2760.5	H	-107.8	-59.3	5.00	-2.15	-107.2
	V	-107.7	-64.5	5.00	-2.15	-112.5

Frequency: 138.025 MHz Spec = -55.0
Highest
Power: 1 Watts Spur = -95.2
30.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation (dBc)
276.05	H	-98.2	-75.8	0.67	-0.47	-107.0
	V	-101.8	-75.5	0.67	-0.47	-106.6
414.075	H	-107.3	-69.3	4.17	-0.46	-103.9
	V	-106.3	-76.1	4.17	-0.46	-110.7
552.1	H	-107.2	-75.5	2.83	-0.49	-108.8
	V	-107.3	-63.5	2.83	-0.49	-96.8
690.125	H	-105.7	-61.7	3.00	-0.51	-95.2
	V	-106.7	-73.0	3.00	-0.51	-106.5
828.15	H	-106.7	-71.2	3.50	-0.47	-105.2
	V	-105.2	-61.2	3.50	-0.47	-95.2
966.175	H	-105.2	-67.4	2.83	-0.54	-100.8
	V	-106.0	-65.2	2.83	-0.54	-98.6
1104.2	H	-107.2	-73.5	2.67	-2.15	-108.4
	V	-106.5	-69.5	2.67	-2.15	-104.3
1242.225	H	-107.8	-71.0	3.00	-2.15	-106.1
	V	-107.8	-73.0	3.00	-2.15	-108.1
1380.25	H	-107.2	-71.4	3.00	-2.15	-106.5
	V	-107.2	-69.9	3.00	-2.15	-105.0
1518.275	H	-108.0	-71.3	2.83	-2.15	-106.3
	V	-107.0	-71.8	2.83	-2.15	-106.8
1656.3	H	-107.5	-70.7	3.17	-2.15	-106.0
	V	-107.5	-69.8	3.17	-2.15	-105.2
1794.325	H	-107.0	-67.2	3.67	-2.15	-103.0
	V	-106.5	-68.8	3.67	-2.15	-104.7
1932.35	H	-108.0	-65.7	5.17	-2.15	-103.0
	V	-107.5	-63.2	5.17	-2.15	-100.5
2070.375	H	-108.0	-65.0	6.50	-2.15	-103.7
	V	-107.7	-65.5	6.50	-2.15	-104.2

2208.4	H	-106.8	-65.3	5.00	-2.15	-102.5
	V	-107.2	-65.5	5.00	-2.15	-102.7
2346.425	H	-107.3	-64.3	5.83	-2.15	-102.3
	V	-107.5	-63.3	5.83	-2.15	-101.3
2484.45	H	-107.3	-61.1	5.67	-2.15	-99.0
	V	-107.3	-63.5	5.67	-2.15	-101.3
2622.475	H	-108.3	-64.6	4.67	-2.15	-101.5
	V	-108.0	-62.7	4.67	-2.15	-99.5
2760.5	H	-108.5	-60.0	5.00	-2.15	-97.2
	V	-107.3	-64.1	5.00	-2.15	-101.3

Half Duplex Radio

Frequency: 150.1 MHz Spec = -65.0
Highest
Power: 12 Watts Spur = -97.5
40.8 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation (dBc)
300.2	H	-92.7	-68.2	1.67	-0.46	-111.1
	V	-96.3	-69.5	1.67	-0.46	-112.4
450.3	H	-102.3	-68.8	6.67	-0.53	-116.8
	V	-106.3	-71.0	6.67	-0.53	-119.0
600.4	H	-97.5	-63.0	3.67	-0.54	-108.0
	V	-106.3	-70.5	3.67	-0.54	-115.5
750.5	H	-106.3	-69.5	4.17	-0.50	-115.0
	V	-106.3	-68.5	4.17	-0.50	-114.0
900.6	H	-106.3	-68.5	4.17	-0.51	-114.0
	V	-105.5	-64.7	4.17	-0.51	-110.2
1050.7	H	-108.3	-72.8	3.00	2.55	-114.0
	V	-108.2	-72.5	3.00	2.55	-113.8
1200.8	H	-107.0	-72.3	3.00	4.73	-111.4
	V	-107.0	-72.3	3.00	4.73	-111.4
1350.9	H	-107.5	-71.3	3.33	4.73	-110.7
	V	-107.2	-70.9	3.33	4.73	-110.3
1501	H	-107.7	-71.0	3.33	4.03	-111.1
	V	-106.5	-71.5	3.33	4.03	-111.6
1651.1	H	-107.8	-70.8	3.50	4.03	-111.1
	V	-105.8	-67.1	3.50	4.03	-107.4
1801.2	H	-107.2	-66.5	4.17	3.09	-108.4
	V	-106.2	-68.2	4.17	3.09	-110.1
1951.3	H	-105.3	-63.6	6.00	5.05	-105.4
	V	-106.8	-62.8	6.00	5.05	-104.5

2101.4	H	-107.0	-61.3	5.67	5.05	-102.7
	V	-106.0	-64.5	5.67	5.05	-105.9
2251.5	H	-106.7	-65.9	5.83	4.47	-108.0
	V	-107.5	-63.0	5.83	4.47	-105.2
2401.6	H	-106.7	-57.0	6.83	2.33	-102.3
	V	-106.2	-61.9	6.83	2.33	-107.2
2551.7	H	-107.0	-64.5	5.50	2.33	-108.5
	V	-107.2	-62.2	5.50	2.33	-106.2
2701.8	H	-107.0	-59.3	5.17	4.48	-100.8
	V	-108.0	-64.5	5.17	4.48	-106.0
2851.9	H	-107.5	-60.0	6.33	4.56	-102.6
	V	-107.7	-61.0	6.33	4.56	-103.6
3002	H	-104.8	-54.6	6.67	4.56	-97.5
	V	-105.0	-58.2	6.67	4.56	-101.1

Frequency: 150.1 MHz Spec = -55.0
 Highest
 Power: 1 Watts Spur = -94.2
 30.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation (dBc)
300.2	H	-102.5	-78.0	1.67	-0.46	-110.1
	V	-103.5	-76.7	1.67	-0.46	-108.8
450.3	H	-107.3	-73.8	6.67	-0.53	-111.0
	V	-107.2	-71.9	6.67	-0.53	-109.1
600.4	H	-106.8	-72.3	3.67	-0.54	-106.5
	V	-106.2	-70.4	3.67	-0.54	-104.6
750.5	H	-105.8	-69.0	4.17	-0.50	-103.7
	V	-106.2	-68.4	4.17	-0.50	-103.1
900.6	H	-106.8	-69.0	4.17	-0.51	-103.7
	V	-106.7	-65.9	4.17	-0.51	-100.6
1050.7	H	-107.7	-72.2	3.00	-2.15	-107.4
	V	-107.0	-71.3	3.00	-2.15	-106.5
1200.8	H	-107.8	-73.1	3.00	-2.15	-108.3
	V	-107.8	-73.1	3.00	-2.15	-108.3
1350.9	H	-107.3	-71.1	3.33	-2.15	-106.6
	V	-106.8	-70.5	3.33	-2.15	-106.0
1501	H	-107.7	-71.0	3.33	-2.15	-106.5
	V	-107.2	-72.2	3.33	-2.15	-107.7
1651.1	H	-106.3	-69.3	3.50	-2.15	-105.0
	V	-106.8	-68.1	3.50	-2.15	-103.8
1801.2	H	-106.2	-65.5	4.17	-2.15	-101.9
	V	-107.5	-69.5	4.17	-2.15	-105.8

1951.3	H	-105.0	-63.3	6.00	-2.15	-101.5
	V	-105.0	-61.0	6.00	-2.15	-99.2
2101.4	H	-106.0	-60.3	5.67	-2.15	-98.2
	V	-107.2	-65.7	5.67	-2.15	-103.5
2251.5	H	-107.5	-66.7	5.83	-2.15	-104.7
	V	-107.3	-62.8	5.83	-2.15	-100.8
2401.6	H	-106.8	-57.1	6.83	-2.15	-96.1
	V	-107.5	-63.2	6.83	-2.15	-102.2
2551.7	H	-107.5	-65.0	5.50	-2.15	-102.7
	V	-107.0	-62.0	5.50	-2.15	-99.7
2701.8	H	-107.3	-59.6	5.17	-2.15	-97.0
	V	-107.3	-63.8	5.17	-2.15	-101.1
2851.9	H	-107.5	-60.0	6.33	-2.15	-98.5
	V	-106.8	-60.1	6.33	-2.15	-98.6
3002	H	-105.5	-55.3	6.67	-2.15	-94.2
	V	-105.3	-58.5	6.67	-2.15	-97.3

Half Duplex Radio

Frequency: 173.975 MHz Spec = -65.0
Highest
Power: 12 Watts Spur = -99.1
40.8 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation (dBc)
347.95	H	-103.3	-69.5	3.50	-0.52	-114.3
	V	-105.5	-76.5	3.50	-0.52	-121.3
521.925	H	-105.7	-74.0	5.33	-0.50	-120.6
	V	-103.2	-59.4	5.33	-0.50	-106.0
695.9	H	-105.0	-61.0	3.33	-0.50	-105.6
	V	-106.5	-72.8	3.33	-0.50	-117.4
869.875	H	-106.3	-68.5	4.17	-0.46	-113.9
	V	-106.3	-65.5	4.17	-0.46	-110.9
1043.85	H	-106.5	-70.2	3.00	2.55	-111.4
	V	-107.2	-71.4	3.00	2.55	-112.6
1217.825	H	-107.2	-71.0	3.00	4.73	-110.1
	V	-107.8	-73.1	3.00	4.73	-112.2
1391.8	H	-106.0	-70.3	3.33	4.73	-109.7
	V	-108.0	-69.3	3.33	4.73	-108.7
1565.775	H	-107.3	-70.0	3.33	4.03	-110.1
	V	-107.2	-71.4	3.33	4.03	-111.5
1739.75	H	-107.5	-68.5	3.50	3.09	-109.7
	V	-106.5	-67.5	3.50	3.09	-108.7

1913.725	H	-107.0	-65.0	6.17	5.05	-106.9
	V	-108.0	-63.5	6.17	5.05	-105.4
2087.7	H	-105.5	-60.3	5.83	5.05	-101.9
	V	-106.7	-65.0	5.83	5.05	-106.6
2261.675	H	-105.8	-64.6	5.83	4.47	-106.8
	V	-106.5	-61.7	5.83	4.47	-103.8
2435.65	H	-106.8	-59.5	6.33	2.33	-104.3
	V	-106.7	-63.0	6.33	2.33	-107.8
2609.625	H	-106.8	-63.1	5.50	2.33	-107.1
	V	-107.2	-61.4	5.50	2.33	-105.3
2783.6	H	-107.0	-60.2	5.50	4.48	-102.0
	V	-108.2	-64.9	5.50	4.48	-106.7
2957.575	H	-106.2	-56.4	6.83	4.56	-99.4
	V	-105.8	-57.3	6.83	4.56	-100.4
3131.55	H	-105.5	-58.2	6.50	4.56	-100.9
	V	-105.5	-57.5	6.50	4.56	-100.2
3305.525	H	-105.7	-56.5	7.33	3.19	-101.5
	V	-104.0	-55.0	7.33	3.19	-99.9
3479.5	H	-105.8	-56.1	8.33	3.20	-102.1
	V	-106.7	-53.2	8.33	3.20	-99.1

Frequency: 173.975 MHz Spec = -55.0
 Highest
 Power: 1 Watts Spur = -93.0
 30.0 dBm

Spurious Frequency (MHz)	Polarization (Horz/Vert)	Spurious Level (dBm)	Substitution Generator (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Spurious Attenuation dBc
347.95	H	-105.5	-71.7	3.50	-0.52	-105.7
	V	-106.0	-77.0	3.50	-0.52	-111.0
521.925	H	-106.2	-74.5	5.33	-0.50	-110.3
	V	-106.0	-62.2	5.33	-0.50	-98.0
695.9	H	-106.8	-62.8	3.33	-0.50	-96.6
	V	-107.0	-73.3	3.33	-0.50	-107.1
869.875	H	-106.5	-68.7	4.17	-0.46	-103.3
	V	-106.2	-65.4	4.17	-0.46	-100.0
1043.85	H	-107.2	-70.9	3.00	-2.15	-106.0
	V	-107.3	-71.5	3.00	-2.15	-106.6
1217.825	H	-107.3	-71.1	3.00	-2.15	-106.3
	V	-107.8	-73.1	3.00	-2.15	-108.3
1391.8	H	-107.5	-71.8	3.33	-2.15	-107.3
	V	-108.0	-69.3	3.33	-2.15	-104.8
1565.775	H	-106.7	-69.4	3.33	-2.15	-104.9
	V	-107.0	-71.2	3.33	-2.15	-106.7

1739.75	H	-107.2	-68.2	3.50	-2.15	-103.9
	V	-107.3	-68.3	3.50	-2.15	-104.0
1913.725	H	-106.0	-64.0	6.17	-2.15	-102.3
	V	-106.5	-62.0	6.17	-2.15	-100.3
2087.7	H	-105.3	-60.1	5.83	-2.15	-98.1
	V	-107.3	-65.6	5.83	-2.15	-103.6
2261.675	H	-107.3	-66.1	5.83	-2.15	-104.1
	V	-107.0	-62.2	5.83	-2.15	-100.2
2435.65	H	-107.0	-59.7	6.33	-2.15	-98.2
	V	-106.2	-62.5	6.33	-2.15	-101.0
2609.625	H	-107.0	-63.3	5.50	-2.15	-101.0
	V	-107.3	-61.5	5.50	-2.15	-99.1
2783.6	H	-106.5	-59.7	5.50	-2.15	-97.3
	V	-106.8	-63.5	5.50	-2.15	-101.1
2957.575	H	-105.0	-55.2	6.83	-2.15	-94.2
	V	-104.8	-56.3	6.83	-2.15	-95.3
3131.55	H	-105.5	-58.2	6.50	-2.15	-96.8
	V	-105.0	-57.0	6.50	-2.15	-95.7
3305.525	H	-104.3	-55.1	7.33	-2.15	-94.6
	V	-106.0	-57.0	7.33	-2.15	-96.5
3479.5	H	-105.3	-55.6	8.33	-2.15	-96.1
	V	-106.0	-52.5	8.33	-2.15	-93.0