

In-Tech Electronics Ltd.

Application
For
Certification
(FCC ID: NV6FRS100)

May 14, 1999

WO# 9904487

WN/at

May 14, 1999

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed a refer to bulk from which such a sample may be said to have been obtained
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited.

FCC ID: NV6FRS100

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2745 8306

F G



K



H

SUMMARY OF CONTENTS

LIST OF EXHIBITS

| | |
|--------------------|----------------------------|
| <i>EXHIBIT 1:</i> | General Description |
| <i>EXHIBIT 2:</i> | System Test Configuration |
| <i>EXHIBIT 3:</i> | RF Power Output |
| <i>EXHIBIT 4:</i> | Modulation Characteristics |
| <i>EXHIBIT 5:</i> | Occupied Bandwidth |
| <i>EXHIBIT 6:</i> | Emission Spurious |
| <i>EXHIBIT 7:</i> | Frequency Stability |
| <i>EXHIBIT 8:</i> | Technical Specifications |
| <i>EXHIBIT 9:</i> | Product Labelling |
| <i>EXHIBIT 10:</i> | Photographs |
| <i>EXHIBIT 11:</i> | Instruction Manual |

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Application : In-Tech Electronics Ltd.
Trade Name/Model No : FRS 2 Channel 467MHz
Date : May 14, 1999

This report concerns (check one:)Original Grant X Class II Change _____

Equipment Type: Family Radio Service, FRS

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X
If yes, defer until: _____ date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Wilbur Ng
Intertek Testing Services.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8502
Fax: 852-2745-8306

Table of Contents

| | |
|---|----|
| 1.0 General Description | 2 |
| 1.1 Product Description..... | 2 |
| 1.2 Ralated Submittal(s) Grants..... | 3 |
| 1.3 Test Methodology..... | 3 |
| 1.4 Test Facility | 3 |
| 2.0 System Test Configuration | 5 |
| 2.1 Justification | 5 |
| 2.2 EUT Exercising Software | 6 |
| 2.3 Special Accessories..... | 6 |
| 2.4 Equipment Modification | 6 |
| 3.0 RF Output Power (Section 95.639(d) | 8 |
| 4.0 Modulation Characteristics (Section 95.637(a)) | 12 |
| 4.1 Modulation Frequency Response..... | 13 |
| 4.2 Modulation Limiting Characteristic | 15 |
| 5.0 Occupied Bandwidth (Section 95.633(c) | 18 |
| 6.0 Spurious Emission (Section 95.635(b)) | 20 |
| 6.2 Field Strength of Spurious Radiation..... | 21 |
| 7.0 Frequency Stanility (Section 95.627) | 27 |
| 7.1 Frequency Tolerance | 28 |
| 7.2 Voltage Extreme Condition..... | 30 |
| 7.3 Temperature Extreme Condition | 33 |
| 8.0 Technical Specifications | 36 |
| 9.0 Product Labelling | 40 |
| 10.0 Equipment Photographs | 43 |
| 11.0 Instruction Manual | 45 |

INTERTEK TESTING SERVICES

List of attached file

| Exhibit type | File Description | Filename |
|-----------------------|---------------------------------|--|
| Cover Letter | Letter of Agency | letter.pdf |
| Operation Description | Technical Description | descri.pdf |
| Test Report | Bandwidth Plot | bw.pdf |
| Test Report | Modulation Frequency Response | mfr.pdf |
| Test Report | Modulation Limit Characteristic | mlc.pdf |
| Test Report | Spurious Emission | spurious.pdf |
| Block Diagram | Block Diagram | block.pdf |
| Schematics | Circuit Diagram | circuit.pdf |
| ID Label/Location | Label Artwork and Location | label.pdf |
| User Manual | User Manual | manual.pdf |
| Test Report | Test Report | report.doc |
| Test Setup Photo | Radiated Emission | radiated1.jpg to radiated2.jpg |
| Internal Photo | Internal Photo | iphoto1.jpg to iphoto4.jpg |
| External Photo | External Photo | ophoto1.jpg to ophoto2.jpg |

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a 2-Channel Family Radio Services (FRS) Transceiver operating at 467.5625 and 467.6625 MHz. The EUT is powered by 4 x 1.5V "AAA" Battery.

Transmitter portion:

- (i) Type of emission: F3E
- (ii) Frequency Range: 467.5625 MHz and 467.6625 MHz
- (iii) Maximum Power Rating: 0.08W

The brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a FRS Transceiver. The receiver section of the FRS Transceiver is subject to verification process.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by 4 fully charged 1.5V "AAA" battery.

The frequency range from 30 MHz to 10th harmonics was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

2.3 Special Accessories

A special headset is provided by client for compliance of this device.

2.4 Equipment Modification

Any modification installed previous to testing by In-Tech Electronics Ltd. will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

Confirmed by:

Wilbur Ng
Assistant Manager
Intertek Testing Services
Agent for In-Tech Electronics Ltd.

Signature

May 14, 1999 Date

EXHIBIT 3

RF POWER OUTPUT

3.0 RF Power Output (Section 2.985(a))

A. Equipment Used

| Equipment | Brand Name | Model No. |
|----------------------|-----------------|------------------|
| Biconical Antenna | CDI | B300 |
| Test receiver | Rohde & Schwarz | ESVS30 |
| RF Filter | Tailithic | 3VF |
| Tuned Dipole Antenna | CDI | Robert Antenna 4 |
| Signal Generator | Maconi | 2024 |

B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

INTERTEK TESTING SERVICES

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

Table 1**In-Tech Electronics Ltd.
Cobra FRS100****Transmission Power**

| Channel | Frequency (M H z) | E ffectived Radiated Power (W) | L imit (W) | M argin (W) |
|---------|----------------------|------------------------------------|----------------|-----------------|
| 8 | 467.567 | 0.08 | 0.5 | -0.42 |
| 12 | 467.671 | 0.08 | 0.5 | -0.42 |

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999

EXHIBIT 4

MODULATION CHARACTERISTICS

4.0 Modulation Characteristics

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are attached in Exhibit 4.1 & 4.2.

Plots for each tests are saved with filename: mfr.pdf and mlc.pdf


4.1 Modulation Frequency Response

A. Test Equipment

| Equipment | Brand Name | Model No. |
|------------------------|--------------------|------------|
| Audio Signal Generator | Leader | LFG-1300S |
| dB meter | Leader | LMV-182A |
| 20 dB RF Load | Bird | 8304-200-N |
| Modulation Meter | Marconi Instrument | 2945 |

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

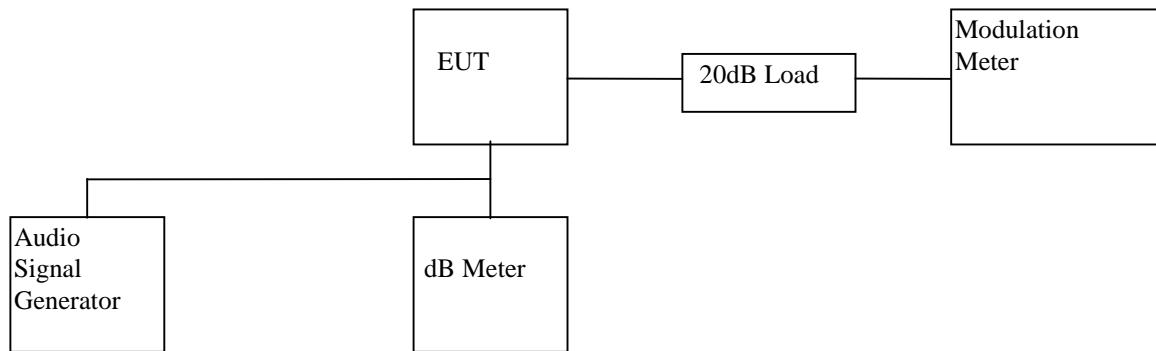

- 2) Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 300Hz to 5kHz.
- 4) Record the frequency deviation.

C. Test Result**Table 2****In-Tech Electronics Ltd
Cobra FRS100****Modulation Frequency Response**

Test Channel : 8

Input level = 97.0dBSPL

| Modulation Frequency (Hz) | Modulation index (%) |
|---------------------------|----------------------|
| 300 | 0.97 |
| 400 | 1.00 |
| 500 | 0.82 |
| 600 | 0.97 |
| 700 | 0.97 |
| 800 | 0.74 |
| 900 | 0.62 |
| 1000 | 0.47 |
| 1250 | 0.38 |
| 1500 | 0.23 |
| 1750 | 0.23 |
| 2000 | 0.24 |
| 2250 | 0.31 |
| 2500 | 0.28 |
| 2750 | 0.21 |
| 3000 | 0.14 |
| 3125 | 0.12 |
| 3250 | 0.11 |
| 3500 | 0.05 |
| 4000 | 0.04 |
| 5000 | 0.03 |

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999


4.2 Modulation Limiting Characteristics (Section 2.987(b))

A. Test Equipment

| Equipment | Brand Name | Model No. |
|------------------------|------------|------------|
| Audio Signal Generator | Leader | LFG-1300S |
| 20 dB RF Load | Bird | 8304-200-N |
| Modulation Meter | Marconi | 2950 |

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

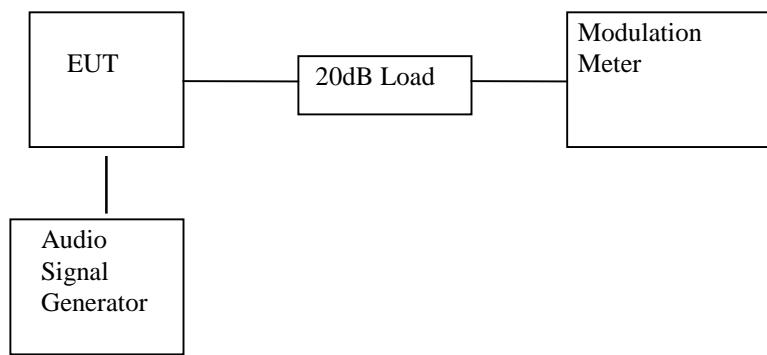

- 2) Set the frequency of the audio signal generator to 700Hz and adjust the level from 47dB SPL to 127dB SPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

C. Test Result**Table 3****In-Tech Electronics Ltd.
Cobra FRS100****Modulation Limiting Characteristics**

Test Channel : 8

| Modulation Input (dB SPL) | Peak Frequency Deviation (kHz) at 700Hz | Peak Frequency Deviation (kHz) at 1000Hz | Peak Frequency Deviation (kHz) at 2500Hz | Peak Frequency Deviation (kHz) at 3125Hz |
|---------------------------|---|--|--|--|
| 47 | 0.15 | 0.15 | 0.11 | 0.11 |
| 57 | 0.15 | 0.15 | 0.11 | 0.11 |
| 67 | 0.15 | 0.15 | 0.12 | 0.11 |
| 77 | 0.18 | 0.15 | 0.13 | 0.11 |
| 87 | 0.35 | 0.21 | 0.22 | 0.13 |
| 97 | 0.68 | 0.47 | 0.71 | 0.37 |
| 107 | 1.03 | 1.12 | 0.73 | 0.45 |
| 117 | 1.04 | 1.17 | 0.75 | 0.49 |
| 127 | 1.05 | 1.20 | 0.76 | 0.51 |

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999

EXHIBIT 5

OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES


5.0 Occupied Bandwidth (Section 95.633(c))

A. Test Equipment

| Equipment | Brand Name | Model No. |
|------------------------|-----------------|------------|
| Audio Signal Generator | Leader | LFG-1300S |
| dB meter | Leader | LMV-182A |
| 20 dB RF Load | Bird | 8304-200-N |
| Spectrum Analyzer | Hewlett Packard | 8951EM |

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

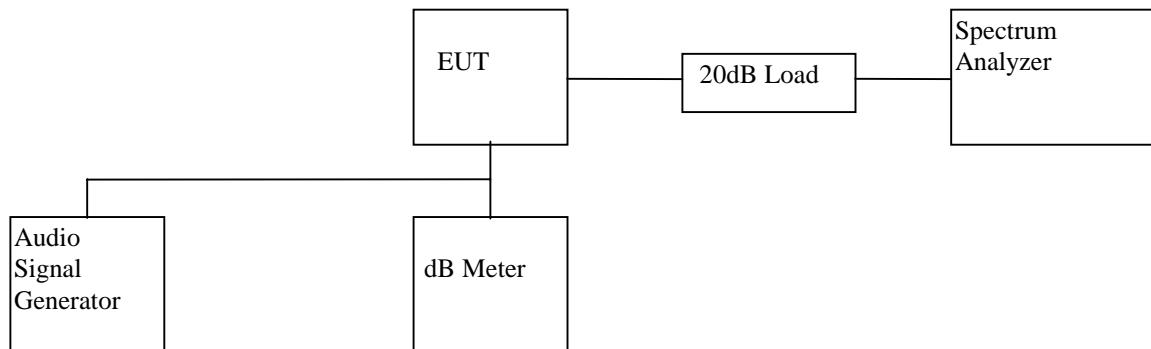

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.

C. Test Result

The occupied Bandwidth is measured to be 5.81 kHz.

For the electronic filing, the bandwidth plot is saved with filename:
bw.pdf

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999

EXHIBIT 6

SPURIOUS EMISSION

6.0 **Spurious Emission (Section 95.635)**

In order to satisfy the 95.635 requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

6.2 Field Strength of Spurious Radiation (Section 95.635)

A. Test Equipment

| Equipment | Brand Name | Model No. |
|---------------|-----------------|----------------------|
| Antenna | CDI | B100,B200,B300, Horn |
| Test receiver | Rohde & Schwarz | ESVS30 |
| RF Filter | Tailithic | 3VF |

B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(1992). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

C. Radiated Emission Configuration Photograph

Worst Case Radiated Emission

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated1.pdf and radiated2.pdf

C. Test Result

In-Tech Electronics Ltd
Cobra FRS100

Table 4(a)

1. Unwanted emission from CARRIER $\pm 6.25\text{kHz}$ to Carrier $\pm 31.25\text{kHz}$

(Refer to the plots which is saved with filename: spurious.pdf)

| Region | Unwanted emission | |
|---|--------------------------|-------------------|
| | Channel 8 | Channel 12 |
| CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$ | <25dB | <25dB |
| CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$ | <35dB | <35dB |

Table 4(b): Channel 8

| Orientation | Frequency (M Hz) | Reading (dB μ V) | Pre-Amp (dB) | Antenna Factor (dB) | Calculated Net at 3m (dB μ V/m) | Calculated Limit at 3m * (dB μ V/m) | Margin (dB) |
|-------------|------------------|----------------------|--------------|---------------------|-------------------------------------|---|-------------|
| V | 935.134 | 53.1 | 16 | 33.0 | 70.1 | 82.2 | -12.1 |
| V | 1402.701 | 87.6 | 34 | 25.5 | 79.1 | 82.2 | -3.1 |
| V | 1870.268 | 77.9 | 34 | 26.5 | 70.4 | 82.2 | -11.8 |
| V | 2337.835 | 73.6 | 34 | 29.1 | 68.7 | 82.2 | -13.5 |
| V | 2805.402 | 62.5 | 34 | 29.1 | 57.6 | 82.2 | -24.6 |
| V | 3272.969 | 56.9 | 34 | 31.4 | 54.3 | 82.2 | -27.9 |
| V | 3740.536 | 57.5 | 34 | 32.9 | 56.4 | 82.2 | -25.8 |
| V | 4208.108 | 58.0 | 34 | 34.2 | 58.2 | 82.2 | -24.0 |
| V | 4675.670 | 43.2 | 34 | 34.0 | 43.2 | 82.2 | -39.0 |
| V | 5143.237 | 42.9 | 34 | 35.2 | 44.1 | 82.2 | -38.1 |

Remark:

1. Quasi-peak data for emission below 1000MHz.
2. ‘-‘ sign in margin column shows the value below the limits.
3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{ Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43 \text{dBW} \\
 &= 82.2 \text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999

Table 4(b): Channel 12 (Cont'd)

| Orientation | Frequency (MHz) | Reading (dB μ V) | Pre-Amp (dB) | Antenna Factor (dB) | Calculated Net at 3m (dB μ V/m) | Calculated Limit at 3m * (dB μ V/m) | Margin (dB) |
|-------------|-----------------|----------------------|--------------|---------------------|-------------------------------------|---|-------------|
| V | 935.342 | 54.2 | 16 | 33.0 | 71.2 | 82.2 | -11.0 |
| V | 1403.013 | 87.5 | 34 | 25.5 | 79.0 | 82.2 | -3.2 |
| V | 1870.684 | 78.8 | 34 | 26.5 | 71.3 | 82.2 | -10.9 |
| V | 2338.355 | 74.1 | 34 | 29.1 | 69.2 | 82.2 | -13.0 |
| V | 3273.697 | 61.3 | 34 | 29.1 | 56.4 | 82.2 | -25.8 |
| V | 3741.368 | 56.6 | 34 | 32.8 | 55.4 | 82.2 | -26.8 |
| V | 4209.039 | 55.1 | 34 | 34.2 | 55.3 | 82.2 | -26.9 |
| V | 4676.710 | 57.6 | 34 | 34.0 | 57.6 | 82.2 | -24.6 |
| V | 5144.381 | 43.1 | 34 | 35.2 | 44.3 | 82.2 | -37.9 |
| V | 5612.052 | 42.2 | 34 | 36.0 | 44.2 | 82.2 | -38.0 |

Remark:

1. Quasi-peak data for emission below 1000MHz.
2. ‘-‘ sign in margin column shows the value below the limits.
3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{ Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43 \text{dBW} \\
 &= 82.2 \text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999

EXHIBIT 7

FREQUENCY STABILITY

7.0 Frequency Stability

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.


7.1 Frequency Tolerance (Section 95.625)

A. Test Equipment

| Equipment | Brand Name | Model No. |
|------------------------|------------|------------|
| Regulated Power Supply | PAD | 30-35L |
| 20 dB RF Load | Bird | 8304-200-N |
| Frequency Counter | Phillips | PM6668 |

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

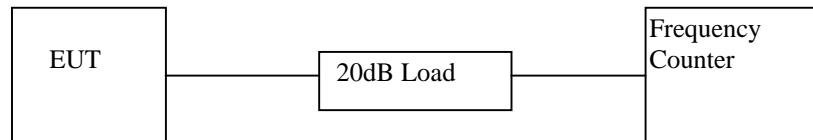

- 2) Measure all transmit channel frequencies in MHz.

C. Test Result

Table 5

**In-Tech Electronics Ltd.
Cobra FRS100**

Frequency Tolerance

| Channel | Frequency (M Hz) | Measured Frequency (M Hz) | Tolerance (%) |
|---------|---------------------|------------------------------|-------------------|
| 8 | 467.5625 | 467.56245 | 0.000011 |
| 12 | 467.6625 | 467.66245 | 0.000011 |


7.2 Frequency Stability - Temperature (Section 2.995)

A. Test Equipment

| Equipment | Brand Name | Model No. |
|-------------------|------------|------------|
| 20 dB RF Load | Bird | 8304-200-N |
| Frequency Counter | Phillips | PM6668 |

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

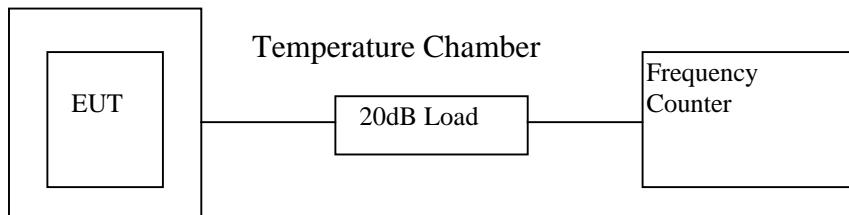

- 2) Set the Temperature Chamber to -20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF
- 5) Repeat the above procedure from -20°C to 50°C with 10°C increment.

C. Test Result**Table 6(a)****In-Tech Electronics Ltd.
Cobra FRS100****Frequency Deviation with Temperature Variation**

Channel : 8

| Temperature (°C) | Assigned Frequency (M Hz) | Measured Frequency (M Hz) | % Deviation |
|------------------|---------------------------|---------------------------|-------------|
| -20 | 467.5625 | 467.56241 | -0.000019 |
| -10 | 467.5625 | 467.56225 | -0.000053 |
| 0 | 467.5625 | 467.56235 | -0.000032 |
| 10 | 467.5625 | 467.56240 | -0.000021 |
| 20 | 467.5625 | 467.56245 | -0.000011 |
| 30 | 467.5625 | 467.56245 | -0.000011 |
| 40 | 467.5625 | 467.56240 | -0.000021 |
| 50 | 467.5625 | 467.56245 | -0.000011 |

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999

C. Test Result**Table 6(b)****In-Tech Electronics Ltd.
Cobra FRS100****Frequency Deviation with Temperature Variation**

Channel : 12

| Temperature (°C) | Assigned Frequency (M Hz) | Measured Frequency (M Hz) | % Deviation |
|------------------|---------------------------|---------------------------|-------------|
| -20 | 467.6625 | 467.66245 | -0.000011 |
| -10 | 467.6625 | 467.66225 | -0.000053 |
| 0 | 467.6625 | 467.66240 | -0.000021 |
| 10 | 467.6625 | 467.66245 | -0.000011 |
| 20 | 467.6625 | 467.66245 | -0.000011 |
| 30 | 467.6625 | 467.66240 | -0.000021 |
| 40 | 467.6625 | 467.66245 | -0.000011 |
| 50 | 467.6625 | 467.66245 | -0.000011 |

Test Engineer: Liza C. Y. Chan

Date of Test: May 12, 1999


7.3 Frequency Stability - Voltage (Section 2.995)

A. Test Equipment

| Equipment | Brand Name | Model No. |
|------------------------|------------|------------|
| Regulated Power Supply | PAD | 30-35L |
| 20 dB RF Load | Bird | 8304-200-N |
| Voltage meter | Fluke | 87 |
| Frequency Counter | Phillips | PM6668 |

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

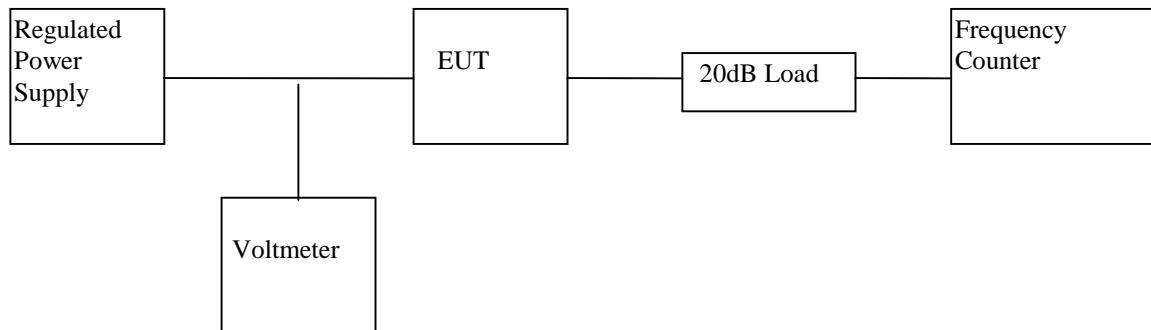

- 2) Vary the level of regulated power supply to [the manufacturer specified battery end point](#) of the EUT.
- 3) Measure the channel frequency from channel 8 to 12 in MHz.

C. Test Result**Table 7****In-Tech Electronics Ltd.
Cobra FRS100****Frequency Deviation with Voltage Variation**

The manufacturer specified battery end point 4.4V

| Channel | Frequency (M H z) | M easured Frequency (M H z) | Tolerance (%) |
|---------|----------------------|--------------------------------|-------------------|
| 8 | 467.5625 | 467.56238 | -0.000026 |
| 12 | 467.6625 | 467.66238 | -0.000026 |

EXHIBIT 8

TECHNICAL SPECIFICATIONS

8.0 Technical Specifications

8.1 Block Diagram

For electronic filing, the block diagram of the FRS is saved with filename:
block.pdf

8.2 Schematic Diagram

For electronic filing, the schematic diagram of the FRS is saved with filename:
circuit.pdf

EXHIBIT 9

PRODUCT LABELLING

9.0 **Product Labelling**

INTERTEK TESTING SERVICES

9.1 Label Artwork & Location

An engineering drawing of the label which will be permanently affixed to the unit. For electronic filing, the label artwork & location are saved with filename: label.pdf

EXHIBIT 10

PHOTOGRAPHS

10.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: ophoto1.jpg to [ophoto2.jpg](#) for external photo and iphoto1.jpg to [iphoto4.jpg](#) for internal photo.

EXHIBIT 11

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

11.0 Instruction Manual

This manual will be provided to the end-user with each unit sold/leased in the United States.

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf