

FCC Part 15.247

TEST REPORT

For

DozyCozy Technology Co., Ltd.

15F-2, No.11, Section 2, Huannan Road, Pingzhen District, Taoyuan City, Taiwan 324

FCC ID: 2A6PCC10AS

Report Type:
Original Report

Product Type:
AirCozy Semi-wearable device

Report Producer : Coco Lin

Report Number : RXZ211124002RF01

Report Date : 2022-06-02

Reviewed By: David Hsu *David Hsu*

Prepared By: Bay Area Compliance Laboratories Corp.

(New Taipei Laboratory)

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,

New Taipei City 22183, Taiwan, R.O.C.

Tel: +886 (2) 2647 6898

Fax: +886 (2) 2647 6895

www.bacl.com.tw

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ211124002	RXZ211124002RF01	2022-06-02	Original Report	Coco Lin

TABLE OF CONTENTS

1	General Information.....	5
1.1	Product Description for Equipment under Test (EUT)	5
1.2	Objective	6
1.3	Related Submittal(s)/Grant(s).....	6
1.4	Test Methodology.....	6
1.5	Statement of Compliance	6
1.6	Measurement Uncertainty	7
1.7	Environmental Conditions.....	7
1.8	Test Facility.....	7
2	System Test Configuration.....	8
2.1	Description of Test Configuration.....	8
2.2	Equipment Modifications	8
2.3	EUT Exercise Software	8
2.4	Support Equipment List and Details.....	8
2.5	External Cable List and Details.....	8
2.6	Test Mode.....	8
2.7	Block Diagram of Test Setup	9
2.8	Duty Cycle.....	10
3	Summary of Test Results.....	12
4	Test Equipment List and Details	13
5	FCC §15.247(i), §1.1307(b)(3)(i) – RF Exposure.....	14
5.1	Applicable Standard	14
5.2	RF Exposure Evaluation Result.....	15
6	FCC §15.203 – Antenna Requirements.....	16
6.1	Applicable Standard	16
6.2	Antenna Information	16
7	FCC §15.207(a) – AC Line Conducted Emissions	17
7.1	Applicable Standard	17
7.2	EUT Setup	17
7.3	EMI Test Receiver Setup	18
7.4	Test Procedure.....	18
7.5	Corrected Factor & Margin Calculation.....	18
7.6	Test Results	19
8	FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions	21
8.1	Applicable Standard.....	21
8.2	EUT Setup.....	22
8.3	EMI Test Receiver & Spectrum Analyzer Setup.....	23
8.4	Test Procedure.....	23
8.5	Corrected Factor & Margin Calculation	23
8.6	Test Results	24
9	FCC §15.247(a)(2) – 6 dB Emission Bandwidth.....	38
9.1	Applicable Standard.....	38
9.2	Test Procedure.....	38
9.3	Test Results	38

10 FCC §15.247(b)(3) – Maximum Output Power..... 42

10.1 Applicable Standard..... 42

10.2 Test Procedure..... 42

10.3 Test Results 42

11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge 43

11.1 Applicable Standard..... 43

11.2 Test Procedure..... 43

11.3 Test Results 43

12 FCC §15.247(e) – Power Spectral Density 46

12.1 Applicable Standard..... 46

12.2 Test Procedure..... 46

12.3 Test Results 46

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	DozyCozy Technology Co., Ltd.
	15F-2, No.11, Section 2, Huannan Road, Pingzhen District, Taoyuan City, Taiwan 324
Manufacturer	DozyCozy Technology Co., Ltd.
	15F-2, No.11, Section 2, Huannan Road, Pingzhen District, Taoyuan City, Taiwan 324
Brand(Trade) Name	DozyCozy, AirCozy
Product (Equipment)	AirCozy Semi-wearable device
Main Model Name	AirCozy Semi-wearable device_N_VA
Frequency Range	BLE(1M) / BLE(2M) : 2402 ~ 2480 MHz
Transmit Power	BLE(1M) Mode : 1.86 dBm BLE(2M) Mode : 0.64 dBm
Modulation Technique	BLE(1M) / BLE(2M) : GFSK
Channel Separation	BLE(1M) / BLE(2M) : 2 MHz
Power Operation (Voltage Range)	<input type="checkbox"/> AC <input type="checkbox"/> Adapter I/P: <input type="checkbox"/> By AC Power Cord <input type="checkbox"/> PoE
	<input checked="" type="checkbox"/> DC Type <input checked="" type="checkbox"/> Battery 3.7V <input type="checkbox"/> Adapter : 12Vdc, 2A <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter
	<input type="checkbox"/> Host System
Received Date	Dec. 10, 2021
Date of Test	Dec. 22, 2021 ~ Mar. 23, 2022

*All measurement and test data in this report was gathered from production sample serial number: RXZ211124002-01 (Assigned by BACL, New Taipei Laboratory).

1.2 Objective

This report is prepared on behalf of DozyCozy Technology Co., Ltd. in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

1.3 Related Submittal(s)/Grant(s)

N/A.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.5 Statement of Compliance

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory).

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.6 Measurement Uncertainty

Parameter		Uncertainty
AC Mains		+/- 2.36 dB
RF output power, conducted		+/- 0.93 dB
Power Spectral Density, conducted		+/- 0.93 dB
Occupied Bandwidth		+/- 0.35 MHz
Unwanted Emissions, conducted		+/- 1.69 dB
Emissions, radiated	30 MHz~1GHz	+/- 5.22 dB
	1 GHz~18 GHz	+/- 6.12 dB
	18 GHz~40 GHz	+/- 4.99 dB
Temperature		+/- 1.27 °C
Humidity		+/- 3 %

1.7 Environmental Conditions

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
AC Line Conducted Emissions	2022/03/05	22.1	69	1010	Boris Kao
Radiation Spurious Emissions	2022/01/13-03/23	18.8-24.1	61-62	1010	Howard Ho
Conducted Spurious Emissions	2021/12/22	24.8	42	1010	Howard Ho
6 dB Emission Bandwidth	2021/12/22	24.8	42	1010	Howard Ho
Maximum Output Power	2021/12/22	24.8	42	1010	Howard Ho
100 kHz Bandwidth of Frequency Band Edge	2021/12/22	24.8	42	1010	Howard Ho
Power Spectral Density	2021/12/22	24.8	42	1010	Howard Ho

1.8 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(New Taipei Laboratory) to collect test data is located on

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp.(New Taipei Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
3	2408	37	2476
--	--	38	2478
19	2440	39	2480

For BLE Modes were tested with channel 0, 19 and 39.

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

The test software was used "Putty.exe V1.0"

Test Frequency		Low	Mid	High
Power Level Setting	BLE 1M	4	4	4
	BLE 2M	4	4	4

2.4 Support Equipment List and Details

Description	Manufacturer	Model Number	S/N
NB	DELL	E6410	8N7PXN1
Pillow	Dozy Cozy	AirCozy Premium	N/A
Fixture	Waveshare	FT232	N/A

2.5 External Cable List and Details

Description	Manufacturer	Model Number	S/N
Fixture CABLE	Waveshare	N/A	N/A

2.6 Test Mode

AC Line Conducted Emissions and Radiated Spurious Emissions

Mode 1: AirCozy Semi-wearable device_N_VA..


Worst case is the Model 1.

2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:


Below 1GHz:

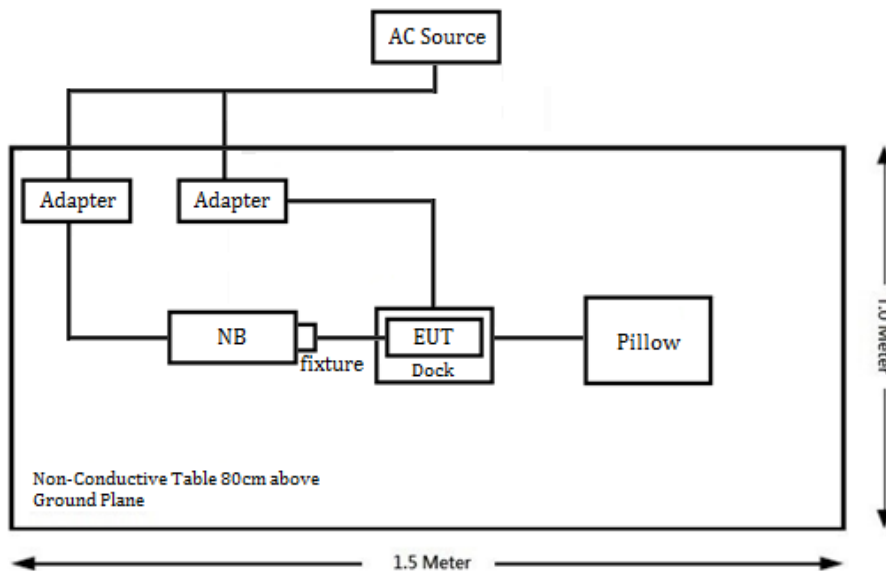

Above 1GHz:

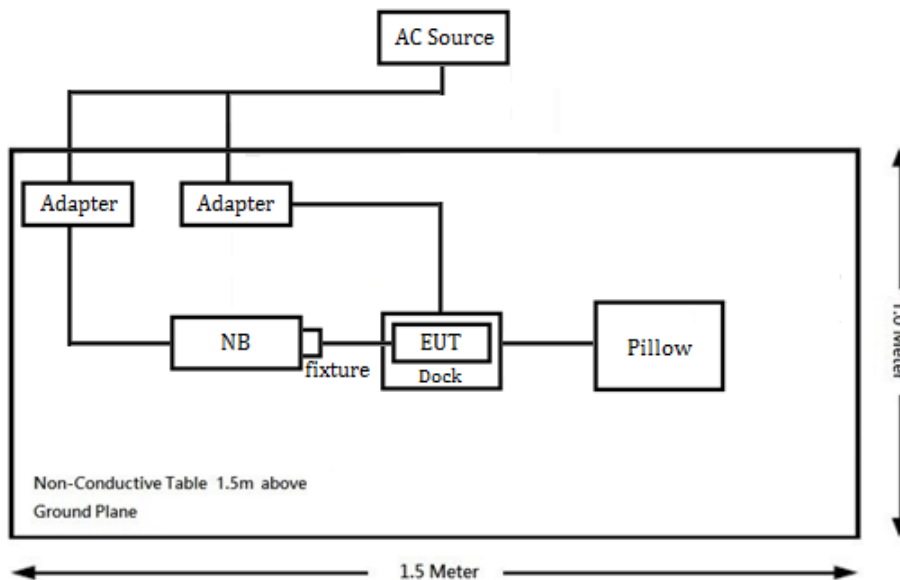

Conduction:

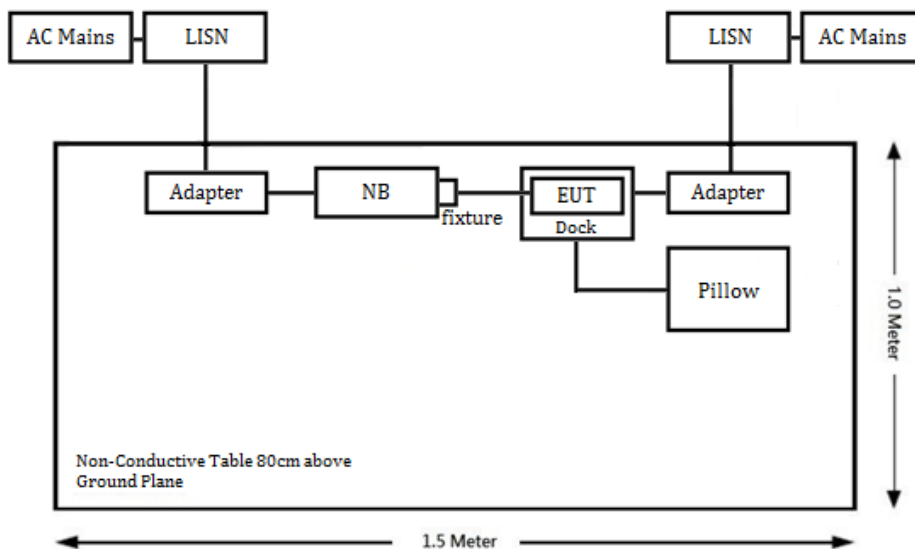


2.8 Duty Cycle

The duty cycle as below:

Radio Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty Cycle (%)
BLE 1M	/	/	100
BLE 2M	/	/	100


Please refer to the following plots.

BLE(1M) Mode

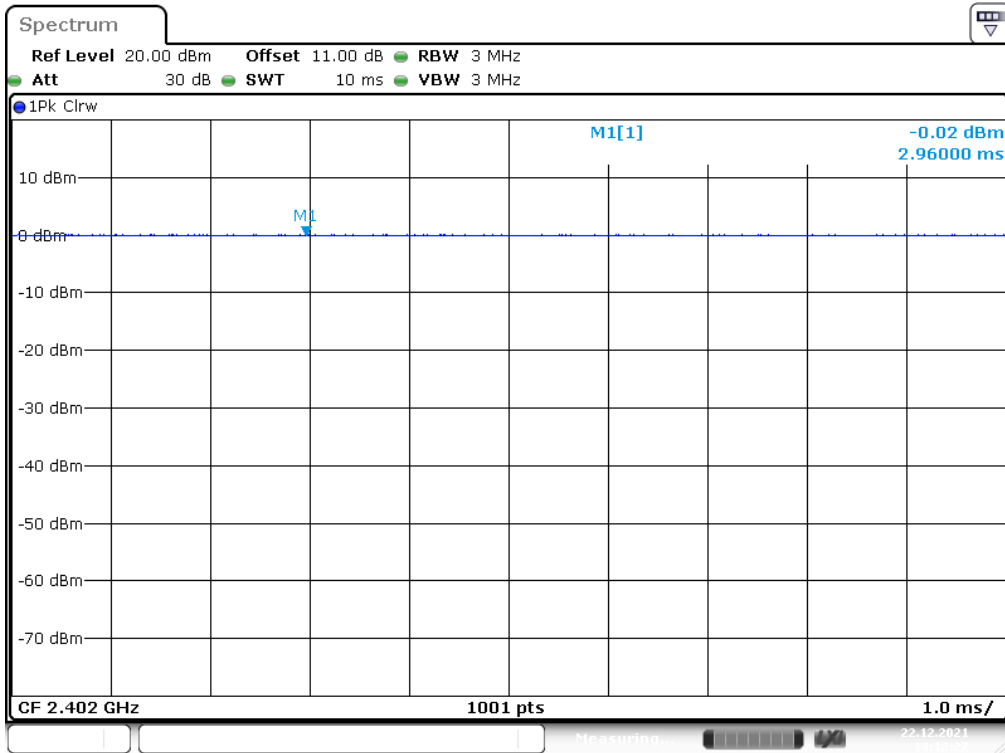

Date: 22.DEC.2021 14:12:28

BLE(2M) Mode

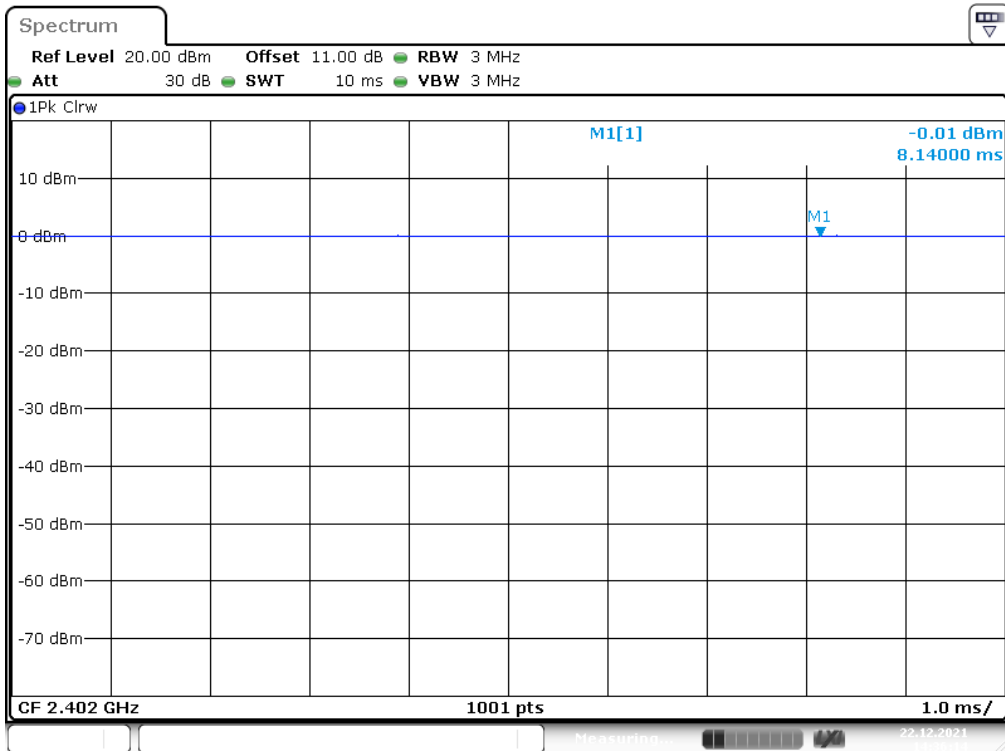

Date: 22.DEC.2021 14:36:14

3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.247(i), §1.1307(b)(3)(i)	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
LISN	Rohde & Schwarz	ENV216	101612	2022/1/14	2023/1/13
EMI Test Receiver	Rohde & Schwarz	ESR3	102099	2021/6/9	2022/6/8
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM104	2021/7/29	2022/7/28
RF Cable	EMEC	EM-CB5D	1	2021/6/11	2022/6/10
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R
Radiated Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/15542_01	2022/2/14	2023/2/13
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2021/11/9	2022/11/8
Horn Antenna	EMCO	SAS-571	1020	2021/4/23	2022/4/22
Horn Antenna	ETS-Lindgren	3116	62638	2021/8/11	2022/8/10
Preamplifier	Sonoma	310N	130602	2021/6/8	2022/6/7
Preamplifier	A.H. system Inc.	PAM-0118P	466	2021/11/4	2022/11/3
Microwave Preamplifier	EM Electronics Corporation	EM18G40G	60656	2021/12/27	2022/12/26
Spectrum Analyzer	Rohde & Schwarz	FSV40	101435	2022/1/13	2023/1/12
Micro flex Cable	UTIFLEX	UFB197C-1-2362-70U-70U	225757-001	2022/1/24	2023/1/23
Coaxial Cable	COMMATE	PEWC	8Dr	2021/12/24	2022/12/23
Coaxial Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2022/1/24	2023/1/23
Coaxial Cable	JUNFLON	J12J102248-00-B-5	AUG-07-15-044	2021/12/24	2022/12/23
Cable	EMC	EMC105-SM-SM-10000	201003	2022/1/24	2023/1/23
Software	Farad	EZ_EM C	BACL-03A1	N.C.R	N.C.R
Conducted Room					
Cable	UTIFLEX	UFA210A	9435	2021/10/5	2022/10/4
Attenuator	MINI-CIRCUITS	BW-S10W5+	1419	2022/2/11	2023/2/10
Power Splitter	Mini-Circuits	ZFRSC-183-S+	S F448201614	2021/6/23	2022/6/22

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §15.247(i), §1.1307(b)(3)(i) – RF Exposure

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(3)(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

For single RF sources (*i.e.*, any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold *P_{th}* (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). *P_{th}* is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

5.2 RF Exposure Evaluation Result

Project info

Band	Freq (MHz)	Tune-up Power (dBm)	Ant Gain (dBi)	Distances (mm)	Duty (%)	Tune-up Power (mW)	ERP (dBm)	ERP (mW)
BLE	2480	2	-1.28	5	100%	1.58	-1.43	0.72

Option A

The available maximum time-averaged power is no more than 1 mW

Band	Freq (MHz)	Result Option A
BLE	2480	not exempt

Option B

The available maximum time-averaged power or effective radiated power (ERP), whichever is greater.

This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).

Band	Freq (MHz)	Pth (mW)	X	ERP 20cm (mW)	Ratio	Result Option B
BLE	2480	2.72	1.905	3060	0.58	exempt

Result: The device meets the exemption requirement.

6 FCC §15.203 – Antenna Requirements

6.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi.

6.2 Antenna Information

Manufacturer	Model	Type	Antenna Gain
DozyCozy Technology	AirCozy semi-wearable device N VA	PCB Antenna	-1.28 dBi

Result: Compliance

7 FCC §15.207(a) – AC Line Conducted Emissions

7.1 Applicable Standard

According to §15.207


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required

7.2 EUT Setup

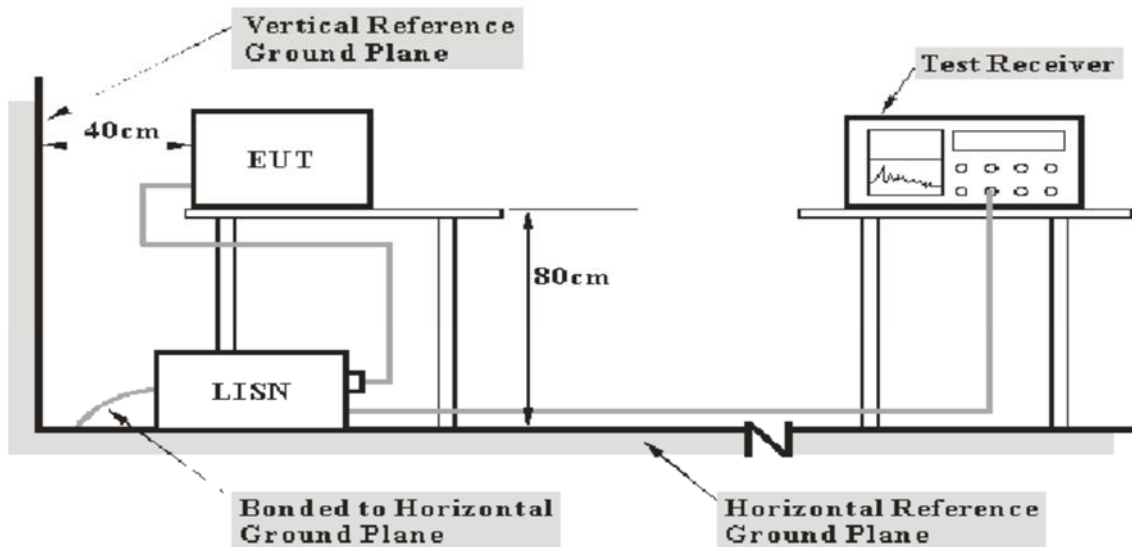

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

7.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

7.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

7.5 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$


The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

7.6 Test Results

Test Mode: Transmitting

Main: AC120 V, 60 Hz, Line

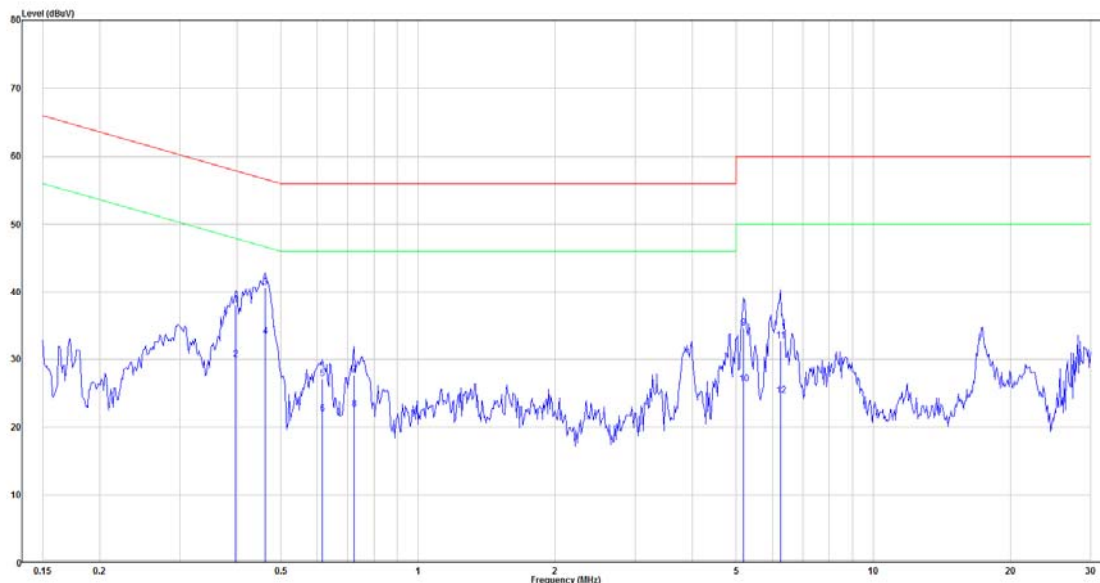

No.	Frequency (MHz)	Reading (dBμV)	Correct Factor(dB)	Result (dBμV)	Limit (dBμV)	Over limit (dB)	Remark
1	0.398	18.47	19.51	37.99	57.90	-19.92	QP
2	0.398	10.52	19.51	30.03	47.90	-17.87	Average
3	0.461	21.17	19.52	40.69	56.67	-15.98	QP
4	0.461	13.84	19.52	33.35	46.67	-13.32	Average
5	0.617	7.68	19.53	27.20	56.00	-28.80	QP
6	0.617	2.41	19.53	21.93	46.00	-24.07	Average
7	0.724	8.21	19.53	27.74	56.00	-28.26	QP
8	0.724	3.12	19.53	22.65	46.00	-23.35	Average
9	5.194	14.99	19.66	34.65	60.00	-25.35	QP
10	5.194	6.65	19.66	26.32	50.00	-23.68	Average
11	6.252	12.99	19.68	32.67	60.00	-27.33	QP
12	6.252	4.94	19.68	24.62	50.00	-25.38	Average


Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

Main: AC120 V, 60 Hz, Neutral

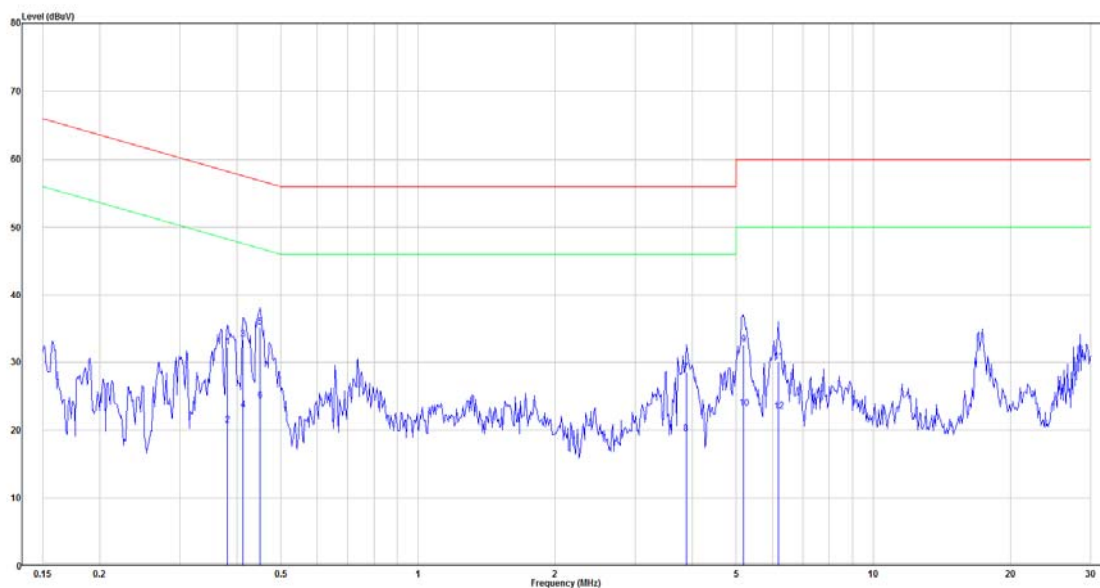

No.	Frequency (MHz)	Reading (dBµV)	Correct Factor(dB)	Result (dBµV)	Limit (dBµV)	Over limit (dB)	Remark
1	0.381	12.70	19.51	32.21	58.25	-26.04	QP
2	0.381	1.21	19.51	20.72	48.25	-27.53	Average
3	0.413	13.81	19.51	33.33	57.59	-24.27	QP
4	0.413	3.43	19.51	22.94	47.59	-24.65	Average
5	0.449	15.64	19.52	35.15	56.89	-21.74	QP
6	0.449	4.86	19.52	24.37	46.89	-22.52	Average
7	3.881	8.92	19.63	28.54	56.00	-27.46	QP
8	3.881	-0.20	19.63	19.43	46.00	-26.57	Average
9	5.194	12.93	19.67	32.60	60.00	-27.40	QP
10	5.194	3.48	19.67	23.14	50.00	-26.86	Average
11	6.186	10.46	19.69	30.14	60.00	-29.86	QP
12	6.186	3.08	19.69	22.76	50.00	-27.24	Average

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

8 FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4. 5 – 5. 15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5. 35 – 5. 46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3 3458 – 3 358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the


intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 EUT Setup

Below 1 GHz:

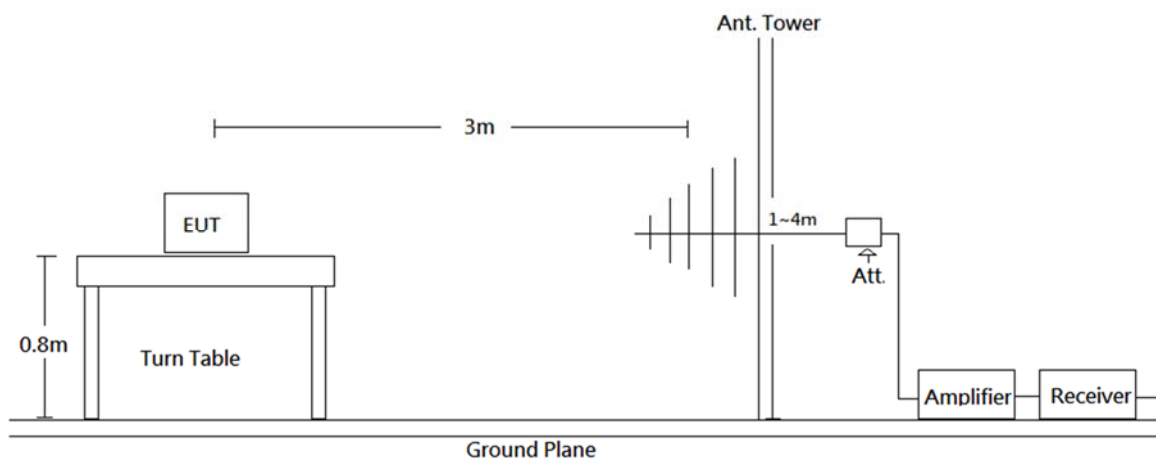

Above 1 GHz:

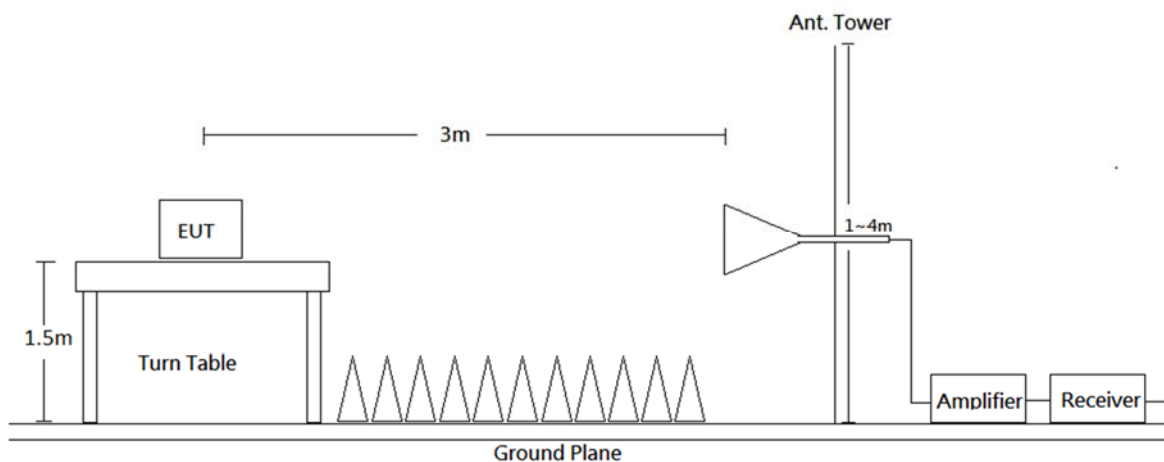

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

8.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/		QP
Above 1 GHz	1 MHz	3 MHz		PK
	1 MHz	10 Hz	>98%	Ave
	1 MHz	1/T	<98%	Ave

8.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Result} - \text{Limit}$$

8.6 Test Results


Test Mode: Transmitting (Pre-scan with three orthogonal axis, and worse case as Y axis.)

30MHz-1GHz: (worst case is BLE 1M mode high channel)

Horizontal

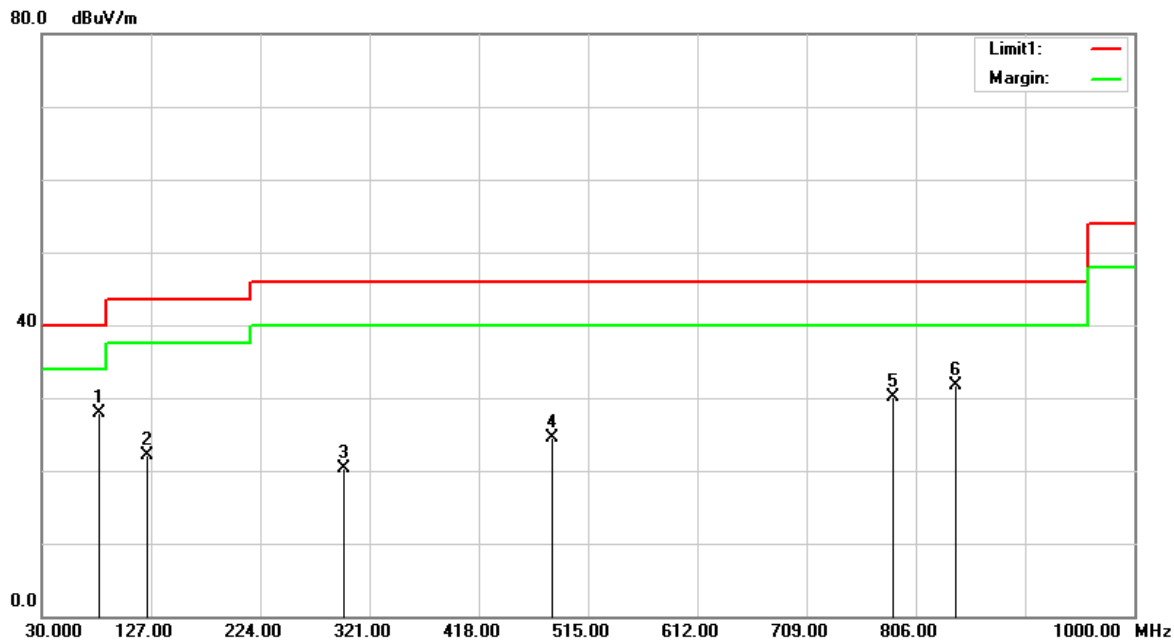


Vertical

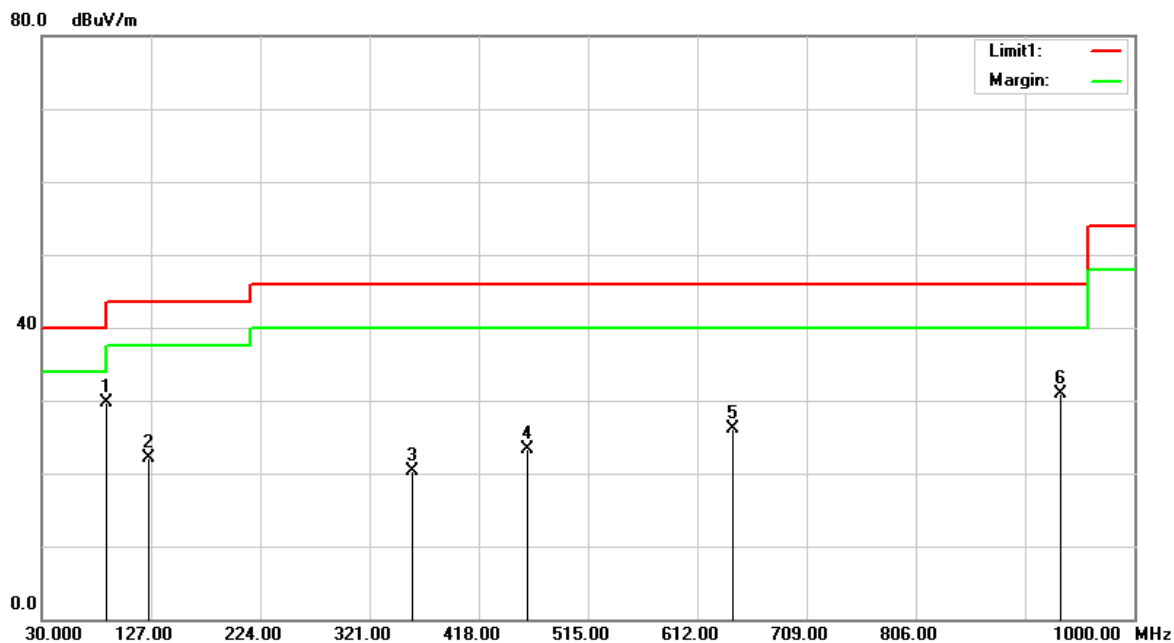


BLE(1M) Mode (Pre-scan with three orthogonal axis, and worse case as Y axis.)

Horizontal (worst case is high channel)

1GHz-18GHz:

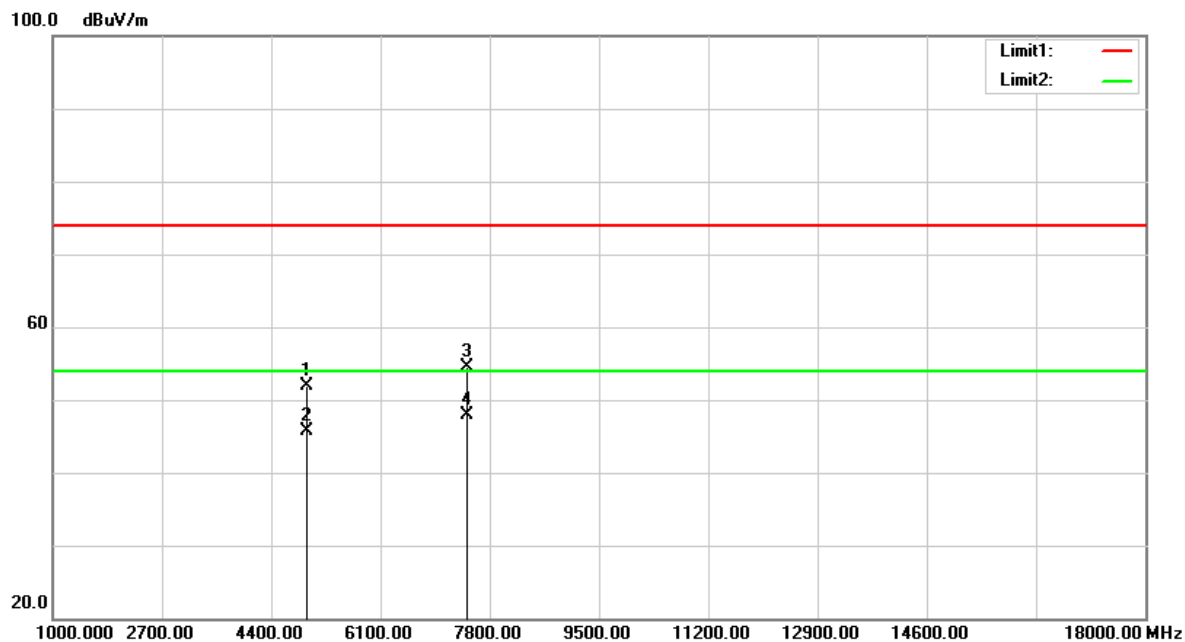


18GHz-26.5GHz:

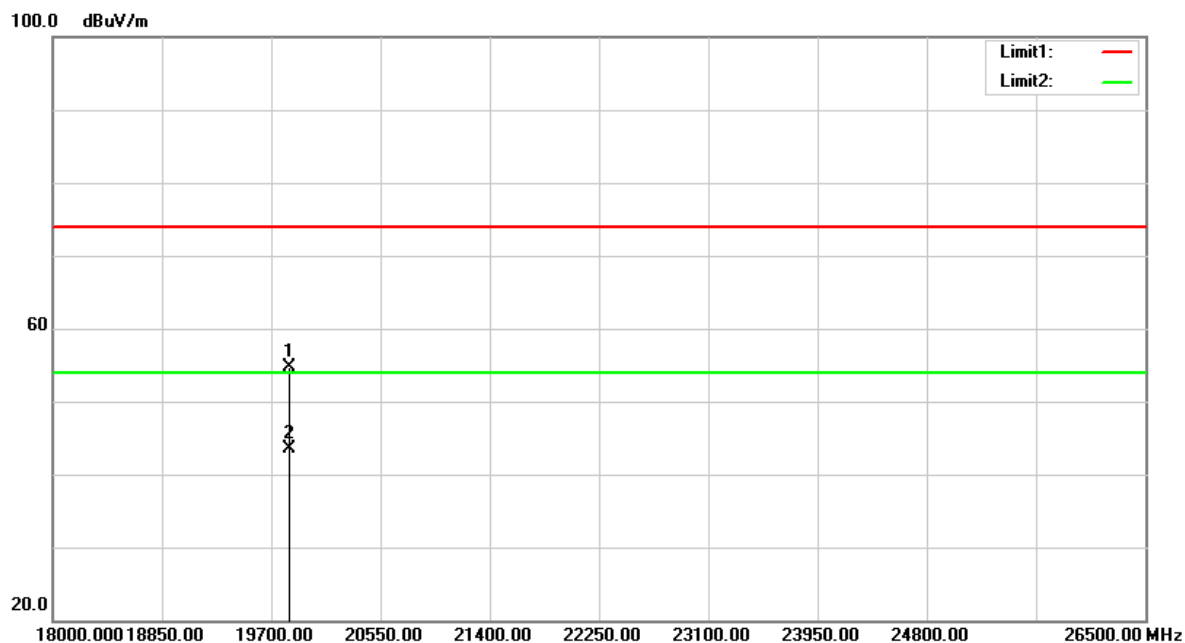


Vertical (worst case is high channel)

1GHz-18GHz:

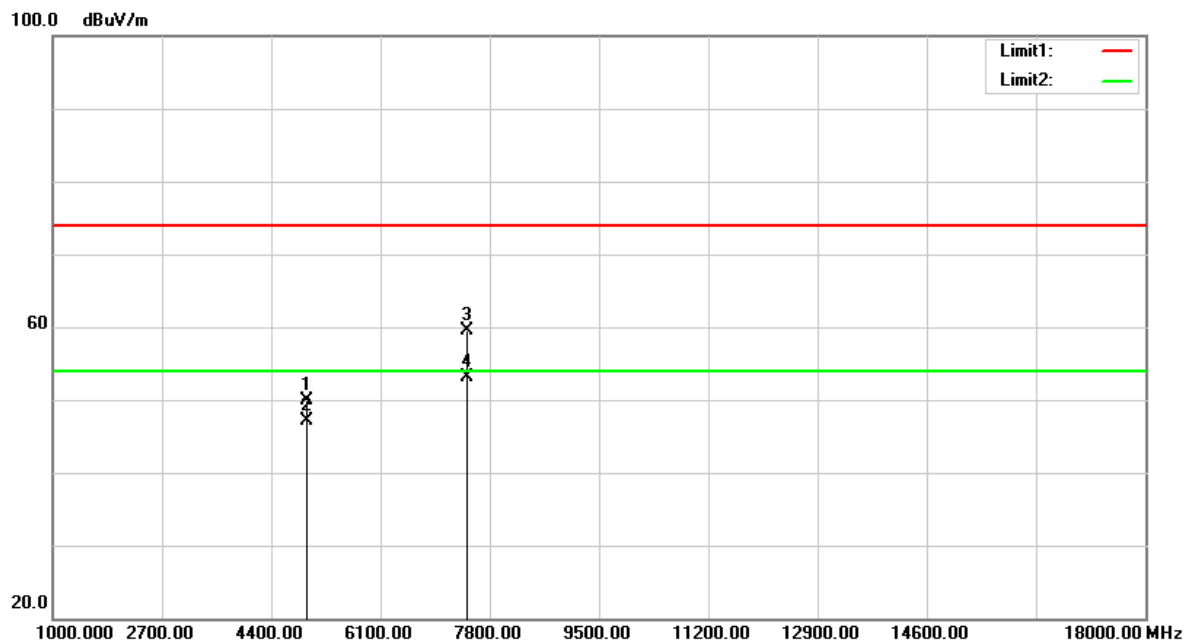


18GHz-26.5GHz:

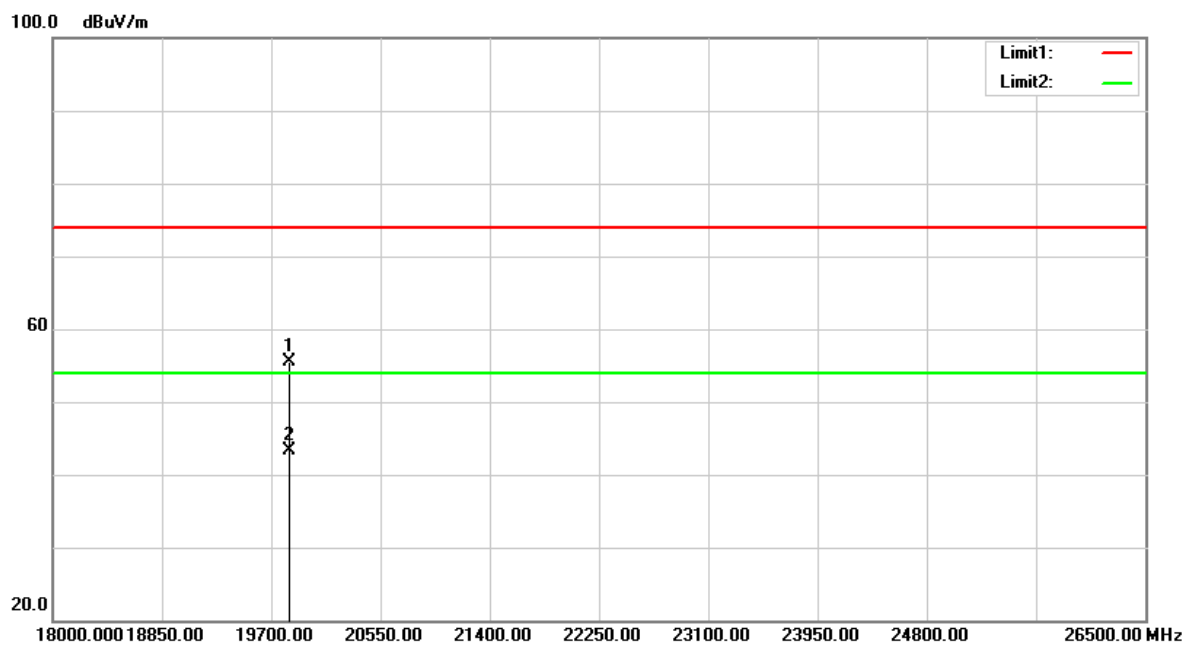


BLE(2M) Mode (Pre-scan with three orthogonal axis, and worse case as Y axis.)

Horizontal (worst case is high channel)

1GHz-18GHz:

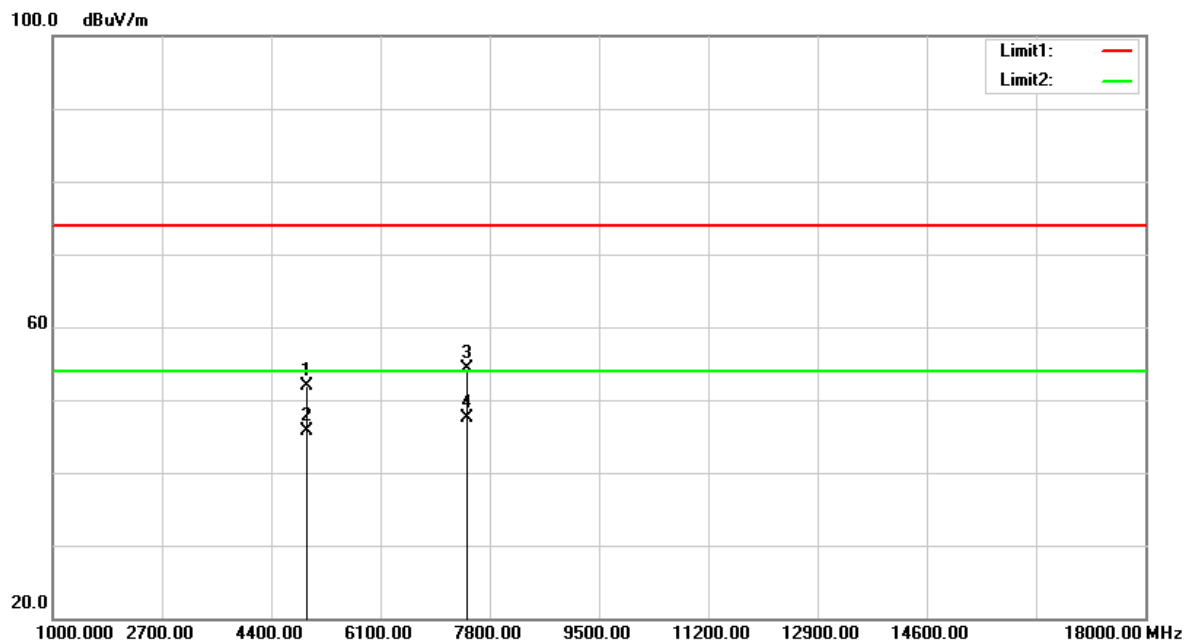


18GHz-26.5GHz:

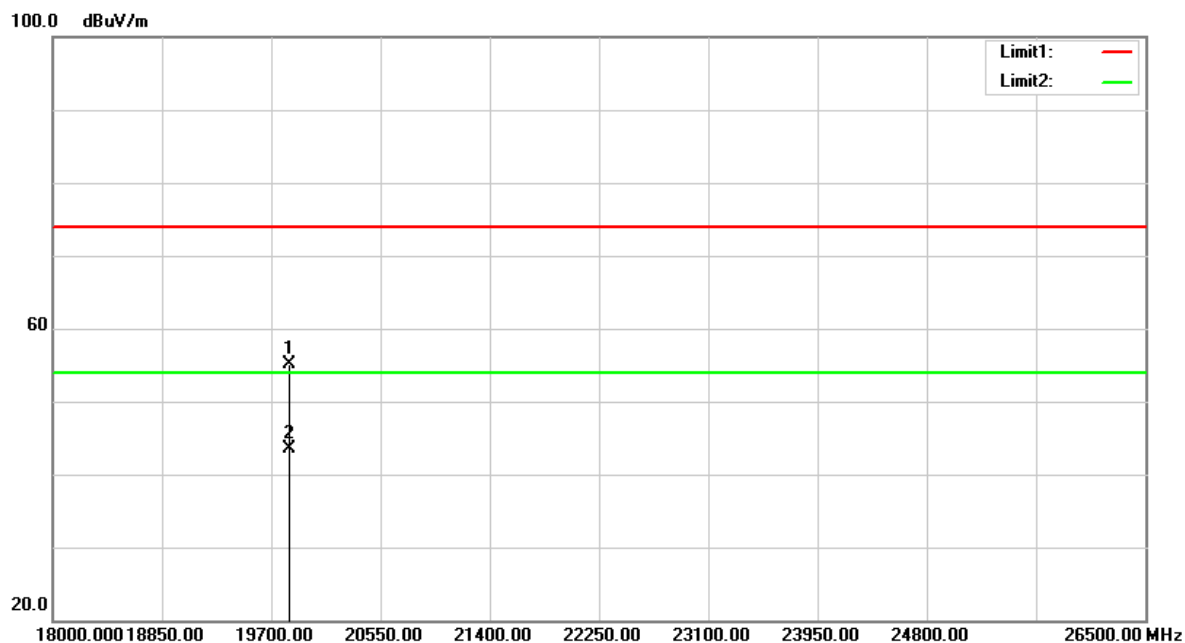


Vertical (worst case is high channel)

1GHz-18GHz:

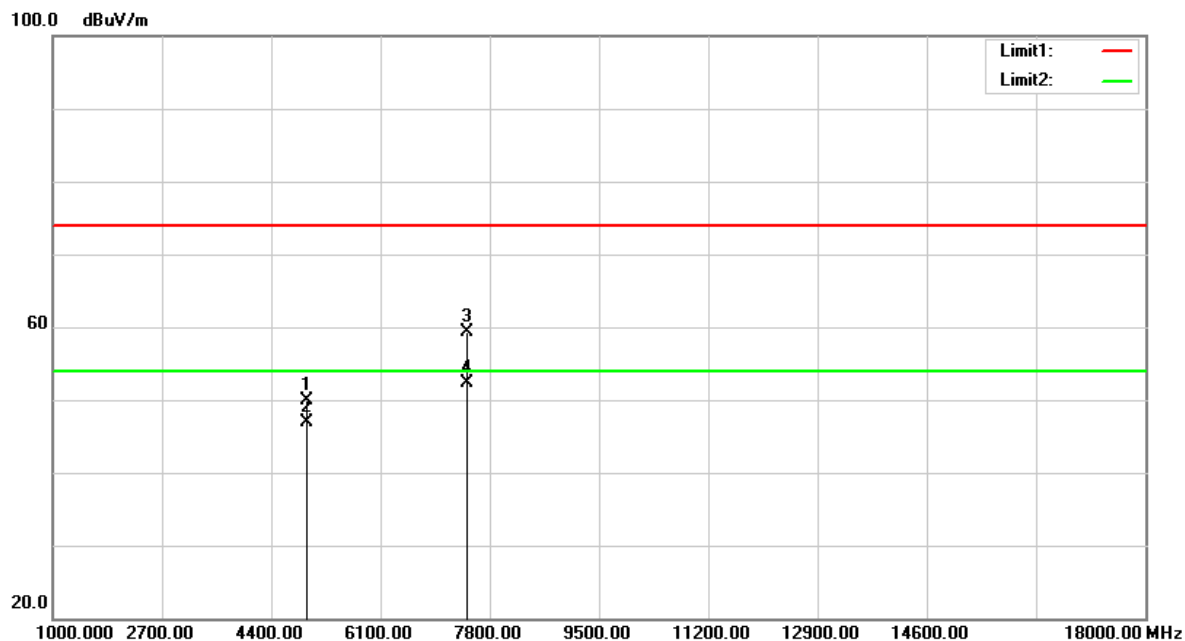

18GHz-26.5GHz:

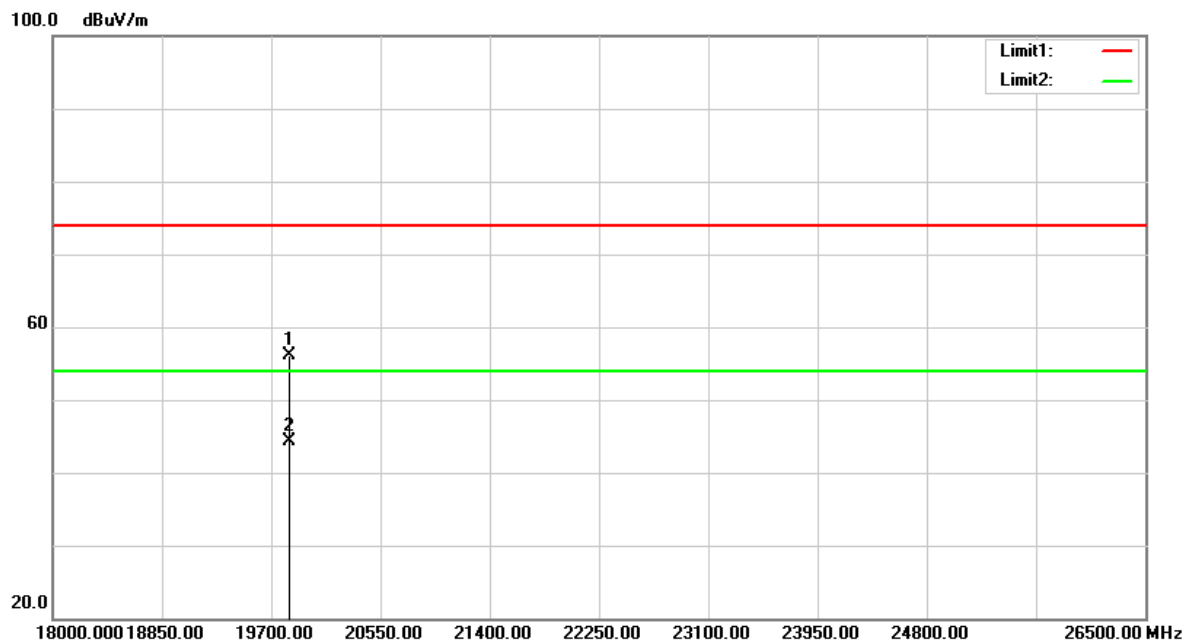

Below 1GHz**Horizontal**

Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
(MHz)	(dB μ V)	Factor(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(cm)	($^{\circ}$)	
81.4100	44.45	-16.62	27.83	40.00	-12.17	100	133	peak
124.0900	32.38	-10.35	22.03	43.50	-21.47	100	146	peak
297.7200	30.37	-10.09	20.28	46.00	-25.72	100	258	peak
482.9900	30.35	-5.93	24.42	46.00	-21.58	100	85	peak
785.6300	31.26	-1.25	30.01	46.00	-15.99	100	169	peak
840.9200	31.79	-0.12	31.67	46.00	-14.33	100	131	peak

Vertical

Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
(MHz)	(dB μ V)	Factor(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(cm)	($^{\circ}$)	
87.2300	46.59	-16.80	29.79	40.00	-10.21	100	123	peak
125.0600	32.22	-10.17	22.05	43.50	-21.45	100	85	peak
358.8300	29.28	-8.94	20.34	46.00	-25.66	100	96	peak
460.6800	29.87	-6.49	23.38	46.00	-22.62	100	233	peak
644.0100	30.00	-3.92	26.08	46.00	-19.92	100	256	peak
934.0400	29.01	1.88	30.89	46.00	-15.11	100	144	peak

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

BLE(1M) Mode

Above 1GHz

Horizontal

Frequency (MHz)	Reading (dBµV)	Correct Factor(dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2337.800	56.96	-9.80	47.16	74.00	-26.84	106	355	peak
2337.800	47.44	-9.80	37.64	54.00	-16.36	106	355	AVG
4804.000	53.08	-2.17	50.91	74.00	-23.09	167	144	peak
4804.000	47.60	-2.17	45.43	54.00	-8.57	167	144	AVG
7206.000	49.86	4.18	54.04	74.00	-19.96	155	3	peak
7206.000	42.45	4.18	46.63	54.00	-7.37	155	3	AVG
19216.000	53.28	-0.77	52.51	74.00	-21.49	151	346	peak
19216.000	41.77	-0.77	41.00	54.00	-13.00	151	346	AVG
Middle channel								
4880.000	51.32	-1.88	49.44	74.00	-24.56	167	138	peak
4880.000	48.65	-1.88	46.77	54.00	-7.23	167	138	AVG
7320.000	54.23	5.10	59.33	74.00	-14.67	144	256	peak
7320.000	47.58	5.10	52.68	54.00	-1.32	144	256	AVG
19520.000	54.24	0.03	54.27	74.00	-19.73	147	198	peak
19520.000	43.31	0.03	43.34	54.00	-10.66	147	198	AVG
High channel								
2486.890	56.34	-8.40	47.94	74.00	-26.06	145	130	peak
2486.890	42.88	-8.40	34.48	54.00	-19.52	145	130	AVG
4960.000	53.45	-1.49	51.96	74.00	-22.04	164	138	peak
4960.000	47.13	-1.49	45.64	54.00	-8.36	164	138	AVG
7440.000	49.28	5.23	54.51	74.00	-19.49	144	15	peak
7440.000	42.66	5.23	47.89	54.00	-6.11	144	15	AVG
19840.000	53.81	0.86	54.67	74.00	-19.33	145	287	peak
19840.000	42.62	0.86	43.48	54.00	-10.52	145	287	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Vertical

Frequency (MHz)	Reading (dBµV)	Correct Factor(dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2389.000	56.14	-9.47	46.67	74.00	-27.33	170	246	peak
2389.000	47.23	-9.47	37.76	54.00	-16.24	170	246	AVG
4804.000	51.22	-2.17	49.05	74.00	-24.95	115	322	peak
4804.000	48.77	-2.17	46.60	54.00	-7.40	115	322	AVG
7206.000	54.20	4.18	58.38	74.00	-15.62	100	170	peak
7206.000	47.90	4.18	52.08	54.00	-1.92	100	170	AVG
19216.000	53.36	-0.77	52.59	74.00	-21.41	148	360	peak
19216.000	42.05	-0.77	41.28	54.00	-12.72	148	360	AVG
Middle channel								
4880.000	53.25	-1.88	51.37	74.00	-22.63	145	149	peak
4880.000	47.45	-1.88	45.57	54.00	-8.43	145	149	AVG
7320.000	49.66	5.10	54.76	74.00	-19.24	168	265	peak
7320.000	42.37	5.10	47.47	54.00	-6.53	168	265	AVG
19520.000	54.69	0.03	54.72	74.00	-19.28	155	360	peak
19520.000	43.35	0.03	43.38	54.00	-10.62	155	360	AVG
High channel								
2487.370	57.60	-8.39	49.21	74.00	-24.79	154	344	peak
2487.370	42.88	-8.39	34.49	54.00	-19.51	154	344	AVG
4960.000	51.44	-1.49	49.95	74.00	-24.05	132	313	peak
4960.000	48.56	-1.49	47.07	54.00	-6.93	132	313	AVG
7440.000	54.25	5.23	59.48	74.00	-14.52	144	165	peak
7440.000	47.95	5.23	53.18	54.00	-0.82	144	165	AVG
19840.000	54.66	0.86	55.52	74.00	-18.48	157	306	peak
19840.000	42.50	0.86	43.36	54.00	-10.64	157	306	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

BLE(2M) Mode**Above 1GHz****Horizontal**

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree ($^{\circ}$)	Remark
Low channel								
2363.400	57.15	-9.67	47.48	74.00	-26.52	110	126	peak
2363.400	43.26	-9.67	33.59	54.00	-20.41	110	126	AVG
4804.000	53.45	-2.17	51.28	74.00	-22.72	166	138	peak
4804.000	47.61	-2.17	45.44	54.00	-8.56	166	138	AVG
7206.000	49.52	4.18	53.70	74.00	-20.30	154	16	peak
7206.000	42.87	4.18	47.05	54.00	-6.95	154	16	AVG
19216.000	53.73	-0.77	52.96	74.00	-21.04	149	283	peak
19216.000	41.87	-0.77	41.10	54.00	-12.90	149	283	AVG
Middle channel								
4880.000	53.06	-1.88	51.18	74.00	-22.82	164	149	peak
4880.000	47.68	-1.88	45.80	54.00	-8.20	164	149	AVG
7320.000	49.58	5.10	54.68	74.00	-19.32	138	26	peak
7320.000	42.33	5.10	47.43	54.00	-6.57	138	26	AVG
19520.000	55.53	0.03	55.56	74.00	-18.44	148	358	peak
19520.000	43.31	0.03	43.34	54.00	-10.66	148	358	AVG
High channel								
2490.250	56.69	-8.35	48.34	74.00	-25.66	140	338	peak
2490.250	43.65	-8.35	35.30	54.00	-18.70	140	338	AVG
4960.000	53.45	-1.49	51.96	74.00	-22.04	145	128	peak
4960.000	47.28	-1.49	45.79	54.00	-8.21	145	128	AVG
7440.000	49.13	5.23	54.36	74.00	-19.64	169	34	peak
7440.000	42.22	5.23	47.45	54.00	-6.55	169	34	AVG
19840.000	54.34	0.86	55.20	74.00	-18.80	149	300	peak
19840.000	42.64	0.86	43.50	54.00	-10.50	149	300	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Vertical

Frequency (MHz)	Reading (dBμV)	Correct Factor(dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2377.200	56.41	-9.56	46.85	74.00	-27.15	114	344	peak
2377.200	43.23	-9.56	33.67	54.00	-20.33	114	344	AVG
4804.000	51.66	-2.17	49.49	74.00	-24.51	132	223	peak
4804.000	48.28	-2.17	46.11	54.00	-7.89	132	223	AVG
7206.000	54.21	4.18	58.39	74.00	-15.61	161	175	peak
7206.000	47.87	4.18	52.05	54.00	-1.95	161	175	AVG
19216.000	54.05	-0.77	53.28	74.00	-20.72	148	310	peak
19216.000	41.91	-0.77	41.14	54.00	-12.86	148	310	AVG
Middle channel								
4880.000	51.32	-1.88	49.44	74.00	-24.56	116	325	peak
4880.000	48.25	-1.88	46.37	54.00	-7.63	116	325	AVG
7320.000	54.32	5.10	59.42	74.00	-14.58	105	175	peak
7320.000	47.64	5.10	52.74	54.00	-1.26	105	175	AVG
19520.000	53.90	0.03	53.93	74.00	-20.07	145	353	peak
19520.000	43.29	0.03	43.32	54.00	-10.68	145	353	AVG
High channel								
2486.980	56.38	-8.40	47.98	74.00	-26.02	105	343	peak
2486.980	43.11	-8.40	34.71	54.00	-19.29	105	343	AVG
4960.000	51.45	-1.49	49.96	74.00	-24.04	116	316	peak
4960.000	48.33	-1.49	46.84	54.00	-7.16	116	316	AVG
7440.000	54.12	5.23	59.35	74.00	-14.65	108	173	peak
7440.000	47.16	5.23	52.39	54.00	-1.61	108	173	AVG
19840.000	55.15	0.86	56.01	74.00	-17.99	156	206	peak
19840.000	43.40	0.86	44.26	54.00	-9.74	156	206	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain


Spurious emissions more than 20 dB below the limit were not reported.

Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE(1M) Mode				
Low	2402	38.87	≥ 20	PASS
Mid	2441	39.27	≥ 20	PASS
High	2480	40.96	≥ 20	PASS
BLE(2M) Mode				
Low	2402	37.59	≥ 20	PASS
Mid	2441	39.87	≥ 20	PASS
High	2480	39.41	≥ 20	PASS


Please refer to the following plots

**BLE(1M) Mode
Low Channel**

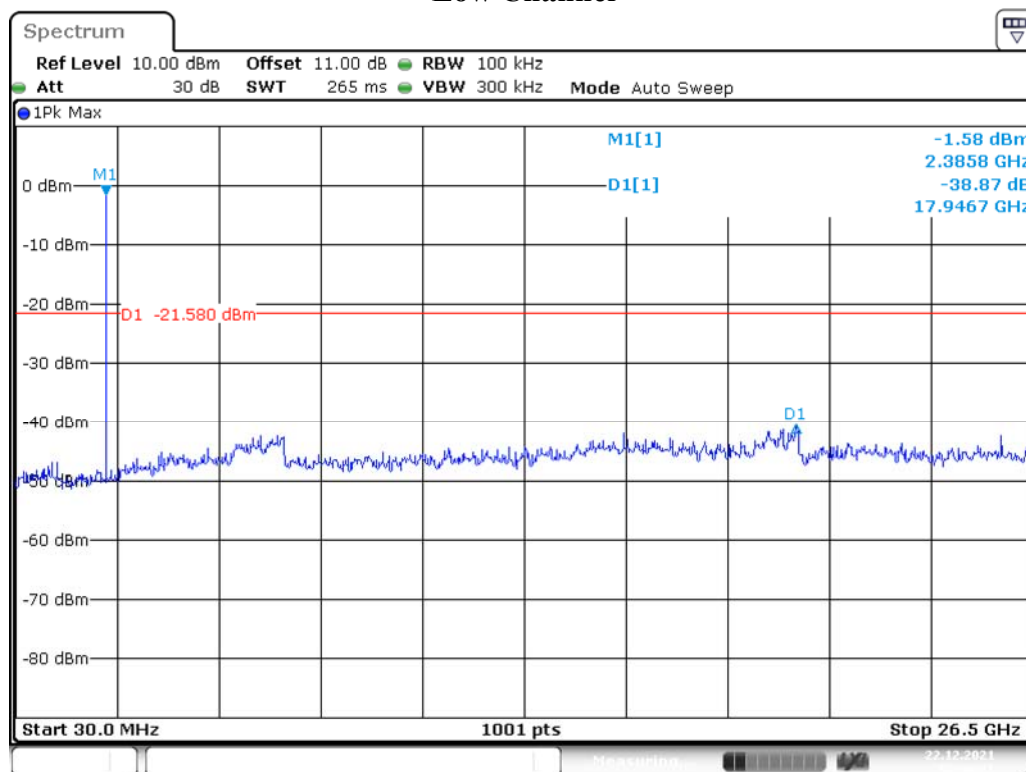


Date: 22.DEC.2021 13:36:22


Middle Channel

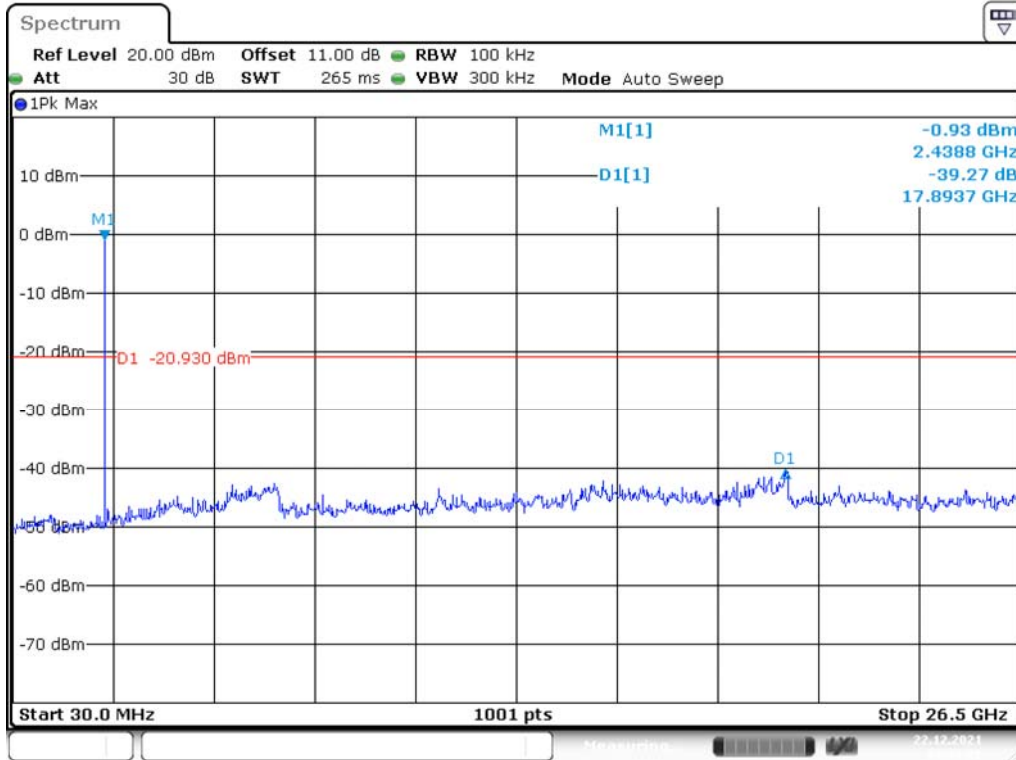

High Channel

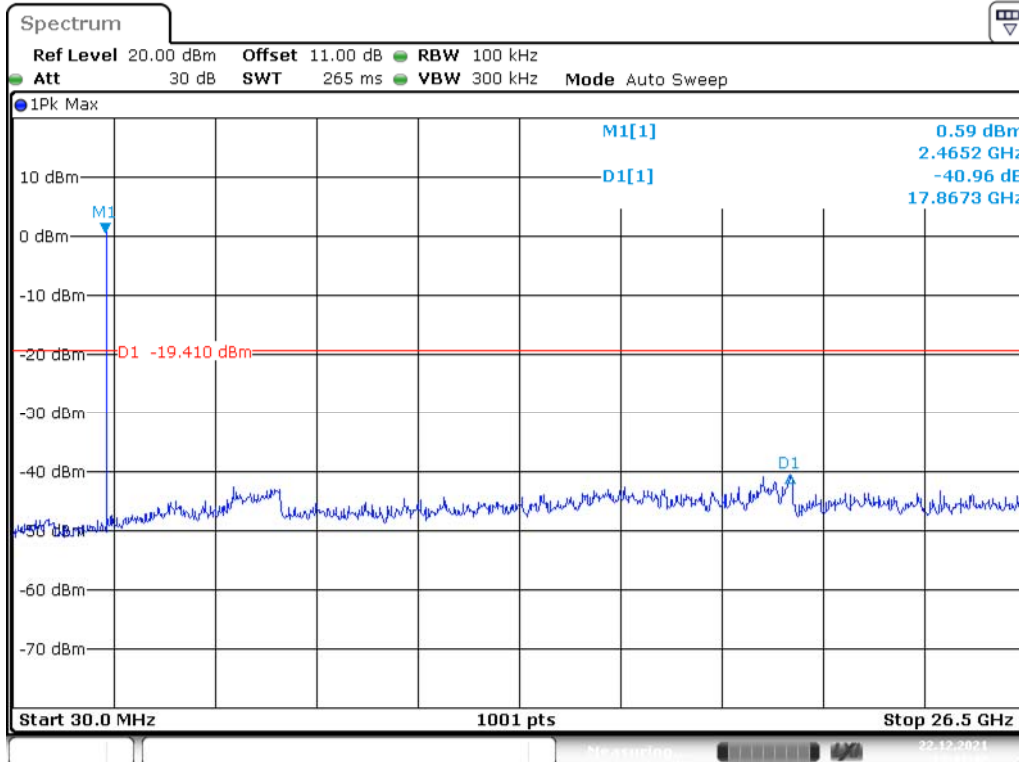


BLE(2M) Mode Low Channel

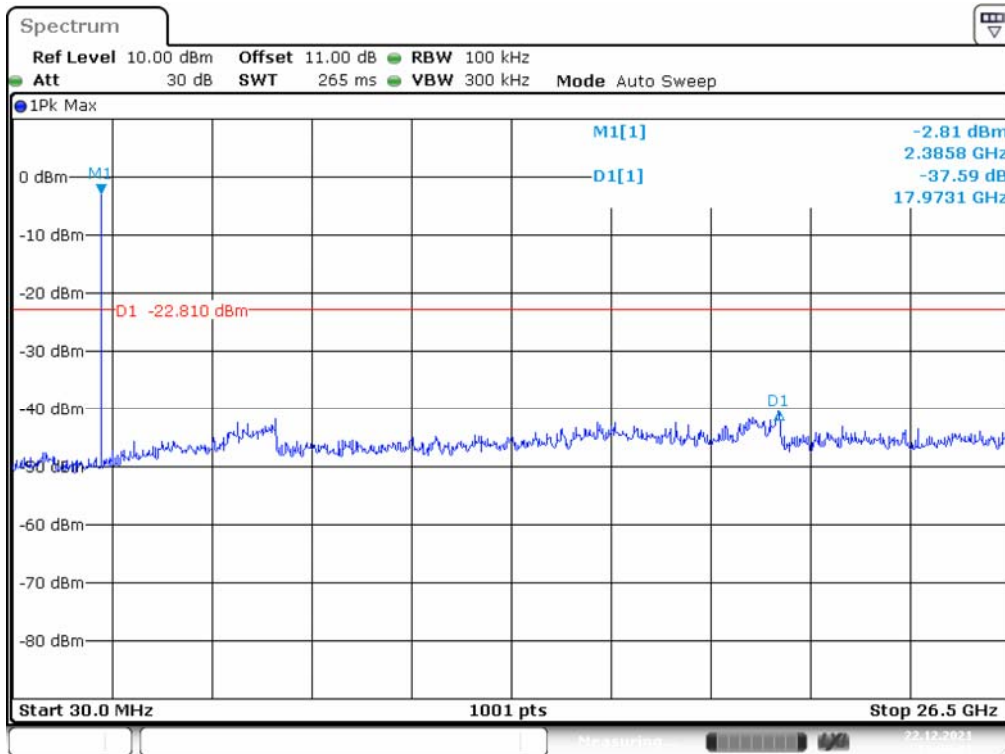


Date: 22.DEC.2021 14:26:02

Middle Channel

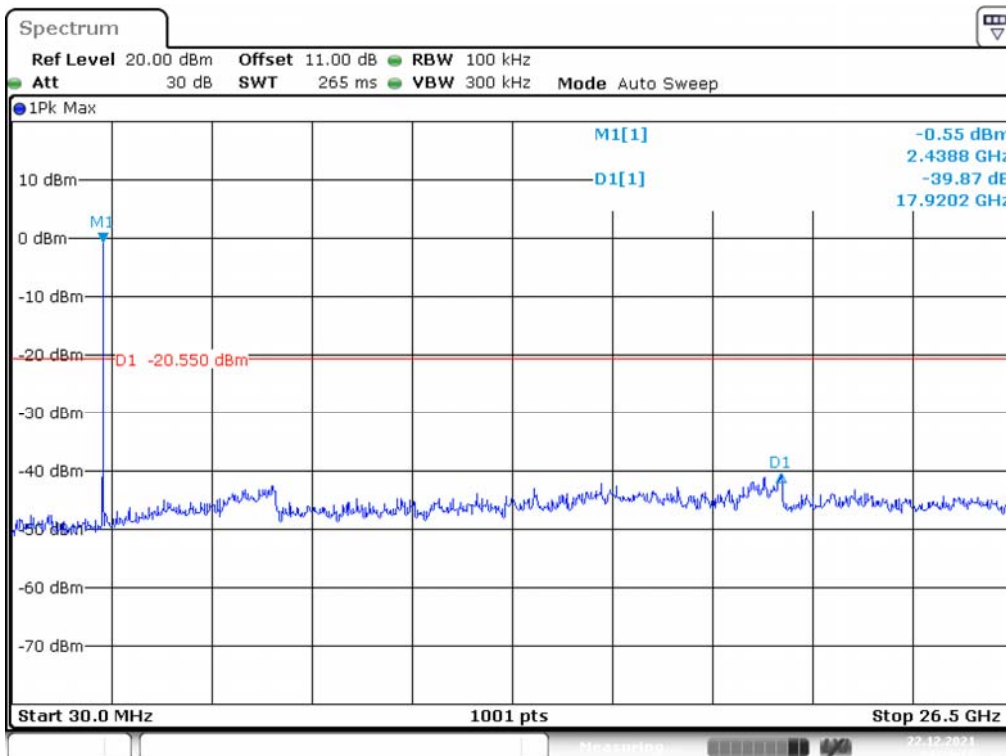

Date: 22.DEC.2021 14:29:17

High Channel

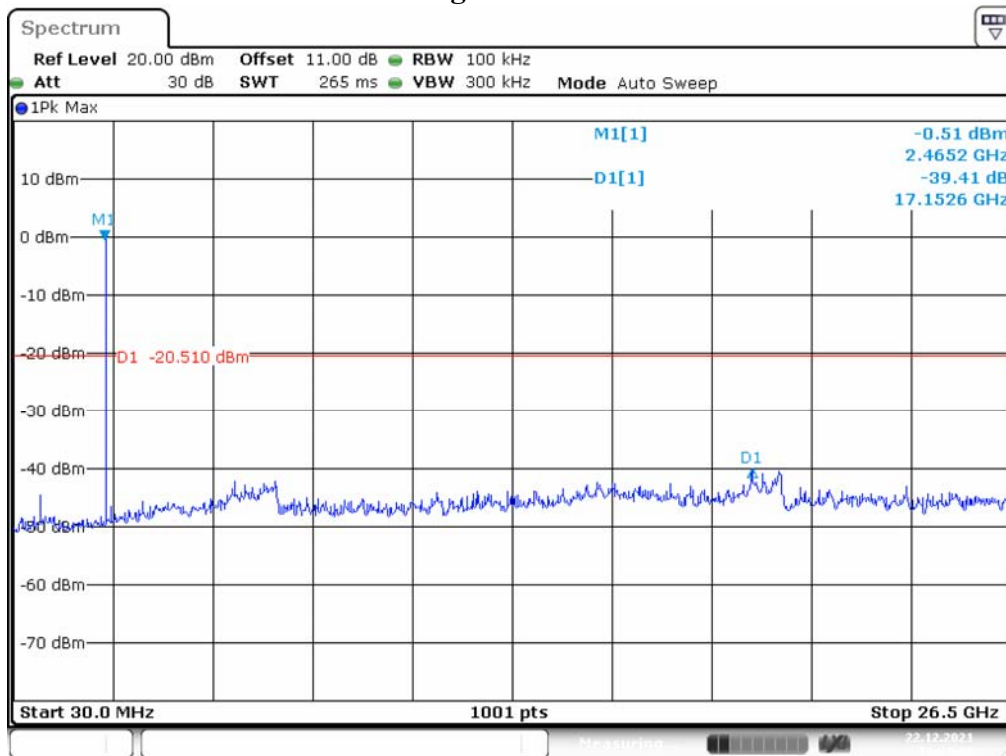

Date: 22.DEC.2021 14:31:24

9 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Test Procedure

The steps for the first option are as follows:


- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.3 Test Results

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)	Result
BLE(1M) Mode				
Low	2402	0.78	> 500	Compliance
Middle	2440	0.75	> 500	Compliance
High	2480	0.78	> 500	Compliance
BLE(2M) Mode				
Low	2402	0.90	> 500	Compliance
Middle	2440	0.88	> 500	Compliance
High	2480	0.93	> 500	Compliance


Please refer to the following plots

BLE(1M) Mode Low Channel

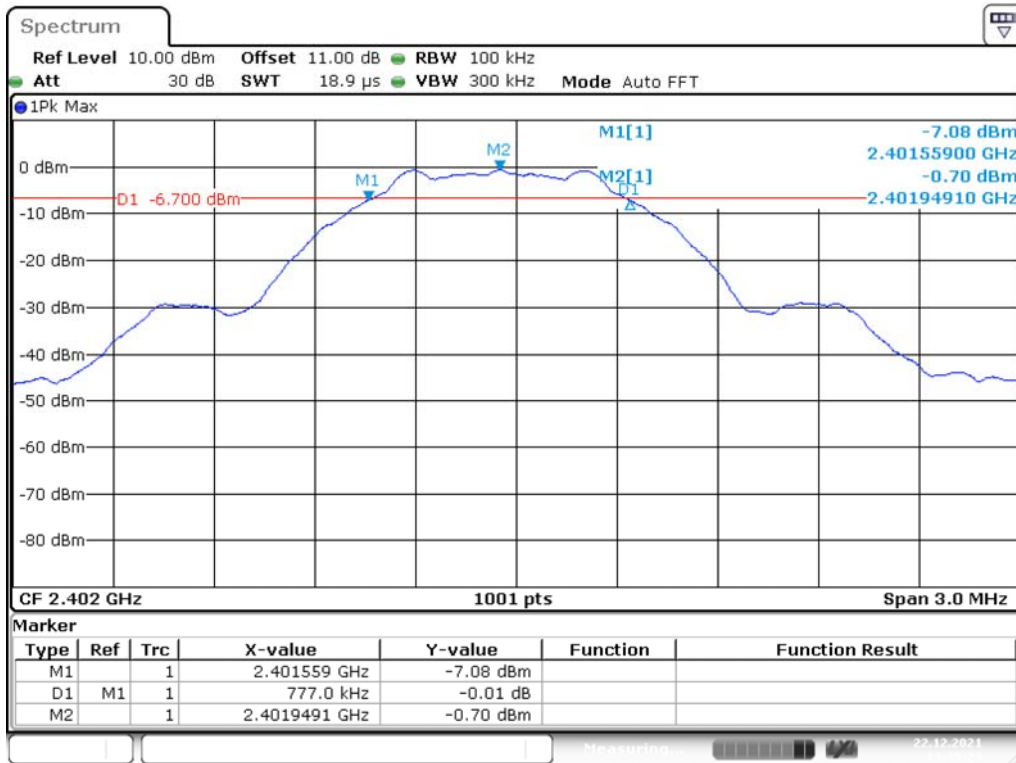


Date: 22. DEC. 2021 13:35:24

Middle Channel

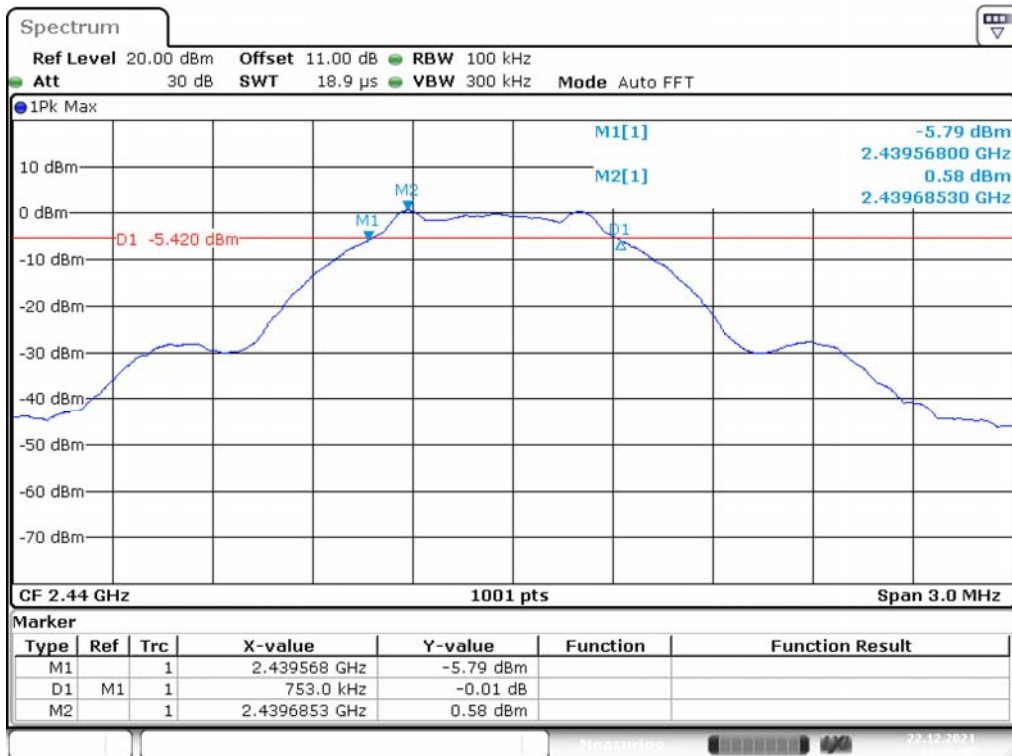


Date: 22. DEC. 2021 13:38:46

High Channel

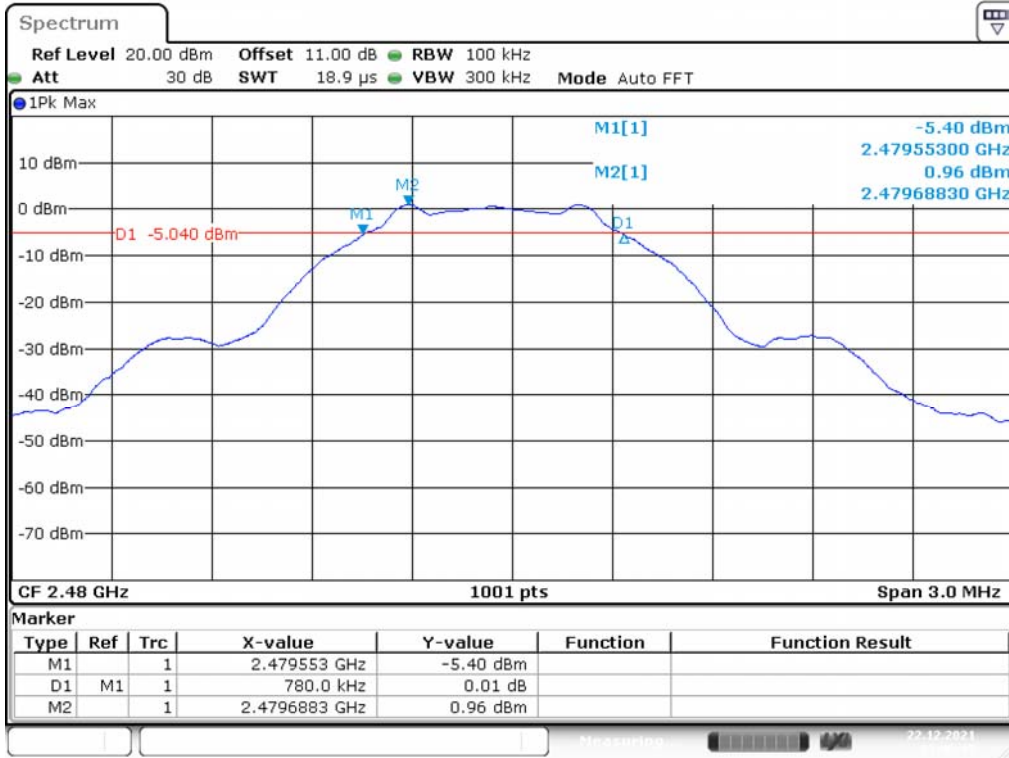


Date: 22.DEC.2021 13:40:45

BLE(2M) Mode Low Channel

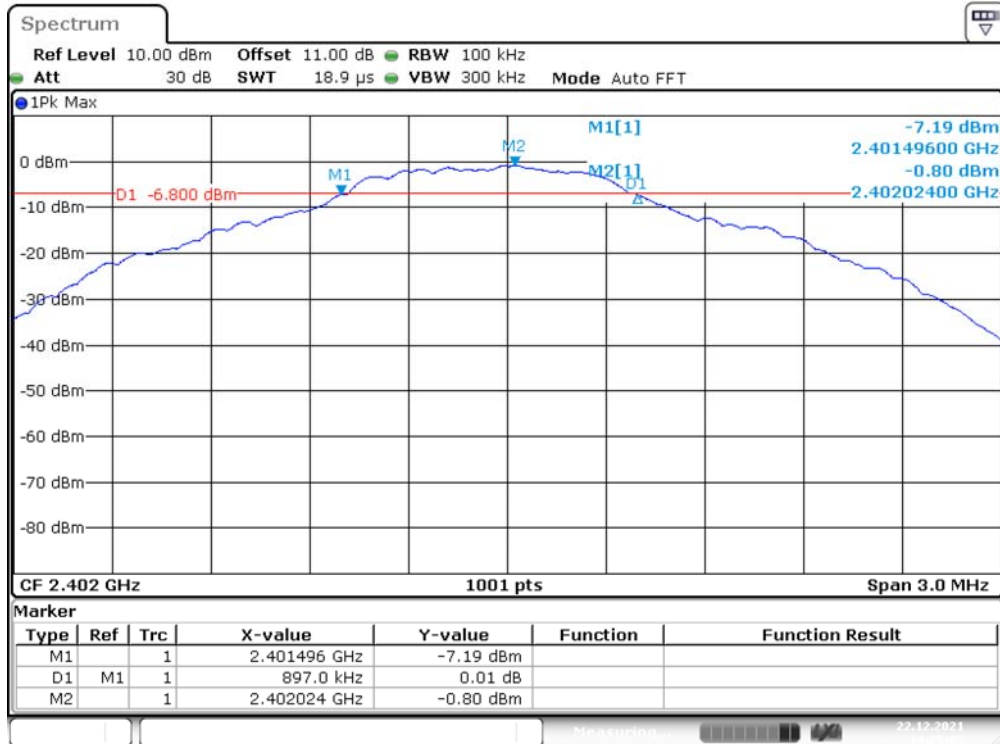


Date: 22.DEC.2021 14:25:04

Middle Channel

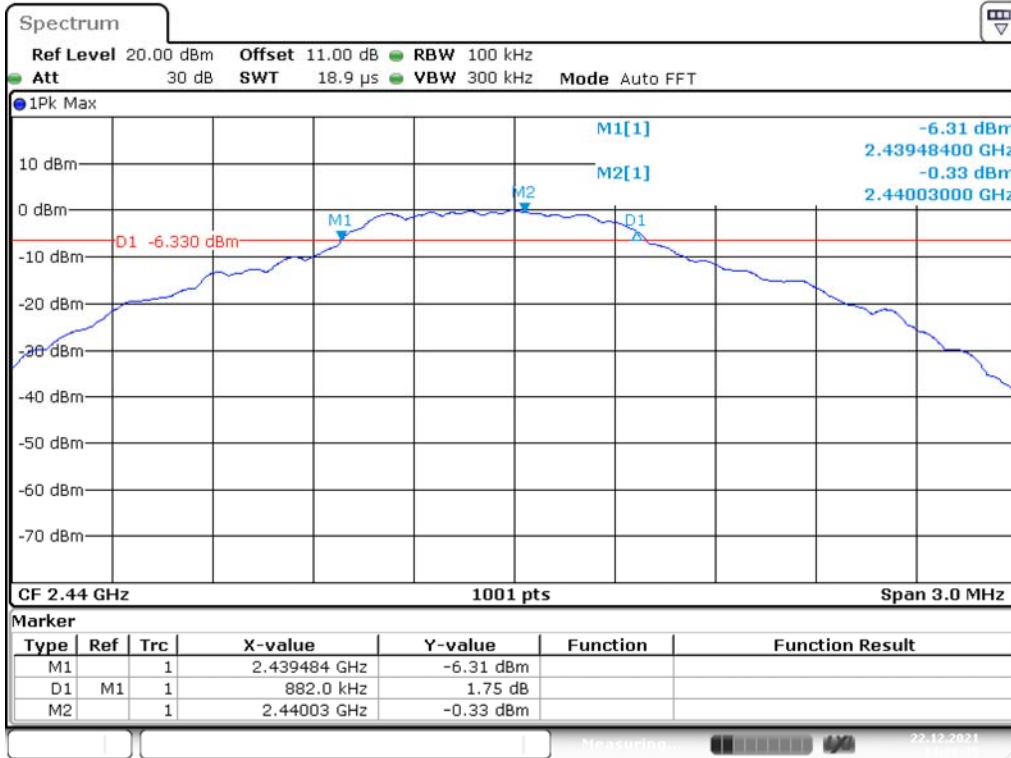

Date: 22.DEC.2021 14:28:36

High Channel

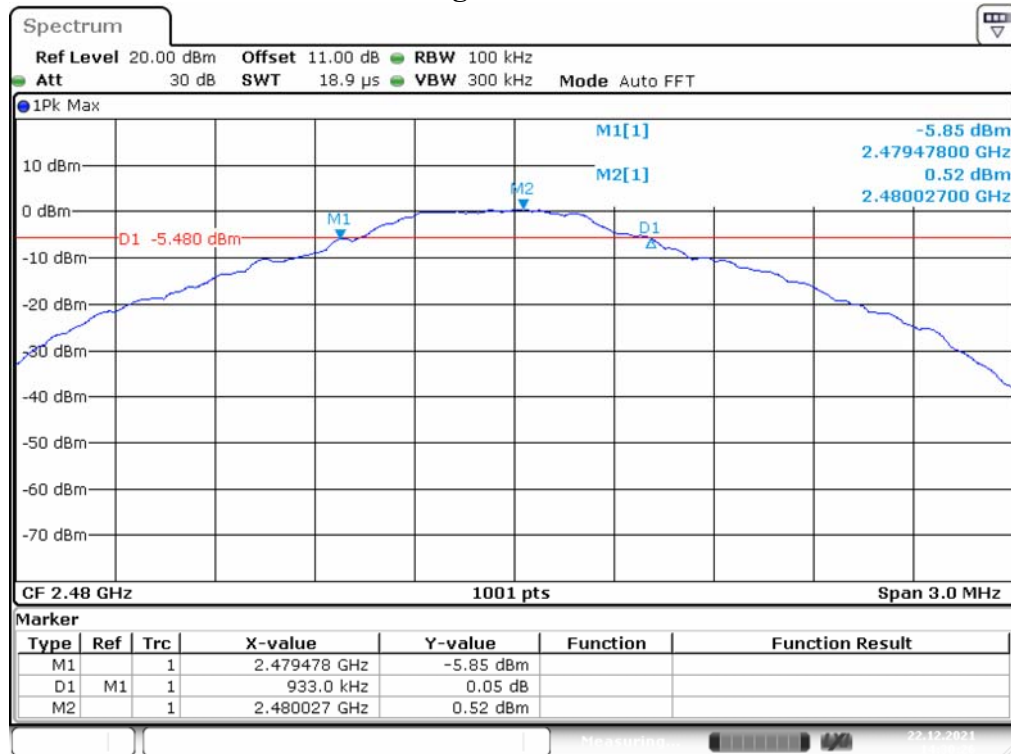

Date: 22.DEC.2021 14:30:27

10 FCC §15.247(b)(3) – Maximum Output Power

10.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

10.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

10.3 Test Results

Channel	Frequency	Maximum peak Conducted Output Power		Limit	Result
	(MHz)	(dBm)	(W)	(W)	
BLE(1M) Mode					
Low	2402	1.21	0.001	1	PASS
Middle	2440	1.64	0.001	1	PASS
High	2480	1.86	0.002	1	PASS
BLE(2M) Mode					
Low	2402	0.41	0.001	1	PASS
Middle	2440	0.52	0.001	1	PASS
High	2480	0.64	0.001	1	PASS

11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

11.1 Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE(1M) Mode				
Low	2402	47.61	≥ 20	PASS
High	2480	49.3	≥ 20	PASS
BLE(2M) Mode				
Low	2402	38.06	≥ 20	PASS
High	2480	47.43	≥ 20	PASS


Please refer to the following plots

BLE(1M) Mode Band Edge, Left Side

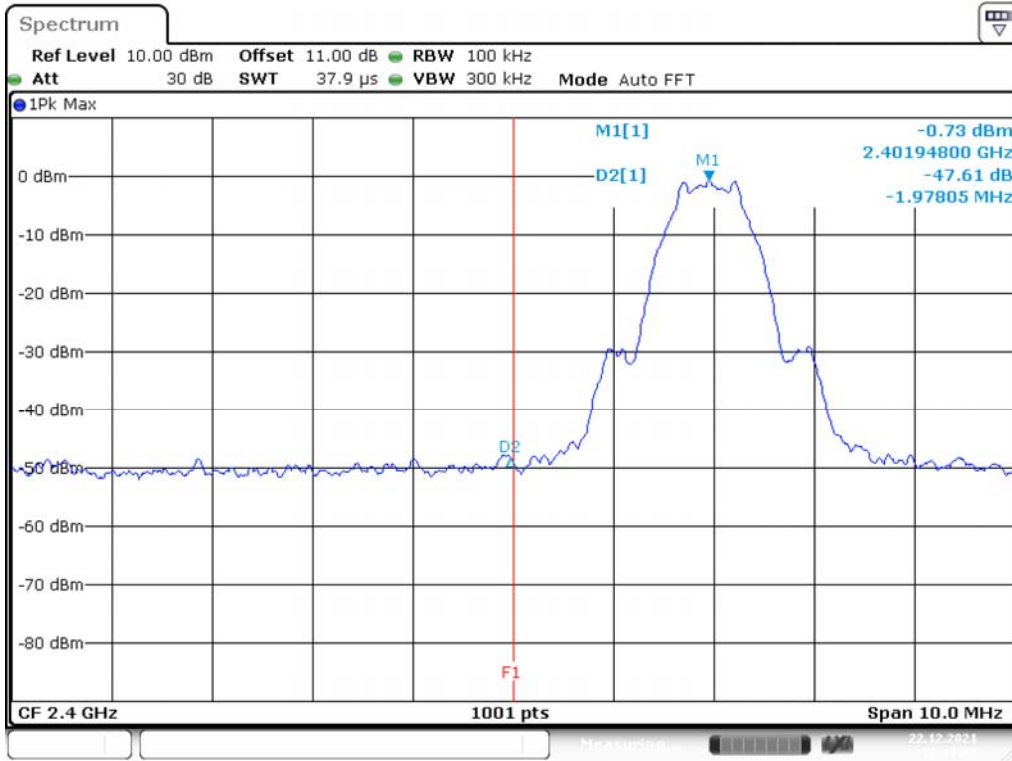


Date: 22.DEC.2021 13:36:05

Band Edge, Right Side

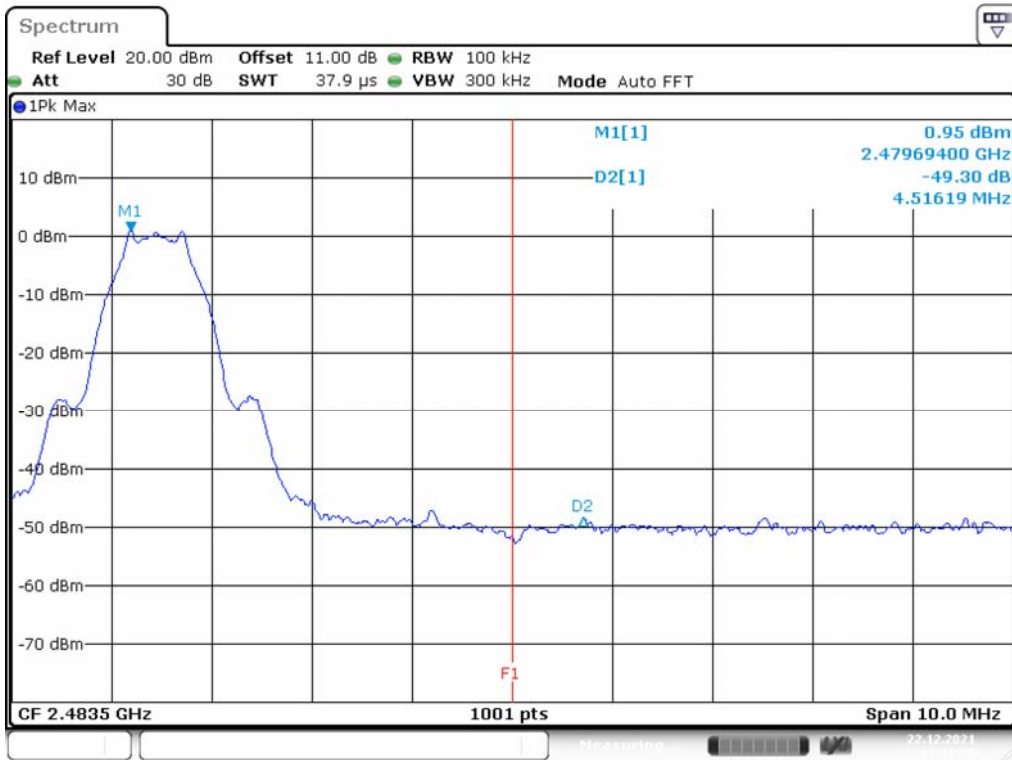


Date: 22.DEC.2021 13:41:26

BLE(2M) Mode Band Edge, Left Side

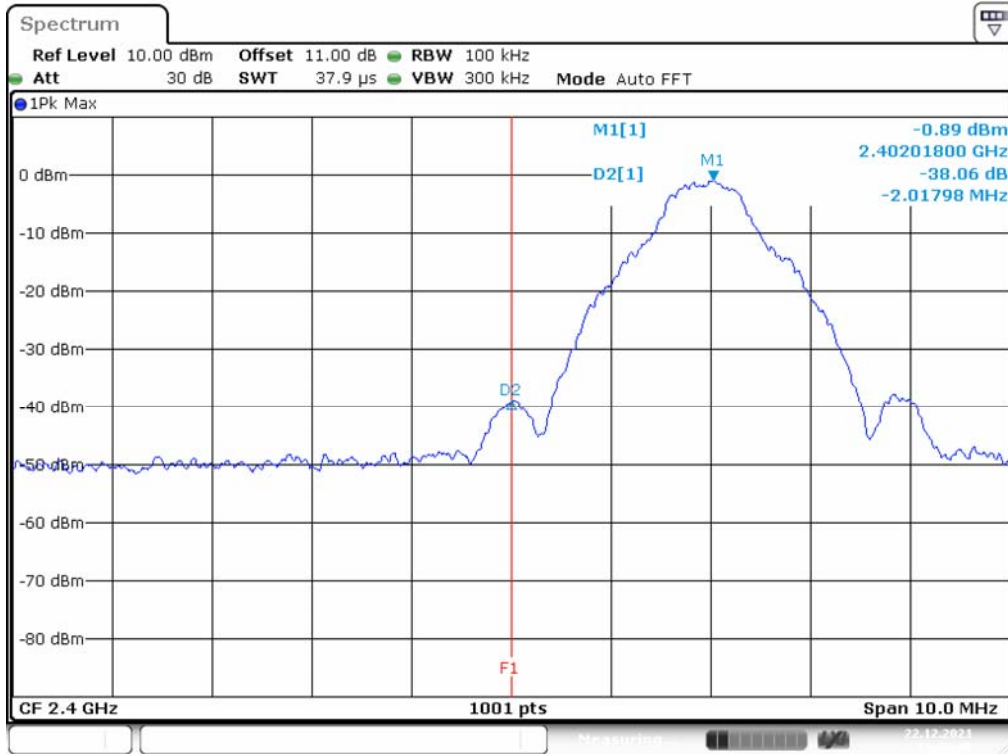

Date: 22.DEC.2021 14:25:46

Band Edge, Right Side

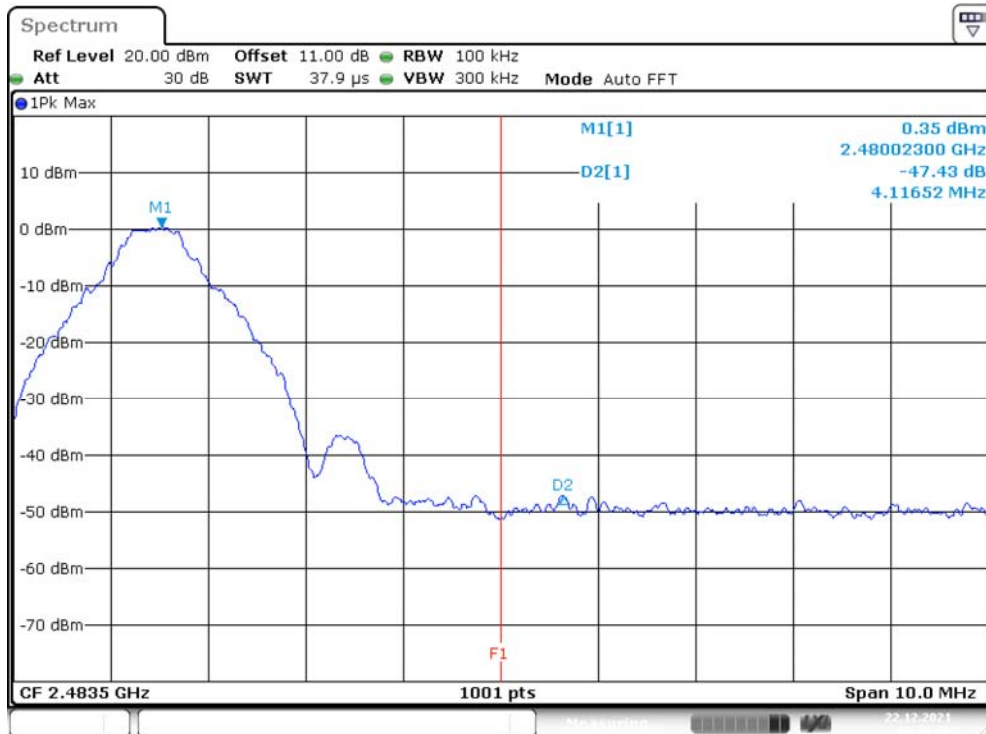

Date: 22.DEC.2021 14:31:08

12 FCC §15.247(e) – Power Spectral Density

12.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.2 Test Procedure

According to ANSI C63.10-2013


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

12.3 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE(1M) Mode				
Low	2402	-13.36	8	Compliance
Middle	2440	-12.72	8	Compliance
High	2480	-9.89	8	Compliance
BLE(2M) Mode				
Low	2402	-13.00	8	Compliance
Middle	2440	-12.22	8	Compliance
High	2480	-11.38	8	Compliance


Please refer to the following plots

BLE(1M) Mode Low Channel

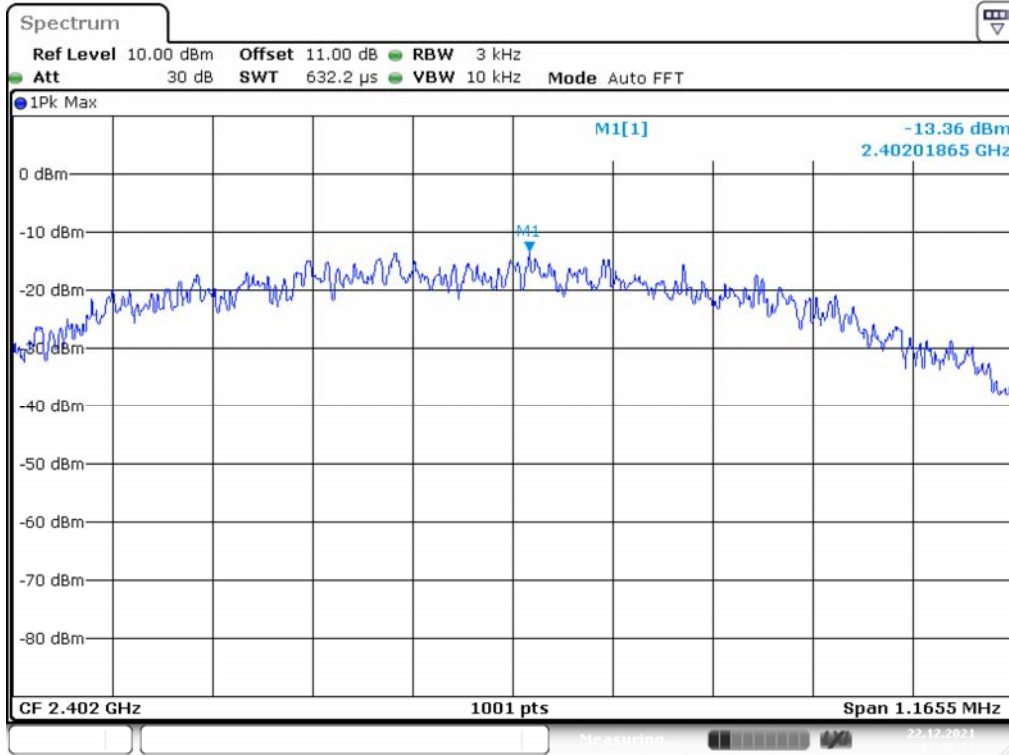


Date: 22.DEC.2021 13:35:33

BLE(1M) Mode Middle Channel

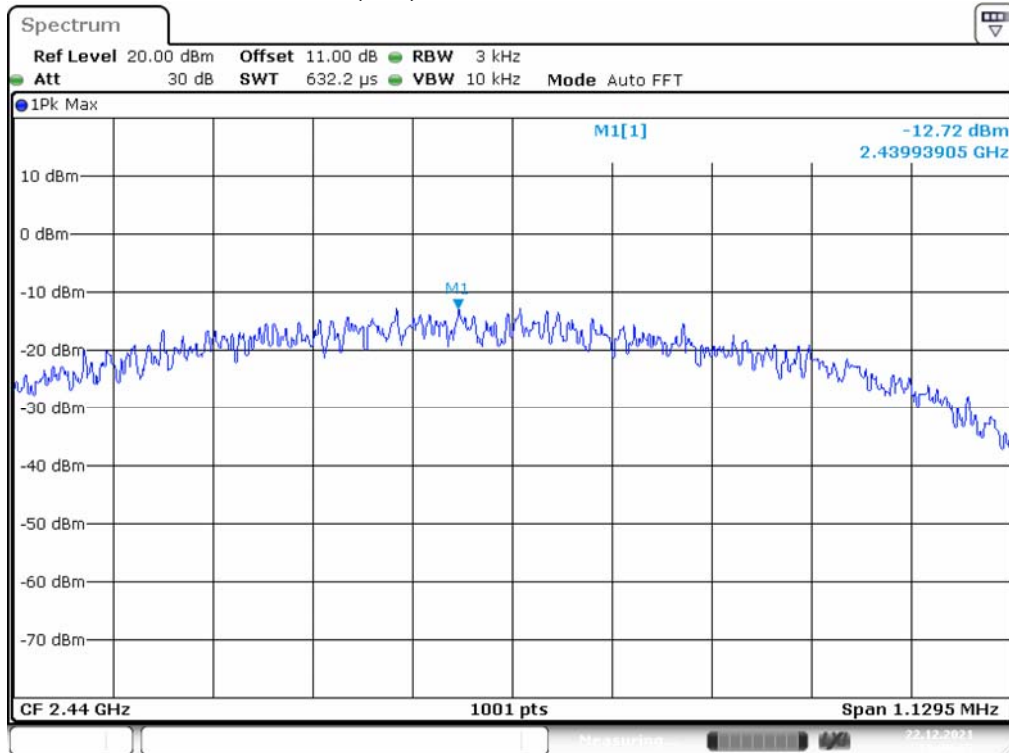


Date: 22.DEC.2021 13:38:56

BLE(1M) Mode High Channel

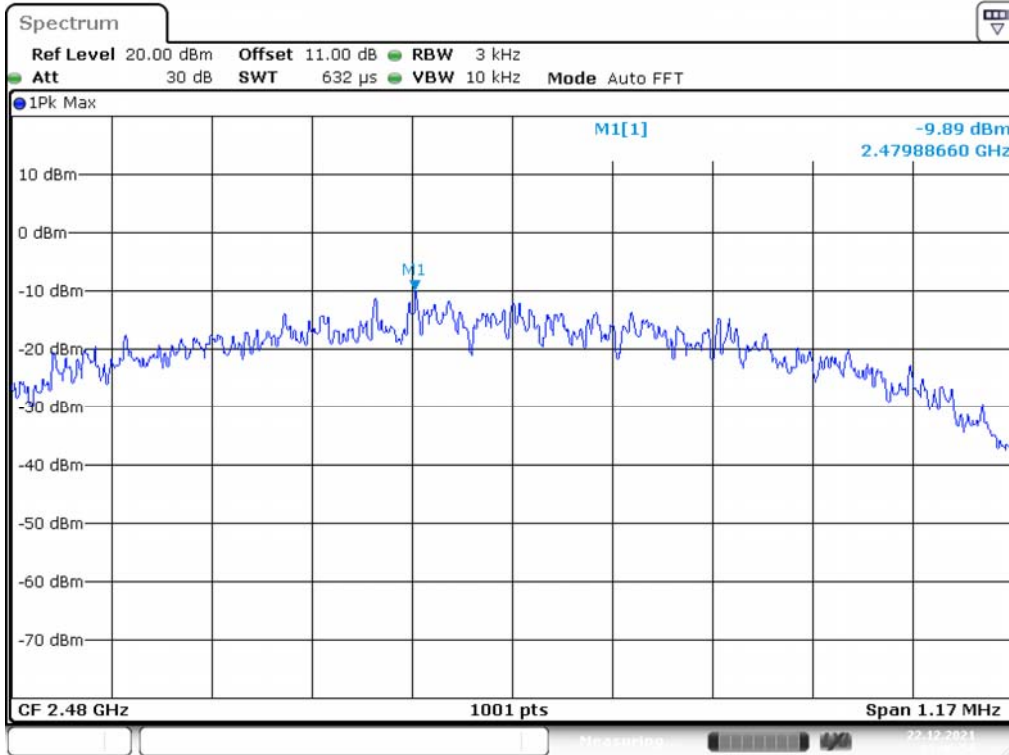


Date: 22.DEC.2021 13:40:54

BLE(2M) Mode Low Channel

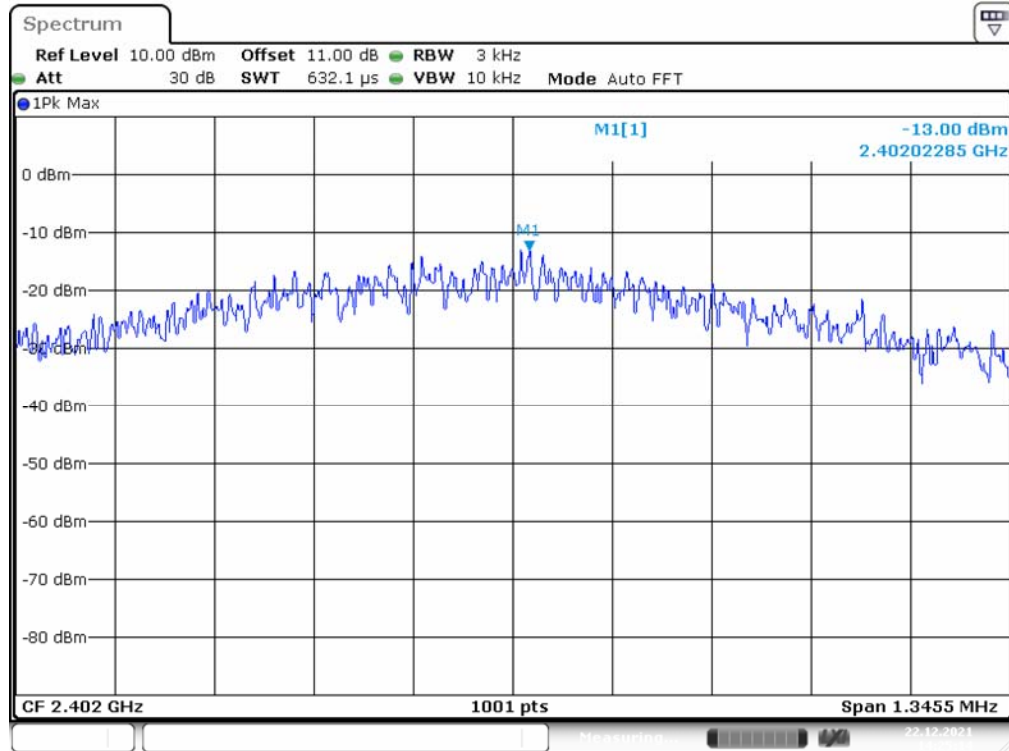


Date: 22.DEC.2021 14:25:14

BLE(2M) Mode Middle Channel

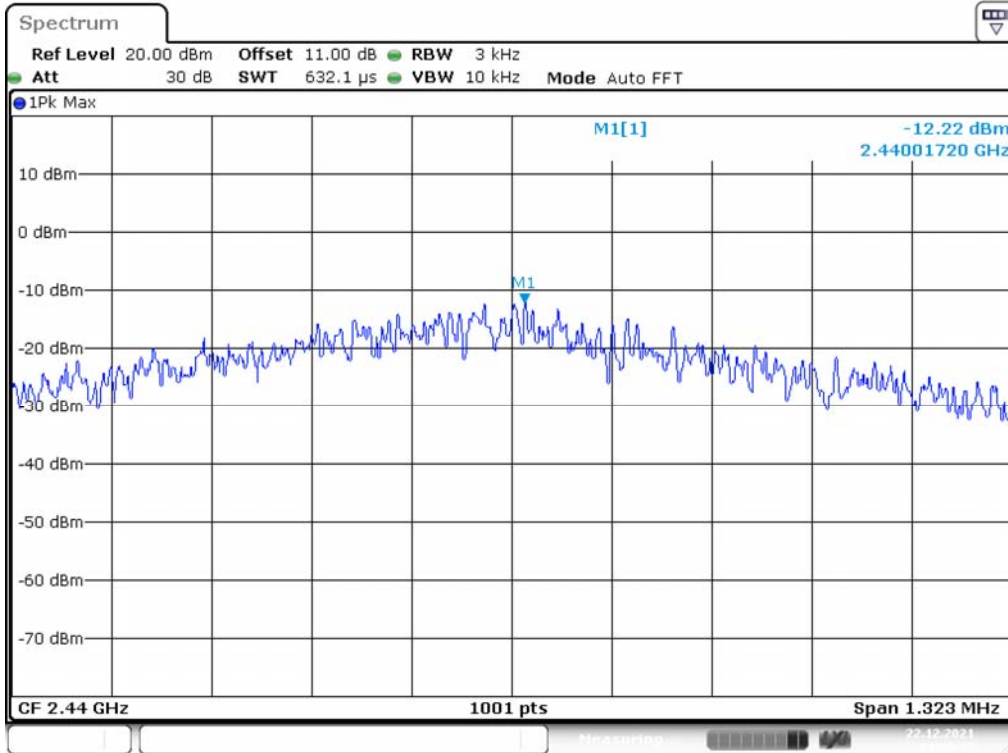

Date: 22.DEC.2021 14:28:45

BLE(2M) Mode High Channel

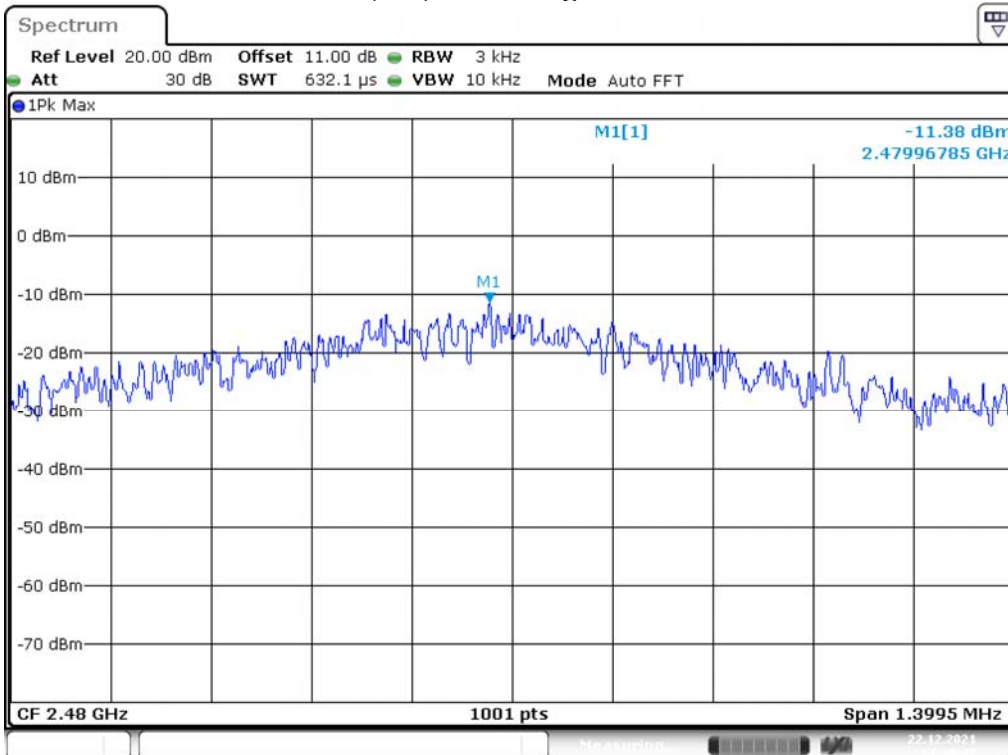

Date: 22.DEC.2021 14:30:36

***** END OF REPORT *****