



## TEST REPORT

**Application No.:** BTEK231024010AE  
**Applicant:** Shenzhen Haijixing Technology Co., Ltd  
**Address of Applicant:** 2/F, No. 97 of Tianwan Road, Tianliao Community, Guangming New District, Shenzhen, China  
**Manufacturer:** Shenzhen Haijixing Technology Co., Ltd  
**Address of Manufacturer:** 2/F, No. 97 of Tianwan Road, Tianliao Community, Guangming New District, Shenzhen, China  
**Factory:** Shenzhen Haijixing Technology Co., Ltd  
**Address of Factory:** 2/F, No. 97 of Tianwan Road, Tianliao Community, Guangming New District, Shenzhen, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Digital Camera  
**Model No.:** WD02, WD03, WD06, WD07, WD08, WD09, WD10  
Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**Trade Mark:** NA  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2023-10-24  
**Date of Test:** 2023-10-24 to 2023-11-13  
**Date of Issue:** 2023-11-13

|                     |              |
|---------------------|--------------|
| <b>Test Result:</b> | <b>Pass*</b> |
|---------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.

*Damon Su*

Damon Su  
EMC Laboratory Manager





| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2023-11-13 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                         |  |                                                                                    |  |
|-------------------------|--|------------------------------------------------------------------------------------|--|
| Authorized for issue by |  |                                                                                    |  |
|                         |  |   |  |
|                         |  | Carl Yang /Project Engineer                                                        |  |
|                         |  |  |  |
|                         |  | Keven Tan /Reviewer                                                                |  |



## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                                 |        |
|--------------------------------------|----------------------------------|--------|-------------------------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                                     | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                        |                                           |        |
|-------------------------------------------------------|----------------------------------|----------------------------------------|-------------------------------------------|--------|
| Item                                                  | Standard                         | Method                                 | Requirement                               | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2         | 47 CFR Part 15, Subpart C 15.207          | Pass   |
| Conducted Average Output Power                        |                                  | ANSI C63.10 (2013) Section 11.9.1.3    | 47 CFR Part 15, Subpart C 15.247(b)(3)    | Pass   |
| Minimum 6dB Bandwidth                                 |                                  | ANSI C63.10 (2013) Section 11.8.1      | 47 CFR Part 15, Subpart C 15.247a(2)      | Pass   |
| Power Spectrum Density                                |                                  | ANSI C63.10 (2013) Section 11.10.2     | 47 CFR Part 15, Subpart C 15.247(e)       | Pass   |
| Conducted Band Edges Measurement                      |                                  | ANSI C63.10 (2013) Section 11.13.3.2   | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Conducted Spurious Emissions                          |                                  | ANSI C63.10 (2013) Section 11.11       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Emissions which fall in the restricted bands |                                  | ANSI C63.10 (2013) Section 6.10.5      | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions (Below 1GHz)              |                                  | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions (Above 1GHz)              |                                  | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |

### Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Model No.: WD02, WD03, WD06, WD07, WD08, WD09, WD10

Only the model WD02 was tested. According to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions of other models are identical for the above models, with only difference on colour.



### 3 Contents

|                                                              | Page      |
|--------------------------------------------------------------|-----------|
| <b>1 Cover Page .....</b>                                    | <b>1</b>  |
| <b>2 Test Summary .....</b>                                  | <b>3</b>  |
| <b>3 Contents .....</b>                                      | <b>4</b>  |
| <b>4 General Information.....</b>                            | <b>6</b>  |
| 4.1 Details of E.U.T. ....                                   | 6         |
| 4.2 Description of Support Units .....                       | 6         |
| 4.3 Measurement Uncertainty .....                            | 6         |
| 4.4 Test Location.....                                       | 7         |
| 4.5 Deviation from Standards.....                            | 7         |
| 4.6 Abnormalities from Standard Conditions .....             | 7         |
| <b>5 Equipment List.....</b>                                 | <b>8</b>  |
| <b>6 Radio Spectrum Technical Requirement .....</b>          | <b>10</b> |
| 6.1 Antenna Requirement .....                                | 10        |
| 6.1.1 Test Requirement: .....                                | 10        |
| 6.1.2 Conclusion .....                                       | 10        |
| <b>7 Radio Spectrum Matter Test Results .....</b>            | <b>11</b> |
| 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)..... | 11        |
| 7.1.1 E.U.T. Operation .....                                 | 11        |
| 7.1.2 Test Mode Description.....                             | 11        |
| 7.1.3 Test Setup Diagram.....                                | 12        |
| 7.1.4 Measurement Procedure and Data.....                    | 12        |
| 7.2 Conducted Average Output Power .....                     | 15        |
| 7.2.1 E.U.T. Operation .....                                 | 15        |
| 7.2.2 Test Mode Description.....                             | 15        |
| 7.2.3 Test Setup Diagram.....                                | 16        |
| 7.2.4 Measurement Procedure and Data.....                    | 16        |
| 7.3 Minimum 6dB Bandwidth .....                              | 17        |
| 7.3.1 E.U.T. Operation .....                                 | 17        |
| 7.3.2 Test Mode Description.....                             | 17        |
| 7.3.3 Test Setup Diagram.....                                | 17        |
| 7.3.4 Measurement Procedure and Data.....                    | 17        |
| 7.4 Power Spectrum Density.....                              | 18        |
| 7.4.1 E.U.T. Operation .....                                 | 18        |
| 7.4.2 Test Mode Description.....                             | 18        |
| 7.4.3 Test Setup Diagram.....                                | 18        |
| 7.4.4 Measurement Procedure and Data.....                    | 18        |
| 7.5 Conducted Band Edges Measurement.....                    | 19        |
| 7.5.1 E.U.T. Operation .....                                 | 19        |
| 7.5.2 Test Mode Description.....                             | 19        |
| 7.5.3 Test Setup Diagram.....                                | 20        |
| 7.5.4 Measurement Procedure and Data.....                    | 20        |
| 7.6 Conducted Spurious Emissions .....                       | 21        |
| 7.6.1 E.U.T. Operation .....                                 | 21        |
| 7.6.2 Test Mode Description.....                             | 21        |
| 7.6.3 Test Setup Diagram.....                                | 22        |
| 7.6.4 Measurement Procedure and Data.....                    | 22        |





|       |                                                             |    |
|-------|-------------------------------------------------------------|----|
| 7.7   | Radiated Emissions which fall in the restricted bands ..... | 23 |
| 7.7.1 | E.U.T. Operation .....                                      | 23 |
| 7.7.2 | Test Mode Description .....                                 | 23 |
| 7.7.3 | Test Setup Diagram .....                                    | 24 |
| 7.7.4 | Measurement Procedure and Data .....                        | 24 |
| 7.8   | Radiated Spurious Emissions (Below 1GHz) .....              | 28 |
| 7.8.1 | E.U.T. Operation .....                                      | 28 |
| 7.8.2 | Test Mode Description .....                                 | 28 |
| 7.8.3 | Test Setup Diagram .....                                    | 29 |
| 7.8.4 | Measurement Procedure and Data .....                        | 29 |
| 7.9   | Radiated Spurious Emissions (Above 1GHz) .....              | 32 |
| 7.9.1 | E.U.T. Operation .....                                      | 32 |
| 7.9.2 | Test Mode Description .....                                 | 32 |
| 7.9.3 | Test Setup Diagram .....                                    | 33 |
| 7.9.4 | Measurement Procedure and Data .....                        | 34 |
| 8     | Test Setup Photo .....                                      | 40 |
| 9     | EUT Constructional Details (EUT Photos) .....               | 40 |
| 10    | Appendix .....                                              | 41 |



## 4 General Information

### 4.1 Details of E.U.T.

|                                                                                                                                                                                           |                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Power supply:                                                                                                                                                                             | DC 3.7V 1500mAh by Rechargeable Lithium-Ion Battery and recharged by usb port.                                              |
| Cable(s):                                                                                                                                                                                 | NA                                                                                                                          |
| Operation Frequency:                                                                                                                                                                      | 802.11b/g/n(HT20): 2412MHz to 2462MHz                                                                                       |
| Modulation Type:                                                                                                                                                                          | 802.11b: DSSS (CCK, DQPSK, DBPSK)<br>802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>802.11n20: OFDM (BPSK, QPSK, 16QAM, 64QAM) |
| Channel Numbers:                                                                                                                                                                          | 802.11b/g, 802.11n HT20: 11 Channels                                                                                        |
| Channel Spacing:                                                                                                                                                                          | 5MHz                                                                                                                        |
| Antenna Type:                                                                                                                                                                             | PCB Antenna                                                                                                                 |
| Antenna Gain:                                                                                                                                                                             | -0.58dBi                                                                                                                    |
| Hardware Version:                                                                                                                                                                         | WD02F_LCD_V1.0                                                                                                              |
| Software and Firmware Version:                                                                                                                                                            | V1.0                                                                                                                        |
| Remark: The information in this section is provided by the applicant or manufacturer, BANTEK is not liable to the accuracy, suitability, reliability or/and integrity of the information. |                                                                                                                             |
| Sample No.:                                                                                                                                                                               | BTEK231024010AE-01                                                                                                          |

### 4.2 Description of Support Units

| Description | Manufacturer | Model No.         | Serial No. |
|-------------|--------------|-------------------|------------|
| adapter     | FUSHIGANG    | AS1201A0502000USU | --         |

### 4.3 Measurement Uncertainty

| Test Item                                             | Measurement Uncertainty                 |
|-------------------------------------------------------|-----------------------------------------|
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | ±3.12dB                                 |
| Conducted Peak Output Power                           | ± 0.75dB                                |
| Minimum 6dB Bandwidth                                 | ± 3%                                    |
| Power Spectrum Density                                | ± 2.84dB                                |
| Conducted Band Edges Measurement                      | ± 0.75dB                                |
| Conducted Spurious Emissions                          | ± 0.75dB                                |
| Radiated Emissions which fall in the restricted bands | ±5.08dB (1GHz-6GHz);±5.14dB(above 6GHz) |
| Radiated Spurious Emissions (Below 1GHz)              | ±5.06dB (3m); ±4.46dB (10m)             |
| Radiated Spurious Emissions (Above 1GHz)              | ±5.08dB (1GHz-6GHz);±5.14dB(above 6GHz) |



#### 4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.,

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518103

Tel:0755-2334 4200

Fax: 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

#### 4.5 Deviation from Standards

None

#### 4.6 Abnormalities from Standard Conditions

None



## 5 Equipment List

| Conducted Emissions at AC Power Line (150kHz-30MHz) |                      |                     |                 |            |            |
|-----------------------------------------------------|----------------------|---------------------|-----------------|------------|------------|
| Description                                         | Manufacturer         | Model               | Serial No.      | Cal. Date  | Cal. Due   |
| Shielding Room                                      | YIHENG EN ELECTRONIC | 9*5*3.3             | YH-BT-220304-04 | 2022-03-03 | 2025-03-02 |
| EMI Test Receiver                                   | Rohde&Schwarz        | ESCI                | 101021          | 2023-06-12 | 2024-06-11 |
| Measurement Software                                | Fara                 | EZ EMC Ver. FA-03A2 | N/A             | N/A        | N/A        |
| LISN                                                | Rohde&Schwarz        | ENV216              | 101472          | 2023-06-12 | 2024-06-11 |
| LISN                                                | Schwarzbeck          | NSLK 8128           | 05127           | 2023-06-12 | 2024-06-11 |

| RF Conducted                              |                      |             |                 |            |              |
|-------------------------------------------|----------------------|-------------|-----------------|------------|--------------|
| Equipment                                 | Manufacturer         | Model No    | Serial No       | Cal Date   | Cal Due Date |
| Shielding Room                            | YIHENG EN ELECTRONIC | 5.5*3.1*3   | YH-BT-220304-03 | 2022-03-03 | 2025-03-02   |
| EXA Signal Analyzer                       | KEYSIGHT             | N9020A      | MY54230486      | 2023-06-12 | 2024-06-11   |
| DC Power Supply                           | E3632A               | E3642A      | KR75304416      | 2023-06-12 | 2024-06-11   |
| Attenuator                                | RswTech              | SMA-JK-6dB  | N/A             | 2023-06-12 | 2024-06-11   |
| Attenuator                                | RswTech              | SMA-JK-3dB  | N/A             | 2023-06-12 | 2024-06-11   |
| RF Control Unit                           | Techy                | TR1029-1    | N/A             | 2023-06-12 | 2024-06-11   |
| RF Sensor Unit                            | Techy                | TR1029-2    | N/A             | 2023-06-12 | 2024-06-11   |
| WIDEBAND RADIO COMMUNICATION TESTER       | R&S                  | CMW 500     | 141258          | 2023-06-12 | 2024-06-11   |
| MXG Vector Signal Generator               | Agilent              | N5182A      | US46240522      | 2023-06-12 | 2024-06-11   |
| Programmable Temperature&Humidity Chamber | GRT                  | GR-HWX1000  | GR22051001      | 2023-06-12 | 2024-06-11   |
| Measurement Software                      | TACHOY               | RF TestSoft | N/A             | N/A        | N/A          |

| RSE                      |                      |                     |                 |            |              |
|--------------------------|----------------------|---------------------|-----------------|------------|--------------|
| Equipment                | Manufacturer         | Model No            | Serial No       | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber | YIHENG EN ELECTRONIC | 966                 | YH-BT-220304-01 | 2022-05-06 | 2025-05-05   |
| EMI Test Receiver        | Rohde&Schwarz        | ESCI                | 100694          | 2023-06-12 | 2024-06-11   |
| TRILOG Broadband Antenna | Schwarzbeck          | VULB 9168           | 01324           | 2022-06-15 | 2025-06-14   |
| Pre-Amplifier            | Schwarzbeck          | BBV 9745            | #180            | 2023-06-12 | 2024-06-11   |
| Measurement Software     | Fara                 | EZ EMC Ver. FA-03A2 | N/A             | 2023-06-12 | 2024-06-11   |
| EXA Signal Analyzer      | Keysight             | N9020A              | MY54440290      | 2023-06-12 | 2024-06-11   |
| Horn Antenna             | Schwarzbeck          | BBHA 9120D          | 02695           | 2022-06-15 | 2025-06-14   |
| Pre-Amplifier            | Tonscend             | TAP0118045          | AP20K806109     | 2023-06-12 | 2024-06-11   |
| Horn Antenna             | SCHWARZBECK          | BBHA9170            | 1157            | 2022-06-15 | 2025-06-14   |
| Low Noise Pre-amplifier  | SKET                 | LNPA-1840G-         | SK2022032902    | 2023-06-12 | 2024-06-11   |







|                 |               |       |          |            |            |
|-----------------|---------------|-------|----------|------------|------------|
|                 |               | 50    |          |            |            |
| Signal analyzer | ROHDE&SCHWARZ | FSQ40 | 100010   | 2023-06-12 | 2024-06-11 |
| Loop Antenna    | ETS           | 6502  | 00201177 | 2022-06-15 | 2025-06-14 |

| General used equipment                                    |              |          |           |            |              |
|-----------------------------------------------------------|--------------|----------|-----------|------------|--------------|
| Equipment                                                 | Manufacturer | Model No | Serial No | Cal Date   | Cal Due Date |
| Humidity/Temperature/B<br>arometric Pressure<br>Indicator | KUMAR        | F132     | N/A       | 2023-06-12 | 2024-06-11   |
| Humidity/Temperature/B<br>arometric Pressure<br>Indicator | KUMAR        | F132     | N/A       | 2023-06-12 | 2024-06-11   |



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.


15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.58dBi.

Please refer to internal photos.

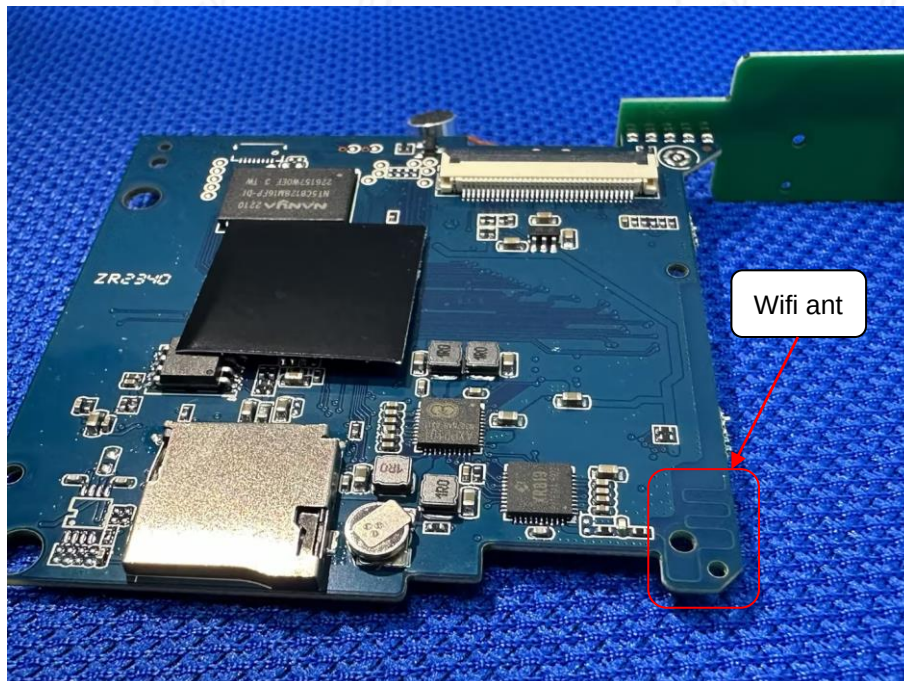

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) |           |
|----------------------------|-----------------------|-----------|
|                            | Quasi-peak            | Average   |
| 0.15-0.5                   | 66 to 56*             | 56 to 46* |
| 0.5-5                      | 56                    | 46        |
| 5-30                       | 60                    | 50        |

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 °C

Humidity: 60.5 % RH

Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description


| Pre-scan /<br>Final test | Mode<br>Code | Description |
|--------------------------|--------------|-------------|
|--------------------------|--------------|-------------|

|            |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test | 01 | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report. |
|------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|





### 7.1.3 Test Setup Diagram

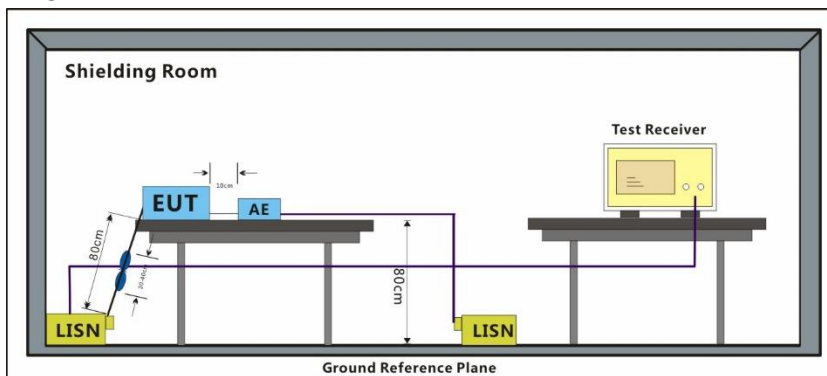


### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 50\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.






Test Mode: 01; Line: Live line; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

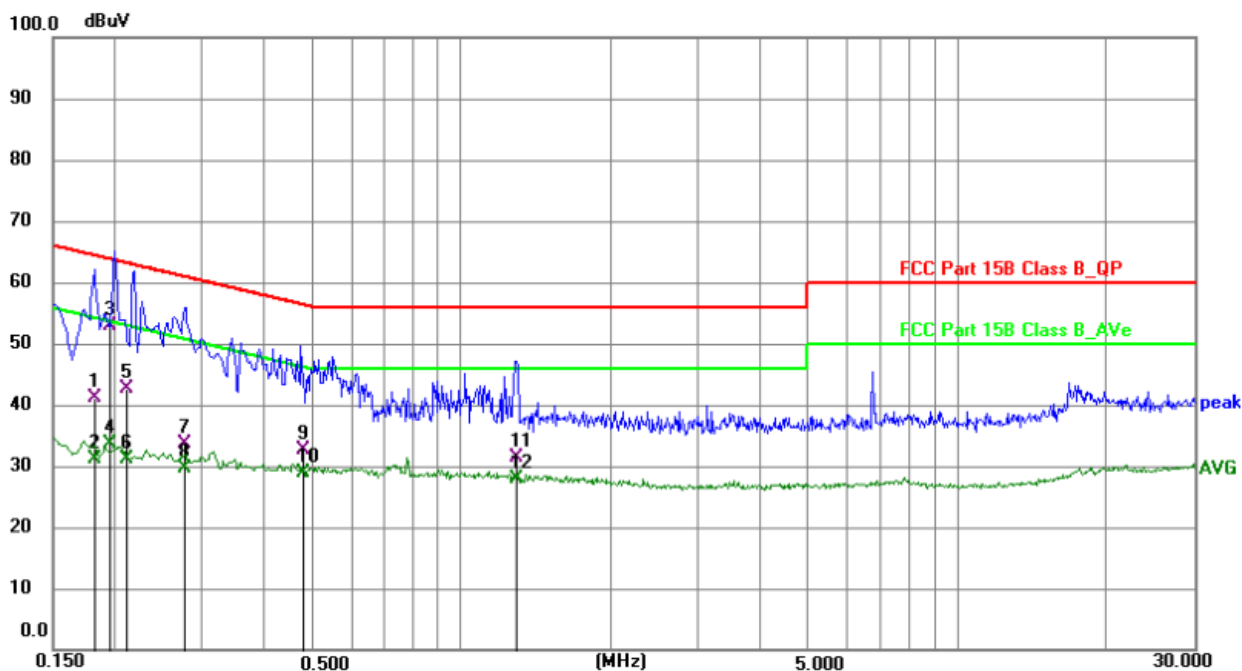

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.1832          | 21.40          | 19.79       | 41.19        | 64.34        | -23.15      | QP       | P   |        |
| 2   | 0.1832          | 11.40          | 19.79       | 31.19        | 54.34        | -23.15      | AVG      | P   |        |
| 3 * | 0.1955          | 33.17          | 19.80       | 52.97        | 63.80        | -10.83      | QP       | P   |        |
| 4   | 0.1955          | 13.79          | 19.80       | 33.59        | 53.80        | -20.21      | AVG      | P   |        |
| 5   | 0.2119          | 22.88          | 19.81       | 42.69        | 63.13        | -20.44      | QP       | P   |        |
| 6   | 0.2119          | 11.21          | 19.81       | 31.02        | 53.13        | -22.11      | AVG      | P   |        |
| 7   | 0.2759          | 13.77          | 19.81       | 33.58        | 60.94        | -27.36      | QP       | P   |        |
| 8   | 0.2759          | 9.90           | 19.81       | 29.71        | 50.94        | -21.23      | AVG      | P   |        |
| 9   | 0.4789          | 12.76          | 19.84       | 32.60        | 56.36        | -23.76      | QP       | P   |        |
| 10  | 0.4789          | 9.14           | 19.84       | 28.98        | 46.36        | -17.38      | AVG      | P   |        |
| 11  | 1.2935          | 11.29          | 20.04       | 31.33        | 56.00        | -24.67      | QP       | P   |        |
| 12  | 1.2935          | 7.83           | 20.04       | 27.87        | 46.00        | -18.13      | AVG      | P   |        |



Test Mode: 01; Line: Neutral Line; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

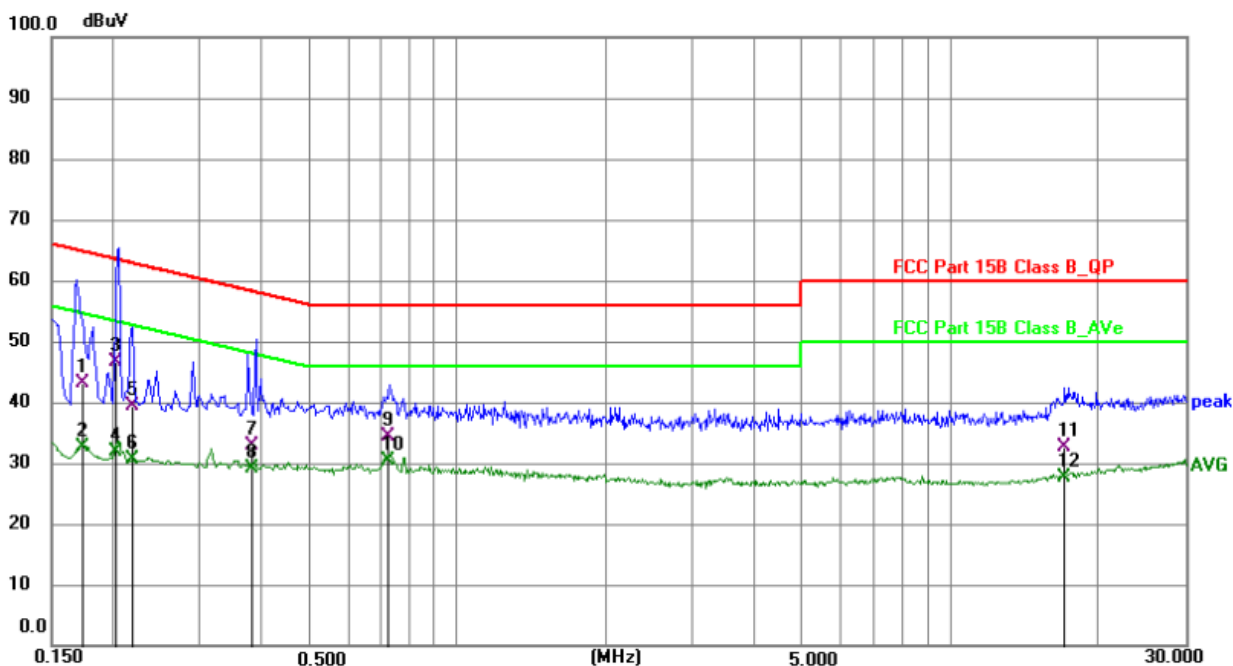

| No.  | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|------|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1    | 0.1728          | 23.44          | 19.79       | 43.23        | 64.82        | -21.59      | QP       | P   |        |
| 2    | 0.1728          | 12.73          | 19.79       | 32.52        | 54.82        | -22.30      | AVG      | P   |        |
| 3    | 0.2028          | 26.70          | 19.81       | 46.51        | 63.50        | -16.99      | QP       | P   |        |
| 4    | 0.2028          | 12.03          | 19.81       | 31.84        | 53.50        | -21.66      | AVG      | P   |        |
| 5    | 0.2177          | 19.64          | 19.82       | 39.46        | 62.91        | -23.45      | QP       | P   |        |
| 6    | 0.2177          | 10.70          | 19.82       | 30.52        | 52.91        | -22.39      | AVG      | P   |        |
| 7    | 0.3820          | 13.14          | 19.83       | 32.97        | 58.24        | -25.27      | QP       | P   |        |
| 8    | 0.3820          | 9.36           | 19.83       | 29.19        | 48.24        | -19.05      | AVG      | P   |        |
| 9    | 0.7300          | 14.38          | 19.92       | 34.30        | 56.00        | -21.70      | QP       | P   |        |
| 10 * | 0.7300          | 10.38          | 19.92       | 30.30        | 46.00        | -15.70      | AVG      | P   |        |
| 11   | 17.0785         | 11.12          | 21.53       | 32.65        | 60.00        | -27.35      | QP       | P   |        |
| 12   | 17.0785         | 6.02           | 21.53       | 27.55        | 50.00        | -22.45      | AVG      | P   |        |

## Note:

- 1) Pre-scan all modes and recorded the worst case results in this report(Low Channel).
- 2) Level= Reading+ Factor; Margin=Level-limit.



## 7.2 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.3

Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--------------------------------------------------------|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $25 \leq$ hopping channels $< 50$             |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 50.0 % RH


Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |



### 7.2.3 Test Setup Diagram

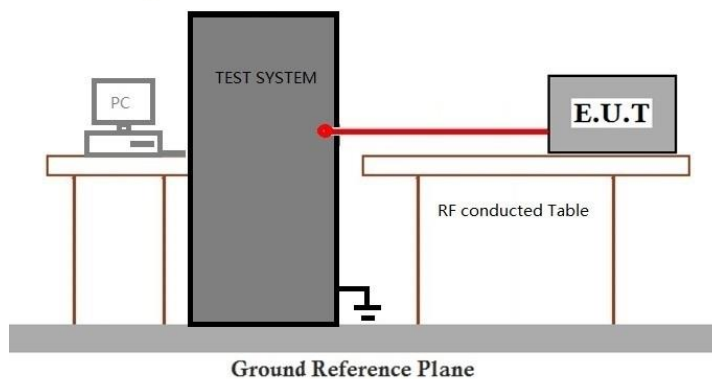

### 7.2.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details





## 7.3 Minimum 6dB Bandwidth

|                  |                                      |
|------------------|--------------------------------------|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247a(2) |
| Test Method:     | ANSI C63.10 (2013) Section 11.8.1    |
| Limit:           | ≥500 kHz                             |


### 7.3.1 E.U.T. Operation

|                        |         |                       |           |
|------------------------|---------|-----------------------|-----------|
| Operating Environment: |         |                       |           |
| Temperature:           | 20.5 °C | Humidity:             | 50.0 % RH |
|                        |         | Atmospheric Pressure: | 1010 mbar |

### 7.3.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |

### 7.3.3 Test Setup Diagram

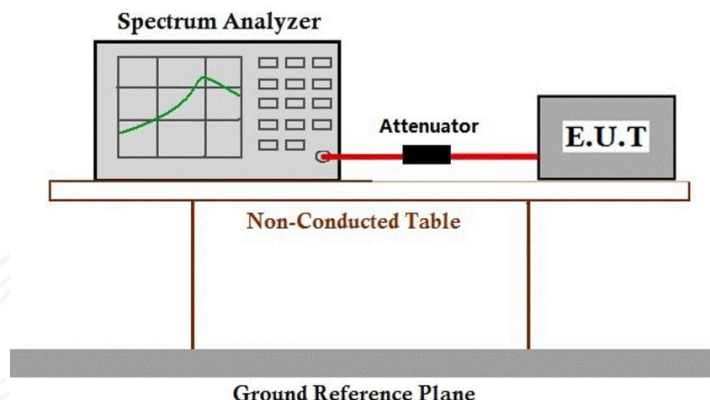

### 7.3.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



## 7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.0 % RH

Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |

### 7.4.3 Test Setup Diagram

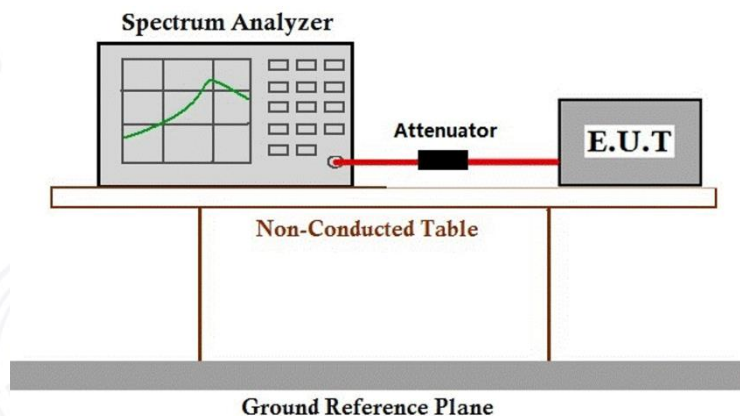

### 7.4.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



## 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2013) Section 11.13.3.2  
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |



### 7.5.3 Test Setup Diagram

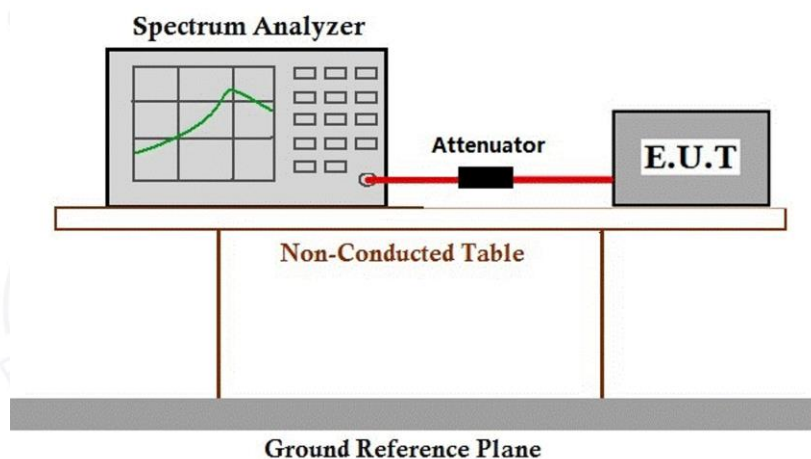

### 7.5.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details





## 7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 50.0 % RH


Atmospheric Pressure: 1010 mbar

### 7.6.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |



### 7.6.3 Test Setup Diagram

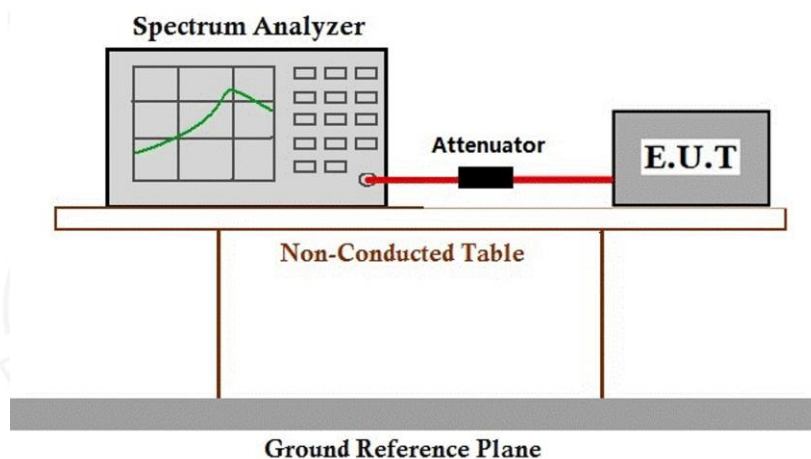

### 7.6.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



## 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.4 °C

Humidity: 54.3 % RH

Atmospheric Pressure: 1010 mbar


### 7.7.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |





### 7.7.3 Test Setup Diagram

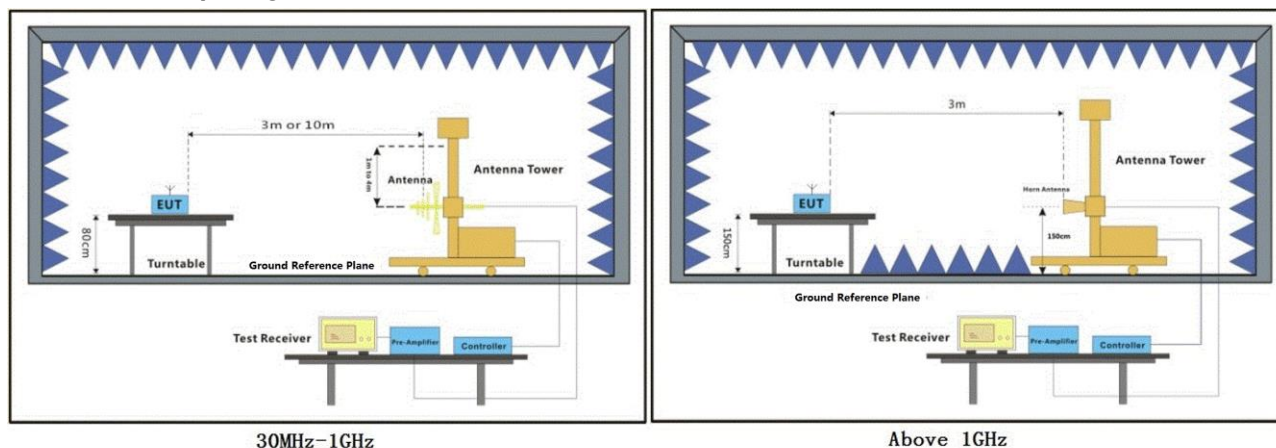

### 7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.





Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2310.000        | 69.01          | -30.59        | 38.42          | 74.00          | -35.58     | peak     | P   |
| 2   | 2390.000        | 69.14          | -30.49        | 38.65          | 74.00          | -35.35     | peak     | P   |
| 3   | 2400.000        | 78.66          | -30.48        | 48.18          | 74.00          | -25.82     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2310.000        | 67.65          | -30.59        | 37.06          | 74.00          | -36.94     | peak     | P   |
| 2   | 2390.000        | 68.91          | -30.49        | 38.42          | 74.00          | -35.58     | peak     | P   |
| 3   | 2400.000        | 78.00          | -30.48        | 47.52          | 74.00          | -26.48     | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2483.500        | 79.85          | -30.39        | 49.46          | 74.00          | -24.54     | peak     | P   |
| 2   | 2500.000        | 70.22          | -30.37        | 39.85          | 74.00          | -34.15     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2483.500        | 79.10          | -30.39        | 48.71          | 74.00          | -25.29     | peak     | P   |
| 2   | 2500.000        | 71.86          | -30.37        | 41.49          | 74.00          | -32.51     | peak     | P   |



Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2310.000        | 67.80          | -30.59        | 37.21          | 74.00          | -36.79     | peak     | P   |
| 2   | 2390.000        | 70.30          | -30.49        | 39.81          | 74.00          | -34.19     | peak     | P   |
| 3   | 2400.000        | 77.48          | -30.48        | 47.00          | 74.00          | -27.00     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2310.000        | 68.32          | -30.59        | 37.73          | 74.00          | -36.27     | peak     | P   |
| 2   | 2390.000        | 69.31          | -30.49        | 38.82          | 74.00          | -35.18     | peak     | P   |
| 3   | 2400.000        | 77.63          | -30.48        | 47.15          | 74.00          | -26.85     | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2483.500        | 79.28          | -30.39        | 48.89          | 74.00          | -25.11     | peak     | P   |
| 2   | 2500.000        | 71.69          | -30.37        | 41.32          | 74.00          | -32.68     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2483.500        | 79.02          | -30.39        | 48.63          | 74.00          | -25.37     | peak     | P   |
| 2   | 2500.000        | 71.75          | -30.37        | 41.38          | 74.00          | -32.62     | peak     | P   |



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2310.000        | 69.05          | -30.59        | 38.46          | 74.00          | -35.54     | peak     | P   |
| 2   | 2390.000        | 70.47          | -30.49        | 39.98          | 74.00          | -34.02     | peak     | P   |
| 3   | 2400.000        | 79.25          | -30.48        | 48.77          | 74.00          | -25.23     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2310.000        | 67.26          | -30.59        | 36.67          | 74.00          | -37.33     | peak     | P   |
| 2   | 2390.000        | 69.36          | -30.49        | 38.87          | 74.00          | -35.13     | peak     | P   |
| 3   | 2400.000        | 77.57          | -30.48        | 47.09          | 74.00          | -26.91     | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2483.500        | 79.06          | -30.39        | 48.67          | 74.00          | -25.33     | peak     | P   |
| 2   | 2500.000        | 70.29          | -30.37        | 39.92          | 74.00          | -34.08     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2483.500        | 79.36          | -30.39        | 48.97          | 74.00          | -25.03     | peak     | P   |
| 2   | 2500.000        | 71.99          | -30.37        | 41.62          | 74.00          | -32.38     | peak     | P   |

Note: Level = Reading level + Factor

Factor= Antenna Factor+ Cable Loss-Preamp Factor



## 7.8 Radiated Spurious Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 &amp; 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 68.6 % RH

Atmospheric Pressure: 1010 mbar


### 7.8.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |





### 7.8.3 Test Setup Diagram

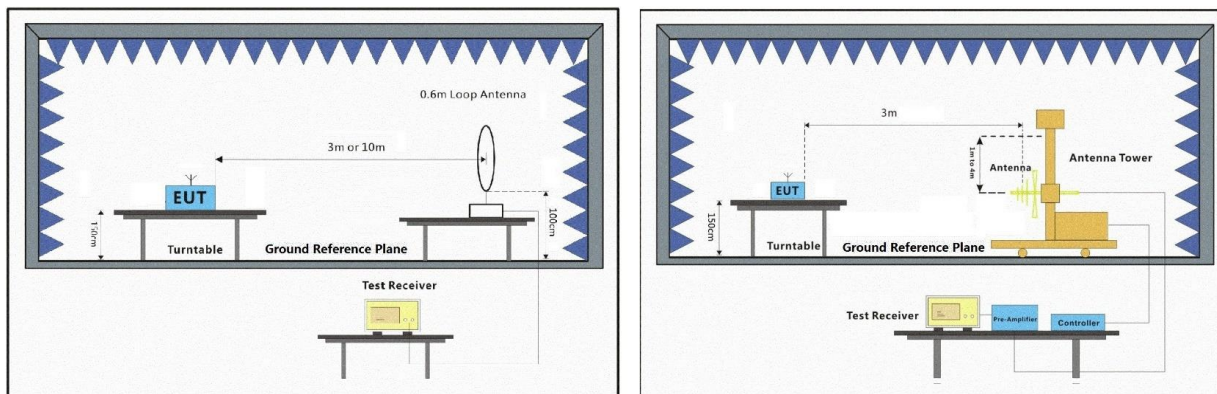

### 7.8.4 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

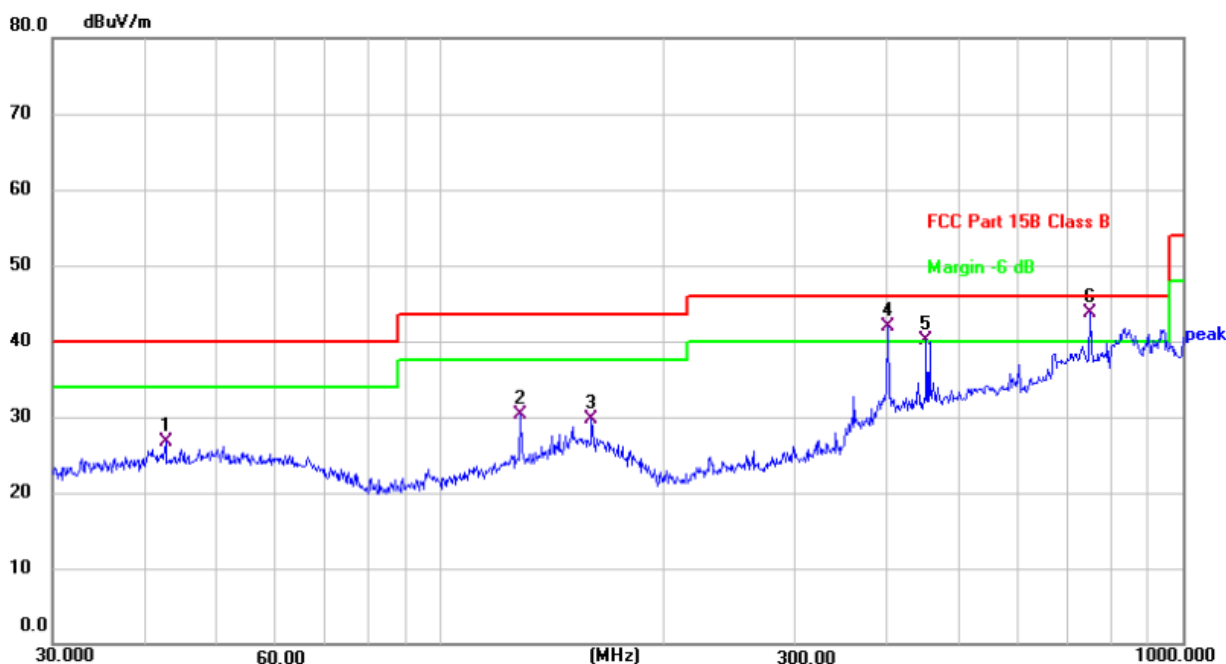

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 42.6000         | 44.12          | -17.41        | 26.71          | 40.00          | -13.29      | QP       | 126         | 56             | P   |        |
| 2   | 128.1130        | 48.64          | -18.26        | 30.38          | 43.50          | -13.12      | QP       | 100         | 46             | P   |        |
| 3   | 159.7844        | 46.88          | -17.23        | 29.65          | 43.50          | -13.85      | QP       | 100         | 53             | P   |        |
| 4 ! | 400.4318        | 57.16          | -15.34        | 41.82          | 46.00          | -4.18       | QP       | 256         | 126            | P   |        |
| 5 ! | 451.1350        | 54.23          | -14.15        | 40.08          | 46.00          | -5.92       | QP       | 43          | 251            | P   |        |
| 6 * | 750.1082        | 52.65          | -8.86         | 43.79          | 46.00          | -2.21       | QP       | 56          | 254            | P   |        |



Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

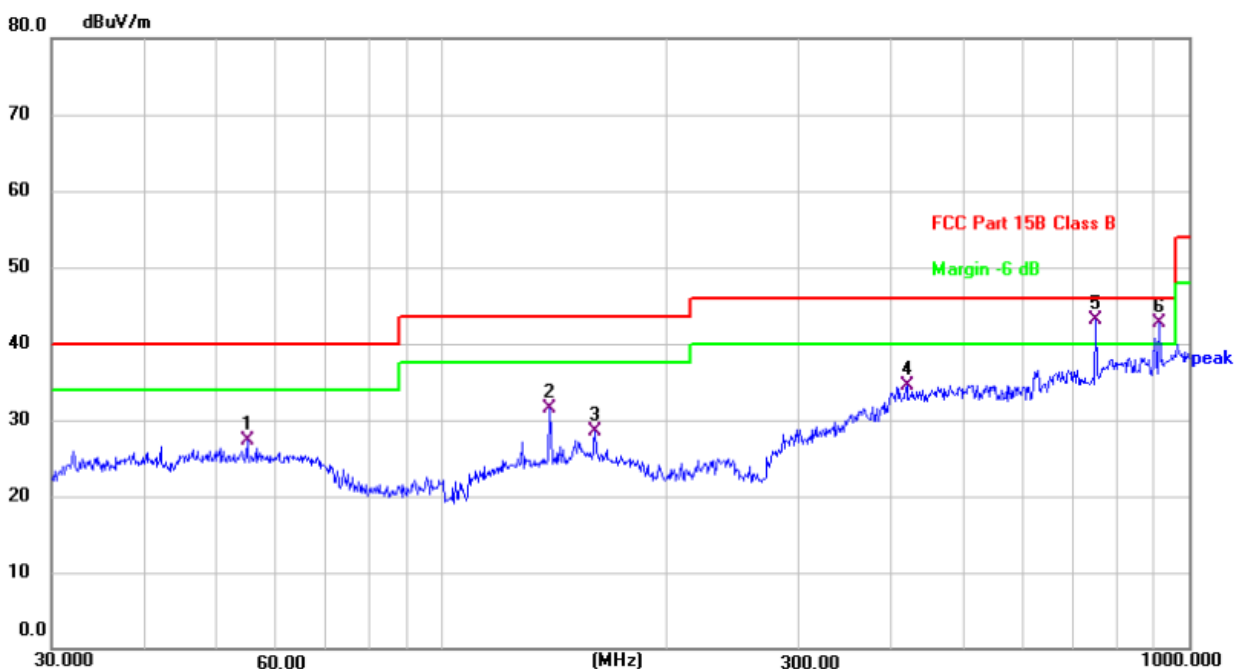

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 54.8348         | 45.20          | -17.85        | 27.35          | 40.00          | -12.65      | QP       | 100         | 25             | P   |        |
| 2   | 139.3610        | 49.09          | -17.52        | 31.57          | 43.50          | -11.93      | QP       | 256         | 126            | P   |        |
| 3   | 160.3454        | 45.91          | -17.32        | 28.59          | 43.50          | -14.91      | QP       | 123         | 125            | P   |        |
| 4   | 419.1080        | 49.39          | -14.83        | 34.56          | 46.00          | -11.44      | QP       | 126         | 46             | P   |        |
| 5 * | 750.1082        | 52.01          | -8.86         | 43.15          | 46.00          | -2.85       | QP       | 125         | 25             | P   |        |
| 6 ! | 912.8620        | 50.42          | -7.77         | 42.65          | 46.00          | -3.35       | QP       | 251         | 135            | P   |        |

## Note:

- 1) Pre-scan all modes and recorded the worst case results in this report (Low Channel).
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) Level= Reading+ Factor, Margin= Level- Limit, Factor= Antenna Factor Cable Loss-Preamp Factor





## 7.9 Radiated Spurious Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.4 °C

Humidity: 54.3 % RH

Atmospheric Pressure: 1010 mbar


### 7.9.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report.                       |
| Final test               | 01           | Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); Only the data of worst case is recorded in the report. |





### 7.9.3 Test Setup Diagram

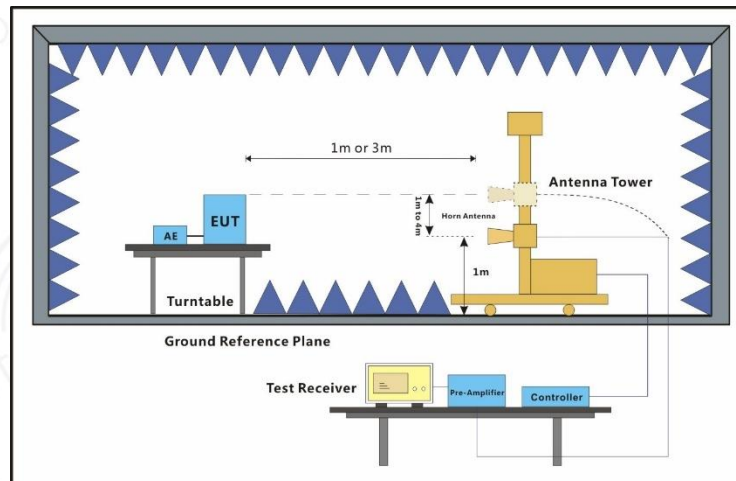

#### 7.9.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) The field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2913.943        | 70.00          | -29.79        | 40.21          | 74.00          | -33.79      | peak     | P   |
| 2   | 4277.113        | 68.14          | -29.41        | 38.73          | 74.00          | -35.27      | peak     | P   |
| 3   | 6085.668        | 65.26          | -26.15        | 39.11          | 74.00          | -34.89      | peak     | P   |
| 4   | 8646.750        | 70.38          | -24.35        | 46.04          | 74.00          | -27.96      | peak     | P   |
| 5   | 11046.718       | 68.57          | -24.23        | 44.34          | 74.00          | -29.66      | peak     | P   |
| 6   | 14218.893       | 70.86          | -20.97        | 49.89          | 74.00          | -24.11      | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2973.906        | 67.34          | -30.48        | 36.86          | 74.00          | -37.14      | peak     | P   |
| 2   | 4312.961        | 67.99          | -29.72        | 38.27          | 74.00          | -35.73      | peak     | P   |
| 3   | 6352.592        | 67.93          | -26.14        | 41.78          | 74.00          | -32.22      | peak     | P   |
| 4   | 8576.764        | 70.69          | -24.81        | 45.88          | 74.00          | -28.12      | peak     | P   |
| 5   | 11286.453       | 67.06          | -23.49        | 43.57          | 74.00          | -30.43      | peak     | P   |
| 6   | 14955.660       | 70.49          | -20.26        | 50.24          | 74.00          | -23.76      | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2915.016        | 69.16          | -29.06        | 40.10          | 74.00          | -33.90      | peak     | P   |
| 2   | 4276.675        | 67.63          | -28.88        | 38.75          | 74.00          | -35.25      | peak     | P   |
| 3   | 6085.948        | 63.99          | -24.78        | 39.21          | 74.00          | -34.79      | peak     | P   |
| 4   | 8645.834        | 69.16          | -24.46        | 44.70          | 74.00          | -29.30      | peak     | P   |
| 5   | 11047.230       | 68.26          | -22.92        | 45.34          | 74.00          | -28.66      | peak     | P   |
| 6   | 14217.427       | 70.15          | -21.44        | 48.71          | 74.00          | -25.29      | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2973.685        | 66.82          | -28.88        | 37.94          | 74.00          | -36.06      | peak     | P   |
| 2   | 4313.550        | 68.68          | -29.24        | 39.44          | 74.00          | -34.56      | peak     | P   |
| 3   | 6352.366        | 67.99          | -25.96        | 42.03          | 74.00          | -31.97      | peak     | P   |
| 4   | 8576.404        | 69.92          | -25.92        | 43.99          | 74.00          | -30.01      | peak     | P   |
| 5   | 11286.338       | 67.40          | -22.84        | 44.57          | 74.00          | -29.43      | peak     | P   |
| 6   | 14956.687       | 70.90          | -20.11        | 50.80          | 74.00          | -23.20      | peak     | P   |





Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2914.476        | 68.68          | -29.44        | 39.23          | 74.00          | -34.77      | peak     | P   |
| 2   | 4277.144        | 67.26          | -29.13        | 38.13          | 74.00          | -35.87      | peak     | P   |
| 3   | 6084.584        | 65.71          | -24.88        | 40.83          | 74.00          | -33.17      | peak     | P   |
| 4   | 8645.602        | 70.55          | -25.71        | 44.84          | 74.00          | -29.16      | peak     | P   |
| 5   | 11047.458       | 67.14          | -24.34        | 42.81          | 74.00          | -31.19      | peak     | P   |
| 6   | 14217.526       | 70.38          | -21.14        | 49.25          | 74.00          | -24.75      | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2972.852        | 66.53          | -28.96        | 37.57          | 74.00          | -36.43      | peak     | P   |
| 2   | 4312.705        | 68.15          | -29.49        | 38.65          | 74.00          | -35.35      | peak     | P   |
| 3   | 6353.264        | 67.55          | -24.73        | 42.82          | 74.00          | -31.18      | peak     | P   |
| 4   | 8575.890        | 70.32          | -25.65        | 44.67          | 74.00          | -29.33      | peak     | P   |
| 5   | 11285.747       | 68.48          | -23.09        | 45.39          | 74.00          | -28.61      | peak     | P   |
| 6   | 14956.553       | 70.07          | -20.56        | 49.51          | 74.00          | -24.49      | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2915.017        | 69.77          | -29.51        | 40.26          | 74.00          | -33.74      | peak     | P   |
| 2   | 4276.815        | 67.78          | -29.05        | 38.73          | 74.00          | -35.27      | peak     | P   |
| 3   | 6084.939        | 64.21          | -25.72        | 38.48          | 74.00          | -35.52      | peak     | P   |
| 4   | 8646.425        | 70.60          | -24.74        | 45.86          | 74.00          | -28.14      | peak     | P   |
| 5   | 11047.600       | 68.68          | -23.96        | 44.72          | 74.00          | -29.28      | peak     | P   |
| 6   | 14217.398       | 70.75          | -20.36        | 50.39          | 74.00          | -23.61      | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2973.985        | 66.72          | -29.64        | 37.08          | 74.00          | -36.92      | peak     | P   |
| 2   | 4313.182        | 69.81          | -29.88        | 39.93          | 74.00          | -34.07      | peak     | P   |
| 3   | 6352.443        | 67.81          | -25.32        | 42.49          | 74.00          | -31.51      | peak     | P   |
| 4   | 8577.069        | 70.52          | -24.90        | 45.62          | 74.00          | -28.38      | peak     | P   |
| 5   | 11286.478       | 67.34          | -22.74        | 44.60          | 74.00          | -29.40      | peak     | P   |
| 6   | 14955.864       | 70.21          | -20.83        | 49.38          | 74.00          | -24.62      | peak     | P   |





Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2915.360        | 69.79          | -30.03        | 39.77          | 74.00          | -34.23      | peak     | P   |
| 2   | 4276.157        | 67.82          | -28.08        | 39.75          | 74.00          | -34.25      | peak     | P   |
| 3   | 6086.306        | 65.57          | -24.86        | 40.72          | 74.00          | -33.28      | peak     | P   |
| 4   | 8646.245        | 69.52          | -24.50        | 45.01          | 74.00          | -28.99      | peak     | P   |
| 5   | 11047.789       | 67.12          | -23.61        | 43.51          | 74.00          | -30.49      | peak     | P   |
| 6   | 14218.280       | 70.80          | -21.93        | 48.87          | 74.00          | -25.13      | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2973.897        | 67.93          | -29.00        | 38.92          | 74.00          | -35.08      | peak     | P   |
| 2   | 4313.547        | 69.26          | -28.14        | 41.12          | 74.00          | -32.88      | peak     | P   |
| 3   | 6353.848        | 67.22          | -25.29        | 41.93          | 74.00          | -32.07      | peak     | P   |
| 4   | 8576.278        | 70.12          | -25.12        | 45.00          | 74.00          | -29.00      | peak     | P   |
| 5   | 11285.213       | 68.77          | -23.98        | 44.78          | 74.00          | -29.22      | peak     | P   |
| 6   | 14956.670       | 71.86          | -19.78        | 52.08          | 74.00          | -21.92      | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2914.818        | 69.15          | -29.38        | 39.77          | 74.00          | -34.23      | peak     | P   |
| 2   | 4277.194        | 67.88          | -28.55        | 39.32          | 74.00          | -34.68      | peak     | P   |
| 3   | 6084.955        | 64.96          | -24.82        | 40.13          | 74.00          | -33.87      | peak     | P   |
| 4   | 8645.680        | 69.58          | -24.35        | 45.23          | 74.00          | -28.77      | peak     | P   |
| 5   | 11047.062       | 68.39          | -23.00        | 45.39          | 74.00          | -28.61      | peak     | P   |
| 6   | 14218.902       | 70.61          | -21.67        | 48.95          | 74.00          | -25.05      | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuv) | Factor (dB/m) | Level (dBuv/m) | Limit (dBuv/m) | Margin( dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 2972.451        | 67.90          | -29.19        | 38.71          | 74.00          | -35.29      | peak     | P   |
| 2   | 4314.051        | 68.95          | -28.54        | 40.41          | 74.00          | -33.59      | peak     | P   |
| 3   | 6352.513        | 67.76          | -25.74        | 42.02          | 74.00          | -31.98      | peak     | P   |
| 4   | 8576.567        | 70.55          | -25.95        | 44.60          | 74.00          | -29.40      | peak     | P   |
| 5   | 11286.309       | 67.57          | -22.45        | 45.12          | 74.00          | -28.88      | peak     | P   |
| 6   | 14956.743       | 70.83          | -19.74        | 51.09          | 74.00          | -22.91      | peak     | P   |



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2915.479        | 69.97          | -28.95        | 41.03          | 74.00          | -32.97     | peak     | P   |
| 2   | 4277.486        | 69.12          | -29.42        | 39.70          | 74.00          | -34.30     | peak     | P   |
| 3   | 6085.160        | 65.43          | -24.69        | 40.74          | 74.00          | -33.26     | peak     | P   |
| 4   | 8644.958        | 69.17          | -25.41        | 43.76          | 74.00          | -30.24     | peak     | P   |
| 5   | 11047.573       | 67.04          | -23.32        | 43.72          | 74.00          | -30.28     | peak     | P   |
| 6   | 14217.701       | 69.95          | -21.45        | 48.50          | 74.00          | -25.50     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2972.534        | 67.91          | -28.90        | 39.01          | 74.00          | -34.99     | peak     | P   |
| 2   | 4312.532        | 68.67          | -28.12        | 40.54          | 74.00          | -33.46     | peak     | P   |
| 3   | 6354.092        | 67.44          | -24.51        | 42.93          | 74.00          | -31.07     | peak     | P   |
| 4   | 8576.880        | 69.63          | -24.36        | 45.27          | 74.00          | -28.73     | peak     | P   |
| 5   | 11286.107       | 68.05          | -24.03        | 44.02          | 74.00          | -29.98     | peak     | P   |
| 6   | 14956.502       | 71.43          | -20.92        | 50.51          | 74.00          | -23.49     | peak     | P   |

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2914.192        | 69.58          | -30.18        | 39.39          | 74.00          | -34.61     | peak     | P   |
| 2   | 4276.155        | 67.87          | -29.26        | 38.61          | 74.00          | -35.39     | peak     | P   |
| 3   | 6086.024        | 64.14          | -25.09        | 39.06          | 74.00          | -34.94     | peak     | P   |
| 4   | 8645.700        | 69.37          | -24.56        | 44.81          | 74.00          | -29.19     | peak     | P   |
| 5   | 11046.712       | 68.65          | -23.17        | 45.48          | 74.00          | -28.52     | peak     | P   |
| 6   | 14217.161       | 71.72          | -21.58        | 50.14          | 74.00          | -23.86     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2972.738        | 66.23          | -29.21        | 37.01          | 74.00          | -36.99     | peak     | P   |
| 2   | 4313.759        | 69.64          | -28.31        | 41.33          | 74.00          | -32.67     | peak     | P   |
| 3   | 6352.606        | 67.61          | -24.57        | 43.04          | 74.00          | -30.96     | peak     | P   |
| 4   | 8576.502        | 69.27          | -24.88        | 44.39          | 74.00          | -29.61     | peak     | P   |
| 5   | 11285.409       | 67.40          | -22.88        | 44.52          | 74.00          | -29.48     | peak     | P   |
| 6   | 14955.339       | 70.16          | -19.97        | 50.18          | 74.00          | -23.82     | peak     | P   |



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2973.965        | 67.53          | -30.25        | 37.28          | 74.00          | -36.72     | peak     | P   |
| 2   | 4314.090        | 68.79          | -29.48        | 39.31          | 74.00          | -34.69     | peak     | P   |
| 3   | 6354.096        | 68.26          | -25.54        | 42.73          | 74.00          | -31.27     | peak     | P   |
| 4   | 8575.751        | 70.03          | -25.33        | 44.70          | 74.00          | -29.30     | peak     | P   |
| 5   | 11285.309       | 68.68          | -23.27        | 45.41          | 74.00          | -28.59     | peak     | P   |
| 6   | 14956.402       | 70.92          | -20.28        | 50.63          | 74.00          | -23.37     | peak     | P   |

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin(dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|------------|----------|-----|
| 1   | 2913.665        | 70.00          | -29.43        | 40.56          | 74.00          | -33.44     | peak     | P   |
| 2   | 4277.309        | 68.79          | -28.40        | 40.39          | 74.00          | -33.61     | peak     | P   |
| 3   | 6085.653        | 65.21          | -25.50        | 39.72          | 74.00          | -34.28     | peak     | P   |
| 4   | 8646.677        | 69.38          | -25.37        | 44.00          | 74.00          | -30.00     | peak     | P   |
| 5   | 11046.890       | 68.90          | -24.26        | 44.64          | 74.00          | -29.36     | peak     | P   |
| 6   | 14217.413       | 70.69          | -22.10        | 48.59          | 74.00          | -25.41     | peak     | P   |



## 8 Test Setup Photo

Please Refer to appendix – Test Setup Photos for BTEK231024010AE

## 9 EUT Constructional Details (EUT Photos)

Please Refer to appendix - External and Internal Photos for BTEK231024010AE








## 10 Appendix


### 1. -6dB Bandwidth

| Condition | Antenna | Modulation    | Frequency (MHz) | -6dB BW(MHz) | limit(kHz) | Result |
|-----------|---------|---------------|-----------------|--------------|------------|--------|
| NVNT      | ANT1    | 802.11b       | 2412.00         | 8.60         | 500        | Pass   |
| NVNT      | ANT1    | 802.11b       | 2437.00         | 10.08        | 500        | Pass   |
| NVNT      | ANT1    | 802.11b       | 2462.00         | 9.08         | 500        | Pass   |
| NVNT      | ANT1    | 802.11g       | 2412.00         | 13.87        | 500        | Pass   |
| NVNT      | ANT1    | 802.11g       | 2437.00         | 16.08        | 500        | Pass   |
| NVNT      | ANT1    | 802.11g       | 2462.00         | 15.09        | 500        | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00         | 13.86        | 500        | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2437.00         | 16.37        | 500        | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00         | 15.09        | 500        | Pass   |

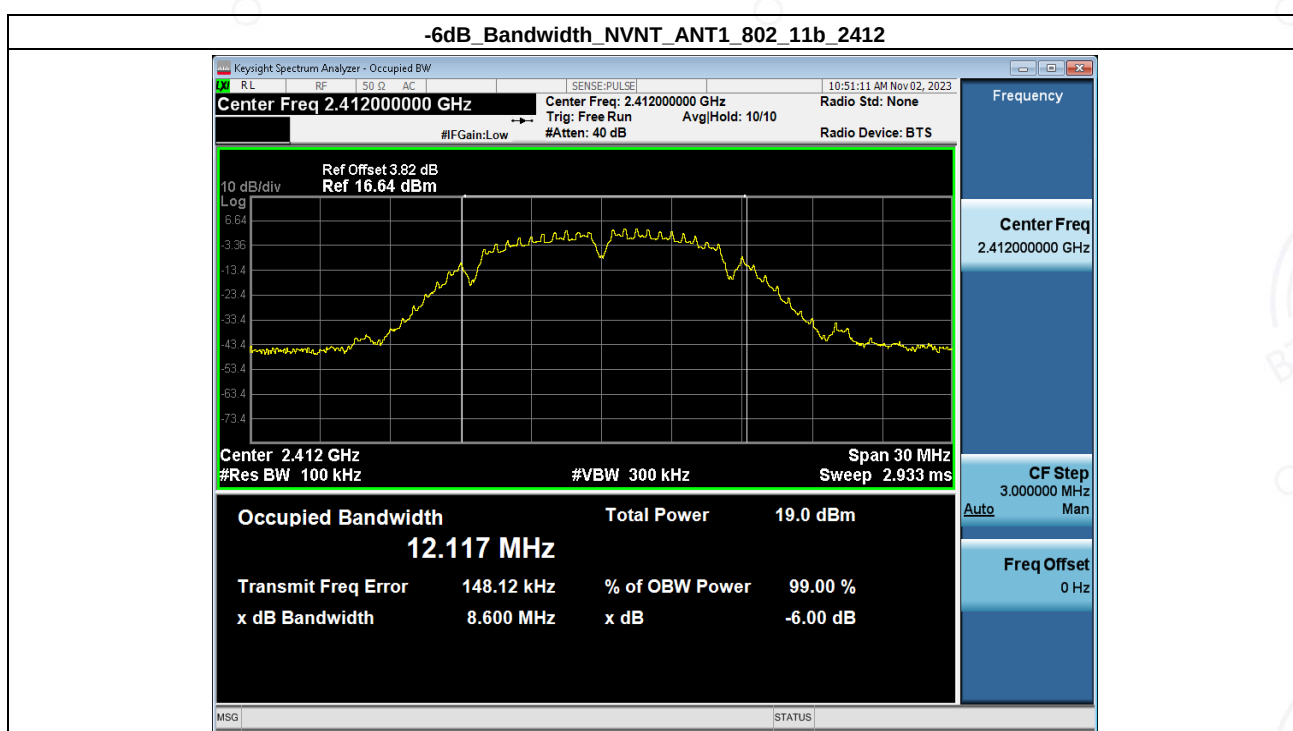


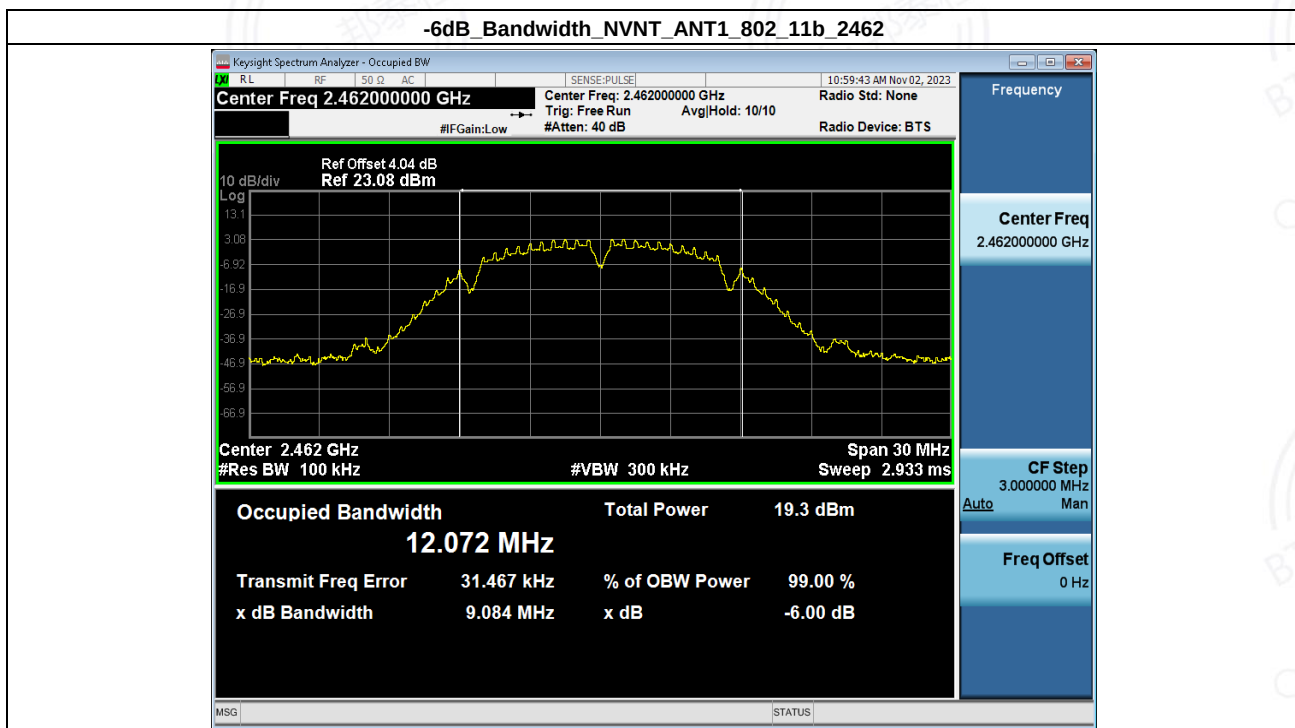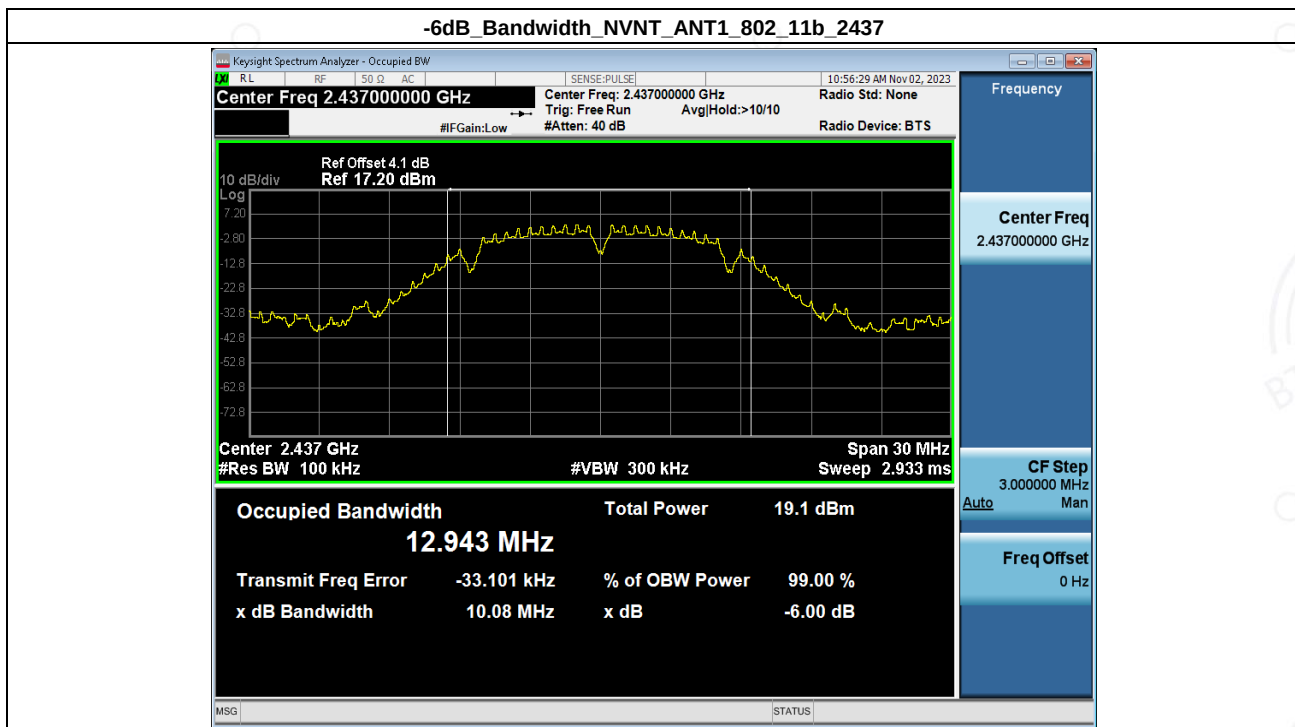


## -6dB Bandwidth\_NVNT\_ANT1\_802\_11g\_2412

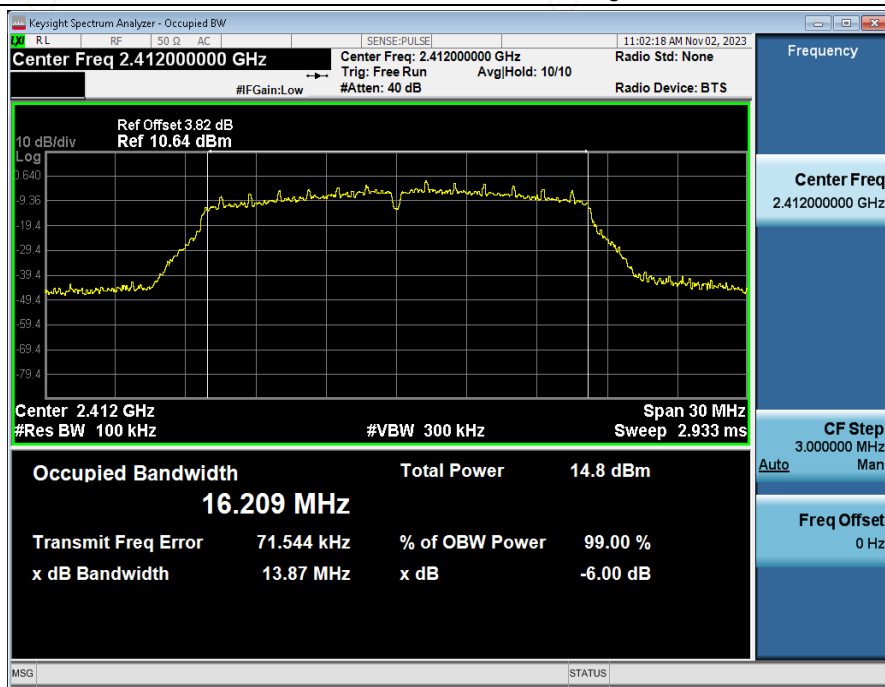


## -6dB Bandwidth\_NVNT\_ANT1\_802\_11g\_2437

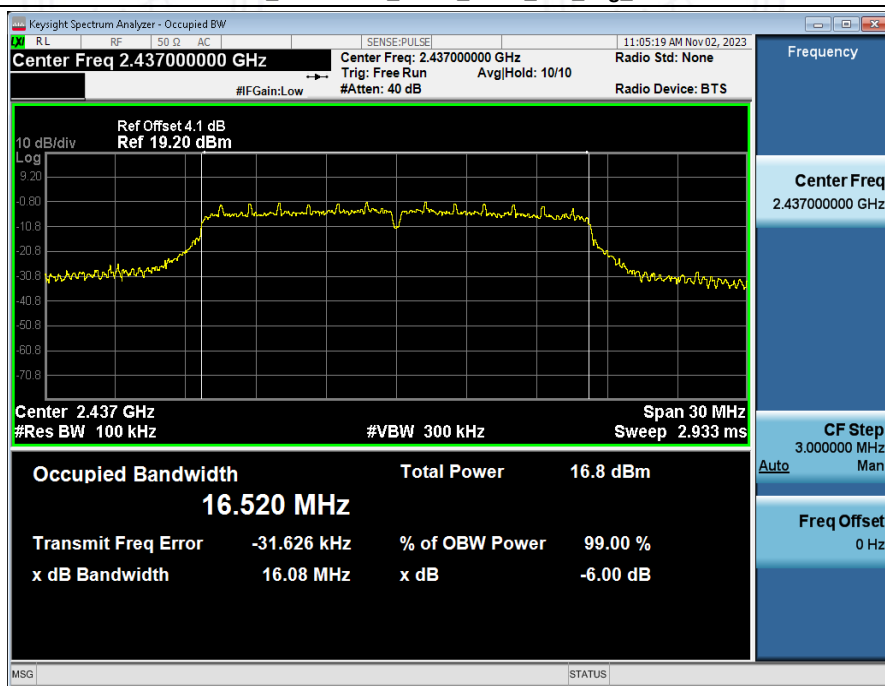

## -6dB Bandwidth\_NVNT\_ANT1\_802\_11g\_2462

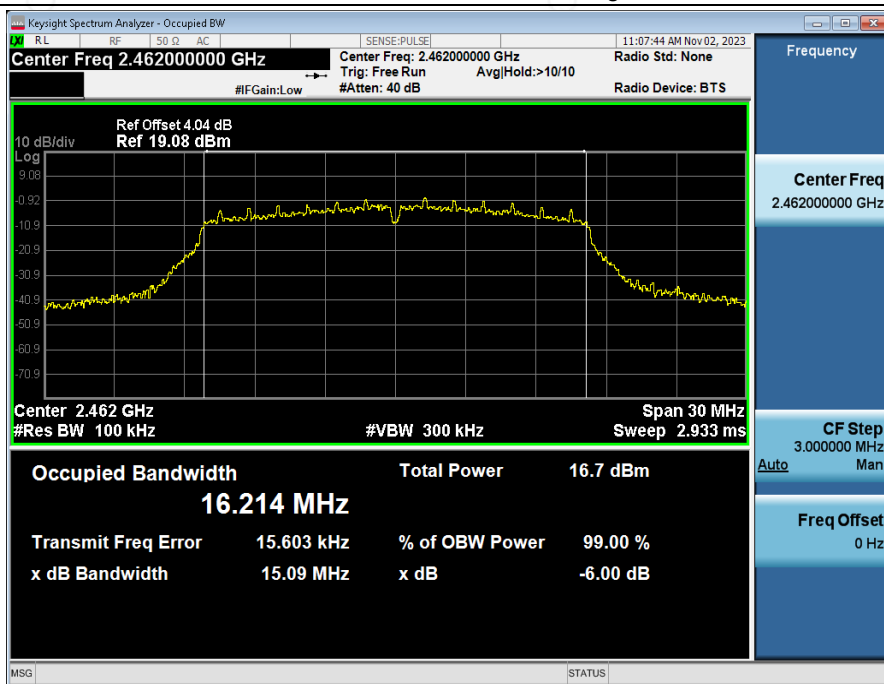


## -6dB Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_2412

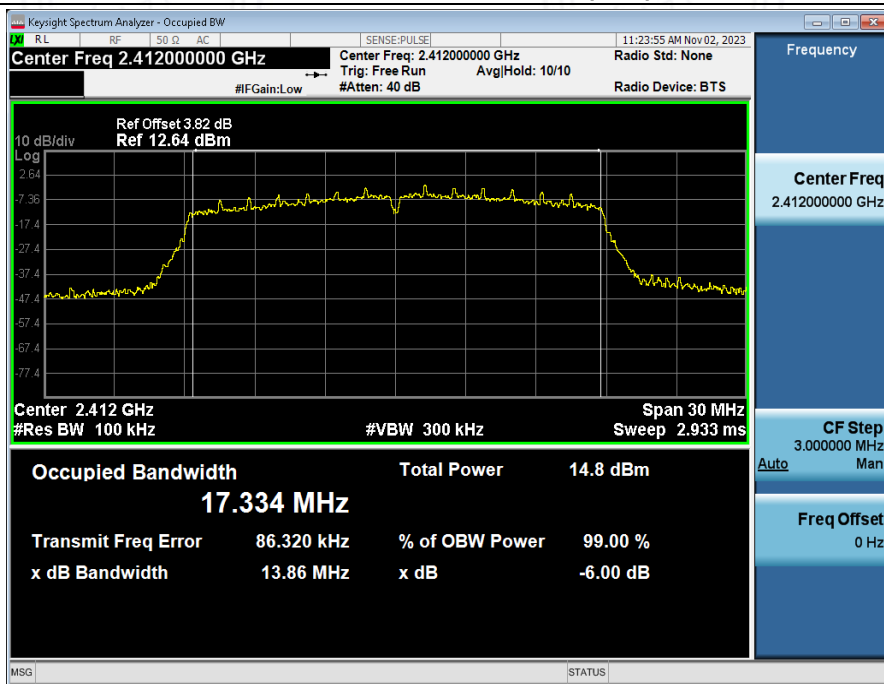




## -6dB\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_2437

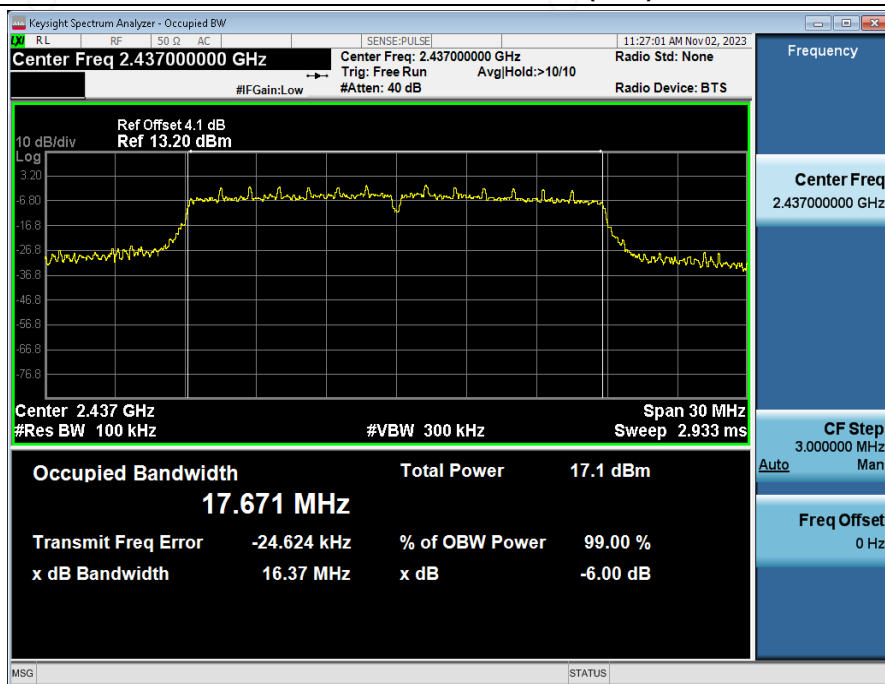




## -6dB\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_2462

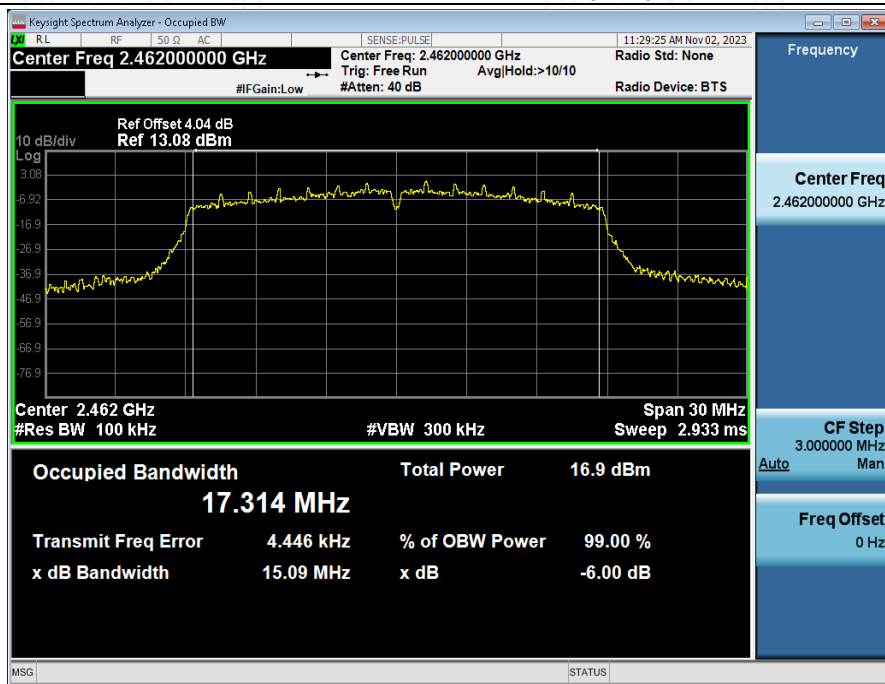


## 2. 99% Occupied Bandwidth

| Condition | Antenna | Modulation    | Frequency (MHz) | 99%BW(MHz) |
|-----------|---------|---------------|-----------------|------------|
| NVNT      | ANT1    | 802.11b       | 2412.00         | 12.004     |
| NVNT      | ANT1    | 802.11b       | 2437.00         | 12.601     |
| NVNT      | ANT1    | 802.11b       | 2462.00         | 11.966     |
| NVNT      | ANT1    | 802.11g       | 2412.00         | 16.724     |
| NVNT      | ANT1    | 802.11g       | 2437.00         | 17.343     |
| NVNT      | ANT1    | 802.11g       | 2462.00         | 16.574     |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00         | 17.567     |
| NVNT      | ANT1    | 802.11n(HT20) | 2437.00         | 18.070     |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00         | 17.497     |

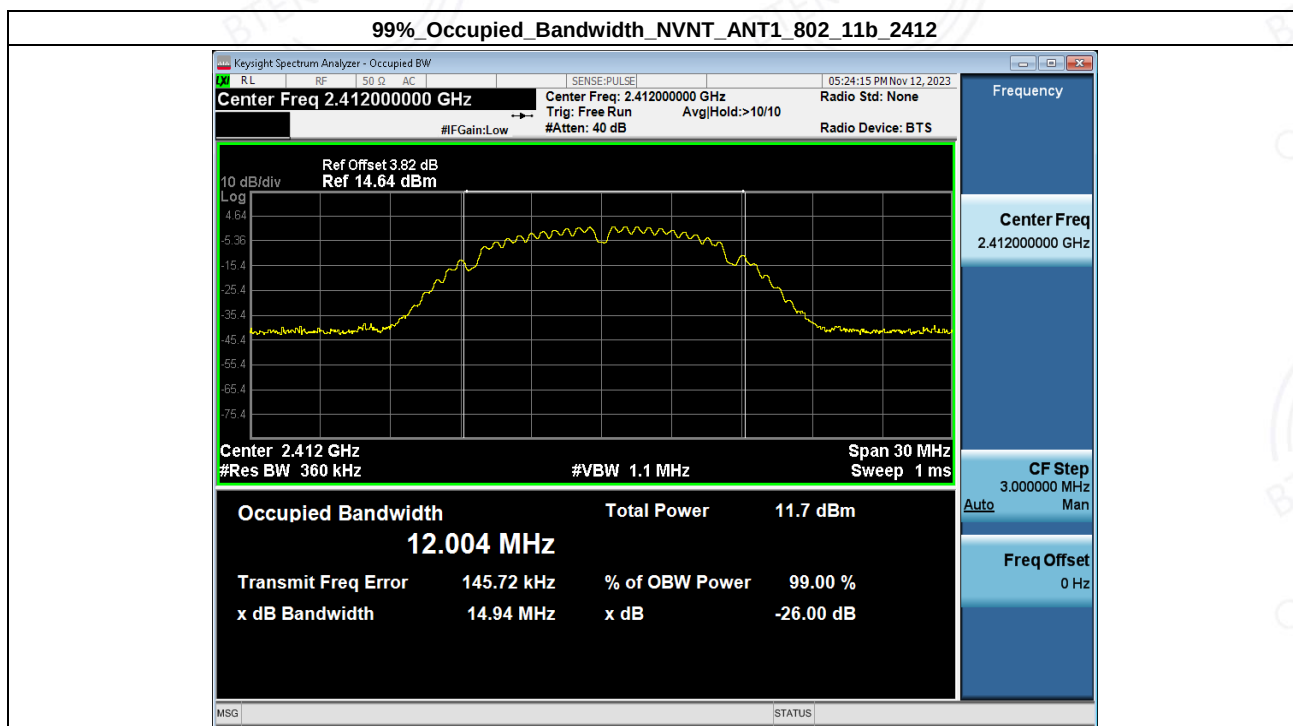


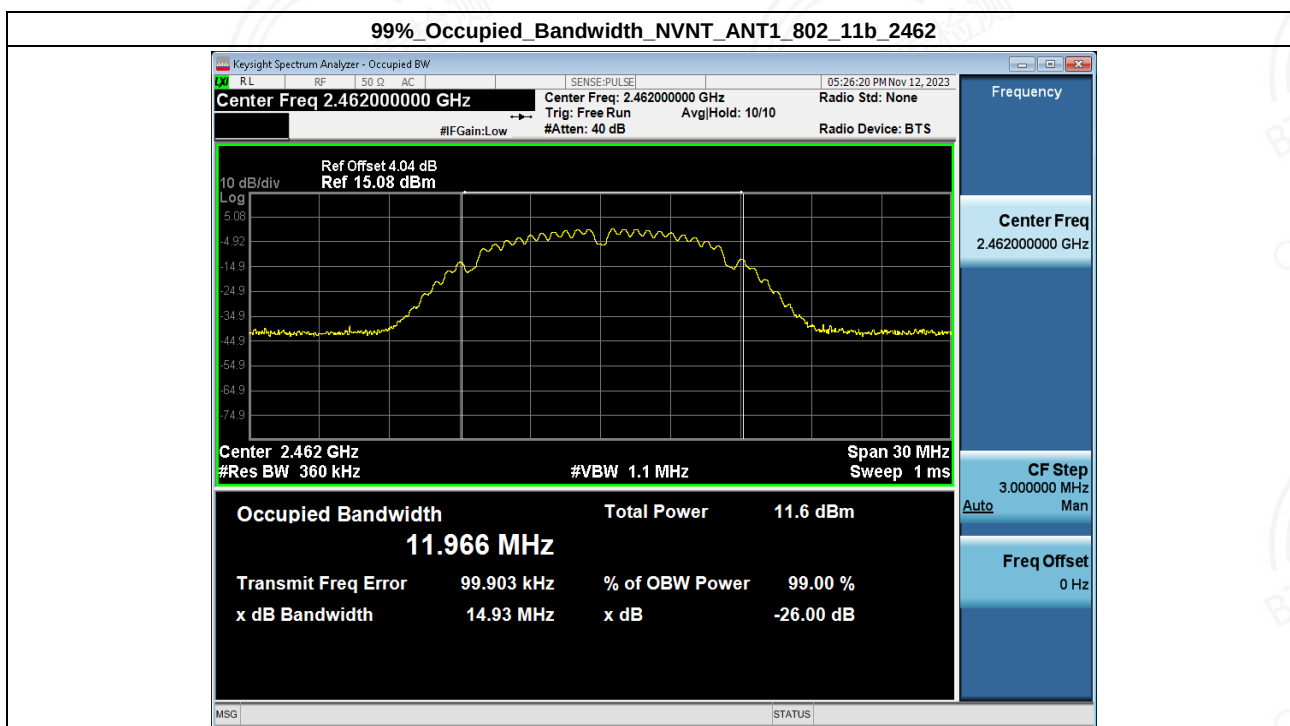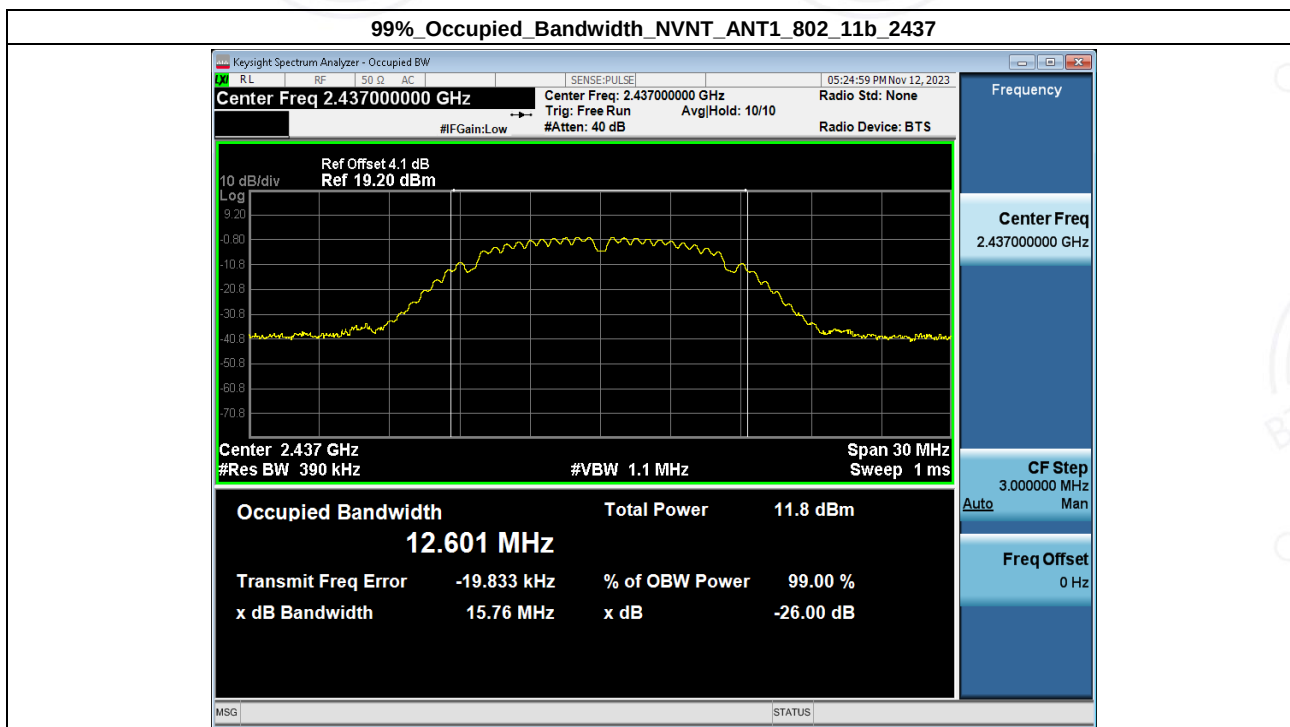

## 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_802\_11g\_2412

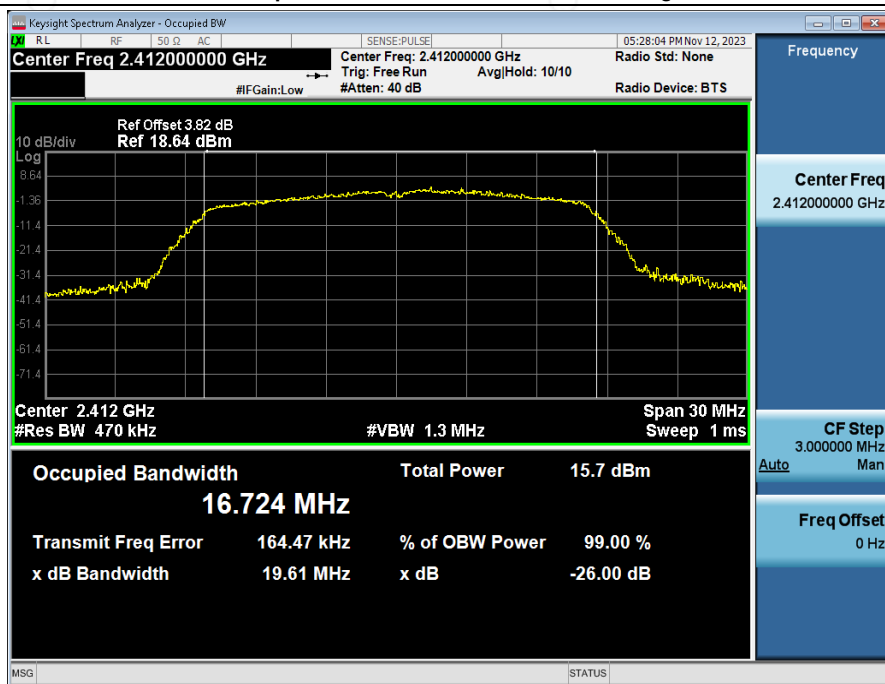


## 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_802\_11g\_2437

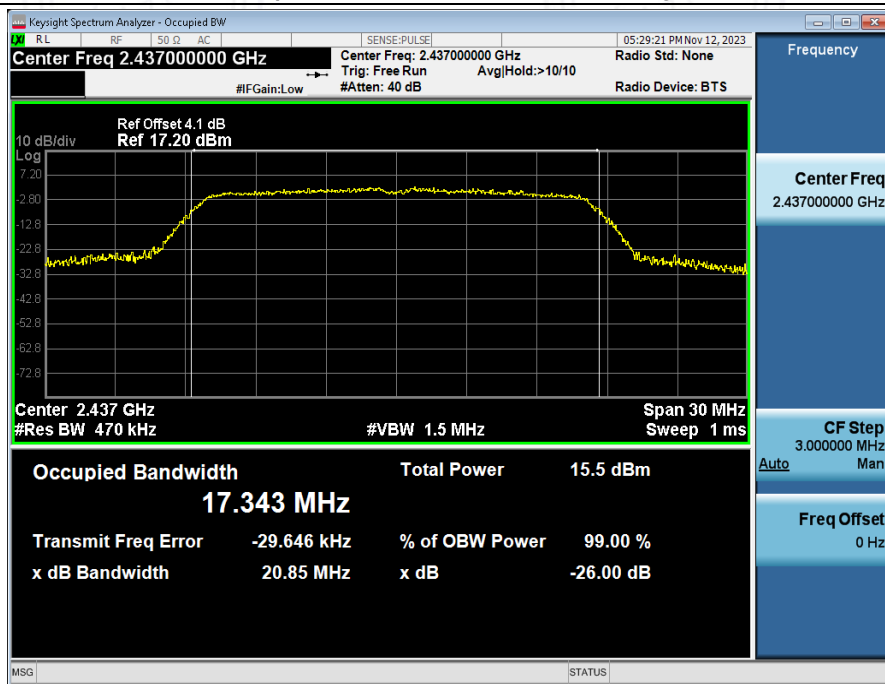





99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_802\_11g\_2462

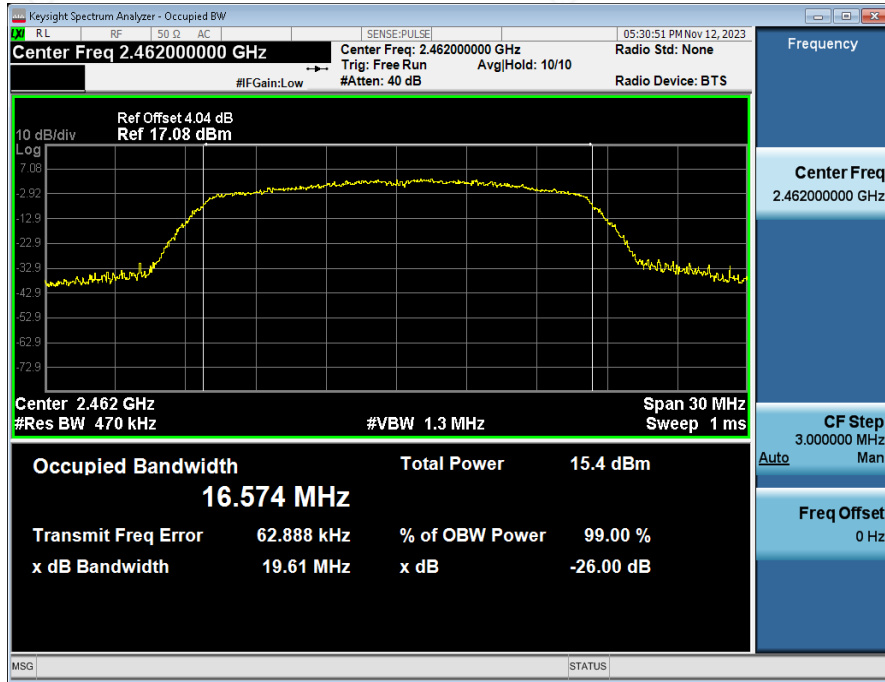


99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_2412

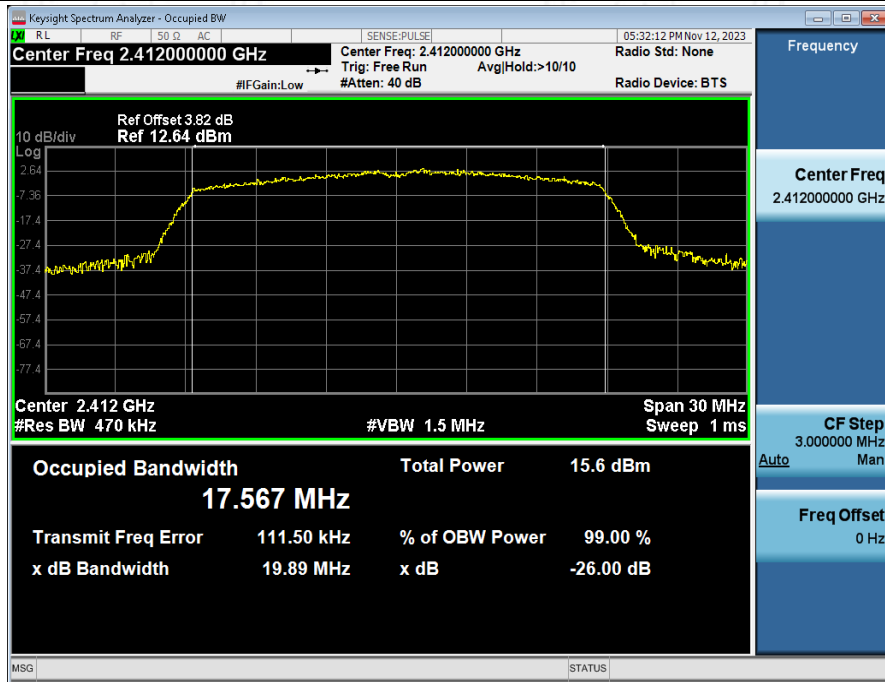

## 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_2437

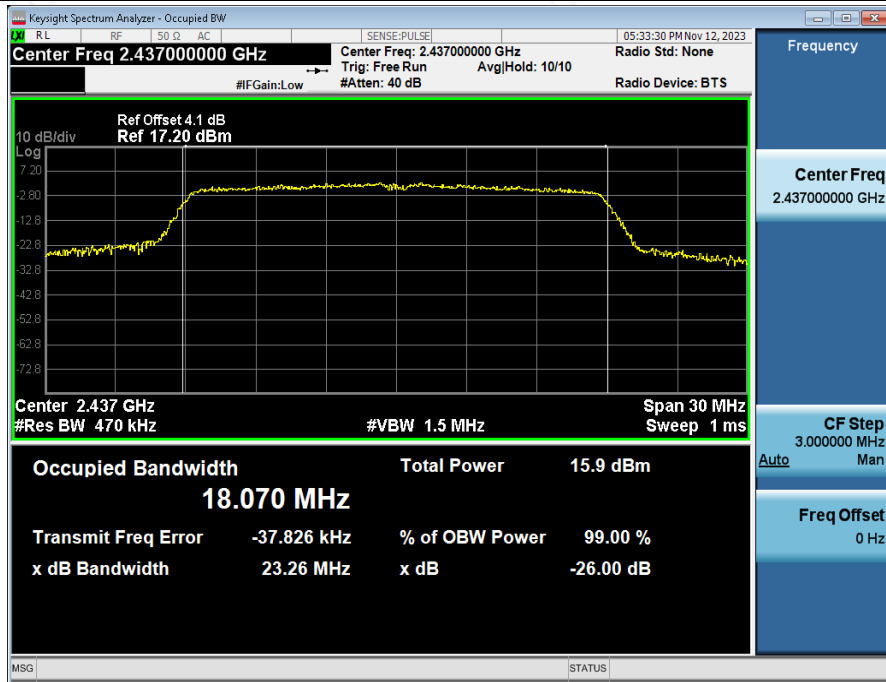




## 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_2462

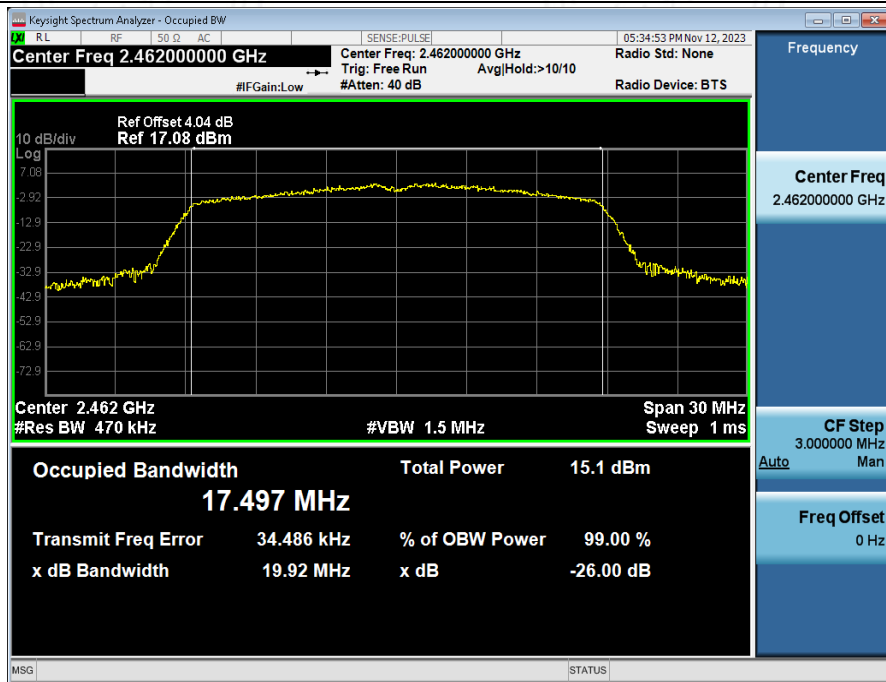



### 3. Duty Cycle



| Condition | Antenna | Modulation    | Frequency (MHz) | Duty cycle(%) | Duty factor(dB) |
|-----------|---------|---------------|-----------------|---------------|-----------------|
| NVNT      | ANT1    | 802.11b       | 2412.00         | 99.76         | 0.00            |
| NVNT      | ANT1    | 802.11b       | 2437.00         | 99.76         | 0.00            |
| NVNT      | ANT1    | 802.11b       | 2462.00         | 100           | 0.00            |
| NVNT      | ANT1    | 802.11g       | 2412.00         | 97.18         | 0.12            |
| NVNT      | ANT1    | 802.11g       | 2437.00         | 99.30         | 0.00            |
| NVNT      | ANT1    | 802.11g       | 2462.00         | 98.59         | 0.00            |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00         | 98.51         | 0.00            |
| NVNT      | ANT1    | 802.11n(HT20) | 2437.00         | 98.51         | 0.00            |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00         | 98.51         | 0.00            |


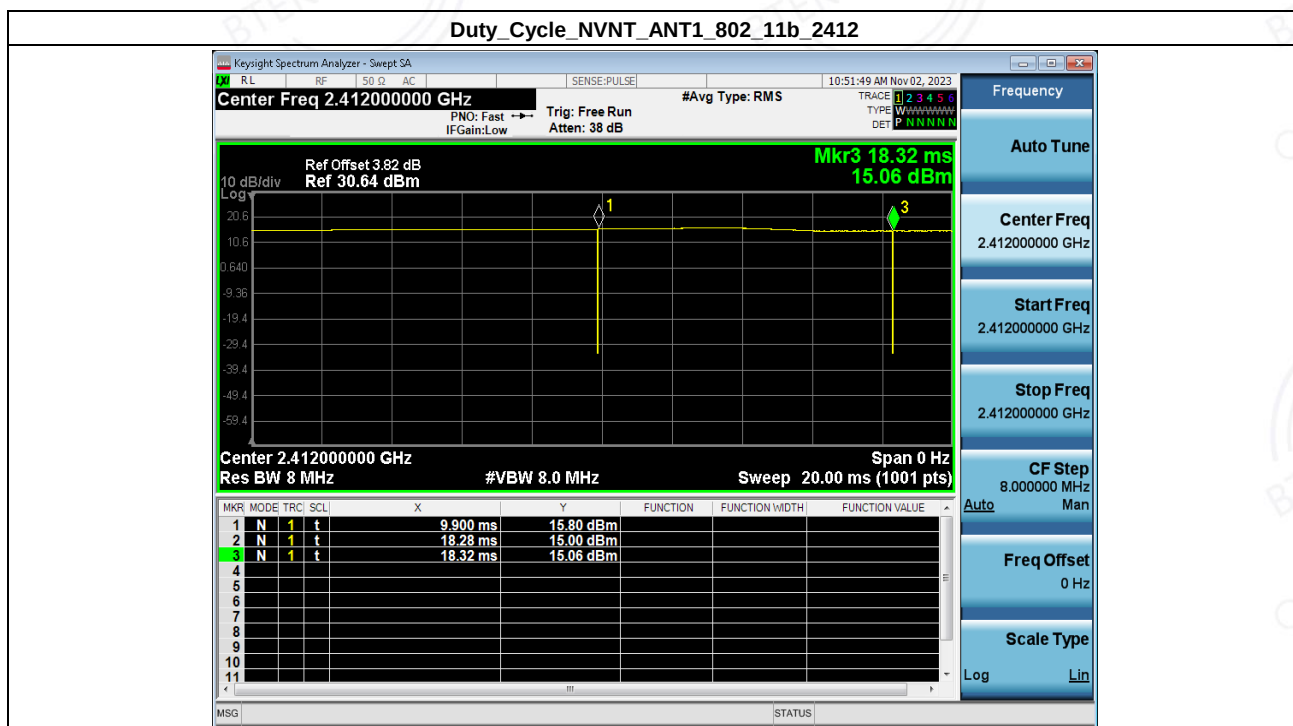


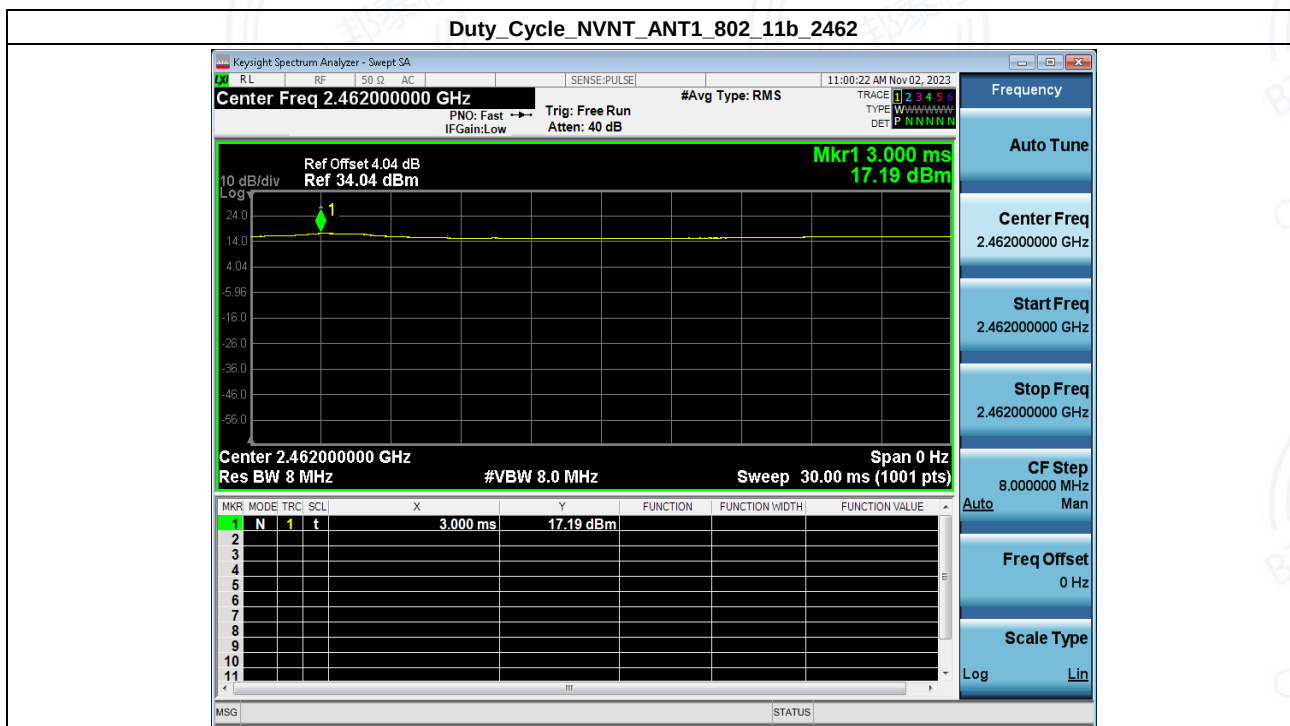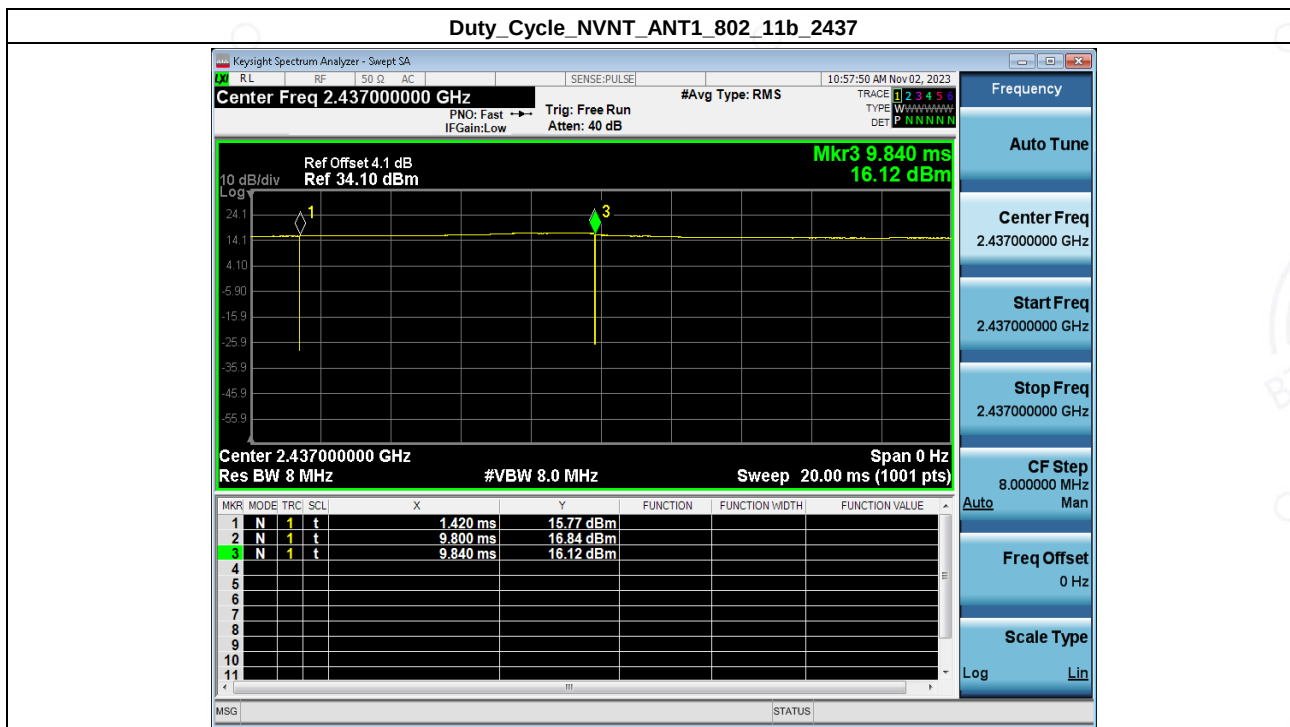



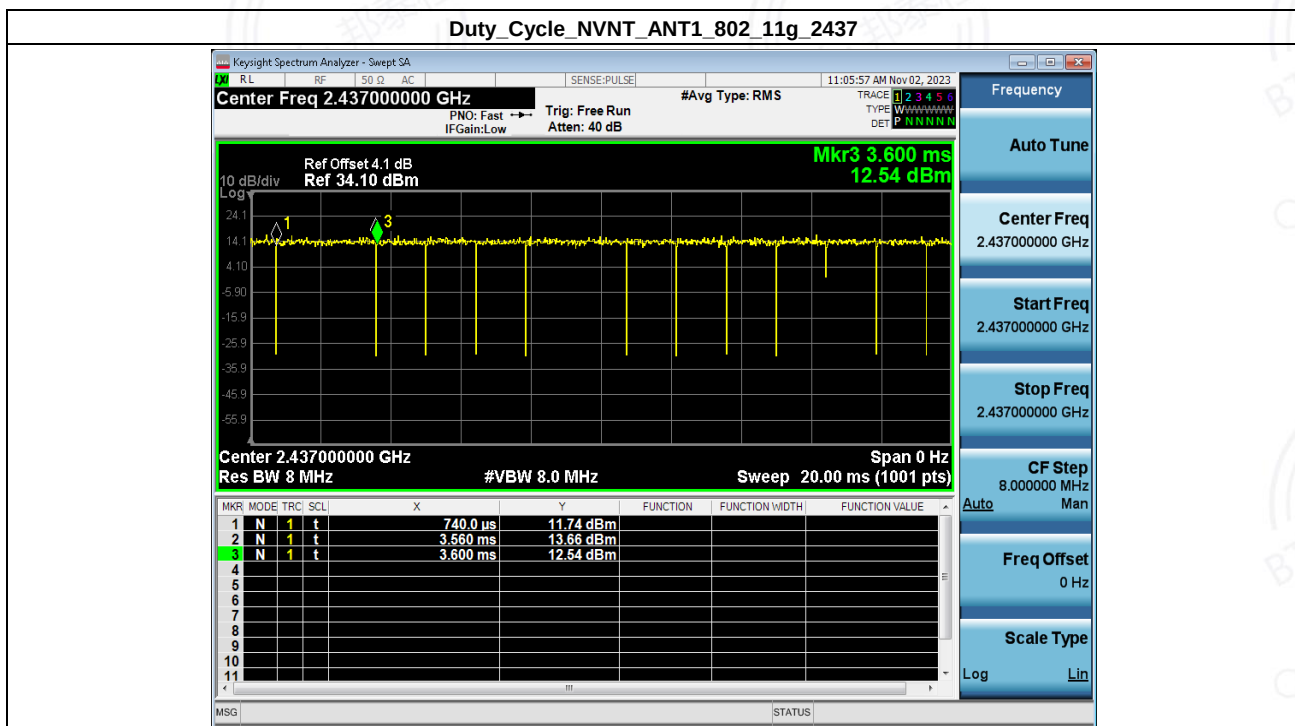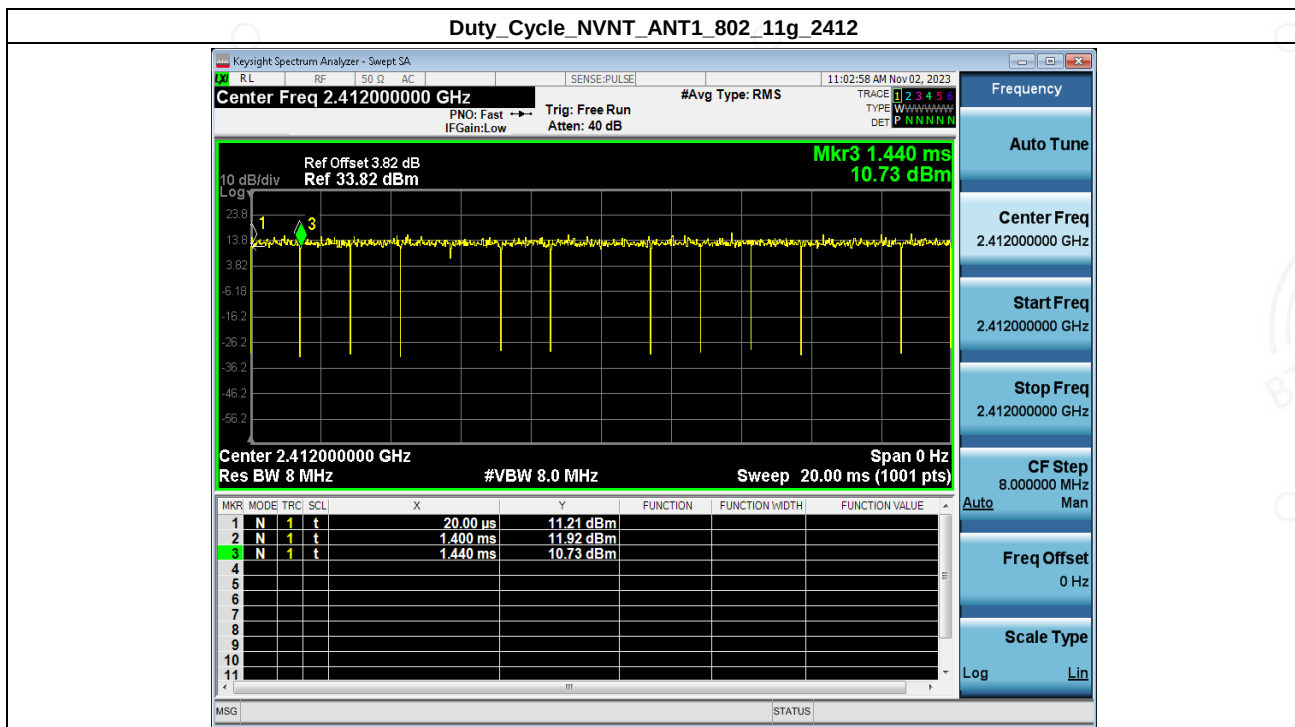

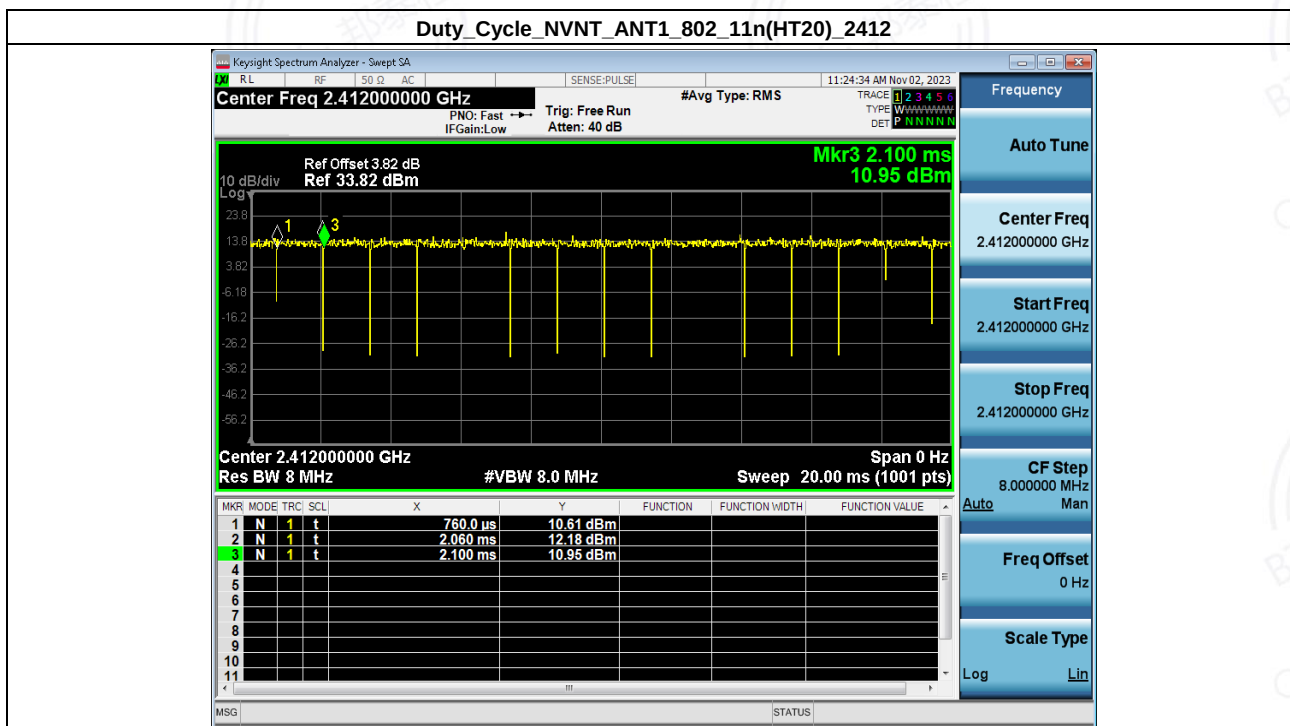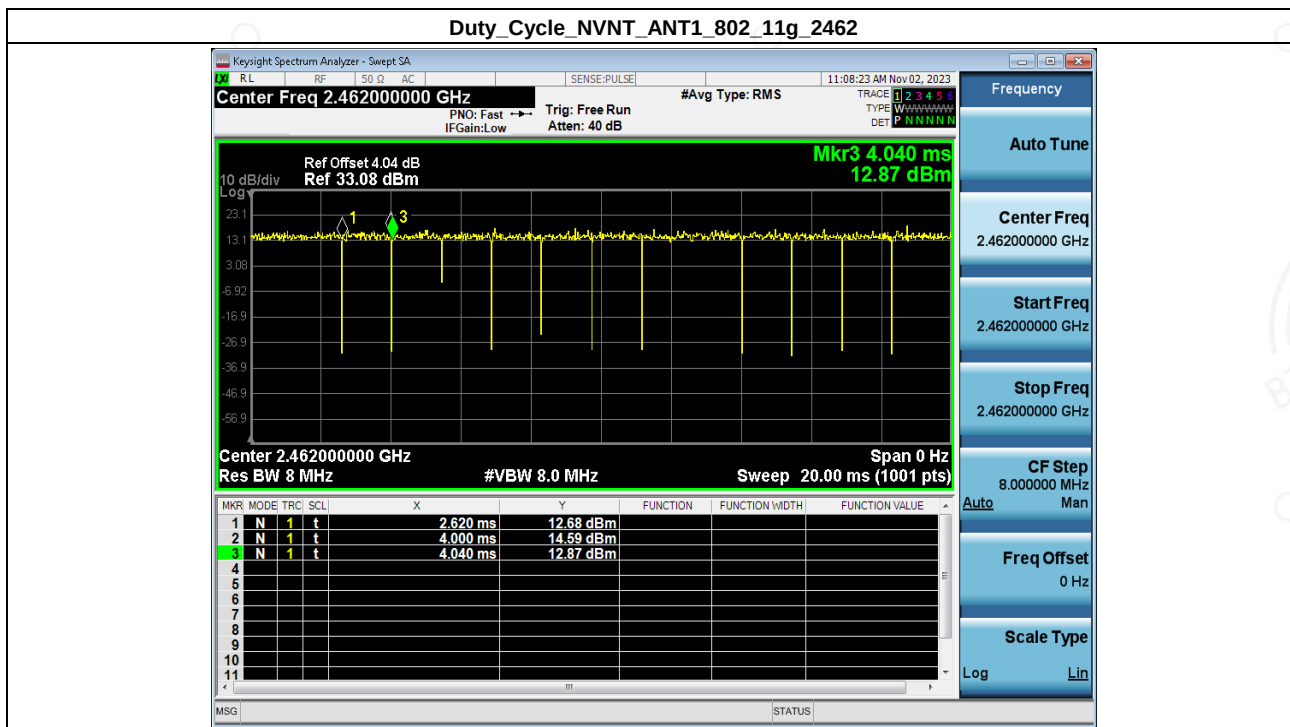

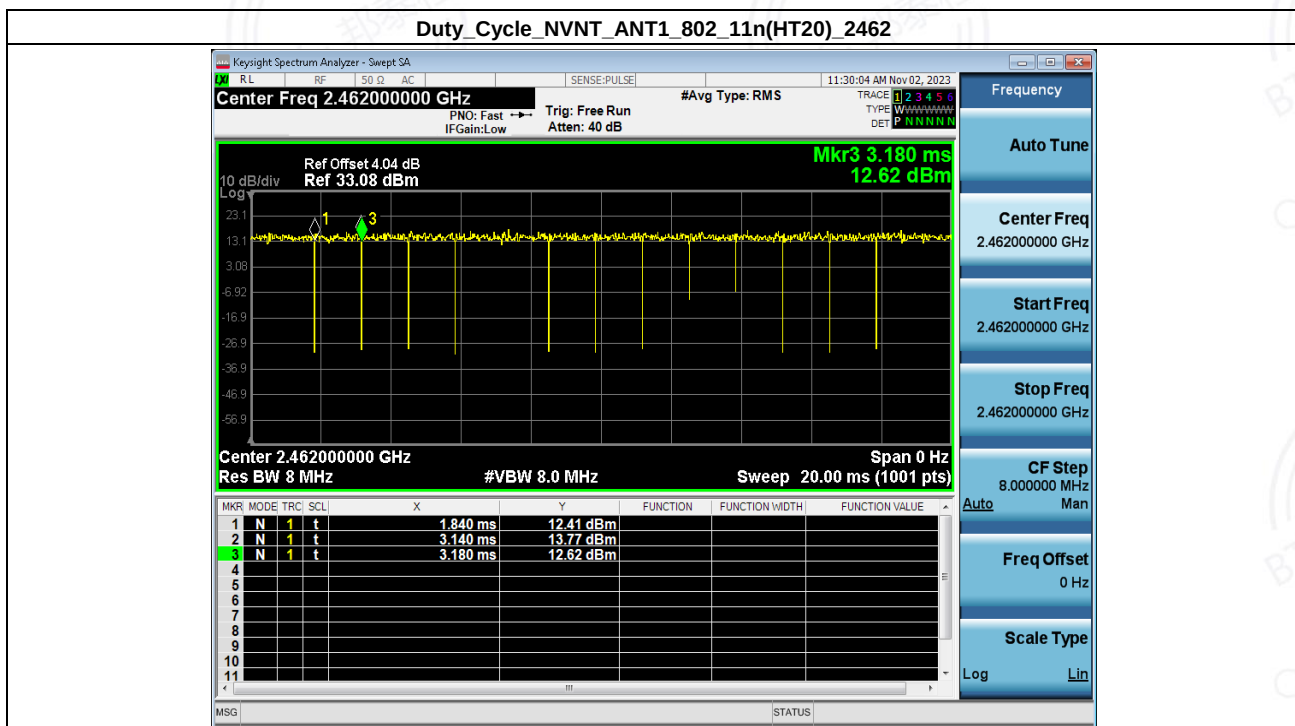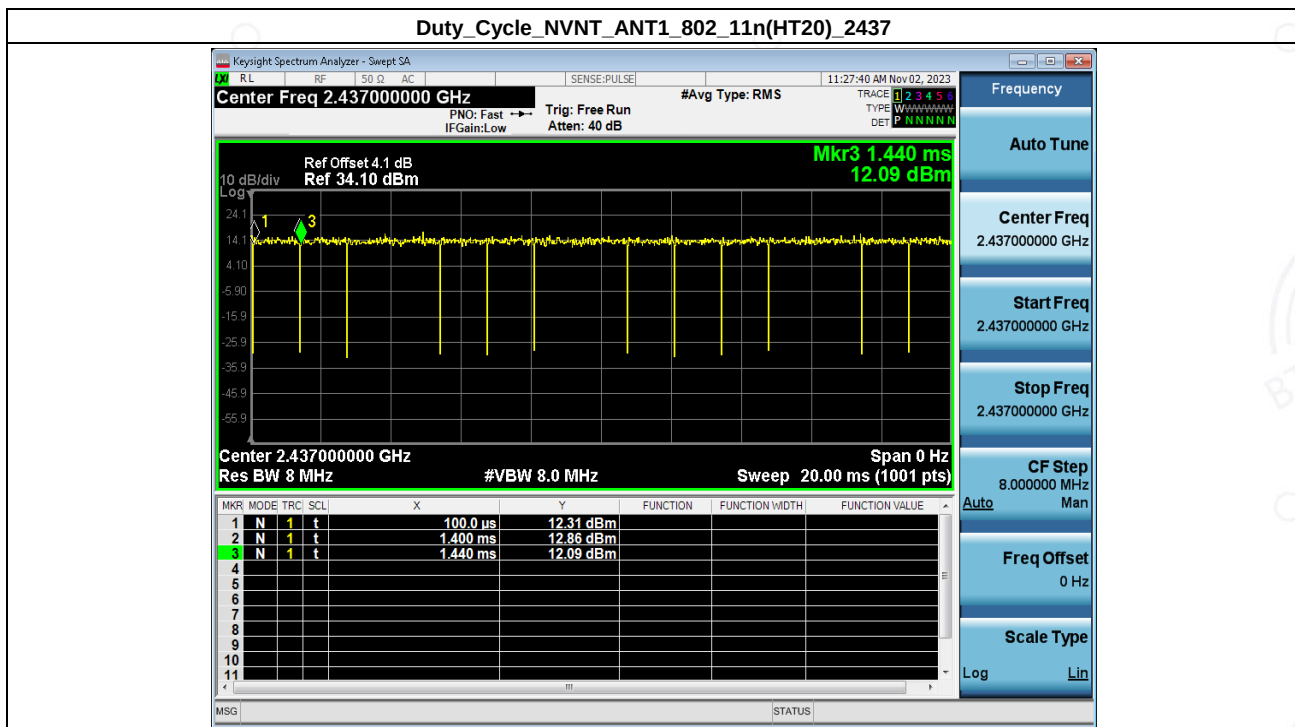




## 4. MAX. Output Power



| Condition | Antenna | Modulation    | Frequency (MHz) | Detector | Conducted Power(dBm) | Duty factor(dB) | Total Power(dBm) | limit(dBm) | Result |
|-----------|---------|---------------|-----------------|----------|----------------------|-----------------|------------------|------------|--------|
| NVNT      | ANT1    | 802.11b       | 2412.00         | RMS      | 8.30                 | 0.00            | 8.30             | 30         | Pass   |
| NVNT      | ANT1    | 802.11b       | 2437.00         | RMS      | 8.56                 | 0.00            | 8.56             | 30         | Pass   |
| NVNT      | ANT1    | 802.11b       | 2462.00         | RMS      | 8.22                 | 0.00            | 8.22             | 30         | Pass   |
| NVNT      | ANT1    | 802.11g       | 2412.00         | RMS      | 8.40                 | 0.12            | 8.52             | 30         | Pass   |
| NVNT      | ANT1    | 802.11g       | 2437.00         | RMS      | 8.39                 | 0.00            | 8.39             | 30         | Pass   |
| NVNT      | ANT1    | 802.11g       | 2462.00         | RMS      | 8.22                 | 0.00            | 8.22             | 30         | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00         | RMS      | 8.32                 | 0.00            | 8.32             | 30         | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2437.00         | RMS      | 8.62                 | 0.00            | 8.62             | 30         | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00         | RMS      | 7.92                 | 0.00            | 7.92             | 30         | Pass   |



## 5. Power Spectral Density



| Condition | Antenna | Modulation    | Frequency (MHz) | PSD(dBm/30kHz) | Duty factor(dB) | RB factor(dB) | PSD(dBm/3kHz) | limit(dBm/3kHz) | Result |
|-----------|---------|---------------|-----------------|----------------|-----------------|---------------|---------------|-----------------|--------|
| NVNT      | ANT1    | 802.11b       | 2412.00         | -13.55         | 0.00            | -10.00        | -23.55        | 8               |        |
| NVNT      | ANT1    | 802.11b       | 2437.00         | -13.74         | 0.00            | -10.00        | -23.74        | 8               |        |
| NVNT      | ANT1    | 802.11b       | 2462.00         | -13.67         | 0.00            | -10.00        | -23.67        | 8               |        |
| NVNT      | ANT1    | 802.11g       | 2412.00         | -14.63         | 0.12            | -10.00        | -24.51        | 8               |        |
| NVNT      | ANT1    | 802.11g       | 2437.00         | -15.63         | 0.00            | -10.00        | -25.63        | 8               |        |
| NVNT      | ANT1    | 802.11g       | 2462.00         | -14.69         | 0.00            | -10.00        | -24.69        | 8               |        |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00         | -14.44         | 0.00            | -10.00        | -24.44        | 8               |        |
| NVNT      | ANT1    | 802.11n(HT20) | 2437.00         | -15.60         | 0.00            | -10.00        | -25.60        | 8               |        |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00         | -15.03         | 0.00            | -10.00        | -25.03        | 8               |        |

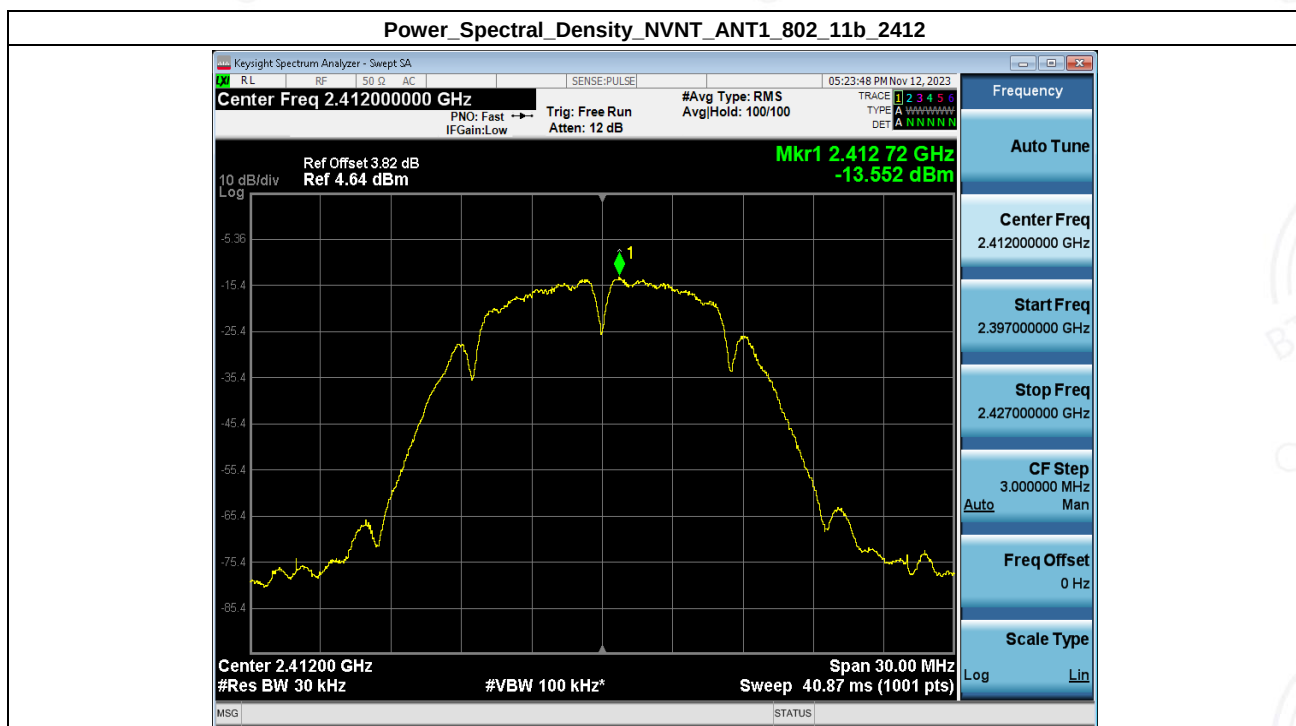




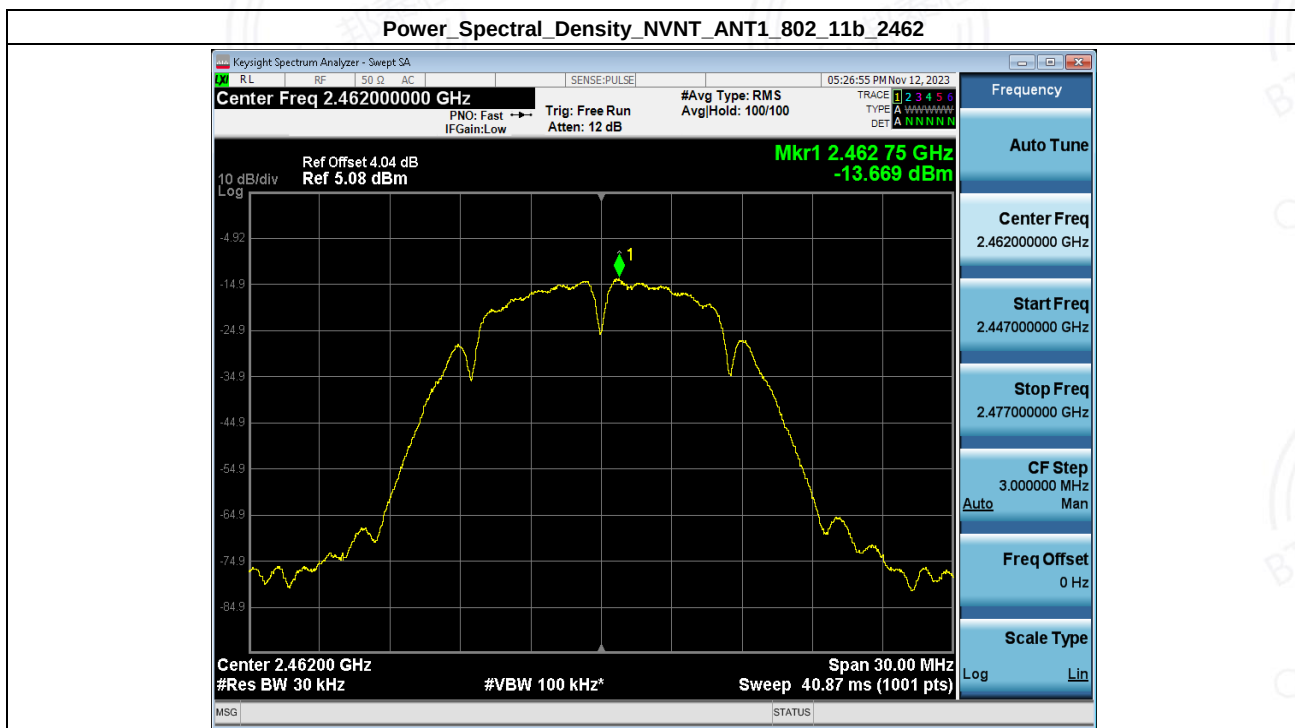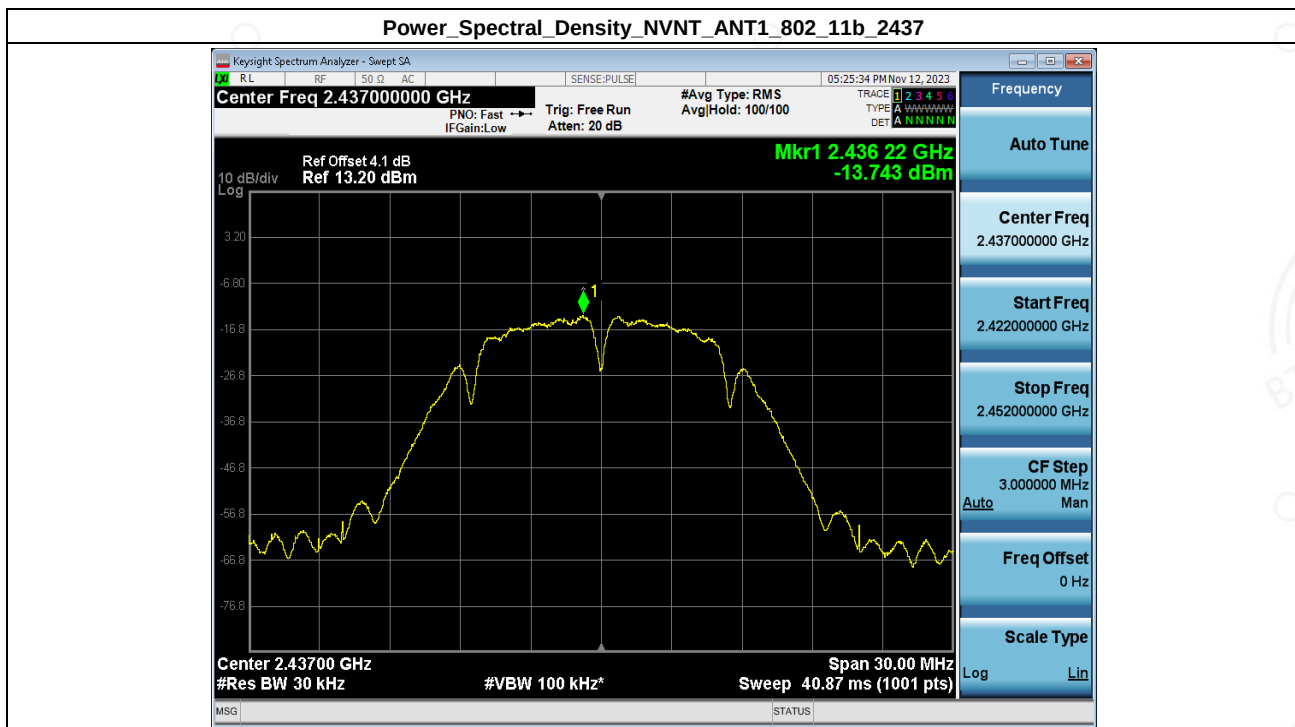

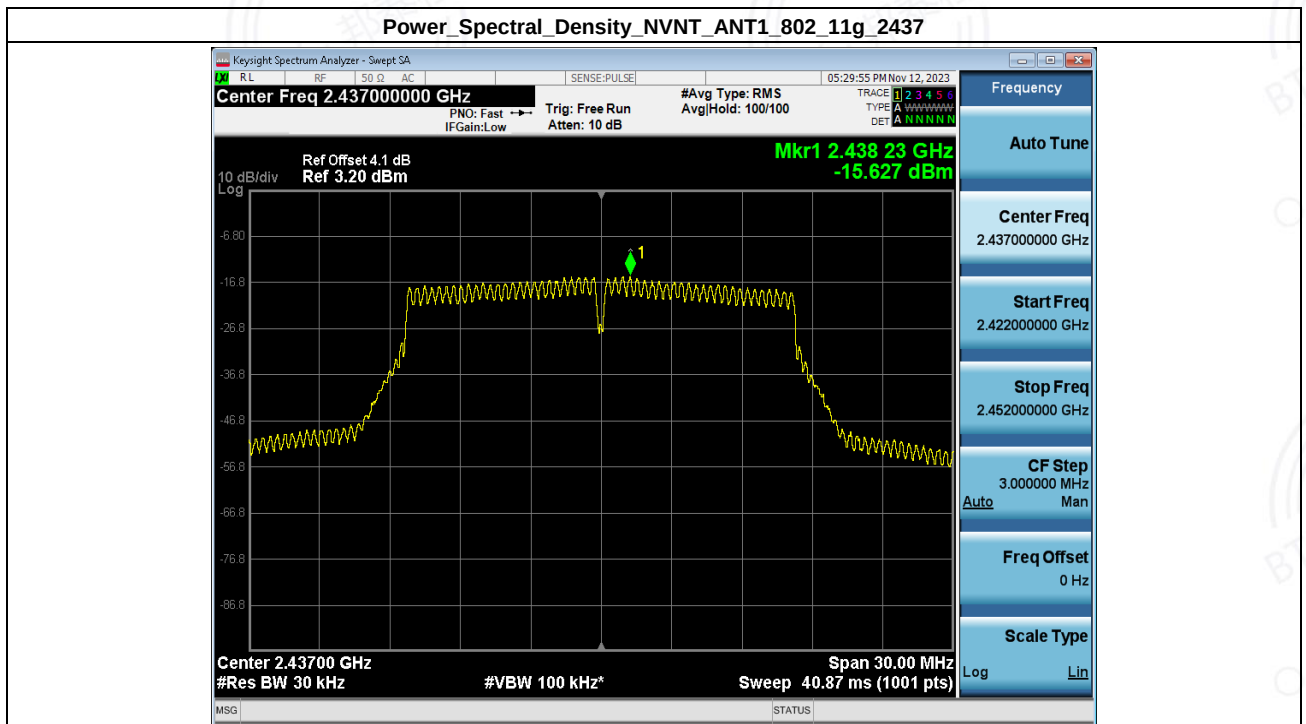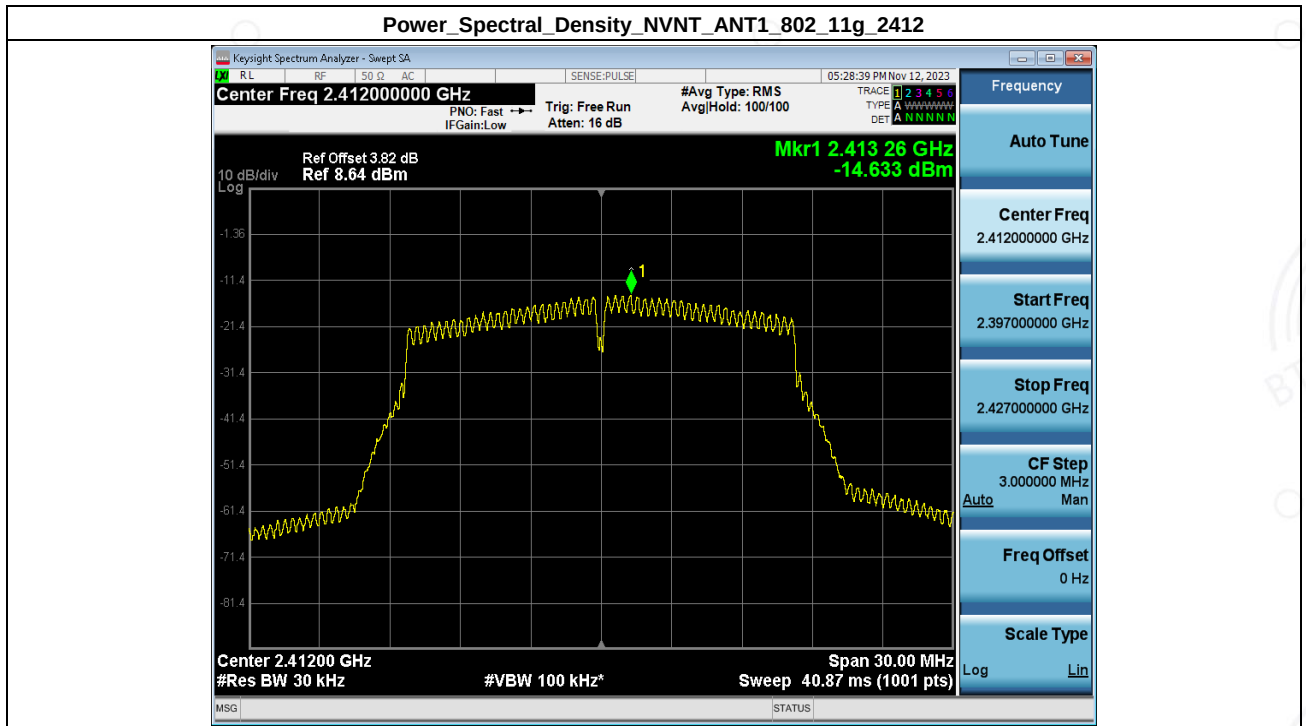


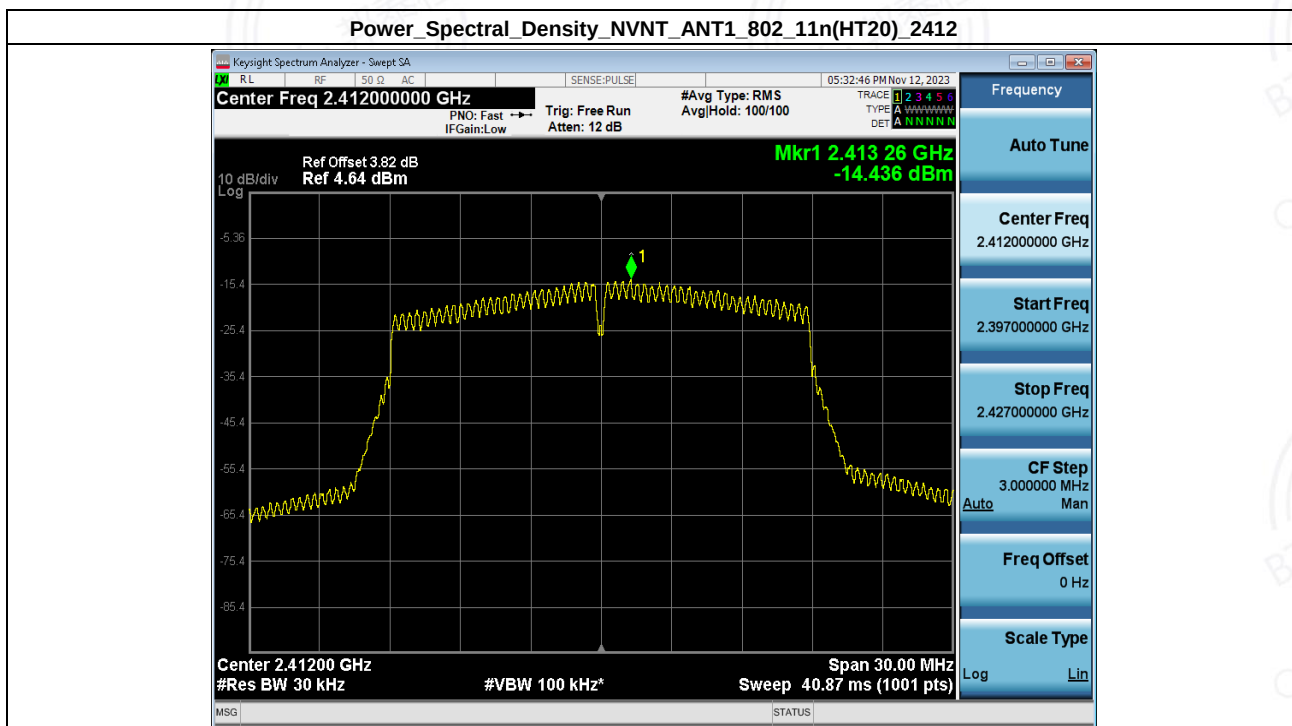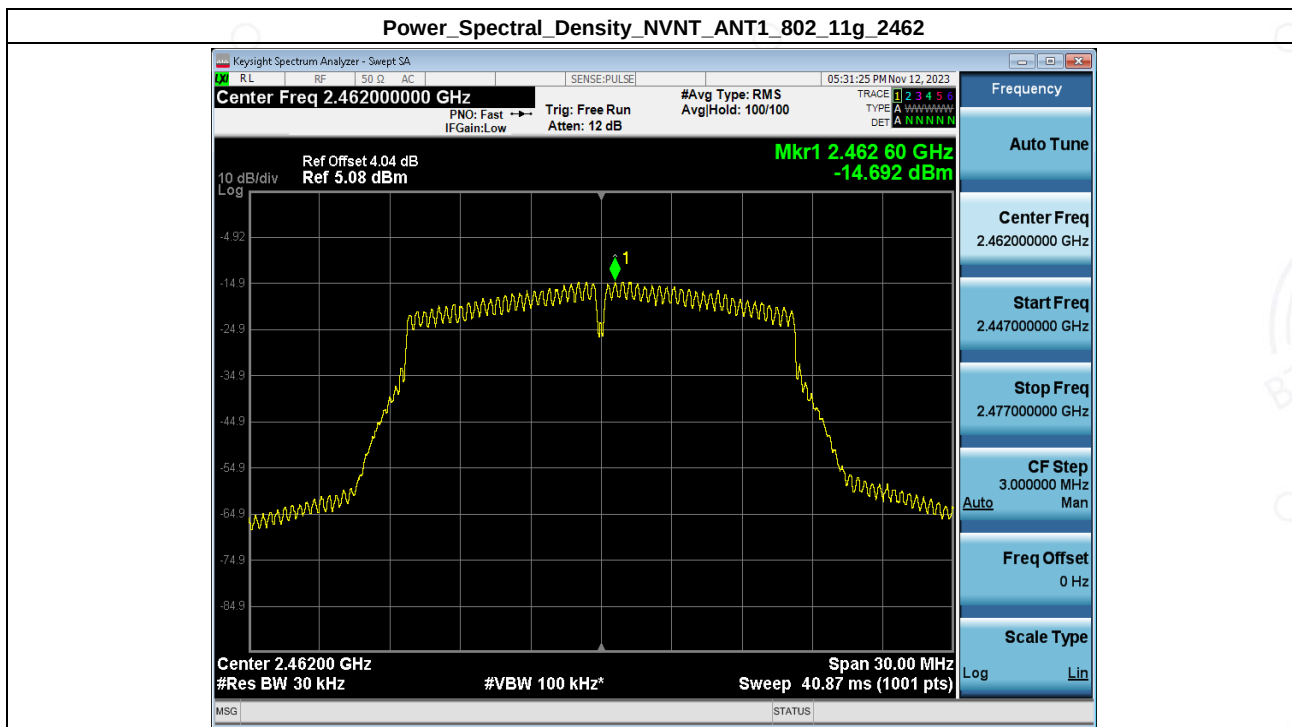

Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT20)\_2437

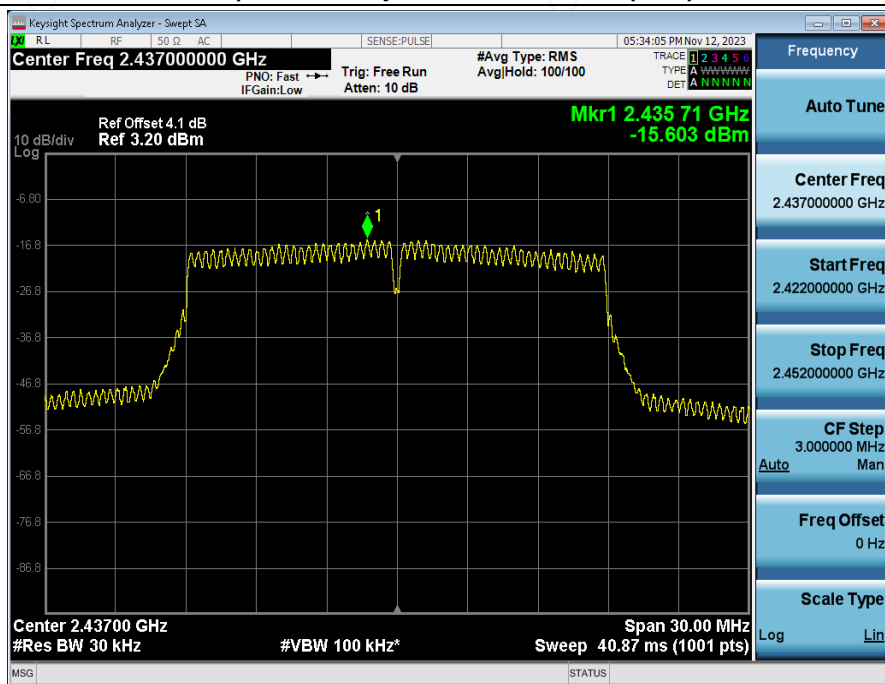



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT20)\_2462

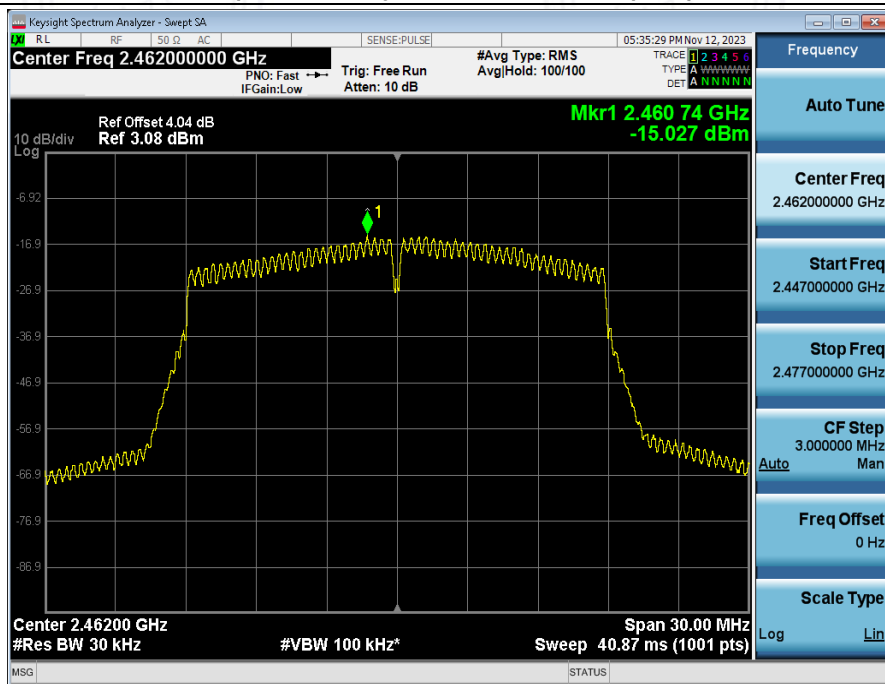



## 6. Bandedge

| Condition | Antenna | Modulation    | TX_Frequency<br>(MHz) | Max.<br>Mark_frequency(MHz) | Spurious<br>level(dBm) | limit(dBm) | Result |
|-----------|---------|---------------|-----------------------|-----------------------------|------------------------|------------|--------|
| NVNT      | ANT1    | 802.11b       | 2412.00               | 2398.032                    | -49.805                | -27.032    | Pass   |
| NVNT      | ANT1    | 802.11b       | 2462.00               | 2488.048                    | -60.578                | -27.437    | Pass   |
| NVNT      | ANT1    | 802.11g       | 2412.00               | 2399.824                    | -47.541                | -32.864    | Pass   |
| NVNT      | ANT1    | 802.11g       | 2462.00               | 2483.536                    | -54.240                | -30.359    | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00               | 2399.488                    | -45.574                | -31.289    | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00               | 2483.536                    | -52.824                | -30.349    | Pass   |

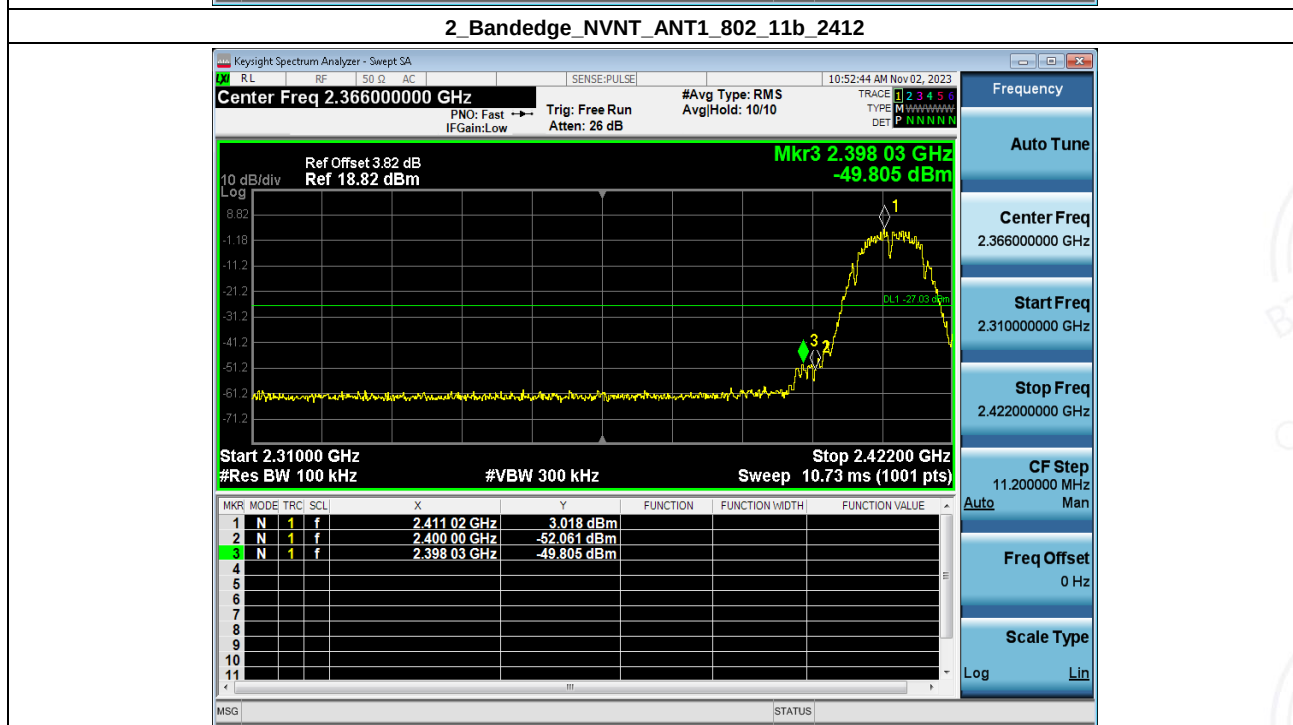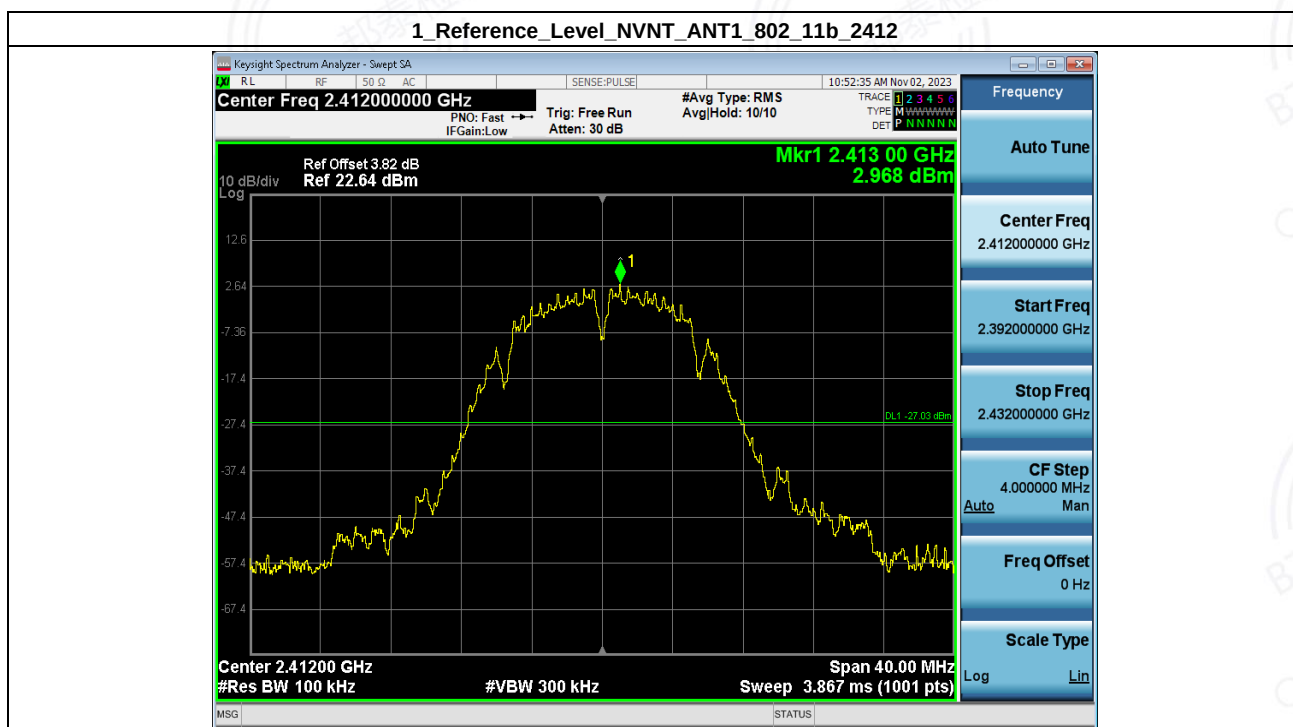


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2462




## 2\_Bandedge\_NVNT\_ANT1\_802\_11b\_2462



**1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2412**

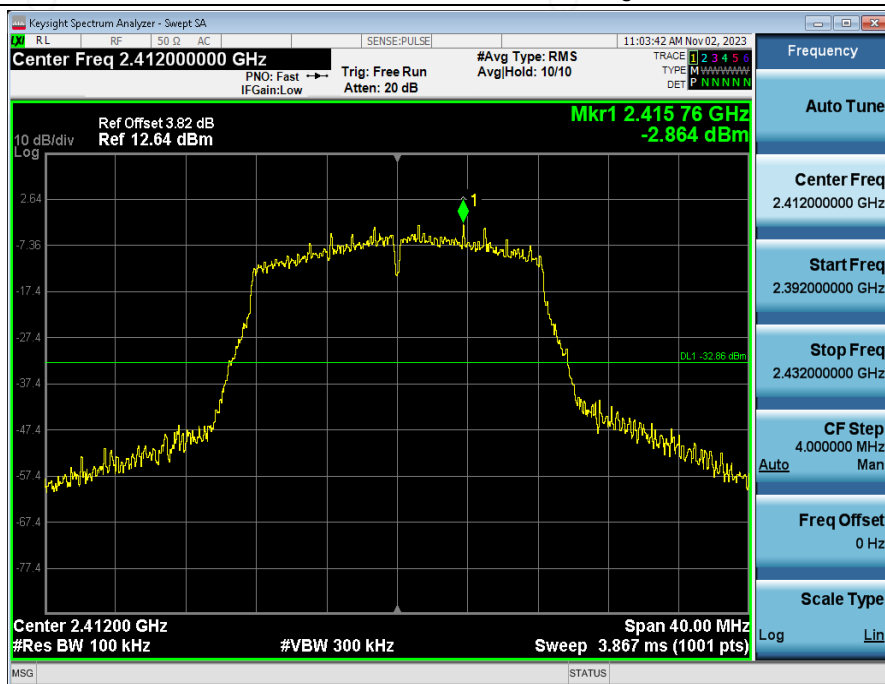

2 Bandedge NVNT ANT1 802 11g 2412

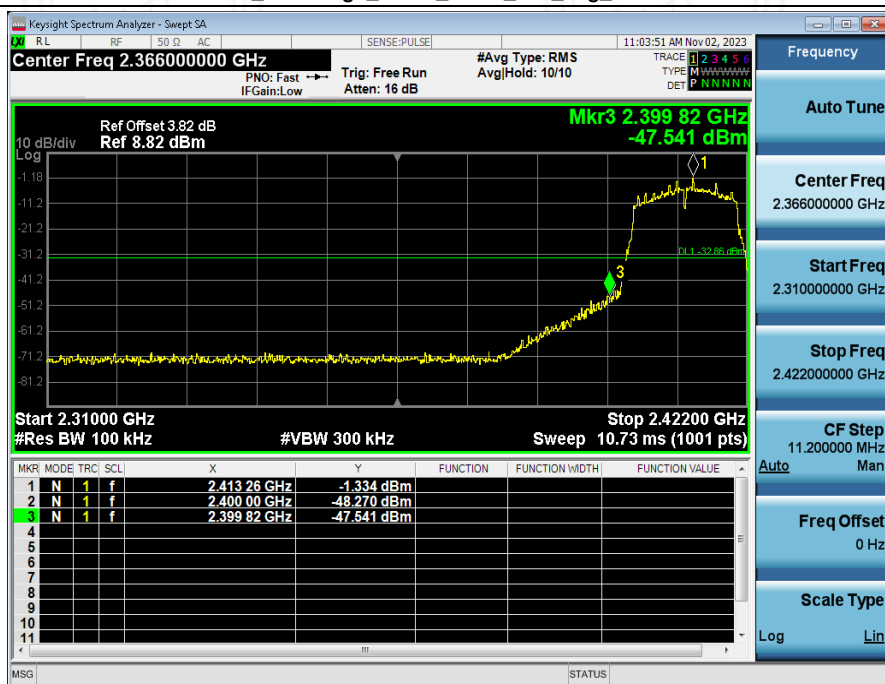

## 1 Reference\_Level\_NVNT\_ANT1\_802\_11g\_2462



## 2 Bandedge\_NVNT\_ANT1\_802\_11g\_2462







## 1 Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2412



## 2 Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_2412

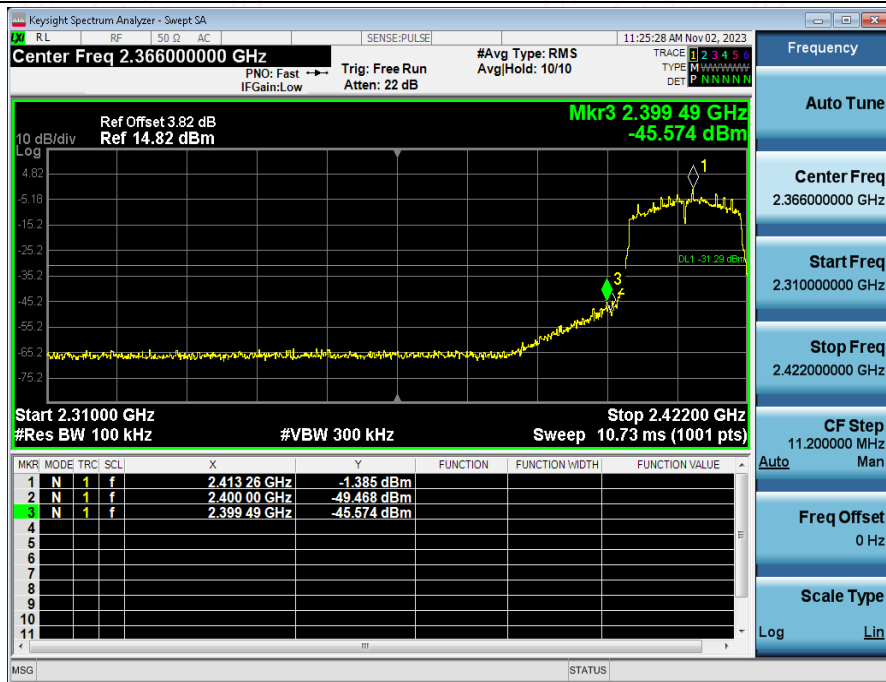

## 1 Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2462

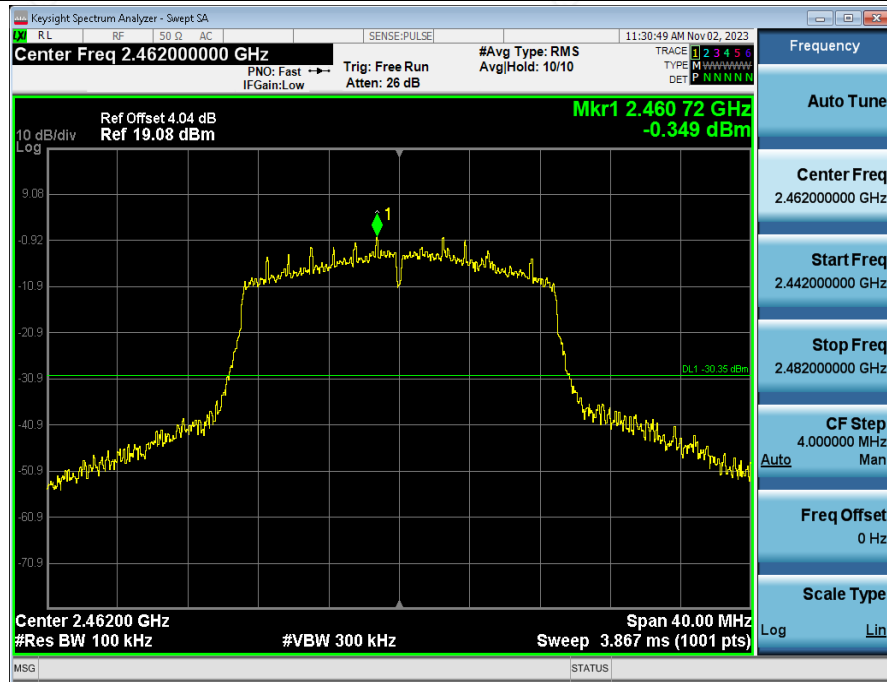


## 2 Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_2462




## 7. Spurious Emission

| Condition | Antenna | Modulation    | TX_Frequency (MHz) | Max. Mark_frequency(MHz) | Spurious level(dBm) | limit(dBm) | Result |
|-----------|---------|---------------|--------------------|--------------------------|---------------------|------------|--------|
| NVNT      | ANT1    | 802.11b       | 2412.00            | 24820.216                | -48.816             | -27.032    | Pass   |
| NVNT      | ANT1    | 802.11b       | 2437.00            | 4874.180                 | -51.305             | -27.228    | Pass   |
| NVNT      | ANT1    | 802.11b       | 2462.00            | 24747.803                | -55.761             | -27.437    | Pass   |
| NVNT      | ANT1    | 802.11g       | 2412.00            | 24882.641                | -59.743             | -32.864    | Pass   |
| NVNT      | ANT1    | 802.11g       | 2437.00            | 24940.072                | -60.046             | -30.784    | Pass   |
| NVNT      | ANT1    | 802.11g       | 2462.00            | 24700.360                | -52.941             | -30.359    | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2412.00            | 24887.635                | -52.994             | -31.289    | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2437.00            | 24278.367                | -59.565             | -31.236    | Pass   |
| NVNT      | ANT1    | 802.11n(HT20) | 2462.00            | 24885.138                | -53.423             | -30.349    | Pass   |

1 Reference\_Level\_NVNT\_ANT1\_802\_11b\_2412

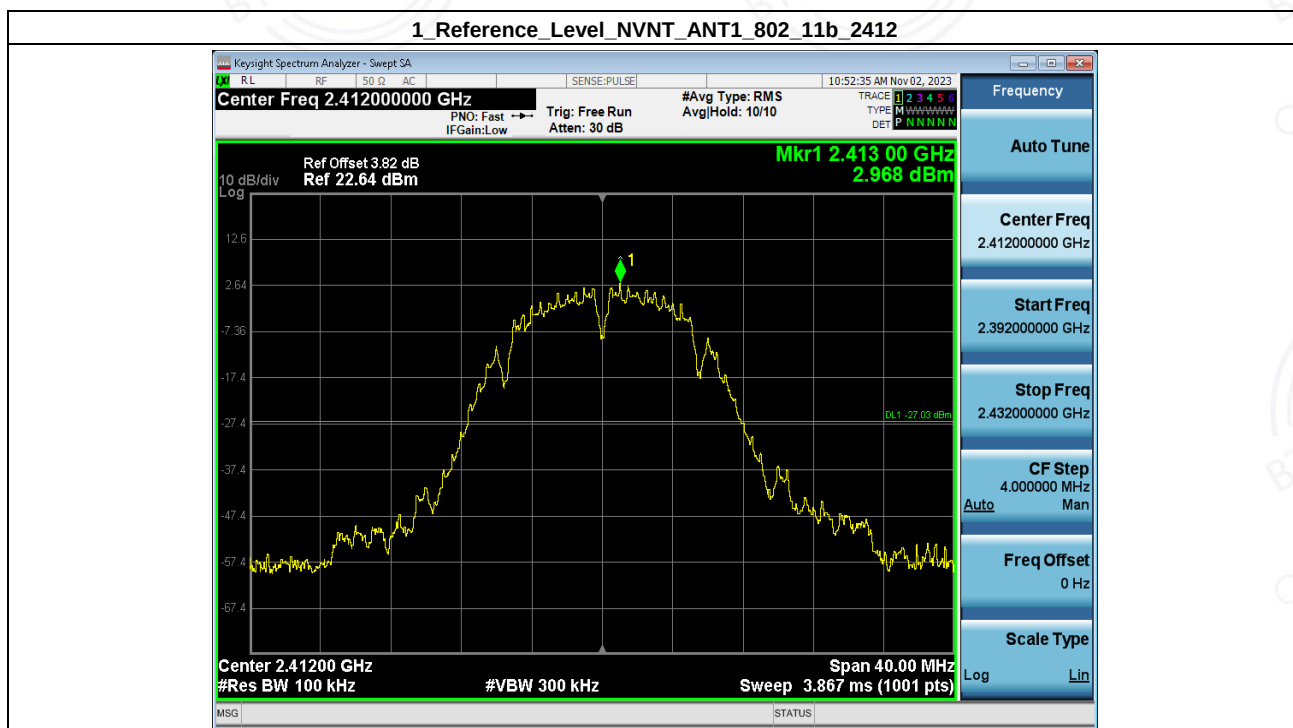

## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2412

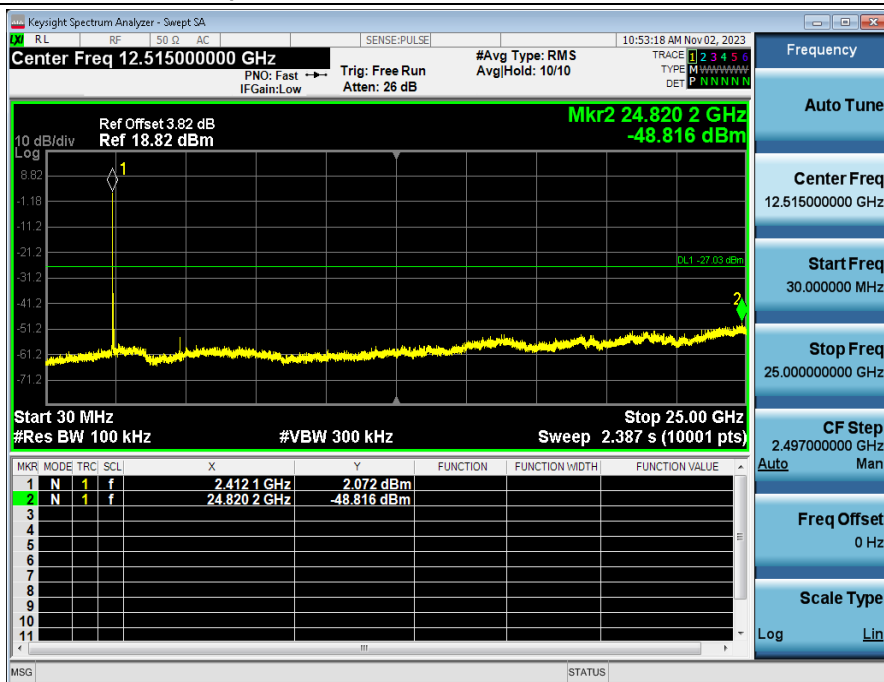


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2437











2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2437


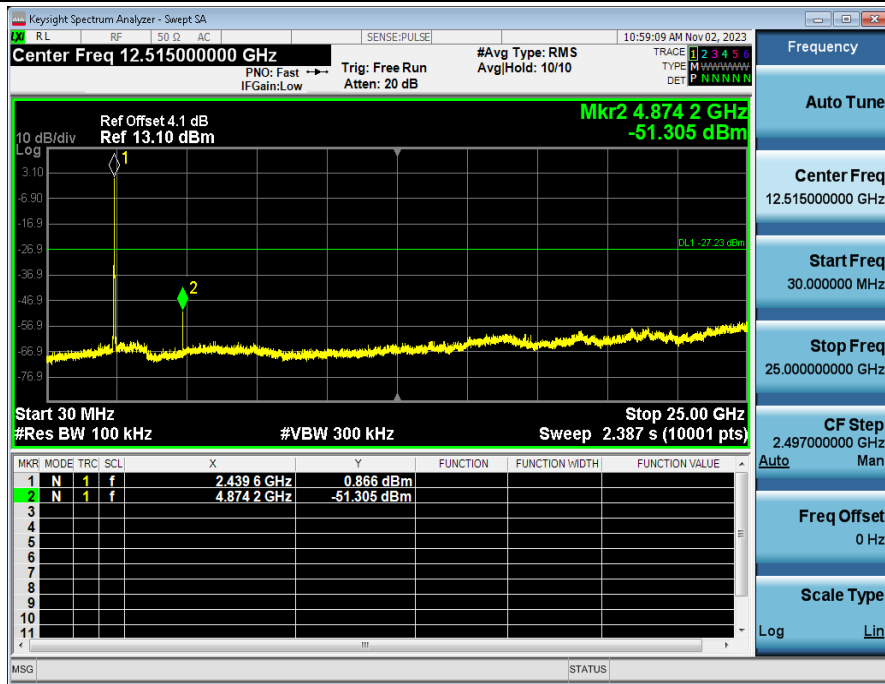


1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2462





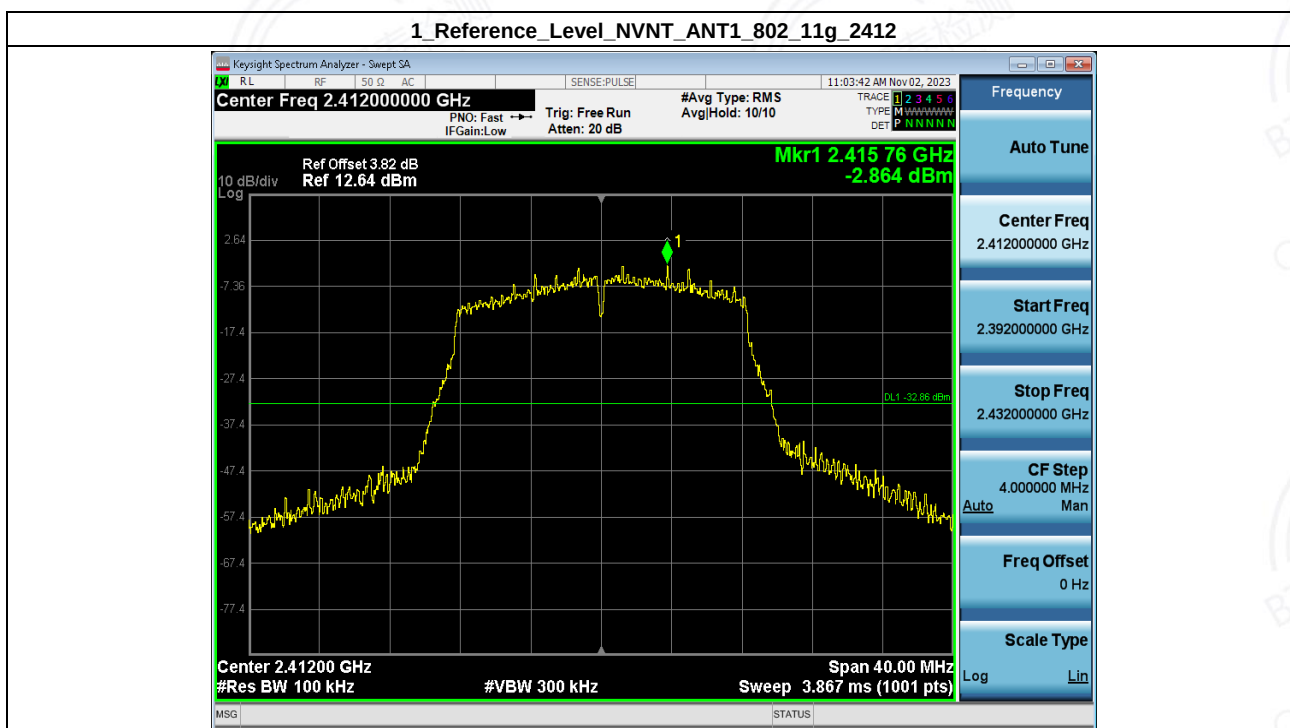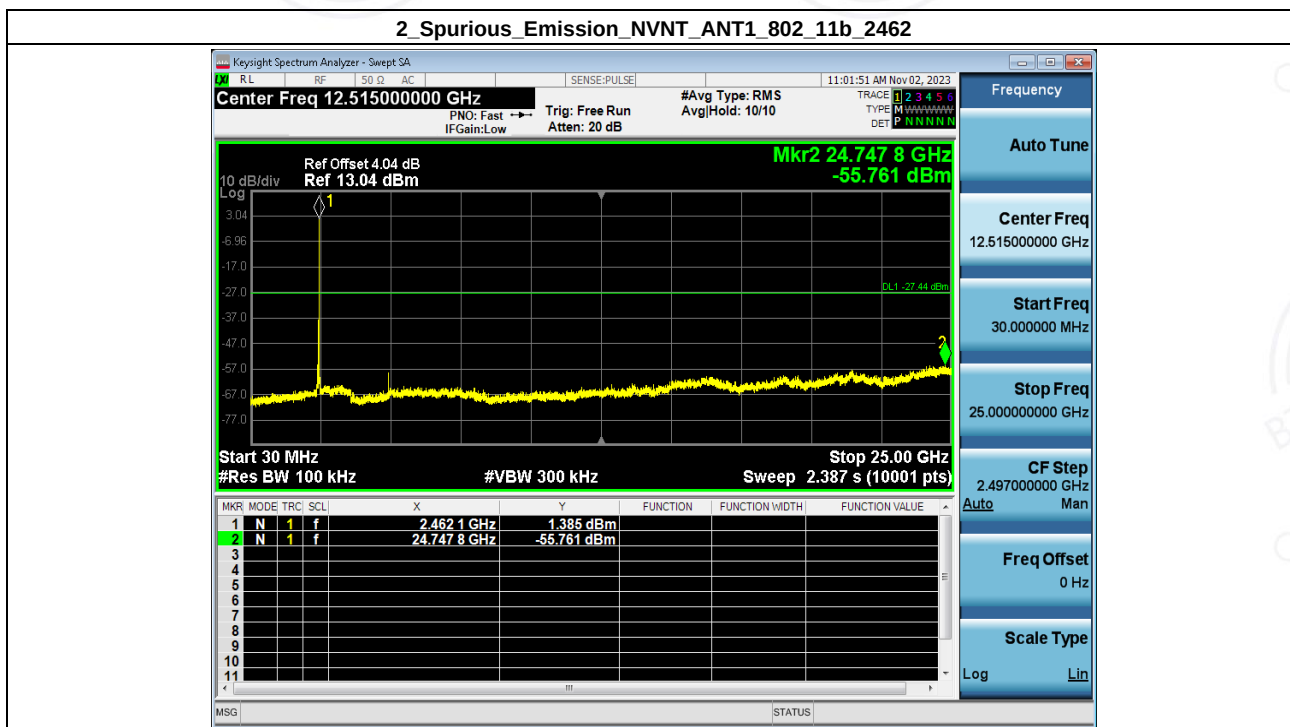

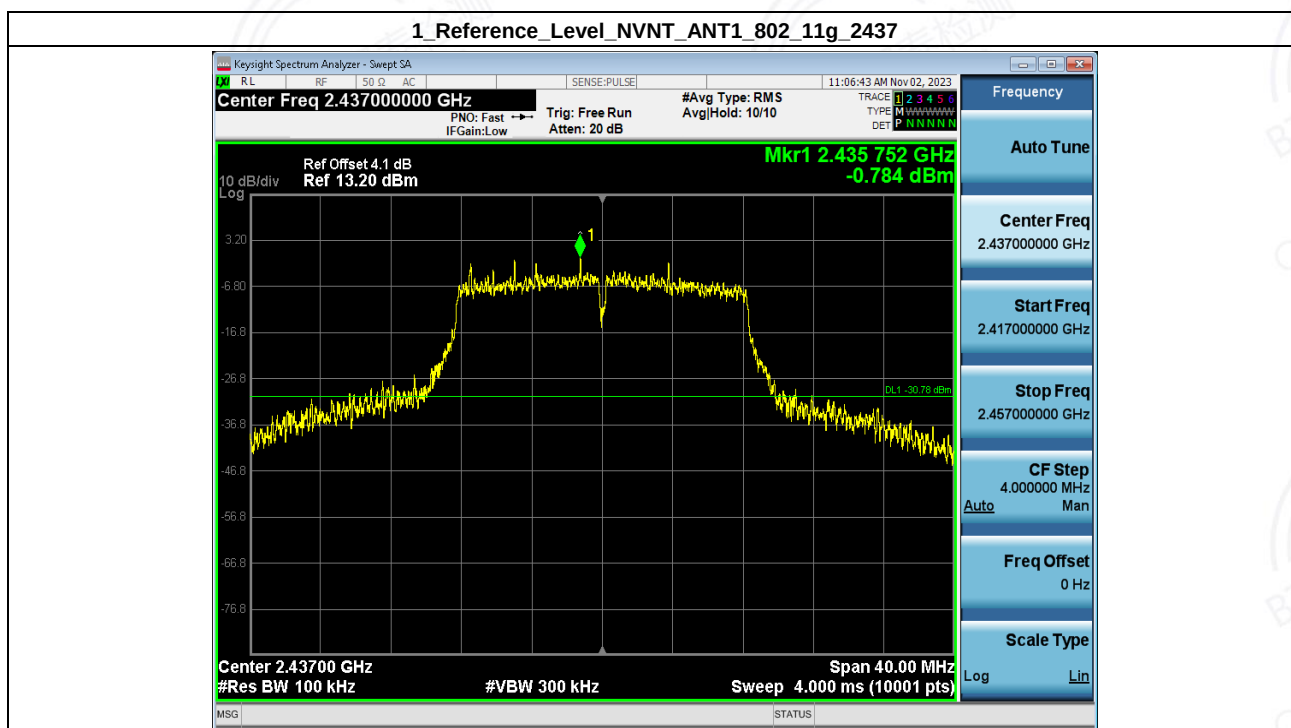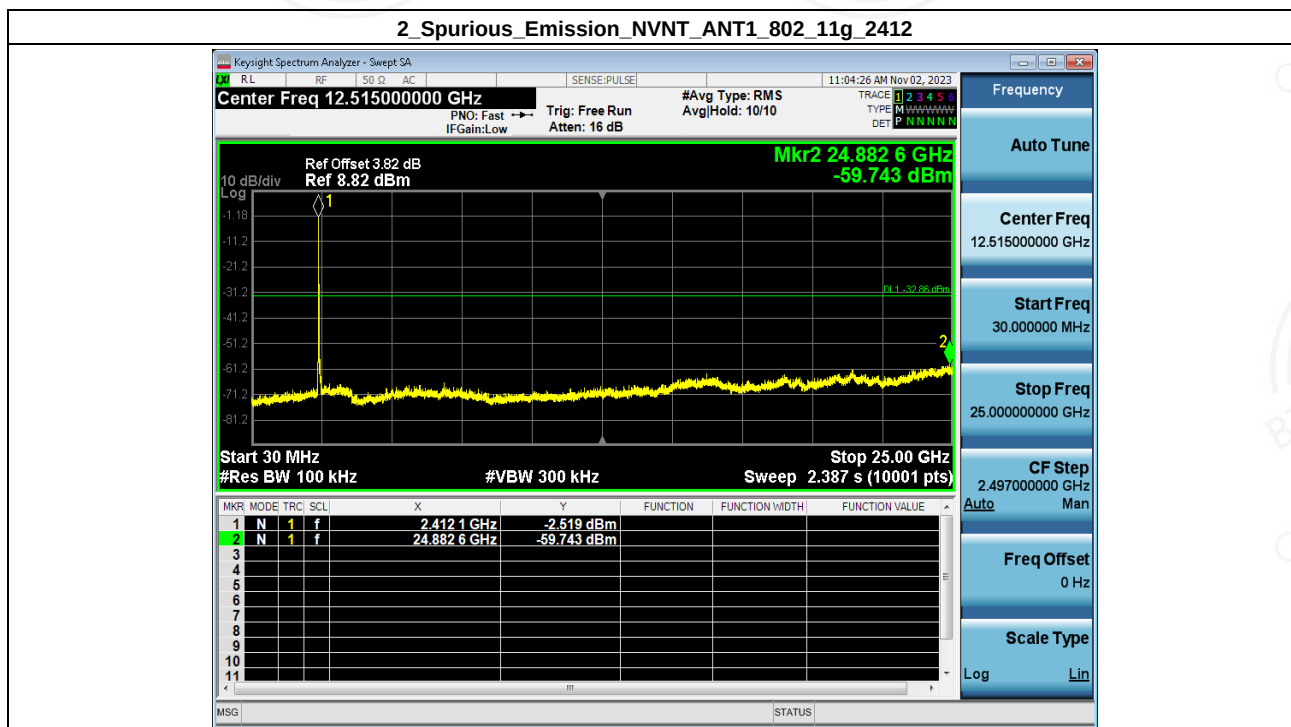


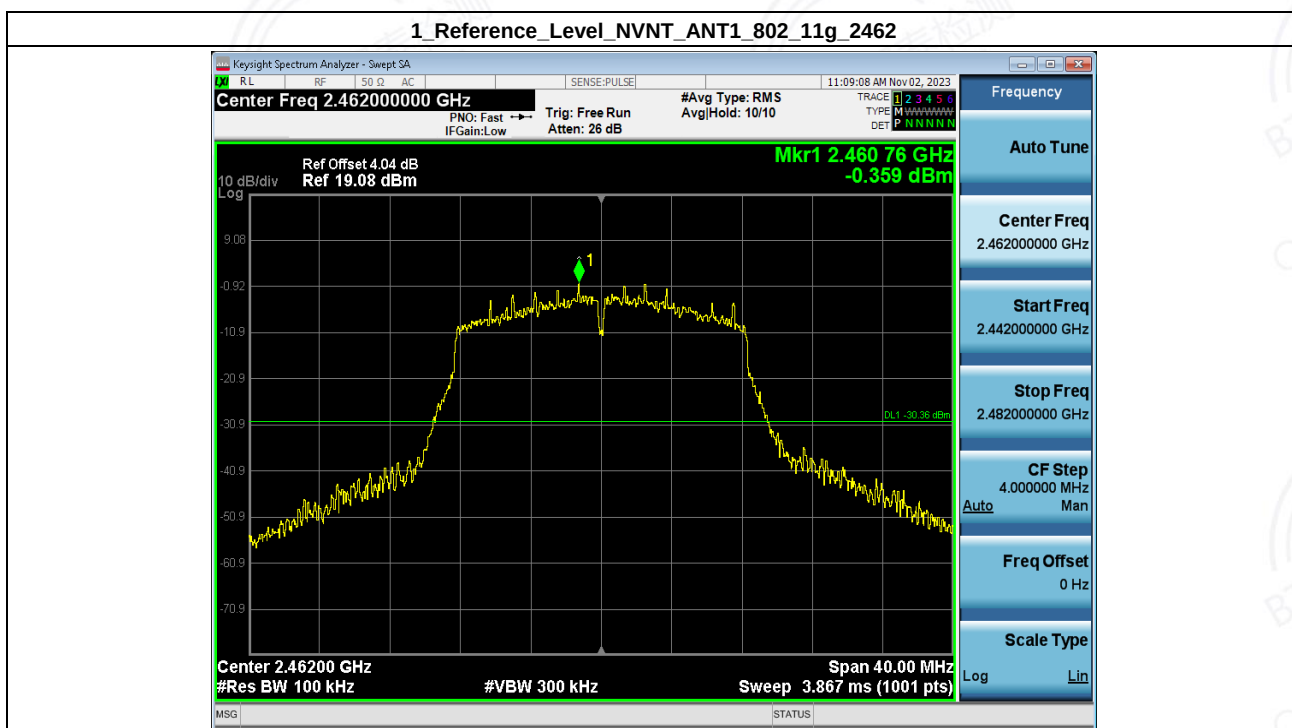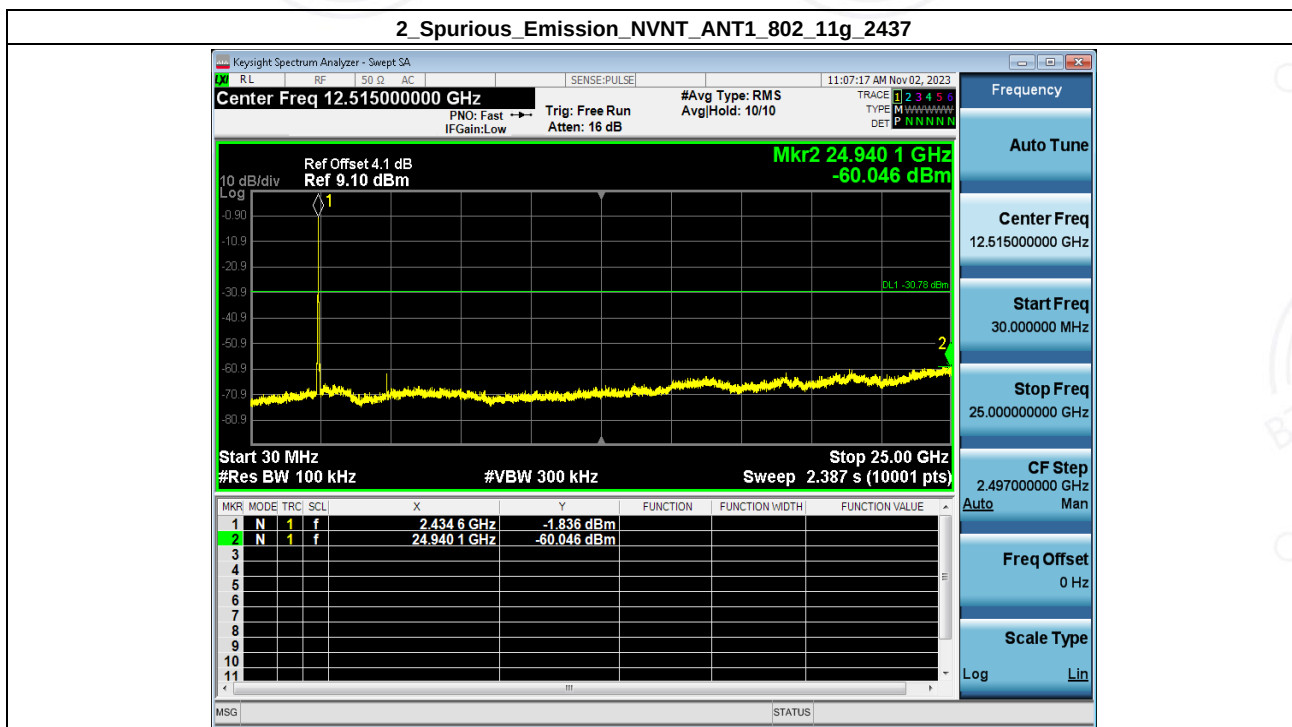



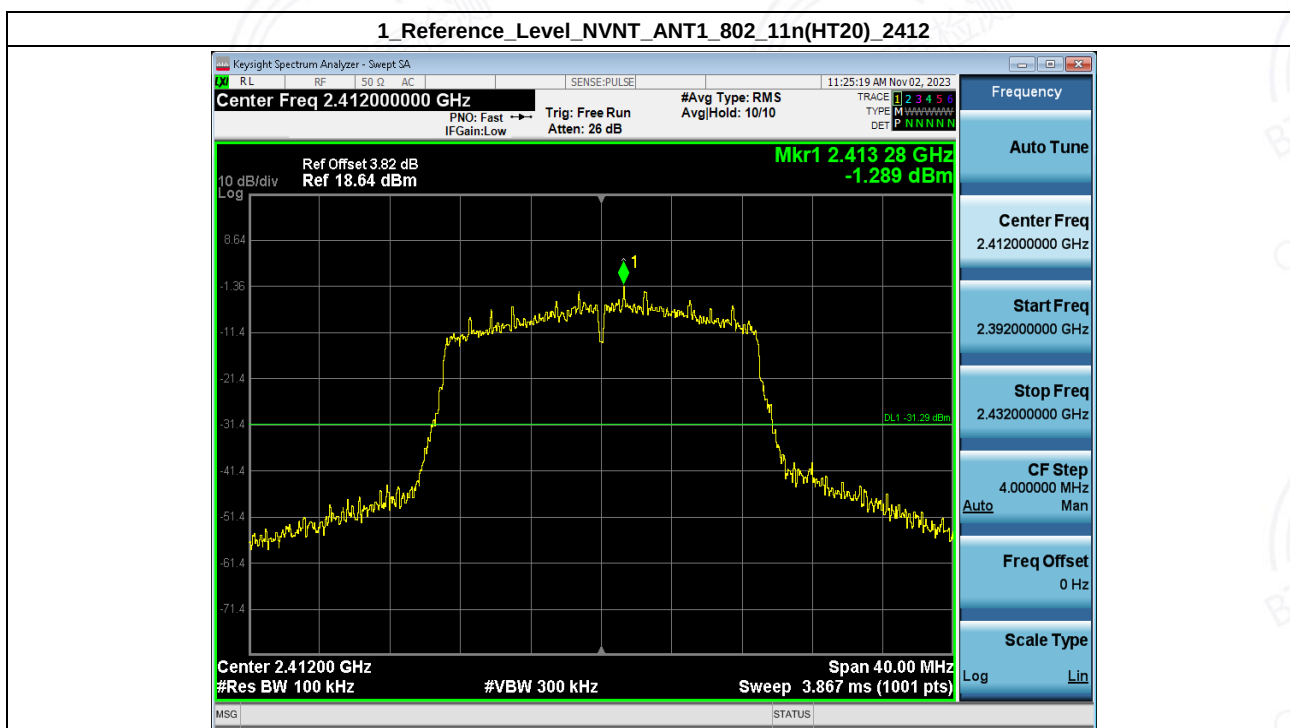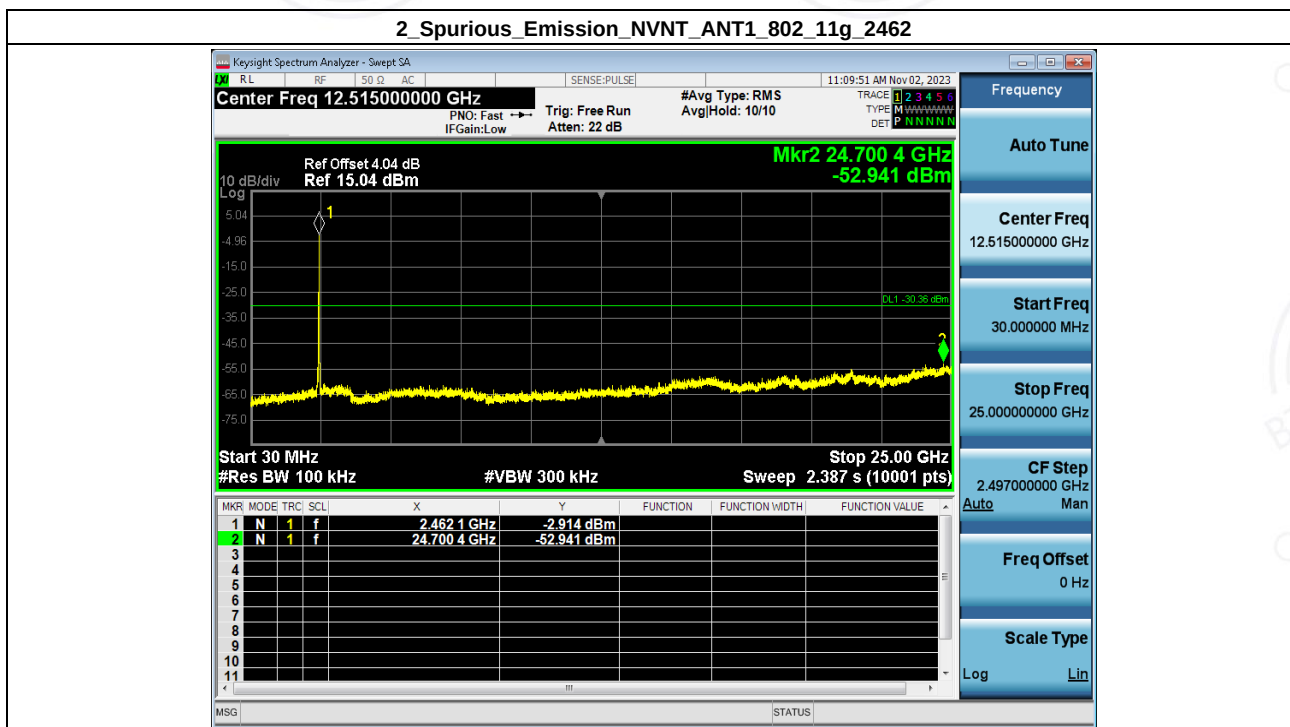


## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2412

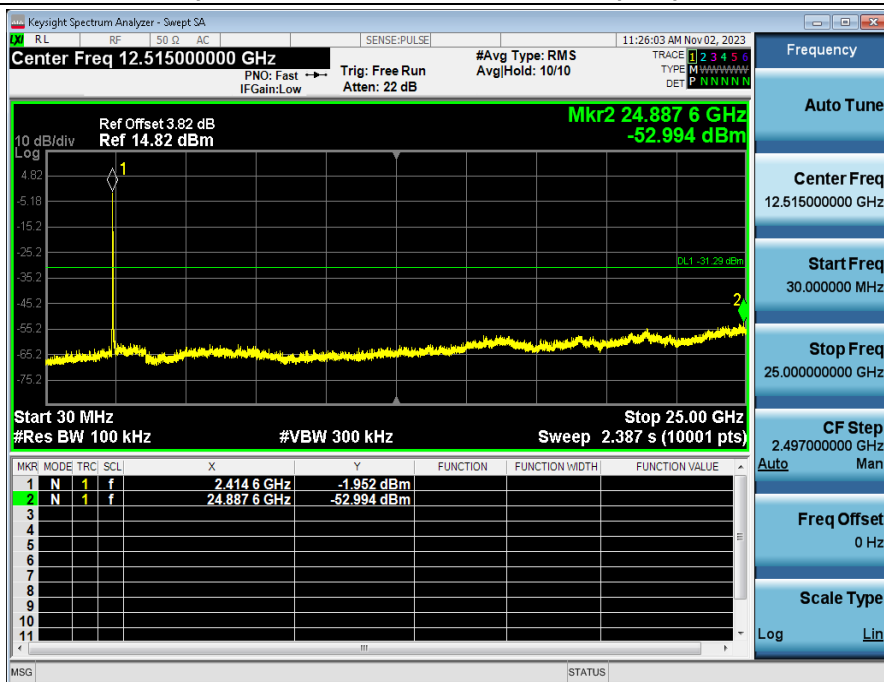


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2437




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2437

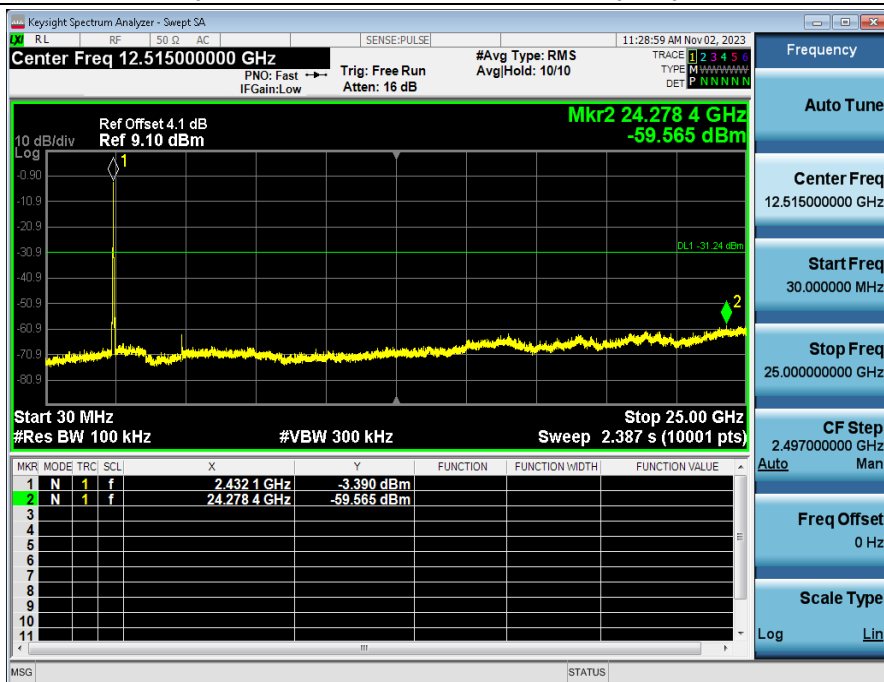

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11n(HT20)\_2462

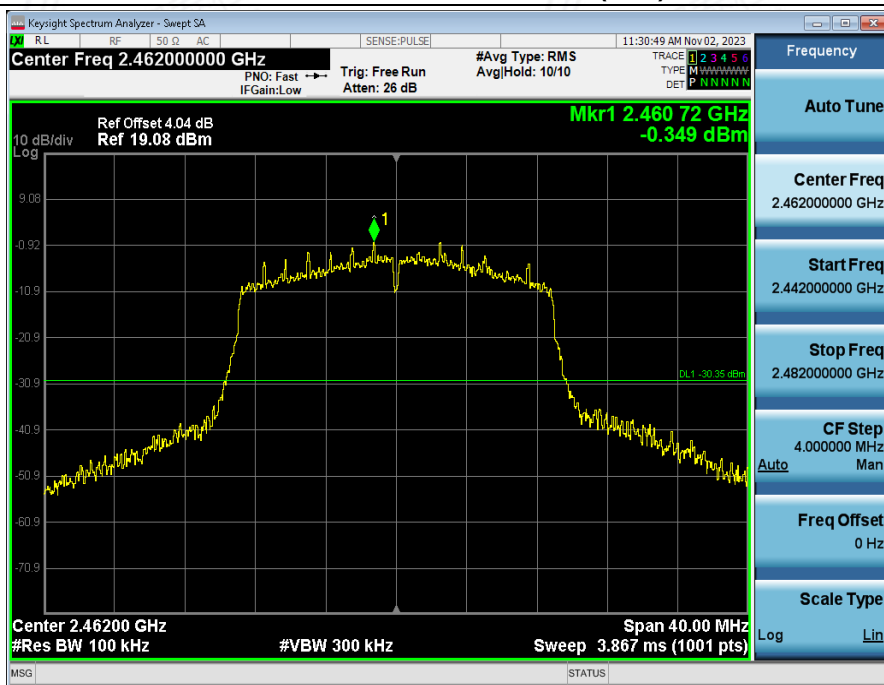

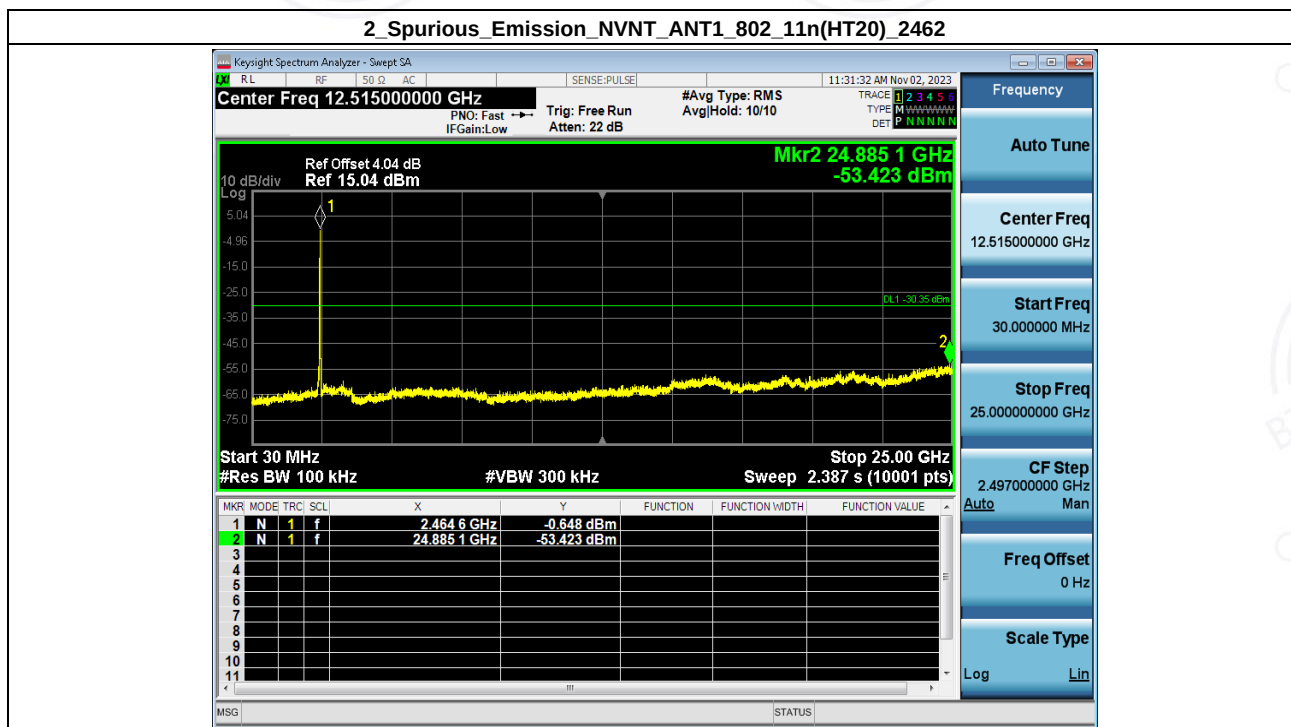

- End of the Report -

