

Limited Test report

463869-6TRFWL

Date of issue: August 9, 2022

Applicant:

Foresight Sports

Product:

Radio Module

Model:

PAN9028 (8987)

FCC ID: 2A6QA-JODYW263FSS

IC ID: 28505-JODYW263FSS

Specifications:

- ◆ **FCC 47 CFR Part 15, Subpart C – §15.247**
Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, 5727 – 5850 MHz
- ◆ **Industry Canada RSS-247, Issue 2**
Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Lab and test locations

Company name	Nemko USA Inc.
Address	2210 Faraday Ave, Suite 150
City	Carlsbad
State	California
Postal code	92008
Country	USA
Telephone	+1 760 444 3500
Website	www.nemko.com
FCC Site Number	Test Firm Registration Number: 392943 Designation Number: US5058
ISED Test Site	2040B-3
Tested by	Lan Sayasane, EMC Test Engineer
Reviewed by	James Cunningham, EMC/MIL/WL Supervisor
Review date	August 9, 2022
Reviewer signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko USA's ISO/IEC 17025 accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Copyright notification

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko USA Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Applicant	4
1.2 Manufacturer	4
1.3 Test specifications	4
1.4 Test methods	4
1.5 Exclusions	4
1.6 Statement of compliance	4
1.7 Test report revision history	4
Section 2 Summary of test results	5
2.1 FCC Part 15 Subpart C, general requirements	5
2.2 FCC Part 15.247	5
2.3 IC RSS-247, Issue 2	5
2.4 IC RSS-GEN, Issue 5	5
2.5 Scope of limited testing	6
Section 3 Equipment under test (EUT) details	7
3.1 Sample information	7
3.2 EUT information	7
3.3 Technical information	7
3.4 EUT exercise and monitoring details	8
3.5 EUT setup diagram	8
Section 4 Engineering considerations	9
4.1 Modifications incorporated in the EUT	9
4.2 Technical judgment	9
4.3 Deviations from laboratory tests procedures	9
Section 5 Test conditions	10
5.1 Atmospheric conditions	10
5.2 Power supply range	10
Section 6 Measurement uncertainty	11
6.1 Uncertainty of measurement	11
Section 7 Test Equipment	12
Section 8 Testing data	13
8.1 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements	13
8.2 FCC 15.247(d) and RSS-247 5.5 Radiated restricted band-edges and spurious emission	15
Section 9 Block diagrams of test set-ups	27
9.1 Radiated emissions set-up	27

Section 1 Report summary

1.1 Applicant

Company name	Foresight Sports
Address	9955 Black Mountain Road
City	San Diego
State	CA
Postal/Zip code	92126
Country	USA

1.2 Manufacturer

Company name	Foresight Sports
Address	9955 Black Mountain Road
City	San Diego
State	CA
Postal/Zip code	92126
Country	USA

1.3 Test specifications

FCC 47 CFR Part 15, Subpart C – §15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
IC RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.4 Test methods

ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
558074 D01 DTS Measurement Guidance v03r02 (June 5, 2014)	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.5 Exclusions

Testing only includes Radiated Spurious and Restricted Band Edge measurements and limited maximum peak conducted power calculations.

1.6 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.7 Test report revision history

Table 1.7-1: Test report revision history

Revision #	Details of changes made to test report
463869-6TRFWL	Original report issued
Notes:	None

Section 2 Summary of test results

2.1 FCC Part 15 Subpart C, general requirements

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not tested
§15.31(e)	Variation of power source	Not tested
§15.203	Antenna requirement	Not tested

Notes: EUT is AC powered

The antenna is located within the protective cover of EUT on PCB

2.2 FCC Part 15.247

Part	Test description	Verdict
§15.247(a)(1)(i)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
§15.247(a)(1)(ii)	Frequency hopping systems operating in the 5725–5850 MHz band	Not applicable
§15.247(a)(1)(iii)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not tested
§15.247(a)(2)	Minimum 6 dB bandwidth for systems using digital modulation techniques	Not tested
§15.247(b)(1)	Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band	Not tested
§15.247(b)(2)	Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band	Not applicable
§15.247(b)(3)	Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands	Pass ¹
§15.247(b)(4)	Transmitting antennas of directional gain greater than 6 dBi	Not applicable
§15.247(c)(1)	Fixed point-to-point operation with directional antenna gains greater than 6 dBi	Not applicable
§15.247(c)(2)	Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams	Not applicable
§15.247(d)	Spurious emissions	Pass
§15.247(e)	Power spectral density for digitally modulated devices	Not tested
§15.247(f)	Time of occupancy for hybrid systems	Not tested

¹ Limited calculations only

2.3 IC RSS-247, Issue 2

Part	Test description	Verdict
5.1 (a)	Bandwidth of a frequency hopping channel	Not tested
5.1 (b)	Minimum channel spacing for frequency hopping systems	Not tested
5.1 (c)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
5.1 (d)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not tested
5.1 (e)	Frequency hopping systems operating in the 5725–5850 MHz band	Not applicable
5.2 (a)	Minimum 6 dB bandwidth	Not tested
5.2 (b)	Maximum power spectral density	Not tested
5.3 (a)	Digital modulation turned off	Not tested
5.3 (b)	Frequency hopping turned off	Not tested
5.4 (a)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
5.4 (b)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not tested
5.4 (c)	Frequency hopping systems operating in the 5725–5850 MHz	Not applicable
5.4 (d)	Systems employing digital modulation techniques	Pass ¹
5.4 (e)	Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band	Not tested
5.4 (f)	Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams	Not tested
5.5	Out-of-band emissions	Pass

¹ Limited calculations only

2.4 IC RSS-GEN, Issue 5

Part	Test description	Verdict
7.3	Receiver radiated emission limits	Not applicable
7.4	Receiver conducted emission limits	Not applicable
8.8	Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus	Not tested

2.5 Scope of limited testing

The EUT supports the following wireless technologies:

- IEEE 802.11b
- IEEE 802.11g
- IEEE 802.11n

The following table summarizes the scope of the limited assessments performed:

Clause	Tests
§15.247(b)(1) Maximum peak output power	IEEE 802.11ac (SISO), Channel 1 (2412 MHz) IEEE 802.11ac (SISO), Channel 11 (2462 MHz) IEEE 802.11n (SISO) Channel 1 (2412 MHz) IEEE 802.11n (SISO) Channel 6 (2437 MHz) IEEE 802.11n (SISO) Channel 11 (2462 MHz)
§15.247(d) Restricted band edges	IEEE 802.11g, High and Low band edge
§15.247(d) Radiated spurious emissions, 30 – 1000 MHz	IEEE 802.11b, Channel 11 (2462 MHz) IEEE 802.11g, Channel 6 (2437 MHz) IEEE 802.11n, Channel 6 (2437 MHz)
§15.247(d) Radiated spurious emissions, 1 – 18 GHz	IEEE 802.11b, Channel 11 (2462 MHz) IEEE 802.11g, Channel 6 (2437 MHz) IEEE 802.11n, Channel 6 (2437 MHz)
§15.247(d) Radiated spurious emissions, 18 – 26 GHz	IEEE 802.11b, Channel 11 (2462 MHz) IEEE 802.11g, Channel 6 (2437 MHz) IEEE 802.11n, Channel 6 (2437 MHz)

Section 3 Equipment under test (EUT) details

3.1 Sample information

Receipt date	May 2, 2022
Nemko sample ID number	NEx: 463869

3.2 EUT information

Product name	Radio Module
Model	PAN9028 (8987)
Serial number	N/A
Part number	N/A

3.3 Technical information

Frequency band	2400 – 2483.5 MHz
Minimum frequency (MHz)	2412
Maximum frequency (MHz)	2462
Type of modulation	802.11b, 802.11g, 802.11n
Power requirements	16-24 V _{DC} ; 1 A
Antenna information	2.2 dBi gain, PCB SMT Antenna

3.4 EUT exercise and monitoring details

EUT was tested in 802.11b/.11g/.11n/.11ac wireless network specifications, using SISO and MIMO antenna configurations as applicable, on the low, mid, and high channels.

Table 3.4-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number	Rev.
	Foresight Sports		--	--

Table 3.4-2: EUT interface ports

Description	Qty.
--	--

Table 3.4-3: Support equipment

Description	Brand name	Model/Part number	Serial number	Rev.
--	--	--	--	--

Table 3.4-4: Inter-connection cables

Cable description	From	To	Length (m)
--	--	--	--

3.5 EUT setup diagram



Figure 3.5-1: Setup diagram

Section 4 Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5 Test conditions

5.1 Atmospheric conditions

Temperature	15-30 °C
Relative humidity	20-75 %
Air pressure	86–106 kPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6 Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
Radiated spurious emissions	3.78
Powerline conducted emissions	1.38
All antenna port measurements	0.55
Conducted spurious emissions	1.13

Section 7 Test Equipment

Table 6.1-1: Test Equipment List

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI Test Receiver	Rohde & Schwarz	ESU40	E1131	1 year	02-Mar-2023
System Controller	Sunol Sciences	SC 104V	E1191	NCR	NCR
Antenna, Bilog	Schaffner-Chase	CBL 6111D	1763	2 years	18-May-2022
Antenna, DRG Horn	ETS-Lindgren	3117-PA	E1139	2 years	19-Apr-2023
Filter, 2.4GHz	N/A	N/A	--	NCR	NCR
HPF	Wainwright Instruments	WHKX10-5850-6500	E1208	NCR	NCR

Notes: NCR - no calibration required

Table 6.1-2: Test Software

Manufacturer of Software	Details
Rohde & Schwarz	EMC 32 V10.60.15 (radiated emissions)

Notes: None

Section 8 Testing data

8.1 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

8.1.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(b)(2) / (3)

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) The conducted output power limit specified in paragraph (b) of this Section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this Section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this Section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

RSS-247 → §5.4(d)

- (d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

8.1.2 Test summary

Verdict	Pass
---------	------

8.1.3 Notes

No testing was performed. The EIRP was calculated on the basis of test data from the original test report on the “JODY-W2” WLAN and Bluetooth module, report reference MDE_UBLOX_2008_RADIO_02 (FCC ID: XPYJODYW263, IC: 8595A-JODYW263). EIRP was re-calculated from the original test data using the new manufacturer declared antenna gain.

Manufacturer declared antenna gain: 2.2 dBi.

8.1.4 Test data

Table 8.1-1: Output power

Operating Mode	Test Frequency (MHz)	Maximum Conducted Power (dBm)	Conducted Limit (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
IEEE 802.11b, 1 Mbps	2412	11.20	30.0	2.2	13.40	36.0
IEEE 802.11b, 1 Mbps	2437	11.50	30.0	2.2	13.70	36.0
IEEE 802.11b, 1 Mbps	2462	11.70	30.0	2.2	13.90	36.0
IEEC 802.11g, 6 Mbps	2412	10.60	30.0	2.2	12.80	36.0
IEEC 802.11g, 6 Mbps	2437	15.30	30.0	2.2	17.50	36.0
IEEC 802.11g, 6 Mbps	2462	10.90	30.0	2.2	13.10	36.0
IEEE 802.11n-HT20 (MSC0)	2412	10.60	30.0	2.2	12.80	36.0
IEEE 802.11n-HT20 (MSC0)	2437	15.60	30.0	2.2	17.80	36.0
IEEE 802.11n-HT20 (MSC0)	2462	11.10	30.0	2.2	13.30	36.0
IEEE 802.11n-HT40 (MSC0)	2422	7.20	30.0	2.2	9.40	36.0
IEEE 802.11n-HT40 (MSC0)	2437	9.50	30.0	2.2	11.70	36.0
IEEE 802.11n-HT40 (MSC0)	2452	9.70	30.0	2.2	11.90	36.0

8.2 FCC 15.247(d) and RSS-247 5.5 Radiated restricted band-edges and spurious emission

8.2.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(d)

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 → §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.2-1: FCC §15.209— Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	μV/m	dBμV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.
For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Table 8.2-2: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.2.2 Test summary

Verdict	Pass		
Test date	May 2, 2022	Temperature	22 °C
Test engineer	Lan Sayasane, EMC Test Engineer	Air pressure	1008 mbar
Test location	3m semi-anechoic chamber (Radiated)	Relative humidity	56 %

8.2.3 Notes

The EUT was configured to transmit continuously on the lowest, middle and highest channels.

The spectrum was search from 30 MHz to 26 GHz (above the 10th harmonic of the highest transmit frequency).

Radiated measurements were performed at a 3 m measurement distance.

8.2.4 Setup details

EUT setup configuration	Tabletop
Test facility	Nemko San Diego
Measurement details	Radiated spurious emissions measurement performed as per C63.10 §11.12

Receiver settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth	120 kHz
Video bandwidth	300 kHz
Detector mode	Peak (preview measurements) Quasi-Peak (final measurements)
Trace mode	Max Hold
Measurement time	5 s (final measurements)

Receiver settings for radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Average and peak (final measurements)
Trace mode	Max Hold
Measurement time	5 s (final measurements)

8.2.5 Test data

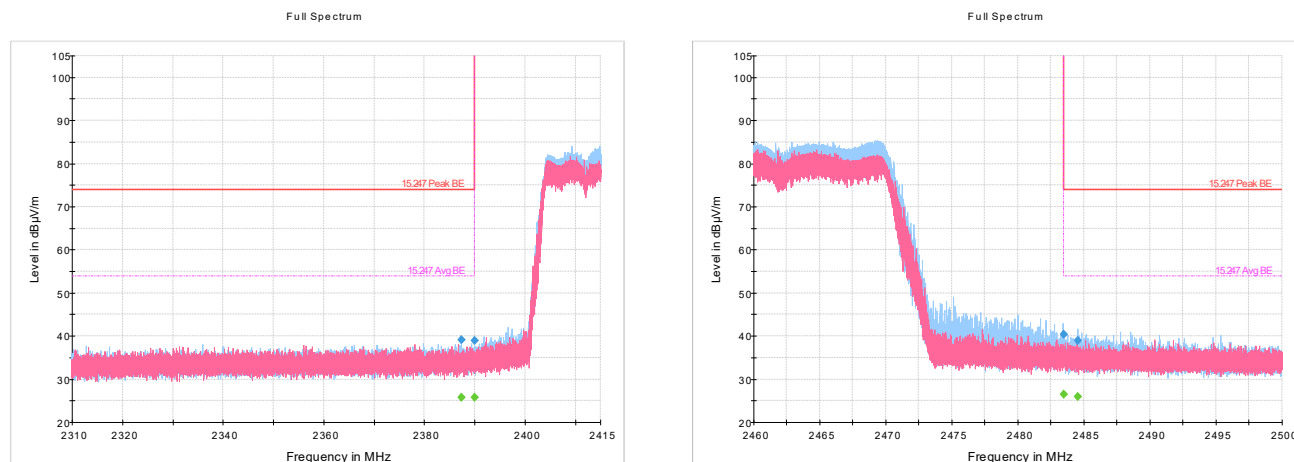


Figure 8.2-1: Radiated emissions, restricted band edge, 802.11g, 6 Mbps

Table 8.2-2: Radiated emissions, restricted band edge, 802.11g, 6 Mbps (Low Channel)

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2387.318500	39.17	---	73.90	34.73	5000.0	1000.000	198.0	V	292.0	-10.0
2387.318500	---	25.85	53.90	28.05	5000.0	1000.000	198.0	V	292.0	-10.0
2390.000000	38.97	---	73.90	34.93	5000.0	1000.000	309.0	H	181.0	-10.0
2390.000000	---	25.80	53.90	28.10	5000.0	1000.000	309.0	H	181.0	-10.0


Notes: ¹ Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Table 8.2-3: Radiated emissions, restricted band edge, 802.11g, 6 Mbps (High Channel)

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	26.55	53.90	27.35	5000.0	1000.000	147.0	V	291.0	-9.7
2483.500000	40.44	---	73.90	33.46	5000.0	1000.000	147.0	V	291.0	-9.7
2484.525333	---	26.01	53.90	27.89	5000.0	1000.000	132.0	V	286.0	-9.7
2484.525333	38.97	---	73.90	34.93	5000.0	1000.000	132.0	V	286.0	-9.7

Notes: ¹ Field strength (dBμV/m) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Full Spectrum

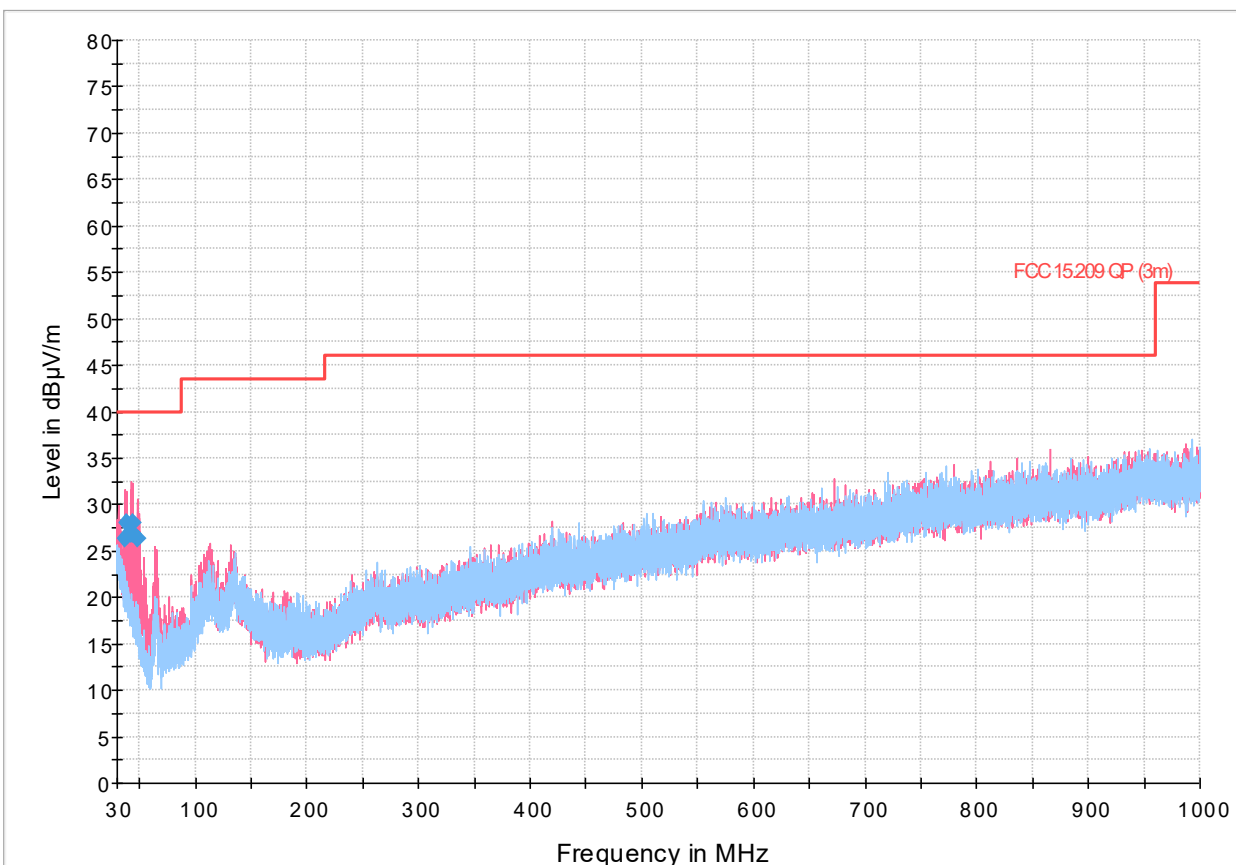

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-2: Radiated spurious emissions, 802.11b, 1 Mbps, 30-1000 MHz spectral plot (2462 MHz)

Table 8.2-4: Radiated spurious emissions, 802.11b, 1 Mbps, 30-1000 MHz (2462 MHz) (Quasi-Peak) results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.567333	26.35	40.00	13.65	5000.0	120.000	129.0	V	0.0	22.5
38.071000	27.94	40.00	12.06	5000.0	120.000	100.0	V	0.0	22.2
43.058000	26.83	40.00	13.17	5000.0	120.000	100.0	V	0.0	19.6
43.426333	26.75	40.00	13.25	5000.0	120.000	105.0	V	333.0	19.4
43.970000	27.96	40.00	12.04	5000.0	120.000	108.0	V	0.0	19.0
48.452667	26.32	40.00	13.68	5000.0	120.000	100.0	V	34.0	16.8


Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

⁴ Limits converted to dBµV/m and an inverse proportionality factor of 20 dB per decade has been used to normalize the specification limit to a measurement distance of 3 meters to determine compliance.

Full Spectrum

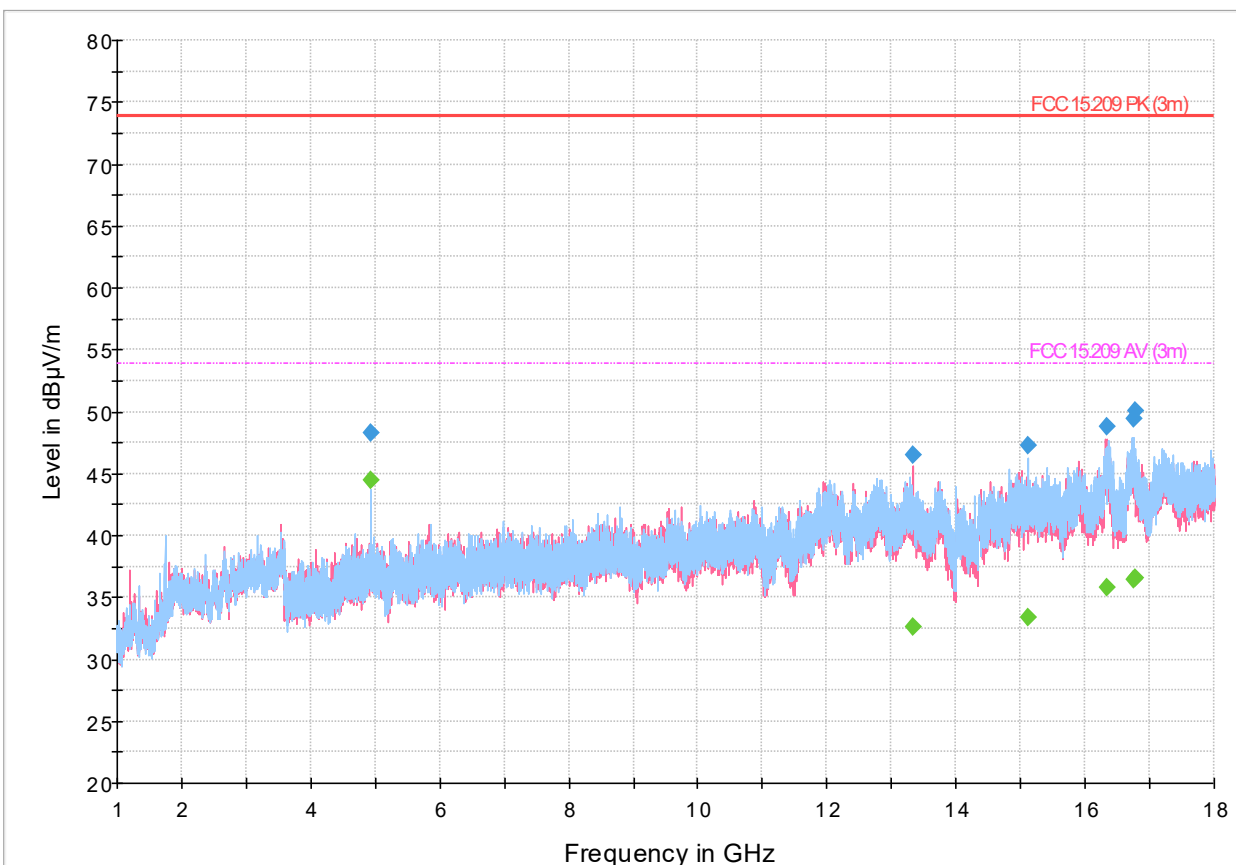

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-3: Radiated spurious emissions, 802.11b, 1 Mbps, 1-18 GHz spectral plot (2462 MHz)

Table 8.2-5: Radiated spurious emissions, 802.11b, 1 Mbps, 1-18 GHz results (2462 MHz)


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	---	44.49	53.90	9.41	5000.0	1000.000	235.0	H	295.0	-2.3
4924.000000	48.24	---	73.90	25.66	5000.0	1000.000	235.0	H	295.0	-2.3
13329.700000	46.49	---	73.90	27.41	5000.0	1000.000	230.0	V	35.0	9.3
13329.700000	---	32.58	53.90	21.32	5000.0	1000.000	230.0	V	35.0	9.3
15116.166667	47.25	---	73.90	26.65	5000.0	1000.000	170.0	H	353.0	10.3
15116.166667	---	33.32	53.90	20.58	5000.0	1000.000	170.0	H	353.0	10.3
16351.133333	---	35.82	53.90	18.08	5000.0	1000.000	139.0	V	168.0	13.1
16351.133333	48.78	---	73.90	25.12	5000.0	1000.000	139.0	V	168.0	13.1
16764.266667	49.44	---	73.90	24.46	5000.0	1000.000	358.0	H	36.0	14.7
16764.266667	---	36.46	53.90	17.44	5000.0	1000.000	358.0	H	36.0	14.7
16769.466667	50.01	---	73.90	23.89	5000.0	1000.000	385.0	H	11.0	14.7
16769.466667	---	36.53	53.90	17.37	5000.0	1000.000	385.0	H	11.0	14.7

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

A 2.4 GHz notch filter was used to remove the fundamental carrier frequency

Full Spectrum

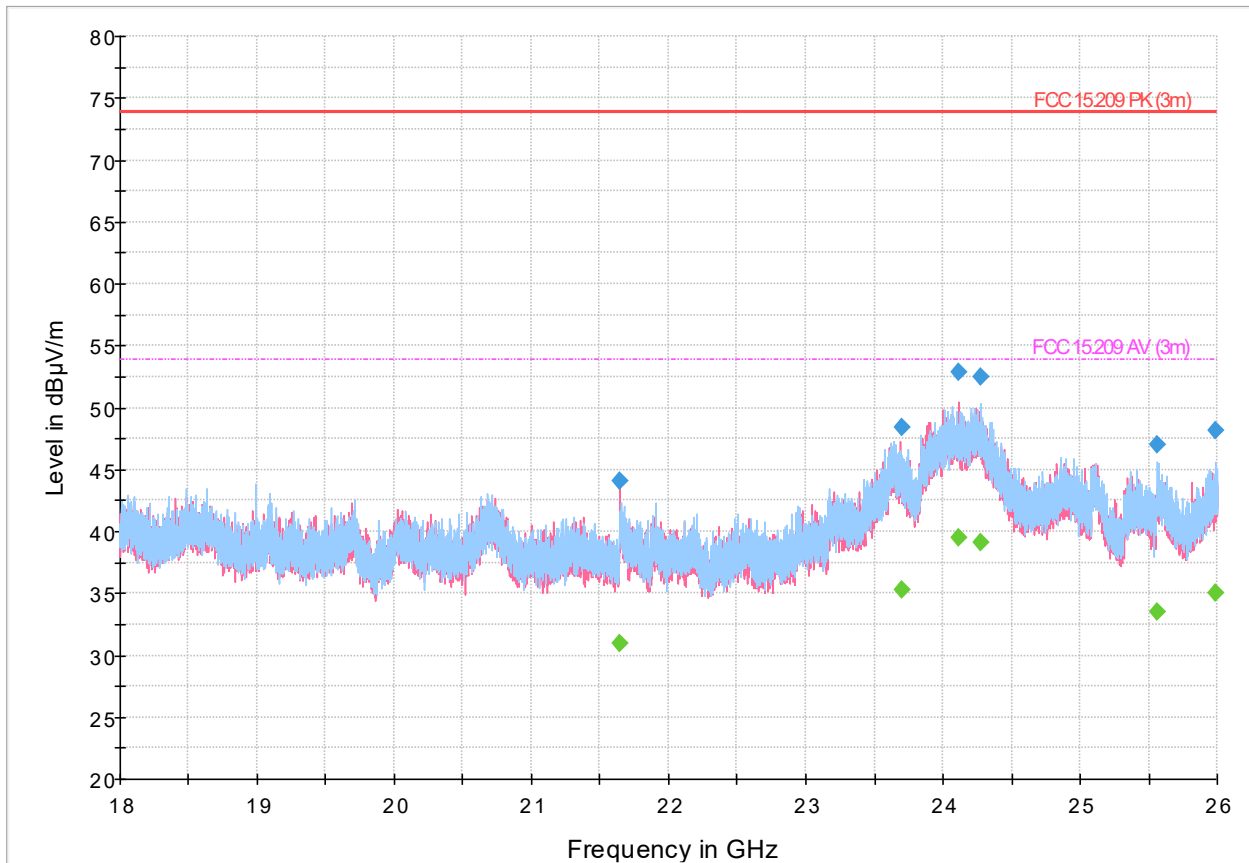

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-4: Radiated spurious emissions, 802.11b, 1 Mbps, 18-26 GHz (2462 MHz) spectral plot


Table 8.2-6: Radiated spurious emissions, 802.11b, 1 Mbps, 18-26 GHz results (2462 MHz)

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21646.900000	---	30.94	53.90	22.96	5000.0	1000.000	383.0	V	180.0	19.0
21646.900000	44.11	---	73.90	29.79	5000.0	1000.000	383.0	V	180.0	19.0
23696.100000	48.43	---	73.90	25.47	5000.0	1000.000	239.0	V	274.0	25.4
23696.100000	---	35.25	53.90	18.65	5000.0	1000.000	239.0	V	274.0	25.4
24115.700000	---	39.54	53.90	14.36	5000.0	1000.000	208.0	V	106.0	29.5
24115.700000	52.87	---	73.90	21.03	5000.0	1000.000	208.0	V	106.0	29.5
24275.500000	52.45	---	73.90	21.45	5000.0	1000.000	291.0	H	46.0	28.7
24275.500000	---	39.13	53.90	14.77	5000.0	1000.000	291.0	H	46.0	28.7
25565.900000	46.95	---	73.90	26.95	5000.0	1000.000	316.0	H	296.0	24.3
25565.900000	---	33.52	53.90	20.38	5000.0	1000.000	316.0	H	296.0	24.3
25990.300000	48.15	---	73.90	25.75	5000.0	1000.000	400.0	H	142.0	25.4
25990.300000	---	35.01	53.90	18.89	5000.0	1000.000	400.0	H	142.0	25.4

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Full Spectrum

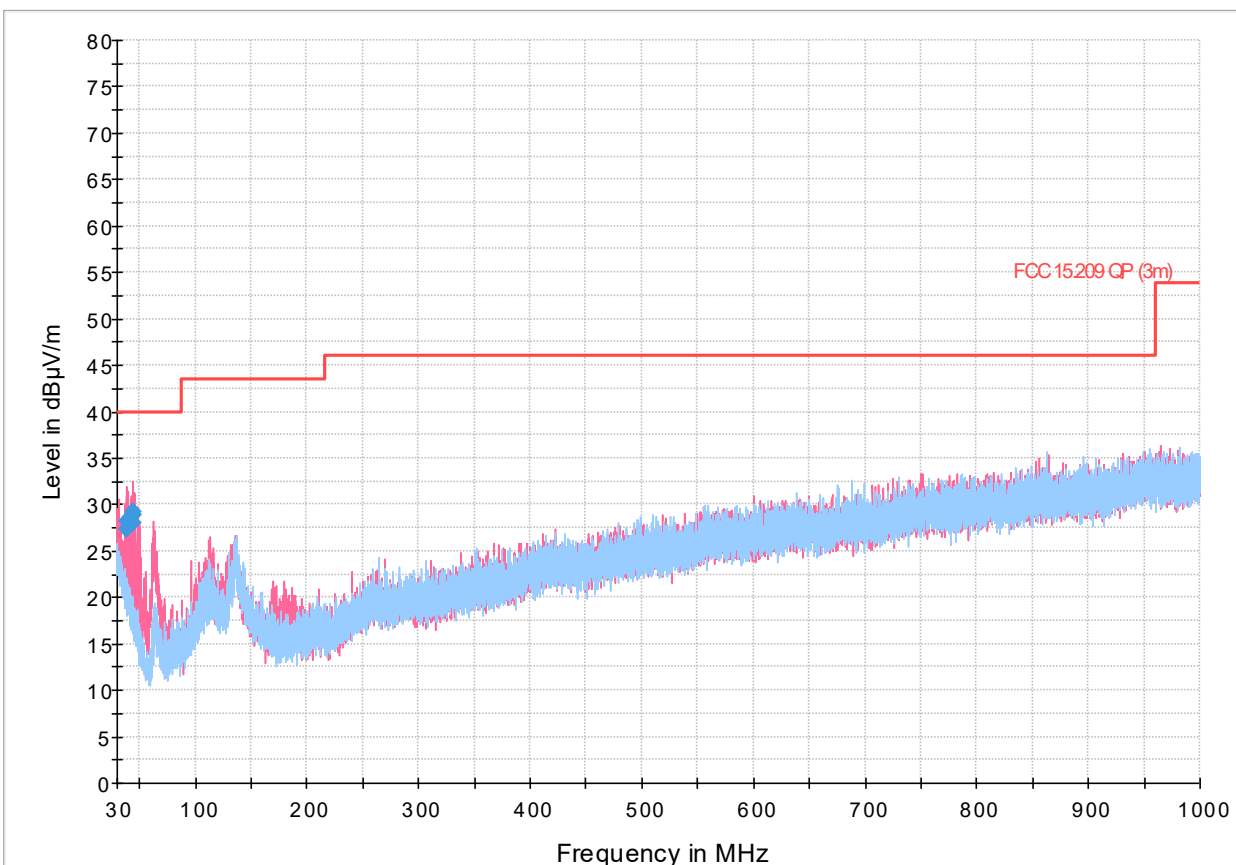

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-5: Radiated spurious emissions, 802.11g, 6 Mbps, 30-1000 MHz spectral plot (2437 MHz)


Table 8.2-7: Radiated spurious emissions, 802.11g, 6 Mbps, 30-1000 MHz (Quasi Peak) results (2437 MHz)

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.437667	28.21	40.00	11.79	5000.0	120.000	104.0	V	353.0	22.1
38.892000	27.29	40.00	12.71	5000.0	120.000	128.0	V	0.0	21.8
43.926667	28.85	40.00	11.15	5000.0	120.000	100.0	V	0.0	19.1
44.283333	28.09	40.00	11.91	5000.0	120.000	100.0	V	275.0	18.9
44.325667	29.24	40.00	10.77	5000.0	120.000	100.0	V	44.0	18.9
44.339333	28.94	40.00	11.06	5000.0	120.000	100.0	V	21.0	18.9

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Full Spectrum

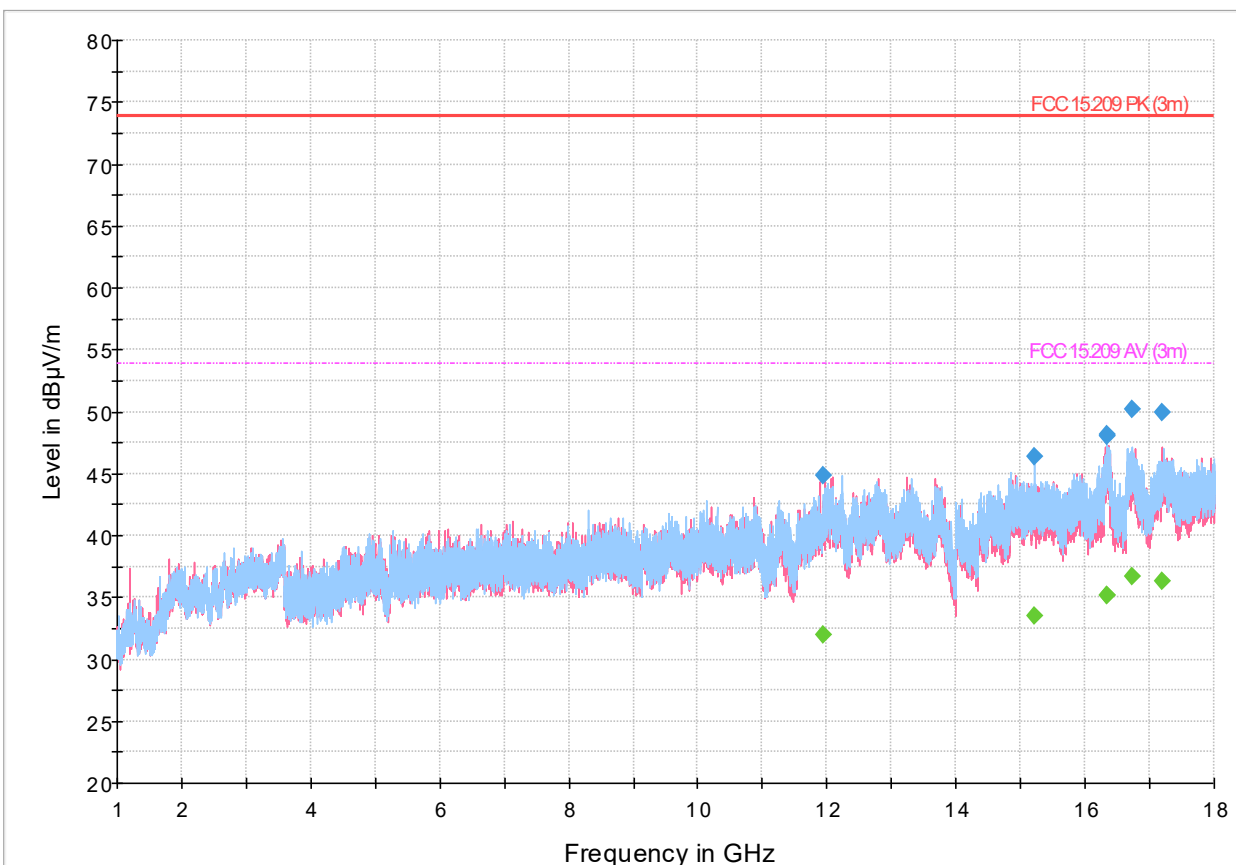

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-6: Radiated spurious emissions, 802.11g, 6 Mbps, 1-18 GHz spectral plot (2437 MHz)

Table 8.2-8: Radiated spurious emissions, 802.11g, 6 Mbps, 1-18 GHz results (2437 MHz)


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11954.566667	---	32.00	53.90	21.90	5000.0	1000.000	371.0	V	154.0	5.9
11954.566667	44.81	---	73.90	29.09	5000.0	1000.000	371.0	V	154.0	5.9
15225.233333	46.37	---	73.90	27.53	5000.0	1000.000	400.0	H	92.0	10.2
15225.233333	---	33.47	53.90	20.43	5000.0	1000.000	400.0	H	92.0	10.2
16339.566667	47.98	---	73.90	25.92	5000.0	1000.000	175.0	H	117.0	13.2
16339.566667	---	35.16	53.90	18.74	5000.0	1000.000	175.0	H	117.0	13.2
16345.166667	48.09	---	73.90	25.81	5000.0	1000.000	100.0	H	64.0	13.2
16345.166667	---	35.17	53.90	18.73	5000.0	1000.000	100.0	H	64.0	13.2
16727.666667	---	36.70	53.90	17.20	5000.0	1000.000	356.0	H	260.0	14.7
16727.666667	50.13	---	73.90	23.77	5000.0	1000.000	356.0	H	260.0	14.7
17194.166667	49.96	---	73.90	23.94	5000.0	1000.000	356.0	V	252.0	14.9
17194.166667	---	36.36	53.90	17.54	5000.0	1000.000	356.0	V	252.0	14.9

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

A 2.4 GHz notch filter was used to remove the fundamental emission

Full Spectrum

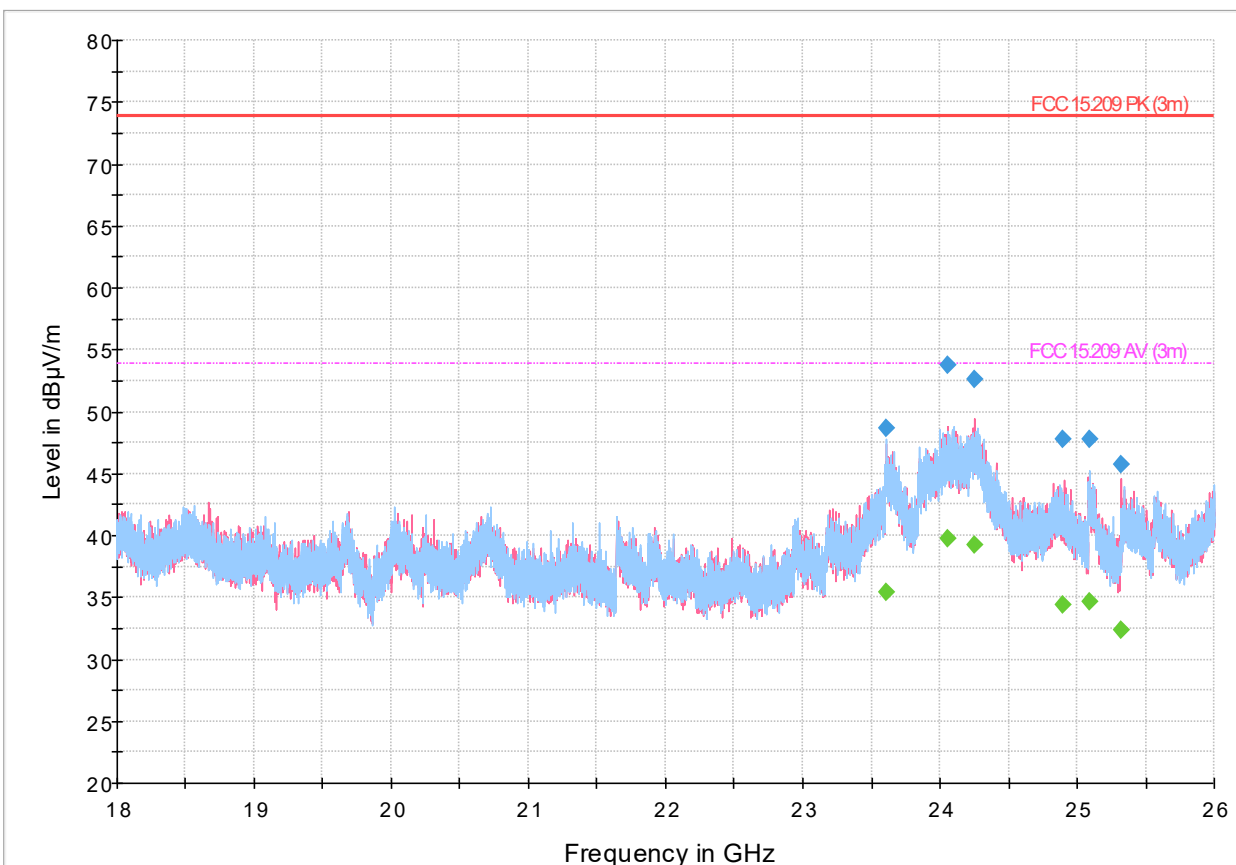

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-7: Radiated spurious emissions, 802.11g, 6 Mbps, 18-26 GHz spectral plot (2437 MHz)


Table 8.2-9: Radiated spurious emissions, 802.11g, 6 Mbps, 18-26 GHz results (2437 MHz)

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23606.500000	48.69	---	73.90	25.21	5000.0	1000.000	351.0	H	144.0	25.8
23606.500000	---	35.44	53.90	18.46	5000.0	1000.000	351.0	H	144.0	25.8
24054.700000	---	39.76	53.90	14.14	5000.0	1000.000	364.0	V	157.0	29.7
24054.700000	53.70	---	73.90	20.20	5000.0	1000.000	364.0	V	157.0	29.7
24249.700000	52.59	---	73.90	21.31	5000.0	1000.000	100.0	V	0.0	29.0
24249.700000	---	39.20	53.90	14.70	5000.0	1000.000	100.0	V	0.0	29.0
24898.100000	---	34.37	53.90	19.53	5000.0	1000.000	293.0	V	112.0	24.7
24898.100000	47.77	---	73.90	26.13	5000.0	1000.000	293.0	V	112.0	24.7
25095.700000	47.76	---	73.90	26.14	5000.0	1000.000	144.0	H	250.0	24.3
25095.700000	---	34.64	53.90	19.26	5000.0	1000.000	144.0	H	250.0	24.3
25318.100000	45.73	---	73.90	28.17	5000.0	1000.000	126.0	V	21.0	23.4
25318.100000	---	32.32	53.90	21.58	5000.0	1000.000	126.0	V	21.0	23.4

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Full Spectrum

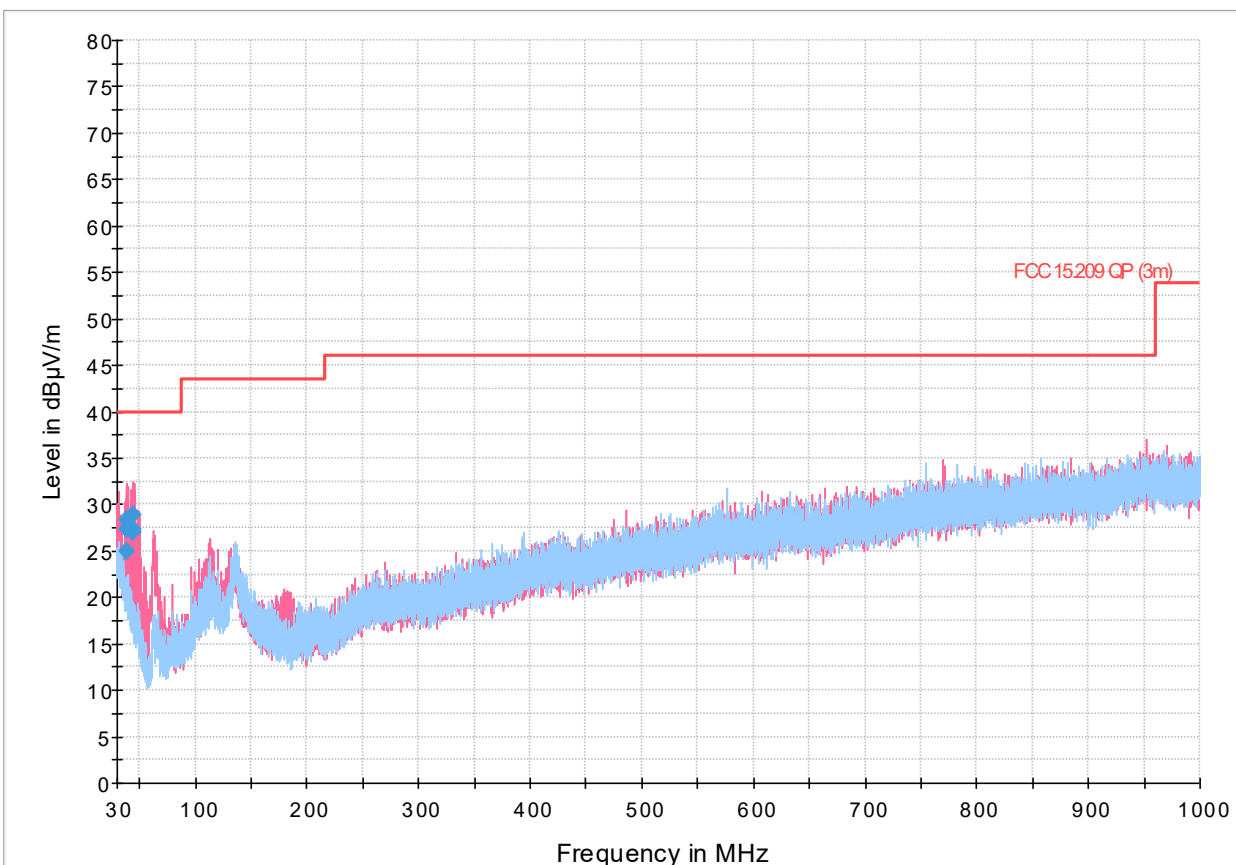

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).


Figure 8.2-8: Radiated spurious emissions, 802.11n-HT20, MSC0, 30-1000 MHz spectral plot (2437 MHz)

Table 8.2-10: Radiated spurious emissions, 802.11n-HT20, MSC0, 30-1000 MHz (Quasi Peak) results (2437 MHz)

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.111000	28.37	40.00	11.63	5000.0	120.000	104.0	V	0.0	22.2
38.708333	27.43	40.00	12.57	5000.0	120.000	114.0	V	0.0	21.9
39.061333	25.03	40.00	14.97	5000.0	120.000	111.0	V	34.0	21.8
44.092667	28.91	40.00	11.09	5000.0	120.000	100.0	V	0.0	19.0
44.502667	27.08	40.00	12.92	5000.0	120.000	100.0	V	207.0	18.8
44.513000	27.42	40.00	12.58	5000.0	120.000	107.0	V	229.0	18.8

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Full Spectrum

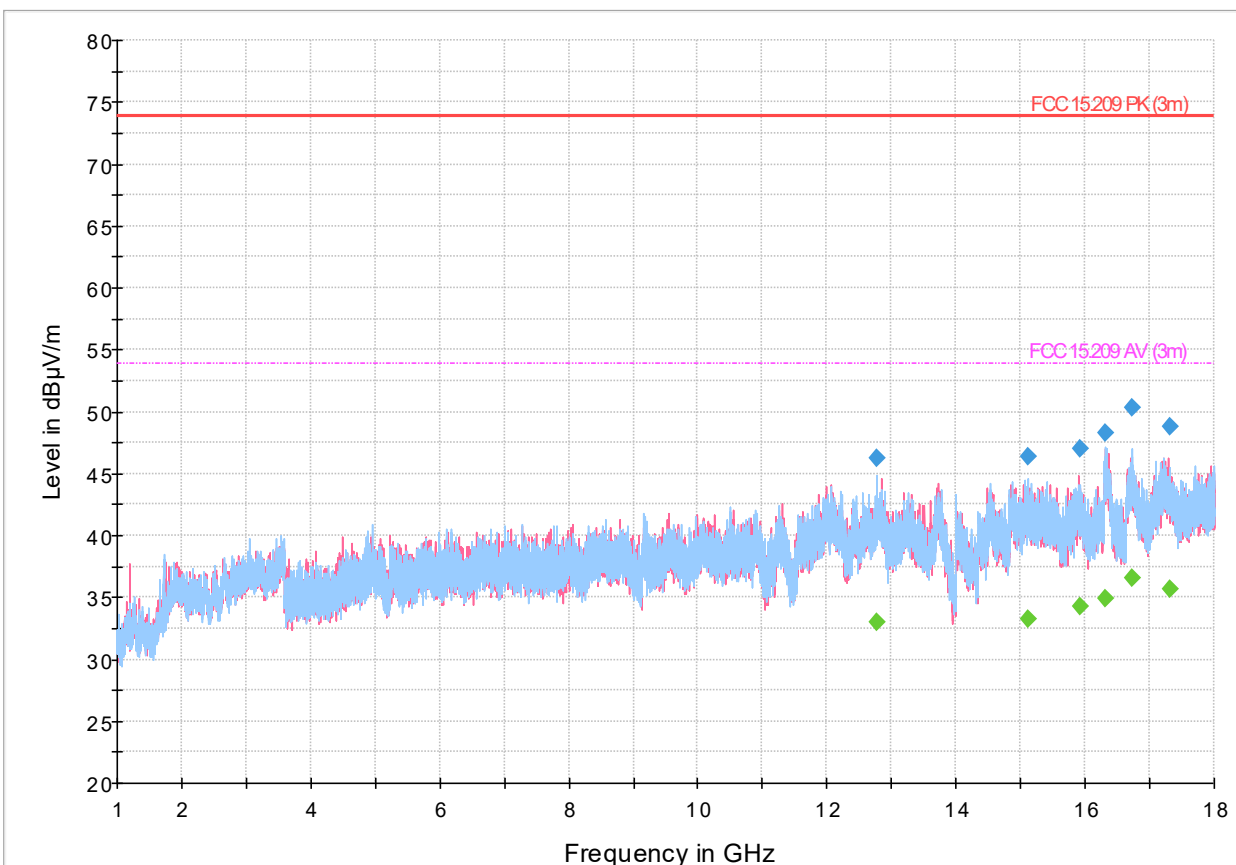

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-9: Radiated spurious emissions, 802.11n-HT20, MSC0, 1-18 GHz spectral plot (2437 MHz)

Table 8.2-11: Radiated spurious emissions, 802.11n-HT20, MSC0, 1-18 GHz results (2437 MHz)


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
12771.366667	---	33.01	53.90	20.89	5000.0	1000.000	310.0	H	184.0	8.5
12771.366667	46.25	---	73.90	27.65	5000.0	1000.000	310.0	H	184.0	8.5
15118.466667	46.37	---	73.90	27.53	5000.0	1000.000	400.0	H	118.0	10.3
15118.466667	---	33.23	53.90	20.67	5000.0	1000.000	400.0	H	118.0	10.3
15918.866667	47.04	---	73.90	26.86	5000.0	1000.000	357.0	V	0.0	11.3
15918.866667	---	34.28	53.90	19.62	5000.0	1000.000	357.0	V	0.0	11.3
16317.000000	48.26	---	73.90	25.64	5000.0	1000.000	279.0	H	240.0	13.3
16317.000000	---	34.92	53.90	18.98	5000.0	1000.000	279.0	H	240.0	13.3
16719.100000	50.26	---	73.90	23.64	5000.0	1000.000	334.0	H	210.0	14.7
16719.100000	---	36.51	53.90	17.39	5000.0	1000.000	334.0	H	210.0	14.7
17305.600000	---	35.66	53.90	18.24	5000.0	1000.000	303.0	V	106.0	14.8
17305.600000	48.73	---	73.90	25.17	5000.0	1000.000	303.0	V	106.0	14.8

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

A 2.4 GHz notch filter was used to remove the fundamental emission

Full Spectrum

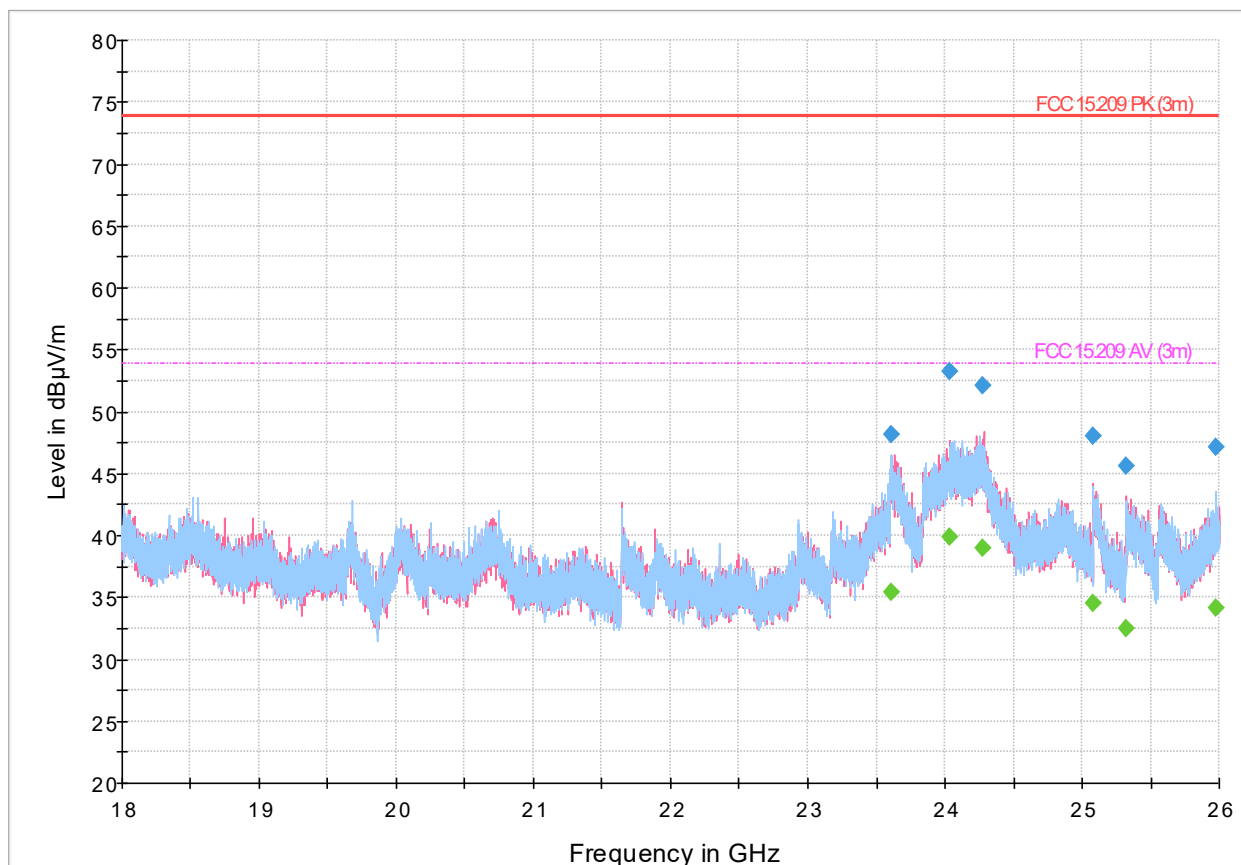

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.2-10: Radiated spurious emissions, 802.11n-HT20, MSC0, 18-26 GHz spectral plot (2437 MHz)

Table 8.2-12: Radiated spurious emissions, 802.11n-HT20, MSC0, 18-26 GHz results (2437 MHz)

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23610.500000	---	35.37	53.90	18.53	5000.0	1000.000	198.0	H	170.0	25.8
23610.500000	48.15	---	73.90	25.75	5000.0	1000.000	198.0	H	170.0	25.8
24033.700000	53.22	---	73.90	20.68	5000.0	1000.000	203.0	V	205.0	29.7
24033.700000	---	39.87	53.90	14.03	5000.0	1000.000	203.0	V	205.0	29.7
24279.700000	52.09	---	73.90	21.81	5000.0	1000.000	173.0	V	83.0	28.6
24279.700000	---	38.98	53.90	14.92	5000.0	1000.000	173.0	V	83.0	28.6
25079.700000	48.05	---	73.90	25.85	5000.0	1000.000	129.0	V	0.0	24.4
25079.700000	---	34.55	53.90	19.35	5000.0	1000.000	129.0	V	0.0	24.4
25322.500000	---	32.42	53.90	21.48	5000.0	1000.000	361.0	V	0.0	23.4
25322.500000	45.56	---	73.90	28.34	5000.0	1000.000	361.0	V	0.0	23.4
25972.100000	47.19	---	73.90	26.71	5000.0	1000.000	340.0	H	343.0	25.2
25972.100000	---	34.15	53.90	19.75	5000.0	1000.000	340.0	H	343.0	25.2

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB) – pre-amp (dB)

Section 9 Block diagrams of test set-ups

9.1 Radiated emissions set-up

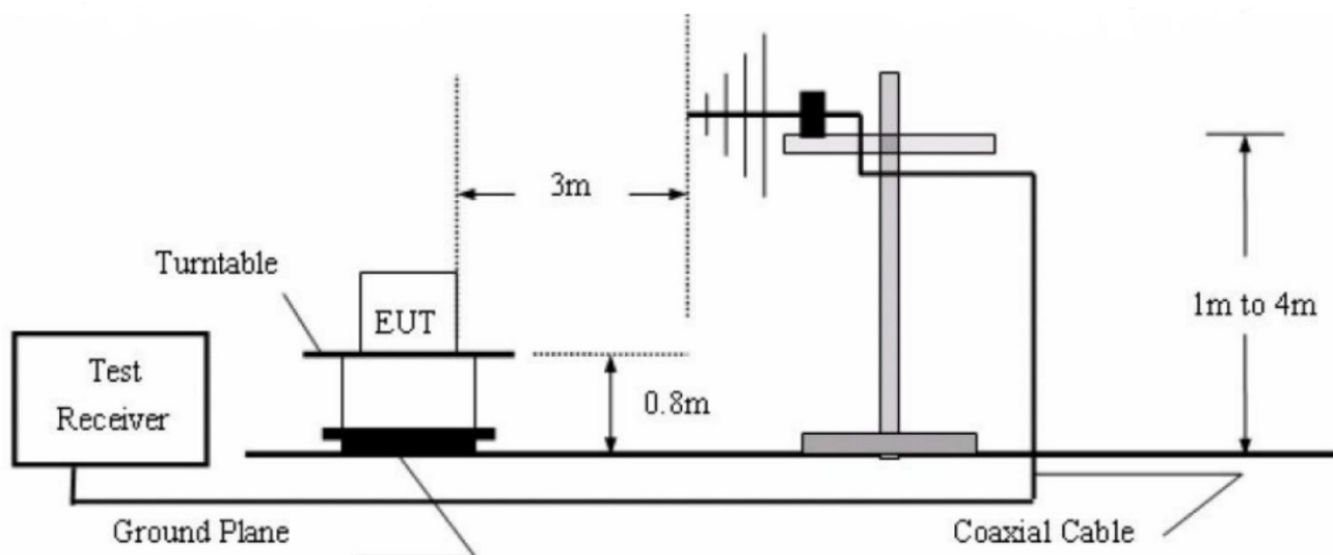


Figure 9.1-1: 30 MHz - 1000 MHz Setup

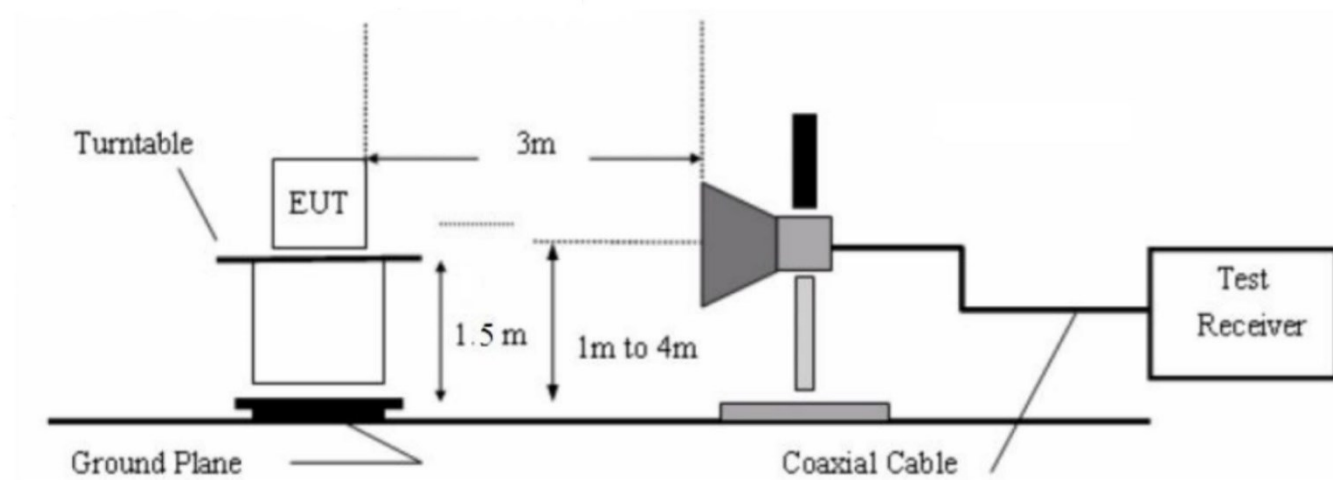


Figure 9.1-2: 1 GHz - 26 GHz Setup