


Shenzhen HamyWe Technology Co., Ltd.

Add:1st floor,Building B,Jinghang Industrial Park,Liu xian 2nd
Road,District71,Bao'an,Shenzhen


S66RFT Antenna Debugging Report

- Name: Wen Xuehua
- Tel: 13609625813
- Date: 2024. 3. 15

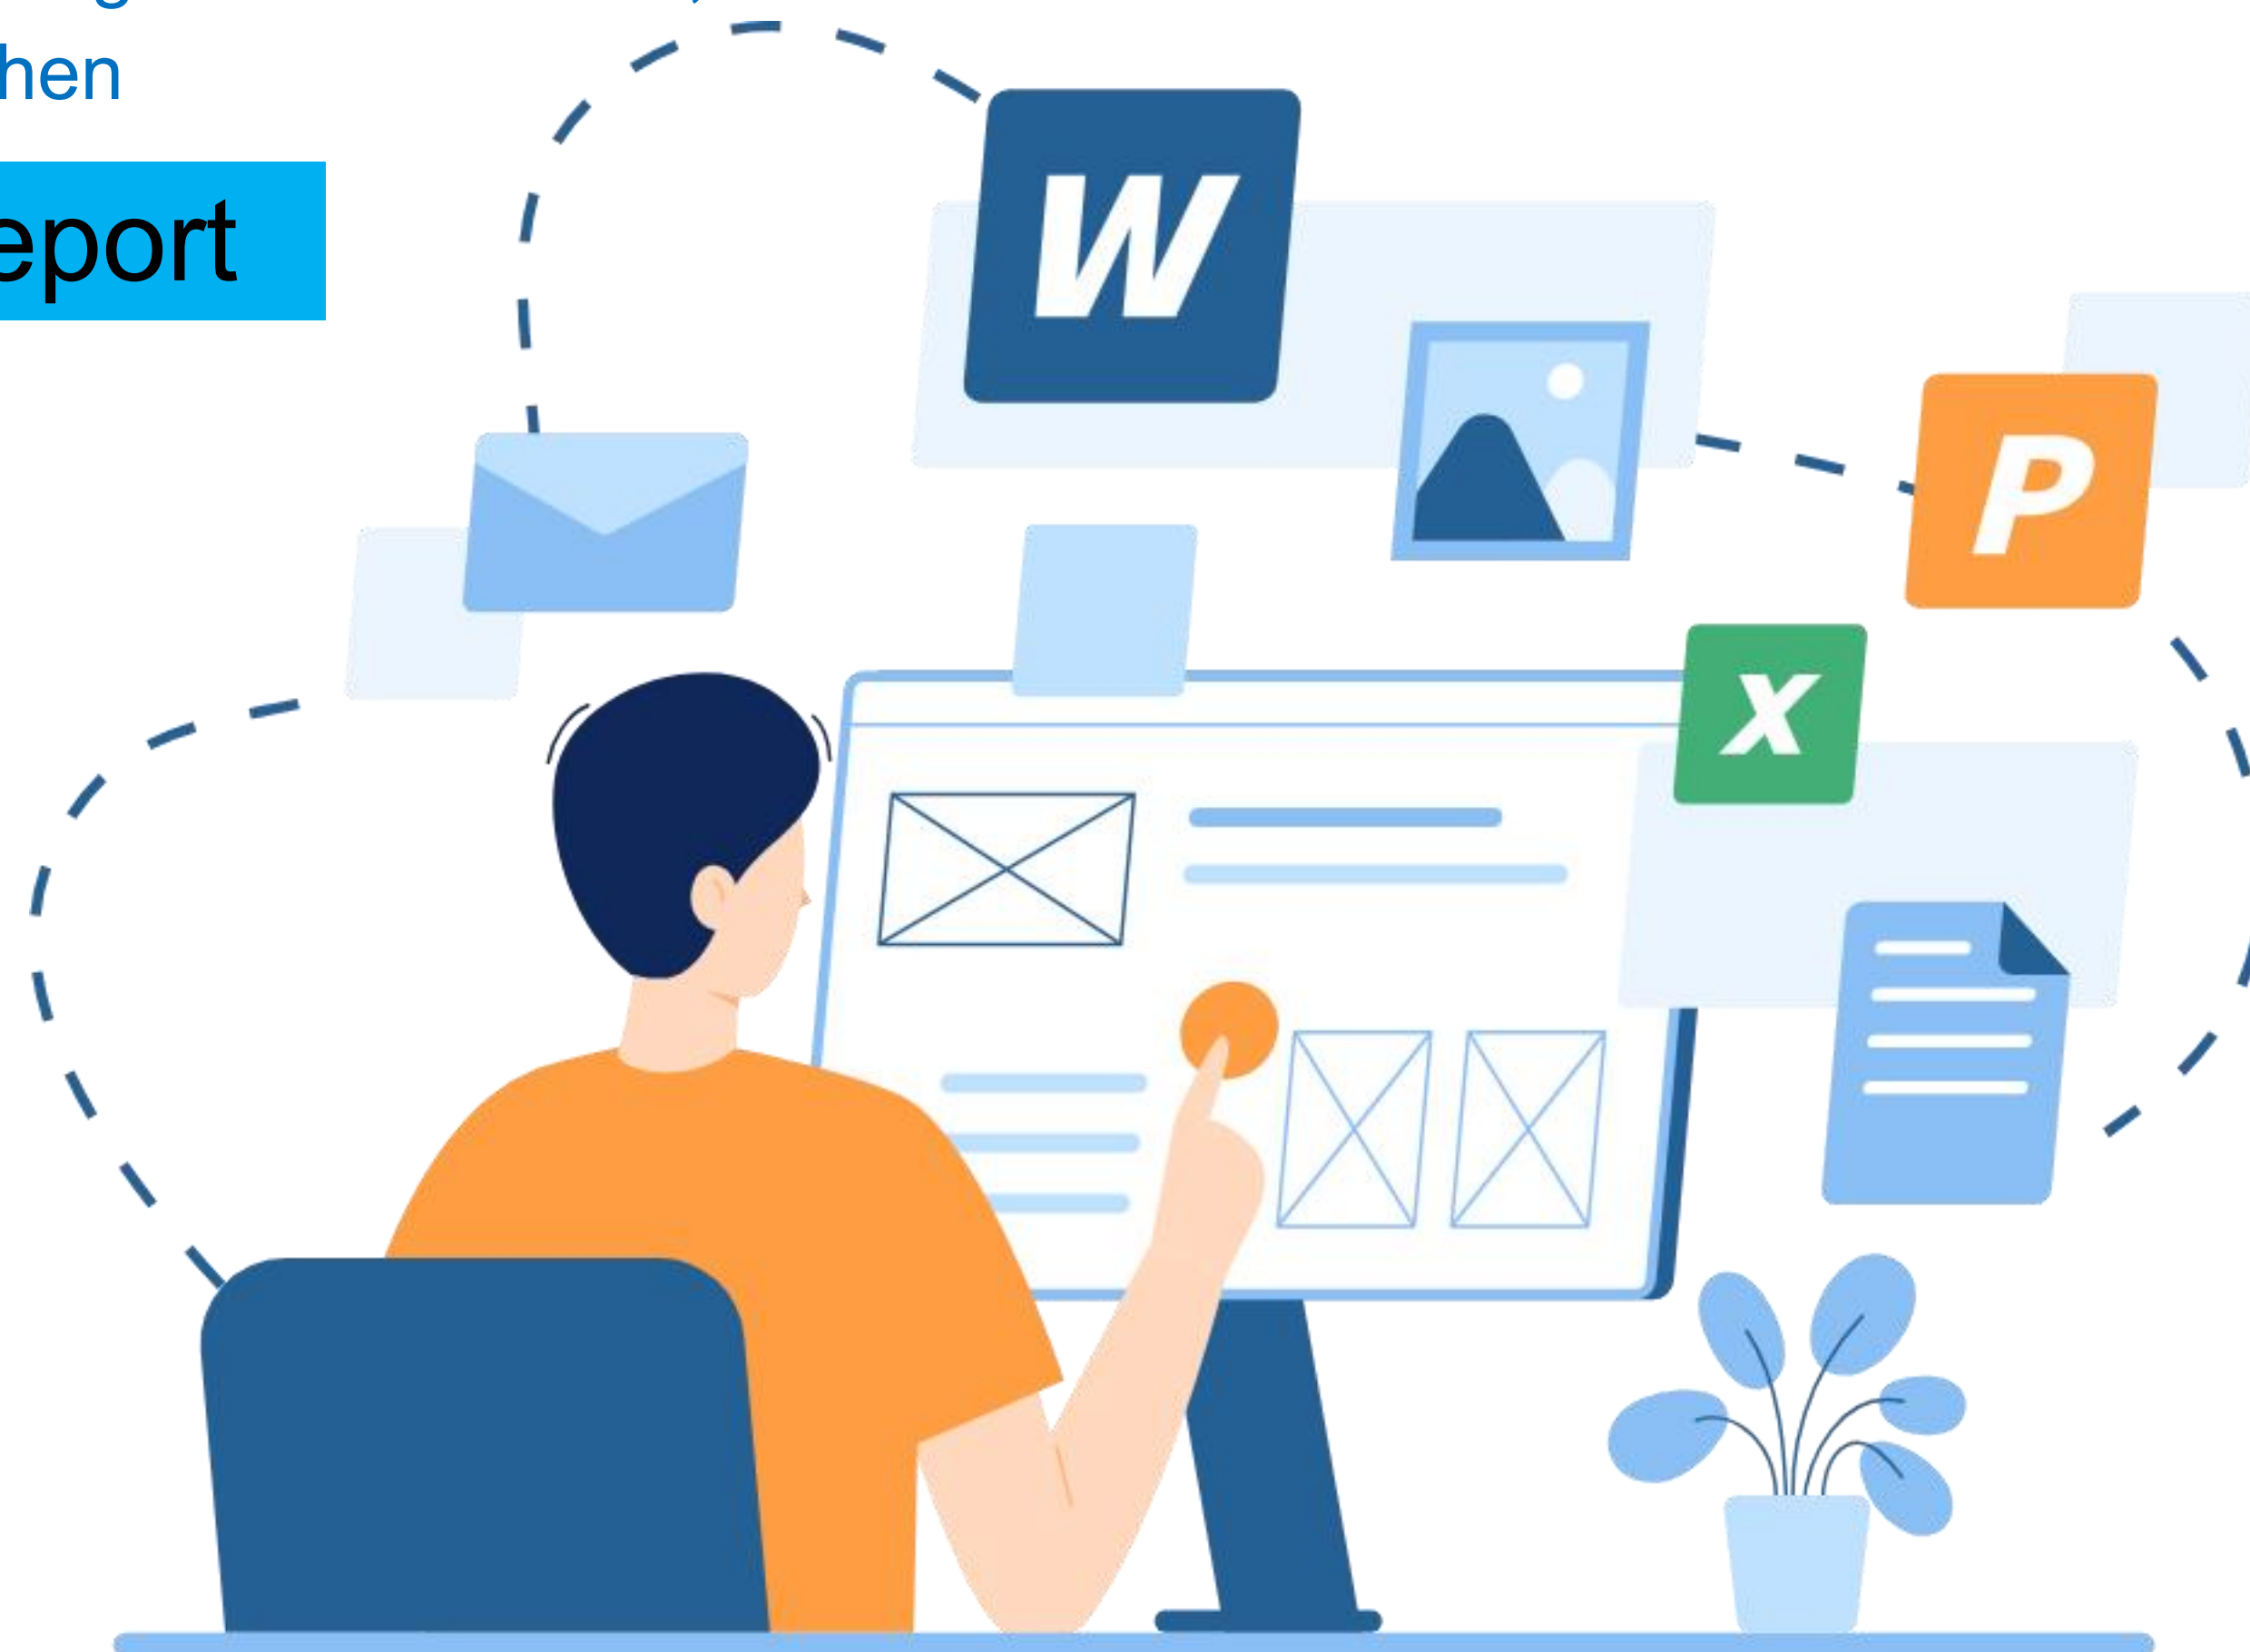



Catalogue


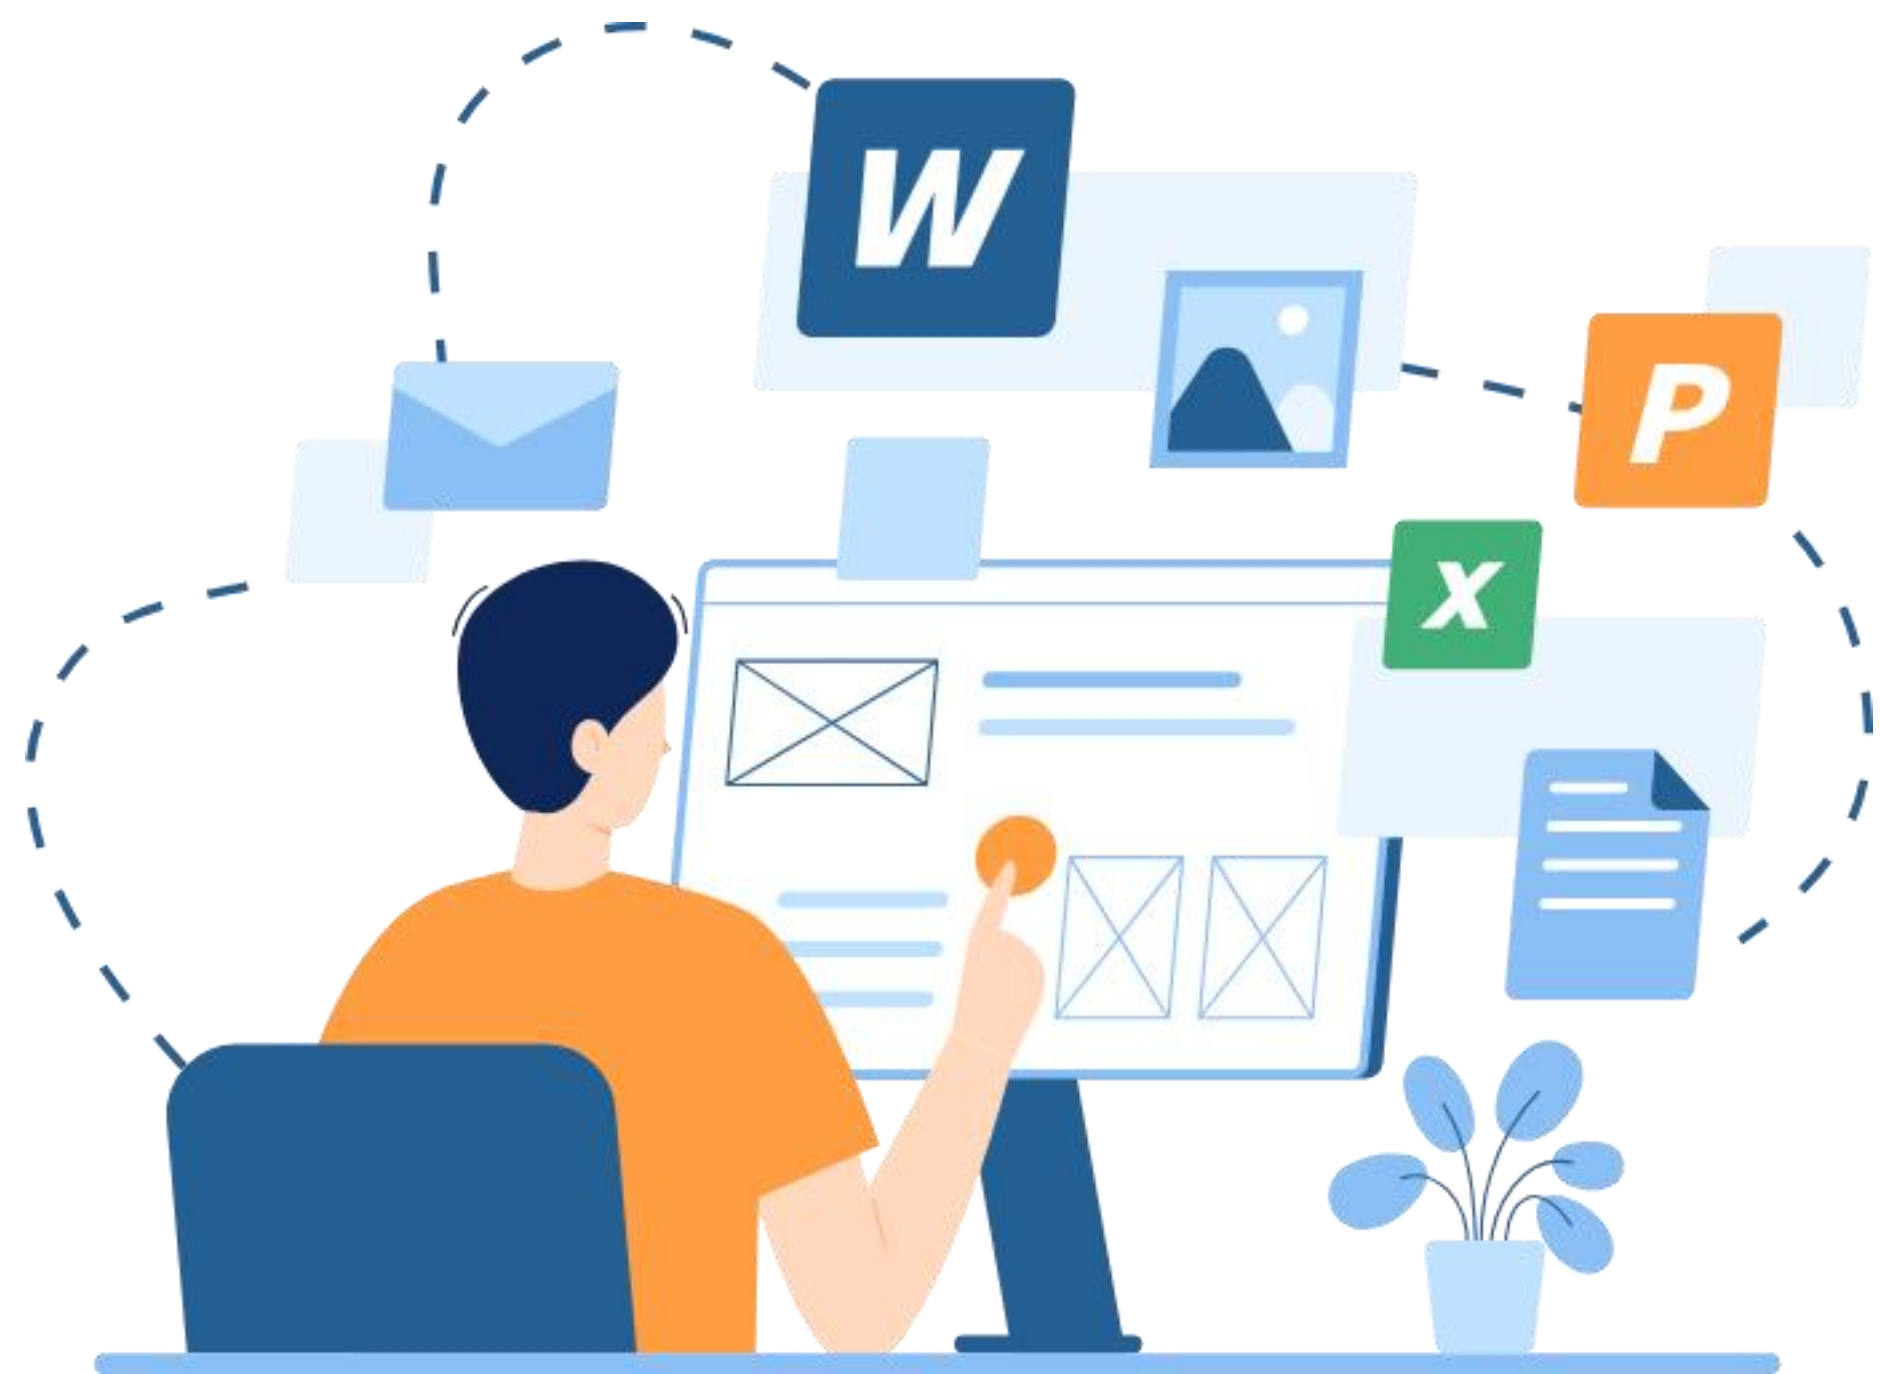


- 1 Test Equipment
- 2 Project Description
- 3 Recording of Dubugging Version
- 4 Recording of Matching
- 5 S11 Parameter
- 6 OTA Test Results
- 7 Important Instruction



Active Testing&Passive Testing— 5G Microwave chamber

◆ Testing System	◆ Testing Environment	◆ Active Testing	◆ Passive Testing
GTS2800	temperature: 22°C±3°C humidity: 50%±15%	support 5G/4G/3G/2G support BT/WIFI/GPS	600MHZ—6G

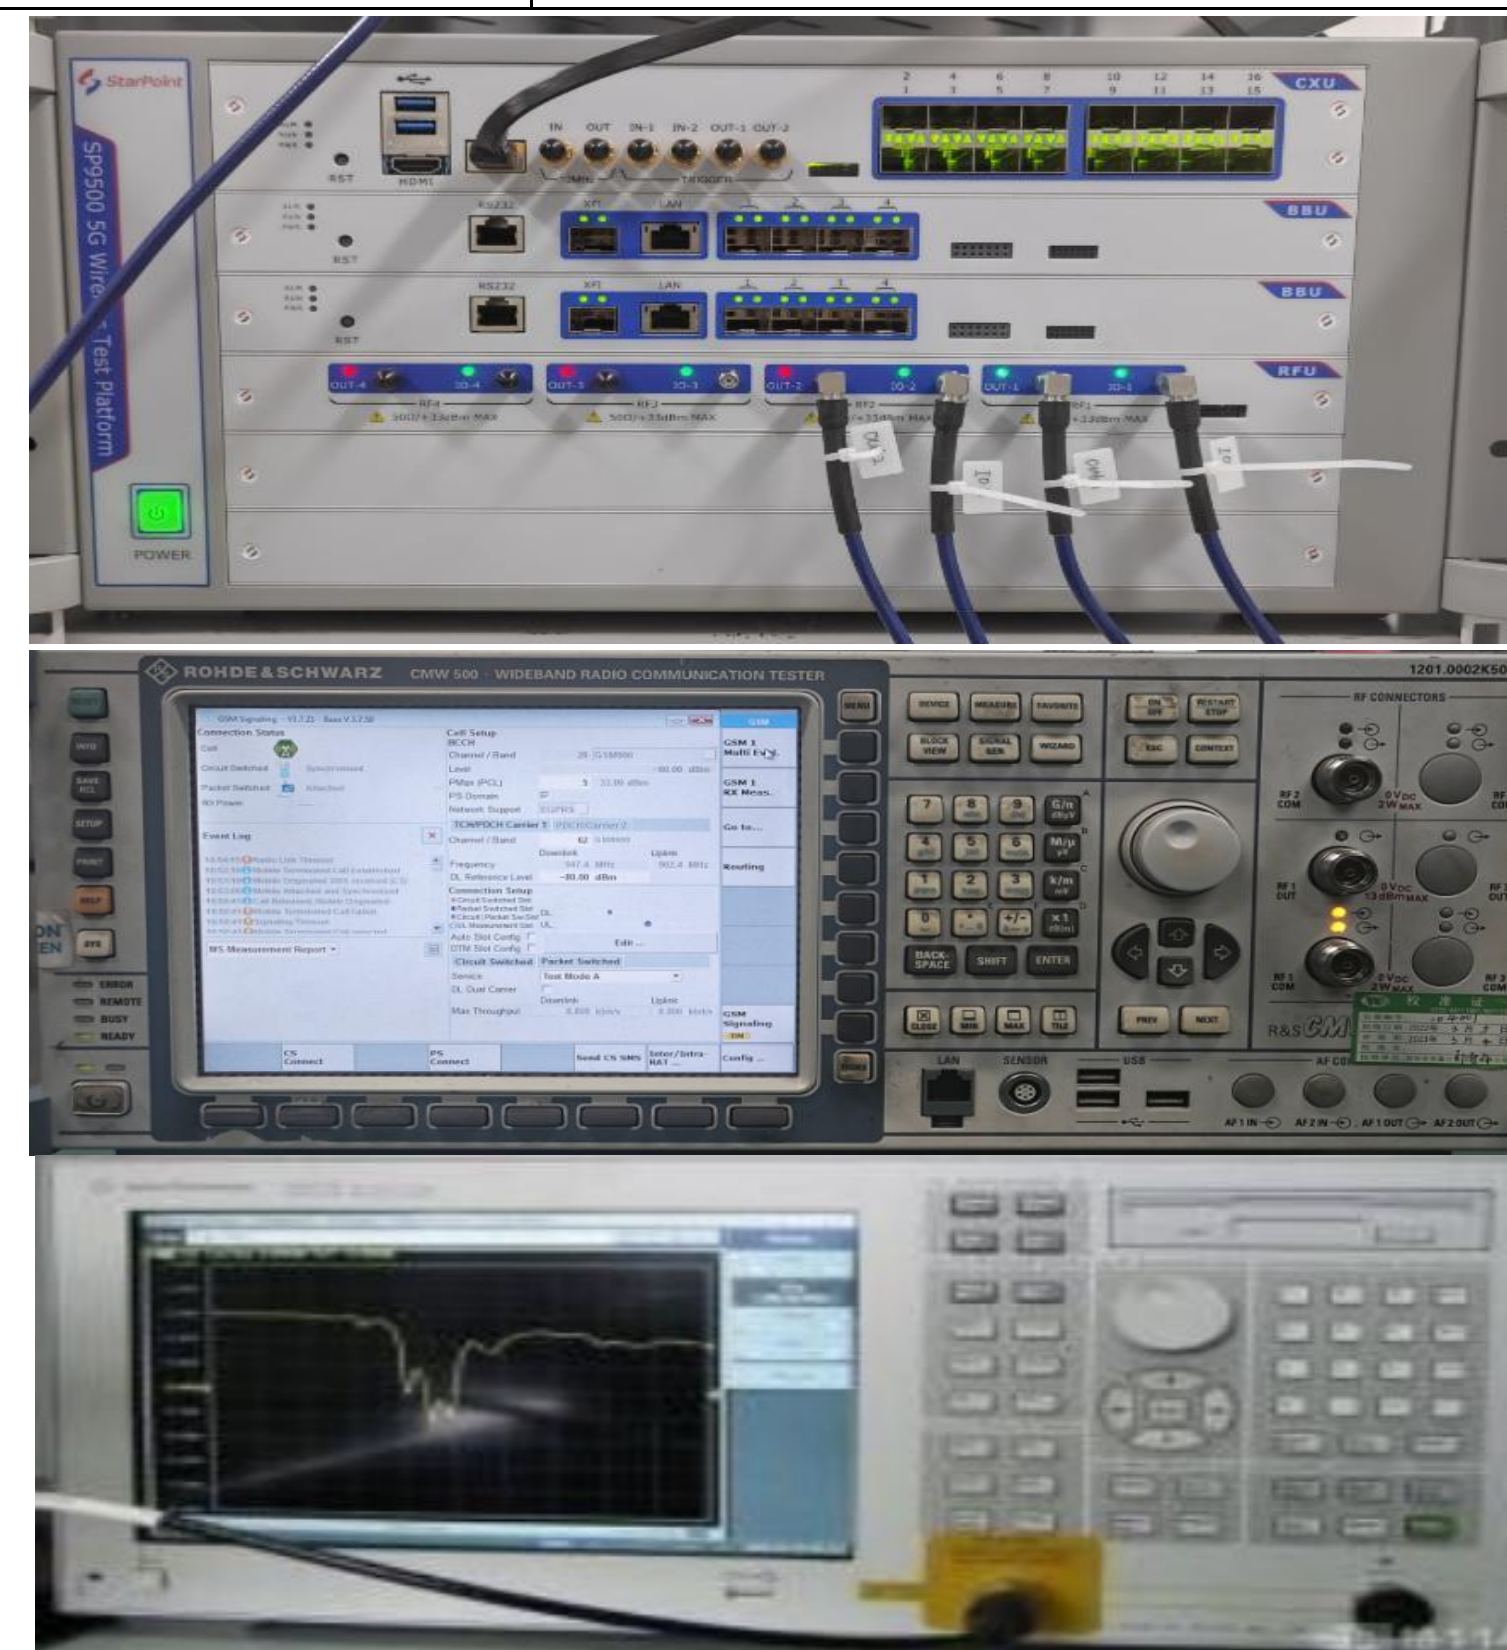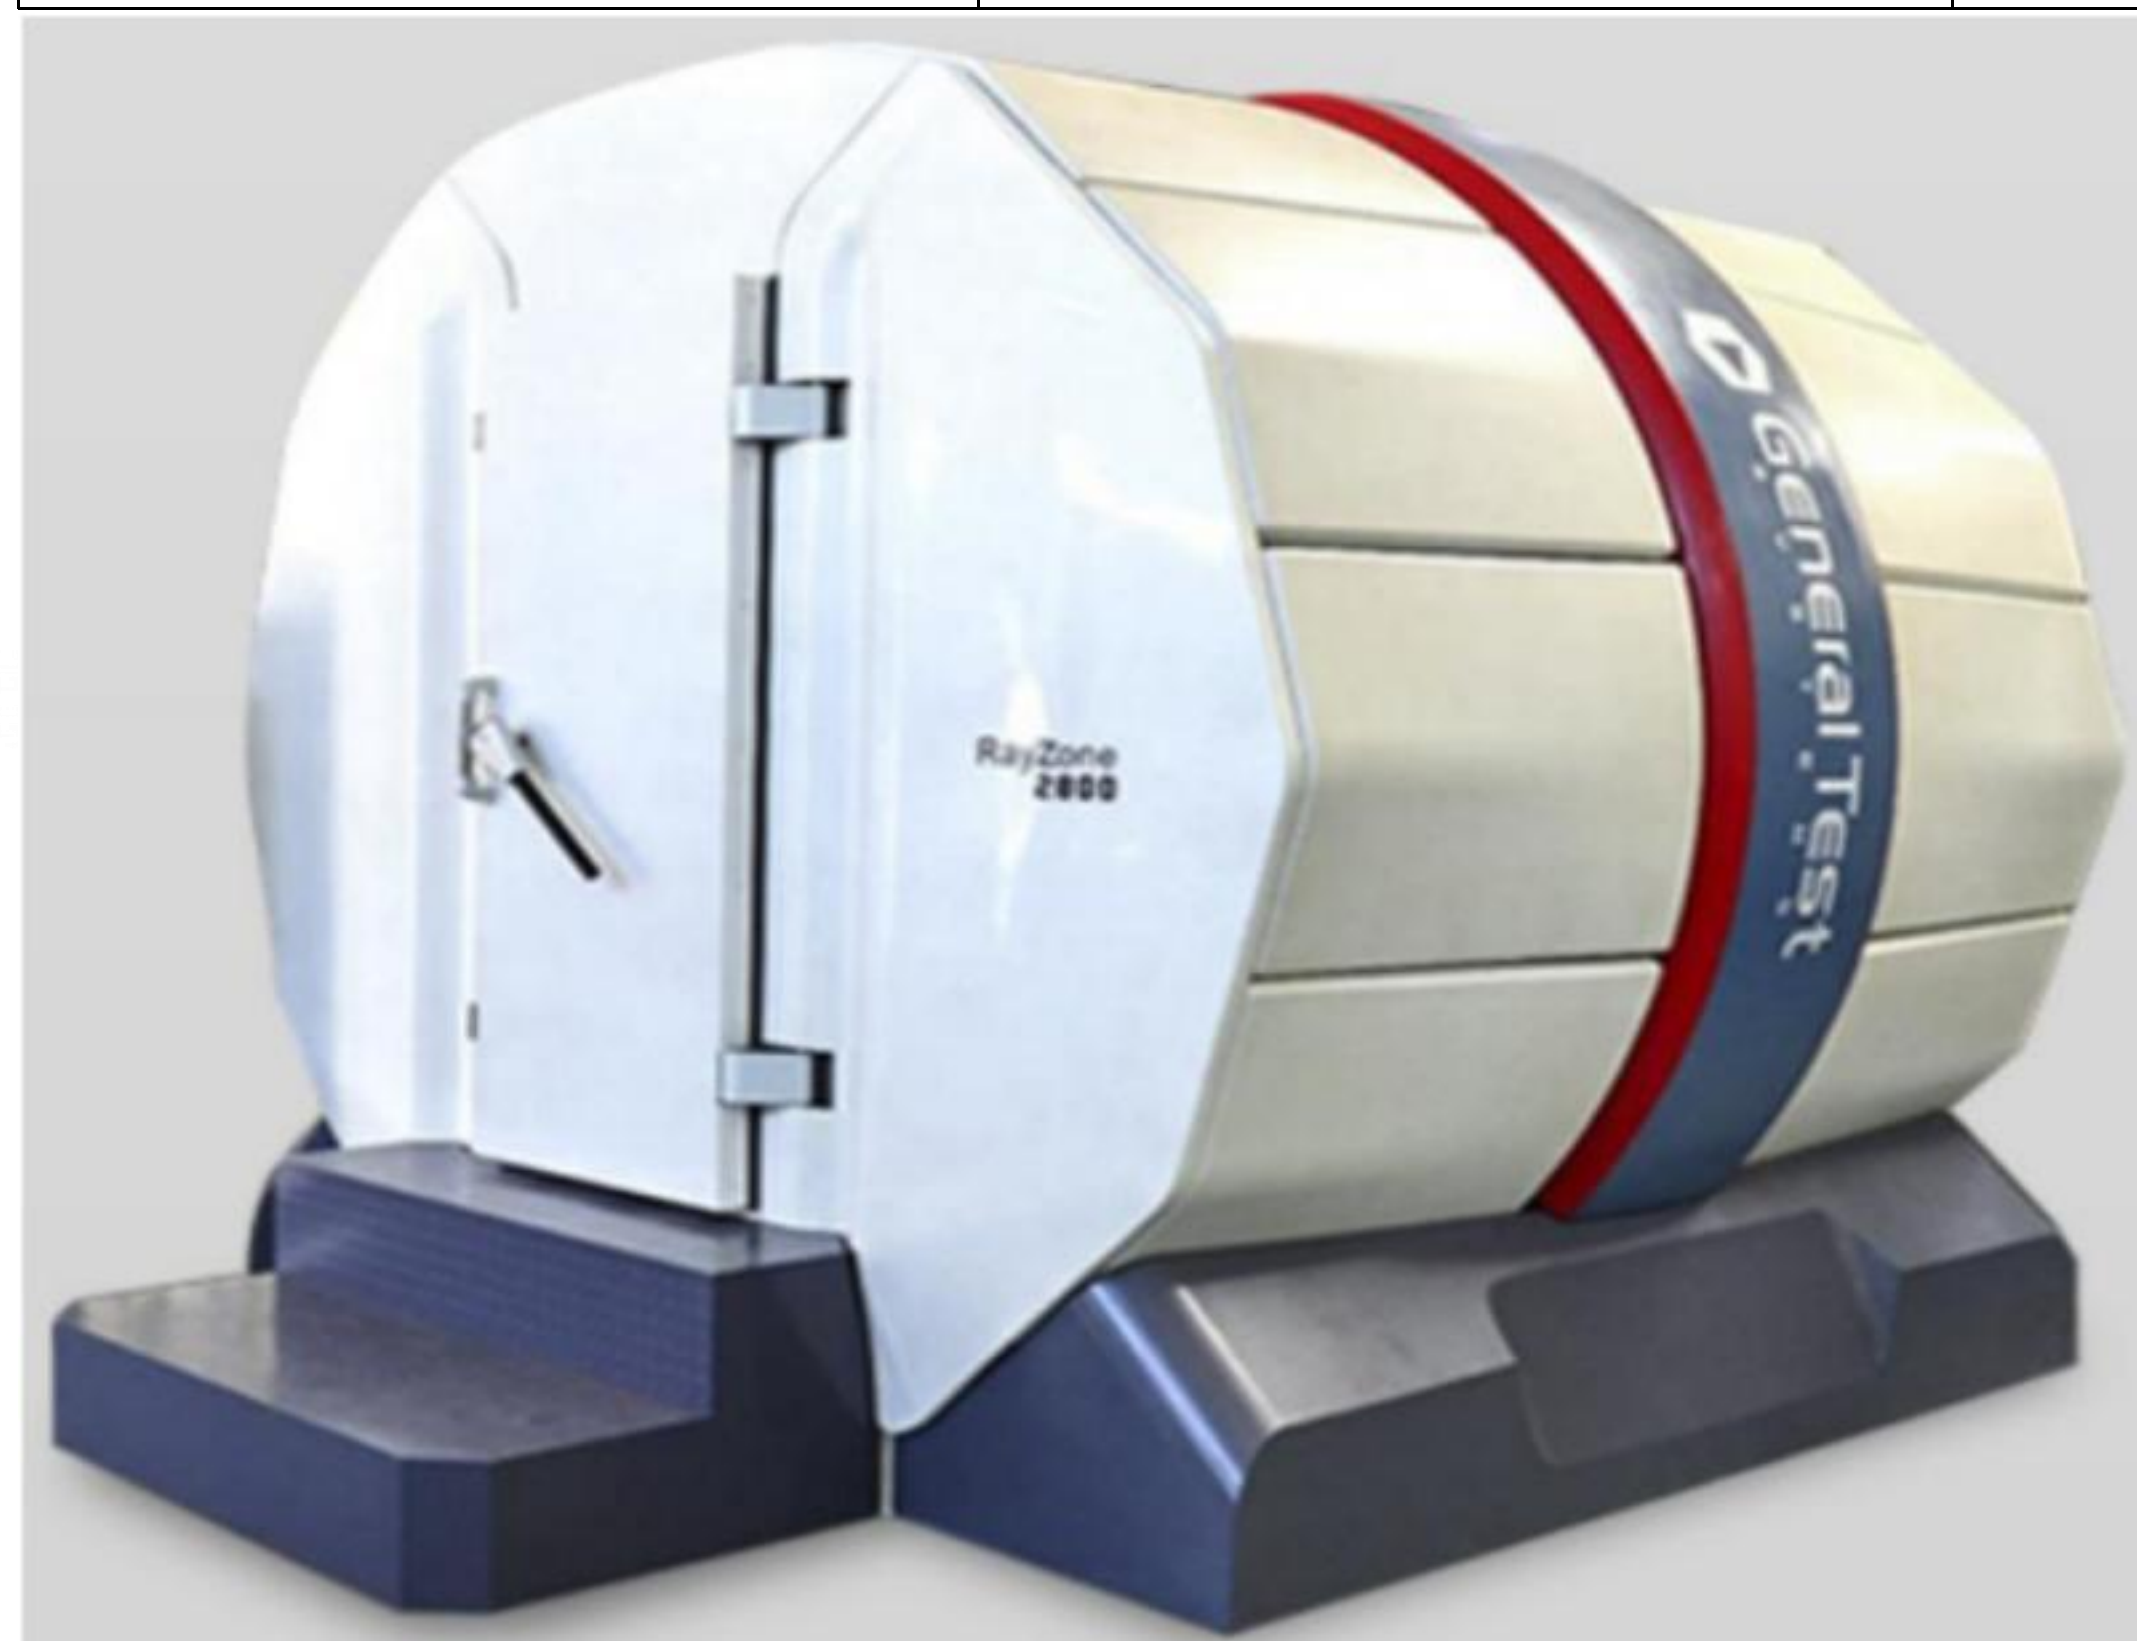

Project description

Machine type	Cell Phone	
Antenna & Supporting Band	Main Antenna	G4 W1/2/5/8 LTEB1/2/3/4/5/7/8/12/17/28/38/66
	B/G/W	Yes
	Diversity Antenna	Yes
Antenna Material/ Antenna Form	Metal frame plus FPC	



Recording of Dubugging version

S66RFT


Version	Date	Content overview
V1	2024/1/10	Dubugging report
V2	2024/02/01	Debug data after the frame change
V3	2024/02/23	Side-top optimization and commissioning
V4	2024/03/15	Final data



Matching circuits

Match change?

No

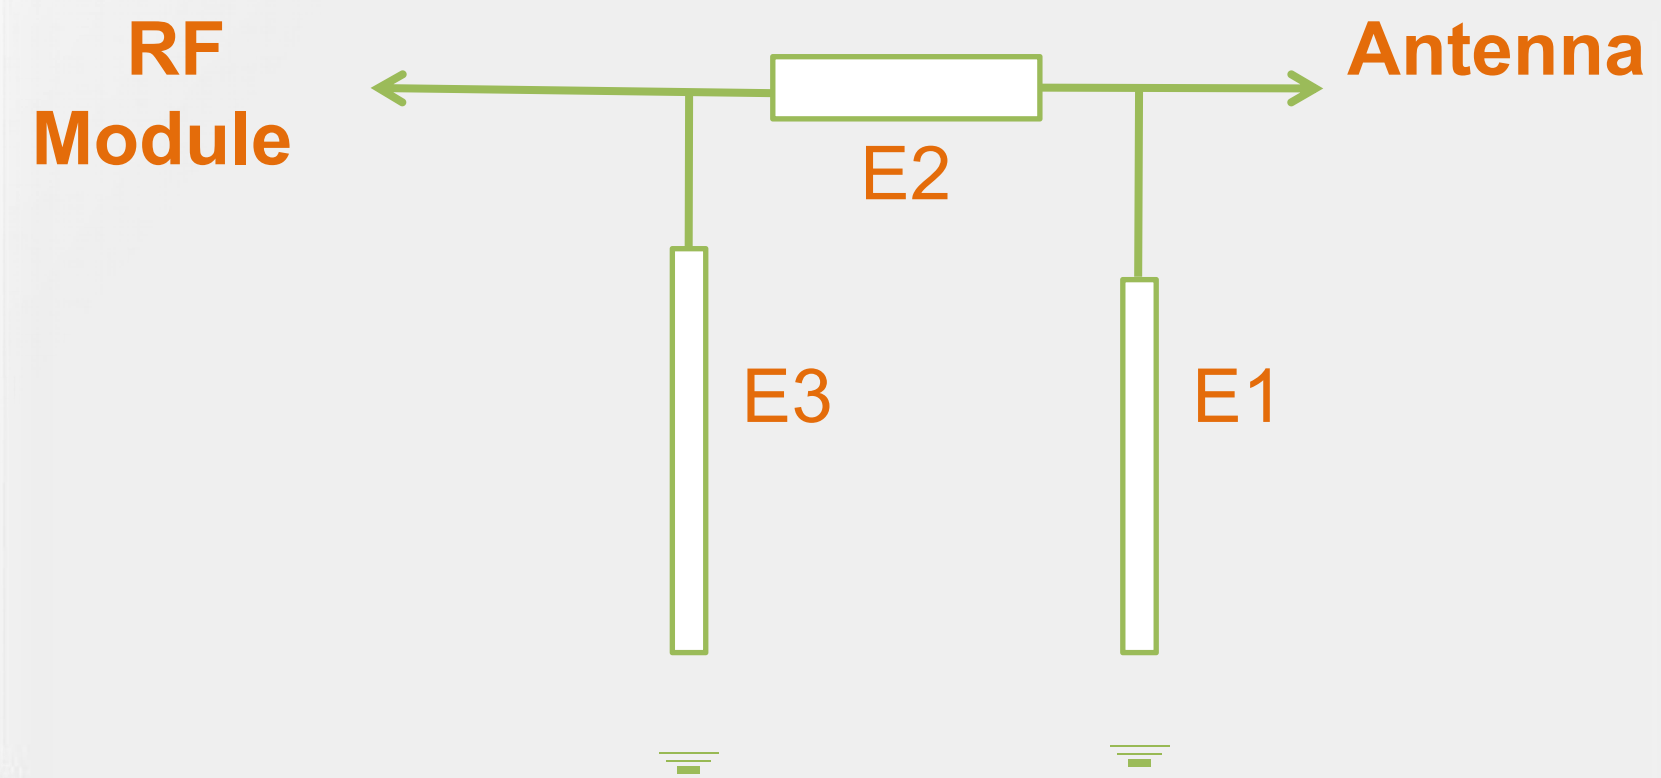

LTE Antenna

Element

Value

E1(0201)

NC

E2(0201)


0 Ω

E3(0201)

NC



Small plate spring-foot and matching details

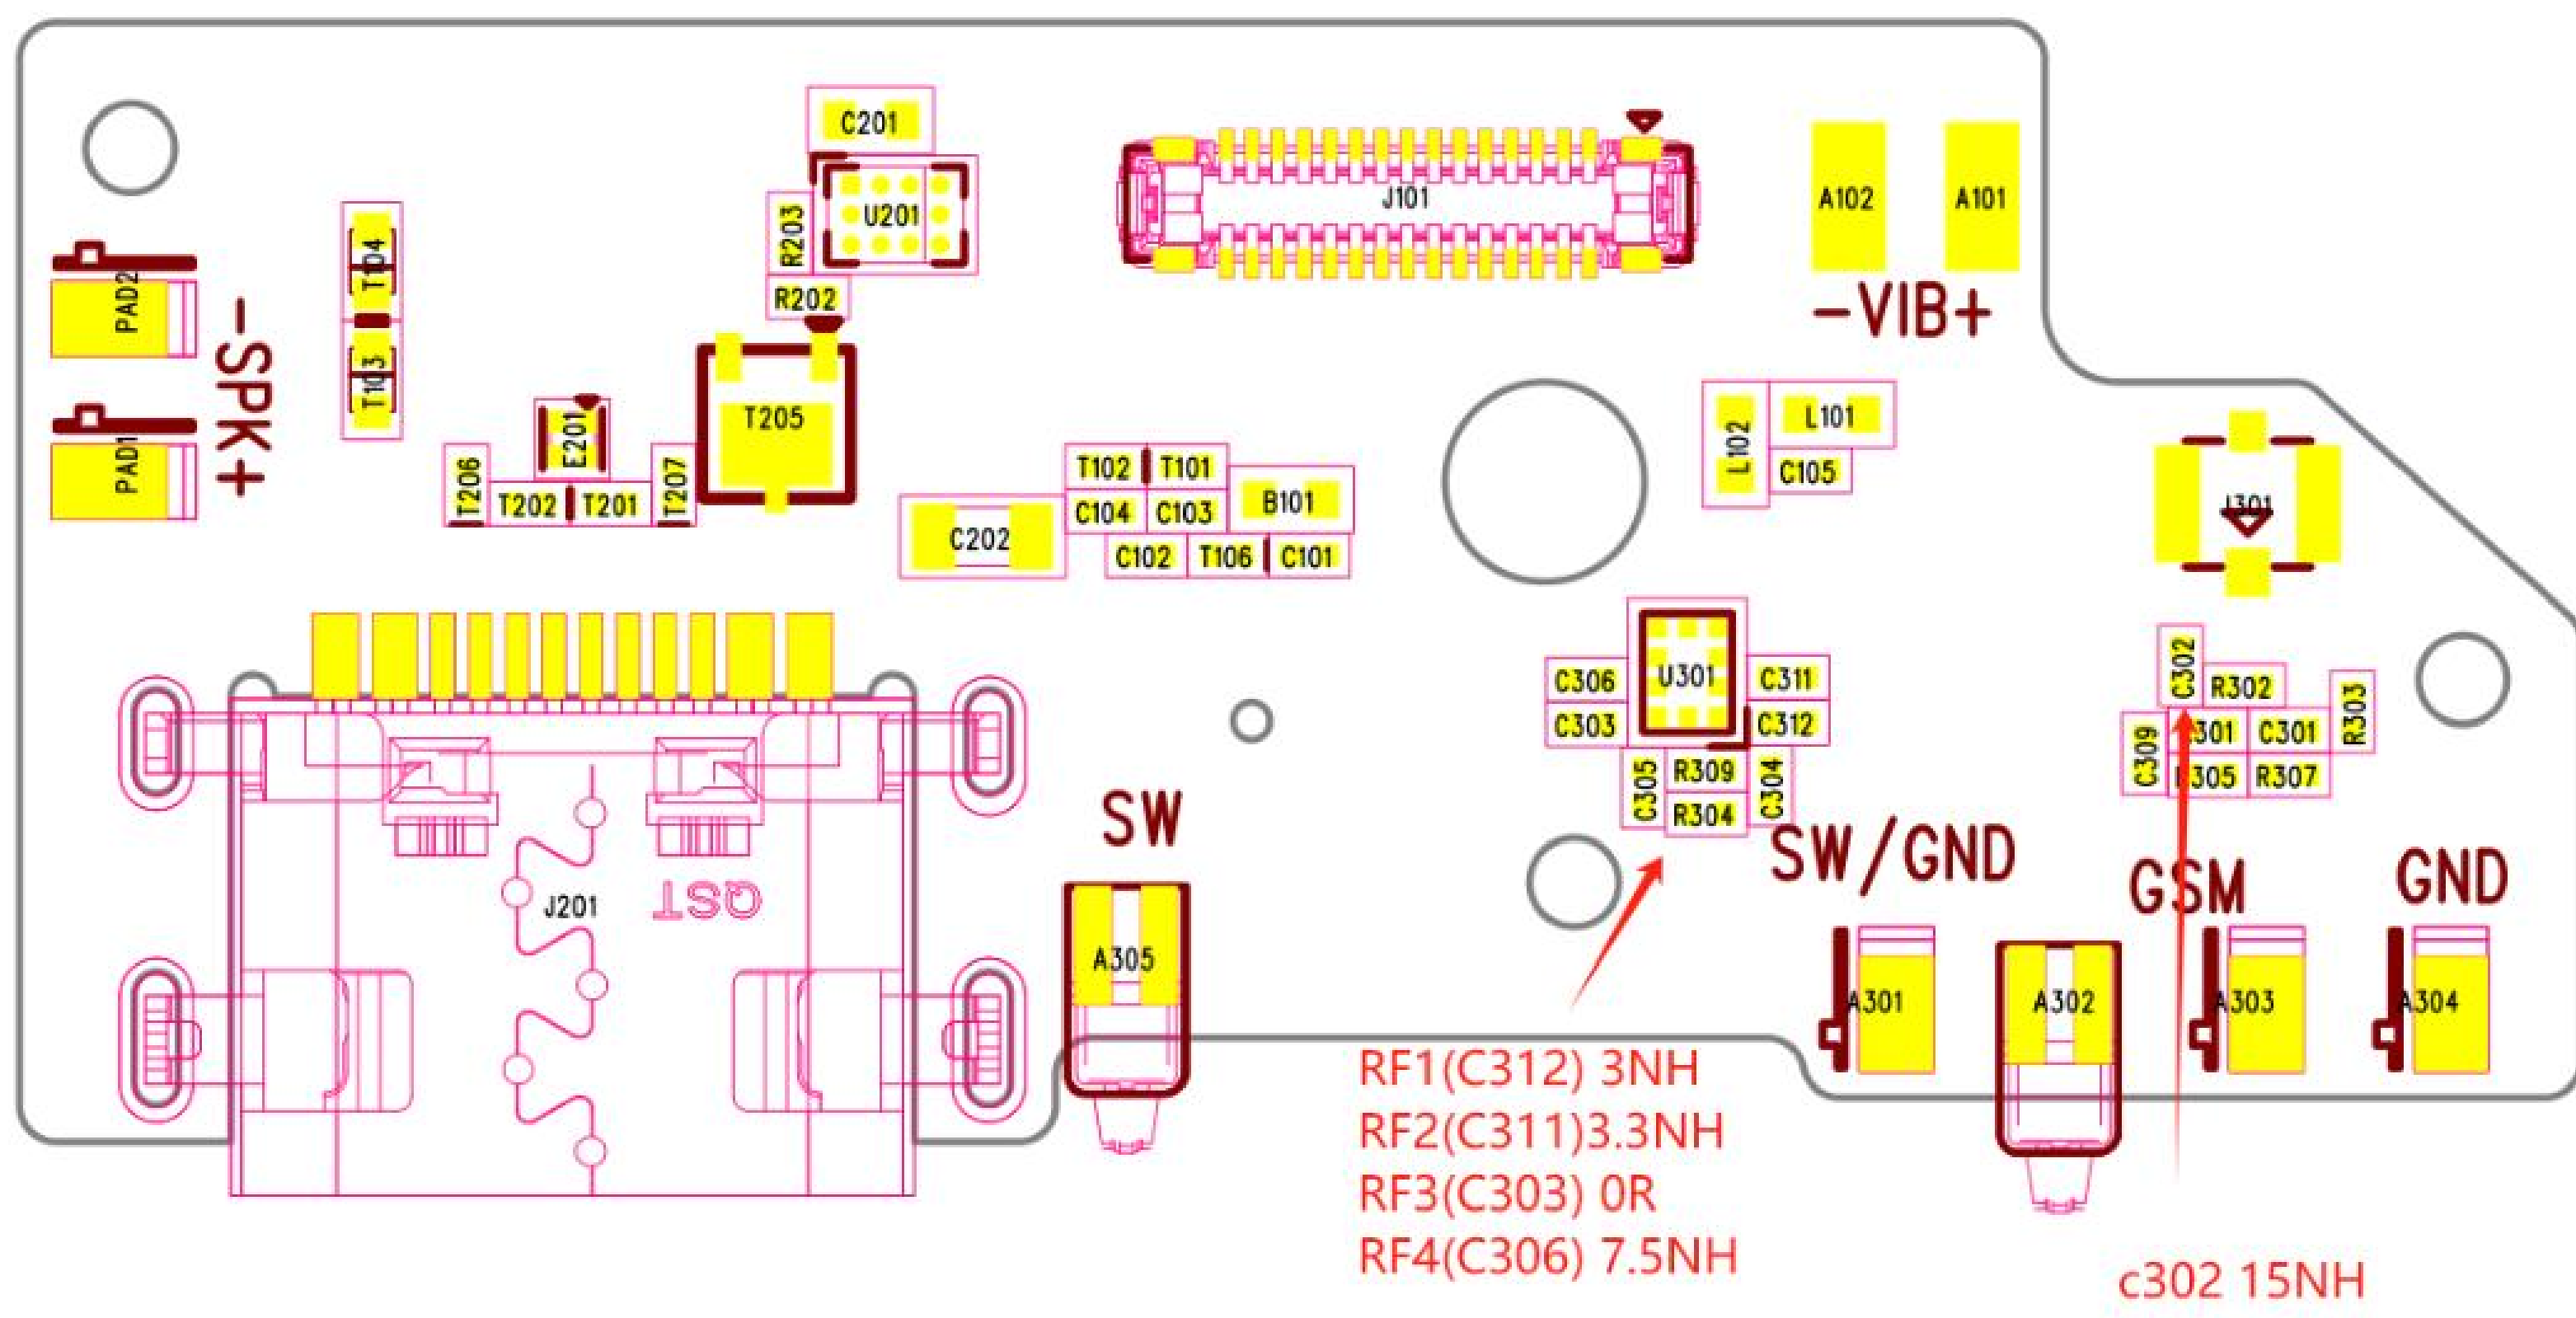

RF1(C312) 3NH
 RF2(C311)3.3NH
 RF3(C303) 0R
 RF4(C306) 7.5NH

c302 15NH

R309和R304 0欧姆



S66RFT Antenna logic

RF1 = 900/W8/B8

RF2 = 850/W5/B5

RF3 = 1800/1900 W1/W2/B1/2/3/4/7/66/38

RF = B12/17/28A/B



OTA report (Screen off)

Band	TRP	TIS		Band	TRP	TIS		Band	TRP	TIS	
GSM850	22.1			W1	19.2			LTE B1	19.5		
	22.3				18.7				19		
	22.4	-101.36			18.6	-105.2			18.8	-92.2	
GSM900	23.1			W2	19.2			LTE B2	18.5		
	23.6				18.5				18.6		
	23.7	-101.01			18.6	-105.2			18.7	-92.3	
DCS1800	24.1			W5	13.0			LTE 3	18.9		
	24.5				13.2				19.1		
	24.5	-103.72			13.4	-104.2			19	-93.1	
PCS1900	24.1			W8	13.2			LTE4	19		
	24.0				13.5				18.7		
	23.8	-103.05			13.5	-104.1			18.9	-93	



OTA report (Screen off)

Band	TRP	TIS		Band	TRP	TIS		Band	TRP	TIS	
LTE B5	12.8			LTE B17	12.3			LTE B66	19.4		
	13.5				12.4				19.3		
	13.6	-89.3			12.7	-87.3			19.1	-92.9	
LTE B7	16.8			LTE28A	12.2						
	16.9				12.4						
	16.6	-90.4			12.5	-87.4					
LTE B8	13.0			LTE28B	12.4						
	13.4				12.5						
	13.8	-90.1			12.7	-87					
LTE B12	12.6			LTE 38	16.4						
	12.7				16.2						
	12.9	-87.6			16.1	-89					



OTA report (Screen on)

Band	TRP	TIS		Band	TRP	TIS		Band	TRP	TIS		
GSM850				W1				LTE B1				
		-98.5				-102.8				-92.7		
GSM900				W2				LTE B2				
		-101.2				-102.5				-91.6		
DCS1800				W5				LTE 3				
		-102.3				-100.6				-92.6		
PCS1900				W8				LTE4				
		-102.1				-102				-92.1		



OTA report (Screen on)

Band	TRP	TIS		Band	TRP	TIS		Band	TRP	TIS	
LTE B5				LTE B17				LTE B66			
		-89.2				-85.3				-91.5	
LTE B7				LTE28A							
		-87.2				-85.5					
LTE B8				LTE28B							
		-87.3				-86					
LTE B12				LTE 38							
		-85.1				-87.2					



Conduction data

Band	TRP	TIS		Band	TRP	TIS		Band	TRP	TIS	
GSM850	31.2			W1	22.4			LTE B1	22		
	31.5				22.6				22.1		
	31.7	-107.5			22.5	-108.5			22.3	-98	
GSM900	31.4			W2	22.3			LTE B2	22.3		
	31.8				22.4				22		
	31.6	-107.8			22.1	-108.5			22.1	-98	
DCS1800	29.4			W5	22.6			LTE 3	22.1		
	29.5				22.7				22.3		
	29.8	-108			22.4	-108			22.4	-98	
PCS1900	29.6			W8	22.6			LTE4	22		
	29.6				22.8				22.1		
	29.5	-108.3			22.4	-108.5			22	-98	



Conduction data

Band	TRP	TIS		Band	TRP	TIS		Band	TRP	TIS	
LTE B5	22.4			LTE B17	22.6			LTE B66	22.1		
	22.6				22.7				22		
	22.5	-98			22.4	-97			22.1	-97.5	
LTE B7	22.1			LTE28A	23						
	22				22.8						
	22.2	-97			22.9	-97					
LTE B8	22.4			LTE28B	22.6						
	22.5				22.9						
	22.3	-96			22.8	-97					
LTE B12	22.3			LTE 38	22.1						
	22.4				22.2						
	22.5	-97			22	-94					



Antenna Gain

S66RFT-L65A 2024 Antenna Gain			
Band	Gain (dBi)	Band	Gain (dBi)
GSM B2	0.1	W B1	0.1
B3	0.4	W B2	0.33
B5	-0.7	W B5	-0.7
B8	-0.8	W B8	-0.8
LTE B2	0.33	GPS	0.6
B3	0.4	2.4GWIFI	0.9
B4	0.25	BT	0.9
B5	-0.7		
B7	0.67		
B8	-0.8		
B12	-1.12		
B17	-1.16		
B28AB	-1.21		
B38	0.67		
B66	0.25		






GPS measurement is measured on the first floor of our company, with 29 stars and more than 3 stable 40







The signal value 10 meters away from our router










Main Antenna 3D Drawing

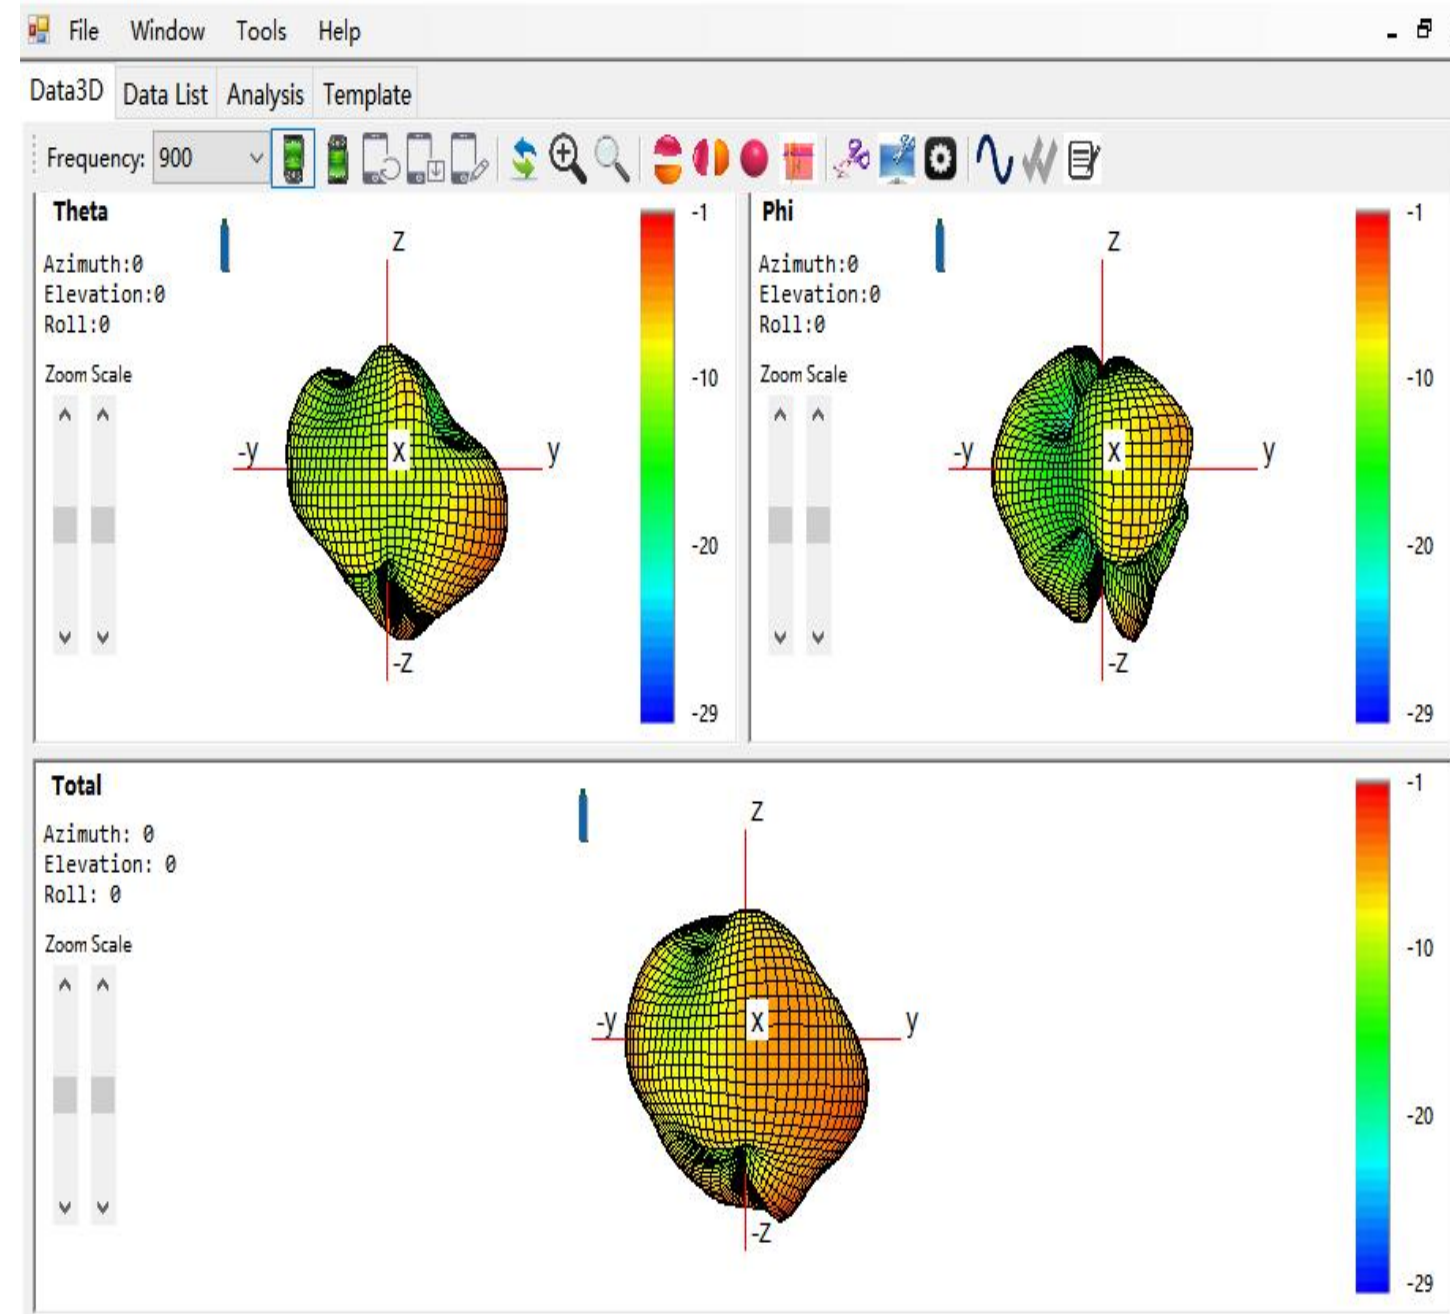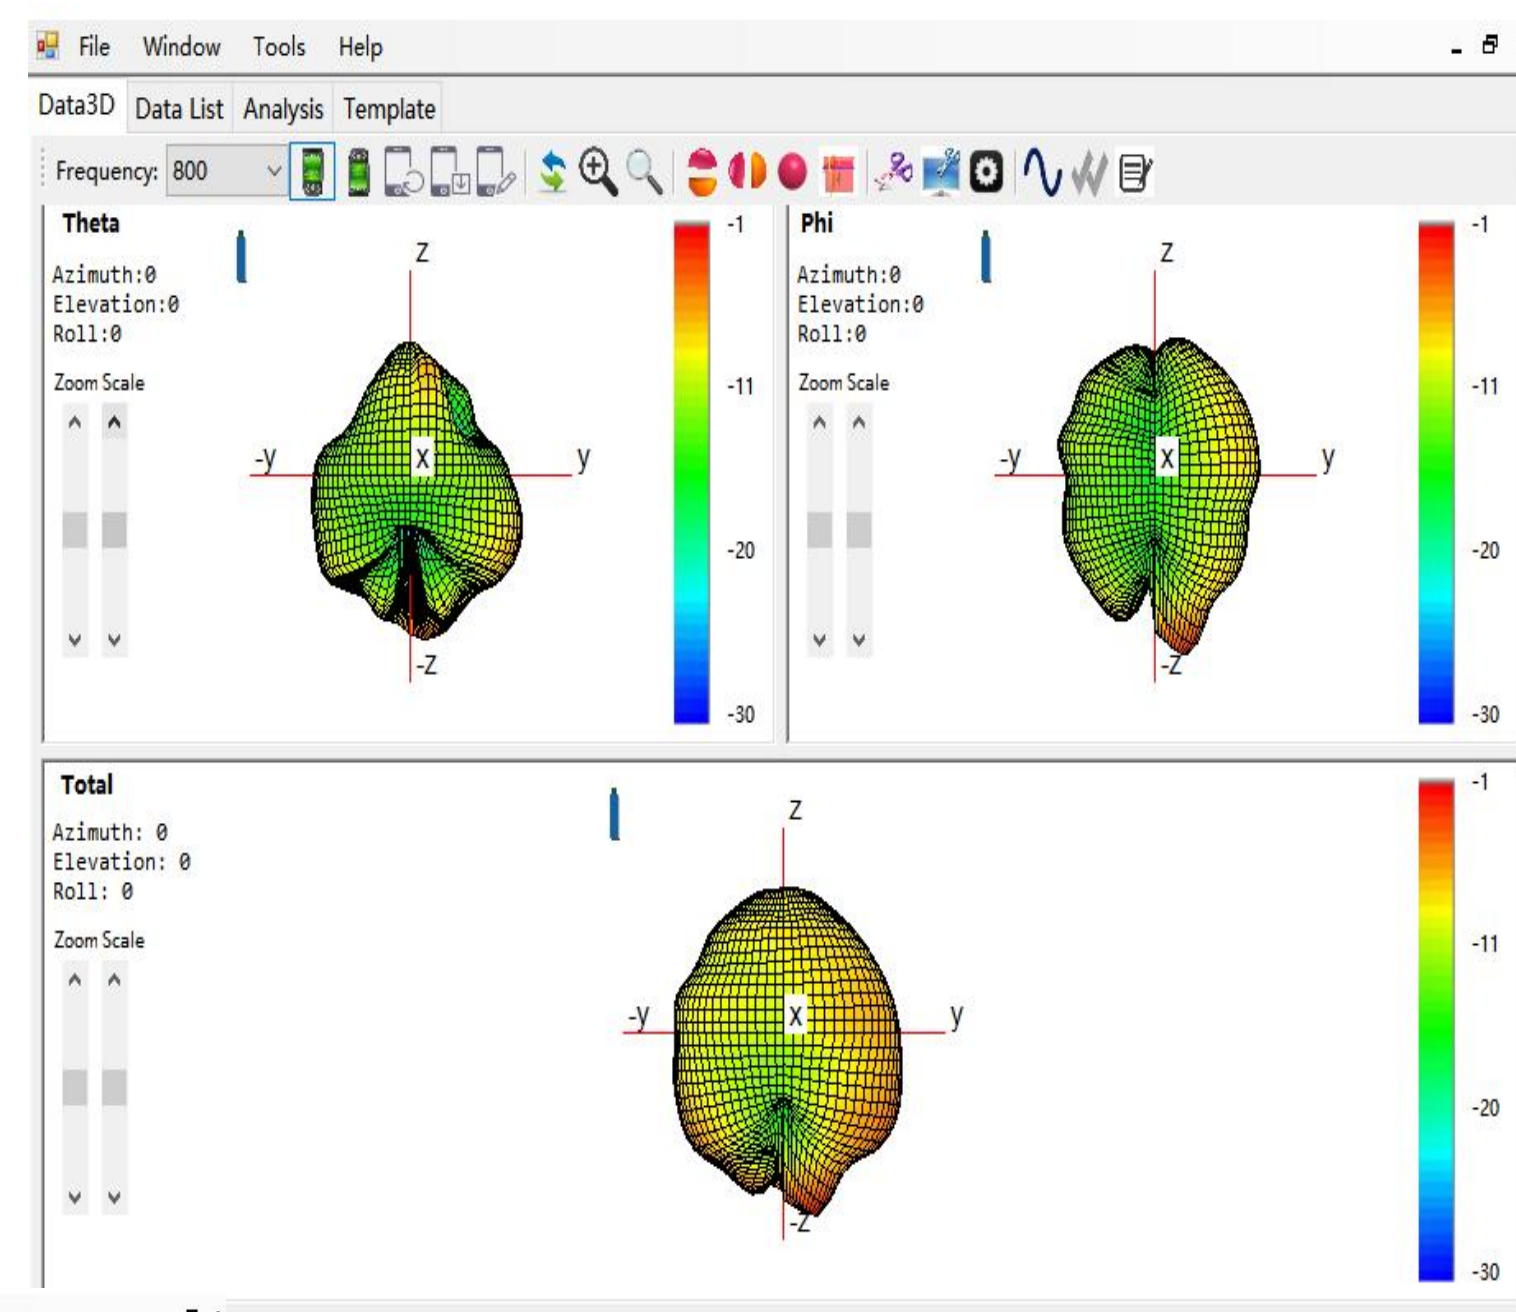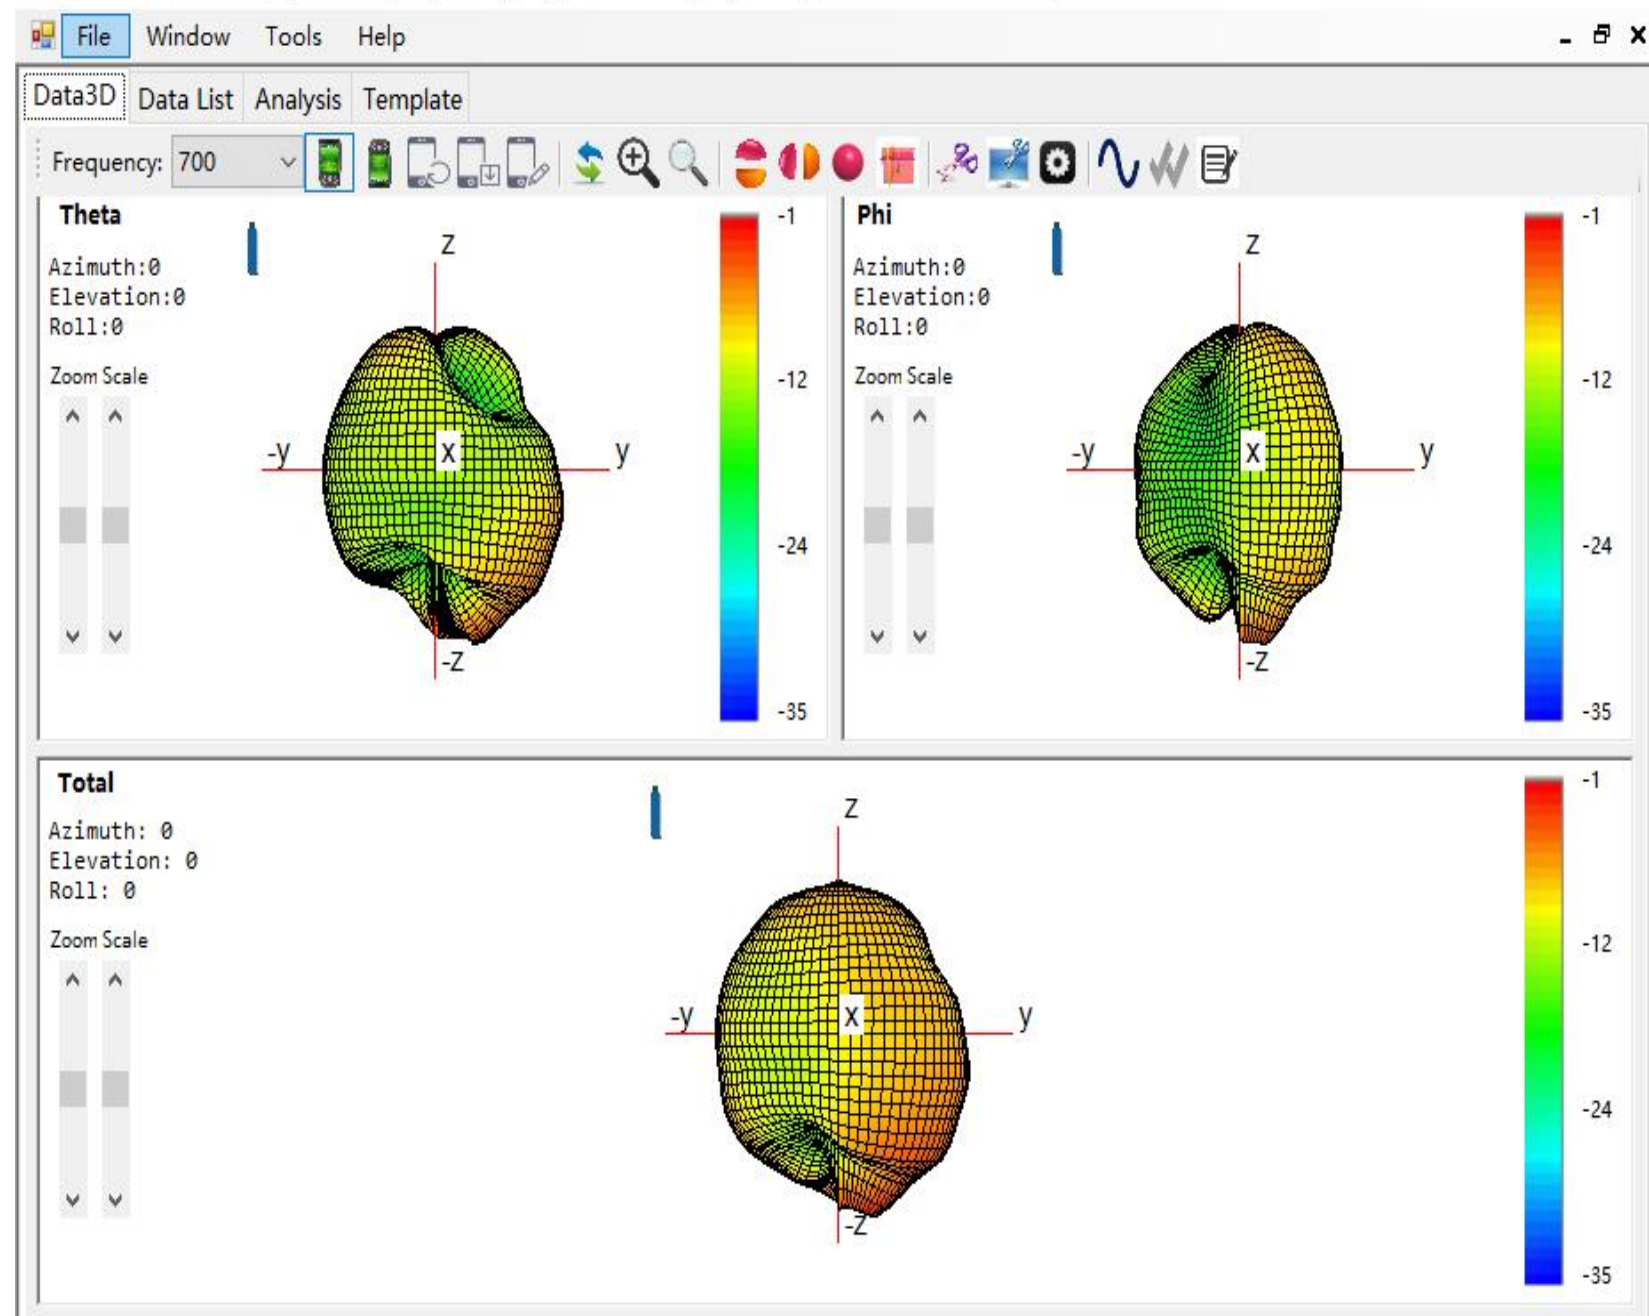

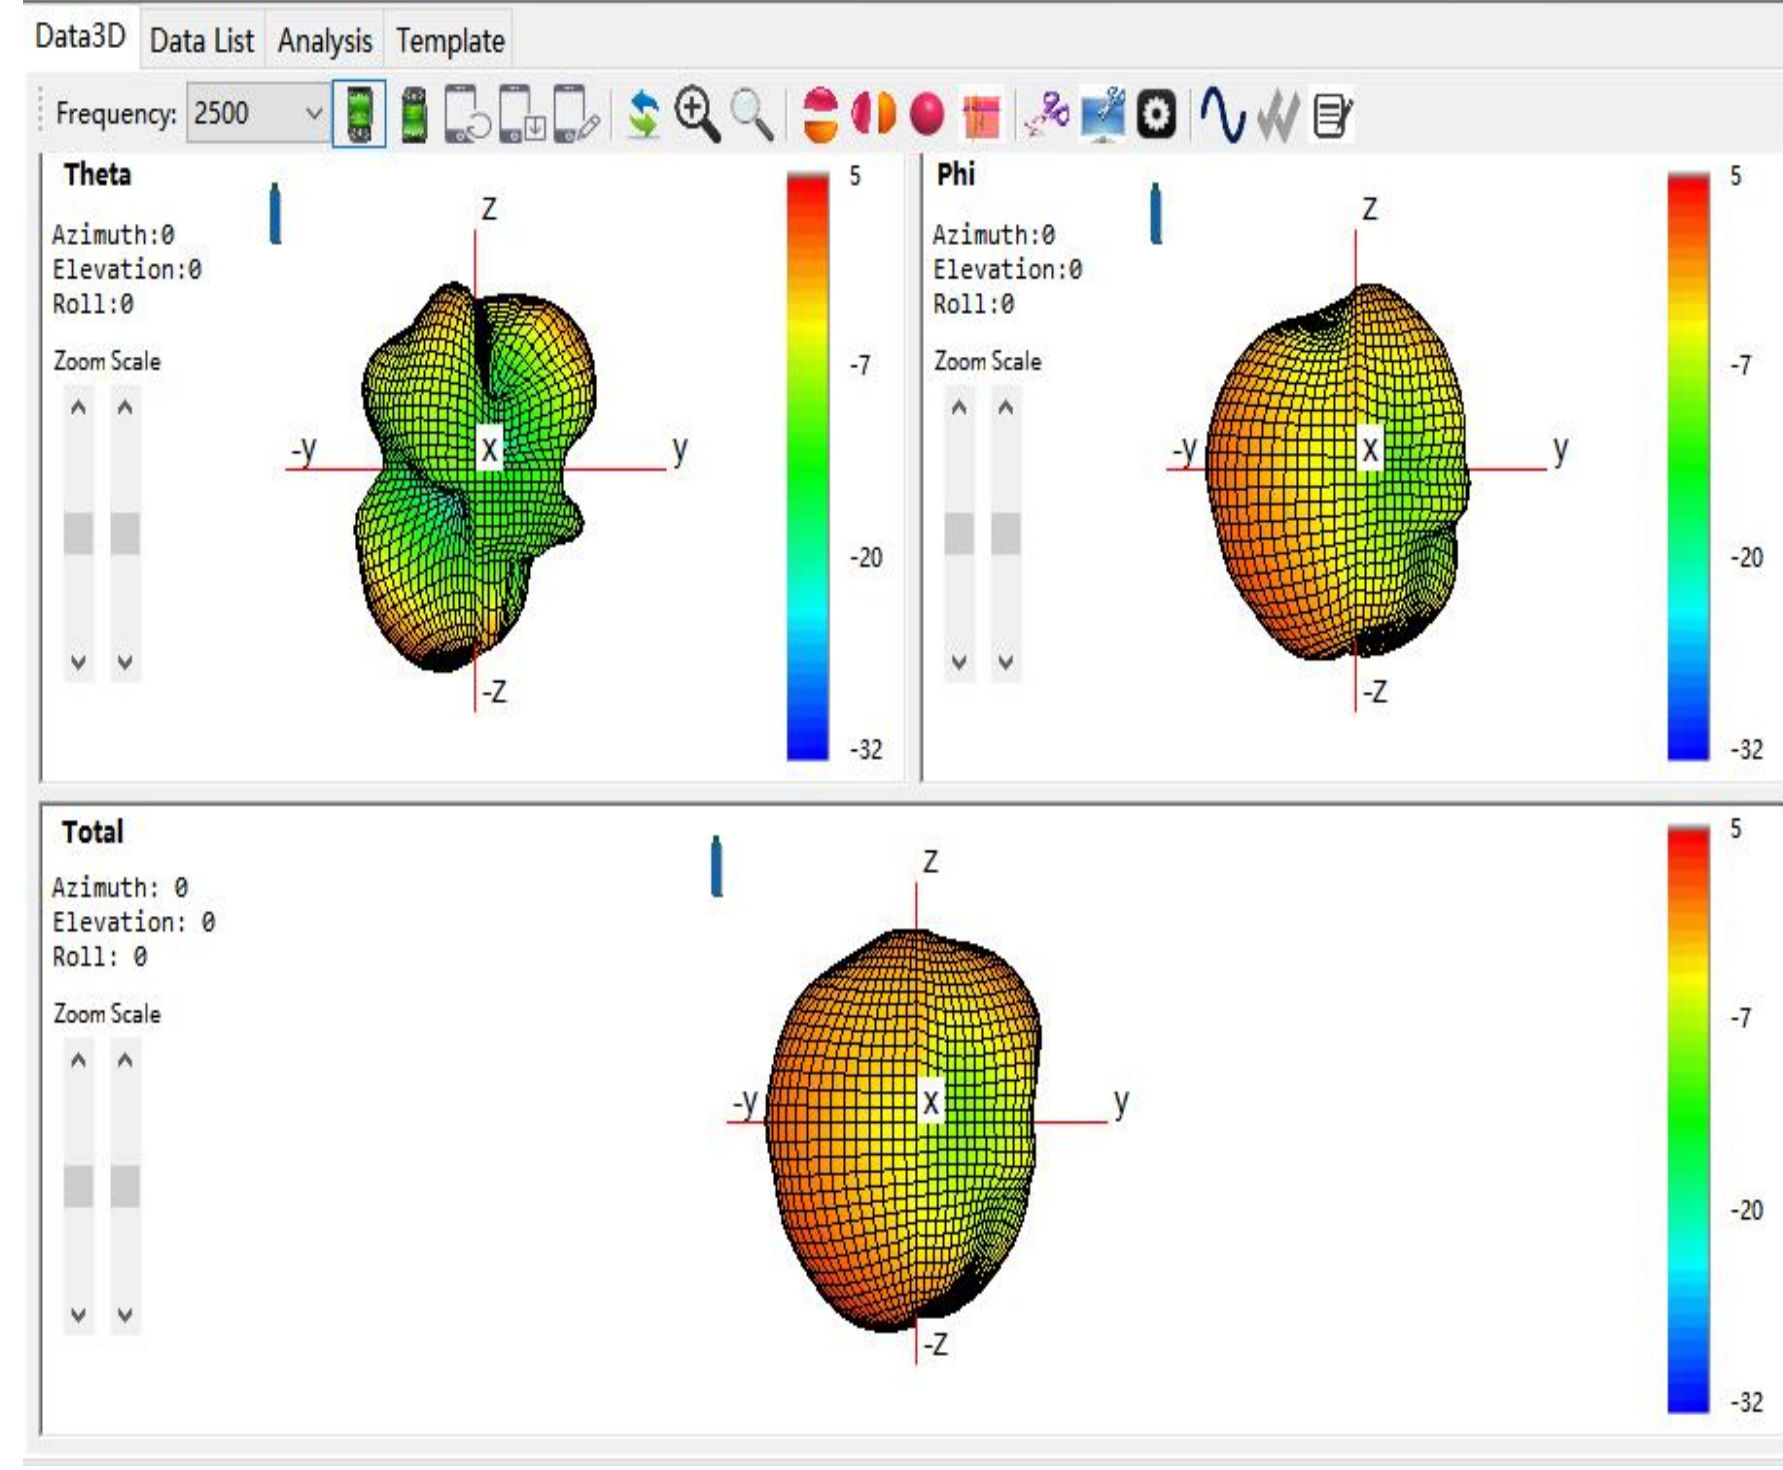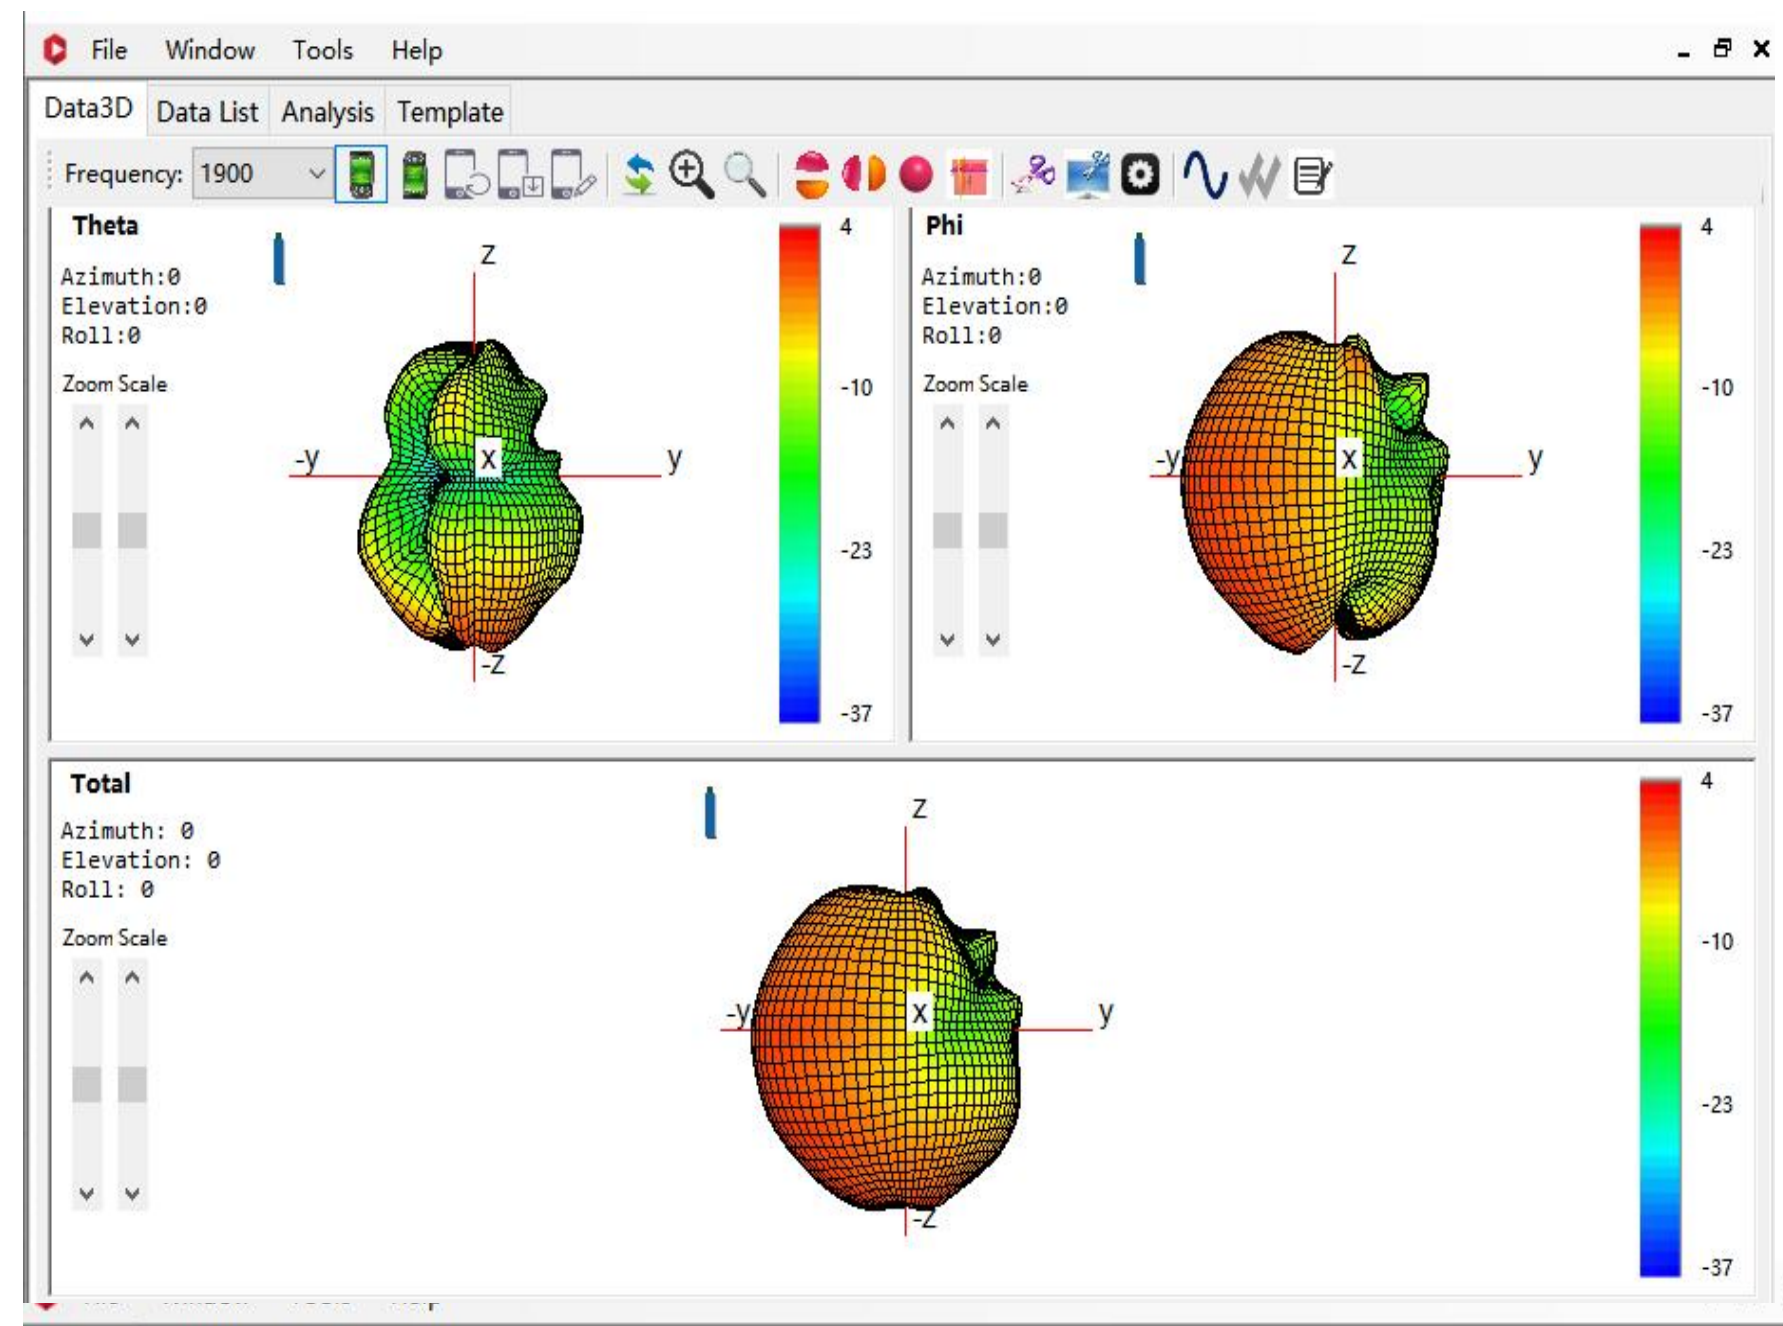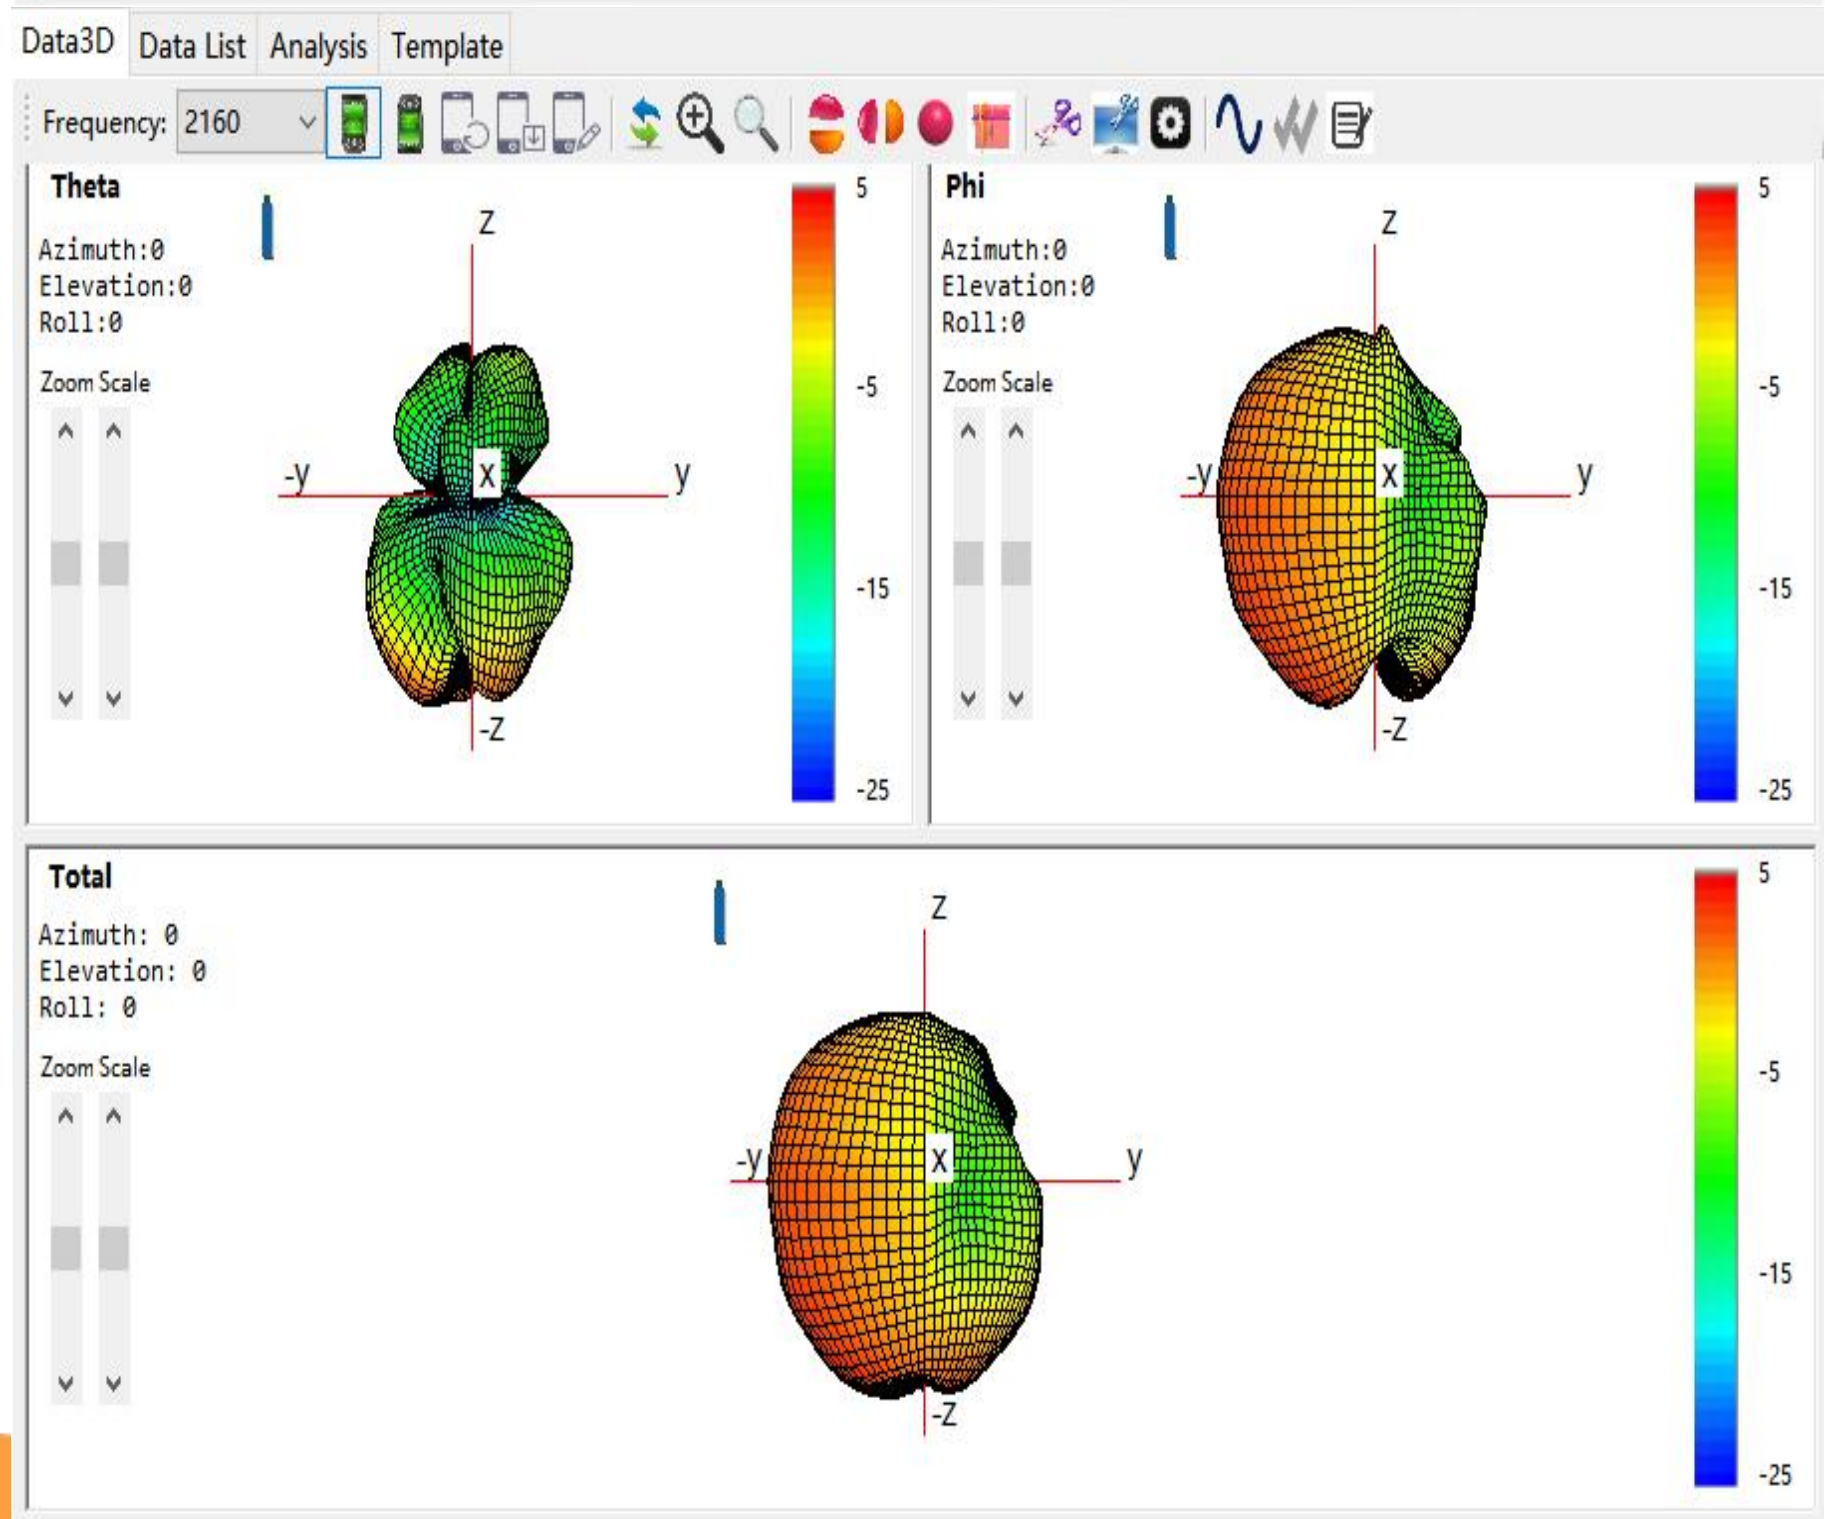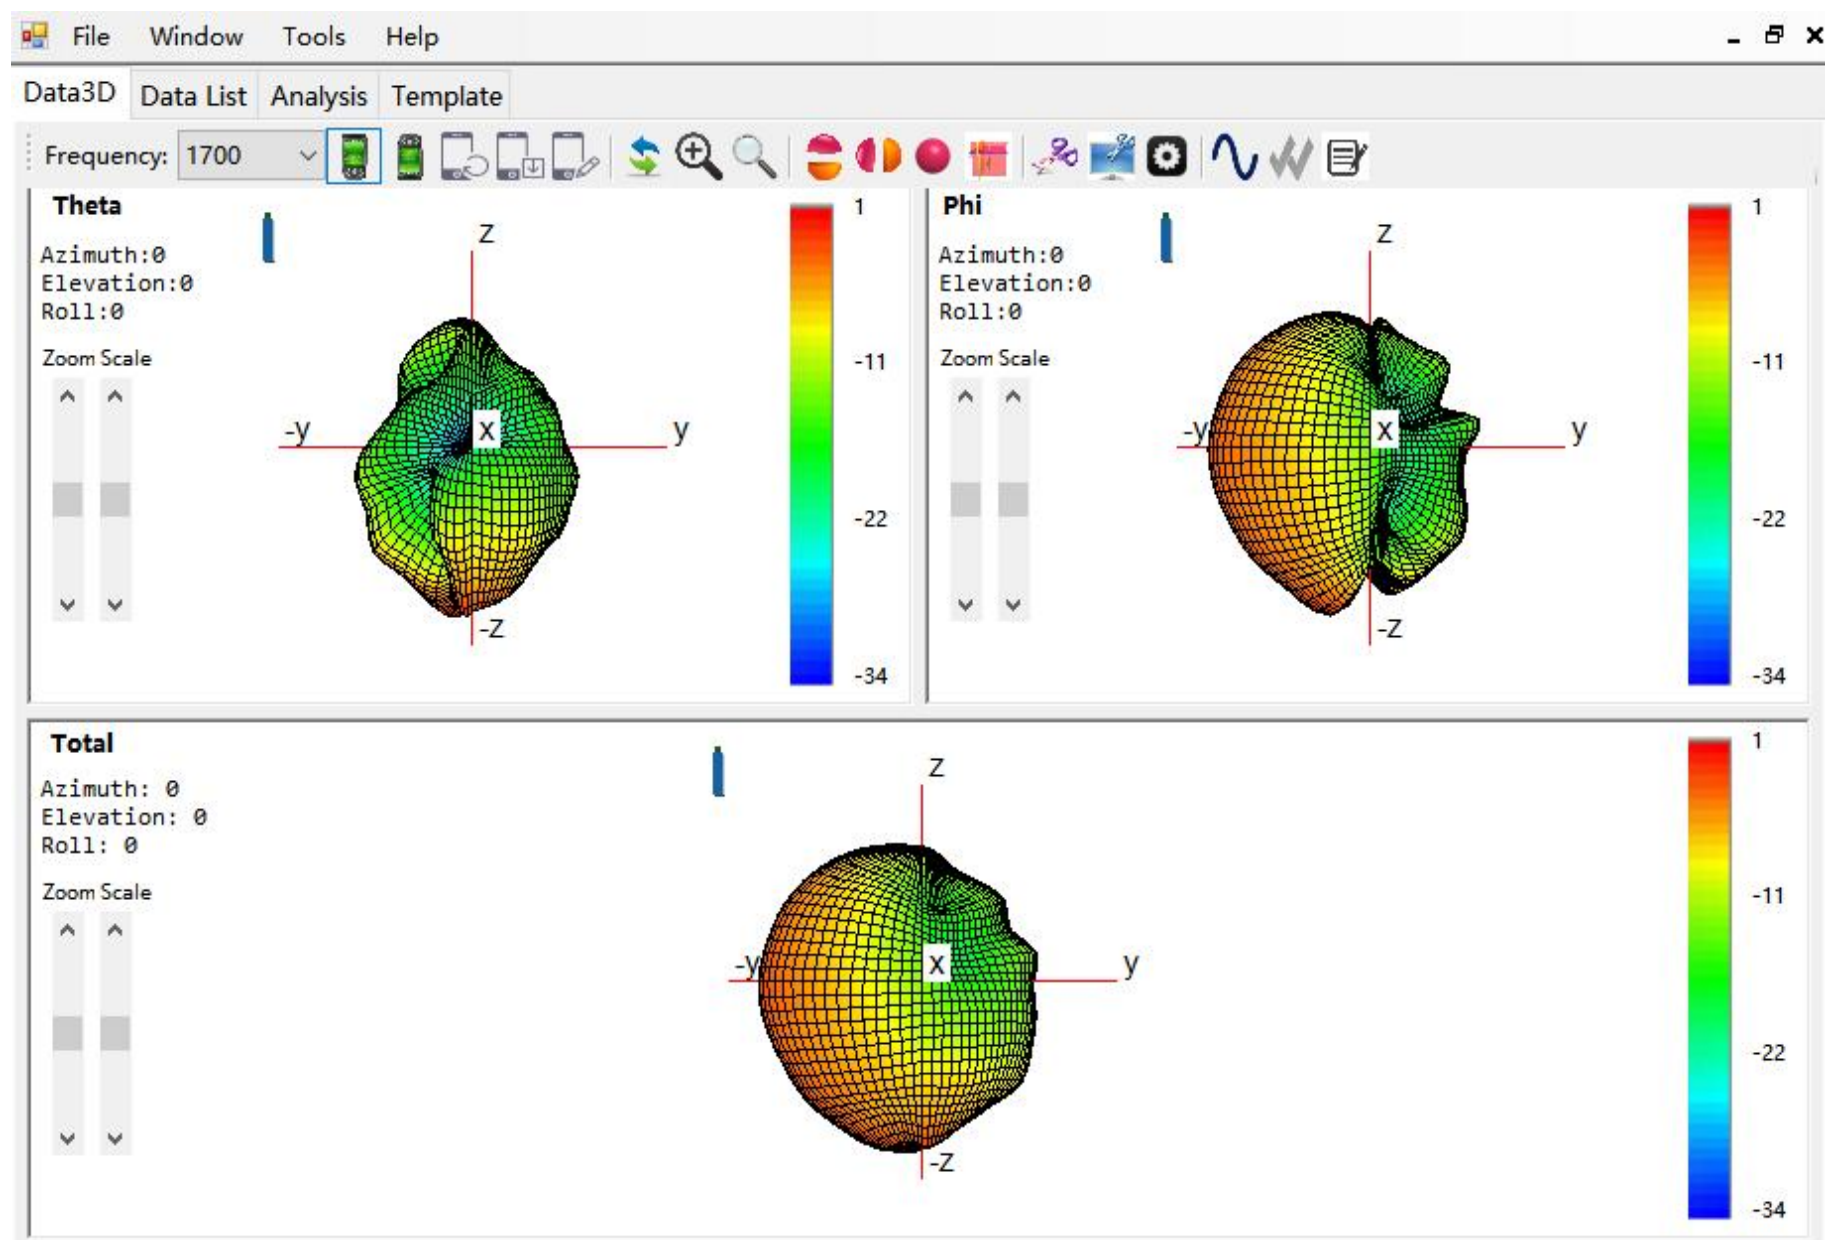


Main Antenna 2D Drawing

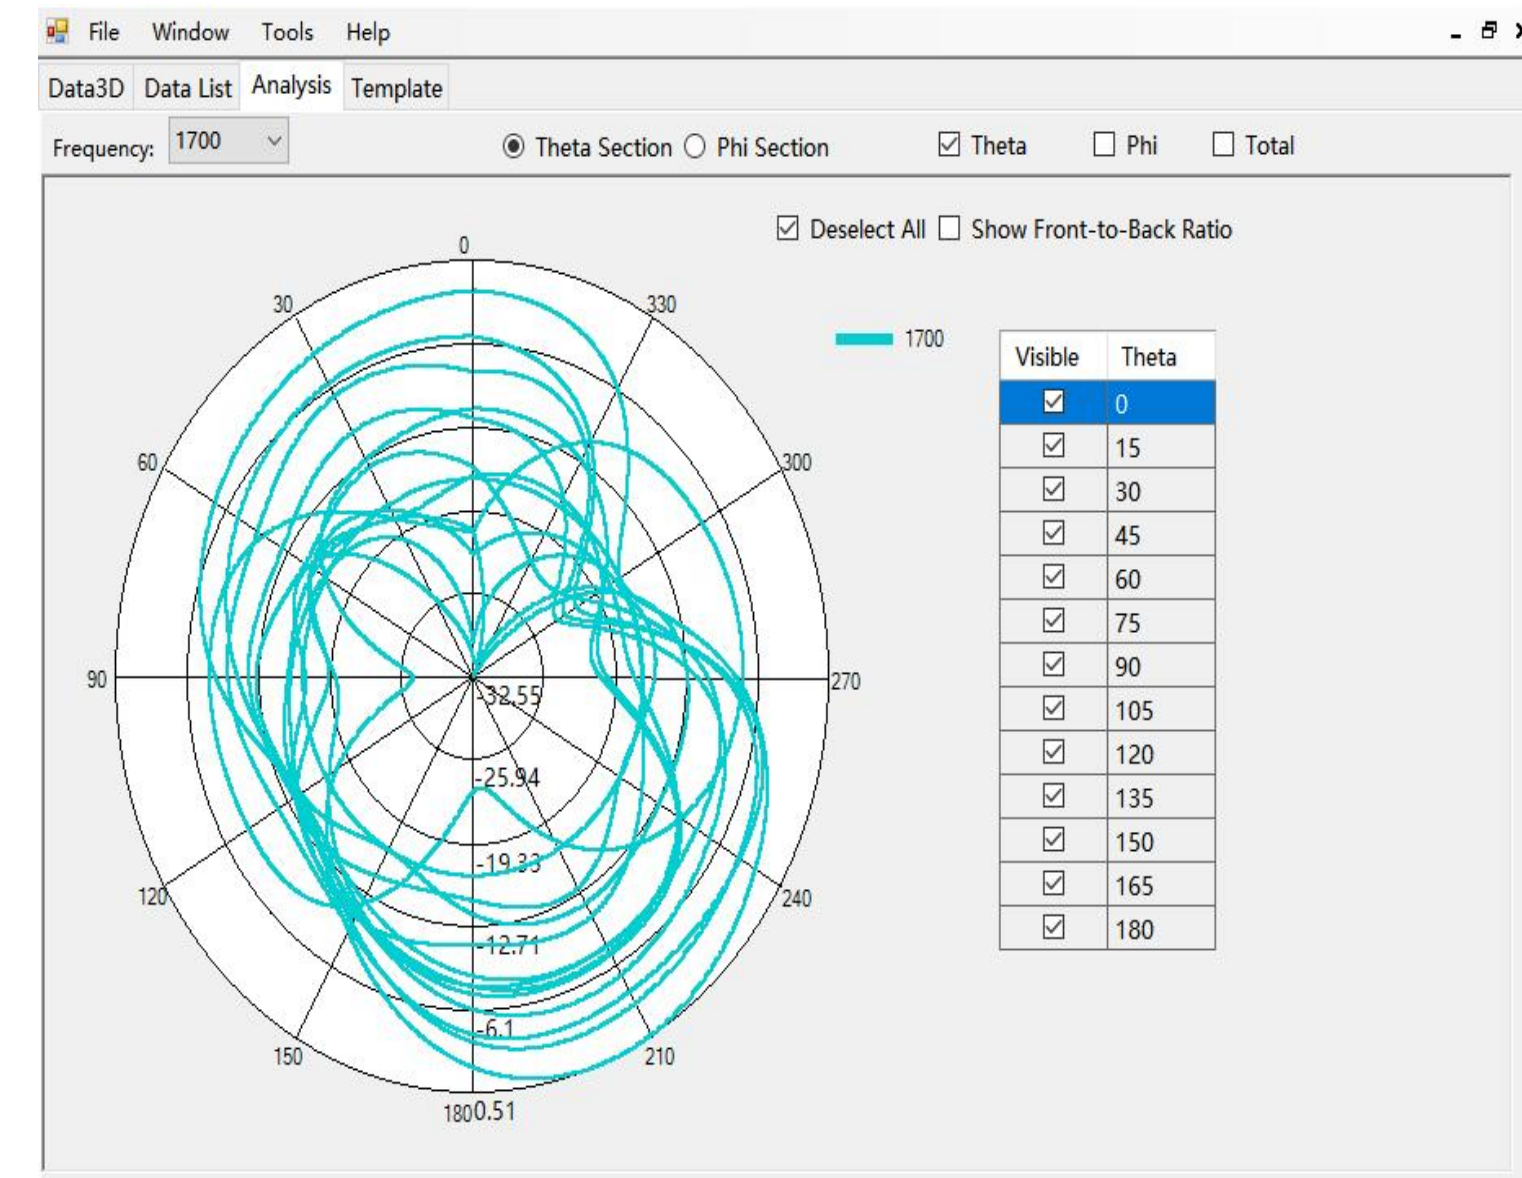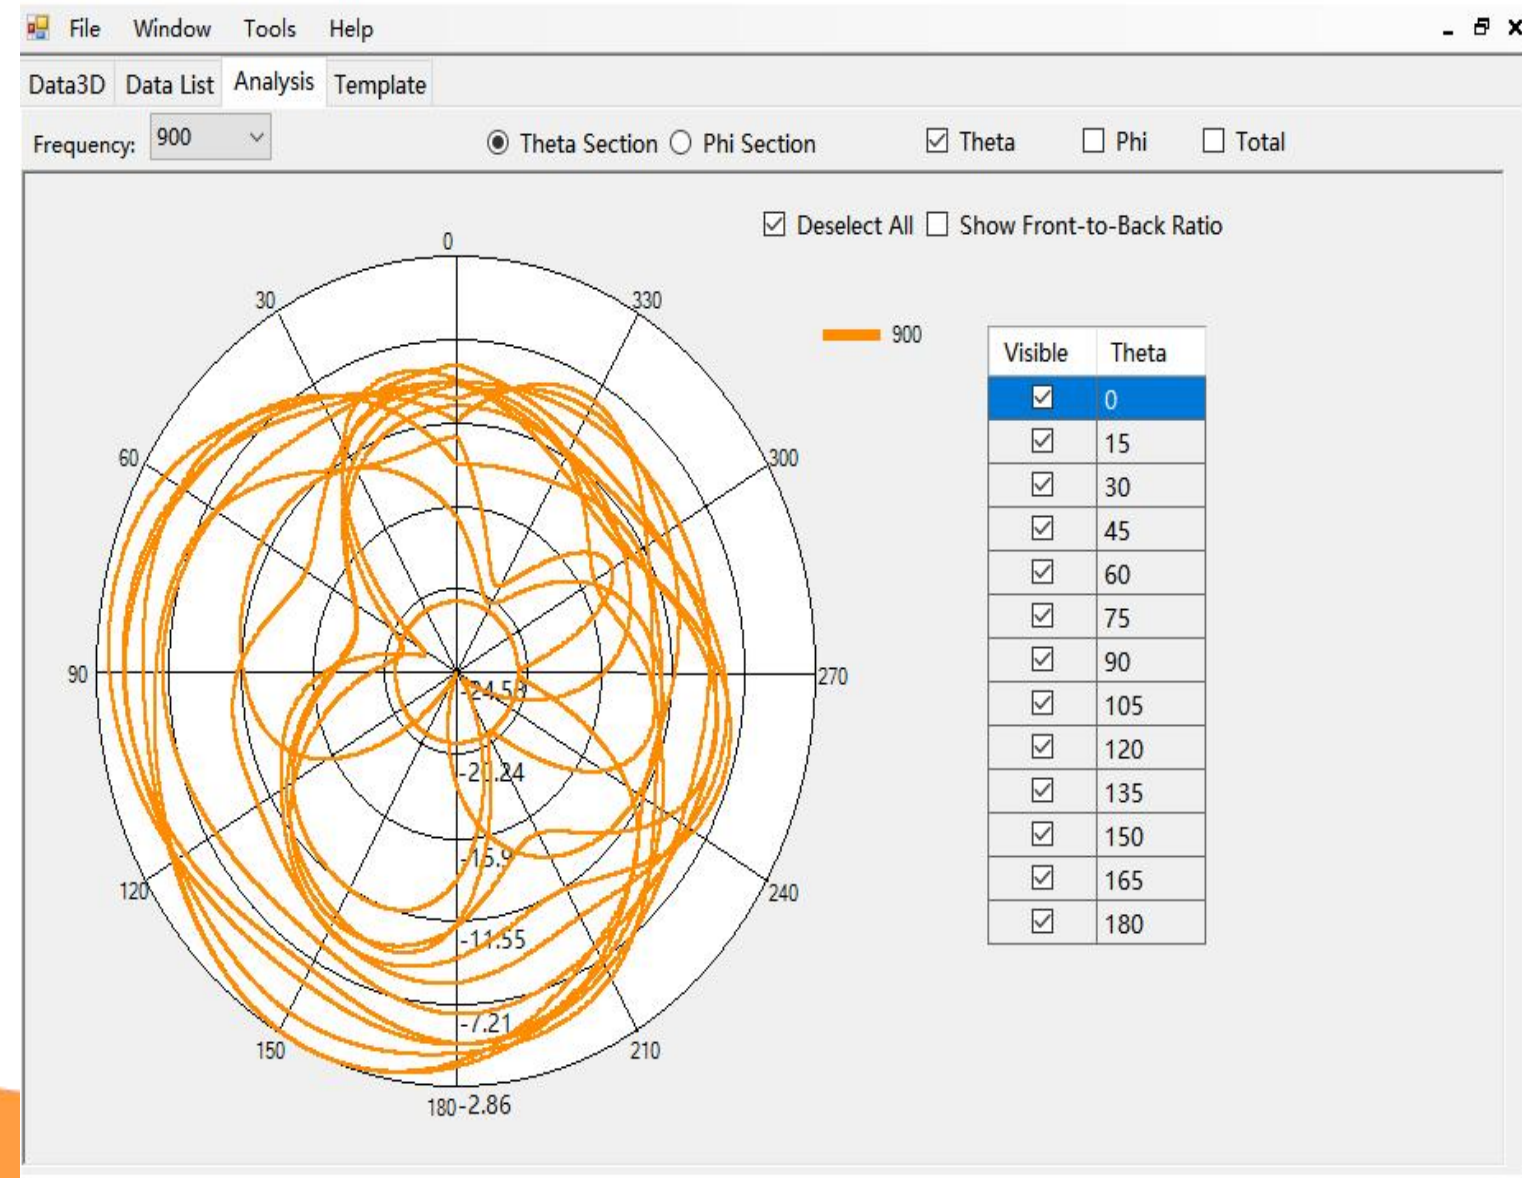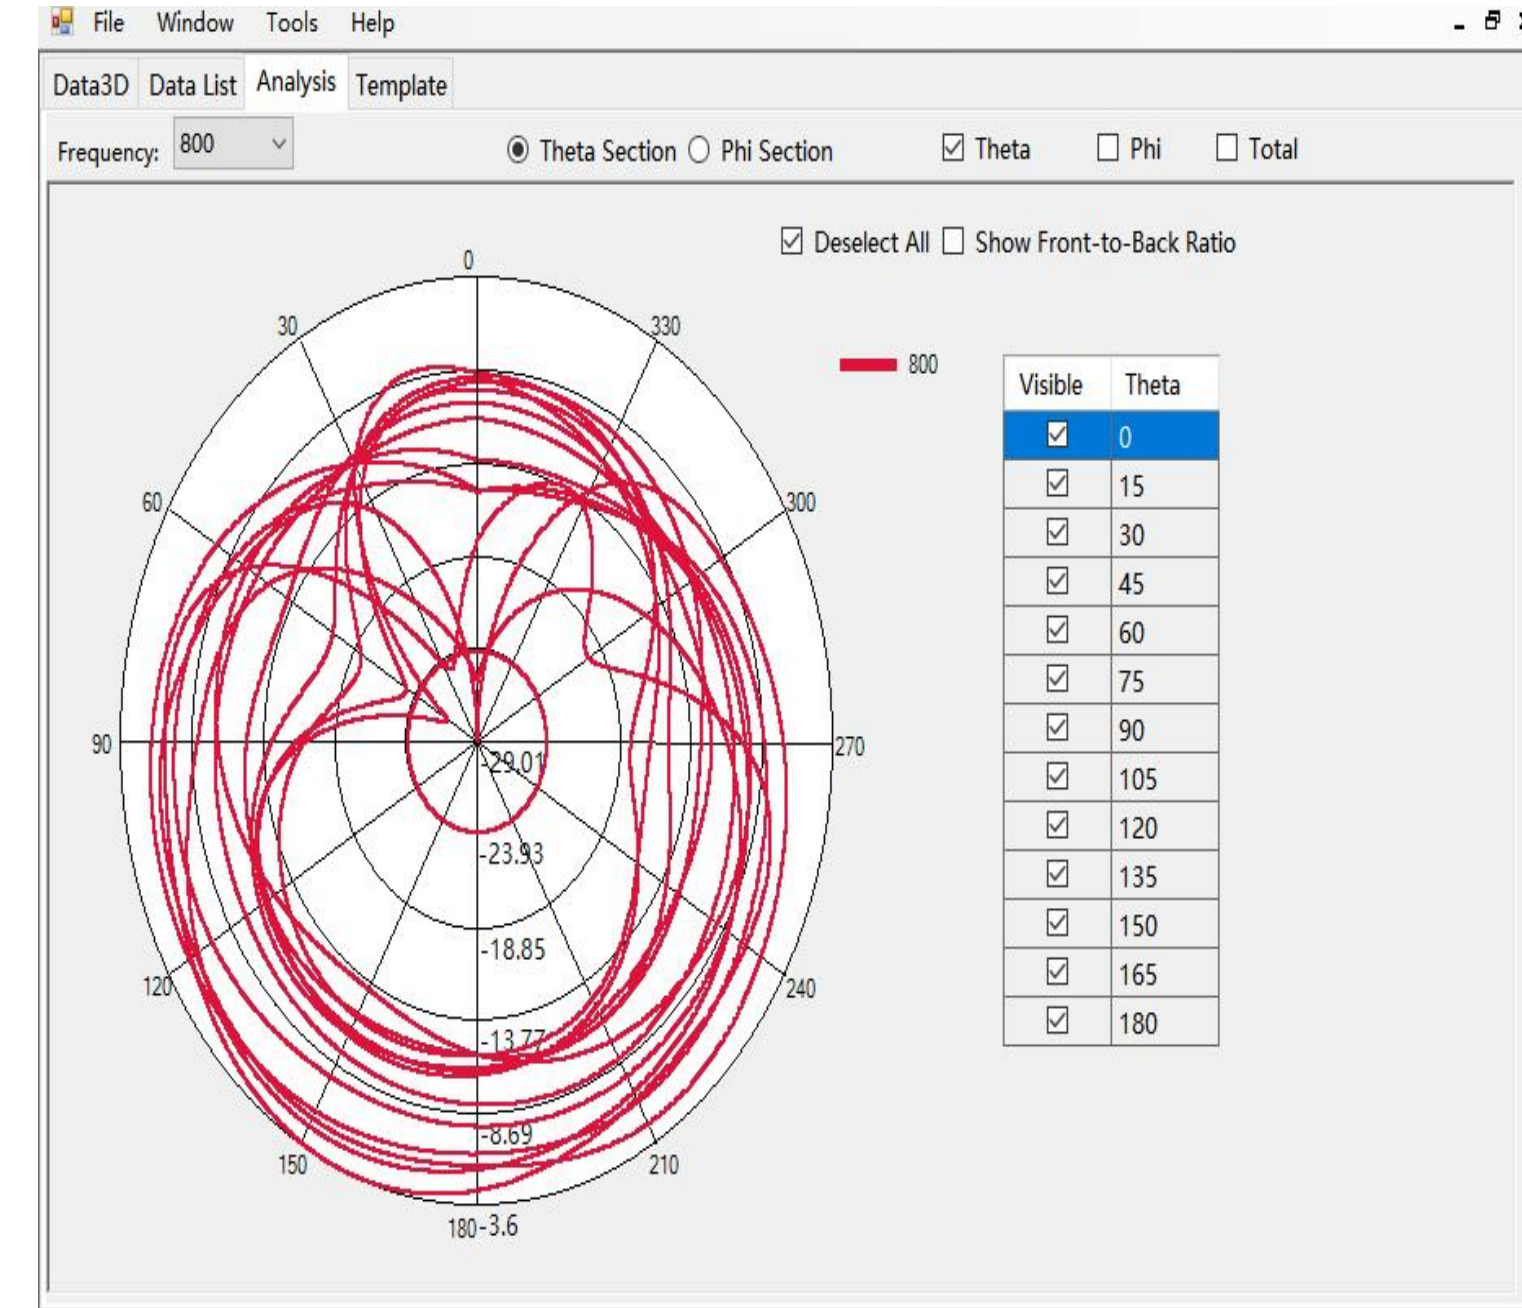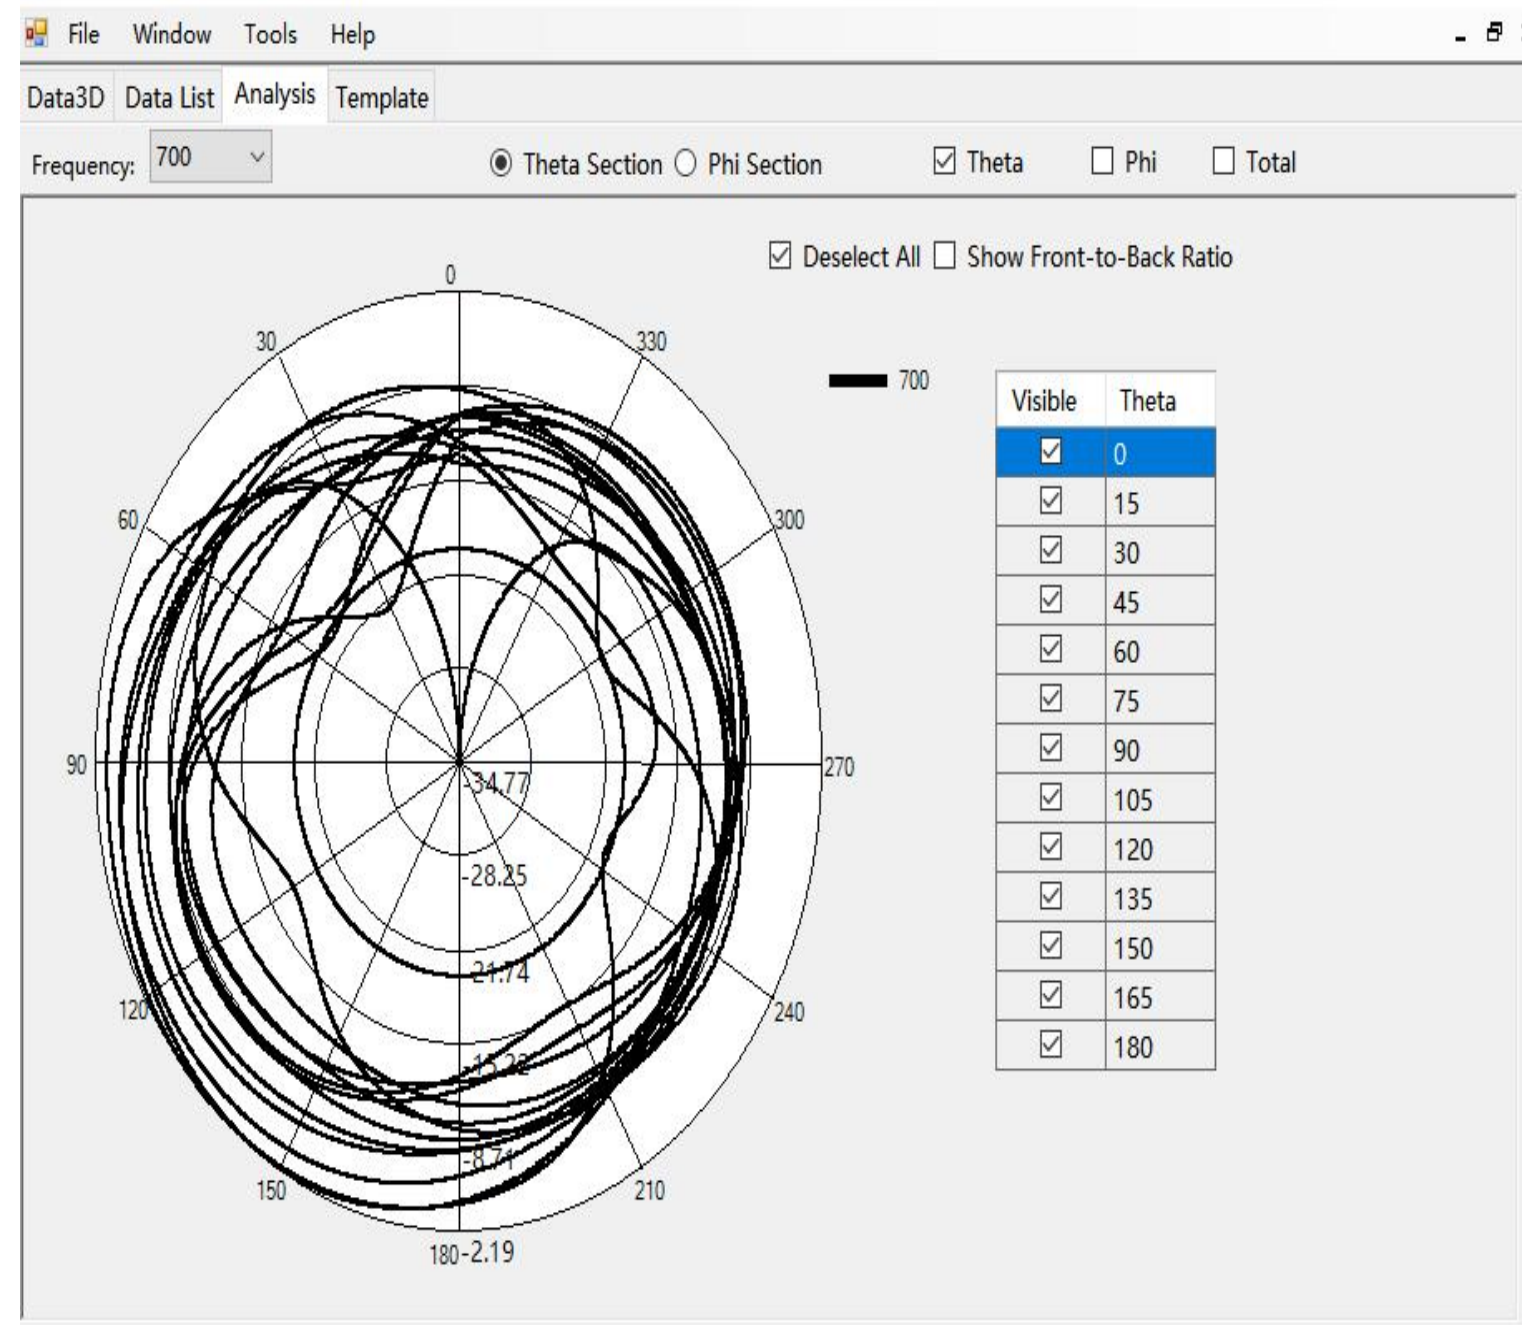


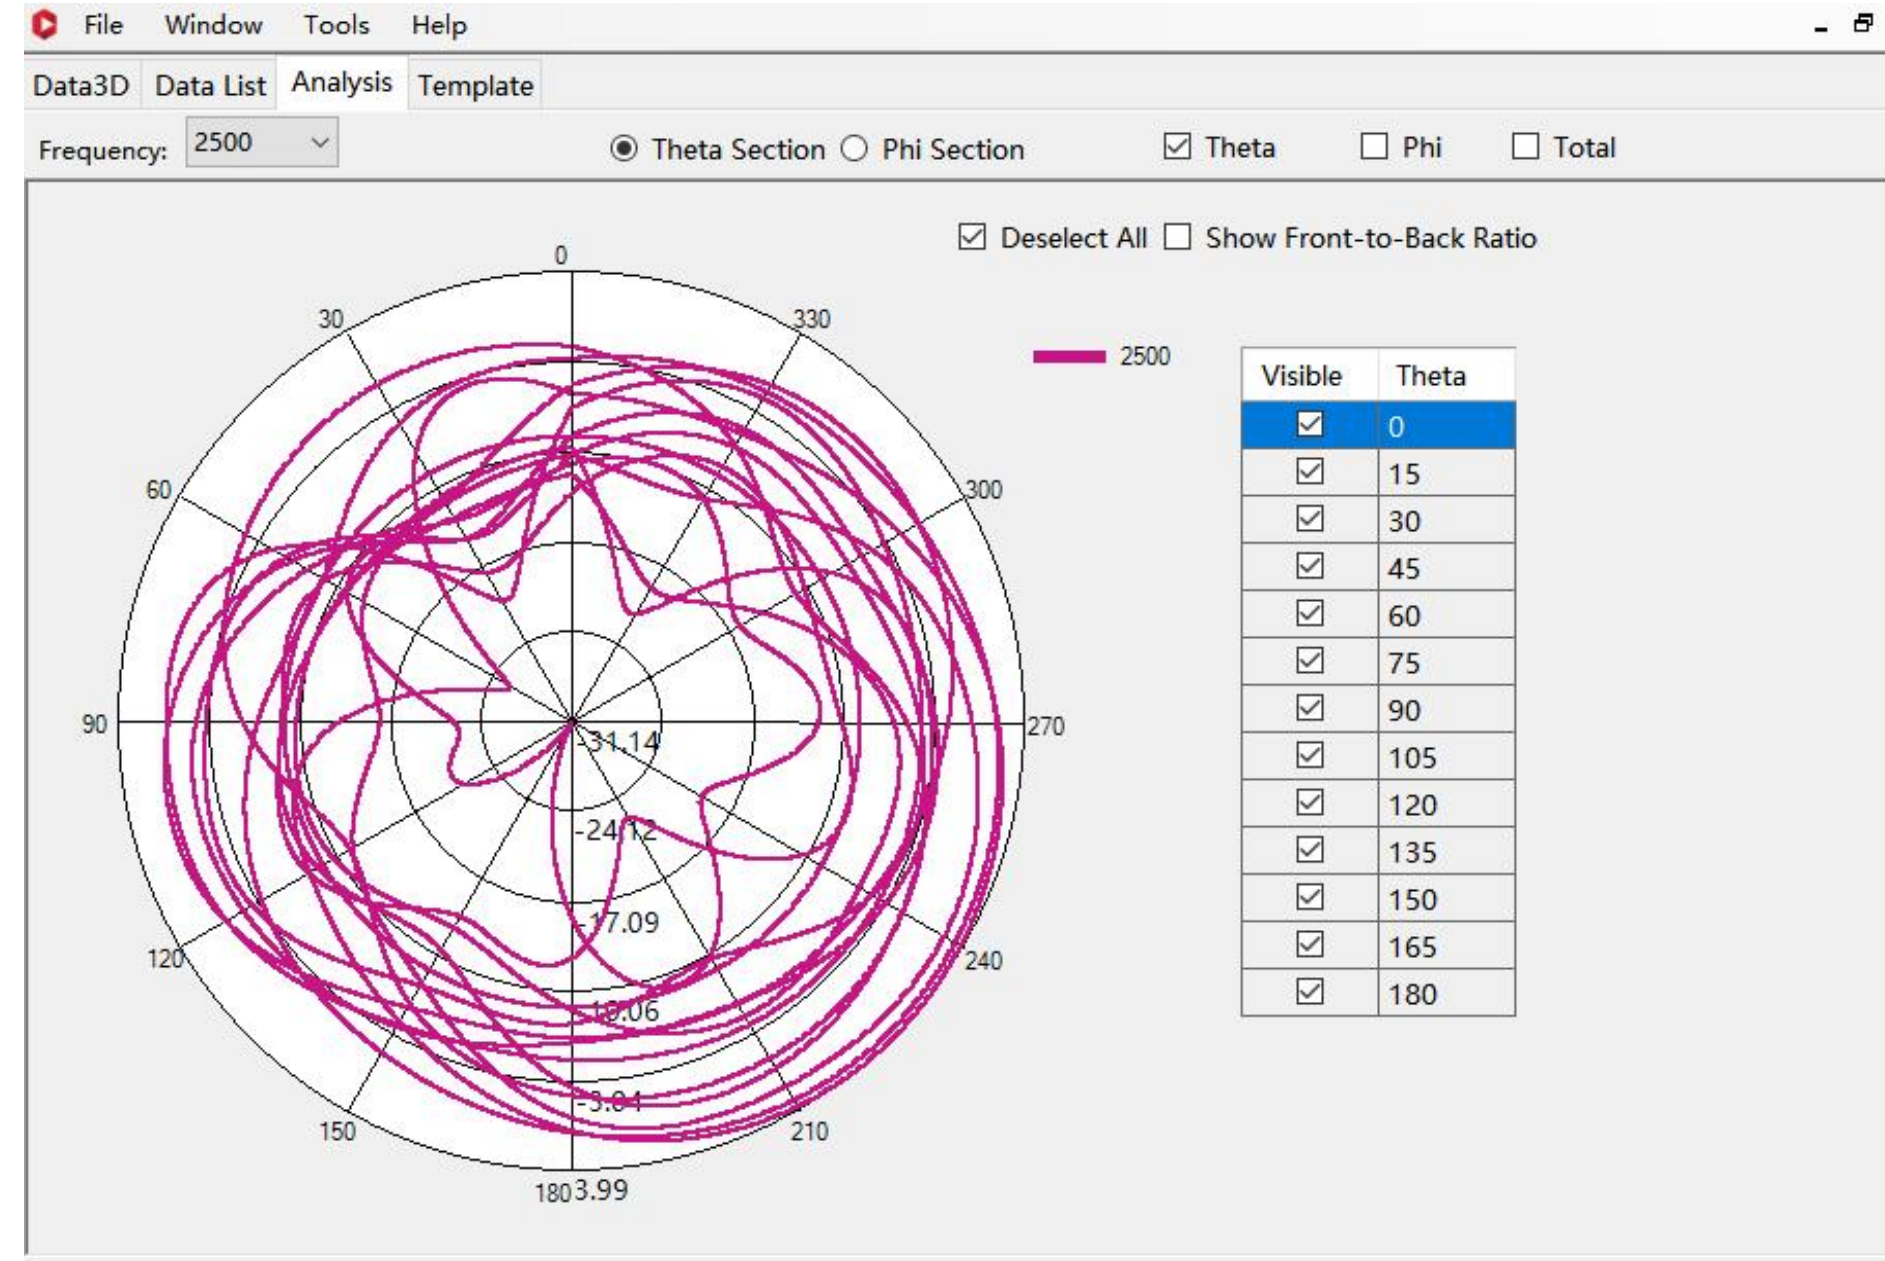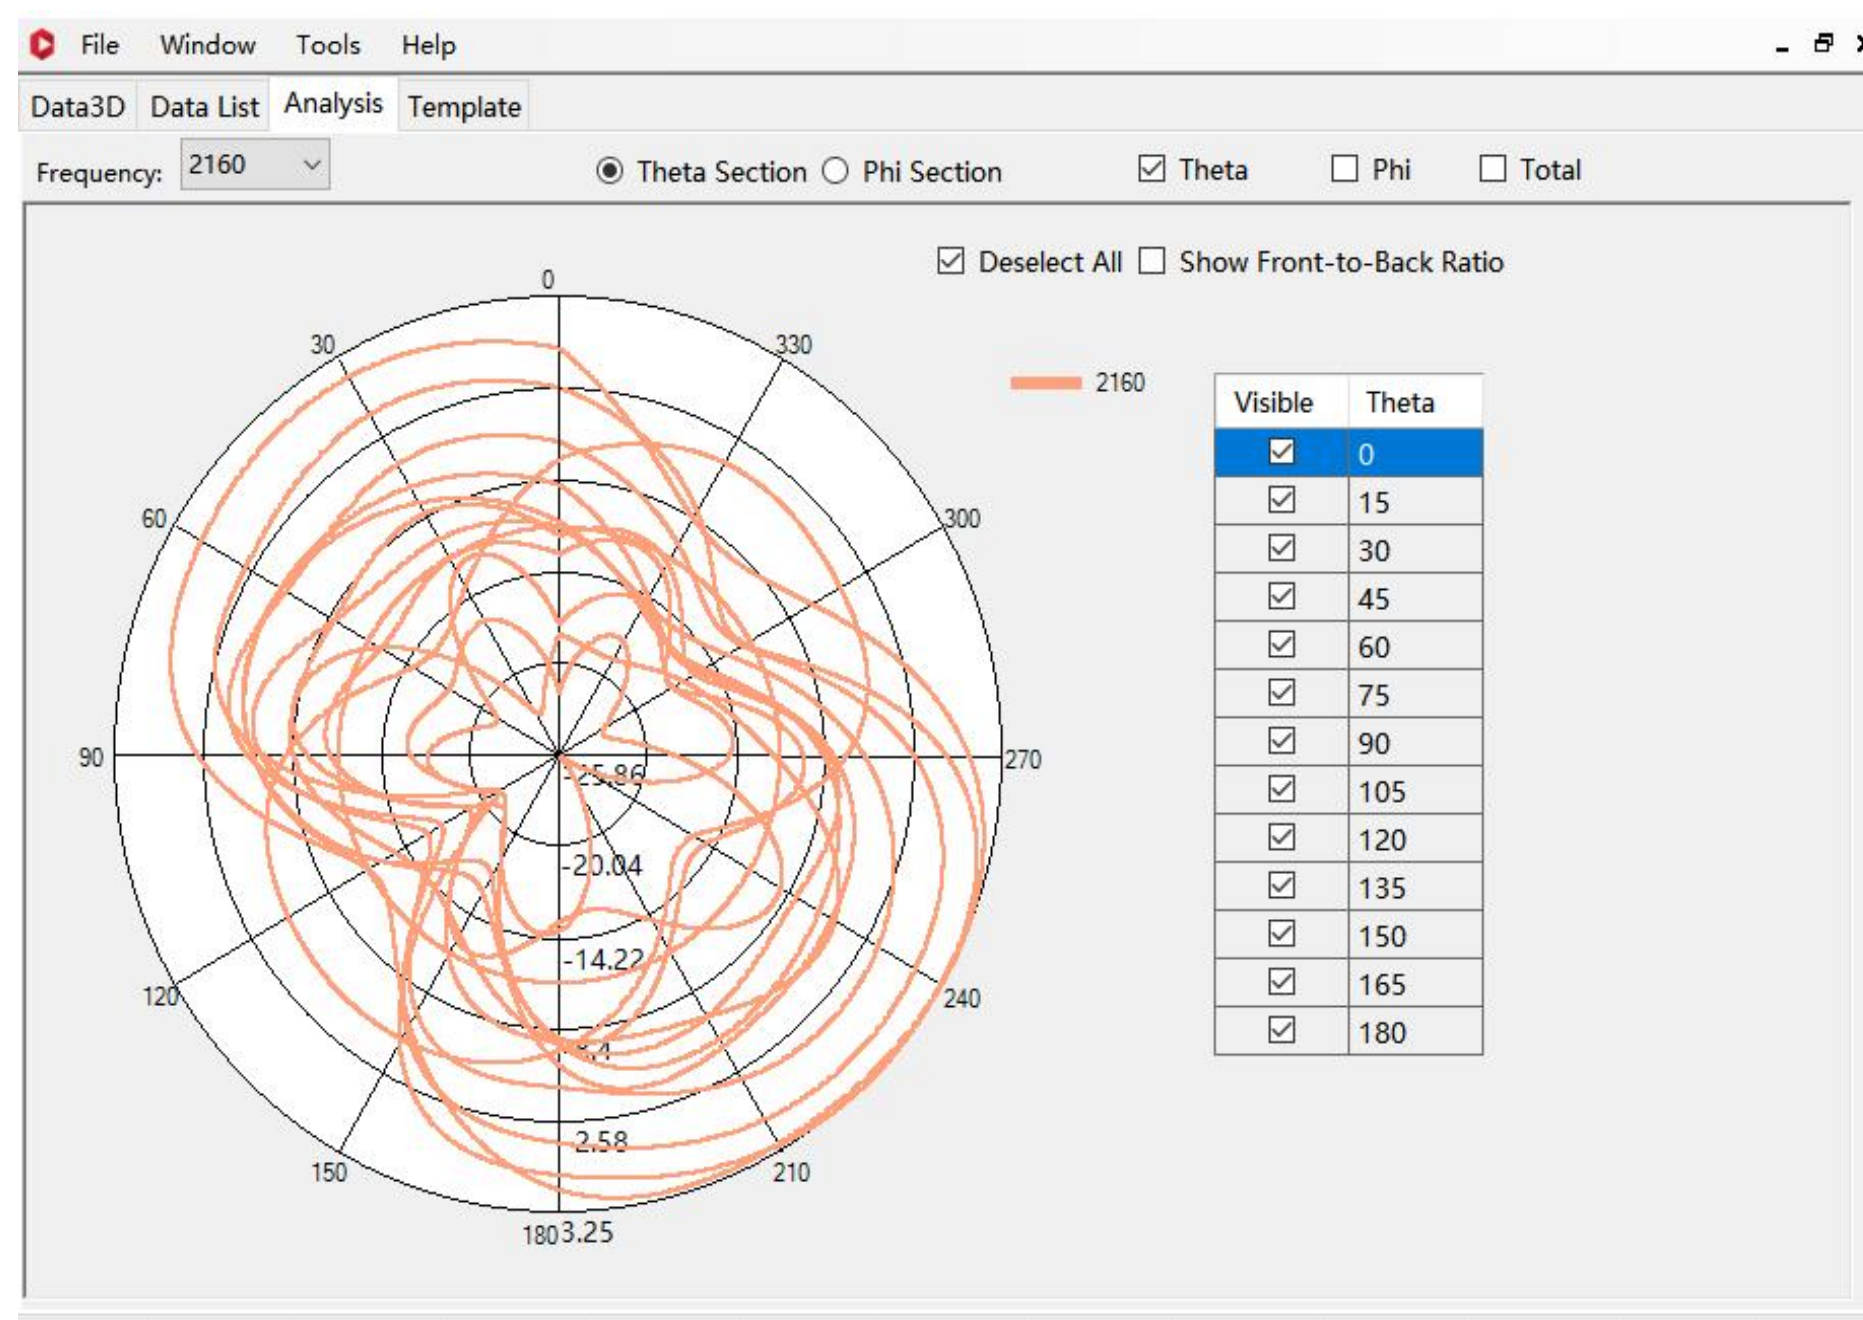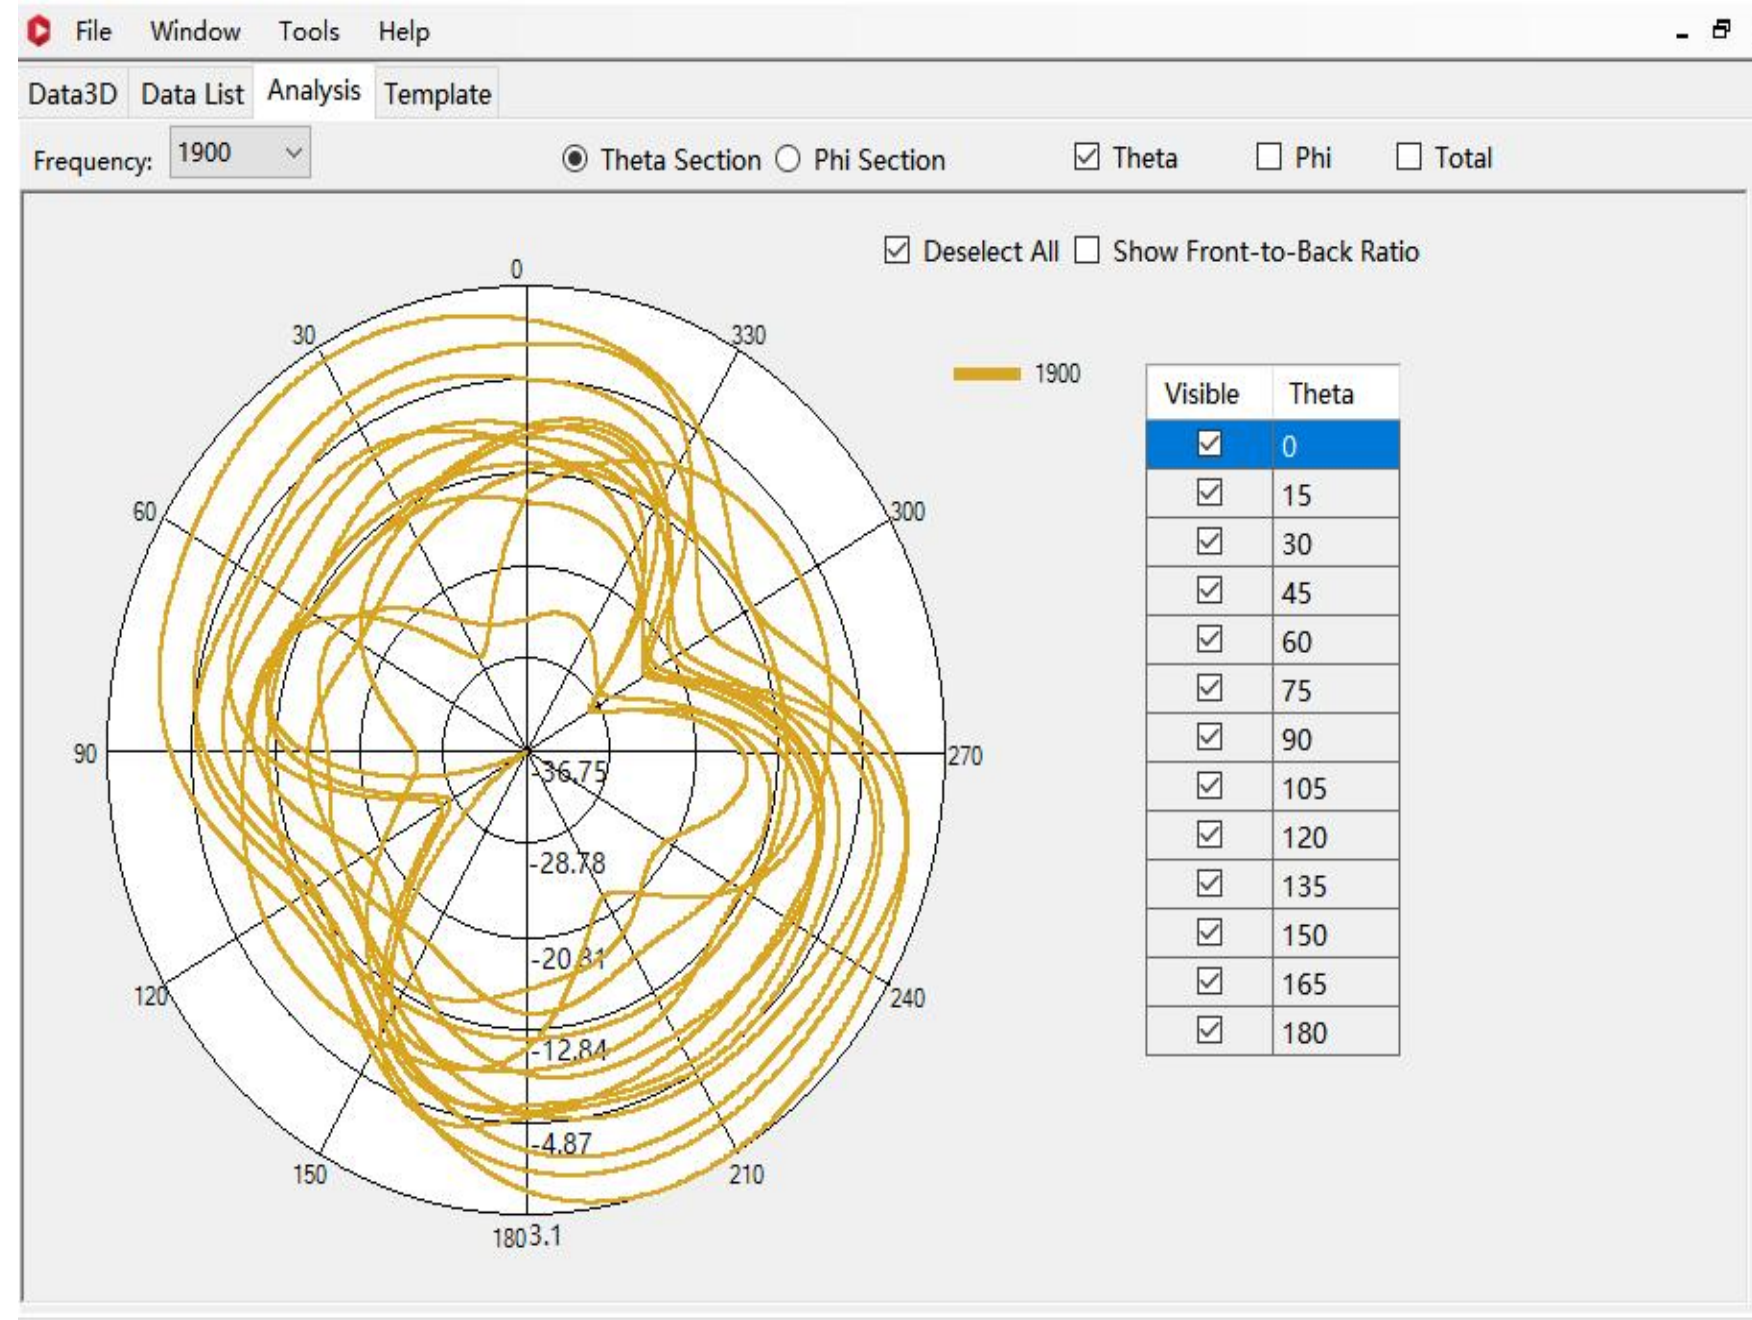




2.4WIFI 3D Drawing

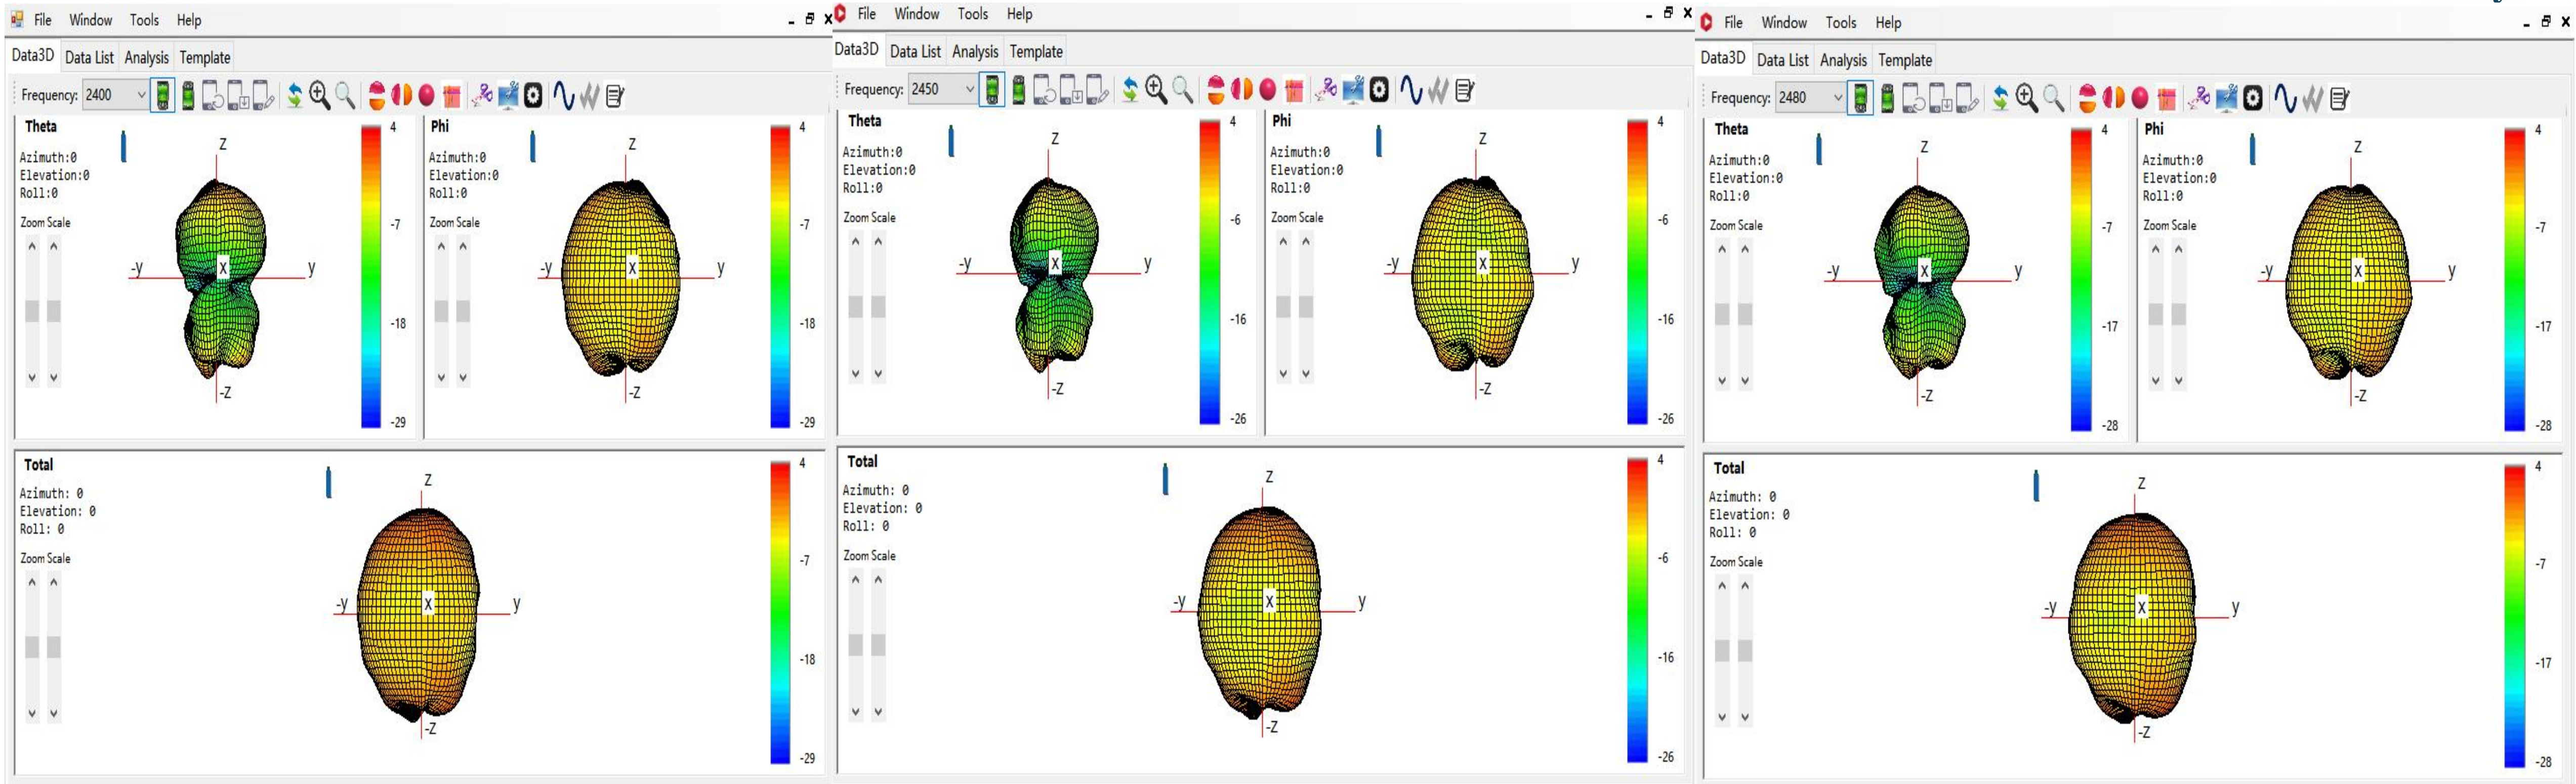


2.4WIFI 2D Drawing

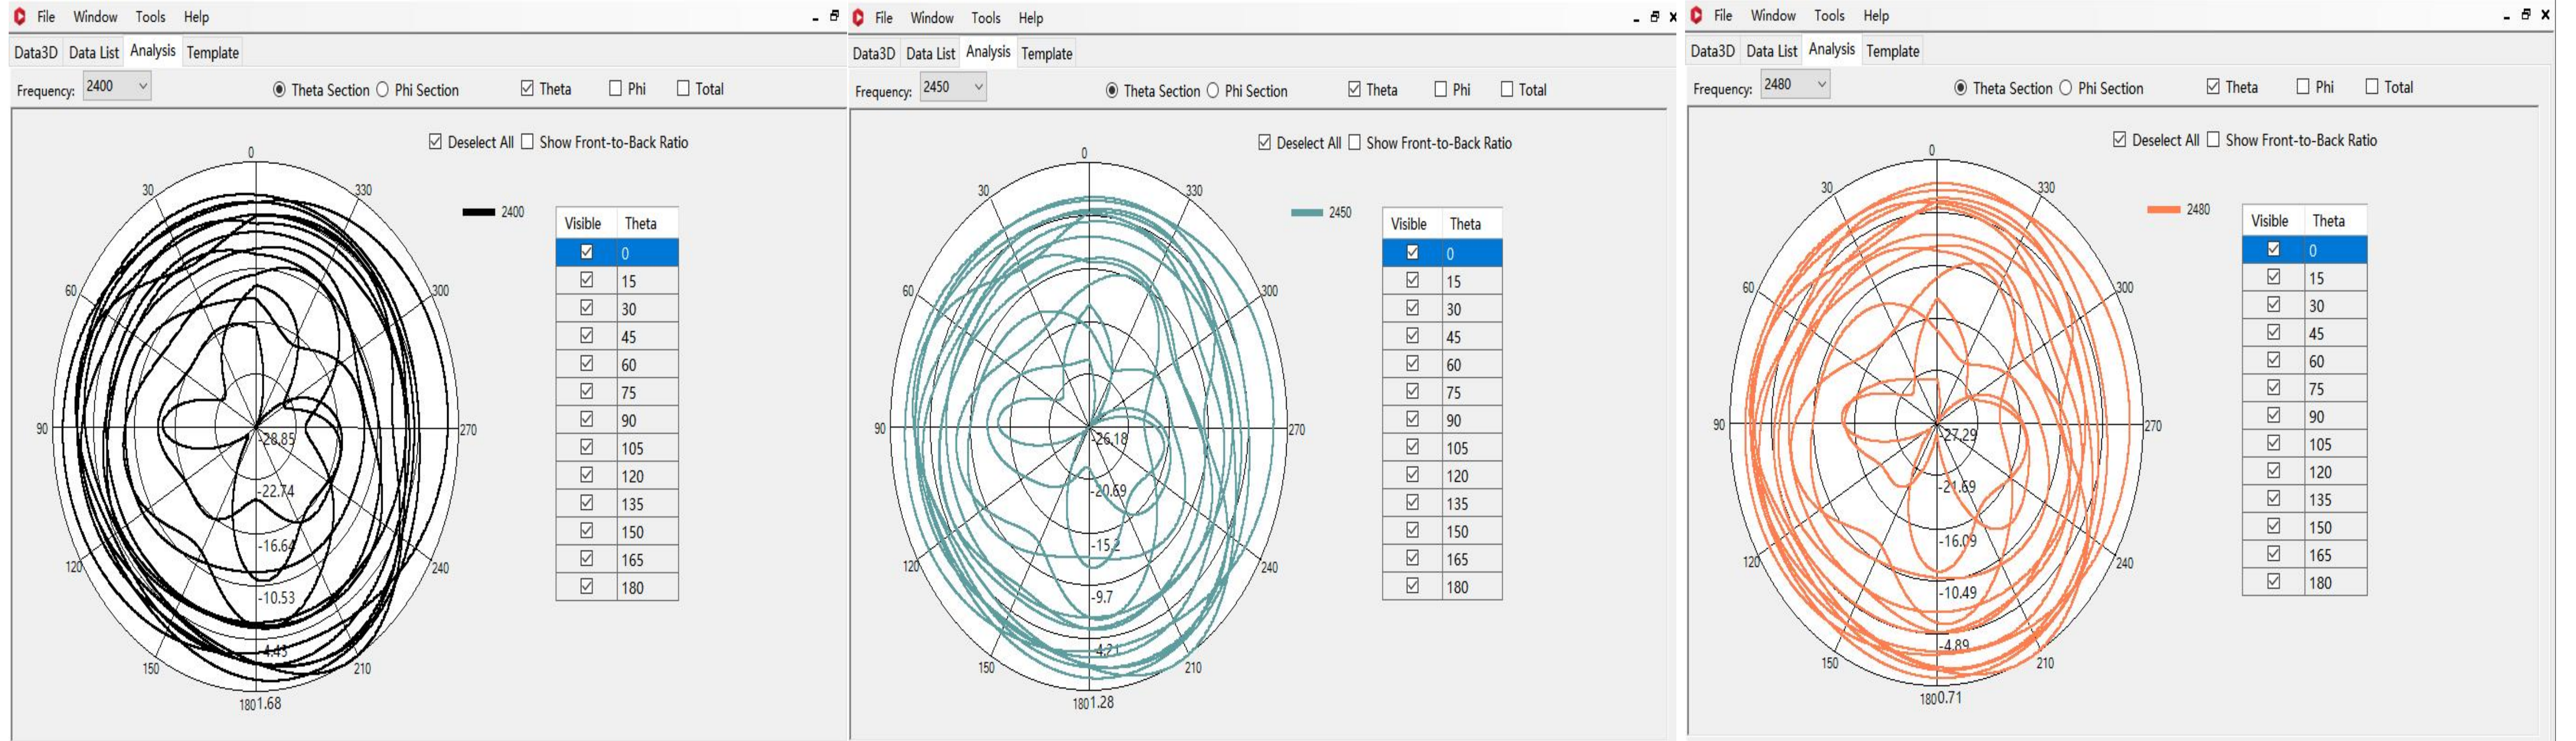


5.8G WIFI 3D Drawing

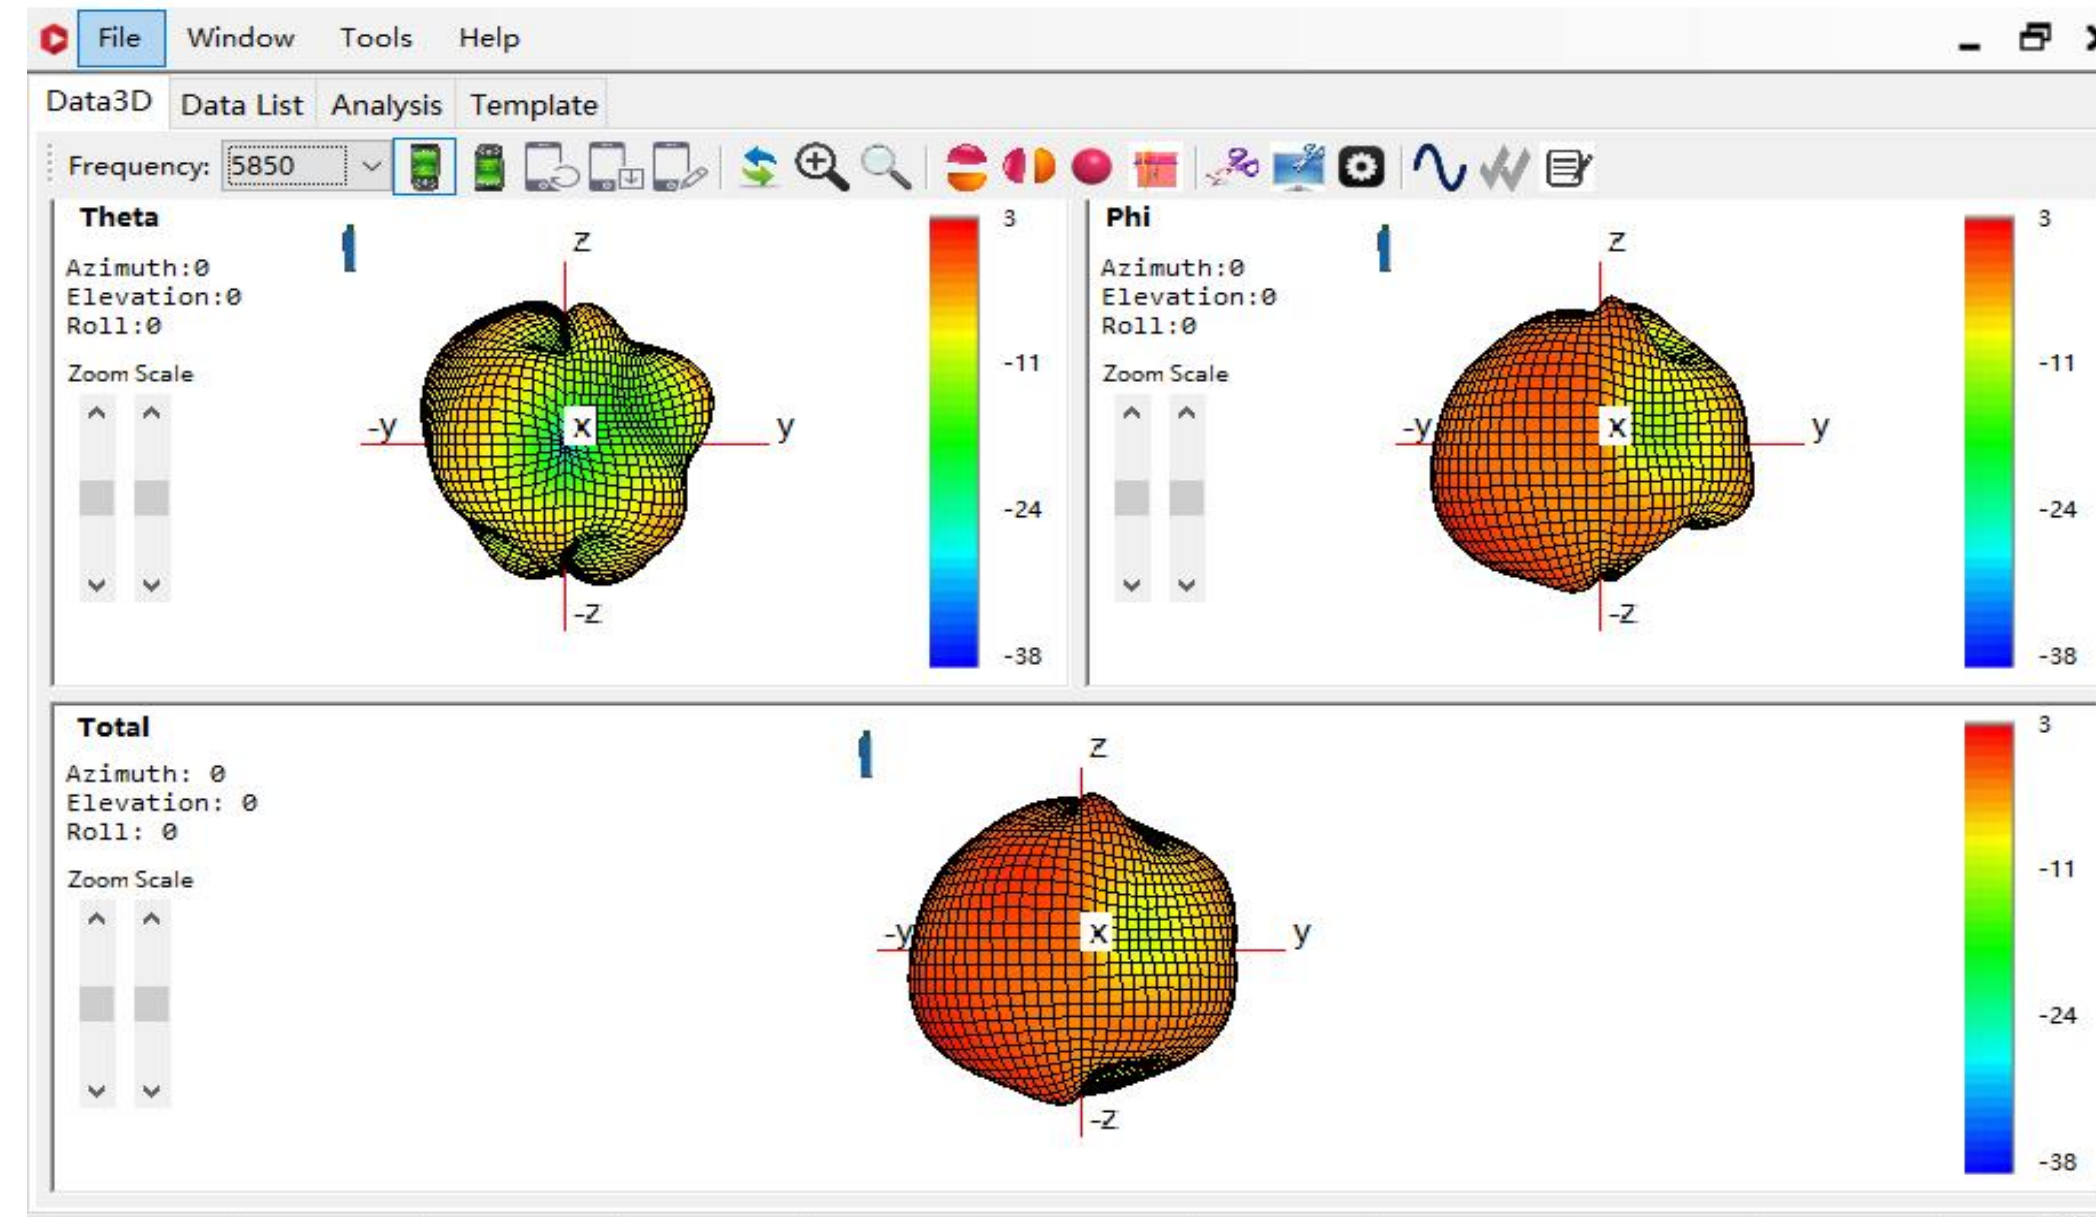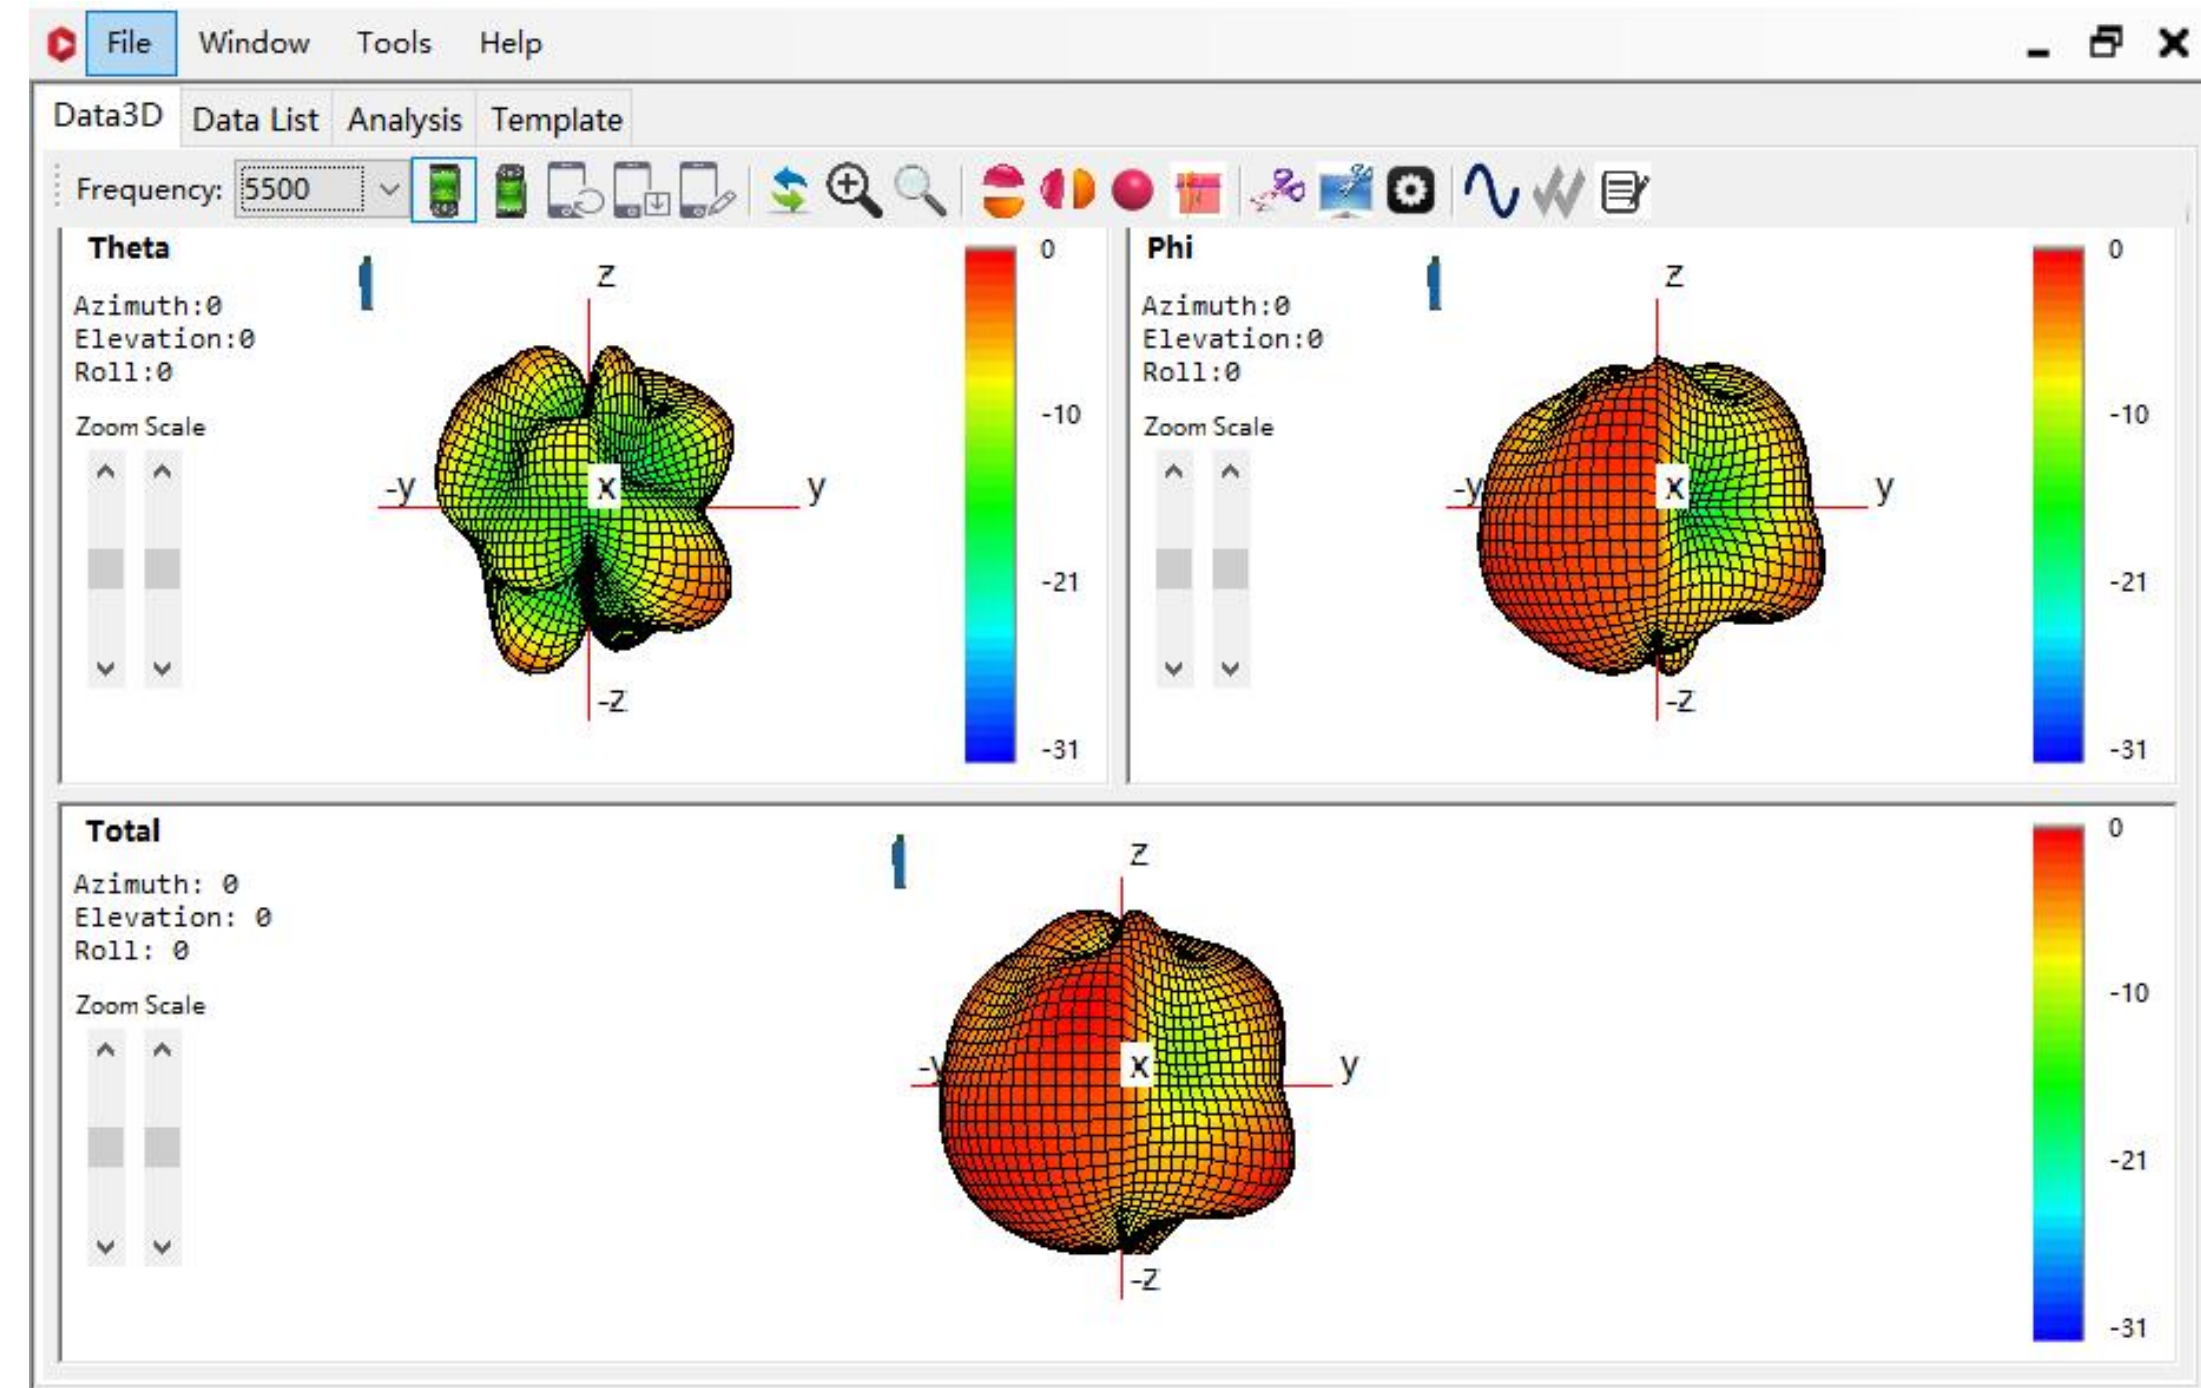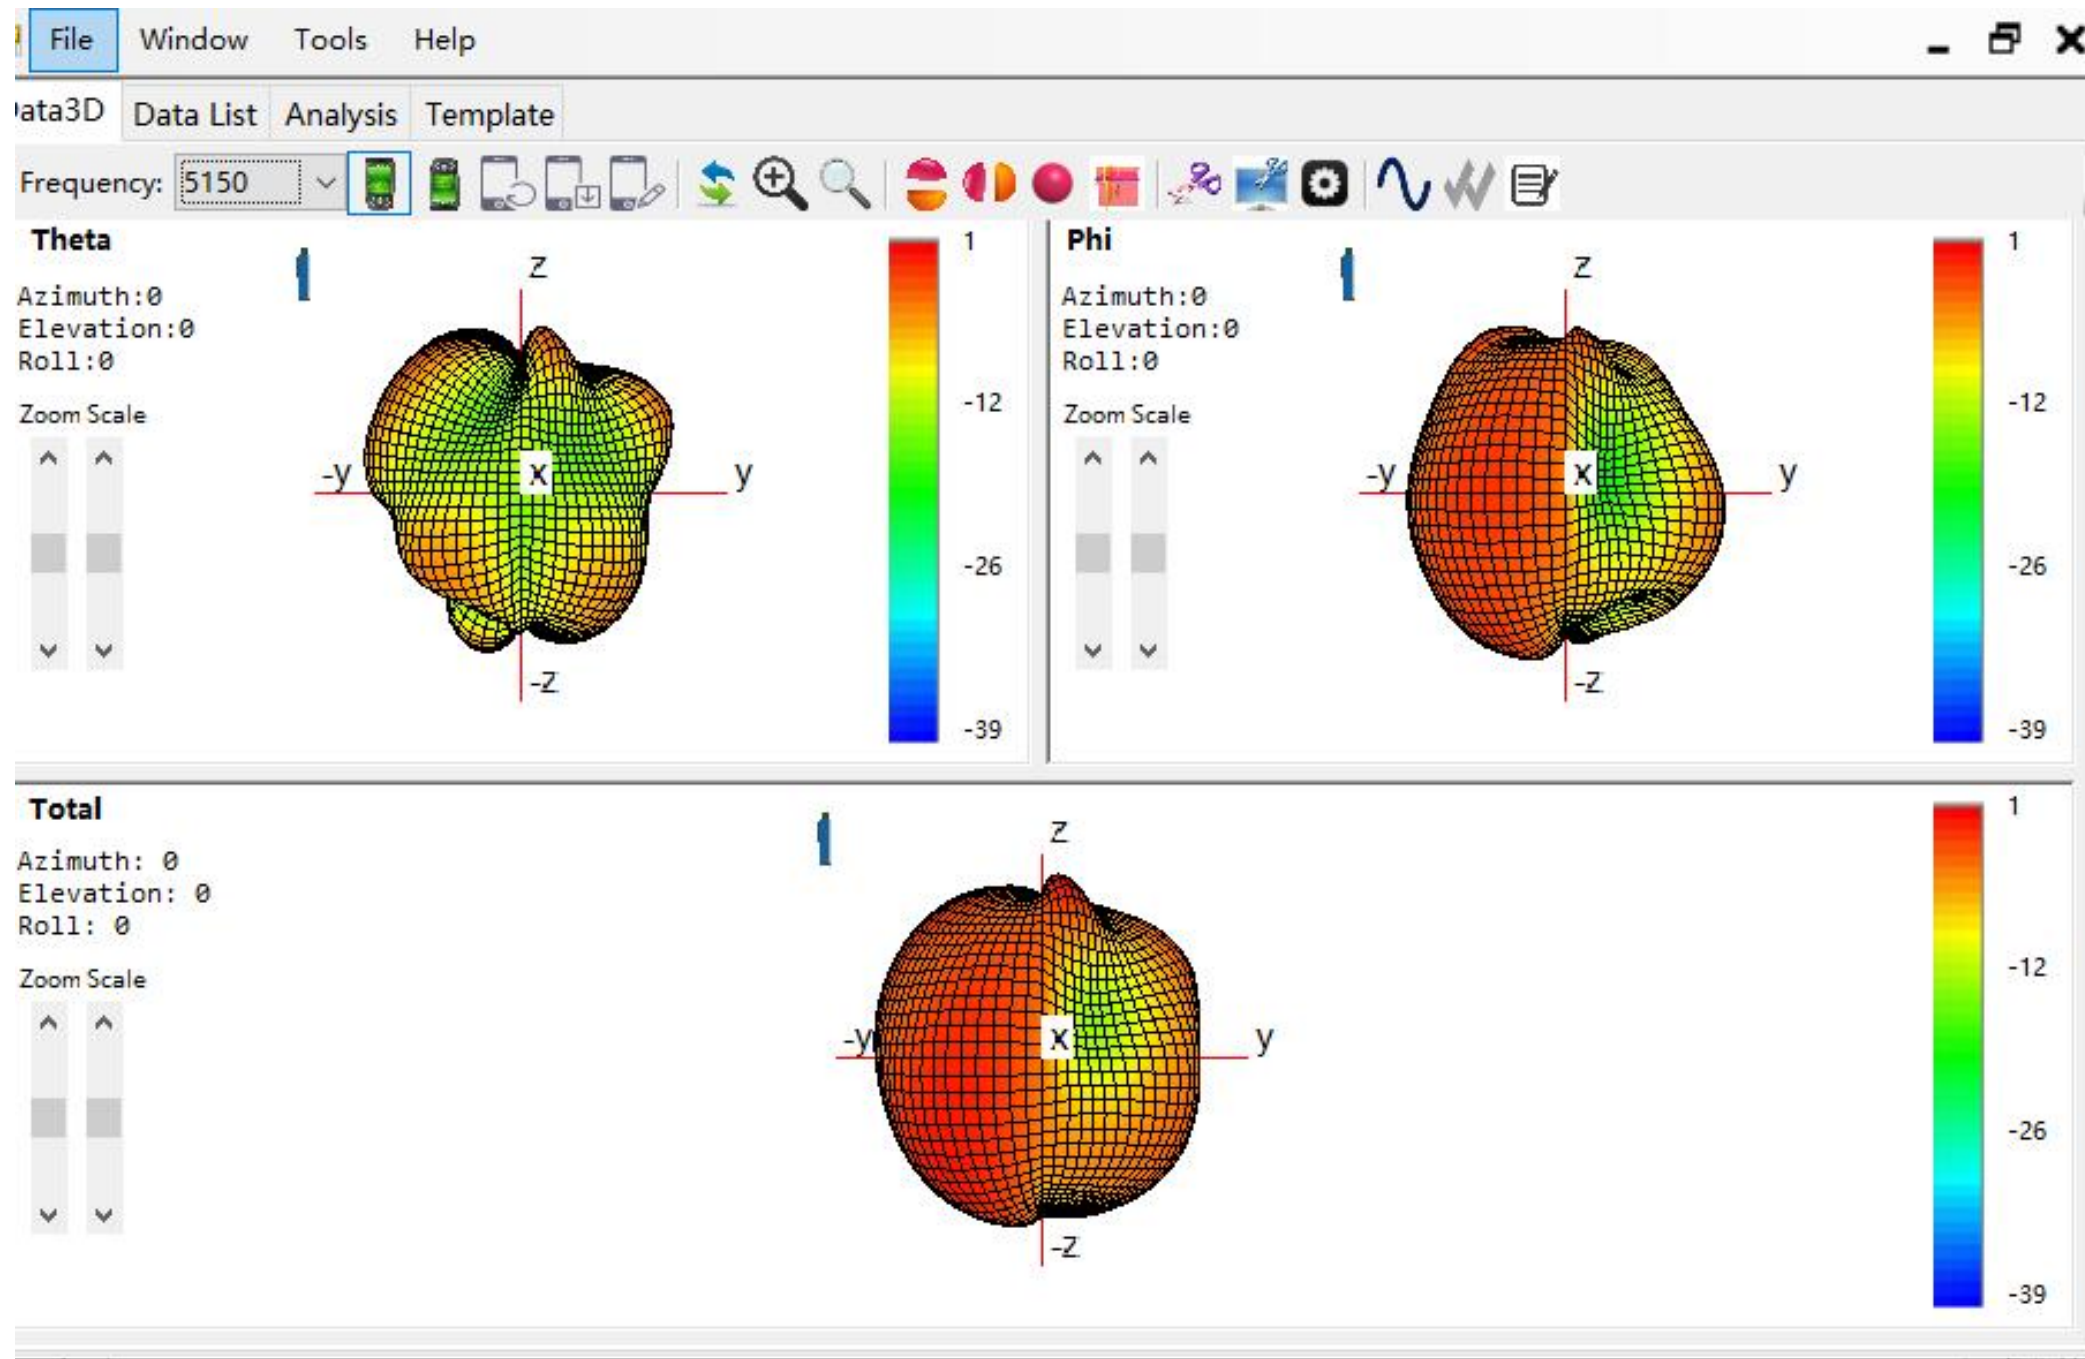


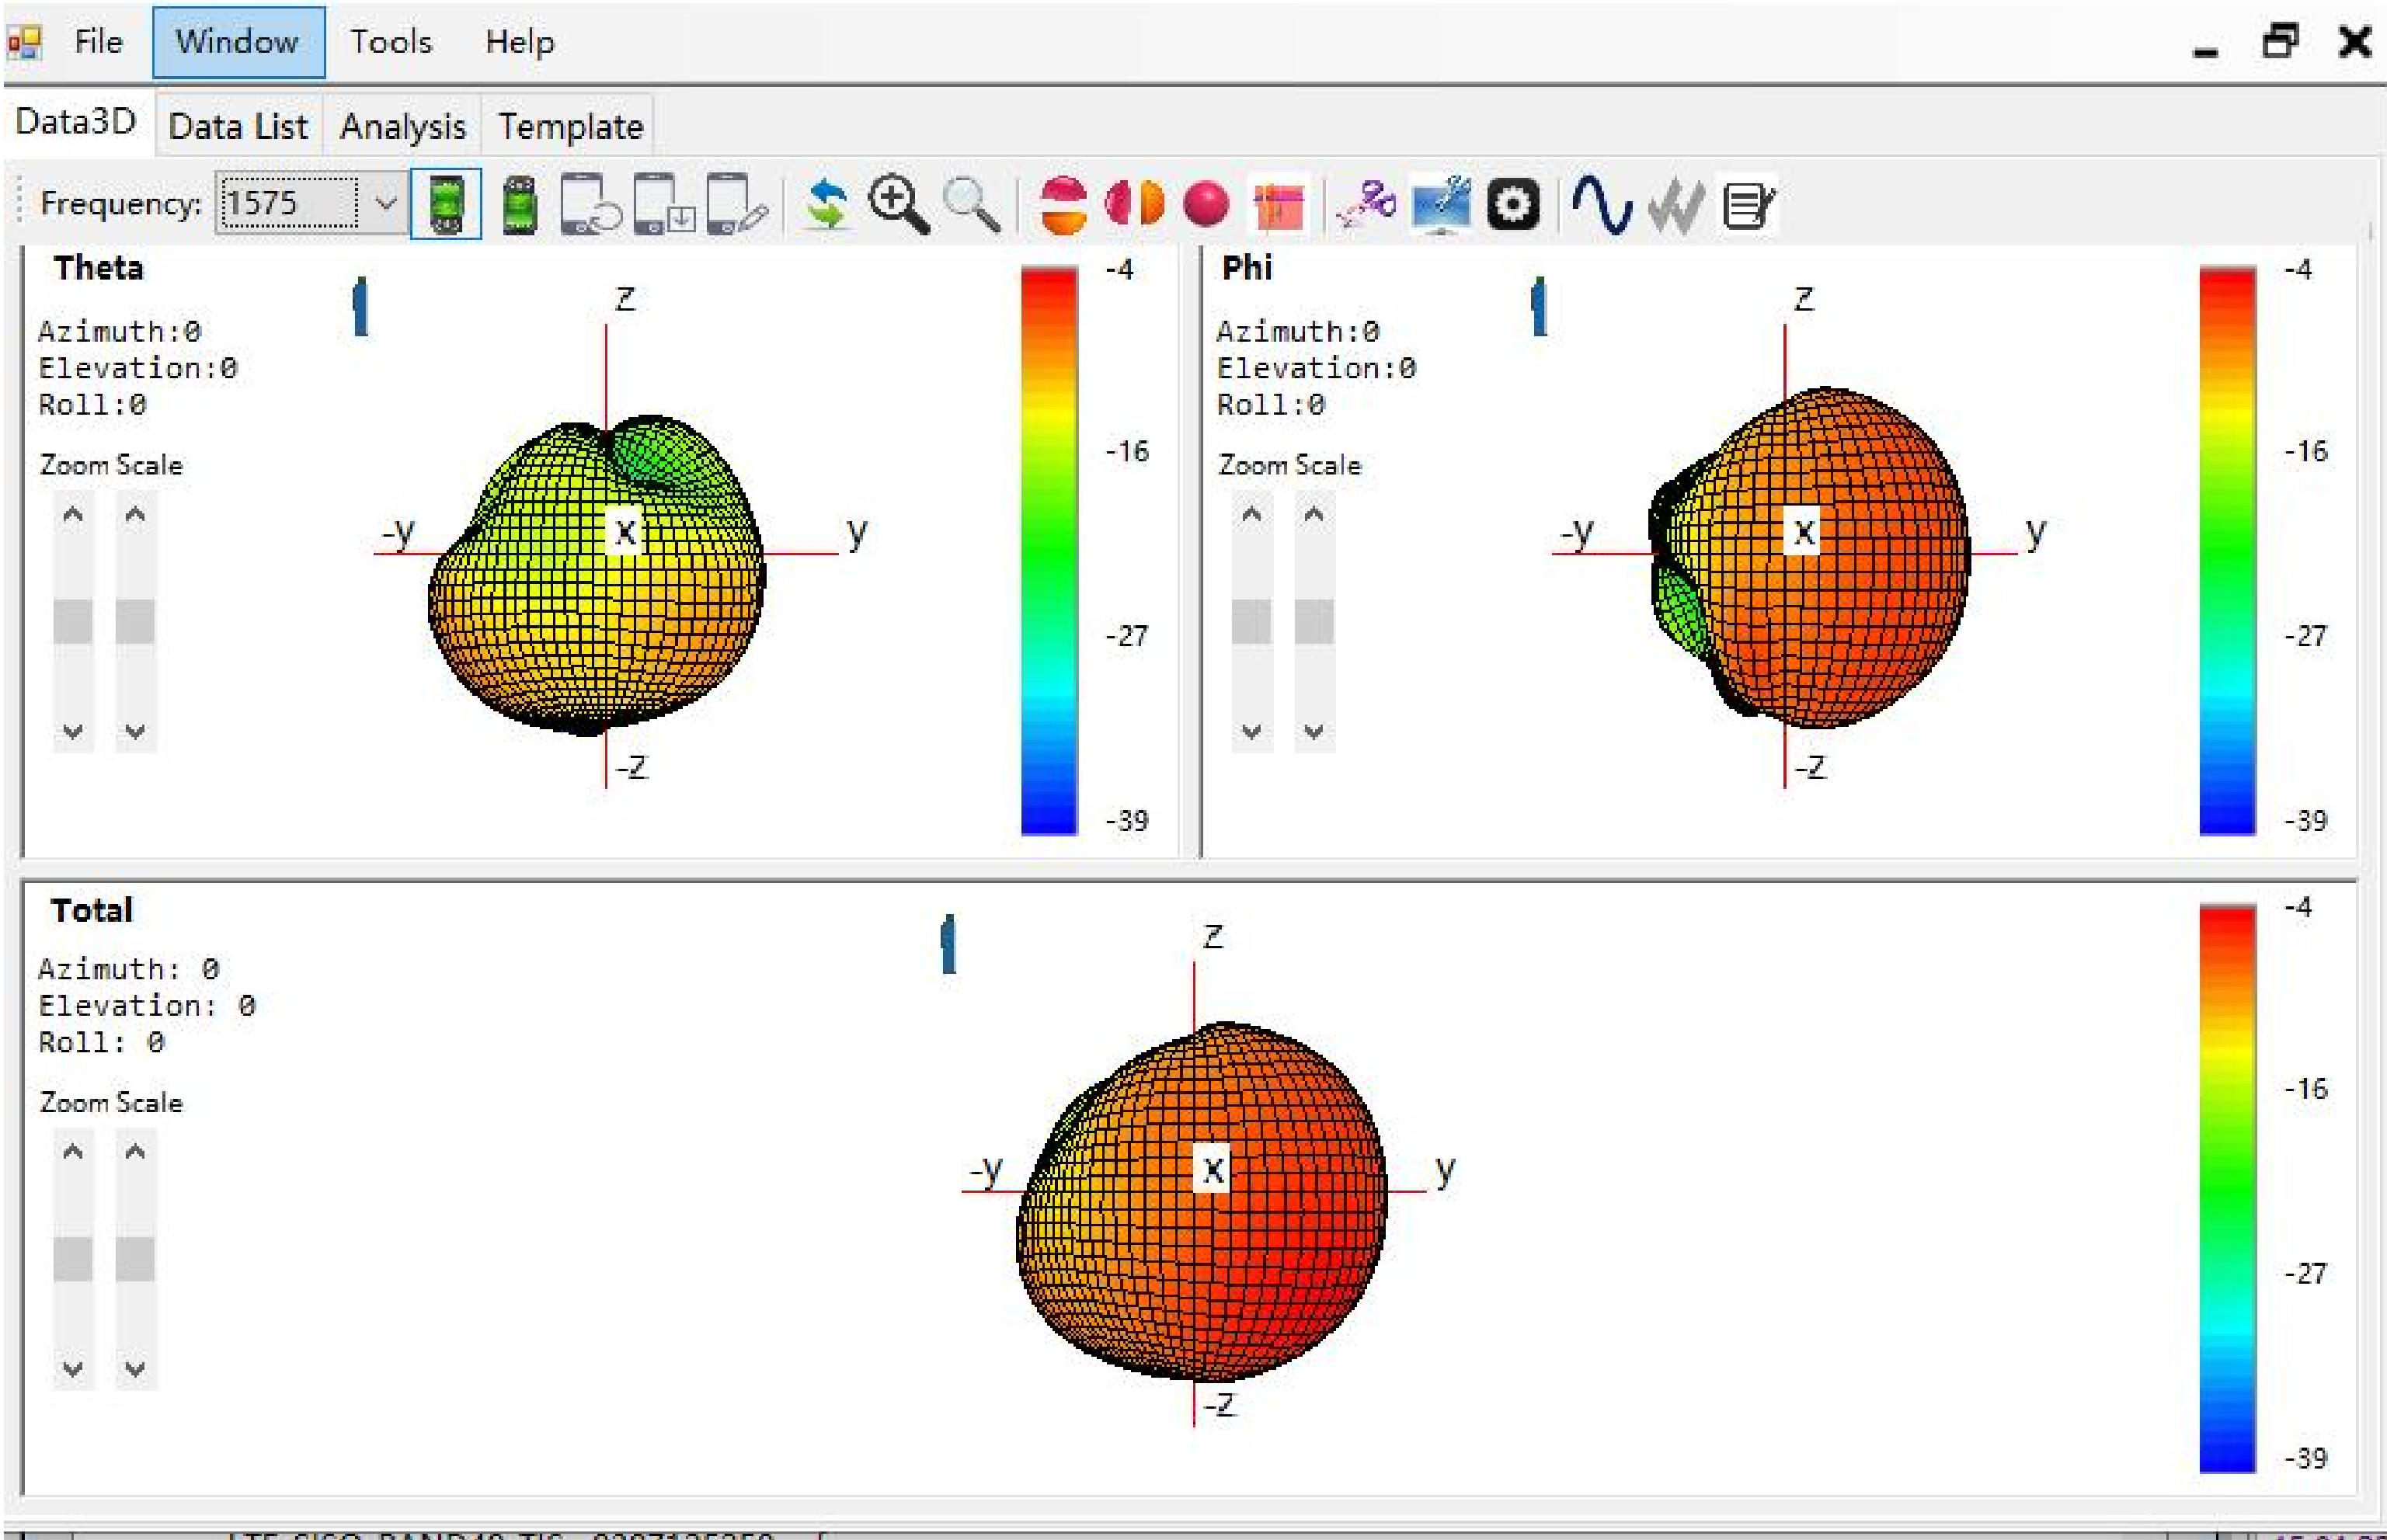





GPS 3D Drawing

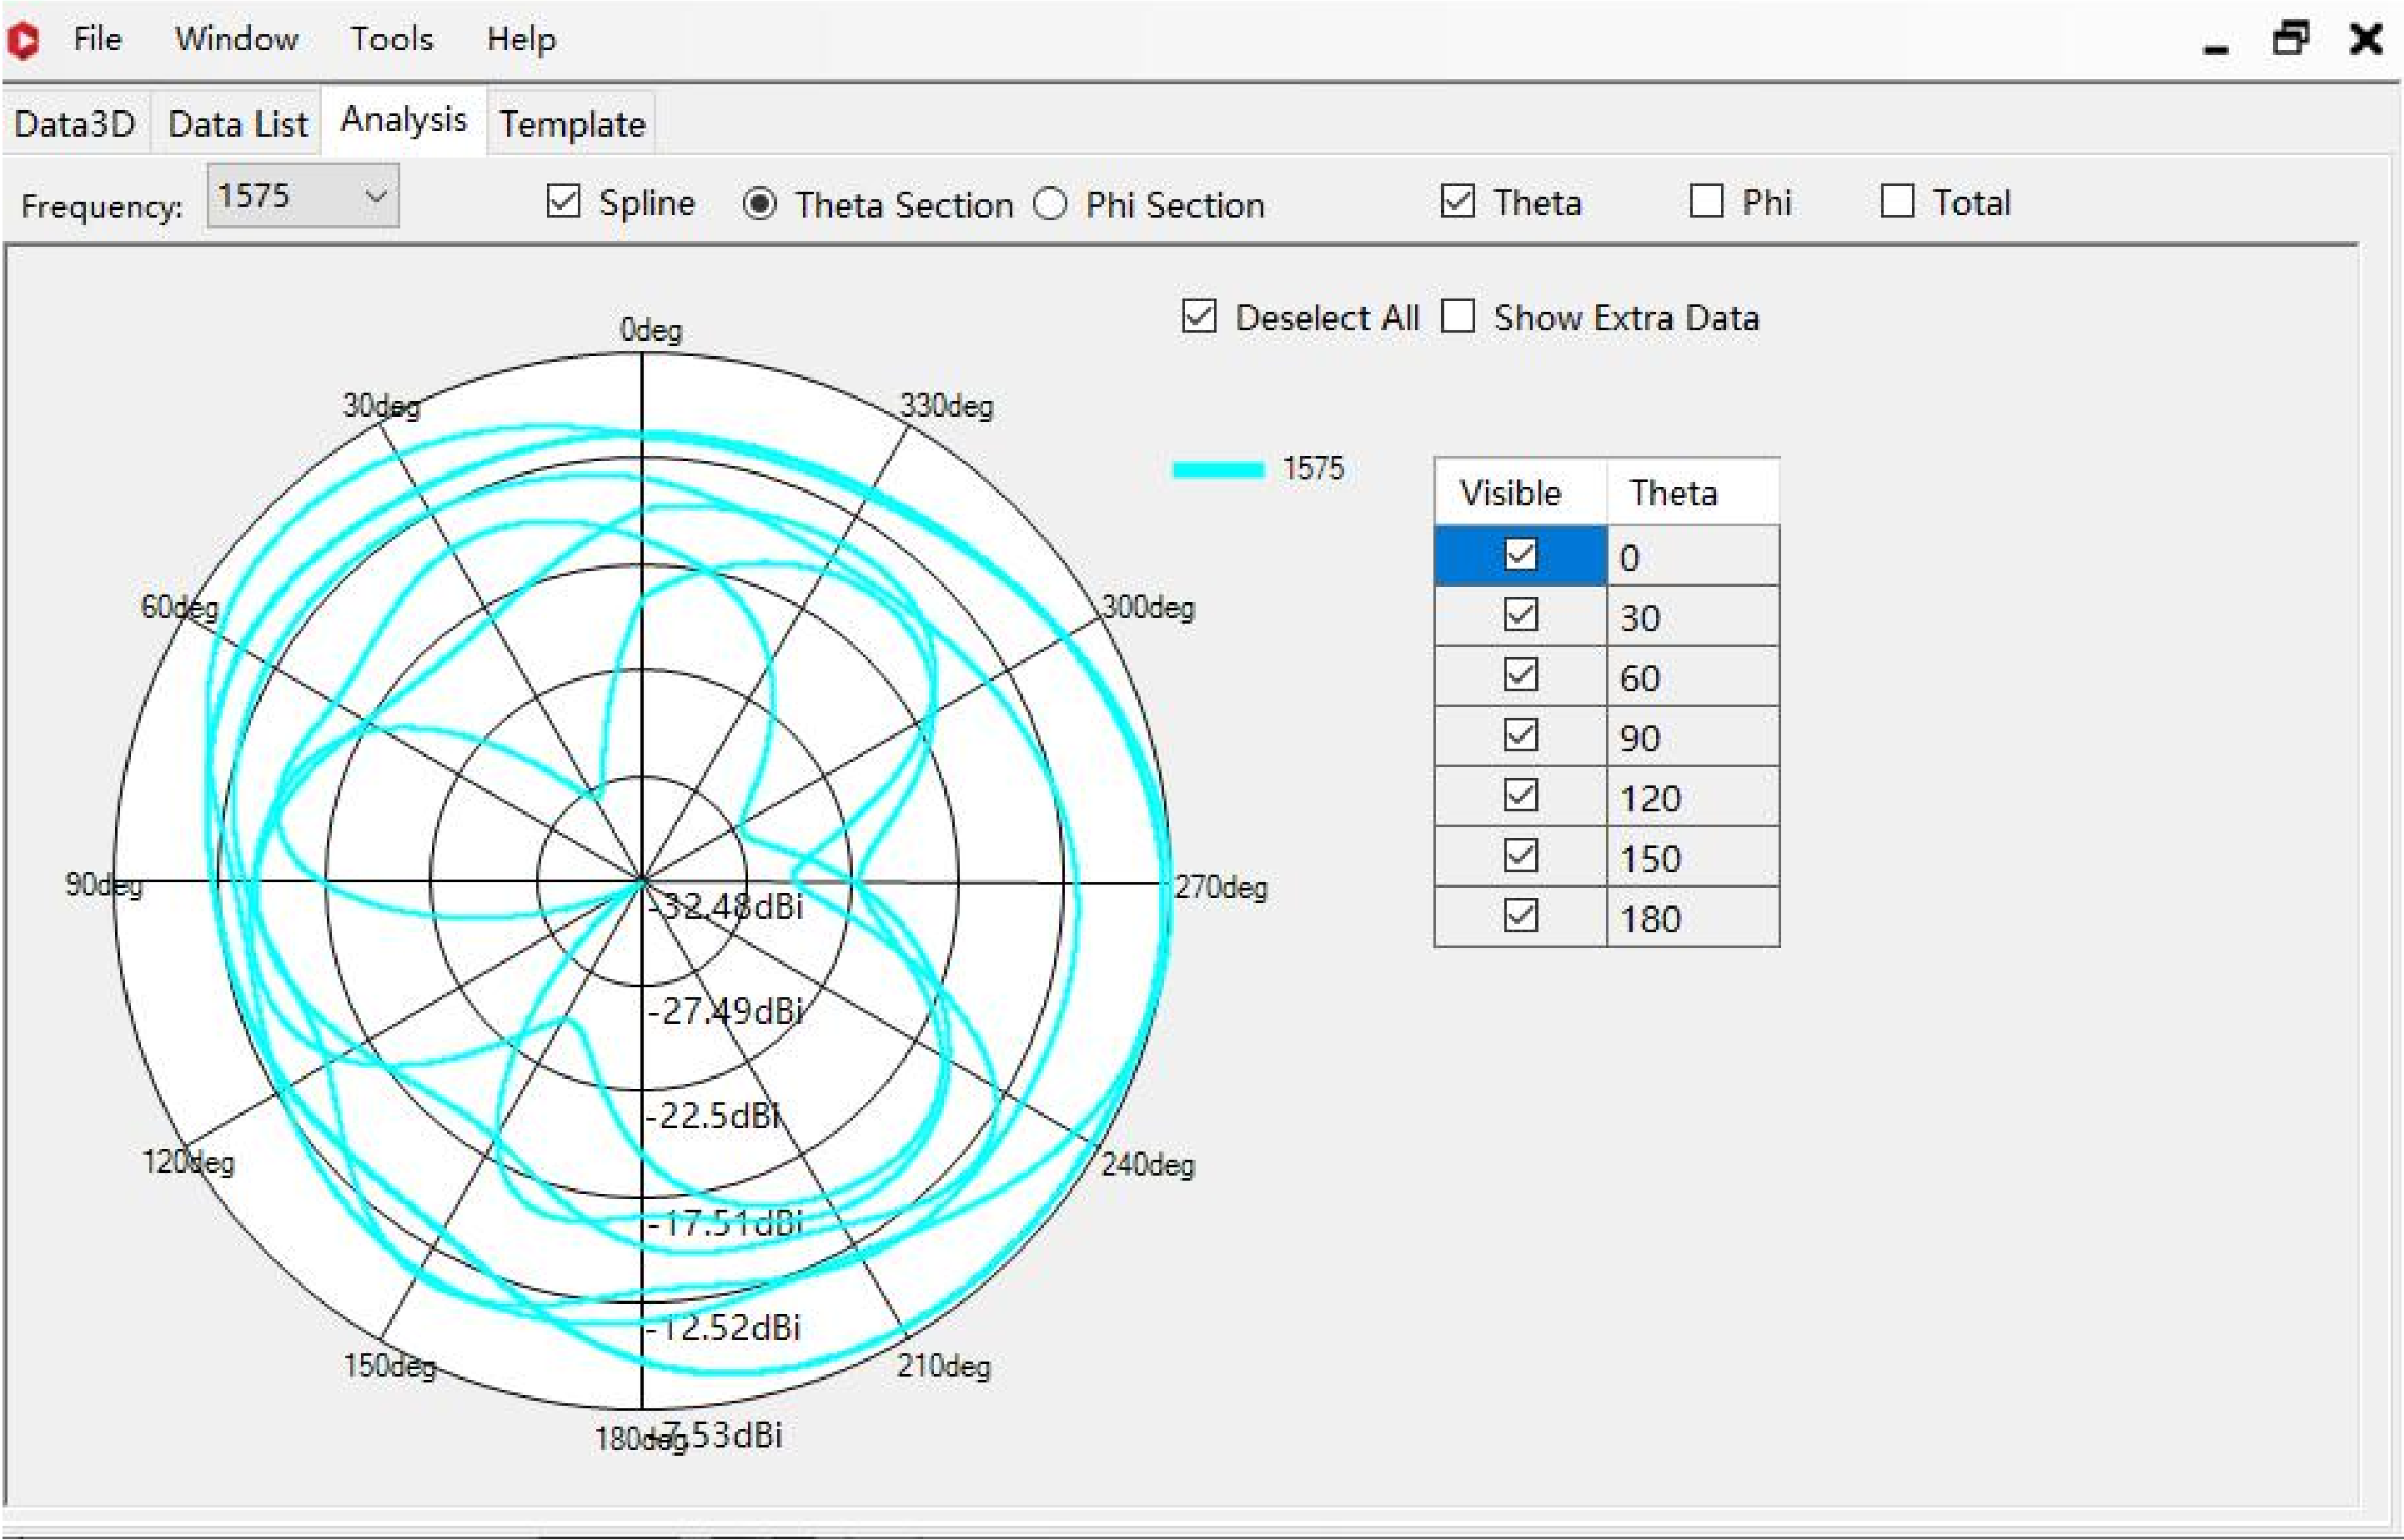

GPS 2D Drawing

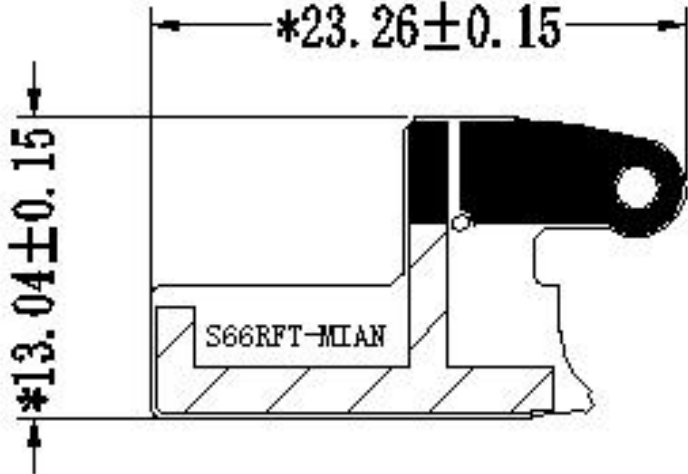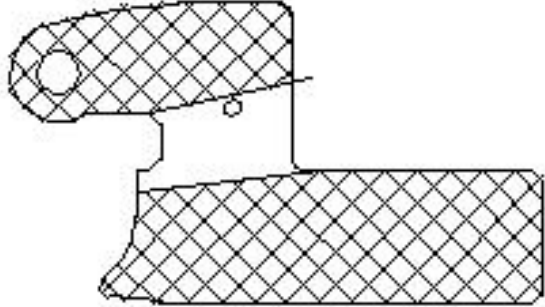


Antenna Engineer drawing

1	2	3	4	5	6				
Environmental requirements : ROHS <input checked="" type="checkbox"/> REACH <input type="checkbox"/> No									
A					A				
B					B				
C	<p>NOTES:</p> <ol style="list-style-type: none"> The knife mold should not damage the circuit, and the gold-plated area should be connected to the circuit The surface should not have any dirt, scratches, black spots, breakage or detachment after plating: Material: FPC single panel [PI (electrolytic copper) 0.0175/0.0127mm base material + adhesive (3M94710.05mm)+ surface sub-white ink (Kaiyao/Youli/Rio Tinto/Ligu) (>0.01mm)]; Reverse adhesive 3M9471300LSE (viscosity needs high and low temperature experiment), test conditions: -30°C(60min)~(conversion time 30min)~+70°C(60min)~(conversion time 30min)~-30°C(60min).After a total of five cycles, place at room temperature for 8 hours without peeling, warping, ink dropping, or bulging;. Nickel plating on the surface of gold finger (thickness: 0.05UM), no oxidation phenomenon (salt spray test is required) : After 48~49 hours of salt spray test, there are no corrosion points on the surface and no coating detachment Mark * as the key dimensions 				C				
D	<p>  Copper platinum circuit  Golden Finger  3M adhesive backing </p>				D				
<h2 style="margin:0;">Shenzhen HamyWe Technology Co., Ltd</h2>									
		<small>unmarked tolerances standard</small>		Type of machine	X2566-S66RFT	Product name	LTE-FPC	Date	2024.03.27
		XXX	±2	○	0.1	Material number	X2566-S66RFT-LTE-A03		M D
		XX	±1	◎	∅ 0.05	material	PI	Special Process	R F
		X	±0.5	⊥	0.05	pages in total page 1		Auditor	
		X	±0.2	▱	0.05	First perspective		  unit mm scale Fit edition V01	
		.XX	±0.10	Angle	±3°				
1	2	3	4	5	6				
mark	change date	Changed by	Content-Change	remarks					



Antenna Engineer drawing

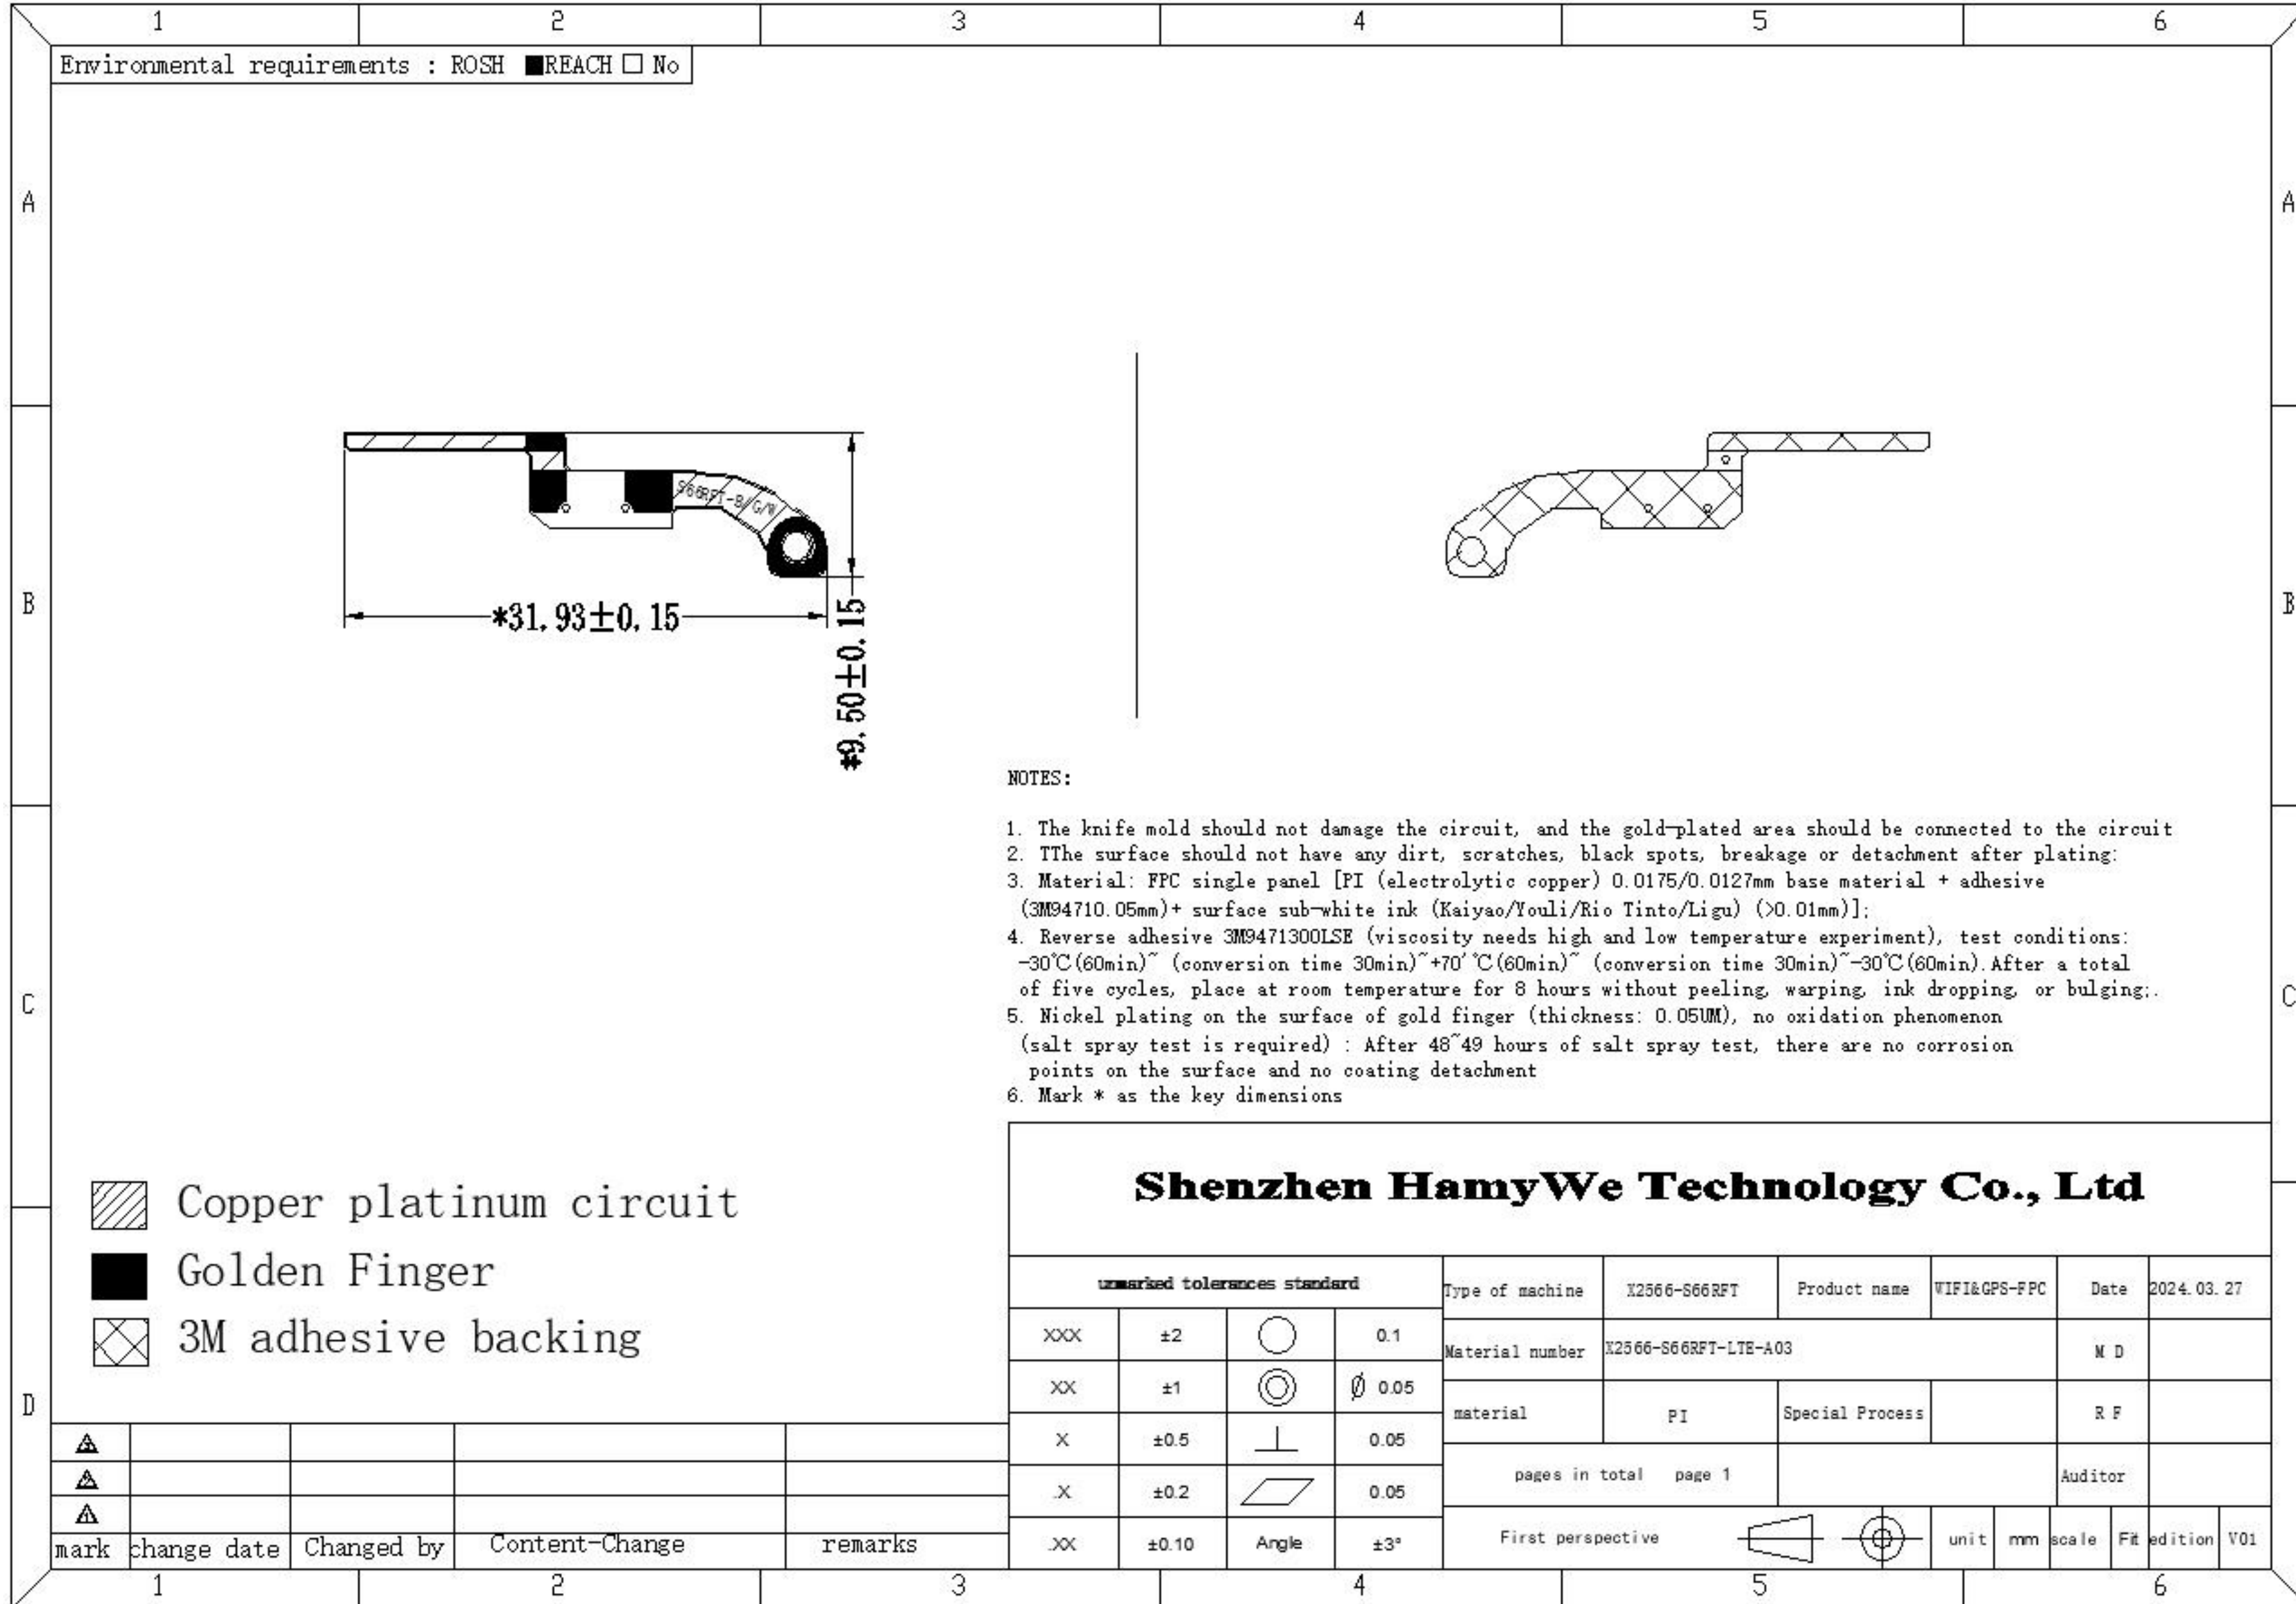

Important Instruction



1

Please pay attention to whether the matching in the report has changed and whether the environmental treatment is feasible; This will directly affect the antenna performance, if you have any objections, please contact us in time;

2

If your machine has replacement materials, updated software, environmental processing changes, etc., you must provide the latest status of the machine to our company for verification in time;

3

If your machine needs to be sent to a third party for verification or inspection, it is best to provide the test machine to our company to test and verify OK before sending it for testing (because the consistency of the motherboard, environmental treatment, antenna assembly and so on will affect the antenna deviation).



THANKS FOR WATCHING

Phone: 0755-3688170
Add: 1st floor, Building B, Jinghang Industrial
Park, Liu xian 2nd Road, District 71, Bao'an, Shenzhen

