



# FCC Part 96.47 TEST REPORT

**FCC ID** : O57FLEX5G14X05  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : Yoga 5G 14Q8CX05\*\*\*\*\*, 81XE\*\*\*\*\*, Lenovo Flex 5G 14Q8CX05\*\*\*\*\*, 82AK\*\*\*\*\* (\* = 0~9, A~Z, a~z, “-“ or blank, for marketing use only, with no impact on RF compliance of the product)  
**Applicant** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
Section 304-305, Building No. 4, # 222, Meiyue Road,  
China (Shanghai) Pilot Free Trade Zone, Shanghai  
**Manufacturer** : Lenovo PC HK Limited  
23/F, Lincoln House, Taikoo Place, 979 King's Road,  
Quarry Bay, Hong Kong  
**Standard** : FCC Part 96.47

Equipment: Murata LBDD5WV1US-575 and HON LIN T99W175 tested inside of Lenovo Notebook Computer.

The product was received on Nov. 27, 2019 and testing was started from Dec. 30, 2019 and completed on Dec. 30, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applicable Standards.....	5
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>6</b>
2.1 Connection Diagram of Test System.....	6
<b>3 End User Device additional requirement .....</b>	<b>7</b>
3.1 Test Requirement .....	7
3.2 Test Procedure .....	7
3.3 Test Result.....	8
<b>4 List of Measuring Equipment.....</b>	<b>10</b>
<b>Appendix A Test Setup Photo</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3	96.47	End User Device additional requirement	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: William Chen

Report Producer: Yimin Ho



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	Yoga 5G 14Q8CX05*****, 81XE*****, Lenovo Flex 5G 14Q8CX05*****, 82AK***** (* = 0~9, A~Z, a~z, "-" or blank, for marketing use only, with no impact on RF compliance of the product)
FCC ID	O57FLEX5G14X05
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/RFID/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Murata LBDD5WV1US-575 and HON LIN T99W175 tested inside of Lenovo Notebook Computer.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	DFS02-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.


## 1.4 Applicable Standards

- ♦ FCC Part 96.47
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v02
- ♦ WINNF-TS-0122-V1.0.1 CBRS CBSD Test Specification

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Connection Diagram of Test System

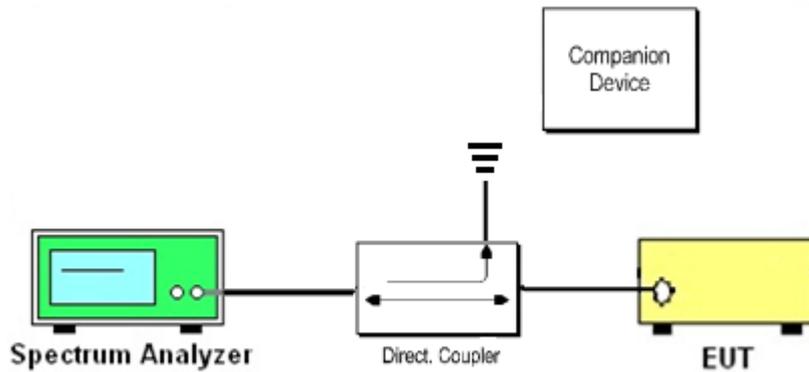

The companion device is certified CBRS (FCC ID: S9GQ910US00)



### 3 End User Device additional requirement

#### 3.1 Test Requirement

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

#### 3.2 Test Procedure

Following procedure can be done by applying WINNF-TS-0122-V1.0.1 CBRS CBSD Test Specification, use the certified Ruckus CBSD (FCC ID: S9GQ910US00) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):


1. Setup with frequency 3600-3620MHz and power level 7dBm/MHz
2. Enable AP service from Ruckus Cloud management
3. Check EUD Tx Frequency and power
4. Disable AP service from Ruckus Cloud management
  - a. Check EUD stops transmission within 10seconds.
5. Setup with 3670-3690MHz & power level 17dBm/MHz
6. Enable AP service from Ruckus Cloud management
7. Check EUD Tx Frequency and power
8. Disable AP service from Ruckus Cloud management
  - a. Check EUD stops transmission within 10seconds.



### 3.3 Test Result


[Step 1] Setup with frequency 3600-3620MHz and power level 7dBm/MHz

[Step 3] Check EUD Tx Frequency and power

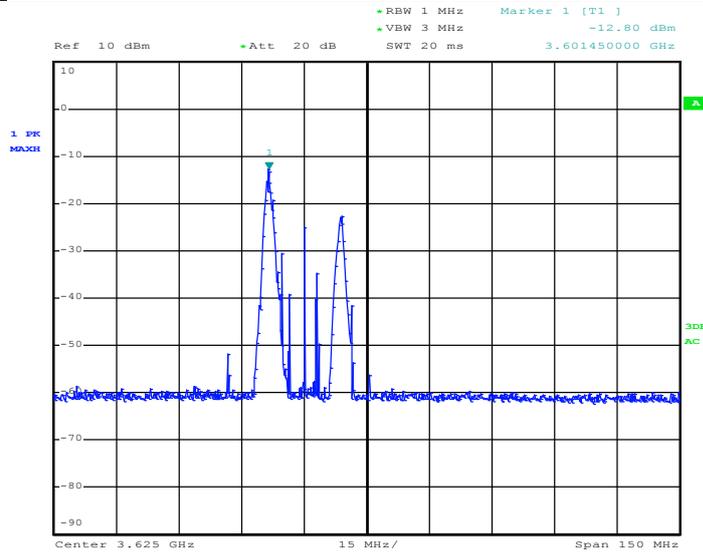

Date: 30.DEC.2019 09:27:31

[Step 4.a.] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.

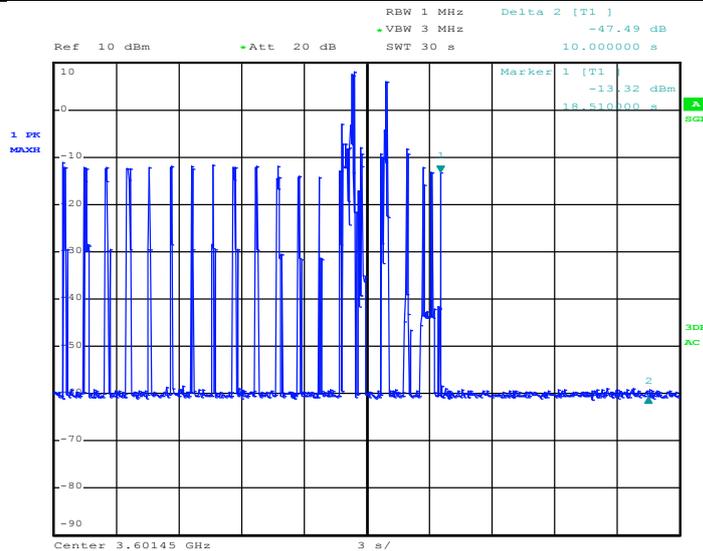


Date: 30.DEC.2019 09:30:51



[Step 5] Setup with 3670-3690MHz & power level 17dBm/MHz


[Step 7] Check EUD Tx Frequency and power

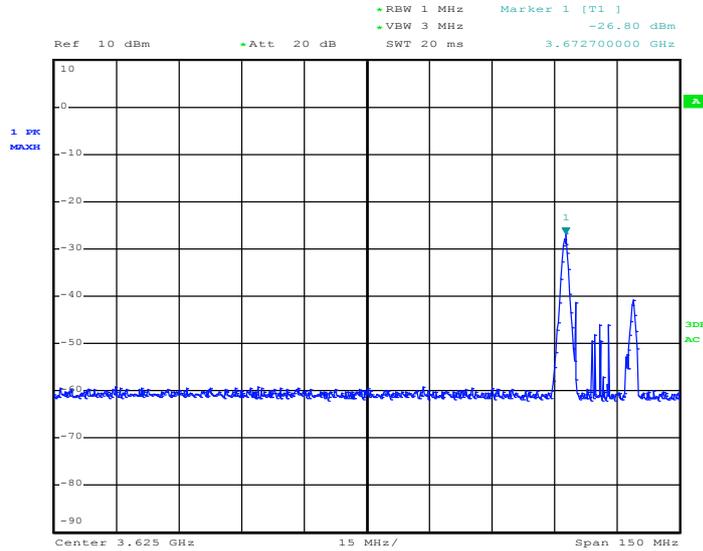

Date: 30.DEC.2019 09:47:53

[Step 8.a.] After changing the frequency and power level,

The module (EUT) discontinues operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD. Test result is PASS.

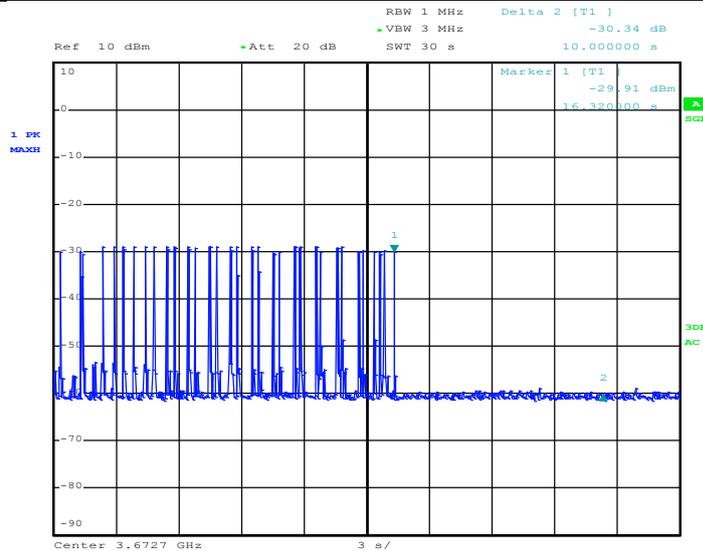

Date: 30.DEC.2019 09:50:23



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Oct. 24, 2019	Dec. 30, 2019	Oct. 23, 2020	DFS02-HY