




## TEST REPORT FCC PART 15.209

<b>Report Reference No.</b> ..... :	<b>MTEB23080359 -R</b>	
<b>FCC ID</b> ..... :	<b>2A6QM-WMS10-121</b>	
Compiled by ( position+printed name+signature)..:	File administrators Alisa Luo	
Supervised by ( position+printed name+signature)..:	Test Engineer Sunny Deng	
Approved by ( position+printed name+signature)..:	Manager Yvette Zhou	
Date of issue..... :	<b>Aug. 31, 2023</b>	
<b>Representative Laboratory Name. : Shenzhen Most Technology Service Co., Ltd.</b>		
Address..... :	No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.	
<b>Applicant's name..... : Shenzhen Romoss Technology Co.,Ltd</b>		
Address..... :	Room1601, BLOCK B, Building 7,Shenzhen International Innovation Valley, Dashi 1st Road Xili community, Xili Street, Nanshan , Shenzhen, Guangdong, P.R.China	
<b>Test specification/ Standard..... : FCC Rules and Regulations Part 15 Subpart C (Section 15.209), ANSI C63.10: 2013</b>		
TRF Originator..... :	Shenzhen Most Technology Service Co., Ltd.	
<b>Shenzhen Most Technology Service Co., Ltd. All rights reserved.</b>		
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.		
<b>Test item description..... : Wireless Power Bank</b>		
Trade Mark..... :	ROMOSS	
Manufacturer..... :	Shenzhen Vaco New Material Technology Co.,Ltd	
Model/Type reference..... :	WMS10-121	
Modulation Type..... :	ASK	
Operation Frequency..... :	110-205KHz	
Rating..... :	Input:5V = 2A or 9V=2A(Lightning 1); Input:5V=3A or 9V=2A(Lightning) Input:5V=3A or 9V=2A(Type-C) Output:5V= 3A or 9V=2.22A or 12V=1.67A (Lightning) Output: 5V=3A or 9V=2.22A or 12V=1.67A (Type-C) Wireless output:15W(MAX); Total output:15W(MAX)	
Hardware Version .....	WMS10-A V1.1-20230423	
Software Version .....	MCU/FT61E14F/CS=0X9B1A/MSOP10/WMS10/ruizhen	
Result..... :	<b>PASS</b>	

**TEST REPORT**

Equipment under Test : Wireless Power Bank

Model /Type : WMS10-121

Series models: N/A

Remark: N/A

Applicant : **Shenzhen Romoss Technology Co.,Ltd**

Address : Room1601, BLOCK B, Building 7,Shenzhen International Innovation Valley, Dashi 1st Road Xili community, Xili Street, Nanshan , Shenzhen, Guangdong, P.R.China

Manufacturer : **Shenzhen Vaco New Material Technology Co.,Ltd**

Address : Room 40109, building 1,Huahan Science and Technology Industrial Park, 19 Qiyun West Road, Heping Community, Pingshan Street, Pingshan district, Shenzhen City

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1. REVISION HISTORY .....</b>	<b>4</b>
<b>2. TEST STANDARDS .....</b>	<b>5</b>
<b>3. SUMMARY .....</b>	<b>6</b>
3.1. General Remarks .....	6
3.2. Product Description .....	6
3.3. Equipment Under Test .....	6
3.4. Short description of the Equipment under Test (EUT) .....	6
3.5. EUT operation mode .....	7
3.6. Block Diagram of Test Setup .....	7
3.7. Test Item (Equipment Under Test) Description* .....	7
3.8. Auxiliary Equipment (AE) Description .....	7
3.9. Antenna Information* .....	7
3.10. EUT configuration .....	7
3.11. Modifications .....	8
<b>4. TEST ENVIRONMENT .....</b>	<b>9</b>
4.1. Address of the test laboratory .....	9
4.2. Environmental conditions .....	9
4.3. Test Description .....	10
4.4. Statement of the measurement uncertainty .....	10
4.5. Equipments Used during the Test .....	11
<b>5. TEST CONDITIONS AND RESULTS .....</b>	<b>12</b>
5.1. AC POWER CONDUCTED EMISSION .....	12
5.2. RADIATED EMISSION .....	15
5.3. ANTENNA REQUIREMENT .....	21
<b>6. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>22</b>
<b>7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>23</b>

## 1. Revision History

Revision	Issue Date	Revisions	Revised By
00	2023.08.31	Initial Issue	Alisa Luo

## **2. TEST STANDARDS**

The tests were performed according to following standards:

The tests were performed according to following standards:

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices  
FCC Rules and Regulations Part 15 Subpart C (Section 15.207): Conducted limits.  
FCC Rules and Regulations Part 15 Subpart C (Section 15.209): Radiated emission limits; general requirements.

### 3. SUMMARY

#### 3.1. General Remarks

Date of receipt of test sample	:	2023.08.17
Testing commenced on	:	2023.08.18
Testing concluded on	:	2023.08.31

#### 3.2. Product Description

Product Name:	Wireless Power Bank
Model/Type reference:	WMS10-121
Power Supply:	Input:5V = 2A or 9V= 2A(Lightning 1); Input:5V= 3A or 9V= 2A(Lightning) Input:5V= 3A or 9V= 2A(Type-C)
Testing sample ID:	MTYP02627
Modulation:	Induction
Operation frequency:	110-205KHz
Antenna type:	Coil Antenna

#### 3.3. Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input type="radio"/> Other (specified in blank below)	

Input:5V= 3A or 9V= 2A(Type-C)

#### 3.4. Short description of the Equipment under Test (EUT)

This is a Wireless Power Bank For more details, refer to the user's manual of the EUT.

### 3.5. EUT operation mode

Test Item	Test Modes	Test Voltage
Conducted Emission	Full load mode	DC9V/2A,DC5V/3A
	Half load mode	DC9V/2A,DC5V/3A
	Null load mode	DC9V/2A,DC5V/3A
	Full load mode (Wireless Output 5W) +Full load mode(Wired charging mode)	DC9V/2A,DC5V/3A
Radiated Emission	Full load mode	DC9V/2A,DC5V/3A
	Half load mode	DC9V/2A,DC5V/3A
	Null load mode	DC9V/2A,DC5V/3A
	Full load mode (Wireless Output 5W) +Full load mode(Wired charging mode)	DC9V/2A,DC5V/3A

Note:The mode is a was the worst case ande only the dato of the worst case record in this report.

### 3.6. Block Diagram of Test Setup



### 3.7. Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	/	/	/	/	/
EUT B	/	/	/	/	/

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8. Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	Wireless load	/	/	/

### 3.9. Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	/	Coil Antenna	---	/
Antenna 2	/	/	/	/	/

\*: declared by the applicant.

### 3.10. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - Supplied by the lab

<input type="radio"/>	ADAPTER	M/N:	
		Manufacturer:	

### 3.11. Modifications

No modifications were implemented to meet testing criteria.



## 4. TEST ENVIRONMENT

### 4.1. Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Registration No.: 0031192610**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2. Environmental conditions

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

### 4.3. Test Description

FCC and IC Requirements		
FCC Part 15.203	Antenna Requirement	PASS
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.209	Radiated emission; Radiated Spurious Emissions	PASS

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5. Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2023/03/17	1 Year

Note: The Cal.Interval was one year.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. AC Power Conducted Emission

#### TEST CONFIGURATION

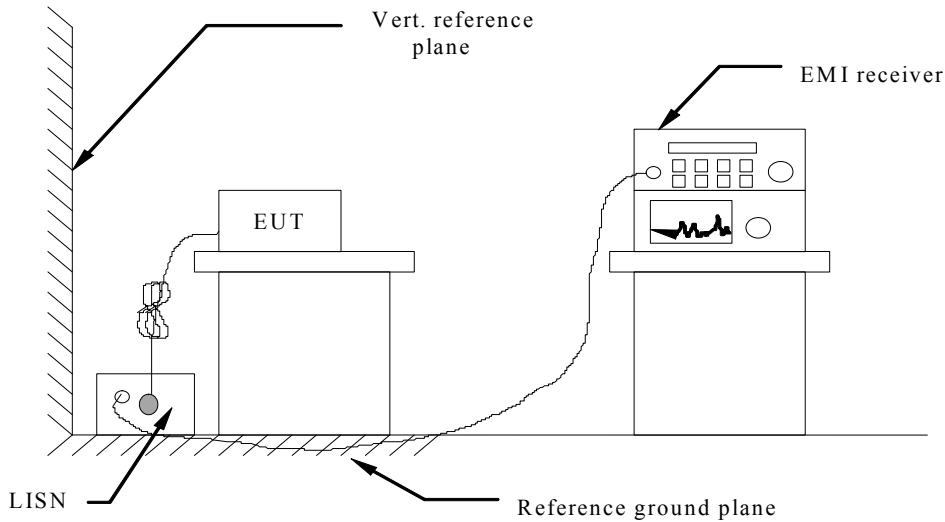

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC5V power, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For unintentional device, according to RSS Gen 8.8 and § 15.207(a) Line Conducted Emission Limits is as following:


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Pass---The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

(Test mode: Full load mode (Wireless Output 5W) +Full load mode(Wired charging mode))

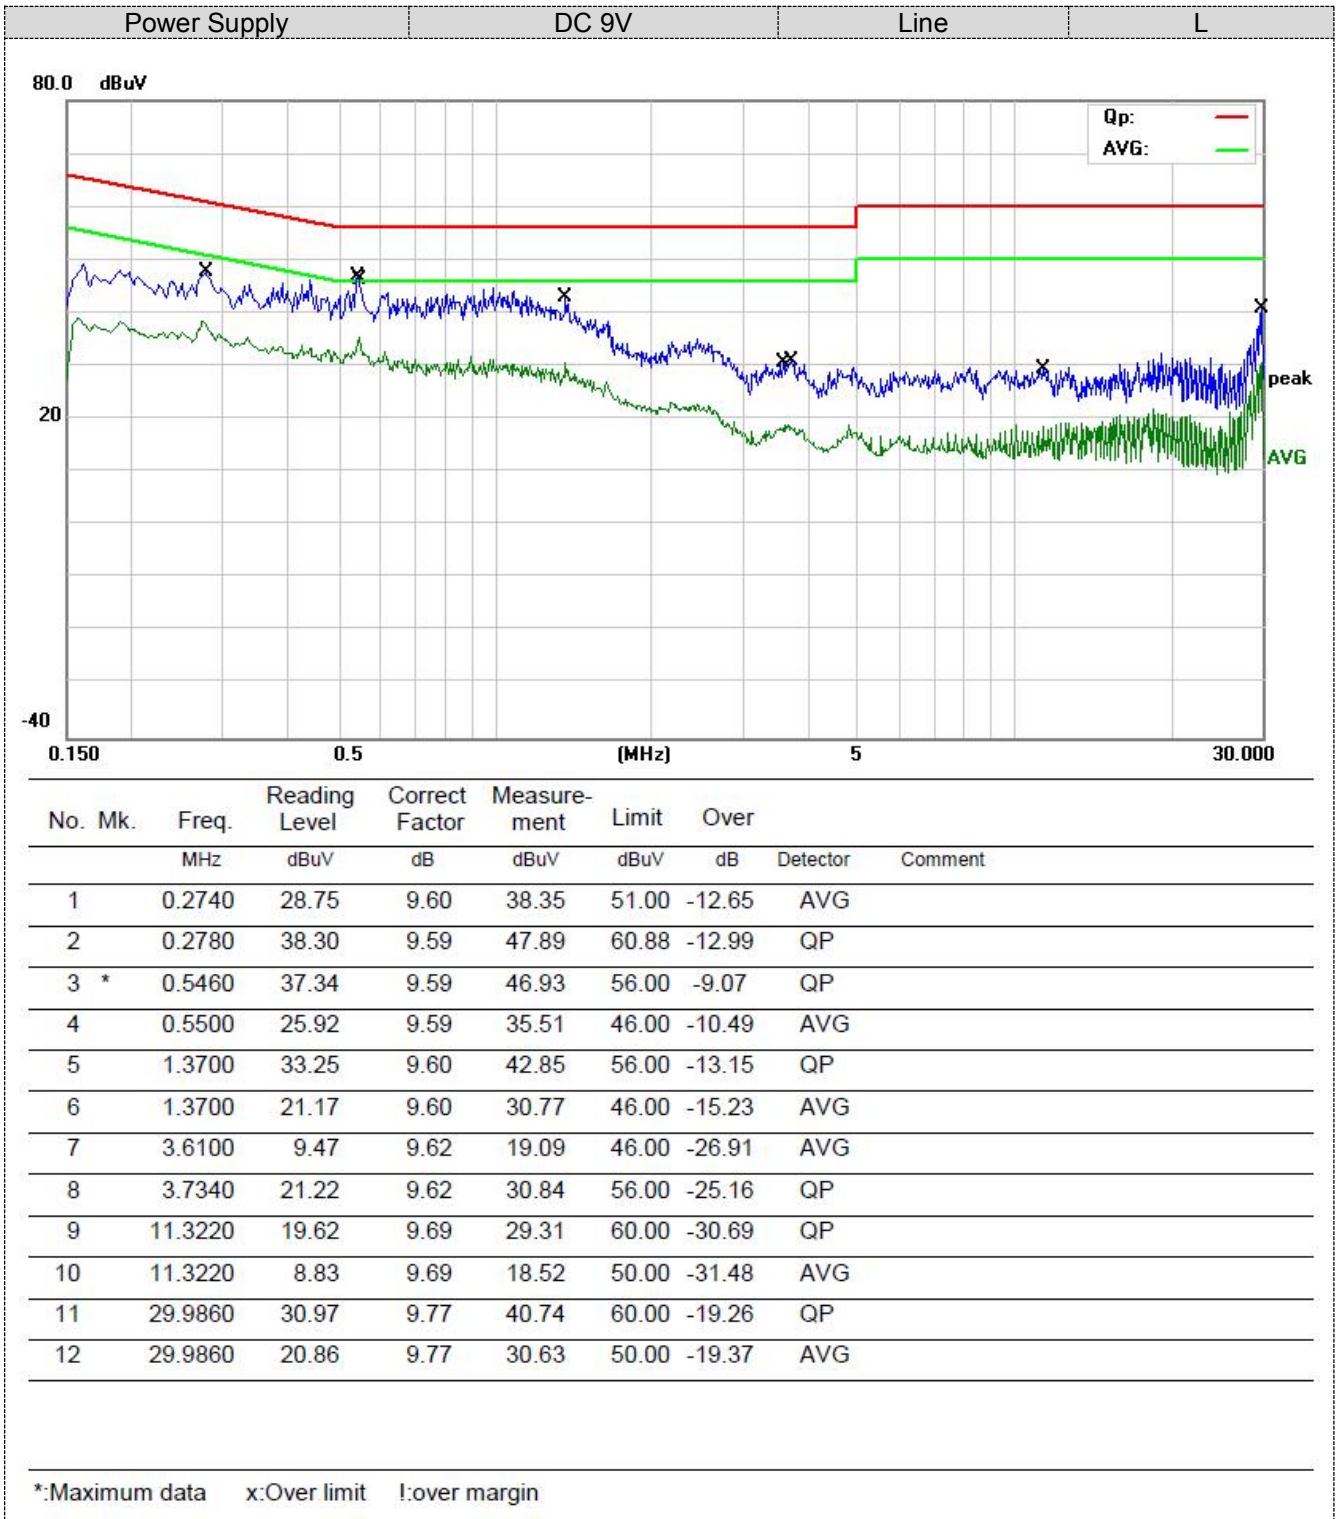

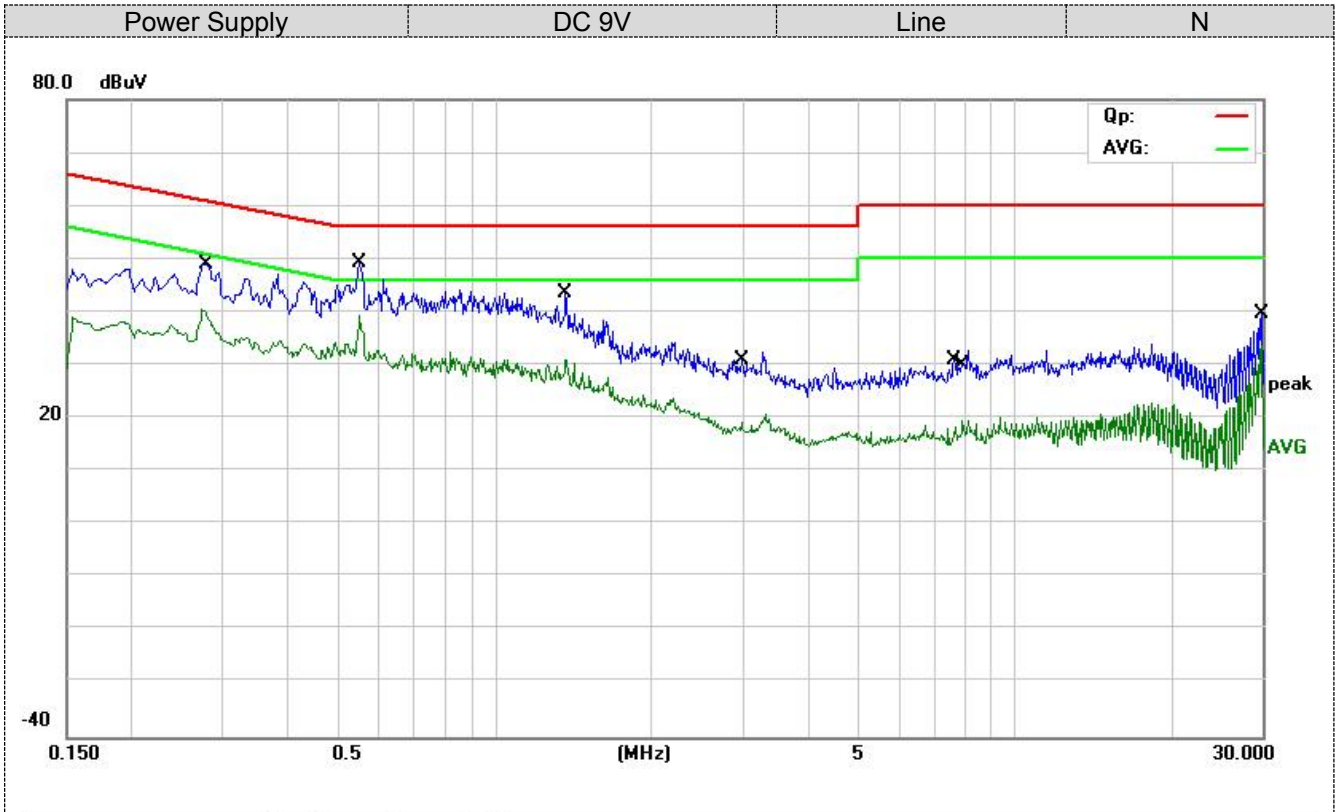


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2740	30.84	9.60	40.44	51.00	-10.56	AVG	
2		0.2780	39.40	9.59	48.99	60.88	-11.89	QP	
3		0.5500	39.63	9.59	49.22	56.00	-6.78	QP	
4	*	0.5500	29.70	9.59	39.29	46.00	-6.71	AVG	
5		1.3700	33.88	9.60	43.48	56.00	-12.52	QP	
6		1.3780	21.39	9.60	30.99	46.00	-15.01	AVG	
7		2.9900	9.57	9.61	19.18	46.00	-26.82	AVG	
8		3.0060	21.33	9.61	30.94	56.00	-25.06	QP	
9		7.6740	21.28	9.66	30.94	60.00	-29.06	QP	
10		7.9460	9.90	9.66	19.56	50.00	-30.44	AVG	
11		29.9780	29.77	9.77	39.54	60.00	-20.46	QP	
12		29.9780	23.97	9.77	33.74	50.00	-16.26	AVG	

\*:Maximum data    x:Over limit    !:over margin


## 5.2. Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

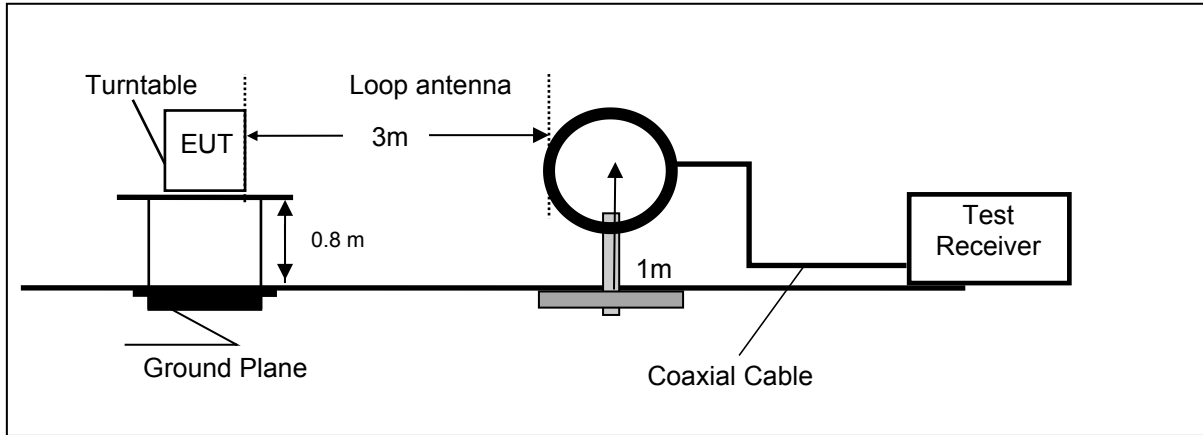

Frequency range 30MHz – 1000MHz

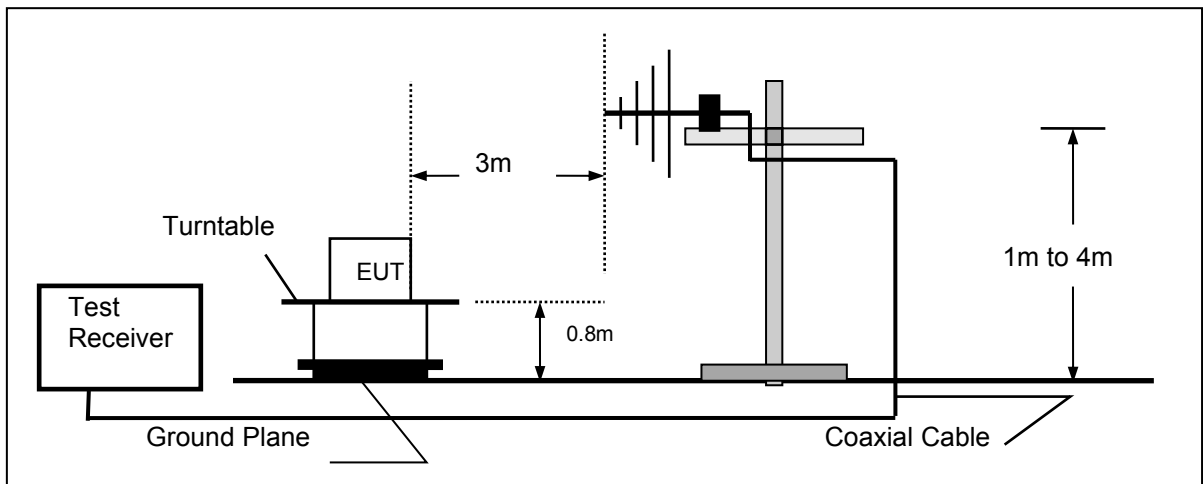

Frequency range above 1GHz-25GHz

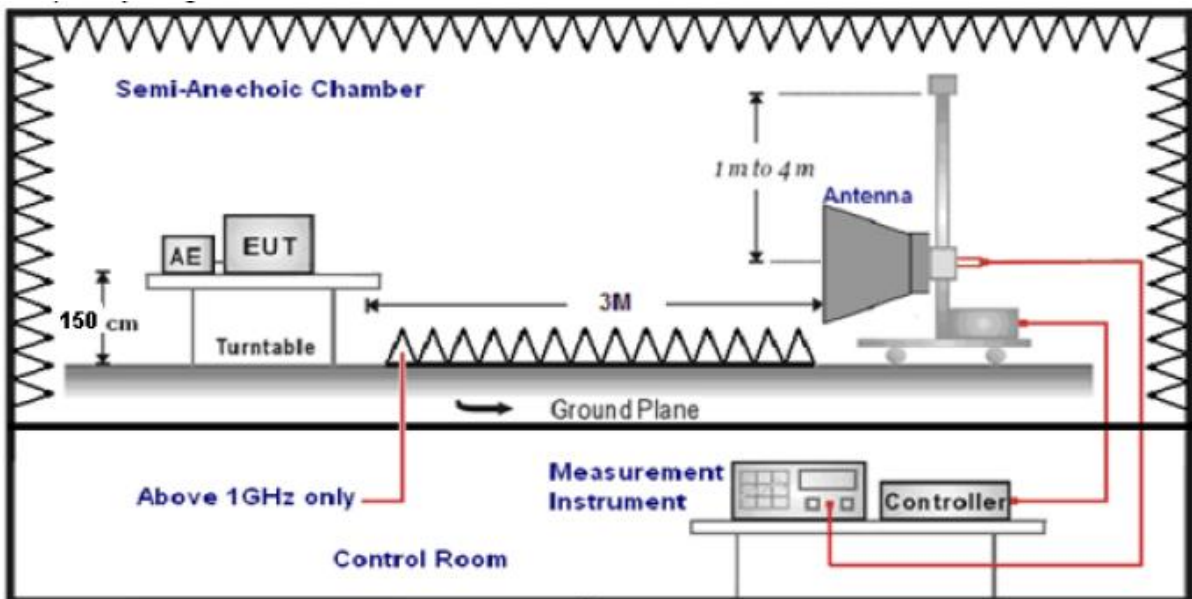

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

**FS = RA + AF + CL - AG**

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter’s fundamental emission

Unwanted emissions that fall into restricted bands shall comply with the limits specified in RSS-Gen; and Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.



Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

**Radiated Emissions****Below 9K~30MHz**

(Test mode: Full load mode)

Frequency	Polarization	Reading	Factor	Result	Limits Average	Magin	PASS/FAIL
(kHz)		(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
123.00	Face	65.76	20.55	86.01	105.80	20.05	PASS
123.00	Side	65.71	20.55	86.22	105.80	20.42	PASS
178.00	Face	68.04	20.55	88.59	102.59	13.98	PASS
178.00	Side	65.42	20.55	85.97	102.59	16.60	PASS
185.00	Face	61.70	20.55	82.25	102.26	20.01	PASS
185.00	Side	59.49	20.55	82.04	102.26	20.22	PASS

## Remark:

Frequency(MHz) = Emission frequency in MHz

Reading(dBv) = Uncorrected Analyzer/Receiver reading

Factor (dB/m)= Antenna factor + Cable Loss – Amplifier gain

Result(dBv/m) = Reading + Factor


Limit (dBv/m)= Limit stated in standard.

Note: No other emissions found between lowest internal used/generates frequencies to 30MHz. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.

**Radiated Emissions**


**For 30MHz-1GHz**

(Test mode: Full load mode (Wireless Output 5W) +Full load mode(Wired charging mode))

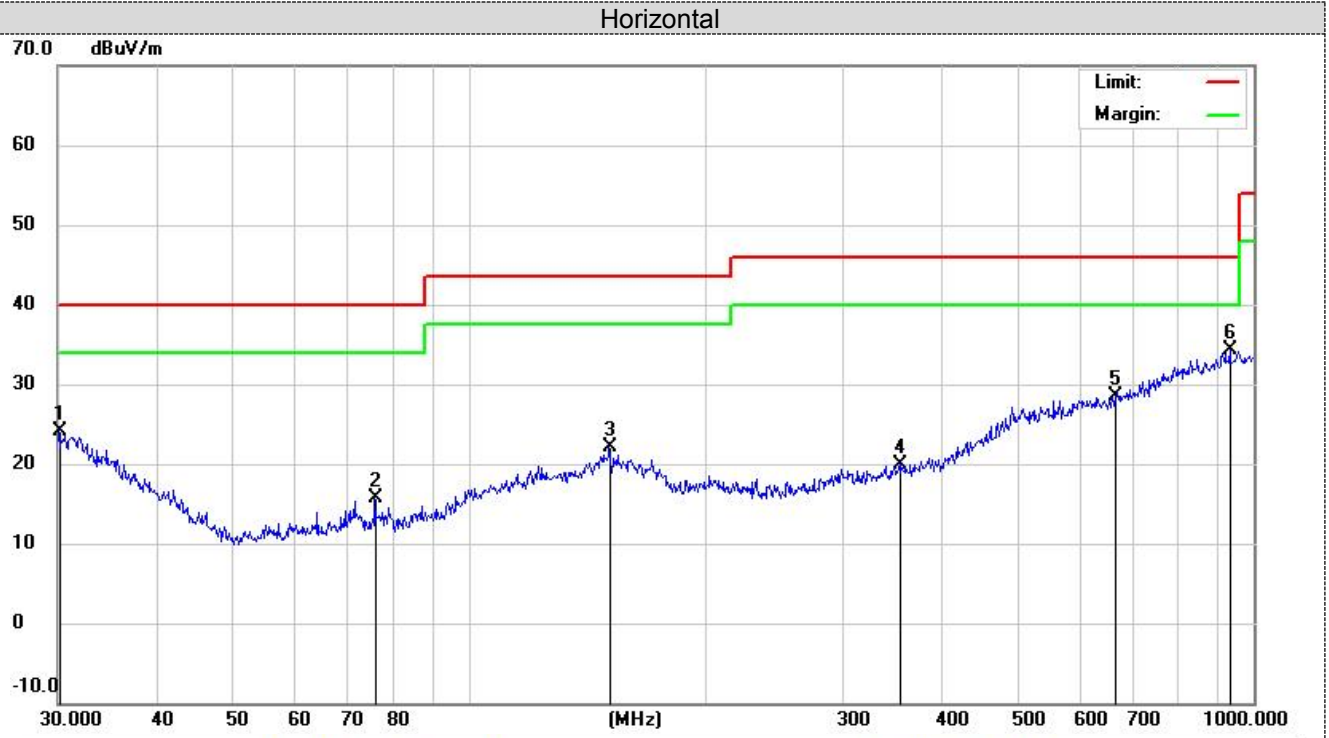

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.1054	3.20	20.83	24.03	40.00	-15.97	QP	200	20
2		75.9773	5.83	9.78	15.61	40.00	-24.39	QP	200	40
3		151.0666	4.54	17.66	22.20	43.50	-21.30	QP	200	90
4		354.1831	3.47	16.53	20.00	46.00	-26.00	QP	200	150
5		665.8035	3.77	24.66	28.43	46.00	-17.57	QP	200	240
6	*	932.2715	4.94	29.32	34.26	46.00	-11.74	QP	200	310

\*:Maximum data    x:Over limit    !:over margin

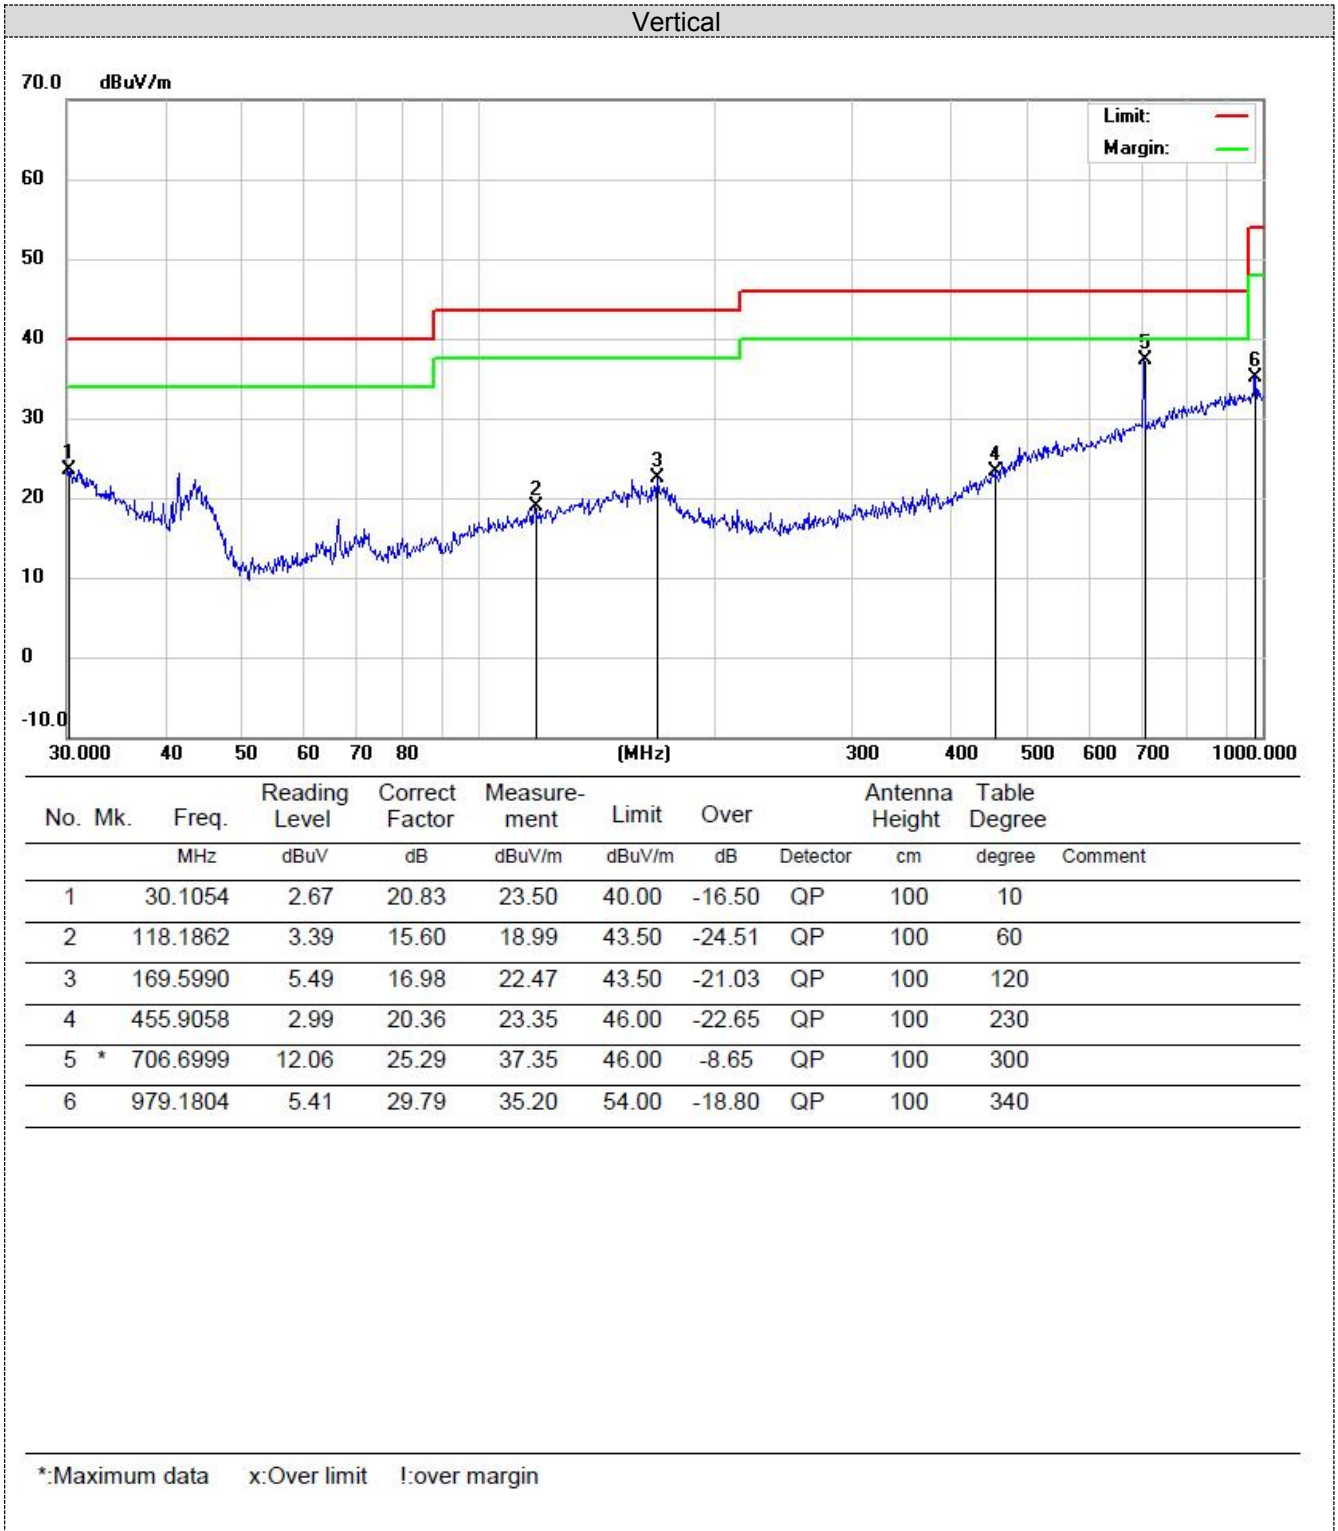

### 5.3. Antenna Requirement



#### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **Antenna Connected Construction**

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203 and RSS-Gen Section 6.8.

## 6. Test Setup Photos of the EUT

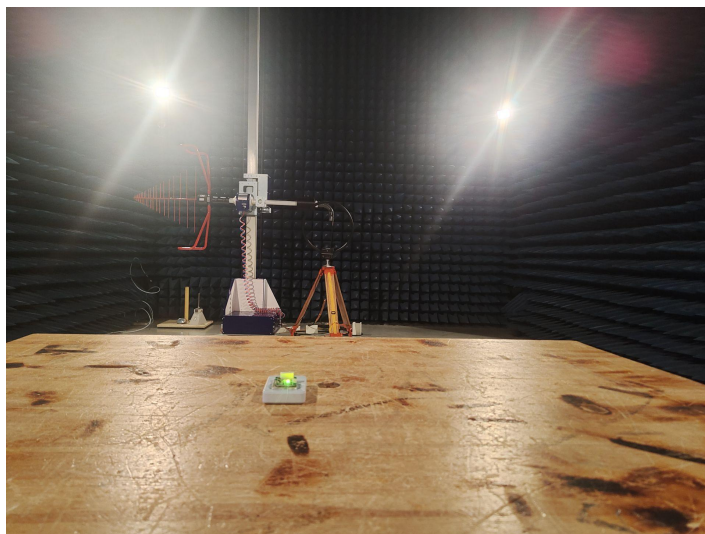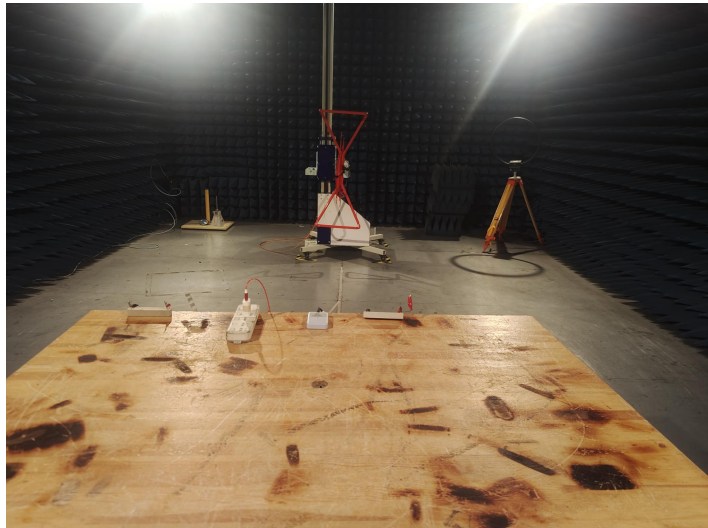

## **7. External and Internal Photos of the EUT**

See related photo report.

.....**End of Report**.....