



Test Report No.: W7L-P22030011-1RF01



# VARIANT FCC TEST REPORT

## (Part 15, Subpart C)



Applicant:	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer or Supplier:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China
Product:	Portable Tablet Computer
Brand Name:	Lenovo
Model Name:	TB132FU
FCC ID:	O57TB132FU
Date of tests:	Mar. 21, 2022 ~ May. 24, 2022

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: May. 24, 2022	 Date: May. 24, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	5
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
1.1 MEASUREMENT UNCERTAINTY.....	7
<b>2 GENERAL INFORMATION .....</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT .....	8
2.2 DESCRIPTION OF TEST MODES .....	10
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	11
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	13
2.4 DESCRIPTION OF SUPPORT UNITS.....	13
<b>3 TEST TYPES AND RESULTS.....</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT.....	14
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	14
3.1.2 TEST INSTRUMENTS.....	14
3.1.3 TEST PROCEDURES .....	14
3.1.4 DEVIATION FROM TEST STANDARD .....	15
3.1.5 TEST SETUP .....	15
3.1.6 EUT OPERATING CONDITIONS .....	15
3.1.7 TEST RESULTS .....	16
3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	18
3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	18
3.2.2 TEST INSTRUMENTS.....	19
3.2.3 TEST PROCEDURES .....	20
3.2.4 DEVIATION FROM TEST STANDARD .....	20
3.2.5 TEST SETUP .....	21
3.2.6 EUT OPERATING CONDITIONS .....	22
3.2.7 TEST RESULTS .....	23
3.3 NUMBER OF HOPPING FREQUENCY USED .....	30
3.3.1 LIMIT OF HOPPING FREQUENCY USED .....	30
3.3.2 TEST SETUP .....	30
3.3.3 TEST INSTRUMENTS.....	30
3.3.4 TEST PROCEDURES .....	31
3.3.5 DEVIATION FROM TEST STANDARD .....	31
3.3.6 TEST RESULTS .....	31
3.4 DWELL TIME ON EACH CHANNEL.....	32



3.4.1	LIMIT OF DWELL TIME USED .....	32
3.4.2	TEST SETUP .....	32
3.4.3	TEST INSTRUMENTS .....	32
3.4.4	TEST PROCEDURES .....	32
3.4.5	DEVIATION FROM TEST STANDARD .....	33
3.4.6	TEST RESULTS .....	33
<b>3.5</b>	<b>CHANNEL BANDWIDTH .....</b>	<b>34</b>
3.5.1	LIMITS OF CHANNEL BANDWIDTH .....	34
3.5.2	TEST SETUP .....	34
3.5.3	TEST INSTRUMENTS .....	34
3.5.4	TEST PROCEDURE .....	34
3.5.5	DEVIATION FROM TEST STANDARD .....	34
3.5.6	EUT OPERATING CONDITION .....	35
3.5.7	TEST RESULTS .....	35
<b>3.6</b>	<b>HOPPING CHANNEL SEPARATION .....</b>	<b>36</b>
3.6.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	36
3.6.2	TEST SETUP .....	36
3.6.3	TEST INSTRUMENTS .....	36
3.6.4	TEST PROCEDURES .....	36
3.6.5	DEVIATION FROM TEST STANDARD .....	36
3.6.6	TEST RESULTS .....	37
<b>3.7</b>	<b>MAXIMUM OUTPUT POWER .....</b>	<b>37</b>
3.7.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT .....	37
3.7.2	TEST SETUP .....	37
3.7.3	TEST INSTRUMENTS .....	37
3.7.4	TEST PROCEDURES .....	37
3.7.5	DEVIATION FROM TEST STANDARD .....	38
3.7.6	EUT OPERATING CONDITION .....	38
3.7.7	TEST RESULTS .....	39
3.7.7.1	MAXIMUM PEAK OUTPUT POWER .....	39
3.7.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE) .....	40
<b>3.8</b>	<b>OUT OF BAND MEASUREMENT .....</b>	<b>41</b>
3.8.1	LIMITS OF OUT OF BAND MEASUREMENT .....	41
3.8.2	TEST INSTRUMENTS .....	41
3.8.3	TEST PROCEDURE .....	41
3.8.4	DEVIATION FROM TEST STANDARD .....	41



**Test Report No.: W7L-P22030011-1RF01**

3.8.5	EUT OPERATING CONDITION .....	41
3.8.6	TEST RESULTS .....	41
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>42</b>
<b>5</b>	<b>MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB 43</b>	
<b>6</b>	<b>APPENDIX .....</b>	<b>44</b>



Test Report No.: W7L-P22030011-1RF01

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22030011RF01	Original release	Apr. 06, 2022
W7L-P22030011-1RF01	Based on the original report W7L-P22030011RF01 add to 2 <sup>nd</sup> the antenna, Verify the RSE worst case.	May. 24, 2022

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C		
STANDARD	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Compliance
15.247(a)(1) (iii)	Dwell Time on Each Channel	Compliance
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Compliance
15.247(b)	Maximum Peak Output Power	Compliance
15.247(d)& 15.209	Transmitter Radiated Emissions	Compliance
15.247(d)	Out of band Measurement	Compliance
15.203	Antenna Requirement	Compliance

### NOTE:

1. If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Lab Information Reference:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

#### Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Accredited Test Lab Cert 3939.01**

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Portable Tablet Computer
<b>BRAND NAME</b>	Lenovo
<b>MODEL NAME</b>	TB132FU
<b>NOMINAL VOLTAGE</b>	3.87Vdc (Li-ion, battery) 10Vdc (adapter)
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>MODULATION TYPE</b>	GFSK, 8DPSK, $\pi/4$ DQPSK
<b>OPERATING FREQUENCY</b>	2402MHz~2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>MAX. OUTPUT POWER</b>	7.48mW (Max. Measured)
<b>ANTENNA TYPE</b>	PIFA Antenna with 1.0dBi gain
<b>HW VERSION</b>	Lenovo Tablet TB132FU
<b>SW VERSION</b>	Lenovo TB132FU_RF01_220315
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB cable 1: non-shielded cable, with w/o ferrite core, 1.5 meter USB cable 2: non-shielded cable, with w/o ferrite core, 1.5 meter

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



**List of Accessory:**

ACCESSORIES	BRAND	MODEL	SPECIFICATION
AC Adapter 1	Chengyang	MC-201	I/P: 100-240Vac, 0.7A, O/P: 10.0Vdc, 2.0A
AC Adapter 2	Acbel	MC-201	I/P: 100-240Vac, 0.7A, O/P: 10.0Vdc, 2.0A
USB Cable 1	Jieye	JY-C03-408	Signal Line, 1.5meter
USB Cable 2	Saibao	SLQ-A195A	Signal Line, 1.5meter
Keyboard	Lenovo	KB686U	/
Stylus Pen	Lenovo	Lenovo BTP-131	/
Battery 1	Lenovo/SC UD	L22D2P31	3.87VDC,8200 mAh
Battery 2	Lenovo/Su nwoda	L22D2P31	3.87VDC,8200 mAh
Type C audio line	Saibao	SLQ-A197A	0.1m

NOTE: BT test in the engineer mode, power setting at “ MAXIMUM CONDUCTED OUTPUT POWER”, the steps for entering engineering mode are as follows:

1. In the finger plate, dial the code for entering Engineer mode: \*###3646633###\*
2. EngineerMode->CONNECTIVITY->BT->Tx

## 2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

## 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

## 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission

**RE≥1G**: Radiated Emission above 1GHz  
**APCM**: Antenna Port Conducted Measurement

### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	39	FHSS	8DPSK	3DH5

### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	39	FHSS	8DPSK	3DH5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH1/DH3/DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH1/2DH3/2DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH1/3DH3/3DH5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	23deg. C, 70%RH	DC10V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC10V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC10V By Adapter	James Fu
APCM	25deg. C, 60%RH	DC 3.87V By Battery	James Fu



### 2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. Section 15.247**  
**ANSI C63.10-2013**

- NOTE:**
1. All test items have been performed and recorded as per the above standards.
  2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

### 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thnikpad L440	R90FTFKN	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 15,22	Feb. 14,23
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 04,22	Mar. 03,23

- NOTE:**
1. The test was performed in CE shielded room.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

##### 3.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

### 3.1.5 TEST SETUP

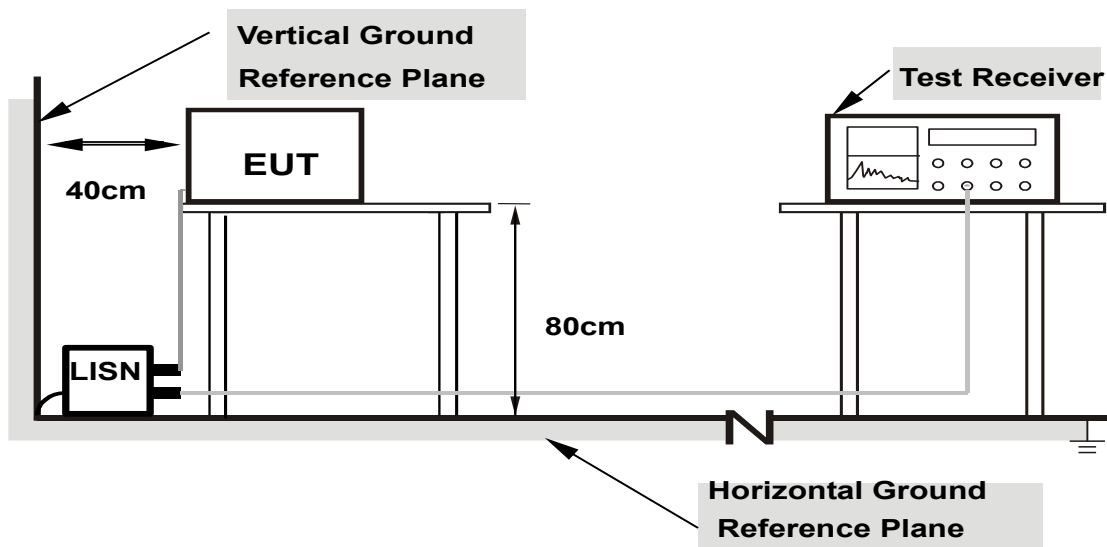

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

### 3.1.7 TEST RESULTS


#### CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	31.38	56.00	24.62	L1	ON	9.7
0.150000	45.48	---	66.00	20.52	L1	ON	9.7
0.380000	---	20.37	48.28	27.91	L1	ON	9.7
0.380000	32.49	---	58.28	25.79	L1	ON	9.7
0.512000	---	20.45	46.00	25.55	L1	ON	9.7
0.512000	37.63	---	56.00	18.37	L1	ON	9.7
0.696000	---	17.79	46.00	28.21	L1	ON	9.7
0.696000	30.22	---	56.00	25.78	L1	ON	9.7
1.848000	---	20.66	46.00	25.34	L1	ON	9.7
1.848000	30.36	---	56.00	25.64	L1	ON	9.7
25.792000	---	33.41	50.00	16.59	L1	ON	9.8
25.792000	43.48	---	60.00	16.52	L1	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Limit value - Emission level
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

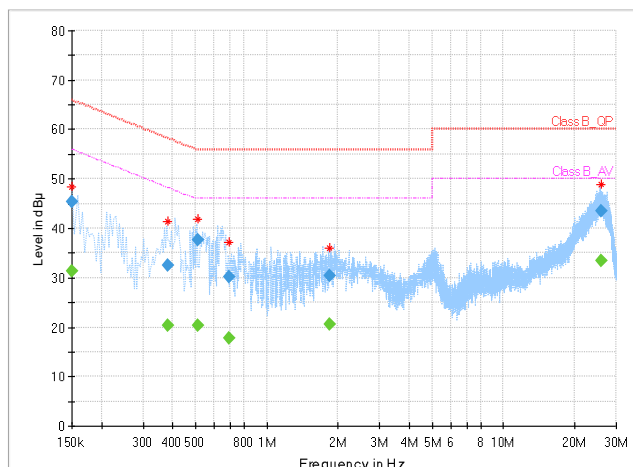






**BUREAU  
VERITAS**

**Test Report No.: W7L-P22030011-1RF01**

<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	26deg. C, 51%RH
<b>Tested By</b>	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.660000	---	23.80	46.00	22.20	N	ON	9.7
0.660000	36.34	---	56.00	19.66	N	ON	9.7
1.668000	---	27.83	46.00	18.17	N	ON	9.8
1.668000	37.07	---	56.00	18.93	N	ON	9.8
2.404000	---	27.06	46.00	18.94	N	ON	9.8
2.404000	35.77	---	56.00	20.23	N	ON	9.8
3.888000	---	24.97	46.00	21.03	N	ON	9.8
3.888000	33.39	---	56.00	22.61	N	ON	9.8
10.928000	---	24.97	50.00	25.03	N	ON	9.8
10.928000	33.09	---	60.00	26.91	N	ON	9.8
26.524000	---	32.95	50.00	17.05	N	ON	9.9
26.524000	42.77	---	60.00	17.23	N	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Limit value - Emission level
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

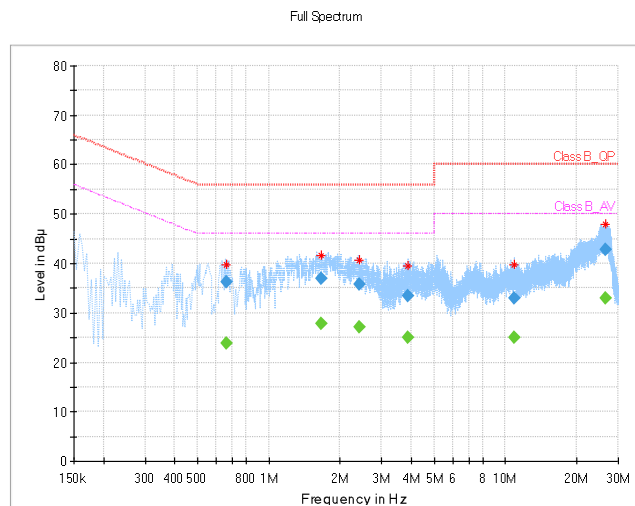

## 3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161964	Feb. 24,22	Feb. 23,23
Horn Antenna	ETS-LINDGREN	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,21	Apr. 26,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 26,22	Apr. 25,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,21	Apr. 29,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 29,22	Apr. 28,23
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 25,21	Aug. 24,22
Power Meter	Anritsu	ML2495A	1506002	Feb. 22,22	Feb. 21,23
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Power Sensor	Anritsu	MA2411B	1339352	May. 06,22	May. 05,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.05,21	Sep.04,22

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4 DEVIATION FROM TEST STANDARD


No deviation.

### 3.2.5 TEST SETUP


#### <Frequency Range 9KHz~30MHz >

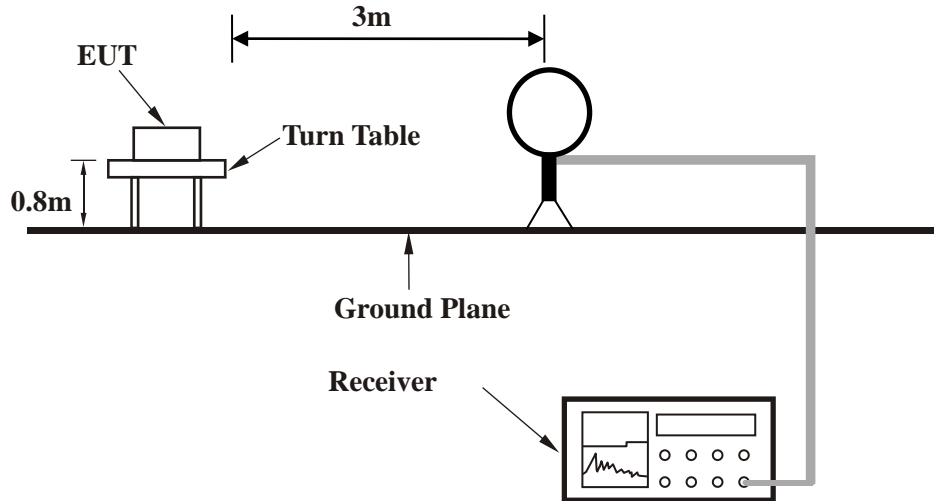

#### < Frequency Range 30MHz~1GHz >

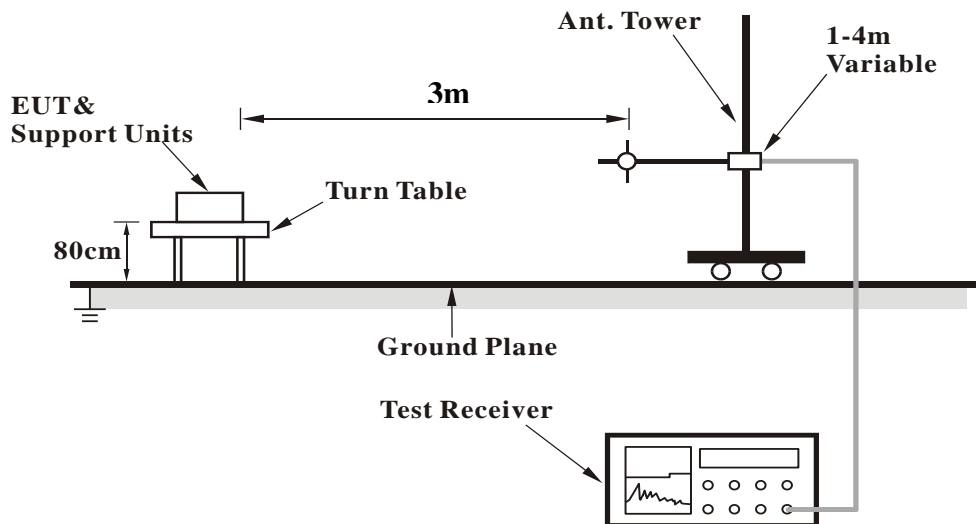

<Frequency Range above 1GHz>

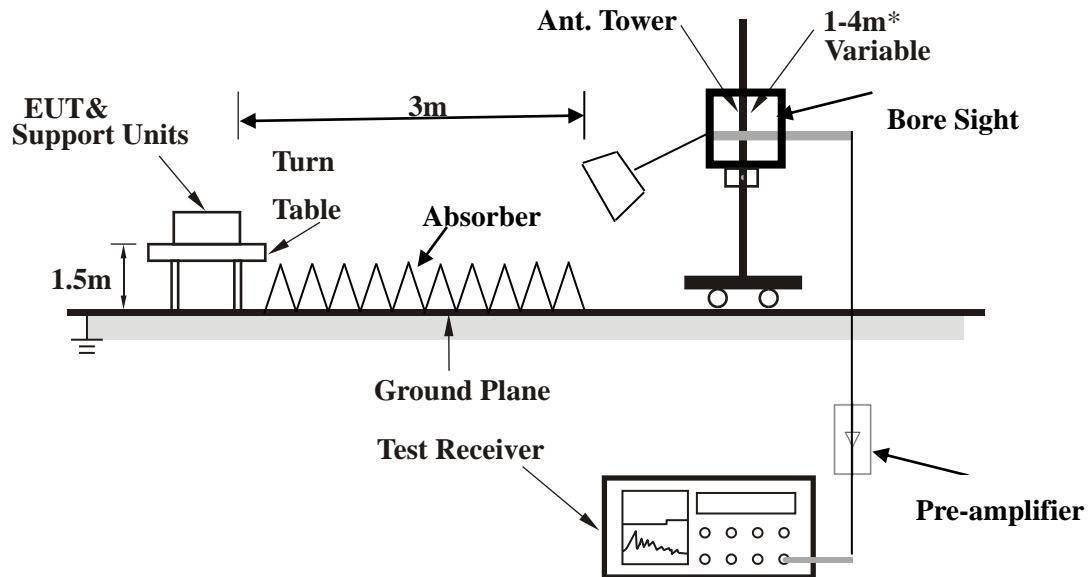

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



**BUREAU  
VERITAS**

Test Report No.: W7L-P22030011-1RF01

### 3.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


BT\_8DPSK

<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
41.64	32.56	58.46	40.00	-7.44	11.97	0.37	38.24	200	360	QP
68.80	22.28	51.34	40.00	-17.72	8.16	0.47	37.69	200	360	QP
108.57	15.55	44.05	43.50	-27.95	8.84	0.55	37.89	200	360	QP
142.52	17.81	45.57	43.50	-25.69	9.30	0.64	37.70	200	360	QP
188.11	18.93	44.34	43.50	-24.57	11.32	0.72	37.45	200	360	QP
292.87	20.82	43.34	46.00	-25.18	13.80	0.90	37.22	200	360	QP

#### REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

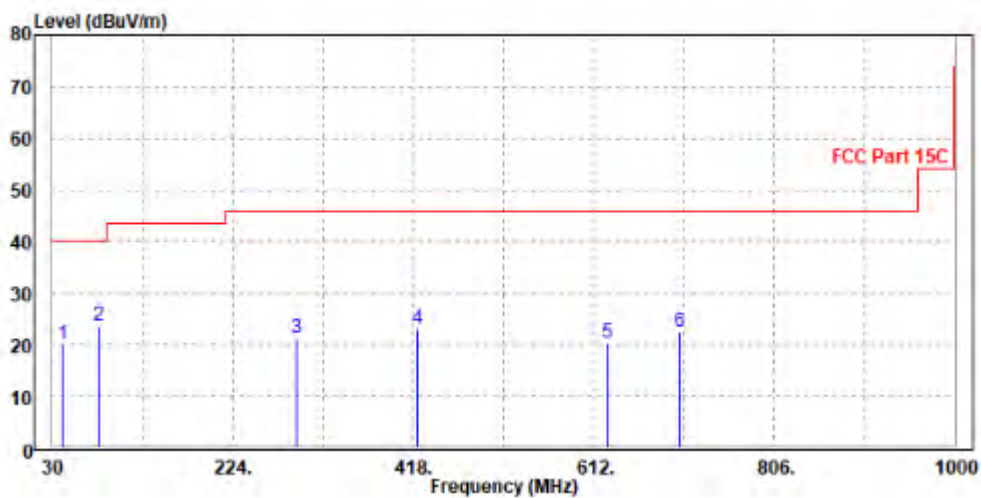



**BUREAU  
VERITAS**


Test Report No.: W7L-P22030011-1RF01

<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
41.64	32.56	58.46	40.00	-7.44	11.97	0.37	38.24	200	360	QP
68.80	22.28	51.34	40.00	-17.72	8.16	0.47	37.69	200	360	QP
108.57	15.55	44.05	43.50	-27.95	8.84	0.55	37.89	200	360	QP
142.52	17.81	45.57	43.50	-25.69	9.30	0.64	37.70	200	360	QP
188.11	18.93	44.34	43.50	-24.57	11.32	0.72	37.45	200	360	QP
292.87	20.82	43.34	46.00	-25.18	13.80	0.90	37.22	200	360	QP

**REMARKS:**

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

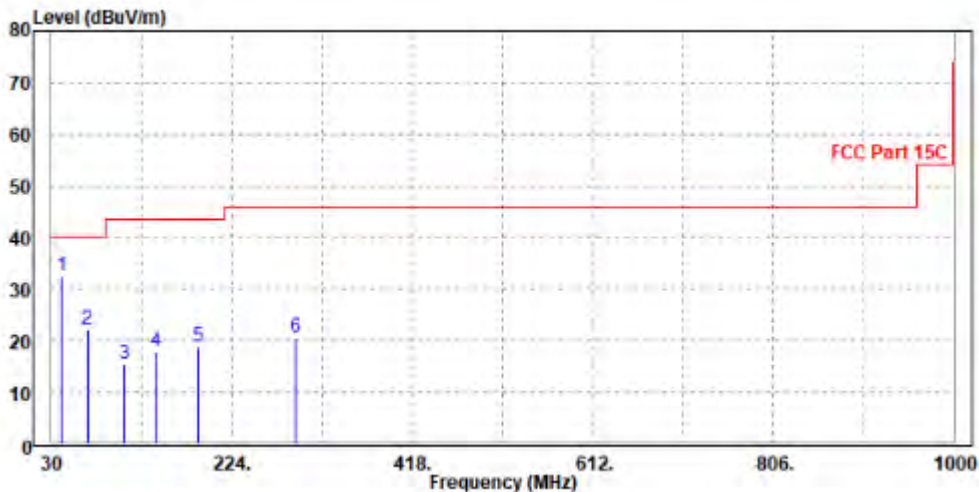





**ABOVE 1GHz WORST-CASE DATA:**

**Note:** 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit is not recorded

1GHz – 25GHz: (Scan with GFSK, π/4-DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)

**BT\_8DPSK**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.13	60.89	74	-21.87	31.75	5.86	46.37	108	215	Peak
2390	44.32	53.08	54	-9.68	31.75	5.86	46.37	108	215	Average
2402	102.56	111.26	/	/	31.79	5.88	46.37	108	215	Peak
2402	102.16	110.86	/	/	31.79	5.88	46.37	108	215	Average
2483.5	52.41	60.74	74	-21.59	32.05	5.99	46.37	108	215	Peak
2483.5	44.39	52.72	54	-9.61	32.05	5.99	46.37	108	215	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.89	61.26	74	-21.11	32.14	5.86	46.37	105	170	Peak
2390	45.61	53.98	54	-8.39	32.14	5.86	46.37	105	170	Average
2402	95.14	103.47	/	/	32.16	5.88	46.37	105	170	Peak
2402	94.72	103.05	/	/	32.16	5.88	46.37	105	170	Average
2483.5	52.57	60.59	74	-21.43	32.36	5.99	46.37	105	170	Peak
2483.5	44.87	52.89	54	-9.13	32.36	5.99	46.37	105	170	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.92	59.68	74	-23.08	31.75	5.86	46.37	103	305	Peak
2390	43.61	52.37	54	-10.39	31.75	5.86	46.37	103	305	Average
2441	101.86	110.39	/	/	31.91	5.93	46.37	103	305	Peak
2441	101.28	109.81	/	/	31.91	5.93	46.37	103	305	Average
2483.5	52.54	60.87	74	-21.46	32.05	5.99	46.37	103	305	Peak
2483.5	44.96	53.29	54	-9.04	32.05	5.99	46.37	103	305	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.24	59.61	74	-22.76	32.14	5.86	46.37	110	165	Peak
2390	44.44	52.81	54	-9.56	32.14	5.86	46.37	110	165	Average
2441	94.78	102.96	/	/	32.26	5.93	46.37	110	165	Peak
2441	94.47	102.65	/	/	32.26	5.93	46.37	110	165	Average
2483.5	51.45	59.47	74	-22.55	32.36	5.99	46.37	110	165	Peak
2483.5	44.65	52.67	54	-9.35	32.36	5.99	46.37	110	165	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2441MHz: Fundamental frequency.



Test Report No.: W7L-P22030011-1RF01

<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.42	60.18	74	-22.58	31.75	5.86	46.37	108	15	Peak
2390	43.81	52.57	54	-10.19	31.75	5.86	46.37	108	15	Average
2480	99.82	108.17	/	/	32.04	5.98	46.37	108	15	Peak
2480	99.29	107.64	/	/	32.04	5.98	46.37	108	15	Average
2483.5	51.78	60.11	74	-22.22	32.05	5.99	46.37	108	15	Peak
2483.5	46.31	54.64	54	-7.69	32.05	5.99	46.37	108	15	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.39	60.76	74	-21.61	32.14	5.86	46.37	105	170	Peak
2390	44.52	52.89	54	-9.48	32.14	5.86	46.37	105	170	Average
2480	94.07	102.11	/	/	32.35	5.98	46.37	105	170	Peak
2480	93.02	101.06	/	/	32.35	5.98	46.37	105	170	Average
2483.5	53.16	61.18	74	-20.84	32.36	5.99	46.37	105	170	Peak
2483.5	45.27	53.29	54	-8.73	32.36	5.99	46.37	105	170	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.




Test Report No.: W7L-P22030011-1RF01

**Worst case harmonic:**

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)


**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4876.000	40.70	43.87	74.00	-33.30	-3.17	Peak	Horizontal
2	4876.000	31.66	34.83	54.00	-22.34	-3.17	Average	Horizontal
3 PK	7323.000	45.72	43.64	74.00	-28.28	2.08	Peak	Horizontal
4 PP	7323.000	35.90	33.82	54.00	-18.10	2.08	Average	Horizontal

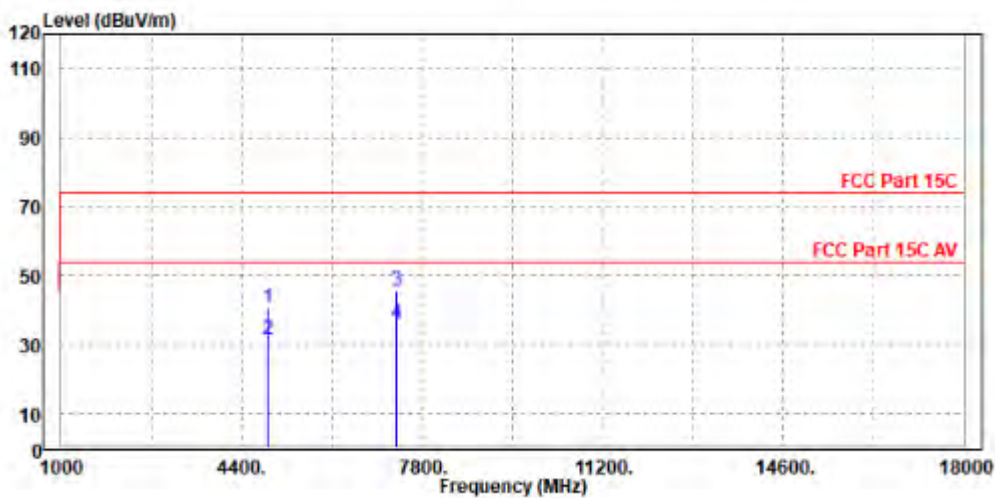

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4876.000	40.45	43.42	74.00	-33.55	-2.97	Peak	Vertical
2	4876.000	30.50	33.47	54.00	-23.50	-2.97	Average	Vertical
3	PK 7323.000	44.28	42.13	74.00	-29.72	2.15	Peak	Vertical
4	PP 7323.000	35.97	33.82	54.00	-18.03	2.15	Average	Vertical

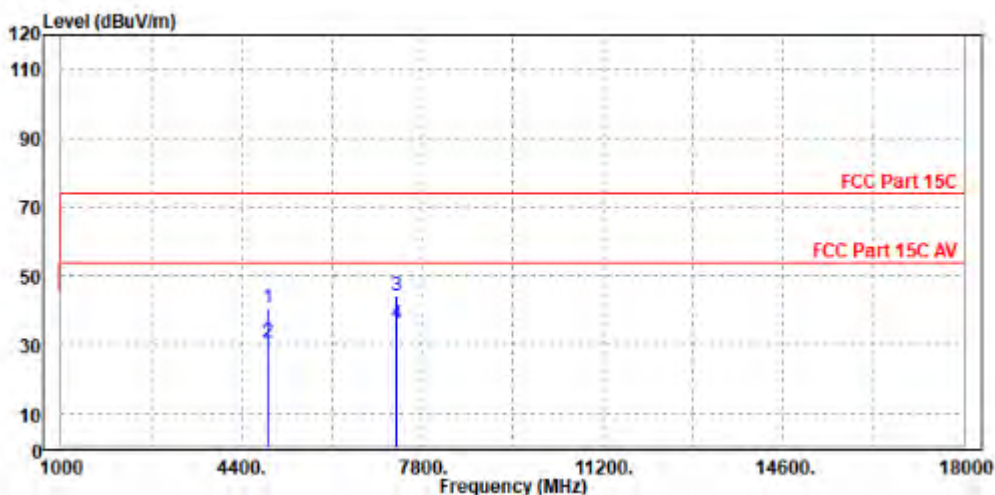

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.

### 3.3 NUMBER OF HOPPING FREQUENCY USED

#### 3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

#### 3.3.2 TEST SETUP

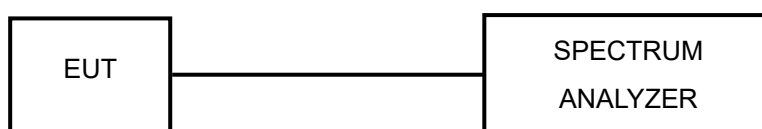

#### 3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 22,22	Feb. 21,23
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Apr. 26,21	Apr. 25,22
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Apr. 25,22	Apr. 24,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Feb. 24,22	Feb. 23,23
Power Sensor	ANRITSU	MA2411B	1339352	May. 07,21	May. 06,22
Power Sensor	ANRITSU	MA2411B	1339352	May. 06,22	May. 05,23

#### NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



Test Report No.: W7L-P22030011-1RF01

### 3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

### 3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.


Please Refer to Appendix Of this test report.

### 3.4 DWELL TIME ON EACH CHANNEL

#### 3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.4.2 TEST SETUP

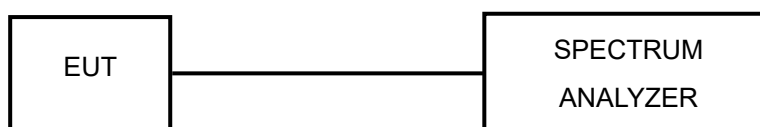

#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.





Test Report No.: W7L-P22030011-1RF01

### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4.6 TEST RESULTS


Please Refer to Appendix Of this test report

### 3.5 CHANNEL BANDWIDTH

#### 3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

#### 3.5.2 TEST SETUP

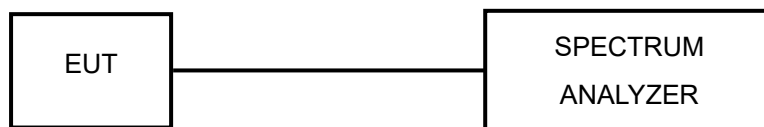

#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: W7L-P22030011-1RF01

### 3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.5.7 TEST RESULTS


Please Refer to Appendix Of this test report.

### 3.6 HOPPING CHANNEL SEPARATION

#### 3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

#### 3.6.2 TEST SETUP



#### 3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.6.6 TEST RESULTS


Please Refer to Appendix Of this test report.

## 3.7 MAXIMUM OUTPUT POWER

### 3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

### 3.7.2 TEST SETUP

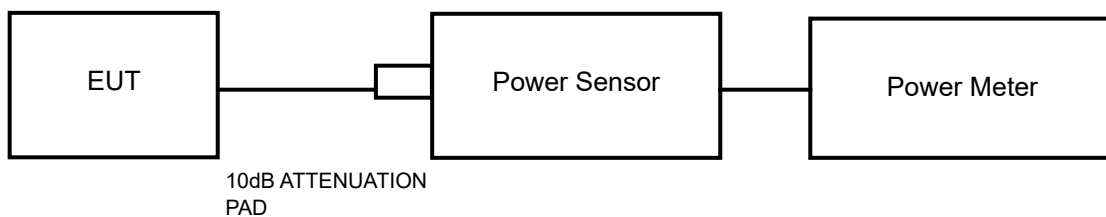

### 3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

### 3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



Test Report No.: W7L-P22030011-1RF01

### 3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-P22030011-1RF01

### 3.7.7 TEST RESULTS

#### 3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix Of this test report.



Test Report No.: W7L-P22030011-1RF01

### 3.7.7.2 Average Output Power (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix Of this test report.





### 3.8 OUT OF BAND MEASUREMENT

#### 3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

#### 3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

#### 3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 3.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix Of this test report.



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22030011-1RF01**

## **4 PHOTOGRAPHS OF THE TEST CONFIGURATION**

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P22030011-1RF01

## 5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

## 6 APPENDIX

### 20DB EMISSION BANDWIDTH

#### TEST RESULT

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.843	2401.568	2402.411	---	---
		2441	0.807	2440.598	2441.405	---	---
		2480	0.843	2479.568	2480.411	---	---
2DH5	Ant1	2402	1.311	2401.340	2402.651	---	---
		2441	1.329	2440.331	2441.660	---	---
		2480	1.323	2479.334	2480.657	---	---
3DH5	Ant1	2402	1.314	2401.346	2402.660	---	---
		2441	1.317	2440.343	2441.660	---	---
		2480	1.302	2479.349	2480.651	---	---

### TEST GRAPHS

DH5\_Ant1\_2402



DH5\_Ant1\_2441



DH5\_Ant1\_2480



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01



2DH5\_Ant1\_2402



2DH5\_Ant1\_2441



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01



2DH5\_Ant1\_2480



3DH5\_Ant1\_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

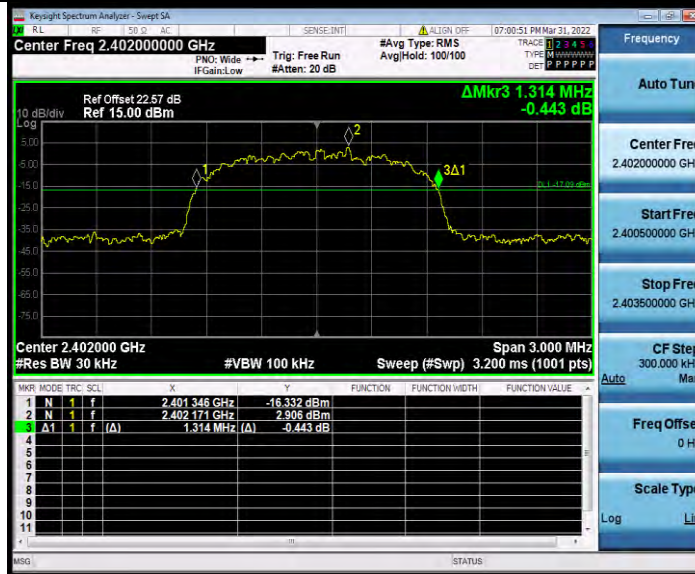

3DH5\_Ant1\_2441




3DH5\_Ant1\_2480





**BUREAU  
VERITAS**

**Test Report No.: W7L-P22030011-1RF01**

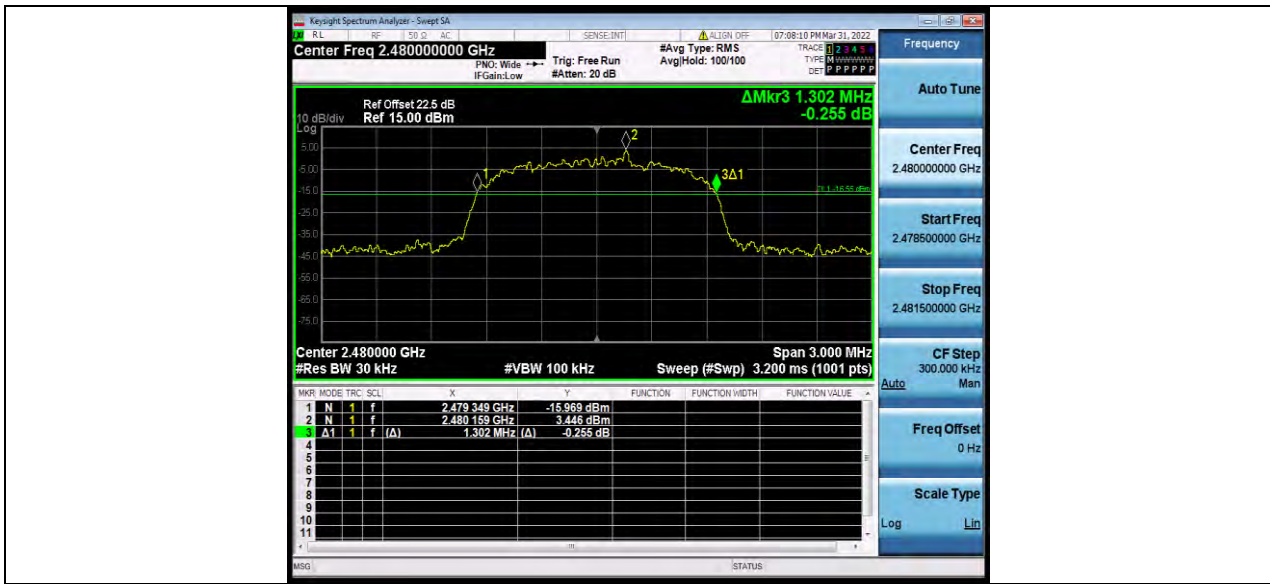

BV 7Layers Communications Technology  
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU  
VERITAS


Test Report No.: W7L-P22030011-1RF01

## OCCUPIED CHANNEL BANDWIDTH TEST RESULT


TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.76071	2401.625	2402.386	---	---
		2441	0.75736	2440.626	2441.384	---	---
		2480	0.75907	2479.624	2480.383	---	---
2DH5	Ant1	2402	1.1868	2401.406	2402.593	---	---
		2441	1.1833	2440.407	2441.590	---	---
		2480	1.1803	2479.407	2480.588	---	---
3DH5	Ant1	2402	1.1922	2401.403	2402.595	---	---
		2441	1.1904	2440.405	2441.595	---	---
		2480	1.1871	2479.406	2480.593	---	---

## TEST GRAPHS

DH5\_Ant1\_2402

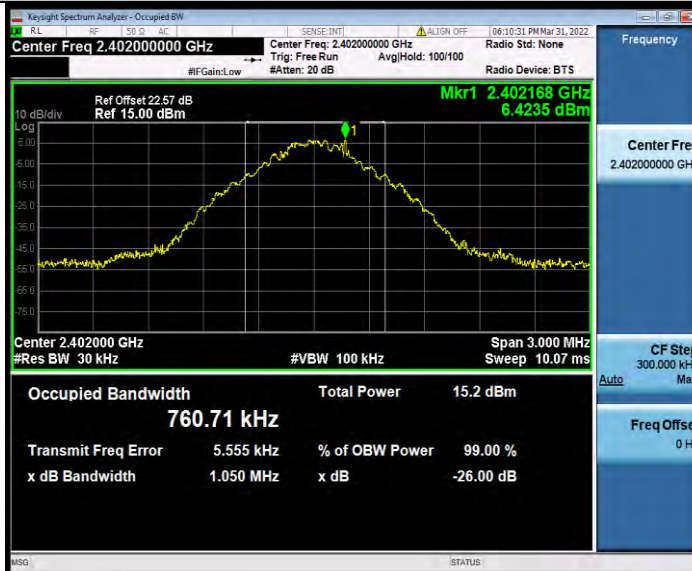

DH5\_Ant1\_2441

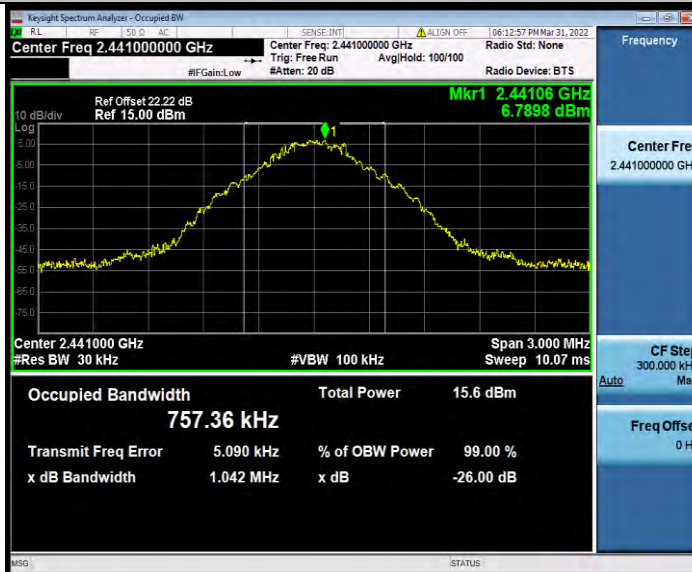

DH5\_Ant1\_2480




BUREAU VERITAS

Test Report No.: W7L-P22030011-1RF01



2DH5\_Ant1\_2402

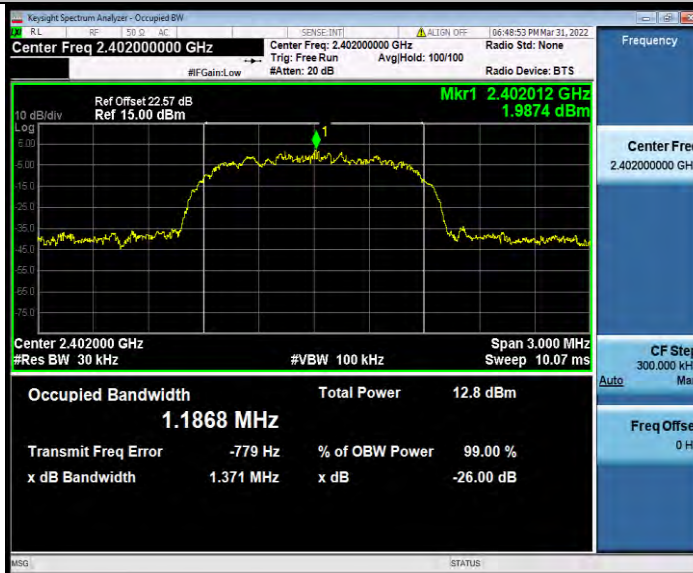


2DH5\_Ant1\_2441




BUREAU VERITAS

### Test Report No.: W7L-P22030011-1RF01

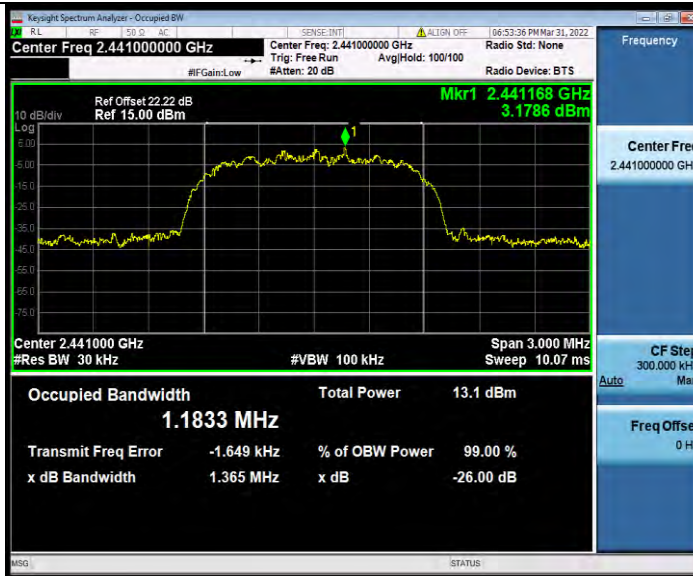

2DH5\_Ant1\_2480

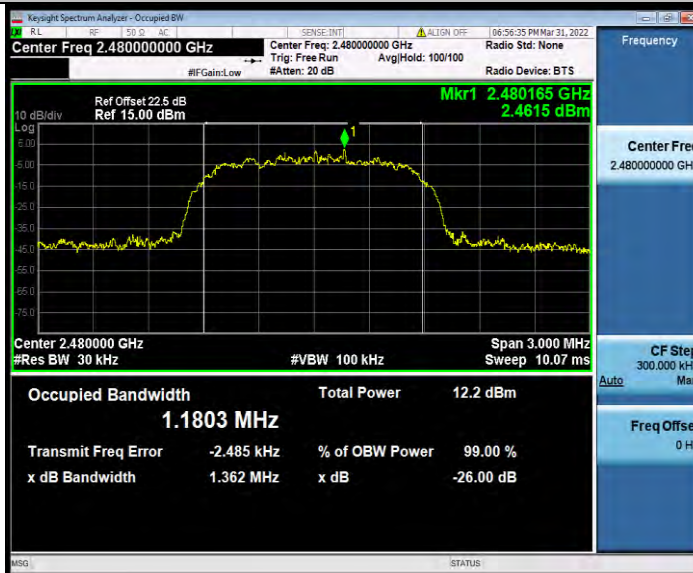

3DH5\_Ant1\_2402




BUREAU VERITAS

### Test Report No.: W7L-P22030011-1RF01



3DH5\_Ant1\_2441

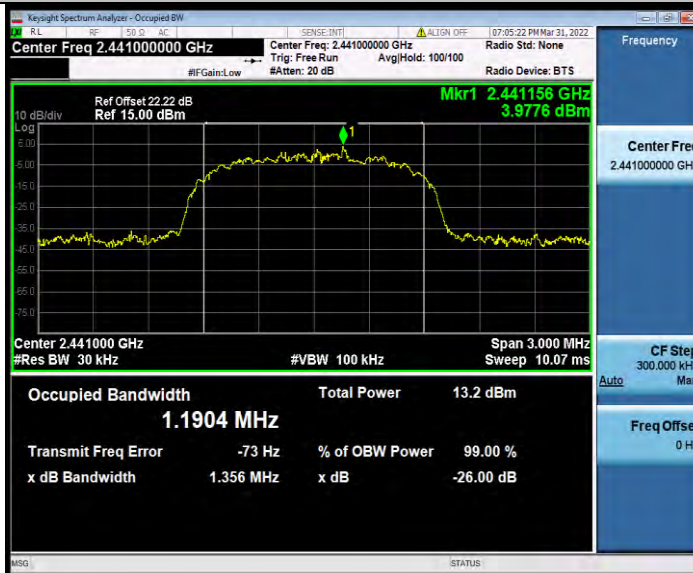

3DH5\_Ant1\_2480



BUREAU  
VERITAS

Test Report No.: W7L-P22030011-1RF01





**MAXIMUM CONDUCTED OUTPUT POWER  
TEST RESULT PEAK**

Test Mode	Antenna	Frequency[MHz]	Peak Power[dBm]	Peak Power[mw]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	7.88	6.14	≤20.97	PASS
		2441	8.37	6.87	≤20.97	PASS
		2480	8.71	7.43	≤20.97	PASS
2DH5	Ant1	2402	7.96	6.25	≤20.97	PASS
		2441	8.31	6.78	≤20.97	PASS
		2480	7.96	6.25	≤20.97	PASS
3DH5	Ant1	2402	8.74	7.48	≤20.97	PASS
		2441	7.91	6.18	≤20.97	PASS
		2480	8.38	6.89	≤20.97	PASS

**TEST RESULT AVERAGE**

Test Mode	Antenna	Frequency[MHz]	Average Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	6.55	≤30	PASS
		2441	7.07	≤30	PASS
		2480	7.35	≤30	PASS
2DH5	Ant1	2402	3.61	≤30	PASS
		2441	4.25	≤30	PASS
		2480	4.60	≤30	PASS
3DH5	Ant1	2402	4.63	≤30	PASS
		2441	3.78	≤30	PASS
		2480	4.28	≤30	PASS





**BUREAU  
VERITAS**

Test Report No.: W7L-P22030011-1RF01

## CARRIER FREQUENCY SEPARATION

### TEST RESULT

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.012	$\geq 0.843$	PASS
2DH5	Ant1	Hop	1.246	$\geq 0.886$	PASS
3DH5	Ant1	Hop	1.276	$\geq 0.878$	PASS

### TEST GRAPHS

DH5\_Ant1\_Hop



2DH5\_Ant1\_Hop



3DH5\_Ant1\_Hop



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazhu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)




Test Report No.: W7L-P22030011-1RF01

## TIME OF OCCUPANCY TEST RESULT

Test Mode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.36	290	0.104	≤0.4	PASS
DH3	Ant1	Hop	1.61	150	0.242	≤0.4	PASS
DH5	Ant1	Hop	2.86	90	0.257	≤0.4	PASS
2DH1	Ant1	Hop	0.36	320	0.115	≤0.4	PASS
2DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
2DH5	Ant1	Hop	2.87	130	0.373	≤0.4	PASS
3DH1	Ant1	Hop	0.36	290	0.104	≤0.4	PASS
3DH3	Ant1	Hop	1.61	190	0.306	≤0.4	PASS
3DH5	Ant1	Hop	2.85	50	0.143	≤0.4	PASS


## TEST GRAPHS

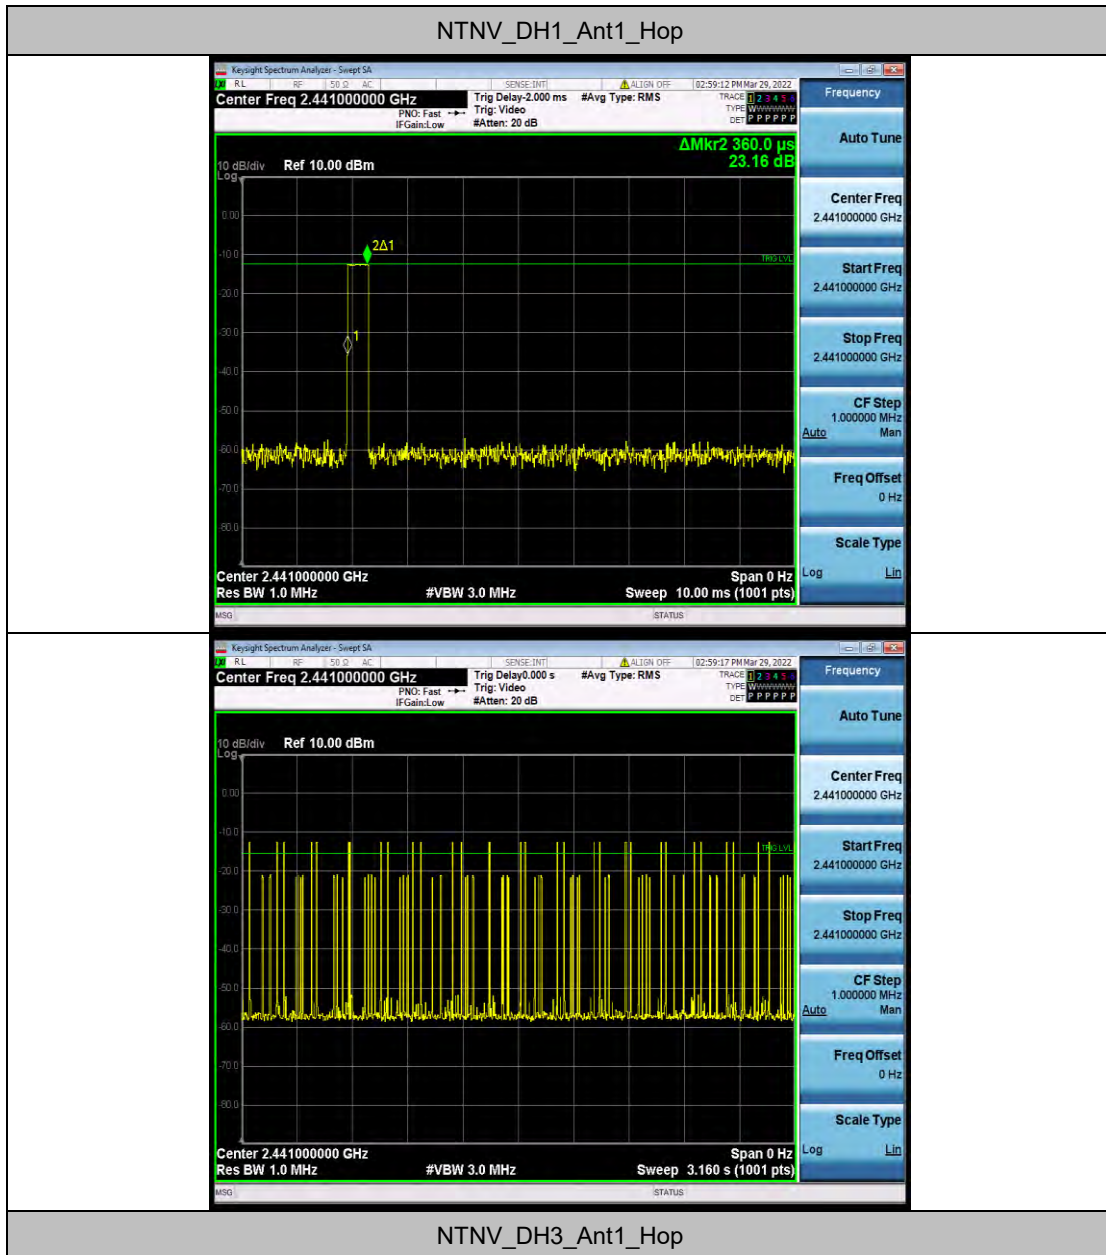



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

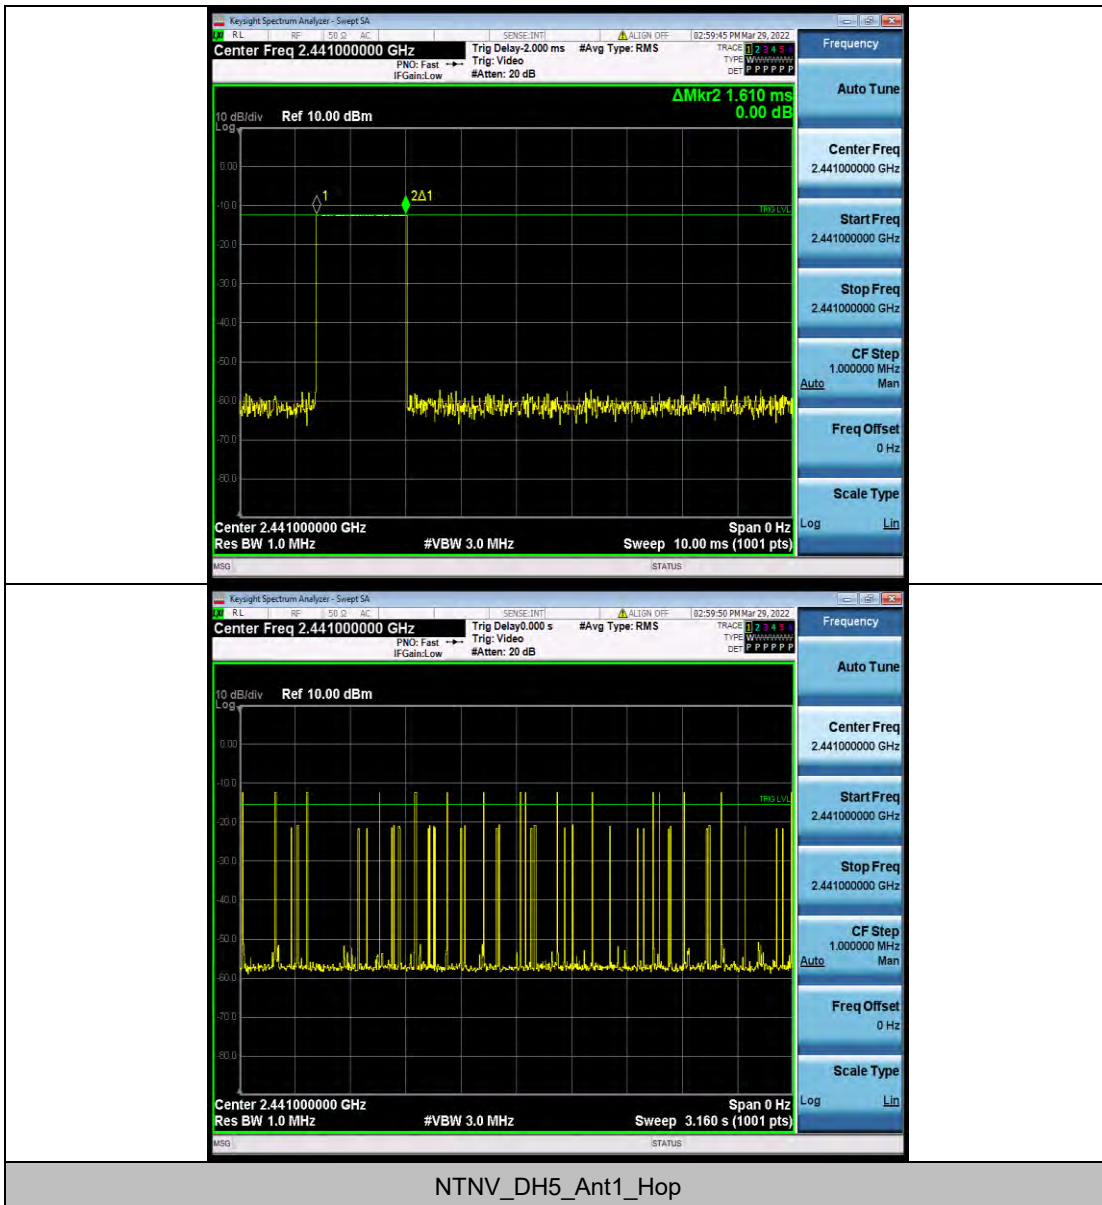


NTNV\_DH5\_Ant1\_Hop


BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazhu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)

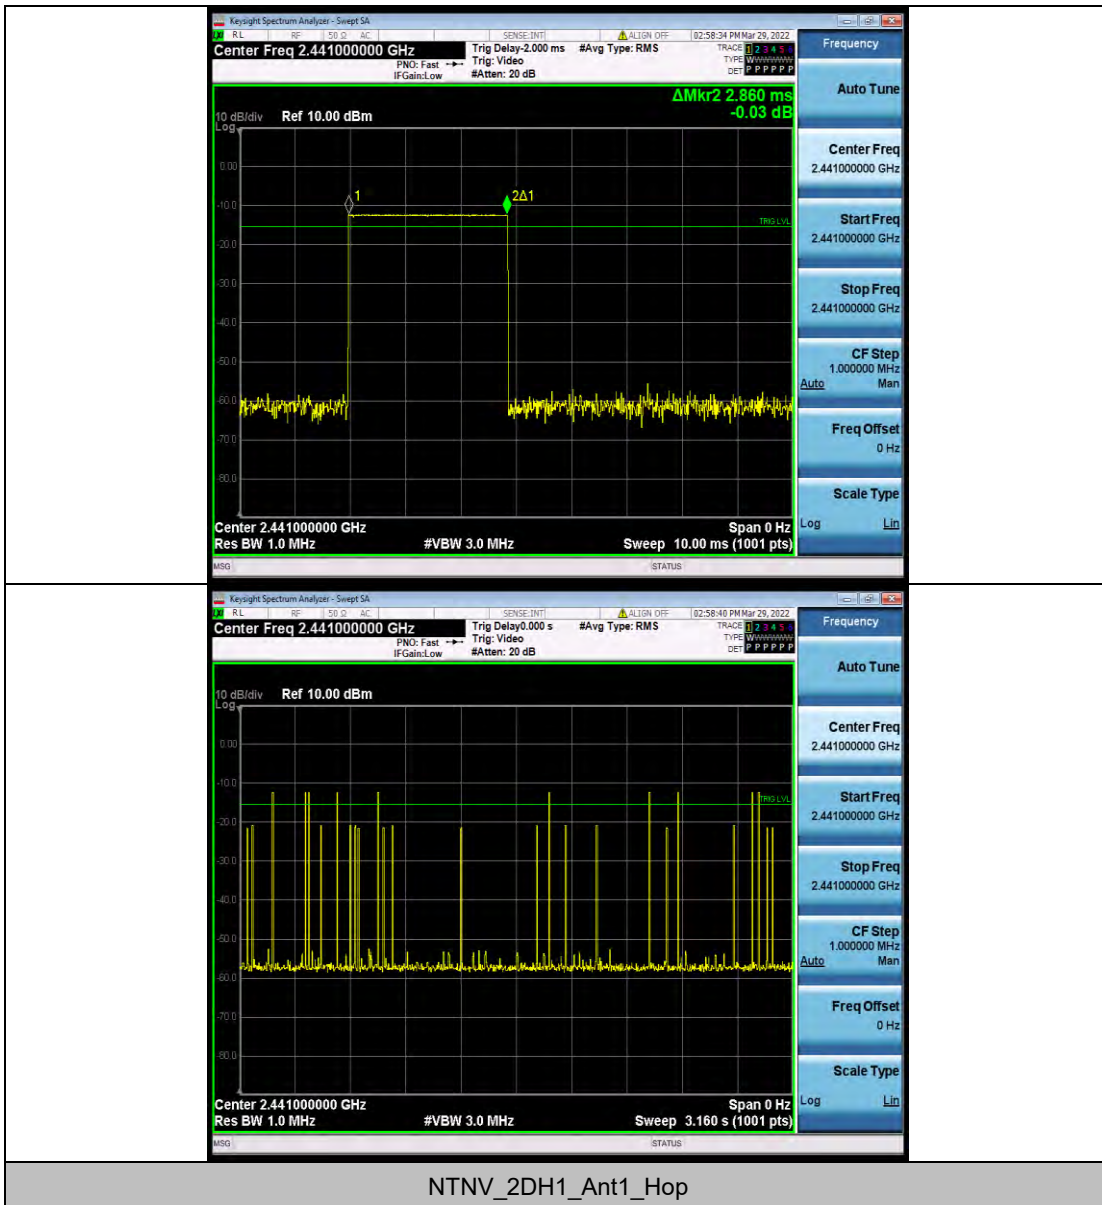

NTNV\_2DH1\_Ant1\_Hop

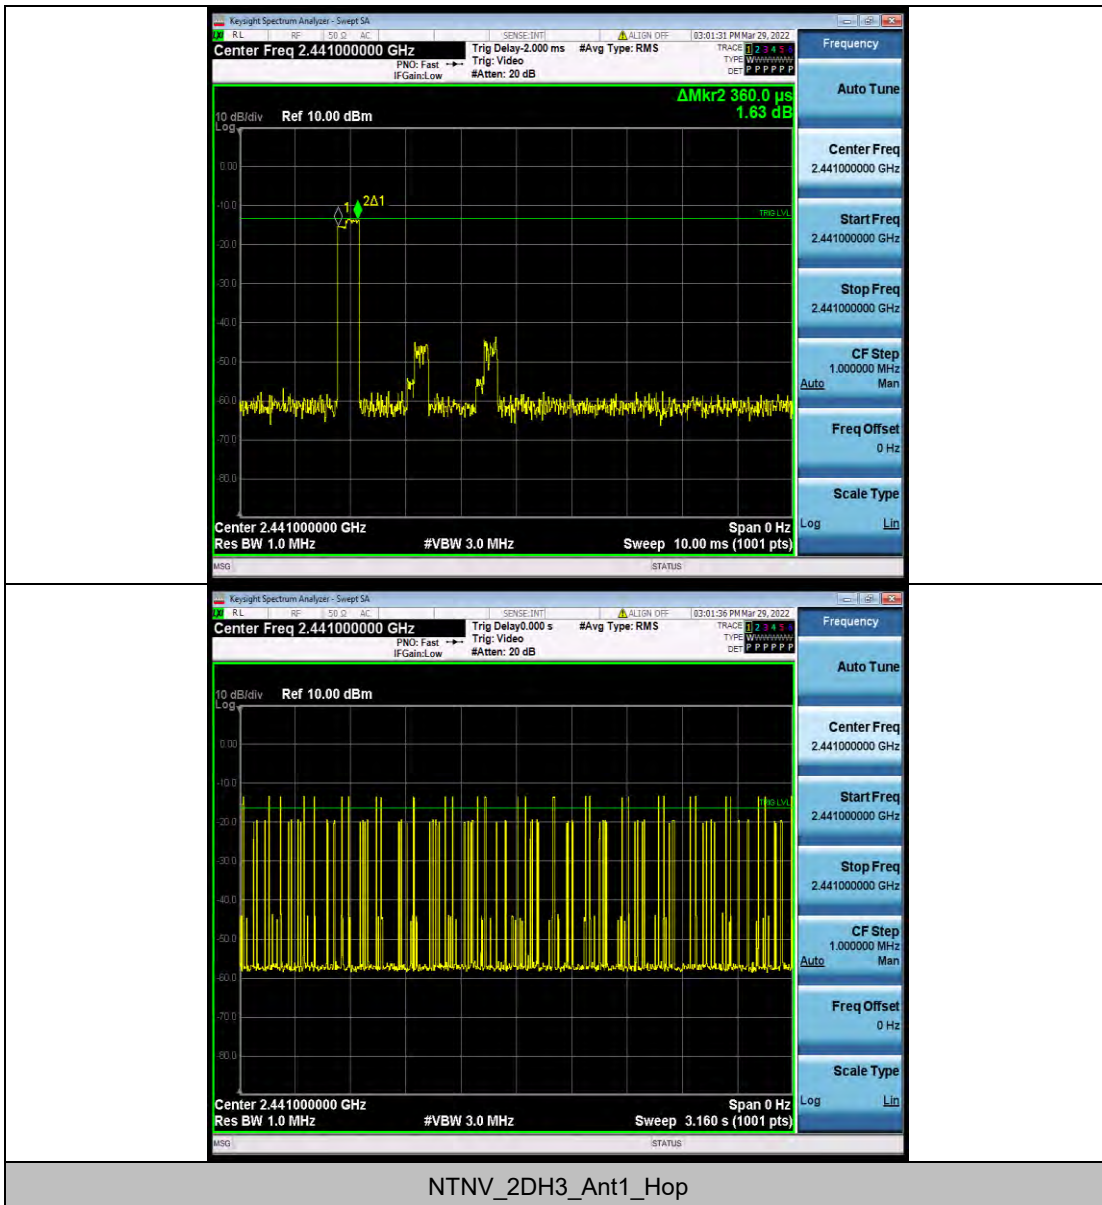


NTNV\_2DH3\_Ant1\_Hop





BUREAU VERITAS

Test Report No.: W7L-P22030011-1RF01

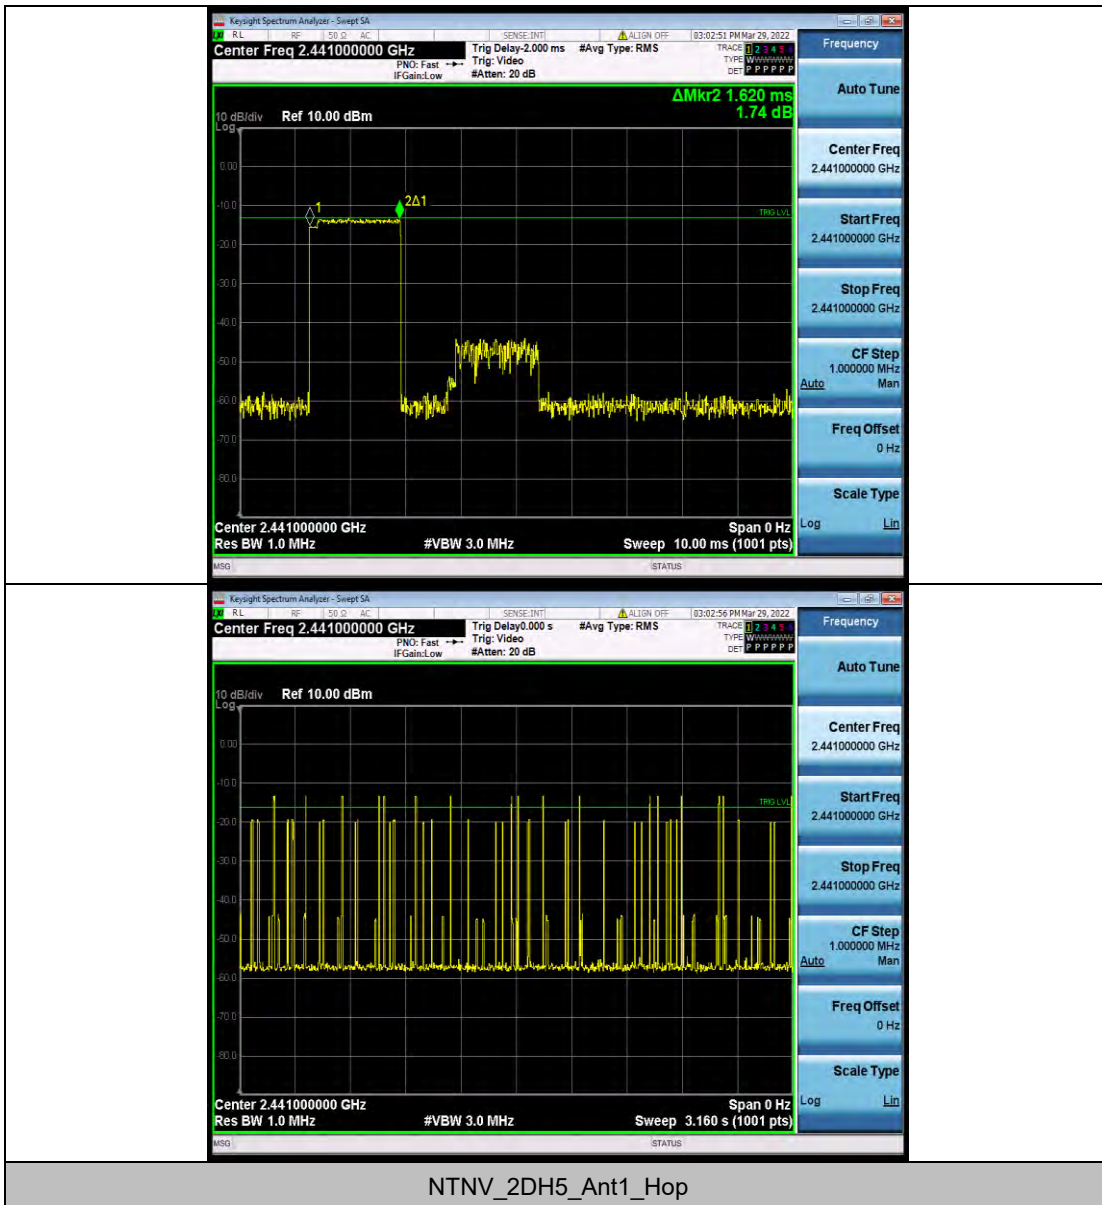


NTNV\_2DH5\_Ant1\_Hop




BUREAU VERITAS

Test Report No.: W7L-P22030011-1RF01

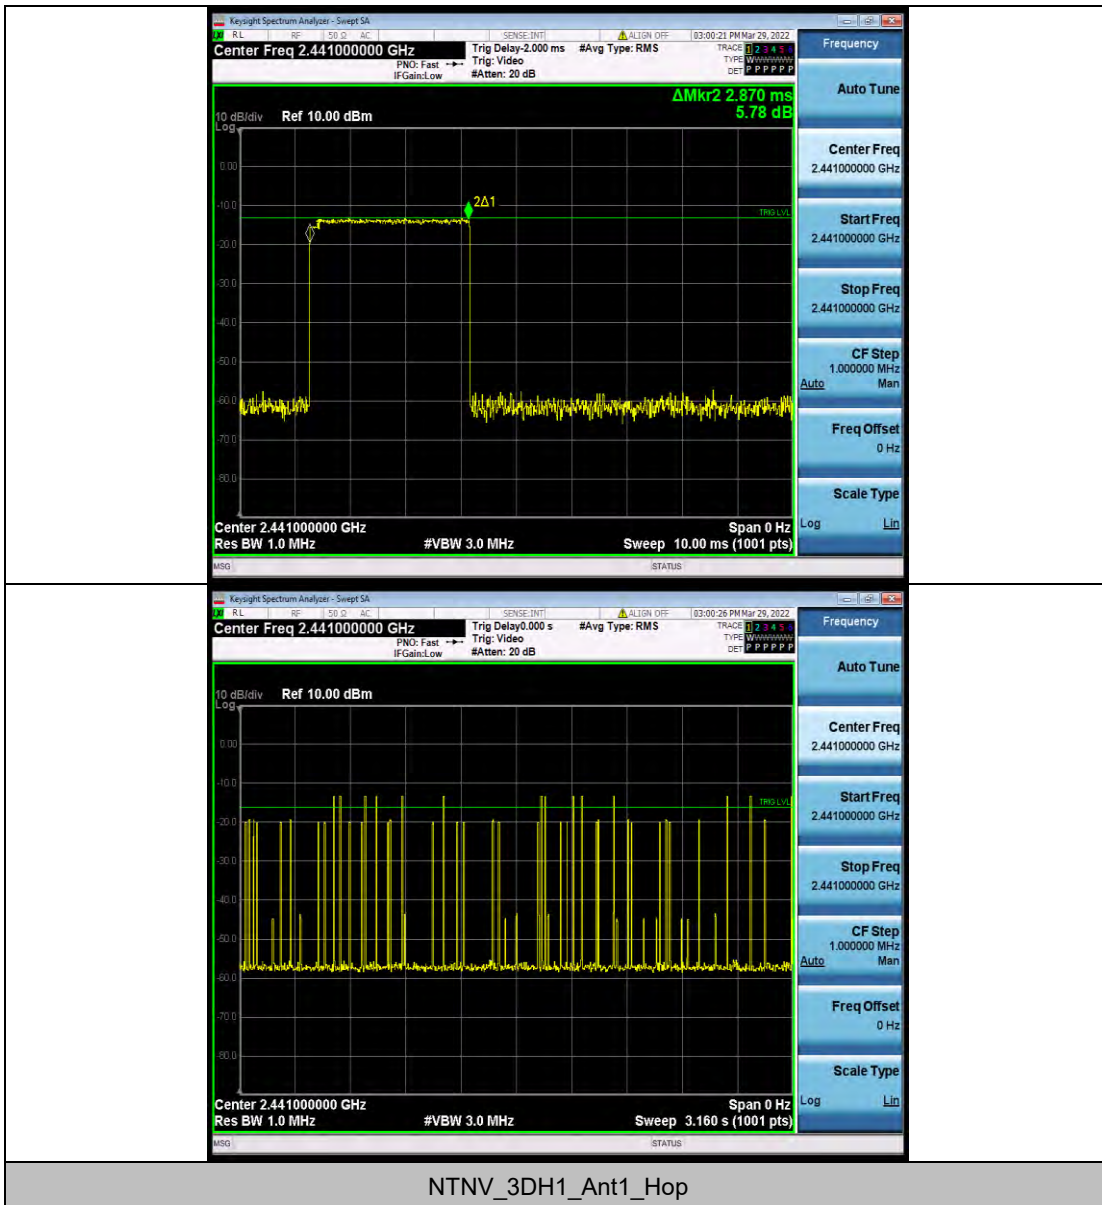

NTNV\_3DH1\_Ant1\_Hop

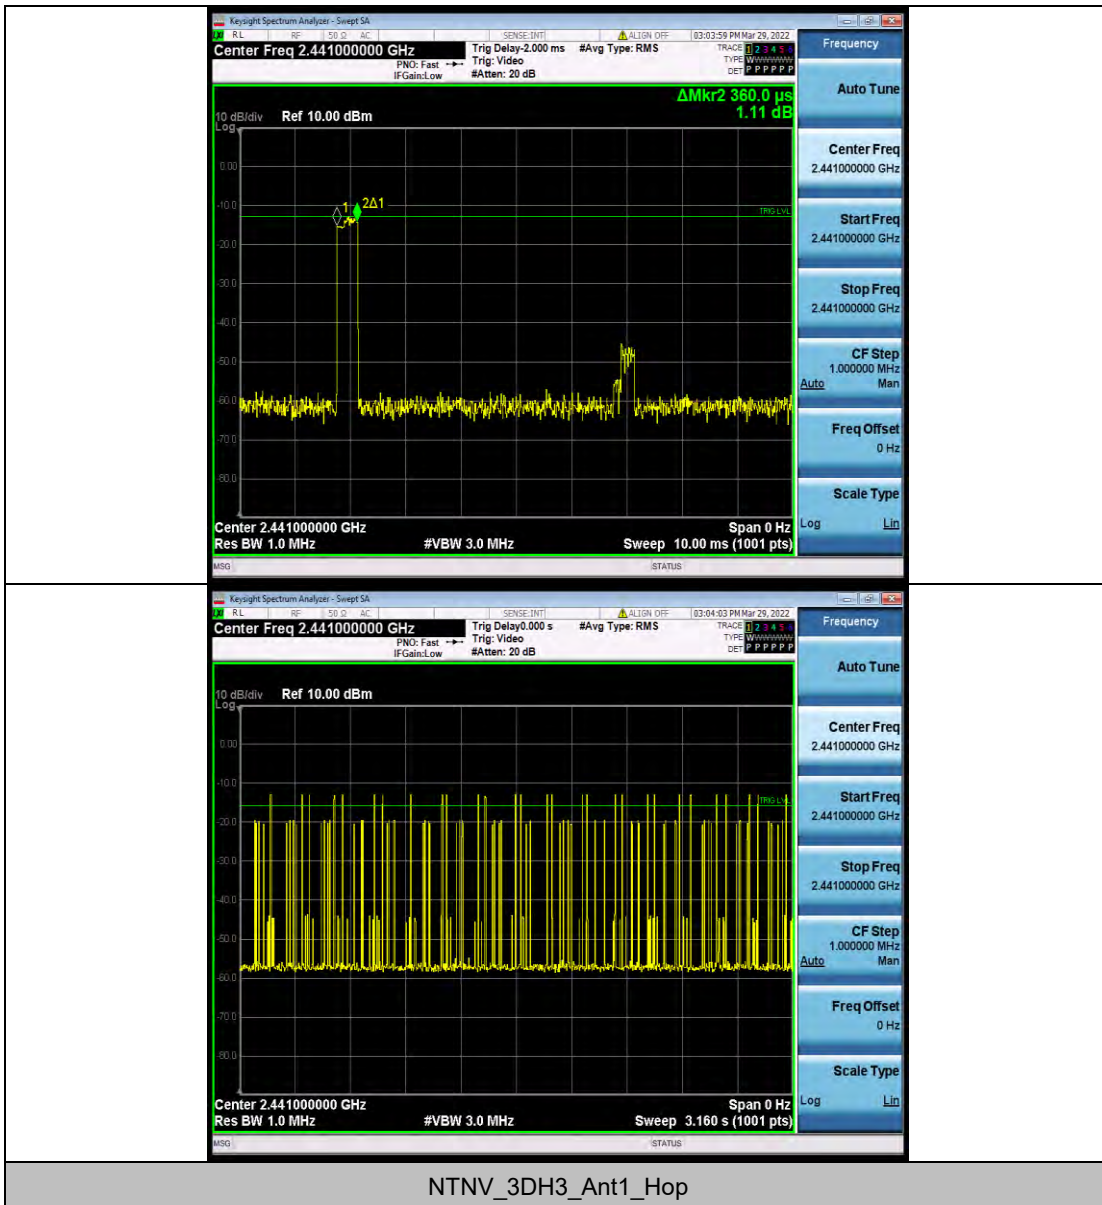


NTNV\_3DH3\_Ant1\_Hop



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

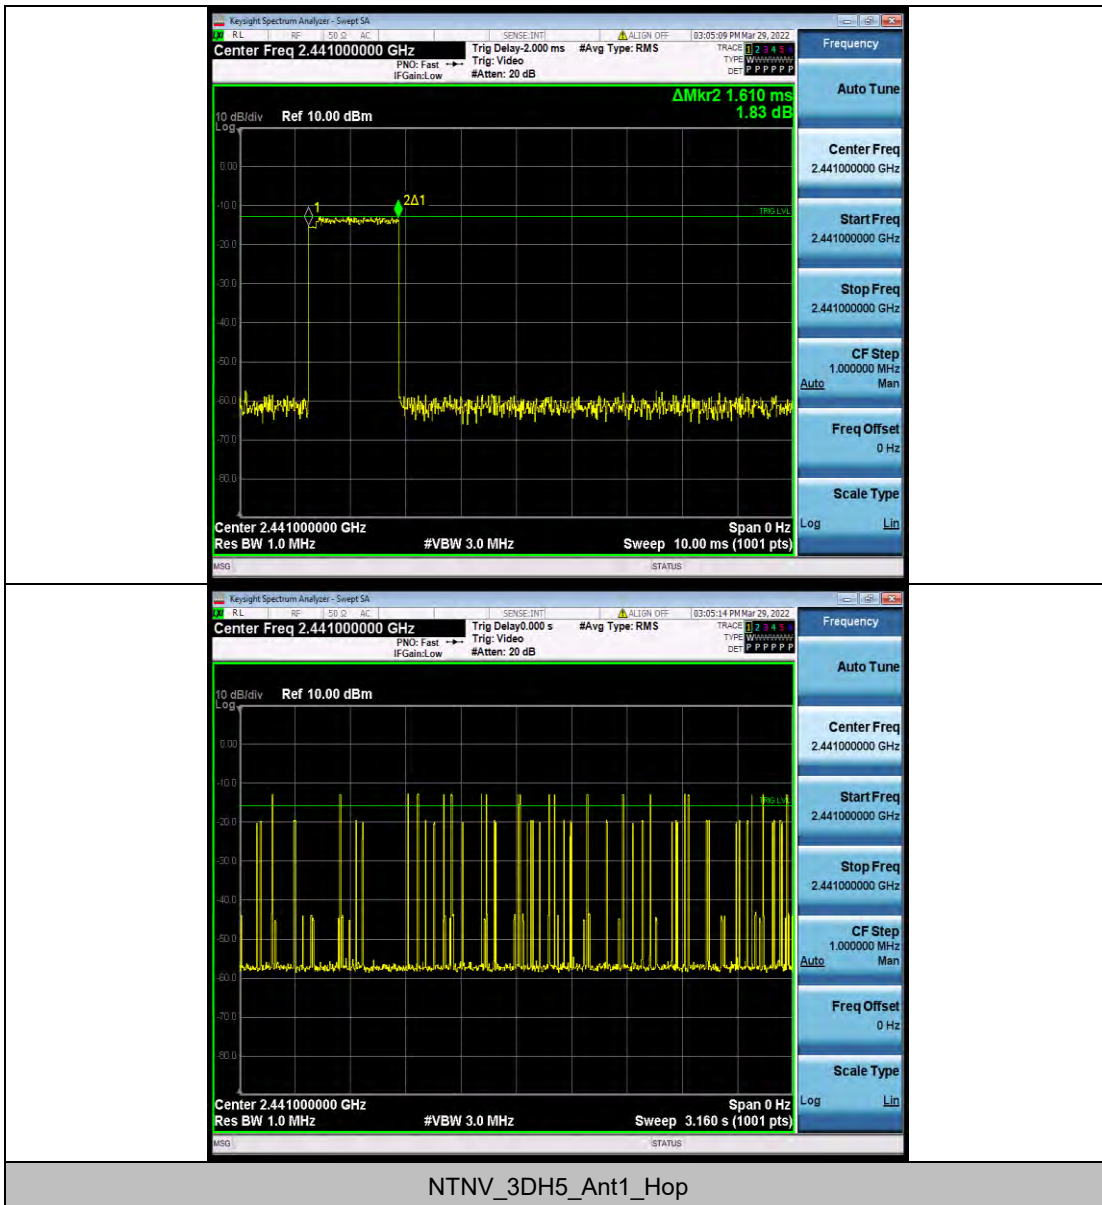

NTNV\_3DH5\_Ant1\_Hop


BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



Test Report No.: W7L-P22030011-1RF01

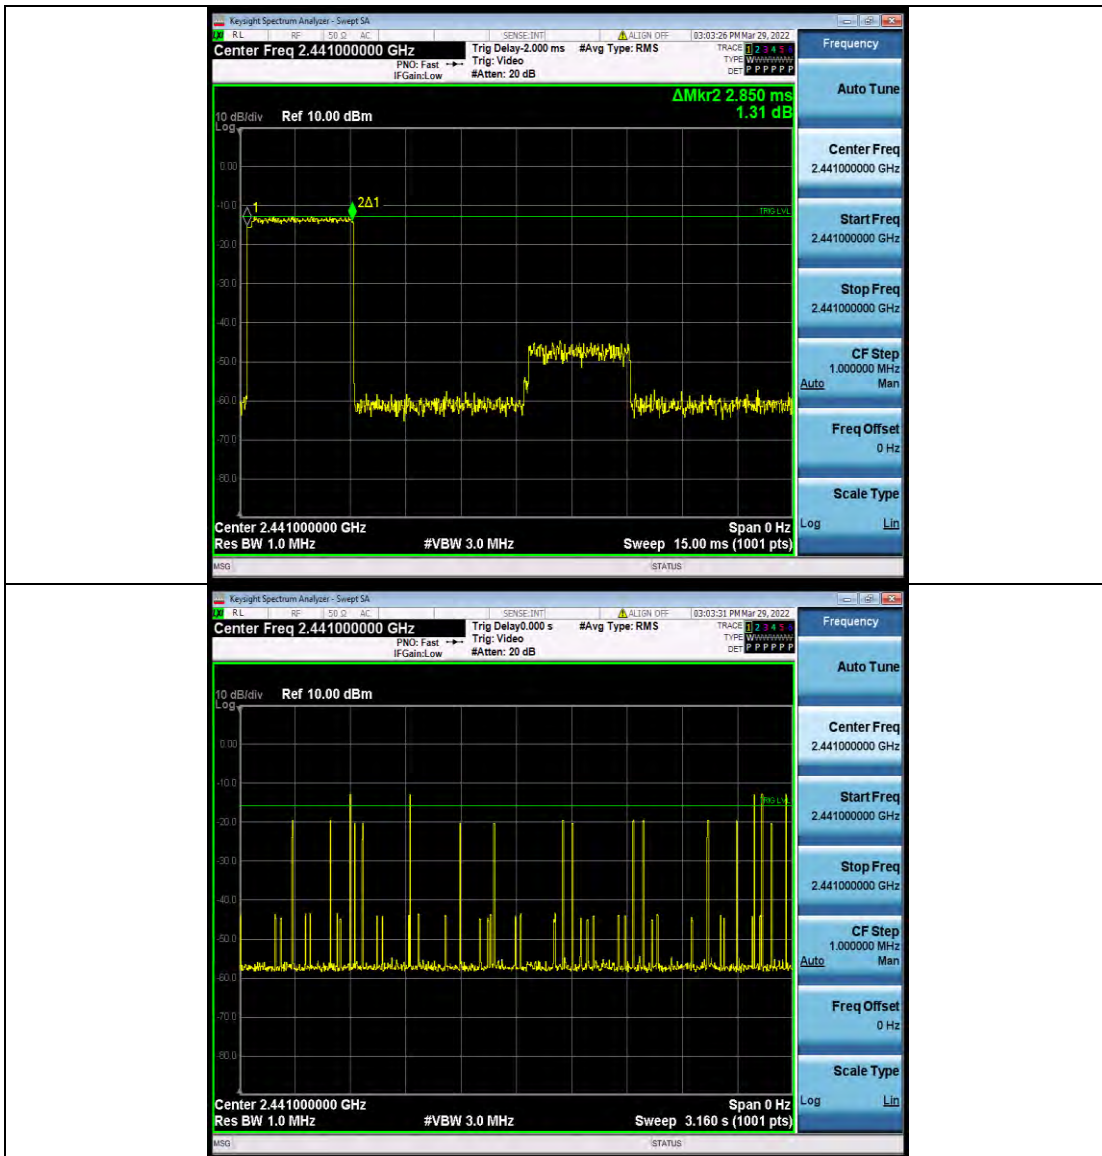

BV 7Layers Communications Technology  
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan  
Avenue, North Area, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: W7L-P22030011-1RF01


## NUMBER OF HOPPING CHANNELS

### TEST RESULT


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
2DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS

## TEST GRAPHS

DH5\_Ant1\_Hop

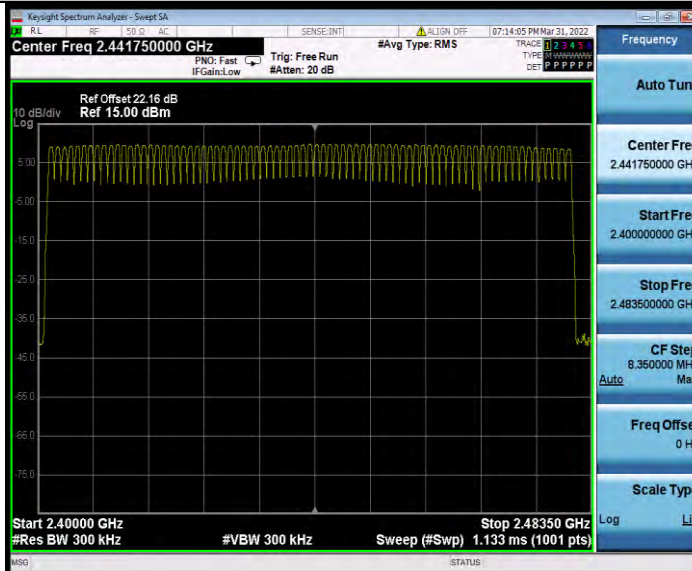

2DH5\_Ant1\_Hop

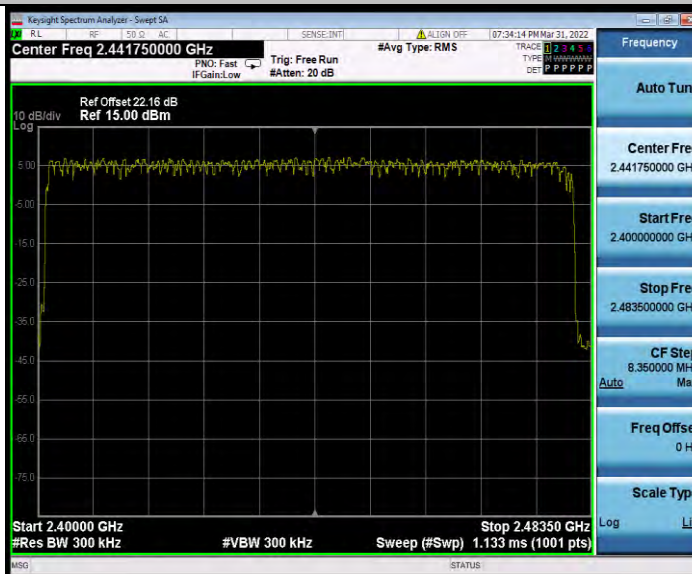


3DH5\_Ant1\_Hop



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

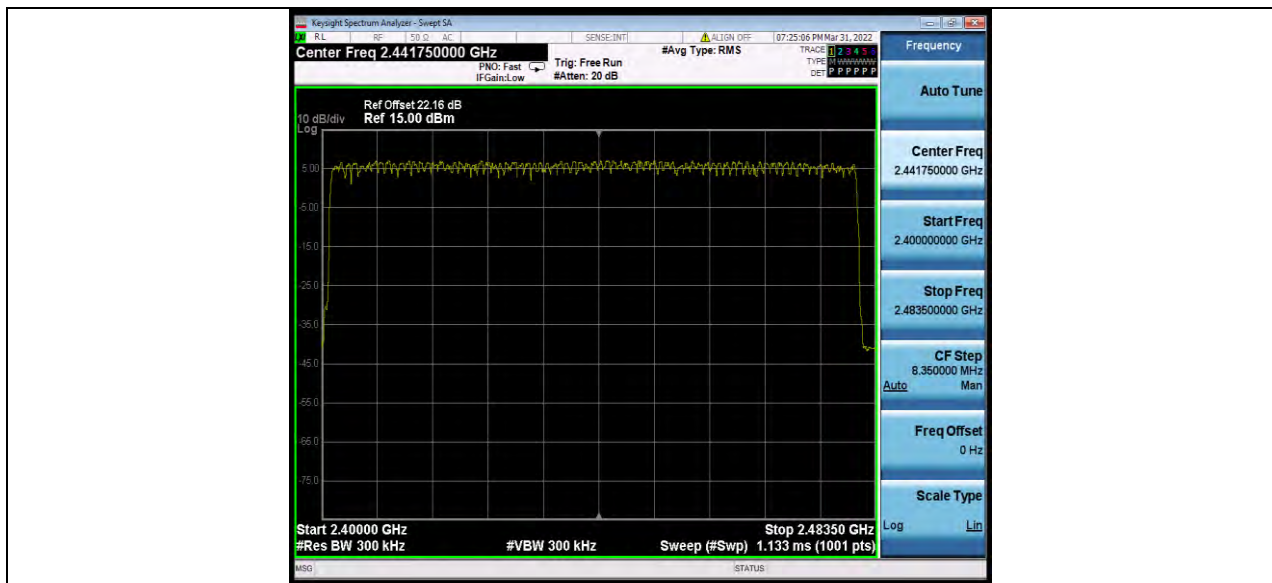

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)




## BAND EDGE MEASUREMENTS

### TEST RESULT


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	9.05	-43.39	≤-10.95	PASS
		High	2480	8.36	-43.24	≤-11.64	PASS
		Low	Hop_2402	8.64	-43.13	≤-11.37	PASS
		High	Hop_2480	9.19	-42.16	≤-10.81	PASS
2DH5	Ant1	Low	2402	6.16	-43.13	≤-13.84	PASS
		High	2480	5.67	-42.37	≤-14.33	PASS
		Low	Hop_2402	4.35	-43.32	≤-15.65	PASS
		High	Hop_2480	4.86	-42.38	≤-15.14	PASS
3DH5	Ant1	Low	2402	6.51	-42.76	≤-13.49	PASS
		High	2480	5.76	-43.47	≤-14.24	PASS
		Low	Hop_2402	5.72	-42.99	≤-14.28	PASS
		High	Hop_2480	6.14	-41.7	≤-13.87	PASS

### TEST GRAPHS

DH5\_Ant1\_Low\_2402

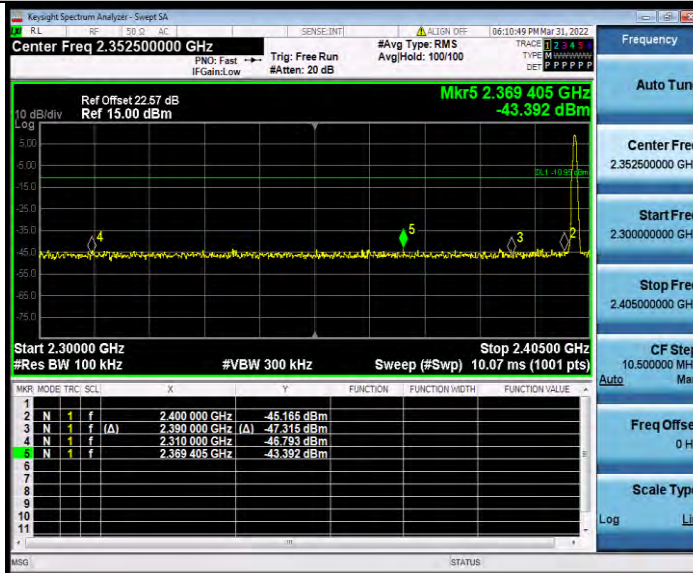

DH5\_Ant1\_High\_2480

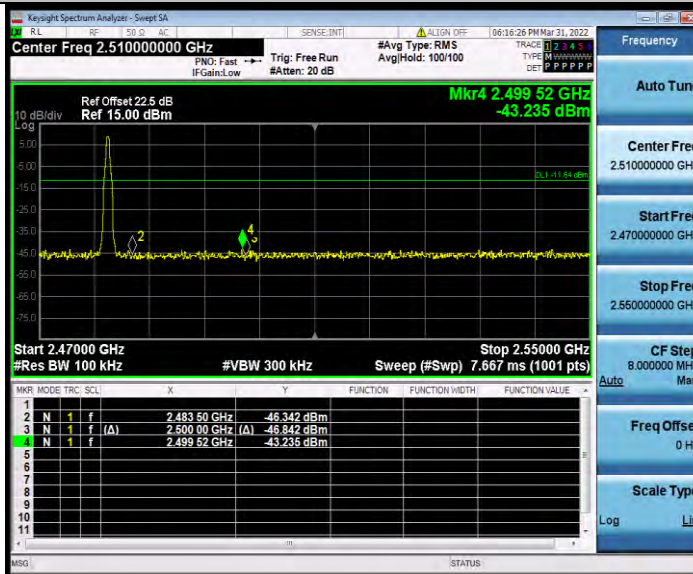


DH5\_Ant1\_Low\_Hop\_2402



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

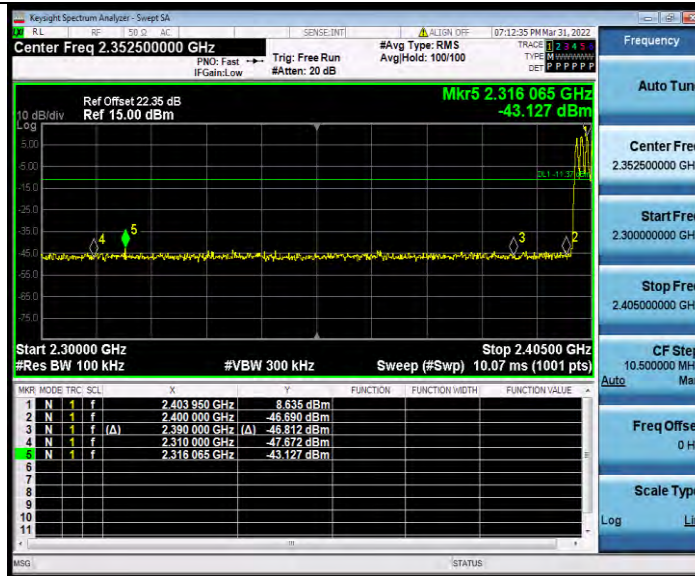

DH5\_Ant1\_High\_Hop\_2480



2DH5\_Ant1\_Low\_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)




BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

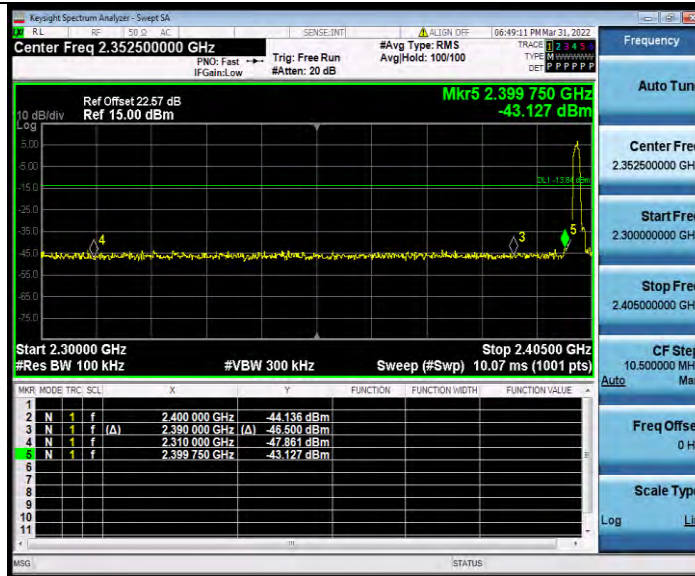

2DH5\_Ant1\_High\_2480

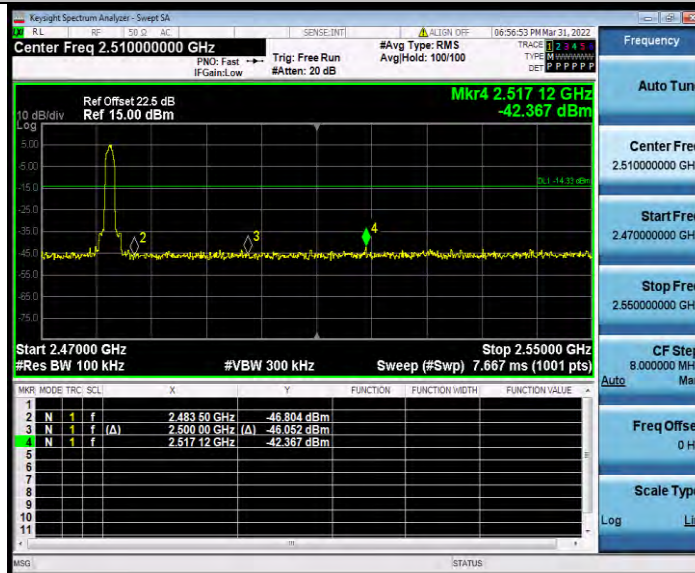

2DH5\_Ant1\_Low\_Hop\_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

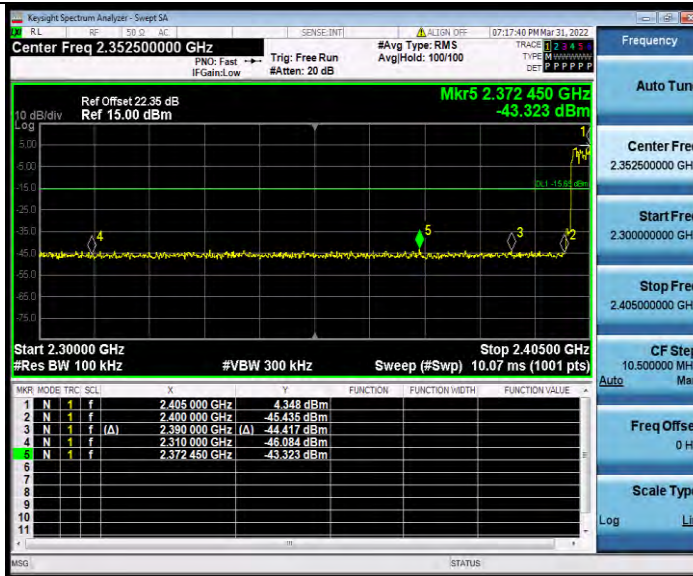

2DH5\_Ant1\_High\_Hop\_2480



3DH5\_Ant1\_Low\_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)




BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

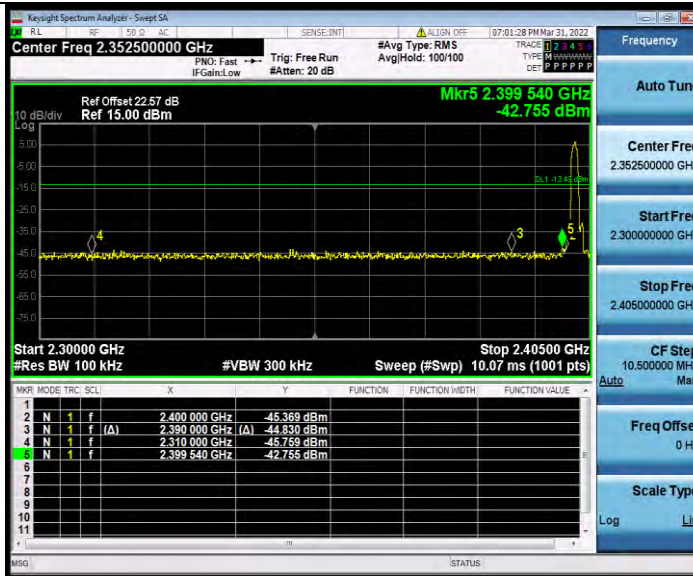

3DH5\_Ant1\_High\_2480

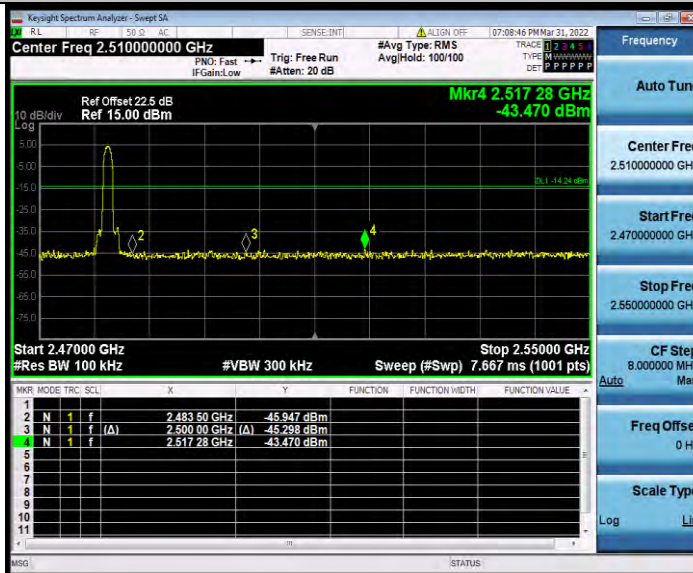

3DH5\_Ant1\_Low\_Hop\_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU VERITAS

### Test Report No.: W7L-P22030011-1RF01

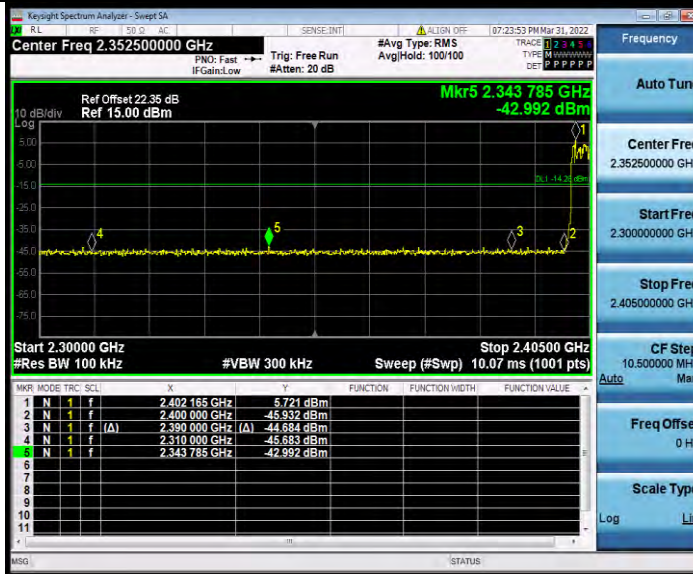

3DH5\_Ant1\_High\_Hop\_2480



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)

## CONDUCTED SPURIOUS EMISSION


### TEST RESULT

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	8.61	-39.35	≤-11.39	PASS
			1000~26500	8.61	-26.69	≤-11.39	PASS
		2441	30~1000	9.23	-42.52	≤-10.77	PASS
			1000~26500	9.23	-25.93	≤-10.77	PASS
		2480	30~1000	8.17	-42.53	≤-11.83	PASS
			1000~26500	8.17	-26.75	≤-11.83	PASS
2DH5	Ant1	2402	30~1000	6.16	-41.98	≤-13.84	PASS
			1000~26500	6.16	-26.41	≤-13.84	PASS
		2441	30~1000	6.34	-42.81	≤-13.66	PASS
			1000~26500	6.34	-26.75	≤-13.66	PASS
		2480	30~1000	5.67	-42.95	≤-14.33	PASS
			1000~26500	5.67	-26.77	≤-14.33	PASS
3DH5	Ant1	2402	30~1000	6.51	-41.64	≤-13.49	PASS
			1000~26500	6.51	-26.49	≤-13.49	PASS
		2441	30~1000	6.00	-34.91	≤-14	PASS
			1000~26500	6.00	-26.07	≤-14	PASS
		2480	30~1000	5.76	-36.71	≤-14.24	PASS
			1000~26500	5.76	-26.42	≤-14.24	PASS



### TEST GRAPHS

DH5\_Ant1\_2402\_30~1000

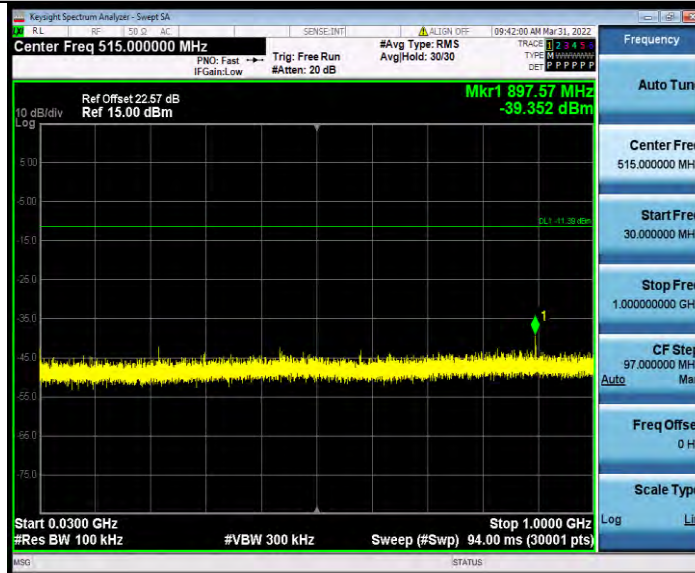

DH5\_Ant1\_2402\_1000~26500




DH5\_Ant1\_2441\_30~1000



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

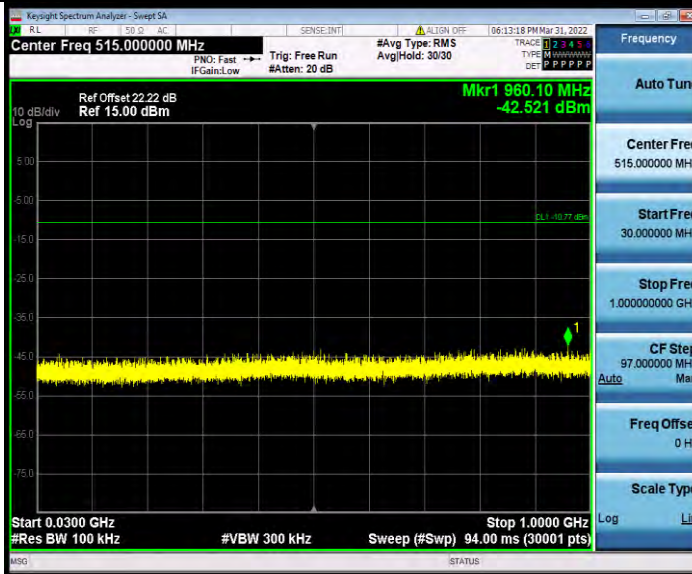

DH5\_Ant1\_2441\_1000~26500



DH5\_Ant1\_2480\_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
 Fax: +86 755 8869 6577  
 Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

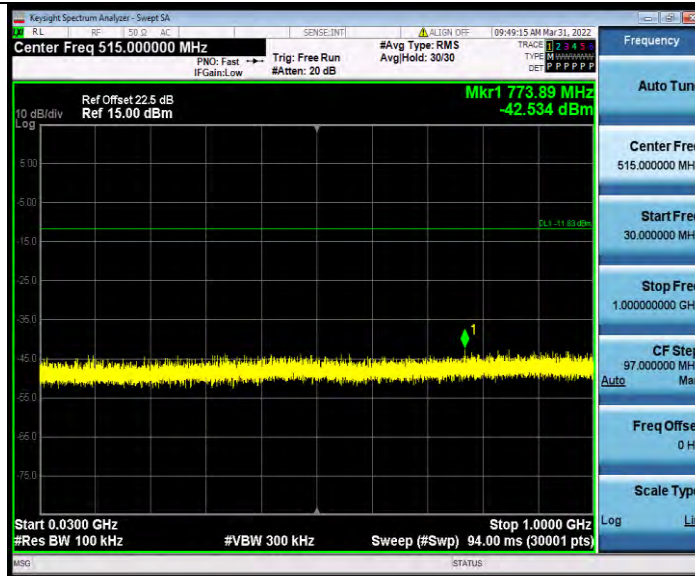

DH5\_Ant1\_2480\_1000~26500



2DH5\_Ant1\_2402\_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU  
VERITAS

Test Report No.: W7L-P22030011-1RF01

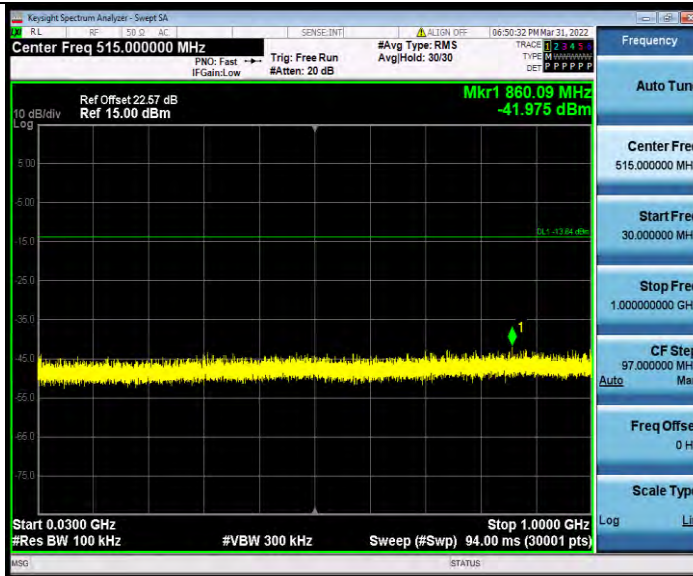

2DH5\_Ant1\_2402\_1000~26500




2DH5\_Ant1\_2441\_30~1000



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

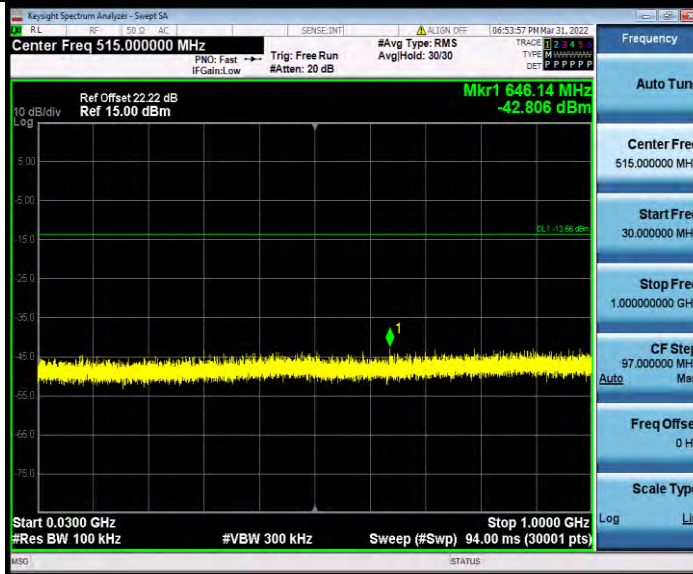

2DH5\_Ant1\_2441\_1000~26500



2DH5\_Ant1\_2480\_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
 Fax: +86 755 8869 6577  
 Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

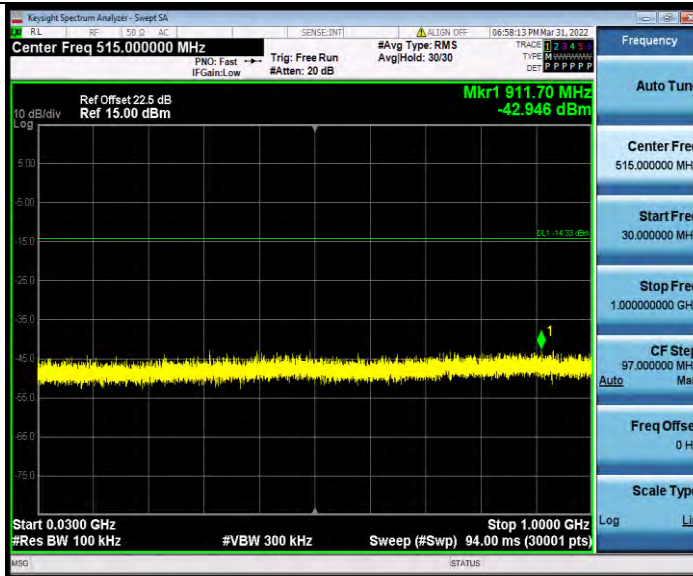

2DH5\_Ant1\_2480\_1000~26500



3DH5\_Ant1\_2402\_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22030011-1RF01**

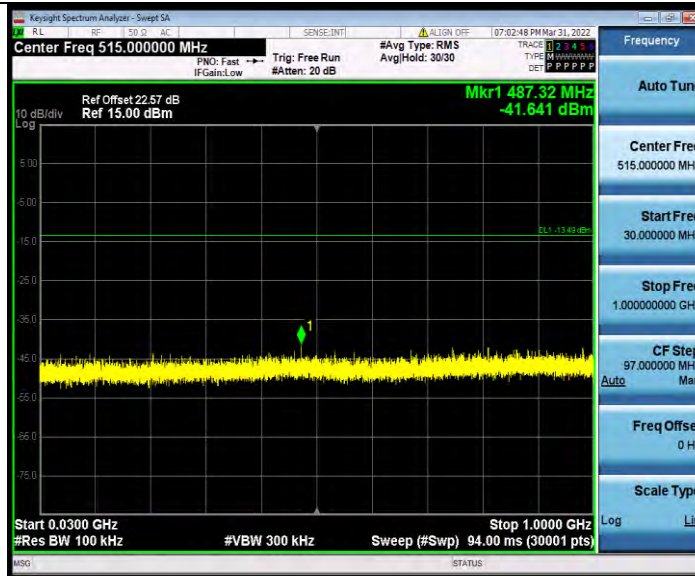

3DH5\_Ant1\_2402\_1000~26500




3DH5\_Ant1\_2441\_30~1000



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

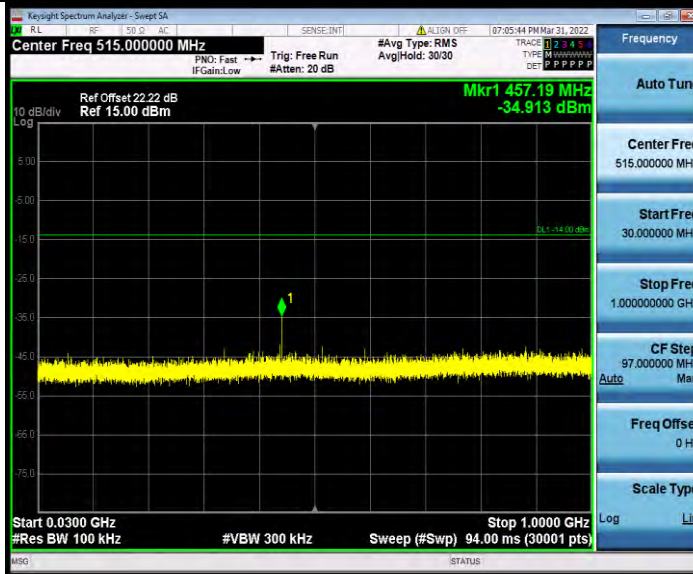

3DH5\_Ant1\_2441\_1000~26500




3DH5\_Ant1\_2480\_30~1000





BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

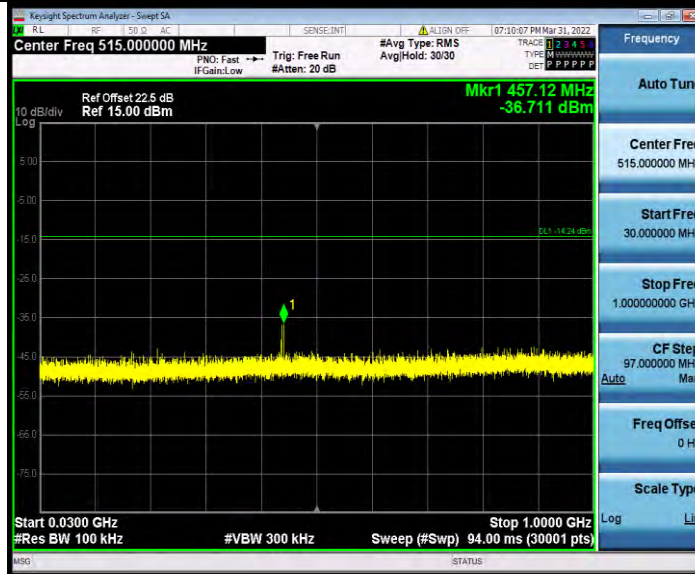

3DH5\_Ant1\_2480\_1000~26500



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: W7L-P22030011-1RF01


## DUTY CYCLE

### TEST RESULT


TestMode	Antenna	Frequency[M Hz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
2441	Ant1	DH5	2.88	3.75	76.80	1.15
		2DH5	2.89	3.75	77.07	1.13
		3DH5	2.89	3.75	77.07	1.13

### TEST GRAPHS

DH5\_Ant1\_2441

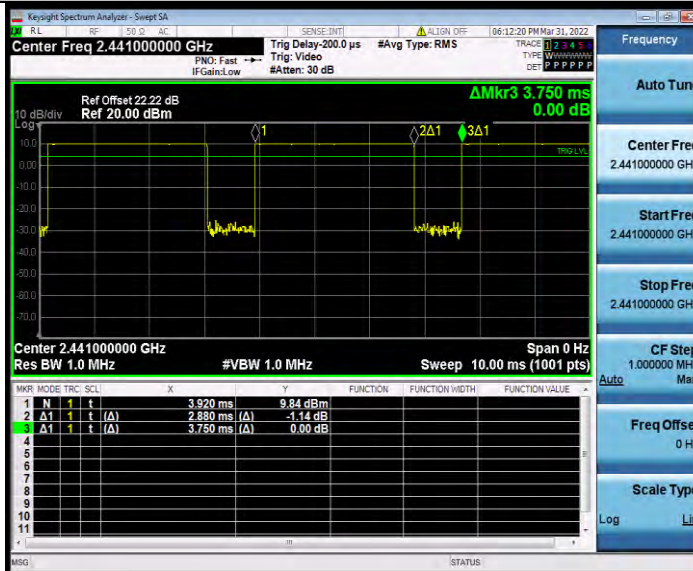

2DH5\_Ant1\_2441

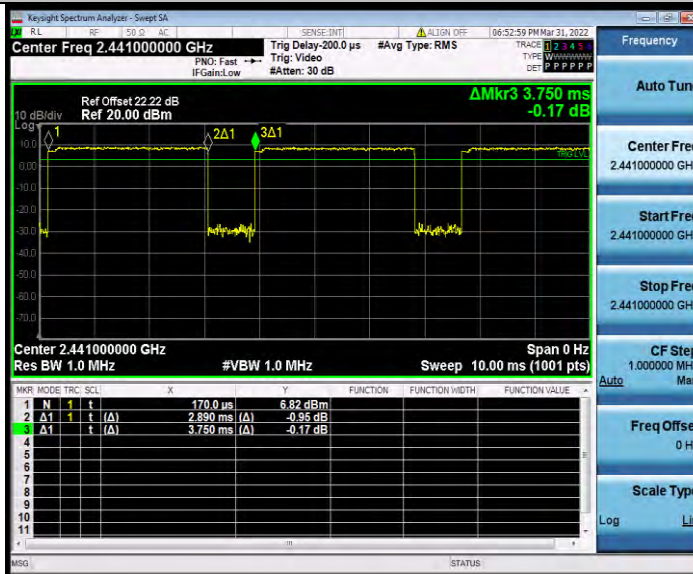


3DH5\_Ant1\_2441



BUREAU VERITAS

# Test Report No.: W7L-P22030011-1RF01

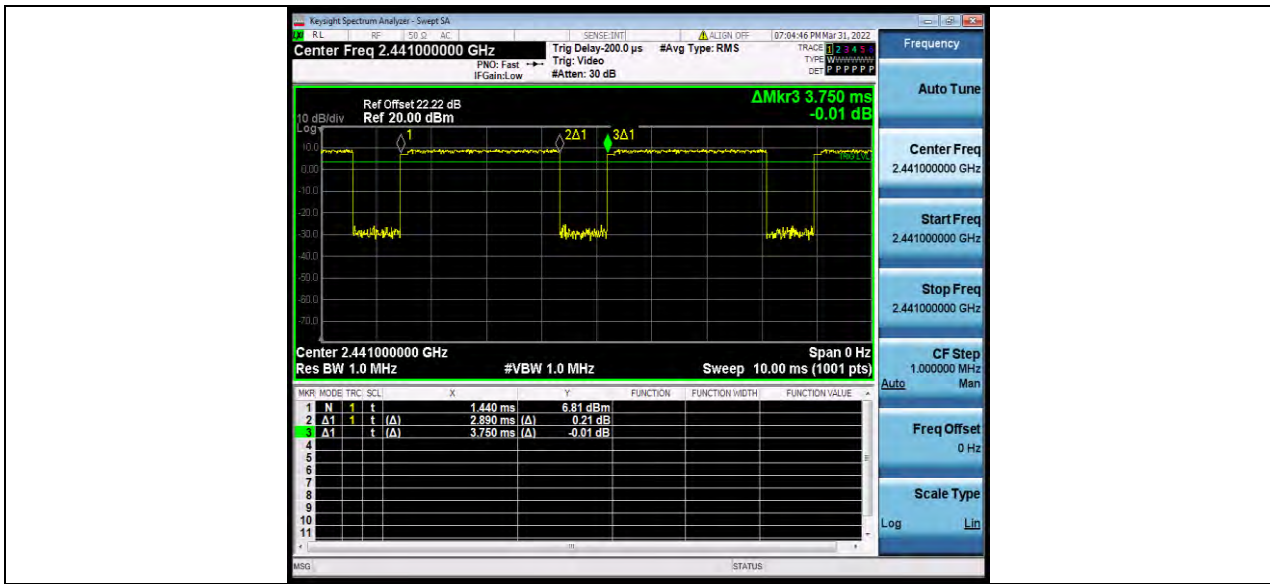

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)