



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB360ZJK
FCC ID : O57TB360ZJK
STANDARD : 47 CFR Part 2, 27O
CLASSIFICATION : Licensed Non-Broadcast Station Transmitter (TNB)
TEST DATE(S) : Jun. 30, 2023 ~ Jul. 04, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu

Province 215300 People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	6
1.7 Testing Location	7
1.8 Test Software	7
1.9 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	10
3 CONDUCTED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test	11
3.4 Conducted Output Power and EIRP	12
3.5 Peak-to-Average Ratio	13
3.6 Occupied Bandwidth	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test	19
4.4 Radiated Spurious Emission	20
5 LIST OF MEASURING EQUIPMENT	21
6 MEASUREMENT UNCERTAINTY	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG362005D	Rev. 01	Initial issue of report	Jul. 19, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 27.03 dB at 7584.000 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB360ZJK
FCC ID	O57TB360ZJK
IMEI Code	Conducted: 869917060004897 Radiation: 869917060004491
HW Version	Lenovo Tablet TB360ZJK
SW Version	TB360ZJK_RF01_230610
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Bandwidth	n77/ n78: 20MHz/40MHz/100MHz
SCS	30kHz
Antenna Type	PIFA Antenna
Antenna Gain	<Ant. 3>: n77: 0.32 dBi n78: 0.32 dBi <Ant. 4>: n77: 0.09 dBi n78: 0.09 dBi <Ant. 7>: n77: 0.13 dBi n78: 0.13 dBi <Ant. 11>: n77: -2.11 dBi n78: -2.11 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The device supports n77/n78(1T4R) SRS resources on Ant.3/4/7/11, only the worst test data of Antenna 3 is showed in the report.
2. 5G NR n77/n78 support SA mode and NSA mode, The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items..
3. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
4. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NRn77		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
100	3750.00 ~ 3930.00	0.2692	97M4G7D	0.2051	97M7W7D

5G NRn78		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
100	3750.00	0.2624	97M4G7D	0.2004	97M7W7D

Note:

1. G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 270
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report(Y Plane).

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel			
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n77	v	-	v		-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n77		-			-	-	-	-	v	v	v				v	v	v	v	v	
26dB and 99% Bandwidth	n77	v	-	v		-	-	-	-	v	v	v	v	v	v		v		v		
Conducted Band Edge	n77	v	-	v	-	-	-	-	-	v	v	v				v	v	v		v	
Conducted Spurious Emission	n77	v	-	v	-	-	-	-	-	v	v	v				v		v	v	v	
Frequency Stability	n77	v	-		-	-	-	-	-			v					v		v		
E.I.R.P	n77	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																		v	
Note	1. 2. 3. 4. 5.	The mark “v ” means that this configuration is chosen for testing The mark “-” means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Based on engineering evaluation, only the worst modulations test results are shown in the report. Frequency Stability : Normal Voltage = 3.86V ; Low Voltage =3.60V. ; High Voltage =4.43V																			

2.2 Connection Diagram of Test System

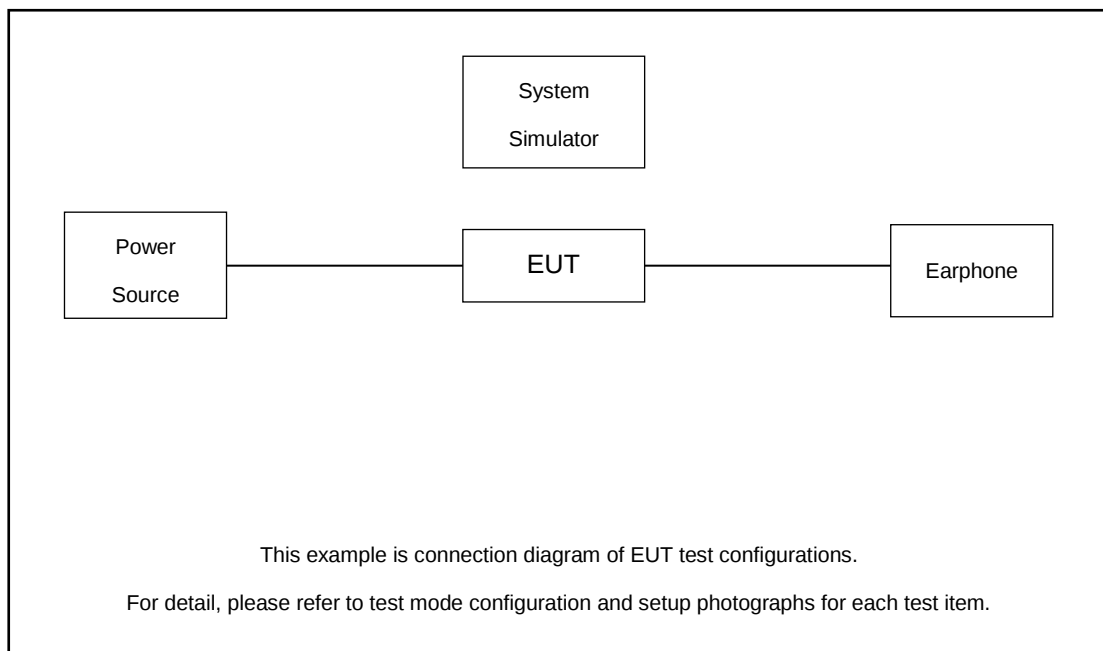

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 6.5 + 20 = 26.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99

5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

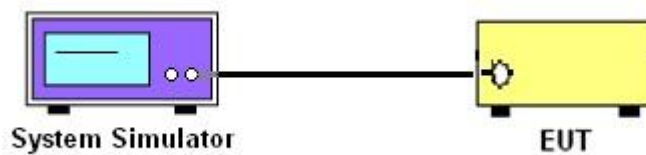

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

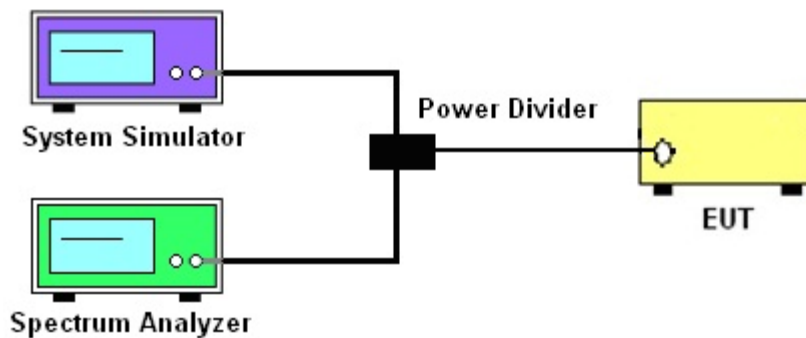

3.2.3 Frequency Stability

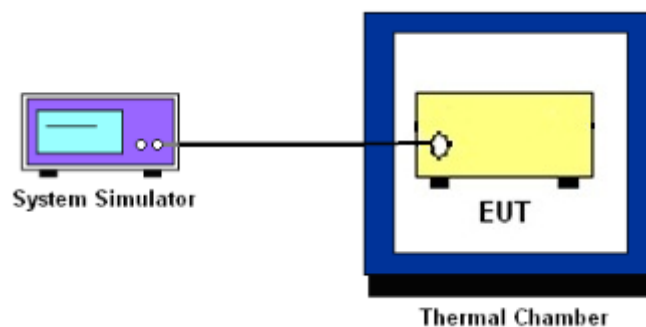

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

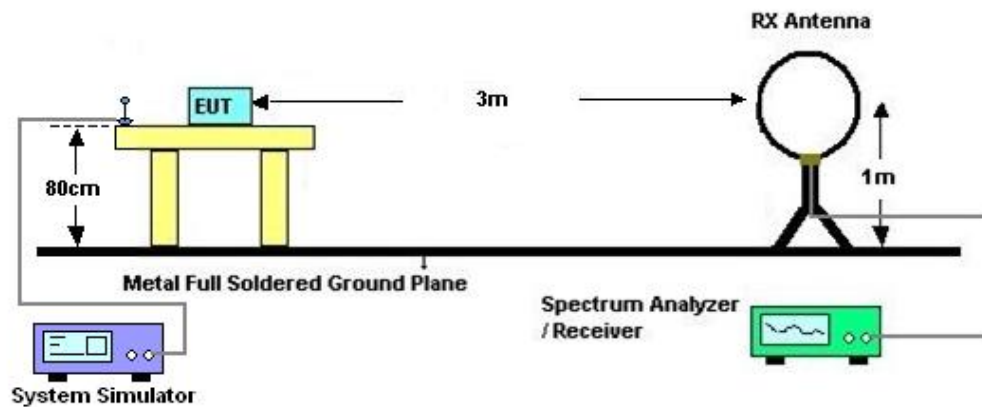

4.2.2 For radiated test from 30MHz to 1GHz

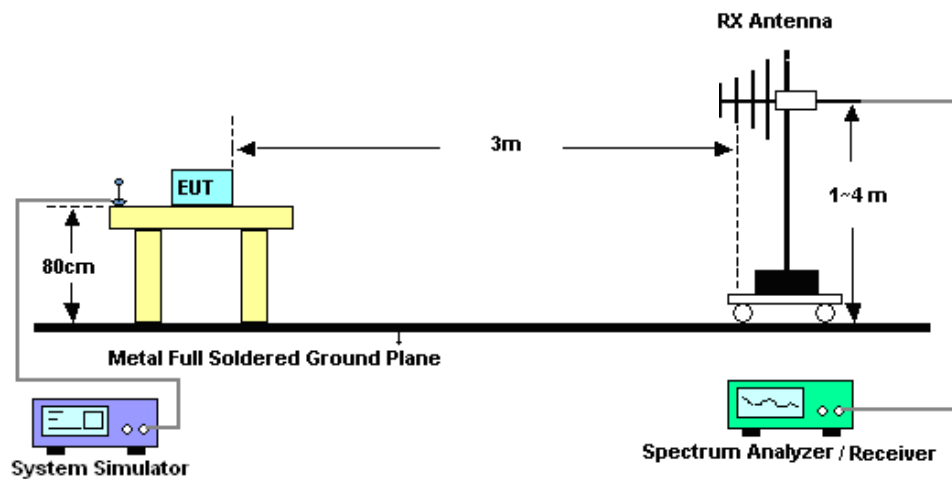

4.2.3 For radiated test above 1GHz

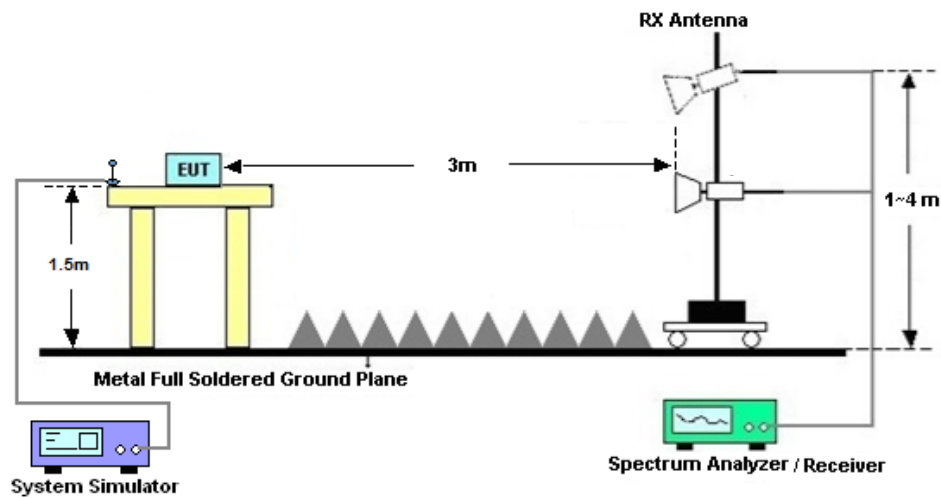

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Jun. 30, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jun. 30, 2023	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Jun. 30, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G, MAX 30dB	Oct. 12, 2022	Jul. 04, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jul. 04, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	Jul. 04, 2023	Apr. 08, 2024	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 04, 2023	Jul. 04, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 04, 2023	Jul. 04, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Jan. 04, 2023	Jul. 04, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 04, 2023	Jul. 04, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 12, 2022	Jul. 04, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz~18Ghz	Oct. 12, 2022	Jul. 04, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 04, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 04, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 04, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 2.26 dB
Occupied Channel Bandwidth	± 0.1 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.82dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.56dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.54dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 n77(Ant3)

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=0.32dB

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@1	23.67	23.99	0.2506
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	23.74	24.06	0.2547
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	22.85	23.17	0.2075
77	30	20	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	23.74	24.06	0.2547
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	23.79	24.11	0.2576
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.82	23.14	0.2061
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@1	23.81	24.13	0.2588
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	23.83	24.15	0.2600
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	22.94	23.26	0.2118
77	30	40	648000	3720	DFT-s-OFDM PI/2 BPSK	1@1	23.83	24.15	0.2600
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	23.83	24.15	0.2600
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	23.13	23.45	0.2213
77	30	40	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	23.98	24.3	0.2692
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	23.8	24.12	0.2582
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.1	23.42	0.2198
77	30	40	664000	3960	DFT-s-OFDM PI/2 BPSK	1@1	23.76	24.08	0.2559
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	23.83	24.15	0.2600
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	23.19	23.51	0.2244
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	23.98	24.3	0.2692
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	23.96	24.28	0.2679
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	23.57	23.89	0.2449
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	23.61	23.93	0.2472
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	23.71	24.03	0.2529
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	23.44	23.76	0.2377
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	22.55	22.87	0.1936
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	22.63	22.95	0.1972
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	22.38	22.7	0.1862
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	21.16	21.48	0.1406
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	21.01	21.33	0.1358
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	20.99	21.31	0.1352
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	19.1	19.42	0.0875
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	18.98	19.3	0.0851
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	18.76	19.08	0.0809
77	30	100	650000	3750	CP-OFDM QPSK	137@68	22.1	22.42	0.1746
77	30	100	650000	3750	CP-OFDM QPSK	1@1	22.11	22.43	0.1750
77	30	100	650000	3750	CP-OFDM QPSK	1@271	21.89	22.21	0.1663

77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	23.69	24.01	0.2518
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	23.62	23.94	0.2477
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	23.58	23.9	0.2455
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	23.65	23.97	0.2495
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	23.56	23.88	0.2443
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	23.58	23.9	0.2455
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	22.62	22.94	0.1968
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.61	22.93	0.1963
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	22.71	23.03	0.2009
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	21.13	21.45	0.1396
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	20.97	21.29	0.1346
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	21.08	21.4	0.1380
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	19.12	19.44	0.0879
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	18.91	19.23	0.0838
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	18.91	19.23	0.0838
77	30	100	656000	3840	CP-OFDM QPSK	137@68	22.11	22.43	0.1750
77	30	100	656000	3840	CP-OFDM QPSK	1@1	22.06	22.38	0.1730
77	30	100	656000	3840	CP-OFDM QPSK	1@271	22.08	22.4	0.1738
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	23.9	24.22	0.2642
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	23.83	24.15	0.2600
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	23.82	24.14	0.2594
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	23.6	23.92	0.2466
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	23.56	23.88	0.2443
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	23.74	24.06	0.2547
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	22.59	22.91	0.1954
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	22.71	23.03	0.2009
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	22.8	23.12	0.2051
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	21.12	21.44	0.1393
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	20.94	21.26	0.1337
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	21.09	21.41	0.1384
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	19.1	19.42	0.0875
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	18.89	19.21	0.0834
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	19.03	19.35	0.0861
77	30	100	662000	3930	CP-OFDM QPSK	137@68	22.05	22.37	0.1726
77	30	100	662000	3930	CP-OFDM QPSK	1@1	22.04	22.36	0.1722
77	30	100	662000	3930	CP-OFDM QPSK	1@271	22.15	22.47	0.1766

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0023	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0017	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0016	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0011	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0023	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0016	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0021	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0013	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0026	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0014	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	270@0	10.09	13	PASS
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	7.47	13	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	270@0	10.41	13	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	7.37	13	PASS

N77(100M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH




N77(100M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH



N77(100M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH




N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

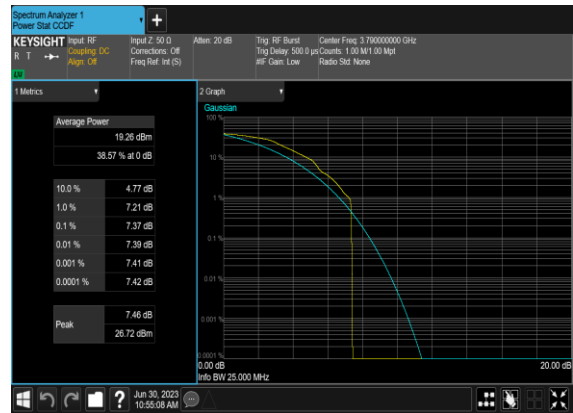


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.164	19.31
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.246	19.26
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.119	19.54
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.227	19.25
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.828	39.37
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.791	39.26
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.816	39.27
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.84	39.14
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.354	100.5
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.684	100.5
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.399	100.4
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.679	100.5


N77(20M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

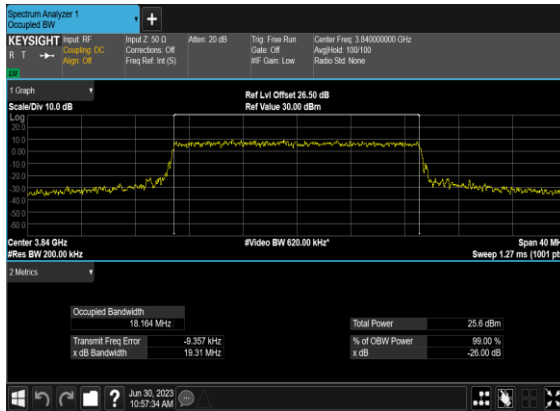


N77(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

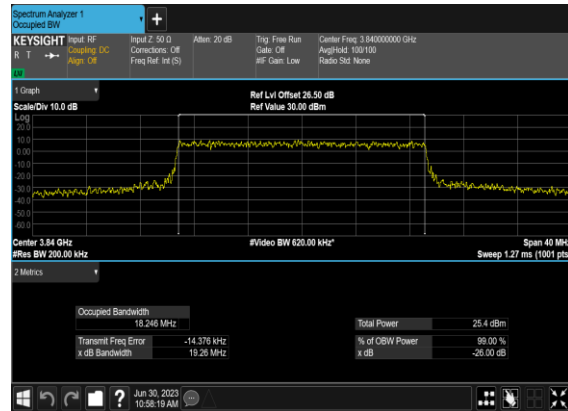


N77(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

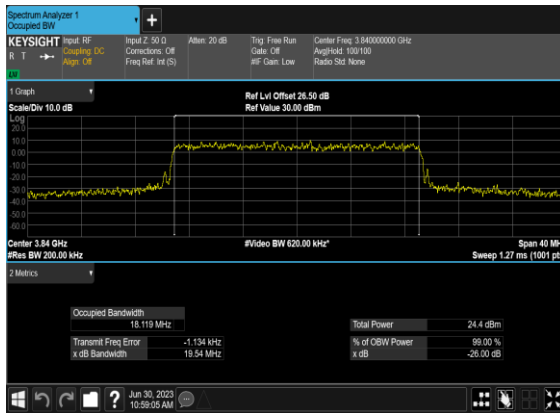


N77(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

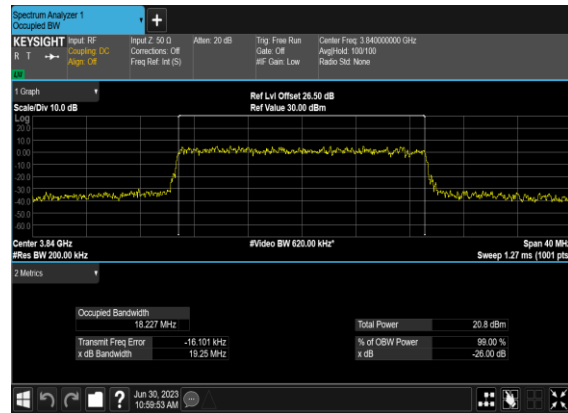


N77(40M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

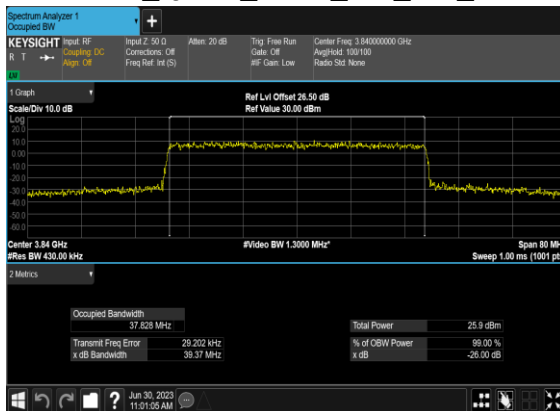


N77(40M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

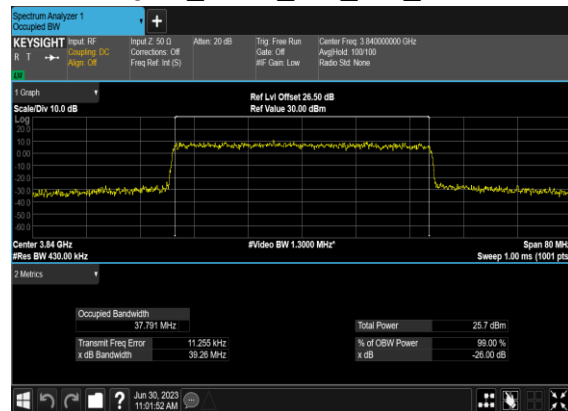


N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

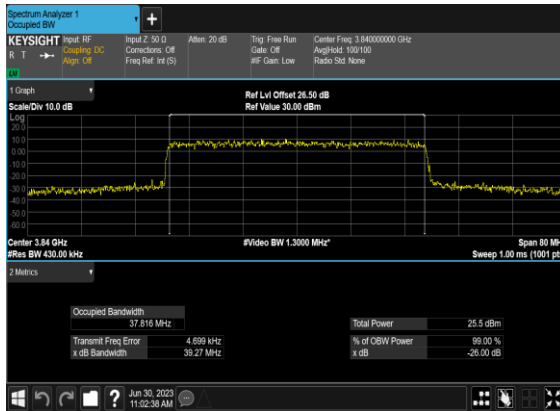


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

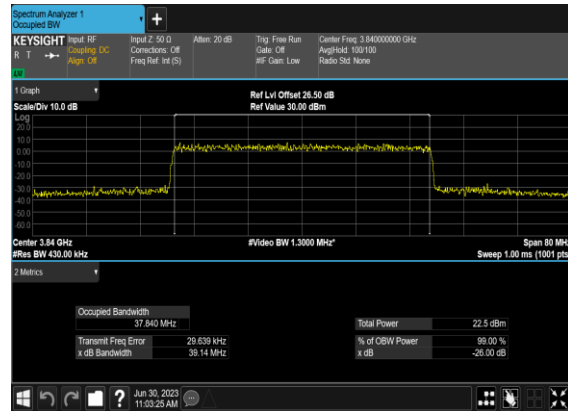


N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

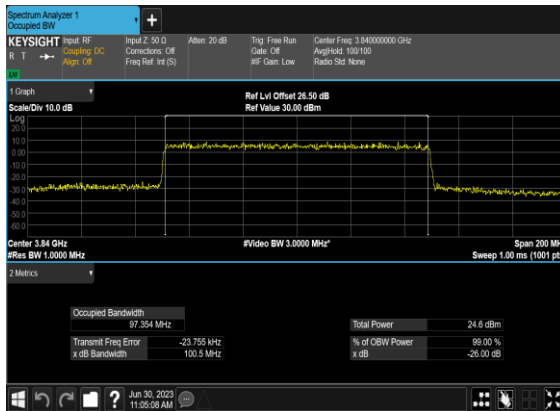


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

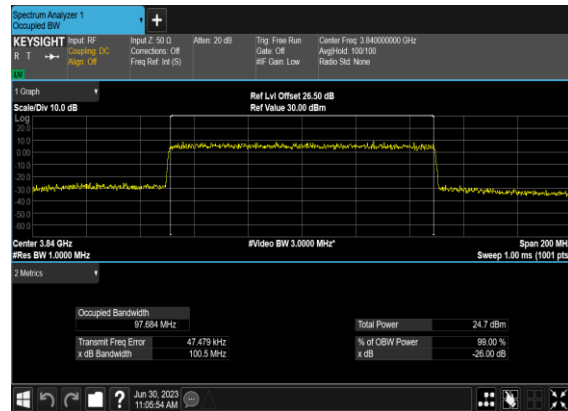

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

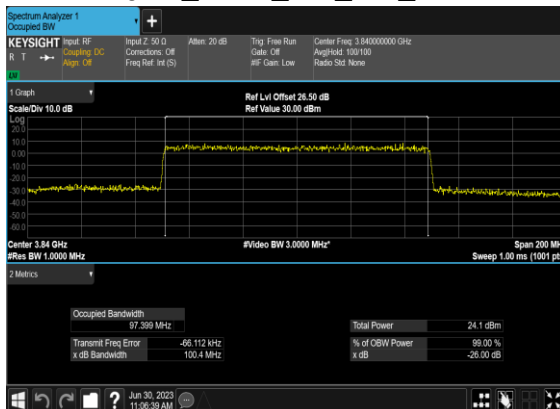

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

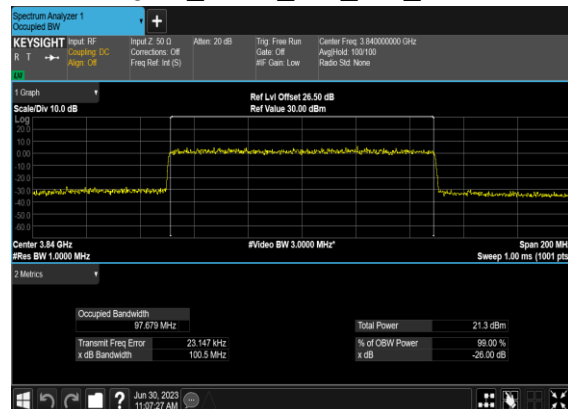


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	40	648000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	PASS


77	30	40	648000	3720.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	40	648000	3720.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	656000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	40	656000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	40	656000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	40	664000	3960.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	40	664000	3960.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS

77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

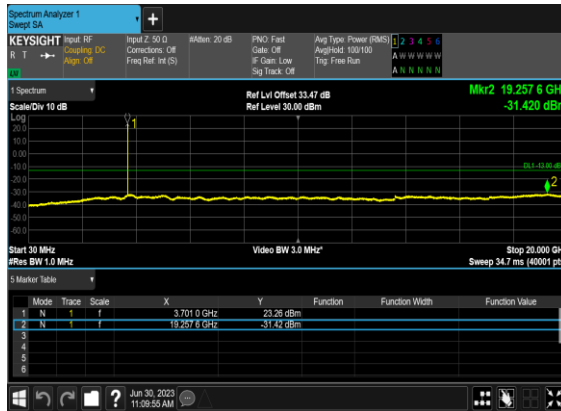


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

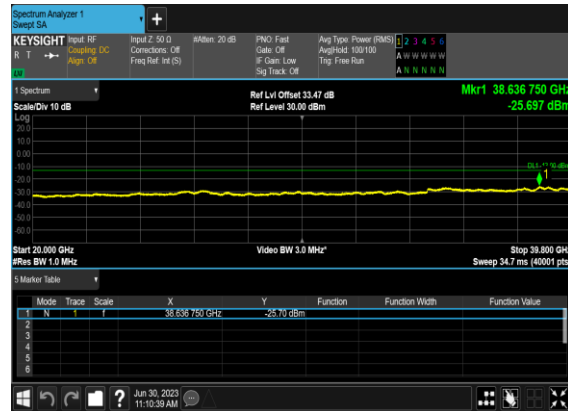


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

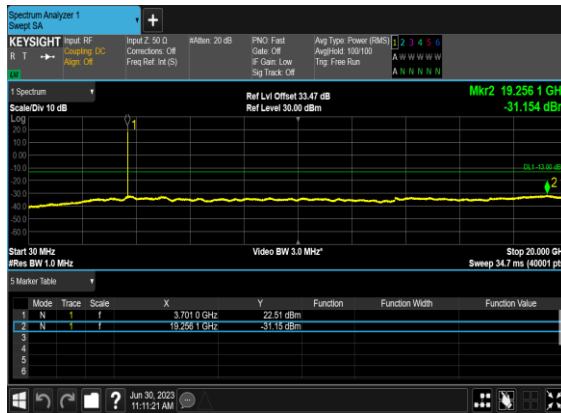


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

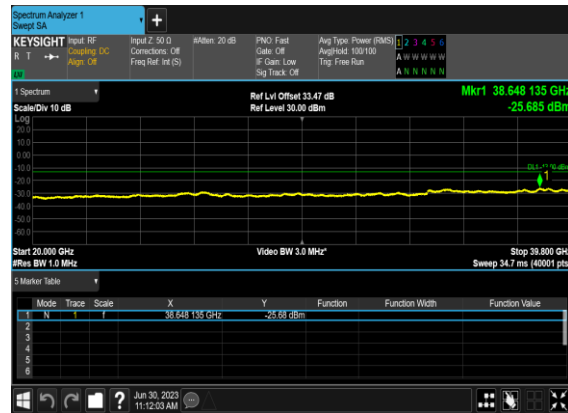


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

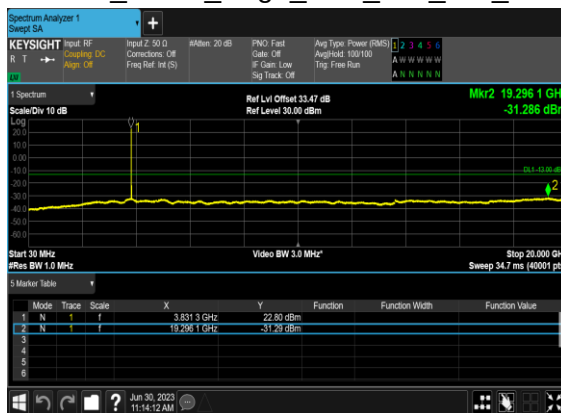


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

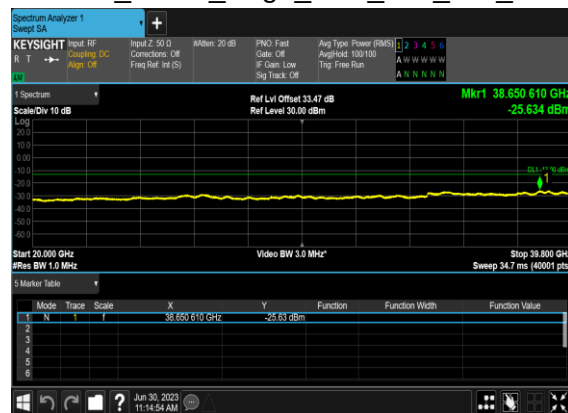


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

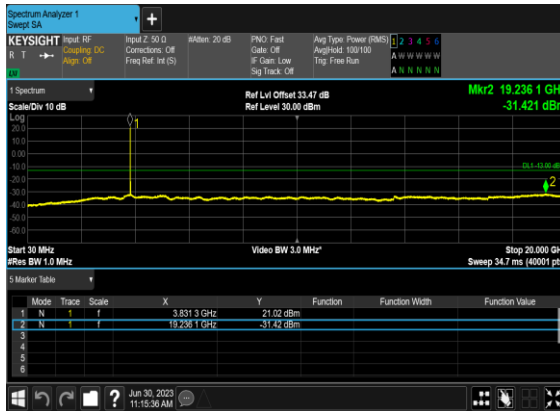


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

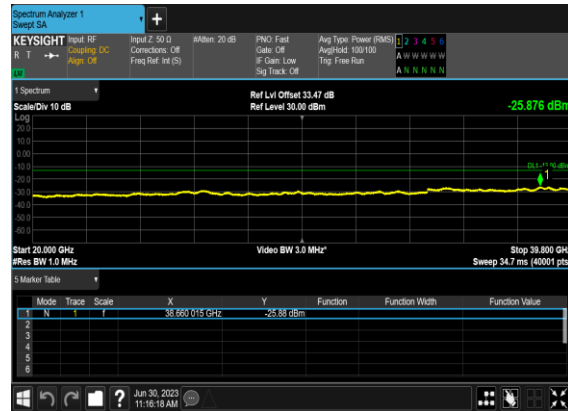


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

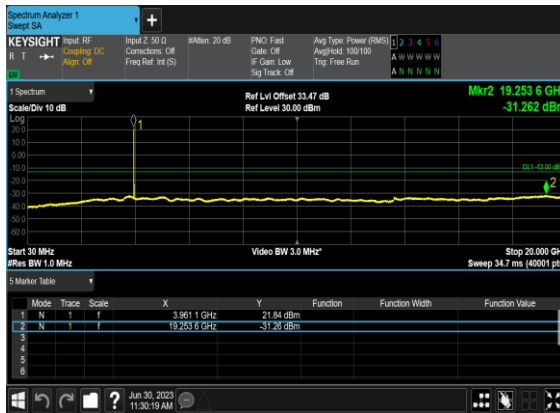


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

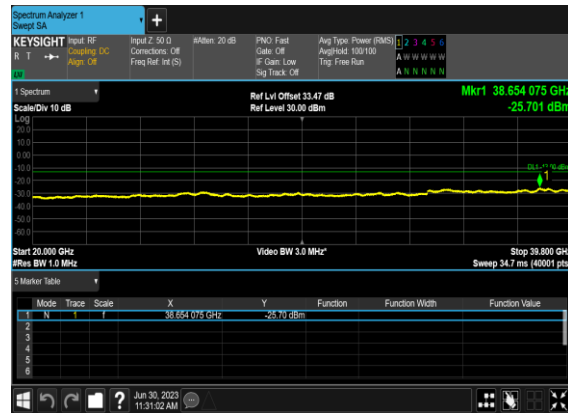


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

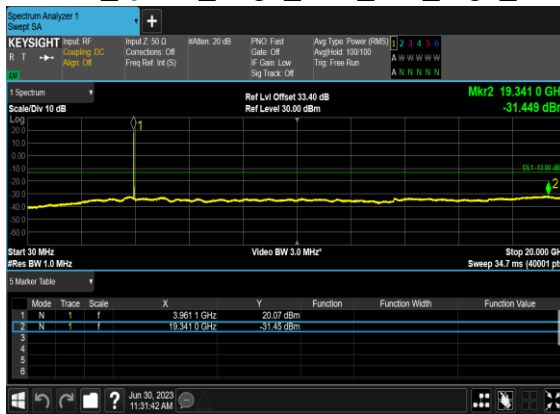


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

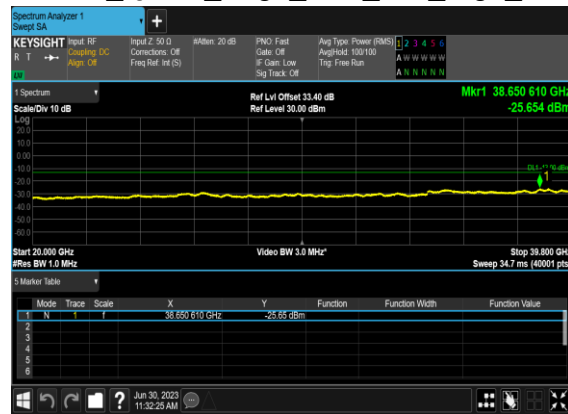


N77(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

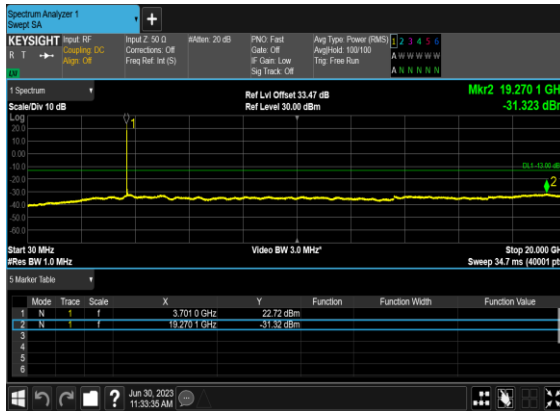


N77(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

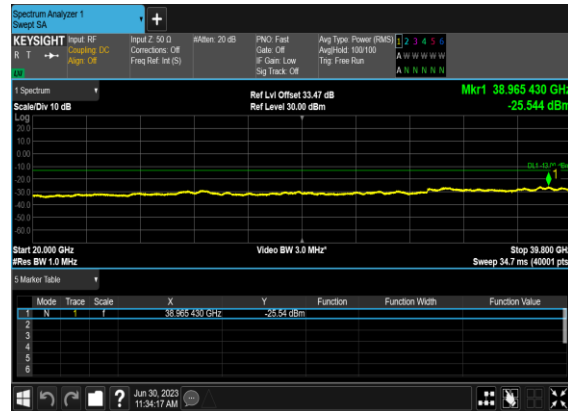


N77(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

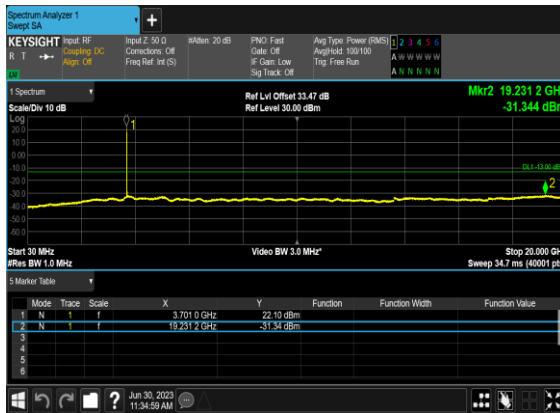


N77(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

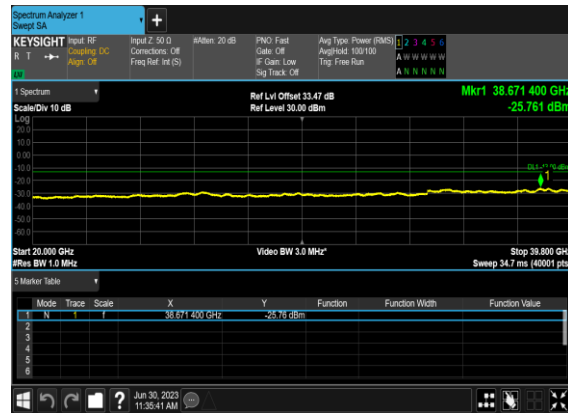


N77(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

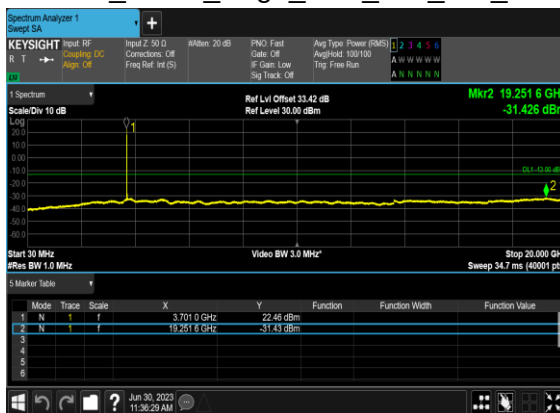


N77(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

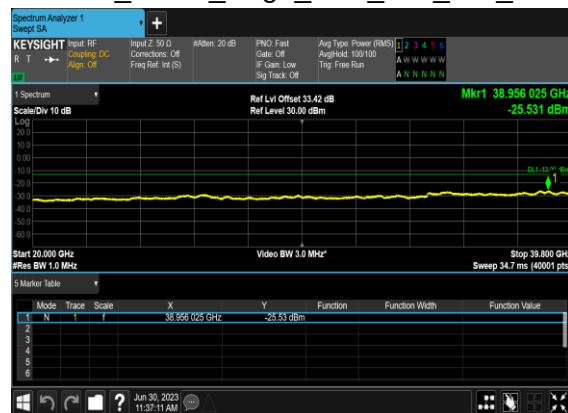


N77(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

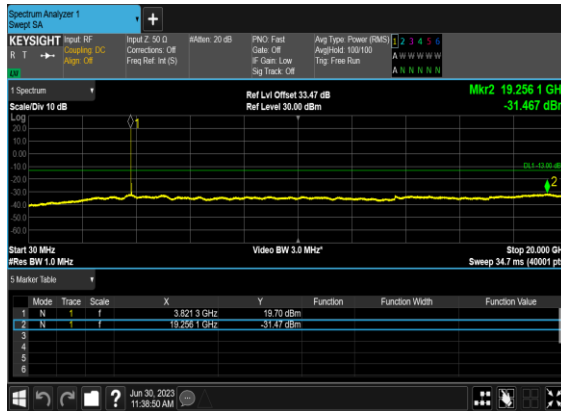


N77(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

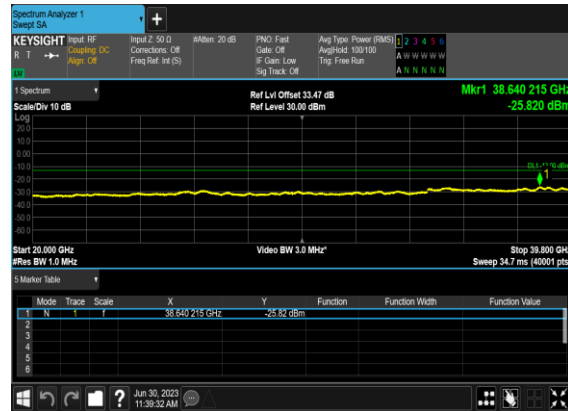


N77(40M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

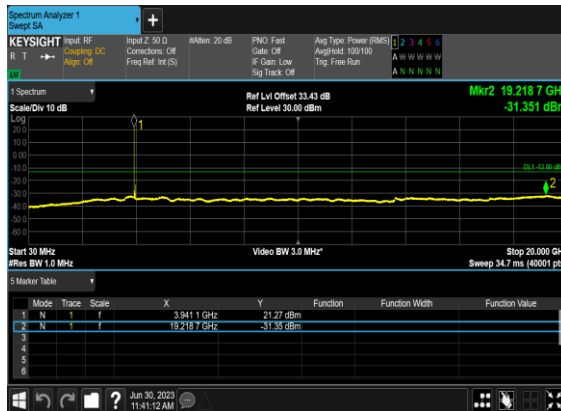


N77(40M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

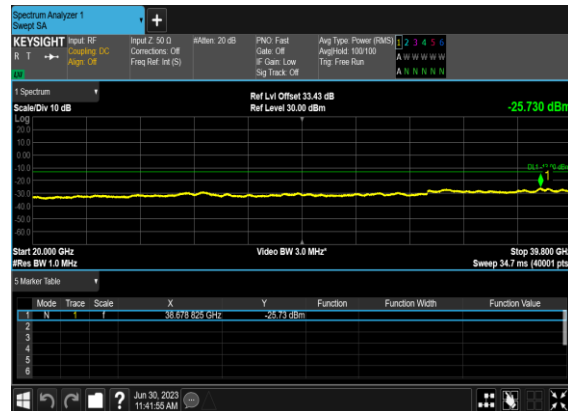


N77(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

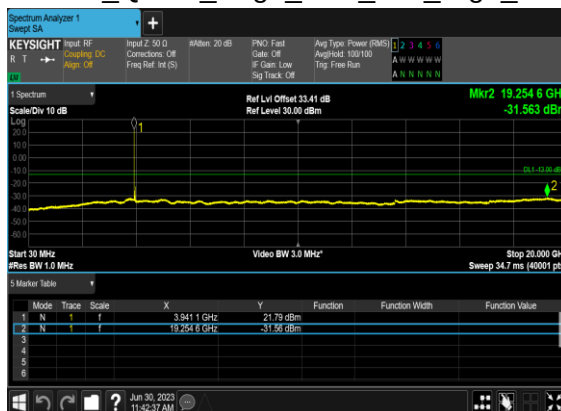


N77(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

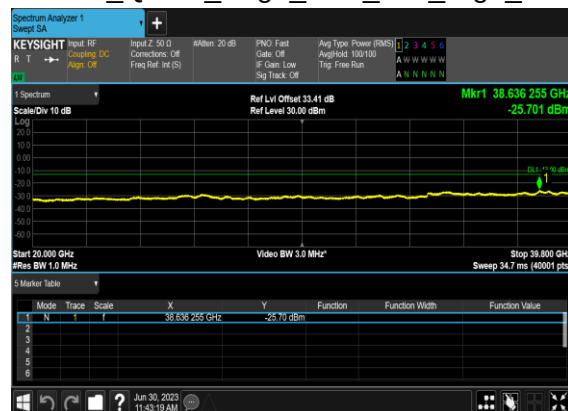


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

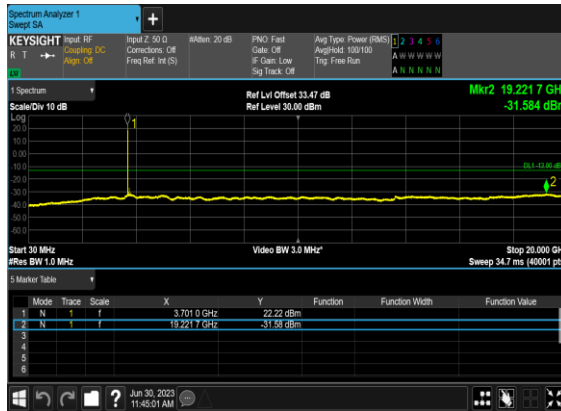


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

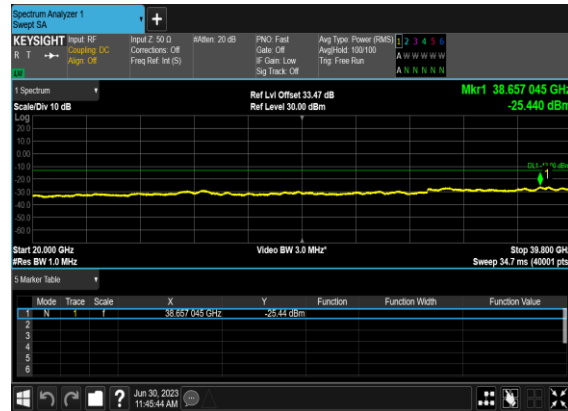


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

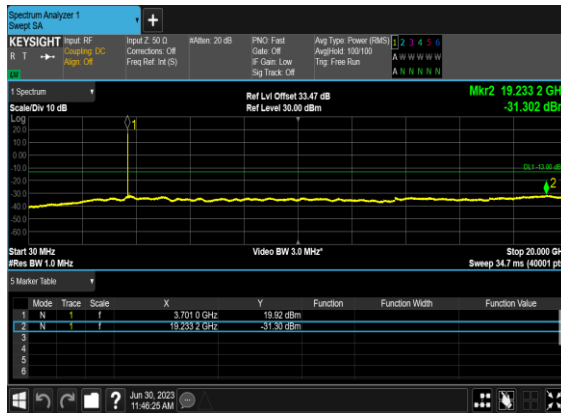


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

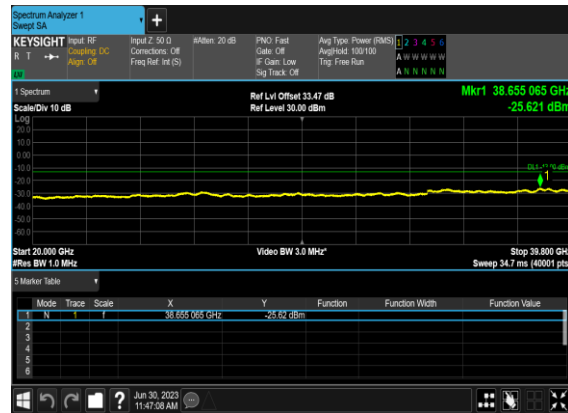


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

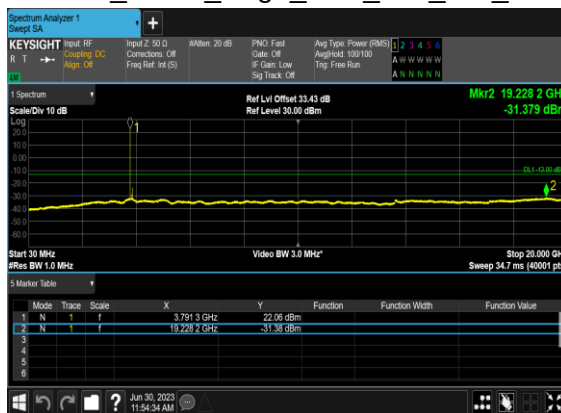


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

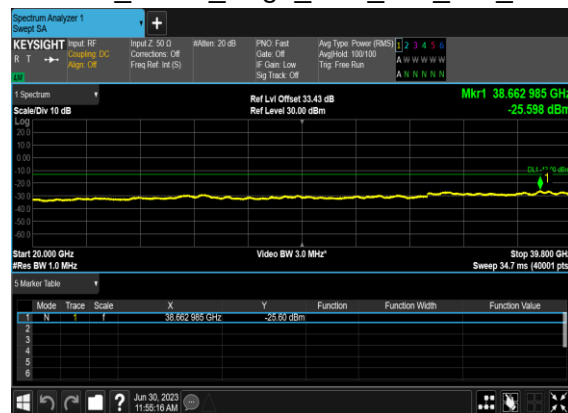


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

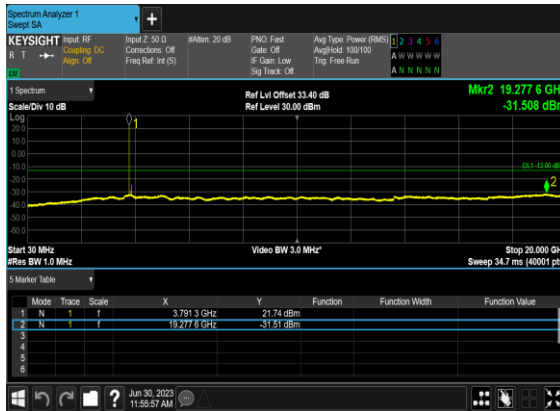


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

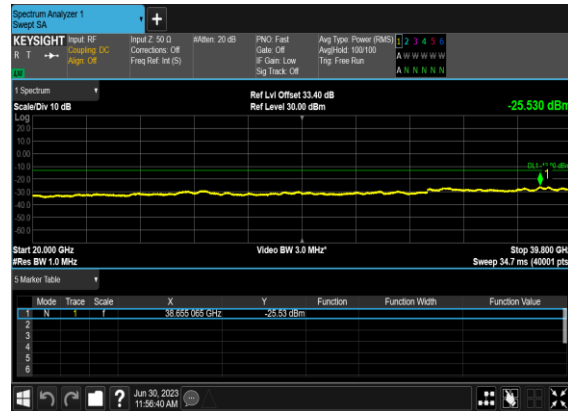


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

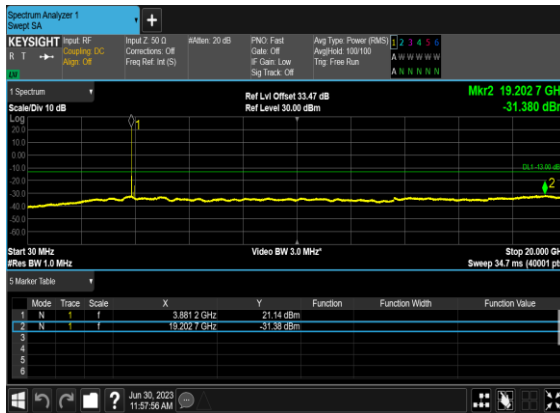


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

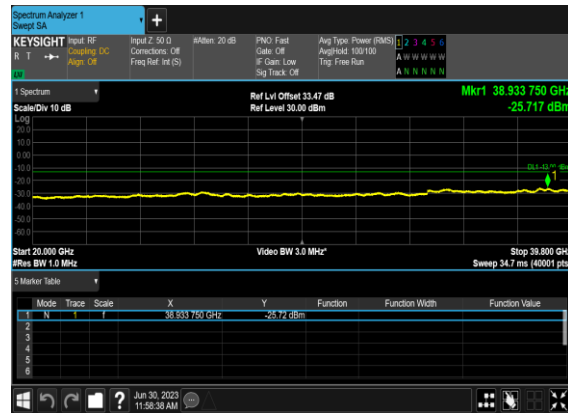

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

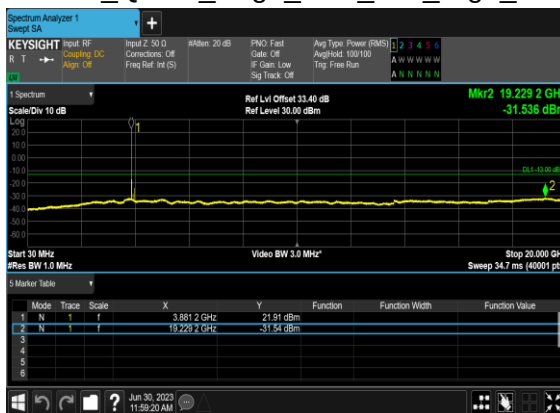


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

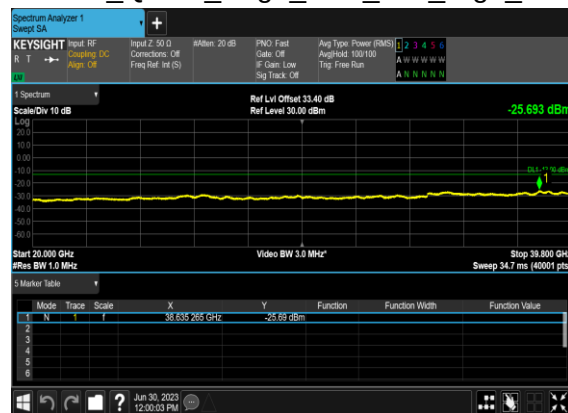


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@50	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@50	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
77	30	40	648000	3720.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
77	30	40	664000	3960.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	270@0	see graph	PASS


N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

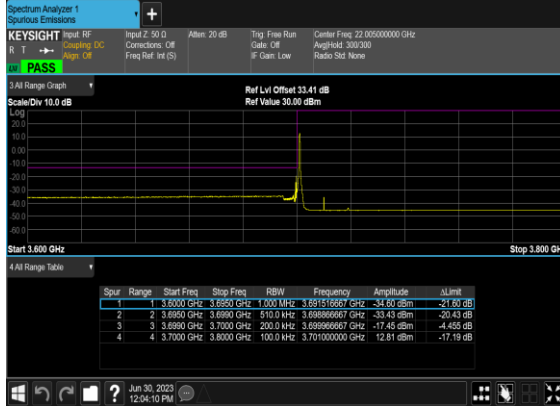


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

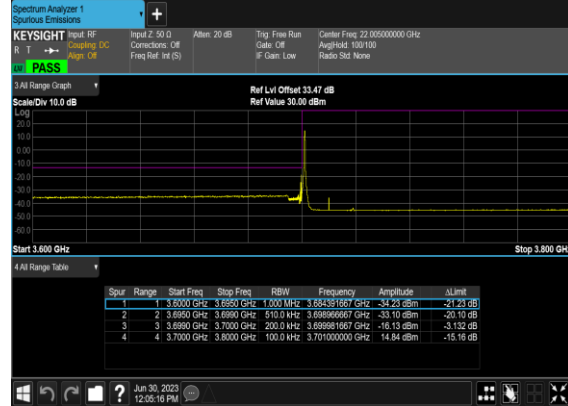


N77(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

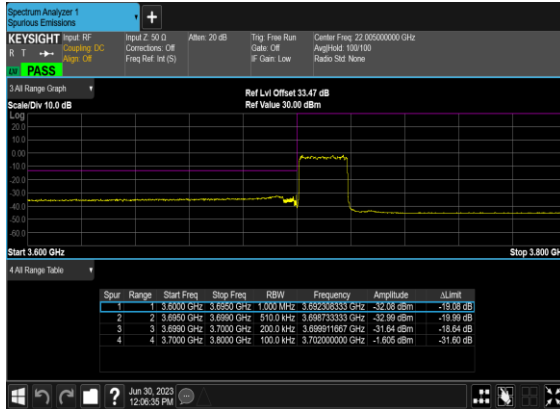


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

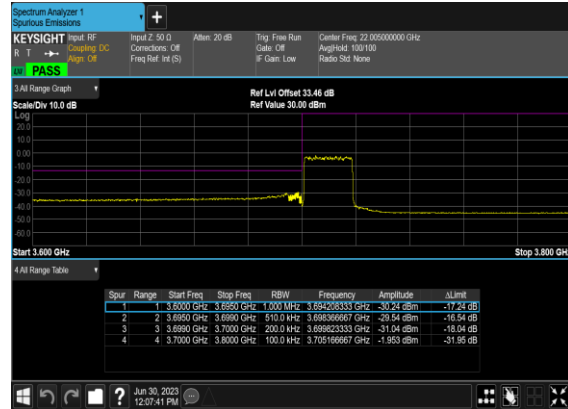


N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

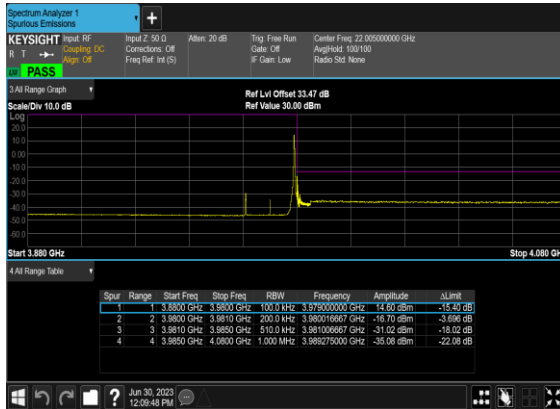


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

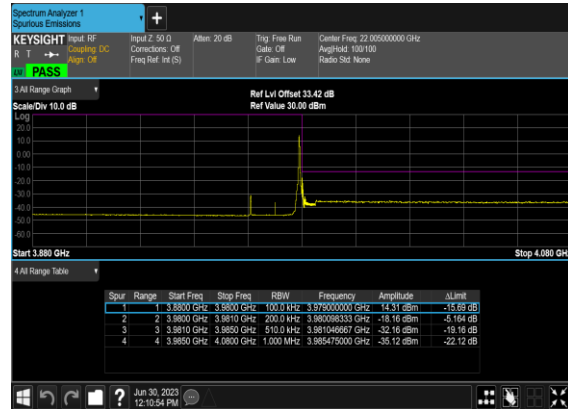


N77(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

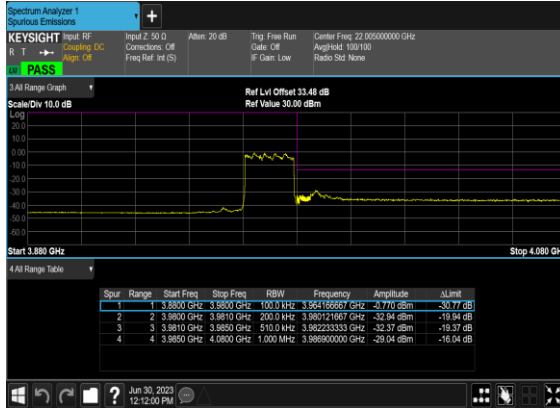


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

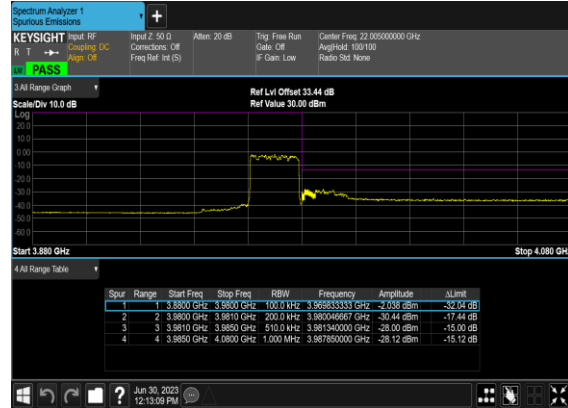


N77(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

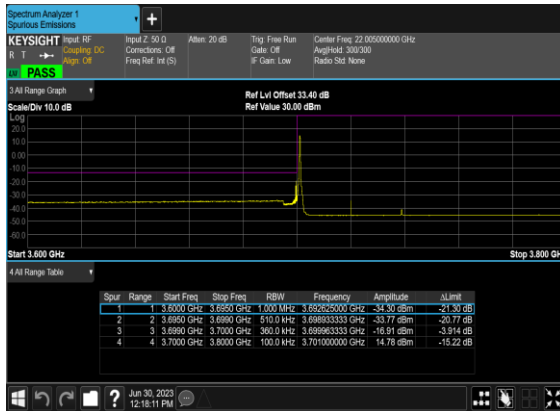


N77(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

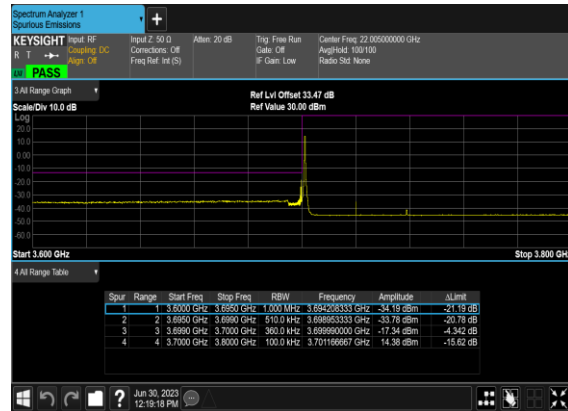


N77(40M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

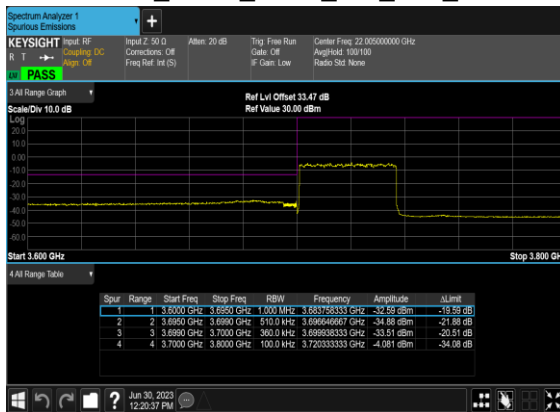


N77(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

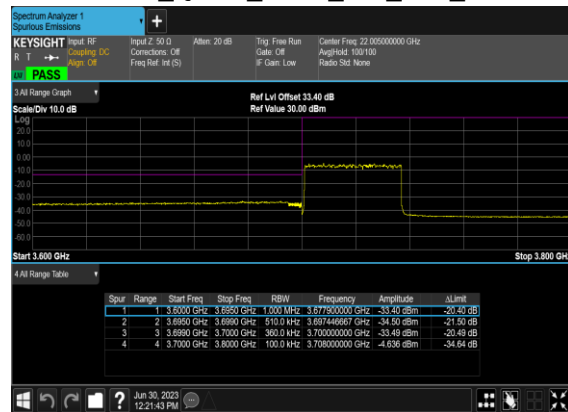


N77(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

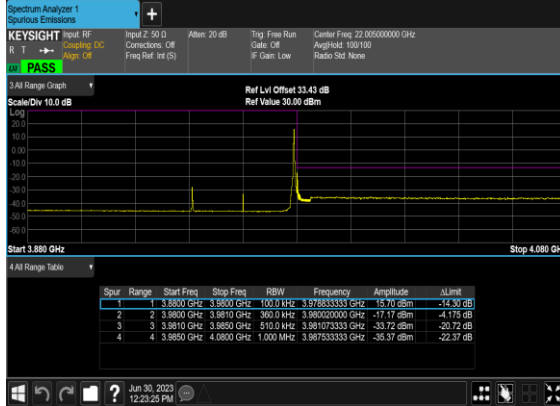


N77(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

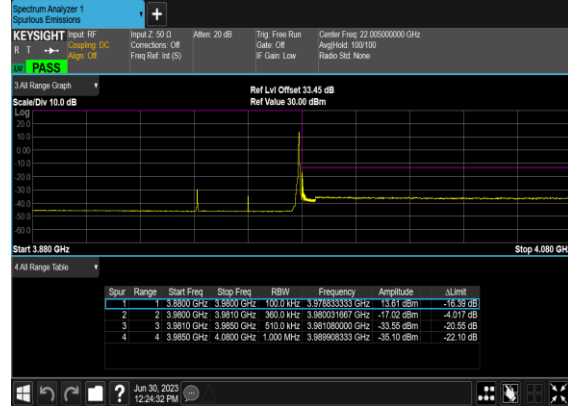


N77(40M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

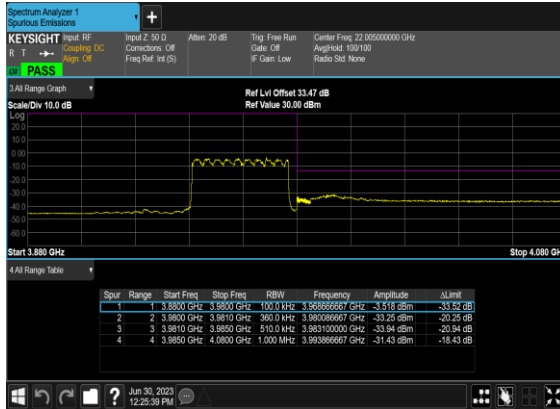


N77(40M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

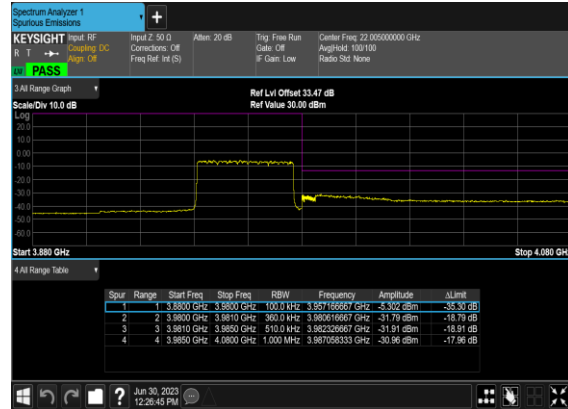


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

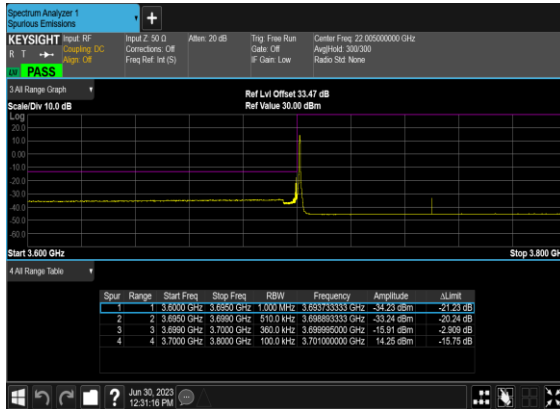


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

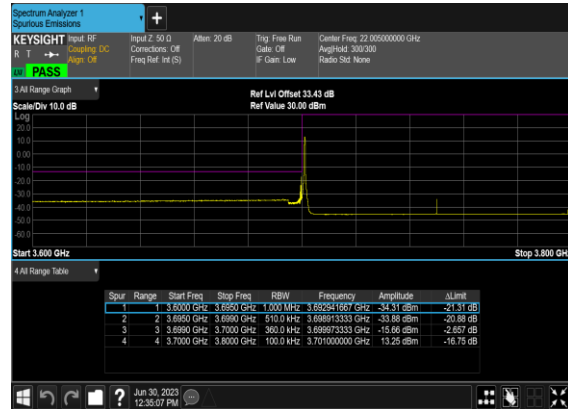


N77(100M)_DFT-s- OFDM_BPSK_Outer_Full_Low_CH

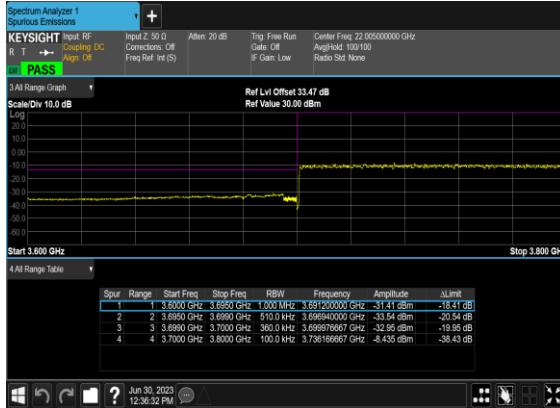


N77(100M)_DFT-s- OFDM_QPSK_Outer_Full_Low_CH

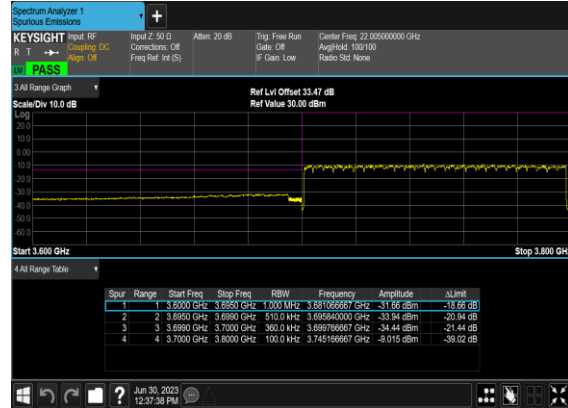


N77(100M)_DFT-s- OFDM_BPSK_Edge_1RB_Right_High_CH

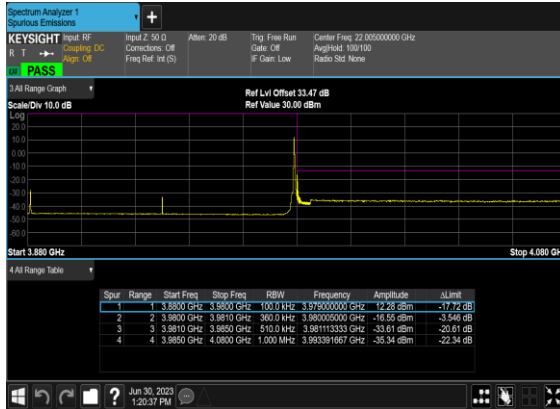


N77(100M)_DFT-s- OFDM_QPSK_Edge_1RB_Right_High_CH

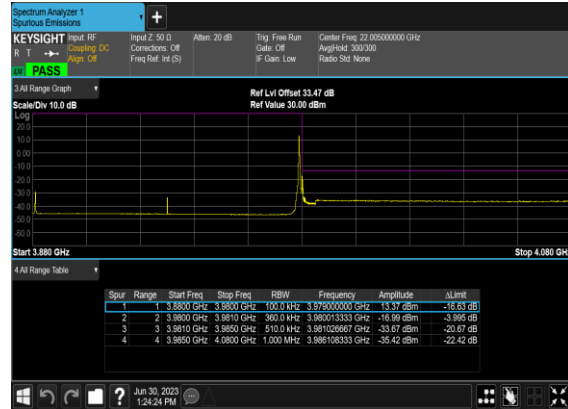

N77(100M)_DFT-s- OFDM_BPSK_Outer_Full_High_CH

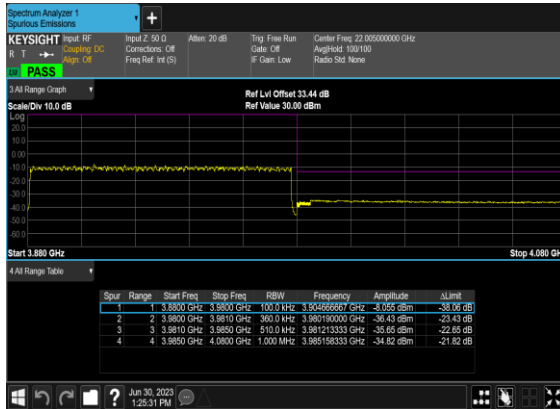

N77(100M)_DFT-s- OFDM_QPSK_Outer_Full_High_CH

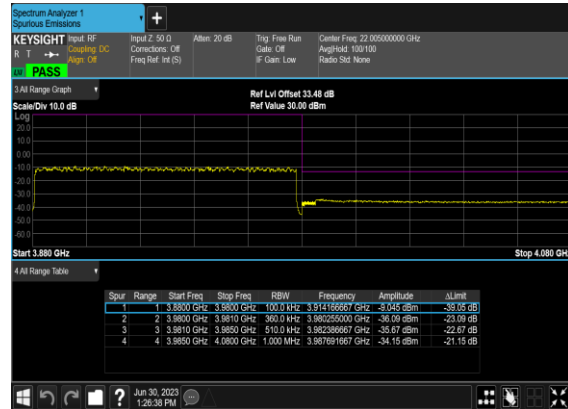

FR1 n78(Ant3)

Transmitter Conducted Output Power And EIRP, $(G_T-L_C)=0.32\text{dB}$

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
78	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@1	23.62	23.94	0.2477
78	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	23.66	23.98	0.2500
78	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	22.8	23.12	0.2051
78	30	20	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	23.72	24.04	0.2535
78	30	20	650000	3750	DFT-s-OFDM QPSK	1@1	23.73	24.05	0.2541
78	30	20	650000	3750	DFT-s-OFDM 16 QAM	1@1	22.88	23.2	0.2089
78	30	20	652666	3789.99	DFT-s-OFDM PI/2 BPSK	1@1	23.75	24.07	0.2553
78	30	20	652666	3789.99	DFT-s-OFDM QPSK	1@1	23.71	24.03	0.2529
78	30	20	652666	3789.99	DFT-s-OFDM 16 QAM	1@1	22.78	23.1	0.2042
78	30	40	648000	3720	DFT-s-OFDM PI/2 BPSK	1@1	23.85	24.17	0.2612
78	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	23.86	24.18	0.2618
78	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	23.09	23.41	0.2193
78	30	40	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	23.66	23.98	0.2500
78	30	40	650000	3750	DFT-s-OFDM QPSK	1@1	23.68	24	0.2512
78	30	40	650000	3750	DFT-s-OFDM 16 QAM	1@1	22.93	23.25	0.2113
78	30	40	652000	3780	DFT-s-OFDM PI/2 BPSK	1@1	23.81	24.13	0.2588
78	30	40	652000	3780	DFT-s-OFDM QPSK	1@1	23.76	24.08	0.2559
78	30	40	652000	3780	DFT-s-OFDM 16 QAM	1@1	23.01	23.33	0.2153
78	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	23.51	23.83	0.2415
78	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	23.59	23.91	0.2460
78	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	23.47	23.79	0.2393
78	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	23.87	24.19	0.2624
78	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	23.7	24.02	0.2523
78	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	23.54	23.86	0.2432
78	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	22.67	22.99	0.1991
78	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	22.7	23.02	0.2004
78	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	22.59	22.91	0.1954
78	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	21.21	21.53	0.1422
78	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	21	21.32	0.1355
78	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	20.91	21.23	0.1327
78	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	19.19	19.51	0.0893
78	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	18.95	19.27	0.0845
78	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	18.83	19.15	0.0822
78	30	100	650000	3750	CP-OFDM QPSK	137@68	22.18	22.5	0.1778
78	30	100	650000	3750	CP-OFDM QPSK	1@1	22.06	22.38	0.1730
78	30	100	650000	3750	CP-OFDM QPSK	1@271	21.97	22.29	0.1694



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Chris Chen	Temperature :	23~25°C
		Relative Humidity :	41~42%

Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test and record in the report.

SA n77 / NR 100MHz / QPSK / ANT3(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7584	-40.03	-13	-27.03	-50.24	3.03	13.24	H
	11376	-48.71	-13	-35.71	-58.16	3.56	13.01	H
	15180	-44.53	-13	-31.53	-54.05	3.92	13.44	H
	7584	-49.11	-13	-36.11	-59.32	3.03	13.24	V
	11376	-51.83	-13	-38.83	-61.28	3.56	13.01	V
	15180	-44.13	-13	-31.13	-53.65	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC 41A n77A / LTE 10MHz + NR 100MHz / QPSK / ANT2 (LTE) & ANT3(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7584	-62.51	-13	-49.51	-72.72	3.03	13.24	H
	11388	-60.32	-13	-47.32	-69.77	3.56	13.01	H
	15180	-58.66	-13	-45.66	-68.18	3.92	13.44	H
	7584	-62.50	-13	-49.50	-72.71	3.03	13.24	V
	11388	-60.10	-13	-47.10	-69.55	3.56	13.01	V
	15180	-58.82	-13	-45.82	-68.34	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.