



Summary of each worse mode

| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|---------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 1 | 802.11a | 36 | 5149.76 | 50.57 | 54.00 | -3.43 | H | AVERAGE | Pass | Band Edge |
| | 802.11a | 36 | 10360.00 | 58.78 | 68.30 | -9.52 | H | Peak | Pass | Harmonic |
| 2 | 802.11a | 44 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 44 | 10439.33 | 61.24 | 68.30 | -7.06 | H | Peak | Pass | Harmonic |
| 3 | 802.11a | 48 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 48 | 10481.13 | 60.69 | 68.30 | -7.61 | H | Peak | Pass | Harmonic |
| 4 | 802.11a | 52 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 52 | 10520.73 | 57.66 | 68.30 | -10.64 | H | Peak | Pass | Harmonic |
| 5 | 802.11a | 60 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 60 | 10600.00 | 50.75 | 54.00 | -3.25 | H | AVERAGE | Pass | Harmonic |
| 6 | 802.11a | 64 | 5350.24 | 50.10 | 54.00 | -3.90 | H | AVERAGE | Pass | Band Edge |
| | 802.11a | 64 | 10640.00 | 47.68 | 54.00 | -6.32 | H | AVERAGE | Pass | Harmonic |
| 7 | 802.11a | 100 | 5459.88 | 50.21 | 54.00 | -3.79 | H | AVERAGE | Pass | Band Edge |
| | 802.11a | 100 | 11000.00 | 50.49 | 54.00 | -3.51 | V | AVERAGE | Pass | Harmonic |
| 8 | 802.11a | 116 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 116 | 11160.00 | 49.42 | 54.00 | -4.58 | V | AVERAGE | Pass | Harmonic |
| 9 | 802.11a | 140 | 5727.71 | 62.93 | 68.30 | -5.37 | H | PEAK | Pass | Band Edge |
| | 802.11a | 140 | 11400.00 | 50.42 | 54.00 | -3.58 | H | AVERAGE | Pass | Harmonic |
| 10 | 802.11ax HE20 | 36 | 5149.53 | 49.73 | 54.00 | -4.27 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 36 | 10360.00 | 62.08 | 68.30 | -6.22 | H | PEAK | Pass | Harmonic |
| 11 | 802.11ax HE20 | 44 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 44 | 10440.00 | 60.85 | 68.30 | -7.45 | H | PEAK | Pass | Harmonic |



Summary of each worse mode

| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|---------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 12 | 802.11ax HE20 | 48 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 48 | 10480.00 | 60.27 | 68.30 | -8.03 | H | PEAK | Pass | Harmonic |
| 13 | 802.11ax HE20 | 52 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 52 | 10520.73 | 58.31 | 68.30 | -9.99 | V | Peak | Pass | Harmonic |
| 14 | 802.11ax HE20 | 60 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 60 | 10600.00 | 50.64 | 54.00 | -3.36 | H | AVERAGE | Pass | Harmonic |
| 15 | 802.11ax HE20 | 64 | 5350.46 | 49.29 | 54.00 | -4.71 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 64 | 10640.00 | 50.84 | 54.00 | -3.16 | H | AVERAGE | Pass | Harmonic |
| 16 | 802.11ax HE20 | 100 | 5455.98 | 49.17 | 54.00 | -4.83 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 100 | 11000.00 | 50.67 | 54.00 | -3.33 | V | AVERAGE | Pass | Harmonic |
| 17 | 802.11ax HE20 | 116 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 116 | 11160.00 | 49.80 | 54.00 | -4.20 | V | AVERAGE | Pass | Harmonic |
| 18 | 802.11ax HE20 | 140 | 5728.90 | 60.65 | 68.30 | -7.65 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 140 | 11400.00 | 50.85 | 54.00 | -3.15 | H | AVERAGE | Pass | Harmonic |
| 19 | 802.11ax HE20 | 36 | 5100.02 | 47.75 | 54.00 | -6.25 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 36 | - | - | - | - | - | - | - | Harmonic |
| 20 | 802.11ax HE20 | 64 | 5459.78 | 47.21 | 54.00 | -6.79 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 64 | - | - | - | - | - | - | - | Harmonic |
| 21 | 802.11ax HE20 | 100 | 5457.17 | 47.25 | 54.00 | -6.75 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 100 | - | - | - | - | - | - | - | Harmonic |
| 22 | 802.11ax HE20 | 140 | 5764.26 | 60.07 | 68.30 | -8.23 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 140 | - | - | - | - | - | - | - | Harmonic |



Summary of each worse mode

| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|---------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 23 | 802.11ax HE20 | 36 | 5101.37 | 47.77 | 54.00 | -6.23 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 36 | - | - | - | - | - | - | - | Harmonic |
| 24 | 802.11ax HE20 | 64 | 5458.48 | 47.22 | 54.00 | -6.78 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 64 | - | - | - | - | - | - | - | Harmonic |
| 25 | 802.11ax HE20 | 100 | 5459.94 | 47.35 | 54.00 | -6.65 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 100 | - | - | - | - | - | - | - | Harmonic |
| 26 | 802.11ax HE20 | 140 | 5744.24 | 60.35 | 68.30 | -7.95 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 140 | - | - | - | - | - | - | - | Harmonic |
| 27 | 802.11ax HE20 | 36 | 5102.30 | 47.75 | 54.00 | -6.25 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 36 | - | - | - | - | - | - | - | Harmonic |
| 28 | 802.11ax HE20 | 64 | 5459.21 | 47.19 | 54.00 | -6.81 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 64 | - | - | - | - | - | - | - | Harmonic |
| 29 | 802.11ax HE20 | 100 | 5459.88 | 47.47 | 54.00 | -6.53 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE20 | 100 | - | - | - | - | - | - | - | Harmonic |
| 30 | 802.11ax HE20 | 140 | 5744.89 | 60.56 | 68.30 | -7.74 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 140 | - | - | - | - | - | - | - | Harmonic |
| 31 | 802.11ax HE40 | 38 | 5146.95 | 50.93 | 54.00 | -3.07 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 38 | 10380.00 | 55.30 | 68.30 | -13.00 | V | Peak | Pass | Harmonic |
| 32 | 802.11ax HE40 | 46 | 5021.51 | 49.61 | 54.00 | -4.39 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 46 | 10460.60 | 57.83 | 68.30 | -10.47 | H | Peak | Pass | Harmonic |
| 33 | 802.11ax HE40 | 54 | 5056.03 | 49.64 | 54.00 | -4.36 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 54 | 10540.00 | 58.13 | 68.30 | -10.17 | V | Peak | Pass | Harmonic |



Summary of each worse mode

| Mode | Modulation | Ch. | Freq. | Level | Limit | Margin | Pol. | Peak | Result | Remark |
|------|---------------|-----|----------|-------|-------|--------|------|---------|--------|-----------|
| 34 | 802.11ax HE40 | 62 | 5351.03 | 50.64 | 54.00 | -3.36 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 62 | 10620.00 | 48.85 | 54.00 | -5.15 | V | AVERAGE | Pass | Harmonic |
| 35 | 802.11ax HE40 | 102 | 5458.73 | 50.73 | 54.00 | -3.27 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 102 | 11020.00 | 48.24 | 54.00 | -5.76 | V | AVERAGE | Pass | Harmonic |
| 36 | 802.11ax HE40 | 110 | 5452.51 | 49.32 | 54.00 | -4.68 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 110 | 11100.00 | 39.74 | 54.00 | -14.26 | H | AVERAGE | Pass | Harmonic |
| 37 | 802.11ax HE40 | 134 | 5459.93 | 48.42 | 54.00 | -5.58 | V | AVERAGE | Pass | Band Edge |
| | 802.11ax HE40 | 134 | 11340.00 | 46.01 | 54.00 | -7.99 | H | AVERAGE | Pass | Harmonic |
| 38 | 802.11ax HE80 | 42 | 5145.63 | 50.90 | 54.00 | -3.10 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE80 | 42 | 10420.00 | 48.33 | 68.30 | -19.97 | H | Peak | Pass | Harmonic |
| 39 | 802.11ax HE80 | 58 | 5350.61 | 50.57 | 54.00 | -3.43 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE80 | 58 | 10580.00 | 45.18 | 68.30 | -23.12 | H | PEAK | Pass | Harmonic |
| 40 | 802.11ax HE80 | 106 | 5437.04 | 50.90 | 54.00 | -3.10 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE80 | 106 | 11060.00 | 45.55 | 74.00 | -28.45 | V | PEAK | Pass | Harmonic |
| 41 | 802.11ax HE80 | 122 | 5450.18 | 49.98 | 54.00 | -4.02 | H | AVERAGE | Pass | Band Edge |
| | 802.11ax HE80 | 122 | 11220.00 | 45.92 | 54.00 | -8.08 | V | AVERAGE | Pass | Harmonic |
| 42 | 802.11a | 149 | 5611.97 | 59.66 | 68.30 | -8.64 | H | PEAK | Pass | Band Edge |
| | 802.11a | 149 | 11490.00 | 49.53 | 54.00 | -4.47 | H | AVERAGE | Pass | Harmonic |
| 43 | 802.11a | 157 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 157 | 11570.00 | 50.35 | 54.00 | -3.65 | V | AVERAGE | Pass | Harmonic |
| 44 | 802.11a | 165 | 5944.94 | 58.96 | 68.30 | -9.34 | H | PEAK | Pass | Band Edge |
| | 802.11a | 165 | 11650.00 | 50.81 | 54.00 | -3.19 | V | AVERAGE | Pass | Harmonic |



| | | | | | | | | | | |
|----|---------------|-----|----------|-------|-------|--------|---|---------|------|-----------|
| 45 | 802.11ax HE20 | 149 | 5628.35 | 58.28 | 68.30 | -10.02 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 149 | 11490.00 | 49.59 | 54.00 | -4.41 | H | AVERAGE | Pass | Harmonic |
| 46 | 802.11ax HE20 | 157 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 157 | 11570.00 | 49.71 | 54.00 | -4.29 | V | AVERAGE | Pass | Harmonic |
| 47 | 802.11ax HE20 | 165 | 5937.82 | 60.38 | 68.30 | -7.92 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 165 | 11650.00 | 50.58 | 54.00 | -3.42 | V | AVERAGE | Pass | Harmonic |
| 48 | 802.11ax HE40 | 151 | 5947.27 | 60.30 | 68.30 | -8.00 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE40 | 151 | 11510.00 | 49.00 | 54.00 | -5.00 | V | AVERAGE | Pass | Harmonic |
| 49 | 802.11ax HE40 | 159 | 5603.90 | 59.42 | 68.30 | -8.88 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE40 | 159 | 11590.00 | 50.50 | 54.00 | -3.50 | V | AVERAGE | Pass | Harmonic |
| 50 | 802.11ax HE80 | 155 | 5937.23 | 59.16 | 68.30 | -9.14 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE80 | 155 | 11550.00 | 50.93 | 54.00 | -3.07 | V | AVERAGE | Pass | Harmonic |
| 51 | 802.11ax HE20 | 149 | 5634.95 | 58.59 | 68.30 | -9.71 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 149 | - | - | - | - | - | - | - | Harmonic |
| 52 | 802.11ax HE20 | 165 | 5935.38 | 59.07 | 68.30 | -9.23 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 165 | - | - | - | - | - | - | - | Harmonic |
| 53 | 802.11ax HE20 | 149 | 5642.05 | 58.30 | 68.30 | -10.00 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 149 | - | - | - | - | - | - | - | Harmonic |
| 54 | 802.11ax HE20 | 165 | 5946.00 | 59.96 | 68.30 | -8.34 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 165 | - | - | - | - | - | - | - | Harmonic |
| 55 | 802.11ax HE20 | 149 | 5631.90 | 59.37 | 68.30 | -8.93 | H | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 149 | - | - | - | - | - | - | - | Harmonic |
| 56 | 802.11ax HE20 | 165 | 5927.00 | 59.00 | 68.30 | -9.30 | V | PEAK | Pass | Band Edge |
| | 802.11ax HE20 | 165 | - | - | - | - | - | - | - | Harmonic |



| | | | | | | | | | | |
|----|--------------|----|----------|-------|-------|--------|---|---------|------|-----------|
| 57 | 802.11n HT20 | 36 | 5150.00 | 50.97 | 54.00 | -3.03 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 36 | 10360.00 | 53.01 | 68.30 | -15.29 | H | PEAK | Pass | Harmonic |
| 58 | 802.11n HT20 | 44 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 44 | 10440.00 | 62.60 | 68.30 | -5.70 | H | PEAK | Pass | Harmonic |
| 59 | 802.11n HT20 | 48 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 48 | 10480.00 | 60.29 | 68.30 | -8.01 | H | PEAK | Pass | Harmonic |

Summary of each worse mode

| Mode | Modulation | Ch. | Freq. | Level | Limit | Margin | Pol. | Peak | Result | Remark |
|------|--------------|-----|----------|-------|-------|--------|------|---------|--------|-----------|
| 60 | 802.11n HT20 | 52 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 52 | 10520.00 | 58.10 | 68.30 | -10.20 | H | PEAK | Pass | Harmonic |
| 61 | 802.11n HT20 | 60 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 60 | 10600.00 | 50.61 | 54.00 | -3.39 | H | AVERAGE | Pass | Harmonic |
| 62 | 802.11n HT20 | 64 | 5350.04 | 50.59 | 54.00 | -3.41 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 64 | 10640.00 | 47.35 | 54.00 | -6.65 | V | AVERAGE | Pass | Harmonic |
| 63 | 802.11n HT20 | 100 | 5459.99 | 50.06 | 54.00 | -3.94 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 100 | 11000.00 | 50.57 | 54.00 | -3.43 | V | AVERAGE | Pass | Harmonic |
| 64 | 802.11n HT20 | 116 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 116 | 11160.00 | 50.65 | 54.00 | -3.35 | V | AVERAGE | Pass | Harmonic |
| 65 | 802.11n HT20 | 140 | 5725.71 | 63.77 | 68.30 | -4.53 | H | PEAK | Pass | Band Edge |
| | 802.11n HT20 | 140 | 11400.00 | 50.98 | 54.00 | -3.02 | V | AVERAGE | Pass | Harmonic |
| 66 | 802.11n HT40 | 38 | 5101.75 | 48.91 | 54.00 | -5.09 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT40 | 38 | 10380.00 | 57.45 | 68.30 | -10.85 | H | PEAK | Pass | Harmonic |
| 67 | 802.11n HT40 | 46 | 5149.85 | 50.44 | 54.00 | -3.56 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT40 | 46 | 10460.00 | 53.92 | 68.30 | -14.38 | V | PEAK | Pass | Harmonic |
| 68 | 802.11n HT40 | 54 | 5009.86 | 49.58 | 54.00 | -4.42 | H | AVERAGE | Pass | Band Edge |



| | | | | | | | | | | |
|----|--------------|-----|----------|-------|-------|--------|---|---------|------|-----------|
| | 802.11n HT40 | 54 | 10540.00 | 54.89 | 68.30 | -13.41 | H | PEAK | Pass | Harmonic |
| 69 | 802.11n HT40 | 62 | 5350.00 | 50.03 | 54.00 | -3.97 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT40 | 62 | 10620.00 | 45.07 | 54.00 | -8.93 | V | AVERAGE | Pass | Harmonic |
| 70 | 802.11n HT40 | 102 | 5458.73 | 50.83 | 54.00 | -3.17 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT40 | 102 | 11020.00 | 48.49 | 54.00 | -5.51 | V | AVERAGE | Pass | Harmonic |





Summary of each worse mode

| Mode | Modulation | Ch. | Freq. | Level | Limit | Margin | Pol. | Peak | Result | Remark |
|------|---------------|-----|----------|-------|-------|--------|------|---------|--------|-----------|
| 71 | 802.11n HT40 | 110 | 5457.31 | 49.34 | 54.00 | -4.66 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT40 | 110 | 11100.00 | 48.51 | 54.00 | -5.49 | H | AVERAGE | Pass | Harmonic |
| 72 | 802.11n HT40 | 134 | 5725.01 | 63.98 | 68.30 | -4.32 | H | PEAK | Pass | Band Edge |
| | 802.11n HT40 | 134 | 11340.00 | 48.49 | 54.00 | -5.51 | V | AVERAGE | Pass | Harmonic |
| 73 | 802.11n HT20 | 149 | 5608.27 | 60.10 | 68.30 | -8.20 | H | PEAK | Pass | Band Edge |
| | 802.11n HT20 | 149 | 11490.00 | 50.57 | 54.00 | -3.43 | V | AVERAGE | Pass | Harmonic |
| 74 | 802.11n HT20 | 157 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 157 | 11570.00 | 50.10 | 54.00 | -3.90 | H | AVERAGE | Pass | Harmonic |
| 75 | 802.11n HT20 | 165 | 5945.75 | 60.38 | 68.30 | -7.92 | V | PEAK | Pass | Band Edge |
| | 802.11n HT20 | 165 | 11650.00 | 50.33 | 54.00 | -3.67 | V | AVERAGE | Pass | Harmonic |
| 76 | 802.11n HT40 | 151 | 5928.94 | 59.29 | 68.30 | -9.01 | V | PEAK | Pass | Band Edge |
| | 802.11n HT40 | 151 | 11510.00 | 47.46 | 54.00 | -6.54 | H | AVERAGE | Pass | Harmonic |
| 77 | 802.11n HT40 | 159 | 5620.87 | 59.54 | 68.30 | -8.76 | V | PEAK | Pass | Band Edge |
| | 802.11n HT40 | 159 | 11590.00 | 46.18 | 54.00 | -7.82 | V | AVERAGE | Pass | Harmonic |
| 78 | 802.11a | 144 | - | - | - | - | - | - | - | Band Edge |
| | 802.11a | 144 | 11440.00 | 50.58 | 54.00 | -3.42 | H | AVERAGE | Pass | Harmonic |
| 79 | 802.11ax HE20 | 144 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE20 | 144 | 11440.00 | 50.54 | 54.00 | -3.46 | V | AVERAGE | Pass | Harmonic |



| | | | | | | | | | | |
|----|-------------------|-----|----------|-------|-------|--------|---|---------|------|-----------|
| 80 | 802.11ax HE40 | 142 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE40 | 142 | 11420.00 | 50.51 | 54.00 | -3.49 | V | AVERAGE | Pass | Harmonic |
| 81 | 802.11ax HE80 | 138 | - | - | - | - | - | - | - | Band Edge |
| | 802.11ax HE80 | 138 | 11380.00 | 50.44 | 54.00 | -3.56 | V | AVERAGE | Pass | Harmonic |
| 82 | 802.11n HT20 | 144 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT20 | 144 | 11440.00 | 49.06 | 54.00 | -4.94 | V | AVERAGE | Pass | Harmonic |
| 83 | 802.11n HT40 | 142 | - | - | - | - | - | - | - | Band Edge |
| | 802.11n HT40 | 142 | 11420.00 | 49.19 | 54.00 | -4.81 | V | AVERAGE | Pass | Harmonic |
| 84 | 802.11n HT20 | 140 | 5729.74 | 63.72 | 68.3 | -4.58 | H | PEAK | Pass | Band Edge |
| | 802.11n HT20 | 140 | 11400.00 | 47.67 | 74.00 | -26.33 | H | PEAK | Pass | Harmonic |
| | 802.11n HT20 | 01 | 2389.43 | 47.49 | 54.00 | -6.51 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 01 | 4824.00 | 40.66 | 74.00 | -33.34 | V | Peak | Pass | Harmonic |
| 85 | 802.11n HT20 | 140 | 5727.075 | 63.46 | 68.3 | -4.84 | H | Peak | Pass | Band Edge |
| | 802.11n HT20 | 140 | 11400.00 | 43.06 | 54.00 | -10.94 | V | AVERAGE | Pass | Harmonic |
| | 802.11n HT20 | 01 | 2389.95 | 47.45 | 54.00 | -6.55 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 01 | 4824.00 | 40.87 | 74.00 | -33.13 | H | Peak | Pass | Harmonic |
| 86 | 802.11n HT20 | 140 | 5725.84 | 62.43 | 68.3 | -5.87 | H | Peak | Pass | Band Edge |
| | 802.11n HT20 | 140 | 11400.00 | 50.02 | 54.00 | -3.98 | H | AVERAGE | Pass | Harmonic |
| | Bluetooth-LE_GSKF | 39 | 2497.54 | 47.19 | 54.00 | -6.81 | H | AVERAGE | Pass | Band Edge |
| | Bluetooth-LE_GSKF | 39 | 4960.00 | 40.95 | 74.00 | -33.05 | V | Peak | Pass | Harmonic |
| 88 | 802.11n HT20 | 140 | 41.64 | 36.76 | 40.00 | -3.24 | V | QP | Pass | LF |
| 89 | 802.11ax HE80 | 155 | 41.64 | 36.83 | 40.00 | -3.17 | V | QP | Pass | LF |

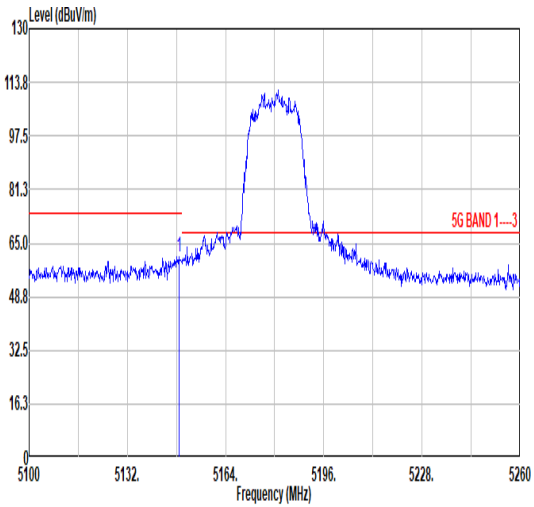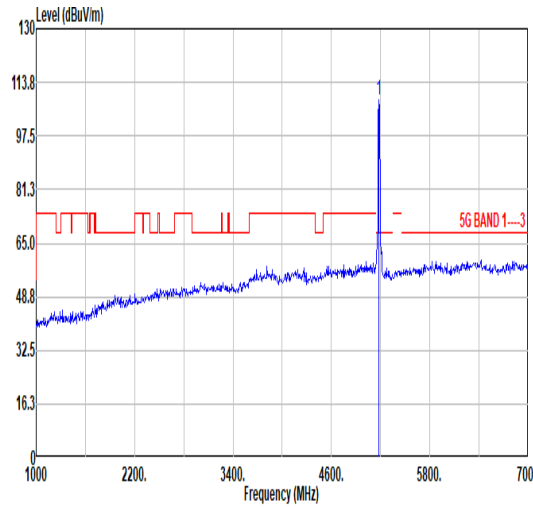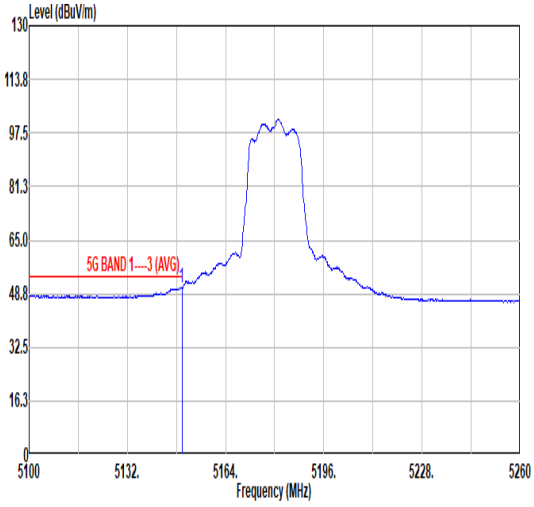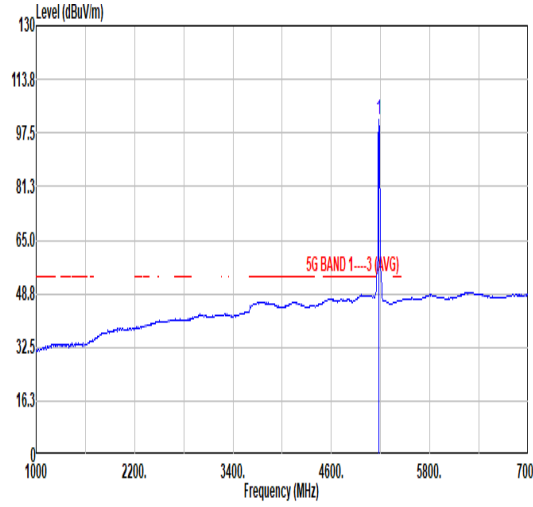

| | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1108 798 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.80</td> <td>60.95</td> <td>74.00</td> <td>-13.05</td> <td>43.38</td> <td>34.40</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>135</td> <td>137</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5148.80 | 60.95 | 74.00 | -13.05 | 43.38 | 34.40 | 12.48 | 29.31 | 0.00 | 135 | 137 | PEAK |  <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.62</td> <td>-----</td> <td>-----</td> <td>90.96</td> <td>34.46</td> <td>12.54</td> <td>29.34</td> <td>0.00</td> <td>135</td> <td>137</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 108.62 | ----- | ----- | 90.96 | 34.46 | 12.54 | 29.34 | 0.00 | 135 | 137 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5148.80 | 60.95 | 74.00 | -13.05 | 43.38 | 34.40 | 12.48 | 29.31 | 0.00 | 135 | 137 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 108.62 | ----- | ----- | 90.96 | 34.46 | 12.54 | 29.34 | 0.00 | 135 | 137 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="263 1792 798 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>50.57</td> <td>54.00</td> <td>-3.43</td> <td>33.00</td> <td>34.40</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>135</td> <td>137</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.76 | 50.57 | 54.00 | -3.43 | 33.00 | 34.40 | 12.48 | 29.31 | 0.00 | 135 | 137 | AVERAGE |  <table border="1" data-bbox="901 1792 1436 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.56</td> <td>-----</td> <td>-----</td> <td>83.90</td> <td>34.46</td> <td>12.54</td> <td>29.34</td> <td>0.00</td> <td>135</td> <td>137</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 101.56 | ----- | ----- | 83.90 | 34.46 | 12.54 | 29.34 | 0.00 | 135 | 137 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.76 | 50.57 | 54.00 | -3.43 | 33.00 | 34.40 | 12.48 | 29.31 | 0.00 | 135 | 137 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 101.56 | ----- | ----- | 83.90 | 34.46 | 12.54 | 29.34 | 0.00 | 135 | 137 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5113.12</td> <td>58.62</td> <td>74.00</td> <td>-15.38</td> <td>41.14</td> <td>34.33</td> <td>12.42</td> <td>29.27</td> <td>0.00</td> <td>135</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5113.12 | 58.62 | 74.00 | -15.38 | 41.14 | 34.33 | 12.42 | 29.27 | 0.00 | 135 | 305 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.74</td> <td>-----</td> <td>-----</td> <td>82.10</td> <td>34.45</td> <td>12.53</td> <td>29.34</td> <td>0.00</td> <td>135</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 99.74 | ----- | ----- | 82.10 | 34.45 | 12.53 | 29.34 | 0.00 | 135 | 305 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5113.12 | 58.62 | 74.00 | -15.38 | 41.14 | 34.33 | 12.42 | 29.27 | 0.00 | 135 | 305 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 99.74 | ----- | ----- | 82.10 | 34.45 | 12.53 | 29.34 | 0.00 | 135 | 305 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5111.04</td> <td>47.78</td> <td>54.00</td> <td>-6.22</td> <td>30.31</td> <td>34.32</td> <td>12.42</td> <td>29.27</td> <td>0.00</td> <td>135</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5111.04 | 47.78 | 54.00 | -6.22 | 30.31 | 34.32 | 12.42 | 29.27 | 0.00 | 135 | 305 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>91.41</td> <td>-----</td> <td>-----</td> <td>73.75</td> <td>34.46</td> <td>12.54</td> <td>29.34</td> <td>0.00</td> <td>135</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 91.41 | ----- | ----- | 73.75 | 34.46 | 12.54 | 29.34 | 0.00 | 135 | 305 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5111.04 | 47.78 | 54.00 | -6.22 | 30.31 | 34.32 | 12.42 | 29.27 | 0.00 | 135 | 305 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 91.41 | ----- | ----- | 73.75 | 34.46 | 12.54 | 29.34 | 0.00 | 135 | 305 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------|--|----------|--------|--------|--------|--------|--------|--------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>58.78</td> <td>68.30</td> <td>-9.52</td> <td>70.30</td> <td>37.40</td> <td>17.56</td> <td>66.48</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 10360.00 | 58.78 | 68.30 | -9.52 | 70.30 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>51.95</td> <td>68.30</td> <td>-16.35</td> <td>63.47</td> <td>37.40</td> <td>17.56</td> <td>66.48</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 10360.00 | 51.95 | 68.30 | -16.35 | 63.47 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10360.00 | 58.78 | 68.30 | -9.52 | 70.30 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10360.00 | 51.95 | 68.30 | -16.35 | 63.47 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|-------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10439.33</td> <td>61.24</td> <td>68.30</td> <td>-7.06</td> <td>72.53</td> <td>37.48</td> <td>17.62</td> <td>66.39</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10439.33 | 61.24 | 68.30 | -7.06 | 72.53 | 37.48 | 17.62 | 66.39 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>54.90</td> <td>68.30</td> <td>-13.40</td> <td>66.19</td> <td>37.48</td> <td>17.62</td> <td>66.39</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10440.00 | 54.90 | 68.30 | -13.40 | 66.19 | 37.48 | 17.62 | 66.39 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10439.33 | 61.24 | 68.30 | -7.06 | 72.53 | 37.48 | 17.62 | 66.39 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10440.00 | 54.90 | 68.30 | -13.40 | 66.19 | 37.48 | 17.62 | 66.39 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|-------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10481.13</td> <td>60.69</td> <td>68.30</td> <td>-7.61</td> <td>71.85</td> <td>37.53</td> <td>17.65</td> <td>66.34</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10481.13 | 60.69 | 68.30 | -7.61 | 71.85 | 37.53 | 17.65 | 66.34 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>54.52</td> <td>68.30</td> <td>-13.78</td> <td>65.68</td> <td>37.53</td> <td>17.65</td> <td>66.34</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10480.00 | 54.52 | 68.30 | -13.78 | 65.68 | 37.53 | 17.65 | 66.34 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10481.13 | 60.69 | 68.30 | -7.61 | 71.85 | 37.53 | 17.65 | 66.34 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10480.00 | 54.52 | 68.30 | -13.78 | 65.68 | 37.53 | 17.65 | 66.34 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10520.73</td> <td>57.66</td> <td>68.30</td> <td>-10.64</td> <td>68.69</td> <td>37.57</td> <td>17.69</td> <td>66.29</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10520.73 | 57.66 | 68.30 | -10.64 | 68.69 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>55.98</td> <td>68.30</td> <td>-12.32</td> <td>67.01</td> <td>37.57</td> <td>17.69</td> <td>66.29</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10520.00 | 55.98 | 68.30 | -12.32 | 67.01 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10520.73 | 57.66 | 68.30 | -10.64 | 68.69 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10520.00 | 55.98 | 68.30 | -12.32 | 67.01 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|----------|--------|--------|--------|--------|--------|--------|-----------------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|--------------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|--------------|------------|-------|-------|-------|-------|-------|-------|-------|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>60.54</td> <td>74.00</td> <td>-13.46</td> <td>71.33</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>161 225 PEAK</td> </tr> <tr> <td>2 10600.00</td> <td>50.75</td> <td>54.00</td> <td>-3.25</td> <td>61.54</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>161 225 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10600.00 | 60.54 | 74.00 | -13.46 | 71.33 | 37.66 | 17.75 | 66.20 | 0.00 | 161 225 PEAK | 2 10600.00 | 50.75 | 54.00 | -3.25 | 61.54 | 37.66 | 17.75 | 66.20 | 0.00 | 161 225 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>57.36</td> <td>74.00</td> <td>-16.64</td> <td>68.15</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>256 327 PEAK</td> </tr> <tr> <td>2 10600.00</td> <td>47.69</td> <td>54.00</td> <td>-6.31</td> <td>58.48</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>256 327 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10600.00 | 57.36 | 74.00 | -16.64 | 68.15 | 37.66 | 17.75 | 66.20 | 0.00 | 256 327 PEAK | 2 10600.00 | 47.69 | 54.00 | -6.31 | 58.48 | 37.66 | 17.75 | 66.20 | 0.00 |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10600.00 | 60.54 | 74.00 | -13.46 | 71.33 | 37.66 | 17.75 | 66.20 | 0.00 | 161 225 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 10600.00 | 50.75 | 54.00 | -3.25 | 61.54 | 37.66 | 17.75 | 66.20 | 0.00 | 161 225 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10600.00 | 57.36 | 74.00 | -16.64 | 68.15 | 37.66 | 17.75 | 66.20 | 0.00 | 256 327 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 10600.00 | 47.69 | 54.00 | -6.31 | 58.48 | 37.66 | 17.75 | 66.20 | 0.00 | 256 327 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

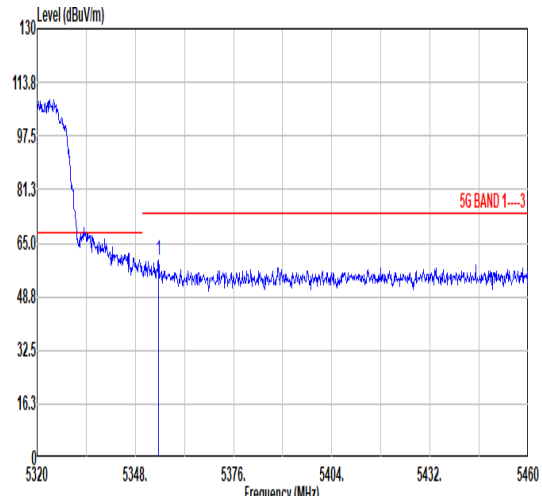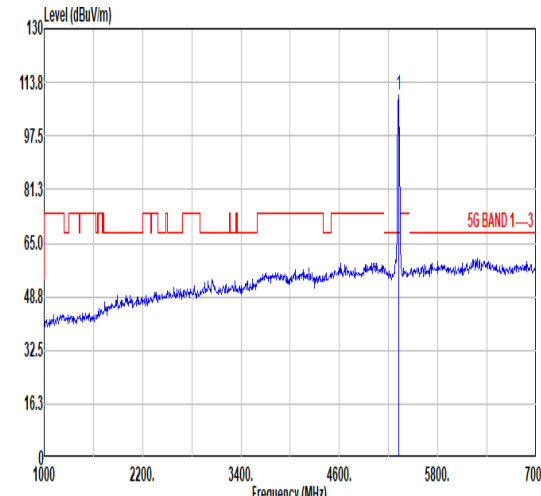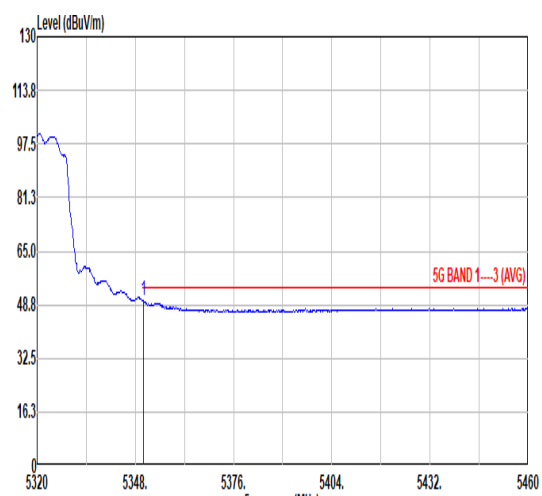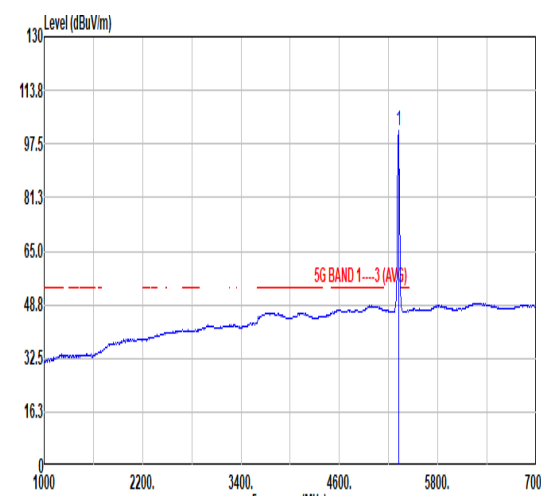

| Mode | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.58</td> <td>59.68</td> <td>74.00</td> <td>-14.32</td> <td>41.82</td> <td>34.50</td> <td>12.88</td> <td>29.52</td> <td>0.00</td> <td>173</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5354.58 | 59.68 | 74.00 | -14.32 | 41.82 | 34.50 | 12.88 | 29.52 | 0.00 | 173 | 141 | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.78</td> <td>-----</td> <td>-----</td> <td>92.00</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>173</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 109.78 | ----- | ----- | 92.00 | 34.50 | 12.77 | 29.49 | 0.00 | 173 | 141 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5354.58 | 59.68 | 74.00 | -14.32 | 41.82 | 34.50 | 12.88 | 29.52 | 0.00 | 173 | 141 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 109.78 | ----- | ----- | 92.00 | 34.50 | 12.77 | 29.49 | 0.00 | 173 | 141 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>50.10</td> <td>54.00</td> <td>-3.90</td> <td>32.25</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> <td>173</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.24 | 50.10 | 54.00 | -3.90 | 32.25 | 34.50 | 12.87 | 29.52 | 0.00 | 173 | 141 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.72</td> <td>-----</td> <td>-----</td> <td>83.94</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>173</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 101.72 | ----- | ----- | 83.94 | 34.50 | 12.77 | 29.49 | 0.00 | 173 | 141 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.24 | 50.10 | 54.00 | -3.90 | 32.25 | 34.50 | 12.87 | 29.52 | 0.00 | 173 | 141 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 101.72 | ----- | ----- | 83.94 | 34.50 | 12.77 | 29.49 | 0.00 | 173 | 141 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>58.08</td> <td>74.00</td> <td>-15.92</td> <td>40.15</td> <td>34.50</td> <td>12.99</td> <td>29.56</td> <td>0.00</td> <td>220 307 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 58.08 | 74.00 | -15.92 | 40.15 | 34.50 | 12.99 | 29.56 | 0.00 | 220 307 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.45</td> <td>-----</td> <td>-----</td> <td>82.67</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>220 307 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 100.45 | ----- | ----- | 82.67 | 34.50 | 12.77 | 29.49 | 0.00 | 220 307 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 58.08 | 74.00 | -15.92 | 40.15 | 34.50 | 12.99 | 29.56 | 0.00 | 220 307 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 100.45 | ----- | ----- | 82.67 | 34.50 | 12.77 | 29.49 | 0.00 | 220 307 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5456.36</td> <td>47.37</td> <td>54.00</td> <td>-6.63</td> <td>29.29</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>220 307 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5456.36 | 47.37 | 54.00 | -6.63 | 29.29 | 34.53 | 13.17 | 29.62 | 0.00 | 220 307 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.02</td> <td>-----</td> <td>-----</td> <td>75.24</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>220 307 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 93.02 | ----- | ----- | 75.24 | 34.50 | 12.77 | 29.49 | 0.00 | 220 307 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5456.36 | 47.37 | 54.00 | -6.63 | 29.29 | 34.53 | 13.17 | 29.62 | 0.00 | 220 307 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 93.02 | ----- | ----- | 75.24 | 34.50 | 12.77 | 29.49 | 0.00 | 220 307 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|---------|-------|-------------|--------------|-------------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>58.54</td> <td>74.00</td> <td>-15.46</td> <td>69.21</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>143</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>2 10640.00</td> <td>47.68</td> <td>54.00</td> <td>-6.32</td> <td>58.35</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>143</td> <td>158</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10640.00 | 58.54 | 74.00 | -15.46 | 69.21 | 37.70 | 17.78 | 66.15 | 0.00 | 143 | 158 | PEAK | 2 10640.00 | 47.68 | 54.00 | -6.32 | 58.35 | 37.70 | 17.78 | 66.15 | 0.00 | 143 | 158 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>56.72</td> <td>74.00</td> <td>-17.28</td> <td>67.39</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>287</td> <td>318</td> <td>PEAK</td> </tr> <tr> <td>2 10640.00</td> <td>46.93</td> <td>54.00</td> <td>-7.07</td> <td>57.60</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>287</td> <td>318</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10640.00 | 56.72 | 74.00 | -17.28 | 67.39 | 37.70 | 17.78 | 66.15 | 0.00 | 287 | 318 | PEAK | 2 10640.00 | 46.93 | 54.00 | -7.07 | 57.60 | 37.70 | 17.78 | 66.15 | 0.00 | 287 | 318 |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10640.00 | 58.54 | 74.00 | -15.46 | 69.21 | 37.70 | 17.78 | 66.15 | 0.00 | 143 | 158 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 10640.00 | 47.68 | 54.00 | -6.32 | 58.35 | 37.70 | 17.78 | 66.15 | 0.00 | 143 | 158 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10640.00 | 56.72 | 74.00 | -17.28 | 67.39 | 37.70 | 17.78 | 66.15 | 0.00 | 287 | 318 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 10640.00 | 46.93 | 54.00 | -7.07 | 57.60 | 37.70 | 17.78 | 66.15 | 0.00 | 287 | 318 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|-------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-------------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-------------|---|---------|-------|-------|-------|-------|--------|-------|-------|------|-----|----------|--|-------------|--------------|-------------|-------------|--------|--------|-----|--------|------|-----|--------|--------|-------------|--------------|-------------|-------------|--------|----|-----|--------|---------|--------|--------|--------|-------|-------|-------|-------|------|-----|-------------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|----------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5437.08</td> <td>59.63</td> <td>74.00</td> <td>-14.37</td> <td>41.59</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>200</td> <td>151 PEAK</td> </tr> <tr> <td>2</td> <td>5465.13</td> <td>62.53</td> <td>68.30</td> <td>-5.77</td> <td>44.43</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>200</td> <td>151 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5437.08 | 59.63 | 74.00 | -14.37 | 41.59 | 34.52 | 13.12 | 29.60 | 0.00 | 200 | 151 PEAK | 2 | 5465.13 | 62.53 | 68.30 | -5.77 | 44.43 | 34.53 | 13.19 | 29.62 | 0.00 | 200 | 151 PEAK | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.38</td> <td>-----</td> <td>-----</td> <td>93.22</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>200</td> <td>151 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 111.38 | ----- | ----- | 93.22 | 34.55 | 13.26 | 29.65 | 0.00 | 200 | 151 PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5437.08 | 59.63 | 74.00 | -14.37 | 41.59 | 34.52 | 13.12 | 29.60 | 0.00 | 200 | 151 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5465.13 | 62.53 | 68.30 | -5.77 | 44.43 | 34.53 | 13.19 | 29.62 | 0.00 | 200 | 151 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 111.38 | ----- | ----- | 93.22 | 34.55 | 13.26 | 29.65 | 0.00 | 200 | 151 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.88</td> <td>50.21</td> <td>54.00</td> <td>-3.79</td> <td>32.13</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>200</td> <td>151 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.88 | 50.21 | 54.00 | -3.79 | 32.13 | 34.53 | 13.17 | 29.62 | 0.00 | 200 | 151 AVERAGE | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.72</td> <td>-----</td> <td>-----</td> <td>86.56</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>200</td> <td>151 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 104.72 | ----- | ----- | 86.56 | 34.55 | 13.26 | 29.65 | 0.00 | 200 | 151 AVERAGE | | | | | | | | | | | | |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.88 | 50.21 | 54.00 | -3.79 | 32.13 | 34.53 | 13.17 | 29.62 | 0.00 | 200 | 151 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 104.72 | ----- | ----- | 86.56 | 34.55 | 13.26 | 29.65 | 0.00 | 200 | 151 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|--------|-------|-------|-------|--------|------|-------|------|---|-------|--------|------|--------|--------|-----|--------|--------|--------|------|-------|------|--------|-------|--------|------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.98</td> <td>57.84</td> <td>74.00</td> <td>-16.16</td> <td>39.76</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>275</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.92</td> <td>58.78</td> <td>68.30</td> <td>-9.52</td> <td>40.68</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>275</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5455.98 | 57.84 | 74.00 | -16.16 | 39.76 | 34.53 | 13.16 | 29.61 | 0.00 | 275 | 360 | PEAK | 2 | 5469.92 | 58.78 | 68.30 | -9.52 | 40.68 | 34.53 | 13.20 | 29.63 | 0.00 | 275 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.10</td> <td>-----</td> <td>-----</td> <td>84.94</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>275</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 103.10 | ----- | ----- | 84.94 | 34.55 | 13.26 | 29.65 | 0.00 | 275 | 360 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5455.98 | 57.84 | 74.00 | -16.16 | 39.76 | 34.53 | 13.16 | 29.61 | 0.00 | 275 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.92 | 58.78 | 68.30 | -9.52 | 40.68 | 34.53 | 13.20 | 29.63 | 0.00 | 275 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 103.10 | ----- | ----- | 84.94 | 34.55 | 13.26 | 29.65 | 0.00 | 275 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.68</td> <td>47.72</td> <td>54.00</td> <td>-6.28</td> <td>29.64</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>275</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.68 | 47.72 | 54.00 | -6.28 | 29.64 | 34.53 | 13.17 | 29.62 | 0.00 | 275 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>93.90</td> <td>-----</td> <td>-----</td> <td>75.74</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>275</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 93.90 | ----- | ----- | 75.74 | 34.55 | 13.26 | 29.65 | 0.00 | 275 | 360 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.68 | 47.72 | 54.00 | -6.28 | 29.64 | 34.53 | 13.17 | 29.62 | 0.00 | 275 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 93.90 | ----- | ----- | 75.74 | 34.55 | 13.26 | 29.65 | 0.00 | 275 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>59.41</td> <td>74.00</td> <td>-14.59</td> <td>60.96</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>199</td> <td>161</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>50.14</td> <td>54.00</td> <td>-3.86</td> <td>59.69</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>199</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11000.00 | 59.41 | 74.00 | -14.59 | 60.96 | 38.10 | 18.08 | 65.73 | 0.00 | 199 | 161 | PEAK | 2 | 11000.00 | 50.14 | 54.00 | -3.86 | 59.69 | 38.10 | 18.08 | 65.73 | 0.00 | 199 | 161 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>60.86</td> <td>74.00</td> <td>-13.14</td> <td>70.41</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>227</td> <td>349</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>50.49</td> <td>54.00</td> <td>-3.51</td> <td>60.04</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>227</td> <td>349</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11000.00 | 60.86 | 74.00 | -13.14 | 70.41 | 38.10 | 18.08 | 65.73 | 0.00 | 227 | 349 | PEAK | 2 | 11000.00 | 50.49 | 54.00 | -3.51 | 60.04 | 38.10 | 18.08 | 65.73 | 0.00 | 227 | 349 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 59.41 | 74.00 | -14.59 | 60.96 | 38.10 | 18.08 | 65.73 | 0.00 | 199 | 161 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 50.14 | 54.00 | -3.86 | 59.69 | 38.10 | 18.08 | 65.73 | 0.00 | 199 | 161 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 60.86 | 74.00 | -13.14 | 70.41 | 38.10 | 18.08 | 65.73 | 0.00 | 227 | 349 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 50.49 | 54.00 | -3.51 | 60.04 | 38.10 | 18.08 | 65.73 | 0.00 | 227 | 349 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>59.29</td> <td>74.00</td> <td>-14.71</td> <td>68.53</td> <td>38.20</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>207</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>49.23</td> <td>54.00</td> <td>-4.77</td> <td>58.48</td> <td>38.19</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>207</td> <td>158</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11160.00 | 59.29 | 74.00 | -14.71 | 68.53 | 38.20 | 18.20 | 65.64 | 0.00 | 207 | 158 | PEAK | 2 | 11160.00 | 49.23 | 54.00 | -4.77 | 58.48 | 38.19 | 18.20 | 65.64 | 0.00 | 207 | 158 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>58.45</td> <td>74.00</td> <td>-15.55</td> <td>67.69</td> <td>38.20</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>245</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>49.42</td> <td>54.00</td> <td>-4.58</td> <td>58.67</td> <td>38.19</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>245</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11160.00 | 58.45 | 74.00 | -15.55 | 67.69 | 38.20 | 18.20 | 65.64 | 0.00 | 245 | 0 | PEAK | 2 | 11160.00 | 49.42 | 54.00 | -4.58 | 58.67 | 38.19 | 18.20 | 65.64 | 0.00 | 245 | 0 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 59.29 | 74.00 | -14.71 | 68.53 | 38.20 | 18.20 | 65.64 | 0.00 | 207 | 158 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11160.00 | 49.23 | 54.00 | -4.77 | 58.48 | 38.19 | 18.20 | 65.64 | 0.00 | 207 | 158 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 58.45 | 74.00 | -15.55 | 67.69 | 38.20 | 18.20 | 65.64 | 0.00 | 245 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11160.00 | 49.42 | 54.00 | -4.58 | 58.67 | 38.19 | 18.20 | 65.64 | 0.00 | 245 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|---|--------------|-------------|--------|--------|--------|--------|--------|--------|--------|---------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|----|-----|-----|---|---------|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.71</td> <td>62.93</td> <td>68.30</td> <td>-5.37</td> <td>44.15</td> <td>34.84</td> <td>13.73</td> <td>29.79</td> <td>0.00</td> <td>286</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5727.71 | 62.93 | 68.30 | -5.37 | 44.15 | 34.84 | 13.73 | 29.79 | 0.00 | 286 | 131 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>109.64</td> <td>-----</td> <td>-----</td> <td>91.17</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>286</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5700.00 | 109.64 | ----- | ----- | 91.17 | 34.78 | 13.49 | 29.80 | 0.00 | 286 | 131 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5727.71 | 62.93 | 68.30 | -5.37 | 44.15 | 34.84 | 13.73 | 29.79 | 0.00 | 286 | 131 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 109.64 | ----- | ----- | 91.17 | 34.78 | 13.49 | 29.80 | 0.00 | 286 | 131 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>101.13</td> <td>-----</td> <td>-----</td> <td>82.70</td> <td>34.77</td> <td>13.46</td> <td>29.80</td> <td>0.00</td> <td>286</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5700.00 | 101.13 | ----- | ----- | 82.70 | 34.77 | 13.46 | 29.80 | 0.00 | 286 | 131 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 101.13 | ----- | ----- | 82.70 | 34.77 | 13.46 | 29.80 | 0.00 | 286 | 131 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.20</td> <td>59.97</td> <td>68.30</td> <td>-8.33</td> <td>41.16</td> <td>34.85</td> <td>13.75</td> <td>29.79</td> <td>0.00</td> <td>149</td> <td>193</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5730.20 | 59.97 | 68.30 | -8.33 | 41.16 | 34.85 | 13.75 | 29.79 | 0.00 | 149 | 193 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.20</td> <td>-----</td> <td>-----</td> <td>85.73</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>149</td> <td>193</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5700.00 | 104.20 | ----- | ----- | 85.73 | 34.78 | 13.49 | 29.80 | 0.00 | 149 | 193 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5730.20 | 59.97 | 68.30 | -8.33 | 41.16 | 34.85 | 13.75 | 29.79 | 0.00 | 149 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 104.20 | ----- | ----- | 85.73 | 34.78 | 13.49 | 29.80 | 0.00 | 149 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>95.76</td> <td>-----</td> <td>-----</td> <td>77.29</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>149</td> <td>193</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5700.00 | 95.76 | ----- | ----- | 77.29 | 34.78 | 13.49 | 29.80 | 0.00 | 149 | 193 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 95.76 | ----- | ----- | 77.29 | 34.78 | 13.49 | 29.80 | 0.00 | 149 | 193 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>60.28</td> <td>74.00</td> <td>-13.72</td> <td>69.06</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>240</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>50.42</td> <td>54.00</td> <td>-3.58</td> <td>59.20</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>240</td> <td>355</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11400.00 | 60.28 | 74.00 | -13.72 | 69.06 | 38.34 | 18.39 | 65.51 | 0.00 | 240 | 355 | PEAK | 2 | 11400.00 | 50.42 | 54.00 | -3.58 | 59.20 | 38.34 | 18.39 | 65.51 | 0.00 | 240 | 355 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>59.84</td> <td>74.00</td> <td>-14.16</td> <td>68.62</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>236</td> <td>323</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>49.30</td> <td>54.00</td> <td>-4.70</td> <td>58.08</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>236</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11400.00 | 59.84 | 74.00 | -14.16 | 68.62 | 38.34 | 18.39 | 65.51 | 0.00 | 236 | 323 | PEAK | 2 | 11400.00 | 49.30 | 54.00 | -4.70 | 58.08 | 38.34 | 18.39 | 65.51 | 0.00 | 236 | 323 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11400.00 | 60.28 | 74.00 | -13.72 | 69.06 | 38.34 | 18.39 | 65.51 | 0.00 | 240 | 355 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11400.00 | 50.42 | 54.00 | -3.58 | 59.20 | 38.34 | 18.39 | 65.51 | 0.00 | 240 | 355 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11400.00 | 59.84 | 74.00 | -14.16 | 68.62 | 38.34 | 18.39 | 65.51 | 0.00 | 236 | 323 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11400.00 | 49.30 | 54.00 | -4.70 | 58.08 | 38.34 | 18.39 | 65.51 | 0.00 | 236 | 323 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.45</td> <td>60.86</td> <td>74.00</td> <td>-13.14</td> <td>43.30</td> <td>34.39</td> <td>12.47</td> <td>29.30</td> <td>0.00</td> <td>229</td> <td>161</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5143.45 | 60.86 | 74.00 | -13.14 | 43.30 | 34.39 | 12.47 | 29.30 | 0.00 | 229 | 161 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.41</td> <td>-----</td> <td>-----</td> <td>92.76</td> <td>34.46</td> <td>12.53</td> <td>29.34</td> <td>0.00</td> <td>229</td> <td>161</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 110.41 | ----- | ----- | 92.76 | 34.46 | 12.53 | 29.34 | 0.00 | 229 | 161 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5143.45 | 60.86 | 74.00 | -13.14 | 43.30 | 34.39 | 12.47 | 29.30 | 0.00 | 229 | 161 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 110.41 | ----- | ----- | 92.76 | 34.46 | 12.53 | 29.34 | 0.00 | 229 | 161 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.53</td> <td>49.73</td> <td>54.00</td> <td>-4.27</td> <td>32.16</td> <td>34.40</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>229</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.53 | 49.73 | 54.00 | -4.27 | 32.16 | 34.40 | 12.48 | 29.31 | 0.00 | 229 | 161 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.01</td> <td>-----</td> <td>-----</td> <td>84.36</td> <td>34.46</td> <td>12.53</td> <td>29.34</td> <td>0.00</td> <td>229</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 102.01 | ----- | ----- | 84.36 | 34.46 | 12.53 | 29.34 | 0.00 | 229 | 161 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.53 | 49.73 | 54.00 | -4.27 | 32.16 | 34.40 | 12.48 | 29.31 | 0.00 | 229 | 161 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 102.01 | ----- | ----- | 84.36 | 34.46 | 12.53 | 29.34 | 0.00 | 229 | 161 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

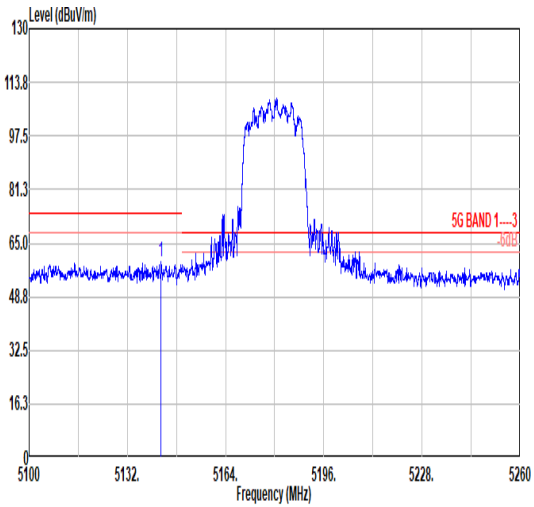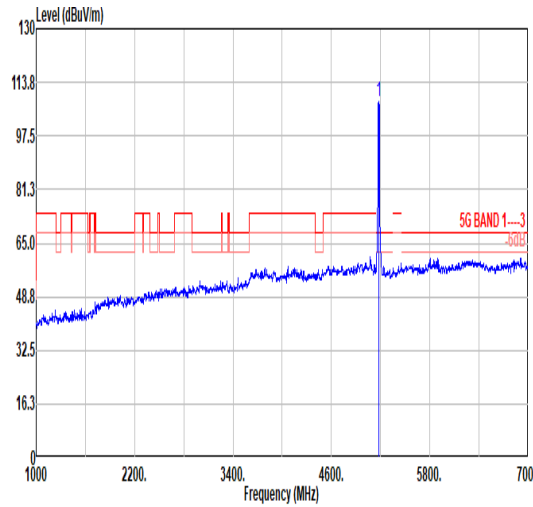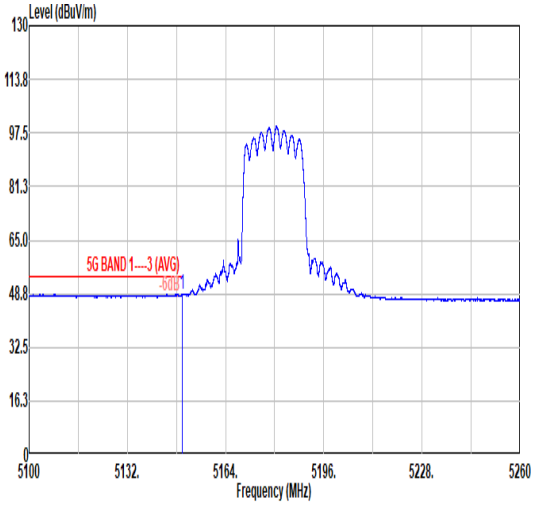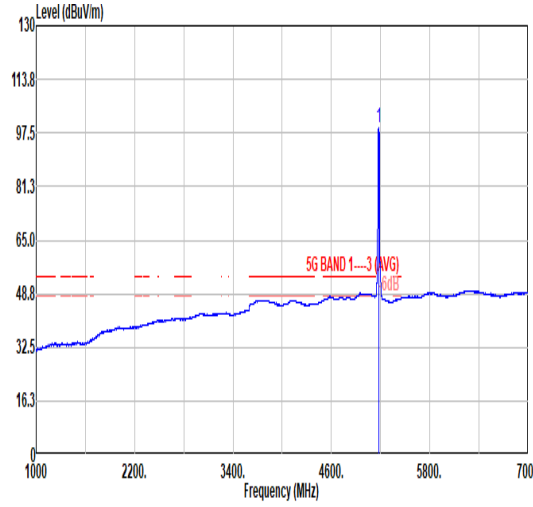

| Mode | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.97</td> <td>59.54</td> <td>74.00</td> <td>-14.46</td> <td>41.98</td> <td>34.39</td> <td>12.47</td> <td>29.30</td> <td>0.00</td> <td>212</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5142.97 | 59.54 | 74.00 | -14.46 | 41.98 | 34.39 | 12.47 | 29.30 | 0.00 | 212 | 304 | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>107.95</td> <td>-----</td> <td>-----</td> <td>90.31</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>212</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 107.95 | ----- | ----- | 90.31 | 34.45 | 12.52 | 29.33 | 0.00 | 212 | 304 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5142.97 | 59.54 | 74.00 | -14.46 | 41.98 | 34.39 | 12.47 | 29.30 | 0.00 | 212 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 107.95 | ----- | ----- | 90.31 | 34.45 | 12.52 | 29.33 | 0.00 | 212 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.85</td> <td>48.64</td> <td>54.00</td> <td>-5.36</td> <td>31.07</td> <td>34.40</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>212</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.85 | 48.64 | 54.00 | -5.36 | 31.07 | 34.40 | 12.48 | 29.31 | 0.00 | 212 | 304 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.33</td> <td>-----</td> <td>-----</td> <td>81.68</td> <td>34.46</td> <td>12.53</td> <td>29.34</td> <td>0.00</td> <td>212</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 99.33 | ----- | ----- | 81.68 | 34.46 | 12.53 | 29.34 | 0.00 | 212 | 304 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.85 | 48.64 | 54.00 | -5.36 | 31.07 | 34.40 | 12.48 | 29.31 | 0.00 | 212 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 99.33 | ----- | ----- | 81.68 | 34.46 | 12.53 | 29.34 | 0.00 | 212 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>62.08</td> <td>68.30</td> <td>-6.22</td> <td>73.60</td> <td>37.40</td> <td>17.56</td> <td>66.48</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10360.00 | 62.08 | 68.30 | -6.22 | 73.60 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>54.91</td> <td>68.30</td> <td>-13.39</td> <td>66.43</td> <td>37.40</td> <td>17.56</td> <td>66.48</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10360.00 | 54.91 | 68.30 | -13.39 | 66.43 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10360.00 | 62.08 | 68.30 | -6.22 | 73.60 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10360.00 | 54.91 | 68.30 | -13.39 | 66.43 | 37.40 | 17.56 | 66.48 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10448.00</td> <td>60.85</td> <td>68.30</td> <td>-7.45</td> <td>72.14</td> <td>37.48</td> <td>17.62</td> <td>66.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10448.00 | 60.85 | 68.30 | -7.45 | 72.14 | 37.48 | 17.62 | 66.39 | 0.00 | --- | --- | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10448.00</td> <td>55.29</td> <td>68.30</td> <td>-13.01</td> <td>66.58</td> <td>37.48</td> <td>17.62</td> <td>66.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10448.00 | 55.29 | 68.30 | -13.01 | 66.58 | 37.48 | 17.62 | 66.39 | 0.00 | --- | --- | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10448.00 | 60.85 | 68.30 | -7.45 | 72.14 | 37.48 | 17.62 | 66.39 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10448.00 | 55.29 | 68.30 | -13.01 | 66.58 | 37.48 | 17.62 | 66.39 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>60.27</td> <td>68.30</td> <td>-8.03</td> <td>71.43</td> <td>37.53</td> <td>17.65</td> <td>66.34</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10480.00 | 60.27 | 68.30 | -8.03 | 71.43 | 37.53 | 17.65 | 66.34 | 0.00 | --- | --- | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>56.22</td> <td>68.30</td> <td>-12.08</td> <td>67.38</td> <td>37.53</td> <td>17.65</td> <td>66.34</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10480.00 | 56.22 | 68.30 | -12.08 | 67.38 | 37.53 | 17.65 | 66.34 | 0.00 | --- | --- | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10480.00 | 60.27 | 68.30 | -8.03 | 71.43 | 37.53 | 17.65 | 66.34 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10480.00 | 56.22 | 68.30 | -12.08 | 67.38 | 37.53 | 17.65 | 66.34 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|-------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>55.22</td> <td>68.30</td> <td>-13.08</td> <td>66.25</td> <td>37.57</td> <td>17.69</td> <td>66.29</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10520.00 | 55.22 | 68.30 | -13.08 | 66.25 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10520.73</td> <td>58.31</td> <td>68.30</td> <td>-9.99</td> <td>69.34</td> <td>37.57</td> <td>17.69</td> <td>66.29</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10520.73 | 58.31 | 68.30 | -9.99 | 69.34 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10520.00 | 55.22 | 68.30 | -13.08 | 66.25 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10520.73 | 58.31 | 68.30 | -9.99 | 69.34 | 37.57 | 17.69 | 66.29 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|----------|--------|--------|--------|--------|--------|--------|--------|-------------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|--------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>62.36</td> <td>74.00</td> <td>-11.64</td> <td>73.15</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>200</td> <td>212 PEAK</td> </tr> <tr> <td>2 10600.00</td> <td>50.64</td> <td>54.00</td> <td>-3.36</td> <td>61.43</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>200</td> <td>212 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10600.00 | 62.36 | 74.00 | -11.64 | 73.15 | 37.66 | 17.75 | 66.20 | 0.00 | 200 | 212 PEAK | 2 10600.00 | 50.64 | 54.00 | -3.36 | 61.43 | 37.66 | 17.75 | 66.20 | 0.00 | 200 | 212 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>57.75</td> <td>74.00</td> <td>-16.25</td> <td>68.54</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>109</td> <td>7 PEAK</td> </tr> <tr> <td>2 10600.00</td> <td>47.24</td> <td>54.00</td> <td>-6.76</td> <td>58.03</td> <td>37.66</td> <td>17.75</td> <td>66.20</td> <td>0.00</td> <td>109</td> <td>7 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10600.00 | 57.75 | 74.00 | -16.25 | 68.54 | 37.66 | 17.75 | 66.20 | 0.00 | 109 | 7 PEAK | 2 10600.00 | 47.24 | 54.00 | -6.76 | 58.03 | 37.66 | 17.75 | 66.20 | 0.00 | 109 | 7 AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10600.00 | 62.36 | 74.00 | -11.64 | 73.15 | 37.66 | 17.75 | 66.20 | 0.00 | 200 | 212 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 10600.00 | 50.64 | 54.00 | -3.36 | 61.43 | 37.66 | 17.75 | 66.20 | 0.00 | 200 | 212 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10600.00 | 57.75 | 74.00 | -16.25 | 68.54 | 37.66 | 17.75 | 66.20 | 0.00 | 109 | 7 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 10600.00 | 47.24 | 54.00 | -6.76 | 58.03 | 37.66 | 17.75 | 66.20 | 0.00 | 109 | 7 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1" data-bbox="268 1115 778 1240"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.46</td> <td>61.96</td> <td>74.00</td> <td>-12.04</td> <td>44.11</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> <td>152 147 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.46 | 61.96 | 74.00 | -12.04 | 44.11 | 34.50 | 12.87 | 29.52 | 0.00 | 152 147 PEAK | <table border="1" data-bbox="911 1115 1422 1240"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>111.32</td> <td>-----</td> <td>-----</td> <td>93.54</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>152 147 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 111.32 | ----- | ----- | 93.54 | 34.50 | 12.77 | 29.49 | 0.00 | 152 147 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.46 | 61.96 | 74.00 | -12.04 | 44.11 | 34.50 | 12.87 | 29.52 | 0.00 | 152 147 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 111.32 | ----- | ----- | 93.54 | 34.50 | 12.77 | 29.49 | 0.00 | 152 147 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1" data-bbox="268 1794 778 1919"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.46</td> <td>49.29</td> <td>54.00</td> <td>-4.71</td> <td>31.44</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> <td>152 147 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.46 | 49.29 | 54.00 | -4.71 | 31.44 | 34.50 | 12.87 | 29.52 | 0.00 | 152 147 AVERAGE | <table border="1" data-bbox="911 1794 1422 1919"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>102.37</td> <td>-----</td> <td>-----</td> <td>84.59</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>152 147 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 102.37 | ----- | ----- | 84.59 | 34.50 | 12.77 | 29.49 | 0.00 | 152 147 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.46 | 49.29 | 54.00 | -4.71 | 31.44 | 34.50 | 12.87 | 29.52 | 0.00 | 152 147 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 102.37 | ----- | ----- | 84.59 | 34.50 | 12.77 | 29.49 | 0.00 | 152 147 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.28</td> <td>58.86</td> <td>74.00</td> <td>-15.14</td> <td>40.78</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>124 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5457.28 | 58.86 | 74.00 | -15.14 | 40.78 | 34.53 | 13.17 | 29.62 | 0.00 | 124 306 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>106.49</td> <td>-----</td> <td>-----</td> <td>88.71</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>124 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 106.49 | ----- | ----- | 88.71 | 34.50 | 12.77 | 29.49 | 0.00 | 124 306 PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5457.28 | 58.86 | 74.00 | -15.14 | 40.78 | 34.53 | 13.17 | 29.62 | 0.00 | 124 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 106.49 | ----- | ----- | 88.71 | 34.50 | 12.77 | 29.49 | 0.00 | 124 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5443.28</td> <td>48.02</td> <td>54.00</td> <td>-5.98</td> <td>29.97</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>124 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5443.28 | 48.02 | 54.00 | -5.98 | 29.97 | 34.52 | 13.13 | 29.60 | 0.00 | 124 306 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>98.80</td> <td>-----</td> <td>-----</td> <td>81.02</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>124 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 98.80 | ----- | ----- | 81.02 | 34.50 | 12.77 | 29.49 | 0.00 | 124 306 AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5443.28 | 48.02 | 54.00 | -5.98 | 29.97 | 34.52 | 13.13 | 29.60 | 0.00 | 124 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 98.80 | ----- | ----- | 81.02 | 34.50 | 12.77 | 29.49 | 0.00 | 124 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>60.92</td> <td>74.00</td> <td>-13.08</td> <td>71.59</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>103</td> <td>273</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>50.84</td> <td>54.00</td> <td>-3.16</td> <td>61.49</td> <td>37.71</td> <td>17.79</td> <td>66.15</td> <td>0.00</td> <td>103</td> <td>273</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10640.00 | 60.92 | 74.00 | -13.08 | 71.59 | 37.70 | 17.78 | 66.15 | 0.00 | 103 | 273 | PEAK | 2 | 10640.00 | 50.84 | 54.00 | -3.16 | 61.49 | 37.71 | 17.79 | 66.15 | 0.00 | 103 | 273 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>56.69</td> <td>74.00</td> <td>-17.31</td> <td>67.36</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>101</td> <td>8</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.92</td> <td>54.00</td> <td>-7.08</td> <td>57.59</td> <td>37.70</td> <td>17.78</td> <td>66.15</td> <td>0.00</td> <td>101</td> <td>8</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10640.00 | 56.69 | 74.00 | -17.31 | 67.36 | 37.70 | 17.78 | 66.15 | 0.00 | 101 | 8 | PEAK | 2 | 10640.00 | 46.92 | 54.00 | -7.08 | 57.59 | 37.70 | 17.78 | 66.15 | 0.00 | 101 | 8 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 60.92 | 74.00 | -13.08 | 71.59 | 37.70 | 17.78 | 66.15 | 0.00 | 103 | 273 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10640.00 | 50.84 | 54.00 | -3.16 | 61.49 | 37.71 | 17.79 | 66.15 | 0.00 | 103 | 273 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 56.69 | 74.00 | -17.31 | 67.36 | 37.70 | 17.78 | 66.15 | 0.00 | 101 | 8 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10640.00 | 46.92 | 54.00 | -7.08 | 57.59 | 37.70 | 17.78 | 66.15 | 0.00 | 101 | 8 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|-------|------|------|-------|-------------|--------------|-------------|--------|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|--------|-------|-------|-------|------|-------|-------------|--------------|--|--------|------|--------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5421.63</td> <td>59.88</td> <td>74.00</td> <td>-14.12</td> <td>41.88</td> <td>34.51</td> <td>13.00</td> <td>29.59</td> <td>0.00</td> <td>152</td> <td>162</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.03</td> <td>61.51</td> <td>68.30</td> <td>-6.79</td> <td>43.41</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>152</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5421.63 | 59.88 | 74.00 | -14.12 | 41.88 | 34.51 | 13.00 | 29.59 | 0.00 | 152 | 162 | PEAK | 2 | 5469.03 | 61.51 | 68.30 | -6.79 | 43.41 | 34.53 | 13.20 | 29.63 | 0.00 | 152 | 162 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.63</td> <td>-----</td> <td>-----</td> <td>93.47</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>152</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 111.63 | ----- | ----- | 93.47 | 34.55 | 13.26 | 29.65 | 0.00 | 152 | 162 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5421.63 | 59.88 | 74.00 | -14.12 | 41.88 | 34.51 | 13.00 | 29.59 | 0.00 | 152 | 162 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.03 | 61.51 | 68.30 | -6.79 | 43.41 | 34.53 | 13.20 | 29.63 | 0.00 | 152 | 162 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 111.63 | ----- | ----- | 93.47 | 34.55 | 13.26 | 29.65 | 0.00 | 152 | 162 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.98</td> <td>49.17</td> <td>54.00</td> <td>-4.83</td> <td>31.09</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>152</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5455.98 | 49.17 | 54.00 | -4.83 | 31.09 | 34.53 | 13.16 | 29.61 | 0.00 | 152 | 162 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>101.95</td> <td>-----</td> <td>-----</td> <td>83.79</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>152</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 101.95 | ----- | ----- | 83.79 | 34.55 | 13.26 | 29.65 | 0.00 | 152 | 162 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5455.98 | 49.17 | 54.00 | -4.83 | 31.09 | 34.53 | 13.16 | 29.61 | 0.00 | 152 | 162 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 101.95 | ----- | ----- | 83.79 | 34.55 | 13.26 | 29.65 | 0.00 | 152 | 162 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|-------|------|------|-------|-------------|--------------|-------------|--------|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|-------|--------|-------|-------|-------|------|-------|-------------|--------------|--|--------|------|--------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5367.78</td> <td>59.28</td> <td>74.00</td> <td>-14.72</td> <td>41.39</td> <td>34.50</td> <td>12.93</td> <td>29.54</td> <td>0.00</td> <td>118</td> <td>300</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.63</td> <td>60.55</td> <td>68.30</td> <td>-7.75</td> <td>42.45</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>118</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5367.78 | 59.28 | 74.00 | -14.72 | 41.39 | 34.50 | 12.93 | 29.54 | 0.00 | 118 | 300 | PEAK | 2 | 5469.63 | 60.55 | 68.30 | -7.75 | 42.45 | 34.53 | 13.20 | 29.63 | 0.00 | 118 | 300 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.42</td> <td>-----</td> <td>-----</td> <td>87.26</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>118</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 105.42 | ----- | ----- | 87.26 | 34.55 | 13.26 | 29.65 | 0.00 | 118 | 300 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5367.78 | 59.28 | 74.00 | -14.72 | 41.39 | 34.50 | 12.93 | 29.54 | 0.00 | 118 | 300 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.63 | 60.55 | 68.30 | -7.75 | 42.45 | 34.53 | 13.20 | 29.63 | 0.00 | 118 | 300 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 105.42 | ----- | ----- | 87.26 | 34.55 | 13.26 | 29.65 | 0.00 | 118 | 300 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.98</td> <td>48.00</td> <td>54.00</td> <td>-5.20</td> <td>30.72</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>118</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.98 | 48.00 | 54.00 | -5.20 | 30.72 | 34.53 | 13.17 | 29.62 | 0.00 | 118 | 300 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.95</td> <td>-----</td> <td>-----</td> <td>78.79</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>118</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 96.95 | ----- | ----- | 78.79 | 34.55 | 13.26 | 29.65 | 0.00 | 118 | 300 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.98 | 48.00 | 54.00 | -5.20 | 30.72 | 34.53 | 13.17 | 29.62 | 0.00 | 118 | 300 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 96.95 | ----- | ----- | 78.79 | 34.55 | 13.26 | 29.65 | 0.00 | 118 | 300 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>59.65</td> <td>74.00</td> <td>-14.35</td> <td>69.20</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>101</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>49.23</td> <td>54.00</td> <td>-4.77</td> <td>58.78</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>101</td> <td>164</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11000.00 | 59.65 | 74.00 | -14.35 | 69.20 | 38.10 | 18.08 | 65.73 | 0.00 | 101 | 164 | PEAK | 2 | 11000.00 | 49.23 | 54.00 | -4.77 | 58.78 | 38.10 | 18.08 | 65.73 | 0.00 | 101 | 164 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>60.96</td> <td>74.00</td> <td>-13.04</td> <td>70.51</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>260</td> <td>343</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>50.67</td> <td>54.00</td> <td>-3.33</td> <td>60.22</td> <td>38.10</td> <td>18.08</td> <td>65.73</td> <td>0.00</td> <td>260</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11000.00 | 60.96 | 74.00 | -13.04 | 70.51 | 38.10 | 18.08 | 65.73 | 0.00 | 260 | 343 | PEAK | 2 | 11000.00 | 50.67 | 54.00 | -3.33 | 60.22 | 38.10 | 18.08 | 65.73 | 0.00 | 260 | 343 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 59.65 | 74.00 | -14.35 | 69.20 | 38.10 | 18.08 | 65.73 | 0.00 | 101 | 164 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 49.23 | 54.00 | -4.77 | 58.78 | 38.10 | 18.08 | 65.73 | 0.00 | 101 | 164 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 60.96 | 74.00 | -13.04 | 70.51 | 38.10 | 18.08 | 65.73 | 0.00 | 260 | 343 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11000.00 | 50.67 | 54.00 | -3.33 | 60.22 | 38.10 | 18.08 | 65.73 | 0.00 | 260 | 343 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>58.15</td> <td>74.00</td> <td>-15.85</td> <td>67.39</td> <td>38.20</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>168</td> <td>169</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>48.72</td> <td>54.00</td> <td>-5.28</td> <td>57.96</td> <td>38.20</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>168</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11160.00 | 58.15 | 74.00 | -15.85 | 67.39 | 38.20 | 18.20 | 65.64 | 0.00 | 168 | 169 | PEAK | 2 | 11160.00 | 48.72 | 54.00 | -5.28 | 57.96 | 38.20 | 18.20 | 65.64 | 0.00 | 168 | 169 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>60.31</td> <td>74.00</td> <td>-13.69</td> <td>69.55</td> <td>38.20</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>234</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>49.80</td> <td>54.00</td> <td>-4.20</td> <td>59.04</td> <td>38.20</td> <td>18.20</td> <td>65.64</td> <td>0.00</td> <td>234</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11160.00 | 60.31 | 74.00 | -13.69 | 69.55 | 38.20 | 18.20 | 65.64 | 0.00 | 234 | 0 | PEAK | 2 | 11160.00 | 49.80 | 54.00 | -4.20 | 59.04 | 38.20 | 18.20 | 65.64 | 0.00 | 234 | 0 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 58.15 | 74.00 | -15.85 | 67.39 | 38.20 | 18.20 | 65.64 | 0.00 | 168 | 169 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11160.00 | 48.72 | 54.00 | -5.28 | 57.96 | 38.20 | 18.20 | 65.64 | 0.00 | 168 | 169 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 60.31 | 74.00 | -13.69 | 69.55 | 38.20 | 18.20 | 65.64 | 0.00 | 234 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11160.00 | 49.80 | 54.00 | -4.20 | 59.04 | 38.20 | 18.20 | 65.64 | 0.00 | 234 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

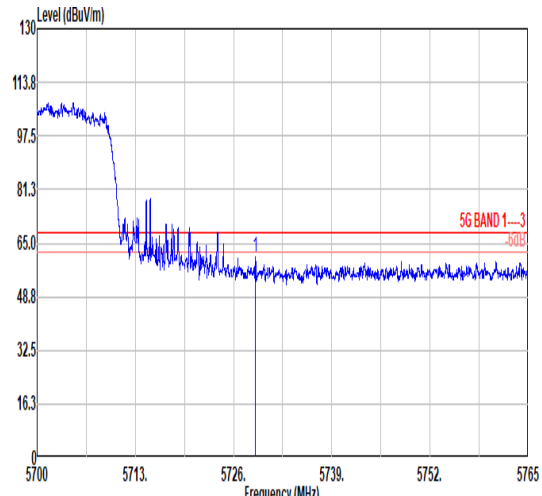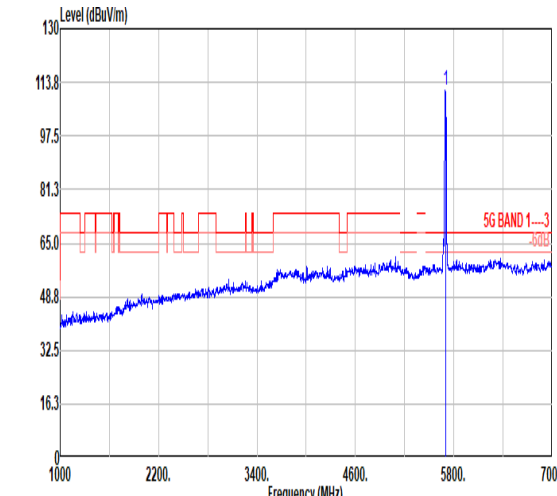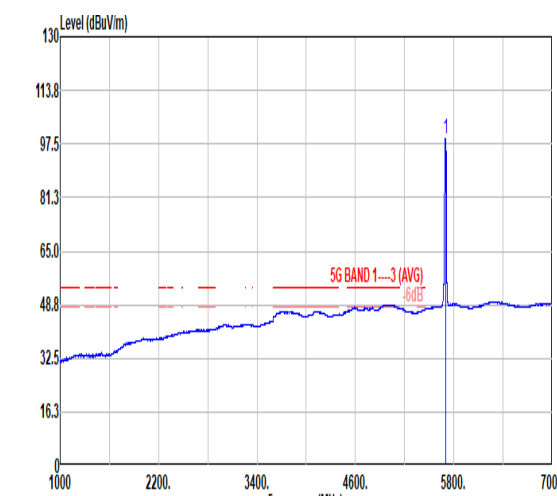

| | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|---|--------------|-------------|--------|--------|--------|-----------------|--------|--------|--------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|------|--|--|--|--|--|--|--|--------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----------|--------|-------|-------|-------|-------|-------|-------|------|--|--|--|--|--|--|--|--|--------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="255 1097 798 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5728.90</td> <td>60.65</td> <td>68.30</td> <td>-7.65</td> <td>41.86</td> <td>34.84</td> <td>13.74</td> <td>29.79</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>320 130 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5728.90 | 60.65 | 68.30 | -7.65 | 41.86 | 34.84 | 13.74 | 29.79 | 0.00 | | | | | | | | | 320 130 PEAK |  <table border="1" data-bbox="877 1097 1436 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>111.23</td> <td>-----</td> <td>-----</td> <td>92.80</td> <td>34.77</td> <td>13.46</td> <td>29.80</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>320 130 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5700.00 | 111.23 | ----- | ----- | 92.80 | 34.77 | 13.46 | 29.80 | 0.00 | | | | | | | | | 320 130 PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5728.90 | 60.65 | 68.30 | -7.65 | 41.86 | 34.84 | 13.74 | 29.79 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 320 130 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 111.23 | ----- | ----- | 92.80 | 34.77 | 13.46 | 29.80 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 320 130 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="877 1769 1436 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>99.12</td> <td>-----</td> <td>-----</td> <td>80.69</td> <td>34.77</td> <td>13.46</td> <td>29.80</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>320 130 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5700.00 | 99.12 | ----- | ----- | 80.69 | 34.77 | 13.46 | 29.80 | 0.00 | | | | | | | | | 320 130 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 99.12 | ----- | ----- | 80.69 | 34.77 | 13.46 | 29.80 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 320 130 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: The higher Signals which are no mark are within frequency band can be ignored.







| | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|---|--------------|-------------|--------|--------|--------|--------|------|--------|---------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.17</td> <td>60.48</td> <td>68.30</td> <td>-7.82</td> <td>41.72</td> <td>34.84</td> <td>13.71</td> <td>29.79</td> <td>0.00</td> <td>124</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5726.17 | 60.48 | 68.30 | -7.82 | 41.72 | 34.84 | 13.71 | 29.79 | 0.00 | 124 | 181 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.55</td> <td>-----</td> <td>-----</td> <td>86.08</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>124</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5700.00 | 104.55 | ----- | ----- | 86.08 | 34.78 | 13.49 | 29.80 | 0.00 | 124 | 181 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5726.17 | 60.48 | 68.30 | -7.82 | 41.72 | 34.84 | 13.71 | 29.79 | 0.00 | 124 | 181 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 104.55 | ----- | ----- | 86.08 | 34.78 | 13.49 | 29.80 | 0.00 | 124 | 181 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>95.82</td> <td>-----</td> <td>-----</td> <td>77.39</td> <td>34.77</td> <td>13.46</td> <td>29.80</td> <td>0.00</td> <td>124</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5700.00 | 95.82 | ----- | ----- | 77.39 | 34.77 | 13.46 | 29.80 | 0.00 | 124 | 181 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 95.82 | ----- | ----- | 77.39 | 34.77 | 13.46 | 29.80 | 0.00 | 124 | 181 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: The higher Signals which are no mark are within frequency band can be ignored.







| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|-------------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|--------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-------------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>61.30</td> <td>74.00</td> <td>-12.70</td> <td>70.08</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>221</td> <td>4 PEAK</td> </tr> <tr> <td>2 11400.00</td> <td>50.85</td> <td>54.00</td> <td>-3.15</td> <td>59.63</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>221</td> <td>4 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11400.00 | 61.30 | 74.00 | -12.70 | 70.08 | 38.34 | 18.39 | 65.51 | 0.00 | 221 | 4 PEAK | 2 11400.00 | 50.85 | 54.00 | -3.15 | 59.63 | 38.34 | 18.39 | 65.51 | 0.00 | 221 | 4 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>60.19</td> <td>74.00</td> <td>-13.81</td> <td>68.97</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>199</td> <td>359 PEAK</td> </tr> <tr> <td>2 11400.00</td> <td>50.71</td> <td>54.00</td> <td>-3.29</td> <td>59.49</td> <td>38.34</td> <td>18.39</td> <td>65.51</td> <td>0.00</td> <td>199</td> <td>359 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11400.00 | 60.19 | 74.00 | -13.81 | 68.97 | 38.34 | 18.39 | 65.51 | 0.00 | 199 | 359 PEAK | 2 11400.00 | 50.71 | 54.00 | -3.29 | 59.49 | 38.34 | 18.39 | 65.51 | 0.00 | 199 | 359 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11400.00 | 61.30 | 74.00 | -12.70 | 70.08 | 38.34 | 18.39 | 65.51 | 0.00 | 221 | 4 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11400.00 | 50.85 | 54.00 | -3.15 | 59.63 | 38.34 | 18.39 | 65.51 | 0.00 | 221 | 4 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11400.00 | 60.19 | 74.00 | -13.81 | 68.97 | 38.34 | 18.39 | 65.51 | 0.00 | 199 | 359 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11400.00 | 50.71 | 54.00 | -3.29 | 59.49 | 38.34 | 18.39 | 65.51 | 0.00 | 199 | 359 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

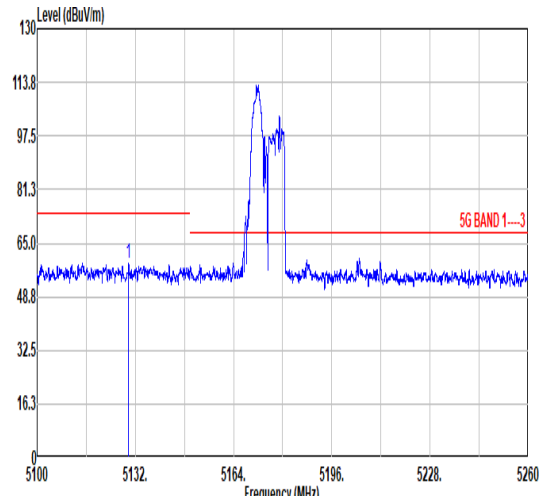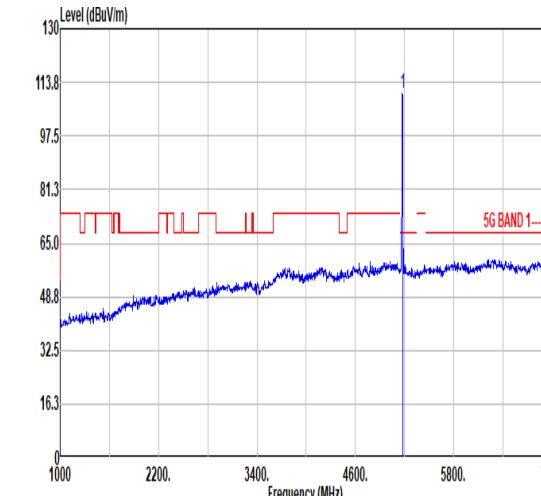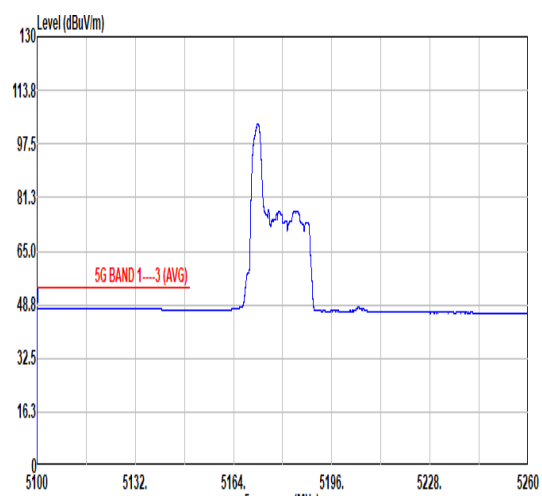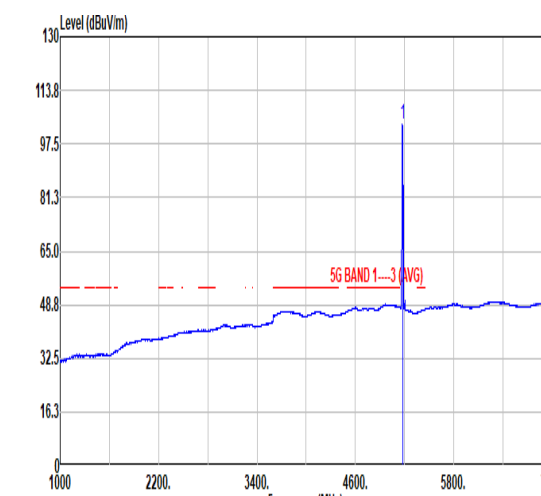

| | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.15-5.25_802.11ax HE20_CH36_RU26/O_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="255 1097 798 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5129.85</td> <td>58.83</td> <td>74.00</td> <td>-15.17</td> <td>41.31</td> <td>34.36</td> <td>12.45</td> <td>29.29</td> <td>0.00</td> <td>200</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5129.85 | 58.83 | 74.00 | -15.17 | 41.31 | 34.36 | 12.45 | 29.29 | 0.00 | 200 | 145 | PEAK |  <table border="1" data-bbox="877 1097 1420 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.35</td> <td>-----</td> <td>-----</td> <td>92.74</td> <td>34.43</td> <td>12.51</td> <td>29.33</td> <td>0.00</td> <td>200</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 110.35 | ----- | ----- | 92.74 | 34.43 | 12.51 | 29.33 | 0.00 | 200 | 145 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5129.85 | 58.83 | 74.00 | -15.17 | 41.31 | 34.36 | 12.45 | 29.29 | 0.00 | 200 | 145 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 110.35 | ----- | ----- | 92.74 | 34.43 | 12.51 | 29.33 | 0.00 | 200 | 145 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="255 1769 798 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.02</td> <td>47.75</td> <td>54.00</td> <td>-6.25</td> <td>30.31</td> <td>34.30</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>200</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5100.02 | 47.75 | 54.00 | -6.25 | 30.31 | 34.30 | 12.40 | 29.26 | 0.00 | 200 | 145 | AVERAGE |  <table border="1" data-bbox="877 1769 1420 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.75</td> <td>-----</td> <td>-----</td> <td>86.14</td> <td>34.43</td> <td>12.51</td> <td>29.33</td> <td>0.00</td> <td>200</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 103.75 | ----- | ----- | 86.14 | 34.43 | 12.51 | 29.33 | 0.00 | 200 | 145 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5100.02 | 47.75 | 54.00 | -6.25 | 30.31 | 34.30 | 12.40 | 29.26 | 0.00 | 200 | 145 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 103.75 | ----- | ----- | 86.14 | 34.43 | 12.51 | 29.33 | 0.00 | 200 | 145 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

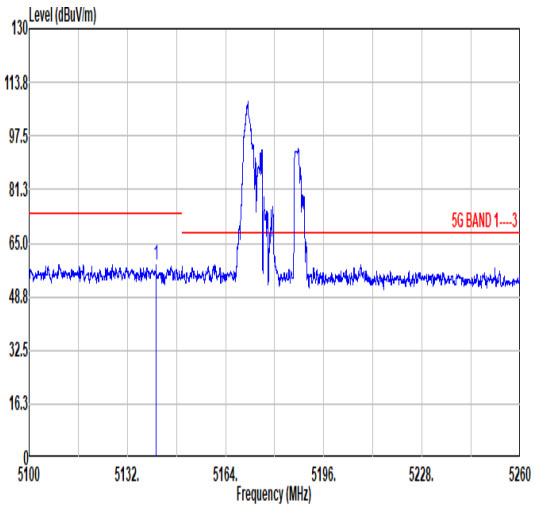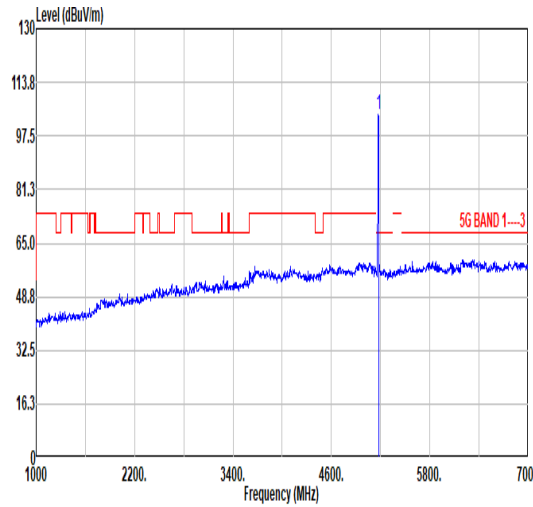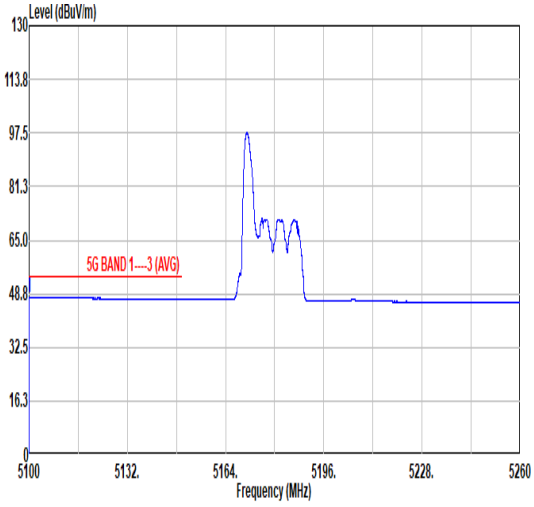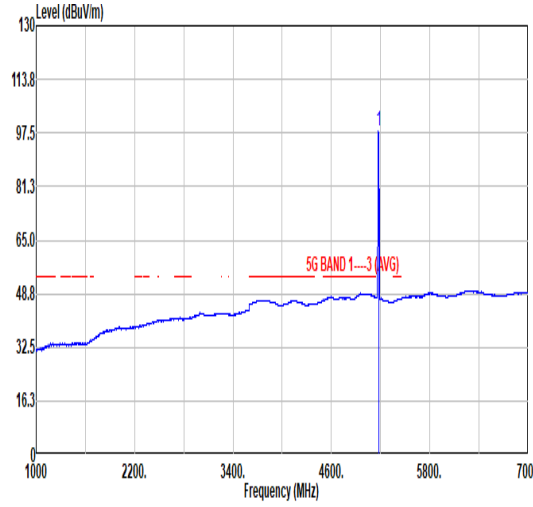

| | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.15-5.25_802.11ax HE20_CH36_RU26/O_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1108 798 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.37</td> <td>58.53</td> <td>74.00</td> <td>-15.47</td> <td>40.98</td> <td>34.38</td> <td>12.47</td> <td>29.30</td> <td>0.00</td> <td>136</td> <td>309</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5141.37 | 58.53 | 74.00 | -15.47 | 40.98 | 34.38 | 12.47 | 29.30 | 0.00 | 136 | 309 | PEAK |  <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.99</td> <td>-----</td> <td>-----</td> <td>86.38</td> <td>34.43</td> <td>12.51</td> <td>29.33</td> <td>0.00</td> <td>136</td> <td>309</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 103.99 | ----- | ----- | 86.38 | 34.43 | 12.51 | 29.33 | 0.00 | 136 | 309 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5141.37 | 58.53 | 74.00 | -15.47 | 40.98 | 34.38 | 12.47 | 29.30 | 0.00 | 136 | 309 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 103.99 | ----- | ----- | 86.38 | 34.43 | 12.51 | 29.33 | 0.00 | 136 | 309 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="263 1792 798 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.00</td> <td>47.65</td> <td>54.00</td> <td>-6.35</td> <td>30.21</td> <td>34.30</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>136</td> <td>309</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5100.00 | 47.65 | 54.00 | -6.35 | 30.21 | 34.30 | 12.40 | 29.26 | 0.00 | 136 | 309 | AVERAGE |  <table border="1" data-bbox="901 1792 1436 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.99</td> <td>-----</td> <td>-----</td> <td>80.38</td> <td>34.43</td> <td>12.51</td> <td>29.33</td> <td>0.00</td> <td>136</td> <td>309</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 97.99 | ----- | ----- | 80.38 | 34.43 | 12.51 | 29.33 | 0.00 | 136 | 309 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5100.00 | 47.65 | 54.00 | -6.35 | 30.21 | 34.30 | 12.40 | 29.26 | 0.00 | 136 | 309 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 97.99 | ----- | ----- | 80.38 | 34.43 | 12.51 | 29.33 | 0.00 | 136 | 309 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5454.19</td> <td>58.02</td> <td>74.00</td> <td>-15.98</td> <td>39.94</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>128 151 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5454.19 | 58.02 | 74.00 | -15.98 | 39.94 | 34.53 | 13.16 | 29.61 | 0.00 | 128 151 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>110.53</td> <td>-----</td> <td>-----</td> <td>92.74</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>128 151 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 110.53 | ----- | ----- | 92.74 | 34.50 | 12.78 | 29.49 | 0.00 | 128 151 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5454.19 | 58.02 | 74.00 | -15.98 | 39.94 | 34.53 | 13.16 | 29.61 | 0.00 | 128 151 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 110.53 | ----- | ----- | 92.74 | 34.50 | 12.78 | 29.49 | 0.00 | 128 151 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.78</td> <td>47.21</td> <td>54.00</td> <td>-6.79</td> <td>29.13</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>128 151 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5459.78 | 47.21 | 54.00 | -6.79 | 29.13 | 34.53 | 13.17 | 29.62 | 0.00 | 128 151 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>102.71</td> <td>-----</td> <td>-----</td> <td>84.92</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>128 151 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 102.71 | ----- | ----- | 84.92 | 34.50 | 12.78 | 29.49 | 0.00 | 128 151 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.78 | 47.21 | 54.00 | -6.79 | 29.13 | 34.53 | 13.17 | 29.62 | 0.00 | 128 151 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 102.71 | ----- | ----- | 84.92 | 34.50 | 12.78 | 29.49 | 0.00 | 128 151 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5364.46</td> <td>58.67</td> <td>74.00</td> <td>-15.33</td> <td>40.78</td> <td>34.50</td> <td>12.92</td> <td>29.53</td> <td>0.00</td> <td>137 309 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5364.46 | 58.67 | 74.00 | -15.33 | 40.78 | 34.50 | 12.92 | 29.53 | 0.00 | 137 309 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>104.66</td> <td>-----</td> <td>-----</td> <td>86.87</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>137 309 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 104.66 | ----- | ----- | 86.87 | 34.50 | 12.78 | 29.49 | 0.00 | 137 309 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5364.46 | 58.67 | 74.00 | -15.33 | 40.78 | 34.50 | 12.92 | 29.53 | 0.00 | 137 309 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 104.66 | ----- | ----- | 86.87 | 34.50 | 12.78 | 29.49 | 0.00 | 137 309 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5458.00</td> <td>47.16</td> <td>54.00</td> <td>-6.84</td> <td>29.08</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>137 309 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5458.00 | 47.16 | 54.00 | -6.84 | 29.08 | 34.53 | 13.17 | 29.62 | 0.00 | 137 309 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>98.64</td> <td>-----</td> <td>-----</td> <td>80.85</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>137 309 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 98.64 | ----- | ----- | 80.85 | 34.50 | 12.78 | 29.49 | 0.00 | 137 309 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5458.00 | 47.16 | 54.00 | -6.84 | 29.08 | 34.53 | 13.17 | 29.62 | 0.00 | 137 309 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 98.64 | ----- | ----- | 80.85 | 34.50 | 12.78 | 29.49 | 0.00 | 137 309 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------------|-------------|--------|--------|--------|-------|------|------|-------|-------------|--------------|-------------|--------|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|--------|--------|-------|-------|-------|------|-------|-------------|--------------|--|--------|------|--------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5442.93</td> <td>58.19</td> <td>74.00</td> <td>-15.81</td> <td>40.14</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>243</td> <td>170</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.08</td> <td>58.21</td> <td>68.30</td> <td>-10.09</td> <td>40.12</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>243</td> <td>170</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5442.93 | 58.19 | 74.00 | -15.81 | 40.14 | 34.52 | 13.13 | 29.60 | 0.00 | 243 | 170 | PEAK | 2 | 5461.08 | 58.21 | 68.30 | -10.09 | 40.12 | 34.53 | 13.18 | 29.62 | 0.00 | 243 | 170 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>108.93</td> <td>-----</td> <td>-----</td> <td>90.77</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>243</td> <td>170</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 108.93 | ----- | ----- | 90.77 | 34.55 | 13.25 | 29.64 | 0.00 | 243 | 170 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5442.93 | 58.19 | 74.00 | -15.81 | 40.14 | 34.52 | 13.13 | 29.60 | 0.00 | 243 | 170 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5461.08 | 58.21 | 68.30 | -10.09 | 40.12 | 34.53 | 13.18 | 29.62 | 0.00 | 243 | 170 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 108.93 | ----- | ----- | 90.77 | 34.55 | 13.25 | 29.64 | 0.00 | 243 | 170 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.17</td> <td>47.25</td> <td>54.00</td> <td>-6.75</td> <td>29.17</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>243</td> <td>170</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5457.17 | 47.25 | 54.00 | -6.75 | 29.17 | 34.53 | 13.17 | 29.62 | 0.00 | 243 | 170 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.28</td> <td>-----</td> <td>-----</td> <td>81.12</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>243</td> <td>170</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 99.28 | ----- | ----- | 81.12 | 34.55 | 13.25 | 29.64 | 0.00 | 243 | 170 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5457.17 | 47.25 | 54.00 | -6.75 | 29.17 | 34.53 | 13.17 | 29.62 | 0.00 | 243 | 170 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 99.28 | ----- | ----- | 81.12 | 34.55 | 13.25 | 29.64 | 0.00 | 243 | 170 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

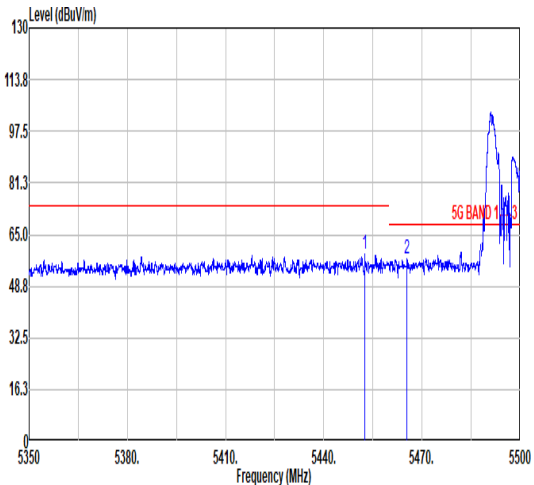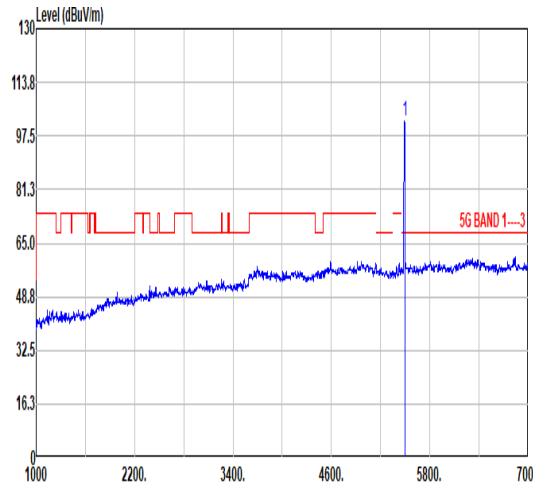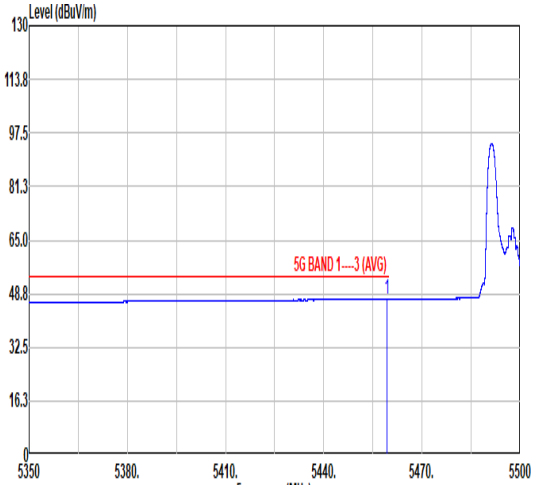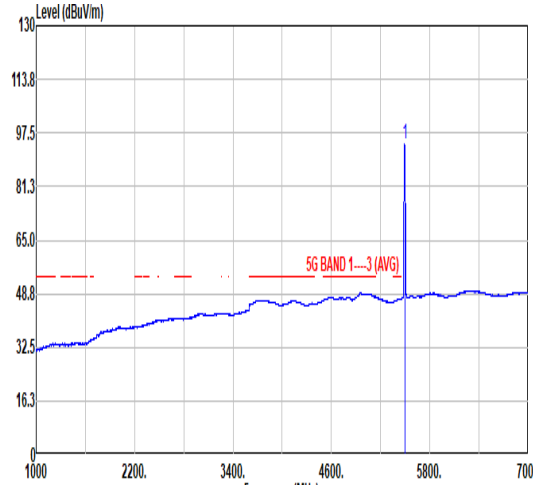

| | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|-------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-------------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-------------|--|---------|-------|-------|--------|-------|--------|-------|-------|------|-----|----------|---|-------------|--------------|-------------|-------------|--------|--------|-----|--------|------|-----|--------|--------|-------------|--------------|-------------|-------------|--------|----|-----|--------|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-------------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|----------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1086 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.53</td> <td>58.81</td> <td>74.00</td> <td>-15.19</td> <td>40.73</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>128</td> <td>302 PEAK</td> </tr> <tr> <td>2</td> <td>5465.43</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>39.43</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>128</td> <td>302 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5452.53 | 58.81 | 74.00 | -15.19 | 40.73 | 34.53 | 13.16 | 29.61 | 0.00 | 128 | 302 PEAK | 2 | 5465.43 | 57.53 | 68.30 | -10.77 | 39.43 | 34.53 | 13.19 | 29.62 | 0.00 | 128 | 302 PEAK |  <table border="1" data-bbox="901 1086 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>101.86</td> <td>-----</td> <td>-----</td> <td>83.70</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>128</td> <td>302 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 101.86 | ----- | ----- | 83.70 | 34.55 | 13.25 | 29.64 | 0.00 | 128 | 302 PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5452.53 | 58.81 | 74.00 | -15.19 | 40.73 | 34.53 | 13.16 | 29.61 | 0.00 | 128 | 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5465.43 | 57.53 | 68.30 | -10.77 | 39.43 | 34.53 | 13.19 | 29.62 | 0.00 | 128 | 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 101.86 | ----- | ----- | 83.70 | 34.55 | 13.25 | 29.64 | 0.00 | 128 | 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="263 1769 774 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.25</td> <td>47.16</td> <td>54.00</td> <td>-6.84</td> <td>29.08</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>128</td> <td>302 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.25 | 47.16 | 54.00 | -6.84 | 29.08 | 34.53 | 13.17 | 29.62 | 0.00 | 128 | 302 AVERAGE |  <table border="1" data-bbox="901 1769 1412 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>94.17</td> <td>-----</td> <td>-----</td> <td>76.01</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>128</td> <td>302 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 94.17 | ----- | ----- | 76.01 | 34.55 | 13.25 | 29.64 | 0.00 | 128 | 302 AVERAGE | | | | | | | | | | | | |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.25 | 47.16 | 54.00 | -6.84 | 29.08 | 34.53 | 13.17 | 29.62 | 0.00 | 128 | 302 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 94.17 | ----- | ----- | 76.01 | 34.55 | 13.25 | 29.64 | 0.00 | 128 | 302 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|--|--------------|-------------|--------|--------|--------|--------|--------|-------------|--------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----|----------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5764.26</td> <td>60.07</td> <td>68.30</td> <td>-8.23</td> <td>40.88</td> <td>34.92</td> <td>14.05</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>296 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5764.26 | 60.07 | 68.30 | -8.23 | 40.88 | 34.92 | 14.05 | 29.78 | 0.00 | 100 | 296 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>107.01</td> <td>-----</td> <td>-----</td> <td>88.47</td> <td>34.80</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>296 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 107.01 | ----- | ----- | 88.47 | 34.80 | 13.54 | 29.80 | 0.00 | 100 | 296 PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5764.26 | 60.07 | 68.30 | -8.23 | 40.88 | 34.92 | 14.05 | 29.78 | 0.00 | 100 | 296 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 107.01 | ----- | ----- | 88.47 | 34.80 | 13.54 | 29.80 | 0.00 | 100 | 296 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.51</td> <td>-----</td> <td>-----</td> <td>79.97</td> <td>34.80</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>296 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 98.51 | ----- | ----- | 79.97 | 34.80 | 13.54 | 29.80 | 0.00 | 100 | 296 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 98.51 | ----- | ----- | 79.97 | 34.80 | 13.54 | 29.80 | 0.00 | 100 | 296 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|---|--------------|-------------|--------|--------|--------|--------|-----------------|--------|--------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|--------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|--------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5756.85</td> <td>59.84</td> <td>68.30</td> <td>-8.46</td> <td>40.72</td> <td>34.91</td> <td>13.99</td> <td>29.78</td> <td>0.00</td> <td>100 343 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5756.85 | 59.84 | 68.30 | -8.46 | 40.72 | 34.91 | 13.99 | 29.78 | 0.00 | 100 343 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>81.94</td> <td>34.80</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>100 343 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 100.48 | ----- | ----- | 81.94 | 34.80 | 13.54 | 29.80 | 0.00 | 100 343 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5756.85 | 59.84 | 68.30 | -8.46 | 40.72 | 34.91 | 13.99 | 29.78 | 0.00 | 100 343 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 100.48 | ----- | ----- | 81.94 | 34.80 | 13.54 | 29.80 | 0.00 | 100 343 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.14</td> <td>-----</td> <td>-----</td> <td>75.60</td> <td>34.80</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>100 343 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 94.14 | ----- | ----- | 75.60 | 34.80 | 13.54 | 29.80 | 0.00 | 100 343 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 94.14 | ----- | ----- | 75.60 | 34.80 | 13.54 | 29.80 | 0.00 | 100 343 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

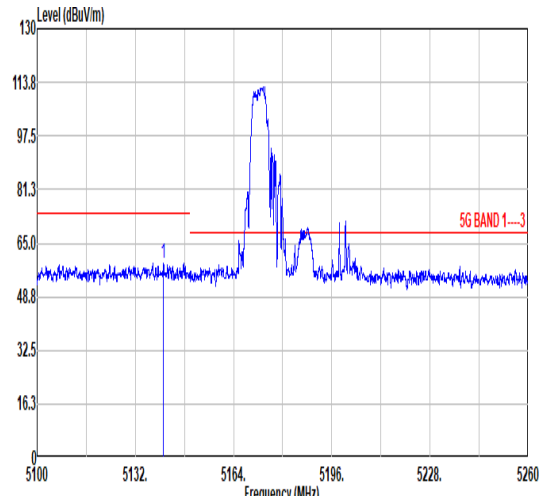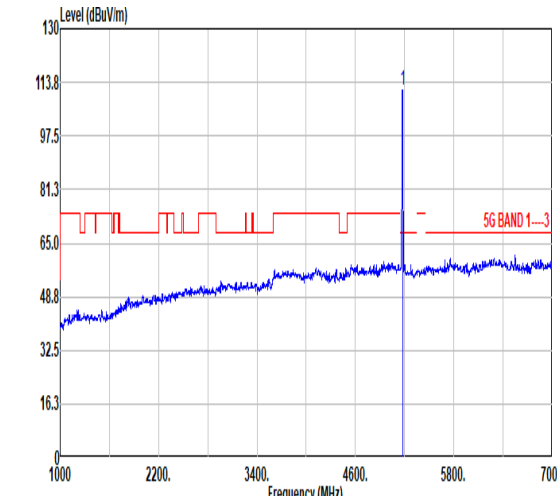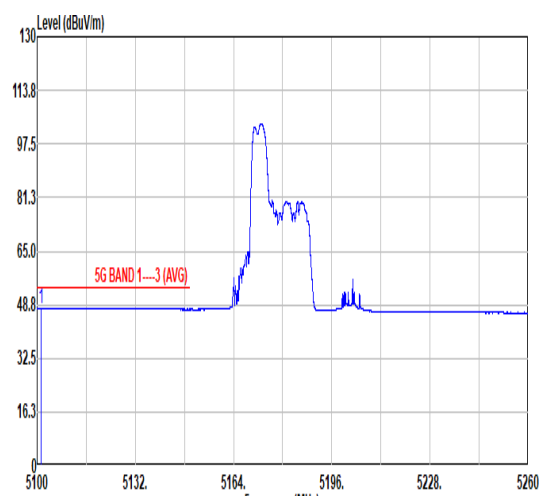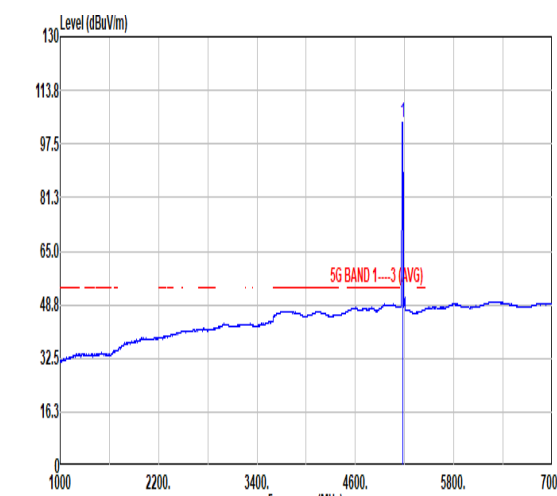

| | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5100 to 5260 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. A sharp peak is visible at 5180 MHz, reaching approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.21</td> <td>59.11</td> <td>74.00</td> <td>-14.89</td> <td>41.56</td> <td>34.38</td> <td>12.47</td> <td>29.30</td> <td>0.00</td> <td>209</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5141.21 | 59.11 | 74.00 | -14.89 | 41.56 | 34.38 | 12.47 | 29.30 | 0.00 | 209 | 142 | PEAK |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. A sharp peak is visible at 5180 MHz, reaching approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>111.20</td> <td>-----</td> <td>-----</td> <td>93.56</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>209</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 111.20 | ----- | ----- | 93.56 | 34.45 | 12.52 | 29.33 | 0.00 | 209 | 142 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5141.21 | 59.11 | 74.00 | -14.89 | 41.56 | 34.38 | 12.47 | 29.30 | 0.00 | 209 | 142 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 111.20 | ----- | ----- | 93.56 | 34.45 | 12.52 | 29.33 | 0.00 | 209 | 142 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization (Average). The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5100 to 5260 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m. A peak is visible at 5180 MHz, reaching approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5101.37</td> <td>47.77</td> <td>54.00</td> <td>-6.23</td> <td>30.33</td> <td>34.30</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>209</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5101.37 | 47.77 | 54.00 | -6.23 | 30.33 | 34.30 | 12.40 | 29.26 | 0.00 | 209 | 142 | AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization (Average). The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m. A peak is visible at 5180 MHz, reaching approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.02</td> <td>-----</td> <td>-----</td> <td>86.38</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>209</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.02 | ----- | ----- | 86.38 | 34.45 | 12.52 | 29.33 | 0.00 | 209 | 142 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5101.37 | 47.77 | 54.00 | -6.23 | 30.33 | 34.30 | 12.40 | 29.26 | 0.00 | 209 | 142 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.02 | ----- | ----- | 86.38 | 34.45 | 12.52 | 29.33 | 0.00 | 209 | 142 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

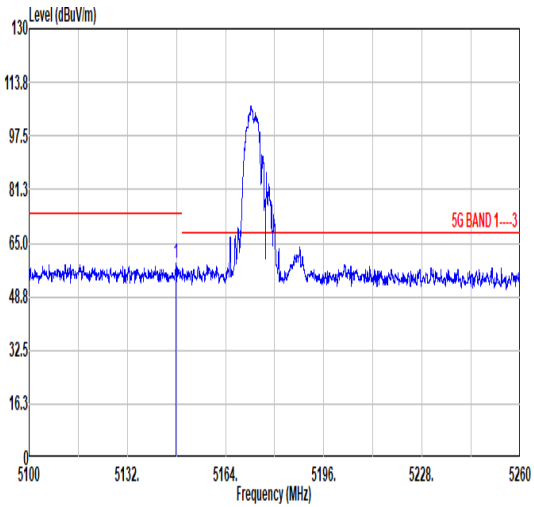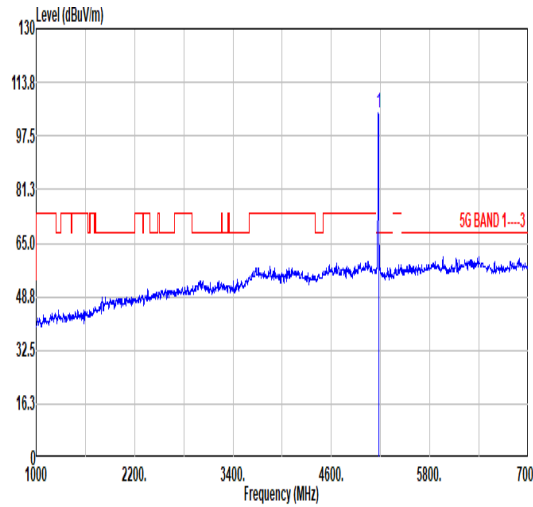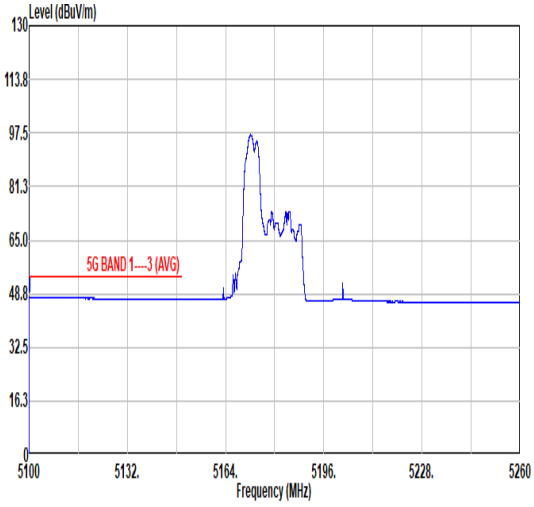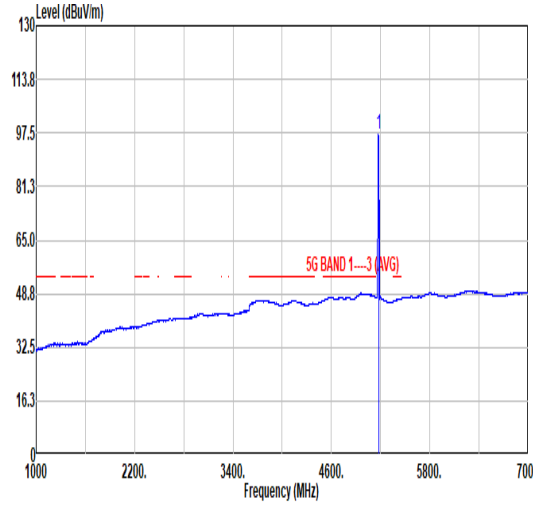

| | | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5100 5132 5164 5196 5228 5260</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.93</td> <td>59.06</td> <td>74.00</td> <td>-14.94</td> <td>41.49</td> <td>34.40</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>149</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5147.93 | 59.06 | 74.00 | -14.94 | 41.49 | 34.40 | 12.48 | 29.31 | 0.00 | 149 | 304 | PEAK |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.51</td> <td>-----</td> <td>-----</td> <td>86.90</td> <td>34.43</td> <td>12.51</td> <td>29.33</td> <td>0.00</td> <td>149</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.51 | ----- | ----- | 86.90 | 34.43 | 12.51 | 29.33 | 0.00 | 149 | 304 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5147.93 | 59.06 | 74.00 | -14.94 | 41.49 | 34.40 | 12.48 | 29.31 | 0.00 | 149 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.51 | ----- | ----- | 86.90 | 34.43 | 12.51 | 29.33 | 0.00 | 149 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>5100 5132 5164 5196 5228 5260</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.06</td> <td>47.61</td> <td>54.00</td> <td>-6.39</td> <td>30.17</td> <td>34.30</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>149</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5100.06 | 47.61 | 54.00 | -6.39 | 30.17 | 34.30 | 12.40 | 29.26 | 0.00 | 149 | 304 | AVERAGE |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2200 3400 4600 5800 7000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.17</td> <td>-----</td> <td>-----</td> <td>79.56</td> <td>34.43</td> <td>12.51</td> <td>29.33</td> <td>0.00</td> <td>149</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 97.17 | ----- | ----- | 79.56 | 34.43 | 12.51 | 29.33 | 0.00 | 149 | 304 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5100.06 | 47.61 | 54.00 | -6.39 | 30.17 | 34.30 | 12.40 | 29.26 | 0.00 | 149 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 97.17 | ----- | ----- | 79.56 | 34.43 | 12.51 | 29.33 | 0.00 | 149 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5391.20</td> <td>58.60</td> <td>74.00</td> <td>-15.40</td> <td>40.66</td> <td>34.50</td> <td>13.00</td> <td>29.56</td> <td>0.00</td> <td>134</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5391.20 | 58.60 | 74.00 | -15.40 | 40.66 | 34.50 | 13.00 | 29.56 | 0.00 | 134 | 142 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>111.80</td> <td>-----</td> <td>-----</td> <td>94.01</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>134</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 111.80 | ----- | ----- | 94.01 | 34.50 | 12.78 | 29.49 | 0.00 | 134 | 142 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5391.20 | 58.60 | 74.00 | -15.40 | 40.66 | 34.50 | 13.00 | 29.56 | 0.00 | 134 | 142 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 111.80 | ----- | ----- | 94.01 | 34.50 | 12.78 | 29.49 | 0.00 | 134 | 142 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>47.22</td> <td>54.00</td> <td>-6.78</td> <td>29.14</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>134</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.48 | 47.22 | 54.00 | -6.78 | 29.14 | 34.53 | 13.17 | 29.62 | 0.00 | 134 | 142 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.62</td> <td>-----</td> <td>-----</td> <td>84.83</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>134</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 102.62 | ----- | ----- | 84.83 | 34.50 | 12.78 | 29.49 | 0.00 | 134 | 142 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.48 | 47.22 | 54.00 | -6.78 | 29.14 | 34.53 | 13.17 | 29.62 | 0.00 | 134 | 142 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 102.62 | ----- | ----- | 84.83 | 34.50 | 12.78 | 29.49 | 0.00 | 134 | 142 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5458.00</td> <td>59.27</td> <td>74.00</td> <td>-14.73</td> <td>41.20</td> <td>34.53</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>216 313 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5458.00 | 59.27 | 74.00 | -14.73 | 41.20 | 34.53 | 13.15 | 29.61 | 0.00 | 216 313 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>105.80</td> <td>-----</td> <td>-----</td> <td>88.01</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>216 313 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 105.80 | ----- | ----- | 88.01 | 34.50 | 12.78 | 29.49 | 0.00 | 216 313 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5458.00 | 59.27 | 74.00 | -14.73 | 41.20 | 34.53 | 13.15 | 29.61 | 0.00 | 216 313 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 105.80 | ----- | ----- | 88.01 | 34.50 | 12.78 | 29.49 | 0.00 | 216 313 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.48</td> <td>47.17</td> <td>54.00</td> <td>-6.83</td> <td>29.09</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>216 313 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5459.48 | 47.17 | 54.00 | -6.83 | 29.09 | 34.53 | 13.17 | 29.62 | 0.00 | 216 313 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>98.64</td> <td>-----</td> <td>-----</td> <td>80.85</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>216 313 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 98.64 | ----- | ----- | 80.85 | 34.50 | 12.78 | 29.49 | 0.00 | 216 313 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.48 | 47.17 | 54.00 | -6.83 | 29.09 | 34.53 | 13.17 | 29.62 | 0.00 | 216 313 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 98.64 | ----- | ----- | 80.85 | 34.50 | 12.78 | 29.49 | 0.00 | 216 313 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------|--------|--------|--------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|-------|-------|--------|-------|-------|-------|-------|---|-------|-------|--------|-------|--------|-------|-------|---|-------|-------|------|--------|--------|--------|------|--------|------|--------|--------|--------|-------|--------|------|--------|-----------|--------|--------|-------|-------|-------|-------|-------|-----------|--------|-------|-------|-------|-------|-------|-------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5458.38</td> <td>58.53</td> <td>74.00</td> <td>-15.47</td> <td>40.45</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> </tr> <tr> <td>2 5465.58</td> <td>57.82</td> <td>68.30</td> <td>-10.48</td> <td>39.72</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5458.38 | 58.53 | 74.00 | -15.47 | 40.45 | 34.53 | 13.17 | 29.62 | 2 5465.58 | 57.82 | 68.30 | -10.48 | 39.72 | 34.53 | 13.19 | 29.62 | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>109.80</td> <td>-----</td> <td>-----</td> <td>91.64</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5500.00 | 109.80 | ----- | ----- | 91.64 | 34.55 | 13.25 | 29.64 |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5458.38 | 58.53 | 74.00 | -15.47 | 40.45 | 34.53 | 13.17 | 29.62 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5465.58 | 57.82 | 68.30 | -10.48 | 39.72 | 34.53 | 13.19 | 29.62 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 | 109.80 | ----- | ----- | 91.64 | 34.55 | 13.25 | 29.64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5459.94</td> <td>47.35</td> <td>54.00</td> <td>-6.65</td> <td>29.27</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5459.94 | 47.35 | 54.00 | -6.65 | 29.27 | 34.53 | 13.17 | 29.62 | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>100.10</td> <td>-----</td> <td>-----</td> <td>81.94</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5500.00 | 100.10 | ----- | ----- | 81.94 | 34.55 | 13.25 | 29.64 | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.94 | 47.35 | 54.00 | -6.65 | 29.27 | 34.53 | 13.17 | 29.62 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 | 100.10 | ----- | ----- | 81.94 | 34.55 | 13.25 | 29.64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------|--------|--------|--------|--------|--------|-----------------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|--|-------|-------|--------|-------|--------|-------|-------|------|--------------|--|-------|------|--------|-------|--------|------|--------|--------|--------|--------|--------|------|--------|-------|--------|------|--------|--------|-----------|--------|--------|-------|-------|-------|-------|-------|------|-----------------|-----------|--------|-------|-------|-------|-------|-------|-------|------|--------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5403.93</td> <td>57.94</td> <td>74.00</td> <td>-16.06</td> <td>39.97</td> <td>34.50</td> <td>13.04</td> <td>29.57</td> <td>0.00</td> <td>138 299 PEAK</td> </tr> <tr> <td>2 5462.73</td> <td>58.29</td> <td>68.30</td> <td>-10.01</td> <td>40.20</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>138 299 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5403.93 | 57.94 | 74.00 | -16.06 | 39.97 | 34.50 | 13.04 | 29.57 | 0.00 | 138 299 PEAK | 2 5462.73 | 58.29 | 68.30 | -10.01 | 40.20 | 34.53 | 13.18 | 29.62 | 0.00 | 138 299 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>103.54</td> <td>-----</td> <td>-----</td> <td>85.38</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>138 299 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5500.00 | 103.54 | ----- | ----- | 85.38 | 34.55 | 13.25 | 29.64 | 0.00 | 138 299 PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5403.93 | 57.94 | 74.00 | -16.06 | 39.97 | 34.50 | 13.04 | 29.57 | 0.00 | 138 299 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5462.73 | 58.29 | 68.30 | -10.01 | 40.20 | 34.53 | 13.18 | 29.62 | 0.00 | 138 299 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 | 103.54 | ----- | ----- | 85.38 | 34.55 | 13.25 | 29.64 | 0.00 | 138 299 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.71</td> <td>47.16</td> <td>54.00</td> <td>-6.84</td> <td>29.08</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>138 299 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5459.71 | 47.16 | 54.00 | -6.84 | 29.08 | 34.53 | 13.17 | 29.62 | 0.00 | 138 299 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>96.06</td> <td>-----</td> <td>-----</td> <td>77.90</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>138 299 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5500.00 | 96.06 | ----- | ----- | 77.90 | 34.55 | 13.25 | 29.64 | 0.00 | 138 299 AVERAGE | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.71 | 47.16 | 54.00 | -6.84 | 29.08 | 34.53 | 13.17 | 29.62 | 0.00 | 138 299 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 | 96.06 | ----- | ----- | 77.90 | 34.55 | 13.25 | 29.64 | 0.00 | 138 299 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|---|--------------|-------------|--------|--------|--------|--------|--------|--------|---------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.50</td> <td>59.16</td> <td>68.30</td> <td>-9.14</td> <td>40.34</td> <td>34.85</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>270</td> <td>129</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5731.50 | 59.16 | 68.30 | -9.14 | 40.34 | 34.85 | 13.76 | 29.79 | 0.00 | 270 | 129 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>107.43</td> <td>-----</td> <td>-----</td> <td>88.96</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>270</td> <td>129</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5700.00 | 107.43 | ----- | ----- | 88.96 | 34.78 | 13.49 | 29.80 | 0.00 | 270 | 129 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5731.50 | 59.16 | 68.30 | -9.14 | 40.34 | 34.85 | 13.76 | 29.79 | 0.00 | 270 | 129 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 107.43 | ----- | ----- | 88.96 | 34.78 | 13.49 | 29.80 | 0.00 | 270 | 129 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>99.35</td> <td>-----</td> <td>-----</td> <td>80.88</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>270</td> <td>129</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 5700.00 | 99.35 | ----- | ----- | 80.88 | 34.78 | 13.49 | 29.80 | 0.00 | 270 | 129 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 99.35 | ----- | ----- | 80.88 | 34.78 | 13.49 | 29.80 | 0.00 | 270 | 129 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--|--------------|-------------|--------|--------|--------|--------|-----------------|--------|--------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|--------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|--------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5744.24</td> <td>60.35</td> <td>68.30</td> <td>-7.95</td> <td>41.39</td> <td>34.88</td> <td>13.87</td> <td>29.79</td> <td>0.00</td> <td>296 346 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5744.24 | 60.35 | 68.30 | -7.95 | 41.39 | 34.88 | 13.87 | 29.79 | 0.00 | 296 346 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.30</td> <td>68.30</td> <td>34.00</td> <td>83.83</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>296 346 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 102.30 | 68.30 | 34.00 | 83.83 | 34.78 | 13.49 | 29.80 | 0.00 | 296 346 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5744.24 | 60.35 | 68.30 | -7.95 | 41.39 | 34.88 | 13.87 | 29.79 | 0.00 | 296 346 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 102.30 | 68.30 | 34.00 | 83.83 | 34.78 | 13.49 | 29.80 | 0.00 | 296 346 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.85</td> <td>94.85</td> <td>0.00</td> <td>76.31</td> <td>34.80</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>296 346 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 94.85 | 94.85 | 0.00 | 76.31 | 34.80 | 13.54 | 29.80 | 0.00 | 296 346 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 94.85 | 94.85 | 0.00 | 76.31 | 34.80 | 13.54 | 29.80 | 0.00 | 296 346 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

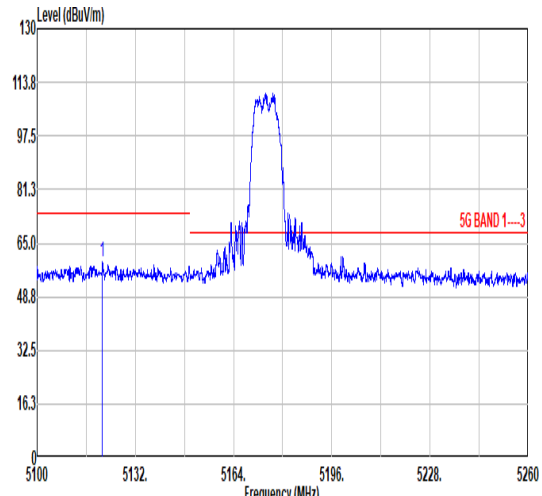
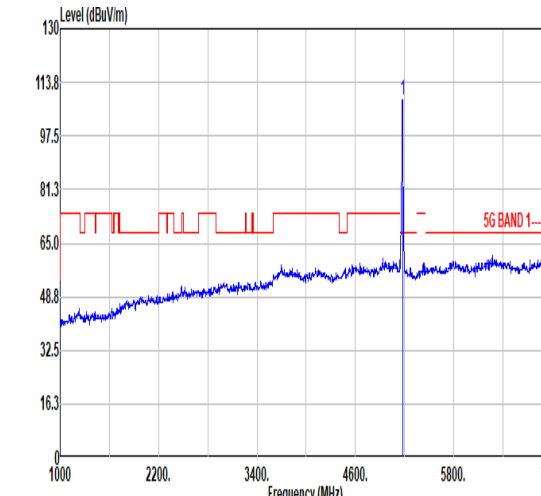
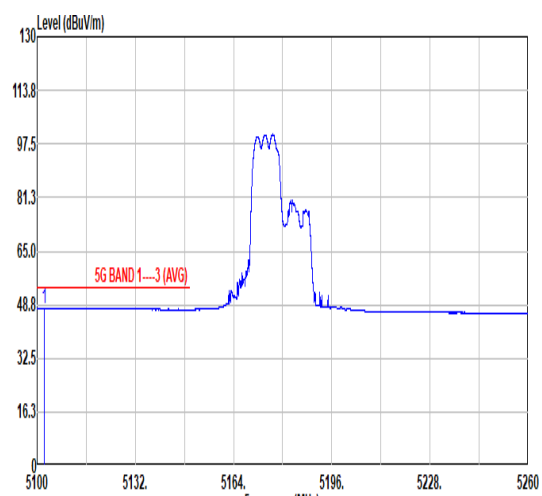
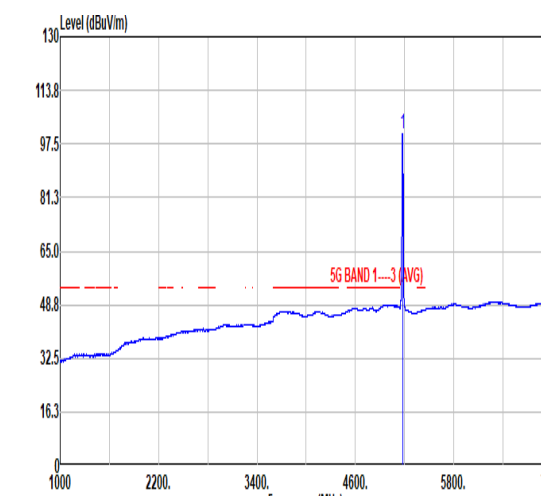


| | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="255 1097 798 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5121.21</td> <td>59.32</td> <td>74.00</td> <td>-14.68</td> <td>41.82</td> <td>34.34</td> <td>12.44</td> <td>29.28</td> <td>0.00</td> <td>219</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5121.21 | 59.32 | 74.00 | -14.68 | 41.82 | 34.34 | 12.44 | 29.28 | 0.00 | 219 | 135 | PEAK |  <table border="1" data-bbox="877 1097 1420 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.33</td> <td>-----</td> <td>-----</td> <td>90.69</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>219</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 100.33 | ----- | ----- | 90.69 | 34.45 | 12.52 | 29.33 | 0.00 | 219 | 135 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5121.21 | 59.32 | 74.00 | -14.68 | 41.82 | 34.34 | 12.44 | 29.28 | 0.00 | 219 | 135 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 100.33 | ----- | ----- | 90.69 | 34.45 | 12.52 | 29.33 | 0.00 | 219 | 135 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="255 1769 798 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5102.30</td> <td>47.75</td> <td>54.00</td> <td>-6.25</td> <td>30.31</td> <td>34.30</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>219</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5102.30 | 47.75 | 54.00 | -6.25 | 30.31 | 34.30 | 12.40 | 29.26 | 0.00 | 219 | 135 | AVERAGE |  <table border="1" data-bbox="877 1769 1420 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.78</td> <td>-----</td> <td>-----</td> <td>83.14</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>219</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 100.78 | ----- | ----- | 83.14 | 34.45 | 12.52 | 29.33 | 0.00 | 219 | 135 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5102.30 | 47.75 | 54.00 | -6.25 | 30.31 | 34.30 | 12.40 | 29.26 | 0.00 | 219 | 135 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 100.78 | ----- | ----- | 83.14 | 34.45 | 12.52 | 29.33 | 0.00 | 219 | 135 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

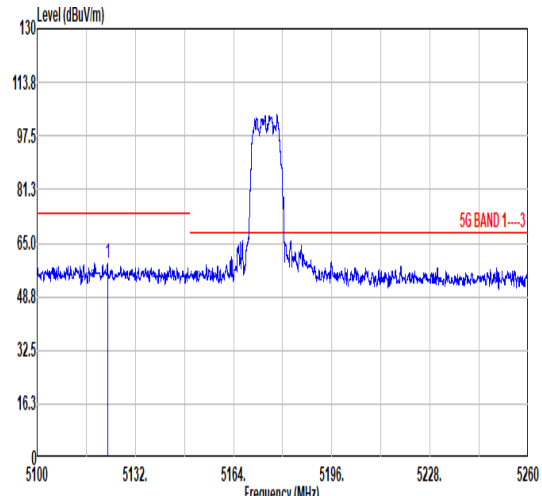
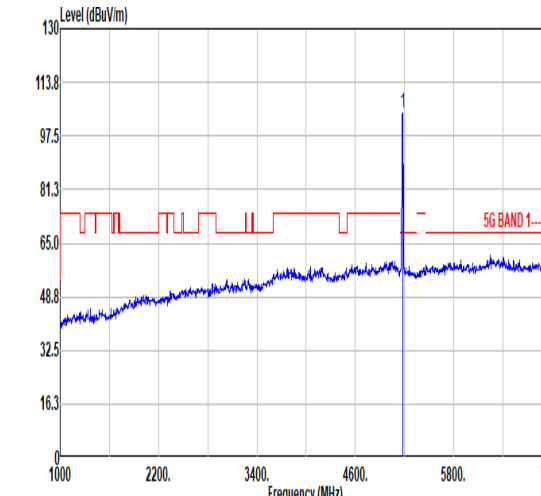
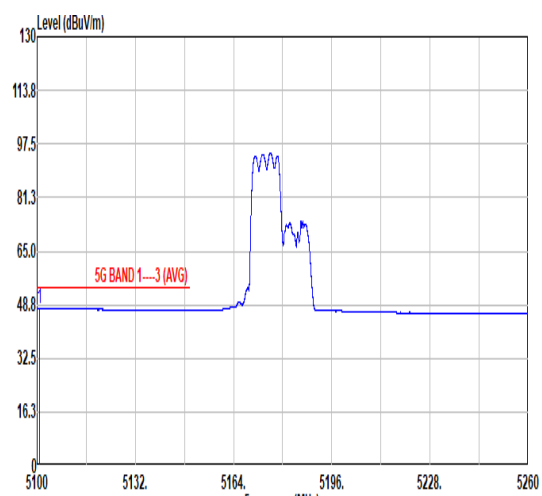
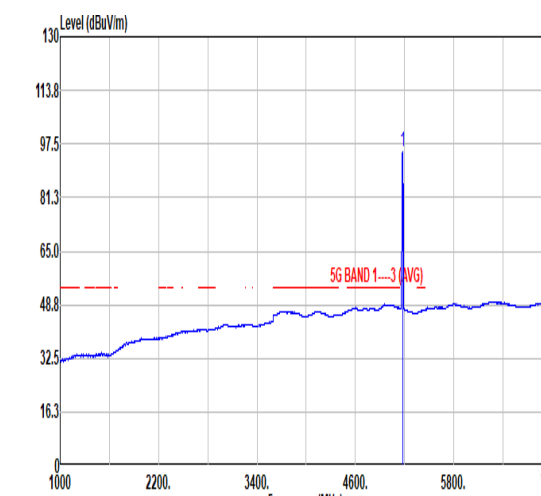


| | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="255 1097 798 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5122.97</td> <td>58.88</td> <td>74.00</td> <td>-15.12</td> <td>41.37</td> <td>34.35</td> <td>12.44</td> <td>29.28</td> <td>0.00</td> <td>130</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5122.97 | 58.88 | 74.00 | -15.12 | 41.37 | 34.35 | 12.44 | 29.28 | 0.00 | 130 | 306 | PEAK |  <table border="1" data-bbox="877 1097 1420 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.40</td> <td>-----</td> <td>-----</td> <td>86.76</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>130</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.40 | ----- | ----- | 86.76 | 34.45 | 12.52 | 29.33 | 0.00 | 130 | 306 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5122.97 | 58.88 | 74.00 | -15.12 | 41.37 | 34.35 | 12.44 | 29.28 | 0.00 | 130 | 306 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.40 | ----- | ----- | 86.76 | 34.45 | 12.52 | 29.33 | 0.00 | 130 | 306 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="255 1769 798 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.89</td> <td>47.62</td> <td>54.00</td> <td>-6.38</td> <td>30.18</td> <td>34.30</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>130</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5100.89 | 47.62 | 54.00 | -6.38 | 30.18 | 34.30 | 12.40 | 29.26 | 0.00 | 130 | 306 | AVERAGE |  <table border="1" data-bbox="877 1769 1420 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.98</td> <td>-----</td> <td>-----</td> <td>77.34</td> <td>34.45</td> <td>12.52</td> <td>29.33</td> <td>0.00</td> <td>130</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 94.98 | ----- | ----- | 77.34 | 34.45 | 12.52 | 29.33 | 0.00 | 130 | 306 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5100.89 | 47.62 | 54.00 | -6.38 | 30.18 | 34.30 | 12.40 | 29.26 | 0.00 | 130 | 306 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 94.98 | ----- | ----- | 77.34 | 34.45 | 12.52 | 29.33 | 0.00 | 130 | 306 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

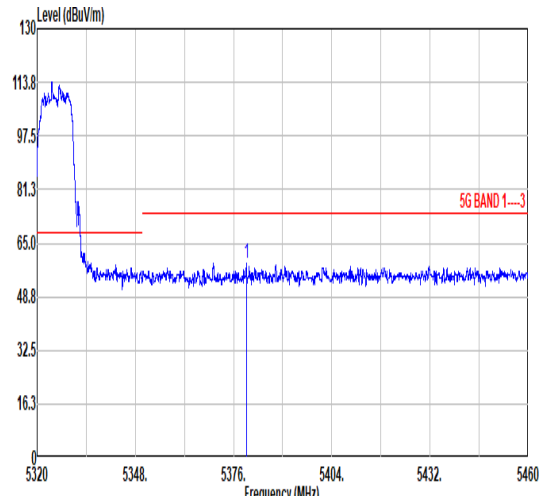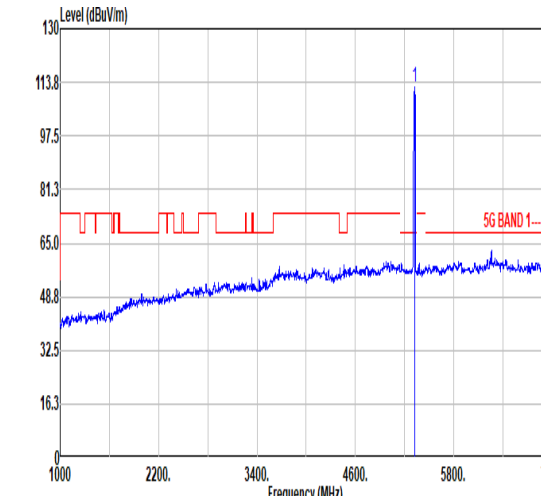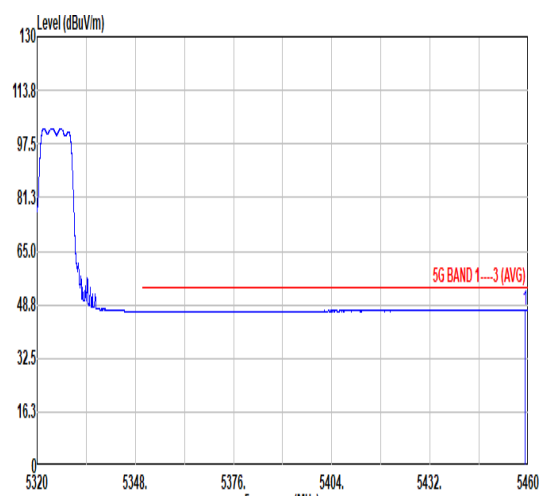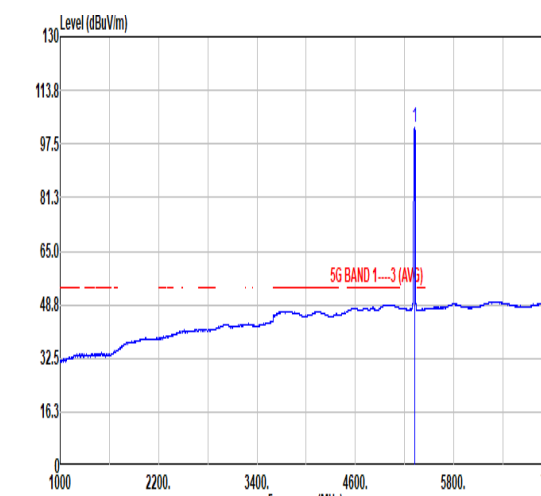

| | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU106/54_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="255 1097 798 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5379.72</td> <td>58.85</td> <td>74.00</td> <td>-15.15</td> <td>40.93</td> <td>34.50</td> <td>12.97</td> <td>29.55</td> <td>0.00</td> <td>144 140 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5379.72 | 58.85 | 74.00 | -15.15 | 40.93 | 34.50 | 12.97 | 29.55 | 0.00 | 144 140 PEAK |  <table border="1" data-bbox="877 1097 1420 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>112.46</td> <td>-----</td> <td>-----</td> <td>94.67</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>144 140 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 112.46 | ----- | ----- | 94.67 | 34.50 | 12.78 | 29.49 | 0.00 | 144 140 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5379.72 | 58.85 | 74.00 | -15.15 | 40.93 | 34.50 | 12.97 | 29.55 | 0.00 | 144 140 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 112.46 | ----- | ----- | 94.67 | 34.50 | 12.78 | 29.49 | 0.00 | 144 140 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="255 1769 798 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.21</td> <td>47.19</td> <td>54.00</td> <td>-6.81</td> <td>29.11</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>144 140 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5459.21 | 47.19 | 54.00 | -6.81 | 29.11 | 34.53 | 13.17 | 29.62 | 0.00 | 144 140 AVERAGE |  <table border="1" data-bbox="877 1769 1420 1904"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>102.30</td> <td>-----</td> <td>-----</td> <td>84.51</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>144 140 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 102.30 | ----- | ----- | 84.51 | 34.50 | 12.78 | 29.49 | 0.00 | 144 140 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.21 | 47.19 | 54.00 | -6.81 | 29.11 | 34.53 | 13.17 | 29.62 | 0.00 | 144 140 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 102.30 | ----- | ----- | 84.51 | 34.50 | 12.78 | 29.49 | 0.00 | 144 140 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

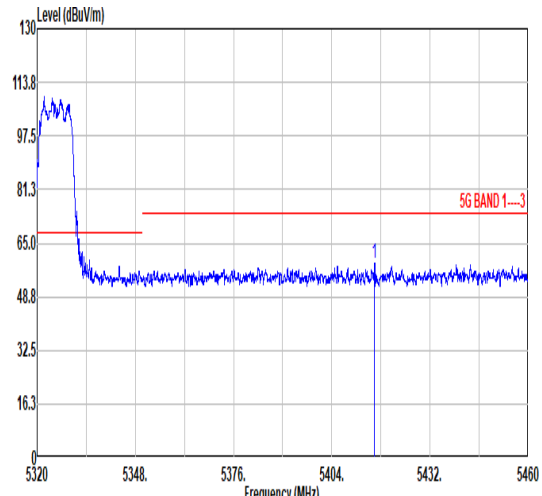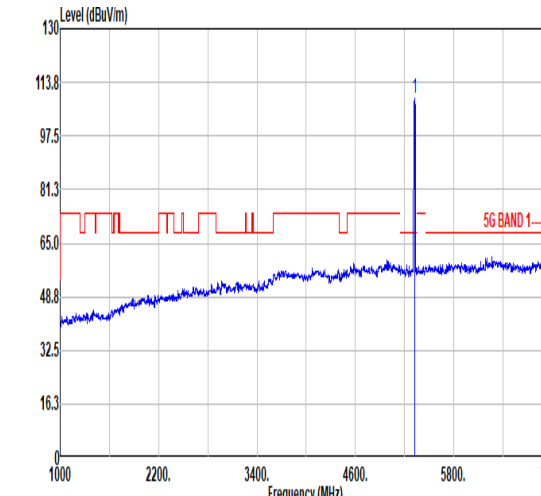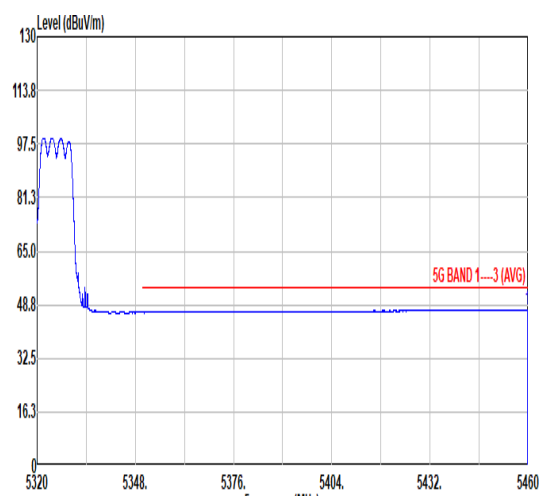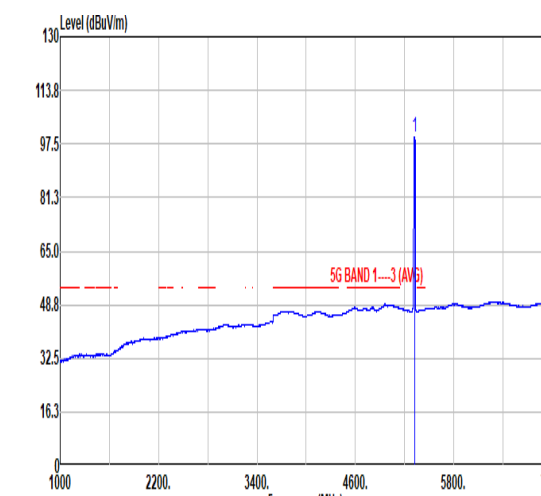

| | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU106/54_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3</p> <p>5320 5348. 5376. 5404. 5432. 5460</p> <p style="text-align: center;">Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.12</td> <td>58.81</td> <td>74.00</td> <td>-15.19</td> <td>40.81</td> <td>34.51</td> <td>13.07</td> <td>29.58</td> <td>0.00</td> <td>137</td> <td>309</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5416.12 | 58.81 | 74.00 | -15.19 | 40.81 | 34.51 | 13.07 | 29.58 | 0.00 | 137 | 309 | PEAK |  <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p style="text-align: center;">Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.88</td> <td>-----</td> <td>-----</td> <td>91.09</td> <td>34.50</td> <td>12.78</td> <td>29.49</td> <td>0.00</td> <td>137</td> <td>309</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 108.88 | ----- | ----- | 91.09 | 34.50 | 12.78 | 29.49 | 0.00 | 137 | 309 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5416.12 | 58.81 | 74.00 | -15.19 | 40.81 | 34.51 | 13.07 | 29.58 | 0.00 | 137 | 309 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 108.88 | ----- | ----- | 91.09 | 34.50 | 12.78 | 29.49 | 0.00 | 137 | 309 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3</p> <p>5320 5348. 5376. 5404. 5432. 5460</p> <p style="text-align: center;">Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.78</td> <td>47.17</td> <td>54.00</td> <td>-6.83</td> <td>29.09</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>137</td> <td>309</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.78 | 47.17 | 54.00 | -6.83 | 29.09 | 34.53 | 13.17 | 29.62 | 0.00 | 137 | 309 | AVERAGE |  <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p style="text-align: center;">Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>99.48</td> <td>-----</td> <td>-----</td> <td>81.70</td> <td>34.50</td> <td>12.77</td> <td>29.49</td> <td>0.00</td> <td>137</td> <td>309</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 99.48 | ----- | ----- | 81.70 | 34.50 | 12.77 | 29.49 | 0.00 | 137 | 309 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.78 | 47.17 | 54.00 | -6.83 | 29.09 | 34.53 | 13.17 | 29.62 | 0.00 | 137 | 309 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 99.48 | ----- | ----- | 81.70 | 34.50 | 12.77 | 29.49 | 0.00 | 137 | 309 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|-------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-------------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-------------|--|---------|-------|-------|--------|-------|--------|-------|-------|------|-----|----------|--|-------------|--------------|-------------|-------------|--------|--------|-----|--------|------|-----|--------|--------|-------------|--------------|-------------|-------------|--------|----|-----|--------|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-------------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|----------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU106/53_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.08</td> <td>58.71</td> <td>74.00</td> <td>-15.29</td> <td>40.63</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>229</td> <td>167 PEAK</td> </tr> <tr> <td>2</td> <td>5463.48</td> <td>57.53</td> <td>68.30</td> <td>-10.77</td> <td>39.44</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>229</td> <td>167 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5455.08 | 58.71 | 74.00 | -15.29 | 40.63 | 34.53 | 13.16 | 29.61 | 0.00 | 229 | 167 PEAK | 2 | 5463.48 | 57.53 | 68.30 | -10.77 | 39.44 | 34.53 | 13.18 | 29.62 | 0.00 | 229 | 167 PEAK | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>108.82</td> <td>-----</td> <td>-----</td> <td>90.66</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>229</td> <td>167 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 108.82 | ----- | ----- | 90.66 | 34.55 | 13.26 | 29.65 | 0.00 | 229 | 167 PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5455.08 | 58.71 | 74.00 | -15.29 | 40.63 | 34.53 | 13.16 | 29.61 | 0.00 | 229 | 167 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5463.48 | 57.53 | 68.30 | -10.77 | 39.44 | 34.53 | 13.18 | 29.62 | 0.00 | 229 | 167 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 108.82 | ----- | ----- | 90.66 | 34.55 | 13.26 | 29.65 | 0.00 | 229 | 167 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.88</td> <td>47.47</td> <td>54.00</td> <td>-6.53</td> <td>29.39</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>229</td> <td>167 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.88 | 47.47 | 54.00 | -6.53 | 29.39 | 34.53 | 13.17 | 29.62 | 0.00 | 229 | 167 AVERAGE | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.61</td> <td>-----</td> <td>-----</td> <td>81.45</td> <td>34.55</td> <td>13.25</td> <td>29.64</td> <td>0.00</td> <td>229</td> <td>167 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 99.61 | ----- | ----- | 81.45 | 34.55 | 13.25 | 29.64 | 0.00 | 229 | 167 AVERAGE | | | | | | | | | | | | |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.88 | 47.47 | 54.00 | -6.53 | 29.39 | 34.53 | 13.17 | 29.62 | 0.00 | 229 | 167 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 99.61 | ----- | ----- | 81.45 | 34.55 | 13.25 | 29.64 | 0.00 | 229 | 167 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|-------------|-------|--------|--------|--------|--------|------|------|--|--|--|--|--|--|--|--------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|---|-------|------|-----|-------|--------|-----|------|---|--|------|-----|-------|--------|-----|------|--------|--|--|--|--|--|--|--|--------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU106/53_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5369.28 58.40 74.00 -15.60 40.51 34.50 12.93 29.54 0.00 148 302 PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 5461.08 58.12 68.30 -10.18 40.03 34.53 13.18 29.62 0.00 148 302 PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 5369.28 58.40 74.00 -15.60 40.51 34.50 12.93 29.54 0.00 148 302 PEAK | | | | | | | | 2 5461.08 58.12 68.30 -10.18 40.03 34.53 13.18 29.62 0.00 148 302 PEAK | | | | | | | | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 104.73 ----- 86.57 34.55 13.25 29.64 0.00 148 302 PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 5500.00 104.73 ----- 86.57 34.55 13.25 29.64 0.00 148 302 PEAK | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5369.28 58.40 74.00 -15.60 40.51 34.50 12.93 29.54 0.00 148 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5461.08 58.12 68.30 -10.18 40.03 34.53 13.18 29.62 0.00 148 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 104.73 ----- 86.57 34.55 13.25 29.64 0.00 148 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.68 47.25 54.00 -6.75 29.17 34.53 13.17 29.62 0.00 148 302 AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 5458.68 47.25 54.00 -6.75 29.17 34.53 13.17 29.62 0.00 148 302 AVERAGE | | | | | | | | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 96.43 ----- 78.27 34.55 13.25 29.64 0.00 148 302 AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 5500.00 96.43 ----- 78.27 34.55 13.25 29.64 0.00 148 302 AVERAGE | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5458.68 47.25 54.00 -6.75 29.17 34.53 13.17 29.62 0.00 148 302 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 96.43 ----- 78.27 34.55 13.25 29.64 0.00 148 302 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|---|--------------|-------------|--------|--------|--------|--------|-----------------|--------|--------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|--------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|--------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU106/54_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5744.89</td> <td>60.56</td> <td>68.30</td> <td>-7.74</td> <td>41.59</td> <td>34.88</td> <td>13.88</td> <td>29.79</td> <td>0.00</td> <td>268 129 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5744.89 | 60.56 | 68.30 | -7.74 | 41.59 | 34.88 | 13.88 | 29.79 | 0.00 | 268 129 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>107.68</td> <td>-----</td> <td>-----</td> <td>89.21</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>268 129 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 107.68 | ----- | ----- | 89.21 | 34.78 | 13.49 | 29.80 | 0.00 | 268 129 PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5744.89 | 60.56 | 68.30 | -7.74 | 41.59 | 34.88 | 13.88 | 29.79 | 0.00 | 268 129 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 107.68 | ----- | ----- | 89.21 | 34.78 | 13.49 | 29.80 | 0.00 | 268 129 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.52</td> <td>-----</td> <td>-----</td> <td>80.05</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>268 129 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 98.52 | ----- | ----- | 80.05 | 34.78 | 13.49 | 29.80 | 0.00 | 268 129 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 98.52 | ----- | ----- | 80.05 | 34.78 | 13.49 | 29.80 | 0.00 | 268 129 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

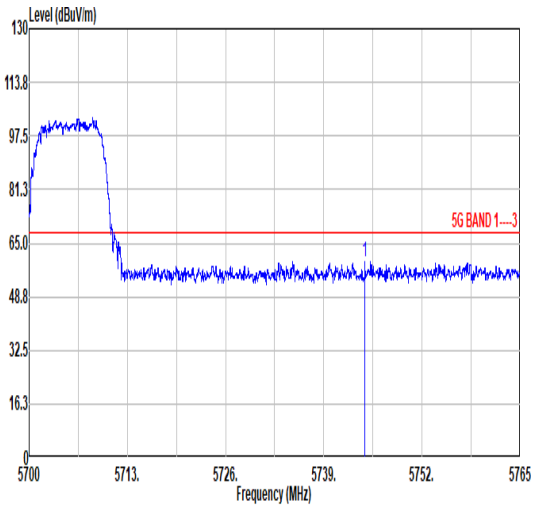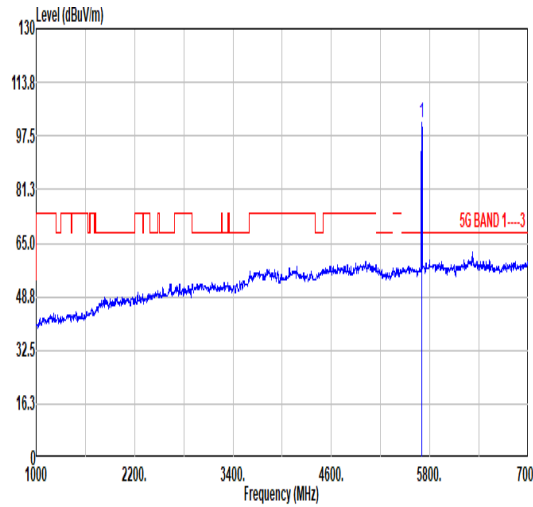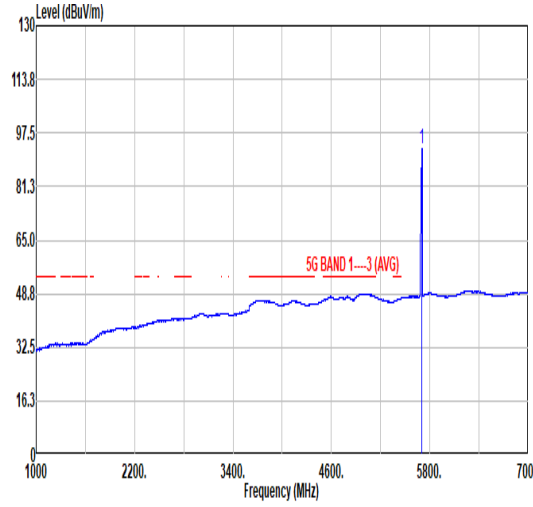

| | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|---|--------------|-------------|--------|--------|--------|--------|-----------------|--------|--------|-------|-------------|--------------|--------------|-------------|--------|--|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|--------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|--------------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU106/54_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1108 798 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5744.43</td> <td>59.58</td> <td>68.30</td> <td>-8.72</td> <td>40.61</td> <td>34.88</td> <td>13.88</td> <td>29.79</td> <td>0.00</td> <td>284 348 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5744.43 | 59.58 | 68.30 | -8.72 | 40.61 | 34.88 | 13.88 | 29.79 | 0.00 | 284 348 PEAK |  <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.41</td> <td>-----</td> <td>-----</td> <td>82.94</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>284 348 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 101.41 | ----- | ----- | 82.94 | 34.78 | 13.49 | 29.80 | 0.00 | 284 348 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5744.43 | 59.58 | 68.30 | -8.72 | 40.61 | 34.88 | 13.88 | 29.79 | 0.00 | 284 348 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 101.41 | ----- | ----- | 82.94 | 34.78 | 13.49 | 29.80 | 0.00 | 284 348 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="901 1792 1436 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>92.94</td> <td>-----</td> <td>-----</td> <td>74.47</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>284 348 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5700.00 | 92.94 | ----- | ----- | 74.47 | 34.78 | 13.49 | 29.80 | 0.00 | 284 348 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5700.00 | 92.94 | ----- | ----- | 74.47 | 34.78 | 13.49 | 29.80 | 0.00 | 284 348 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|--------|--------|--------|--------|------|--------|------|---------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.55</td> <td>60.78</td> <td>74.00</td> <td>-13.22</td> <td>43.22</td> <td>34.39</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>212</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5145.55 | 60.78 | 74.00 | -13.22 | 43.22 | 34.39 | 12.48 | 29.31 | 0.00 | 212 | 141 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>107.67</td> <td>-----</td> <td>-----</td> <td>90.02</td> <td>34.46</td> <td>12.53</td> <td>29.34</td> <td>0.00</td> <td>212</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5190.00 | 107.67 | ----- | ----- | 90.02 | 34.46 | 12.53 | 29.34 | 0.00 | 212 | 141 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5145.55 | 60.78 | 74.00 | -13.22 | 43.22 | 34.39 | 12.48 | 29.31 | 0.00 | 212 | 141 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 107.67 | ----- | ----- | 90.02 | 34.46 | 12.53 | 29.34 | 0.00 | 212 | 141 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.95</td> <td>50.93</td> <td>54.00</td> <td>-3.07</td> <td>33.37</td> <td>34.39</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>212</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5146.95 | 50.93 | 54.00 | -3.07 | 33.37 | 34.39 | 12.48 | 29.31 | 0.00 | 212 | 141 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>98.84</td> <td>-----</td> <td>-----</td> <td>81.16</td> <td>34.48</td> <td>12.55</td> <td>29.35</td> <td>0.00</td> <td>212</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5190.00 | 98.84 | ----- | ----- | 81.16 | 34.48 | 12.55 | 29.35 | 0.00 | 212 | 141 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5146.95 | 50.93 | 54.00 | -3.07 | 33.37 | 34.39 | 12.48 | 29.31 | 0.00 | 212 | 141 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 98.84 | ----- | ----- | 81.16 | 34.48 | 12.55 | 29.35 | 0.00 | 212 | 141 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: The higher Signals which are no mark are within frequency band can be ignored.



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------|--------|--------|--------|---------|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|-------|-------|--------|-------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|-----|--|--|--|--|--|--|--|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5388.86</td> <td>58.63</td> <td>74.00</td> <td>-15.37</td> <td>40.70</td> <td>34.50</td> <td>12.99</td> <td>29.56</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>212</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>141</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5388.86 | 58.63 | 74.00 | -15.37 | 40.70 | 34.50 | 12.99 | 29.56 | | | | | | | 0.00 | 212 | | | | | | | | 141 | | | | | | | | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5388.86 | 58.63 | 74.00 | -15.37 | 40.70 | 34.50 | 12.99 | 29.56 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | 0.00 | 212 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | 141 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5453.39</td> <td>48.44</td> <td>54.00</td> <td>-5.56</td> <td>30.36</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>212</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>141</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5453.39 | 48.44 | 54.00 | -5.56 | 30.36 | 34.53 | 13.16 | 29.61 | | | | | | | 0.00 | 212 | | | | | | | | 141 | | | | | | | | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5453.39 | 48.44 | 54.00 | -5.56 | 30.36 | 34.53 | 13.16 | 29.61 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | 0.00 | 212 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | 141 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|-------------|-------------|--------|--------|---------|---------|------|------|------------------------|--------------|-------------|--------|--------|--|--|--------|----------------------|--------------|----|----|----|----|----|-----|------------------------------|-------------|-------------|-------|------|-----|---------|--|--|-------|------|-------|--------|--------|------|------|------------------------|------------------------|--------------|-------------|--------|--------|--|--------|----------------------|----------------------|--------------|----|----|----|----|-----|-----------------|------------------|-------------|-------------|-------------|------|-----|---------|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5142.45 59.51 74.00 -14.49</td> <td>41.96 34.38</td> <td>12.47</td> <td>29.30</td> <td>0.00</td> <td>122</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | 1 5142.45 59.51 74.00 -14.49 | 41.96 34.38 | 12.47 | 29.30 | 0.00 | 122 | 301 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00 101.83</td> <td>-----</td> <td>84.15 34.48</td> <td>12.55 29.35</td> <td>0.00</td> <td>122</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | 1 5190.00 101.83 | ----- | 84.15 34.48 | 12.55 29.35 | 0.00 | 122 | 301 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5142.45 59.51 74.00 -14.49 | 41.96 34.38 | 12.47 | 29.30 | 0.00 | 122 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5190.00 101.83 | ----- | 84.15 34.48 | 12.55 29.35 | 0.00 | 122 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5107.05 49.00 54.00 -5.00</td> <td>31.55 34.31</td> <td>12.41 29.27</td> <td>0.00</td> <td>122</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | 1 5107.05 49.00 54.00 -5.00 | 31.55 34.31 | 12.41 29.27 | 0.00 | 122 | 301 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00 94.09</td> <td>-----</td> <td>76.40 34.48</td> <td>12.56 29.35</td> <td>0.00</td> <td>122</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | 1 5190.00 94.09 | ----- | 76.40 34.48 | 12.56 29.35 | 0.00 | 122 | 301 | AVERAGE | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5107.05 49.00 54.00 -5.00 | 31.55 34.31 | 12.41 29.27 | 0.00 | 122 | 301 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5190.00 94.09 | ----- | 76.40 34.48 | 12.56 29.35 | 0.00 | 122 | 301 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------|--------|--------|--------|--------|--------|-----------------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5431.25</td> <td>57.77</td> <td>74.00</td> <td>-16.23</td> <td>39.73</td> <td>34.52</td> <td>13.11</td> <td>29.59</td> <td>0.00</td> <td>122 301 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5431.25 | 57.77 | 74.00 | -16.23 | 39.73 | 34.52 | 13.11 | 29.59 | 0.00 | 122 301 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5431.25 | 57.77 | 74.00 | -16.23 | 39.73 | 34.52 | 13.11 | 29.59 | 0.00 | 122 301 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5455.55</td> <td>48.20</td> <td>54.00</td> <td>-5.80</td> <td>30.12</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>122 301 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5455.55 | 48.20 | 54.00 | -5.80 | 30.12 | 34.53 | 13.16 | 29.61 | 0.00 | 122 301 AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5455.55 | 48.20 | 54.00 | -5.80 | 30.12 | 34.53 | 13.16 | 29.61 | 0.00 | 122 301 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|----------|--------|--------|--------|--------|--------|--------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>54.74</td> <td>68.30</td> <td>-13.56</td> <td>66.21</td> <td>37.42</td> <td>17.57</td> <td>66.46</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10380.00 | 54.74 | 68.30 | -13.56 | 66.21 | 37.42 | 17.57 | 66.46 | 0.00 | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>55.30</td> <td>68.30</td> <td>-13.00</td> <td>66.77</td> <td>37.42</td> <td>17.57</td> <td>66.46</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10380.00 | 55.30 | 68.30 | -13.00 | 66.77 | 37.42 | 17.57 | 66.46 | 0.00 |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10380.00 | 54.74 | 68.30 | -13.56 | 66.21 | 37.42 | 17.57 | 66.46 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10380.00 | 55.30 | 68.30 | -13.00 | 66.77 | 37.42 | 17.57 | 66.46 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10460.60</td> <td>57.83</td> <td>68.30</td> <td>-10.47</td> <td>69.04</td> <td>37.51</td> <td>17.64</td> <td>66.36</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10460.60 | 57.83 | 68.30 | -10.47 | 69.04 | 37.51 | 17.64 | 66.36 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>57.61</td> <td>68.30</td> <td>-10.69</td> <td>68.82</td> <td>37.51</td> <td>17.64</td> <td>66.36</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10460.00 | 57.61 | 68.30 | -10.69 | 68.82 | 37.51 | 17.64 | 66.36 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10460.60 | 57.83 | 68.30 | -10.47 | 69.04 | 37.51 | 17.64 | 66.36 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10460.00 | 57.61 | 68.30 | -10.69 | 68.82 | 37.51 | 17.64 | 66.36 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5044.15</td> <td>59.31</td> <td>74.00</td> <td>-14.69</td> <td>41.99</td> <td>34.19</td> <td>12.36</td> <td>29.23</td> <td>0.00</td> <td>185</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5044.15 | 59.31 | 74.00 | -14.69 | 41.99 | 34.19 | 12.36 | 29.23 | 0.00 | 185 | 155 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>109.73</td> <td>-----</td> <td>-----</td> <td>91.99</td> <td>34.50</td> <td>12.68</td> <td>29.44</td> <td>0.00</td> <td>185</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 109.73 | ----- | ----- | 91.99 | 34.50 | 12.68 | 29.44 | 0.00 | 185 | 155 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5044.15 | 59.31 | 74.00 | -14.69 | 41.99 | 34.19 | 12.36 | 29.23 | 0.00 | 185 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 109.73 | ----- | ----- | 91.99 | 34.50 | 12.68 | 29.44 | 0.00 | 185 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5056.03</td> <td>49.64</td> <td>54.00</td> <td>-4.36</td> <td>32.29</td> <td>34.21</td> <td>12.37</td> <td>29.23</td> <td>0.00</td> <td>185</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5056.03 | 49.64 | 54.00 | -4.36 | 32.29 | 34.21 | 12.37 | 29.23 | 0.00 | 185 | 155 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>82.75</td> <td>34.50</td> <td>12.66</td> <td>29.43</td> <td>0.00</td> <td>185</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 100.48 | ----- | ----- | 82.75 | 34.50 | 12.66 | 29.43 | 0.00 | 185 | 155 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5056.03 | 49.64 | 54.00 | -4.36 | 32.29 | 34.21 | 12.37 | 29.23 | 0.00 | 185 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 100.48 | ----- | ----- | 82.75 | 34.50 | 12.66 | 29.43 | 0.00 | 185 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|-------------|--------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|--|--|--|--|--|--|--|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|-------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="7"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.72</td> <td>59.55</td> <td>74.00</td> <td>-14.45</td> <td>41.47</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>185</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | 1 | 5459.72 | 59.55 | 74.00 | -14.45 | 41.47 | 34.53 | 13.17 | 29.62 | 0.00 | 185 | 155 | PEAK | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.72 | 59.55 | 74.00 | -14.45 | 41.47 | 34.53 | 13.17 | 29.62 | 0.00 | 185 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="7"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.97</td> <td>48.65</td> <td>54.00</td> <td>-5.35</td> <td>30.57</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>185</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | 1 | 5454.97 | 48.65 | 54.00 | -5.35 | 30.57 | 34.53 | 13.16 | 29.61 | 0.00 | 185 | 155 | AVERAGE | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5454.97 | 48.65 | 54.00 | -5.35 | 30.57 | 34.53 | 13.16 | 29.61 | 0.00 | 185 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

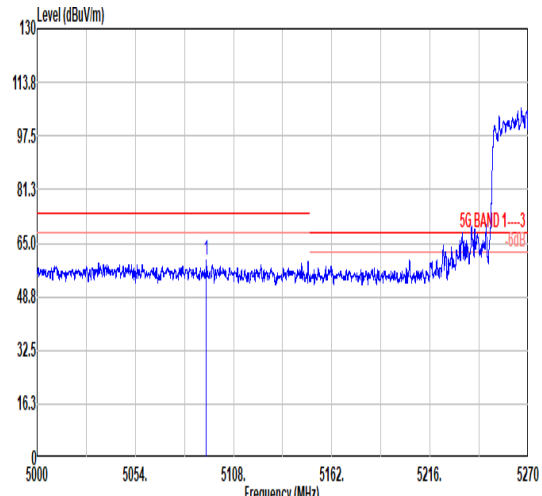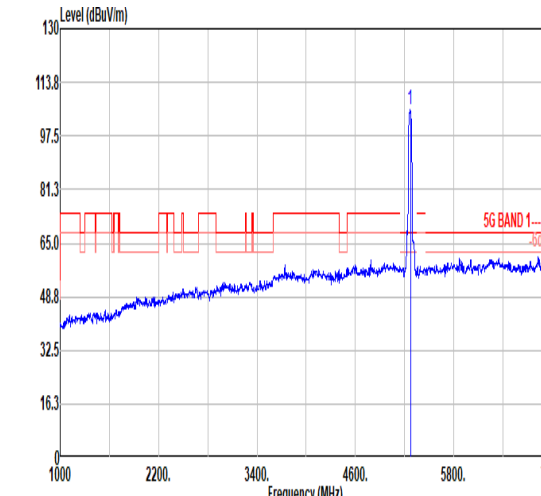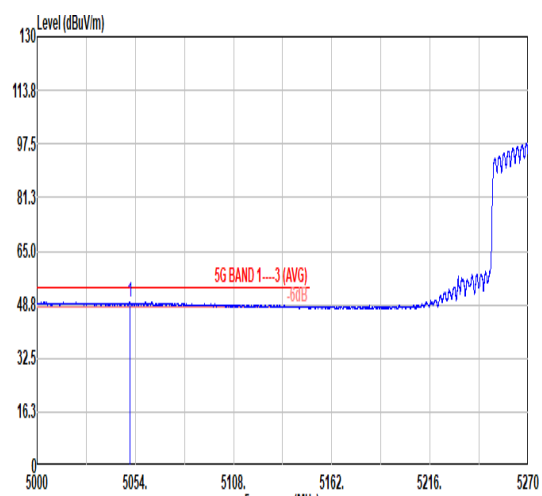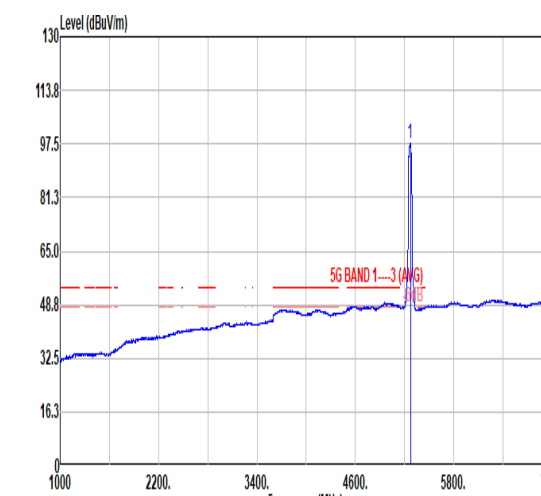

| | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------------|-------------|--------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>5000 5054. 5108. 5162. 5216. 5270</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 -30dB</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5093.02</td> <td>59.86</td> <td>74.00</td> <td>-14.14</td> <td>42.43</td> <td>34.29</td> <td>12.40</td> <td>29.26</td> <td>0.00</td> <td>130</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5093.02 | 59.86 | 74.00 | -14.14 | 42.43 | 34.29 | 12.40 | 29.26 | 0.00 | 130 | 305 | PEAK |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 -30dB</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>105.62</td> <td>-----</td> <td>-----</td> <td>87.89</td> <td>34.50</td> <td>12.66</td> <td>29.43</td> <td>0.00</td> <td>130</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 105.62 | ----- | ----- | 87.89 | 34.50 | 12.66 | 29.43 | 0.00 | 130 | 305 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5093.02 | 59.86 | 74.00 | -14.14 | 42.43 | 34.29 | 12.40 | 29.26 | 0.00 | 130 | 305 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 105.62 | ----- | ----- | 87.89 | 34.50 | 12.66 | 29.43 | 0.00 | 130 | 305 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>5000 5054. 5108. 5162. 5216. 5270</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 (AVG) -30dB</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.90</td> <td>49.54</td> <td>54.00</td> <td>-4.46</td> <td>32.20</td> <td>34.20</td> <td>12.37</td> <td>29.23</td> <td>0.00</td> <td>130</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5050.90 | 49.54 | 54.00 | -4.46 | 32.20 | 34.20 | 12.37 | 29.23 | 0.00 | 130 | 305 | AVERAGE |  <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 (AVG) -30dB</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>97.76</td> <td>-----</td> <td>-----</td> <td>80.03</td> <td>34.50</td> <td>12.67</td> <td>29.44</td> <td>0.00</td> <td>130</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5270.00 | 97.76 | ----- | ----- | 80.03 | 34.50 | 12.67 | 29.44 | 0.00 | 130 | 305 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5050.90 | 49.54 | 54.00 | -4.46 | 32.20 | 34.20 | 12.37 | 29.23 | 0.00 | 130 | 305 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5270.00 | 97.76 | ----- | ----- | 80.03 | 34.50 | 12.67 | 29.44 | 0.00 | 130 | 305 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-----|---------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1" data-bbox="263 1115 774 1236"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.55</td> <td>58.22</td> <td>74.00</td> <td>-15.78</td> <td>40.15</td> <td>34.53</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>130</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5451.55 | 58.22 | 74.00 | -15.78 | 40.15 | 34.53 | 13.15 | 29.61 | 0.00 | 130 | 305 | PEAK | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5451.55 | 58.22 | 74.00 | -15.78 | 40.15 | 34.53 | 13.15 | 29.61 | 0.00 | 130 | 305 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1" data-bbox="263 1794 774 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.44</td> <td>48.38</td> <td>54.00</td> <td>-5.62</td> <td>30.30</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>130</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5457.44 | 48.38 | 54.00 | -5.62 | 30.30 | 34.53 | 13.17 | 29.62 | 0.00 | 130 | 305 | AVERAGE | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5457.44 | 48.38 | 54.00 | -5.62 | 30.30 | 34.53 | 13.17 | 29.62 | 0.00 | 130 | 305 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |





| Mode | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10533.20</td> <td>56.12</td> <td>68.30</td> <td>-12.18</td> <td>67.11</td> <td>37.59</td> <td>17.70</td> <td>66.28</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10533.20 | 56.12 | 68.30 | -12.18 | 67.11 | 37.59 | 17.70 | 66.28 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>58.13</td> <td>68.30</td> <td>-10.17</td> <td>69.11</td> <td>37.59</td> <td>17.70</td> <td>66.27</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10540.00 | 58.13 | 68.30 | -10.17 | 69.11 | 37.59 | 17.70 | 66.27 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10533.20 | 56.12 | 68.30 | -12.18 | 67.11 | 37.59 | 17.70 | 66.28 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10540.00 | 58.13 | 68.30 | -10.17 | 69.11 | 37.59 | 17.70 | 66.27 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5024.97</td> <td>59.81</td> <td>74.00</td> <td>-14.19</td> <td>42.52</td> <td>34.15</td> <td>12.35</td> <td>29.21</td> <td>0.00</td> <td>161</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5024.97 | 59.81 | 74.00 | -14.19 | 42.52 | 34.15 | 12.35 | 29.21 | 0.00 | 161 | 155 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>106.52</td> <td>-----</td> <td>-----</td> <td>88.75</td> <td>34.50</td> <td>12.75</td> <td>29.48</td> <td>0.00</td> <td>161</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5310.00 | 106.52 | ----- | ----- | 88.75 | 34.50 | 12.75 | 29.48 | 0.00 | 161 | 155 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5024.97 | 59.81 | 74.00 | -14.19 | 42.52 | 34.15 | 12.35 | 29.21 | 0.00 | 161 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5310.00 | 106.52 | ----- | ----- | 88.75 | 34.50 | 12.75 | 29.48 | 0.00 | 161 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5054.42</td> <td>49.70</td> <td>54.00</td> <td>-4.30</td> <td>32.35</td> <td>34.21</td> <td>12.37</td> <td>29.23</td> <td>0.00</td> <td>161</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5054.42 | 49.70 | 54.00 | -4.30 | 32.35 | 34.21 | 12.37 | 29.23 | 0.00 | 161 | 155 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>98.12</td> <td>-----</td> <td>-----</td> <td>80.37</td> <td>34.50</td> <td>12.73</td> <td>29.48</td> <td>0.00</td> <td>161</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5310.00 | 98.12 | ----- | ----- | 80.37 | 34.50 | 12.73 | 29.48 | 0.00 | 161 | 155 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5054.42 | 49.70 | 54.00 | -4.30 | 32.35 | 34.21 | 12.37 | 29.23 | 0.00 | 161 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5310.00 | 98.12 | ----- | ----- | 80.37 | 34.50 | 12.73 | 29.48 | 0.00 | 161 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

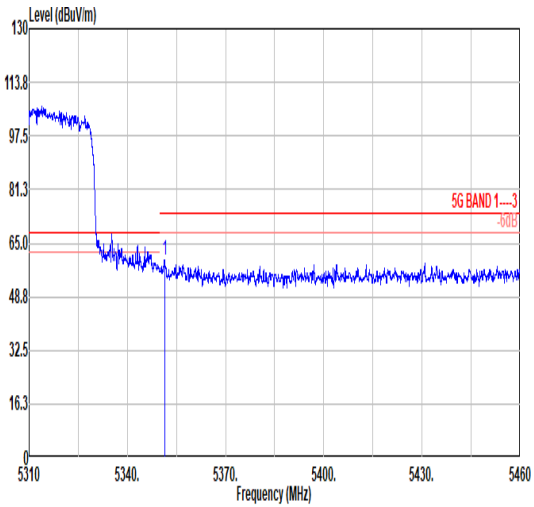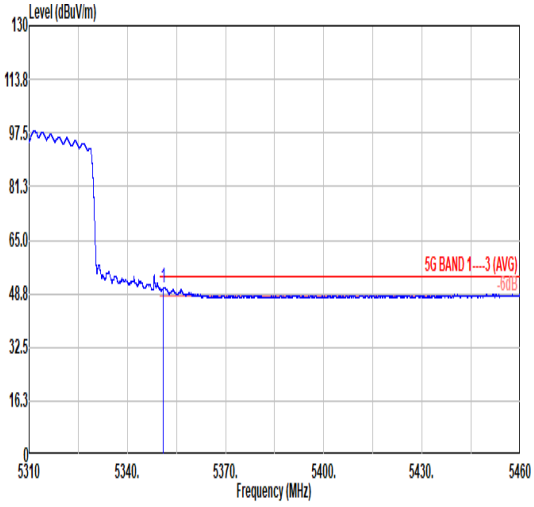

| | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-----|---------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1108 774 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.33</td> <td>59.98</td> <td>74.00</td> <td>-14.02</td> <td>42.13</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> <td>161</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5351.33 | 59.98 | 74.00 | -14.02 | 42.13 | 34.50 | 12.87 | 29.52 | 0.00 | 161 | 155 | PEAK | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5351.33 | 59.98 | 74.00 | -14.02 | 42.13 | 34.50 | 12.87 | 29.52 | 0.00 | 161 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="263 1792 774 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.03</td> <td>50.64</td> <td>54.00</td> <td>-3.36</td> <td>32.79</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> <td>161</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5351.03 | 50.64 | 54.00 | -3.36 | 32.79 | 34.50 | 12.87 | 29.52 | 0.00 | 161 | 155 | AVERAGE | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5351.03 | 50.64 | 54.00 | -3.36 | 32.79 | 34.50 | 12.87 | 29.52 | 0.00 | 161 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

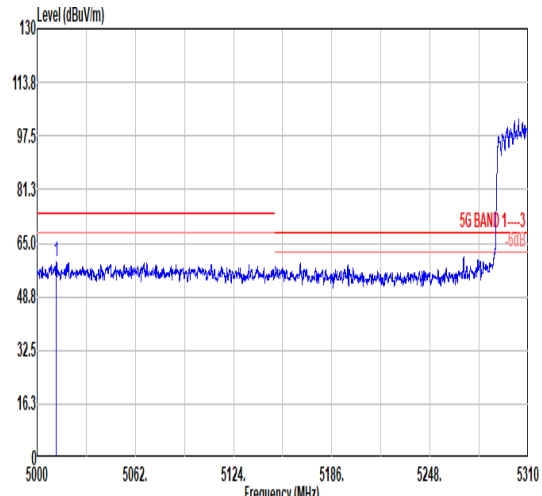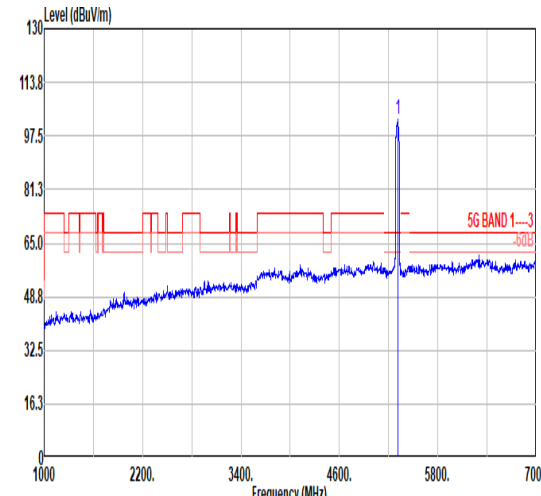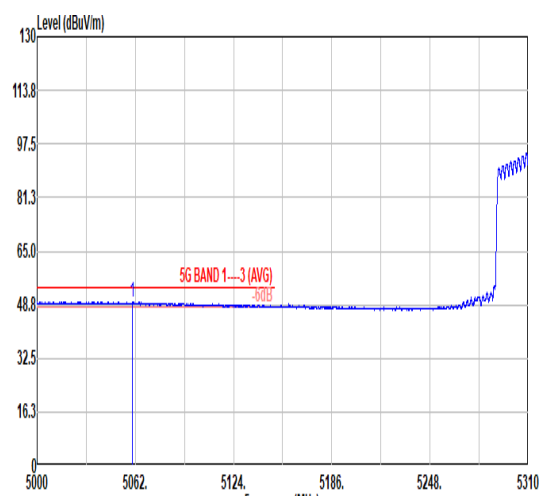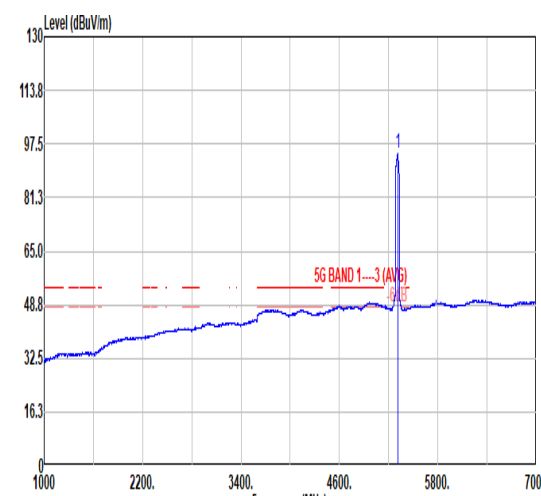

| | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a blue signal line with a sharp peak at 5310 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5000 to 5310 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5012.26</td> <td>59.12</td> <td>74.00</td> <td>-14.88</td> <td>41.87</td> <td>34.12</td> <td>12.34</td> <td>29.21</td> <td>0.00</td> <td>136 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5012.26 | 59.12 | 74.00 | -14.88 | 41.87 | 34.12 | 12.34 | 29.21 | 0.00 | 136 306 PEAK |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a sharp peak at 5310 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>102.75</td> <td>-----</td> <td>-----</td> <td>84.98</td> <td>34.50</td> <td>12.75</td> <td>29.48</td> <td>0.00</td> <td>136 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5310.00 | 102.75 | ----- | ----- | 84.98 | 34.50 | 12.75 | 29.48 | 0.00 | 136 306 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5012.26 | 59.12 | 74.00 | -14.88 | 41.87 | 34.12 | 12.34 | 29.21 | 0.00 | 136 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5310.00 | 102.75 | ----- | ----- | 84.98 | 34.50 | 12.75 | 29.48 | 0.00 | 136 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a blue signal line with a peak at 5310 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 54.00 dBuV/m. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5000 to 5310 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5060.31</td> <td>49.55</td> <td>54.00</td> <td>-4.45</td> <td>32.20</td> <td>34.22</td> <td>12.37</td> <td>29.24</td> <td>0.00</td> <td>136 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5060.31 | 49.55 | 54.00 | -4.45 | 32.20 | 34.22 | 12.37 | 29.24 | 0.00 | 136 306 AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a peak at 5310 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 54.00 dBuV/m. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>94.52</td> <td>-----</td> <td>-----</td> <td>76.75</td> <td>34.50</td> <td>12.75</td> <td>29.48</td> <td>0.00</td> <td>136 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5310.00 | 94.52 | ----- | ----- | 76.75 | 34.50 | 12.75 | 29.48 | 0.00 | 136 306 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5060.31 | 49.55 | 54.00 | -4.45 | 32.20 | 34.22 | 12.37 | 29.24 | 0.00 | 136 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5310.00 | 94.52 | ----- | ----- | 76.75 | 34.50 | 12.75 | 29.48 | 0.00 | 136 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------|--------|--------|--------|--------|--------|-----------------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5352.97</td> <td>58.43</td> <td>74.00</td> <td>-15.57</td> <td>40.57</td> <td>34.50</td> <td>12.88</td> <td>29.52</td> <td>0.00</td> <td>136 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5352.97 | 58.43 | 74.00 | -15.57 | 40.57 | 34.50 | 12.88 | 29.52 | 0.00 | 136 306 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5352.97 | 58.43 | 74.00 | -15.57 | 40.57 | 34.50 | 12.88 | 29.52 | 0.00 | 136 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5351.48</td> <td>48.74</td> <td>54.00</td> <td>-5.26</td> <td>30.89</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> <td>136 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5351.48 | 48.74 | 54.00 | -5.26 | 30.89 | 34.50 | 12.87 | 29.52 | 0.00 | 136 306 AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5351.48 | 48.74 | 54.00 | -5.26 | 30.89 | 34.50 | 12.87 | 29.52 | 0.00 | 136 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>54.06</td> <td>74.00</td> <td>-19.94</td> <td>64.78</td> <td>37.68</td> <td>17.77</td> <td>66.17</td> <td>0.00</td> <td>102</td> <td>173</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10620.00</td> <td>45.26</td> <td>54.00</td> <td>-8.74</td> <td>55.99</td> <td>37.68</td> <td>17.77</td> <td>66.18</td> <td>0.00</td> <td>102</td> <td>173</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10620.00 | 54.06 | 74.00 | -19.94 | 64.78 | 37.68 | 17.77 | 66.17 | 0.00 | 102 | 173 | PEAK | 2 | 10620.00 | 45.26 | 54.00 | -8.74 | 55.99 | 37.68 | 17.77 | 66.18 | 0.00 | 102 | 173 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>59.02</td> <td>74.00</td> <td>-14.98</td> <td>69.74</td> <td>37.68</td> <td>17.77</td> <td>66.17</td> <td>0.00</td> <td>100</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10620.00</td> <td>48.85</td> <td>54.00</td> <td>-5.15</td> <td>59.57</td> <td>37.68</td> <td>17.77</td> <td>66.17</td> <td>0.00</td> <td>100</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10620.00 | 59.02 | 74.00 | -14.98 | 69.74 | 37.68 | 17.77 | 66.17 | 0.00 | 100 | 4 | PEAK | 2 | 10620.00 | 48.85 | 54.00 | -5.15 | 59.57 | 37.68 | 17.77 | 66.17 | 0.00 | 100 | 4 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10620.00 | 54.06 | 74.00 | -19.94 | 64.78 | 37.68 | 17.77 | 66.17 | 0.00 | 102 | 173 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10620.00 | 45.26 | 54.00 | -8.74 | 55.99 | 37.68 | 17.77 | 66.18 | 0.00 | 102 | 173 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10620.00 | 59.02 | 74.00 | -14.98 | 69.74 | 37.68 | 17.77 | 66.17 | 0.00 | 100 | 4 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 10620.00 | 48.85 | 54.00 | -5.15 | 59.57 | 37.68 | 17.77 | 66.17 | 0.00 | 100 | 4 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|-------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-----|---------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|-------|--------|-------|-------|------|-----|------|-------|---|--------------|-------------|-------------|--------|-------|--------|--------|------|------|--------|--------|-------|-------------|--------------|-------------|-------------|--------|-----|---|---------|-------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.25</td> <td>63.31</td> <td>74.00</td> <td>-10.69</td> <td>45.23</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>200</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.13</td> <td>61.93</td> <td>68.30</td> <td>-6.37</td> <td>43.83</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>200</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.25 | 63.31 | 74.00 | -10.69 | 45.23 | 34.53 | 13.17 | 29.62 | 0.00 | 200 | 146 | PEAK | 2 | 5469.13 | 61.93 | 68.30 | -6.37 | 43.83 | 34.53 | 13.20 | 29.63 | 0.00 | 200 | 146 | PEAK | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>107.35</td> <td>-----</td> <td>-----</td> <td>89.20</td> <td>34.55</td> <td>13.26</td> <td>29.66</td> <td>0.00</td> <td>200</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5510.00 | 107.35 | ----- | ----- | 89.20 | 34.55 | 13.26 | 29.66 | 0.00 | 200 | 146 | PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.25 | 63.31 | 74.00 | -10.69 | 45.23 | 34.53 | 13.17 | 29.62 | 0.00 | 200 | 146 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.13 | 61.93 | 68.30 | -6.37 | 43.83 | 34.53 | 13.20 | 29.63 | 0.00 | 200 | 146 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 107.35 | ----- | ----- | 89.20 | 34.55 | 13.26 | 29.66 | 0.00 | 200 | 146 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.73</td> <td>50.73</td> <td>54.00</td> <td>-3.27</td> <td>32.65</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>200</td> <td>146</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.73 | 50.73 | 54.00 | -3.27 | 32.65 | 34.53 | 13.17 | 29.62 | 0.00 | 200 | 146 | AVERAGE | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>97.86</td> <td>-----</td> <td>-----</td> <td>79.71</td> <td>34.55</td> <td>13.26</td> <td>29.66</td> <td>0.00</td> <td>200</td> <td>146</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5510.00 | 97.86 | ----- | ----- | 79.71 | 34.55 | 13.26 | 29.66 | 0.00 | 200 | 146 | AVERAGE | | | | | | | | | | | | | |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.73 | 50.73 | 54.00 | -3.27 | 32.65 | 34.53 | 13.17 | 29.62 | 0.00 | 200 | 146 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 97.86 | ----- | ----- | 79.71 | 34.55 | 13.26 | 29.66 | 0.00 | 200 | 146 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: The higher Signals which are no mark are within frequency band can be ignored.



| Mode | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------------|-------------|-------------|--------|-------|--------|---------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5764.63</td> <td>59.53</td> <td>68.30</td> <td>-8.77</td> <td>40.33</td> <td>34.92</td> <td>14.06</td> <td>29.78</td> <td>0.00</td> <td>200 146</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5764.63 | 59.53 | 68.30 | -8.77 | 40.33 | 34.92 | 14.06 | 29.78 | 0.00 | 200 146 | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5764.63 | 59.53 | 68.30 | -8.77 | 40.33 | 34.92 | 14.06 | 29.78 | 0.00 | 200 146 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|-------------|-------|--------|--------|--------|--------|-------|------|--|-----|---------|--|--|--|--|--------|--|--|--|--|--|--|--|--|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|--------|-------|-------|-------|--|-----|-----|------|---|-------|------|--------|--|--------|-----|------|------|--|--|--|---|---------|-------|-------|--------|--|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5437.61</td> <td>58.15</td> <td>74.00</td> <td>-15.85</td> <td>40.11</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>122</td> <td>299</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.61</td> <td>59.59</td> <td>68.30</td> <td>-8.71</td> <td>41.49</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>122</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 | 5437.61 | 58.15 | 74.00 | -15.85 | 40.11 | 34.52 | 13.12 | 29.60 | 0.00 | 122 | 299 | PEAK | 2 | 5469.61 | 59.59 | 68.30 | -8.71 | 41.49 | 34.53 | 13.20 | 29.63 | 0.00 | 122 | 299 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>100.82</td> <td>-----</td> <td>-----</td> <td>82.66</td> <td>34.55</td> <td>13.26</td> <td>29.65</td> <td>0.00</td> <td>122</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 | 5510.00 | 100.82 | ----- | ----- | 82.66 | 34.55 | 13.26 | 29.65 | 0.00 | 122 | 299 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5437.61 | 58.15 | 74.00 | -15.85 | 40.11 | 34.52 | 13.12 | 29.60 | 0.00 | 122 | 299 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.61 | 59.59 | 68.30 | -8.71 | 41.49 | 34.53 | 13.20 | 29.63 | 0.00 | 122 | 299 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 100.82 | ----- | ----- | 82.66 | 34.55 | 13.26 | 29.65 | 0.00 | 122 | 299 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.69</td> <td>49.14</td> <td>54.00</td> <td>-4.86</td> <td>31.06</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>122</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 | 5459.69 | 49.14 | 54.00 | -4.86 | 31.06 | 34.53 | 13.17 | 29.62 | 0.00 | 122 | 299 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.91</td> <td>-----</td> <td>-----</td> <td>74.76</td> <td>34.55</td> <td>13.26</td> <td>29.66</td> <td>0.00</td> <td>122</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | 1 | 5510.00 | 92.91 | ----- | ----- | 74.76 | 34.55 | 13.26 | 29.66 | 0.00 | 122 | 299 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.69 | 49.14 | 54.00 | -4.86 | 31.06 | 34.53 | 13.17 | 29.62 | 0.00 | 122 | 299 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin Level Factor Loss Factor Factor | | | | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 92.91 | ----- | ----- | 74.76 | 34.55 | 13.26 | 29.66 | 0.00 | 122 | 299 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|-------|--------|--------|------|------|-----|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|--|--|--|--|--|--|--|--|----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Blank | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5764.88</td> <td>60.28</td> <td>68.30</td> <td>-8.02</td> <td>41.08</td> <td>34.92</td> <td>14.06</td> <td>29.78</td> <td>0.00</td> <td>122</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | cm | 1 | 5764.88 | 60.28 | 68.30 | -8.02 | 41.08 | 34.92 | 14.06 | 29.78 | 0.00 | 122 | 299 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5764.88 | 60.28 | 68.30 | -8.02 | 41.08 | 34.92 | 14.06 | 29.78 | 0.00 | 122 | 299 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|-------|--------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>52.78</td> <td>74.00</td> <td>-21.22</td> <td>62.29</td> <td>38.11</td> <td>18.10</td> <td>65.72</td> <td>0.00</td> <td>112</td> <td>162</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>42.67</td> <td>54.00</td> <td>-11.33</td> <td>52.18</td> <td>38.11</td> <td>18.10</td> <td>65.72</td> <td>0.00</td> <td>112</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11020.00 | 52.78 | 74.00 | -21.22 | 62.29 | 38.11 | 18.10 | 65.72 | 0.00 | 112 | 162 | PEAK | 2 | 11020.00 | 42.67 | 54.00 | -11.33 | 52.18 | 38.11 | 18.10 | 65.72 | 0.00 | 112 | 162 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>57.25</td> <td>74.00</td> <td>-16.75</td> <td>66.76</td> <td>38.11</td> <td>18.10</td> <td>65.72</td> <td>0.00</td> <td>109</td> <td>329</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>48.24</td> <td>54.00</td> <td>-5.76</td> <td>57.75</td> <td>38.11</td> <td>18.10</td> <td>65.72</td> <td>0.00</td> <td>109</td> <td>329</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11020.00 | 57.25 | 74.00 | -16.75 | 66.76 | 38.11 | 18.10 | 65.72 | 0.00 | 109 | 329 | PEAK | 2 | 11020.00 | 48.24 | 54.00 | -5.76 | 57.75 | 38.11 | 18.10 | 65.72 | 0.00 | 109 | 329 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11020.00 | 52.78 | 74.00 | -21.22 | 62.29 | 38.11 | 18.10 | 65.72 | 0.00 | 112 | 162 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11020.00 | 42.67 | 54.00 | -11.33 | 52.18 | 38.11 | 18.10 | 65.72 | 0.00 | 112 | 162 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11020.00 | 57.25 | 74.00 | -16.75 | 66.76 | 38.11 | 18.10 | 65.72 | 0.00 | 109 | 329 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11020.00 | 48.24 | 54.00 | -5.76 | 57.75 | 38.11 | 18.10 | 65.72 | 0.00 | 109 | 329 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|-------|------|------|-------|-------------|--------------|-------------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|-------|--------|-------|-------|-------|------|-------|-------------|--------------|--|--------|--------|--------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.51</td> <td>58.49</td> <td>74.00</td> <td>-15.51</td> <td>40.41</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>199</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.51</td> <td>60.09</td> <td>68.30</td> <td>-8.21</td> <td>41.99</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>199</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.51 | 58.49 | 74.00 | -15.51 | 40.41 | 34.53 | 13.17 | 29.62 | 0.00 | 199 | 154 | PEAK | 2 | 5467.51 | 60.09 | 68.30 | -8.21 | 41.99 | 34.53 | 13.19 | 29.62 | 0.00 | 199 | 154 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>109.27</td> <td>-----</td> <td>-----</td> <td>91.19</td> <td>34.58</td> <td>13.21</td> <td>29.71</td> <td>0.00</td> <td>199</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5550.00 | 109.27 | ----- | ----- | 91.19 | 34.58 | 13.21 | 29.71 | 0.00 | 199 | 154 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.51 | 58.49 | 74.00 | -15.51 | 40.41 | 34.53 | 13.17 | 29.62 | 0.00 | 199 | 154 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5467.51 | 60.09 | 68.30 | -8.21 | 41.99 | 34.53 | 13.19 | 29.62 | 0.00 | 199 | 154 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5550.00 | 109.27 | ----- | ----- | 91.19 | 34.58 | 13.21 | 29.71 | 0.00 | 199 | 154 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.51</td> <td>49.32</td> <td>54.00</td> <td>-4.68</td> <td>31.24</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>199</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5452.51 | 49.32 | 54.00 | -4.68 | 31.24 | 34.53 | 13.16 | 29.61 | 0.00 | 199 | 154 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>99.91</td> <td>-----</td> <td>-----</td> <td>81.82</td> <td>34.57</td> <td>13.22</td> <td>29.70</td> <td>0.00</td> <td>199</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5550.00 | 99.91 | ----- | ----- | 81.82 | 34.57 | 13.22 | 29.70 | 0.00 | 199 | 154 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5452.51 | 49.32 | 54.00 | -4.68 | 31.24 | 34.53 | 13.16 | 29.61 | 0.00 | 199 | 154 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5550.00 | 99.91 | ----- | ----- | 81.82 | 34.57 | 13.22 | 29.70 | 0.00 | 199 | 154 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5743.19</td> <td>59.09</td> <td>68.30</td> <td>-9.21</td> <td>40.14</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>199 154 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5743.19 | 59.09 | 68.30 | -9.21 | 40.14 | 34.88 | 13.86 | 29.79 | 0.00 | 199 154 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5743.19 | 59.09 | 68.30 | -9.21 | 40.14 | 34.88 | 13.86 | 29.79 | 0.00 | 199 154 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

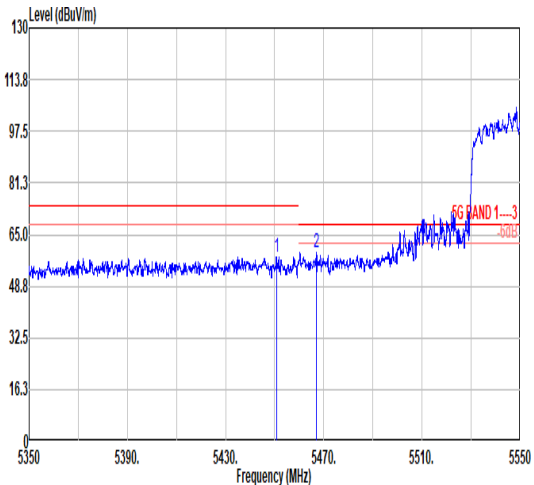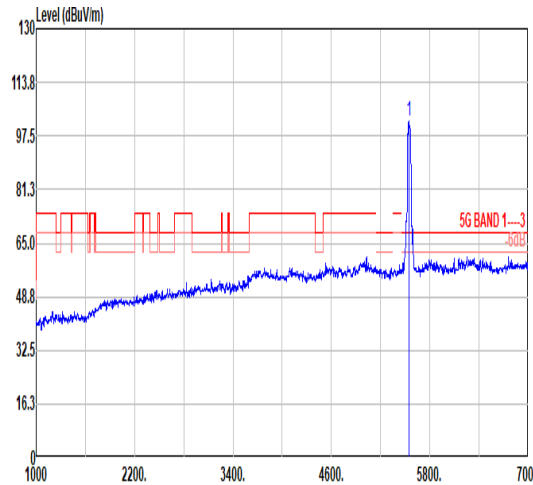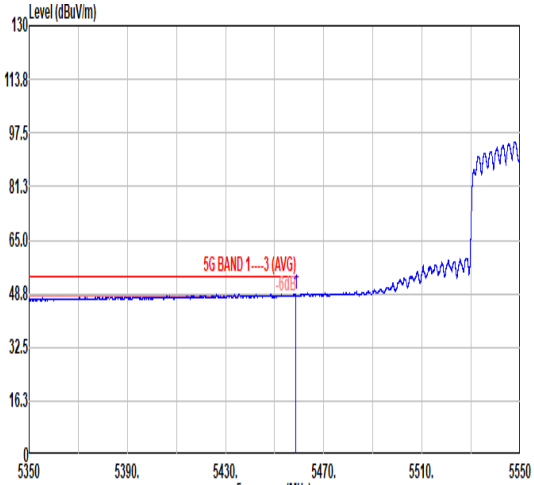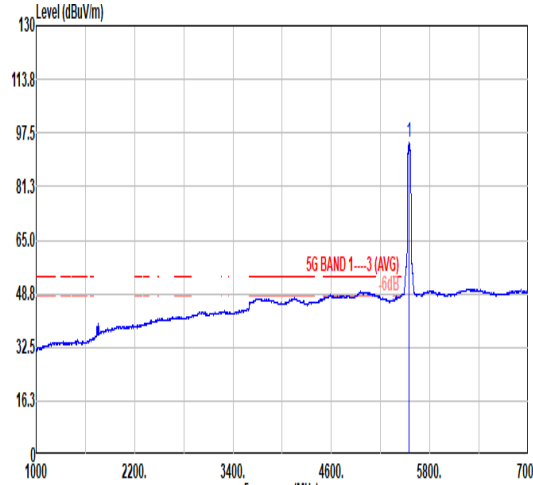

| | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|--------|-------|-------|-------|--------|------|-------|-------------|--|-------------|-------------|--------|-------|--------|-----|---------|-------|--------|-------|-------|-------------|--------------|-------------|-------------|--------|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1086 774 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.71</td> <td>58.10</td> <td>74.00</td> <td>-15.90</td> <td>40.03</td> <td>34.53</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>171</td> <td>297</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.07</td> <td>59.35</td> <td>68.30</td> <td>-8.95</td> <td>41.25</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>171</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | 1 | 5450.71 | 58.10 | 74.00 | -15.90 | 40.03 | 34.53 | 13.15 | 29.61 | 0.00 | 171 | 297 | PEAK | 2 | 5467.07 | 59.35 | 68.30 | -8.95 | 41.25 | 34.53 | 13.19 | 29.62 | 0.00 | 171 | 297 | PEAK |  <table border="1" data-bbox="901 1086 1412 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>101.80</td> <td>-----</td> <td>-----</td> <td>83.71</td> <td>34.57</td> <td>13.22</td> <td>29.70</td> <td>0.00</td> <td>171</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | 1 | 5550.00 | 101.80 | ----- | ----- | 83.71 | 34.57 | 13.22 | 29.70 | 0.00 | 171 | 297 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5450.71 | 58.10 | 74.00 | -15.90 | 40.03 | 34.53 | 13.15 | 29.61 | 0.00 | 171 | 297 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5467.07 | 59.35 | 68.30 | -8.95 | 41.25 | 34.53 | 13.19 | 29.62 | 0.00 | 171 | 297 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5550.00 | 101.80 | ----- | ----- | 83.71 | 34.57 | 13.22 | 29.70 | 0.00 | 171 | 297 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="263 1769 774 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.51</td> <td>48.60</td> <td>54.00</td> <td>-5.40</td> <td>30.52</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>171</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | 1 | 5458.51 | 48.60 | 54.00 | -5.40 | 30.52 | 34.53 | 13.17 | 29.62 | 0.00 | 171 | 297 | AVERAGE |  <table border="1" data-bbox="901 1769 1412 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>94.57</td> <td>-----</td> <td>-----</td> <td>76.48</td> <td>34.57</td> <td>13.22</td> <td>29.70</td> <td>0.00</td> <td>171</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | 1 | 5550.00 | 94.57 | ----- | ----- | 76.48 | 34.57 | 13.22 | 29.70 | 0.00 | 171 | 297 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.51 | 48.60 | 54.00 | -5.40 | 30.52 | 34.53 | 13.17 | 29.62 | 0.00 | 171 | 297 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5550.00 | 94.57 | ----- | ----- | 76.48 | 34.57 | 13.22 | 29.70 | 0.00 | 171 | 297 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.35</td> <td>58.62</td> <td>68.30</td> <td>-9.68</td> <td>39.84</td> <td>34.84</td> <td>13.73</td> <td>29.79</td> <td>0.00</td> <td>171 297 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5728.35 | 58.62 | 68.30 | -9.68 | 39.84 | 34.84 | 13.73 | 29.79 | 0.00 | 171 297 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5728.35 | 58.62 | 68.30 | -9.68 | 39.84 | 34.84 | 13.73 | 29.79 | 0.00 | 171 297 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------|--|----------|-------|--------|--------|-------|--------|--------|--------|------|------------|------|-------|------|-------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|------------|--|-------|------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|-------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|------------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>48.90</td> <td>74.00</td> <td>-25.10</td> <td>58.25</td> <td>38.16</td> <td>18.16</td> <td>65.67</td> <td>0.00</td> <td>245</td> <td>64 PEAK</td> </tr> <tr> <td>2</td> <td>11100.00</td> <td>39.74</td> <td>54.00</td> <td>-14.26</td> <td>49.09</td> <td>38.16</td> <td>18.16</td> <td>65.67</td> <td>0.00</td> <td>245</td> <td>64 AVERAGE</td> </tr> </tbody> </table> | Limit | Over | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Limit | Level | Factor | Loss | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 11100.00 | 48.90 | 74.00 | -25.10 | 58.25 | 38.16 | 18.16 | 65.67 | 0.00 | 245 | 64 PEAK | 2 | 11100.00 | 39.74 | 54.00 | -14.26 | 49.09 | 38.16 | 18.16 | 65.67 | 0.00 | 245 | 64 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>48.40</td> <td>74.00</td> <td>-25.60</td> <td>57.75</td> <td>38.16</td> <td>18.16</td> <td>65.67</td> <td>0.00</td> <td>103</td> <td>96 PEAK</td> </tr> <tr> <td>2</td> <td>11100.00</td> <td>39.41</td> <td>54.00</td> <td>-14.59</td> <td>48.76</td> <td>38.16</td> <td>18.16</td> <td>65.67</td> <td>0.00</td> <td>103</td> <td>96 AVERAGE</td> </tr> </tbody> </table> | Limit | Over | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Limit | Level | Factor | Loss | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 11100.00 | 48.40 | 74.00 | -25.60 | 57.75 | 38.16 | 18.16 | 65.67 | 0.00 | 103 | 96 PEAK | 2 | 11100.00 | 39.41 | 54.00 | -14.59 | 48.76 | 38.16 | 18.16 | 65.67 | 0.00 | 103 | 96 AVERAGE |
| Limit | Over | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Limit | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11100.00 | 48.90 | 74.00 | -25.10 | 58.25 | 38.16 | 18.16 | 65.67 | 0.00 | 245 | 64 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11100.00 | 39.74 | 54.00 | -14.26 | 49.09 | 38.16 | 18.16 | 65.67 | 0.00 | 245 | 64 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Over | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Limit | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11100.00 | 48.40 | 74.00 | -25.60 | 57.75 | 38.16 | 18.16 | 65.67 | 0.00 | 103 | 96 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11100.00 | 39.41 | 54.00 | -14.59 | 48.76 | 38.16 | 18.16 | 65.67 | 0.00 | 103 | 96 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|-------------|--------|--------|-------|------|-----|-----|---------|-------|-------------|--------------|-------------|-------------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|-------|--------|-------|-------|-------|------|-----|------|-------|--|--------------|-------------|-------------|--------|--------|-----|------|------|--------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--------|----|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5438.81</td> <td>57.59</td> <td>74.00</td> <td>-16.41</td> <td>39.55</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>311</td> <td>132</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.41</td> <td>58.83</td> <td>68.30</td> <td>-9.47</td> <td>40.74</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>311</td> <td>132</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5438.81 | 57.59 | 74.00 | -16.41 | 39.55 | 34.52 | 13.12 | 29.60 | 0.00 | 311 | 132 | PEAK | 2 | 5464.41 | 58.83 | 68.30 | -9.47 | 40.74 | 34.53 | 13.18 | 29.62 | 0.00 | 311 | 132 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>107.48</td> <td>-----</td> <td>-----</td> <td>89.16</td> <td>34.73</td> <td>13.38</td> <td>29.79</td> <td>0.00</td> <td>311</td> <td>132</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5670.00 | 107.48 | ----- | ----- | 89.16 | 34.73 | 13.38 | 29.79 | 0.00 | 311 | 132 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5438.81 | 57.59 | 74.00 | -16.41 | 39.55 | 34.52 | 13.12 | 29.60 | 0.00 | 311 | 132 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5464.41 | 58.83 | 68.30 | -9.47 | 40.74 | 34.53 | 13.18 | 29.62 | 0.00 | 311 | 132 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 107.48 | ----- | ----- | 89.16 | 34.73 | 13.38 | 29.79 | 0.00 | 311 | 132 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.53</td> <td>48.38</td> <td>54.00</td> <td>-5.62</td> <td>30.30</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>311</td> <td>132</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5453.53 | 48.38 | 54.00 | -5.62 | 30.30 | 34.53 | 13.16 | 29.61 | 0.00 | 311 | 132 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.39</td> <td>-----</td> <td>-----</td> <td>80.09</td> <td>34.72</td> <td>13.37</td> <td>29.79</td> <td>0.00</td> <td>311</td> <td>132</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5670.00 | 98.39 | ----- | ----- | 80.09 | 34.72 | 13.37 | 29.79 | 0.00 | 311 | 132 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5453.53 | 48.38 | 54.00 | -5.62 | 30.30 | 34.53 | 13.16 | 29.61 | 0.00 | 311 | 132 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 98.39 | ----- | ----- | 80.09 | 34.72 | 13.37 | 29.79 | 0.00 | 311 | 132 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--|------|-------|-------------|--------------|-------------|-------------|--------|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.43</td> <td>60.30</td> <td>68.30</td> <td>-8.00</td> <td>41.53</td> <td>34.84</td> <td>13.72</td> <td>29.79</td> <td>0.00</td> <td>311 132 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5727.43 | 60.30 | 68.30 | -8.00 | 41.53 | 34.84 | 13.72 | 29.79 | 0.00 | 311 132 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5727.43 | 60.30 | 68.30 | -8.00 | 41.53 | 34.84 | 13.72 | 29.79 | 0.00 | 311 132 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

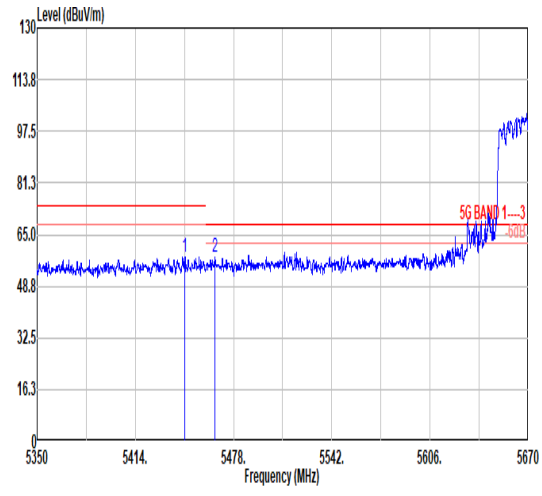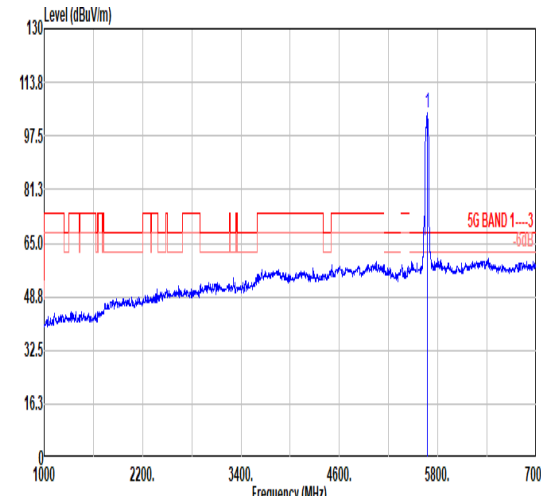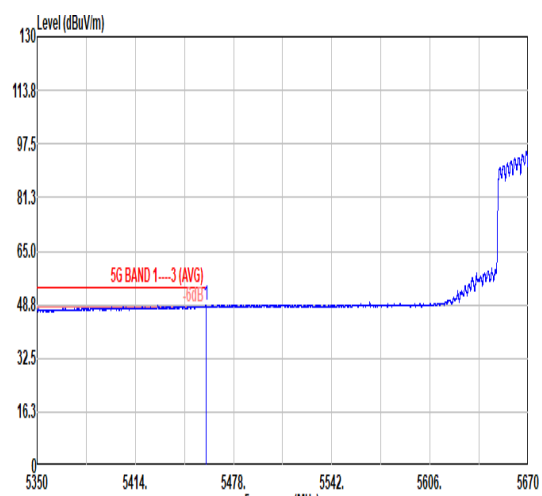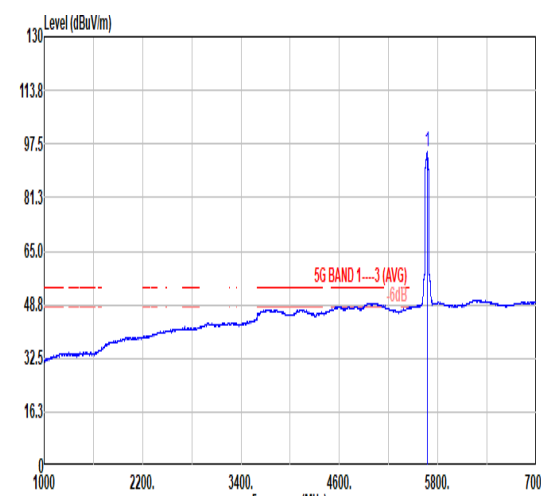

| | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|-------|--------|-------------|--------|-------|--------|------|-----|------|---------|-------------|-------|--------|-------------|--------|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|--------|--------|-------|-------|-------|------|------|-------|-------------|---|--------|-------------|--------|-------|--------|-----|--------|--------|----|------|-------|-------------|-------|--------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.17</td> <td>57.89</td> <td>74.00</td> <td>-16.11</td> <td>39.84</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>164</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.69</td> <td>57.80</td> <td>68.30</td> <td>-10.50</td> <td>39.70</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>164</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5446.17 | 57.89 | 74.00 | -16.11 | 39.84 | 34.52 | 13.14 | 29.61 | 0.00 | 164 | 296 | PEAK | 2 | 5465.69 | 57.80 | 68.30 | -10.50 | 39.70 | 34.53 | 13.19 | 29.62 | 0.00 | 164 | 296 | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>104.67</td> <td>-----</td> <td>-----</td> <td>86.35</td> <td>34.73</td> <td>13.38</td> <td>29.79</td> <td>0.00</td> <td>164</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5670.00 | 104.67 | ----- | ----- | 86.35 | 34.73 | 13.38 | 29.79 | 0.00 | 164 | 296 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5446.17 | 57.89 | 74.00 | -16.11 | 39.84 | 34.52 | 13.14 | 29.61 | 0.00 | 164 | 296 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5465.69 | 57.80 | 68.30 | -10.50 | 39.70 | 34.53 | 13.19 | 29.62 | 0.00 | 164 | 296 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 104.67 | ----- | ----- | 86.35 | 34.73 | 13.38 | 29.79 | 0.00 | 164 | 296 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.93</td> <td>48.42</td> <td>54.00</td> <td>-5.58</td> <td>30.34</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>164</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.93 | 48.42 | 54.00 | -5.58 | 30.34 | 34.53 | 13.17 | 29.62 | 0.00 | 164 | 296 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>94.94</td> <td>-----</td> <td>-----</td> <td>76.62</td> <td>34.73</td> <td>13.38</td> <td>29.79</td> <td>0.00</td> <td>164</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5670.00 | 94.94 | ----- | ----- | 76.62 | 34.73 | 13.38 | 29.79 | 0.00 | 164 | 296 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.93 | 48.42 | 54.00 | -5.58 | 30.34 | 34.53 | 13.17 | 29.62 | 0.00 | 164 | 296 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 94.94 | ----- | ----- | 76.62 | 34.73 | 13.38 | 29.79 | 0.00 | 164 | 296 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--|-------------|--------------|-------------|-------------|--------|-------|--------|---------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|---------|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.61</td> <td>59.60</td> <td>68.30</td> <td>-8.70</td> <td>40.78</td> <td>34.85</td> <td>13.76</td> <td>29.79</td> <td>0.00</td> <td>164 296</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5731.61 | 59.60 | 68.30 | -8.70 | 40.78 | 34.85 | 13.76 | 29.79 | 0.00 | 164 296 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5731.61 | 59.60 | 68.30 | -8.70 | 40.78 | 34.85 | 13.76 | 29.79 | 0.00 | 164 296 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|----------|--------|-------|--------|--------|--------|--------|--------|-------------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-------------|--|-------|------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|-------|-------|--------|------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|---------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|------------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11340.00</td> <td>53.93</td> <td>74.00</td> <td>-20.07</td> <td>62.83</td> <td>38.30</td> <td>18.34</td> <td>65.54</td> <td>0.00</td> <td>100</td> <td>270 PEAK</td> </tr> <tr> <td>2 11340.00</td> <td>46.01</td> <td>54.00</td> <td>-7.99</td> <td>54.91</td> <td>38.30</td> <td>18.34</td> <td>65.54</td> <td>0.00</td> <td>100</td> <td>270 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11340.00 | 53.93 | 74.00 | -20.07 | 62.83 | 38.30 | 18.34 | 65.54 | 0.00 | 100 | 270 PEAK | 2 11340.00 | 46.01 | 54.00 | -7.99 | 54.91 | 38.30 | 18.34 | 65.54 | 0.00 | 100 | 270 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11340.00</td> <td>52.38</td> <td>74.00</td> <td>-21.62</td> <td>61.28</td> <td>38.30</td> <td>18.34</td> <td>65.54</td> <td>0.00</td> <td>102</td> <td>52 PEAK</td> </tr> <tr> <td>2 11340.00</td> <td>43.93</td> <td>54.00</td> <td>-10.07</td> <td>52.83</td> <td>38.30</td> <td>18.34</td> <td>65.54</td> <td>0.00</td> <td>102</td> <td>52 AVERAGE</td> </tr> </tbody> </table> | Limit | Over | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Limit | Level | Factor | Loss | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 11340.00 | 52.38 | 74.00 | -21.62 | 61.28 | 38.30 | 18.34 | 65.54 | 0.00 | 102 | 52 PEAK | 2 11340.00 | 43.93 | 54.00 | -10.07 | 52.83 | 38.30 | 18.34 | 65.54 | 0.00 | 102 | 52 AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11340.00 | 53.93 | 74.00 | -20.07 | 62.83 | 38.30 | 18.34 | 65.54 | 0.00 | 100 | 270 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11340.00 | 46.01 | 54.00 | -7.99 | 54.91 | 38.30 | 18.34 | 65.54 | 0.00 | 100 | 270 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Over | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Limit | Level | Factor | Loss | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11340.00 | 52.38 | 74.00 | -21.62 | 61.28 | 38.30 | 18.34 | 65.54 | 0.00 | 102 | 52 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11340.00 | 43.93 | 54.00 | -10.07 | 52.83 | 38.30 | 18.34 | 65.54 | 0.00 | 102 | 52 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.24</td> <td>59.54</td> <td>74.00</td> <td>-14.46</td> <td>42.01</td> <td>34.37</td> <td>12.46</td> <td>29.30</td> <td>0.00</td> <td>205</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5137.24 | 59.54 | 74.00 | -14.46 | 42.01 | 34.37 | 12.46 | 29.30 | 0.00 | 205 | 143 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>99.98</td> <td>-----</td> <td>-----</td> <td>82.26</td> <td>34.50</td> <td>12.62</td> <td>29.40</td> <td>0.00</td> <td>205</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5210.00 | 99.98 | ----- | ----- | 82.26 | 34.50 | 12.62 | 29.40 | 0.00 | 205 | 143 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5137.24 | 59.54 | 74.00 | -14.46 | 42.01 | 34.37 | 12.46 | 29.30 | 0.00 | 205 | 143 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5210.00 | 99.98 | ----- | ----- | 82.26 | 34.50 | 12.62 | 29.40 | 0.00 | 205 | 143 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.63</td> <td>50.90</td> <td>54.00</td> <td>-3.10</td> <td>33.34</td> <td>34.39</td> <td>12.48</td> <td>29.31</td> <td>0.00</td> <td>205</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5145.63 | 50.90 | 54.00 | -3.10 | 33.34 | 34.39 | 12.48 | 29.31 | 0.00 | 205 | 143 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>91.39</td> <td>-----</td> <td>-----</td> <td>73.68</td> <td>34.50</td> <td>12.57</td> <td>29.36</td> <td>0.00</td> <td>205</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5210.00 | 91.39 | ----- | ----- | 73.68 | 34.50 | 12.57 | 29.36 | 0.00 | 205 | 143 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5145.63 | 50.90 | 54.00 | -3.10 | 33.34 | 34.39 | 12.48 | 29.31 | 0.00 | 205 | 143 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5210.00 | 91.39 | ----- | ----- | 73.68 | 34.50 | 12.57 | 29.36 | 0.00 | 205 | 143 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |





| | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|--|--|--|--|--|--|--|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1" data-bbox="263 1115 774 1238"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.38</td> <td>58.93</td> <td>74.00</td> <td>-15.07</td> <td>40.88</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>205</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | cm | deg | 1 | 5445.38 | 58.93 | 74.00 | -15.07 | 40.88 | 34.52 | 13.14 | 29.61 | 0.00 | 205 | 143 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5445.38 | 58.93 | 74.00 | -15.07 | 40.88 | 34.52 | 13.14 | 29.61 | 0.00 | 205 | 143 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1" data-bbox="263 1798 774 1921"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.38</td> <td>48.69</td> <td>54.00</td> <td>-5.31</td> <td>30.70</td> <td>34.51</td> <td>13.06</td> <td>29.58</td> <td>0.00</td> <td>205</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | cm | deg | 1 | 5412.38 | 48.69 | 54.00 | -5.31 | 30.70 | 34.51 | 13.06 | 29.58 | 0.00 | 205 | 143 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5412.38 | 48.69 | 54.00 | -5.31 | 30.70 | 34.51 | 13.06 | 29.58 | 0.00 | 205 | 143 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5049.46</td> <td>59.78</td> <td>74.00</td> <td>-14.22</td> <td>42.45</td> <td>34.20</td> <td>12.36</td> <td>29.23</td> <td>0.00</td> <td>131 301 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5049.46 | 59.78 | 74.00 | -14.22 | 42.45 | 34.20 | 12.36 | 29.23 | 0.00 | 131 301 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5210.00</td> <td>94.86</td> <td>-----</td> <td>-----</td> <td>77.15</td> <td>34.50</td> <td>12.57</td> <td>29.36</td> <td>0.00</td> <td>131 301 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5210.00 | 94.86 | ----- | ----- | 77.15 | 34.50 | 12.57 | 29.36 | 0.00 | 131 301 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5049.46 | 59.78 | 74.00 | -14.22 | 42.45 | 34.20 | 12.36 | 29.23 | 0.00 | 131 301 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5210.00 | 94.86 | ----- | ----- | 77.15 | 34.50 | 12.57 | 29.36 | 0.00 | 131 301 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5013.97</td> <td>50.00</td> <td>54.00</td> <td>-4.00</td> <td>32.74</td> <td>34.13</td> <td>12.34</td> <td>29.21</td> <td>0.00</td> <td>131 301 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5013.97 | 50.00 | 54.00 | -4.00 | 32.74 | 34.13 | 12.34 | 29.21 | 0.00 | 131 301 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5210.00</td> <td>86.95</td> <td>-----</td> <td>-----</td> <td>69.23</td> <td>34.50</td> <td>12.61</td> <td>29.39</td> <td>0.00</td> <td>131 301 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5210.00 | 86.95 | ----- | ----- | 69.23 | 34.50 | 12.61 | 29.39 | 0.00 | 131 301 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5013.97 | 50.00 | 54.00 | -4.00 | 32.74 | 34.13 | 12.34 | 29.21 | 0.00 | 131 301 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5210.00 | 86.95 | ----- | ----- | 69.23 | 34.50 | 12.61 | 29.39 | 0.00 | 131 301 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



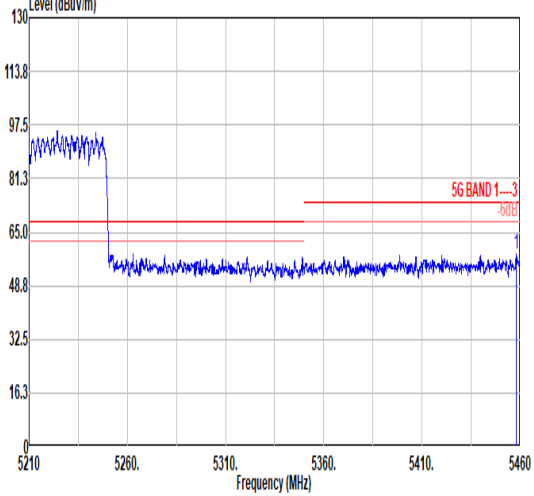
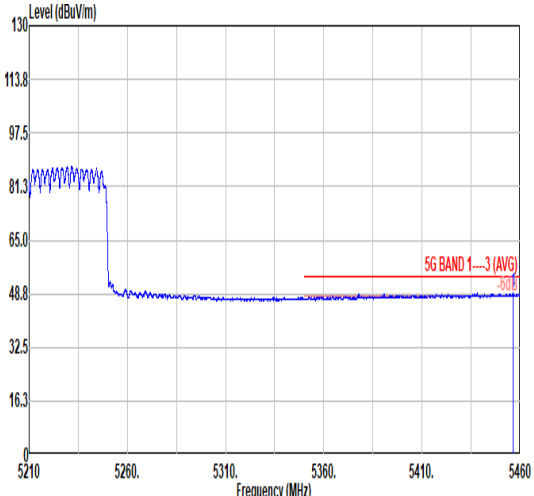


| | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1108 774 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.88</td> <td>58.45</td> <td>74.00</td> <td>-15.55</td> <td>40.37</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>131</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5457.88 | 58.45 | 74.00 | -15.55 | 40.37 | 34.53 | 13.17 | 29.62 | 0.00 | 131 | 301 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5457.88 | 58.45 | 74.00 | -15.55 | 40.37 | 34.53 | 13.17 | 29.62 | 0.00 | 131 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1" data-bbox="263 1780 774 1915"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.38</td> <td>48.94</td> <td>54.00</td> <td>-5.06</td> <td>30.86</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>131</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5456.38 | 48.94 | 54.00 | -5.06 | 30.86 | 34.53 | 13.17 | 29.62 | 0.00 | 131 | 301 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5456.38 | 48.94 | 54.00 | -5.06 | 30.86 | 34.53 | 13.17 | 29.62 | 0.00 | 131 | 301 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>48.33</td> <td>68.30</td> <td>-19.97</td> <td>59.68</td> <td>37.46</td> <td>17.60</td> <td>66.41</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10420.00 | 48.33 | 68.30 | -19.97 | 59.68 | 37.46 | 17.60 | 66.41 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>44.76</td> <td>68.30</td> <td>-23.54</td> <td>56.11</td> <td>37.46</td> <td>17.60</td> <td>66.41</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10420.00 | 44.76 | 68.30 | -23.54 | 56.11 | 37.46 | 17.60 | 66.41 | 0.00 | --- Peak |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10420.00 | 48.33 | 68.30 | -19.97 | 59.68 | 37.46 | 17.60 | 66.41 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10420.00 | 44.76 | 68.30 | -23.54 | 56.11 | 37.46 | 17.60 | 66.41 | 0.00 | --- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

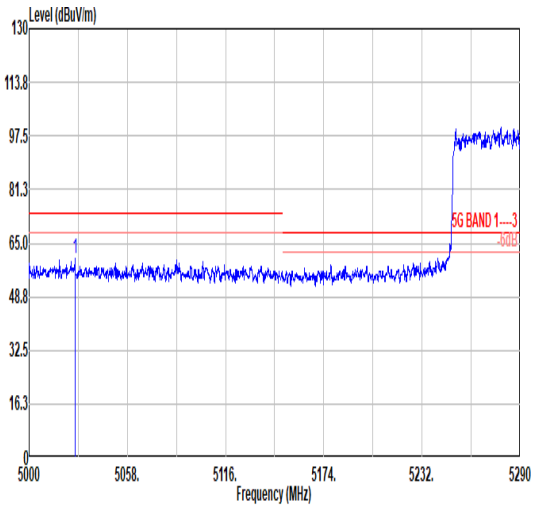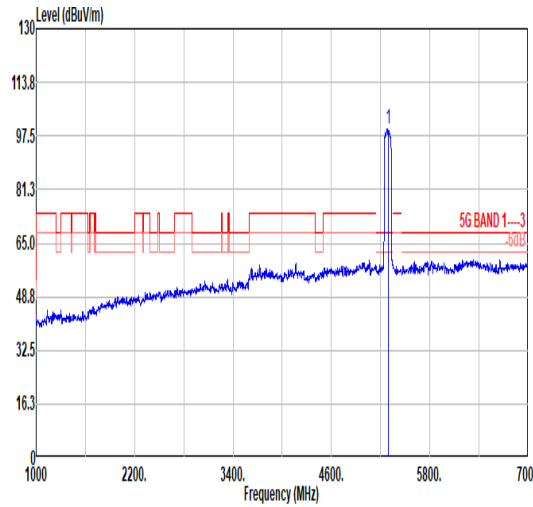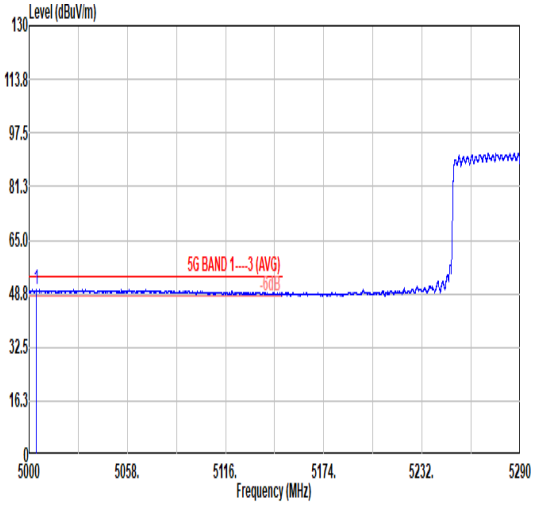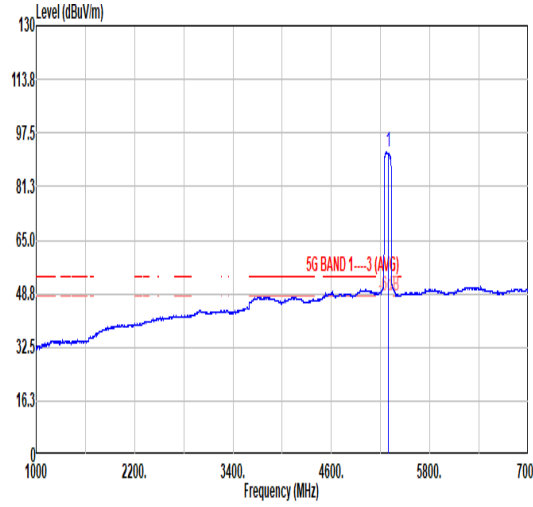

| | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5000 to 5290 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. A blue peak is visible at 5027.13 MHz, reaching a level of 60.11 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5027.13</td> <td>60.11</td> <td>74.00</td> <td>-13.89</td> <td>42.83</td> <td>34.15</td> <td>12.35</td> <td>29.22</td> <td>0.00</td> <td>164 142 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5027.13 | 60.11 | 74.00 | -13.89 | 42.83 | 34.15 | 12.35 | 29.22 | 0.00 | 164 142 PEAK |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. A blue peak is visible at 5290.00 MHz, reaching a level of 99.66 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>99.66</td> <td>-----</td> <td>-----</td> <td>81.93</td> <td>34.50</td> <td>12.68</td> <td>29.45</td> <td>0.00</td> <td>164 142 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5290.00 | 99.66 | ----- | ----- | 81.93 | 34.50 | 12.68 | 29.45 | 0.00 | 164 142 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5027.13 | 60.11 | 74.00 | -13.89 | 42.83 | 34.15 | 12.35 | 29.22 | 0.00 | 164 142 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5290.00 | 99.66 | ----- | ----- | 81.93 | 34.50 | 12.68 | 29.45 | 0.00 | 164 142 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5000 to 5290 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m. A blue peak is visible at 5004.22 MHz, reaching a level of 50.12 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5004.22</td> <td>50.12</td> <td>54.00</td> <td>-3.88</td> <td>32.88</td> <td>34.11</td> <td>12.33</td> <td>29.20</td> <td>0.00</td> <td>164 142 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5004.22 | 50.12 | 54.00 | -3.88 | 32.88 | 34.11 | 12.33 | 29.20 | 0.00 | 164 142 AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m. A blue peak is visible at 5290.00 MHz, reaching a level of 91.67 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>91.67</td> <td>-----</td> <td>-----</td> <td>73.94</td> <td>34.50</td> <td>12.67</td> <td>29.44</td> <td>0.00</td> <td>164 142 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5290.00 | 91.67 | ----- | ----- | 73.94 | 34.50 | 12.67 | 29.44 | 0.00 | 164 142 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5004.22 | 50.12 | 54.00 | -3.88 | 32.88 | 34.11 | 12.33 | 29.20 | 0.00 | 164 142 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5290.00 | 91.67 | ----- | ----- | 73.94 | 34.50 | 12.67 | 29.44 | 0.00 | 164 142 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------|--------|--------|--------|--------|--------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----------|-------|-------|--------|-------|-------|-------|-------|------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.80</td> <td>60.05</td> <td>74.00</td> <td>-13.95</td> <td>42.19</td> <td>34.50</td> <td>12.88</td> <td>29.52</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5351.80 | 60.05 | 74.00 | -13.95 | 42.19 | 34.50 | 12.88 | 29.52 | 0.00 | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5351.80 | 60.05 | 74.00 | -13.95 | 42.19 | 34.50 | 12.88 | 29.52 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.61</td> <td>50.57</td> <td>54.00</td> <td>-3.43</td> <td>32.72</td> <td>34.50</td> <td>12.87</td> <td>29.52</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5350.61 | 50.57 | 54.00 | -3.43 | 32.72 | 34.50 | 12.87 | 29.52 | 0.00 | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.61 | 50.57 | 54.00 | -3.43 | 32.72 | 34.50 | 12.87 | 29.52 | 0.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|--------|--------|-------|--------|-----------------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----------------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5039.02</td> <td>59.92</td> <td>74.00</td> <td>-14.08</td> <td>42.60</td> <td>34.18</td> <td>12.36</td> <td>29.22</td> <td>0.00</td> <td>125 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5039.02 | 59.92 | 74.00 | -14.08 | 42.60 | 34.18 | 12.36 | 29.22 | 0.00 | 125 306 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>96.00</td> <td>-----</td> <td>-----</td> <td>78.27</td> <td>34.50</td> <td>12.68</td> <td>29.45</td> <td>0.00</td> <td>125 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5290.00 | 96.00 | ----- | ----- | 78.27 | 34.50 | 12.68 | 29.45 | 0.00 | 125 306 PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5039.02 | 59.92 | 74.00 | -14.08 | 42.60 | 34.18 | 12.36 | 29.22 | 0.00 | 125 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5290.00 | 96.00 | ----- | ----- | 78.27 | 34.50 | 12.68 | 29.45 | 0.00 | 125 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5029.45</td> <td>50.14</td> <td>54.00</td> <td>-3.86</td> <td>32.85</td> <td>34.16</td> <td>12.35</td> <td>29.22</td> <td>0.00</td> <td>125 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5029.45 | 50.14 | 54.00 | -3.86 | 32.85 | 34.16 | 12.35 | 29.22 | 0.00 | 125 306 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>87.41</td> <td>-----</td> <td>-----</td> <td>69.68</td> <td>34.50</td> <td>12.68</td> <td>29.45</td> <td>0.00</td> <td>125 306 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5290.00 | 87.41 | ----- | ----- | 69.68 | 34.50 | 12.68 | 29.45 | 0.00 | 125 306 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5029.45 | 50.14 | 54.00 | -3.86 | 32.85 | 34.16 | 12.35 | 29.22 | 0.00 | 125 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5290.00 | 87.41 | ----- | ----- | 69.68 | 34.50 | 12.68 | 29.45 | 0.00 | 125 306 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--------------|
| Mode | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.72</td> <td>58.82</td> <td>74.00</td> <td>-15.18</td> <td>40.76</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>125</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5449.72 | 58.82 | 74.00 | -15.18 | 40.76 | 34.52 | 13.15 | 29.61 | 0.00 | 125 | 306 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5449.72 | 58.82 | 74.00 | -15.18 | 40.76 | 34.52 | 13.15 | 29.61 | 0.00 | 125 | 306 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.49</td> <td>49.04</td> <td>54.00</td> <td>-4.96</td> <td>31.16</td> <td>34.50</td> <td>12.91</td> <td>29.53</td> <td>0.00</td> <td>125</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5361.49 | 49.04 | 54.00 | -4.96 | 31.16 | 34.50 | 12.91 | 29.53 | 0.00 | 125 | 306 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5361.49 | 49.04 | 54.00 | -4.96 | 31.16 | 34.50 | 12.91 | 29.53 | 0.00 | 125 | 306 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|--------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|----|-----|--------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>45.18</td> <td>68.30</td> <td>-23.12</td> <td>56.02</td> <td>37.64</td> <td>17.74</td> <td>66.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10580.00 | 45.18 | 68.30 | -23.12 | 56.02 | 37.64 | 17.74 | 66.22 | 0.00 | --- | --- | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>45.03</td> <td>68.30</td> <td>-23.27</td> <td>55.87</td> <td>37.64</td> <td>17.74</td> <td>66.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | Remark | 1 10580.00 | 45.03 | 68.30 | -23.27 | 55.87 | 37.64 | 17.74 | 66.22 | 0.00 | --- | --- | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10580.00 | 45.18 | 68.30 | -23.12 | 56.02 | 37.64 | 17.74 | 66.22 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10580.00 | 45.03 | 68.30 | -23.27 | 55.87 | 37.64 | 17.74 | 66.22 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------------|-------------|--------|--------|--------|-------|------|------|-------|-------------|--------------|-------------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|-------|--------|-------|-------|-------|------|-------|-------------|--------------|---|--------|--------|--------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.20</td> <td>60.62</td> <td>74.00</td> <td>-13.38</td> <td>42.56</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>200</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.58</td> <td>60.31</td> <td>68.30</td> <td>-7.99</td> <td>42.22</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>200</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5448.20 | 60.62 | 74.00 | -13.38 | 42.56 | 34.52 | 13.15 | 29.61 | 0.00 | 200 | 153 | PEAK | 2 | 5464.58 | 60.31 | 68.30 | -7.99 | 42.22 | 34.53 | 13.18 | 29.62 | 0.00 | 200 | 153 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>90.54</td> <td>-----</td> <td>-----</td> <td>80.40</td> <td>34.56</td> <td>13.25</td> <td>29.67</td> <td>0.00</td> <td>200</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5530.00 | 90.54 | ----- | ----- | 80.40 | 34.56 | 13.25 | 29.67 | 0.00 | 200 | 153 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5448.20 | 60.62 | 74.00 | -13.38 | 42.56 | 34.52 | 13.15 | 29.61 | 0.00 | 200 | 153 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5464.58 | 60.31 | 68.30 | -7.99 | 42.22 | 34.53 | 13.18 | 29.62 | 0.00 | 200 | 153 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5530.00 | 90.54 | ----- | ----- | 80.40 | 34.56 | 13.25 | 29.67 | 0.00 | 200 | 153 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5437.04</td> <td>50.90</td> <td>54.00</td> <td>-3.10</td> <td>32.86</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>200</td> <td>153</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5437.04 | 50.90 | 54.00 | -3.10 | 32.86 | 34.52 | 13.12 | 29.60 | 0.00 | 200 | 153 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>90.81</td> <td>-----</td> <td>-----</td> <td>72.67</td> <td>34.56</td> <td>13.25</td> <td>29.67</td> <td>0.00</td> <td>200</td> <td>153</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5530.00 | 90.81 | ----- | ----- | 72.67 | 34.56 | 13.25 | 29.67 | 0.00 | 200 | 153 | AVERAGE | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5437.04 | 50.90 | 54.00 | -3.10 | 32.86 | 34.52 | 13.12 | 29.60 | 0.00 | 200 | 153 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5530.00 | 90.81 | ----- | ----- | 72.67 | 34.56 | 13.25 | 29.67 | 0.00 | 200 | 153 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5741.16</td> <td>59.65</td> <td>68.30</td> <td>-8.65</td> <td>40.72</td> <td>34.87</td> <td>13.85</td> <td>29.79</td> <td>0.00</td> <td>200 153 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5741.16 | 59.65 | 68.30 | -8.65 | 40.72 | 34.87 | 13.85 | 29.79 | 0.00 | 200 153 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5741.16 | 59.65 | 68.30 | -8.65 | 40.72 | 34.87 | 13.85 | 29.79 | 0.00 | 200 153 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

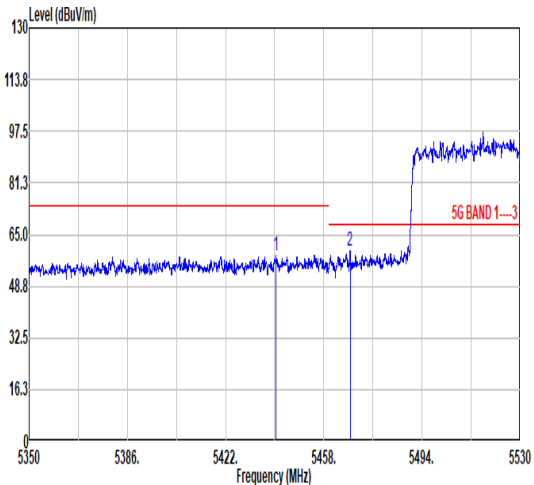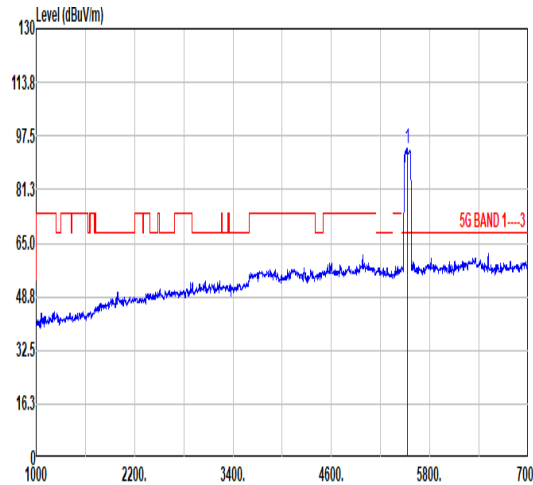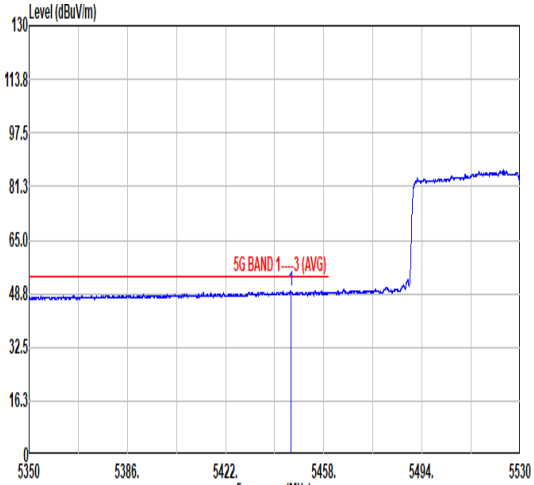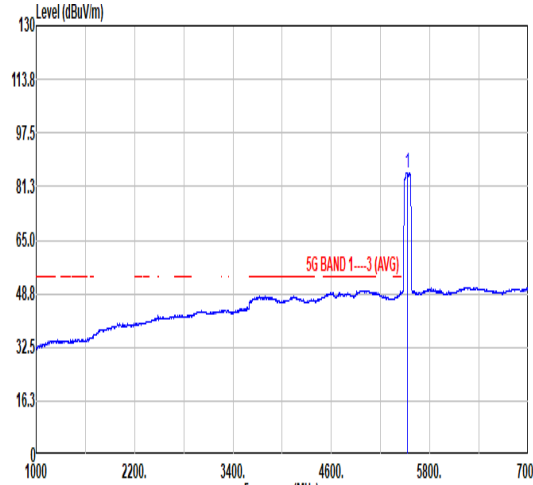

| | | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|--|--------------|-------------|--------|--------|--------|-------|------|------|-------|-------------|--------------|-------------|--------|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|--------|-------|-------|-------|------|-------|-------------|--------------|---|--------|------|--------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level around 50 dBuV/m from 5350 to 5494 MHz, then rising to approximately 90 dBuV/m. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m. Two vertical blue lines mark frequencies 5440.46 MHz and 5467.64 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.46</td> <td>58.53</td> <td>74.00</td> <td>-15.47</td> <td>40.48</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>192</td> <td>308</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.64</td> <td>59.82</td> <td>68.30</td> <td>-8.48</td> <td>41.72</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>192</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5440.46 | 58.53 | 74.00 | -15.47 | 40.48 | 34.52 | 13.13 | 29.60 | 0.00 | 192 | 308 | PEAK | 2 | 5467.64 | 59.82 | 68.30 | -8.48 | 41.72 | 34.53 | 13.19 | 29.62 | 0.00 | 192 | 308 | PEAK |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level around 45 dBuV/m from 1000 to 5700 MHz, with a sharp peak at 5530 MHz reaching approximately 95 dBuV/m. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>93.73</td> <td>-----</td> <td>-----</td> <td>75.60</td> <td>34.56</td> <td>13.24</td> <td>29.67</td> <td>0.00</td> <td>192</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5530.00 | 93.73 | ----- | ----- | 75.60 | 34.56 | 13.24 | 29.67 | 0.00 | 192 | 308 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5440.46 | 58.53 | 74.00 | -15.47 | 40.48 | 34.52 | 13.13 | 29.60 | 0.00 | 192 | 308 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5467.64 | 59.82 | 68.30 | -8.48 | 41.72 | 34.53 | 13.19 | 29.62 | 0.00 | 192 | 308 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5530.00 | 93.73 | ----- | ----- | 75.60 | 34.56 | 13.24 | 29.67 | 0.00 | 192 | 308 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization, Average. The plot shows a signal level around 48 dBuV/m from 5350 to 5494 MHz, then rising to approximately 85 dBuV/m. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.86</td> <td>49.78</td> <td>54.00</td> <td>-4.22</td> <td>31.73</td> <td>34.52</td> <td>13.14</td> <td>29.61</td> <td>0.00</td> <td>192</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5445.86 | 49.78 | 54.00 | -4.22 | 31.73 | 34.52 | 13.14 | 29.61 | 0.00 | 192 | 308 | AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average. The plot shows a signal level around 40 dBuV/m from 1000 to 5700 MHz, with a peak at 5530 MHz reaching approximately 85 dBuV/m. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>85.46</td> <td>-----</td> <td>-----</td> <td>67.33</td> <td>34.56</td> <td>13.24</td> <td>29.67</td> <td>0.00</td> <td>192</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5530.00 | 85.46 | ----- | ----- | 67.33 | 34.56 | 13.24 | 29.67 | 0.00 | 192 | 308 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5445.86 | 49.78 | 54.00 | -4.22 | 31.73 | 34.52 | 13.14 | 29.61 | 0.00 | 192 | 308 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5530.00 | 85.46 | ----- | ----- | 67.33 | 34.56 | 13.24 | 29.67 | 0.00 | 192 | 308 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5758.55</td> <td>59.65</td> <td>68.30</td> <td>-8.65</td> <td>40.52</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>192 308 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5758.55 | 59.65 | 68.30 | -8.65 | 40.52 | 34.91 | 14.00 | 29.78 | 0.00 | 192 308 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5758.55 | 59.65 | 68.30 | -8.65 | 40.52 | 34.91 | 14.00 | 29.78 | 0.00 | 192 308 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|----|-----|--|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|----|-----|--|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11060.00</td> <td>45.00</td> <td>74.00</td> <td>-29.00</td> <td>54.43</td> <td>38.14</td> <td>18.13</td> <td>65.70</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 11060.00 | 45.00 | 74.00 | -29.00 | 54.43 | 38.14 | 18.13 | 65.70 | 0.00 | --- | --- | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11060.00</td> <td>45.55</td> <td>74.00</td> <td>-28.45</td> <td>54.98</td> <td>38.14</td> <td>18.13</td> <td>65.70</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 11060.00 | 45.55 | 74.00 | -28.45 | 54.98 | 38.14 | 18.13 | 65.70 | 0.00 | --- | --- |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11060.00 | 45.00 | 74.00 | -29.00 | 54.43 | 38.14 | 18.13 | 65.70 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11060.00 | 45.55 | 74.00 | -28.45 | 54.98 | 38.14 | 18.13 | 65.70 | 0.00 | --- | --- | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| | | 41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--------------|-------------|-------------|--------|--------|-------|--------|------|-----|---------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|-------|--------|-------|-------|------|-----|------|-------|---|--------------|-------------|-------------|--------|-------|--------|--------|------|------|--------|--------|-------|-------------|--------------|-------------|-------------|--------|-----|---|---------|-------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.64</td> <td>59.47</td> <td>74.00</td> <td>-14.53</td> <td>41.41</td> <td>34.52</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>219</td> <td>173</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>59.55</td> <td>68.30</td> <td>-8.75</td> <td>41.45</td> <td>34.53</td> <td>13.19</td> <td>29.62</td> <td>0.00</td> <td>219</td> <td>173</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5449.64 | 59.47 | 74.00 | -14.53 | 41.41 | 34.52 | 13.15 | 29.61 | 0.00 | 219 | 173 | PEAK | 2 | 5468.72 | 59.55 | 68.30 | -8.75 | 41.45 | 34.53 | 13.19 | 29.62 | 0.00 | 219 | 173 | PEAK | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>105.71</td> <td>-----</td> <td>-----</td> <td>87.70</td> <td>34.59</td> <td>13.17</td> <td>29.75</td> <td>0.00</td> <td>219</td> <td>173</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5610.00 | 105.71 | ----- | ----- | 87.70 | 34.59 | 13.17 | 29.75 | 0.00 | 219 | 173 | PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5449.64 | 59.47 | 74.00 | -14.53 | 41.41 | 34.52 | 13.15 | 29.61 | 0.00 | 219 | 173 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5468.72 | 59.55 | 68.30 | -8.75 | 41.45 | 34.53 | 13.19 | 29.62 | 0.00 | 219 | 173 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 105.71 | ----- | ----- | 87.70 | 34.59 | 13.17 | 29.75 | 0.00 | 219 | 173 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.18</td> <td>49.98</td> <td>54.00</td> <td>-4.02</td> <td>31.91</td> <td>34.53</td> <td>13.15</td> <td>29.61</td> <td>0.00</td> <td>219</td> <td>173</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5450.18 | 49.98 | 54.00 | -4.02 | 31.91 | 34.53 | 13.15 | 29.61 | 0.00 | 219 | 173 | AVERAGE | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>95.87</td> <td>-----</td> <td>-----</td> <td>77.85</td> <td>34.61</td> <td>13.17</td> <td>29.76</td> <td>0.00</td> <td>219</td> <td>173</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5610.00 | 95.87 | ----- | ----- | 77.85 | 34.61 | 13.17 | 29.76 | 0.00 | 219 | 173 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5450.18 | 49.98 | 54.00 | -4.02 | 31.91 | 34.53 | 13.15 | 29.61 | 0.00 | 219 | 173 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 95.87 | ----- | ----- | 77.85 | 34.61 | 13.17 | 29.76 | 0.00 | 219 | 173 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.29</td> <td>59.30</td> <td>68.30</td> <td>-9.00</td> <td>40.53</td> <td>34.84</td> <td>13.72</td> <td>29.79</td> <td>0.00</td> <td>219 173 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5727.29 | 59.30 | 68.30 | -9.00 | 40.53 | 34.84 | 13.72 | 29.79 | 0.00 | 219 173 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5727.29 | 59.30 | 68.30 | -9.00 | 40.53 | 34.84 | 13.72 | 29.79 | 0.00 | 219 173 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

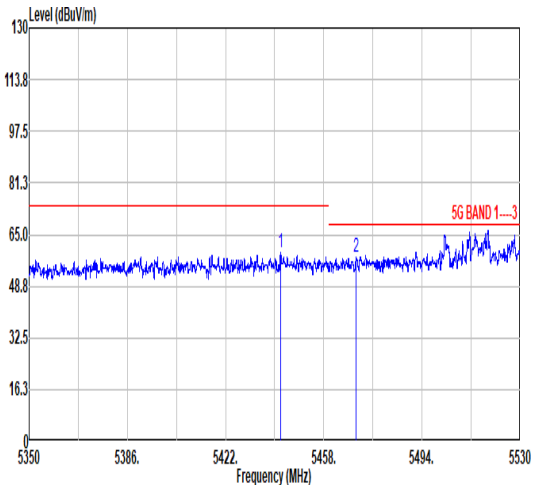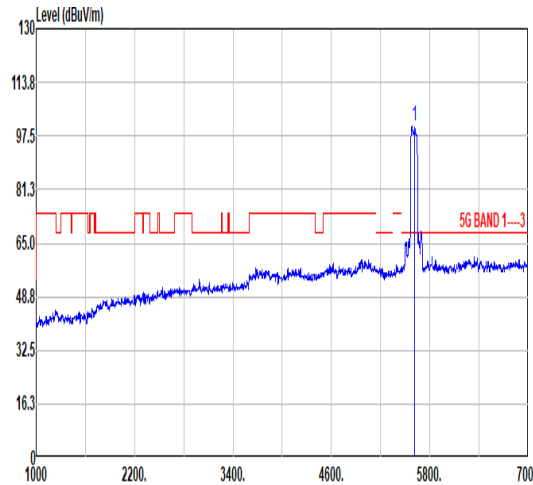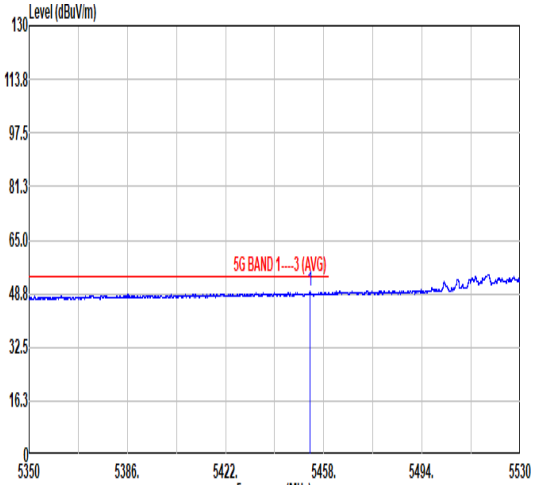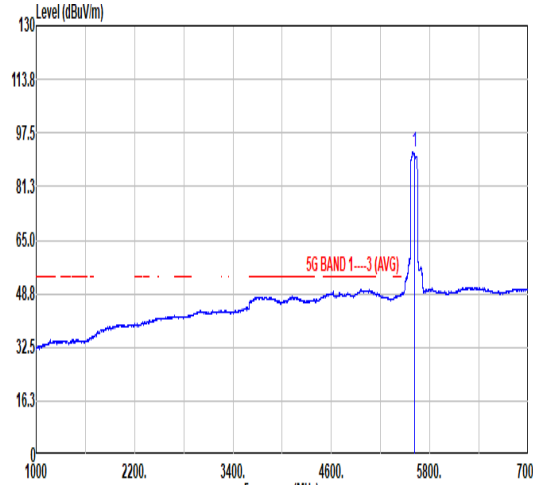

| | | 41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------------------|--------------|-------------|-------------|--------|--------|-------|------|-----|-----|---------|-------|-------------|--------------|-------------|-------------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|--------|--------|-------|-------|-------|------|-----|------|-------|--|--------------|-------------|-------------|--------|--------|-----|------|------|--------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--------|----|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5442.08</td> <td>59.43</td> <td>74.00</td> <td>-14.57</td> <td>41.38</td> <td>34.52</td> <td>13.13</td> <td>29.60</td> <td>0.00</td> <td>198</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.80</td> <td>57.80</td> <td>68.30</td> <td>-10.50</td> <td>39.70</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>198</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5442.08 | 59.43 | 74.00 | -14.57 | 41.38 | 34.52 | 13.13 | 29.60 | 0.00 | 198 | 306 | PEAK | 2 | 5469.80 | 57.80 | 68.30 | -10.50 | 39.70 | 34.53 | 13.20 | 29.63 | 0.00 | 198 | 306 | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>100.36</td> <td>-----</td> <td>-----</td> <td>82.34</td> <td>34.59</td> <td>13.17</td> <td>29.74</td> <td>0.00</td> <td>198</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5610.00 | 100.36 | ----- | ----- | 82.34 | 34.59 | 13.17 | 29.74 | 0.00 | 198 | 306 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5442.08 | 59.43 | 74.00 | -14.57 | 41.38 | 34.52 | 13.13 | 29.60 | 0.00 | 198 | 306 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.80 | 57.80 | 68.30 | -10.50 | 39.70 | 34.53 | 13.20 | 29.63 | 0.00 | 198 | 306 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 100.36 | ----- | ----- | 82.34 | 34.59 | 13.17 | 29.74 | 0.00 | 198 | 306 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.06</td> <td>49.36</td> <td>54.00</td> <td>-4.64</td> <td>31.28</td> <td>34.53</td> <td>13.16</td> <td>29.61</td> <td>0.00</td> <td>198</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5453.06 | 49.36 | 54.00 | -4.64 | 31.28 | 34.53 | 13.16 | 29.61 | 0.00 | 198 | 306 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>91.76</td> <td>-----</td> <td>-----</td> <td>73.75</td> <td>34.59</td> <td>13.17</td> <td>29.75</td> <td>0.00</td> <td>198</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5610.00 | 91.76 | ----- | ----- | 73.75 | 34.59 | 13.17 | 29.75 | 0.00 | 198 | 306 | AVERAGE | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5453.06 | 49.36 | 54.00 | -4.64 | 31.28 | 34.53 | 13.16 | 29.61 | 0.00 | 198 | 306 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.00 | 91.76 | ----- | ----- | 73.75 | 34.59 | 13.17 | 29.75 | 0.00 | 198 | 306 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5762.07</td> <td>60.12</td> <td>68.30</td> <td>-8.18</td> <td>40.95</td> <td>34.92</td> <td>14.03</td> <td>29.78</td> <td>0.00</td> <td>198 306 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5762.07 | 60.12 | 68.30 | -8.18 | 40.95 | 34.92 | 14.03 | 29.78 | 0.00 | 198 306 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5762.07 | 60.12 | 68.30 | -8.18 | 40.95 | 34.92 | 14.03 | 29.78 | 0.00 | 198 306 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|-------------|--------|--------|-------------|--------|-------|--------|------|--------|---------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full_5610MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11220.00</td> <td>52.11</td> <td>74.00</td> <td>-21.89</td> <td>61.24</td> <td>38.23</td> <td>18.25</td> <td>65.61</td> <td>0.00</td> <td>132</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>2 11220.00</td> <td>44.49</td> <td>54.00</td> <td>-9.51</td> <td>53.59</td> <td>38.24</td> <td>18.26</td> <td>65.60</td> <td>0.00</td> <td>132</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11220.00 | 52.11 | 74.00 | -21.89 | 61.24 | 38.23 | 18.25 | 65.61 | 0.00 | 132 | 185 | PEAK | 2 11220.00 | 44.49 | 54.00 | -9.51 | 53.59 | 38.24 | 18.26 | 65.60 | 0.00 | 132 | 185 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11220.00</td> <td>55.62</td> <td>74.00</td> <td>-18.38</td> <td>64.75</td> <td>38.23</td> <td>18.25</td> <td>65.61</td> <td>0.00</td> <td>223</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2 11220.00</td> <td>45.92</td> <td>54.00</td> <td>-8.08</td> <td>55.02</td> <td>38.24</td> <td>18.26</td> <td>65.60</td> <td>0.00</td> <td>223</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11220.00 | 55.62 | 74.00 | -18.38 | 64.75 | 38.23 | 18.25 | 65.61 | 0.00 | 223 | 0 | PEAK | 2 11220.00 | 45.92 | 54.00 | -8.08 | 55.02 | 38.24 | 18.26 | 65.60 | 0.00 | 223 | 0 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11220.00 | 52.11 | 74.00 | -21.89 | 61.24 | 38.23 | 18.25 | 65.61 | 0.00 | 132 | 185 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11220.00 | 44.49 | 54.00 | -9.51 | 53.59 | 38.24 | 18.26 | 65.60 | 0.00 | 132 | 185 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11220.00 | 55.62 | 74.00 | -18.38 | 64.75 | 38.23 | 18.25 | 65.61 | 0.00 | 223 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11220.00 | 45.92 | 54.00 | -8.08 | 55.02 | 38.24 | 18.26 | 65.60 | 0.00 | 223 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

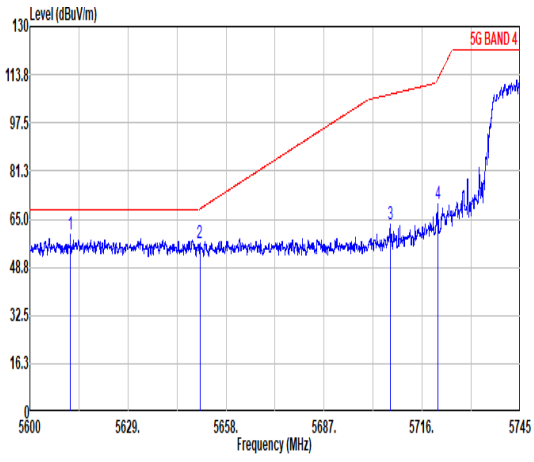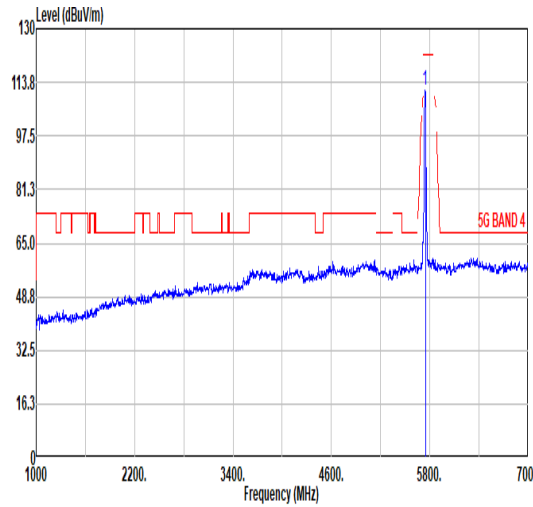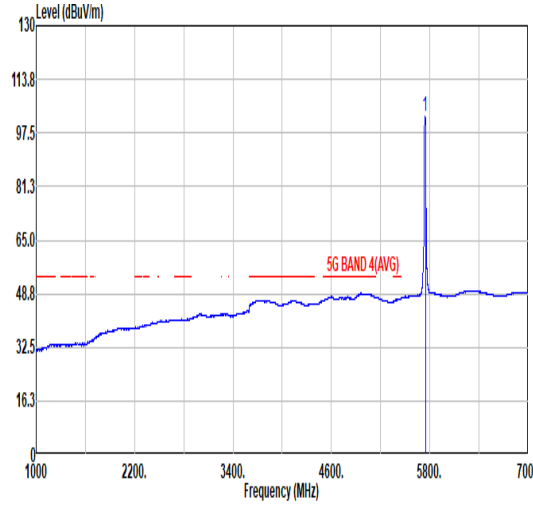

| | 42 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|--|--------|--------|-------------|--------|--------|--------|--------|------|------|---------|-------|-------------|-------------|--------|-------------|-------------|--------|--|--------|--------|-----|--------|--------|--------|------|------|------|----|----|----|-----|-----|---|---------|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|--|--|-------|------|-----|-------|--------|-----|------|------|--|------|-------|-------------|-------|--------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.97</td> <td>59.66</td> <td>68.30</td> <td>-8.64</td> <td>41.61</td> <td>34.62</td> <td>13.19</td> <td>29.76</td> <td>0.00</td> <td>202</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.25</td> <td>56.72</td> <td>68.48</td> <td>-11.76</td> <td>38.49</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>202</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.51</td> <td>63.16</td> <td>107.12</td> <td>-43.96</td> <td>44.63</td> <td>34.79</td> <td>13.54</td> <td>29.80</td> <td>0.00</td> <td>202</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.57</td> <td>69.92</td> <td>112.20</td> <td>-42.28</td> <td>51.22</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>202</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5611.97 | 59.66 | 68.30 | -8.64 | 41.61 | 34.62 | 13.19 | 29.76 | 0.00 | 202 | 155 | PEAK | 2 | 5650.25 | 56.72 | 68.48 | -11.76 | 38.49 | 34.69 | 13.32 | 29.78 | 0.00 | 202 | 155 | PEAK | 3 | 5706.51 | 63.16 | 107.12 | -43.96 | 44.63 | 34.79 | 13.54 | 29.80 | 0.00 | 202 | 155 | PEAK | 4 | 5728.57 | 69.92 | 112.20 | -42.28 | 51.22 | 34.83 | 13.66 | 29.79 | 0.00 | 202 | 155 | PEAK |  <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.16</td> <td>-----</td> <td>-----</td> <td>92.21</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>202</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5745.00 | 111.16 | ----- | ----- | 92.21 | 34.88 | 13.86 | 29.79 | 0.00 | 202 | 155 | PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5611.97 | 59.66 | 68.30 | -8.64 | 41.61 | 34.62 | 13.19 | 29.76 | 0.00 | 202 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.25 | 56.72 | 68.48 | -11.76 | 38.49 | 34.69 | 13.32 | 29.78 | 0.00 | 202 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5706.51 | 63.16 | 107.12 | -43.96 | 44.63 | 34.79 | 13.54 | 29.80 | 0.00 | 202 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5728.57 | 69.92 | 112.20 | -42.28 | 51.22 | 34.83 | 13.66 | 29.79 | 0.00 | 202 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 111.16 | ----- | ----- | 92.21 | 34.88 | 13.86 | 29.79 | 0.00 | 202 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.56</td> <td>-----</td> <td>-----</td> <td>83.61</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>202</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5745.00 | 102.56 | ----- | ----- | 83.61 | 34.88 | 13.86 | 29.79 | 0.00 | 202 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 102.56 | ----- | ----- | 83.61 | 34.88 | 13.86 | 29.79 | 0.00 | 202 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 42 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|---|--------|--------|-------------|--------|--------|--------|--------|------|------|---------|-------|-------------|-------------|--------|-------------|-------------|--------|--|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|--|-------|------|-----|-------|--------|-----|------|------|--|------|-------|-------------|-------|--------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5614.72</td> <td>59.62</td> <td>68.30</td> <td>-8.68</td> <td>41.56</td> <td>34.63</td> <td>13.20</td> <td>29.77</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.54</td> <td>55.89</td> <td>68.70</td> <td>-12.81</td> <td>37.66</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.72</td> <td>58.03</td> <td>105.78</td> <td>-47.75</td> <td>39.55</td> <td>34.78</td> <td>13.50</td> <td>29.80</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.01</td> <td>64.53</td> <td>113.20</td> <td>-48.67</td> <td>45.82</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5614.72 | 59.62 | 68.30 | -8.68 | 41.56 | 34.63 | 13.20 | 29.77 | 0.00 | 300 | 347 | PEAK | 2 | 5650.54 | 55.89 | 68.70 | -12.81 | 37.66 | 34.69 | 13.32 | 29.78 | 0.00 | 300 | 347 | PEAK | 3 | 5701.72 | 58.03 | 105.78 | -47.75 | 39.55 | 34.78 | 13.50 | 29.80 | 0.00 | 300 | 347 | PEAK | 4 | 5721.01 | 64.53 | 113.20 | -48.67 | 45.82 | 34.83 | 13.67 | 29.79 | 0.00 | 300 | 347 | PEAK | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.84</td> <td>-----</td> <td>-----</td> <td>87.89</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5745.00 | 106.84 | ----- | ----- | 87.89 | 34.88 | 13.86 | 29.79 | 0.00 | 300 | 347 | PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5614.72 | 59.62 | 68.30 | -8.68 | 41.56 | 34.63 | 13.20 | 29.77 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.54 | 55.89 | 68.70 | -12.81 | 37.66 | 34.69 | 13.32 | 29.78 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5701.72 | 58.03 | 105.78 | -47.75 | 39.55 | 34.78 | 13.50 | 29.80 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5721.01 | 64.53 | 113.20 | -48.67 | 45.82 | 34.83 | 13.67 | 29.79 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 106.84 | ----- | ----- | 87.89 | 34.88 | 13.86 | 29.79 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>99.75</td> <td>-----</td> <td>-----</td> <td>80.80</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5745.00 | 99.75 | ----- | ----- | 80.80 | 34.88 | 13.86 | 29.79 | 0.00 | 300 | 347 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 99.75 | ----- | ----- | 80.80 | 34.88 | 13.86 | 29.79 | 0.00 | 300 | 347 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 42 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|-------------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|--------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>59.12</td> <td>74.00</td> <td>-14.88</td> <td>67.73</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>239</td> <td>352 PEAK</td> </tr> <tr> <td>2 11490.00</td> <td>49.53</td> <td>54.00</td> <td>-4.47</td> <td>58.12</td> <td>38.40</td> <td>18.46</td> <td>65.45</td> <td>0.00</td> <td>239</td> <td>352 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11490.00 | 59.12 | 74.00 | -14.88 | 67.73 | 38.39 | 18.46 | 65.46 | 0.00 | 239 | 352 PEAK | 2 11490.00 | 49.53 | 54.00 | -4.47 | 58.12 | 38.40 | 18.46 | 65.45 | 0.00 | 239 | 352 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>58.93</td> <td>74.00</td> <td>-15.07</td> <td>67.54</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>230</td> <td>0 PEAK</td> </tr> <tr> <td>2 11490.00</td> <td>48.57</td> <td>54.00</td> <td>-5.43</td> <td>57.16</td> <td>38.40</td> <td>18.46</td> <td>65.45</td> <td>0.00</td> <td>230</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11490.00 | 58.93 | 74.00 | -15.07 | 67.54 | 38.39 | 18.46 | 65.46 | 0.00 | 230 | 0 PEAK | 2 11490.00 | 48.57 | 54.00 | -5.43 | 57.16 | 38.40 | 18.46 | 65.45 | 0.00 | 230 | 0 AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11490.00 | 59.12 | 74.00 | -14.88 | 67.73 | 38.39 | 18.46 | 65.46 | 0.00 | 239 | 352 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11490.00 | 49.53 | 54.00 | -4.47 | 58.12 | 38.40 | 18.46 | 65.45 | 0.00 | 239 | 352 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11490.00 | 58.93 | 74.00 | -15.07 | 67.54 | 38.39 | 18.46 | 65.46 | 0.00 | 230 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11490.00 | 48.57 | 54.00 | -5.43 | 57.16 | 38.40 | 18.46 | 65.45 | 0.00 | 230 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 43 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH157_5785MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>60.24</td> <td>74.00</td> <td>-13.76</td> <td>68.69</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>251</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>50.10</td> <td>54.00</td> <td>-3.90</td> <td>58.55</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>251</td> <td>285</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11570.00 | 60.24 | 74.00 | -13.76 | 68.69 | 38.44 | 18.52 | 65.41 | 0.00 | 251 | 285 | PEAK | 2 | 11570.00 | 50.10 | 54.00 | -3.90 | 58.55 | 38.44 | 18.52 | 65.41 | 0.00 | 251 | 285 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>60.05</td> <td>74.00</td> <td>-13.95</td> <td>68.50</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>354</td> <td>352</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>50.35</td> <td>54.00</td> <td>-3.65</td> <td>58.00</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>354</td> <td>352</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11570.00 | 60.05 | 74.00 | -13.95 | 68.50 | 38.44 | 18.52 | 65.41 | 0.00 | 354 | 352 | PEAK | 2 | 11570.00 | 50.35 | 54.00 | -3.65 | 58.00 | 38.44 | 18.52 | 65.41 | 0.00 | 354 | 352 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 60.24 | 74.00 | -13.76 | 68.69 | 38.44 | 18.52 | 65.41 | 0.00 | 251 | 285 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11570.00 | 50.10 | 54.00 | -3.90 | 58.55 | 38.44 | 18.52 | 65.41 | 0.00 | 251 | 285 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 60.05 | 74.00 | -13.95 | 68.50 | 38.44 | 18.52 | 65.41 | 0.00 | 354 | 352 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11570.00 | 50.35 | 54.00 | -3.65 | 58.00 | 38.44 | 18.52 | 65.41 | 0.00 | 354 | 352 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

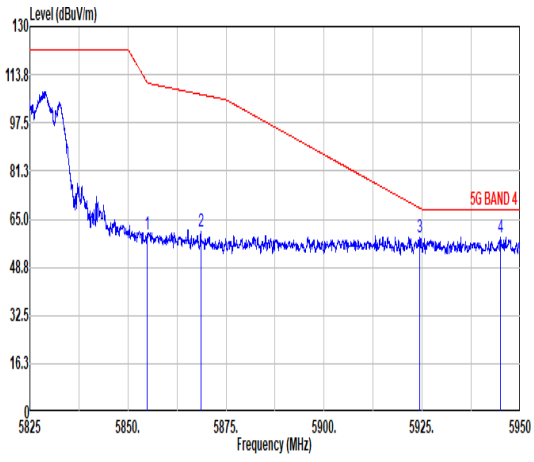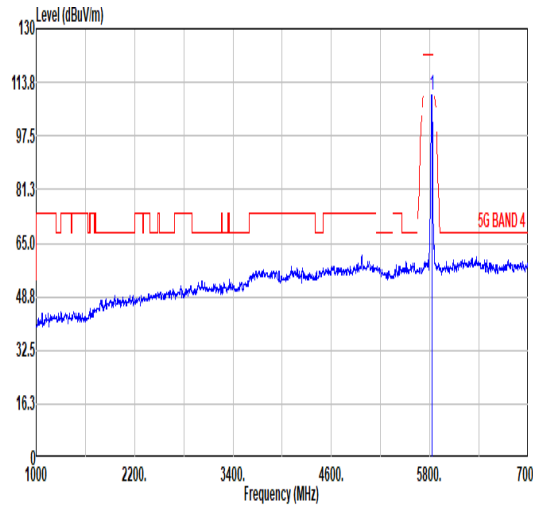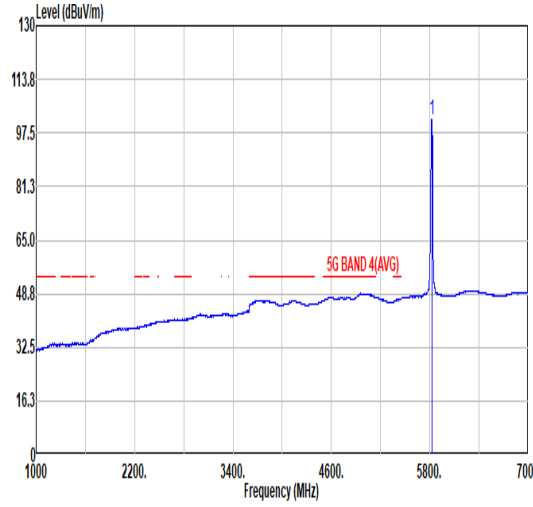

| | 44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|--|--------------|-------------|-------------|--------|--------|--------|--------|------|------|---------|-------|-------------|--------------|--------------|-------------|-------------|--------|--|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|--------|--------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|--|--|-------|------|-----|-------|--------|-----|------|------|--|------|-------|-------------|--------------|-------------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.82</td> <td>59.84</td> <td>111.32</td> <td>-51.48</td> <td>40.53</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.57</td> <td>60.73</td> <td>107.10</td> <td>-46.37</td> <td>41.48</td> <td>35.10</td> <td>13.94</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.44</td> <td>59.05</td> <td>68.71</td> <td>-9.66</td> <td>39.99</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>106</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5944.94</td> <td>58.96</td> <td>68.30</td> <td>-9.34</td> <td>39.93</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> <td>106</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5854.82 | 59.84 | 111.32 | -51.48 | 40.53 | 35.08 | 14.02 | 29.79 | 0.00 | 106 | 302 | PEAK | 2 | 5868.57 | 60.73 | 107.10 | -46.37 | 41.48 | 35.10 | 13.94 | 29.79 | 0.00 | 106 | 302 | PEAK | 3 | 5924.44 | 59.05 | 68.71 | -9.66 | 39.99 | 35.19 | 13.69 | 29.82 | 0.00 | 106 | 302 | PEAK | 4 | 5944.94 | 58.96 | 68.30 | -9.34 | 39.93 | 35.22 | 13.65 | 29.84 | 0.00 | 106 | 302 | PEAK |  <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.05</td> <td>-----</td> <td>-----</td> <td>90.56</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>106</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5825.00 | 110.05 | ----- | ----- | 90.56 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 302 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.82 | 59.84 | 111.32 | -51.48 | 40.53 | 35.08 | 14.02 | 29.79 | 0.00 | 106 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5868.57 | 60.73 | 107.10 | -46.37 | 41.48 | 35.10 | 13.94 | 29.79 | 0.00 | 106 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.44 | 59.05 | 68.71 | -9.66 | 39.99 | 35.19 | 13.69 | 29.82 | 0.00 | 106 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5944.94 | 58.96 | 68.30 | -9.34 | 39.93 | 35.22 | 13.65 | 29.84 | 0.00 | 106 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 110.05 | ----- | ----- | 90.56 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.78</td> <td>-----</td> <td>-----</td> <td>82.29</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>106</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5825.00 | 101.78 | ----- | ----- | 82.29 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 302 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 101.78 | ----- | ----- | 82.29 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 302 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|--|--------|--------|-------------|--------|--------|-------|------|--------|-------------|------|-------|-------------|-------------|--------|-------------|-------------|--------|--------|-----|--------|--------|---------|---------|--------|--------|-------|-------|-------|-------|-------|------|----------|-------------|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|----------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|----------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|----------|--|-------|------|-----|-------|--------|-----|------|------|--|--|------|-------|-------------|-------|--------|-------------|--------|--------|----|-----|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|----------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>58.45</td> <td>110.90</td> <td>-52.45</td> <td>39.14</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>115</td> <td>193 PEAK</td> </tr> <tr> <td>2</td> <td>5874.07</td> <td>59.05</td> <td>105.56</td> <td>-46.51</td> <td>39.83</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>115</td> <td>193 PEAK</td> </tr> <tr> <td>3</td> <td>5924.69</td> <td>58.71</td> <td>68.53</td> <td>-9.82</td> <td>39.65</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>115</td> <td>193 PEAK</td> </tr> <tr> <td>4</td> <td>5939.69</td> <td>58.86</td> <td>68.30</td> <td>-9.44</td> <td>39.83</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>115</td> <td>193 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Factor | cm | deg | Remark | 1 | 5855.00 | 58.45 | 110.90 | -52.45 | 39.14 | 35.08 | 14.02 | 29.79 | 0.00 | 115 | 193 PEAK | 2 | 5874.07 | 59.05 | 105.56 | -46.51 | 39.83 | 35.11 | 13.90 | 29.79 | 0.00 | 115 | 193 PEAK | 3 | 5924.69 | 58.71 | 68.53 | -9.82 | 39.65 | 35.19 | 13.69 | 29.82 | 0.00 | 115 | 193 PEAK | 4 | 5939.69 | 58.86 | 68.30 | -9.44 | 39.83 | 35.21 | 13.66 | 29.84 | 0.00 | 115 | 193 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.24</td> <td>-----</td> <td>-----</td> <td>86.75</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>115</td> <td>193 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Factor | cm | deg | Remark | 1 | 5825.00 | 106.24 | ----- | ----- | 86.75 | 35.03 | 14.24 | 29.78 | 0.00 | 115 | 193 PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5855.00 | 58.45 | 110.90 | -52.45 | 39.14 | 35.08 | 14.02 | 29.79 | 0.00 | 115 | 193 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5874.07 | 59.05 | 105.56 | -46.51 | 39.83 | 35.11 | 13.90 | 29.79 | 0.00 | 115 | 193 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.69 | 58.71 | 68.53 | -9.82 | 39.65 | 35.19 | 13.69 | 29.82 | 0.00 | 115 | 193 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5939.69 | 58.86 | 68.30 | -9.44 | 39.83 | 35.21 | 13.66 | 29.84 | 0.00 | 115 | 193 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 106.24 | ----- | ----- | 86.75 | 35.03 | 14.24 | 29.78 | 0.00 | 115 | 193 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.49</td> <td>-----</td> <td>-----</td> <td>78.00</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>115</td> <td>193 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Factor | cm | deg | Remark | 1 | 5825.00 | 97.49 | ----- | ----- | 78.00 | 35.03 | 14.24 | 29.78 | 0.00 | 115 | 193 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 97.49 | ----- | ----- | 78.00 | 35.03 | 14.24 | 29.78 | 0.00 | 115 | 193 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>60.69</td> <td>74.00</td> <td>-13.31</td> <td>60.99</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>227</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>50.52</td> <td>54.00</td> <td>-3.48</td> <td>50.82</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>227</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11650.00 | 60.69 | 74.00 | -13.31 | 60.99 | 38.49 | 18.58 | 65.37 | 0.00 | 227 | 0 | PEAK | 2 | 11650.00 | 50.52 | 54.00 | -3.48 | 50.82 | 38.49 | 18.58 | 65.37 | 0.00 | 227 | 0 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>60.97</td> <td>74.00</td> <td>-13.03</td> <td>60.27</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>212</td> <td>351</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>50.81</td> <td>54.00</td> <td>-3.19</td> <td>50.11</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>212</td> <td>351</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11650.00 | 60.97 | 74.00 | -13.03 | 60.27 | 38.49 | 18.58 | 65.37 | 0.00 | 212 | 351 | PEAK | 2 | 11650.00 | 50.81 | 54.00 | -3.19 | 50.11 | 38.49 | 18.58 | 65.37 | 0.00 | 212 | 351 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 60.69 | 74.00 | -13.31 | 60.99 | 38.49 | 18.58 | 65.37 | 0.00 | 227 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11650.00 | 50.52 | 54.00 | -3.48 | 50.82 | 38.49 | 18.58 | 65.37 | 0.00 | 227 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 60.97 | 74.00 | -13.03 | 60.27 | 38.49 | 18.58 | 65.37 | 0.00 | 212 | 351 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11650.00 | 50.81 | 54.00 | -3.19 | 50.11 | 38.49 | 18.58 | 65.37 | 0.00 | 212 | 351 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|--|--------|--------|-------------|--------|--------|--------|--------|--------|--------|---------|-------------|-------------|--------|-------------|-------------|--------|-----|-----|---------|---------|--------|--------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.35</td> <td>58.28</td> <td>68.30</td> <td>-10.02</td> <td>40.16</td> <td>34.65</td> <td>13.24</td> <td>29.77</td> <td>0.00</td> <td>113</td> <td>303</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.84</td> <td>57.54</td> <td>69.67</td> <td>-12.13</td> <td>39.31</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>113</td> <td>303</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.85</td> <td>67.35</td> <td>110.86</td> <td>-43.51</td> <td>48.66</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>113</td> <td>303</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.57</td> <td>66.19</td> <td>112.20</td> <td>-46.01</td> <td>47.49</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>113</td> <td>303</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5628.35 | 58.28 | 68.30 | -10.02 | 40.16 | 34.65 | 13.24 | 29.77 | 0.00 | 113 | 303 | PEAK | 2 | 5651.84 | 57.54 | 69.67 | -12.13 | 39.31 | 34.69 | 13.32 | 29.78 | 0.00 | 113 | 303 | PEAK | 3 | 5719.85 | 67.35 | 110.86 | -43.51 | 48.66 | 34.82 | 13.66 | 29.79 | 0.00 | 113 | 303 | PEAK | 4 | 5728.57 | 66.19 | 112.20 | -46.01 | 47.49 | 34.83 | 13.66 | 29.79 | 0.00 | 113 | 303 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.72</td> <td>-----</td> <td>-----</td> <td>91.77</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>113</td> <td>303</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5745.00 | 110.72 | ----- | ----- | 91.77 | 34.88 | 13.86 | 29.79 | 0.00 | 113 | 303 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5628.35 | 58.28 | 68.30 | -10.02 | 40.16 | 34.65 | 13.24 | 29.77 | 0.00 | 113 | 303 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5651.84 | 57.54 | 69.67 | -12.13 | 39.31 | 34.69 | 13.32 | 29.78 | 0.00 | 113 | 303 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5719.85 | 67.35 | 110.86 | -43.51 | 48.66 | 34.82 | 13.66 | 29.79 | 0.00 | 113 | 303 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5728.57 | 66.19 | 112.20 | -46.01 | 47.49 | 34.83 | 13.66 | 29.79 | 0.00 | 113 | 303 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 110.72 | ----- | ----- | 91.77 | 34.88 | 13.86 | 29.79 | 0.00 | 113 | 303 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.06</td> <td>-----</td> <td>-----</td> <td>83.11</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>113</td> <td>303</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5745.00 | 102.06 | ----- | ----- | 83.11 | 34.88 | 13.86 | 29.79 | 0.00 | 113 | 303 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 102.06 | ----- | ----- | 83.11 | 34.88 | 13.86 | 29.79 | 0.00 | 113 | 303 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | 45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|---|--------|--------|-------------|--------|--------|--------|--------|--------|--------|---------|-------------|-------------|--------|-------------|-------------|--------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|--------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5636.91</td> <td>58.10</td> <td>68.30</td> <td>-10.20</td> <td>39.93</td> <td>34.67</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.10</td> <td>56.48</td> <td>68.38</td> <td>-11.90</td> <td>38.25</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.12</td> <td>67.30</td> <td>110.65</td> <td>-43.35</td> <td>48.62</td> <td>34.82</td> <td>13.65</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.86</td> <td>67.60</td> <td>112.87</td> <td>-45.27</td> <td>48.89</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5636.91 | 58.10 | 68.30 | -10.20 | 39.93 | 34.67 | 13.27 | 29.77 | 0.00 | 300 | 347 | PEAK | 2 | 5650.10 | 56.48 | 68.38 | -11.90 | 38.25 | 34.69 | 13.32 | 29.78 | 0.00 | 300 | 347 | PEAK | 3 | 5719.12 | 67.30 | 110.65 | -43.35 | 48.62 | 34.82 | 13.65 | 29.79 | 0.00 | 300 | 347 | PEAK | 4 | 5720.86 | 67.60 | 112.87 | -45.27 | 48.89 | 34.83 | 13.67 | 29.79 | 0.00 | 300 | 347 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.34</td> <td>-----</td> <td>-----</td> <td>85.46</td> <td>34.86</td> <td>13.81</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5745.00 | 104.34 | ----- | ----- | 85.46 | 34.86 | 13.81 | 29.79 | 0.00 | 300 | 347 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5636.91 | 58.10 | 68.30 | -10.20 | 39.93 | 34.67 | 13.27 | 29.77 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.10 | 56.48 | 68.38 | -11.90 | 38.25 | 34.69 | 13.32 | 29.78 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5719.12 | 67.30 | 110.65 | -43.35 | 48.62 | 34.82 | 13.65 | 29.79 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.86 | 67.60 | 112.87 | -45.27 | 48.89 | 34.83 | 13.67 | 29.79 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 104.34 | ----- | ----- | 85.46 | 34.86 | 13.81 | 29.79 | 0.00 | 300 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>97.80</td> <td>-----</td> <td>-----</td> <td>78.85</td> <td>34.88</td> <td>13.86</td> <td>29.79</td> <td>0.00</td> <td>300</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5745.00 | 97.80 | ----- | ----- | 78.85 | 34.88 | 13.86 | 29.79 | 0.00 | 300 | 347 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 97.80 | ----- | ----- | 78.85 | 34.88 | 13.86 | 29.79 | 0.00 | 300 | 347 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|-------------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|--------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-------------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>58.96</td> <td>74.00</td> <td>-15.04</td> <td>67.57</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>214</td> <td>0 PEAK</td> </tr> <tr> <td>2 11490.00</td> <td>49.59</td> <td>54.00</td> <td>-4.41</td> <td>58.18</td> <td>38.40</td> <td>18.46</td> <td>65.45</td> <td>0.00</td> <td>214</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11490.00 | 58.96 | 74.00 | -15.04 | 67.57 | 38.39 | 18.46 | 65.46 | 0.00 | 214 | 0 PEAK | 2 11490.00 | 49.59 | 54.00 | -4.41 | 58.18 | 38.40 | 18.46 | 65.45 | 0.00 | 214 | 0 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>59.77</td> <td>74.00</td> <td>-14.23</td> <td>68.38</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> <td>0.00</td> <td>193</td> <td>355 PEAK</td> </tr> <tr> <td>2 11490.00</td> <td>48.84</td> <td>54.00</td> <td>-5.16</td> <td>57.43</td> <td>38.40</td> <td>18.46</td> <td>65.45</td> <td>0.00</td> <td>193</td> <td>355 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11490.00 | 59.77 | 74.00 | -14.23 | 68.38 | 38.39 | 18.46 | 65.46 | 0.00 | 193 | 355 PEAK | 2 11490.00 | 48.84 | 54.00 | -5.16 | 57.43 | 38.40 | 18.46 | 65.45 | 0.00 | 193 | 355 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11490.00 | 58.96 | 74.00 | -15.04 | 67.57 | 38.39 | 18.46 | 65.46 | 0.00 | 214 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11490.00 | 49.59 | 54.00 | -4.41 | 58.18 | 38.40 | 18.46 | 65.45 | 0.00 | 214 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11490.00 | 59.77 | 74.00 | -14.23 | 68.38 | 38.39 | 18.46 | 65.46 | 0.00 | 193 | 355 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 11490.00 | 48.84 | 54.00 | -5.16 | 57.43 | 38.40 | 18.46 | 65.45 | 0.00 | 193 | 355 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 46 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>56.87</td> <td>74.00</td> <td>-17.13</td> <td>65.32</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>225</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>48.69</td> <td>54.00</td> <td>-5.31</td> <td>57.14</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>225</td> <td>347</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11570.00 | 56.87 | 74.00 | -17.13 | 65.32 | 38.44 | 18.52 | 65.41 | 0.00 | 225 | 347 | PEAK | 2 | 11570.00 | 48.69 | 54.00 | -5.31 | 57.14 | 38.44 | 18.52 | 65.41 | 0.00 | 225 | 347 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>59.17</td> <td>74.00</td> <td>-14.83</td> <td>67.62</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>198</td> <td>356</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>49.71</td> <td>54.00</td> <td>-4.29</td> <td>58.16</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> <td>198</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11570.00 | 59.17 | 74.00 | -14.83 | 67.62 | 38.44 | 18.52 | 65.41 | 0.00 | 198 | 356 | PEAK | 2 | 11570.00 | 49.71 | 54.00 | -4.29 | 58.16 | 38.44 | 18.52 | 65.41 | 0.00 | 198 | 356 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 56.87 | 74.00 | -17.13 | 65.32 | 38.44 | 18.52 | 65.41 | 0.00 | 225 | 347 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11570.00 | 48.69 | 54.00 | -5.31 | 57.14 | 38.44 | 18.52 | 65.41 | 0.00 | 225 | 347 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 59.17 | 74.00 | -14.83 | 67.62 | 38.44 | 18.52 | 65.41 | 0.00 | 198 | 356 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11570.00 | 49.71 | 54.00 | -4.29 | 58.16 | 38.44 | 18.52 | 65.41 | 0.00 | 198 | 356 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

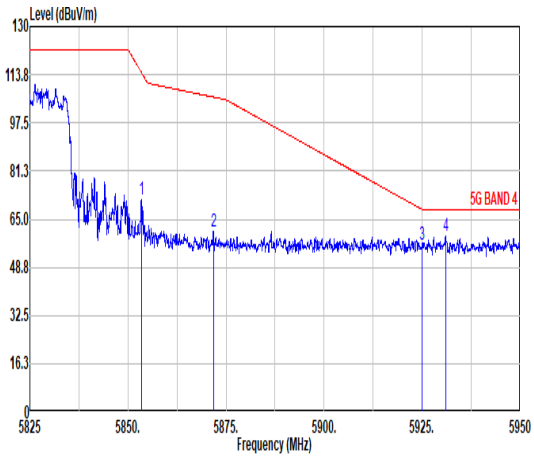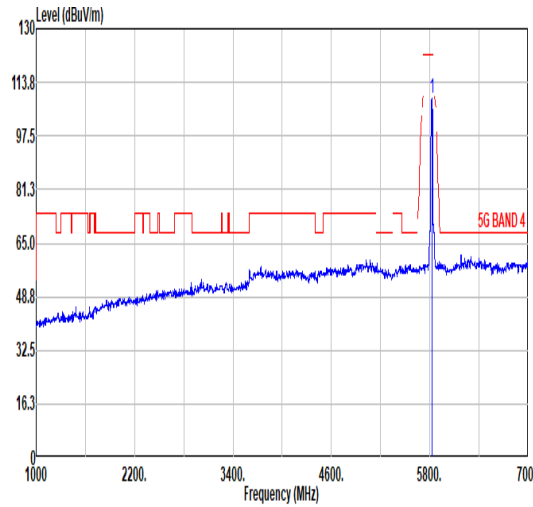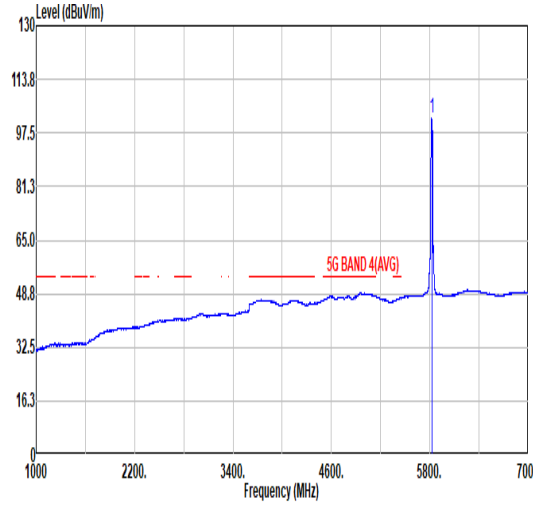

| Mode | 47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|---|--------|--------|-------------|--------|--------|--------|--------|--------|--------|---------|-------------|-------------|--------|-------------|-------------|--------|-----|-----|---------|---------|--------|--------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.44</td> <td>71.46</td> <td>114.45</td> <td>-42.99</td> <td>52.14</td> <td>35.08</td> <td>14.83</td> <td>29.79</td> <td>0.00</td> <td>118</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.80</td> <td>60.83</td> <td>106.19</td> <td>-45.36</td> <td>41.59</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>118</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>56.65</td> <td>68.30</td> <td>-11.65</td> <td>37.59</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>118</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.94</td> <td>59.41</td> <td>68.30</td> <td>-8.89</td> <td>40.36</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>118</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5853.44 | 71.46 | 114.45 | -42.99 | 52.14 | 35.08 | 14.83 | 29.79 | 0.00 | 118 | 304 | PEAK | 2 | 5871.80 | 60.83 | 106.19 | -45.36 | 41.59 | 35.11 | 13.92 | 29.79 | 0.00 | 118 | 304 | PEAK | 3 | 5925.00 | 56.65 | 68.30 | -11.65 | 37.59 | 35.19 | 13.69 | 29.82 | 0.00 | 118 | 304 | PEAK | 4 | 5938.94 | 59.41 | 68.30 | -8.89 | 40.36 | 35.20 | 13.68 | 29.83 | 0.00 | 118 | 304 | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.80</td> <td>-----</td> <td>-----</td> <td>89.34</td> <td>35.04</td> <td>14.20</td> <td>29.78</td> <td>0.00</td> <td>118</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5825.00 | 108.80 | ----- | ----- | 89.34 | 35.04 | 14.20 | 29.78 | 0.00 | 118 | 304 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5853.44 | 71.46 | 114.45 | -42.99 | 52.14 | 35.08 | 14.83 | 29.79 | 0.00 | 118 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5871.80 | 60.83 | 106.19 | -45.36 | 41.59 | 35.11 | 13.92 | 29.79 | 0.00 | 118 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5925.00 | 56.65 | 68.30 | -11.65 | 37.59 | 35.19 | 13.69 | 29.82 | 0.00 | 118 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5938.94 | 59.41 | 68.30 | -8.89 | 40.36 | 35.20 | 13.68 | 29.83 | 0.00 | 118 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 108.80 | ----- | ----- | 89.34 | 35.04 | 14.20 | 29.78 | 0.00 | 118 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.83</td> <td>-----</td> <td>-----</td> <td>82.34</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>118</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5825.00 | 101.83 | ----- | ----- | 82.34 | 35.03 | 14.24 | 29.78 | 0.00 | 118 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 101.83 | ----- | ----- | 82.34 | 35.03 | 14.24 | 29.78 | 0.00 | 118 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|--|--------------|-------------|--------|--------|--------|--------|--------|--------|--------|---------|-------------|--------------|--------------|-------------|--------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|--------|--------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.32</td> <td>65.73</td> <td>117.02</td> <td>-51.29</td> <td>46.40</td> <td>35.08</td> <td>14.04</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>193</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.07</td> <td>59.27</td> <td>106.68</td> <td>-47.41</td> <td>40.02</td> <td>35.11</td> <td>13.93</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>193</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.32</td> <td>57.32</td> <td>68.80</td> <td>-11.48</td> <td>38.26</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>106</td> <td>193</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5937.82</td> <td>60.38</td> <td>68.30</td> <td>-7.92</td> <td>41.33</td> <td>35.21</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>106</td> <td>193</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5852.32 | 65.73 | 117.02 | -51.29 | 46.40 | 35.08 | 14.04 | 29.79 | 0.00 | 106 | 193 | PEAK | 2 | 5870.07 | 59.27 | 106.68 | -47.41 | 40.02 | 35.11 | 13.93 | 29.79 | 0.00 | 106 | 193 | PEAK | 3 | 5924.32 | 57.32 | 68.80 | -11.48 | 38.26 | 35.19 | 13.69 | 29.82 | 0.00 | 106 | 193 | PEAK | 4 | 5937.82 | 60.38 | 68.30 | -7.92 | 41.33 | 35.21 | 13.67 | 29.83 | 0.00 | 106 | 193 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>105.18</td> <td>-----</td> <td>-----</td> <td>85.69</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>106</td> <td>193</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5825.00 | 105.18 | ----- | ----- | 85.69 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 193 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5852.32 | 65.73 | 117.02 | -51.29 | 46.40 | 35.08 | 14.04 | 29.79 | 0.00 | 106 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5870.07 | 59.27 | 106.68 | -47.41 | 40.02 | 35.11 | 13.93 | 29.79 | 0.00 | 106 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.32 | 57.32 | 68.80 | -11.48 | 38.26 | 35.19 | 13.69 | 29.82 | 0.00 | 106 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5937.82 | 60.38 | 68.30 | -7.92 | 41.33 | 35.21 | 13.67 | 29.83 | 0.00 | 106 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 105.18 | ----- | ----- | 85.69 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 193 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.77</td> <td>-----</td> <td>-----</td> <td>78.28</td> <td>35.03</td> <td>14.24</td> <td>29.78</td> <td>0.00</td> <td>106</td> <td>193</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5825.00 | 97.77 | ----- | ----- | 78.28 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 193 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 97.77 | ----- | ----- | 78.28 | 35.03 | 14.24 | 29.78 | 0.00 | 106 | 193 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>59.01</td> <td>74.00</td> <td>-14.99</td> <td>67.31</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>216</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>50.53</td> <td>54.00</td> <td>-3.47</td> <td>58.83</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>216</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11650.00 | 59.01 | 74.00 | -14.99 | 67.31 | 38.49 | 18.58 | 65.37 | 0.00 | 216 | 0 | PEAK | 2 | 11650.00 | 50.53 | 54.00 | -3.47 | 58.83 | 38.49 | 18.58 | 65.37 | 0.00 | 216 | 0 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>59.26</td> <td>74.00</td> <td>-14.74</td> <td>67.56</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>203</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>50.58</td> <td>54.00</td> <td>-3.42</td> <td>58.88</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>203</td> <td>355</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11650.00 | 59.26 | 74.00 | -14.74 | 67.56 | 38.49 | 18.58 | 65.37 | 0.00 | 203 | 355 | PEAK | 2 | 11650.00 | 50.58 | 54.00 | -3.42 | 58.88 | 38.49 | 18.58 | 65.37 | 0.00 | 203 | 355 |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 59.01 | 74.00 | -14.99 | 67.31 | 38.49 | 18.58 | 65.37 | 0.00 | 216 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11650.00 | 50.53 | 54.00 | -3.47 | 58.83 | 38.49 | 18.58 | 65.37 | 0.00 | 216 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 59.26 | 74.00 | -14.74 | 67.56 | 38.49 | 18.58 | 65.37 | 0.00 | 203 | 355 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11650.00 | 50.58 | 54.00 | -3.42 | 58.88 | 38.49 | 18.58 | 65.37 | 0.00 | 203 | 355 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

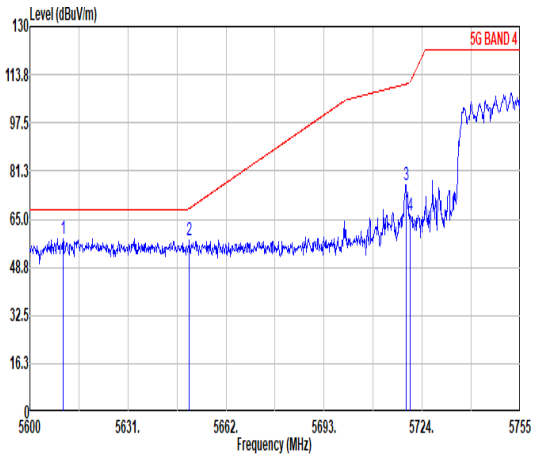
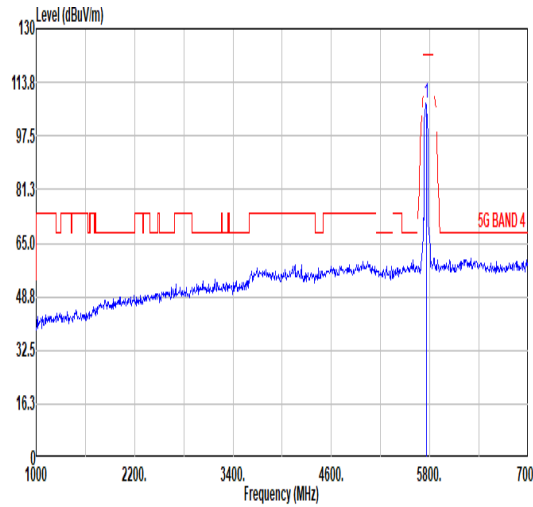
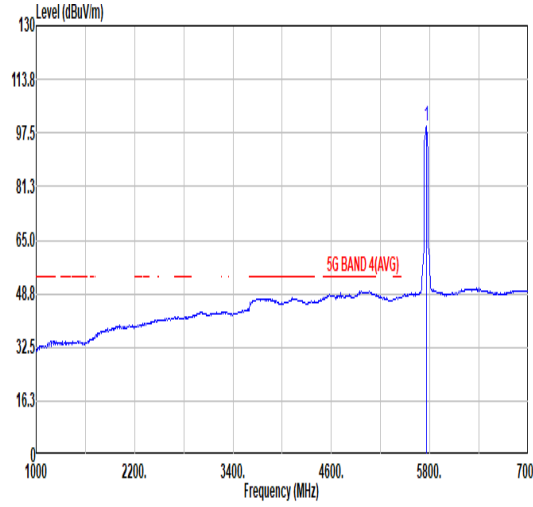


| | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|---|--------|--------|--------|-------|--------|--------|--------|------|--------|---------|---------|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|--|--|-------|------|-----|-------|--------|-----|------|------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5610.54</th> <th>58.53</th> <th>68.30</th> <th>-9.77</th> <th>40.49</th> <th>34.62</th> <th>13.18</th> <th>29.76</th> <th>0.00</th> <th>101</th> <th>301</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>5650.38</td> <td>57.68</td> <td>68.58</td> <td>-10.90</td> <td>39.45</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.89</td> <td>76.71</td> <td>110.59</td> <td>-33.88</td> <td>58.03</td> <td>34.82</td> <td>13.65</td> <td>29.79</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.28</td> <td>66.15</td> <td>111.54</td> <td>-45.39</td> <td>47.46</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | 1 | 5610.54 | 58.53 | 68.30 | -9.77 | 40.49 | 34.62 | 13.18 | 29.76 | 0.00 | 101 | 301 | PEAK | 2 | 5650.38 | 57.68 | 68.58 | -10.90 | 39.45 | 34.69 | 13.32 | 29.78 | 0.00 | 101 | 301 | PEAK | 3 | 5718.89 | 76.71 | 110.59 | -33.88 | 58.03 | 34.82 | 13.65 | 29.79 | 0.00 | 101 | 301 | PEAK | 4 | 5728.28 | 66.15 | 111.54 | -45.39 | 47.46 | 34.82 | 13.66 | 29.79 | 0.00 | 101 | 301 | PEAK |  <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5755.00</th> <th>107.48</th> <th>-----</th> <th>-----</th> <th>88.43</th> <th>34.89</th> <th>13.94</th> <th>29.78</th> <th>0.00</th> <th>101</th> <th>301</th> <th>PEAK</th> </tr> </thead> <tbody> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | 1 | 5755.00 | 107.48 | ----- | ----- | 88.43 | 34.89 | 13.94 | 29.78 | 0.00 | 101 | 301 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5610.54 | 58.53 | 68.30 | -9.77 | 40.49 | 34.62 | 13.18 | 29.76 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.38 | 57.68 | 68.58 | -10.90 | 39.45 | 34.69 | 13.32 | 29.78 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5718.89 | 76.71 | 110.59 | -33.88 | 58.03 | 34.82 | 13.65 | 29.79 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5728.28 | 66.15 | 111.54 | -45.39 | 47.46 | 34.82 | 13.66 | 29.79 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 107.48 | ----- | ----- | 88.43 | 34.89 | 13.94 | 29.78 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5755.00</th> <th>99.52</th> <th>-----</th> <th>-----</th> <th>80.39</th> <th>34.91</th> <th>14.00</th> <th>29.78</th> <th>0.00</th> <th>101</th> <th>301</th> <th>AVERAGE</th> </tr> </thead> <tbody> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | 1 | 5755.00 | 99.52 | ----- | ----- | 80.39 | 34.91 | 14.00 | 29.78 | 0.00 | 101 | 301 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 99.52 | ----- | ----- | 80.39 | 34.91 | 14.00 | 29.78 | 0.00 | 101 | 301 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|-------------|--------|-------|--------|------|--------|------|-------|-------------|-------|--------|-------------|--------|----|-----|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>56.99</td> <td>111.71</td> <td>-54.72</td> <td>37.67</td> <td>35.08</td> <td>14.83</td> <td>29.79</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.69</td> <td>59.98</td> <td>107.07</td> <td>-47.09</td> <td>40.73</td> <td>35.10</td> <td>13.94</td> <td>29.79</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.26</td> <td>56.98</td> <td>68.85</td> <td>-11.87</td> <td>37.92</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.62</td> <td>58.69</td> <td>68.30</td> <td>-9.61</td> <td>39.64</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>101</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | 1 | 5854.65 | 56.99 | 111.71 | -54.72 | 37.67 | 35.08 | 14.83 | 29.79 | 0.00 | 101 | 301 | PEAK | 2 | 5868.69 | 59.98 | 107.07 | -47.09 | 40.73 | 35.10 | 13.94 | 29.79 | 0.00 | 101 | 301 | PEAK | 3 | 5924.26 | 56.98 | 68.85 | -11.87 | 37.92 | 35.19 | 13.69 | 29.82 | 0.00 | 101 | 301 | PEAK | 4 | 5933.62 | 58.69 | 68.30 | -9.61 | 39.64 | 35.20 | 13.68 | 29.83 | 0.00 | 101 | 301 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.65 | 56.99 | 111.71 | -54.72 | 37.67 | 35.08 | 14.83 | 29.79 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5868.69 | 59.98 | 107.07 | -47.09 | 40.73 | 35.10 | 13.94 | 29.79 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.26 | 56.98 | 68.85 | -11.87 | 37.92 | 35.19 | 13.69 | 29.82 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5933.62 | 58.69 | 68.30 | -9.61 | 39.64 | 35.20 | 13.68 | 29.83 | 0.00 | 101 | 301 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

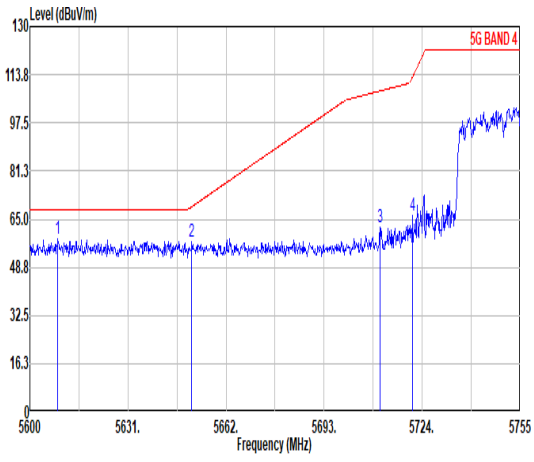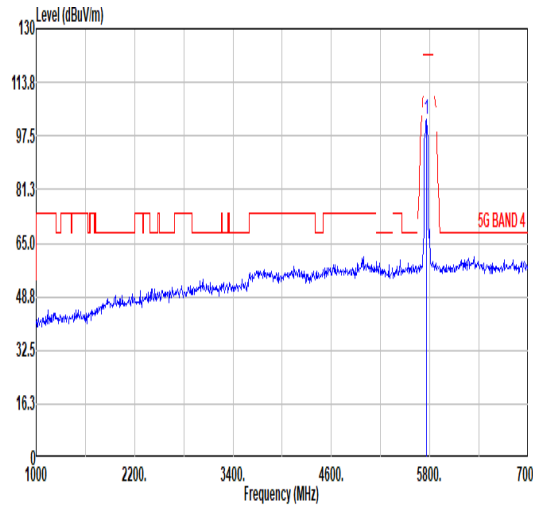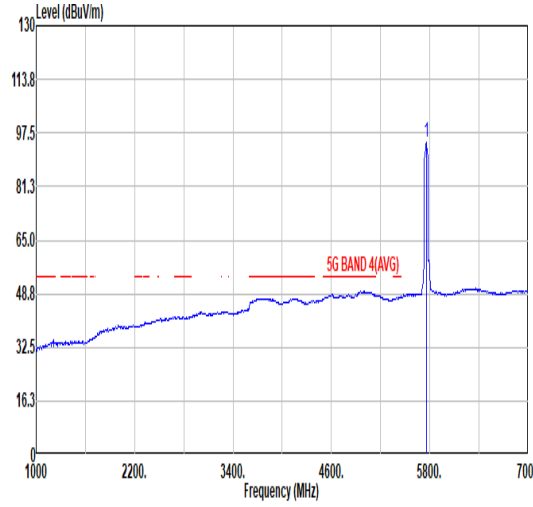

| | | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|---|--------|--------|-------------|--------|--------|-------|--------|------|------|---------|-------|-------------|-------|-------------|-------------|--------|-------------|--------|--------|--|--------|--------|--------|--------|--------|------|------|------|----|----|-----|----|-----|---------|-------|---------|--------|-------|-------|-------|-------|-------|-------|------|------|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|---|------|--|--|-------|------|-----|-------|--------|-----|------|------|--|------|-------|-------------|-------|--------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|---|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5608.84</td> <td>58.24</td> <td>68.30</td> <td>-10.06</td> <td>40.20</td> <td>34.62</td> <td>13.18</td> <td>29.76</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.15</td> <td>57.40</td> <td>69.15</td> <td>-11.75</td> <td>39.17</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5710.67</td> <td>62.48</td> <td>108.29</td> <td>-45.81</td> <td>43.91</td> <td>34.80</td> <td>13.57</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.90</td> <td>66.41</td> <td>112.95</td> <td>-46.54</td> <td>47.70</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5608.84 | 58.24 | 68.30 | -10.06 | 40.20 | 34.62 | 13.18 | 29.76 | 0.00 | 100 | 0 | PEAK | 2 | 5651.15 | 57.40 | 69.15 | -11.75 | 39.17 | 34.69 | 13.32 | 29.78 | 0.00 | 100 | 0 | PEAK | 3 | 5710.67 | 62.48 | 108.29 | -45.81 | 43.91 | 34.80 | 13.57 | 29.80 | 0.00 | 100 | 0 | PEAK | 4 | 5728.90 | 66.41 | 112.95 | -46.54 | 47.70 | 34.83 | 13.67 | 29.79 | 0.00 | 100 | 0 | PEAK |  <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>102.74</td> <td>-----</td> <td>-----</td> <td>83.61</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5755.00 | 102.74 | ----- | ----- | 83.61 | 34.91 | 14.00 | 29.78 | 0.00 | 100 | 0 | PEAK |
| | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5608.84 | 58.24 | 68.30 | -10.06 | 40.20 | 34.62 | 13.18 | 29.76 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5651.15 | 57.40 | 69.15 | -11.75 | 39.17 | 34.69 | 13.32 | 29.78 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5710.67 | 62.48 | 108.29 | -45.81 | 43.91 | 34.80 | 13.57 | 29.80 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5728.90 | 66.41 | 112.95 | -46.54 | 47.70 | 34.83 | 13.67 | 29.79 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 102.74 | ----- | ----- | 83.61 | 34.91 | 14.00 | 29.78 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.78</td> <td>-----</td> <td>-----</td> <td>75.65</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | 1 | 5755.00 | 94.78 | ----- | ----- | 75.65 | 34.91 | 14.00 | 29.78 | 0.00 | 100 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 94.78 | ----- | ----- | 75.65 | 34.91 | 14.00 | 29.78 | 0.00 | 100 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|--------|---|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>59.44</td> <td>112.15</td> <td>-52.71</td> <td>40.12</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.54</td> <td>58.44</td> <td>105.43</td> <td>-46.99</td> <td>39.22</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>55.99</td> <td>68.56</td> <td>-12.57</td> <td>36.93</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5947.27</td> <td>60.30</td> <td>68.30</td> <td>-8.00</td> <td>41.27</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5854.45 | 59.44 | 112.15 | -52.71 | 40.12 | 35.08 | 14.03 | 29.79 | 0.00 | 100 | 0 | PEAK | 2 | 5874.54 | 58.44 | 105.43 | -46.99 | 39.22 | 35.11 | 13.90 | 29.79 | 0.00 | 100 | 0 | PEAK | 3 | 5924.65 | 55.99 | 68.56 | -12.57 | 36.93 | 35.19 | 13.69 | 29.82 | 0.00 | 100 | 0 | PEAK | 4 | 5947.27 | 60.30 | 68.30 | -8.00 | 41.27 | 35.22 | 13.65 | 29.84 | 0.00 | 100 | 0 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.45 | 59.44 | 112.15 | -52.71 | 40.12 | 35.08 | 14.03 | 29.79 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5874.54 | 58.44 | 105.43 | -46.99 | 39.22 | 35.11 | 13.90 | 29.79 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.65 | 55.99 | 68.56 | -12.57 | 36.93 | 35.19 | 13.69 | 29.82 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5947.27 | 60.30 | 68.30 | -8.00 | 41.27 | 35.22 | 13.65 | 29.84 | 0.00 | 100 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>56.15</td> <td>74.00</td> <td>-17.85</td> <td>64.71</td> <td>38.41</td> <td>18.47</td> <td>65.44</td> <td>0.00</td> <td>219</td> <td>359</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>47.47</td> <td>54.00</td> <td>-6.53</td> <td>56.02</td> <td>38.41</td> <td>18.48</td> <td>65.44</td> <td>0.00</td> <td>219</td> <td>359</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11510.00 | 56.15 | 74.00 | -17.85 | 64.71 | 38.41 | 18.47 | 65.44 | 0.00 | 219 | 359 | PEAK | 2 | 11510.00 | 47.47 | 54.00 | -6.53 | 56.02 | 38.41 | 18.48 | 65.44 | 0.00 | 219 | 359 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>60.00</td> <td>74.00</td> <td>-14.00</td> <td>68.56</td> <td>38.41</td> <td>18.47</td> <td>65.44</td> <td>0.00</td> <td>212</td> <td>8</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>49.00</td> <td>54.00</td> <td>-5.00</td> <td>57.58</td> <td>38.40</td> <td>18.47</td> <td>65.45</td> <td>0.00</td> <td>212</td> <td>8</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11510.00 | 60.00 | 74.00 | -14.00 | 68.56 | 38.41 | 18.47 | 65.44 | 0.00 | 212 | 8 | PEAK | 2 | 11510.00 | 49.00 | 54.00 | -5.00 | 57.58 | 38.40 | 18.47 | 65.45 | 0.00 | 212 | 8 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11510.00 | 56.15 | 74.00 | -17.85 | 64.71 | 38.41 | 18.47 | 65.44 | 0.00 | 219 | 359 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11510.00 | 47.47 | 54.00 | -6.53 | 56.02 | 38.41 | 18.48 | 65.44 | 0.00 | 219 | 359 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11510.00 | 60.00 | 74.00 | -14.00 | 68.56 | 38.41 | 18.47 | 65.44 | 0.00 | 212 | 8 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11510.00 | 49.00 | 54.00 | -5.00 | 57.58 | 38.40 | 18.47 | 65.45 | 0.00 | 212 | 8 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| | 49 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|---|--------|--------|-------------|--------|--------|--------|------|--------|--------|---------|-------------|-------------|--------|-------------|-------------|--------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.90</td> <td>59.17</td> <td>68.30</td> <td>-9.13</td> <td>41.12</td> <td>34.62</td> <td>13.19</td> <td>29.76</td> <td>0.00</td> <td>103</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>57.22</td> <td>68.68</td> <td>-11.46</td> <td>38.99</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>103</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.23</td> <td>57.15</td> <td>105.36</td> <td>-48.21</td> <td>38.69</td> <td>34.78</td> <td>13.48</td> <td>29.00</td> <td>0.00</td> <td>103</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.90</td> <td>56.52</td> <td>112.95</td> <td>-56.43</td> <td>37.81</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>103</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5611.90 | 59.17 | 68.30 | -9.13 | 41.12 | 34.62 | 13.19 | 29.76 | 0.00 | 103 | 302 | PEAK | 2 | 5650.51 | 57.22 | 68.68 | -11.46 | 38.99 | 34.69 | 13.32 | 29.78 | 0.00 | 103 | 302 | PEAK | 3 | 5700.23 | 57.15 | 105.36 | -48.21 | 38.69 | 34.78 | 13.48 | 29.00 | 0.00 | 103 | 302 | PEAK | 4 | 5720.90 | 56.52 | 112.95 | -56.43 | 37.81 | 34.83 | 13.67 | 29.79 | 0.00 | 103 | 302 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>105.57</td> <td>-----</td> <td>-----</td> <td>86.11</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>103</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5795.00 | 105.57 | ----- | ----- | 86.11 | 34.97 | 14.26 | 29.77 | 0.00 | 103 | 302 | PEAK |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5611.90 | 59.17 | 68.30 | -9.13 | 41.12 | 34.62 | 13.19 | 29.76 | 0.00 | 103 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.51 | 57.22 | 68.68 | -11.46 | 38.99 | 34.69 | 13.32 | 29.78 | 0.00 | 103 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5700.23 | 57.15 | 105.36 | -48.21 | 38.69 | 34.78 | 13.48 | 29.00 | 0.00 | 103 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.90 | 56.52 | 112.95 | -56.43 | 37.81 | 34.83 | 13.67 | 29.79 | 0.00 | 103 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5795.00 | 105.57 | ----- | ----- | 86.11 | 34.97 | 14.26 | 29.77 | 0.00 | 103 | 302 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>97.69</td> <td>-----</td> <td>-----</td> <td>78.15</td> <td>34.99</td> <td>14.32</td> <td>29.77</td> <td>0.00</td> <td>103</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5795.00 | 97.69 | ----- | ----- | 78.15 | 34.99 | 14.32 | 29.77 | 0.00 | 103 | 302 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5795.00 | 97.69 | ----- | ----- | 78.15 | 34.99 | 14.32 | 29.77 | 0.00 | 103 | 302 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 49 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------|--------|--------|--------|--------|--------|--------------|--------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|--------|--------|-------|-------|-------|-------|------|--------------|-----------|-------|--------|--------|-------|-------|-------|-------|------|--------------|-----------|-------|-------|--------|-------|-------|-------|-------|------|--------------|-----------|-------|-------|-------|-------|-------|-------|-------|------|--------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.99</td> <td>58.63</td> <td>110.93</td> <td>-52.30</td> <td>39.32</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>103 302 PEAK</td> </tr> <tr> <td>2 5874.98</td> <td>58.98</td> <td>105.31</td> <td>-46.33</td> <td>39.76</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>103 302 PEAK</td> </tr> <tr> <td>3 5923.65</td> <td>57.47</td> <td>69.29</td> <td>-11.82</td> <td>38.40</td> <td>35.19</td> <td>13.70</td> <td>29.82</td> <td>0.00</td> <td>103 302 PEAK</td> </tr> <tr> <td>4 5933.42</td> <td>59.12</td> <td>68.30</td> <td>-9.18</td> <td>40.07</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>103 302 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5854.99 | 58.63 | 110.93 | -52.30 | 39.32 | 35.08 | 14.02 | 29.79 | 0.00 | 103 302 PEAK | 2 5874.98 | 58.98 | 105.31 | -46.33 | 39.76 | 35.11 | 13.90 | 29.79 | 0.00 | 103 302 PEAK | 3 5923.65 | 57.47 | 69.29 | -11.82 | 38.40 | 35.19 | 13.70 | 29.82 | 0.00 | 103 302 PEAK | 4 5933.42 | 59.12 | 68.30 | -9.18 | 40.07 | 35.20 | 13.68 | 29.83 | 0.00 | 103 302 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5854.99 | 58.63 | 110.93 | -52.30 | 39.32 | 35.08 | 14.02 | 29.79 | 0.00 | 103 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5874.98 | 58.98 | 105.31 | -46.33 | 39.76 | 35.11 | 13.90 | 29.79 | 0.00 | 103 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5923.65 | 57.47 | 69.29 | -11.82 | 38.40 | 35.19 | 13.70 | 29.82 | 0.00 | 103 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5933.42 | 59.12 | 68.30 | -9.18 | 40.07 | 35.20 | 13.68 | 29.83 | 0.00 | 103 302 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

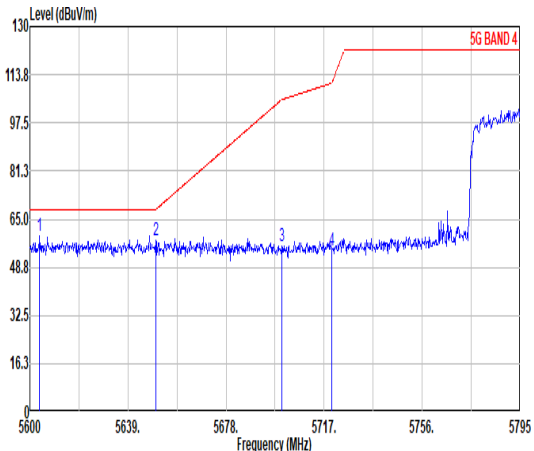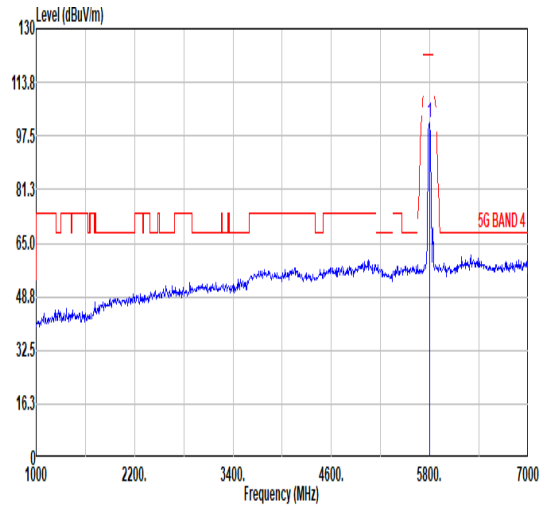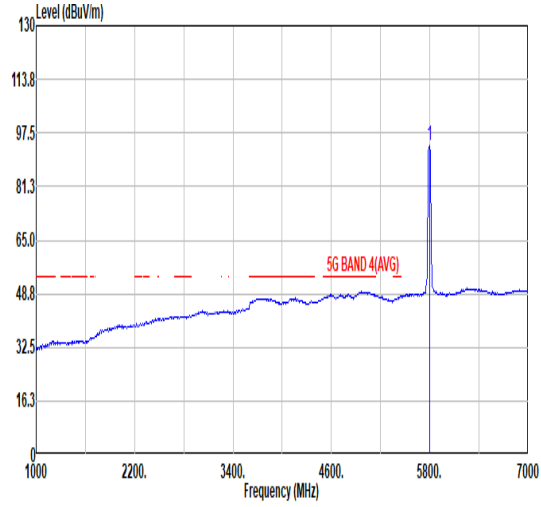

| | | 49 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--------------------|--|--------|-------------|--------|-------|--------|--------|------|-----------|------|------|-------|-------------|-------------|--------|-------------|-------------|--------|--|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|------|--------|-----------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|--------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|--------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|--------|--|--|-------|------|-----|-------|--------|-----|------|------|--|------|-------|-------------|-------|--------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5603.90</td> <td>59.42</td> <td>68.30</td> <td>-8.88</td> <td>41.41</td> <td>34.61</td> <td>13.16</td> <td>29.76</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> <tr> <td>2</td> <td>5650.12</td> <td>57.87</td> <td>68.39</td> <td>-10.52</td> <td>39.64</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> <tr> <td>3</td> <td>5700.04</td> <td>55.78</td> <td>105.31</td> <td>-49.53</td> <td>37.32</td> <td>34.78</td> <td>13.48</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>54.65</td> <td>111.17</td> <td>-56.52</td> <td>35.96</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> </tbody> </table> | | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5603.90 | 59.42 | 68.30 | -8.88 | 41.41 | 34.61 | 13.16 | 29.76 | 0.00 | 100 | 1 PEAK | 2 | 5650.12 | 57.87 | 68.39 | -10.52 | 39.64 | 34.69 | 13.32 | 29.78 | 0.00 | 100 | 1 PEAK | 3 | 5700.04 | 55.78 | 105.31 | -49.53 | 37.32 | 34.78 | 13.48 | 29.80 | 0.00 | 100 | 1 PEAK | 4 | 5720.12 | 54.65 | 111.17 | -56.52 | 35.96 | 34.82 | 13.66 | 29.79 | 0.00 | 100 | 1 PEAK | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>101.50</td> <td>-----</td> <td>-----</td> <td>81.96</td> <td>34.99</td> <td>14.32</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5795.00 | 101.50 | ----- | ----- | 81.96 | 34.99 | 14.32 | 29.77 | 0.00 | 100 |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5603.90 | 59.42 | 68.30 | -8.88 | 41.41 | 34.61 | 13.16 | 29.76 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.12 | 57.87 | 68.39 | -10.52 | 39.64 | 34.69 | 13.32 | 29.78 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5700.04 | 55.78 | 105.31 | -49.53 | 37.32 | 34.78 | 13.48 | 29.80 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.12 | 54.65 | 111.17 | -56.52 | 35.96 | 34.82 | 13.66 | 29.79 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5795.00 | 101.50 | ----- | ----- | 81.96 | 34.99 | 14.32 | 29.77 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>93.65</td> <td>-----</td> <td>-----</td> <td>74.11</td> <td>34.99</td> <td>14.32</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>1 AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5795.00 | 93.65 | ----- | ----- | 74.11 | 34.99 | 14.32 | 29.77 | 0.00 | 100 | 1 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5795.00 | 93.65 | ----- | ----- | 74.11 | 34.99 | 14.32 | 29.77 | 0.00 | 100 | 1 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 49 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------|--------|--------|--------|--------|--------|------|--------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|--------|--------|-------|-------|-------|-------|------|-----|--------|-----------|-------|--------|--------|-------|-------|-------|-------|------|-----|--------|-----------|-------|-------|--------|-------|-------|-------|-------|------|-----|--------|-----------|-------|-------|-------|-------|-------|-------|-------|------|-----|--------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.52</td> <td>58.07</td> <td>111.99</td> <td>-53.92</td> <td>38.75</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> <tr> <td>2 5871.88</td> <td>59.12</td> <td>106.17</td> <td>-47.05</td> <td>39.88</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> <tr> <td>3 5923.81</td> <td>56.64</td> <td>69.18</td> <td>-12.54</td> <td>37.58</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> <tr> <td>4 5948.70</td> <td>59.24</td> <td>68.30</td> <td>-9.06</td> <td>40.21</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>100</td> <td>1 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5854.52 | 58.07 | 111.99 | -53.92 | 38.75 | 35.08 | 14.03 | 29.79 | 0.00 | 100 | 1 PEAK | 2 5871.88 | 59.12 | 106.17 | -47.05 | 39.88 | 35.11 | 13.92 | 29.79 | 0.00 | 100 | 1 PEAK | 3 5923.81 | 56.64 | 69.18 | -12.54 | 37.58 | 35.19 | 13.69 | 29.82 | 0.00 | 100 | 1 PEAK | 4 5948.70 | 59.24 | 68.30 | -9.06 | 40.21 | 35.21 | 13.66 | 29.84 | 0.00 | 100 | 1 PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5854.52 | 58.07 | 111.99 | -53.92 | 38.75 | 35.08 | 14.03 | 29.79 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5871.88 | 59.12 | 106.17 | -47.05 | 39.88 | 35.11 | 13.92 | 29.79 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5923.81 | 56.64 | 69.18 | -12.54 | 37.58 | 35.19 | 13.69 | 29.82 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5948.70 | 59.24 | 68.30 | -9.06 | 40.21 | 35.21 | 13.66 | 29.84 | 0.00 | 100 | 1 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 49 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|---|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|---|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>53.74</td> <td>74.00</td> <td>-20.26</td> <td>62.16</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>216</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>45.35</td> <td>54.00</td> <td>-8.65</td> <td>53.77</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>216</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11590.00 | 53.74 | 74.00 | -20.26 | 62.16 | 38.45 | 18.53 | 65.40 | 0.00 | 216 | 360 | PEAK | 2 | 11590.00 | 45.35 | 54.00 | -8.65 | 53.77 | 38.45 | 18.53 | 65.40 | 0.00 | 216 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>59.82</td> <td>74.00</td> <td>-14.18</td> <td>68.24</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>215</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>50.50</td> <td>54.00</td> <td>-3.50</td> <td>58.91</td> <td>38.45</td> <td>18.54</td> <td>65.40</td> <td>0.00</td> <td>215</td> <td>1</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 11590.00 | 59.82 | 74.00 | -14.18 | 68.24 | 38.45 | 18.53 | 65.40 | 0.00 | 215 | 1 | PEAK | 2 | 11590.00 | 50.50 | 54.00 | -3.50 | 58.91 | 38.45 | 18.54 | 65.40 | 0.00 | 215 | 1 | AVERAGE |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11590.00 | 53.74 | 74.00 | -20.26 | 62.16 | 38.45 | 18.53 | 65.40 | 0.00 | 216 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11590.00 | 45.35 | 54.00 | -8.65 | 53.77 | 38.45 | 18.53 | 65.40 | 0.00 | 216 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11590.00 | 59.82 | 74.00 | -14.18 | 68.24 | 38.45 | 18.53 | 65.40 | 0.00 | 215 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 11590.00 | 50.50 | 54.00 | -3.50 | 58.91 | 38.45 | 18.54 | 65.40 | 0.00 | 215 | 1 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

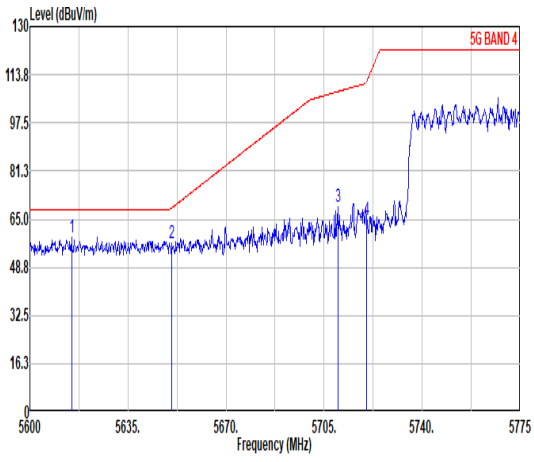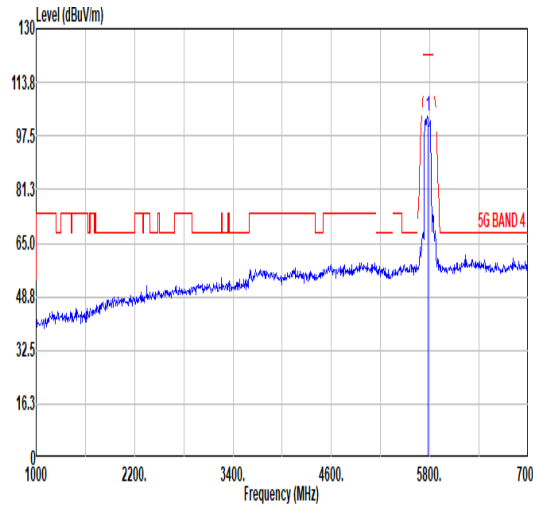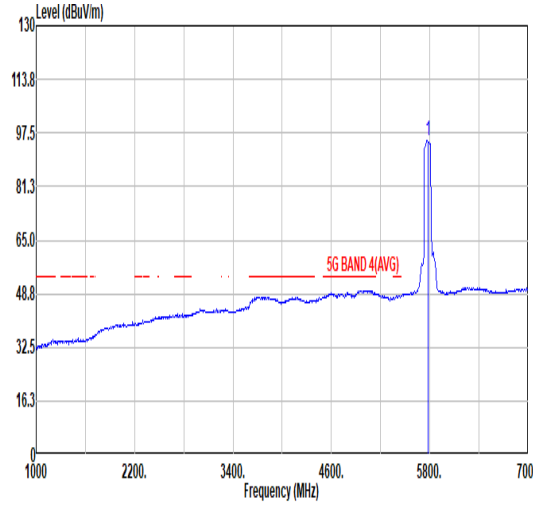

| | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|---|--------|--------|-------------|--------|--------|--------|--------|------|------|---------|-------|-------------|-------------|--------|-------------|-------------|--------|--|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|--|--|-------|------|-----|-------|--------|-----|------|------|--|------|-------|-------------|-------|--------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5614.88</td> <td>58.84</td> <td>68.30</td> <td>-9.46</td> <td>40.78</td> <td>34.63</td> <td>13.20</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>56.93</td> <td>68.73</td> <td>-11.80</td> <td>38.70</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5709.90</td> <td>69.14</td> <td>108.07</td> <td>-38.93</td> <td>50.57</td> <td>34.80</td> <td>13.57</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.05</td> <td>64.52</td> <td>111.01</td> <td>-46.49</td> <td>45.83</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5614.88 | 58.84 | 68.30 | -9.46 | 40.78 | 34.63 | 13.20 | 29.77 | 0.00 | 100 | 304 | PEAK | 2 | 5650.58 | 56.93 | 68.73 | -11.80 | 38.70 | 34.69 | 13.32 | 29.78 | 0.00 | 100 | 304 | PEAK | 3 | 5709.90 | 69.14 | 108.07 | -38.93 | 50.57 | 34.80 | 13.57 | 29.80 | 0.00 | 100 | 304 | PEAK | 4 | 5728.05 | 64.52 | 111.01 | -46.49 | 45.83 | 34.82 | 13.66 | 29.79 | 0.00 | 100 | 304 | PEAK |  <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>103.65</td> <td>-----</td> <td>-----</td> <td>84.40</td> <td>34.93</td> <td>14.10</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5775.00 | 103.65 | ----- | ----- | 84.40 | 34.93 | 14.10 | 29.78 | 0.00 | 100 | 304 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5614.88 | 58.84 | 68.30 | -9.46 | 40.78 | 34.63 | 13.20 | 29.77 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.58 | 56.93 | 68.73 | -11.80 | 38.70 | 34.69 | 13.32 | 29.78 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5709.90 | 69.14 | 108.07 | -38.93 | 50.57 | 34.80 | 13.57 | 29.80 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5728.05 | 64.52 | 111.01 | -46.49 | 45.83 | 34.82 | 13.66 | 29.79 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5775.00 | 103.65 | ----- | ----- | 84.40 | 34.93 | 14.10 | 29.78 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>95.31</td> <td>-----</td> <td>-----</td> <td>76.12</td> <td>34.92</td> <td>14.05</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5775.00 | 95.31 | ----- | ----- | 76.12 | 34.92 | 14.05 | 29.78 | 0.00 | 100 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5775.00 | 95.31 | ----- | ----- | 76.12 | 34.92 | 14.05 | 29.78 | 0.00 | 100 | 304 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|-------------|--------|--------|-------------|--------|--------|-------|--------|------|-----|------|-------|-------------|-------|--------|-------------|--------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1+2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>66.92</td> <td>111.75</td> <td>-44.83</td> <td>47.60</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.70</td> <td>67.45</td> <td>105.66</td> <td>-38.21</td> <td>48.22</td> <td>35.11</td> <td>13.91</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.28</td> <td>57.86</td> <td>68.83</td> <td>-10.97</td> <td>38.80</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5937.23</td> <td>59.16</td> <td>68.30</td> <td>-9.14</td> <td>40.11</td> <td>35.21</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5854.63 | 66.92 | 111.75 | -44.83 | 47.60 | 35.08 | 14.03 | 29.79 | 0.00 | 100 | 304 | PEAK | 2 | 5873.70 | 67.45 | 105.66 | -38.21 | 48.22 | 35.11 | 13.91 | 29.79 | 0.00 | 100 | 304 | PEAK | 3 | 5924.28 | 57.86 | 68.83 | -10.97 | 38.80 | 35.19 | 13.69 | 29.82 | 0.00 | 100 | 304 | PEAK | 4 | 5937.23 | 59.16 | 68.30 | -9.14 | 40.11 | 35.21 | 13.67 | 29.83 | 0.00 | 100 | 304 | PEAK | Blank |
| | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.63 | 66.92 | 111.75 | -44.83 | 47.60 | 35.08 | 14.03 | 29.79 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5873.70 | 67.45 | 105.66 | -38.21 | 48.22 | 35.11 | 13.91 | 29.79 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.28 | 57.86 | 68.83 | -10.97 | 38.80 | 35.19 | 13.69 | 29.82 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5937.23 | 59.16 | 68.30 | -9.14 | 40.11 | 35.21 | 13.67 | 29.83 | 0.00 | 100 | 304 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |