

Applicant: TITAN INC.

Product: SPEAKER BOX

Model No.: MS-R105BLT

Trademark: monki°

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tong

Terry Tang

Manager


Dated: December 29, 2023

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2312087-01E Page 2 of 52

Date: 2023-12-29



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2023-12-29



Test Report Conclusion

1 'an	tant
v on	tent
0011	CLIL

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	13
6.5	Test Result	15
7.0	Band Edge	23
7.1	Test Method and Test Procedure	23
7.2	Radiated Test Setup	23
7.3	Configuration of the EUT	23
7.4	EUT Operating Condition	23
7.5	Band Edge Limit.	23
7.6	Band Edge Test Result	24
8.0	Antenna Requirement	28
9.0	20dB bandwidth measurement	29
10.0	FCC ID Label	39
11.0	Photo of Test Setup and EUT View	40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-12-29



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: TITAN INC.

Address: 3530 Nw 115 Ave, Miami, Florida 33178, United States

Telephone: 786-618-8393 Fax: 305-320-3198

1.3 Description of EUT

Product: SPEAKER BOX

Manufacturer: MAXTRONIX CO., LTD.

Address: NO.12, HEXIANG ROAD, WUJIN ECONOMIC DEVELOPMENT ZONE.

CHANGZHOU, JIANGSU, CHINA

Trademark:

moonki°

Model Number: MS-R105BLT

Additional Model Name N/A

Rating: Input: DC5V, 2A

Battery: DC7.4V, 1800mAh Li-ion battery

Serial No.: 2839SR105BLTBL000938

Hardware Version: MSR105BLT-V1.1 Software Version: MSR105BLT-V1.1 Operation Frequency: 2402-2480MHz

Modulation Type: GFSK, Л/4DQPSK, 8DPSK

Number of Channels: 79 Channel Separation: 1MHz

Antenna Designation PCB antenna with gain 0dBi maximum (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2312087-01E Page 5 of 52

Date: 2023-12-29



1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2023-12-11 to 2023-12-29

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



2.0 Test Equipment						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13	
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13	
LISN	R&S	EZH3-Z5	100253	2023-07-14	2024-07-13	
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2023-07-14	2024-07-13	
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17	
Spectrum	R&S	FSIQ26	100292	2023-07-14	2024-07-13	
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17	
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17	
Power meter	Anritsu	ML2487A	6K00003613	2023-07-14	2024-07-13	
Power sensor	Anritsu	MA2491A	32263	2023-07-14	2024-07-13	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17	
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25	
EMI Test Receiver	RS	ESVB	826156/011	2023-07-14	2024-07-13	
EMI Test Receiver	RS	ESCS 30	834115/006	2023-07-14	2024-07-13	
Spectrum	HP/Agilent	E4407B	MY50441392	2023-07-14	2024-07-13	
Spectrum	RS	FSP	1164.4391.38	2023-07-14	2024-07-13	
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2023-07-14	2024-07-13	
RF Cable	Zhengdi	7m		2023-07-14	2024-07-13	
Pre-Amplifier	Schwarebeck	BBV9743	#218	2023-07-14	2024-07-13	
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2023-07-14	2024-07-13	
LISN	SCHAFFNER	NNB42	00012	2023-07-14	2024-07-13	
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13	
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13	

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies
FCC Part 15.215(c)	20dB bandwidth	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2023-12-29



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

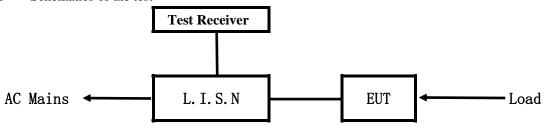


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10–2013.

Test Voltage: 120V, 60Hz Block diagram of Test setup

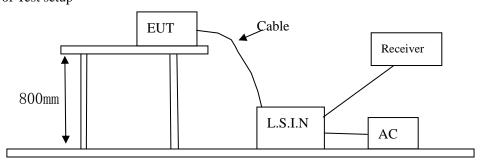

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device Manufacturer		Model	FCC ID	
	SPEAKER BOX	MAXTRONIX CO., LTD.	MS-R105BLT	2A6R4-MSR105BLT

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2312087-01E Page 9 of 52

Date: 2023-12-29



C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)		
(MHz)	Quasi-peak Level	Aver ge Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Date: 2023-12-29



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by BT

Results: Pass

Please refer to following diagram for individual

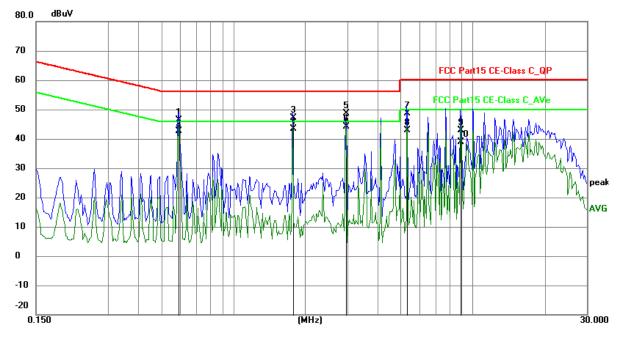

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5907	36.65	9.77	46.42	56.00	-9.58	QP	Р
2	0.5907	32.82	9.77	42.59	46.00	-3.41	AVG	Р
3	1.7762	37.34	9.80	47.14	56.00	-8.86	QP	Р
4	1.7762	33.52	9.80	43.32	46.00	-2.68	AVG	Р
5	2.9580	38.74	9.84	48.58	56.00	-7.42	QP	Р
6	2.9580	34.38	9.84	44.22	46.00	-1.78	AVG	Р
7	5.3282	38.62	9.94	48.56	60.00	-11.44	QP	Р
8	5.3282	32.84	9.94	42.78	50.00	-7.22	AVG	Р
9	8.8811	32.82	10.10	42.92	60.00	-17.08	QP Q	Р
10	8.8811	28.82	10.10	38.92	50.00	-11.08	AVG	Р

Date: 2023-12-29



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by BT

Results: Pass

Please refer to following diagram for individual

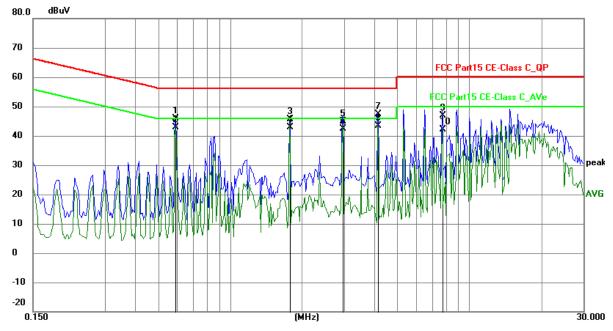

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5907	36.20	9.77	45.97	56.00	-10.03	QP	Р
2	0.5907	33.01	9.77	42.78	46.00	-3.22	AVG	Р
3	1.7763	35.87	9.80	45.67	56.00	-10.33	QP	Р
4	1.7763	33.20	9.80	43.00	46.00	-3.00	AVG	Р
5	2.9580	34.95	9.84	44.79	56.00	-11.21	QP	Р
6	2.9580	32.66	9.84	42.50	46.00	-3.50	AVG	Р
7	4.1427	37.39	9.89	47.28	56.00	-8.72	QP	Р
8	4.1427	33.49	9.89	43.38	46.00	-2.62	AVG	Р
9	7.6917	36.81	10.04	46.85	60.00	-13.15	QP	Р
10	7.6917	32.10	10.04	42.14	50.00	-7.86	AVG	J

Date: 2023-12-29



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
ADOVE IGHZ	Peak	1MHz	10Hz	Average

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

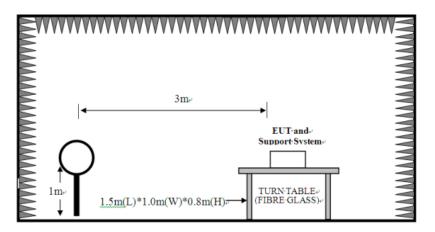


Date: 2023-12-29



For radiated emissions from 30MHz to1GHz

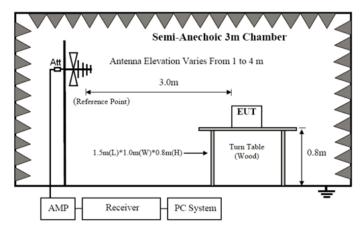

For radiated emissions above 1GHz

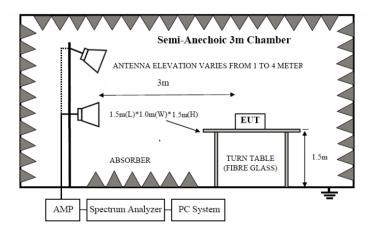

- 6.2 Configuration of the EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundamental (3m)	Field Strength of Harmonics (3m)			
(MHz)	mV/m	dBuV/m	uV/m	dBuV/m		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2312087-01E Page 14 of 52

Date: 2023-12-29



2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Dools)
2400-2403.3	30	94 (Average)	114 (1 cak)	300	J4 (Average)	/4 (1 Cak)

Note: 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$

- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. The three modulation modes of GFSK, Pi/4D-QPSK and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2312087-01E Page 15 of 52

Date: 2023-12-29




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

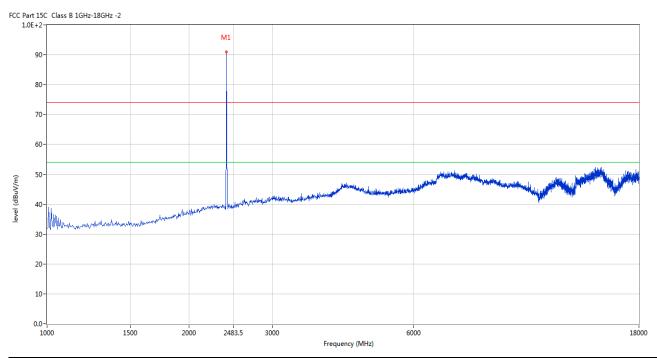


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	90.92	-3.57	114.0	-23.08	Peak	183.00	100	Horizontal	Pass

Report No.: TW2312087-01E Page 16 of 52

Date: 2023-12-29



Vertical

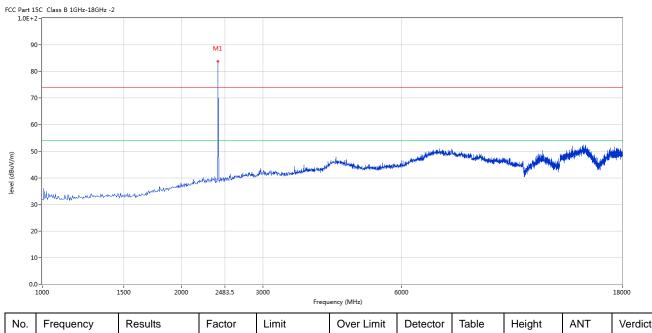

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	83.73	-3.57	114.0	-30.27	Peak	285.00	100	Vertical	Pass


Report No.: TW2312087-01E Page 17 of 52

Date: 2023-12-29



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

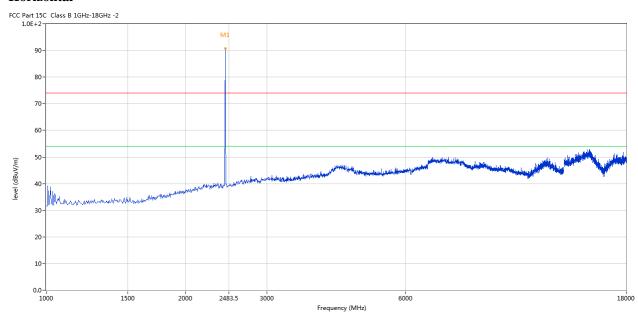


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	90.69	-3.57	114.0	-23.31	Peak	334.00	100	Horizontal	Pass

Report No.: TW2312087-01E Page 18 of 52

Date: 2023-12-29



Vertical

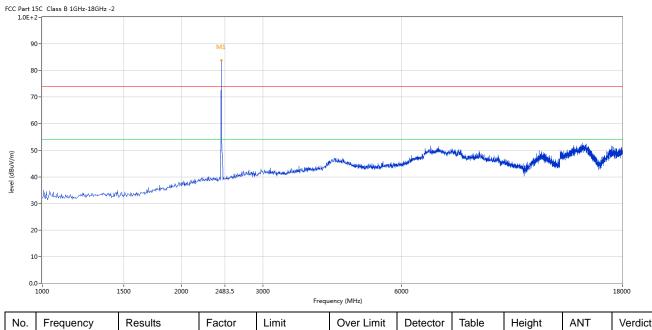

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	83.79	-3.57	114.0	-30.21	Peak	276.00	100	Vertical	Pass


Report No.: TW2312087-01E Page 19 of 52

Date: 2023-12-29



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

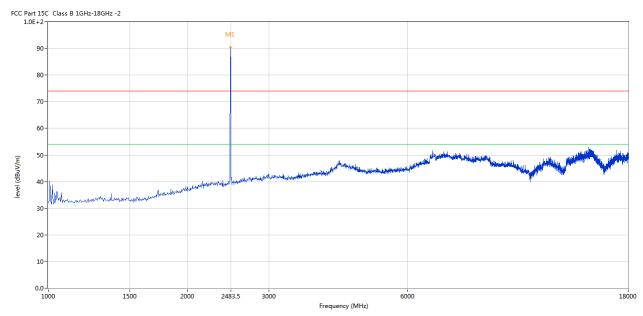


N	lo.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1		2480	90.44	-3.57	114.0	-23.56	Peak	16.00	100	Horizontal	Pass

Report No.: TW2312087-01E Page 20 of 52

Date: 2023-12-29



Vertical

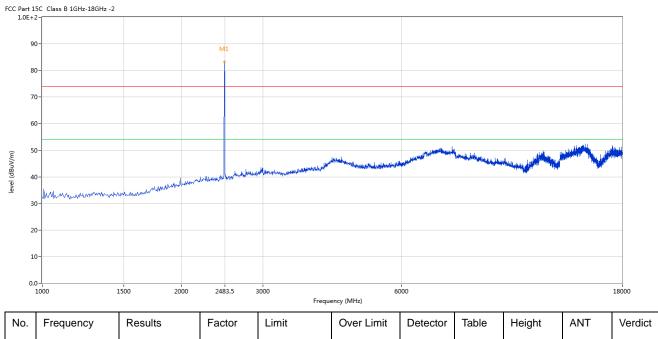

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	83.32	-3.57	114.0	-30.68	Peak	0.00	100	Vertical	Pass

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2312087-01E Page 21 of 52

Date: 2023-12-29




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

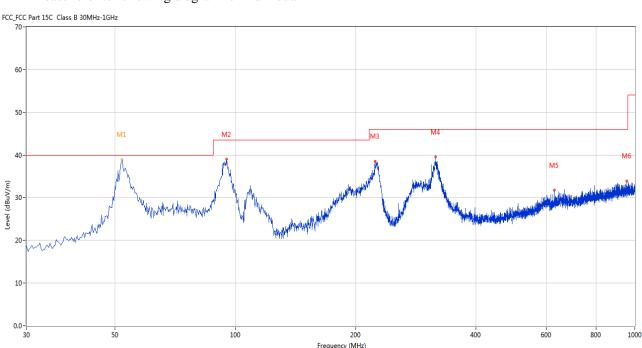

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1*	51.998	38.91	-11.43	40.0	1.09	QP	235.00	193	Horizontal	Pass
2	95.216	39.03	-14.25	43.5	4.47	Peak	219.00	100	Horizontal	Pass
3	223.467	38.48	-13.14	46.0	7.52	Peak	248.00	100	Horizontal	Pass
4	317.291	39.49	-10.78	46.0	6.51	Peak	18.00	100	Horizontal	Pass
5	628.340	31.77	-4.93	46.0	14.23	Peak	283.00	100	Horizontal	Pass
6	953.937	33.93	-1.71	47.0	13.07	Peak	337.00	100	Horizontal	Pass

Report No.: TW2312087-01E Page 22 of 52

Date: 2023-12-29




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

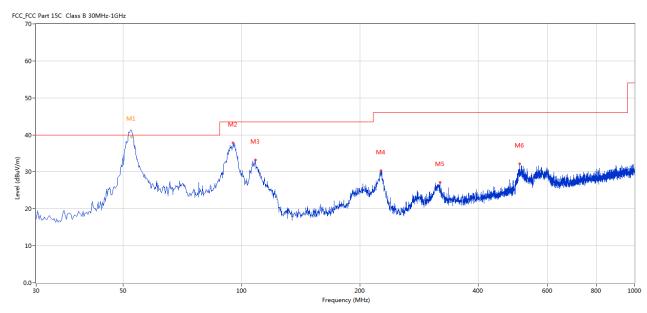

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1*	52.397	39.47	-11.45	40.0	0.53	QP	321.00	101	Vertical	Pass
2	95.216	37.80	-14.25	43.5	5.70	Peak	146.00	100	Vertical	Pass
3	108.550	33.22	-13.46	43.5	10.28	Peak	270.00	100	Vertical	Pass
4	226.618	30.38	-12.81	46.0	15.62	Peak	180.00	100	Vertical	Pass
5	320.200	27.11	-10.59	46.0	18.89	Peak	279.00	100	Vertical	Pass
6	510.757	32.23	-6.82	46.0	13.77	Peak	174.00	100	Vertical	Pass

Date: 2023-12-29




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

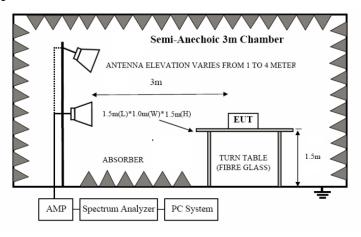

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TW2312087-01E Page 24 of 52

Date: 2023-12-29



7.6 Test Result

Product:	SPEAKER BOX	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC7.4V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

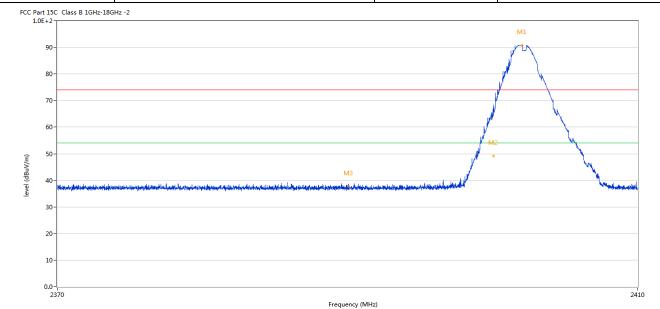

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.962	90.77	-3.57	74.0	16.77	Peak	175.00	100	Horizontal	N/A
2	2400.000	65.24	-3.57	74.0	-8.76	Peak	3.89	100	Horizontal	Pass
2**	2400.000	49.18	-3.57	54.0	-4.82	AV	3.89	100	Horizontal	Pass
3	2390.000	37.72	-3.53	74.0	-36.28	Peak	191.50	100	Horizontal	Pass

Report No.: TW2312087-01E Page 25 of 52




]	Product:		SPEAKE	ER BOX		Detect	or		Vertical	
	Mode	I	Keeping Tr	ansmitting		Test Vol	tage		DC7.4V	
Te	emperature		24 de	g. C,		Humid	ity		56% RH	
Te	est Result:		Pa	ss						
	rt 15C Class B 1GHz-18GI E+2-	Hz -2								
	90-							M1		
	80-							JAN TO THE STREET		
	70-							<i>y</i> "		
								<i>'</i>		
	60-						, P	· ·	X	
							ı f		J.	
(m//m)	50-						M2		M.	
el (dBuV/m)	40-	al destruit librariile, de libraria de color poi esculla que est el destruit de la color poi esculla que est e	رود المساور ال	hann 1 H, labo han 1 Mar 100 ar a a na antaonta	M3	t da skoj judijska kojala koja i tr	M2		Manage	ull Lumpilator
level (dBuV/m)	40-	d ones this rate of the production of many to over a fi	nardiallisteral lydroselvidterapatrid	terrijske stanjensjelejste svjet sti vilovin e		hdjandrije odledkoj polijskym odka	<i>T</i>		Manage Ma	radilyyd organidd thirtholys,
level (dBuV/m)	40-	d order the edge of the conference of the control of the conference of the control of the contro	nand international light constitution and when the	new gilde index, despited of the congress of the collections		holyenedesis sadisaldeske deplejaleske nathus	<i>T</i>		Menden	indiga kingga kika kanga
level (dBuV/m)	40-	denga dikendip perbagnah persangan pengalangan pe	nerylaribisasikyik yakeidennepeted	المعارفان بالمرابع رداع والمرابع		hife-desir selfselfelfestelfependlig	<i>T</i>		Manager and Manage	indiga kanggulik shirip.
level (dBuV/m)	40-	interestible alle philosophysical prisoner il anni selle	n en	garan gida sahan, danga arka galan sang dangga ari bisa dan		hije dago sali salika ya kipipen na ku	<i>T</i>		Manages	indige has personal design.
	30- 20- 10-	dungssible milly de Village milyos stansystem est amenis et	nerfuellikansk falle udenfannspoterel	ter gild sites, legs soft gills any engle softwise en			<i>T</i>		Managem	
	30- 20-	interesti kinale pirtemaka saminin masa di	n de general de la company de de			hije dage sali salah yaiki dapa kala	<i>T</i>		Manage	
	30- 20- 10-	Results	Factor		menant physical to middentification is quite regarde	Detector	<i>T</i>	Height	ANT	241
	30 - 20 - 10 - 2370				Frequency (MHz)		o companyable	Height (cm)		241
No.	30- 20- 10- 2370	Results	Factor	Limit	Frequency (MHz)		Table	_		241
No.	30- 20- 10- 2370 Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)	Detector	Table (o)	(cm)	ANT	Verdi
(w/\(\rho_{\text{N}}\)\(\rho_{\text{N}}\)\(\rho_{\text{N}}\)	40- 20- 10- 2370 Frequency (MHz) 2401.832	Results (dBuV/m) 83.37	Factor (dB) -3.57	Limit (dBuV/m) 74.0	Frequency (MHz) Over Limit (dB) 9.37	Detector Peak	Table (o) 285.00	(cm)	ANT Vertical	241 Verdi

Report No.: TW2312087-01E Page 26 of 52



SPEAKER BOX	Polarity	Horizontal
Keeping Transmitting	Test Voltage	DC7.4V
24 deg. C,	Humidity	56% RH
Pass		
	24 deg. C,	24 deg. C, Humidity

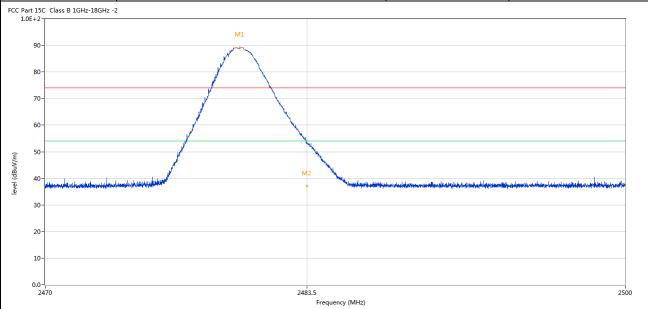

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2480.017	89.11	-3.57	74.0	15.11	Peak	177.00	100	Horizontal	N/A
2	2483.500	53.25	-3.57	74.0	-20.75	Peak	272.29	100	Horizontal	Pass
2**	2483.500	37.19	-3.57	54.0	-16.81	AV	272.29	100	Horizontal	Pass

Report No.: TW2312087-01E Page 27 of 52

Date: 2023-12-29



ŀ	Product:		SPEAKE	ER BOX		Detec	tor		Vertical	
	Mode	I	Keeping Tr	ansmitting		Test Vo	ltage		DC7.4V	
Te	mperature		24 de	g. C,		Humio	lity		56% RH	
Te	est Result:		Pa	SS						
CC Par	t 15C Class B 1GHz-18G	iHz -2			•					
	90-		M	11						
	80-		y more							
	70-									
	60-		1							
Œ.	50-		1	M _M M ₂						
level (dbuv/m)	40-	asonisonissaska a tandishka a tanionisonis		MM M2	The second straight of	ecopy of hospitan adaptor and fraced	الذياه لمطابرالازستواط بالإراث	and find the second second second	gethalogyanes failgein met winders	والمجاهدة والمعاولة
level (dbuV/m)	40-	ganganigaskun gandaphun gan an dilli		Man M2	Market Wilders Construction Superior Su	angkari kasiri sa nda dan ada dan ad	tti de <mark>di</mark> teriti meni ^k lande den	etelekkissiyayeylektoroki hiddi etelek	get)vellengende für halin soch wirden.	dilya di.gg.ba <mark>d</mark> u,
level (dBuV/m)	40- hindustricanand left habitericity 30-	nionestationis de la constitució de la		Man M2	Market and despressing about the last and th	engeni kasirin nakuhan ada keny	the straight with course bloom the site of the	arin uzanin anti dili ede	nt deposit, al secondarios	abbase, see trades,
level (dBuV/m)	40- 	niteracijantijatiska in kirjantija karazana na delektro		2483.		engeral kaspitan ada dan ada din ad	tti telekirikunukterikeete	and subject of a self-code	untivativa en estatura antrevidas,	2500
o.evel (dBuV/m)	30 - 10 - 0.0	Results	Factor	2483.	5	Detector	Table	Height	ANT	2500
	30 - 20 - 10 - 2470		Factor (dB)	1	5 Frequency (MHz)					
	30- 20- 10- 2470	Results		Limit	5 Frequency (MHz)		Table	Height		2500

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. The three modulation modes of GFSK, Pi/4D-QPSK and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Date: 2023-12-29



Page 28 of 52

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain 0dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Date: 2023-12-29



Page 29 of 52

9.0 20dB Bandwidth Measurement

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit

N/A

Page 30 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Test Result

Product:	SPE	AKER B	OX		Tes	st Mode:		Keep trai	nsmitting	5
Mode	Keepir	ng Transm	nitting		Tes	t Voltage		DC7	7.4V	
Temperature	2	24 deg. C,			Н	umidity		56%	RH	
Test Result:		Pass			D	Detector		P	K	
dB Bandwidth		896kHz								
	Marker	1 [T1 r	ndB]	RI	BW	30 k	Hz R	F Att	20 d	В
Ref Lvl	ndB		.00 dB	VI	B₩	100 k				
10 dBm	BW 895	.791583	317 kHz	SI	TW	8.5 m	s U:	nit	d	Bm
						v ₁	[T1]	_	4.86 d	Bm
								2.4020	902 GI	
0				,		ndI	3	2(0.00 di	
			\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	$\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ $		BW ▽ _T :	89 [T1]	35.79158 - 2	8317 ki 4.92 di	
-10							- <u> + + </u>	2.4015		
		\wedge	\mathcal{N}			$ abla_{\mathrm{T}_{2}}$	2 [T1]	-2		
1MAX		TA				T2		2.4024	4790 GI	Hz 1 1
		الم				V				
-30		/				\sim				
	//م						~			
-40							4			
	ا کمس						ha	\sim		
-50							<u> </u>	,	~~~~	··-
-60										\dashv
-70										\dashv
-80										$-\parallel$
-90 Center 2.402				kHz/					an 3 Mi	[

Page 31 of 52

Report No.: TW2312087-01E



GFSK	1								**		
Product:			AKER BO				est Mode:			nsmitting	
Mode			g Transmi	tting			est Voltage	;		7.4V	
Temperature		24	4 deg. C,				Humidity			6 RH	
Test Result:			Pass				Detector		I	PK	
20dB Bandwidth		8	896kHz								
(R)	M	larker	1 [T1 r	ndB]	R	BW	30 k	Hz R	F Att	20 dB	
Ref Lvl		dB		00 dB		BW	100 k				
10 dBm	В	8W 895	5.791583	317 kHz	S	WT	8.5 m	s U	nit	dBr	n
10							v ₁	[T1]	- 4	.06 dBm	A
									2.44100	902 GHz	
0				_	-		ndI	3	20	.00 dB	1
					$\backslash \wedge$		BW ▽ _{T1}		5.79158		
-10						\forall	V T1	[T1]	2 44055	.06 dBn 210 GHz	
			^	\mathcal{N}		1	∧ ∇ _T	2 [T1]	-24		
-20			TA				T2		2.44144	790 GHz	:
1MAX							~_\^				1M2
-30		كم					Ì	~\			
-40									M		
-50										**********	
-60											
-70											1
-80											
-90											
Center 2	.441 GHz	Z		300	kHz/				Spa	ın 3 MHz	
Date: 28	B.DEC.20	23 17	:05:18								

Page 32 of 52

Report No.: TW2312087-01E



FSK											
Product:			AKER BO				est Mode:	_		ansmitting	
Mode			g Transmi	tting			est Voltage	:		C7.4V	
Temperature		2	4 deg. C,]	Humidity		569	% RH	
Test Result:			Pass				Detector]	PK	
OdB Bandwidth			896kHz								
Ŕ		Marker	1 [T1 r	ndB]	R	BW	30 k	Hz R	F Att	20 dB	
Ref Lvl		ndB	20.	.00 dB	V	BW	100 k	Hz			
10 dBm		BW 895	5.791583	317 kHz	SI	WТ	8.5 m	s U	nit	dBn	n
10							$lacktriangledown_1$	[T1]	- 4	4.82 dBm	A
									2.48000	902 GHz	A
0							ndE	3	20	0.00 dB	
				$\sim\sim$	\		BW		5.79158		
-10					V ~		$ abla_{\mathrm{T1}}$	[T1]	2.47955	4.70 dBm 210 GHz	
			^	\mathcal{N}		1	Λ ∇ _{T1}	? [T1]	-2!		
-20			ma l				7		2.48044	4790 GHz	
1MAX			7				V				1M2
-30		كم	<i>,</i>					M			
-40	<u></u>	أسسه							\sim		
-50										Married Married	
-60											
-70											
-80											
-90											
Center 2	Center 2.48 GHz			300	kHz/				Spa	an 3 MHz	

Report No.: TW2312087-01E Page 33 of 52



Л/4DQPSK								
Product:	SPEAKE	R BOX		Test Mode:		Keep tran	smitting	
Mode	Keeping Tr	ansmitting		Test Voltage	;	DC7	.4V	
Temperature	24 de	g. C,		Humidity		56%	RH	
Test Result:	Pas	SS		Detector		PF	ζ	
20dB Bandwidth	1.281	MHz						
(R)	Marker 1 ['	[1 ndB]	RI	BW 30 k	Hz R	F Att	20 dB	
Ref Lvl	ndB		BW 100 k					
10 dBm	BW 1.28	056112 MHz	Sī	WT 8.5 m	ıs Uı	nit	dBm	
				v ₁	[T1]	- 4	.86 dBm	Α
0						2.40200	902 GHz	
Ů,		Į.		ndI	8	20	.00 dB	
		$\wedge \wedge \wedge$	Λ	BW ∇ _T	[T1]	1.28056	112 MHz 1.97 dBm	
-10		7~~	/ \	Command of the second		2.40136		
				\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	2 [T1]	-24	.97 dBm	
-20	TA				T2 Y	2.40264	629 GHz	1MA
-30								
-40	<u></u>					4		
-50	~~~ W				WY	M		
-60								
-70								
-80								
-90								
Center 2.4	402 GHz	300 ki	Hz/			Spa	ın 3 MHz	
Date: 28.	DEC.2023 17:16:	49						

Page 34 of 52

Report No.: TW2312087-01E



I/4DQPSK		25-		***		_			***	• •	
Product:			AKER BO				est Mode:			nsmitting	
Mode			g Transmi	tting			est Voltage	:		7.4V	
Temperature		2	4 deg. C,				Humidity			6 RH	
Test Result:			Pass				Detector		I	PK	
0dB Bandwidth		1	.281MHz								
Ŕ		Marker	1 [T1 r	ndB]	R	.BW	30 k	Hz Rl	F Att	20 dB	
Ref Lvl		ndB	20.	00 dB	V	BW	100 k	Hz			
10 dBm		BW :	1.280561	12 MHz	S	WT	8.5 m	s Uı	nit	dBm	ı
10							v ₁	[T1]	- 4	.09 dBm	, a
									2.44100	902 GHz	A
0							ndE	3	20	.00 dB	
				$\wedge \wedge \wedge$	\setminus		BW		1.28056		
-10			~~~	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		\vdash	√ ¬ ¬	[T1]	-24	.05 dBm	
				0			^	2 [T1]	2.44036	573 GHz .31 dBm	
-20		Ti	~				1	T2	2.44164	629 GHz	ĺ
1MAX								֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓			1M2
-30											
-40	me							m	M		
-50									~~~	Andrew Manager	
-60											
-70											
-80											
-90 Center 2	.441 GI	Hz		300	kHz/				Spa	n 3 MHz	
Date: 28									_		

Page 35 of 52

Report No.: TW2312087-01E



I/4DQPSK						_		1				
			SPEAKER BOX			Test Mode:			Keep transmitting			
Mode		Keeping Transmitting 24 deg. C, Pass					est Voltage		DC7.4V			
Temperature						Humidity			56% RH			
Test Result:						Detector			PK 			
0dB Bandwidth	1.281MHz											
Ŕ A		Marker	1 [T1 r	ndB]	R	BW	30 k	Hz RI	7 Att	20 dB		
Ref Lvl		ndB	20.	00 dB	V	BW	100 k	Hz				
10 dBm		BW :	1.280561	12 MHz	S	WT	8.5 m	s Ui	nit	dBm	ı	
10							\mathbf{v}_1	[T1]	- 4	.83 dBm		
									2.48000	902 GHz	A	
0					1		ndI		20	.00 dB		
				$\wedge \wedge \wedge$	\wedge		BW		1.28056			
-10			^		W	\~	V _T ·	[T1]	-24	.78 dBm		
				V		\		T1]	2.47936	573 GHz .96 dBm		
-20			\sim					. [11]	2.48064	629 GHz	İ	
1MAX		7						7			1M	
-30												
-40								l.	<u></u>			
-50									***************************************	· · · · · · · · · · · · · · · · · · ·		
-60												
-70												
-80												
-90 Center 2.48 GHz 300 kHz					kHz/				Spa	n 3 MHz		
ate: 28	B.DEC.2		7:12:19									

Page 36 of 52

Report No.: TW2312087-01E



8DPSK												
Product:		SPEAKER BOX Keeping Transmitting 24 deg. C,				Test Mode: Test Voltage Humidity			Keep transmitting			
Mode								DC7.4V 56% RH PK 				
Temperature												
Test Result:		Pass 1.244MHz					Detector					
20dB Bandwidth												
(R)		Marker	1 [T1 r	ndB]	R	BW	30 k	Hz R	F Att	20 dB		
Ref Lvl		ndB		.00 dB		BW	100 k					
10 dBm		BW 1	.244488	398 MHz	SI	WT	8.5 m	s Uı	nit	dBm	1	
							v ₁	[T1]	- 4	.85 dBm	A	
0									2.40200	902 GHz		
					,		ndE	3	20	.00 dB		
				$\wedge \wedge \wedge$	\ \		BW ∇ _T	[T1]	1.24448	898 MHz		
-10			7.	~ ·		7	\setminus \wedge		2.40139			
						v	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	P [T1]	-24	.47 dBm	l	
-20		T	1				1	Γ2 7	2.40264	028 GHz	1MA	
IFIAA											In	
-30								$\overline{}$				
								\				
-40								-\				
	\wedge	لسمها						\bigvee	$\wedge \wedge$			
-50	y h	<u>'</u>							V	· ·		
										,		
-60												
-70												
-80												
-90												
Center 2.	402 GI	Hz		300	kHz/				Spa	ın 3 MHz		
Date: 28	DEC.2	023 17	:19:28									

Page 37 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



BDPSK												
Product: SPEAKER BOX Mode Keeping Transmitt			X	Test				Keep transmitting				
			g Transmi	Transmitting			Test Voltage Humidity		DC7.4V 56% RH			
Temperature	2	24 deg. C,										
Test Result:		Pass				Detector			PK			
20dB Bandwidth	1.251MHz											
Ŕ		Marker	1 [T1 n	idB]	R	BW	30 k	Hz R	F Att	20 dB		
Ref Lvl		ndB		00 dB	V	BW	100 k					
10 dBm		BW 1	L.250501	.00 MHz	S	TW	8.5 m	s Ui	nit	dBm	1	
							v ₁	[T1]	- 4	.02 dBm	A	
									2.44100	902 GHz		
0							ndE	3	20	.00 dB		
				\wedge / \vee	$\backslash \backslash \backslash$		BW ∇⊤i	[T1]	1.25050	100 MHz		
-10			~~~			abla	1	<u> </u>	2.44039	579 GHz		
							~ √ √ 1	2 [T1]	-24	.34 dBm	ı	
-20		T	7				\	T2	2.44164	629 GHz	1MA	
											IMA	
-30												
-40		m						\bigvee	\mathcal{M}_{\perp}			
-50 with	-									and the same		
-60												
-70												
-80												
-90 Center 2	0 441 6	T.		300	kHz/				C	n 3 MHz		
	8.441 G		:23:34	300	кп2/				spa	и с п		

Page 38 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



BDPSK										
Product: SPEAKER BOX Mode Keeping Transmitting			X	7	Test Mode:		Keep transmitting			
			nsmitting		est Voltage	DC7.4V				
Temperature	24 deg. C,		Humidity		56% RH					
Test Result:		Pass				PK				
20dB Bandwidth										
Ŕ	Mark	er 1 [T1 r	ndB]	RBW	30 kH	Iz RI	7 Att	20 dB		
Ref Lvl	ndB		00 dB	VBW	100 kH					
10 dBm	BW	1.244488	898 MHz	SWT	8.5 ms	. Ur	nit	dBm	1	
10					v ₁	[T1]	- 4	.79 dBm	A	
							2.48000	902 GHz		
0				_	ndB		20	.00 dB		
			$\wedge \wedge /$	\ _ a \	BW ∇ _{T1}	[T1]	1.24448	898 MHz		
-10		~~~	~/ *		$^{\wedge}$	1 + + 1	2.47939	579 GHz	İ	
		/ V		•	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	[T1]	-24	.80 dBm		
-20		ŢĮ.			1	12	2.48064	028 GHz	1MA	
					l \	\				
-30										
-40	1. m						\wedge_{\wedge}			
-50	mil V						- VV	my vh		
-60										
-70										
-80										
-90 Center 2	.48 GHz		300	kHz/			Spa	ın 3 MHz		
	.DEC.2023	14:09:07		,			<u>-</u> -	_		

Report No.: TW2312087-01E Page 39 of 52

Date: 2023-12-29



10.0 FCC ID Label

FCC ID: 2A6R4-MSR105BLT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 40 of 52


Report No.: TW2312087-01E

Date: 2023-12-29



11.0 Photo of testing

11.1 Conducted test View

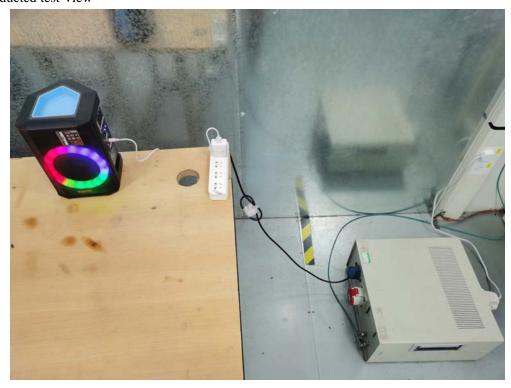


Page 41 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Radiated emission test view

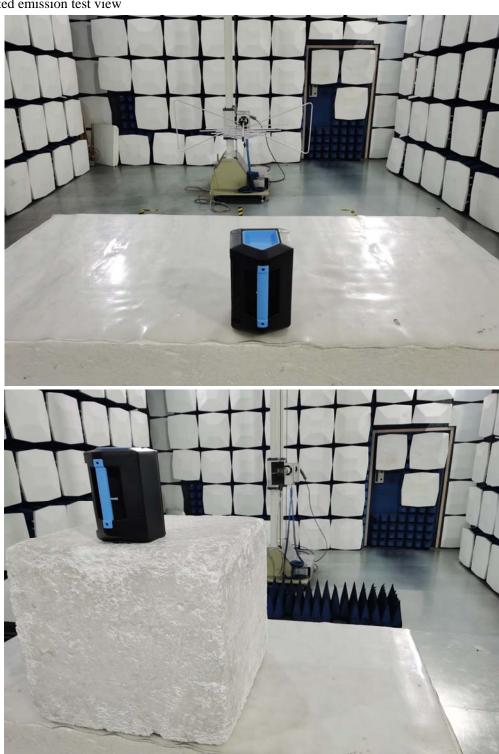

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2312087-01E

Date: 2023-12-29



Photographs-EUT11.2

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 43 of 52


Report No.: TW2312087-01E

Date: 2023-12-29



Outside View



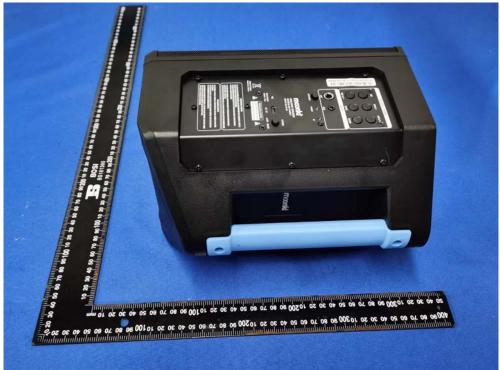

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 44 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Outside View

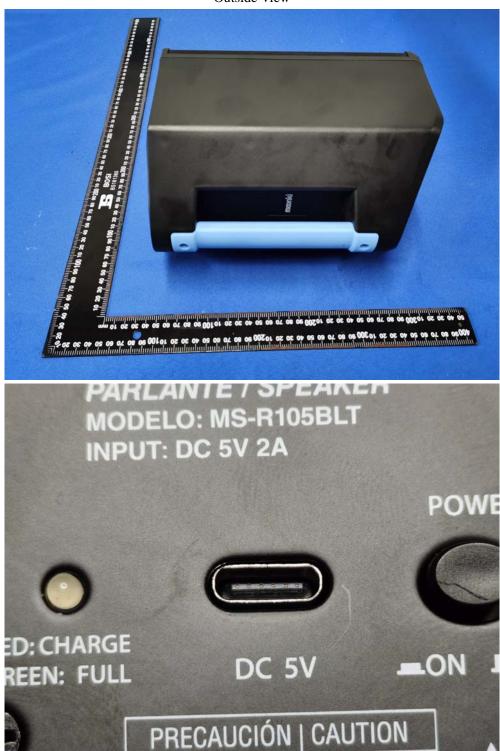

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 45 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2312087-01E Page 46 of 52

Date: 2023-12-29



Outside View




Page 47 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Inside View

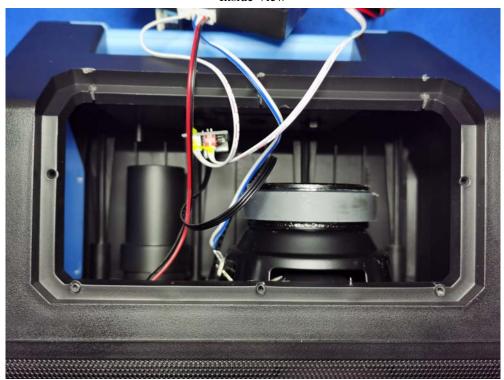



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 48 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Inside View

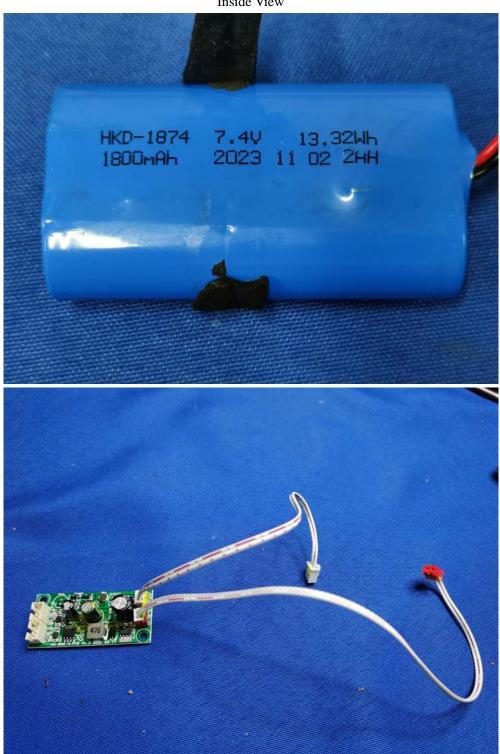

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 49 of 52


Report No.: TW2312087-01E

Date: 2023-12-29



Inside View



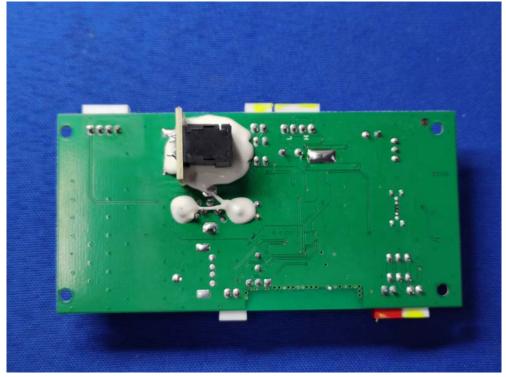

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 50 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Inside View

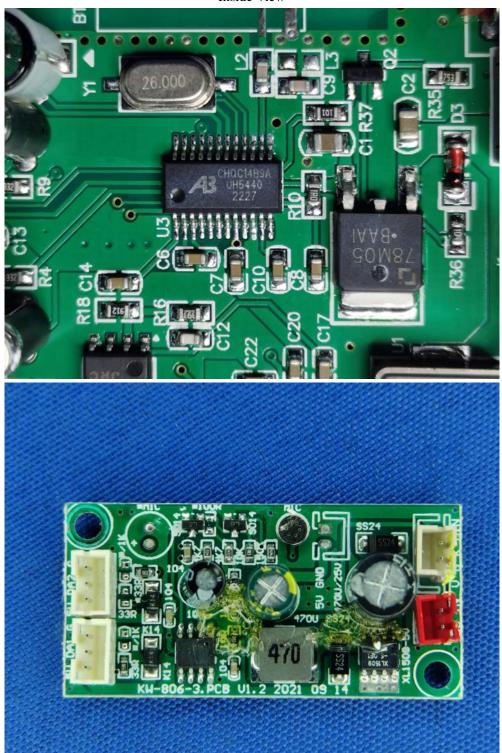

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 51 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



Inside View

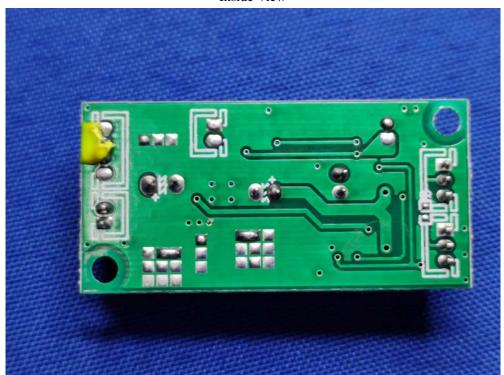



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 52 of 52

Report No.: TW2312087-01E

Date: 2023-12-29



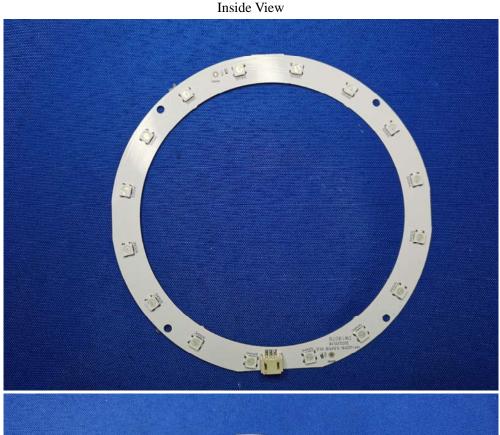



-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.