




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

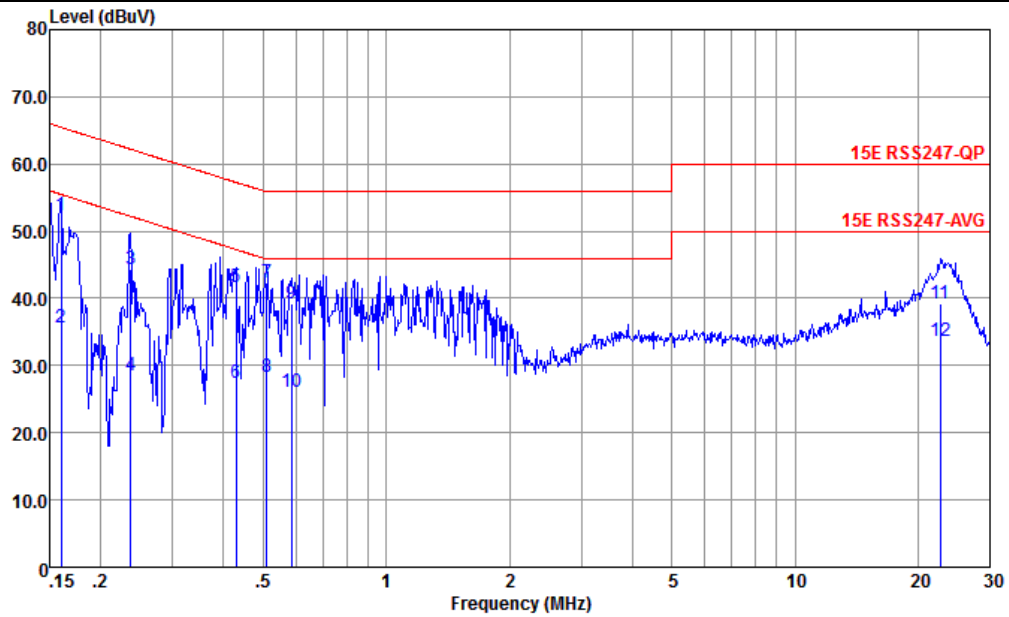


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.160	52.29	-13.18	65.47	41.80	0.06	10.43	QP
2	0.160	35.69	-29.78	65.47	25.20	0.06	10.43	Average
3	0.237	44.33	-17.89	62.22	33.90	0.04	10.39	QP
4	0.237	28.63	-33.59	62.22	18.20	0.04	10.39	Average
5	0.428	41.77	-15.52	57.29	31.50	0.00	10.27	QP
6	0.428	27.47	-29.82	57.29	17.20	0.00	10.27	Average
7	0.510	42.37	-13.63	56.00	32.19	-0.03	10.21	QP
8	0.510	28.37	-27.63	56.00	18.19	-0.03	10.21	Average
9	0.585	39.33	-16.67	56.00	29.20	-0.06	10.19	QP
10	0.585	26.03	-29.97	56.00	15.90	-0.06	10.19	Average
11	22.655	39.30	-20.70	60.00	28.20	-0.33	11.43	QP
12	22.655	33.60	-26.40	60.00	22.50	-0.33	11.43	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

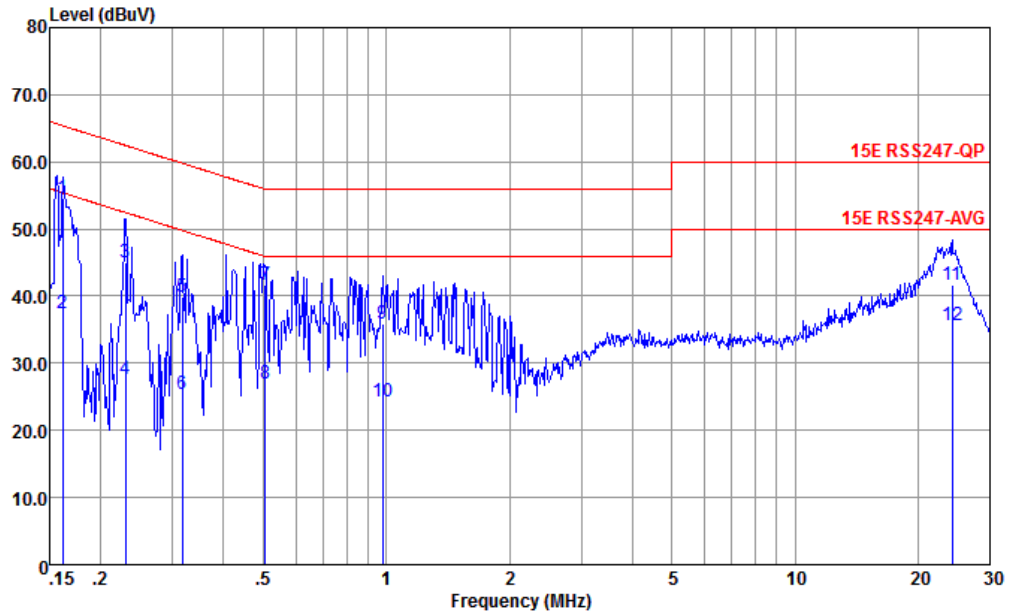

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.162	54.66	-10.72	65.38	44.19	0.04	10.43	QP
2	0.162	37.36	-28.02	65.38	26.89	0.04	10.43	Average
3	0.230	45.01	-17.43	62.44	34.60	0.01	10.40	QP
4	0.230	27.61	-34.83	62.44	17.20	0.01	10.40	Average
5	0.317	39.79	-20.01	59.80	29.50	-0.05	10.34	QP
6	0.317	25.49	-34.31	59.80	15.20	-0.05	10.34	Average
7	0.505	41.63	-14.37	56.00	31.50	-0.08	10.21	QP
8	0.505	27.03	-28.97	56.00	16.90	-0.08	10.21	Average
9	0.979	35.90	-20.10	56.00	25.90	-0.11	10.11	QP
10	0.979	24.20	-31.80	56.00	14.20	-0.11	10.11	Average
11	24.271	41.66	-18.34	60.00	30.50	-0.32	11.48	QP
12	24.271	35.76	-24.24	60.00	24.60	-0.32	11.48	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Relative Humidity :	22~23°C
		Temperature :	41~42 %



### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	ANT 4A+5A	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	ANT 4A+5A	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	ANT 4A+5A	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE20	44	5220	MCS0	Full RU	-



### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE20	36	5180	MCS0	Partial_RU26/0	-
Mode 20	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE20	64	5320	MCS0	Partial_RU26/8	-
Mode 21	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	100	5500	MCS0	Partial_RU26/0	-
Mode 22	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	140	5700	MCS0	Partial_RU26/8	-



### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE20	36	5180	MCS0	Partial_RU52/37	-
Mode 24	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE20	64	5320	MCS0	Partial_RU52/40	-
Mode 25	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	100	5500	MCS0	Partial_RU52/37	-
Mode 26	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	140	5700	MCS0	Partial_RU52/40	-
Mode 27	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE20	36	5180	MCS0	Partial_RU106/53	-
Mode 28	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE20	64	5320	MCS0	Partial_RU106/54	-
Mode 29	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	100	5500	MCS0	Partial_RU106/53	-
Mode 30	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE20	140	5700	MCS0	Partial_RU106/54	-
Mode 31	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 32	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 33	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE40	54	5270	MCS0	Full RU	-



## Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 35	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 36	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 37	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 38	U-NII-1	5.15-5.25	ANT 4A+5A	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 39	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 40	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 41	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE80	122	5610	MCS0	Full RU	-
Mode 42	U-NII-2A	5.15-5.35	ANT 4A+5A	802.11ax HE160	50	5250	MCS0	Full RU	-
Mode 43	U-NII-2C	5.47-5.725	ANT 4A+5A	802.11ax HE160	114	5570	MCS0	Full RU	-
Mode 44	U-NII-3	5.725-5.85	ANT 4A+5A	802.11a	149	5745	6Mbps	-	-





### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 45	U-NII-3	5.725-5.85	ANT 4A+5A	802.11a	157	5785	6Mbps	-	-
Mode 46	U-NII-3	5.725-5.85	ANT 4A+5A	802.11a	165	5825	6Mbps	-	-
Mode 47	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 48	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 49	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 50	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 51	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 52	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 53	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	149	5745	MCS0	Partial_RU26/0	-
Mode 54	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	165	5825	MCS0	Partial_RU26/8	-
Mode 55	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	149	5745	MCS0	Partial_RU52/37	-



### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 56	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	165	5825	MCS0	Partial_RU52/40	-
Mode 57	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	149	5745	MCS0	Partial_RU106/53	-
Mode 58	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	165	5825	MCS0	Partial_RU106/54	-
Mode 59	U-NII-2C-3	5.47-5.85	ANT 4A+5A	802.11a	144	5720	6Mbps	-	-
Mode 60	U-NII-2C-3	5.47-5.85	ANT 4A+5A	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 61	U-NII-2C-3	5.47-5.85	ANT 4A+5A	802.11ax HE40	142	5710	MCS0	Full RU	-
Mode 62	U-NII-2C-3	5.47-5.85	ANT 4A+5A	802.11ax HE80	138	5690	MCS0	Full RU	-
Mode 63	U-NII-2A	5.25-5.35	ANT 4A+5A	802.11ax HE80	58	5290	MCS0	Full RU	WIFI Worse Band LF
Mode 64	U-NII-3	5.725-5.85	ANT 4A+5A	802.11ax HE20	165	5825	MCS0	Full RU	WIFI Worse Band LF



### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 65	2.4G	2400-2483.5	Ant.4B	802.11ax HE40	09	2452	MCS0	-	Co-location
	U-NII-2A	5.25-5.35	Ant.5A	802.11ax HE80	58	5290	MCS0	Full RU	
Mode 66	2.4G	2400-2483.5	Ant.4B	Bluetooth-LE_GSKF	39	2480	2Mbps	-	Co-location
	U-NII-2A	5.25-5.35	Ant.5A	802.11ax HE80	58	5290	MCS0	Full RU	



### Summary of each worse mode





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5147.54	49.40	54.00	-4.60	V	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	45.29	68.30	-23.01	V	PEAK	Pass	Harmonic
3	802.11a	48	10480.00	44.84	68.30	-23.46	H	PEAK	Pass	Harmonic
4	802.11a	52	10520.00	44.92	68.30	-23.38	V	PEAK	Pass	Harmonic
5	802.11a	60	10600.00	46.56	74.00	-27.44	V	PEAK	Pass	Harmonic
6	802.11a	64	5351.80	47.30	54.00	-6.70	V	AVERAGE	Pass	Band Edge
7	802.11a	100	5454.06	46.31	54.00	-7.69	V	AVERAGE	Pass	Band Edge
8	802.11a	116	11160.00	45.24	74.00	-28.76	H	PEAK	Pass	Harmonic
9	802.11a	140	5726.36	64.14	68.30	-4.16	V	PEAK	Pass	Band Edge
10	802.11ax HE20	36	5148.95	49.78	54.00	-4.22	V	AVERAGE	Pass	Band Edge
11	802.11ax HE20	44	10440.00	44.50	68.30	-23.80	V	PEAK	Pass	Harmonic
12	802.11ax HE20	48	10480.00	44.78	68.30	-23.52	V	PEAK	Pass	Harmonic
13	802.11ax HE20	52	10520.00	45.41	68.30	-22.89	V	PEAK	Pass	Harmonic
14	802.11ax HE20	60	10600.00	45.51	74.00	-28.49	V	PEAK	Pass	Harmonic
15	802.11ax HE20	64	5350.74	48.31	54.00	-5.69	V	AVERAGE	Pass	Band Edge
16	802.11ax HE20	100	5457.18	46.25	54.00	-7.75	V	AVERAGE	Pass	Band Edge
17	802.11ax HE20	116	11160.00	46.10	74.00	-27.90	V	PEAK	Pass	Harmonic
18	802.11ax HE20	140	5725.13	64.40	68.30	-3.90	V	PEAK	Pass	Band Edge
19	802.11ax HE20	36	5135.87	46.45	54.00	-7.55	V	AVERAGE	Pass	Band Edge
20	802.11ax HE20	64	5458.97	44.61	54.00	-9.39	V	AVERAGE	Pass	Band Edge
21	802.11ax HE20	100	5457.50	44.86	54.00	-9.14	V	AVERAGE	Pass	Band Edge
22	802.11ax HE20	140	5757.36	57.79	68.30	-10.51	V	PEAK	Pass	Band Edge
23	802.11ax HE20	36	5112.59	46.36	54.00	-7.64	V	AVERAGE	Pass	Band Edge
24	802.11ax HE20	64	5355.78	44.68	54.00	-9.32	V	AVERAGE	Pass	Band Edge
25	802.11ax HE20	100	5457.66	44.95	54.00	-9.05	V	AVERAGE	Pass	Band Edge
26	802.11ax HE20	140	5746.49	57.41	68.30	-10.89	H	PEAK	Pass	Band Edge
27	802.11ax HE20	36	5125.65	47.73	54.00	-6.27	V	AVERAGE	Pass	Band Edge
28	802.11ax HE20	64	5426.76	45.98	54.00	-8.02	H	AVERAGE	Pass	Band Edge
29	802.11ax HE20	100	5454.18	46.79	54.00	-7.21	H	AVERAGE	Pass	Band Edge
30	802.11ax HE20	140	5727.99	58.72	68.30	-9.58	H	PEAK	Pass	Band Edge
31	802.11ax HE40	38	5147.05	49.52	54.00	-4.48	V	AVERAGE	Pass	Band Edge
32	802.11ax HE40	46	5027.26	48.09	54.00	-5.91	H	AVERAGE	Pass	Band Edge
33	802.11ax HE40	54	5073.31	47.83	54.00	-6.17	V	AVERAGE	Pass	Band Edge







### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
34	802.11ax HE40	62	5352.08	49.98	54.00	-4.02	V	AVERAGE	Pass	Band Edge
35	802.11ax HE40	102	5469.93	64.71	68.30	-3.59	V	PEAK	Pass	Band Edge
36	802.11ax HE40	110	11100.00	45.79	74.00	-28.21	H	PEAK	Pass	Harmonic
37	802.11ax HE40	134	5459.29	46.02	54.00	-7.98	V	AVERAGE	Pass	Band Edge
38	802.11ax HE80	42	5148.58	50.45	54.00	-3.55	V	AVERAGE	Pass	Band Edge
39	802.11ax HE80	58	5356.73	50.95	54.00	-3.05	V	AVERAGE	Pass	Band Edge
40	802.11ax HE80	106	5459.34	49.33	54.00	-4.67	V	AVERAGE	Pass	Band Edge
41	802.11ax HE80	122	5359.28	46.07	54.00	-7.93	V	AVERAGE	Pass	Band Edge
42	802.11ax HE160	50	5127.38	50.93	54.00	-3.07	V	AVERAGE	Pass	Band Edge
43	802.11ax HE160	114	5448.46	50.05	54.00	-3.95	V	AVERAGE	Pass	Band Edge
44	802.11a	149	5641.62	57.42	68.30	-10.88	V	PEAK	Pass	Band Edge
45	802.11a	157	11570.00	45.08	54.00	-8.92	V	AVERAGE	Pass	Harmonic
46	802.11a	165	11650.00	44.60	54.00	-9.40	V	AVERAGE	Pass	Harmonic
47	802.11ax HE20	149	5602.47	56.99	68.30	-11.31	V	PEAK	Pass	Band Edge
48	802.11ax HE20	157	11570.00	42.06	54.00	-11.94	H	AVERAGE	Pass	Harmonic
49	802.11ax HE20	165	11650.00	46.44	54.00	-7.56	V	AVERAGE	Pass	Harmonic
50	802.11ax HE40	151	5936.35	57.89	68.30	-10.41	H	PEAK	Pass	Band Edge
51	802.11ax HE40	159	5932.80	58.34	68.30	-9.96	V	PEAK	Pass	Band Edge
52	802.11ax HE80	155	5940.73	57.08	68.30	-11.22	V	PEAK	Pass	Band Edge
53	802.11ax HE20	149	5644.08	57.12	68.30	-11.18	H	PEAK	Pass	Band Edge
54	802.11ax HE20	165	5945.25	57.46	68.30	-10.84	V	PEAK	Pass	Band Edge
55	802.11ax HE20	149	5628.28	58.14	68.30	-10.16	V	PEAK	Pass	Band Edge
56	802.11ax HE20	165	5944.38	58.13	68.30	-10.17	H	PEAK	Pass	Band Edge
57	802.11ax HE20	149	5644.66	57.22	68.30	-11.08	V	PEAK	Pass	Band Edge
58	802.11ax HE20	165	5931.50	58.50	68.30	-9.80	H	PEAK	Pass	Band Edge
59	802.11a	144	11440.00	45.52	54.00	-8.48	V	AVERAGE	Pass	Harmonic
60	802.11ax HE20	144	11440.00	43.98	54.00	-10.02	H	AVERAGE	Pass	Harmonic
61	802.11ax HE40	142	11420.00	49.59	74.00	-24.41	V	PEAK	Pass	Harmonic
62	802.11ax HE80	138	11380.00	49.21	74.00	-24.79	H	PEAK	Pass	Harmonic
63	802.11ax HE80	58	50.37	34.78	40	-5.22	H	PEAK	Pass	LF
64	802.11ax HE20	165	48.43	31.48	40	-8.52	V	PEAK	Pass	LF
65	802.11ax HE40	09	2483.63	50.92	54.00	-3.08	V	AVERAGE	Pass	Band Edge
	802.11ax HE80	58	5076.72	47.82	54.00	-6.18	V	AVERAGE	Pass	Band Edge
66	Bluetooth-LE_GSKF	39	2483.56	50.26	54.00	-3.74	V	AVERAGE	Pass	Band Edge
	802.11ax HE80	58	5350.86	50.53	54.00	-3.47	V	AVERAGE	Pass	Band Edge

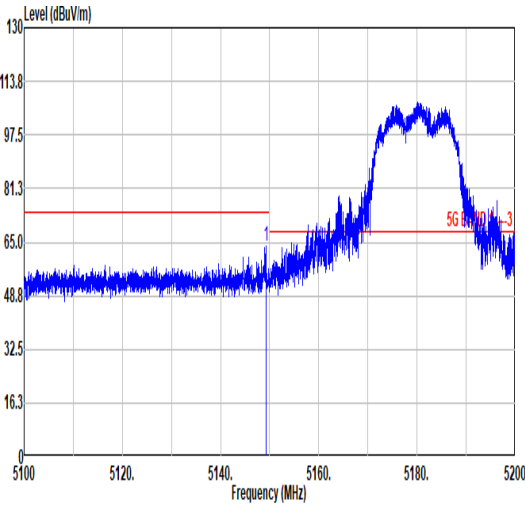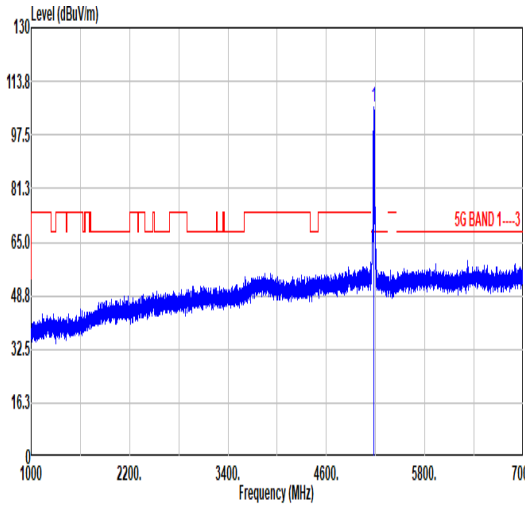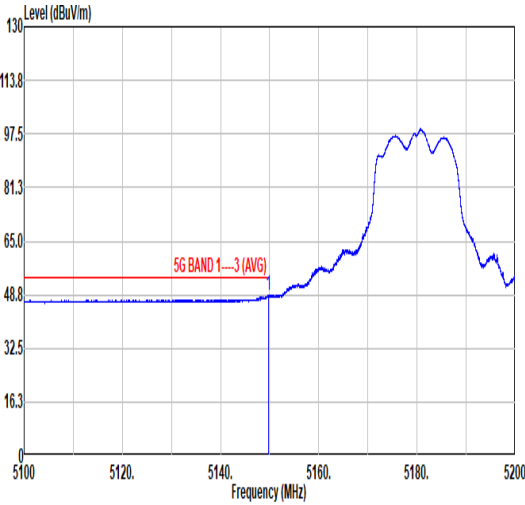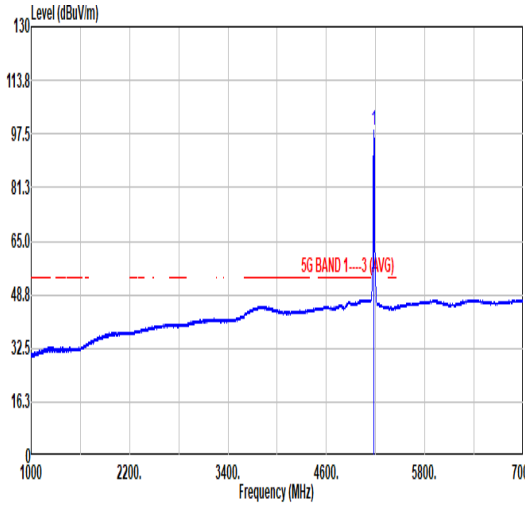

		1																																																																										
Mode	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																											
ANT	ANT 4A+5A																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal peak at approximately 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m. The measured peak level is 121 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.21</td> <td>63.54</td> <td>74.00</td> <td>-10.46</td> <td>47.83</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>386</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.21	63.54	74.00	-10.46	47.83	34.40	10.62	29.31	0.00	386	121	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal peak at approximately 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m. The measured peak level is 121 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.14</td> <td>-----</td> <td>-----</td> <td>90.39</td> <td>34.46</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>386</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	106.14	-----	-----	90.39	34.46	10.63	29.34	0.00	386	121	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.21	63.54	74.00	-10.46	47.83	34.40	10.62	29.31	0.00	386	121	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	106.14	-----	-----	90.39	34.46	10.63	29.34	0.00	386	121	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization showing the average signal. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 48.77 dBuV/m. The measured average level is 48.77 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.69</td> <td>48.77</td> <td>54.00</td> <td>-5.23</td> <td>33.06</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>386</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.69	48.77	54.00	-5.23	33.06	34.40	10.62	29.31	0.00	386	121	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization showing the average signal. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 48.85 dBuV/m. The measured average level is 48.85 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>98.85</td> <td>-----</td> <td>-----</td> <td>83.10</td> <td>34.46</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>386</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	98.85	-----	-----	83.10	34.46	10.63	29.34	0.00	386	121	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.69	48.77	54.00	-5.23	33.06	34.40	10.62	29.31	0.00	386	121	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	98.85	-----	-----	83.10	34.46	10.63	29.34	0.00	386	121	AVERAGE																																																																

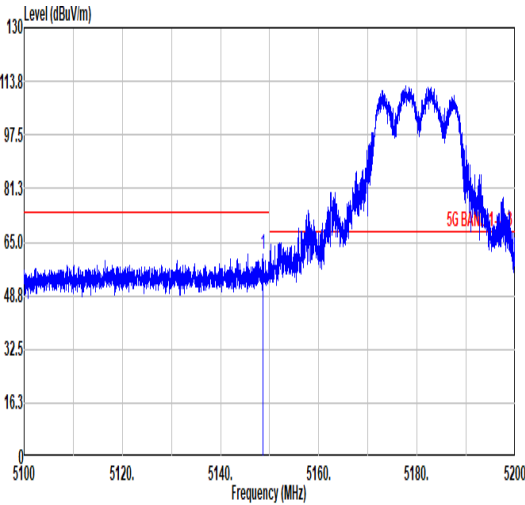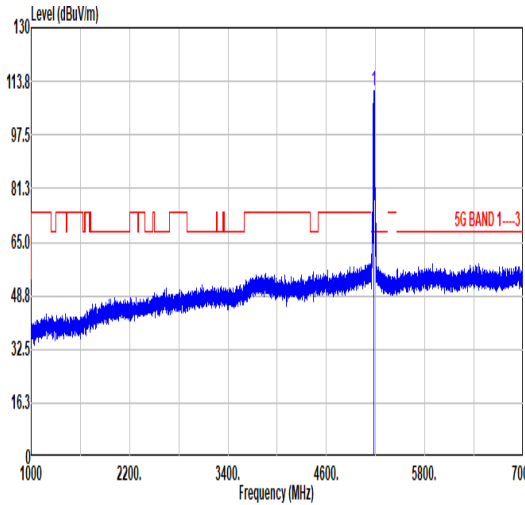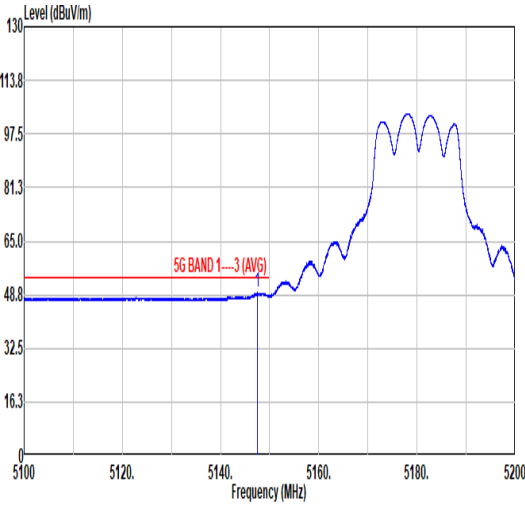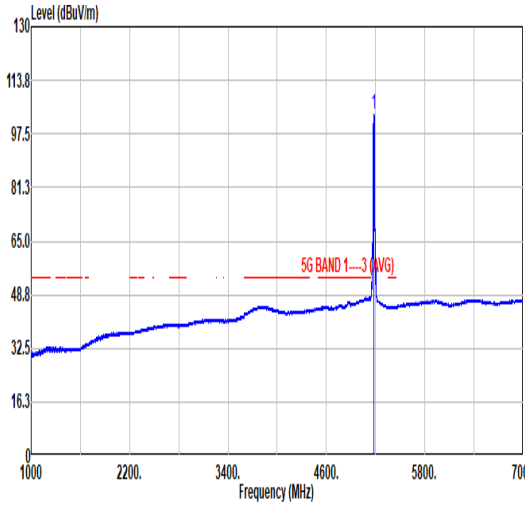

		1																																																																												
Mode	Band Edge																																																																													
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																													
ANT	ANT 4A+5A																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.56</td> <td>61.32</td> <td>74.00</td> <td>-12.68</td> <td>45.61</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>178</td> <td>3 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.56	61.32	74.00	-12.68	45.61	34.40	10.62	29.31	0.00	178	3 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>111.02</td> <td>-----</td> <td>-----</td> <td>95.27</td> <td>34.46</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>178</td> <td>3 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	111.02	-----	-----	95.27	34.46	10.63	29.34	0.00	178	3 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5148.56	61.32	74.00	-12.68	45.61	34.40	10.62	29.31	0.00	178	3 PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5180.00	111.02	-----	-----	95.27	34.46	10.63	29.34	0.00	178	3 PEAK																																																																			
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.54</td> <td>49.40</td> <td>54.00</td> <td>-4.60</td> <td>33.69</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>178</td> <td>3 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.54	49.40	54.00	-4.60	33.69	34.40	10.62	29.31	0.00	178	3 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.31</td> <td>-----</td> <td>-----</td> <td>87.56</td> <td>34.46</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>178</td> <td>3 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.31	-----	-----	87.56	34.46	10.63	29.34	0.00	178	3 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5147.54	49.40	54.00	-4.60	33.69	34.40	10.62	29.31	0.00	178	3 AVERAGE																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5180.00	103.31	-----	-----	87.56	34.46	10.63	29.34	0.00	178	3 AVERAGE																																																																			



Mode	1																																																																									
	Harmonic																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																									
ANT	ANT 4A+5A																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.16</td> <td>68.30</td> <td>-23.14</td> <td>58.69</td> <td>37.40</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10360.00	45.16	68.30	-23.14	58.69	37.40	15.55	66.48	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>47.30</td> <td>68.30</td> <td>-21.00</td> <td>60.83</td> <td>37.40</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10360.00	47.30	68.30	-21.00	60.83	37.40	15.55	66.48	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 10360.00	45.16	68.30	-23.14	58.69	37.40	15.55	66.48	0.00																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 10360.00	47.30	68.30	-21.00	60.83	37.40	15.55	66.48	0.00																																																																		





Mode	2																																																																																		
	Harmonic																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																		
ANT	ANT 4A+5A																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>44.51</td> <td>68.30</td> <td>-23.79</td> <td>57.82</td> <td>37.48</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10440.00	44.51	68.30	-23.79	57.82	37.48	15.60	66.39	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>45.29</td> <td>68.30</td> <td>-23.01</td> <td>58.60</td> <td>37.48</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> </tr> <tr> <td>2 15660.00</td> <td>47.58</td> <td>74.00</td> <td>-26.42</td> <td>52.63</td> <td>40.30</td> <td>18.83</td> <td>64.18</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10440.00	45.29	68.30	-23.01	58.60	37.48	15.60	66.39	0.00	2 15660.00	47.58	74.00	-26.42	52.63	40.30	18.83	64.18	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1 10440.00	44.51	68.30	-23.79	57.82	37.48	15.60	66.39	0.00																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1 10440.00	45.29	68.30	-23.01	58.60	37.48	15.60	66.39	0.00																																																																											
2 15660.00	47.58	74.00	-26.42	52.63	40.30	18.83	64.18	0.00																																																																											



Mode	3																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>44.84</td> <td>68.30</td> <td>-23.46</td> <td>58.03</td> <td>37.53</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	44.84	68.30	-23.46	58.03	37.53	15.62	66.34	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>43.95</td> <td>68.30</td> <td>-24.35</td> <td>57.14</td> <td>37.53</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	43.95	68.30	-24.35	57.14	37.53	15.62	66.34	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10480.00	44.84	68.30	-23.46	58.03	37.53	15.62	66.34	0.00	300	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10480.00	43.95	68.30	-24.35	57.14	37.53	15.62	66.34	0.00	100	360	PEAK																																																																							



Mode	4																																																																																	
	Harmonic																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>44.25</td> <td>68.30</td> <td>-24.05</td> <td>57.33</td> <td>37.57</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10520.00	44.25	68.30	-24.05	57.33	37.57	15.64	66.29	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>44.92</td> <td>68.30</td> <td>-23.38</td> <td>58.00</td> <td>37.57</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10520.00	44.92	68.30	-23.38	58.00	37.57	15.64	66.29	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	10520.00	44.25	68.30	-24.05	57.33	37.57	15.64	66.29	0.00	300	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	10520.00	44.92	68.30	-23.38	58.00	37.57	15.64	66.29	0.00	100	360	PEAK																																																																						







Mode	5																																																																																									
	Harmonic																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																									
ANT	ANT 4A+5A																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.63</td> <td>74.00</td> <td>-29.37</td> <td>57.49</td> <td>37.66</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.63	74.00	-29.37	57.49	37.66	15.68	66.20	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>59.42</td> <td>37.66</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	46.56	74.00	-27.44	59.42	37.66	15.68	66.20	0.00	100	360	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	44.63	74.00	-29.37	57.49	37.66	15.68	66.20	0.00	300	360	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	46.56	74.00	-27.44	59.42	37.66	15.68	66.20	0.00	100	360	PEAK																																																																														



6																																																									
Mode	Band Edge																																																								
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																								
ANT	ANT 4A+5A																																																								
Pol.	Horizontal																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5376.31</td> <td>55.88</td> <td>74.00</td> <td>-18.12</td> <td>40.06</td> <td>34.50</td> <td>10.86</td> <td>29.54</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5376.31	55.88	74.00	-18.12	40.06	34.50	10.86	29.54							0.00	100								307								PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
1 5376.31	55.88	74.00	-18.12	40.06	34.50	10.86	29.54																																																		
						0.00	100																																																		
							307																																																		
							PEAK																																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>101.72</td> <td>-----</td> <td>-----</td> <td>85.92</td> <td>34.50</td> <td>10.79</td> <td>29.49</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	101.72	-----	-----	85.92	34.50	10.79	29.49							0.00	100								307								PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
1 5320.00	101.72	-----	-----	85.92	34.50	10.79	29.49																																																		
						0.00	100																																																		
							307																																																		
							PEAK																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5455.51</td> <td>45.30</td> <td>54.00</td> <td>-8.70</td> <td>29.41</td> <td>34.53</td> <td>10.97</td> <td>29.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5455.51	45.30	54.00	-8.70	29.41	34.53	10.97	29.61							0.00	100								307								AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
1 5455.51	45.30	54.00	-8.70	29.41	34.53	10.97	29.61																																																		
						0.00	100																																																		
							307																																																		
							AVERAGE																																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>95.22</td> <td>-----</td> <td>-----</td> <td>79.42</td> <td>34.50</td> <td>10.79</td> <td>29.49</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>307</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	95.22	-----	-----	79.42	34.50	10.79	29.49							0.00	100								307								AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
1 5320.00	95.22	-----	-----	79.42	34.50	10.79	29.49																																																		
						0.00	100																																																		
							307																																																		
							AVERAGE																																																		

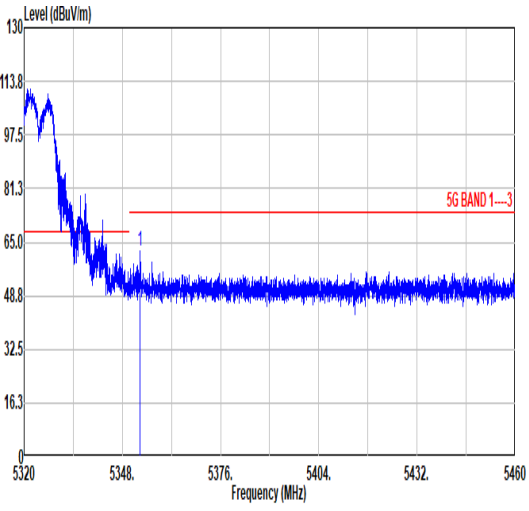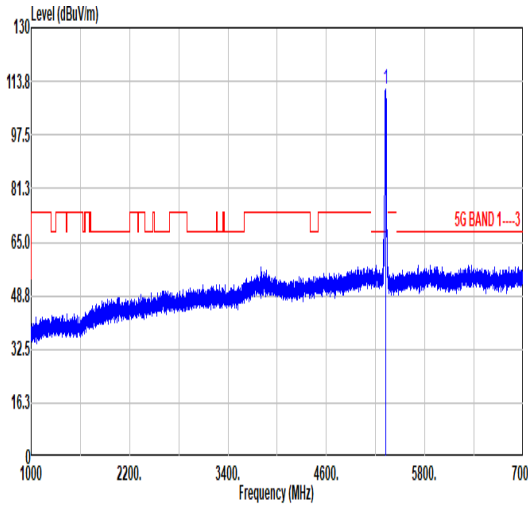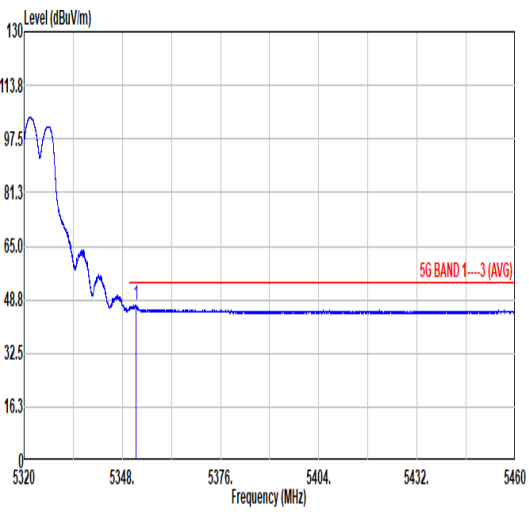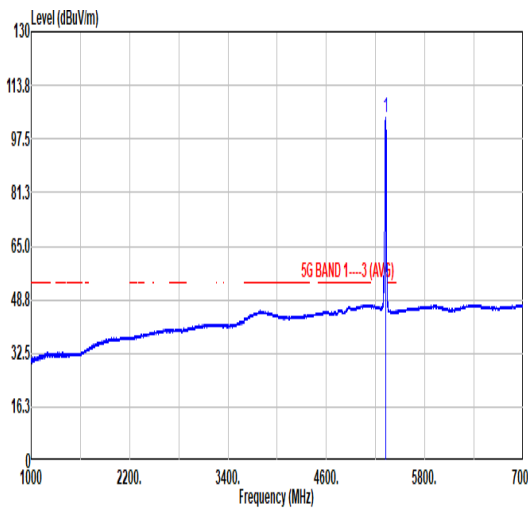

		6																																																																										
Mode	Band Edge																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																											
ANT	ANT 4A+5A																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a peak at 5320 MHz and a red limit line for 5G BAND 1-3 at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.97</td> <td>62.26</td> <td>74.00</td> <td>-11.74</td> <td>46.45</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>167</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.97	62.26	74.00	-11.74	46.45	34.50	10.83	29.52	0.00	167	0	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a peak at 5320 MHz and a red limit line for 5G BAND 1-3 at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>111.37</td> <td>-----</td> <td>-----</td> <td>95.56</td> <td>34.50</td> <td>10.80</td> <td>29.49</td> <td>0.00</td> <td>167</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	111.37	-----	-----	95.56	34.50	10.80	29.49	0.00	167	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5352.97	62.26	74.00	-11.74	46.45	34.50	10.83	29.52	0.00	167	0	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5320.00	111.37	-----	-----	95.56	34.50	10.80	29.49	0.00	167	0	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows the average spectrum with a red limit line for 5G BAND 1-3 (AVG) at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.00</td> <td>47.30</td> <td>54.00</td> <td>-6.70</td> <td>31.49</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>167</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.00	47.30	54.00	-6.70	31.49	34.50	10.83	29.52	0.00	167	0	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows the average spectrum with a red limit line for 5G BAND 1-3 (AVG) at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>103.82</td> <td>-----</td> <td>-----</td> <td>88.01</td> <td>34.50</td> <td>10.80</td> <td>29.49</td> <td>0.00</td> <td>167</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	103.82	-----	-----	88.01	34.50	10.80	29.49	0.00	167	0	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5351.00	47.30	54.00	-6.70	31.49	34.50	10.83	29.52	0.00	167	0	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5320.00	103.82	-----	-----	88.01	34.50	10.80	29.49	0.00	167	0	AVERAGE																																																																







Mode	6																																																																																	
	Harmonic																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak																																																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.22</td> <td>74.00</td> <td>-29.78</td> <td>56.96</td> <td>37.70</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	44.22	74.00	-29.78	56.96	37.70	15.71	66.15	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>46.74</td> <td>74.00</td> <td>-27.26</td> <td>59.48</td> <td>37.70</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	46.74	74.00	-27.26	59.48	37.70	15.71	66.15	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10640.00	44.22	74.00	-29.78	56.96	37.70	15.71	66.15	0.00	100	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10640.00	46.74	74.00	-27.26	59.48	37.70	15.71	66.15	0.00	100	0	PEAK																																																																							



Mode	7																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																
ANT	ANT 4A+5A																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5366.01</td> <td>55.99</td> <td>74.00</td> <td>-18.01</td> <td>40.18</td> <td>34.50</td> <td>10.85</td> <td>29.54</td> <td>0.00</td> <td>381</td> <td>102</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.96</td> <td>55.35</td> <td>68.30</td> <td>-12.95</td> <td>39.45</td> <td>34.53</td> <td>10.99</td> <td>29.62</td> <td>0.00</td> <td>381</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5366.01	55.99	74.00	-18.01	40.18	34.50	10.85	29.54	0.00	381	102	PEAK	2	5466.96	55.35	68.30	-12.95	39.45	34.53	10.99	29.62	0.00	381	102	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.29</td> <td>-----</td> <td>-----</td> <td>89.35</td> <td>34.55</td> <td>11.04</td> <td>29.65</td> <td>0.00</td> <td>381</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	105.29	-----	-----	89.35	34.55	11.04	29.65	0.00	381	102	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5366.01	55.99	74.00	-18.01	40.18	34.50	10.85	29.54	0.00	381	102	PEAK																																																																																					
2	5466.96	55.35	68.30	-12.95	39.45	34.53	10.99	29.62	0.00	381	102	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	105.29	-----	-----	89.35	34.55	11.04	29.65	0.00	381	102	PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.77</td> <td>45.45</td> <td>54.00</td> <td>-8.55</td> <td>29.56</td> <td>34.53</td> <td>10.97</td> <td>29.61</td> <td>0.00</td> <td>381</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.77	45.45	54.00	-8.55	29.56	34.53	10.97	29.61	0.00	381	102	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.86</td> <td>-----</td> <td>-----</td> <td>81.92</td> <td>34.55</td> <td>11.04</td> <td>29.65</td> <td>0.00</td> <td>381</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	97.86	-----	-----	81.92	34.55	11.04	29.65	0.00	381	102	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5451.77	45.45	54.00	-8.55	29.56	34.53	10.97	29.61	0.00	381	102	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	97.86	-----	-----	81.92	34.55	11.04	29.65	0.00	381	102	AVERAGE																																																																																					



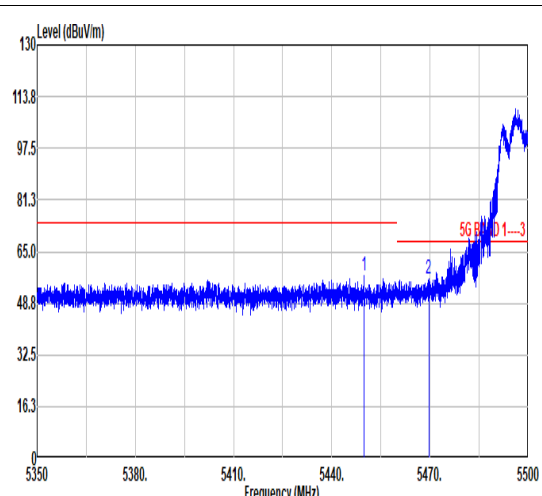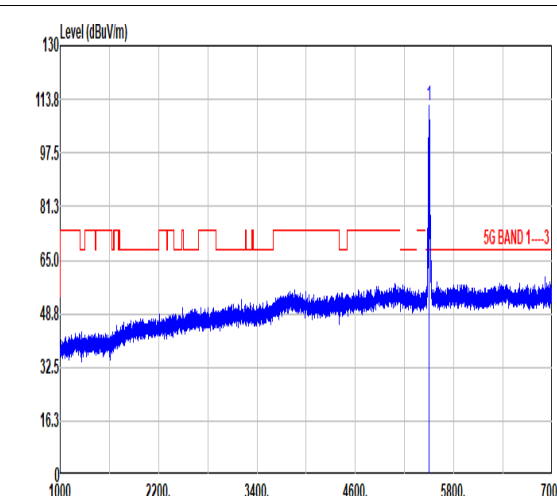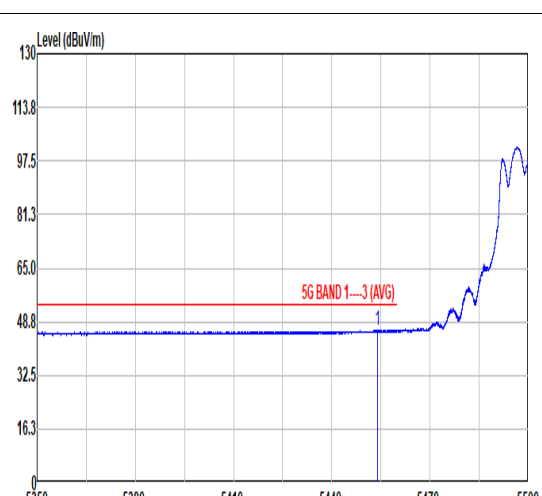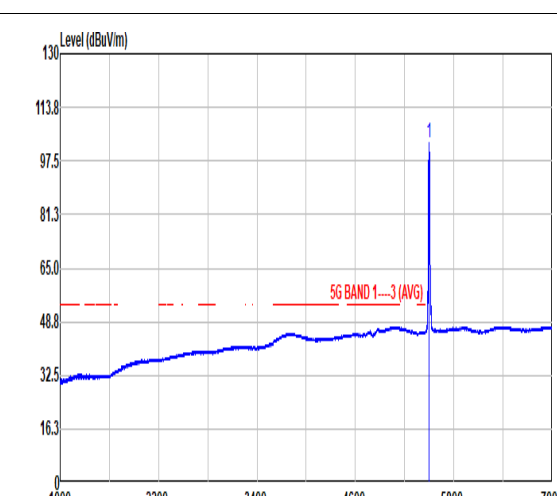

Mode	7																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																
ANT	ANT 4A+5A																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.84</td> <td>57.22</td> <td>74.00</td> <td>-16.78</td> <td>41.35</td> <td>34.52</td> <td>10.96</td> <td>29.61</td> <td>0.00</td> <td>152</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.59</td> <td>56.21</td> <td>68.30</td> <td>-12.09</td> <td>40.32</td> <td>34.53</td> <td>10.99</td> <td>29.63</td> <td>0.00</td> <td>152</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5449.84	57.22	74.00	-16.78	41.35	34.52	10.96	29.61	0.00	152	360	PEAK	2	5469.59	56.21	68.30	-12.09	40.32	34.53	10.99	29.63	0.00	152	360	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.95</td> <td>-----</td> <td>-----</td> <td>96.01</td> <td>34.55</td> <td>11.04</td> <td>29.65</td> <td>0.00</td> <td>152</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	111.95	-----	-----	96.01	34.55	11.04	29.65	0.00	152	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5449.84	57.22	74.00	-16.78	41.35	34.52	10.96	29.61	0.00	152	360	PEAK																																																																																					
2	5469.59	56.21	68.30	-12.09	40.32	34.53	10.99	29.63	0.00	152	360	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	111.95	-----	-----	96.01	34.55	11.04	29.65	0.00	152	360	PEAK																																																																																					
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.06</td> <td>46.31</td> <td>54.00</td> <td>-7.69</td> <td>30.42</td> <td>34.53</td> <td>10.97</td> <td>29.61</td> <td>0.00</td> <td>152</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.06	46.31	54.00	-7.69	30.42	34.53	10.97	29.61	0.00	152	360	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.78</td> <td>-----</td> <td>-----</td> <td>86.84</td> <td>34.55</td> <td>11.04</td> <td>29.65</td> <td>0.00</td> <td>152</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.78	-----	-----	86.84	34.55	11.04	29.65	0.00	152	360	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5454.06	46.31	54.00	-7.69	30.42	34.53	10.97	29.61	0.00	152	360	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	102.78	-----	-----	86.84	34.55	11.04	29.65	0.00	152	360	AVERAGE																																																																																					



Mode	7																																																																											
	Harmonic																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																											
ANT	ANT 4A+5A																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak																																																																												
Avg																																																																												
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>58.39</td> <td>38.10</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	46.66	74.00	-27.34	58.39	38.10	15.90	65.73	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.82</td> <td>74.00</td> <td>-26.18</td> <td>59.55</td> <td>38.10</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	47.82	74.00	-26.18	59.55	38.10	15.90	65.73	0.00	100	0	PEAK
Limit	Read		Ant	Cable								Preamp	Aux	APos	TPos	Remark																																																												
	Freq	Level			Line Margin																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11000.00	46.66	74.00	-27.34	58.39	38.10	15.90	65.73	0.00	100	360	PEAK																																																																
Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
	Freq	Level								Line Margin																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11000.00	47.82	74.00	-26.18	59.55	38.10	15.90	65.73	0.00	100	0	PEAK																																																																



Mode	8																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak																																																																																		
Avg																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.24</td> <td>74.00</td> <td>-28.76</td> <td>56.70</td> <td>38.20</td> <td>15.98</td> <td>65.64</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	45.24	74.00	-28.76	56.70	38.20	15.98	65.64	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.18</td> <td>74.00</td> <td>-28.82</td> <td>56.64</td> <td>38.20</td> <td>15.98</td> <td>65.64</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	45.18	74.00	-28.82	56.64	38.20	15.98	65.64	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11160.00	45.24	74.00	-28.76	56.70	38.20	15.98	65.64	0.00	300	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11160.00	45.18	74.00	-28.82	56.64	38.20	15.98	65.64	0.00	100	360	PEAK																																																																							



Mode	9																																																																																																																	
	Band Edge																																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																	
ANT	ANT 4A+5A																																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5745.47</td> <td>57.91</td> <td>68.30</td> <td>-10.39</td> <td>41.49</td> <td>34.88</td> <td>11.33</td> <td>29.79</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>391</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5745.47	57.91	68.30	-10.39	41.49	34.88	11.33	29.79							0.00	391								110								PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>103.24</td> <td>-----</td> <td>-----</td> <td>86.98</td> <td>34.78</td> <td>11.28</td> <td>29.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>391</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	103.24	-----	-----	86.98	34.78	11.28	29.80							0.00	391								110								PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1 5745.47	57.91	68.30	-10.39	41.49	34.88	11.33	29.79																																																																																																											
						0.00	391																																																																																																											
							110																																																																																																											
							PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1 5700.00	103.24	-----	-----	86.98	34.78	11.28	29.80																																																																																																											
						0.00	391																																																																																																											
							110																																																																																																											
							PEAK																																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.76</td> <td>-----</td> <td>-----</td> <td>78.50</td> <td>34.78</td> <td>11.28</td> <td>29.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>391</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	94.76	-----	-----	78.50	34.78	11.28	29.80							0.00	391								110								AVERAGE																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1 5700.00	94.76	-----	-----	78.50	34.78	11.28	29.80																																																																																																											
						0.00	391																																																																																																											
							110																																																																																																											
							AVERAGE																																																																																																											







Mode	9																																																																																																	
	Band Edge																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																	
ANT	ANT 4A+5A																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.36</td> <td>64.14</td> <td>68.30</td> <td>-4.16</td> <td>47.78</td> <td>34.84</td> <td>11.31</td> <td>29.79</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>12 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5726.36	64.14	68.30	-4.16	47.78	34.84	11.31	29.79							0.00	100								12 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>109.42</td> <td>-----</td> <td>-----</td> <td>93.17</td> <td>34.77</td> <td>11.28</td> <td>29.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>12 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	109.42	-----	-----	93.17	34.77	11.28	29.80							0.00	100								12 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5726.36	64.14	68.30	-4.16	47.78	34.84	11.31	29.79																																																																																											
						0.00	100																																																																																											
							12 PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5700.00	109.42	-----	-----	93.17	34.77	11.28	29.80																																																																																											
						0.00	100																																																																																											
							12 PEAK																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.88</td> <td>-----</td> <td>-----</td> <td>85.62</td> <td>34.78</td> <td>11.28</td> <td>29.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>12 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	101.88	-----	-----	85.62	34.78	11.28	29.80							0.00	100								12 AVERAGE																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5700.00	101.88	-----	-----	85.62	34.78	11.28	29.80																																																																																											
						0.00	100																																																																																											
							12 AVERAGE																																																																																											







Mode	9																																																																																							
	Harmonic																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																							
ANT	ANT 4A+5A																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>44.91</td> <td>74.00</td> <td>-29.09</td> <td>55.98</td> <td>38.34</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	44.91	74.00	-29.09	55.98	38.34	16.10	65.51	0.00	100 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>52.63</td> <td>74.00</td> <td>-21.37</td> <td>63.70</td> <td>38.34</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>103 12 PEAK</td> </tr> <tr> <td>2 11400.00</td> <td>41.56</td> <td>54.00</td> <td>-12.44</td> <td>52.63</td> <td>38.34</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>103 12 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	52.63	74.00	-21.37	63.70	38.34	16.10	65.51	0.00	103 12 PEAK	2 11400.00	41.56	54.00	-12.44	52.63	38.34	16.10	65.51	0.00	103 12 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1 11400.00	44.91	74.00	-29.09	55.98	38.34	16.10	65.51	0.00	100 360 PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1 11400.00	52.63	74.00	-21.37	63.70	38.34	16.10	65.51	0.00	103 12 PEAK																																																																															
2 11400.00	41.56	54.00	-12.44	52.63	38.34	16.10	65.51	0.00	103 12 AVERAGE																																																																															

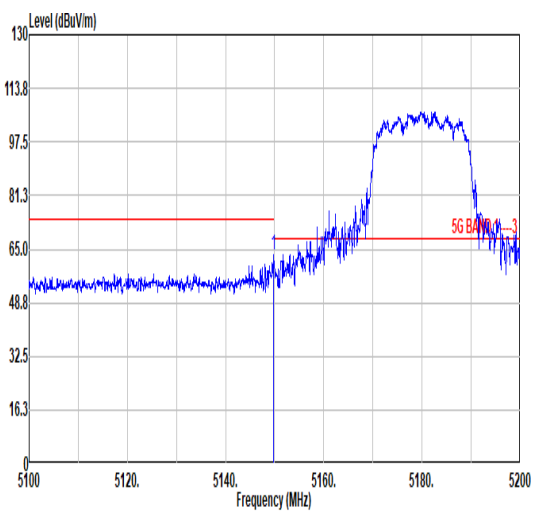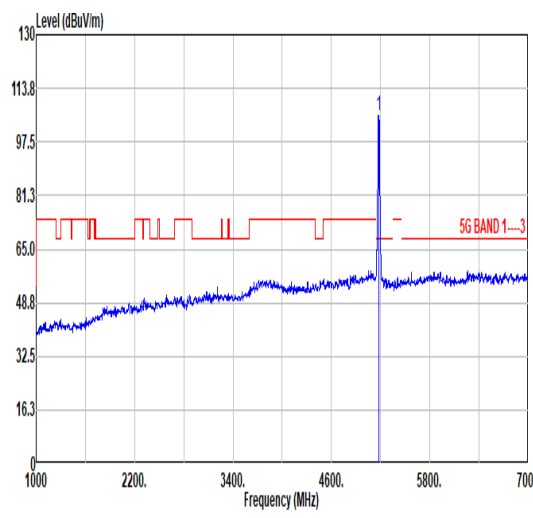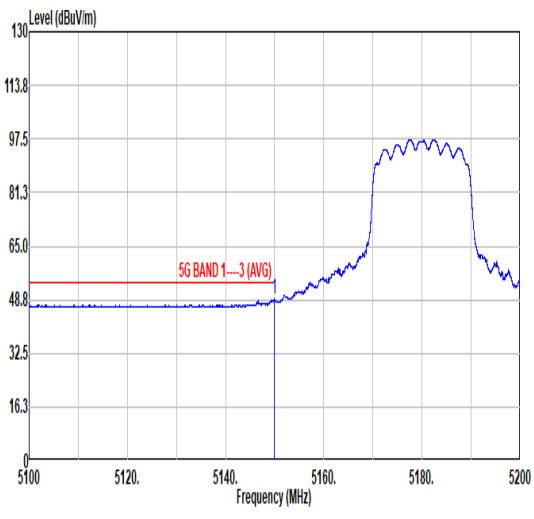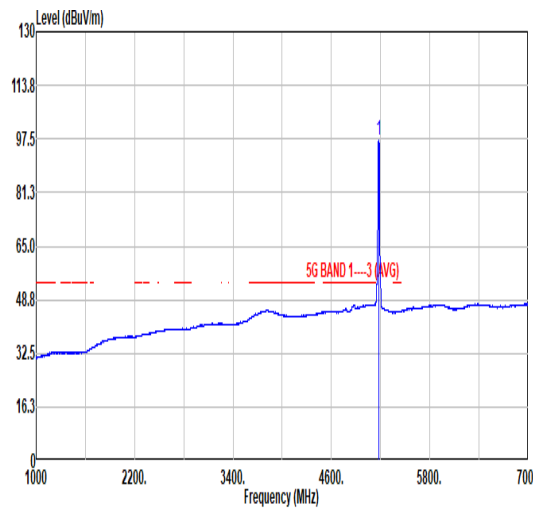

		10																																																																										
Mode	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																											
ANT	ANT 4A+5A																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal between 5100 and 5200 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. The signal peaks at 5180 MHz with a level of 122 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.75</td> <td>63.45</td> <td>74.00</td> <td>-10.55</td> <td>47.74</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>384</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.75	63.45	74.00	-10.55	47.74	34.40	10.62	29.31	0.00	384	122	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. The signal peaks at 5180 MHz with a level of 122 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.46</td> <td>-----</td> <td>-----</td> <td>89.71</td> <td>34.45</td> <td>10.63</td> <td>29.33</td> <td>0.00</td> <td>384</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	105.46	-----	-----	89.71	34.45	10.63	29.33	0.00	384	122	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.75	63.45	74.00	-10.55	47.74	34.40	10.62	29.31	0.00	384	122	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	105.46	-----	-----	89.71	34.45	10.63	29.33	0.00	384	122	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization showing the average signal. The signal peaks at 5180 MHz with an average level of 122 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.85</td> <td>48.84</td> <td>54.00</td> <td>-5.16</td> <td>33.13</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>384</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.85	48.84	54.00	-5.16	33.13	34.40	10.62	29.31	0.00	384	122	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization showing the average signal. The signal peaks at 5180 MHz with an average level of 122 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.04</td> <td>-----</td> <td>-----</td> <td>81.29</td> <td>34.46</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>384</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	97.04	-----	-----	81.29	34.46	10.63	29.34	0.00	384	122	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.85	48.84	54.00	-5.16	33.13	34.40	10.62	29.31	0.00	384	122	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	97.04	-----	-----	81.29	34.46	10.63	29.34	0.00	384	122	AVERAGE																																																																

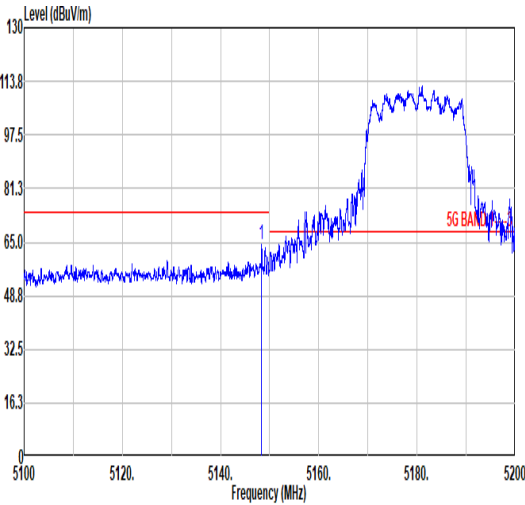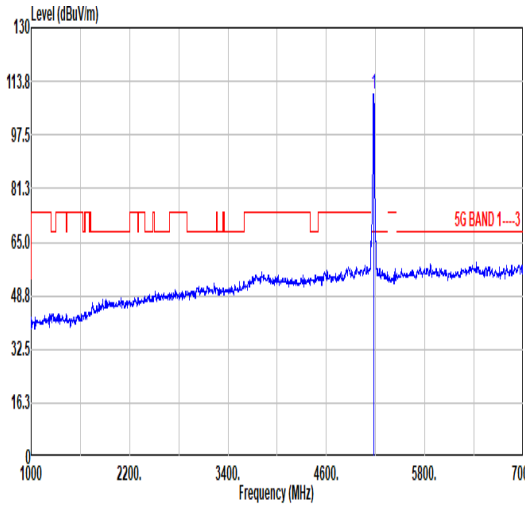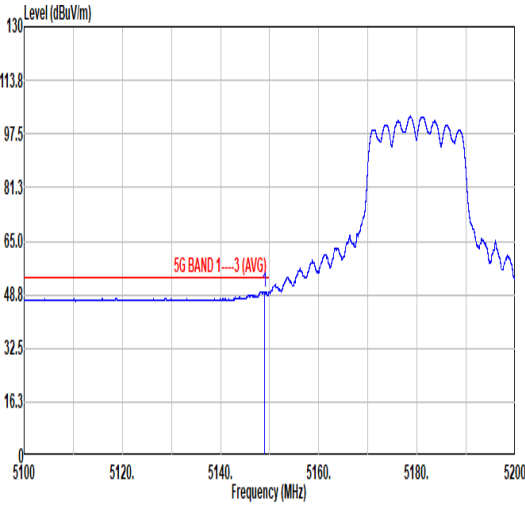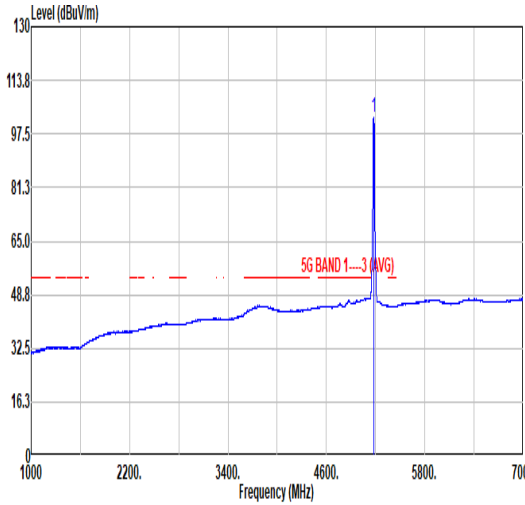

		10																																																																										
Mode	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																											
ANT	ANT 4A+5A																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level rising from approximately 50 dBuV/m at 5100 MHz to a peak of about 110 dBuV/m between 5160 MHz and 5180 MHz. A red horizontal line indicates the 5G BAND 1 limit at approximately 65 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.35</td> <td>64.29</td> <td>74.00</td> <td>-9.71</td> <td>48.58</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.35	64.29	74.00	-9.71	48.58	34.40	10.62	29.31	0.00	100	360	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level rising from approximately 40 dBuV/m at 1000 MHz to a peak of about 110 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.90</td> <td>-----</td> <td>-----</td> <td>94.15</td> <td>34.45</td> <td>10.63</td> <td>29.33</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	109.90	-----	-----	94.15	34.45	10.63	29.33	0.00	100	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5148.35	64.29	74.00	-9.71	48.58	34.40	10.62	29.31	0.00	100	360	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	109.90	-----	-----	94.15	34.45	10.63	29.33	0.00	100	360	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization, averaged. The plot shows a signal level rising from approximately 48 dBuV/m at 5100 MHz to a peak of about 95 dBuV/m between 5160 MHz and 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.95</td> <td>49.78</td> <td>54.00</td> <td>-4.22</td> <td>34.07</td> <td>34.40</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.95	49.78	54.00	-4.22	34.07	34.40	10.62	29.31	0.00	100	360	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, averaged. The plot shows a signal level rising from approximately 32 dBuV/m at 1000 MHz to a peak of about 95 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.36</td> <td>-----</td> <td>-----</td> <td>86.61</td> <td>34.45</td> <td>10.63</td> <td>29.33</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	102.36	-----	-----	86.61	34.45	10.63	29.33	0.00	100	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5148.95	49.78	54.00	-4.22	34.07	34.40	10.62	29.31	0.00	100	360	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	102.36	-----	-----	86.61	34.45	10.63	29.33	0.00	100	360	AVERAGE																																																																





Mode	10																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>44.26</td> <td>68.30</td> <td>-24.04</td> <td>57.79</td> <td>37.40</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	44.26	68.30	-24.04	57.79	37.40	15.55	66.48	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>44.76</td> <td>68.30</td> <td>-23.54</td> <td>58.29</td> <td>37.40</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	44.76	68.30	-23.54	58.29	37.40	15.55	66.48	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10360.00	44.26	68.30	-24.04	57.79	37.40	15.55	66.48	0.00	100	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10360.00	44.76	68.30	-23.54	58.29	37.40	15.55	66.48	0.00	100	0	PEAK																																																																							



Mode	11																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>44.37</td> <td>68.30</td> <td>-23.93</td> <td>57.68</td> <td>37.48</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	44.37	68.30	-23.93	57.68	37.48	15.60	66.39	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>44.50</td> <td>68.30</td> <td>-23.80</td> <td>57.81</td> <td>37.48</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	44.50	68.30	-23.80	57.81	37.48	15.60	66.39	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10440.00	44.37	68.30	-23.93	57.68	37.48	15.60	66.39	0.00	300	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10440.00	44.50	68.30	-23.80	57.81	37.48	15.60	66.39	0.00	100	360	PEAK																																																																							



Mode	12																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																															
ANT	ANT 4A+5A																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>43.90</td> <td>68.30 -24.40</td> <td>57.09</td> <td>37.53</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	43.90	68.30 -24.40	57.09	37.53	15.62	66.34	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>44.78</td> <td>68.30 -23.52</td> <td>57.97</td> <td>37.53</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	44.78	68.30 -23.52	57.97	37.53	15.62	66.34	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	43.90	68.30 -24.40	57.09	37.53	15.62	66.34	0.00	300	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	44.78	68.30 -23.52	57.97	37.53	15.62	66.34	0.00	100	360	PEAK																																																																						







Mode	13																																																																																					
	Harmonic																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																																																																					
ANT	ANT 4A+5A																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak																																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.00</td> <td>68.30</td> <td>-23.30</td> <td>58.08</td> <td>37.57</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 10520.00	45.00	68.30	-23.30	58.08	37.57	15.64	66.29	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.41</td> <td>68.30</td> <td>-22.89</td> <td>58.49</td> <td>37.57</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 10520.00	45.41	68.30	-22.89	58.49	37.57	15.64	66.29	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 10520.00	45.00	68.30	-23.30	58.08	37.57	15.64	66.29	0.00	300	360	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 10520.00	45.41	68.30	-22.89	58.49	37.57	15.64	66.29	0.00	100	360	PEAK																																																																											



Mode	14																																																																																									
	Harmonic																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz																																																																																									
ANT	ANT 4A+5A																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak																																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.86</td> <td>74.00</td> <td>-29.14</td> <td>57.72</td> <td>37.66</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.86	74.00	-29.14	57.72	37.66	15.68	66.20	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.51</td> <td>74.00</td> <td>-28.49</td> <td>58.37</td> <td>37.66</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.51	74.00	-28.49	58.37	37.66	15.68	66.20	0.00	100	360	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	44.86	74.00	-29.14	57.72	37.66	15.68	66.20	0.00	300	360	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	45.51	74.00	-28.49	58.37	37.66	15.68	66.20	0.00	100	360	PEAK																																																																														

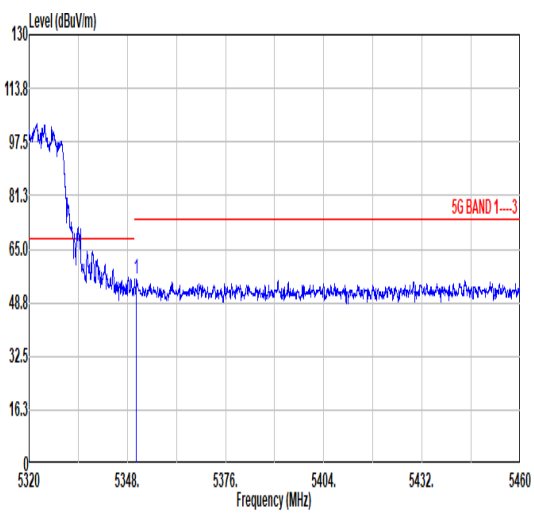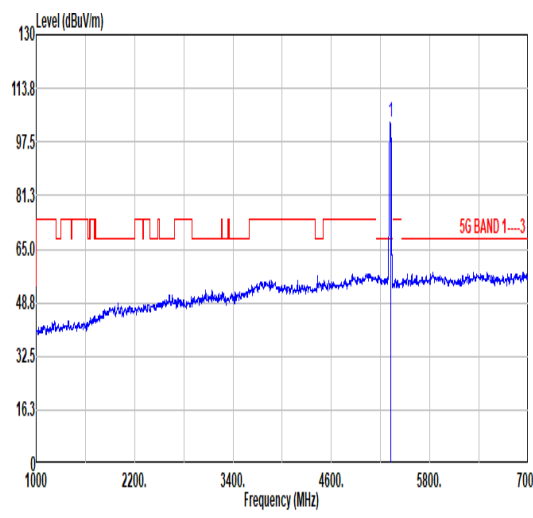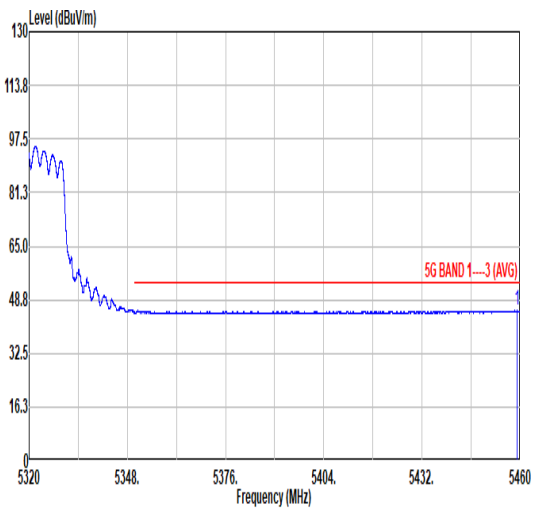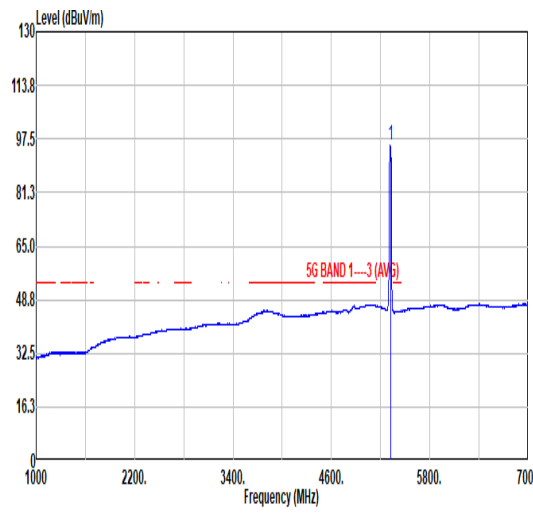

		15																																																																										
Mode	Band Edge																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																											
ANT	ANT 4A+5A																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal level starting at approximately 97.5 dBuV/m at 5320 MHz and decreasing to about 48.8 dBuV/m by 5340 MHz. A red limit line for '5G BAND 1---3' is shown at 65.0 dBuV/m. A peak is marked at 5350.60 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.60</td> <td>56.14</td> <td>74.00</td> <td>-17.86</td> <td>40.33</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>358</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.60	56.14	74.00	-17.86	40.33	34.50	10.83	29.52	0.00	358	253	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level starting at approximately 48.8 dBuV/m at 5320 MHz and increasing to about 103.41 dBuV/m at 5320.00 MHz. A red limit line for '5G BAND 1---3' is shown at 65.0 dBuV/m. A peak is marked at 5320.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>103.41</td> <td>-----</td> <td>-----</td> <td>87.61</td> <td>34.50</td> <td>10.79</td> <td>29.49</td> <td>0.00</td> <td>358</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	103.41	-----	-----	87.61	34.50	10.79	29.49	0.00	358	253	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5350.60	56.14	74.00	-17.86	40.33	34.50	10.83	29.52	0.00	358	253	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5320.00	103.41	-----	-----	87.61	34.50	10.79	29.49	0.00	358	253	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows an average signal level starting at approximately 97.5 dBuV/m at 5320 MHz and decreasing to about 45.48 dBuV/m by 5340 MHz. A red limit line for '5G BAND 1---3 (AVG)' is shown at 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.10</td> <td>45.48</td> <td>54.00</td> <td>-8.52</td> <td>29.59</td> <td>34.53</td> <td>10.90</td> <td>29.62</td> <td>0.00</td> <td>358</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.10	45.48	54.00	-8.52	29.59	34.53	10.90	29.62	0.00	358	253	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows an average signal level starting at approximately 48.8 dBuV/m at 5320 MHz and increasing to about 95.57 dBuV/m at 5320.00 MHz. A red limit line for '5G BAND 1---3 (AVG)' is shown at 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>95.57</td> <td>-----</td> <td>-----</td> <td>79.77</td> <td>34.50</td> <td>10.79</td> <td>29.49</td> <td>0.00</td> <td>358</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	95.57	-----	-----	79.77	34.50	10.79	29.49	0.00	358	253	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5459.10	45.48	54.00	-8.52	29.59	34.53	10.90	29.62	0.00	358	253	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5320.00	95.57	-----	-----	79.77	34.50	10.79	29.49	0.00	358	253	AVERAGE																																																																



Mode	15																																																																																															
	Band Edge																																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																															
ANT	ANT 4A+5A																																																																																															
Pol.	Vertical	Fundamental																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.02</td> <td>62.21</td> <td>74.00</td> <td>-11.79</td> <td>46.40</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>196</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5351.02	62.21	74.00	-11.79	46.40	34.50	10.83	29.52	0.00	196	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.33</td> <td>-----</td> <td>-----</td> <td>93.53</td> <td>34.50</td> <td>10.79</td> <td>29.49</td> <td>0.00</td> <td>196</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5320.00	109.33	-----	-----	93.53	34.50	10.79	29.49	0.00	196	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5351.02	62.21	74.00	-11.79	46.40	34.50	10.83	29.52	0.00	196	0	PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5320.00	109.33	-----	-----	93.53	34.50	10.79	29.49	0.00	196	0	PEAK																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.74</td> <td>48.31</td> <td>54.00</td> <td>-5.69</td> <td>32.50</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>196</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5350.74	48.31	54.00	-5.69	32.50	34.50	10.83	29.52	0.00	196	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.09</td> <td>-----</td> <td>-----</td> <td>86.09</td> <td>34.50</td> <td>10.79</td> <td>29.49</td> <td>0.00</td> <td>196</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5320.00	101.09	-----	-----	86.09	34.50	10.79	29.49	0.00	196	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5350.74	48.31	54.00	-5.69	32.50	34.50	10.83	29.52	0.00	196	0	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	5320.00	101.09	-----	-----	86.09	34.50	10.79	29.49	0.00	196	0	AVERAGE																																																																																				



Mode	15																																																																																	
	Harmonic																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>43.85</td> <td>74.00</td> <td>-30.15</td> <td>56.59</td> <td>37.70</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	43.85	74.00	-30.15	56.59	37.70	15.71	66.15	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>45.01</td> <td>74.00</td> <td>-28.99</td> <td>57.75</td> <td>37.70</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	45.01	74.00	-28.99	57.75	37.70	15.71	66.15	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10640.00	43.85	74.00	-30.15	56.59	37.70	15.71	66.15	0.00	100	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10640.00	45.01	74.00	-28.99	57.75	37.70	15.71	66.15	0.00	100	0	PEAK																																																																							