

FCC TEST REPORT (PART 24)



Applicant:	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer or Supplier:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China
Product:	Tablet Computer
Brand Name:	Lenovo
Model Name:	Lenovo TB-X6C6NBL
FCC ID:	O57TBX6C6NBL
Date of tests:	Mar. 05, 2021 ~ Jun. 22, 2021

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**
 FCC PART 2
 ANSI/TIA/EIA-603-D
 ANSI/TIA/EIA-603-E
 ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jun. 23, 2021	 Date: Jun. 23, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD4

1 SUMMARY OF TEST RESULTS5

1.1 MEASUREMENT UNCERTAINTY5

1.2 TEST SITE AND INSTRUMENTS6

2 GENERAL INFORMATION8

2.1 GENERAL DESCRIPTION OF EUT8

2.2 CONFIGURATION OF SYSTEM UNDER TEST12

2.3 DESCRIPTION OF SUPPORT UNITS13

2.4 TEST ITEM AND TEST CONFIGURATION.....13

2.5 EUT OPERATING CONDITIONS18

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS18

3 TEST TYPES AND RESULTS19

3.1 OUTPUT POWER MEASUREMENT19

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT19

3.1.2 TEST PROCEDURES.....19

3.1.3 TEST SETUP20

3.1.4 TEST RESULTS.....20

3.2 FREQUENCY STABILITY MEASUREMENT34

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT34

3.2.2 TEST PROCEDURE34

3.2.3 TEST SETUP34

3.2.4 TEST RESULTS.....35

3.3 OCCUPIED BANDWIDTH MEASUREMENT50

3.3.1 TEST PROCEDURES.....50

3.3.2 TEST SETUP50

3.3.3 TEST RESULTS.....51

3.4 BAND EDGE MEASUREMENTC65

3.4.1 LIMITS OF BAND EDGE MEASUREMENT65

3.4.2 TEST SETUP65

3.4.3 TEST PROCEDURES.....66

3.4.4. TEST RESULTS.....67

3.5 CONDUCTED SPURIOUS EMISSIONS.....92

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT92

3.5.2 TEST PROCEDURE92

3.5.3 TEST SETUP92

3.5.4 TEST RESULTS.....93

3.6 RADIATED EMISSION MEASUREMENT108

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT108

3.6.2 TEST PROCEDURES.....108

3.6.3 DEVIATION FROM TEST STANDARD.....108



**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

3.6.4 TEST SETUP	109
3.6.5 TEST RESULTS	110
3.7 PEAK TO AVERAGE RATIO	160
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	160
3.7.2 TEST SETUP	160
3.7.3 TEST PROCEDURES	160
3.7.4 TEST RESULTS	161
4 INFORMATION ON THE TESTING LABORATORIES	182
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	182



Test Report No.: RF210603W002-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF210603W002-2	Original release	Jun. 23, 2021

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	1.1.1.1.1 TEST TYPE	RESULT
2.1046 24.232	Equivalent Isotropic Radiated Power	Compliance
2.1055 24.235	Frequency Stability	Compliance
2.1049 24.238(b)	Occupied Bandwidth	Compliance
24.232(d)	Peak to average ratio	Compliance
24.238(b)	Band Edge Measurements	Compliance
2.1051 24.238	Conducted Spurious Emissions	Compliance
2.1053 24.238	Radiated Spurious Emissions	Compliance

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,21	Apr. 26,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,20	Apr. 26,21
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 25,21	Feb. 24,22
Signal Analyzer	Rohde&Schwarz	FSV7	101561	Mar. 26,21	Mar. 25,22
Signal Analyzer	Rohde&Schwarz	FSV7	101561	Mar. 27,20	Mar. 26,21
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 26,21	Mar. 25,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 27,20	Mar. 26,21
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Nov. 24, 20	Nov. 23, 21
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Feb. 26,21	Feb. 25,22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Jun. 02,20	Jun. 01,21
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,21	Apr. 29,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,20	Apr. 29,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	May. 19,20	May. 19,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	May. 19,21	May. 19,22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	Jun. 03,20	Jun. 02,21
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	Jun. 03,21	Jun. 02,22
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Feb. 25,21	Feb. 24,22
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Jun. 02,20	Jun. 01,21
Power Sensor	Anritsu	MA2411B	1339352	Jun. 02,21	Jun. 01,22
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Mar. 10,21	Mar. 09,22
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Mar. 11,20	Mar. 10,21
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Apr. 27,20	Apr. 26,21
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Apr. 27,21	Apr. 26,22



BUREAU
VERITAS

Test Report No.: RF210603W002-2

Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 26,20	Aug. 25,21

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Tablet Computer	
BRAND NAME	Lenovo	
MODEL NAME	Lenovo TB-X6C6NBL	
NOMINAL VOLTAGE	DC12V	
MODULATION TYPE	GPRS: GMSK EDGE: 8PSK WCDMA: BPSK,QPSK LTE Band 2: QPSK, 16QAM	
FREQUENCY RANGE	GPRS, EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA	1852.4MHz ~ 1907.6MHz
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz
	LTE Band 25 Channel Bandwidth: 10MHz	1855.0MHz ~ 1910.0MHz
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz
	LTE Band 25 Channel Bandwidth: 20MHz	1860.0MHz ~ 1905.0MHz



MAX. EIRP POWER	GPRS	1336.6mW
	EDGE	575.44mW
	WCDMA	318.42mW
	LTE Band 2 Channel Bandwidth: 1.4MHz	298.54mW
	LTE Band 2 Channel Bandwidth: 3MHz	291.07mW
	LTE Band 2 Channel Bandwidth: 5MHz	294.44mW
	LTE Band 2 Channel Bandwidth: 10MHz	294.44mW
	LTE Band 2 Channel Bandwidth: 15MHz	293.09mW
	LTE Band 2 Channel Bandwidth: 20MHz	295.80mW
	LTE Band 25 Channel Bandwidth: 1.4MHz	282.49mW
	LTE Band 25 Channel Bandwidth: 3MHz	279.25mW
	LTE Band 25 Channel Bandwidth: 5MHz	278.61mW
	LTE Band 25 Channel Bandwidth: 10MHz	278.61mW
	LTE Band 25 Channel Bandwidth: 15MHz	280.54mW
	LTE Band 25 Channel Bandwidth: 20MHz	282.49mW



EMISSION DESIGNATOR	GPRS	250KGXW	
	EDGE	250KG7W	
	WCDMA	4M18F9W	
	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M08G7D 16QAM: 1M08W7D	
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M68G7D 16QAM: 2M68W7D	
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M48G7D 16QAM: 4M47W7D	
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 8M95G7D 16QAM: 8M95W7D	
	LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 13M4G7D 16QAM: 13M4W7D	
	LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 17M9G7D 16QAM: 17M9W7D	
	LTE Band 25 Channel Bandwidth: 1.4MHz	QPSK: 1M08G7D 16QAM: 1M08W7D	
	LTE Band 25 Channel Bandwidth: 3MHz	QPSK: 2M67G7D 16QAM: 2M67W7D	
	LTE Band 25 Channel Bandwidth: 5MHz	QPSK: 4M67G7D 16QAM: 4M66W7D	
	LTE Band 25 Channel Bandwidth: 10MHz	QPSK: 8M93G7D 16QAM: 8M91W7D	
	LTE Band 25 Channel Bandwidth: 15MHz	QPSK: 13M4G7D 16QAM: 13M4W7D	
	LTE Band 25 Channel Bandwidth: 20MHz	QPSK: 17M8G7D 16QAM: 17M8W7D	
	ANTENNA TYPE	PIFA Antenna with 1.64dBi gain	
	HW VERSION	Lenovo TB-X6C6NBL	
	SW VERSION	TB-X6C6NBL_RF01_210930	
I/O PORTS	Refer to user's manual		
CABLE SUPPLIED	N/A		
EXTREME TEMPERATURE	-30-50 °C		
EXTREME VOLTAGE	9V- 15V		



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.


MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

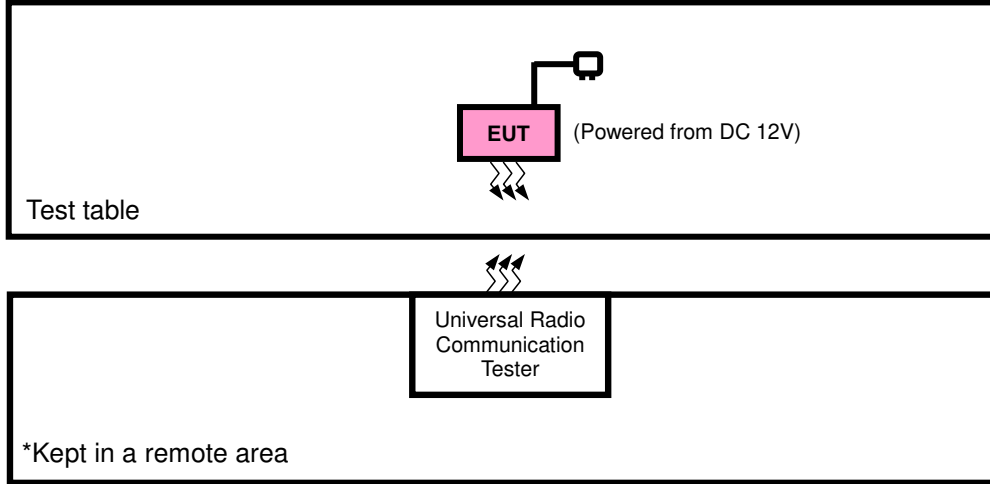



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	1.1.1.1.1.2DESCRIPTION
A	EUT + DC Source with GSM or WCDMA or LTE link

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	512 to 810	512, 661, 810	GPRS, EDGE
B	FREQUENCY STABILITY	512 to 810	512, 810	GPRS, EDGE
B	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GPRS, EDGE
B	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GPRS, EDGE
B	BAND EDGE	512 to 810	512, 810	GPRS, EDGE
B	CONDCUDETED EMISSION	512 to 810	512, 661, 810	GPRS, EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GPRS, EDGE



WCDMA

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9538	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

LTE BAND 2

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



BUREAU
VERITAS

Test Report No.: RF210603W002-2

B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 5 RB Offset		
			19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19175	5MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 14 RB Offset		
			19150	10MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19125	15MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 24 RB Offset		
			19100	20MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		B	CONDCUDED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
18675 to 19125	18675, 18900, 19125			15MHz	QPSK	1 RB / 0 RB Offset		
18700 to 19100	18700, 18900, 19100			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18607, 18900, 19193	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		



LTE BAND 25

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	26047 to 26683	26047, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26055, 26675	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26665	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26090, 26640	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26115, 26615	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26590	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



Test Report No.: RF210603W002-2

B	BAND EDGE	26047 to 26683	26047	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			26683	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		26055 to 26675	26055	3MHz	QPSK,16QAM	1 RB / 5 RB Offset		
			26675	3MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		26065 to 26665	26065	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			26665	5MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		26090 to 26640	26090	10MHz	QPSK,16QAM	1 RB / 14 RB Offset		
			26640	10MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		26115 to 26615	26115	15MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			26615	15MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		26140 to 26590	26140	20MHz	QPSK,16QAM	1 RB / 24 RB Offset		
			26590	20MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		B	CONDCUDED EMISSION	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset
				26055 to 26675	26055, 26365, 26675	3MHz	QPSK	1 RB / 0 RB Offset
				26065 to 26665	26065, 26365, 26665	5MHz	QPSK	1 RB / 0 RB Offset
				26090 to 26640	26090, 26365, 26640	10MHz	QPSK	1 RB / 0 RB Offset
26115 to 26615	26115, 26365, 26615			15MHz	QPSK	1 RB / 0 RB Offset		
26140 to 26590	26140, 26365, 26590			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 0 RB Offset		
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB Offset		
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK	1 RB / 0 RB Offset		
		26090 to 26640	26365	10MHz	QPSK	1 RB / 0 RB Offset		
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset		
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset		

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 12V	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 12V	Chase Zhou
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC 12V	Chase Zhou
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 12V	Chase Zhou
BAND EDGE	23deg. C, 61%RH	DC 12V	Chase Zhou
CONDCUDED EMISSION	23deg. C, 61%RH	DC 12V	Chase Zhou
RADIATED EMISSION	23deg. C, 70%RH	DC 12V	Jace Hu



2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:

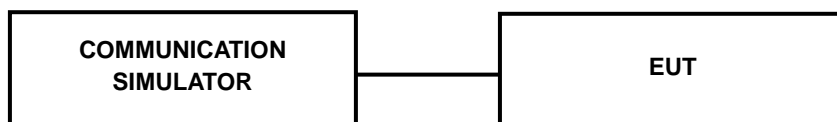

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900			Max. Tune-up Power
	512	661	810	
Channel	1850.2	1880	1909.8	
Frequency	1850.2	1880	1909.8	
GPRS (GMSK, 1Tx-slot)	29.61	29.62	29.44	30.5
GPRS (GMSK, 2Tx-slot)	28.88	28.98	28.81	29.5
GPRS (GMSK, 3Tx-slot)	27.25	27.37	27.36	27.5
GPRS (GMSK, 4Tx-slot)	26.26	26.44	26.42	26.5
EDGE (8PSK, 1Tx-slot)	25.51	25.77	25.96	26.5
EDGE (8PSK, 2Tx-slot)	24.33	24.67	24.87	25.0
EDGE (8PSK, 3Tx-slot)	22.20	22.55	22.63	22.5
EDGE (8PSK, 4Tx-slot)	21.32	21.60	21.59	21.5

Band	WCDMA II			Max. Tune-up Power
	9262	9400	9538	
Channel	1852.4	1880	1907.6	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	23.39	23.33	23.31	24.5
HSDPA Subtest-1	22.58	22.67	22.69	23.5
HSDPA Subtest-2	22.56	22.66	22.68	23.5
HSDPA Subtest-3	22.10	22.15	22.15	23.5
HSDPA Subtest-4	22.05	22.16	22.18	23.5
DC-HSDPA Subtest-1	23.04	22.79	22.75	23.5
DC-HSDPA Subtest-2	22.62	22.73	22.73	23.5
DC-HSDPA Subtest-3	22.21	22.18	22.26	23.5
DC-HSDPA Subtest-4	22.17	22.27	22.12	23.5
HSUPA Subtest-1	21.70	21.73	21.72	21.5
HSUPA Subtest-2	21.71	21.72	21.70	21.5
HSUPA Subtest-3	20.67	20.60	20.71	20.5
HSUPA Subtest-4	20.67	20.48	20.51	21.0
HSUPA Subtest-5	19.68	19.72	19.54	19.5
HSPA+ Subtest-1	22.05	22.04	22.08	22.5



LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.80	22.75	22.63	0
		1	2	23.04	22.96	22.90	0
		1	5	22.69	22.59	22.51	0
		3	0	23.08	23.01	23.04	0
		3	1	23.11	23.03	22.87	0
		3	3	23.06	22.98	22.98	0
		6	0	22.18	22.04	22.02	1
	16QAM	1	0	22.03	21.97	21.87	1
		1	2	22.29	22.16	22.18	1
		1	5	21.85	21.80	21.79	1
		3	0	22.14	22.01	22.01	1
		3	1	21.95	22.00	21.88	1
		3	3	22.14	22.04	22.05	1
		6	0	21.12	21.06	20.93	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/ 3	QPSK	1	0	22.82	22.77	22.62	0
		1	7	23.00	22.97	22.90	0
		1	14	22.65	22.59	22.51	0
		8	0	22.07	22.04	22.04	1
		8	3	22.04	22.03	21.89	1
		8	7	22.03	22.05	22.02	1
		15	0	22.15	22.05	21.96	1
	16QAM	1	0	22.00	22.03	21.90	1
		1	7	22.26	22.19	22.16	1
		1	14	21.88	21.80	21.79	1
		8	0	21.10	21.02	21.01	2
		8	3	21.00	20.95	20.91	2
		8	7	21.16	21.02	21.01	2
		15	0	21.12	21.00	20.96	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/ 5	QPSK	1	0	22.83	22.72	22.63	0
		1	12	23.05	22.94	22.90	0
		1	24	22.66	22.58	22.55	0
		12	0	22.10	22.04	22.01	1
		12	6	22.04	22.04	21.90	1
		12	13	22.07	22.01	22.03	1
		25	0	22.13	22.08	21.99	1
	16QAM	1	0	22.01	21.99	21.90	1
		1	12	22.23	22.22	22.15	1
		1	24	21.88	21.80	21.78	1
		12	0	21.10	21.00	20.98	2
		12	6	20.97	20.99	20.87	2
		12	13	21.11	21.04	21.04	2
		25	0	21.12	21.01	20.93	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.80	22.75	22.63	0
		1	24	23.05	22.94	22.91	0
		1	49	22.63	22.62	22.51	0
		25	0	22.11	22.03	22.04	1
		25	12	22.10	21.98	21.90	1
		25	25	22.05	21.98	22.02	1
		50	0	22.18	22.08	21.96	1
	16QAM	1	0	22.01	21.96	21.86	1
		1	24	22.28	22.18	22.18	1
		1	49	21.88	21.81	21.75	1
		25	0	21.12	20.98	21.04	2
		25	12	21.01	20.93	20.92	2
		25	25	21.10	21.05	21.01	2
		50	0	21.16	21.00	20.97	2



BUREAU
VERITAS

Test Report No.: RF210603W002-2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.87	22.75	22.60	0
		1	37	23.03	22.99	22.86	0
		1	74	22.69	22.65	22.52	0
		36	0	22.08	22.04	22.05	1
		36	19	22.11	22.03	21.90	1
		36	39	22.03	21.99	22.02	1
		75	0	22.18	22.06	22.01	1
	16QAM	1	0	22.05	22.03	21.86	1
		1	37	22.27	22.19	22.18	1
		1	74	21.84	21.86	21.77	1
		36	0	21.16	20.98	21.05	2
		36	19	20.95	20.97	20.88	2
		36	39	21.15	21.03	21.04	2
		75	0	21.17	21.03	20.90	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	22.88	22.79	22.68	0
		1	50	23.07	23.02	22.92	0
		1	99	22.71	22.66	22.56	0
		50	0	22.14	22.09	22.06	1
		50	25	22.12	22.05	21.95	1
		50	50	22.11	22.06	22.04	1
		100	0	22.19	22.10	22.04	1
	16QAM	1	0	22.08	22.04	21.92	1
		1	50	22.31	22.24	22.20	1
		1	99	21.90	21.88	21.80	1
		50	0	21.18	21.06	21.06	2
		50	25	21.03	21.01	20.93	2
		50	50	21.18	21.09	21.06	2
		100	0	21.18	21.08	20.98	2



LTE BAND 25

Band/BW	Modulation	RB Size	RB Offset	Low CH 26047	Mid CH 26365	High CH 26683	MPR
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz	
25/ 1.4	QPSK	1	0	22.56	22.60	22.41	0
		1	2	22.80	22.81	22.68	0
		1	5	22.41	22.40	22.25	0
		3	0	22.85	22.87	22.83	0
		3	1	22.85	22.86	22.63	0
		3	3	22.82	22.83	22.76	0
		6	0	21.93	21.88	21.79	1
	16QAM	1	0	21.77	21.80	21.63	1
		1	2	22.05	22.01	21.96	1
		1	5	21.64	21.68	21.60	1
		3	0	21.91	21.87	21.80	1
		3	1	21.70	21.84	21.65	1
		3	3	21.87	21.86	21.80	1
		6	0	20.87	20.90	20.70	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26055	Mid CH 26365	High CH 26675	MPR
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz	
25/ 3	QPSK	1	0	22.58	22.62	22.40	0
		1	7	22.76	22.82	22.68	0
		1	14	22.37	22.40	22.25	0
		8	0	21.84	21.90	21.83	1
		8	3	21.78	21.86	21.65	1
		8	7	21.79	21.90	21.80	1
		15	0	21.90	21.89	21.73	1
	16QAM	1	0	21.74	21.86	21.66	1
		1	7	22.02	22.04	21.94	1
		1	14	21.67	21.68	21.60	1
		8	0	20.87	20.88	20.80	2
		8	3	20.75	20.79	20.68	2
		8	7	20.89	20.84	20.76	2
		15	0	20.87	20.84	20.73	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 26065	Mid CH 26365	High CH 26665	MPR
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz	
25/ 5	QPSK	1	0	22.59	22.57	22.41	0
		1	12	22.81	22.79	22.68	0
		1	24	22.38	22.39	22.29	0
		12	0	21.87	21.90	21.80	1
		12	6	21.78	21.87	21.66	1
		12	13	21.83	21.86	21.81	1
		25	0	21.88	21.92	21.76	1
	16QAM	1	0	21.75	21.82	21.66	1
		1	12	21.99	22.07	21.93	1
		1	24	21.67	21.68	21.59	1
		12	0	20.87	20.86	20.77	2
		12	6	20.72	20.83	20.64	2
		12	13	20.84	20.86	20.79	2
		25	0	20.87	20.85	20.70	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26090	Mid CH 26365	High CH 26640	MPR
				Frequency 1855 MHz	Frequency 1882.5 MHz	Frequency 1910 MHz	
25/ 10	QPSK	1	0	22.56	22.60	22.41	0
		1	24	22.81	22.79	22.69	0
		1	49	22.35	22.43	22.25	0
		25	0	21.88	21.89	21.83	1
		25	12	21.84	21.81	21.66	1
		25	25	21.81	21.83	21.80	1
		50	0	21.93	21.92	21.73	1
	16QAM	1	0	21.75	21.79	21.62	1
		1	24	22.04	22.03	21.96	1
		1	49	21.67	21.69	21.56	1
		25	0	20.89	20.84	20.83	2
		25	12	20.76	20.77	20.69	2
		25	25	20.83	20.87	20.76	2
		50	0	20.91	20.84	20.74	2



BUREAU
VERITAS

Test Report No.: RF210603W002-2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26115	Mid CH 26365	High CH 26615	MPR
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz	
25/ 15	QPSK	1	0	22.63	22.60	22.38	0
		1	37	22.79	22.84	22.64	0
		1	74	22.41	22.46	22.26	0
		36	0	21.85	21.90	21.84	1
		36	19	21.85	21.86	21.66	1
		36	39	21.79	21.84	21.80	1
		75	0	21.93	21.90	21.78	1
	16QAM	1	0	21.79	21.86	21.62	1
		1	37	22.03	22.04	21.96	1
		1	74	21.63	21.74	21.58	1
		36	0	20.93	20.84	20.84	2
		36	19	20.70	20.81	20.65	2
		36	39	20.88	20.85	20.79	2
		75	0	20.92	20.87	20.67	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26140	Mid CH 26365	High CH 26590	MPR
				Frequency 1860 MHz	Frequency 1882.5 MHz	Frequency 1905 MHz	
25/ 20	QPSK	1	0	22.64	22.64	22.46	0
		1	50	22.83	22.87	22.70	0
		1	99	22.43	22.47	22.30	0
		50	0	21.91	21.95	21.85	1
		50	25	21.86	21.88	21.71	1
		50	50	21.87	21.91	21.82	1
		100	0	21.94	21.94	21.81	1
	16QAM	1	0	21.82	21.87	21.68	1
		1	50	22.07	22.09	21.98	1
		1	99	21.69	21.76	21.61	1
		50	0	20.95	20.92	20.85	2
		50	25	20.78	20.85	20.70	2
		50	50	20.91	20.91	20.81	2
		100	0	20.93	20.92	20.75	2



EIRP POWER (dBm)

GPRS

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.61	1.64	31.25	1333.52	2
661	1880.0	29.62	1.64	31.26	1336.60	2
810	1909.8	29.44	1.64	31.08	1282.33	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	25.51	1.64	27.15	518.80	2
661	1880.0	25.77	1.64	27.41	550.81	2
810	1909.8	25.96	1.64	27.60	575.44	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9662	1852.4	23.39	1.64	25.03	318.42	2
9800	1880	23.33	1.64	24.97	314.05	2
9938	1907.6	23.31	1.64	24.95	312.61	2



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.11	1.64	24.75	298.54	2
18900	1880.0	23.03	1.64	24.67	293.09	2
19193	1908.3	23.04	1.64	24.68	293.76	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.29	1.64	23.93	247.17	2
18900	1880.0	22.16	1.64	23.80	239.88	2
19193	1908.3	22.18	1.64	23.82	240.99	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.00	1.64	24.64	291.07	2
18900	1880.0	22.97	1.64	24.61	289.07	2
19185	1908.5	22.90	1.64	24.54	284.45	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.26	1.64	23.90	245.47	2
18900	1880.0	22.19	1.64	23.83	241.55	2
19185	1908.5	22.16	1.64	23.80	239.88	2



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.05	1.64	24.69	294.44	2
18900	1880.0	22.94	1.64	24.58	287.08	2
19175	1907.5	22.90	1.64	24.54	284.45	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.23	1.64	23.87	243.78	2
18900	1880.0	22.22	1.64	23.86	243.22	2
19175	1907.5	22.15	1.64	23.79	239.33	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.05	1.64	24.69	294.44	2
18900	1880.0	22.94	1.64	24.58	287.08	2
19150	1905.0	22.91	1.64	24.55	285.10	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.28	1.64	23.92	246.60	2
18900	1880.0	22.18	1.64	23.82	240.99	2
19150	1905.0	22.18	1.64	23.82	240.99	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.03	1.64	24.67	293.09	2
18900	1880.0	22.99	1.64	24.63	290.40	2
19125	1902.5	22.86	1.64	24.50	281.84	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.27	1.64	23.91	246.04	2
18900	1880.0	22.19	1.64	23.83	241.55	2
19125	1902.5	22.18	1.64	23.82	240.99	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.07	1.64	24.71	295.80	2
18900	1880	23.02	1.64	24.66	292.42	2
19100	1900	22.92	1.64	24.56	285.76	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.31	1.64	23.95	248.31	2
18900	1880	22.24	1.64	23.88	244.34	2
19100	1900	22.20	1.64	23.84	242.10	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



LTE BAND 25

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	22.85	1.64	24.49	281.19	2
26365	1882.5	22.87	1.64	24.51	282.49	2
26683	1914.3	22.83	1.64	24.47	279.90	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	22.05	1.64	23.69	233.88	2
26365	1882.5	22.01	1.64	23.65	231.74	2
26683	1914.3	21.96	1.64	23.60	229.09	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.76	1.64	24.40	275.42	2
26365	1882.5	22.82	1.64	24.46	279.25	2
26675	1913.5	22.68	1.64	24.32	270.40	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.02	1.64	23.66	232.27	2
26365	1882.5	22.04	1.64	23.68	233.35	2
26675	1913.5	21.94	1.64	23.58	228.03	2



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	22.81	1.64	24.45	278.61	2
26365	1882.5	22.79	1.64	24.43	277.33	2
26665	1912.5	22.68	1.64	24.32	270.40	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	21.99	1.64	23.63	230.67	2
26365	1882.5	22.07	1.64	23.71	234.96	2
26665	1912.5	21.93	1.64	23.57	227.51	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.81	1.64	24.45	278.61	2
26365	1882.5	22.79	1.64	24.43	277.33	2
26640	1910	22.69	1.64	24.33	271.02	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.04	1.64	23.68	233.35	2
26365	1882.5	22.03	1.64	23.67	232.81	2
26640	1910	21.96	1.64	23.60	229.09	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.79	1.64	24.43	277.33	2
26365	1882.5	22.84	1.64	24.48	280.54	2
26615	1907.5	22.64	1.64	24.28	267.92	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.03	1.64	23.67	232.81	2
26365	1882.5	22.04	1.64	23.68	233.35	2
26615	1907.5	21.96	1.64	23.60	229.09	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	22.83	1.64	24.47	279.90	2
26365	1882.5	22.87	1.64	24.51	282.49	2
26590	1905	22.70	1.64	24.34	271.64	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	22.07	1.64	23.71	234.96	2
26365	1882.5	22.09	1.64	23.73	236.05	2
26590	1905	21.98	1.64	23.62	230.14	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

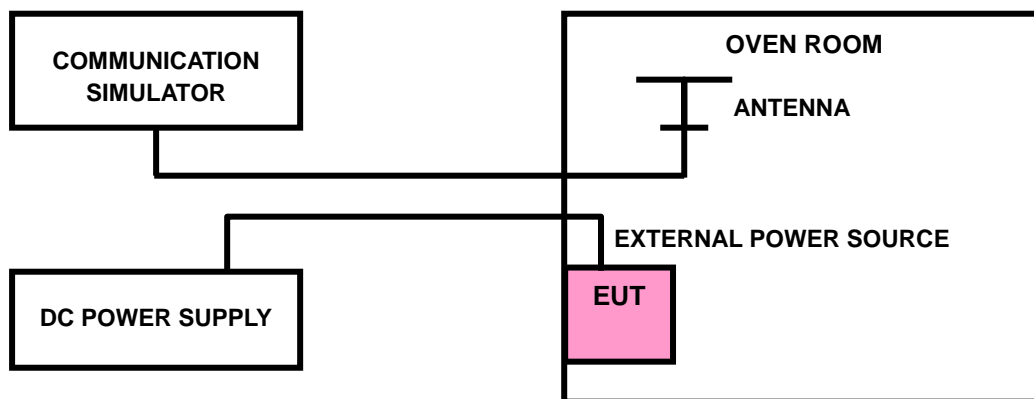



3.2.4 TEST RESULTS

GPRS1900

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V_{nor}	0.0002	0.0013	2.5
V_{min}	-0.0015	-0.0016	2.5
V_{max}	0.0010	0.0007	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0033	-0.0042	2.5
-20	-0.0021	-0.0046	2.5
-10	-0.0034	-0.0037	2.5
0	-0.0012	-0.0039	2.5
10	-0.0021	-0.0026	2.5
20	-0.0015	-0.0024	2.5
30	-0.0019	-0.0016	2.5
40	-0.0014	-0.0010	2.5
50	-0.0023	-0.0003	2.5



EDGE 1900

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V _{nor}	0.0008	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0009	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0052	-0.0049	2.5
-20	-0.0047	-0.0044	2.5
-10	-0.0038	-0.0035	2.5
0	-0.0035	-0.0032	2.5
10	-0.0021	-0.0019	2.5
20	-0.0018	-0.0017	2.5
30	-0.0013	-0.0012	2.5
40	-0.0009	-0.0009	2.5
50	-0.0001	-0.0001	2.5



WCDMA BAND II

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V _{nor}	0.0014	0.0011	2.5
V _{min}	0.0007	0.0009	2.5
V _{max}	0.0028	0.0015	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0042	-0.0035	2.5
-20	-0.0014	-0.0017	2.5
-10	-0.0035	-0.0032	2.5
0	-0.0016	-0.0019	2.5
10	0.0004	0.0005	2.5
20	0.0012	0.0013	2.5
30	0.0027	0.0026	2.5
40	0.0018	0.0042	2.5
50	0.0022	0.0026	2.5



LTE BAND 2

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.002	0.0024	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0022	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0116	-0.0113	2.5
-20	-0.0102	-0.0109	2.5
-10	-0.0084	-0.0081	2.5
0	-0.0074	-0.0076	2.5
10	-0.0046	-0.0053	2.5
20	-0.004	-0.0039	2.5
30	-0.0032	-0.0032	2.5
40	-0.0016	-0.0019	2.5
50	-0.0002	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0022	0.0021	2.5
V _{min}	-0.0021	-0.0025	2.5
V _{max}	0.0018	0.0018	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0116	2.5
-20	-0.0107	-0.0102	2.5
-10	-0.0082	-0.0084	2.5
0	-0.0078	-0.0073	2.5
10	-0.0054	-0.0045	2.5
20	-0.0044	-0.0043	2.5
30	-0.0033	-0.0041	2.5
40	-0.0022	-0.0018	2.5
50	-0.0002	-0.0005	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0022	0.0026	2.5
V _{min}	-0.0024	-0.003	2.5
V _{max}	0.0021	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.0111	2.5
-20	-0.0107	-0.0097	2.5
-10	-0.0085	-0.0081	2.5
0	-0.0075	-0.0076	2.5
10	-0.0045	-0.0051	2.5
20	-0.0044	-0.0038	2.5
30	-0.004	-0.0038	2.5
40	-0.0018	-0.0015	2.5
50	-0.0004	-0.0005	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0024	0.0025	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0025	0.0025	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.0121	2.5
-20	-0.0106	-0.0102	2.5
-10	-0.0085	-0.0082	2.5
0	-0.0074	-0.0074	2.5
10	-0.0045	-0.0047	2.5
20	-0.0044	-0.0037	2.5
30	-0.0026	-0.0037	2.5
40	-0.0019	-0.0014	2.5
50	-0.0002	-0.0005	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0026	0.0025	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0026	0.0025	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0116	2.5
-20	-0.0105	-0.0103	2.5
-10	-0.0084	-0.008	2.5
0	-0.0074	-0.0073	2.5
10	-0.0049	-0.0045	2.5
20	-0.0043	-0.0043	2.5
30	-0.0029	-0.0032	2.5
40	-0.0018	-0.0019	2.5
50	-0.0005	-0.0005	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0026	0.0026	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0024	0.0026	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0112	2.5
-20	-0.0102	-0.0105	2.5
-10	-0.0085	-0.0083	2.5
0	-0.0074	-0.0075	2.5
10	-0.0051	-0.0055	2.5
20	-0.0039	-0.004	2.5
30	-0.0031	-0.0032	2.5
40	-0.0018	-0.0022	2.5
50	-0.0003	-0.0005	2.5



LTE BAND 25

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0009	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.001	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0053	-0.005	2.5
-20	-0.0046	-0.0048	2.5
-10	-0.0038	-0.0037	2.5
0	-0.0035	-0.0034	2.5
10	-0.0021	-0.0022	2.5
20	-0.0018	-0.0019	2.5
30	-0.0014	-0.0019	2.5
40	-0.0007	-0.0009	2.5
50	-0.0001	-0.0001	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.001	0.0009	2.5
V _{min}	-0.0009	-0.0011	2.5
V _{max}	0.0008	0.0008	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0054	-0.0051	2.5
-20	-0.0045	-0.0046	2.5
-10	-0.0037	-0.0036	2.5
0	-0.0035	-0.0033	2.5
10	-0.0021	-0.0023	2.5
20	-0.0019	-0.0019	2.5
30	-0.0015	-0.0011	2.5
40	-0.0008	-0.001	2.5
50	-0.0002	-0.0001	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.001	0.0011	2.5
V _{min}	-0.001	-0.0013	2.5
V _{max}	0.0009	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0052	-0.0053	2.5
-20	-0.0044	-0.0045	2.5
-10	-0.0038	-0.0035	2.5
0	-0.0033	-0.0032	2.5
10	-0.0024	-0.0024	2.5
20	-0.002	-0.0017	2.5
30	-0.0017	-0.0012	2.5
40	-0.001	-0.001	2.5
50	-0.0002	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0011	0.001	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0011	0.001	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.005	2.5
-20	-0.0044	-0.0047	2.5
-10	-0.0038	-0.0036	2.5
0	-0.0034	-0.0033	2.5
10	-0.0025	-0.0024	2.5
20	-0.0018	-0.0018	2.5
30	-0.0017	-0.0015	2.5
40	-0.0008	-0.0009	2.5
50	-0.0001	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0011	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0012	0.001	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0051	2.5
-20	-0.0044	-0.0045	2.5
-10	-0.0038	-0.0037	2.5
0	-0.0034	-0.0033	2.5
10	-0.0024	-0.002	2.5
20	-0.0018	-0.0017	2.5
30	-0.0012	-0.0017	2.5
40	-0.0009	-0.0007	2.5
50	-0.0001	-0.0001	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0011	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0012	0.0011	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0051	2.5
-20	-0.0048	-0.0045	2.5
-10	-0.0038	-0.0036	2.5
0	-0.0034	-0.0032	2.5
10	-0.0022	-0.0024	2.5
20	-0.0017	-0.0017	2.5
30	-0.0016	-0.0013	2.5
40	-0.001	-0.001	2.5
50	-0.0001	-0.0001	2.5




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

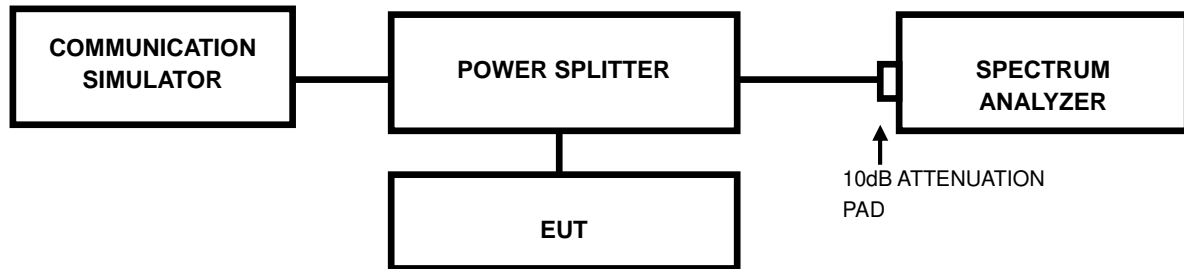




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

3.3.3 TEST RESULTS

Channel	Frequency (MHz)	99% Occupied bandwidth (kHz)		Channel	Frequency (MHz)	99% Occupied bandwidth (kHz)
		GPRS	EDGE			WCAMA
512	1850.2	240.00	240.00	9262	1852.4	4.180
661	1880.0	250.00	250.00	9400	1880.0	4.170
810	1909.8	250.00	240.00	9538	1907.6	4.180

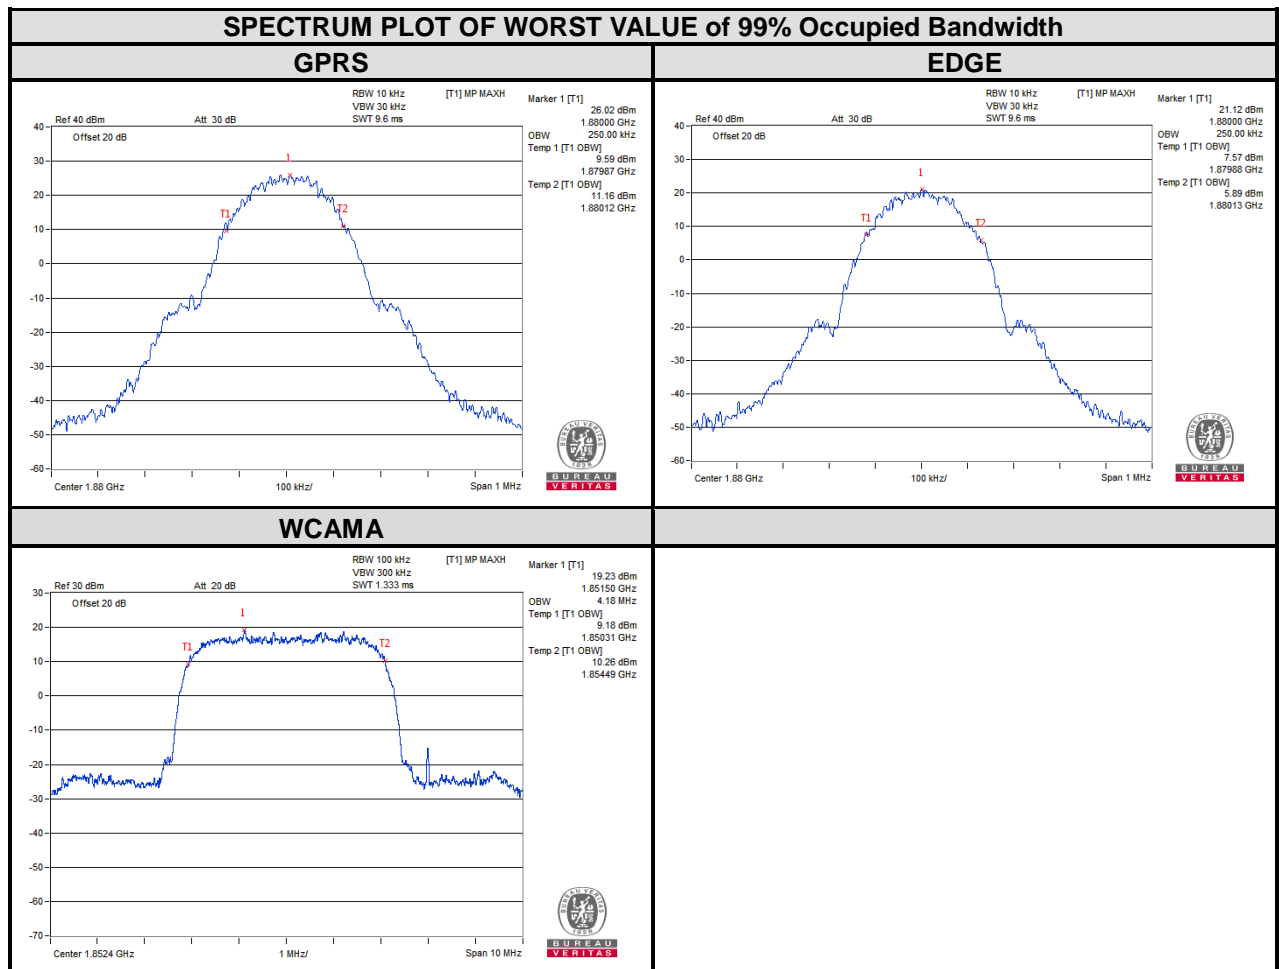




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2


Channel	Frequency (MHz)	26dB bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)
		GPRS	EDGE			
512	1850.2	319.00	311.80	9262	1852.4	4.721
661	1880.0	322.60	308.60	9400	1880.0	4.727
810	1909.8	317.60	314.40	9538	1907.6	4.745

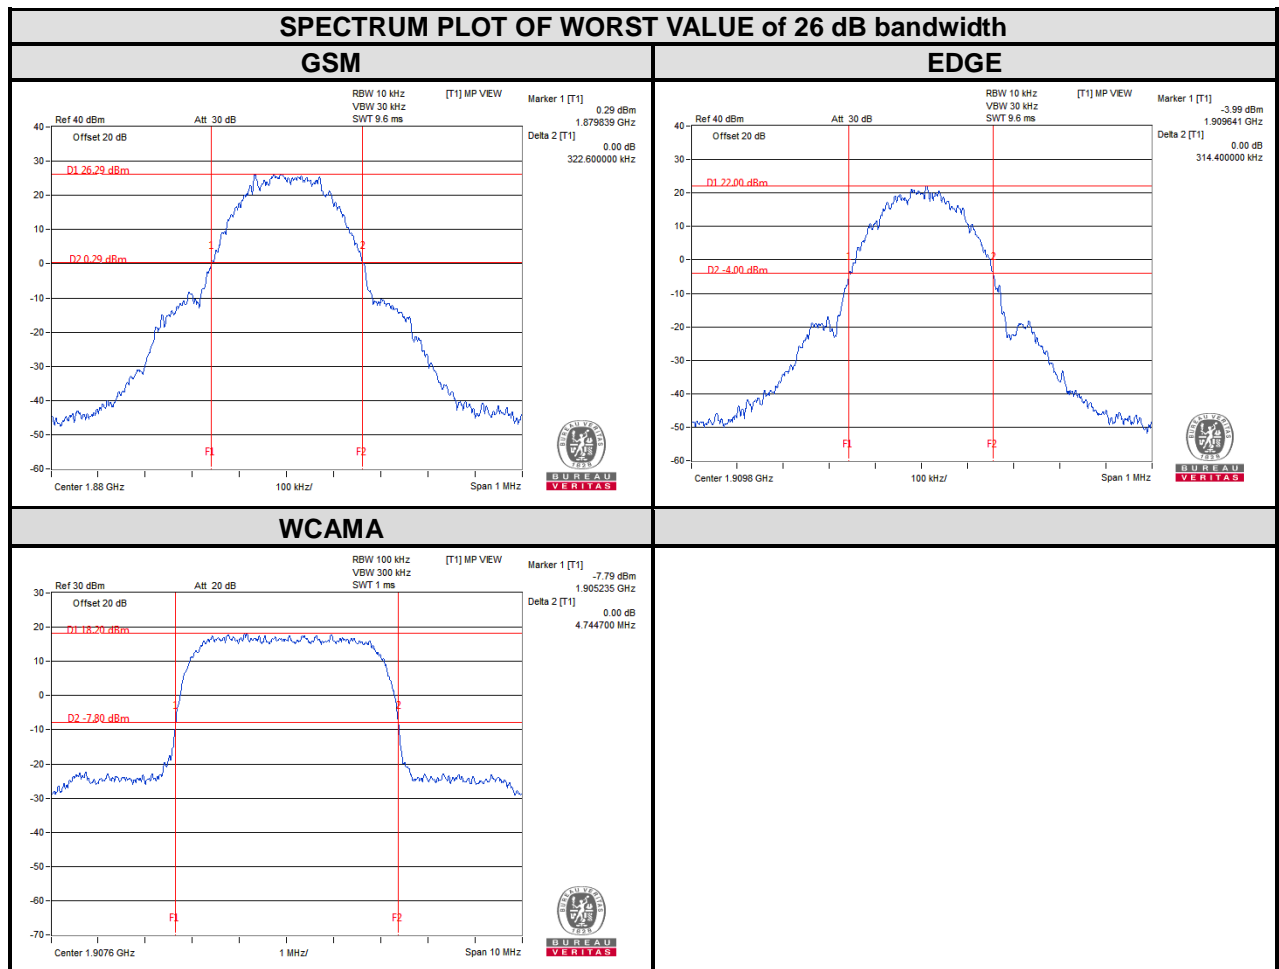



LTE BAND 2

LTE band 2					
CHANNEL BANDWIDTH: 1.4MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18607	1850.7	1.08	1.08	1.24	1.24
18900	1880	1.08	1.08	1.25	1.23
19193	1909.3	1.08	1.08	1.25	1.26

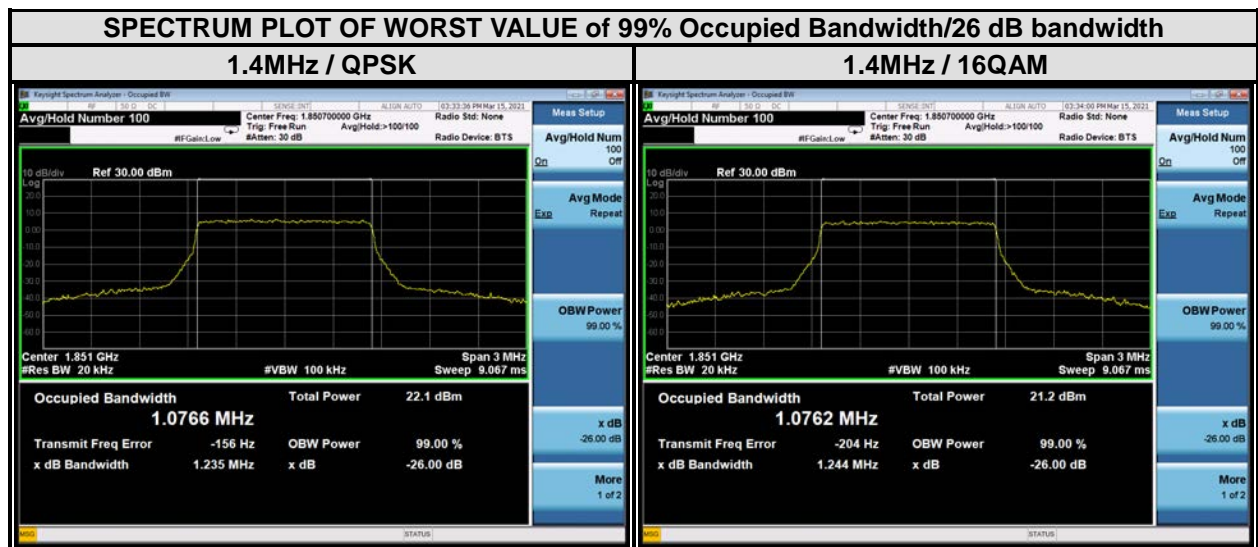




**BUREAU
VERITAS**


Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 3MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18615	1851.5	2.68	2.68	2.86	2.86
18900	1880	2.67	2.68	2.85	2.87
19185	1908.5	2.68	2.67	2.86	2.85

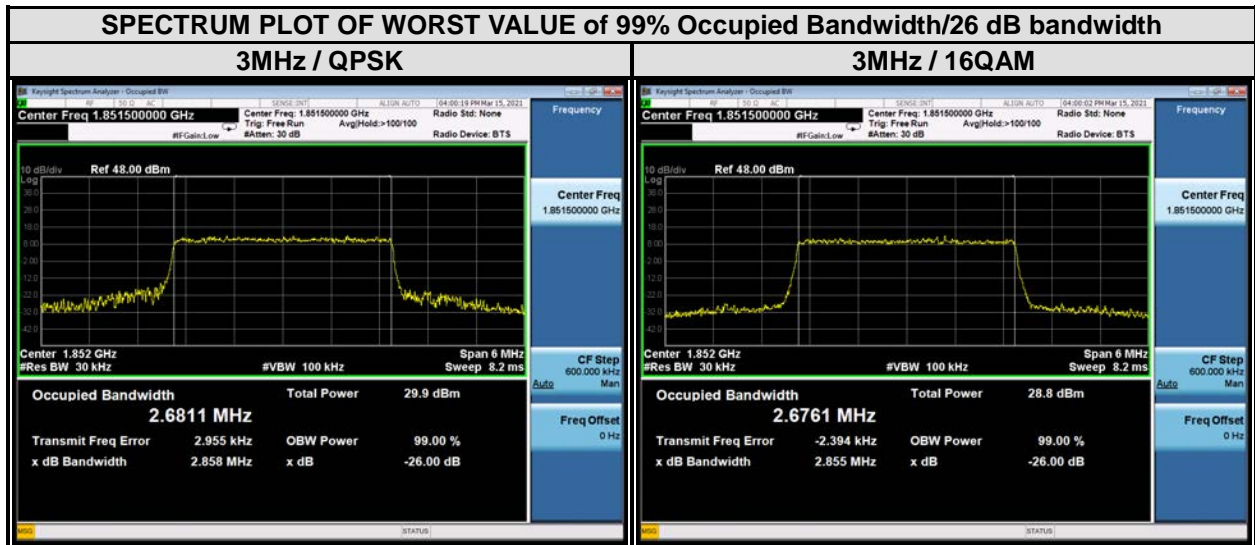



CHANNEL BANDWIDTH: 5MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18625	1852.5	4.48	4.47	4.82	4.80
18900	1880	4.47	4.46	4.80	4.76
19175	1907.5	4.46	4.46	4.80	4.85

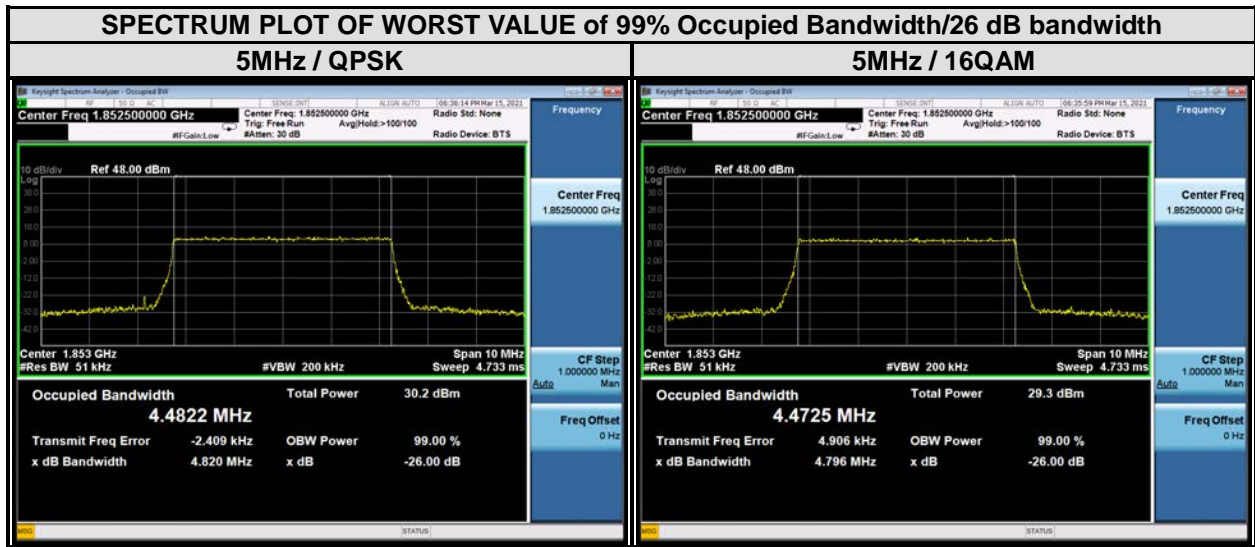




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 10MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18650	1855	8.94	8.95	9.75	10.38
18900	1880	8.95	8.93	9.54	9.51
19150	1905	8.94	8.93	9.52	9.44

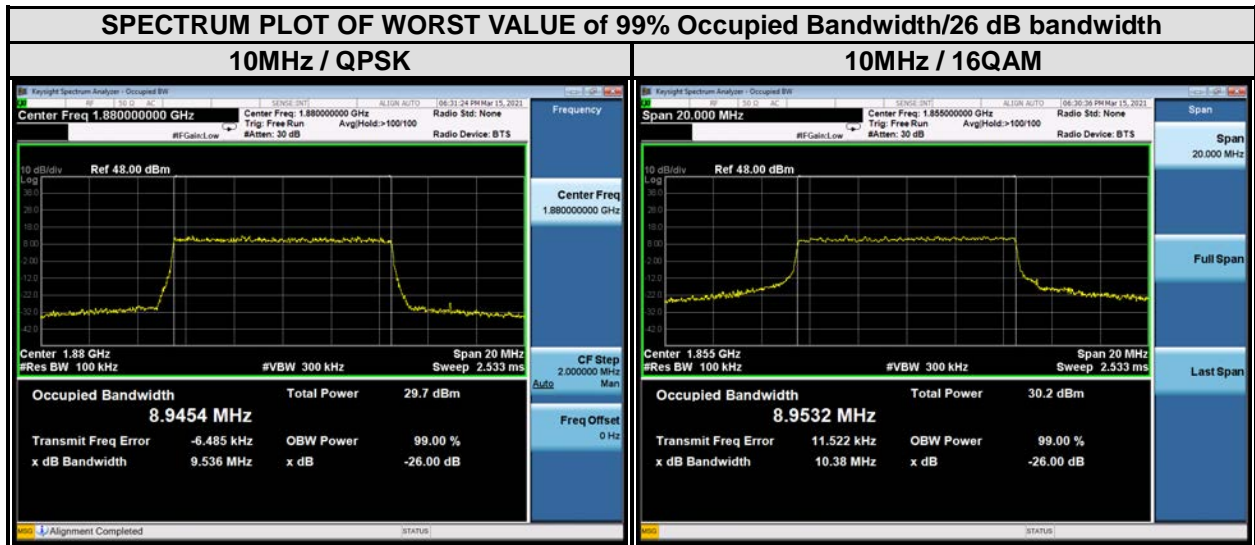




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 15MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18675	1857.5	13.41	13.39	14.18	14.30
18900	1880	13.41	13.41	14.32	14.33
19125	1902.5	13.39	13.40	14.35	14.30

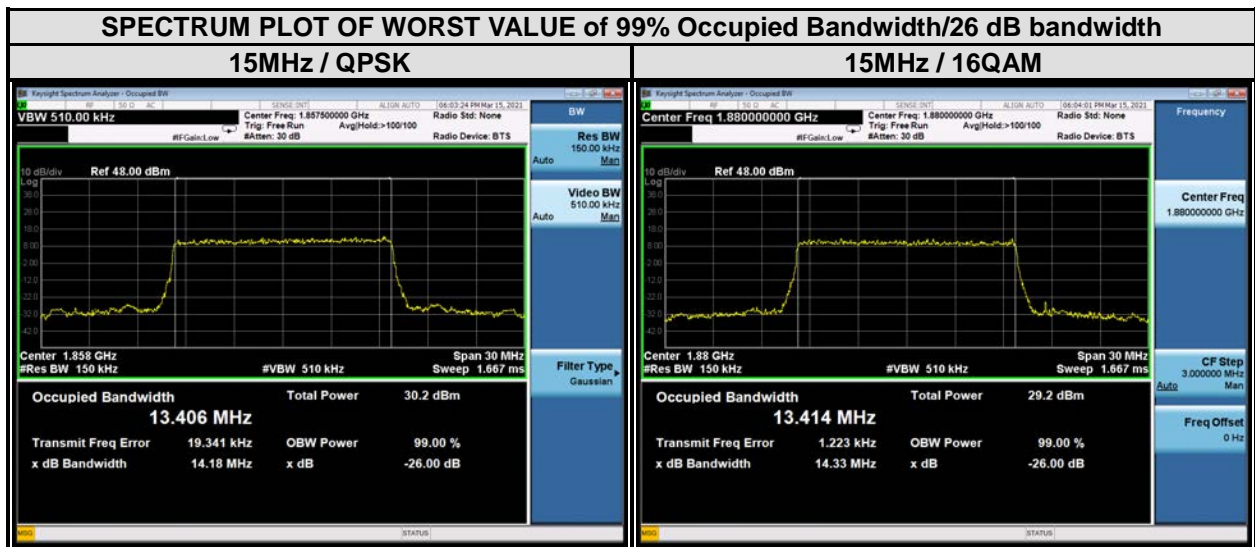




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 20MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18700	1860	17.86	17.84	18.86	19.07
18900	1880	17.88	17.88	19.00	19.55
19100	1900	17.86	17.88	18.93	19.10

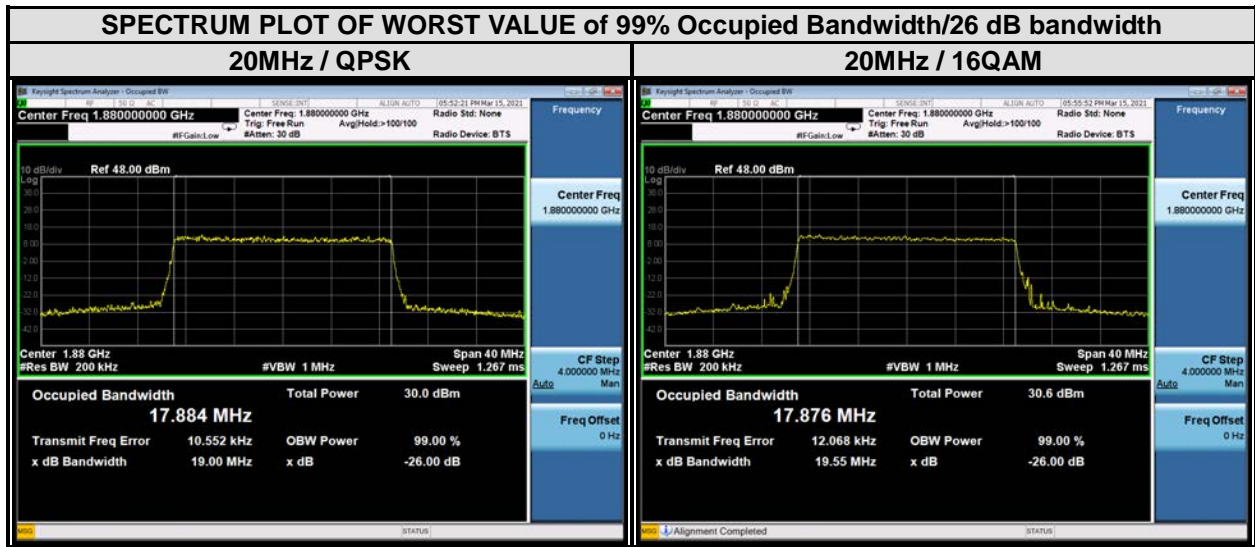




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

LTE BAND 25

LTE band 25					
CHANNEL BANDWIDTH: 1.4MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26047	1850.7	1.08	1.08	1.23	1.24
26365	1882.5	1.08	1.08	1.23	1.24
26683	1914.3	1.08	1.08	1.24	1.24

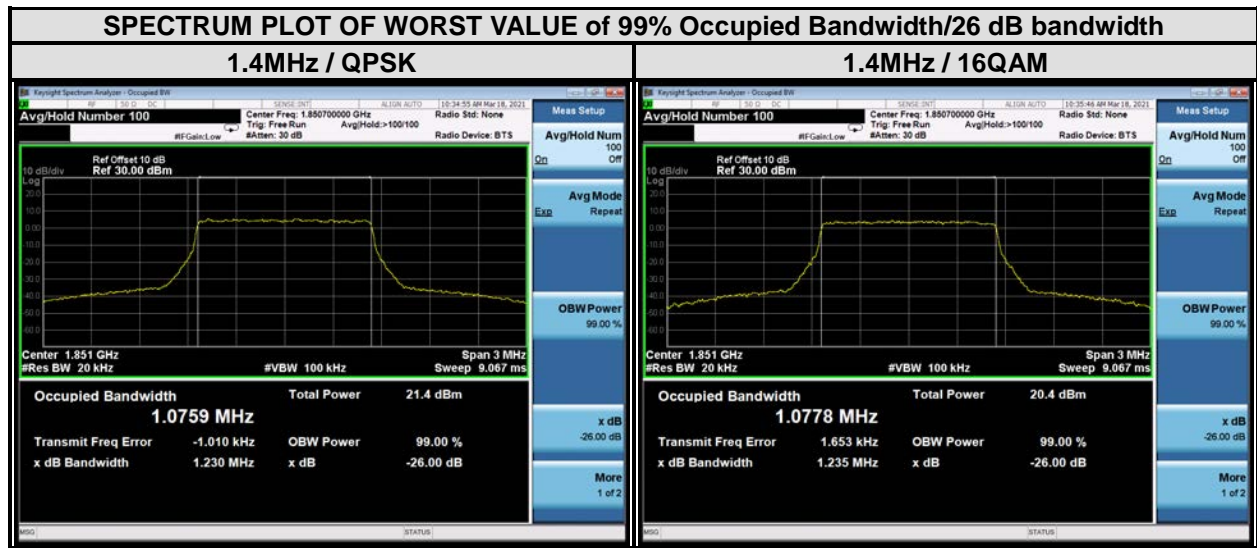




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 3MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26055	1851.5	2.67	2.67	2.82	2.82
26365	1882.5	2.67	2.67	2.82	2.82
26675	1913.5	2.67	2.68	2.83	2.82

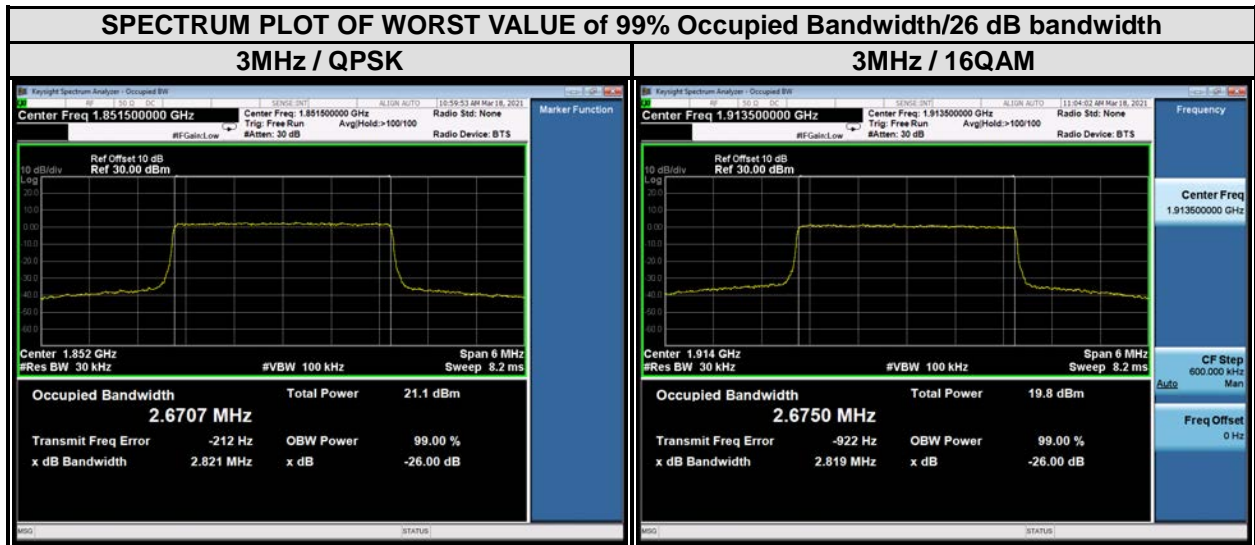




**BUREAU
VERITAS**


Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 5MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26065	1852.5	4.47	4.46	4.80	4.83
26365	1882.5	4.46	4.46	4.79	4.75
26665	1912.5	4.46	4.46	4.76	4.74

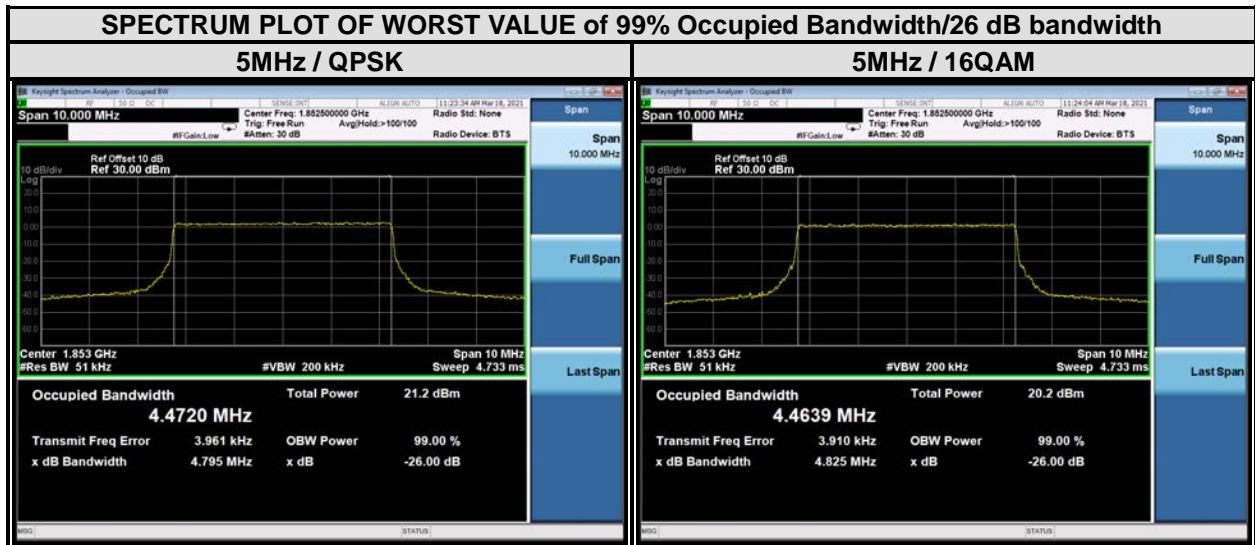




CHANNEL BANDWIDTH: 10MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26090	1855	8.93	8.91	9.32	9.35
26365	1882.5	8.92	8.91	9.39	9.33
26640	1910	8.91	8.90	9.31	9.28

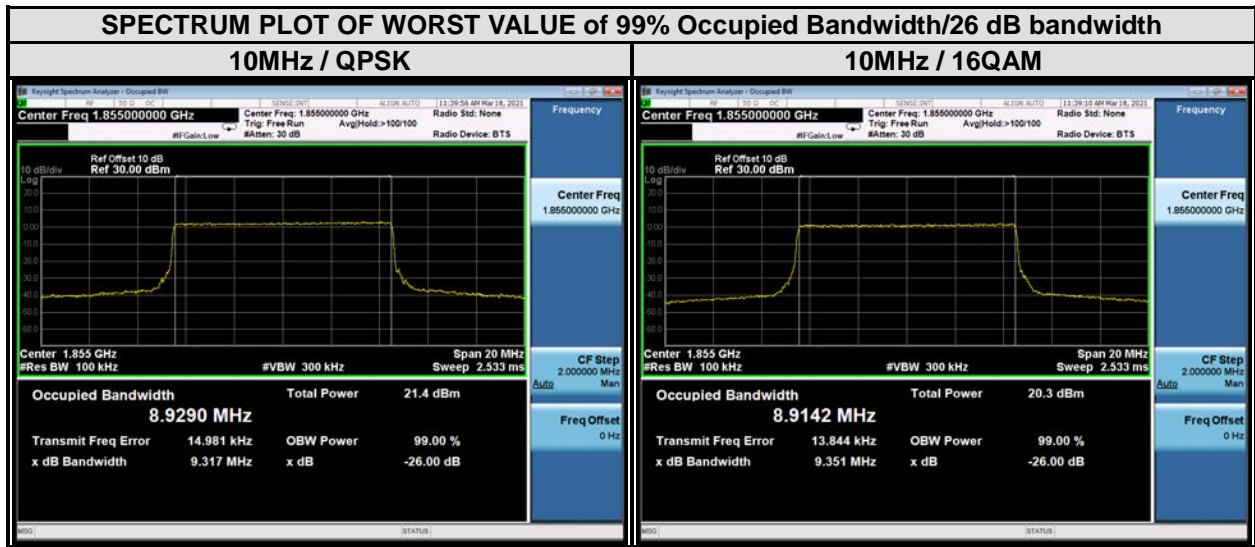



CHANNEL BANDWIDTH: 15MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26115	1857.5	13.38	13.38	13.91	13.99
26365	1882.5	13.39	13.39	13.94	13.94
26615	1907.5	13.35	13.35	13.98	13.92

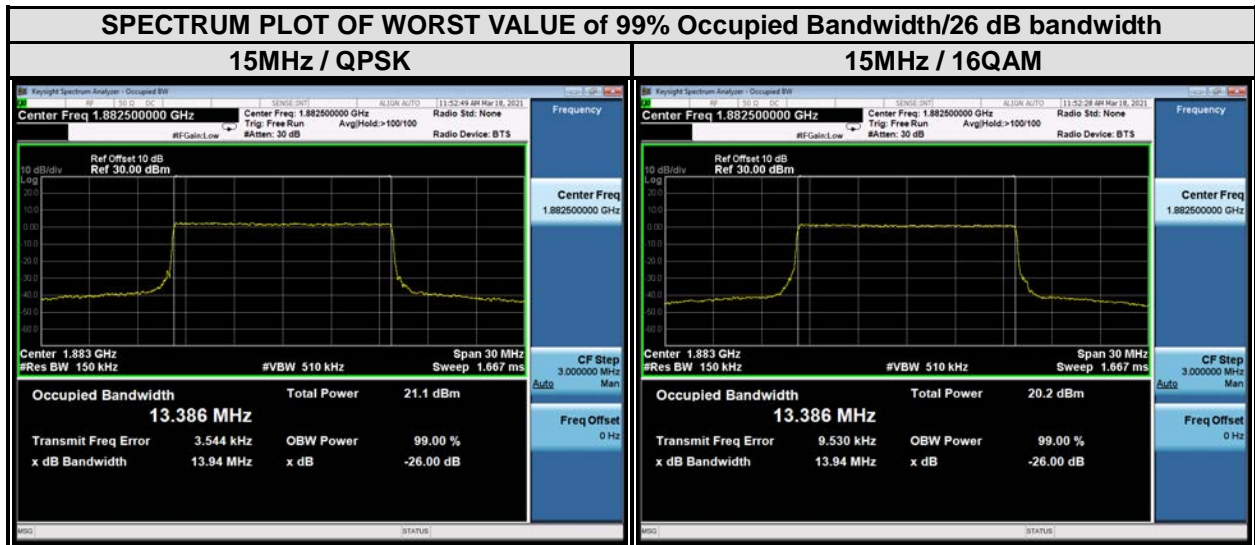




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

CHANNEL BANDWIDTH: 20MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26140	1860	17.84	17.83	18.56	18.54
26365	1882.5	17.85	17.84	18.55	18.56
26590	1905	17.82	17.82	18.55	18.59

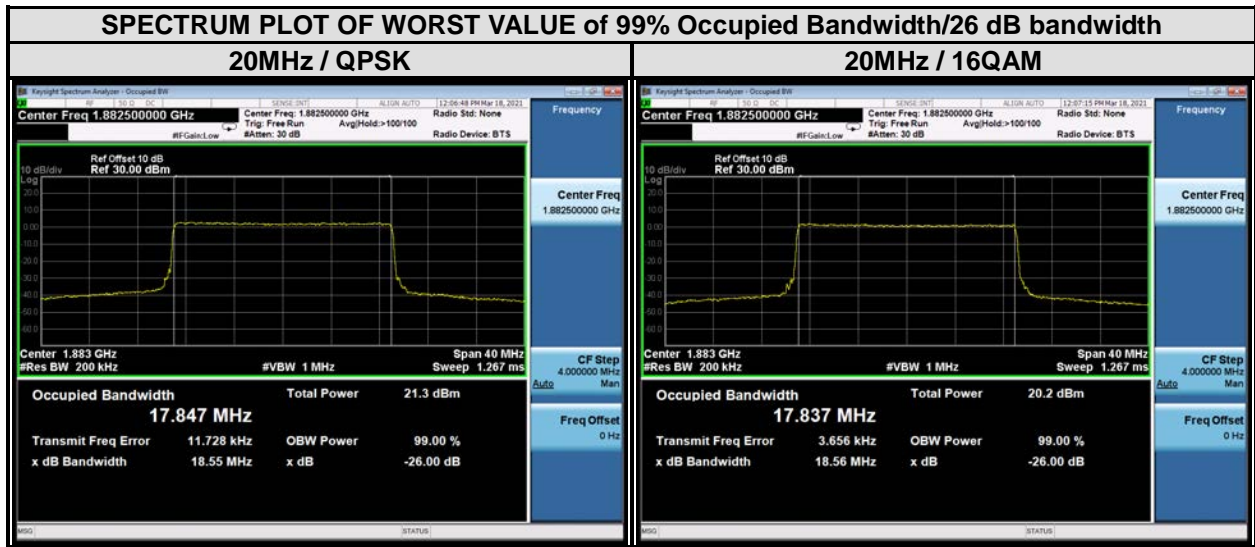




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

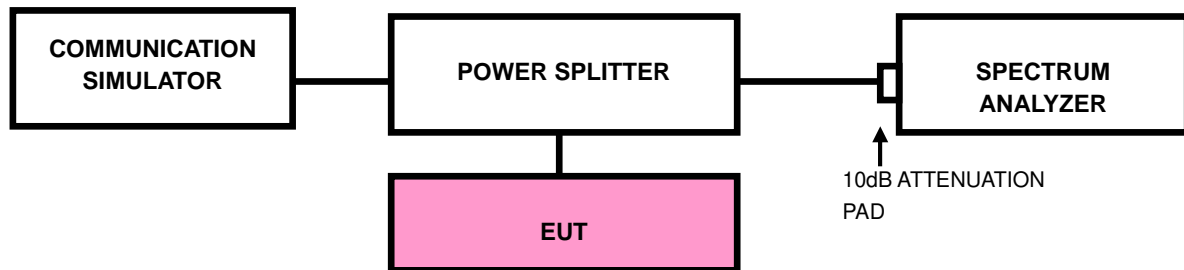

3.4.3 TEST PROCEDURES


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.



BUREAU VERITAS

Test Report No.: RF210603W002-2

3.4.4. TEST RESULTS

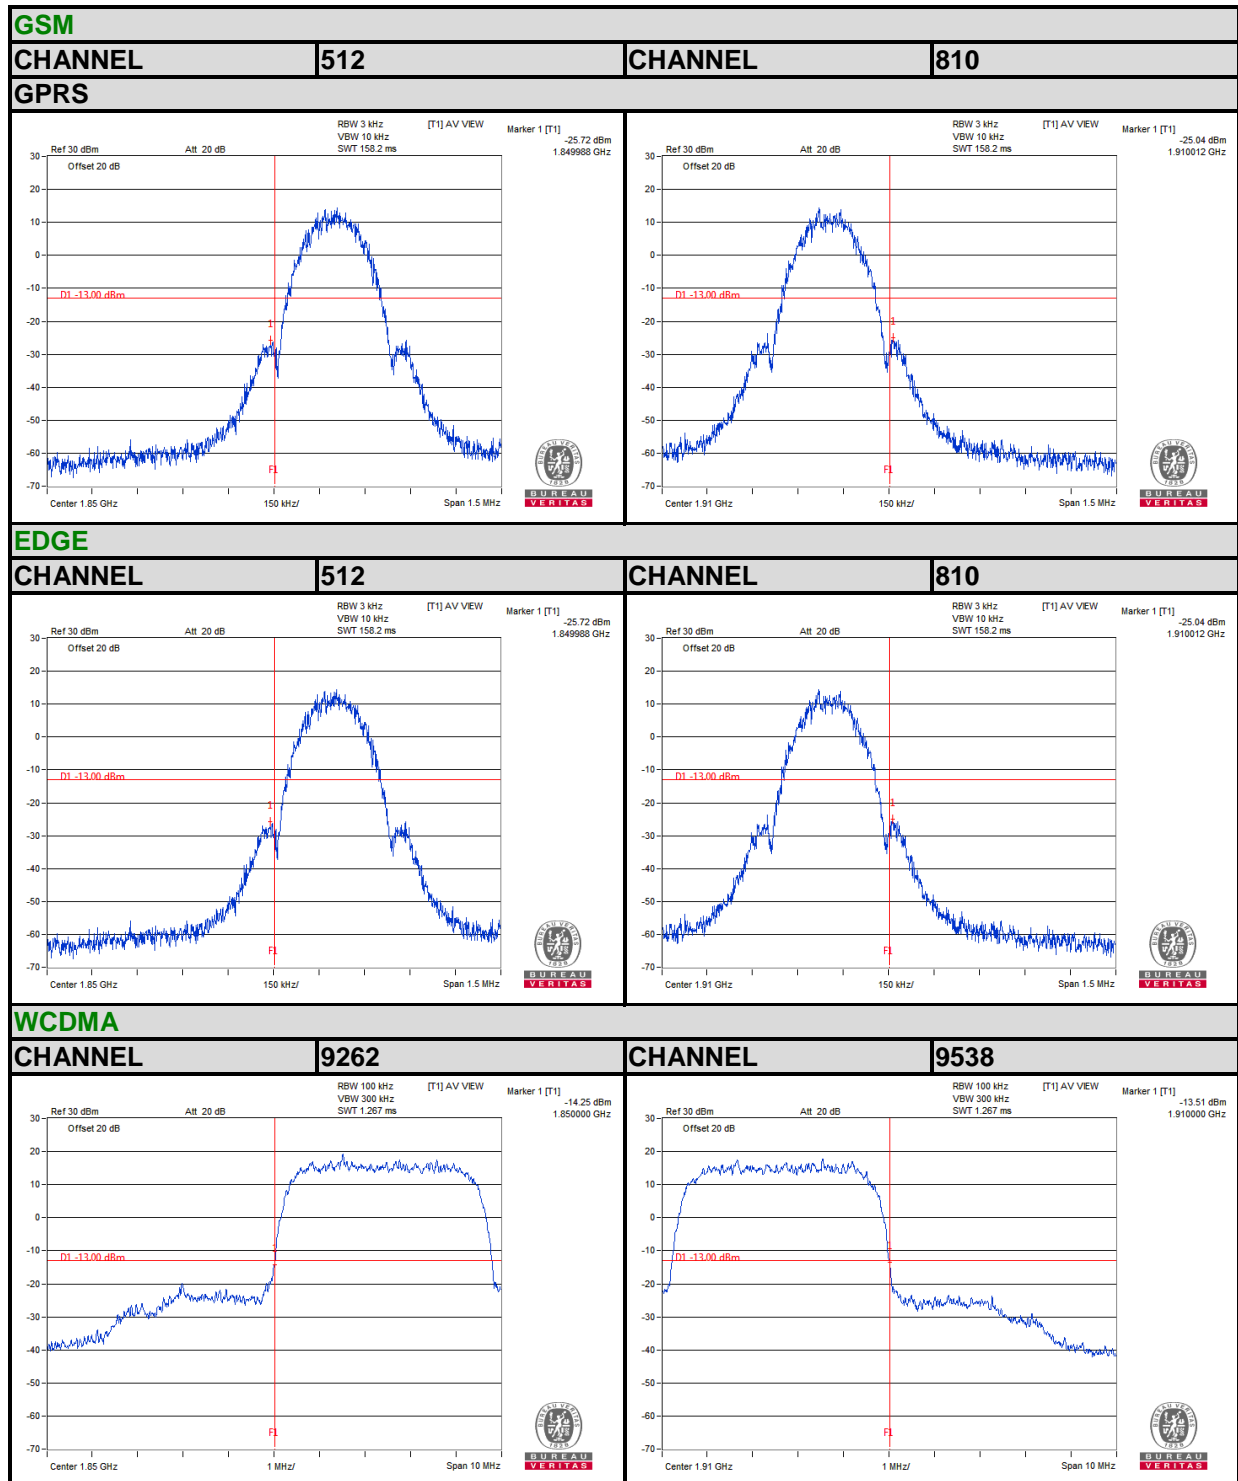



BUREAU VERITAS

Test Report No.: RF210603W002-2

LTE BAND 2


Channel Bandwidth: 1.4MHz QPSK





BUREAU VERITAS

Test Report No.: RF210603W002-2

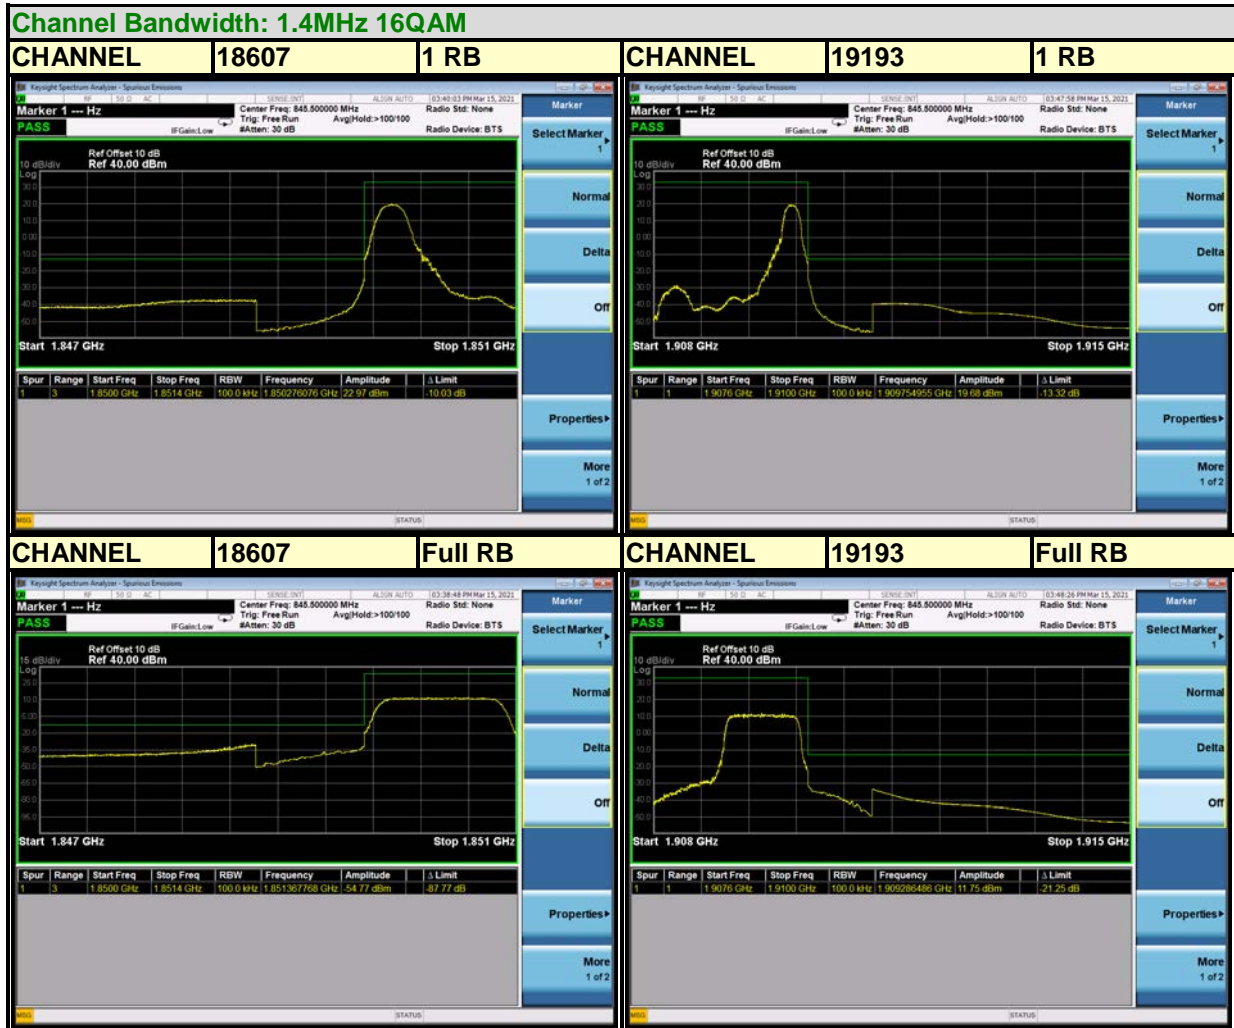



**BUREAU
VERITAS**

Test Report No.: RF210603W002-2

LTE BAND 2


Channel Bandwidth: 3MHz QPSK





BUREAU
VERITAS

Test Report No.: RF210603W002-2

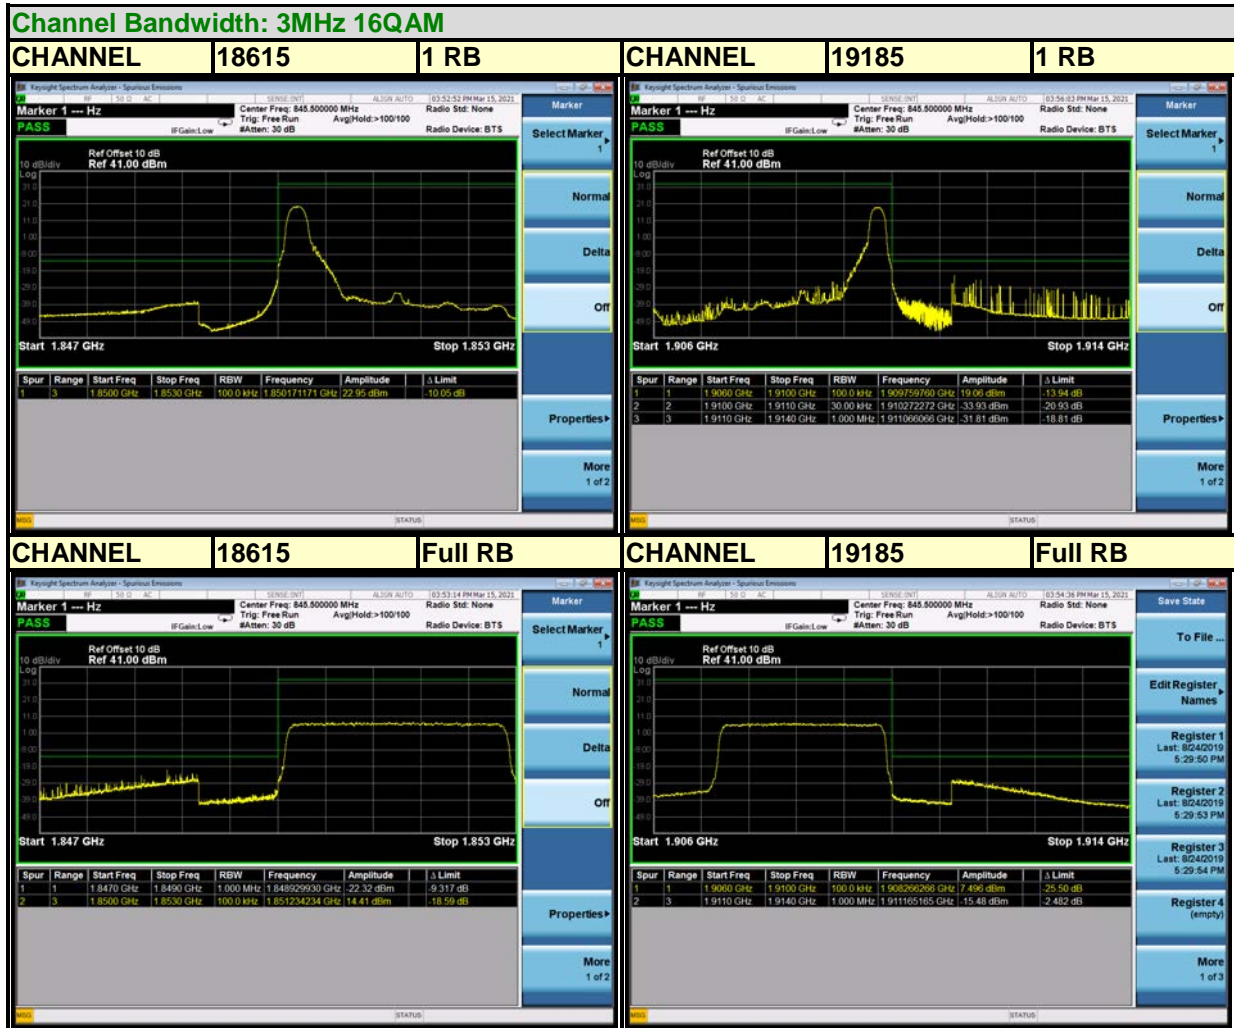




BUREAU VERITAS

Test Report No.: RF210603W002-2


LTE BAND 2

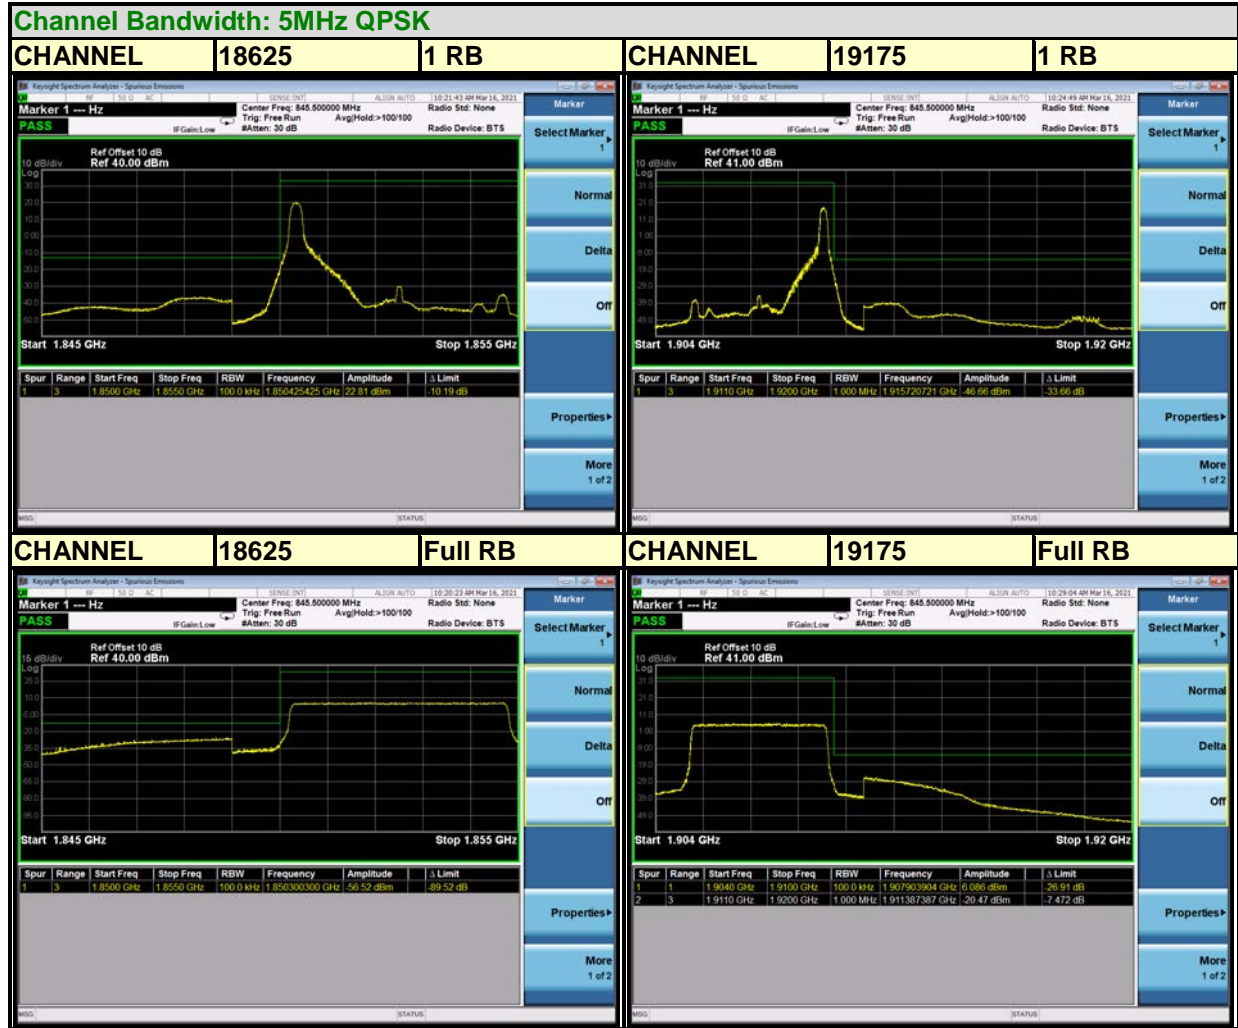



BUREAU VERITAS

Test Report No.: RF210603W002-2

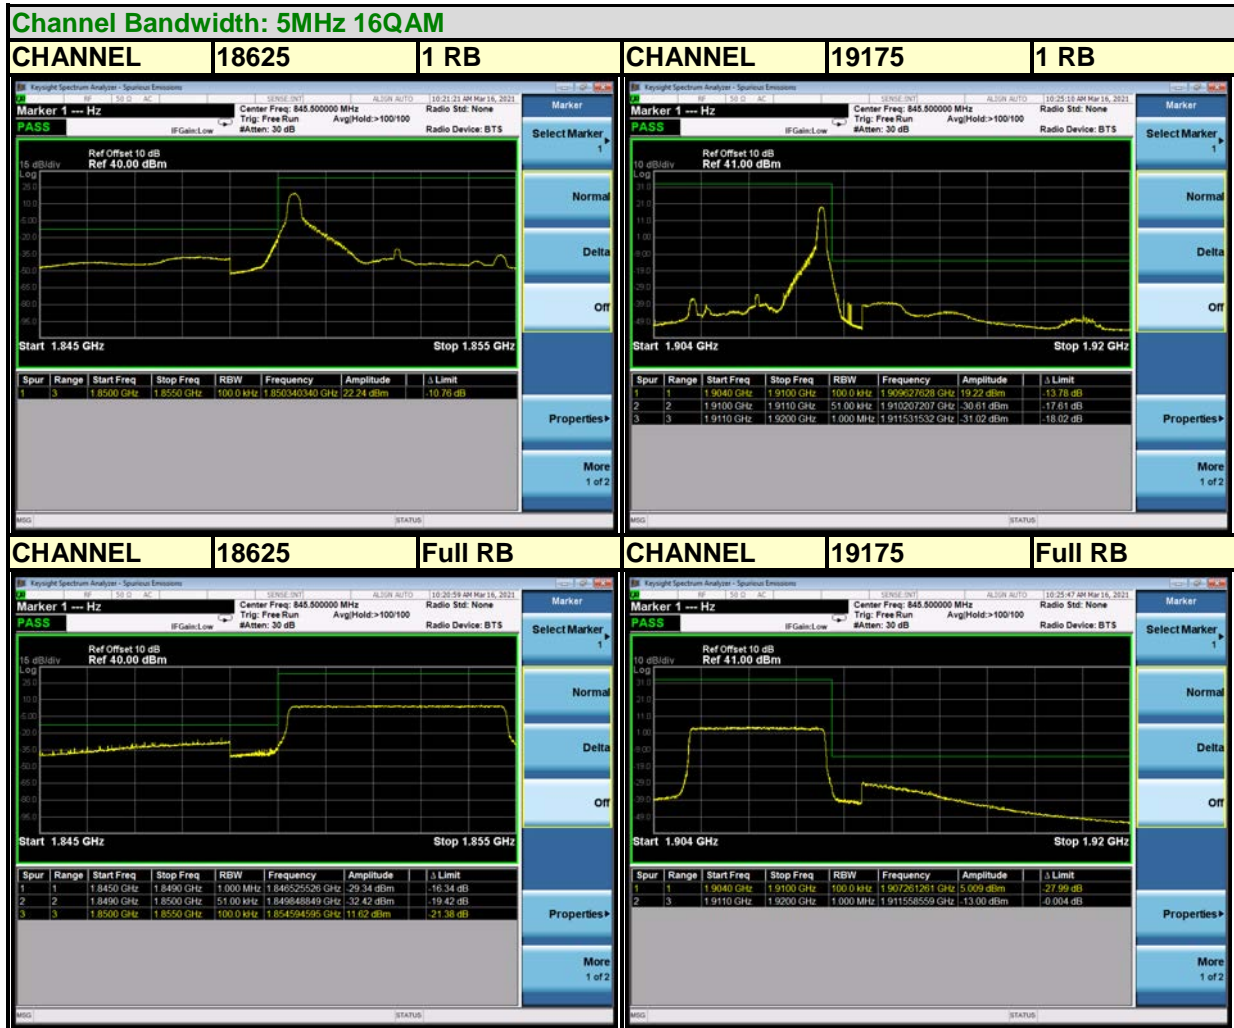




**BUREAU
VERITAS**

Test Report No.: RF210603W002-2


LTE BAND 2

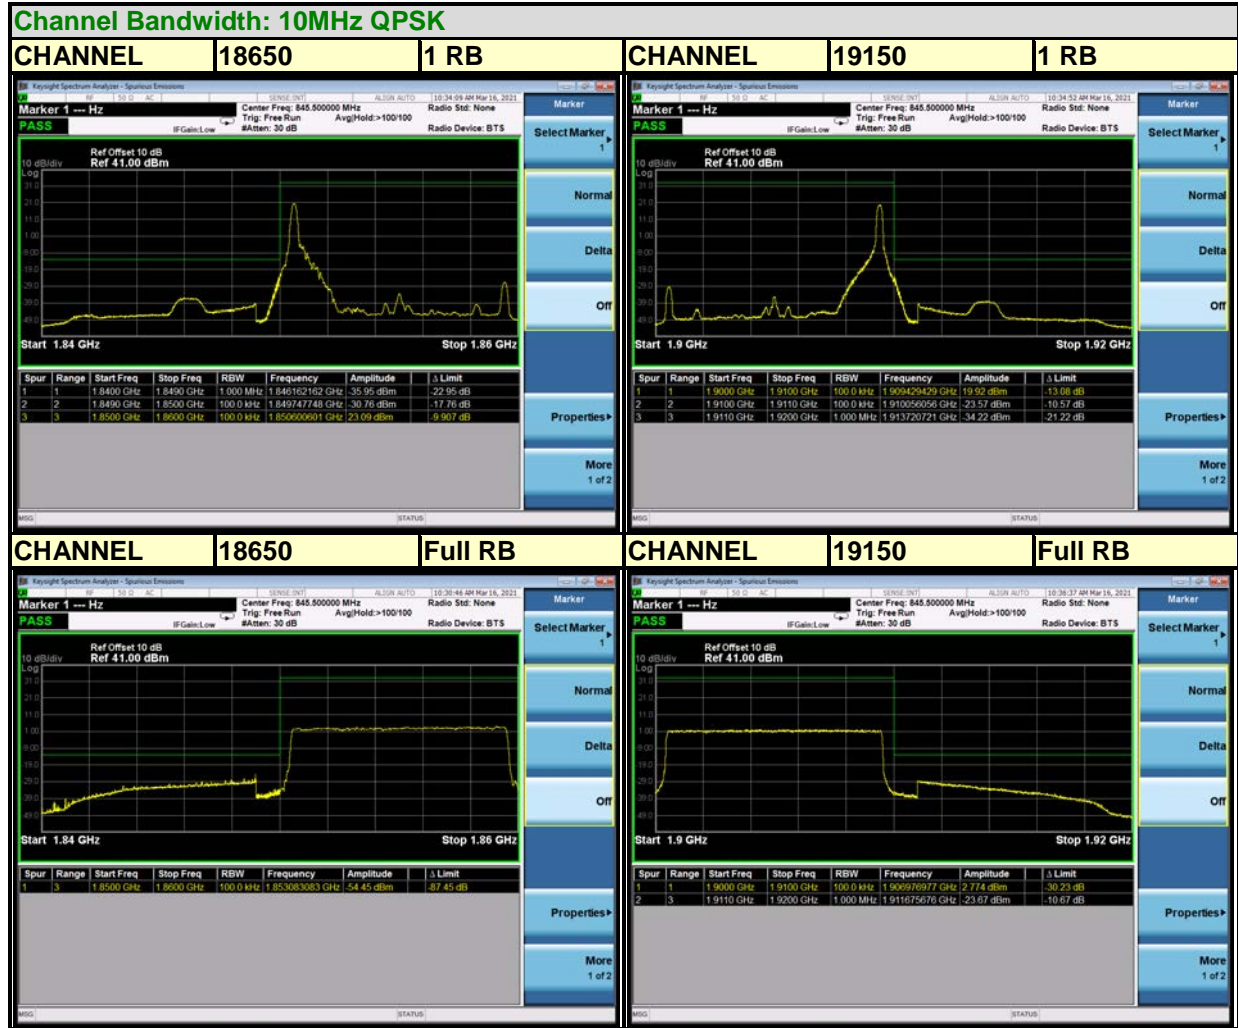



BUREAU
VERITAS

Test Report No.: RF210603W002-2

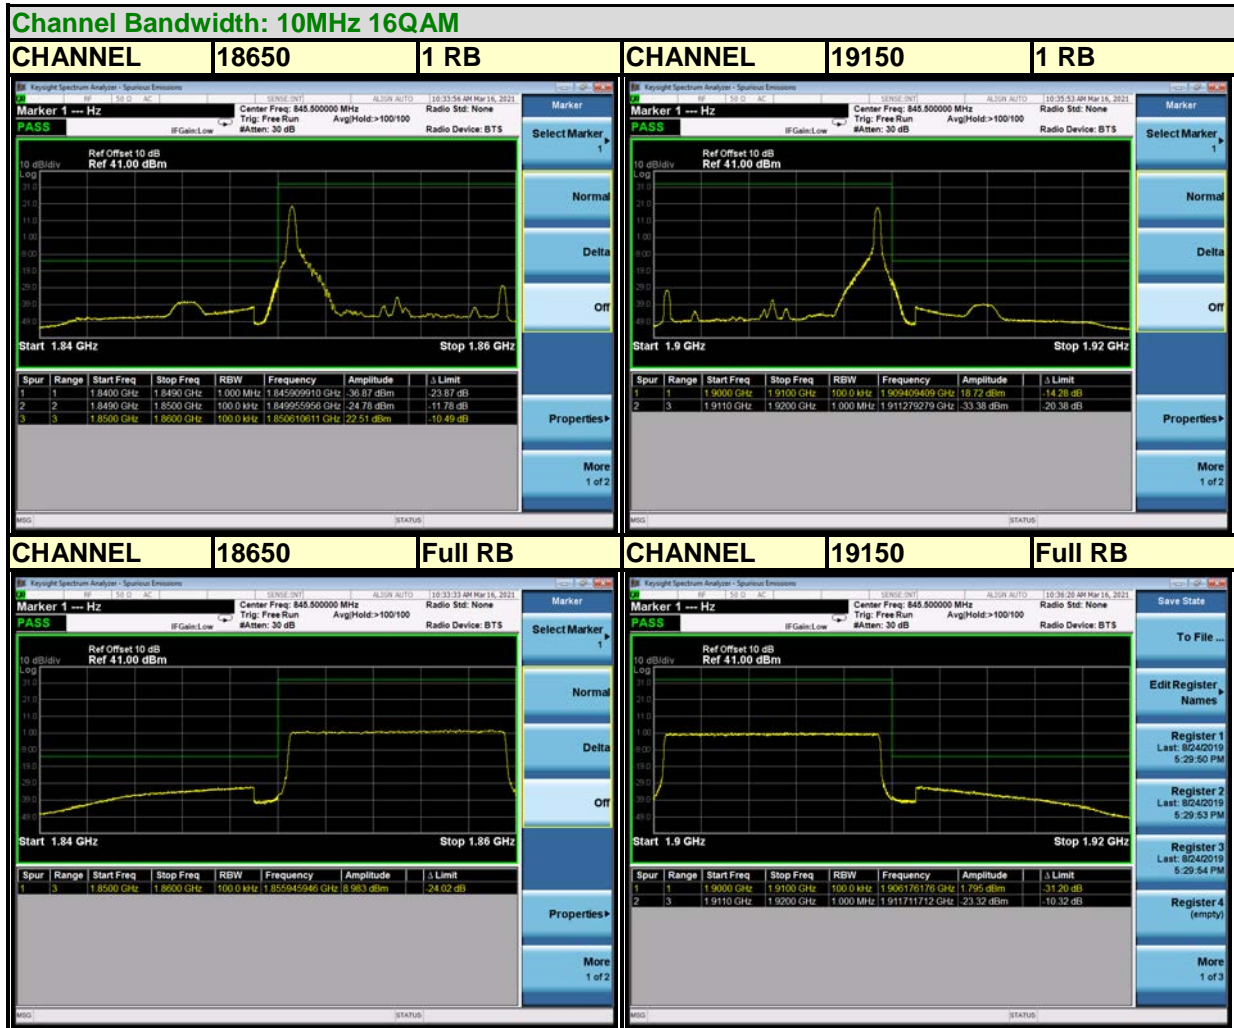



BUREAU VERITAS

Test Report No.: RF210603W002-2


LTE BAND 2





BUREAU
VERITAS

Test Report No.: RF210603W002-2

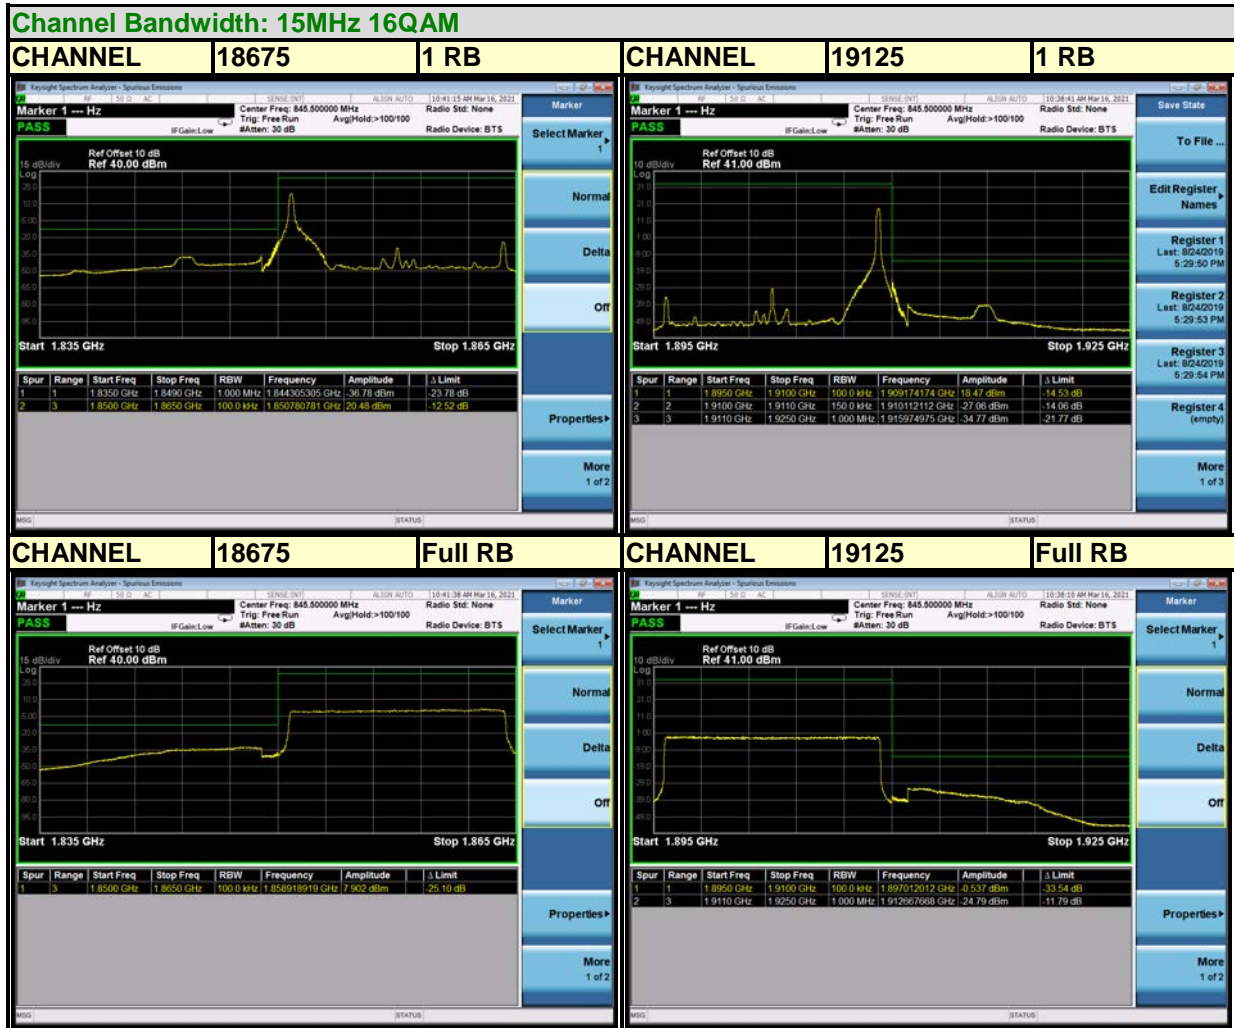



BUREAU VERITAS

Test Report No.: RF210603W002-2


LTE BAND 2





BUREAU
VERITAS

Test Report No.: RF210603W002-2

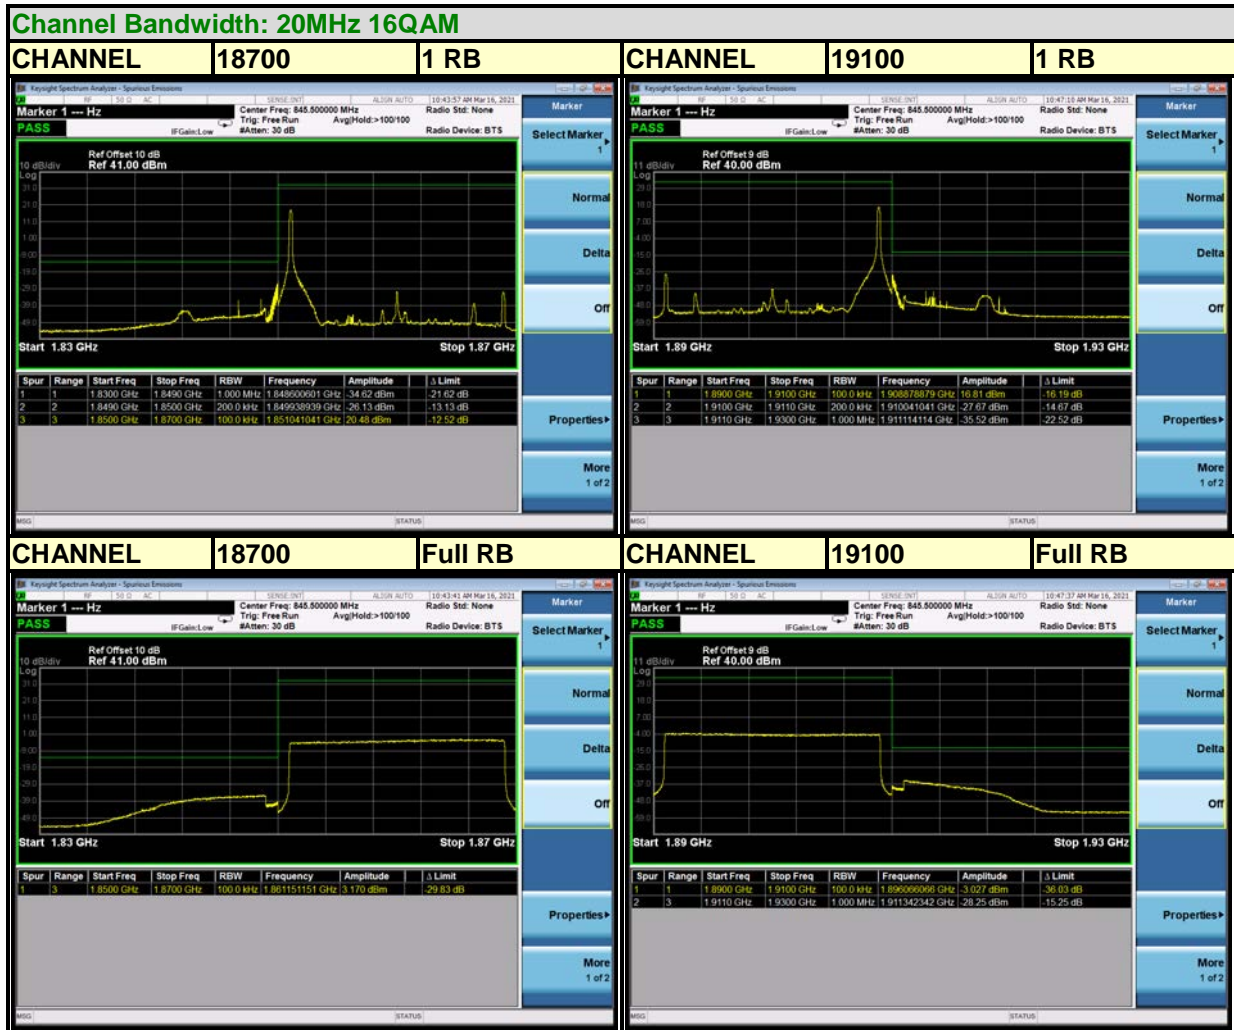




BUREAU VERITAS

Test Report No.: RF210603W002-2


LTE BAND 25

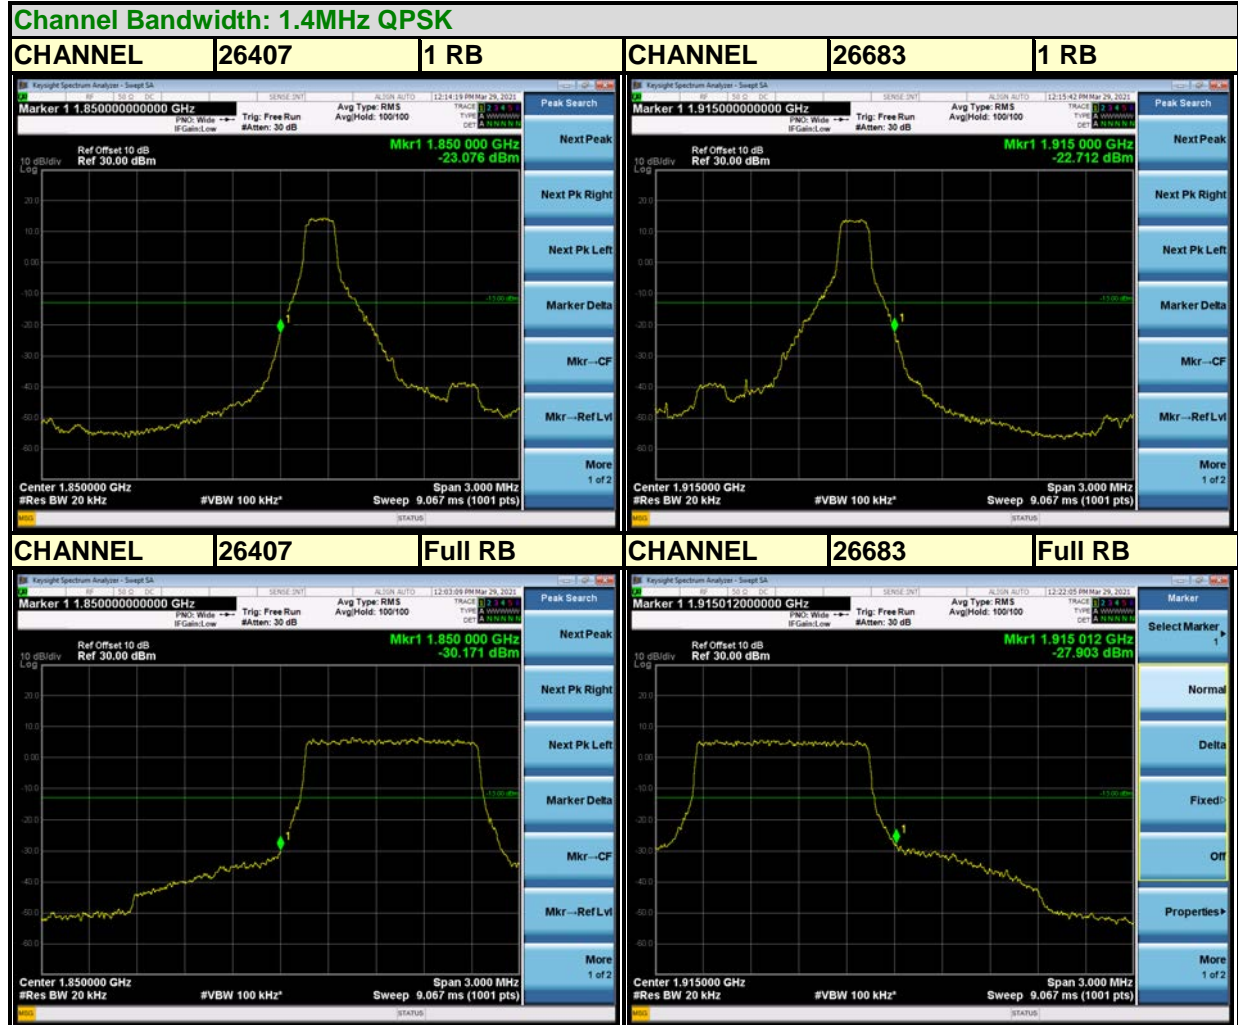



BUREAU VERITAS

Test Report No.: RF210603W002-2

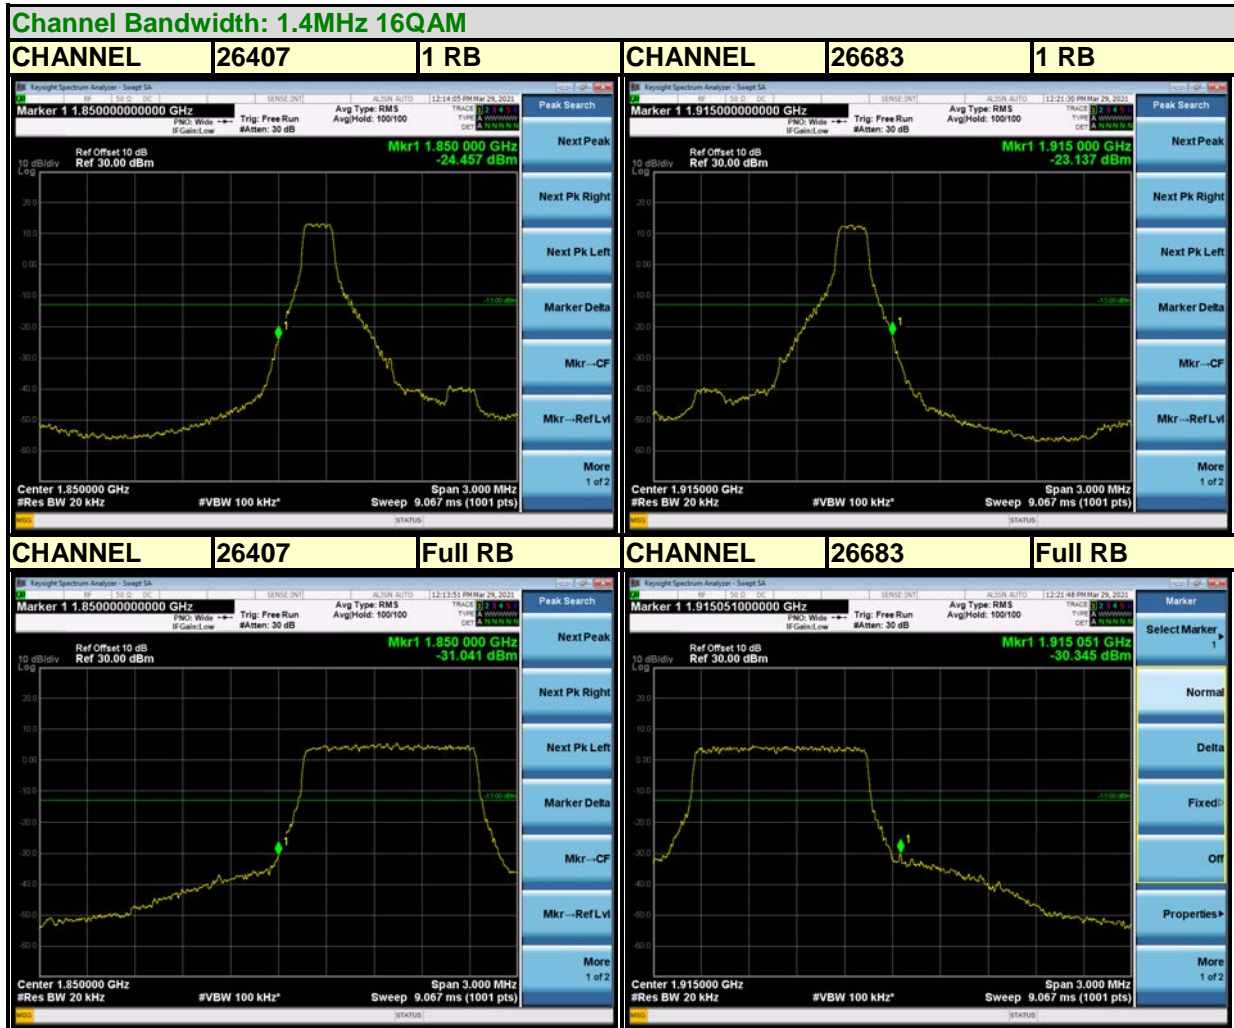




BUREAU VERITAS

Test Report No.: RF210603W002-2

LTE BAND 25

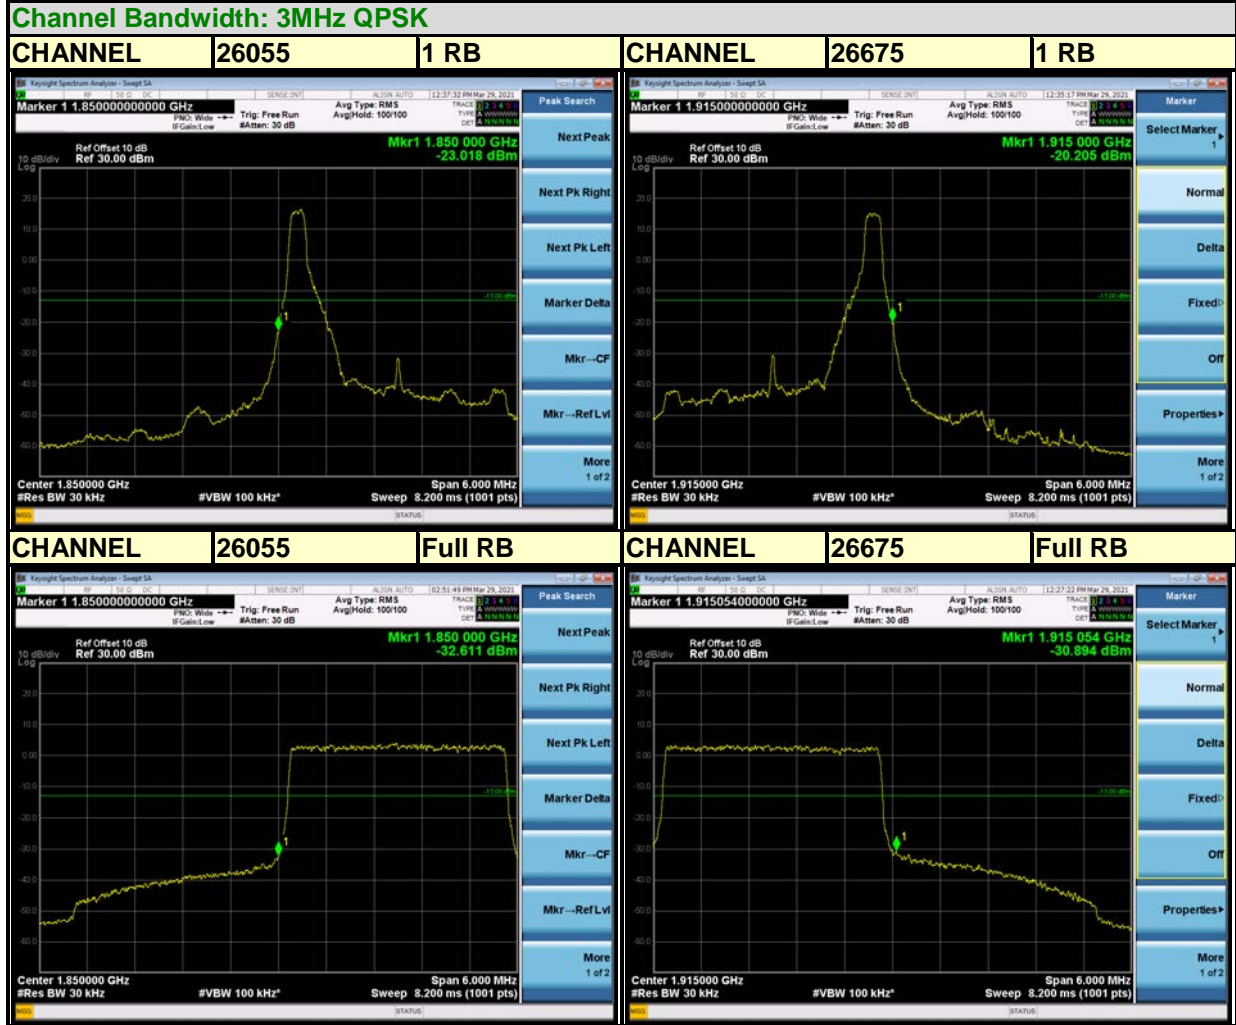

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China


Tel: +86 755 8869 6566 Fax: +86 755 8869 6577

Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: RF210603W002-2

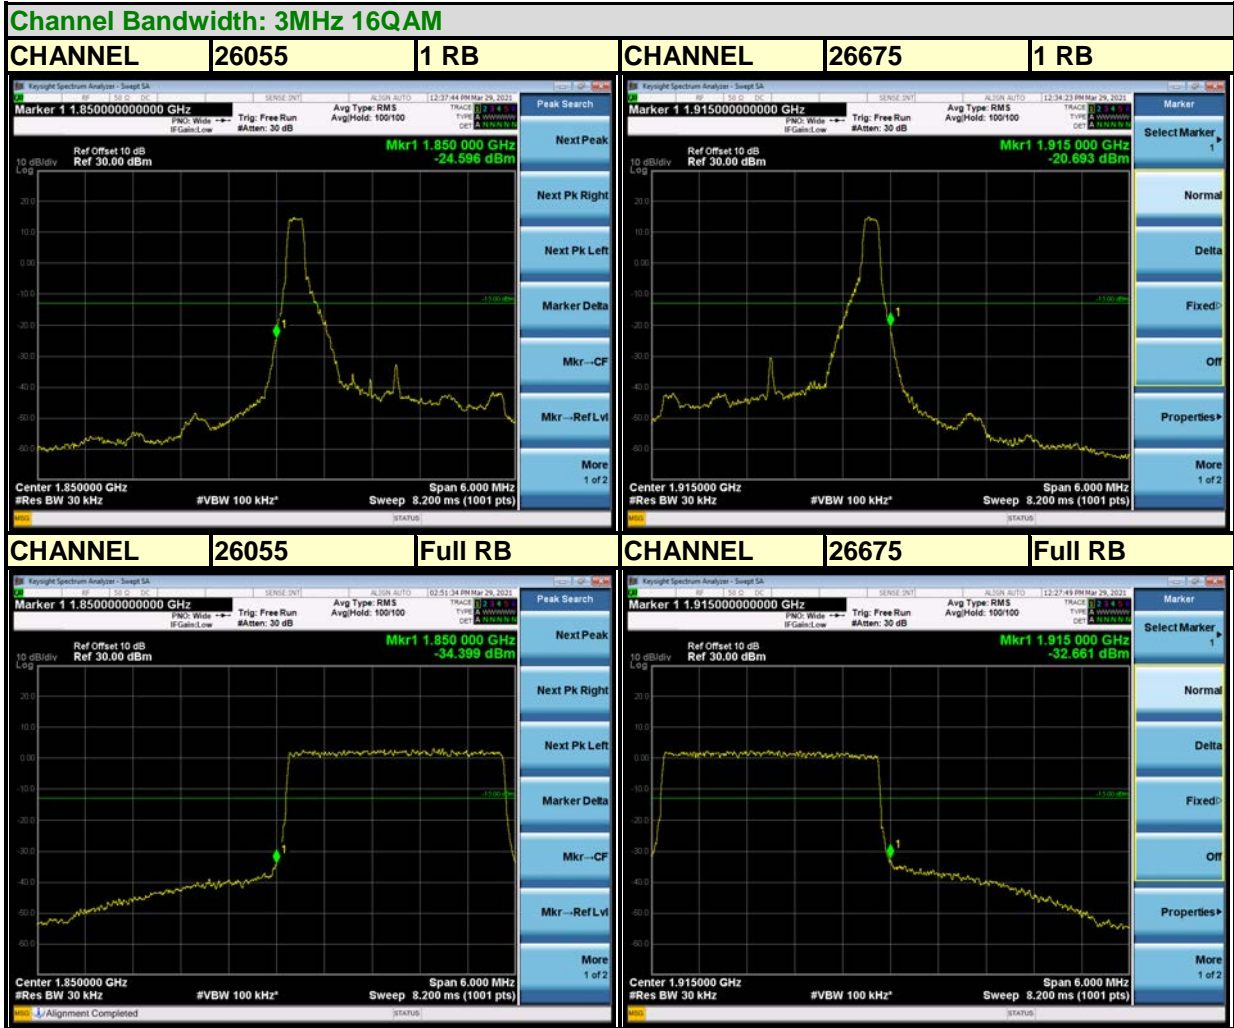



BUREAU VERITAS

Test Report No.: RF210603W002-2

LTE BAND 25


Channel Bandwidth: 5MHz QPSK





BUREAU VERITAS

Test Report No.: RF210603W002-2

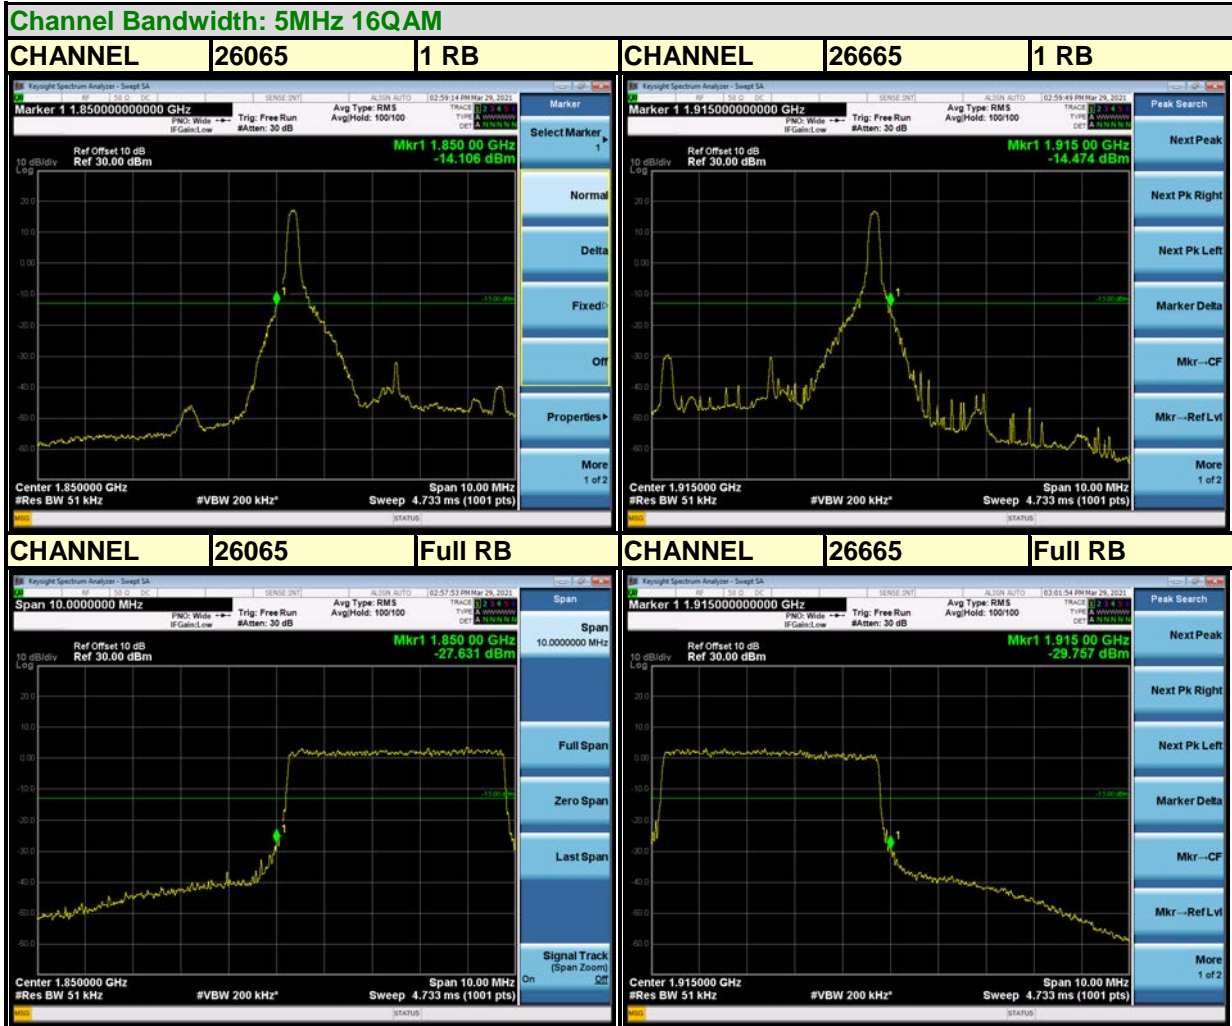




BUREAU VERITAS

Test Report No.: RF210603W002-2

LTE BAND 25


Channel Bandwidth: 10MHz QPSK

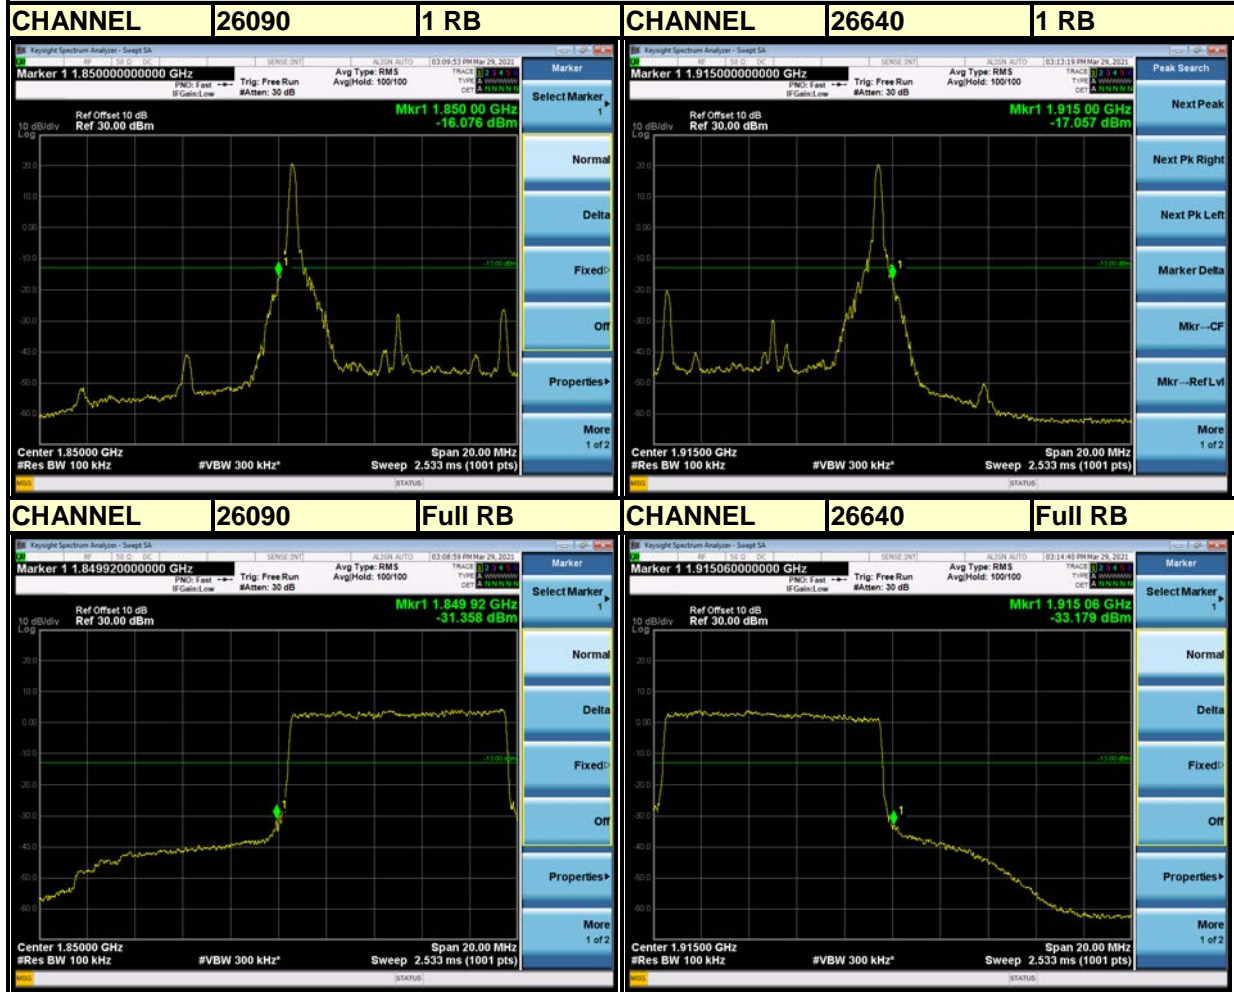



BUREAU VERITAS

Test Report No.: RF210603W002-2

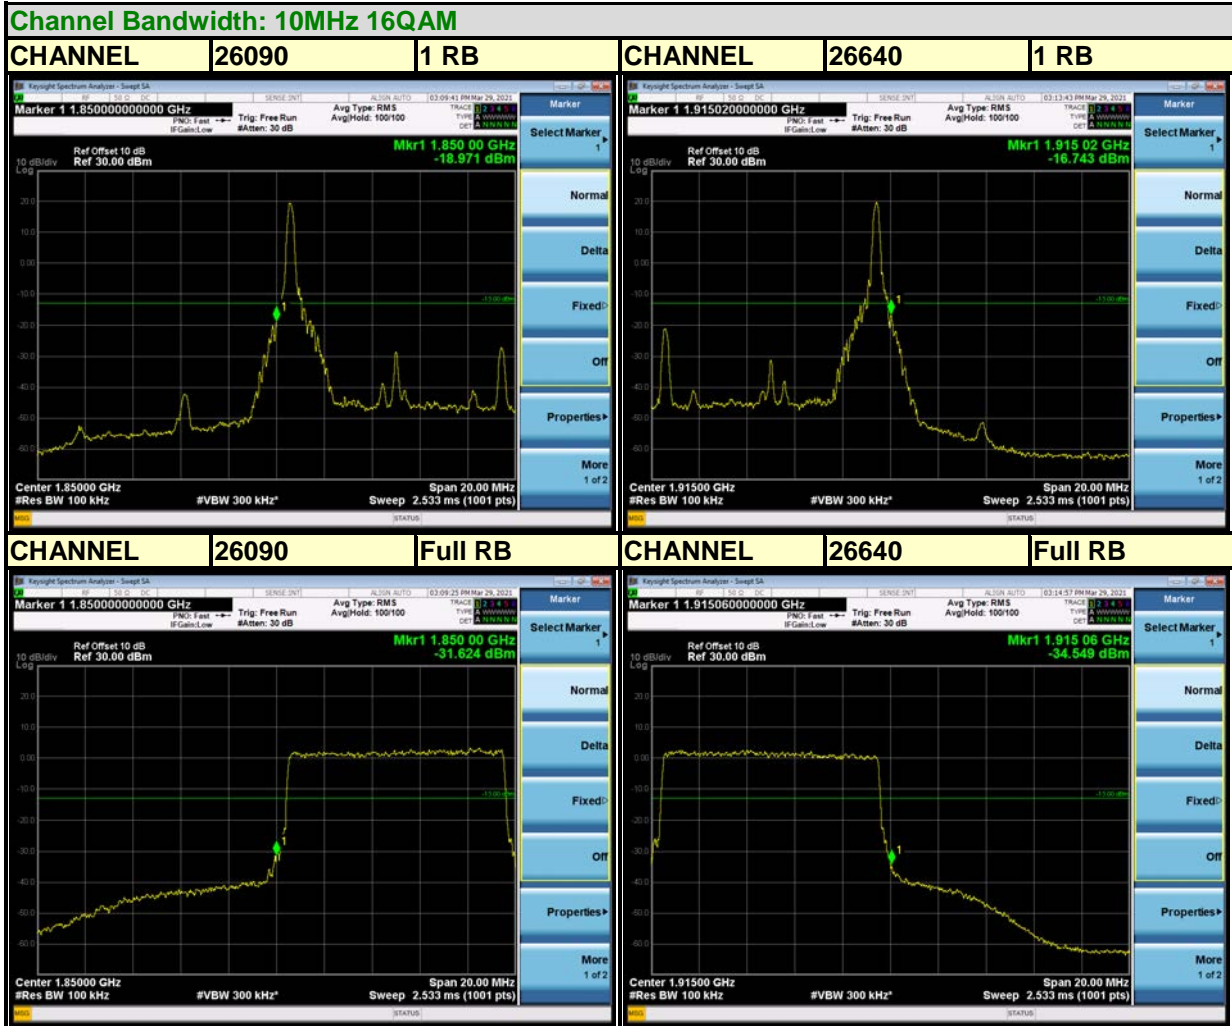




BUREAU VERITAS

Test Report No.: RF210603W002-2

LTE BAND 25


Channel Bandwidth: 15MHz QPSK

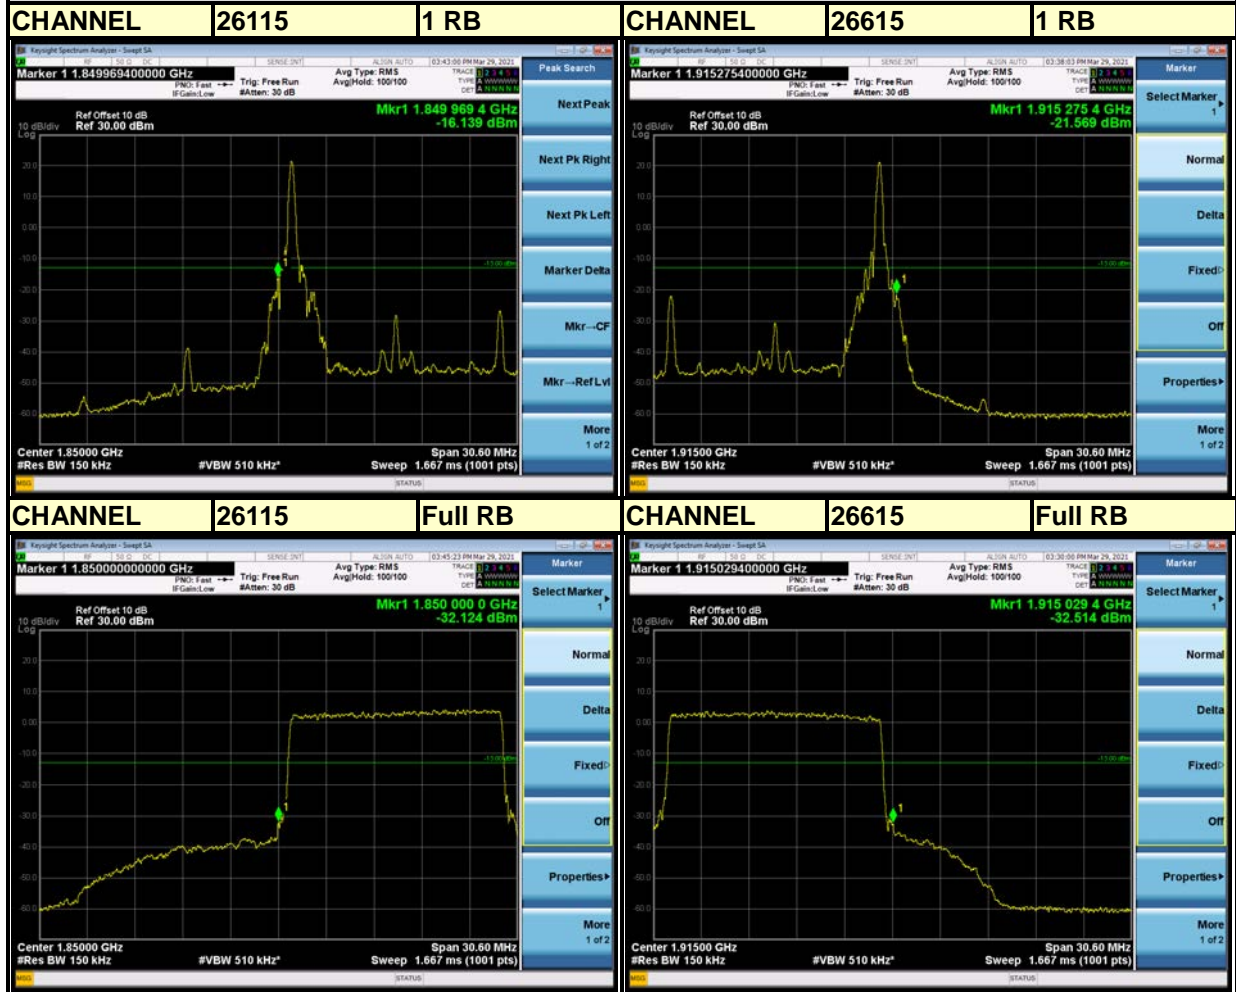



BUREAU VERITAS

Test Report No.: RF210603W002-2

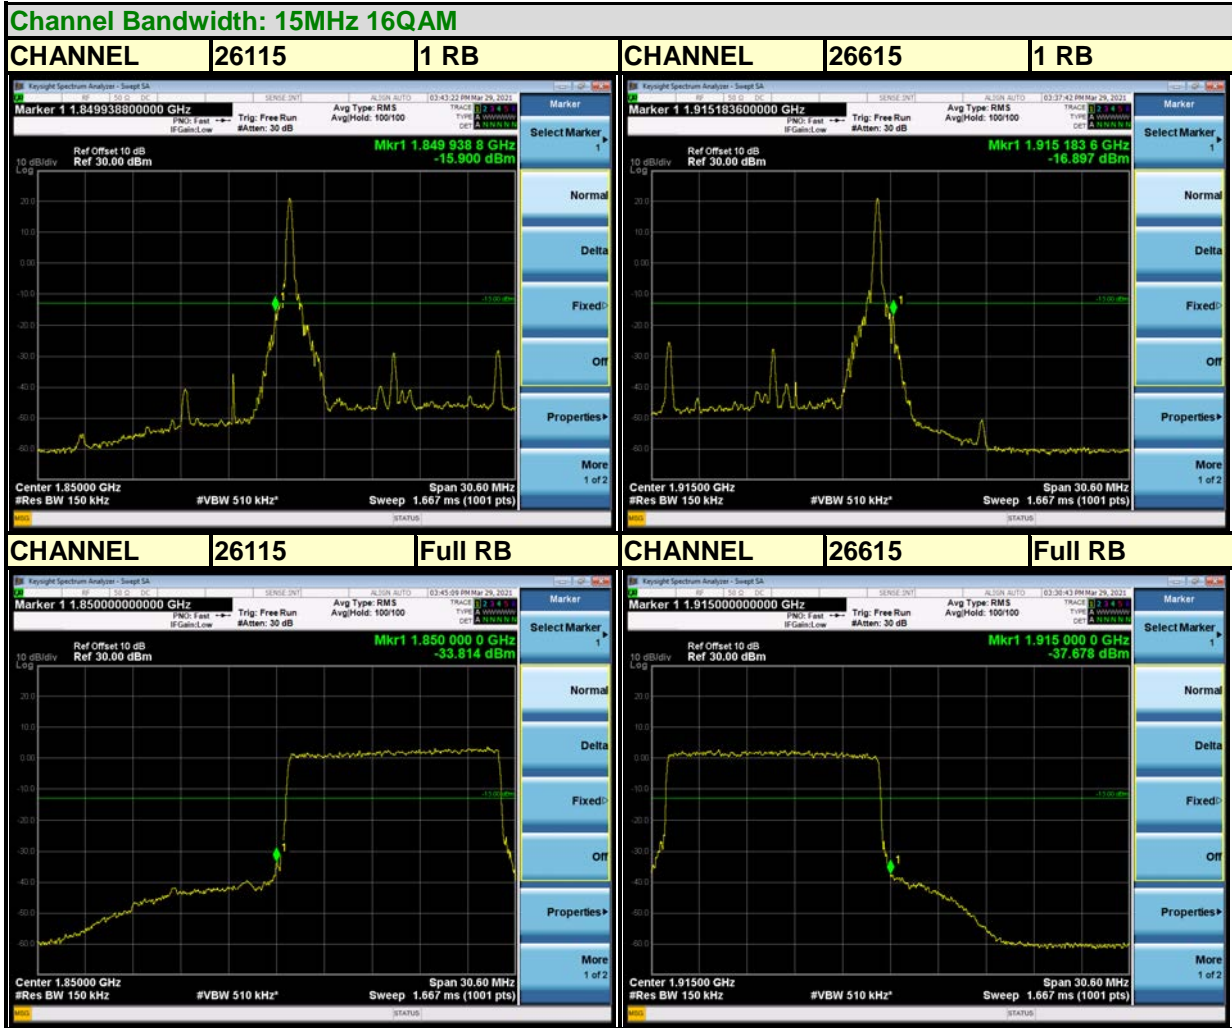




BUREAU VERITAS

Test Report No.: RF210603W002-2

LTE BAND 25

Channel Bandwidth: 20MHz QPSK


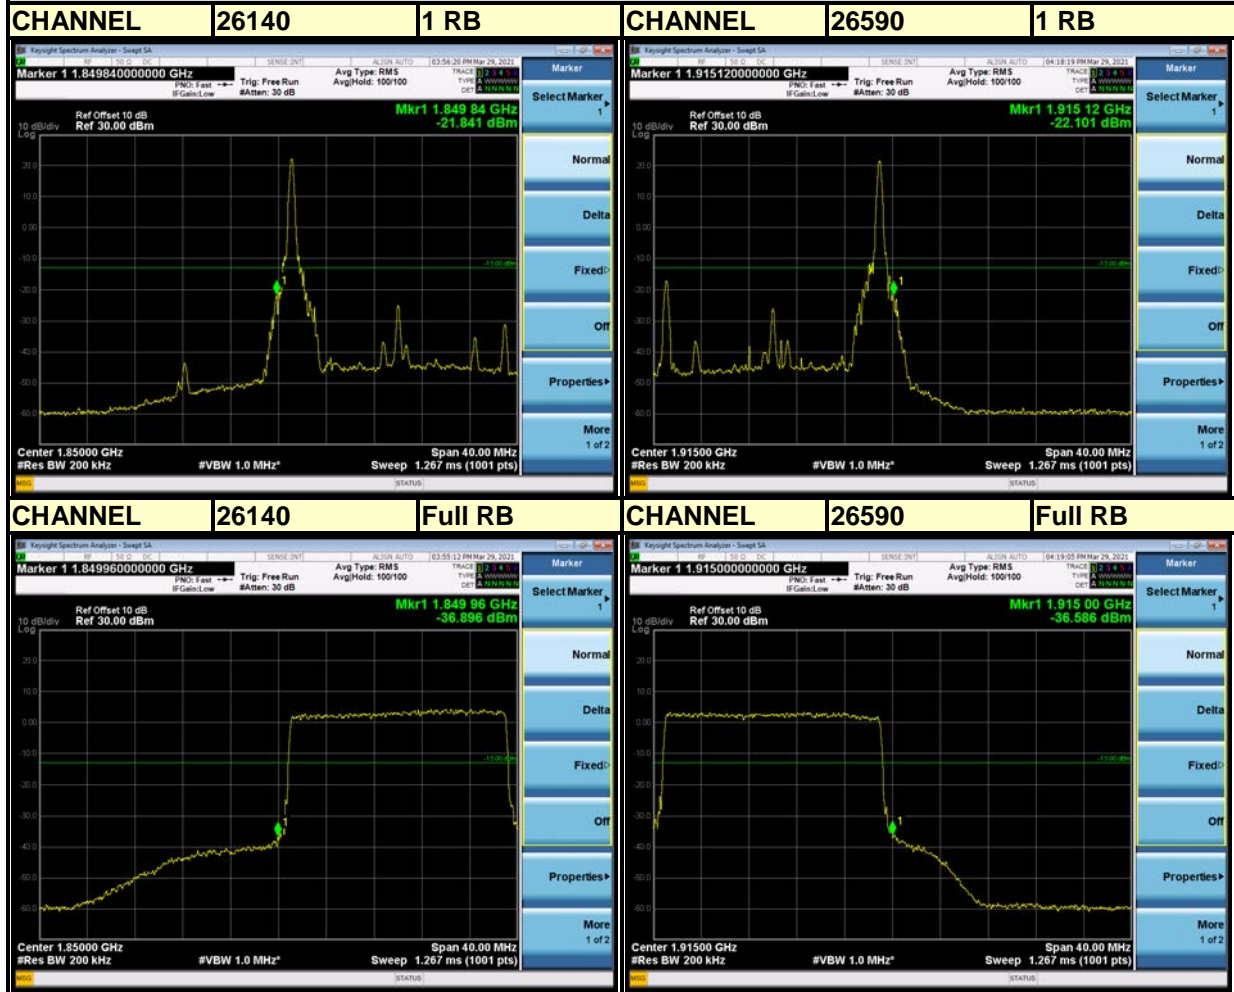




BUREAU VERITAS

Test Report No.: RF210603W002-2

Channel Bandwidth: 20MHz 16QAM

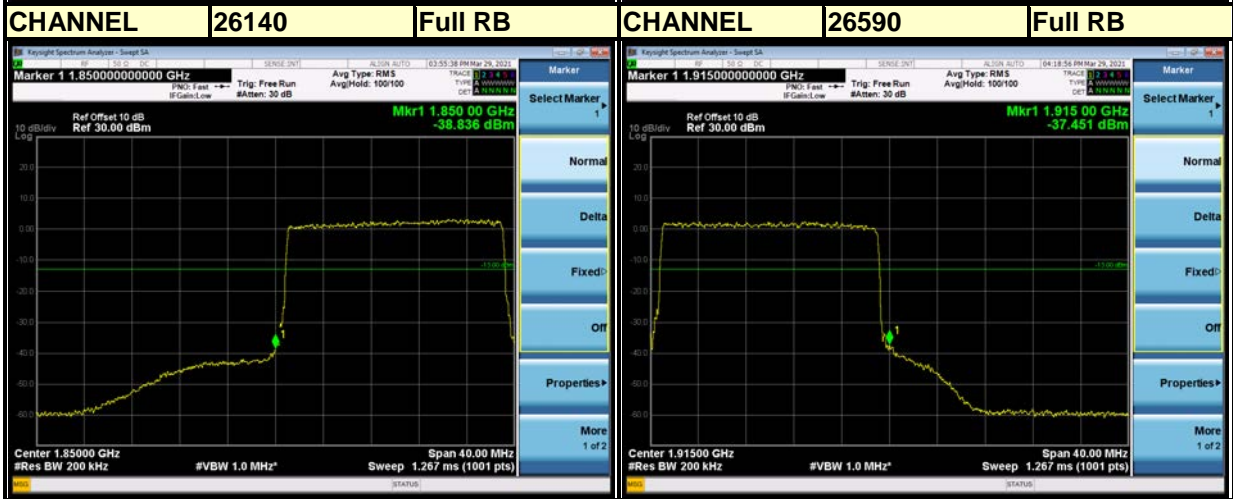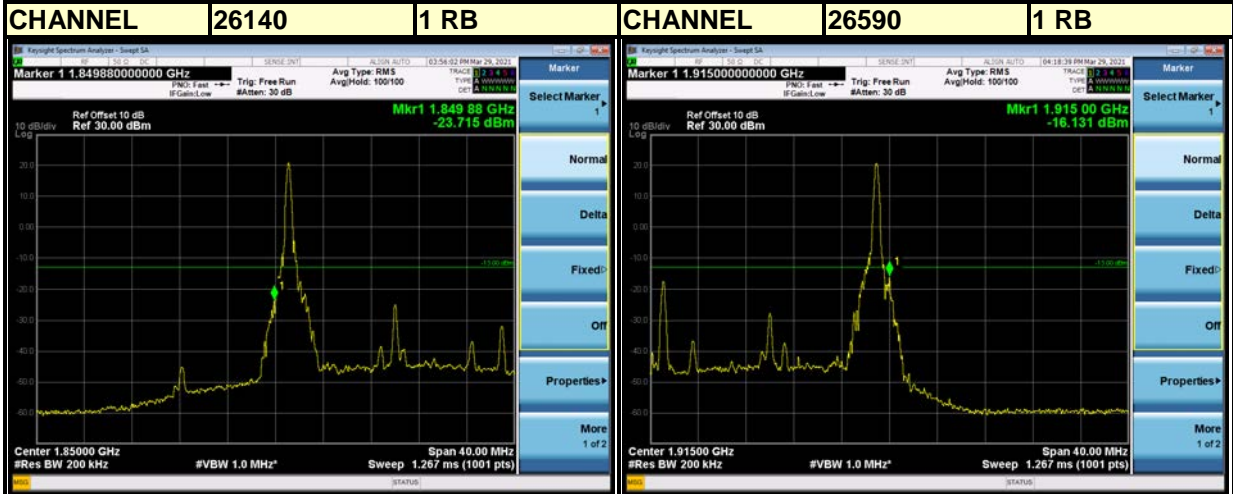



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

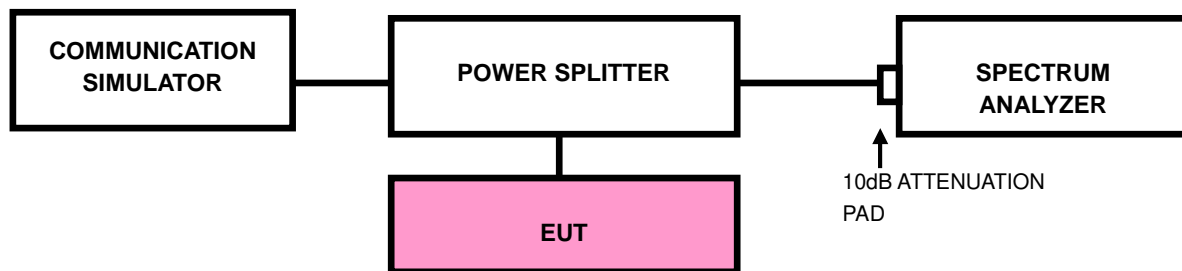




BUREAU VERITAS

Test Report No.: RF210603W002-2


3.5.4 TEST RESULTS

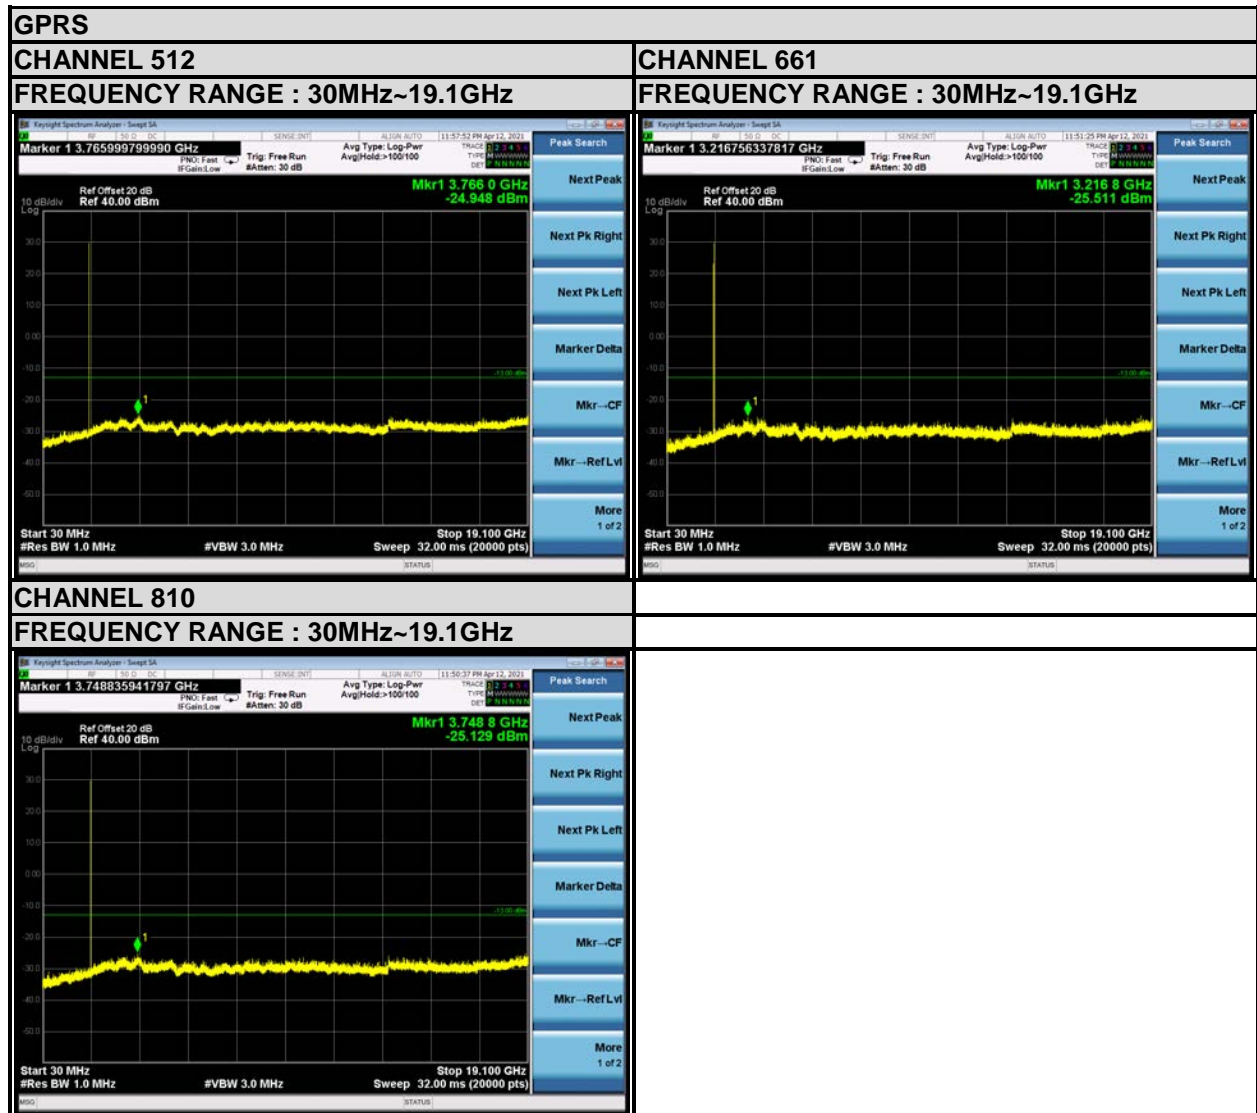



BUREAU VERITAS

Test Report No.: RF210603W002-2

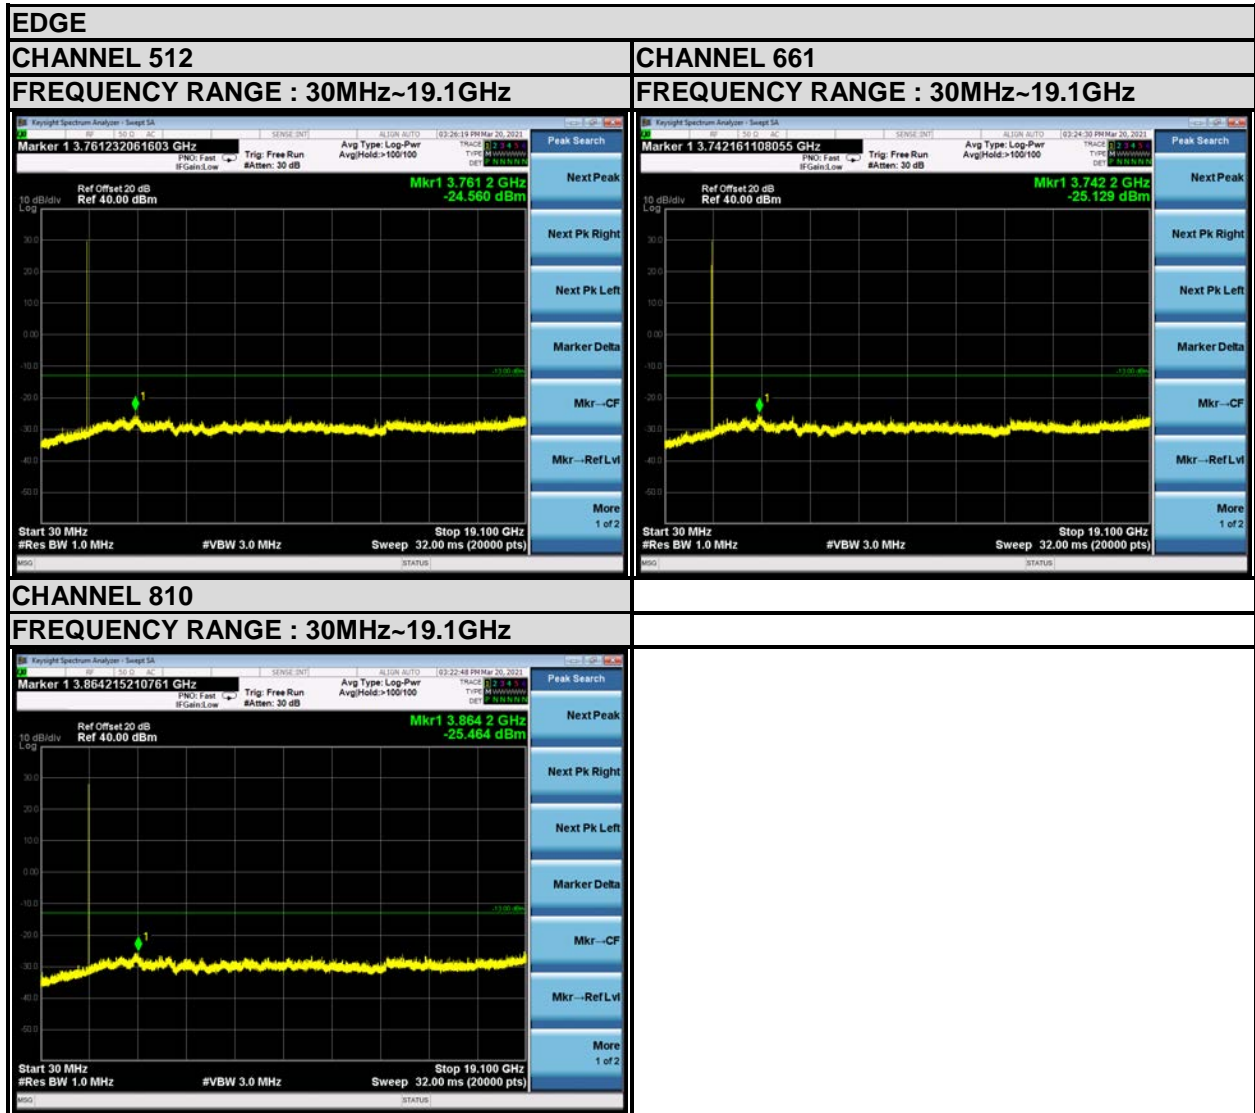



BUREAU VERITAS

Test Report No.: RF210603W002-2





BUREAU VERITAS


Test Report No.: RF210603W002-2

LTE BAND 2

1.4MHz / QPSK

CHANNEL 18607

FREQUENCY RANGE : 30MHz~44.5GHz

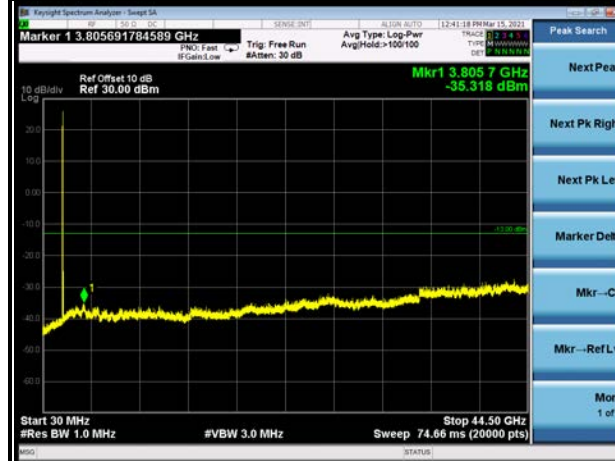


CHANNEL 18900

FREQUENCY RANGE : 30MHz~44.5GHz



CHANNEL 19193


FREQUENCY RANGE : 30MHz~44.5GHz

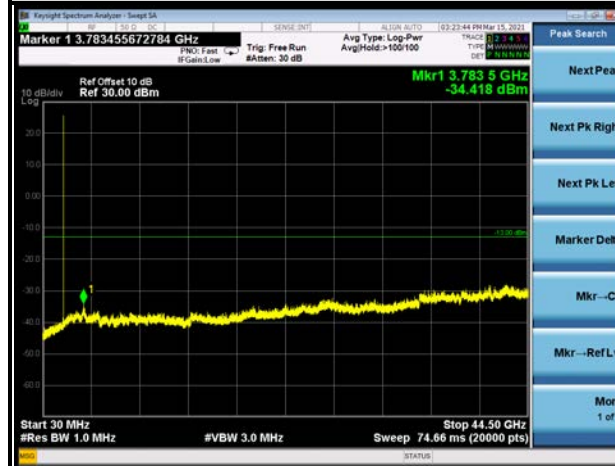



BUREAU VERITAS

Test Report No.: RF210603W002-2

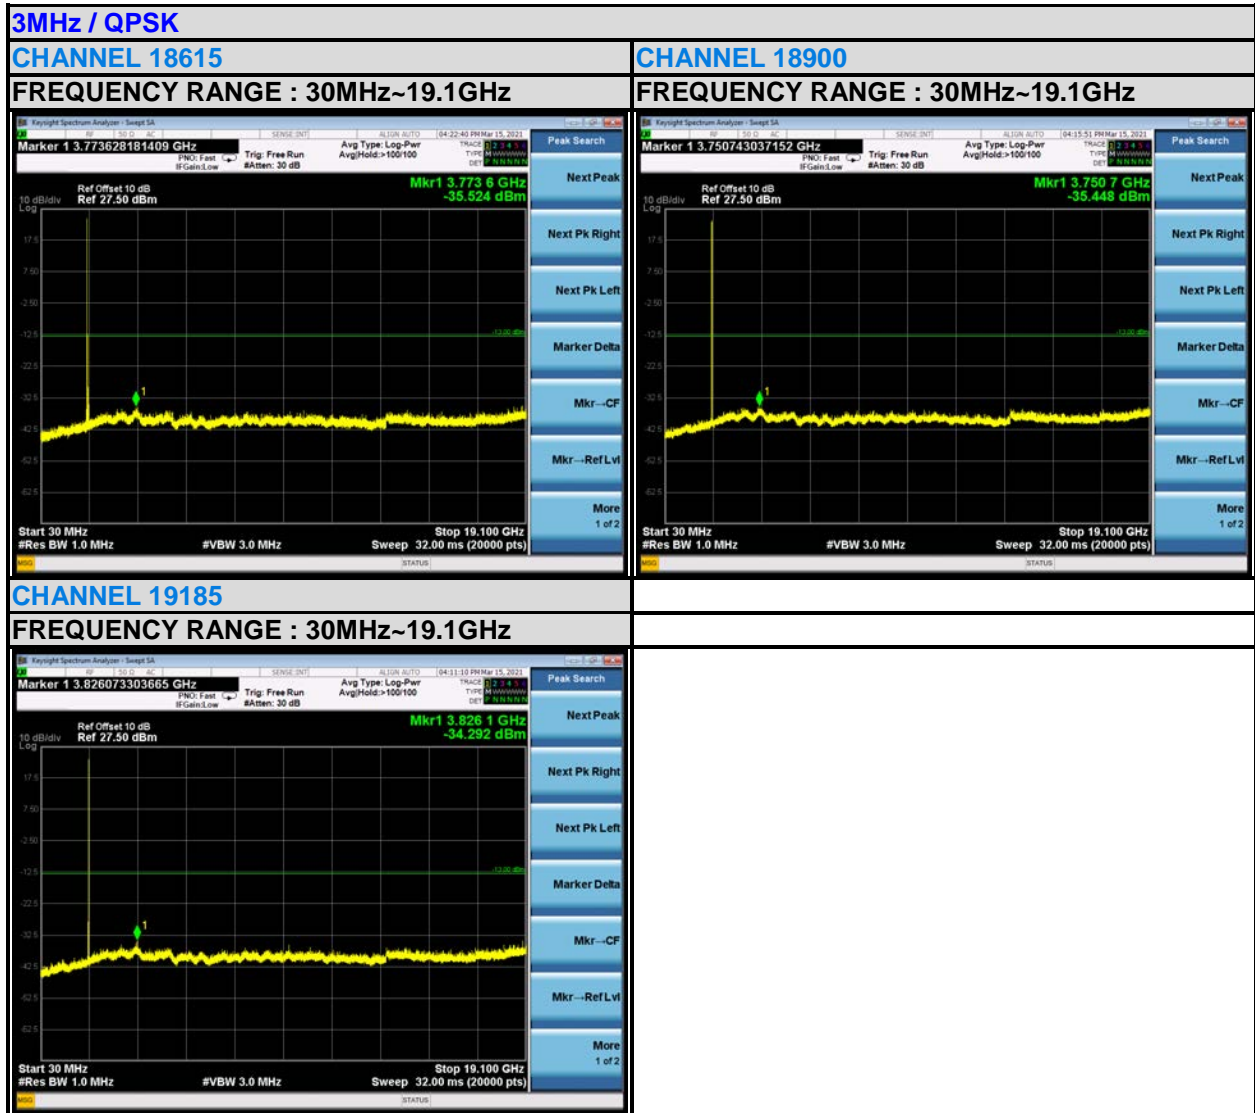




BUREAU VERITAS

Test Report No.: RF210603W002-2

5MHz / QPSK


CHANNEL 18625

FREQUENCY RANGE : 30MHz~19.1GHz

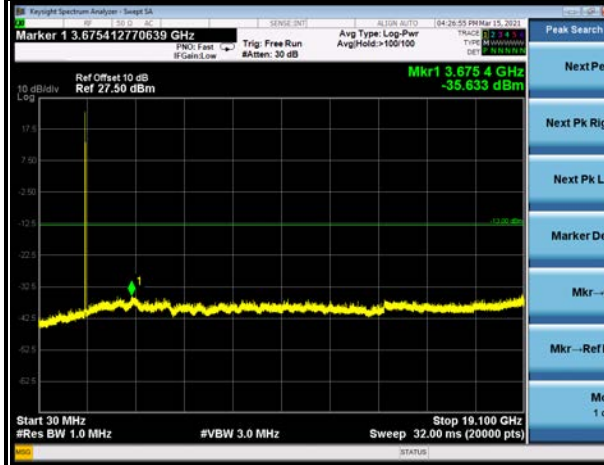


CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz

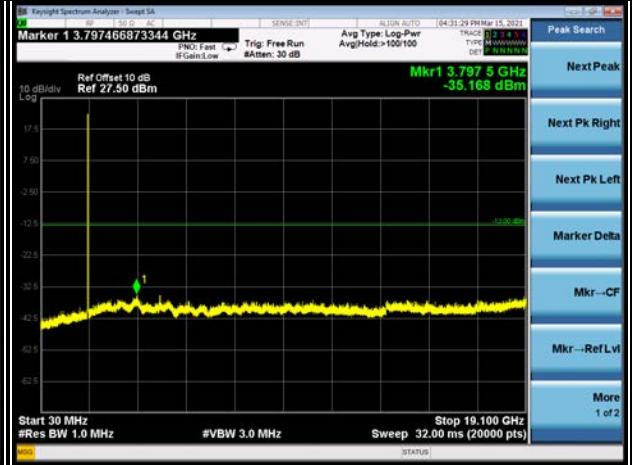

CHANNEL 19175

FREQUENCY RANGE : 30MHz~19.1GHz

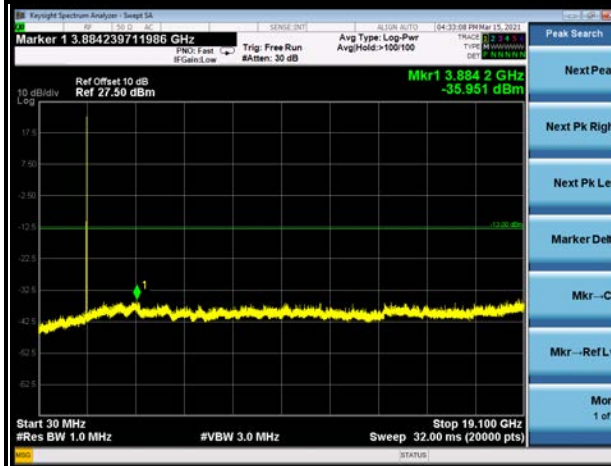




BUREAU VERITAS

Test Report No.: RF210603W002-2

10MHz / QPSK


CHANNEL 18650

FREQUENCY RANGE : 30MHz~19.1GHz

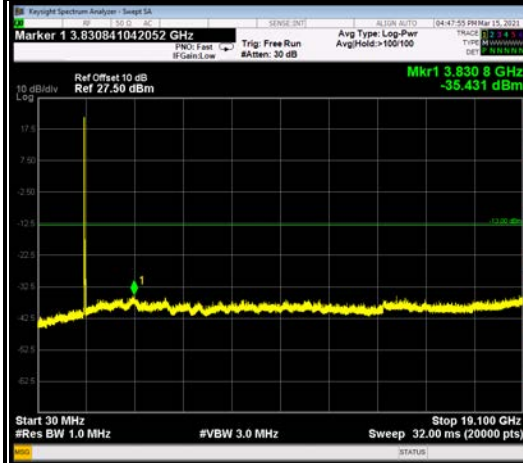


CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz

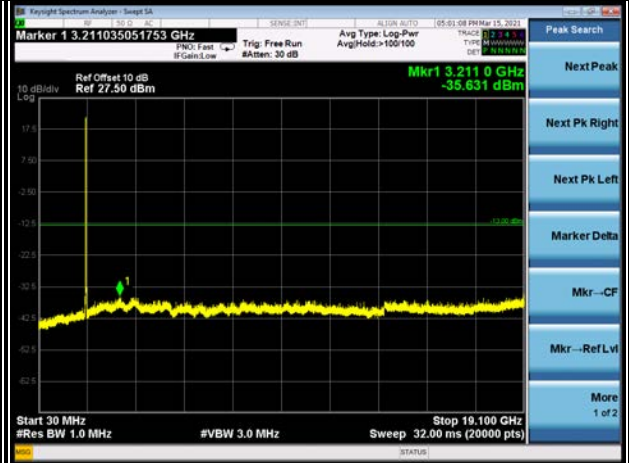

CHANNEL 19150


FREQUENCY RANGE : 30MHz~19.1GHz

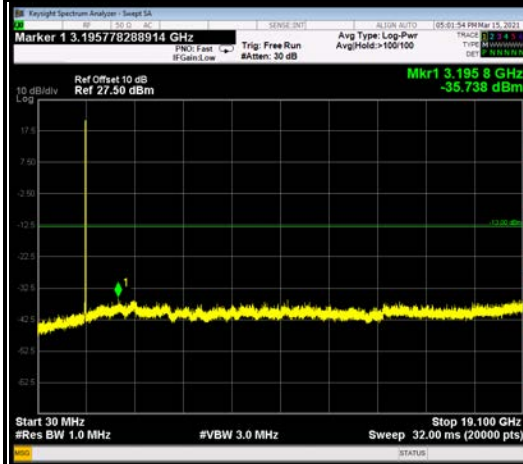



BUREAU VERITAS

Test Report No.: RF210603W002-2

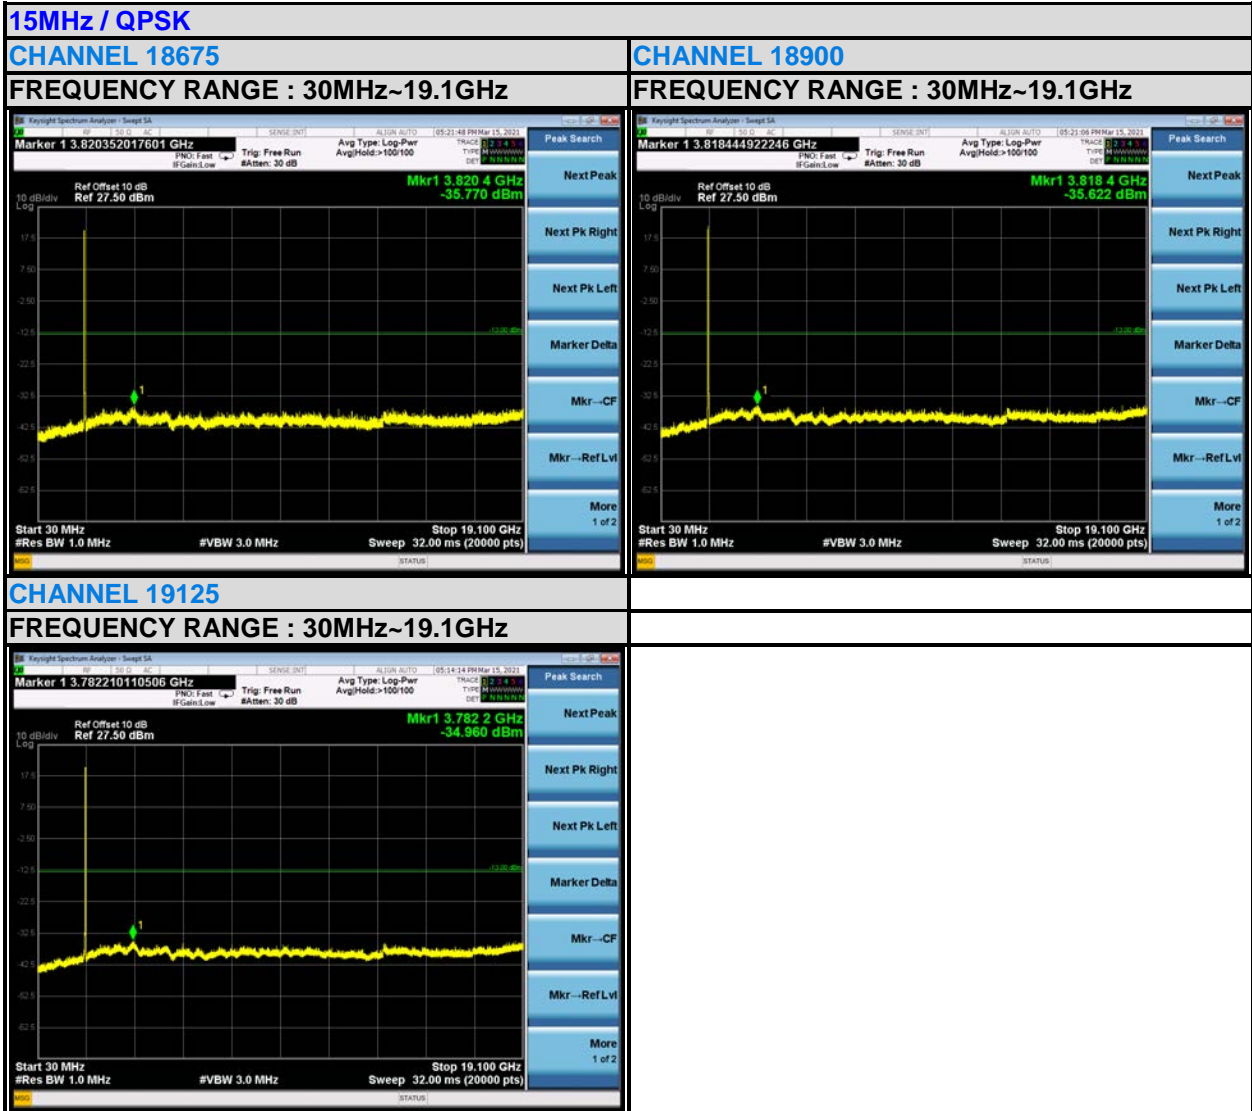



BUREAU VERITAS

Test Report No.: RF210603W002-2





BUREAU VERITAS


Test Report No.: RF210603W002-2

LTE BAND 25

1.4MHz / QPSK


CHANNEL 26047

FREQUENCY RANGE : 30MHz~19.15GHz

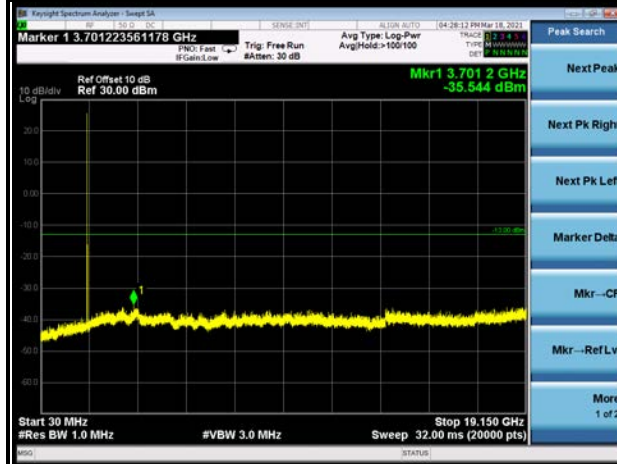


CHANNEL 26365

FREQUENCY RANGE : 30MHz~19.15GHz

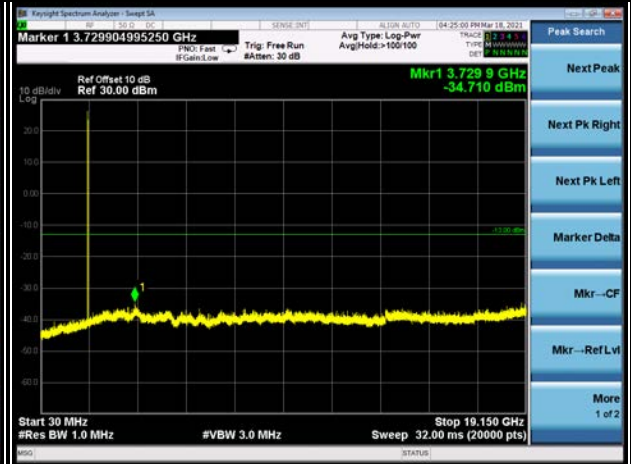

CHANNEL 26683


FREQUENCY RANGE : 30MHz~19.15GHz

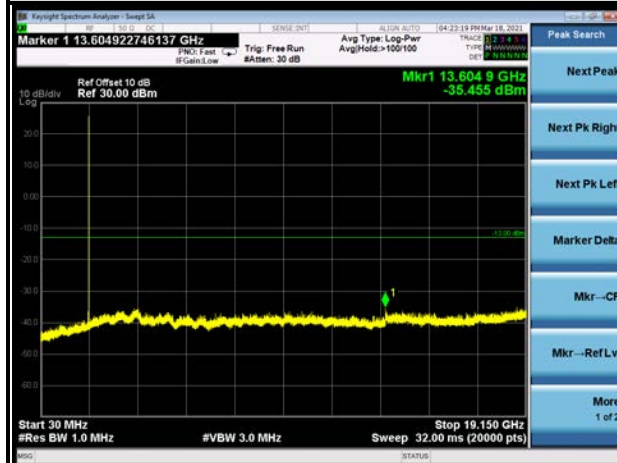



BUREAU VERITAS


Test Report No.: RF210603W002-2

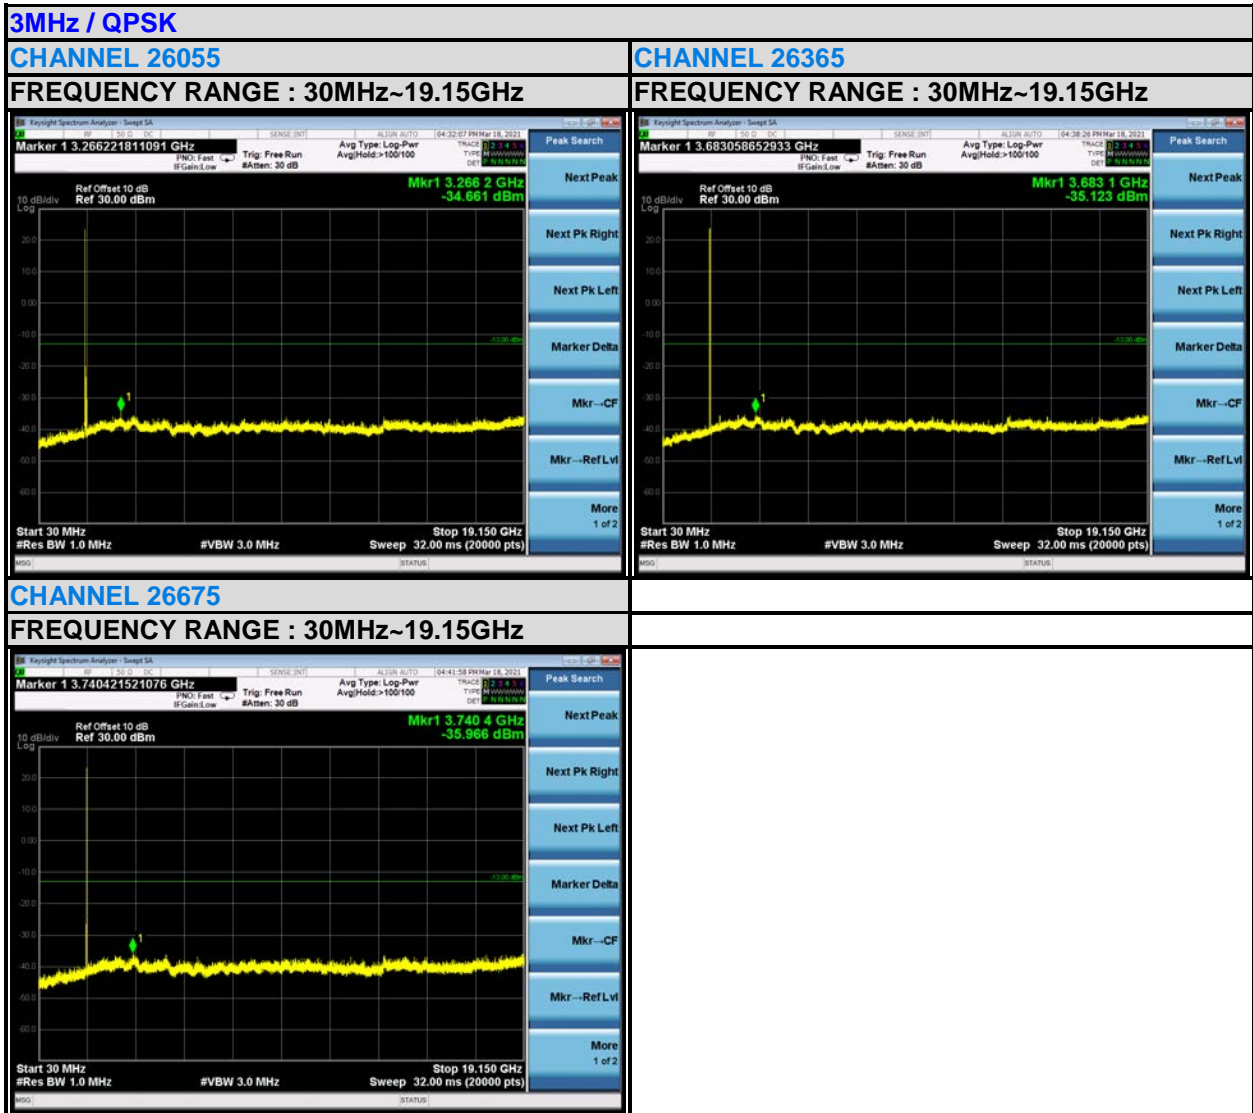



BUREAU VERITAS

Test Report No.: RF210603W002-2

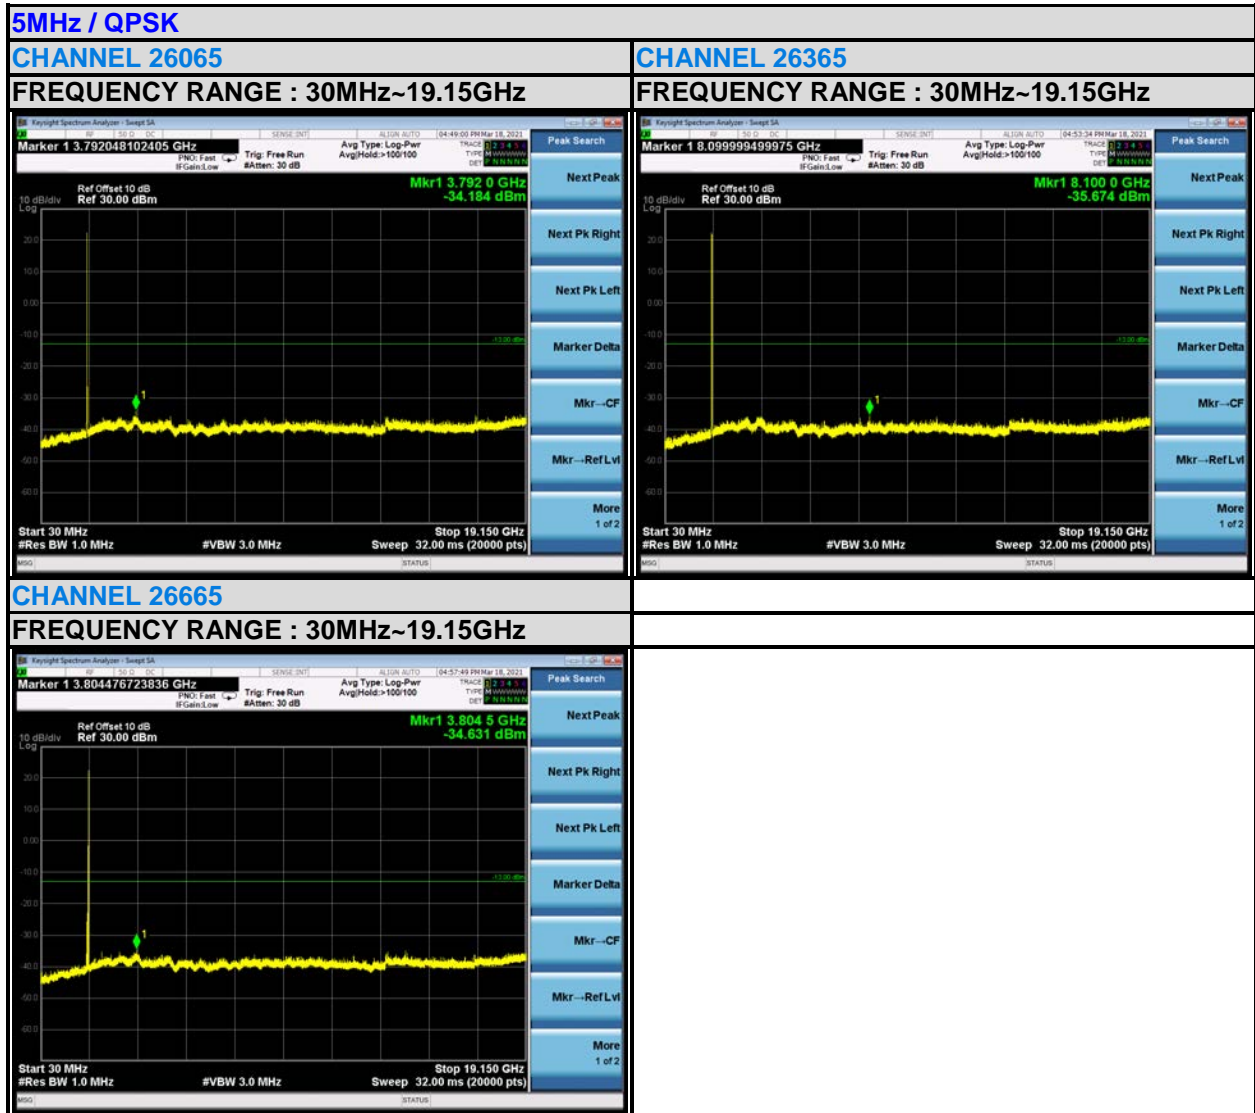



BUREAU VERITAS

Test Report No.: RF210603W002-2

