

# FCC TEST REPORT (PART 24)



Applicant:	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer or Supplier:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China
Product:	Portable Tablet Computer
Brand Name:	Lenovo
Model Name:	Lenovo TB-X6C6X
FCC ID:	O57TBX6C6X
Date of tests:	Mar. 03, 2021 ~ Mar. 30, 2021

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**  
  **FCC PART 2**  
 **ANSI/TIA/EIA-603-D**  
  **ANSI/TIA/EIA-603-E**  
  **ANSI C63.26-2015**

**CONCLUSION:** The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Apr. 8, 2021	Date: Apr. 8, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY .....	5
1.2 TEST SITE AND INSTRUMENTS .....	6
<b>2 GENERAL INFORMATION .....</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT .....	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST .....	10
2.3 DESCRIPTION OF SUPPORT UNITS .....	11
2.4 TEST ITEM AND TEST CONFIGURATION.....	11
2.5 EUT OPERATING CONDITIONS .....	14
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
<b>3 TEST TYPES AND RESULTS .....</b>	<b>15</b>
3.1 OUTPUT POWER MEASUREMENT .....	15
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	15
3.1.2 TEST PROCEDURES.....	15
3.1.3 TEST SETUP .....	16
3.1.4 TEST RESULTS.....	16
3.2 FREQUENCY STABILITY MEASUREMENT .....	30
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	30
3.2.2 TEST PROCEDURE .....	30
3.2.3 TEST SETUP .....	30
3.2.4 TEST RESULTS.....	31
3.3 OCCUPIED BANDWIDTH MEASUREMENT .....	40
3.3.1 TEST PROCEDURES.....	40
3.3.2 TEST SETUP .....	40
3.3.3 TEST RESULTS.....	41
3.4 BAND EDGE MEASUREMENT.....	49
3.4.1 LIMITS OF BAND EDGE MEASUREMENT .....	49
3.4.2 TEST SETUP.....	49
3.4.3 TEST PROCEDURES.....	50
3.4.4 TEST RESULTS.....	51
3.5 CONDUCTED SPURIOUS EMISSIONS.....	65
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	65
3.5.2 TEST PROCEDURE .....	65
3.5.3 TEST SETUP .....	65
3.5.4 TEST RESULTS.....	66
3.6 RADIATED EMISSION MEASUREMENT .....	74
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	74
3.6.2 TEST PROCEDURES.....	74
3.6.3 DEVIATION FROM TEST STANDARD.....	74



**Test Report No.: RFA210218W001-3**

3.6.4 TEST SETUP ..... 75  
3.6.5 TEST RESULTS ..... 76  
3.7 PEAK TO AVERAGE RATIO ..... 112  
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT ..... 112  
3.7.2 TEST SETUP ..... 112  
3.7.3 TEST PROCEDURES ..... 112  
3.7.4 TEST RESULTS ..... 113  
**4 INFORMATION ON THE TESTING LABORATORIES ..... 128**  
**5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB ..... 128**



Test Report No.: RFA210218W001-3

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RFA210218W001-5	Original release	Apr. 8, 2021



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	1.1.1.1.1 TEST TYPE	RESULT
2.1046 24.232	Equivalent Isotropic Radiated Power	Compliance
2.1055 24.235	Frequency Stability	Compliance
2.1049 24.238(b)	Occupied Bandwidth	Compliance
24.232(d)	Peak to average ratio	Compliance
24.238(b)	Band Edge Measurements	Compliance
2.1051 24.238	Conducted Spurious Emissions	Compliance
2.1053 24.238	Radiated Spurious Emissions	Compliance

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,20	Apr. 26,21
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 25,21	Feb. 24,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 26,21	Mar. 25,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 27,20	Mar. 26,21
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 26,21	Mar. 25,22
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 27,20	Mar. 26,21
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 24, 20	Nov. 23, 21
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,21	Feb. 25,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,20	Apr. 29,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 19,21
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,20	Jun. 02,21
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP-AR	IAA1504-001	Jun. 02,20	Jun. 01,21
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 10,21	Mar. 09,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 11,20	Mar. 10,21
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Portable Tablet Computer	
<b>BRAND NAME</b>	Lenovo	
<b>MODEL NAME</b>	Lenovo TB-X606X	
<b>NOMINAL VOLTAGE</b>	5.0Vdc (adapter or host equipment) 3.86Vdc (Li-ion, battery)	
<b>MODULATION TYPE</b>	<b>GSM, GPRS:</b> GMSK <b>EDGE:</b> 8PSK <b>WCDMA:</b> HSDPA, HSUPA, DC-HSDPA <b>LTE Band 2:</b> QPSK, 16QAM	
<b>FREQUENCY RANGE</b>	<b>GSM, GPRS, EDGE</b>	1850.2MHz ~ 1909.8MHz
	<b>WCDMA</b>	1852.4MHz ~ 1907.6MHz
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	1850.7MHz ~ 1909.3MHz
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	1851.5MHz ~ 1908.5MHz
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	1852.5MHz ~ 1907.5MHz
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	1855.0MHz ~ 1905.0MHz
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	1857.5MHz ~ 1902.5MHz
	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	1860.0MHz ~ 1900.0MHz
	<b>MAX. EIRP POWER</b>	<b>GSM</b>
<b>EDGE</b>		298.54mW
<b>WCDMA</b>		182.81mW
<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>		171.4mW
<b>LTE Band 2 Channel Bandwidth: 3MHz</b>		169.82mW
<b>LTE Band 2 Channel Bandwidth: 5MHz</b>		171.79mW
<b>LTE Band 2 Channel Bandwidth: 10MHz</b>		171.79mW
<b>LTE Band 2 Channel Bandwidth: 15MHz</b>		171mW



**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	172.58mW
<b>EMISSION DESIGNATOR</b>	<b>GSM</b>	250KGXW
	<b>EDGE</b>	260KG7W
	<b>WCDMA</b>	4M19F9W
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	QPSK: 1M09G7D
		16QAM: 1M09W7D
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	QPSK: 2M69G7D
		16QAM: 2M68W7D
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	QPSK: 4M48G7D
		16QAM: 4M48W7D
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	QPSK: 8M95G7D
16QAM: 8M95W7D		
<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	QPSK: 13M4G7D	
	16QAM: 13M4W7D	
<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	QPSK: 17M9G7D	
	16QAM: 17M9W7D	
<b>ANTENNA TYPE</b>	PIFA Antenna with -0.2dBi gain	
<b>HW VERSION</b>	Lenovo TB-X6C6X	
<b>SW VERSION</b>	TB-X6C6X_RF01_210430	
<b>I/O PORTS</b>	Refer to user's manual	
<b>CABLE SUPPLIED</b>	USB cable: shielded, detachable, 1meter	
<b>EXTREME TEMPERATURE</b>	-10-55 °C	
<b>EXTREME VOLTAGE</b>	3.6-4.4 V	





**BUREAU  
VERITAS**

**Test Report No.: RFA210218W001-3**

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX


3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

**List of Accessory:**

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery 1	Sunwoda	L20D1P32	Capacity : 3.86vdc 7500mAh
Battery 2	SCUD	L20D1P32	Capacity : 3.86vdc 7500mAh
AC Adapter 1	Salom	SC-41	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
AC Adapter 2	AcBel	SC-41	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
USB Cable 1	BRL	GSZ-209H-A3120	Shielded, 1.0meter
USB Cable 2	Leagtech	CDG-203T-A05WF	Shielded, 1.0meter

## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

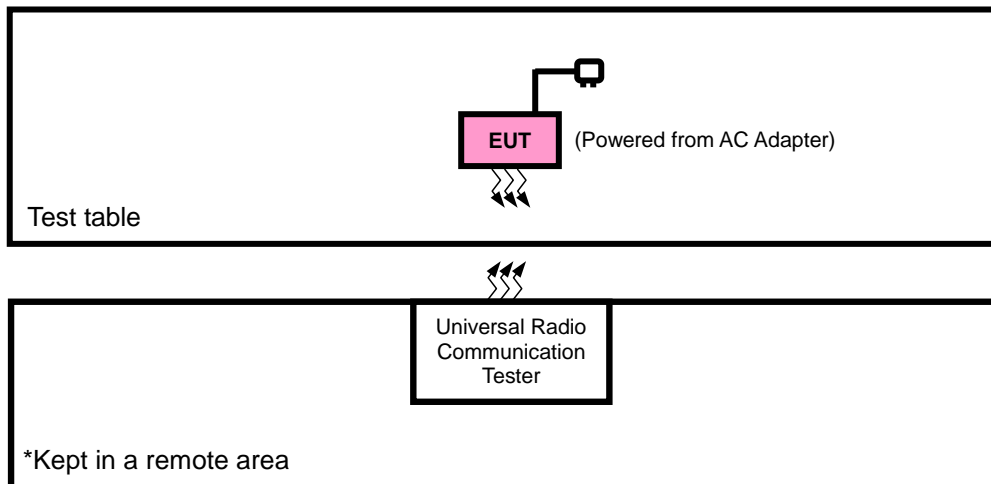



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	1.1.1.1.2DESCRIPTION
A	EUT + Adapter + USB Cable with GSM or WCDMA or LTE link
B	EUT + Battery with GSM or WCDMA or LTE link

#### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	512 to 810	512, 661, 810	GSM, EDGE
B	FREQUENCY STABILITY	512 to 810	512, 810	GSM, EDGE
B	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
B	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM, EDGE
B	BAND EDGE	512 to 810	512, 810	GSM, EDGE
B	CONDUCTED EMISSION	512 to 810	512, 661, 810	GSM, EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GSM, EDGE



**WCDMA**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9538	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

**LTE BAND 2**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



Test Report No.: RFA210218W001-3

B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 5 RB Offset		
			19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19175	5MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 14 RB Offset		
			19150	10MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19125	15MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 24 RB Offset		
			19100	20MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		B	CONDCUDED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
				18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
				18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 3.7V By Battery	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 3.6V/3.7V/4.2V	Chase Zhou
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC 3.7V By Battery	Chase Zhou
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 3.7V By Battery	Chase Zhou
BAND EDGE	23deg. C, 61%RH	DC 3.7V By Battery	Chase Zhou
CONDCUDED EMISSION	23deg. C, 61%RH	DC 3.7V By Battery	Chase Zhou
RADIATED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu



## 2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

## 2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



### 3 TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

##### 3.1.2 TEST PROCEDURES

###### **EIRP MEASUREMENT:**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_{\text{T}}$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_{\text{C}}$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

###### **CONDUCTED POWER MEASUREMENT:**


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



### 3.1.4 TEST RESULTS

#### CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900			Max. Tune-up Power
	Channel	512	661	
Frequency	1850.2	1880	1909.8	
GSM (GMSK, 1Tx-slot)	30.07	30.09	30.08	31.0
GPRS (GMSK, 1Tx-slot)	30.09	30.10	<b>30.12</b>	31.0
GPRS (GMSK, 2Tx-slot)	29.46	29.49	29.44	30.5
GPRS (GMSK, 3Tx-slot)	27.90	27.95	27.98	29.0
GPRS (GMSK, 4Tx-slot)	26.91	27.02	27.04	28.0
EDGE (8PSK, 1Tx-slot)	24.83	24.90	24.95	26.0
EDGE (8PSK, 2Tx-slot)	23.73	23.72	23.98	25.0
EDGE (8PSK, 3Tx-slot)	21.51	21.66	21.80	22.5
EDGE (8PSK, 4Tx-slot)	20.47	20.44	20.52	21.5

Band	WCDMA II			Max. Tune-up Power
	Channel	9262	9400	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	<b>22.82</b>	22.75	22.77	24.5
HSDPA Subtest-1	22.11	22.15	22.18	23.5
HSDPA Subtest-2	22.09	22.17	22.20	23.5
HSDPA Subtest-3	21.62	21.71	21.69	23.5
HSDPA Subtest-4	21.57	21.76	21.71	23.5
DC-HSDPA Subtest-1	22.11	22.19	22.22	23.5
DC-HSDPA Subtest-2	22.06	22.20	22.13	23.5
DC-HSDPA Subtest-3	21.57	21.70	21.70	23.5
DC-HSDPA Subtest-4	21.54	21.70	21.54	23.5
HSUPA Subtest-1	21.42	21.33	21.36	21.5
HSUPA Subtest-2	21.30	21.29	21.28	21.5
HSUPA Subtest-3	20.35	20.33	20.27	20.5
HSUPA Subtest-4	20.07	20.21	20.21	21.0
HSUPA Subtest-5	19.36	19.31	19.39	19.5
HSPA+ Subtest-1	21.54	21.56	21.62	22.5





BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.22	22.22	22.18	0
		1	2	<b>22.54</b>	22.47	22.48	0
		1	5	22.08	21.99	21.98	0
		3	0	22.39	22.33	22.36	0
		3	1	22.50	22.45	22.36	0
		3	3	22.34	22.27	22.26	0
		6	0	21.43	21.34	21.35	1
	16QAM	1	0	21.46	21.40	21.39	1
		1	2	21.77	21.67	21.70	1
		1	5	21.32	21.25	21.29	1
		3	0	21.45	21.40	21.37	1
		3	1	21.45	21.48	21.41	1
		3	3	21.39	21.34	21.35	1
		6	0	20.41	20.41	20.35	2



Test Report No.: RFA210218W001-3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/3	QPSK	1	0	22.24	22.24	22.17	0
		1	7	<b>22.50</b>	22.48	22.48	0
		1	14	22.04	21.99	21.98	0
		8	0	21.38	21.36	21.36	1
		8	3	21.43	21.45	21.38	1
		8	7	21.31	21.34	21.30	1
		15	0	21.40	21.35	21.29	1
	16QAM	1	0	21.43	21.46	21.42	1
		1	7	21.74	21.70	21.68	1
		1	14	21.35	21.25	21.29	1
		8	0	20.41	20.41	20.37	2
		8	3	20.50	20.43	20.44	2
		8	7	20.41	20.32	20.31	2
		15	0	20.41	20.35	20.38	2



Test Report No.: RFA210218W001-3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/5	QPSK	1	0	22.25	22.19	22.18	0
		1	12	<b>22.55</b>	22.45	22.48	0
		1	24	22.05	21.98	22.02	0
		12	0	21.41	21.36	21.33	1
		12	6	21.43	21.46	21.39	1
		12	13	21.35	21.30	21.31	1
		25	0	21.38	21.38	21.32	1
	16QAM	1	0	21.44	21.42	21.42	1
		1	12	21.71	<b>21.73</b>	21.67	1
		1	24	21.35	21.25	21.28	1
		12	0	20.41	20.39	20.34	2
		12	6	20.47	20.47	20.40	2
		12	13	20.36	20.34	20.34	2
		25	0	20.41	20.36	20.35	2



Test Report No.: RFA210218W001-3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.22	22.22	22.18	0
		1	24	<b>22.55</b>	22.45	22.49	0
		1	49	22.02	22.02	21.98	0
		25	0	21.42	21.35	21.36	1
		25	12	21.49	21.40	21.39	1
		25	25	21.33	21.27	21.30	1
		50	0	21.43	21.38	21.29	1
	16QAM	1	0	21.44	21.39	21.38	1
		1	24	21.76	21.69	21.70	1
		1	49	21.35	21.26	21.25	1
		25	0	20.43	20.37	20.40	2
		25	12	20.51	20.41	20.45	2
		25	25	20.35	20.35	20.31	2
		50	0	20.45	20.35	20.39	2



Test Report No.: RFA210218W001-3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.29	22.22	22.15	0
		1	37	<b>22.53</b>	22.50	22.44	0
		1	74	22.08	22.05	21.99	0
		36	0	21.39	21.36	21.37	1
		36	19	21.50	21.45	21.39	1
		36	39	21.31	21.28	21.30	1
		75	0	21.43	21.36	21.34	1
	16QAM	1	0	21.48	21.46	21.38	1
		1	37	<b>21.75</b>	21.70	21.70	1
		1	74	21.31	21.31	21.27	1
		36	0	20.47	20.37	20.41	2
		36	19	20.45	20.45	20.41	2
		36	39	20.40	20.33	20.34	2
		75	0	20.46	20.38	20.32	2



Test Report No.: RFA210218W001-3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	22.30	22.26	22.23	0
		1	50	<b>22.57</b>	22.53	22.50	0
		1	99	22.10	22.06	22.03	0
		50	0	21.45	21.41	21.38	1
		50	25	21.51	21.47	21.44	1
		50	50	21.39	21.35	21.32	1
		100	0	21.44	21.40	21.37	1
	16QAM	1	0	21.51	21.47	21.44	1
		1	50	21.79	21.75	21.72	1
		1	99	21.37	21.33	21.30	1
		50	0	20.49	20.45	20.42	2
		50	25	20.53	20.49	20.46	2
		50	50	20.43	20.39	20.36	2
		100	0	20.47	20.43	20.40	2



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**EIRP POWER (dBm)**

**GSM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	30.09	-0.2	29.89	974.99	2
661	1880.0	30.11	-0.2	29.91	<b>979.49</b>	2
810	1909.8	29.99	-0.2	29.79	952.8	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**EDGE**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	24.83	-0.2	24.63	290.4	2
661	1880.0	24.9	-0.2	24.7	295.12	2
810	1909.8	24.95	-0.2	24.75	<b>298.54</b>	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**WCDMA**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9662	1852.4	22.82	-0.2	22.62	<b>182.81</b>	2
9800	1880	22.75	-0.2	22.55	179.89	2
9938	1907.6	22.77	-0.2	22.57	180.72	2



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

## LTE BAND 2

### CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.54	-0.2	22.34	<b>171.4</b>	2
18900	1880.0	22.47	-0.2	22.27	168.66	2
19193	1908.3	22.48	-0.2	22.28	169.04	2

### CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.77	-0.2	21.57	<b>143.55</b>	2
18900	1880.0	21.67	-0.2	21.47	140.28	2
19193	1908.3	21.7	-0.2	21.5	141.25	2





BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 3MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.5	-0.2	22.3	<b>169.82</b>	2
18900	1880.0	22.48	-0.2	22.28	169.04	2
19185	1908.5	22.48	-0.2	22.28	169.04	2

**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.74	-0.2	21.54	<b>142.56</b>	2
18900	1880.0	21.7	-0.2	21.5	141.25	2
19185	1908.5	21.68	-0.2	21.48	140.6	2



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.55	-0.2	22.35	<b>171.79</b>	2
18900	1880.0	22.45	-0.2	22.25	167.88	2
19175	1907.5	22.48	-0.2	22.28	169.04	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.71	-0.2	21.51	141.58	2
18900	1880.0	21.73	-0.2	21.53	<b>142.23</b>	2
19175	1907.5	21.67	-0.2	21.47	140.28	2



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.55	-0.2	22.35	<b>171.79</b>	2
18900	1880.0	22.45	-0.2	22.25	167.88	2
19150	1905.0	22.49	-0.2	22.29	169.43	2

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	21.76	-0.2	21.56	<b>143.22</b>	2
18900	1880.0	21.69	-0.2	21.49	140.93	2
19150	1905.0	21.7	-0.2	21.5	141.25	2



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.53	-0.2	22.33	<b>171</b>	2
18900	1880.0	22.5	-0.2	22.3	169.82	2
19125	1902.5	22.44	-0.2	22.24	167.49	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.75	-0.2	21.55	<b>142.89</b>	2
18900	1880.0	21.7	-0.2	21.5	141.25	2
19125	1902.5	21.7	-0.2	21.5	141.25	2



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.57	-0.2	22.37	<b>172.58</b>	2
18900	1880	22.53	-0.2	22.33	171	2
19100	1900	22.5	-0.2	22.3	169.82	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-Lc</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.79	-0.2	21.59	<b>144.21</b>	2
18900	1880	21.75	-0.2	21.55	142.89	2
19100	1900	21.72	-0.2	21.52	141.91	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



### 3.2 FREQUENCY STABILITY MEASUREMENT

#### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 3.2.3 TEST SETUP

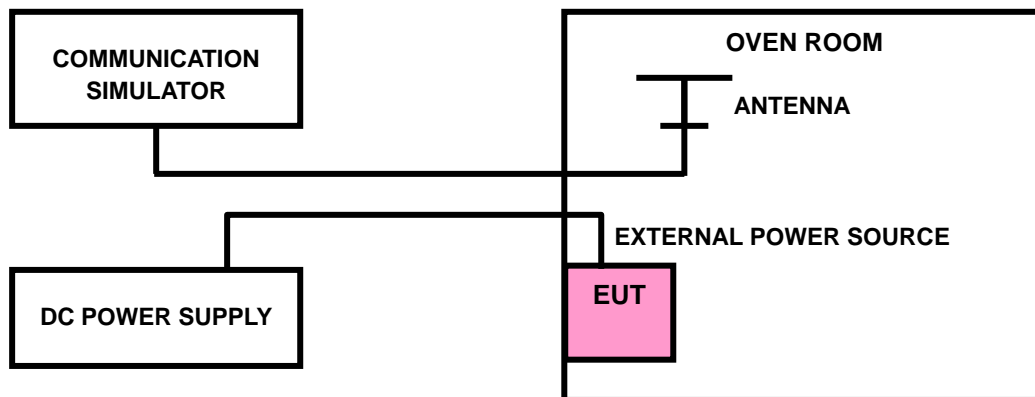



### 3.2.4 TEST RESULTS

#### GSM1900

#### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
$V_{nor}$	0.0009	0.0009	2.5
$V_{min}$	-0.0009	-0.0011	2.5
$V_{max}$	0.0008	0.0007	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from  $V_{min}$  to  $V_{max}$ .

#### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0053	-0.0051	2.5
-20	-0.0046	-0.0044	2.5
-10	-0.0038	-0.0036	2.5
0	-0.0034	-0.0032	2.5
10	-0.0025	-0.0023	2.5
20	-0.0019	-0.0017	2.5
30	-0.0013	-0.0011	2.5
40	-0.0007	-0.0005	2.5
50	-0.0002	0	2.5



EDGE 1900

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
$V_{nor}$	0.0009	0.0011	2.5
$V_{min}$	-0.0014	-0.0014	2.5
$V_{max}$	0.0009	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from  $V_{min}$  to  $V_{max}$ .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0052	-0.0049	2.5
-20	-0.0044	-0.0041	2.5
-10	-0.0036	-0.0034	2.5
0	-0.0033	-0.0031	2.5
10	-0.0021	-0.002	2.5
20	-0.0019	-0.0017	2.5
30	-0.0014	-0.0013	2.5
40	-0.0009	-0.0008	2.5
50	-0.0002	-0.0002	2.5





WCDMA 1900

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V <sub>nor</sub>	0.0011	0.0007	2.5
V <sub>min</sub>	0.0005	0.0008	2.5
V <sub>max</sub>	0.0026	0.0021	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0042	-0.0038	2.5
-20	-0.0026	-0.0029	2.5
-10	-0.0032	-0.0034	2.5
0	-0.0011	-0.0012	2.5
10	0.0005	0.0008	2.5
20	0.0016	0.0014	2.5
30	0.0021	0.0029	2.5
40	0.0037	0.0045	2.5
50	0.0042	0.0030	2.5



LTE BAND 2

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V <sub>nor</sub>	0.0021	0.0024	2.5
V <sub>min</sub>	-0.0031	-0.003	2.5
V <sub>max</sub>	0.0021	0.0023	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0114	-0.0113	2.5
-20	-0.0113	-0.0104	2.5
-10	-0.0086	-0.0079	2.5
0	-0.0077	-0.0072	2.5
10	-0.0053	-0.0049	2.5
20	-0.0044	-0.004	2.5
30	-0.0042	-0.0031	2.5
40	-0.0017	-0.0019	2.5
50	-0.0004	-0.0003	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V <sub>nor</sub>	0.0021	0.0021	2.5
V <sub>min</sub>	-0.0021	-0.0025	2.5
V <sub>max</sub>	0.0019	0.0017	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0114	-0.0116	2.5
-20	-0.0108	-0.0108	2.5
-10	-0.0085	-0.0079	2.5
0	-0.0074	-0.0073	2.5
10	-0.0049	-0.0048	2.5
20	-0.0041	-0.0041	2.5
30	-0.0041	-0.0039	2.5
40	-0.0022	-0.0019	2.5
50	-0.0002	-0.0004	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V <sub>nor</sub>	0.0021	0.0024	2.5
V <sub>min</sub>	-0.0023	-0.003	2.5
V <sub>max</sub>	0.0022	0.0021	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0113	-0.0112	2.5
-20	-0.0108	-0.0105	2.5
-10	-0.0085	-0.0082	2.5
0	-0.0075	-0.0073	2.5
10	-0.0051	-0.0051	2.5
20	-0.0043	-0.0041	2.5
30	-0.0041	-0.0034	2.5
40	-0.0022	-0.0016	2.5
50	-0.0003	-0.0002	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V <sub>nor</sub>	0.0026	0.0024	2.5
V <sub>min</sub>	-0.0031	-0.0031	2.5
V <sub>max</sub>	0.0026	0.0023	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.012	2.5
-20	-0.0098	-0.0098	2.5
-10	-0.0082	-0.0083	2.5
0	-0.0073	-0.0075	2.5
10	-0.0049	-0.0054	2.5
20	-0.0042	-0.0037	2.5
30	-0.0032	-0.0032	2.5
40	-0.002	-0.0019	2.5
50	-0.0002	-0.0004	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V <sub>nor</sub>	0.0024	0.0024	2.5
V <sub>min</sub>	-0.0031	-0.003	2.5
V <sub>max</sub>	0.0025	0.0024	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

**FREQUENCY ERROR vs. TEMPERATURE.**

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0117	2.5
-20	-0.0112	-0.0104	2.5
-10	-0.0084	-0.0079	2.5
0	-0.0076	-0.0075	2.5
10	-0.0052	-0.0047	2.5
20	-0.0043	-0.0041	2.5
30	-0.0032	-0.0033	2.5
40	-0.0019	-0.0016	2.5
50	-0.0003	-0.0005	2.5



**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V <sub>nor</sub>	0.0025	0.0025	2.5
V <sub>min</sub>	-0.0031	-0.003	2.5
V <sub>max</sub>	0.0024	0.0025	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from V<sub>min</sub> to V<sub>max</sub>.

**FREQUENCY ERROR vs. TEMPERATURE.**


TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.012	-0.0114	2.5
-20	-0.0109	-0.0109	2.5
-10	-0.0084	-0.008	2.5
0	-0.0075	-0.0076	2.5
10	-0.0049	-0.0047	2.5
20	-0.0039	-0.0044	2.5
30	-0.0029	-0.0029	2.5
40	-0.0022	-0.0021	2.5
50	-0.0005	-0.0005	2.5

### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 3.3.2 TEST SETUP

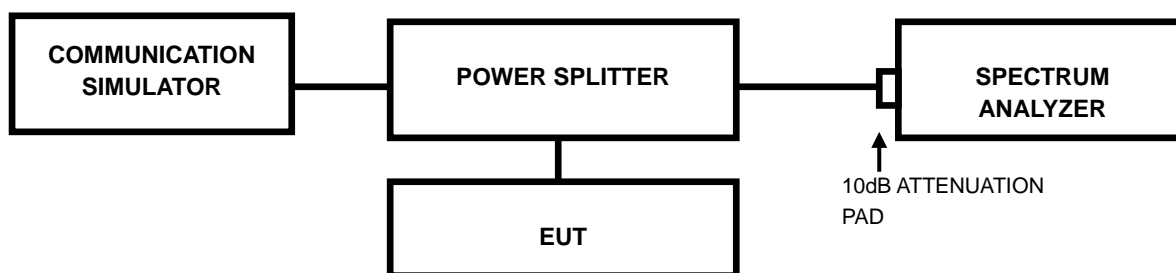







### 3.3.3 TEST RESULTS

#### PCS 1900

Channel	Frequency (MHz)	99% Occupied bandwidth (kHz)		Channel	Frequency (MHz)	26dB bandwidth (kHz)	
		GSM	EDGE			GSM	EDGE
512	1850.2	240	240	512	1850.2	316.1	315.7
661	1880.0	250	240	661	1880.0	315.0	306.7
810	1909.8	240	260	810	1909.8	320.3	319.7

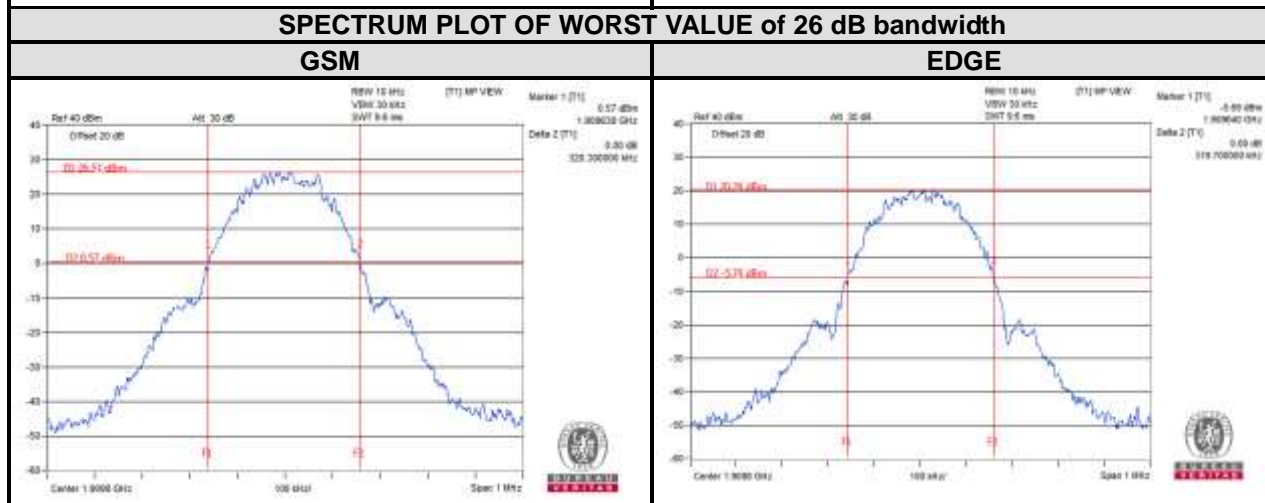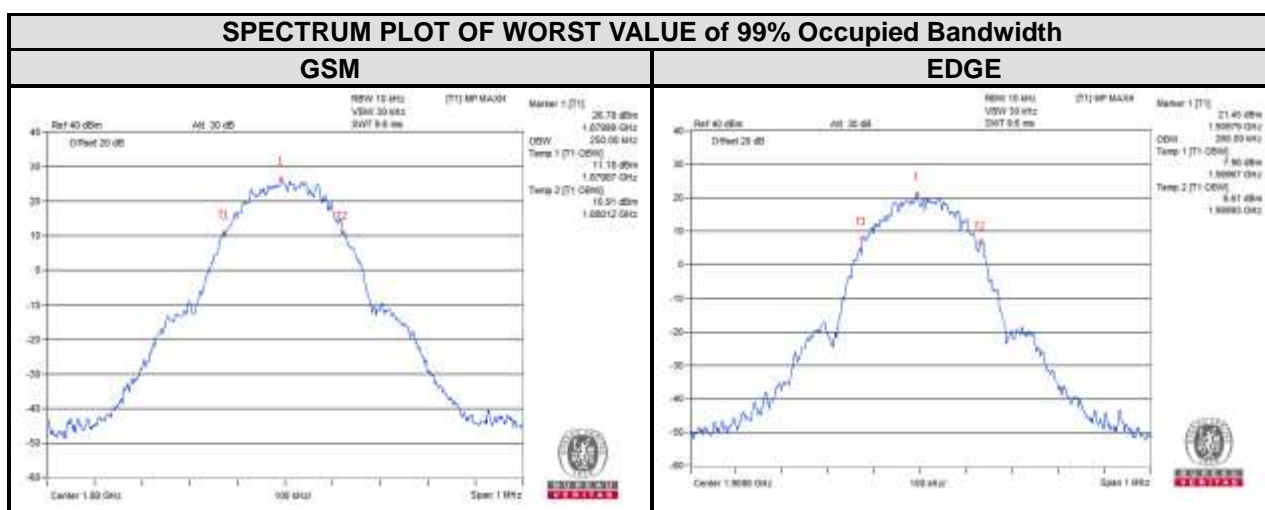




BUREAU VERITAS

Test Report No.: RFA210218W001-3

WCDMA BAND II

Channel	FREQ. (MHz)	99% Occupied Bandwidth (MHz)	Channel	FREQ. (MHz)	26dB Bandwidth (MHz)
		WCDMA			WCDMA
9262	1852.4	4.190	9262	1852.4	4.749
9400	1880	4.190	9400	1880	4.739
9538	1907.6	4.190	9538	1907.6	4.759

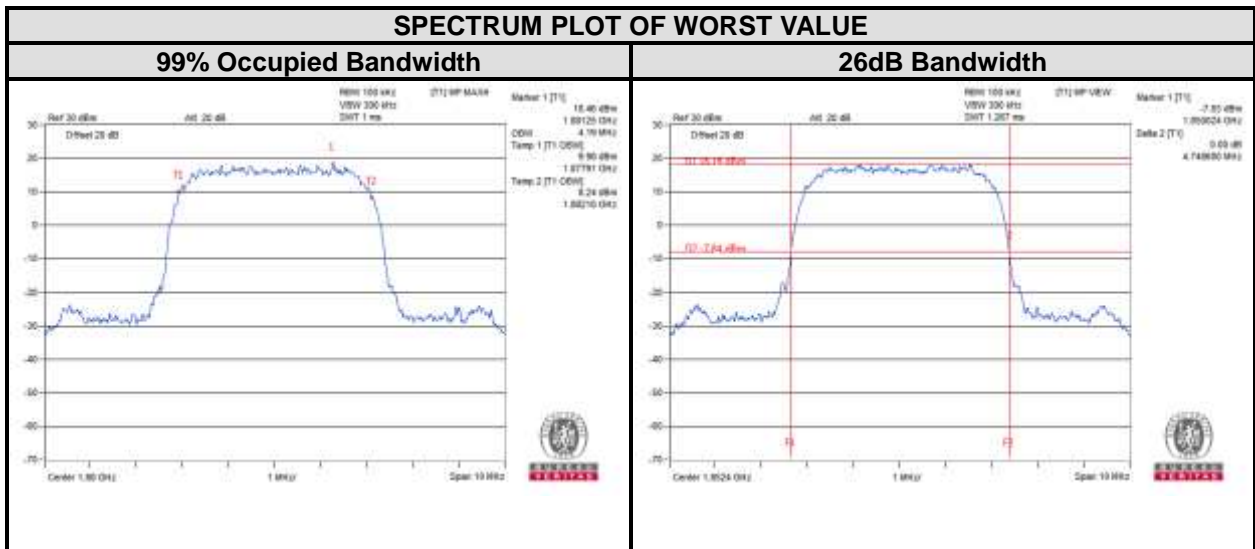



**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**LTE BAND 2**

LTE band 2							
CHANNEL BANDWIDTH: 1.4MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18607	1850.7	1.08	1.08	/	1.28	1.25	/
18900	1880	1.09	1.09	/	1.26	1.27	/
19193	1909.3	1.08	1.09	/	1.27	1.29	/





CHANNEL BANDWIDTH: 3MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18615	1851.5	2.69	2.68	/	2.87	2.86	/
18900	1880	2.68	2.68	/	2.86	2.88	/
19185	1908.5	2.68	2.68	/	2.87	2.85	/






CHANNEL BANDWIDTH: 5MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18625	1852.5	4.47	4.48	/	4.83	4.85	/
18900	1880	4.48	4.46	/	4.83	4.81	/
19175	1907.5	4.47	4.47	/	4.81	4.86	/






CHANNEL BANDWIDTH: 10MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18650	1855	8.95	8.94	/	9.58	9.55	/
18900	1880	8.95	8.95	/	9.65	9.50	/
19150	1905	8.94	8.94	/	9.49	9.52	/

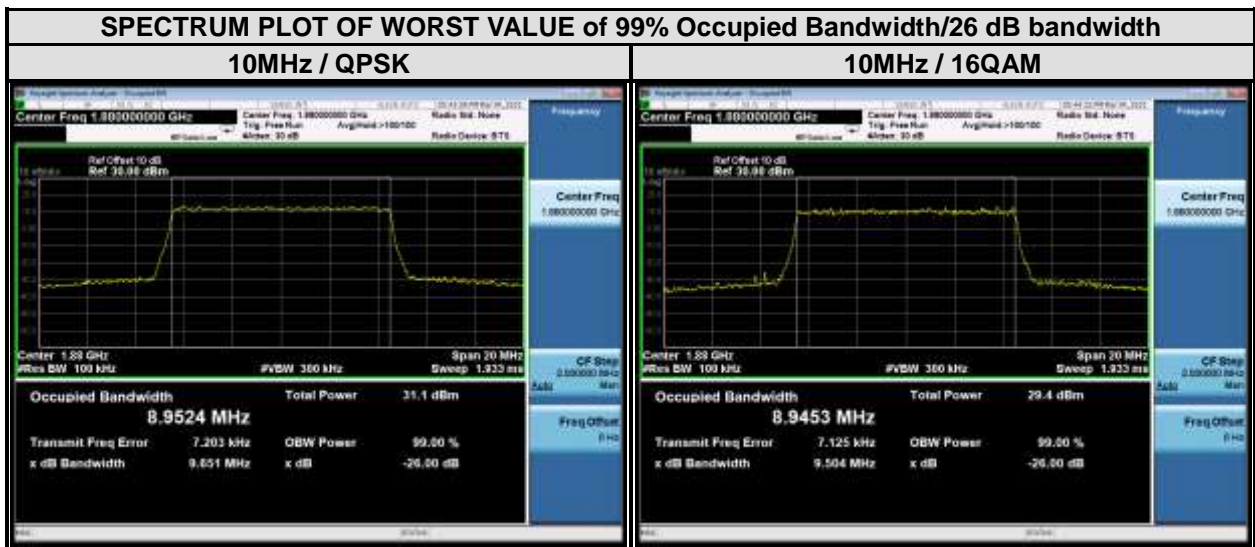




CHANNEL BANDWIDTH: 15MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18675	1857.5	13.39	13.41	/	14.26	14.26	/
18900	1880	13.43	13.42	/	14.46	14.44	/
19125	1902.5	13.43	13.42	/	14.42	14.18	/

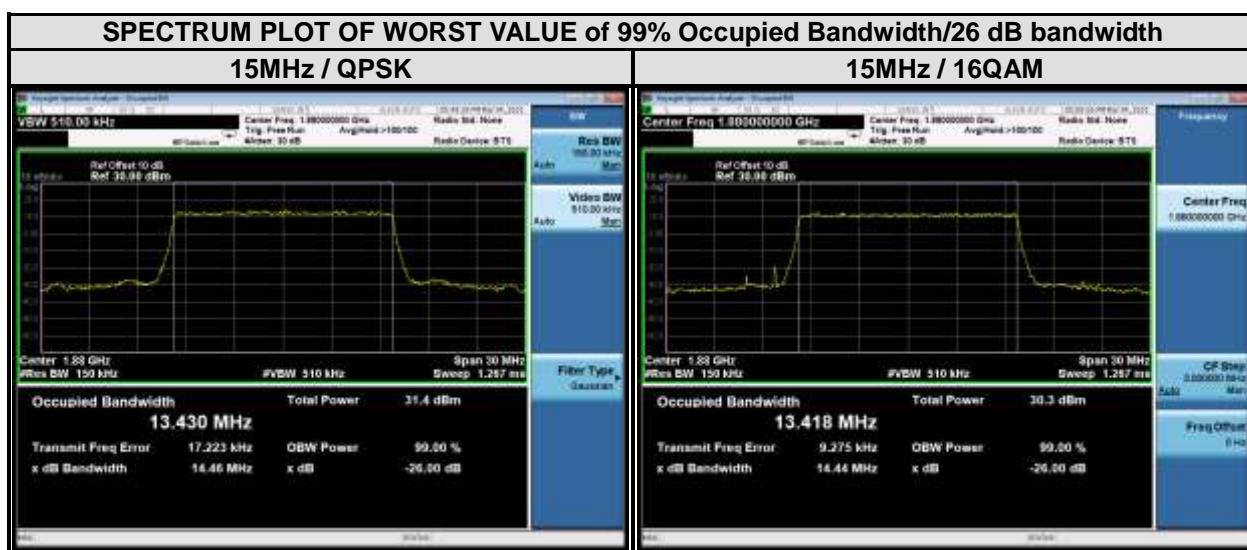



CHANNEL BANDWIDTH: 20MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18700	1860	17.87	17.87	/	18.96	18.98	/
18900	1880	17.87	17.92	/	18.95	19.09	/
19100	1900	17.92	17.89	/	19.17	19.07	/

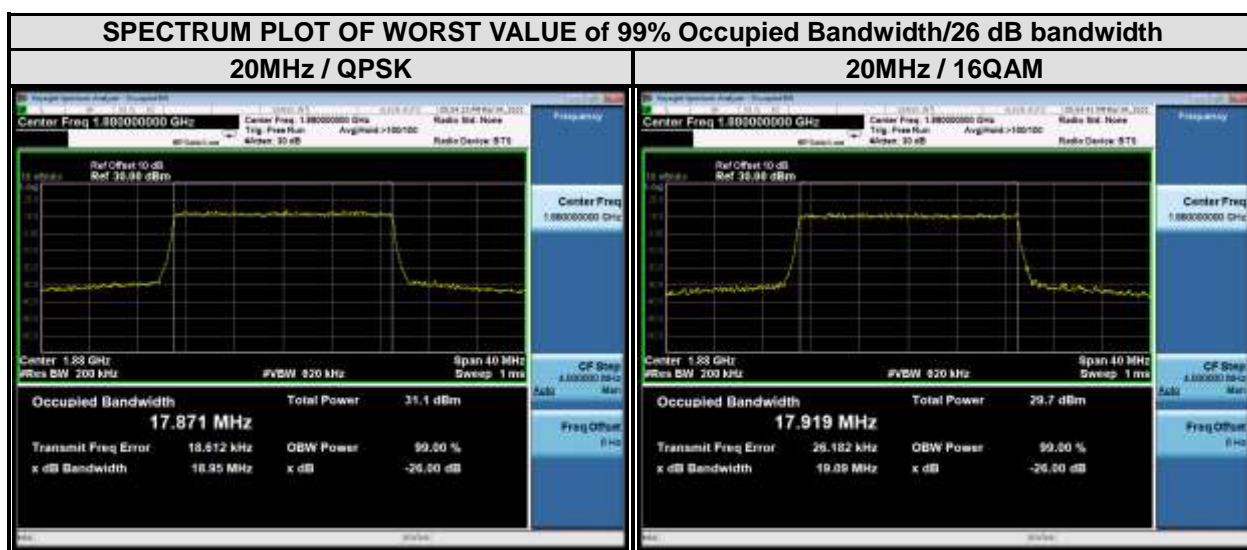






### 3.4 BAND EDGE MEASUREMENTC

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

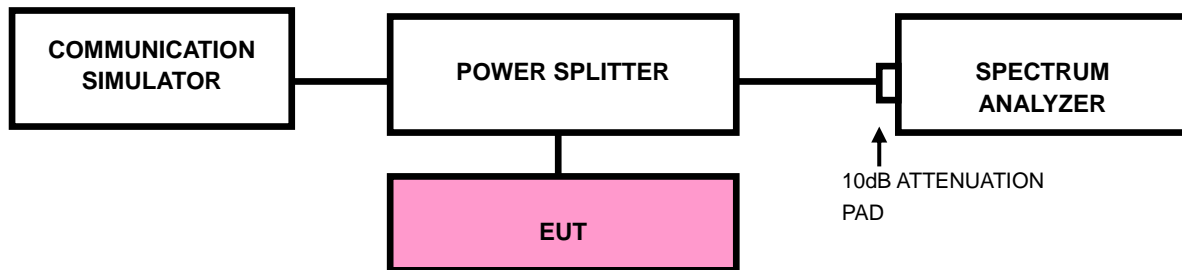



### 3.4.3 TEST PROCEDURES


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- h. he center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- i. Record the max trace plot into the test report.



BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

### 3.4.4. TEST RESULTS

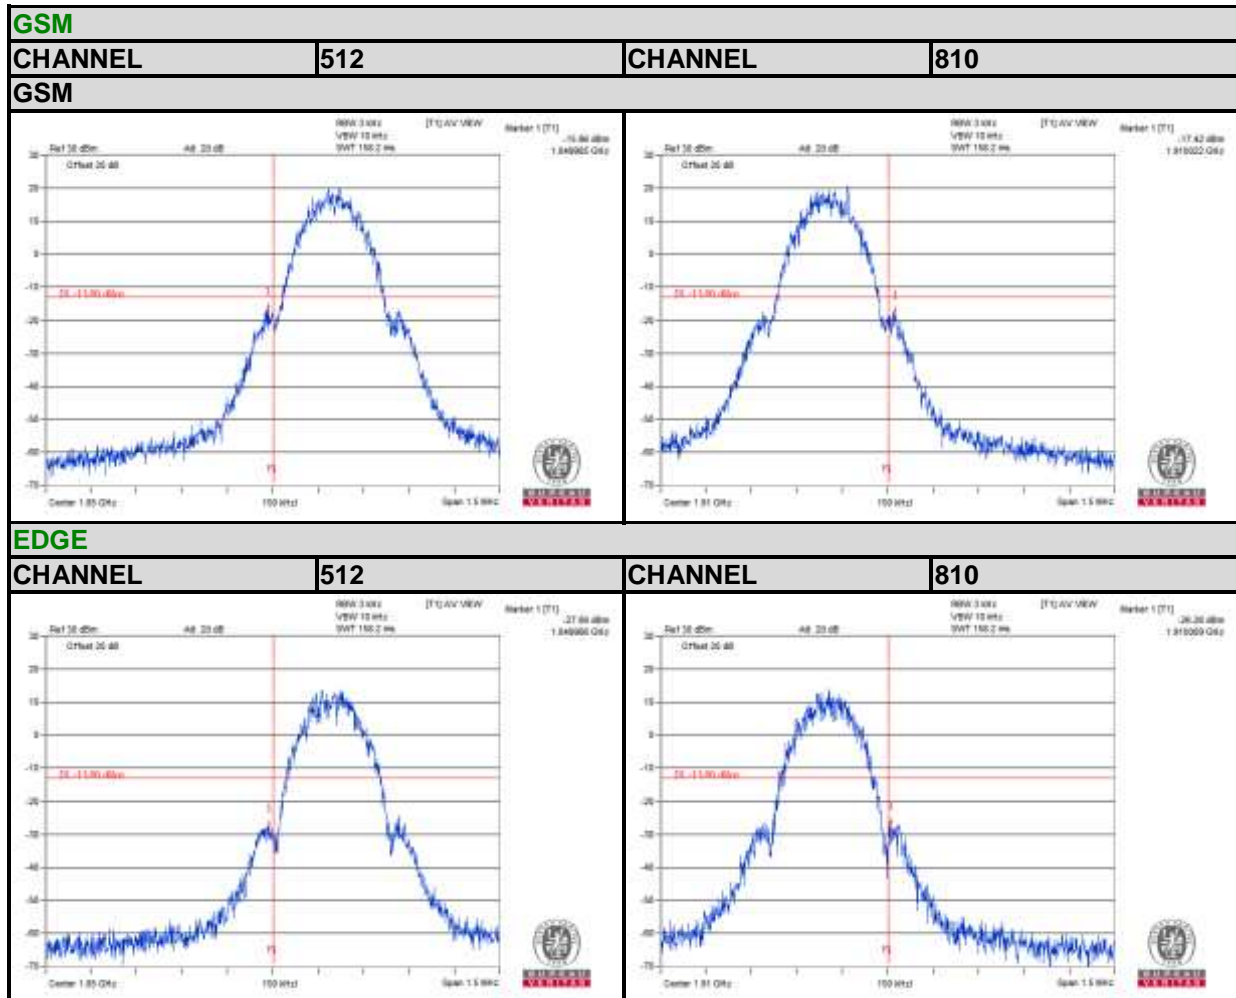




BUREAU VERITAS

Test Report No.: RFA210218W001-3

WCDMA BAND II

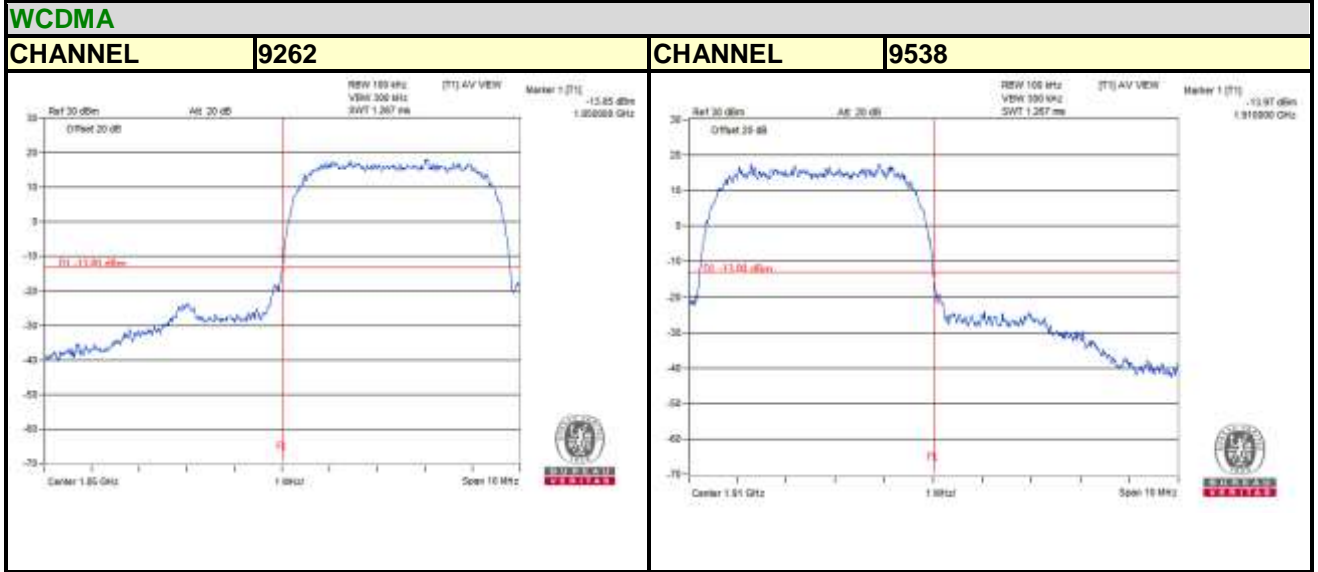





BUREAU VERITAS

Test Report No.: RFA210218W001-3

LTE BAND 2

Channel Bandwidth: 1.4MHz QPSK

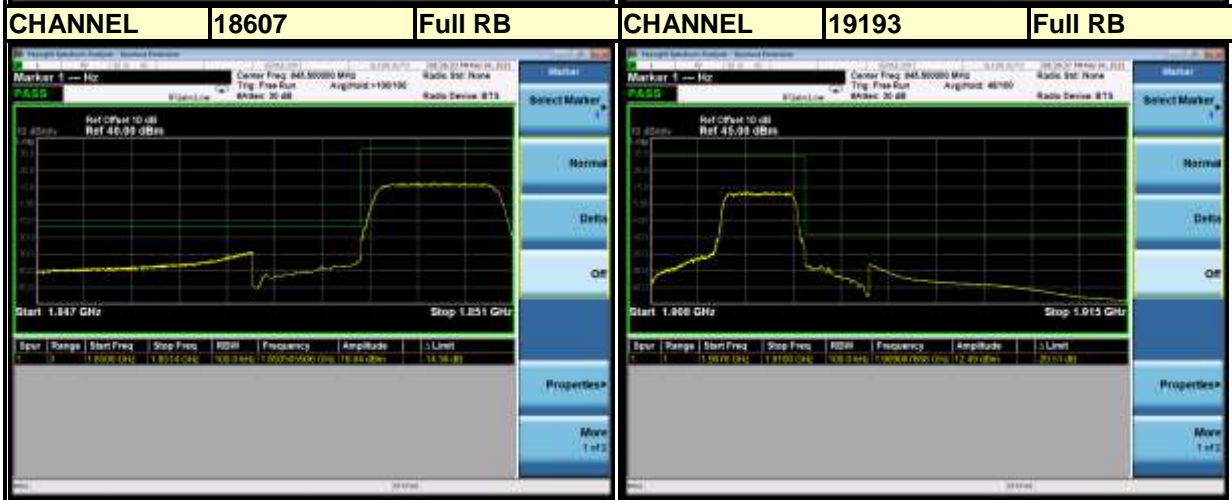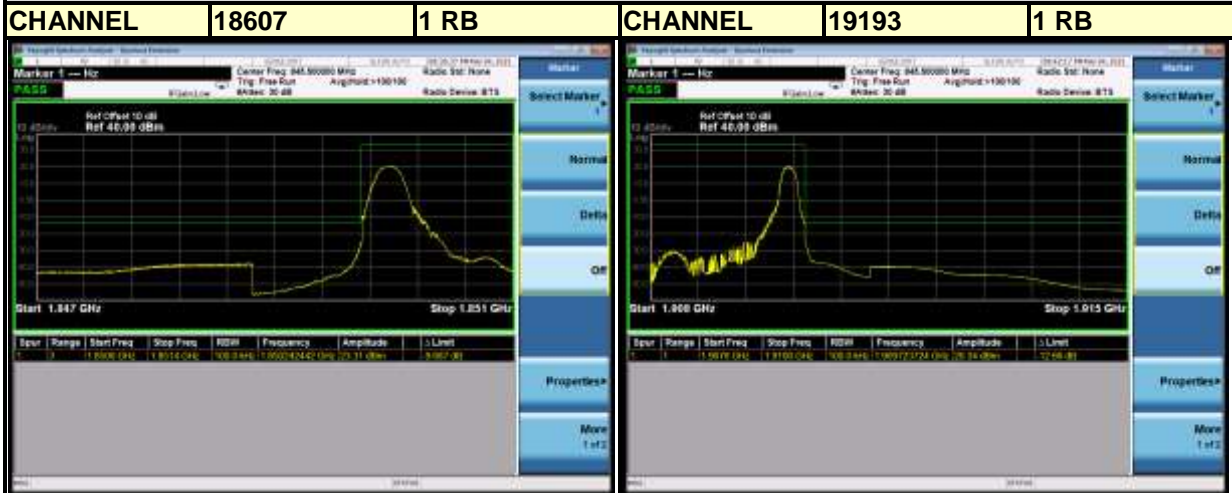



BUREAU VERITAS

Test Report No.: RFA210218W001-3





**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**LTE BAND 2**

**Channel Bandwidth: 3MHz QPSK**







BUREAU VERITAS

Test Report No.: RFA210218W001-3

Channel Bandwidth: 3MHz 16QAM

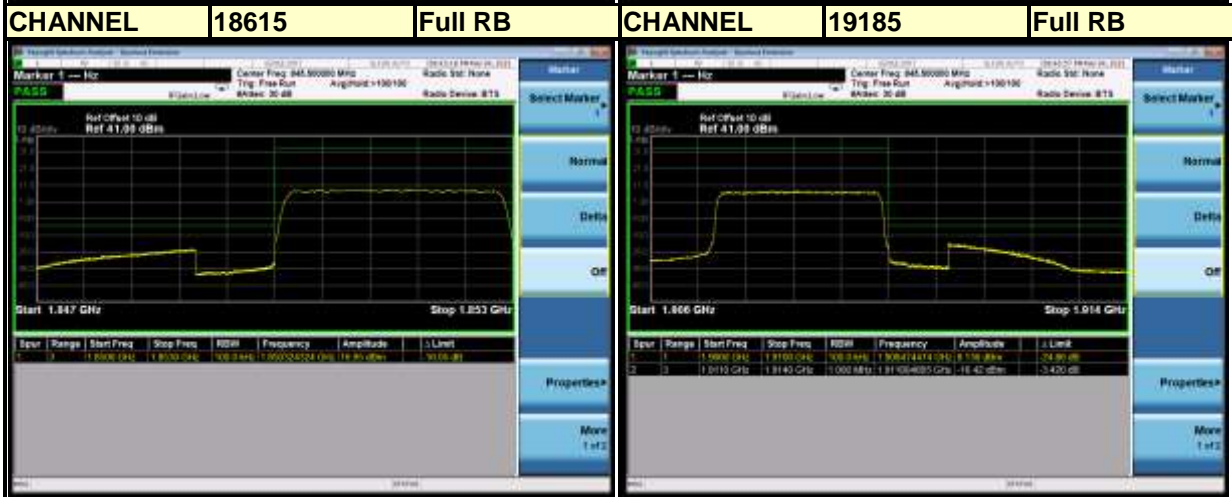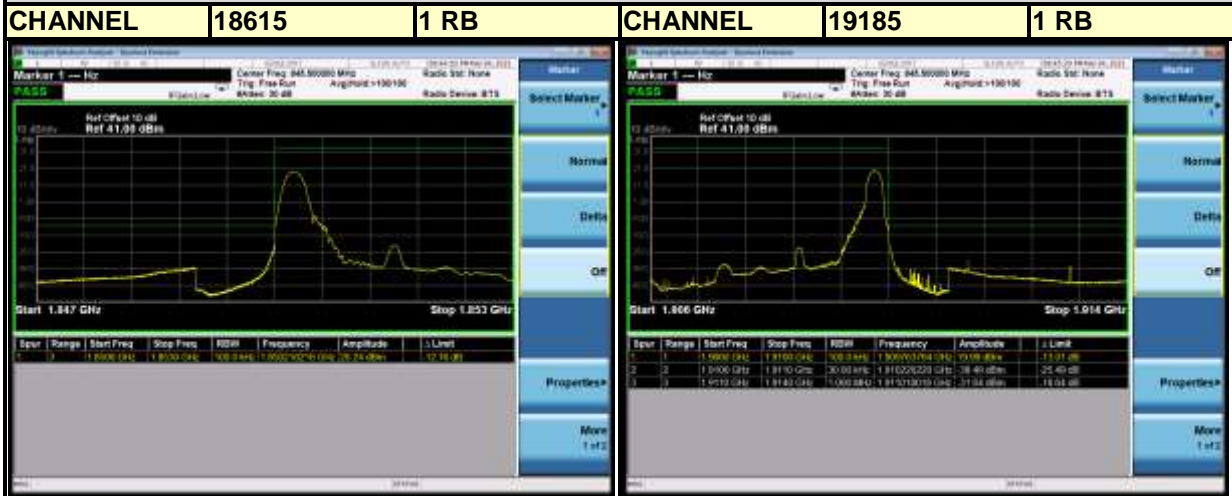





**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**LTE BAND 2**

**Channel Bandwidth: 5MHz QPSK**







BUREAU VERITAS

Test Report No.: RFA210218W001-3

Channel Bandwidth: 5MHz 16QAM

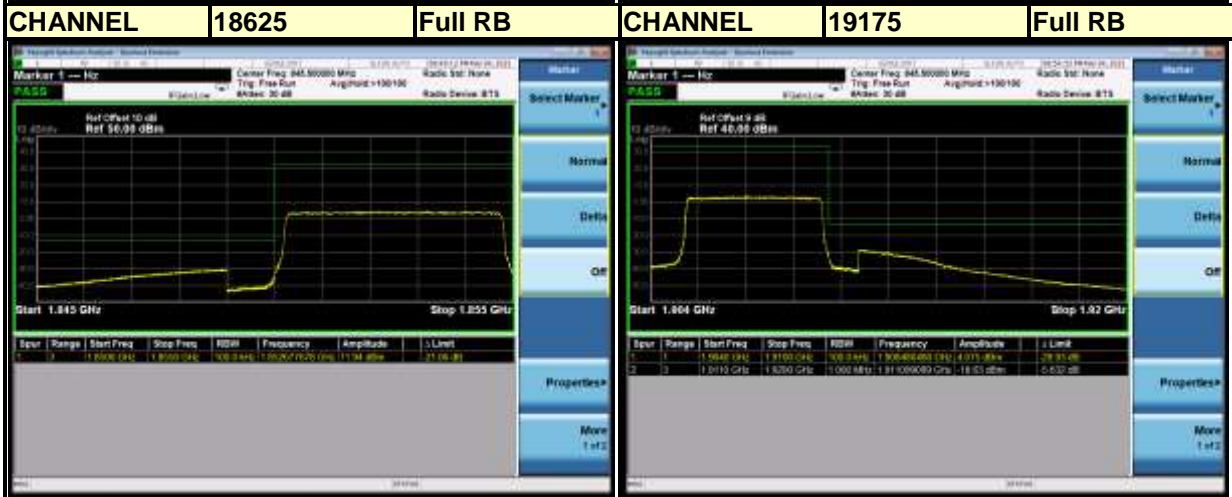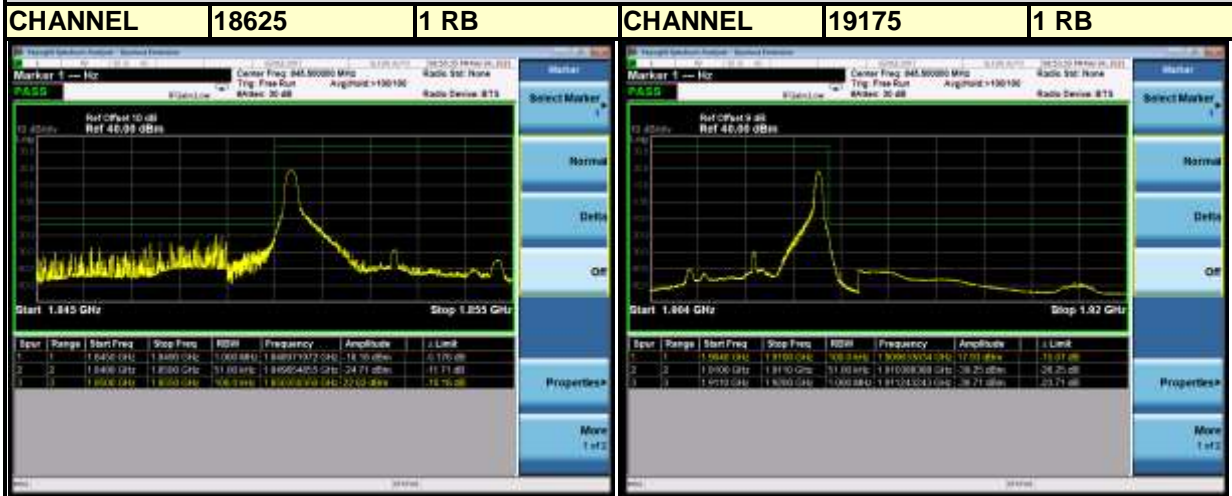




**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**LTE BAND 2**

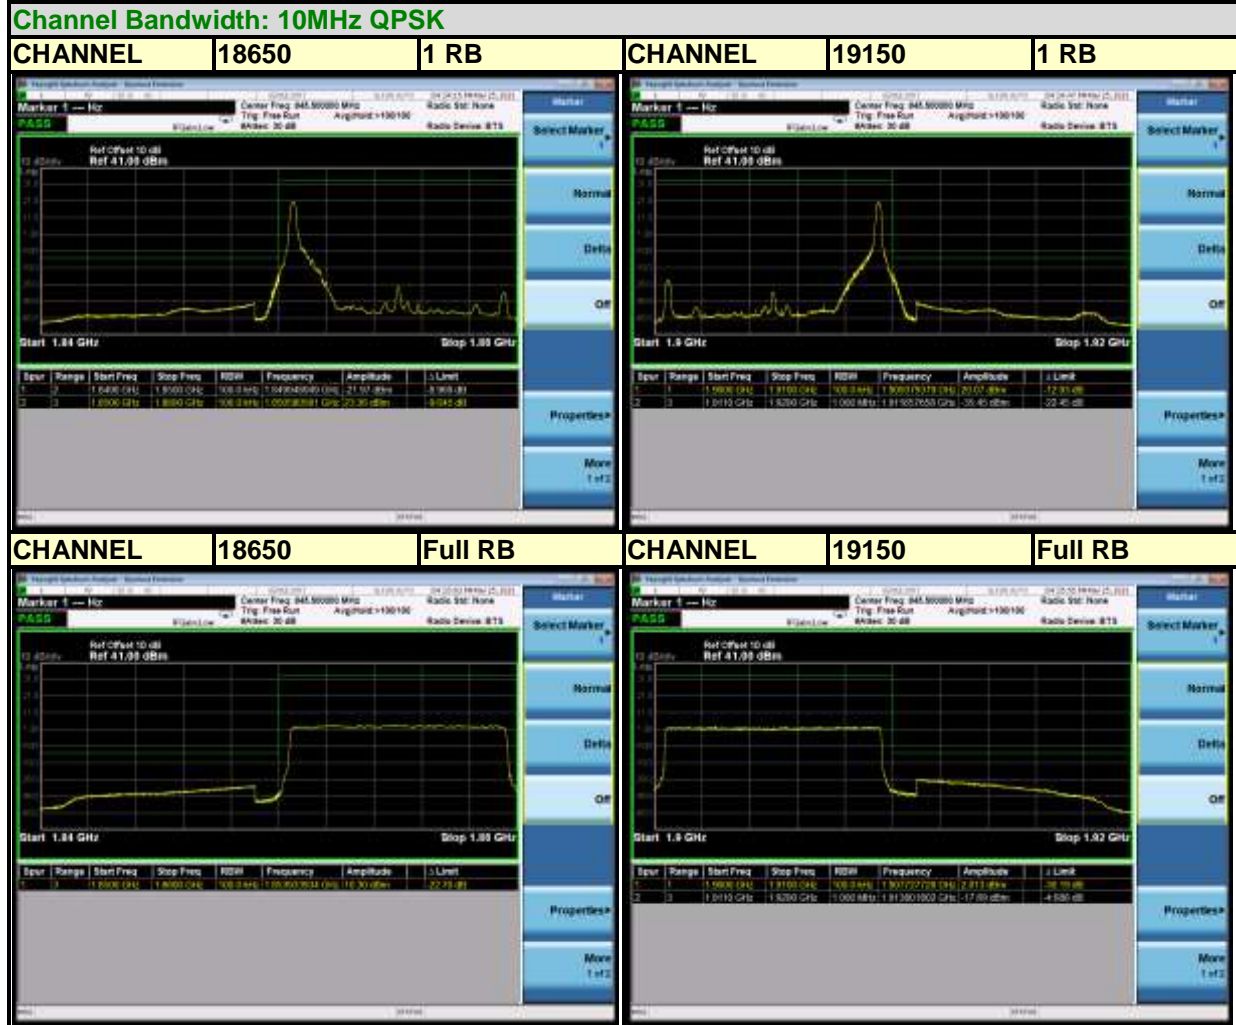




**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**Channel Bandwidth: 10MHz 16QAM**

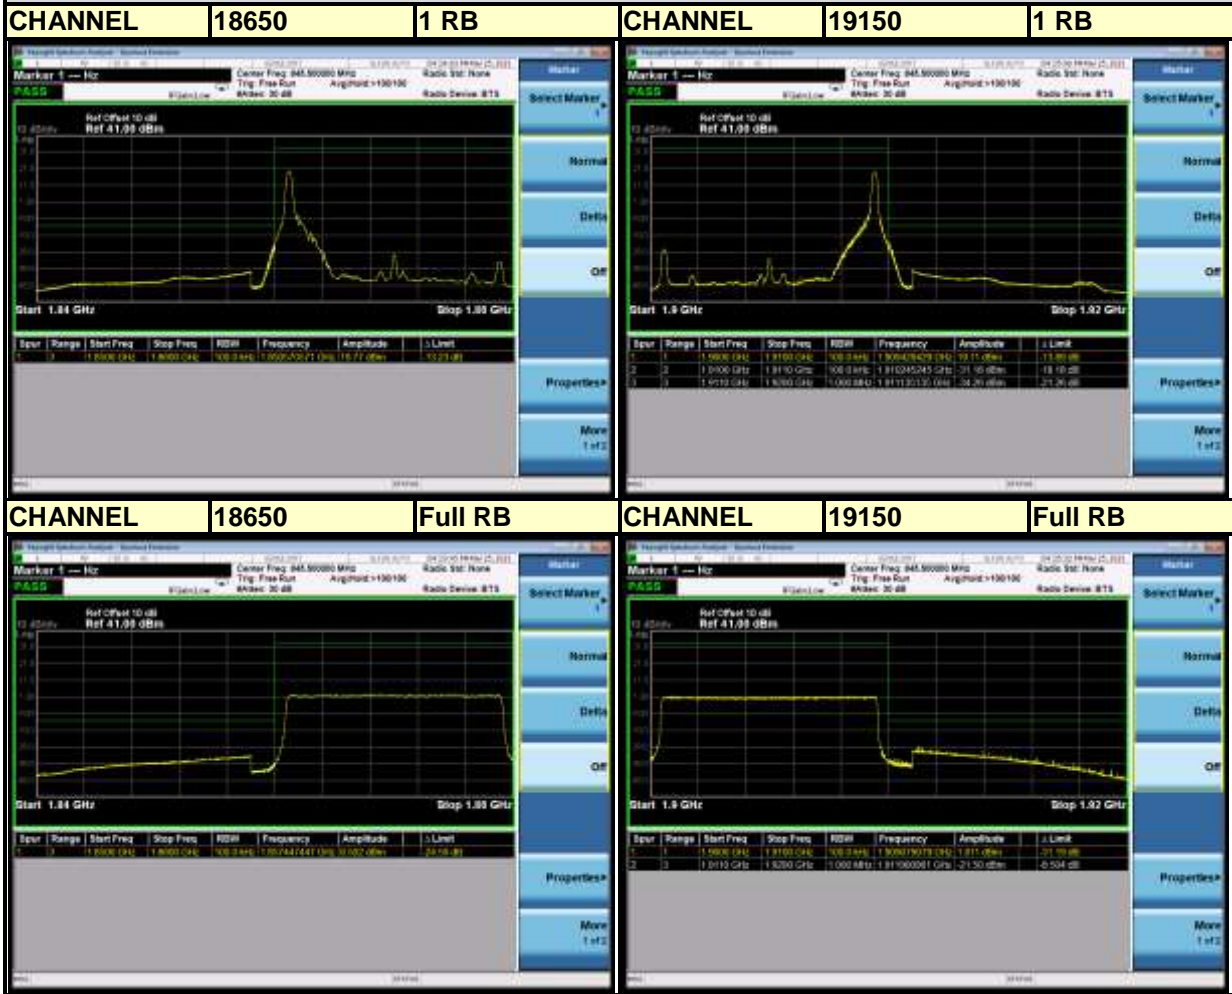



BUREAU VERITAS

Test Report No.: RFA210218W001-3

LTE BAND 2





**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3





**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**LTE BAND 2**





**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**Channel Bandwidth: 20MHz 16QAM**





### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

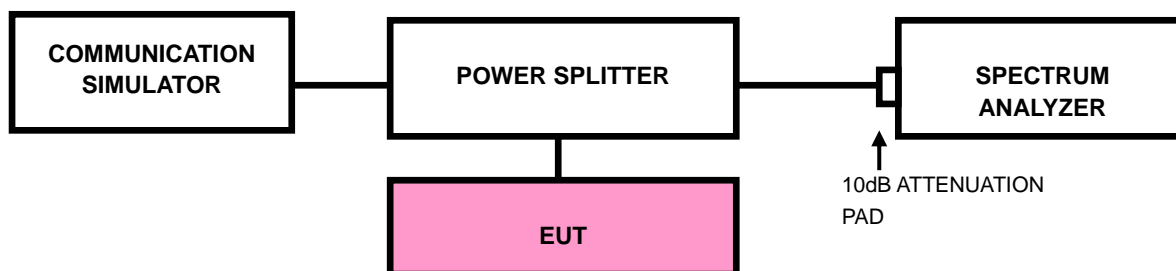




BUREAU VERITAS

Test Report No.: RFA210218W001-3


### 3.5.4 TEST RESULTS

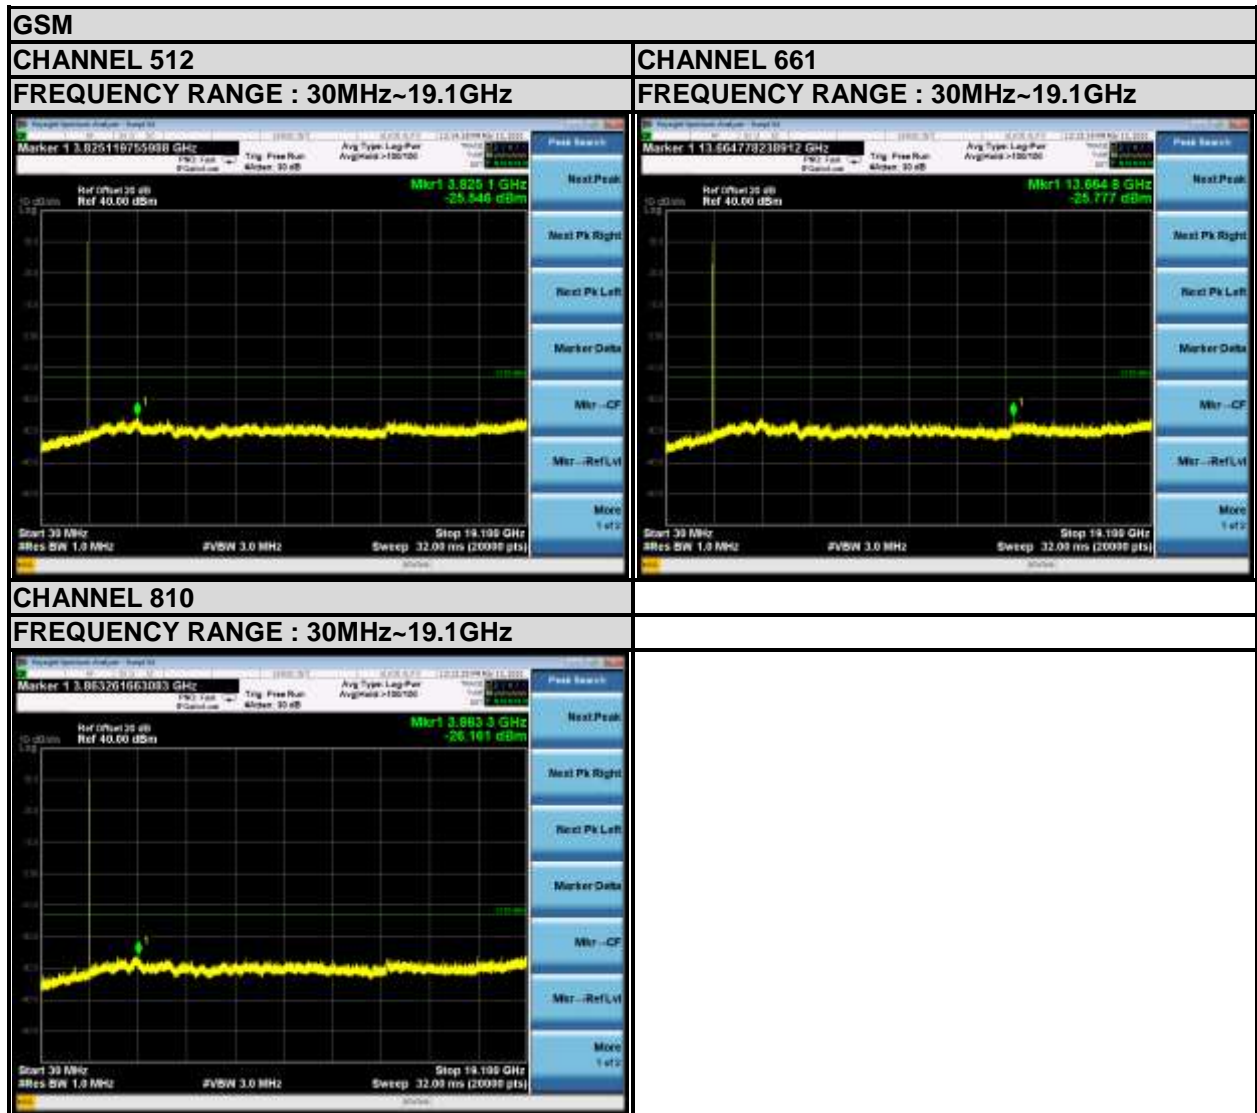



BUREAU VERITAS

Test Report No.: RFA210218W001-3

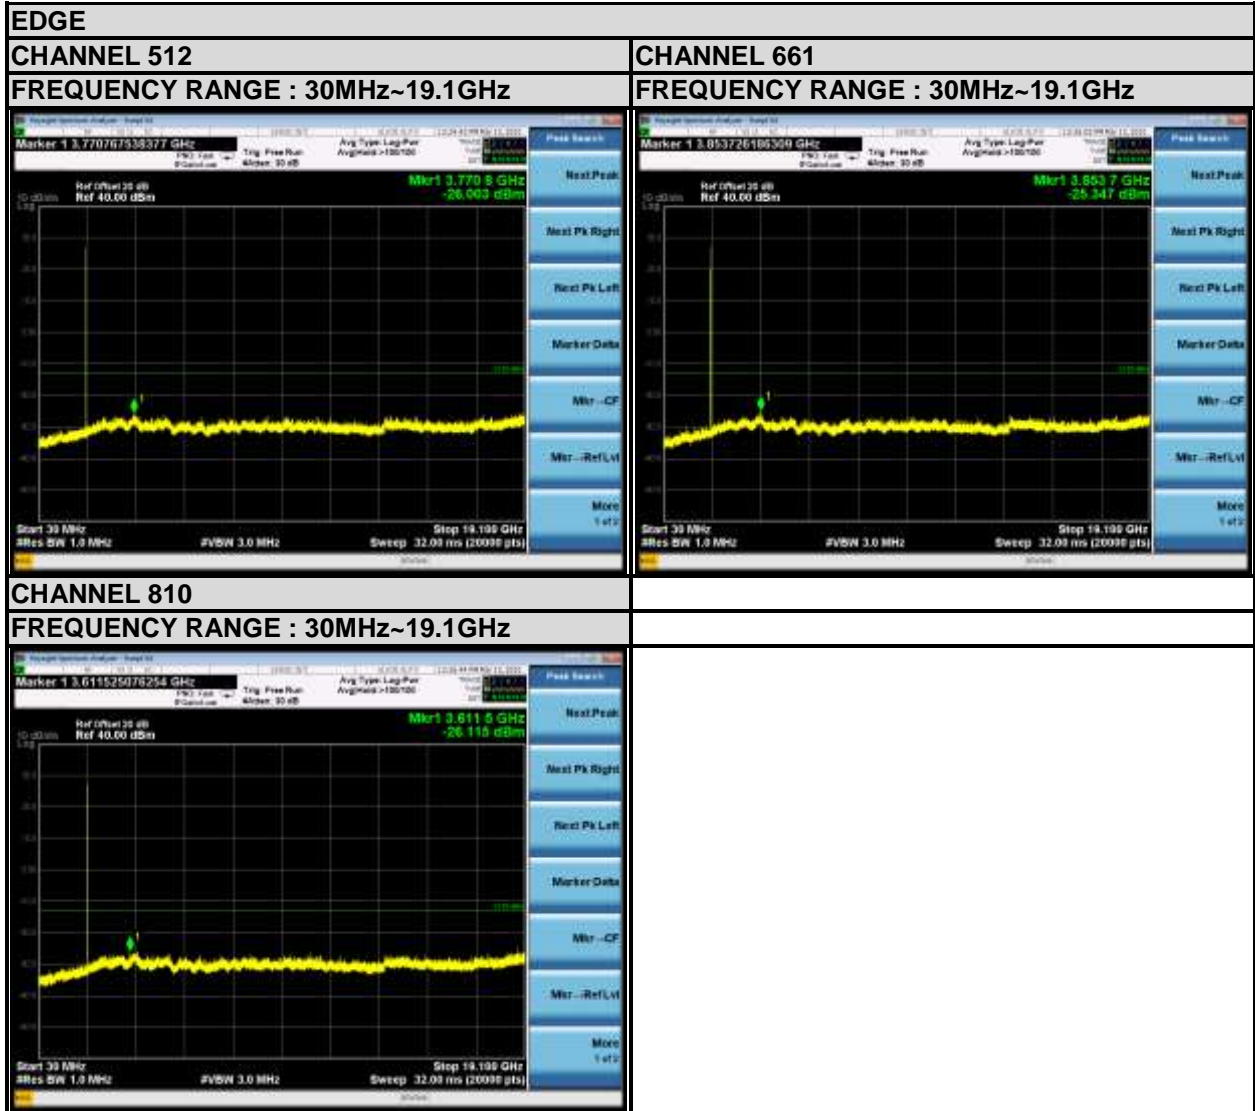



BUREAU VERITAS


Test Report No.: RFA210218W001-3

LTE BAND 2

1.4MHz / QPSK


CHANNEL 18607

FREQUENCY RANGE : 30MHz~19.1GHz

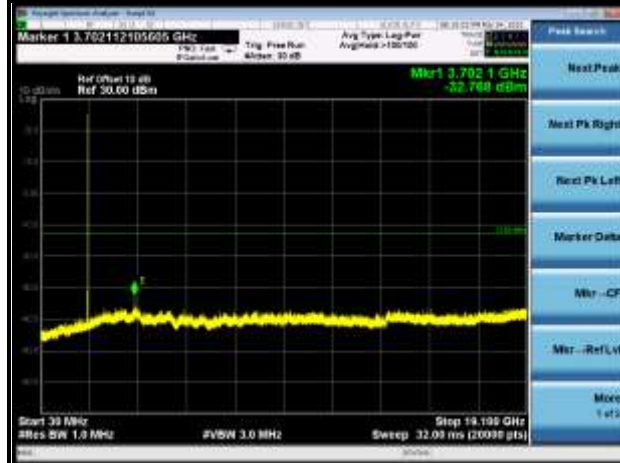

CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz

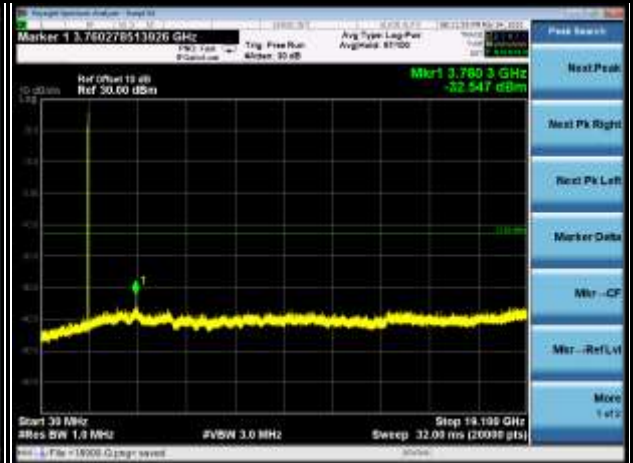

CHANNEL 19193

FREQUENCY RANGE : 30MHz~19.1GHz






BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**3MHz / QPSK**


**CHANNEL 18615**

**FREQUENCY RANGE : 30MHz~19.1GHz**

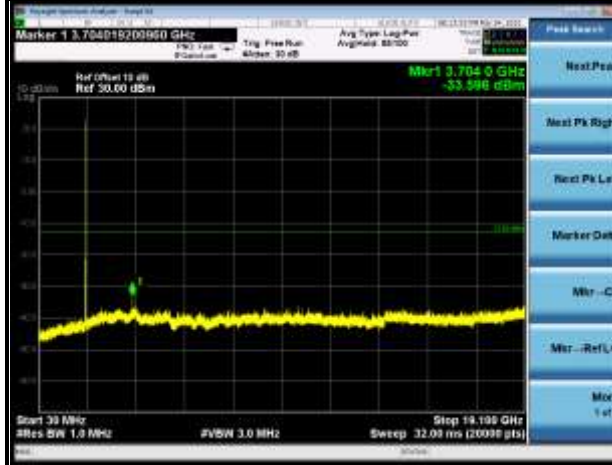

**CHANNEL 18900**

**FREQUENCY RANGE : 30MHz~19.1GHz**

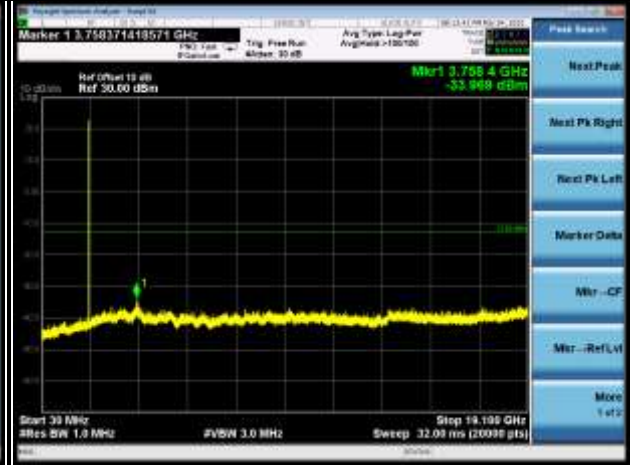

**CHANNEL 19185**

**FREQUENCY RANGE : 30MHz~19.1GHz**






BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

**5MHz / QPSK**


**CHANNEL 18625**

**FREQUENCY RANGE : 30MHz~19.1GHz**

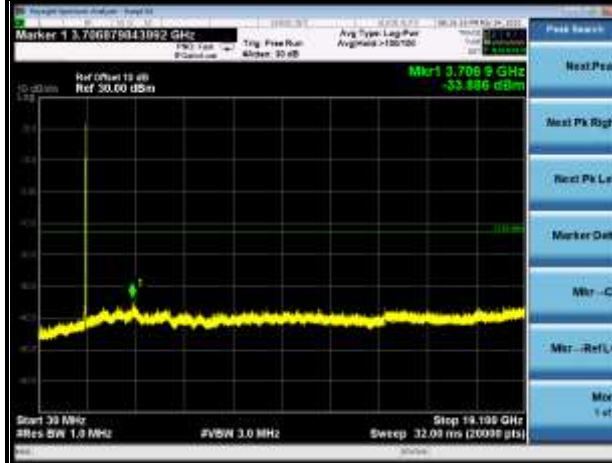


**CHANNEL 18900**

**FREQUENCY RANGE : 30MHz~19.1GHz**

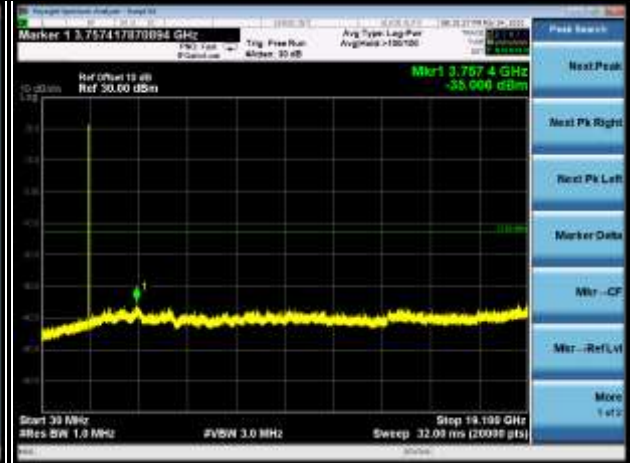

**CHANNEL 19175**

**FREQUENCY RANGE : 30MHz~19.1GHz**

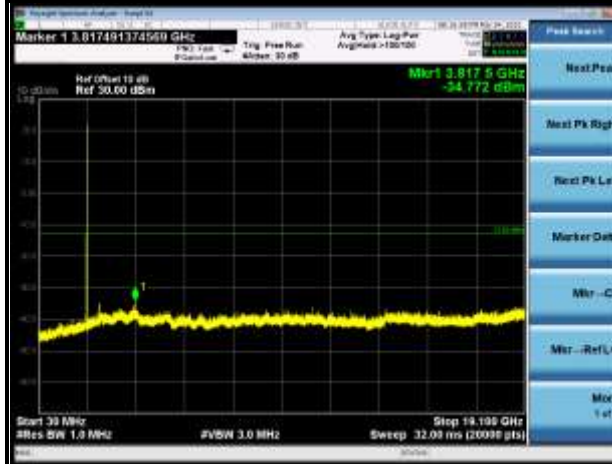




BUREAU VERITAS

Test Report No.: RFA210218W001-3

10MHz / QPSK

CHANNEL 18650

FREQUENCY RANGE : 30MHz~19.1GHz

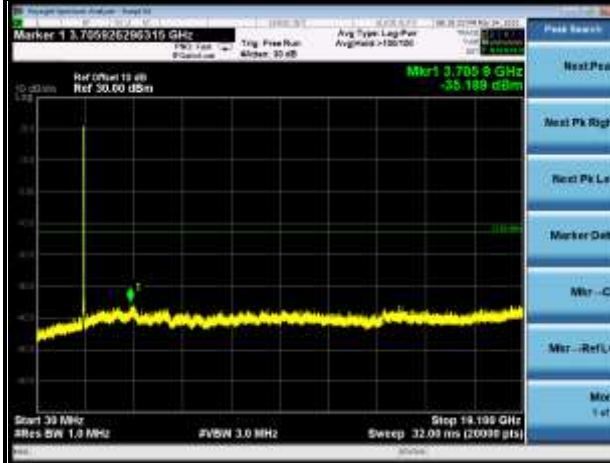

CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz



CHANNEL 19150

FREQUENCY RANGE : 30MHz~19.1GHz






BUREAU  
VERITAS

Test Report No.: RFA210218W001-3

15MHz / QPSK


CHANNEL 18675

FREQUENCY RANGE : 30MHz~19.1GHz

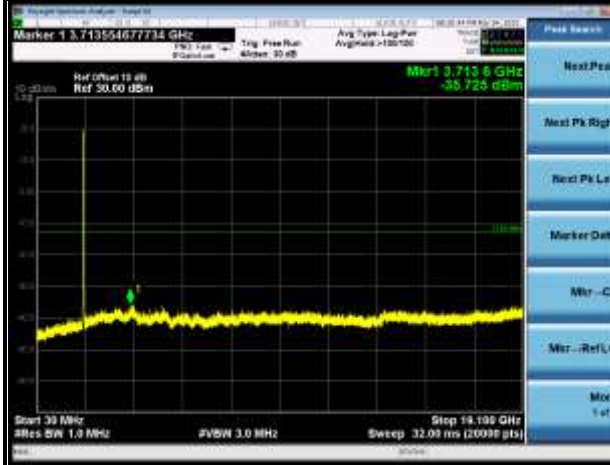



CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz

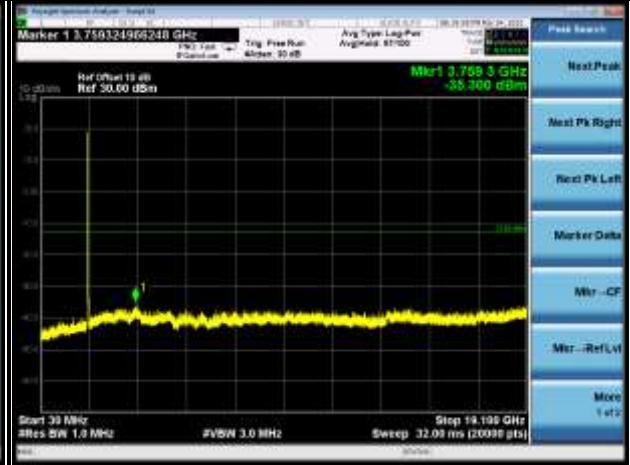

CHANNEL 19125

FREQUENCY RANGE : 30MHz~19.1GHz

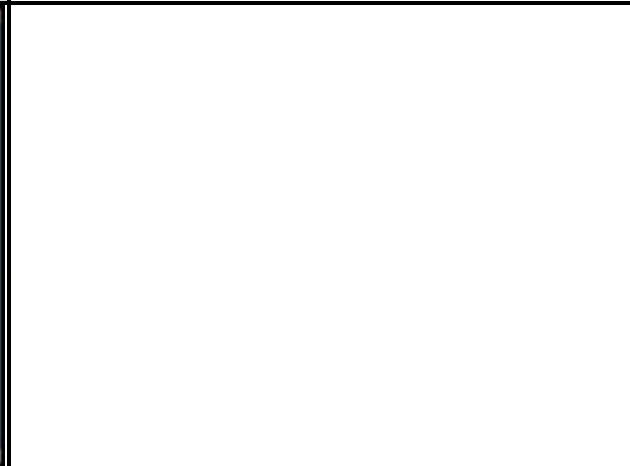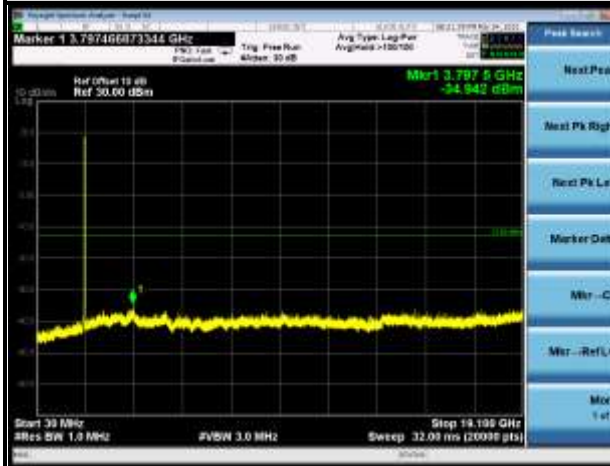






BUREAU VERITAS

Test Report No.: RFA210218W001-3

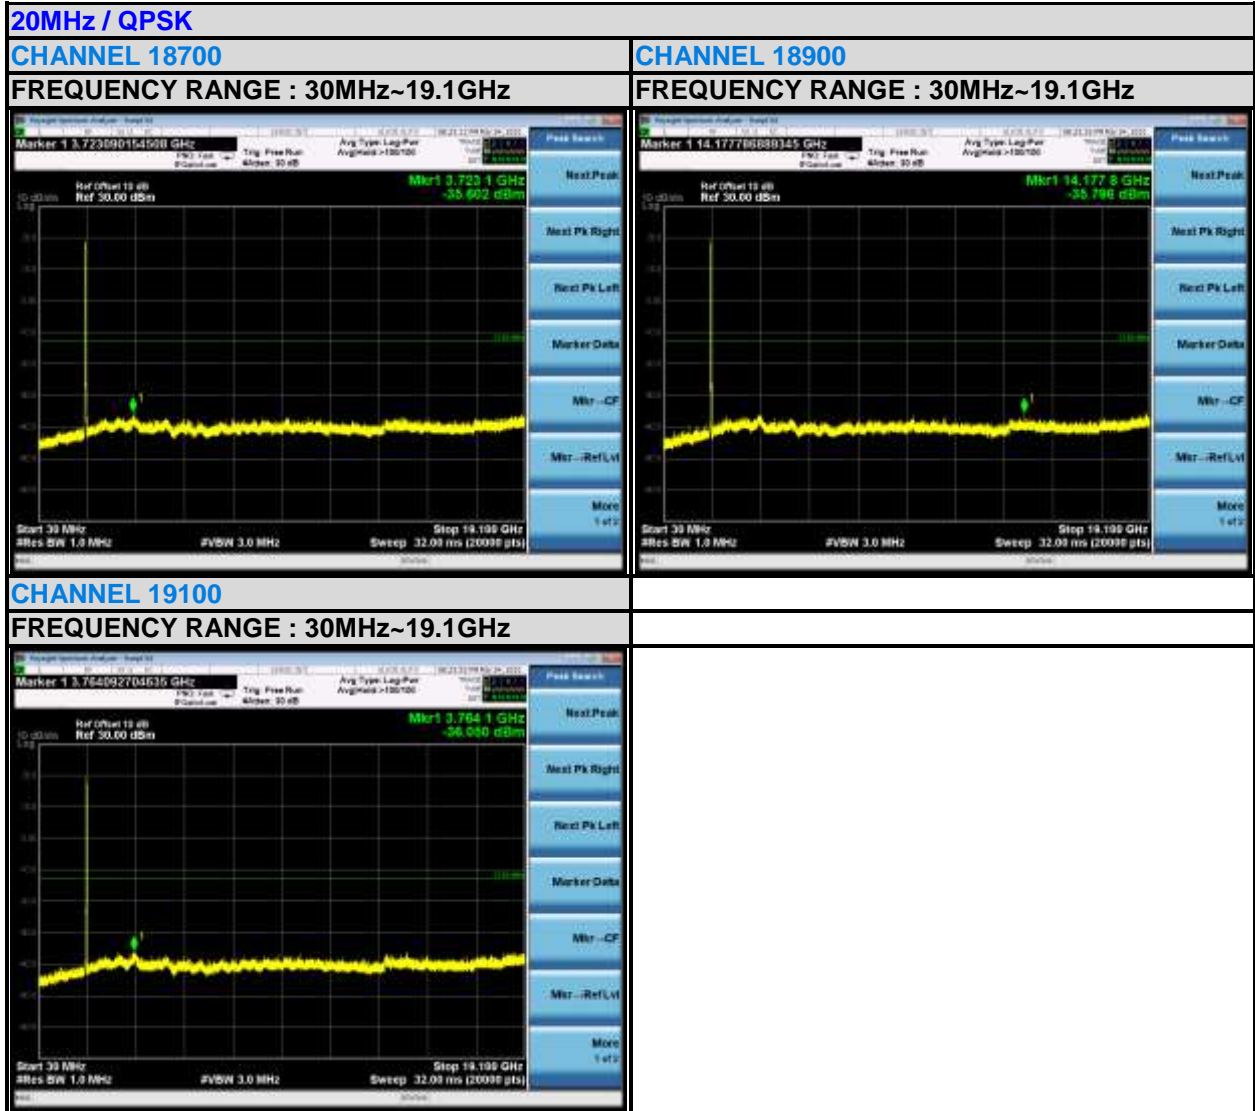



### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 3.6.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.6.4 TEST SETUP

#### < Frequency Range 30MHz~1GHz >

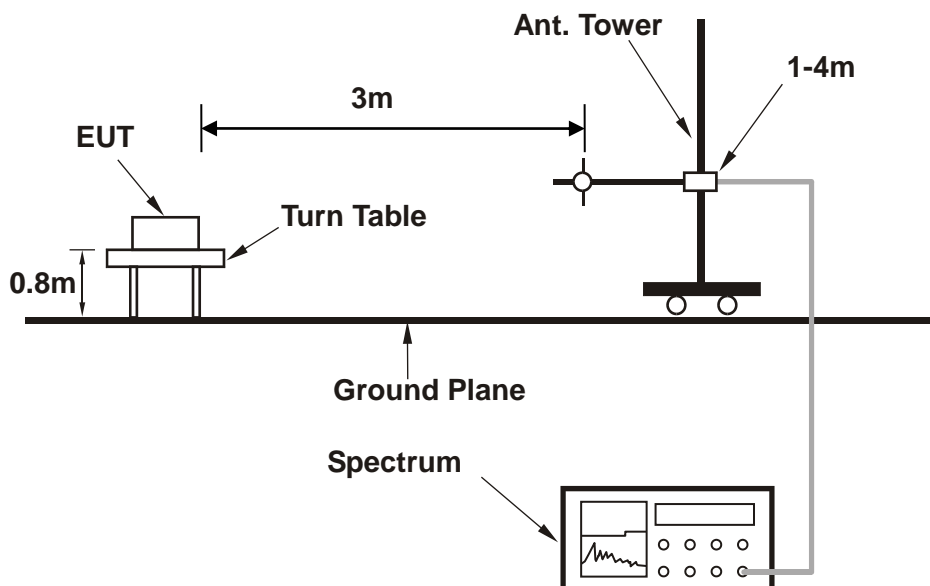

#### < Frequency Range above 1GHz >

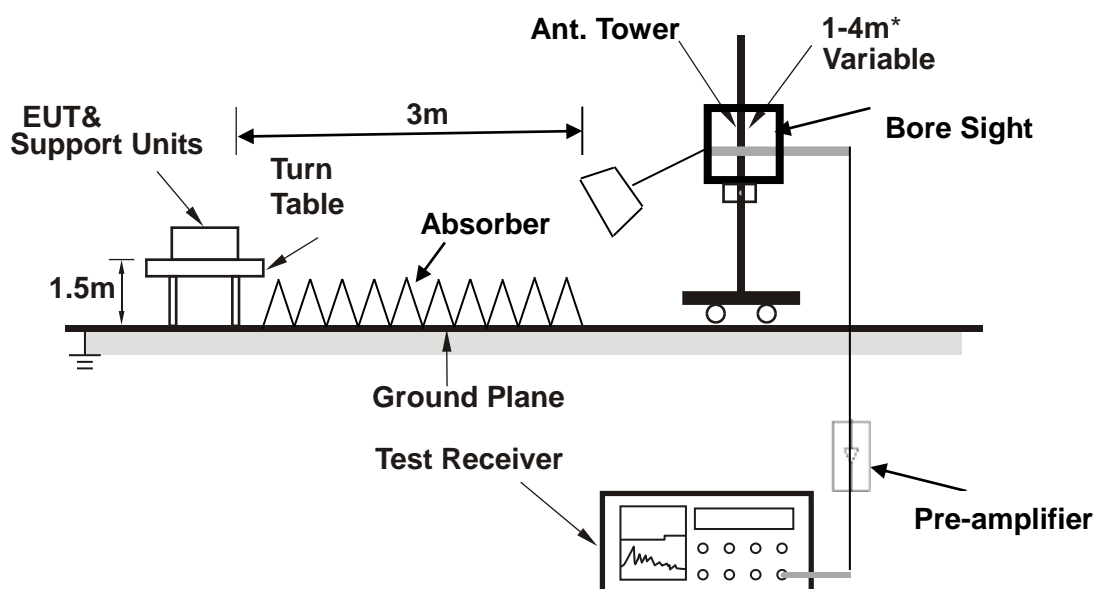

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

### 3.6.5 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.970	-42.49	-62.90	-13.00	-29.49	20.41	Peak	Horizontal
2	67.830	-33.16	-40.33	-13.00	-20.16	7.17	Peak	Horizontal
3	169.680	-36.14	-46.45	-13.00	-23.14	10.31	Peak	Horizontal
4 PP	250.190	-28.95	-42.45	-13.00	-15.95	13.50	Peak	Horizontal
5	323.910	-35.45	-49.82	-13.00	-22.45	14.37	Peak	Horizontal
6	503.360	-44.34	-63.56	-13.00	-31.34	19.22	Peak	Horizontal

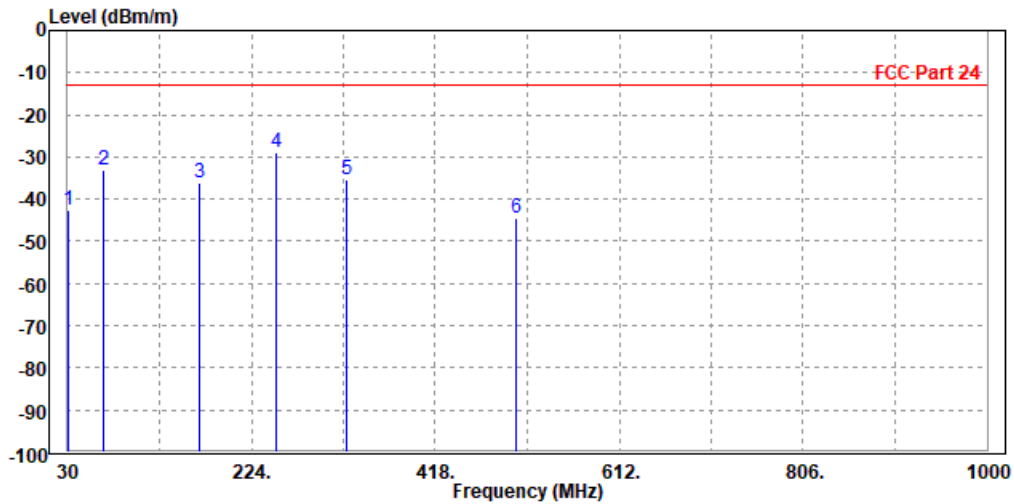




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.970	-29.58	-50.00	-13.00	-16.58	20.42	Peak	Vertical
2 PP	67.830	-25.32	-32.49	-13.00	-12.32	7.17	Peak	Vertical
3	124.090	-41.99	-49.43	-13.00	-28.99	7.44	Peak	Vertical
4	168.710	-41.40	-51.75	-13.00	-28.40	10.35	Peak	Vertical
5	240.490	-38.41	-51.24	-13.00	-25.41	12.83	Peak	Vertical
6	400.540	-40.52	-57.33	-13.00	-27.52	16.81	Peak	Vertical

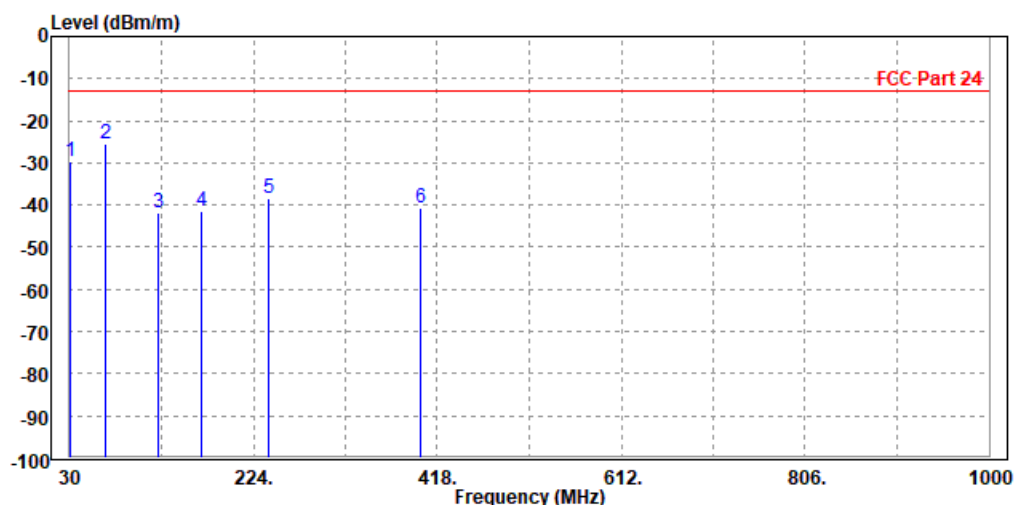



Test Report No.: RFA210218W001-3

**ABOVE 1GHz DATA**

**Note:** For higher frequency, the emission is too low to be detected.


**WORST-CASE DATA**

**PCS 1900:**

**CH 512**

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-49.79	-58.57	-13.00	-36.79	8.78	Peak	Horizontal
2	5550.000	-50.68	-60.87	-13.00	-37.68	10.19	Peak	Horizontal

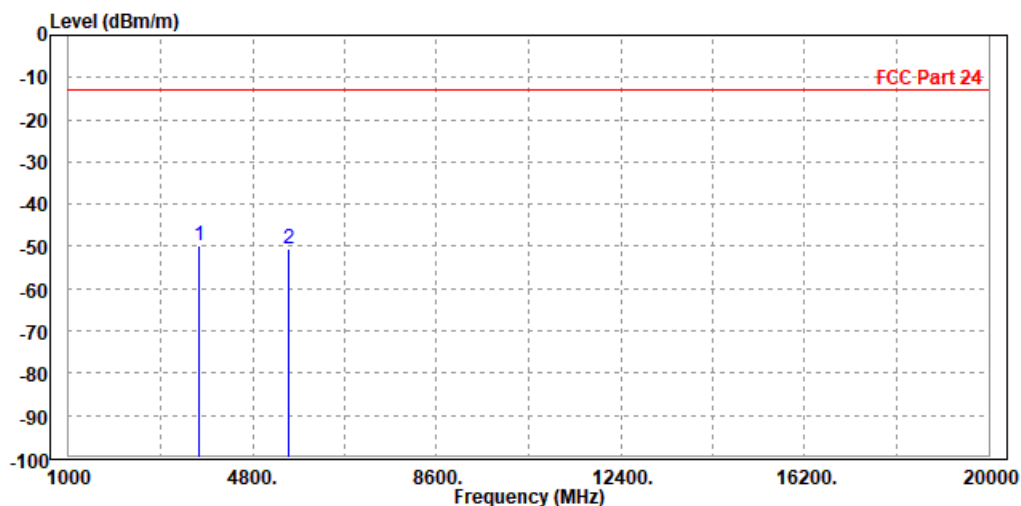




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-49.84	-59.09	-13.00	-36.84	9.25	Peak	Vertical
2	5550.000	-51.30	-61.20	-13.00	-38.30	9.90	Peak	Vertical

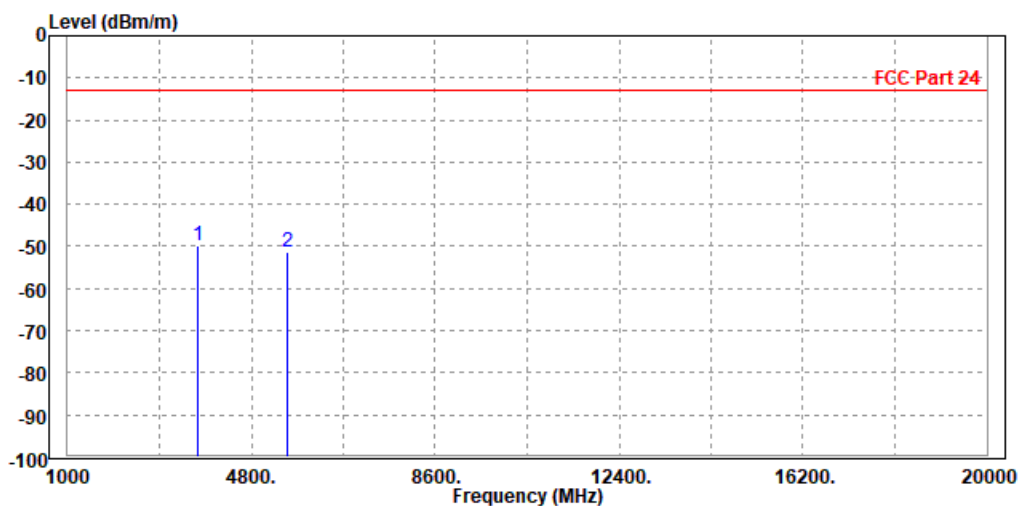




Test Report No.: RFA210218W001-3

CH 661

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.44	-59.29	-13.00	-37.44	8.85	Peak	Horizontal
2 PP	5640.000	-50.17	-60.65	-13.00	-37.17	10.48	Peak	Horizontal

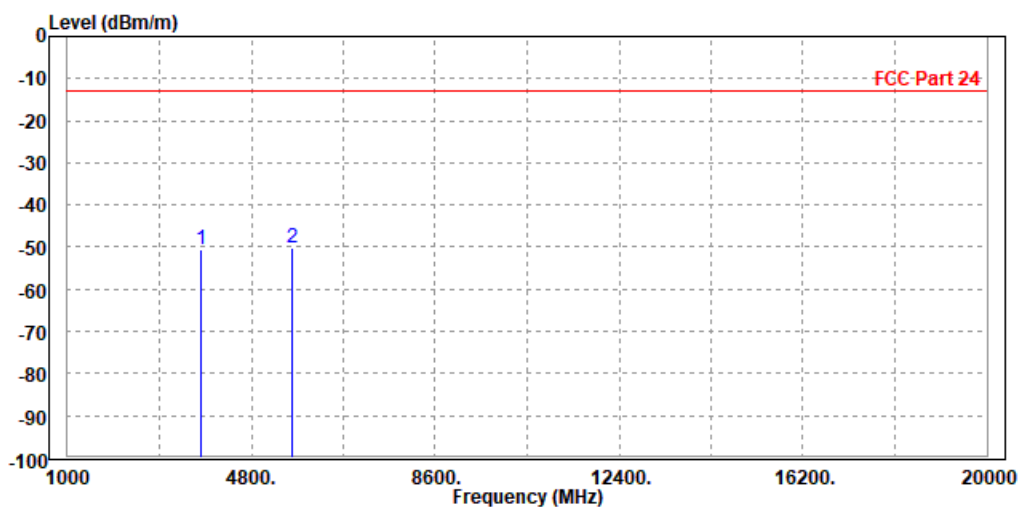






Test Report No.: RFA210218W001-3

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-47.74	-57.01	-13.00	-34.74	9.27	Peak	Vertical
2 PP	5640.000	-47.21	-57.46	-13.00	-34.21	10.25	Peak	Vertical

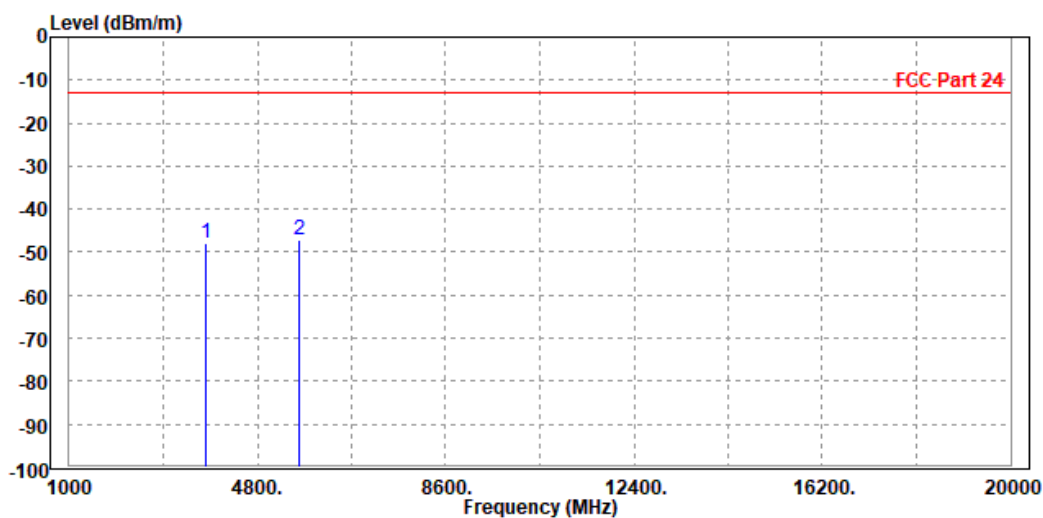




**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

**CH 810**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-49.44	-58.35	-13.00	-36.44	8.91	Peak	Horizontal
2	PP 5729.400	-48.83	-59.61	-13.00	-35.83	10.78	Peak	Horizontal

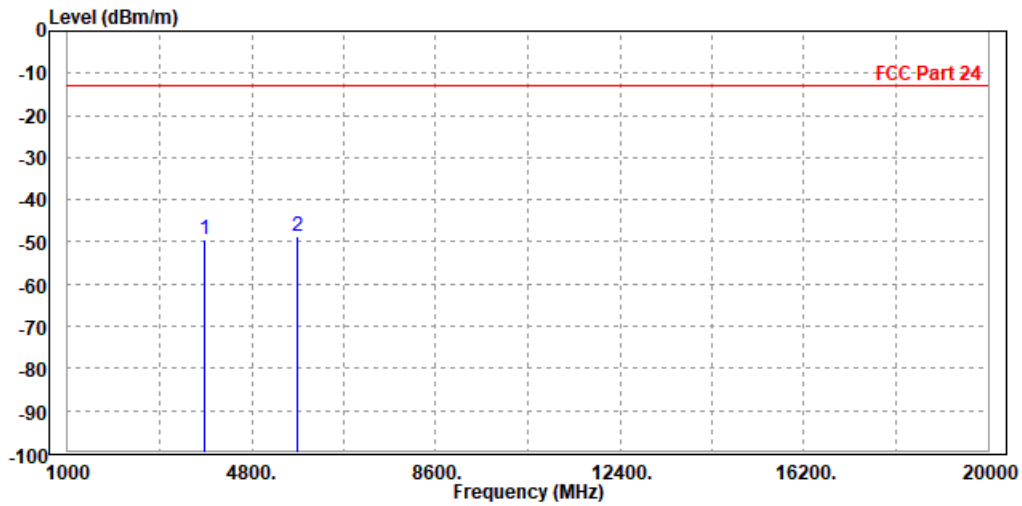




Test Report No.: RFA210218W001-3

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-45.45	-54.74	-13.00	-32.45	9.29	Peak	Vertical
2	5729.400	-48.99	-59.58	-13.00	-35.99	10.59	Peak	Vertical

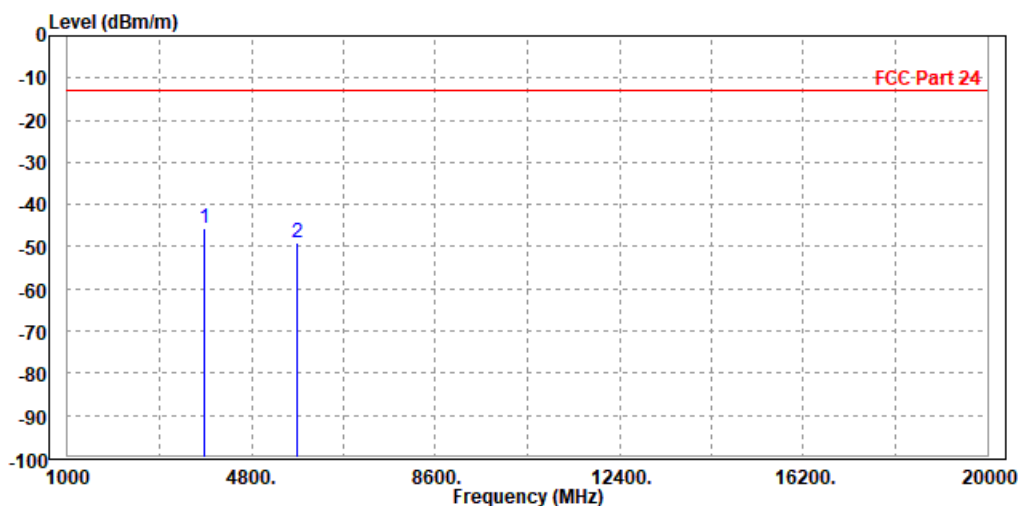




Test Report No.: RFA210218W001-3

EDGE 1900:

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-48.38	-57.16	-13.00	-35.38	8.78	Peak	Horizontal
2	5550.000	-50.79	-60.98	-13.00	-37.79	10.19	Peak	Horizontal

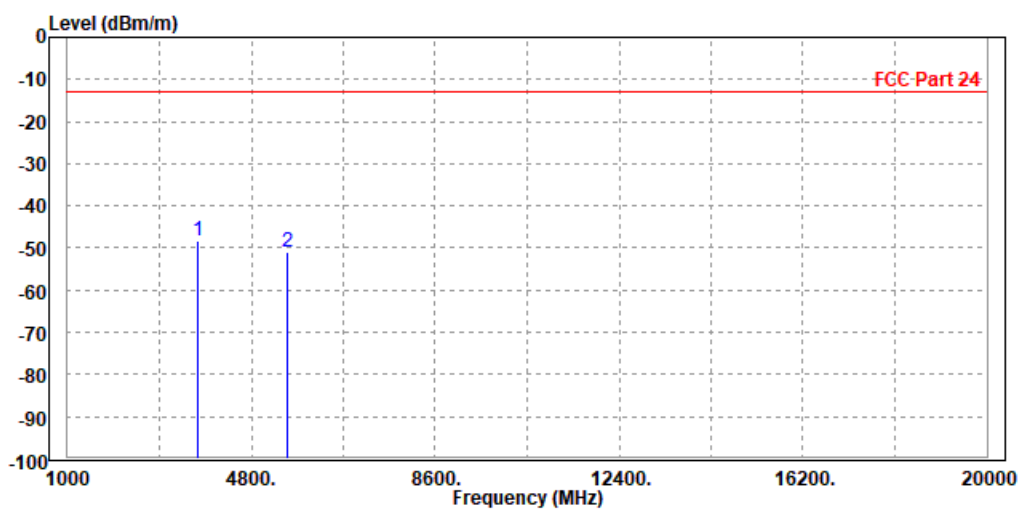




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-48.56	-57.81	-13.00	-35.56	9.25	Peak	Vertical
2	5550.000	-50.11	-60.01	-13.00	-37.11	9.90	Peak	Vertical

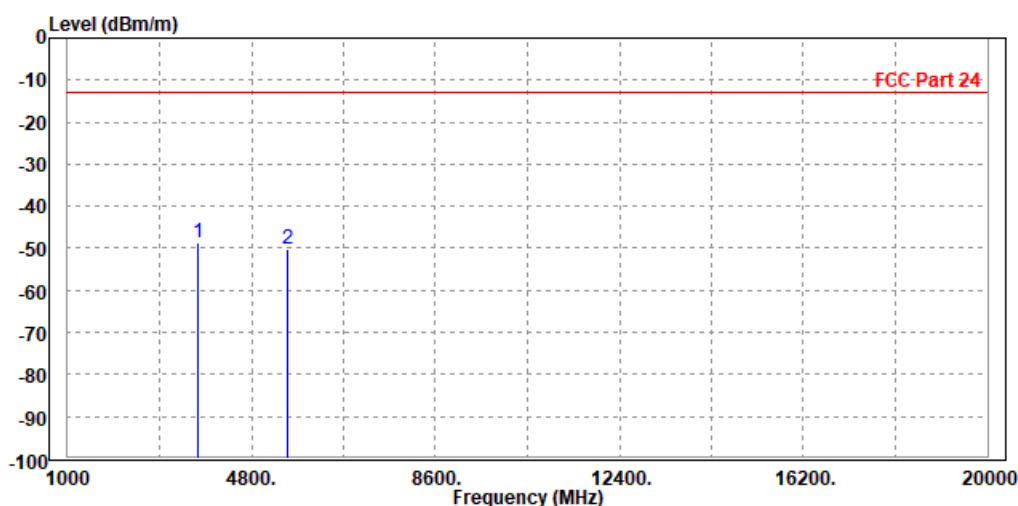




Test Report No.: RFA210218W001-3

CH 661

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.05	-58.90	-13.00	-37.05	8.85	Peak	Horizontal
2	PP 5640.000	-49.16	-59.64	-13.00	-36.16	10.48	Peak	Horizontal

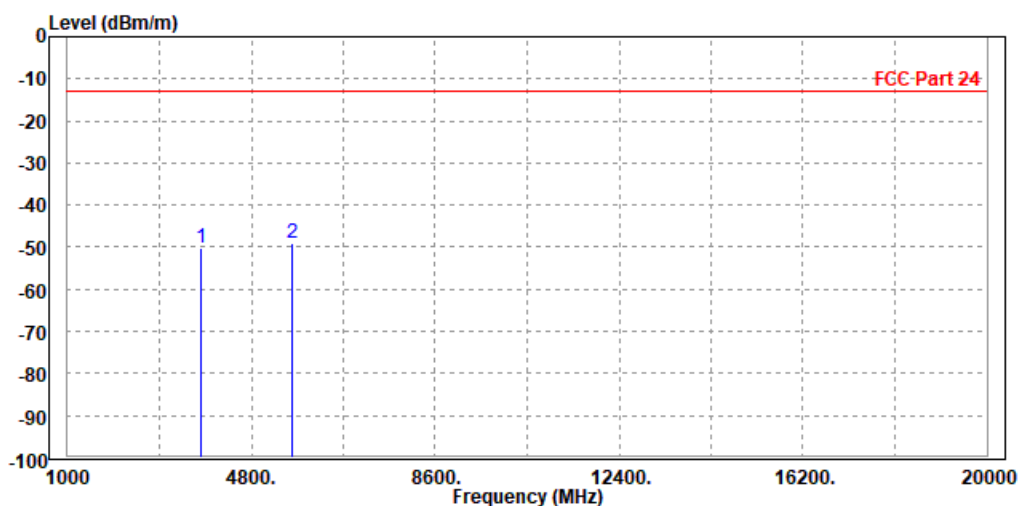




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.48	-58.75	-13.00	-36.48	9.27	Peak	Vertical
2 PP	5640.000	-49.08	-59.33	-13.00	-36.08	10.25	Peak	Vertical

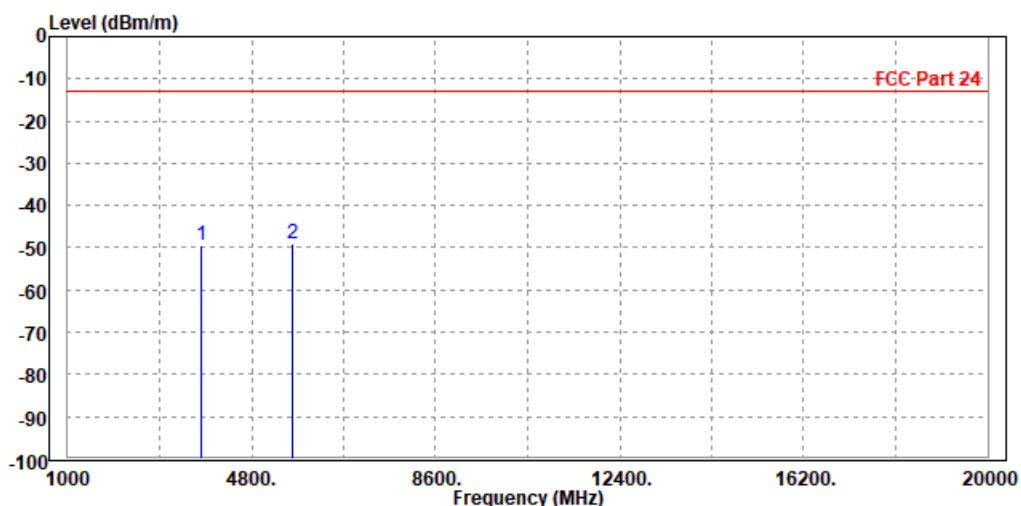




Test Report No.: RFA210218W001-3

CH 810

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.05	-56.96	-13.00	-35.05	8.91	Peak	Horizontal
2 PP	5729.400	-46.05	-56.83	-13.00	-33.05	10.78	Peak	Horizontal

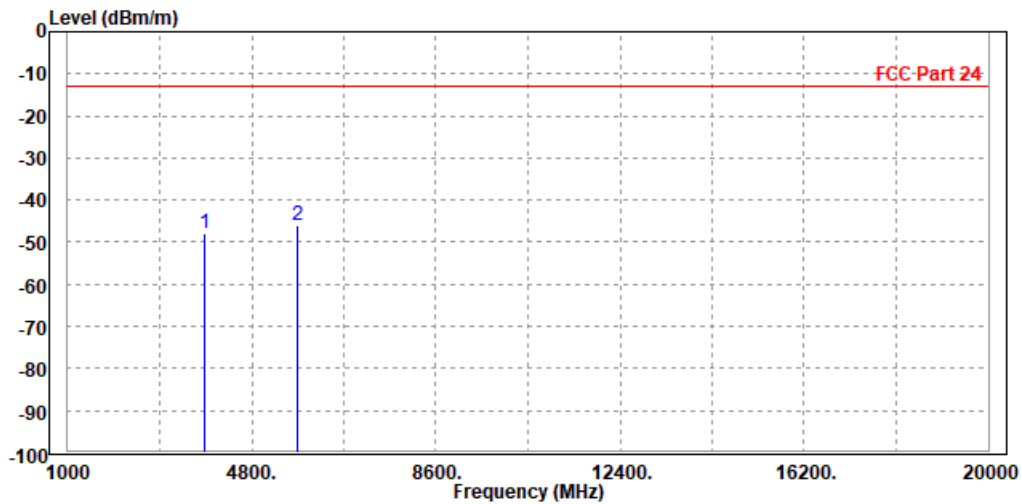






Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-46.88	-56.17	-13.00	-33.88	9.29	Peak	Vertical
2	5729.400	-47.85	-58.44	-13.00	-34.85	10.59	Peak	Vertical

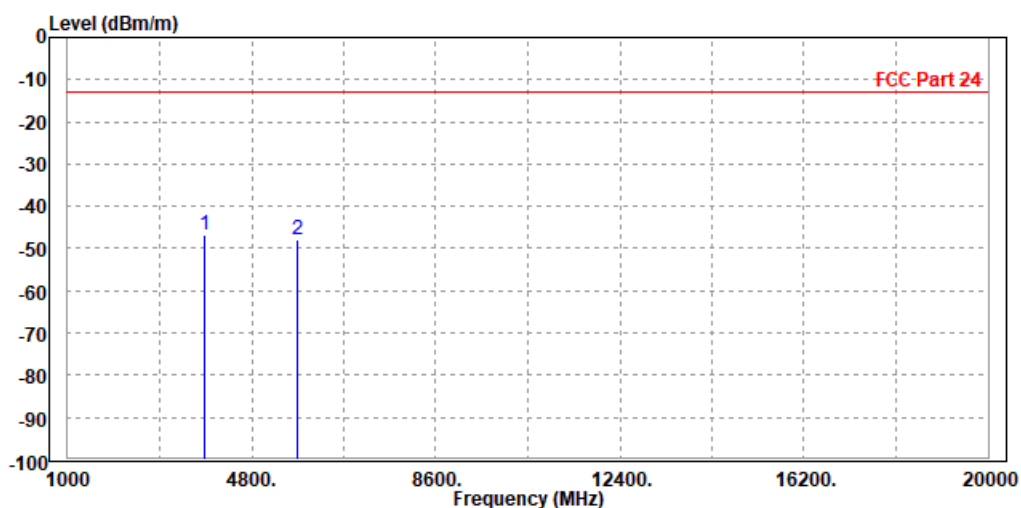




Test Report No.: RFA210218W001-3

WCDMA Band II

CH 9262

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-39.82	-48.60	-13.00	-26.82	8.78	Peak	Horizontal
2	5557.200	-48.53	-58.74	-13.00	-35.53	10.21	Peak	Horizontal

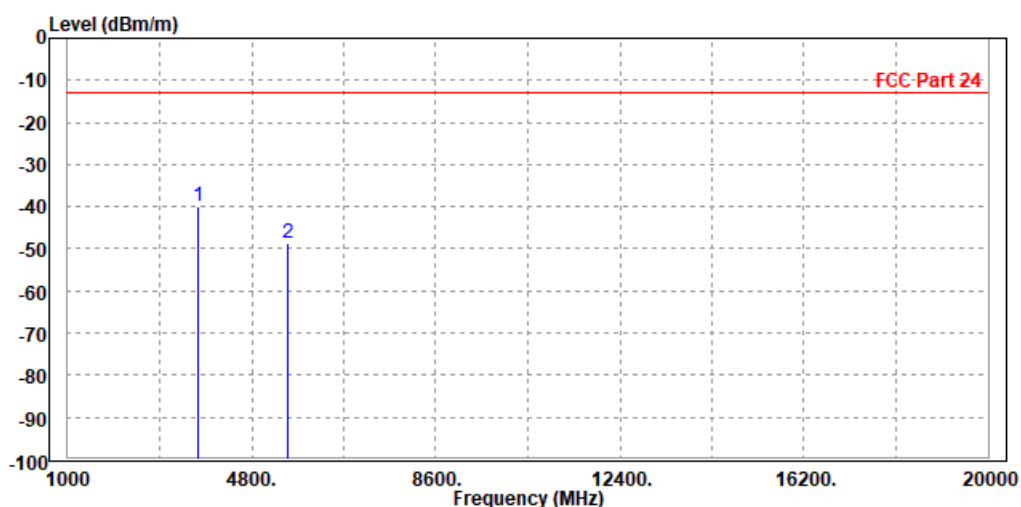




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 9262	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-39.21	-48.46	-13.00	-26.21	9.25	Peak	Vertical
2	5557.200	-46.56	-56.49	-13.00	-33.56	9.93	Peak	Vertical

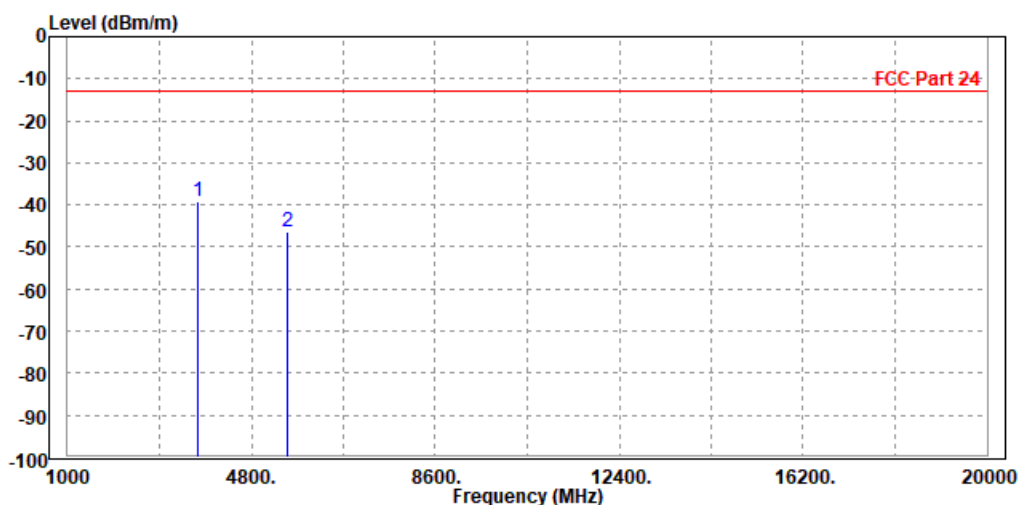




**BUREAU  
VERITAS**

**Test Report No.: RFA210218W001-3**

**CH 9400**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-39.17	-48.02	-13.00	-26.17	8.85	Peak	Horizontal
2	5640.000	-47.75	-58.23	-13.00	-34.75	10.48	Peak	Horizontal

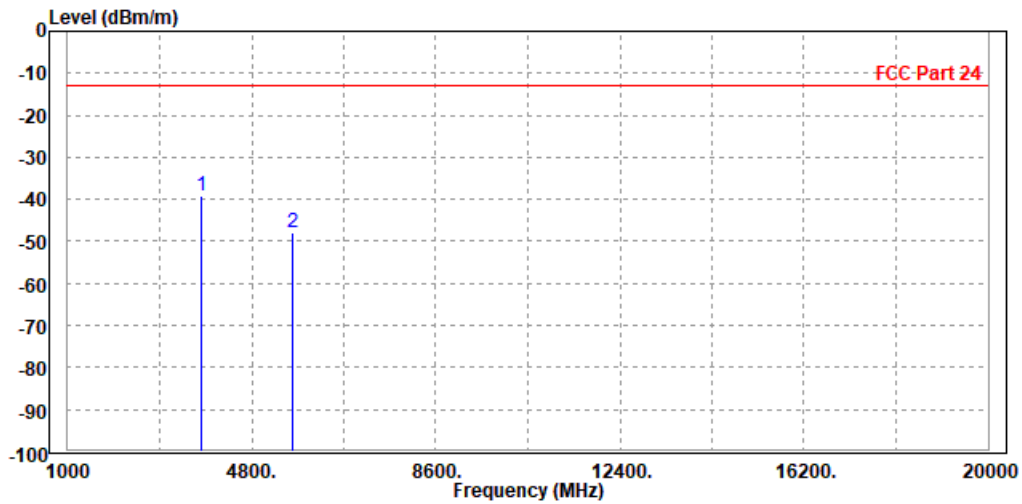




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-35.20	-44.47	-13.00	-22.20	9.27	Peak	Vertical
2	5640.000	-46.88	-57.13	-13.00	-33.88	10.25	Peak	Vertical

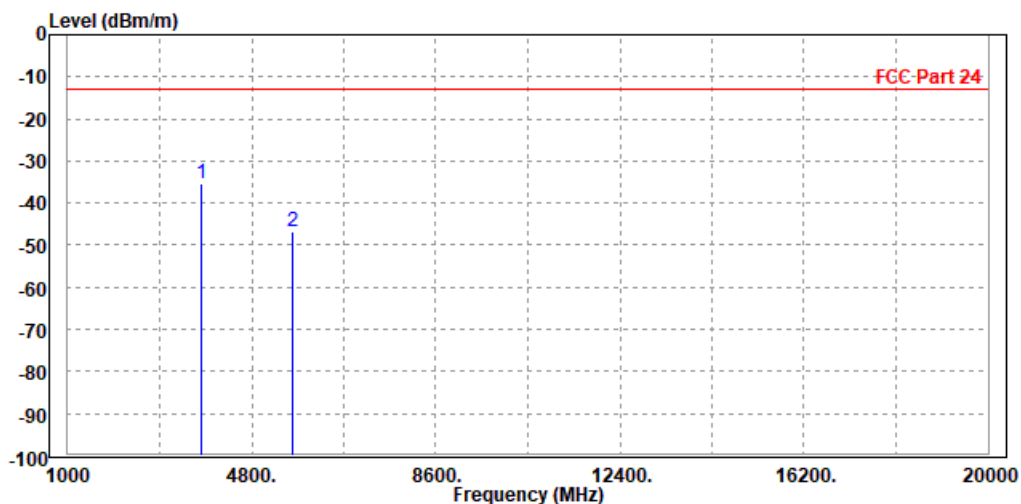




**BUREAU  
VERITAS**

Test Report No.: RFA210218W001-3

CH 9538

<b>MODE</b>	TX channel 9538	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

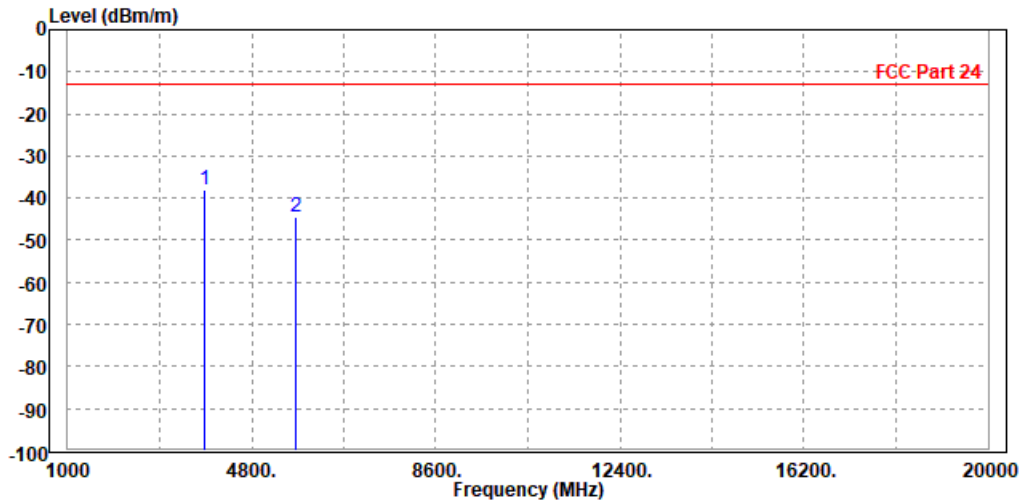


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-37.90	-46.81	-13.00	-24.90	8.91	Peak	Horizontal
2	5722.800	-44.68	-55.44	-13.00	-31.68	10.76	Peak	Horizontal



Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 9538	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-35.55	-44.84	-13.00	-22.55	9.29	Peak	Vertical
2	5722.800	-42.98	-53.55	-13.00	-29.98	10.57	Peak	Vertical

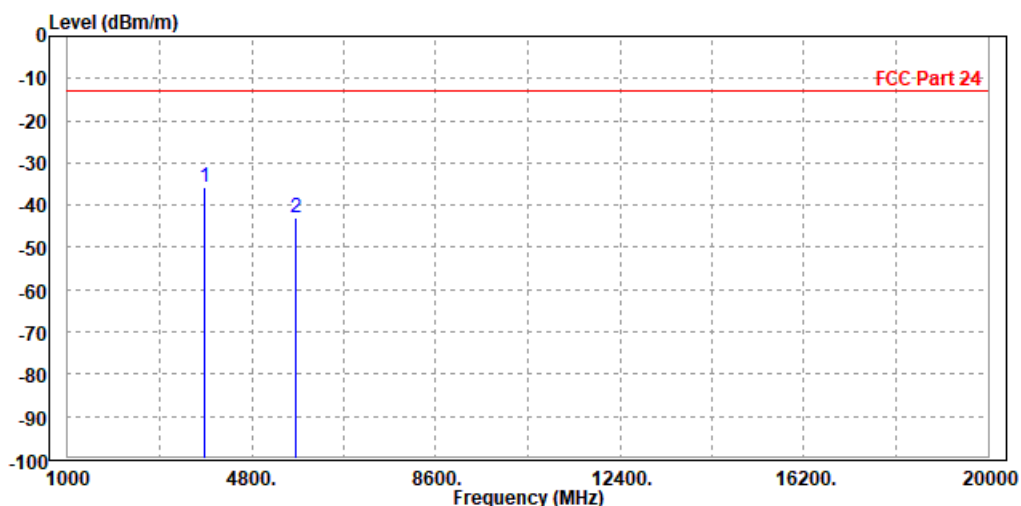



BUREAU VERITAS


Test Report No.: RFA210218W001-3

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-36.86	-45.71	-13.00	-23.86	8.85	Peak	Horizontal
2	5640.000	-49.00	-59.48	-13.00	-36.00	10.48	Peak	Horizontal

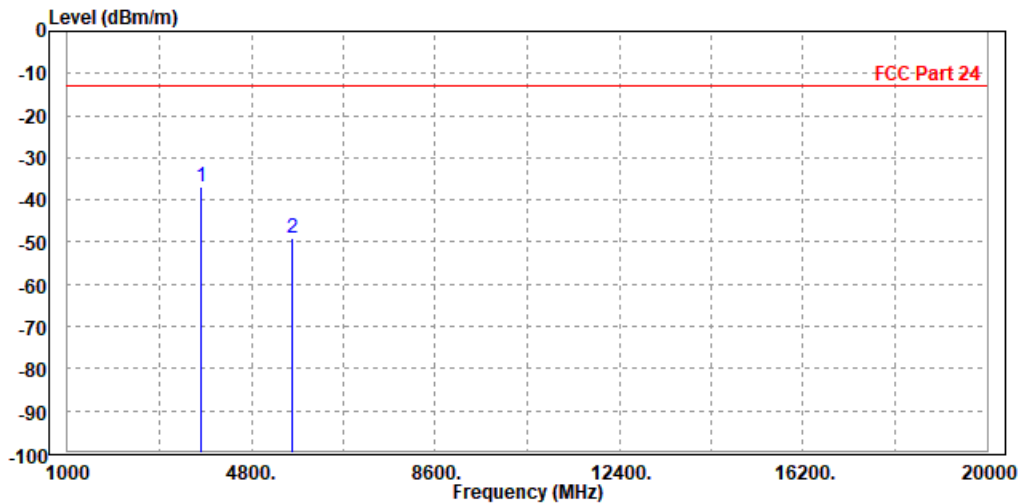






Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-36.96	-46.23	-13.00	-23.96	9.27	Peak	Vertical
2	5640.000	-45.01	-55.26	-13.00	-32.01	10.25	Peak	Vertical

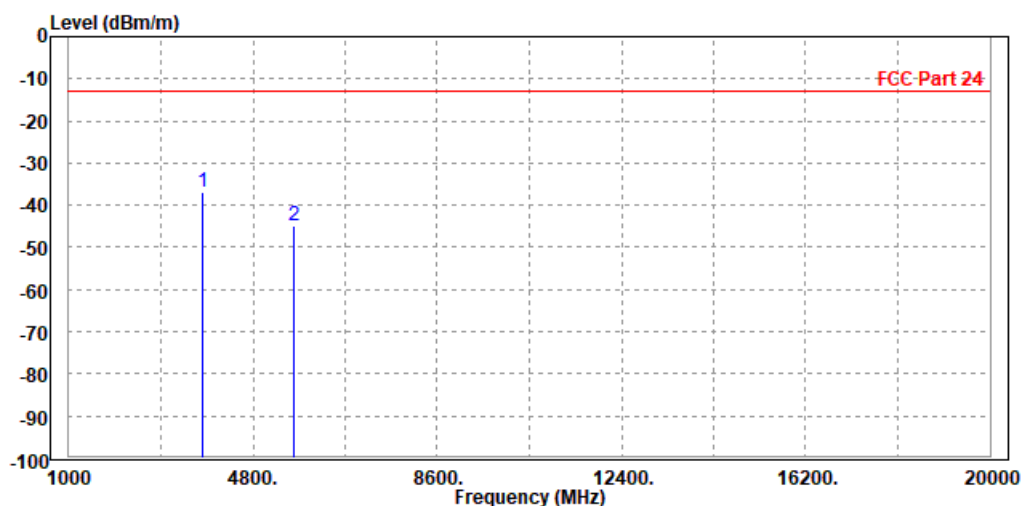




BUREAU VERITAS

Test Report No.: RFA210218W001-3

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-40.55	-49.40	-13.00	-27.55	8.85	Peak	Horizontal
2	5640.000	-49.45	-59.93	-13.00	-36.45	10.48	Peak	Horizontal

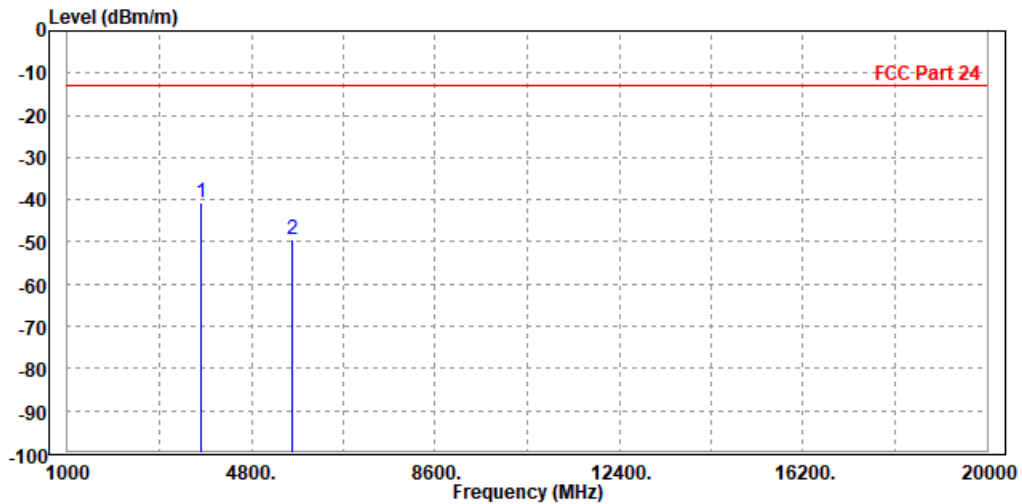




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-38.22	-47.49	-13.00	-25.22	9.27	Peak	Vertical
2	5640.000	-48.31	-58.56	-13.00	-35.31	10.25	Peak	Vertical

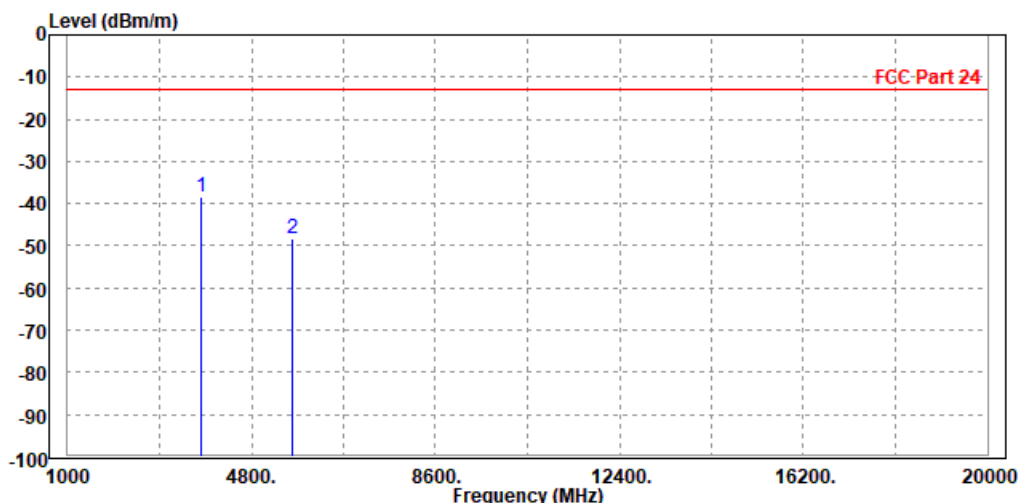




Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 5MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-40.34	-49.19	-13.00	-27.34	8.85	Peak	Horizontal
2	5640.000	-49.18	-59.66	-13.00	-36.18	10.48	Peak	Horizontal

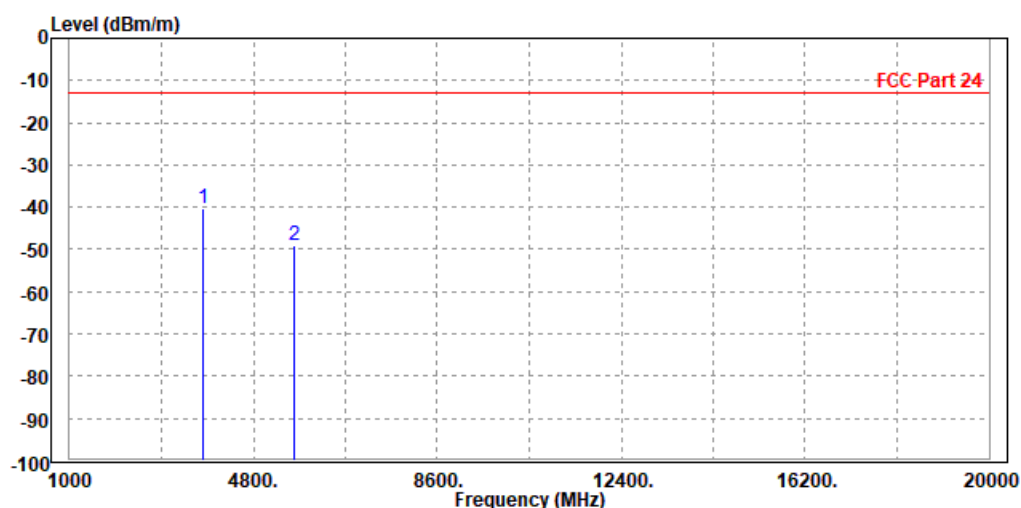




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-40.70	-49.97	-13.00	-27.70	9.27	Peak	Vertical
2	5640.000	-47.58	-57.83	-13.00	-34.58	10.25	Peak	Vertical

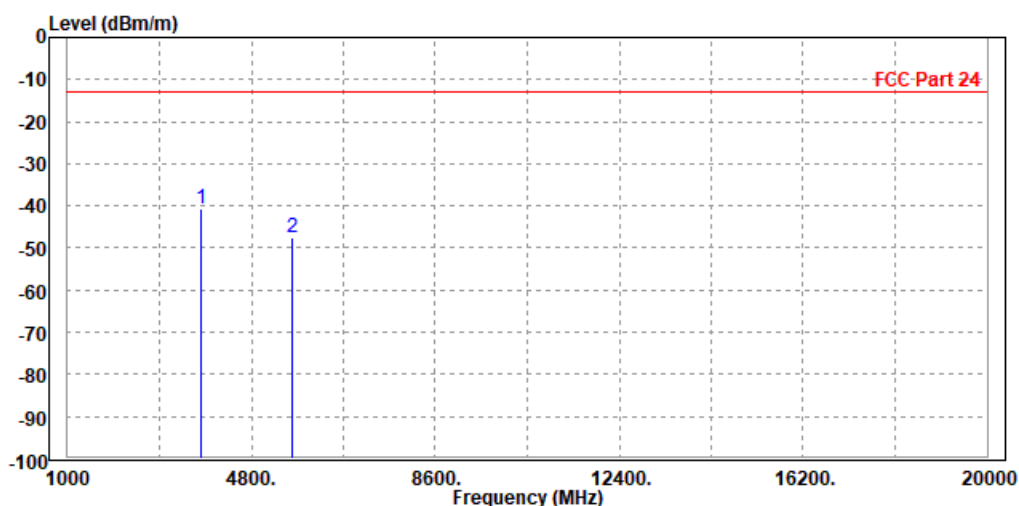




Test Report No.: RFA210218W001-3

CHANNEL BANDWIDTH: 10MHz / QPSK

CH18650

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3717.000	-43.05	-51.86	-13.00	-30.05	8.81	Peak	Horizontal
2	5565.000	-50.15	-60.39	-13.00	-37.15	10.24	Peak	Horizontal

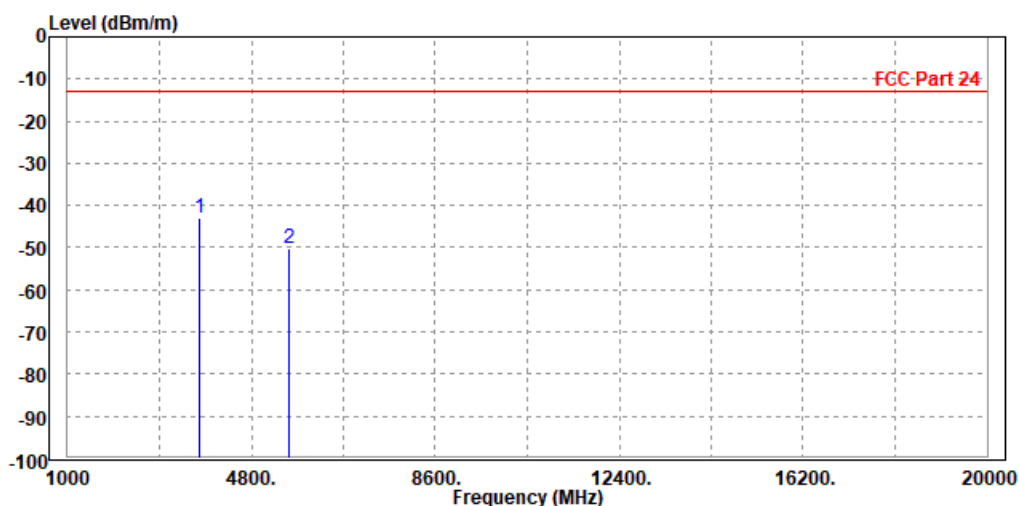




Test Report No.: RFA210218W001-3

MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3717.000	-43.06	-52.32	-13.00	-30.06	9.26	Peak	Vertical
2	5565.000	-48.98	-58.94	-13.00	-35.98	9.96	Peak	Vertical

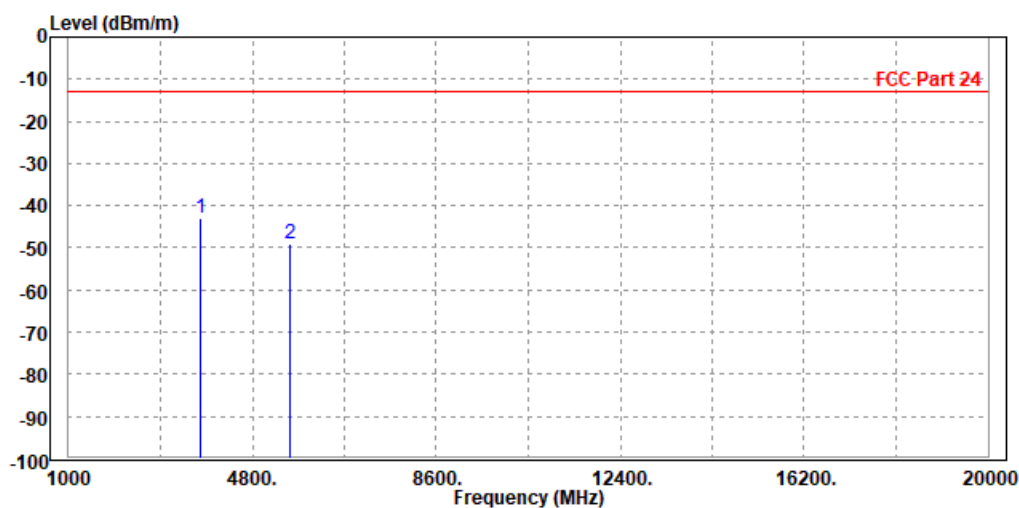




BUREAU VERITAS

Test Report No.: RFA210218W001-3

CH 18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-36.92	-45.77	-13.00	-23.92	8.85	Peak	Horizontal
2	5640.000	-47.29	-57.77	-13.00	-34.29	10.48	Peak	Horizontal

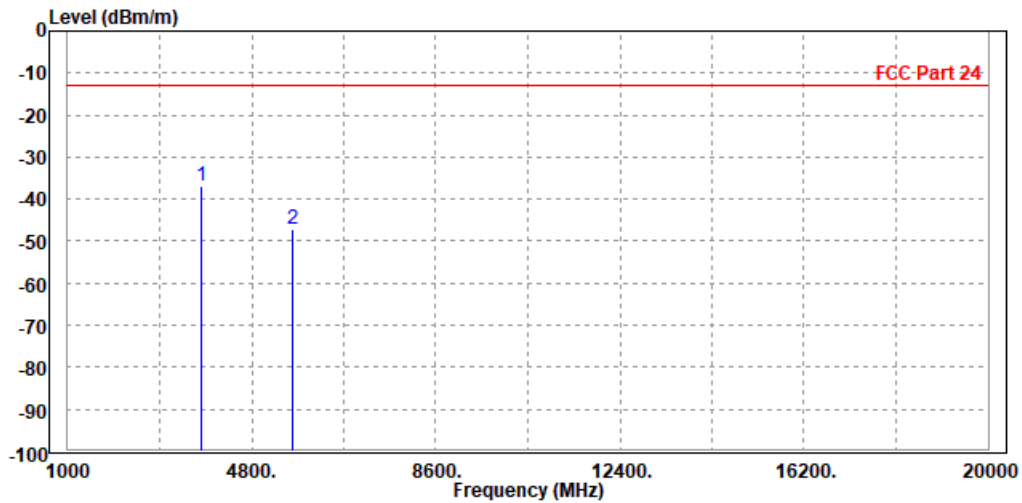






Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-36.75	-46.02	-13.00	-23.75	9.27	Peak	Vertical
2	5640.000	-45.43	-55.68	-13.00	-32.43	10.25	Peak	Vertical

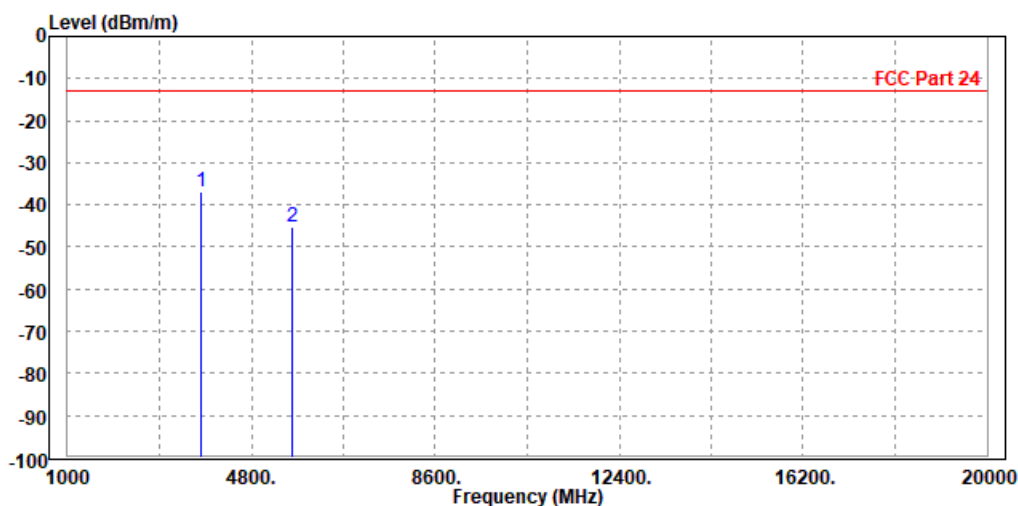




**BUREAU  
VERITAS**

**Test Report No.: RFA210218W001-3**

**CH 19150**

<b>MODE</b>	TX channel 19150	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-40.89	-49.80	-13.00	-27.89	8.91	Peak	Horizontal
2	5715.000	-47.87	-58.60	-13.00	-34.87	10.73	Peak	Horizontal

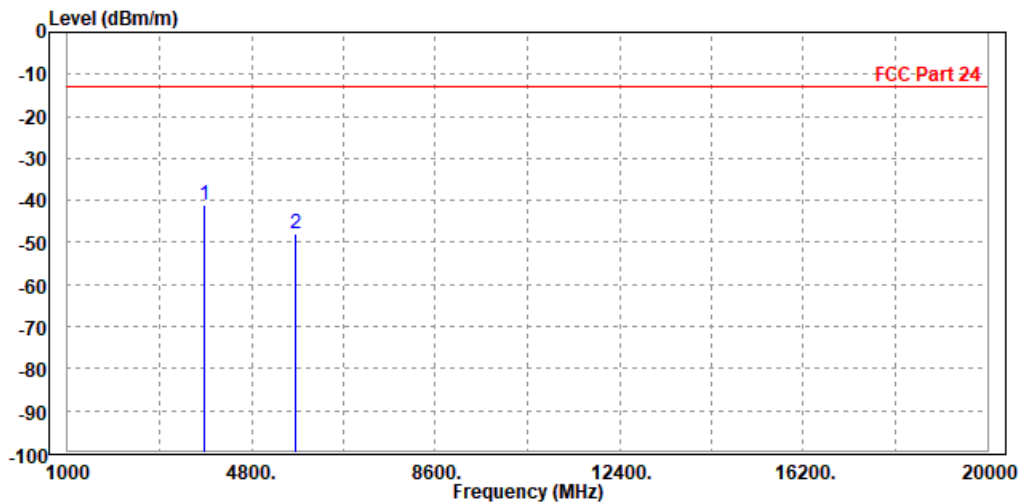




Test Report No.: RFA210218W001-3


<b>MODE</b>	TX channel 19150	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Rose Ma		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-37.48	-46.77	-13.00	-24.48	9.29	Peak	Vertical
2	5715.000	-47.21	-57.75	-13.00	-34.21	10.54	Peak	Vertical

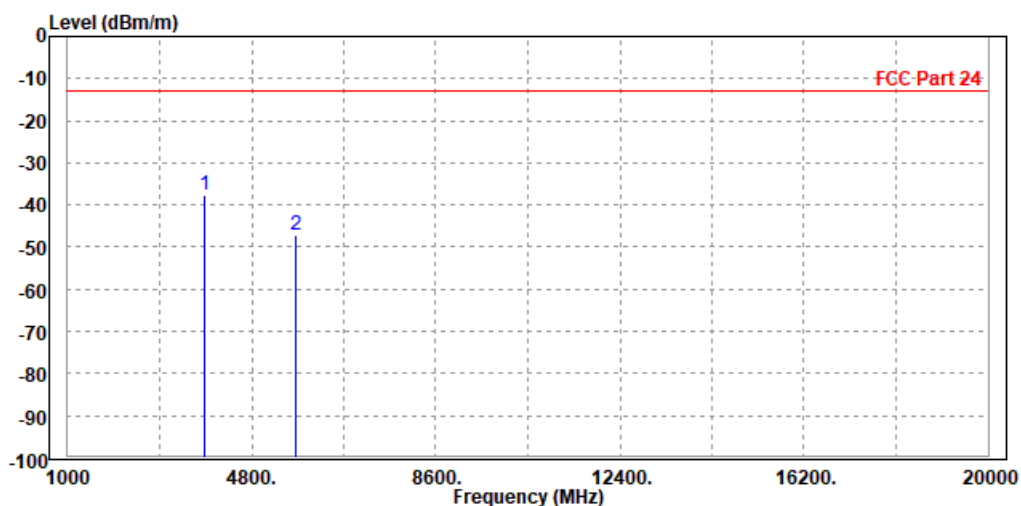

1	PP	3755.000	-43.02	-51.87	-13.00	-30.02	8.85	Peak	Horizontal
2		5640.000	-49.54	-60.02	-13.00	-36.54	10.48	Peak	Horizontal

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase	
	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	3755.000	-40.34	-49.19	-13.00	-27.34	8.85	Peak	Horizontal
2		5640.000	-49.18	-59.66	-13.00	-36.18	10.48	Peak	Horizontal

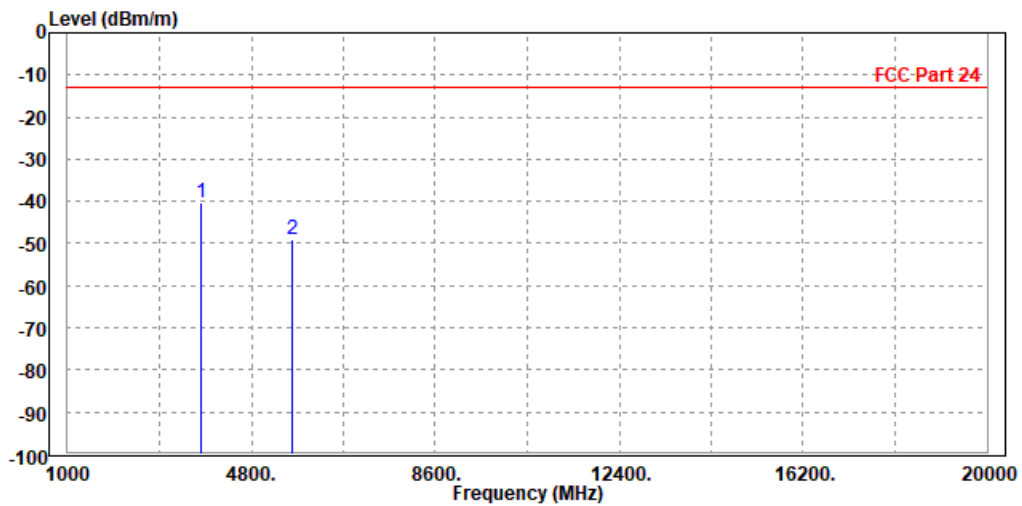




Test Report No.: RFA210218W001-3

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-43.11	-52.38	-13.00	-30.11	9.27	Peak	Vertical
2	5640.000	-47.84	-58.09	-13.00	-34.84	10.25	Peak	Vertical

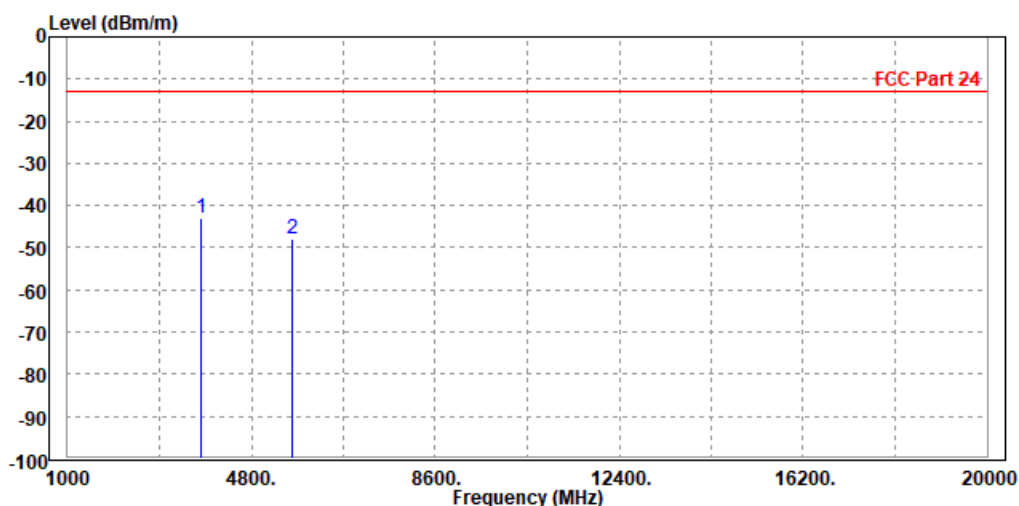




Test Report No.: RFA210218W001-3

**CHANNEL BANDWIDTH: 20MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-45.63	-54.48	-13.00	-32.63	8.85	Peak	Horizontal
2	5640.000	-49.85	-60.33	-13.00	-36.85	10.48	Peak	Horizontal

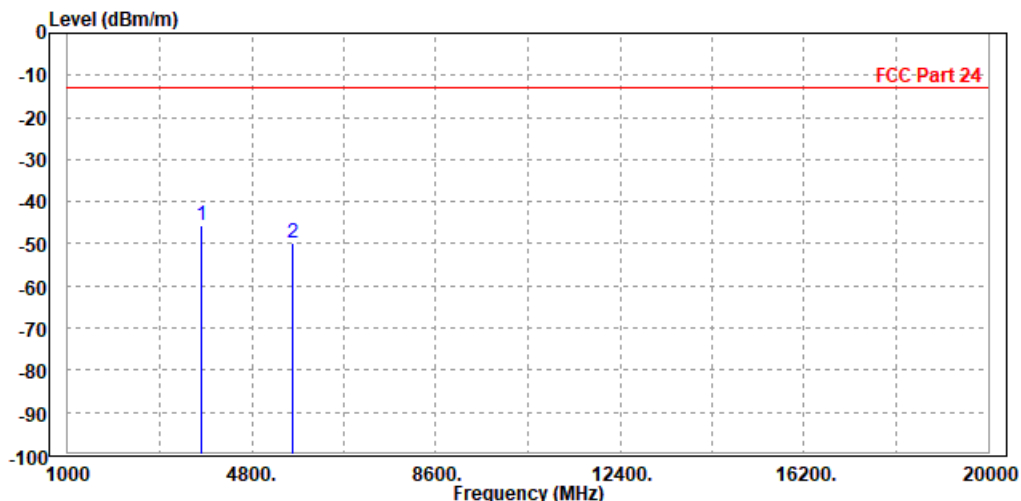




Test Report No.: RFA210218W001-3

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-43.71	-52.98	-13.00	-30.71	9.27	Peak	Vertical
2	5640.000	-49.77	-60.02	-13.00	-36.77	10.25	Peak	Vertical

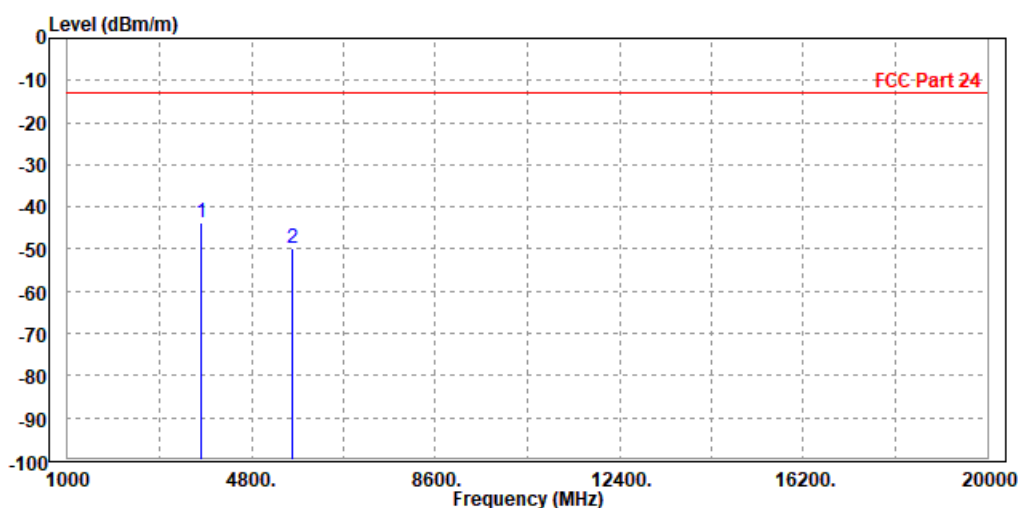


### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

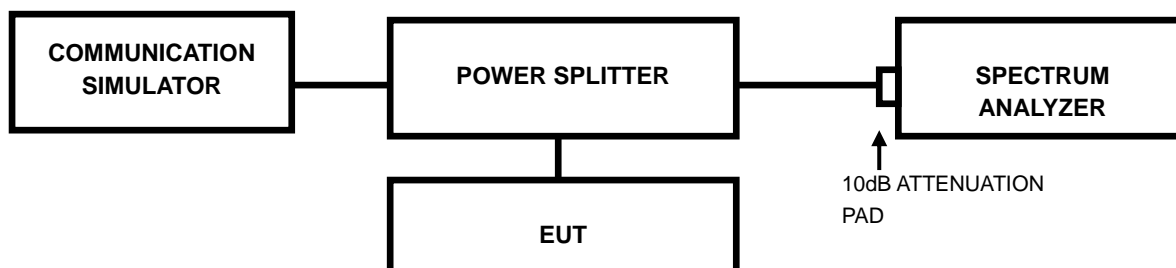

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.






### 3.7.4 TEST RESULTS

#### GSM


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
512	1850.2	2.63

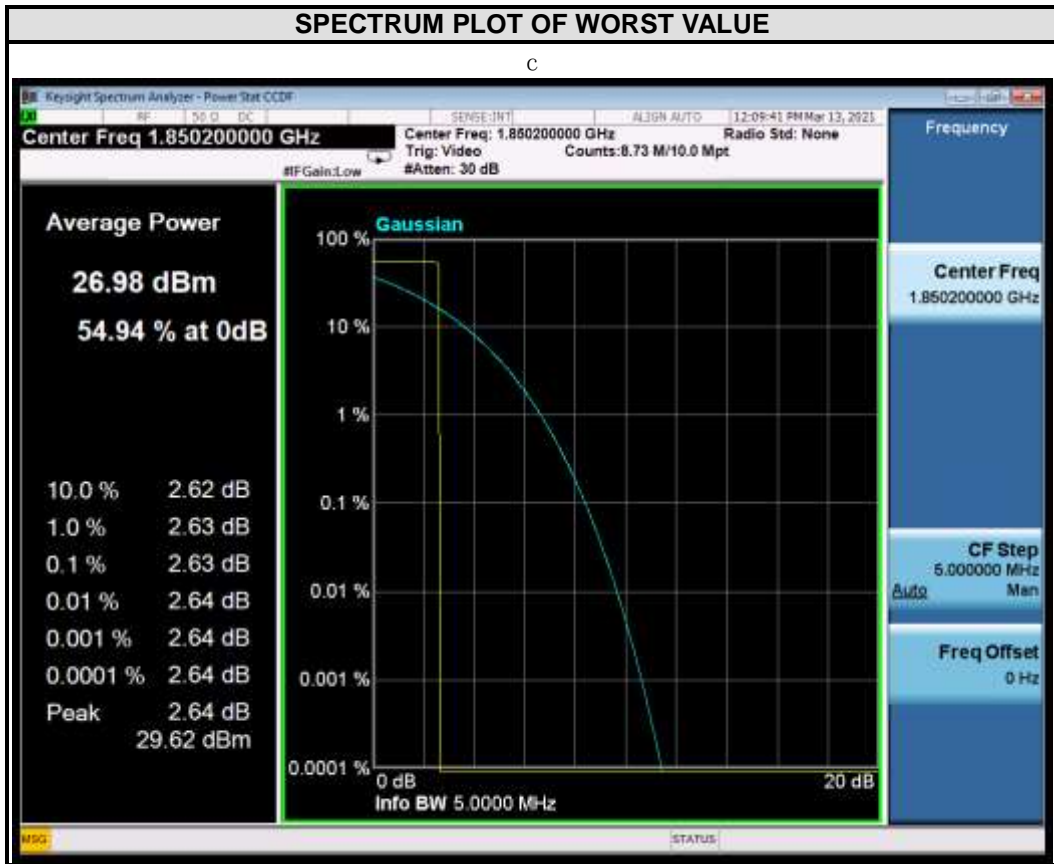



Test Report No.: RFA210218W001-3


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	2.64

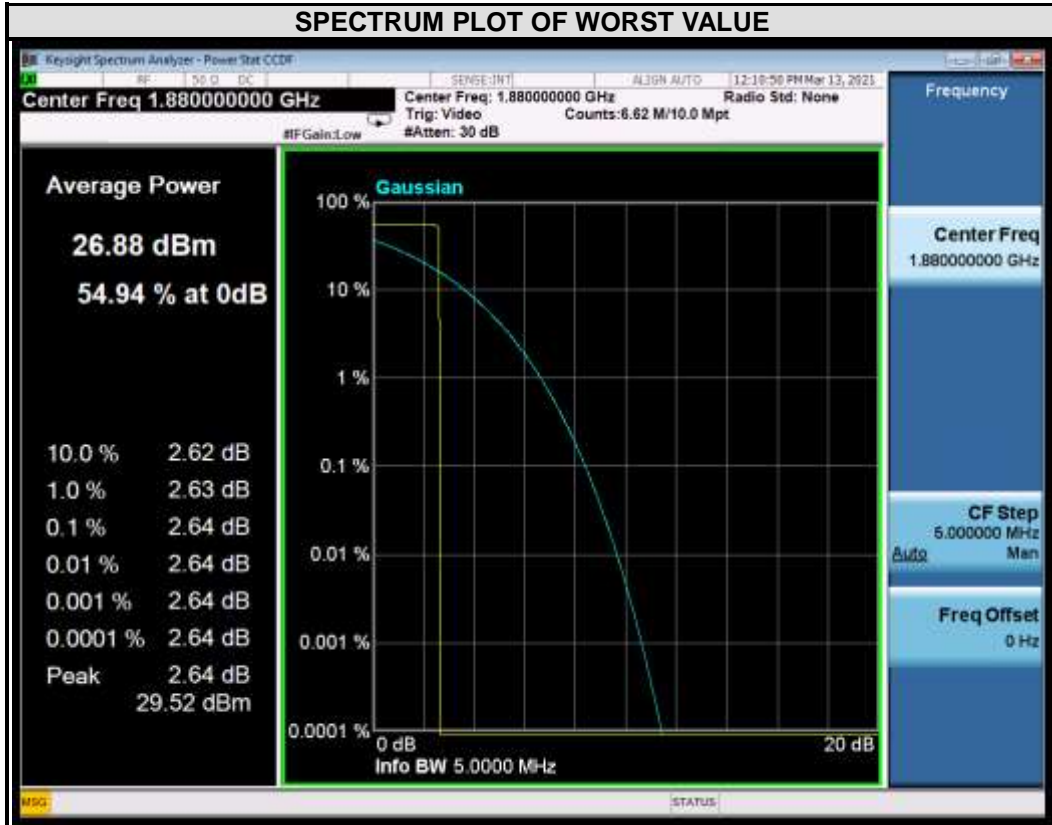



Test Report No.: RFA210218W001-3


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
810	1909.8	2.64

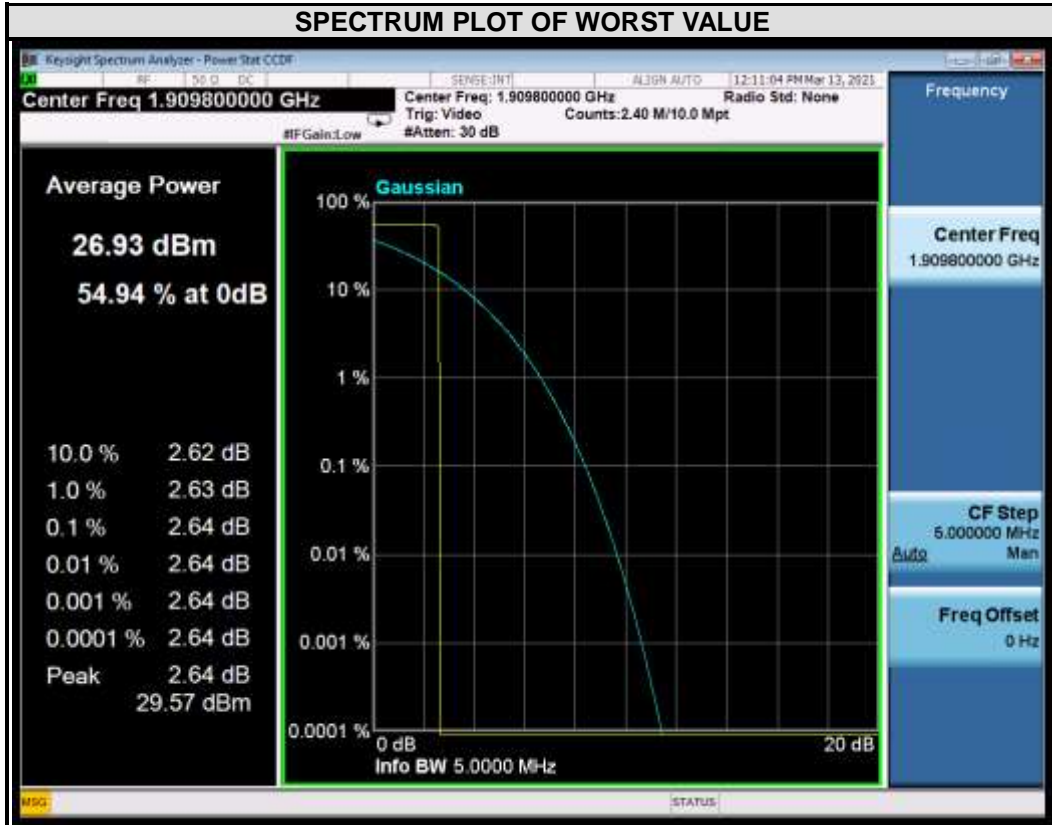



EDGE


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
512	1850.2	5.96

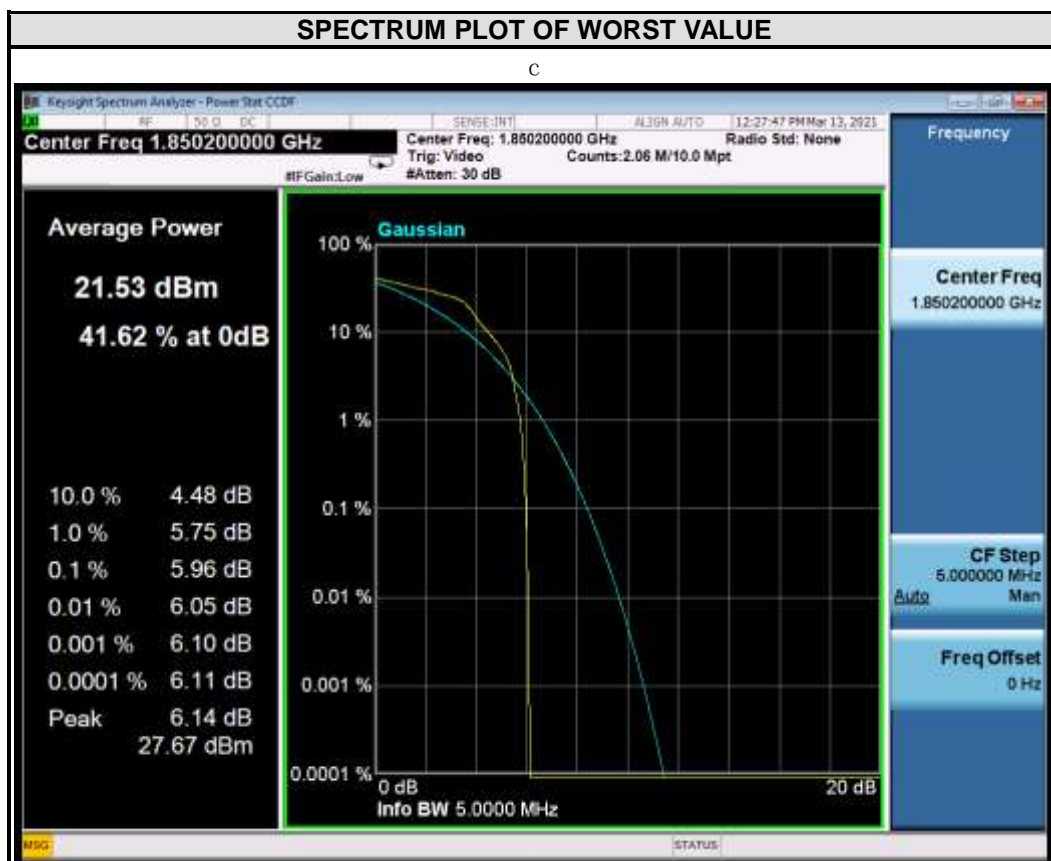



Test Report No.: RFA210218W001-3


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	5.99

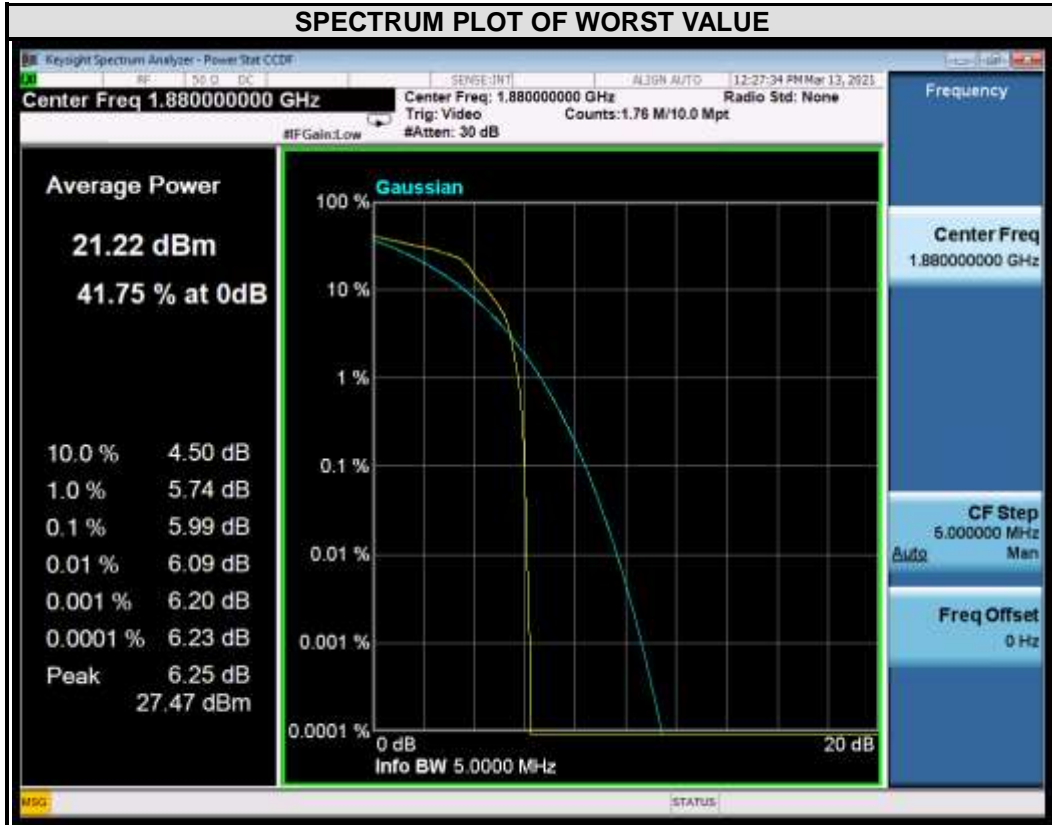




Test Report No.: RFA210218W001-3

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
810	1909.8	5.95

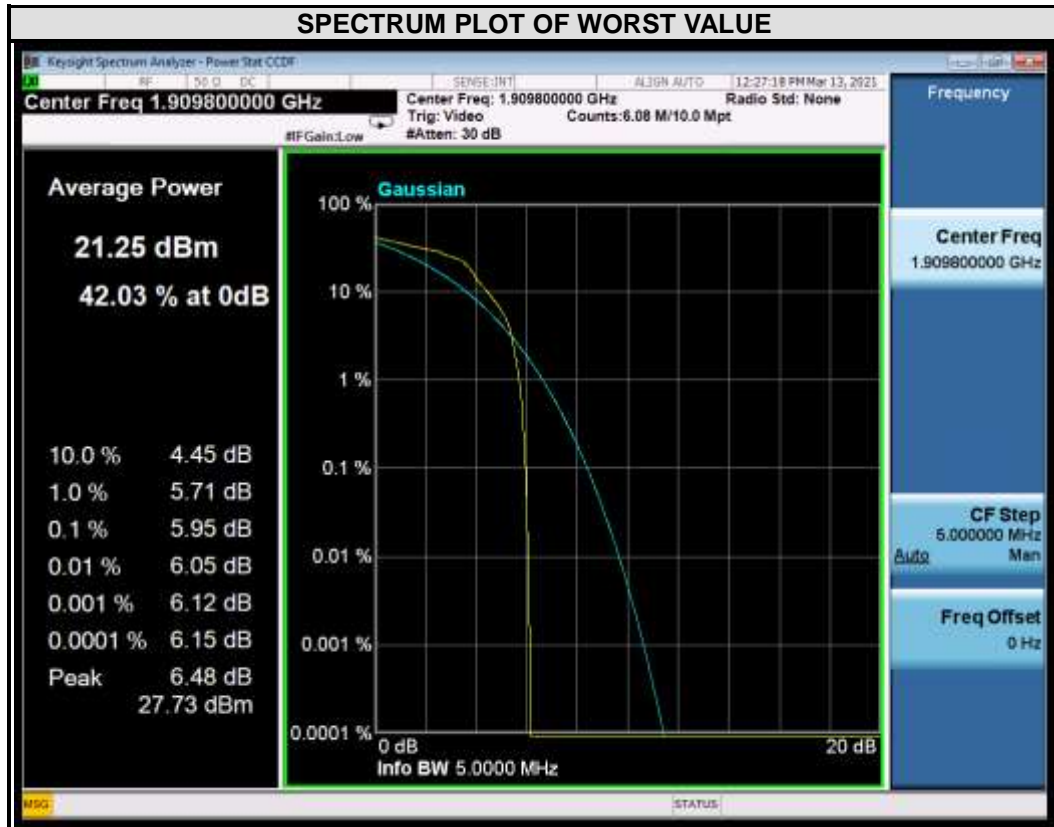


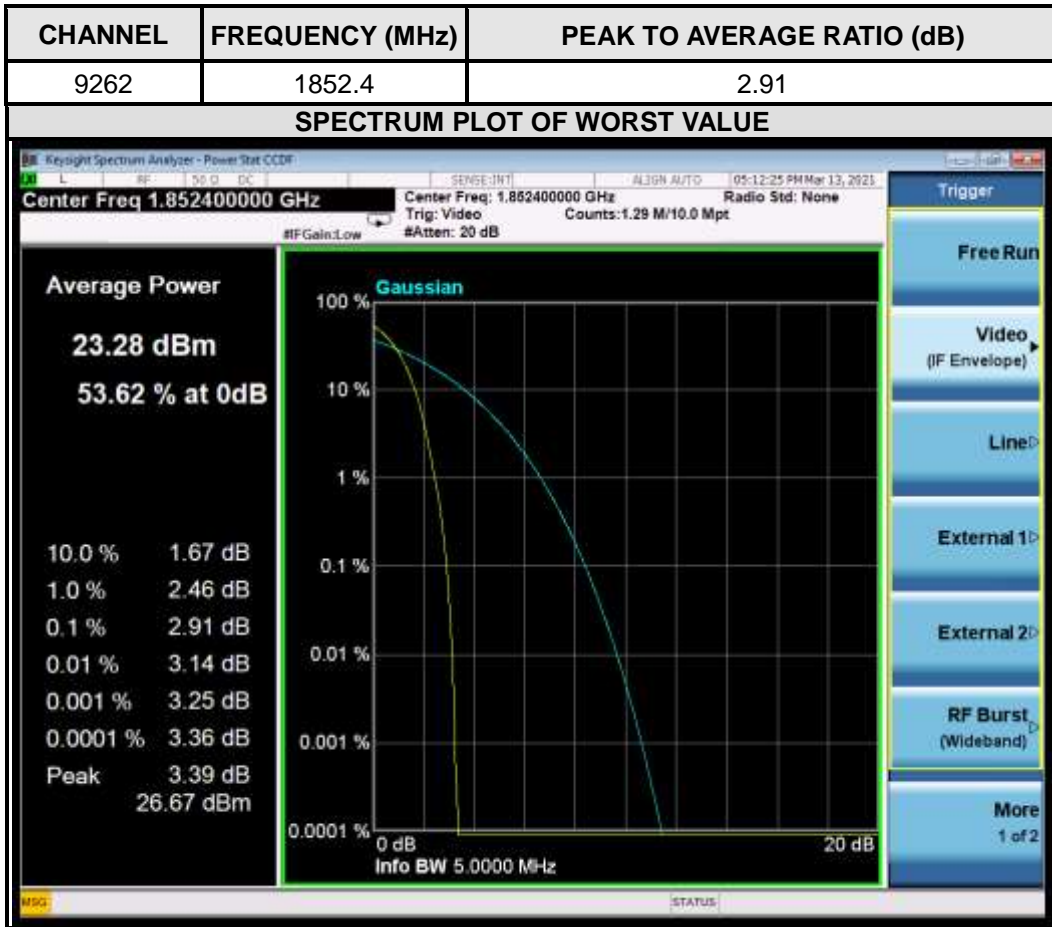



Test Report No.: RFA210218W001-3

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9400	1880.0	2.91

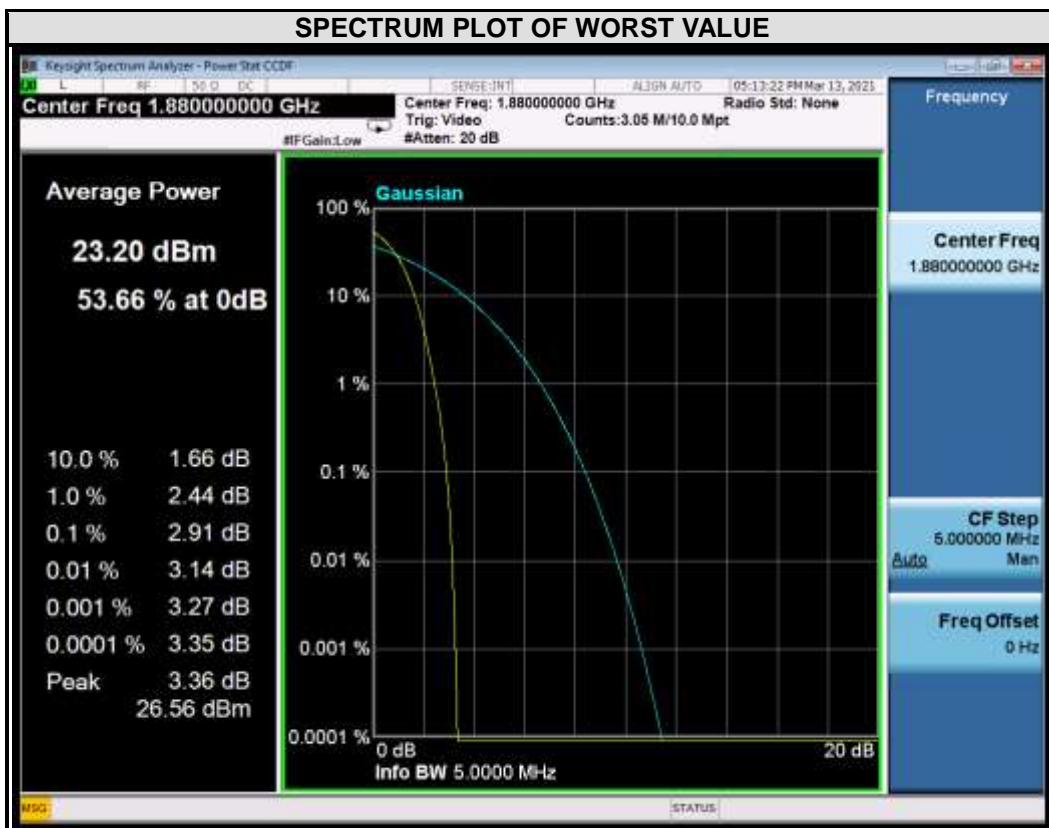






Test Report No.: RFA210218W001-3


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9538	1907.6	2.80

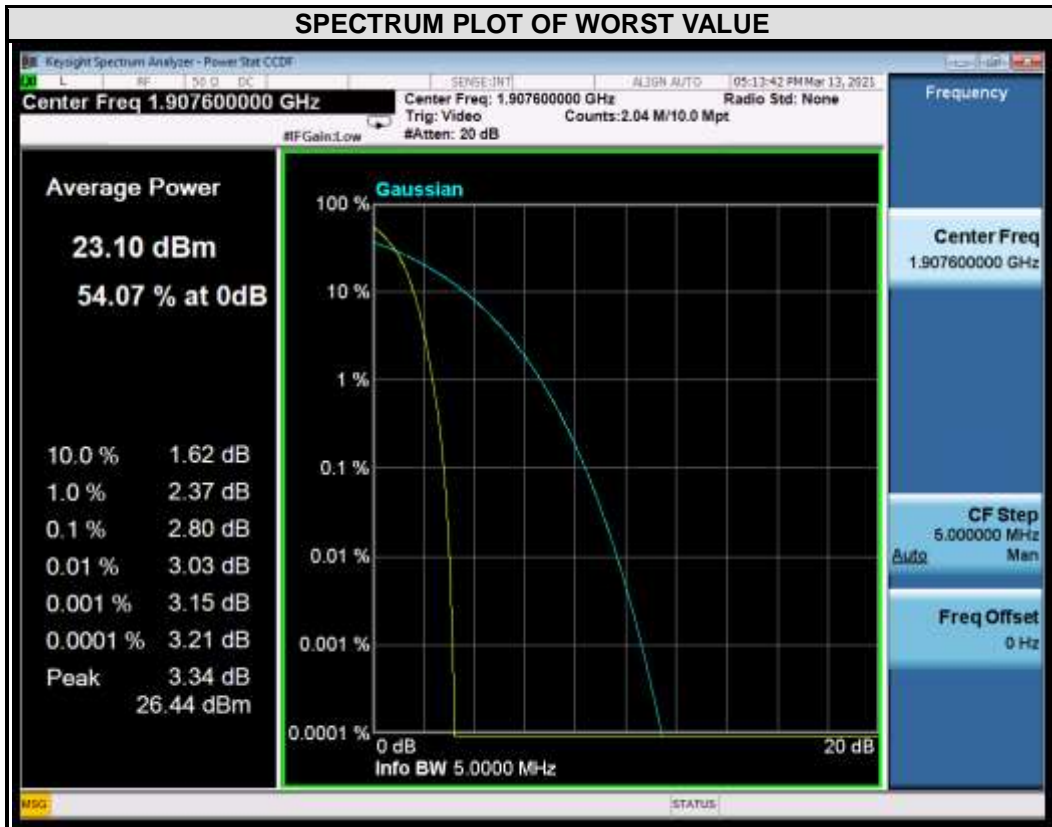




LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
18607	1850.7	5.26	6.14	/
18900	1880	5.30	6.03	/
19193	1909.3	5.00	5.79	/

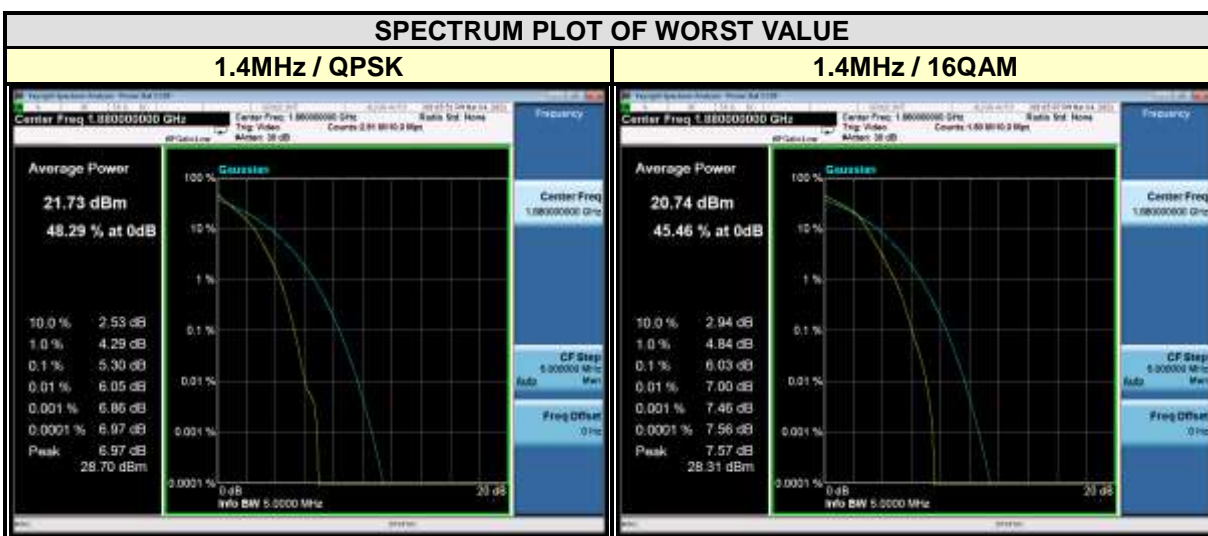




CHANNEL BANDWIDTH: 3MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
18615	1851.5	5.32	6.11	/
18900	1880	5.39	6.19	/
19185	1908.5	5.08	5.94	/

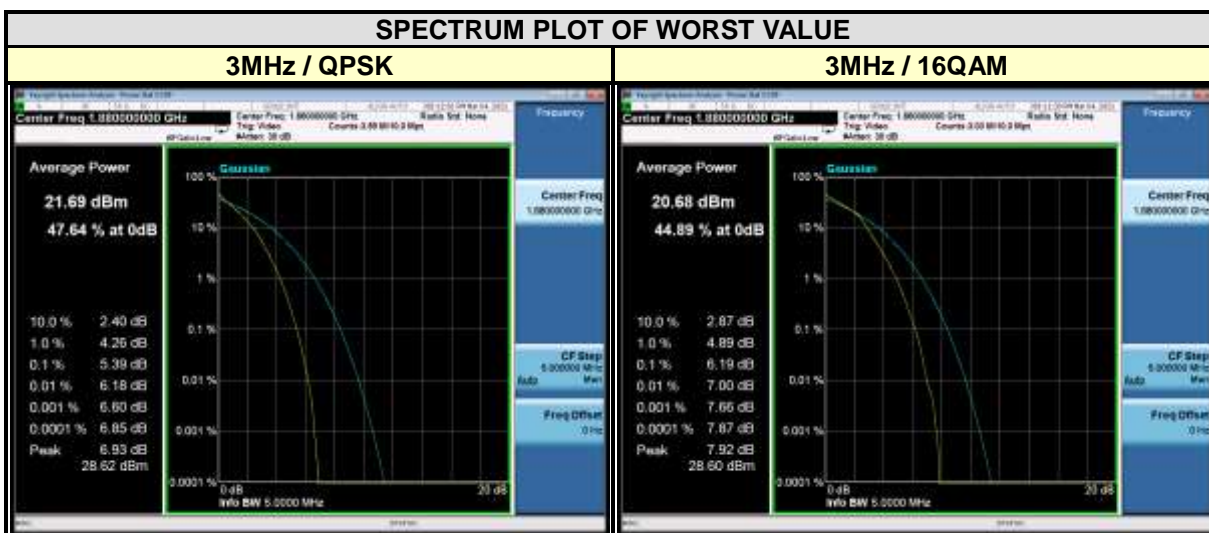




CHANNEL BANDWIDTH: 5MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
18625	1852.5	5.54	6.17	/
18900	1880	5.54	6.15	/
19175	1907.5	5.29	5.99	/

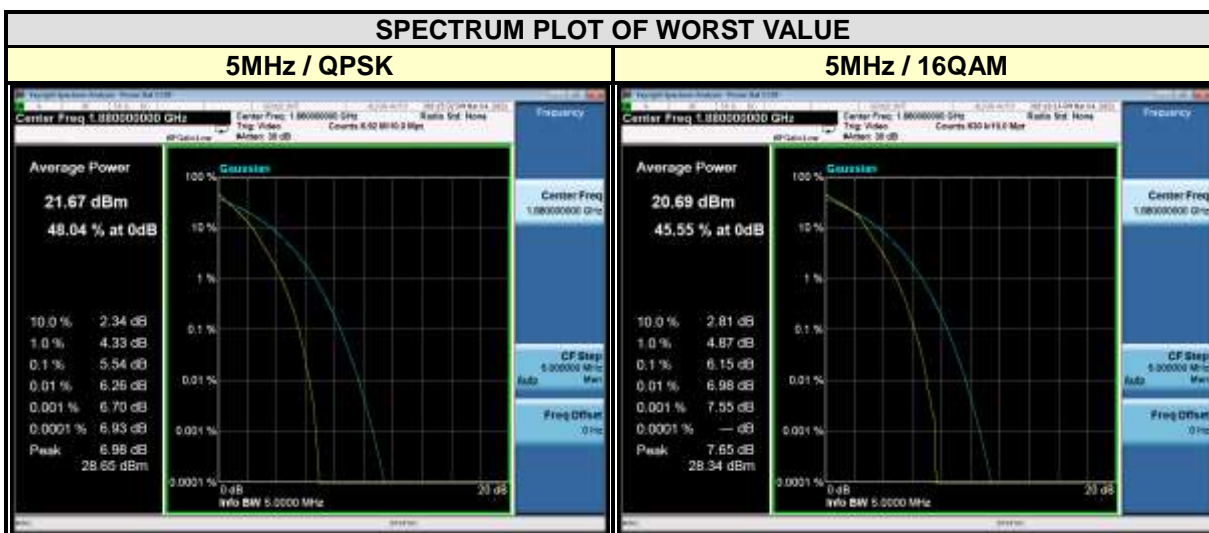




CHANNEL BANDWIDTH: 10MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
18650	1855	5.36	6.13	/
18900	1880	5.38	6.11	/
19150	1905	5.16	5.98	/

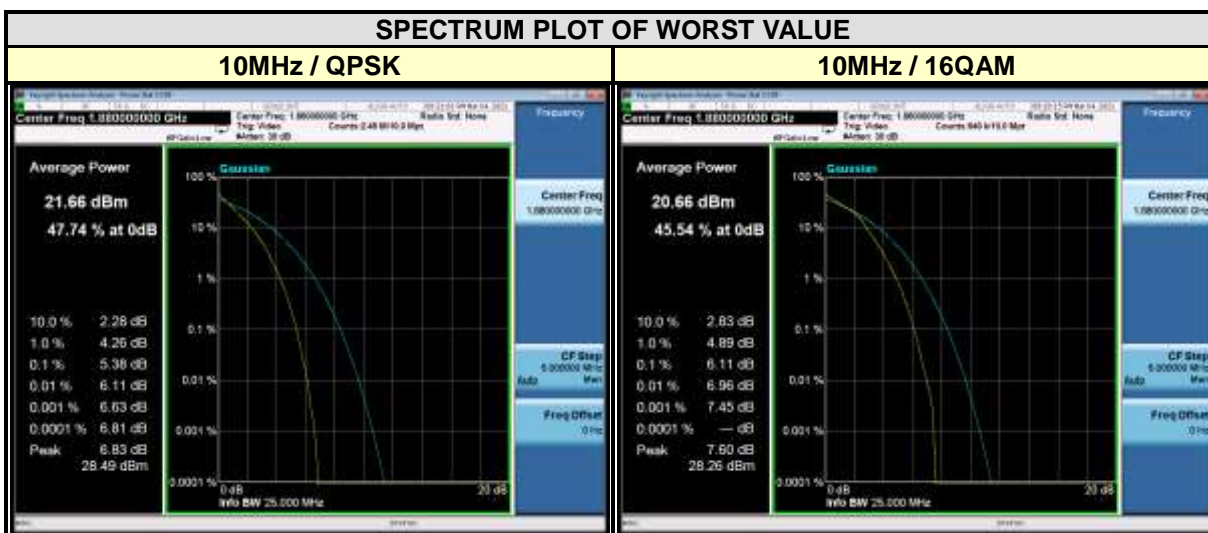




CHANNEL BANDWIDTH: 15MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
18675	1857.5	5.72	6.23	/
18900	1880	5.74	6.25	/
19125	1902.5	5.56	6.15	/

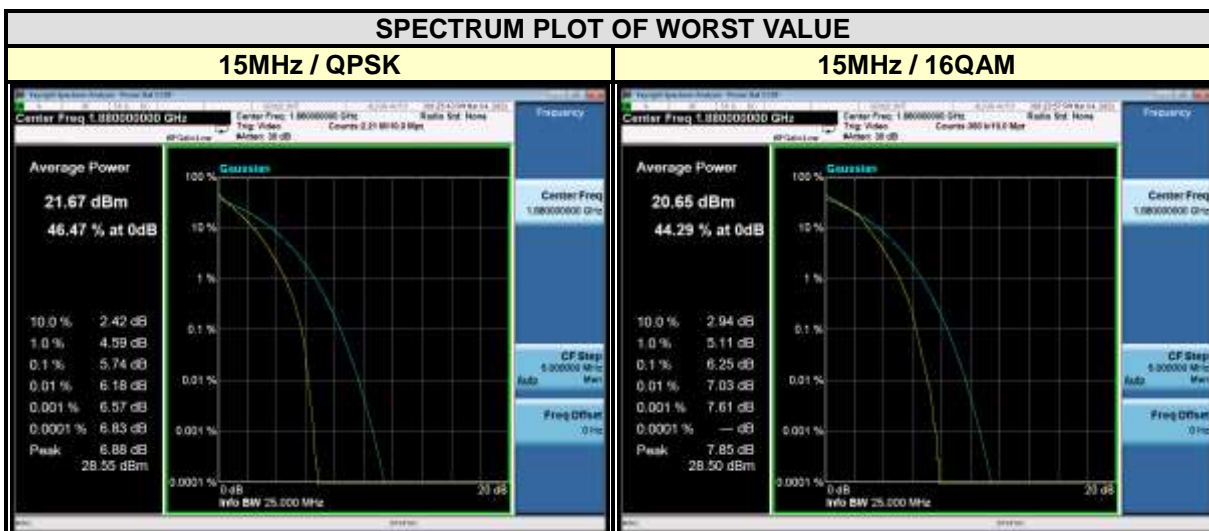



CHANNEL BANDWIDTH: 20MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
18700	1860	5.52	6.22	/
18900	1880	5.49	6.23	/
19100	1900	5.51	6.17	/

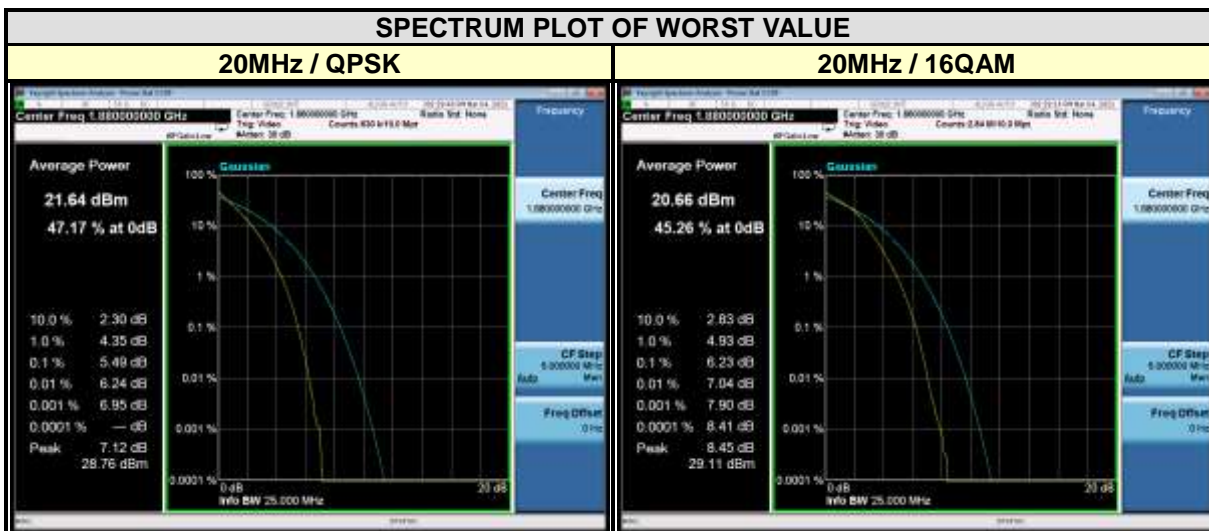



Test Report No.: RFA210218W001-3

## 4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Shenzhen EMC/RF Lab:**

Tel: +86-755-88696566

Fax: +86-755-88696577

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## 5 APPENDIX A – MODIFICATIONS RECORDERS FOR





Test Report No.: RFA210218W001-3

## ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---