

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client JWIT (Auden)

## CALIBRATION CERTIFICATE

Object(s) D2450V2 - SN:731

Calibration procedure(s) QA CAL-05.v2  
 Calibration procedure for dipole validation kits

Calibration date: May 21, 2003

Condition of the calibrated item: In Tolerance (according to the specific calibration document)


This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

| Model Type                | ID #        | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|---------------------------|-------------|---|------------------------|
| RF generator R&S SML-03   | 100698      | 27-Mar-2002 (R&S, No. 20-92389)           | In house check: Mar-05 |
| Power sensor HP 8481A     | MY41092317  | 18-Oct-02 (Agilent, No. 20021018)         | Oct-04                 |
| Power sensor HP 8481A     | US937292783 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Power meter EPM E442      | GB37480704  | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Network Analyzer HP 8753E | US384332426 | 3-May-00 (Agilent, No. 8702K084602)       | In house check: May 03 |

Calibrated by: Name: Judith Mueller Function: Technician Signature: 

Approved by: Name: Katja Polcová Function: Laboratory Director Signature: 

Date issued: May 21, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Schmid & Partner Engineering AG

**s p e a g**

Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, <http://www.speag.com>

# DASY

## Dipole Validation Kit

Type: D2450V2

Serial: 731

Manufactured: May 7, 2003

Calibrated: May 21, 2003

### 1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **head simulating solution** of the following electrical parameters at 2450 MHz:

|                        |            |      |
|------------------------|------------|------|
| Relative Dielectricity | 37.5       | ± 5% |
| Conductivity           | 1.89 mho/m | ± 5% |

The DASY4 System with a dosimetric E-field probe ES3DV2 (SN:3013, Conversion factor 4.8 at 2450 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. Lossless spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was  $250\text{mW} \pm 3\%$ . The results are normalized to 1W input power.

### 2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ES3DV2 SN:3013 and applying the advanced extrapolation are:

averaged over  $1\text{ cm}^3$  (1 g) of tissue:  $55.2\text{ mW/g} \pm 16.8\% \text{ (k=2)}$ <sup>1</sup>

averaged over  $10\text{ cm}^3$  (10 g) of tissue:  $24.5\text{ mW/g} \pm 16.2\% \text{ (k=2)}$ <sup>1</sup>

---

<sup>1</sup> validation uncertainty

### 3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

|                      |          |                                       |
|----------------------|----------|---------------------------------------|
| Electrical delay:    | 1.150 ns | (one direction)                       |
| Transmission factor: | 0.990    | (voltage transmission, one direction) |

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 2450 MHz:  $\text{Re}\{Z\} = 52.9 \Omega$

$\text{Im}\{Z\} = 3.9 \Omega$

Return Loss at 2450 MHz  $-26.4 \text{ dB}$

### 4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with body simulating solution of the following electrical parameters at 2450 MHz:

|                        |            |           |
|------------------------|------------|-----------|
| Relative Dielectricity | 50.5       | $\pm 5\%$ |
| Conductivity           | 1.97 mho/m | $\pm 5\%$ |

The DASY4 System with a dosimetric E-field probe ES3DV2 (SN:3013, Conversion factor 4.2 at 2450 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. Lossless spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was  $250\text{mW} \pm 3\%$ . The results are normalized to 1W input power.

### 5. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ES3DV2 SN:3013 and applying the advanced extrapolation are:

averaged over 1 cm<sup>3</sup> (1 g) of tissue: 53.2 mW/g ± 16.8 % (k=2)<sup>2</sup>

averaged over 10 cm<sup>3</sup> (10 g) of tissue: 24.3 mW/g ± 16.2 % (k=2)<sup>2</sup>

### 6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 2450 MHz:  $\text{Re}\{Z\} = 49.1 \Omega$

$\text{Im}\{Z\} = 5.0 \Omega$

Return Loss at 2450 MHz: -25.7 dB

### 7. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

### 8. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Small end caps have been added to the dipole arms in order to improve matching when loaded according to the position as explained in Sections 1 and 4. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

### 9. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

<sup>2</sup> validation uncertainty

Date/Time: 05/19/03 14:30:09

Test Laboratory: SPEAG, Zurich, Switzerland  
 File Name: SN731\_SN3013\_HSL2450\_190503.da4

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN731  
 Program: Dipole Calibration

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: HSL 2450 MHz ( $\sigma = 1.89 \text{ mho/m}$ ,  $\epsilon_r = 37.52$ ,  $\rho = 1000 \text{ kg/m}^3$ )


Phantom section: Flat Section  
 Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ES3DV2 - SN3013; ConvF(4.8, 4.8, 4.8); Calibrated: 1/19/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1); Measurement grid: dx=15mm, dy=15mm  
 Reference Value = 91 V/m  
 Power Drift = -0.003 dB  
 Maximum value of SAR = 15.1 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Peak SAR (extrapolated) = 30.3 W/kg  
 SAR(1 g) = 13.8 mW/g; SAR(10 g) = 6.13 mW/g  
 Reference Value = 91 V/m  
 Power Drift = -0.003 dB  
 Maximum value of SAR = 15.3 mW/g

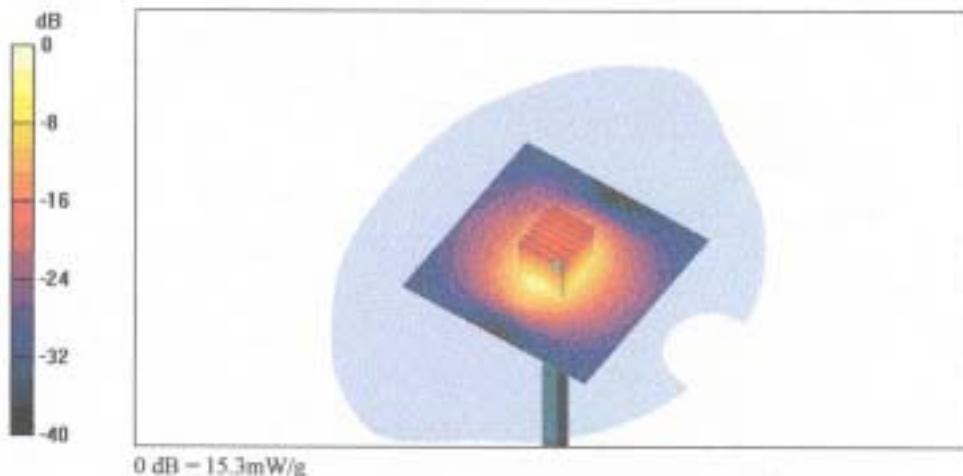

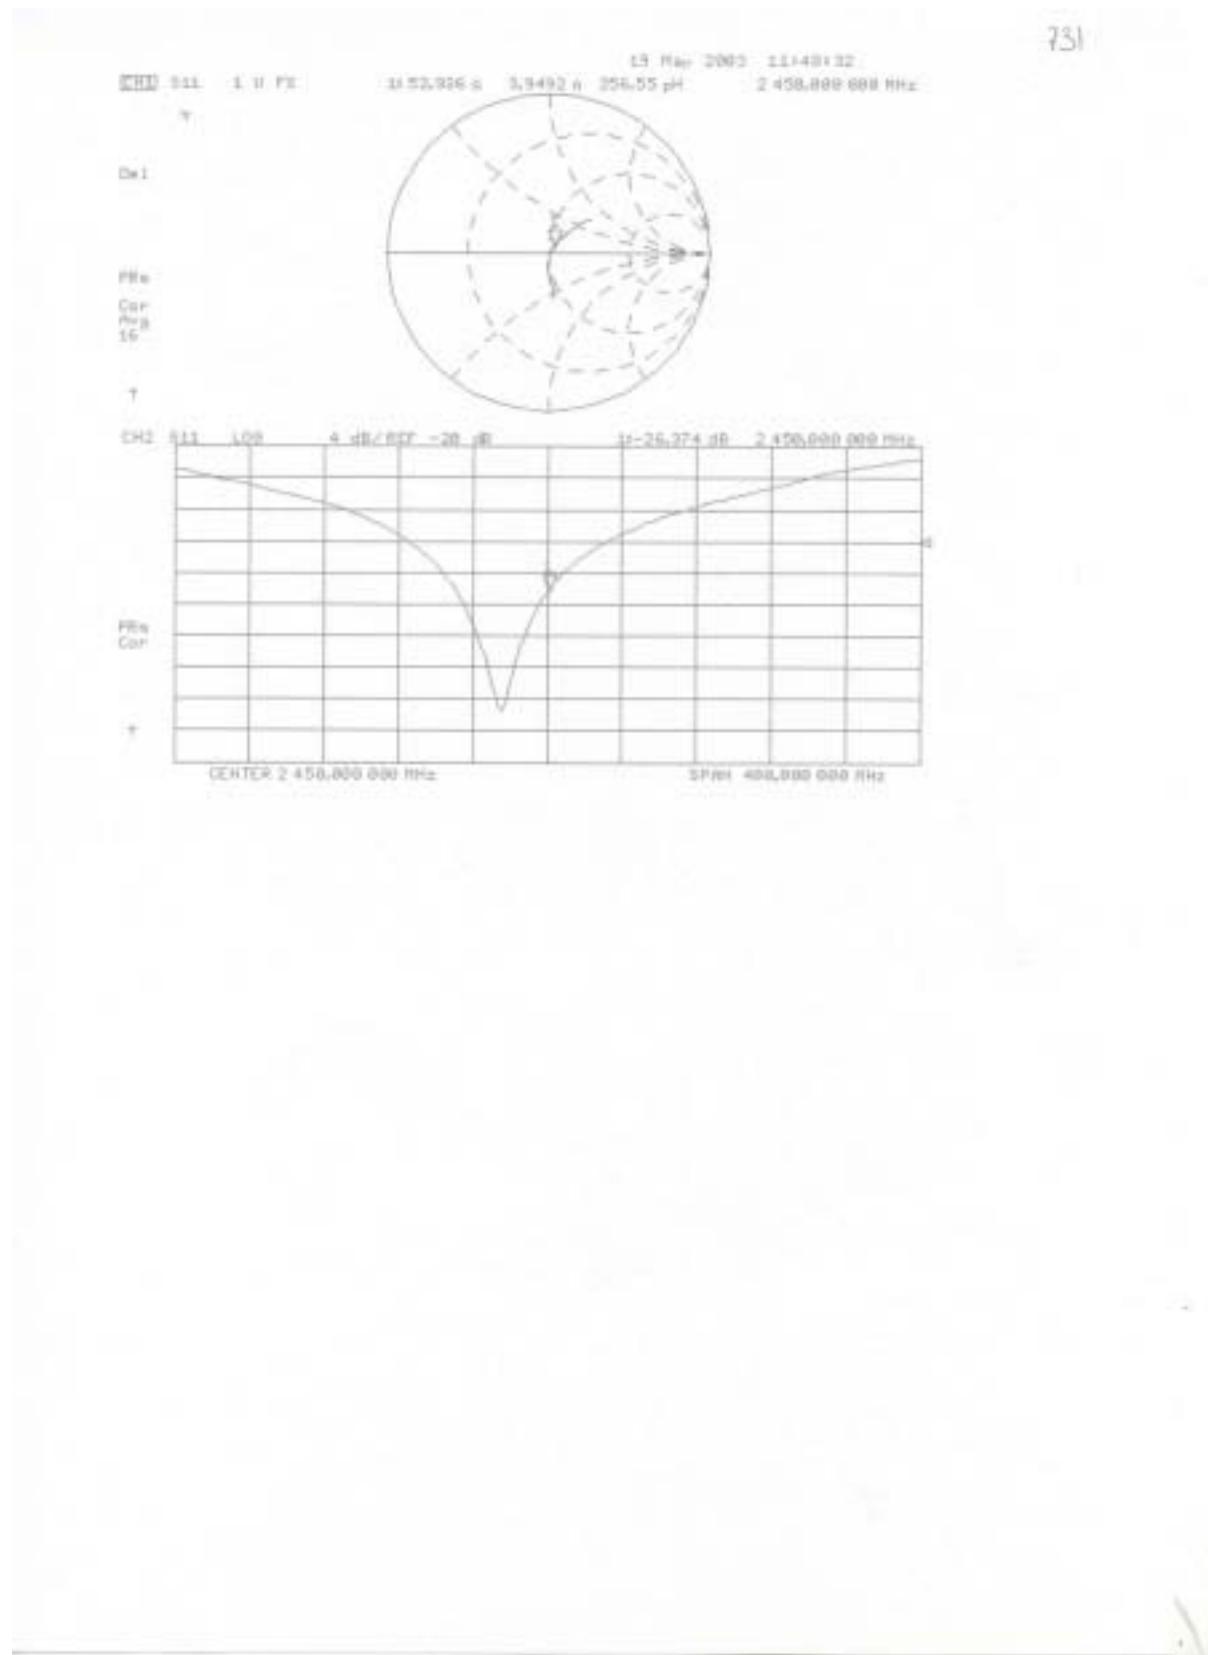

Date/Time: 05/21/03 11:32:43

Test Laboratory: SPEAG, Zurich, Switzerland  
File Name: SN731\_SN3013\_M2450\_210503.da4

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN731  
Program: Dipole Calibration

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: Muscle 2450 MHz ( $\sigma = 1.97 \text{ mho/m}$ ,  $\epsilon_r = 50.47$ ,  $\rho = 1000 \text{ kg/m}^3$ )


Phantom section: Flat Section  
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3013; ConvF(4.2, 4.2, 4.2); Calibrated: 1/19/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP-1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1); Measurement grid: dx=15mm, dy=15mm  
Reference Value = 89.5 V/m  
Power Drift = 0.06 dB  
Maximum value of SAR = 14.8 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0; Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Peak SAR (extrapolated) = 26.6 W/kg  
SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.08 mW/g  
Reference Value = 89.5 V/m  
Power Drift = 0.06 dB  
Maximum value of SAR = 14.9 mW/g

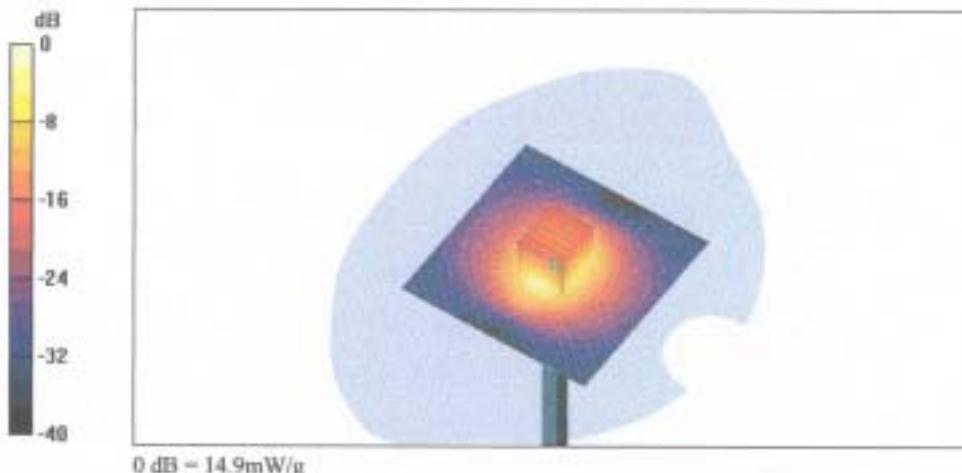

731

Body

