

Dipole 835 MHz

SAM TP1019 Phantom; Flat Section; Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1608; ConvF(6.62,6.62,6.62); Crest factor: 1.0; Brain 835 MHz: $\sigma = 0.90$ mho/m $\epsilon_r = 41.1$ $\rho = 1.00$ g/cm³

Cubes (2): SAR (1g): 2.58 mW/g ± 0.02 dB, SAR (10g): 1.63 mW/g ± 0.02 dB,

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.01 dB


Comment :

835 MHz Brain

Dipole Validation (D835V2 / S.N: 441)

Antenna Input Power: 250 [mW]

HCT Co., Ltd. Brain Tissue Simulating Liquid

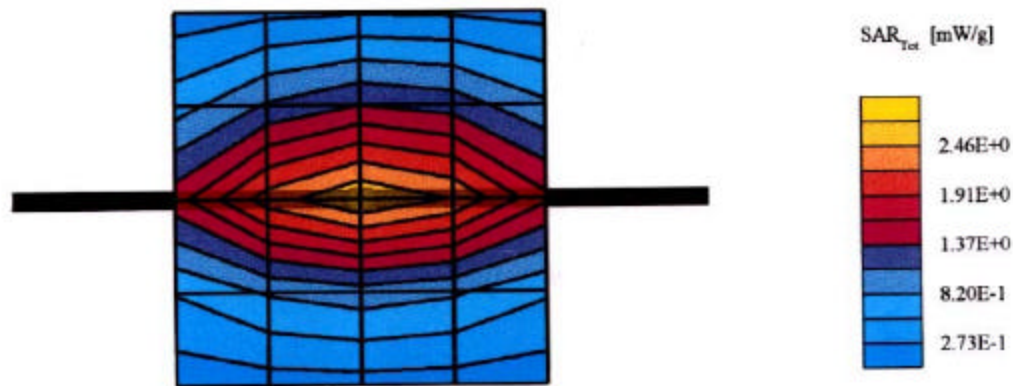

Dipole 835 MHz

SAM TP1019 Phantom; Flat Section; Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1608; ConvF(6.62,6.62,6.62); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.98$ mho/m $\epsilon_r = 54.4$ $\rho = 1.00$ g/cm³

Cubes (2): SAR (1g): 2.52 mW/g ± 0.02 dB, SAR (10g): 1.61 mW/g ± 0.03 dB,

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.01 dB


Comment :

835 MHz Muscle

Dipole Validation (D835V2 / S.N: 441)

Antenna Input Power: 250 [mW]

HCT Co., Ltd. Muscle Tissue Simulating Liquid

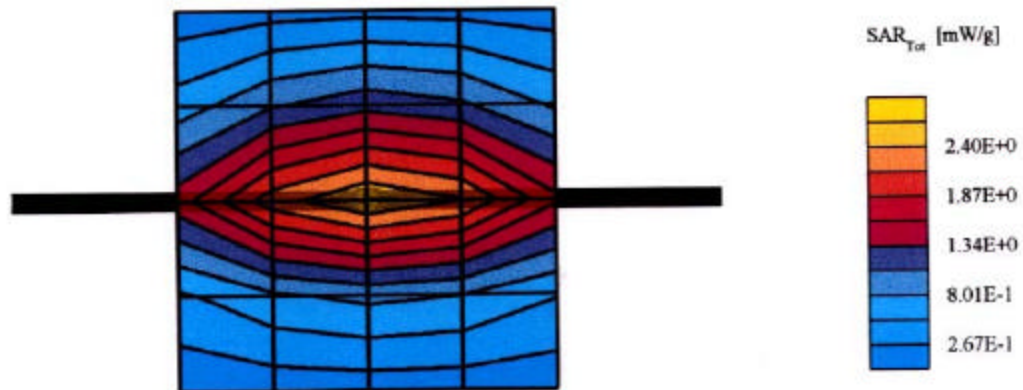

APPENDIX E – PROBE CALIBRATION DATA

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1608

Place of Calibration:

Zurich

Date of Calibration:

August 10, 2001

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

M. dos Reis

Approved by:

W. K. Kim

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Telephone +41 1 245 97 00, Fax +41 1 245 97 79

Probe ET3DV6

SN:1608

Manufactured: July 27, 2001
Calibrated: August 10, 2001

Calibrated for System DASY3

ET3DV6 SN:1608

DASY3 - Parameters of Probe: ET3DV6 SN:1608**Sensitivity in Free Space****Diode Compression**

NormX	1.70 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	97 mV
NormY	1.51 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	97 mV
NormZ	1.79 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	97 mV

Sensitivity in Tissue Simulating Liquid


Head	450 MHz	$\epsilon_r = 43.5 \pm 5\%$	$\sigma = 0.87 \pm 10\%$ mho/m
ConvF X	7.13 extrapolated	Boundary effect:	
ConvF Y	7.13 extrapolated	Alpha	0.21
ConvF Z	7.13 extrapolated	Depth	3.07
Head	900 MHz	$\epsilon_r = 42 \pm 5\%$	$\sigma = 0.97 \pm 10\%$ mho/m
ConvF X	6.62 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	6.62 $\pm 7\%$ (k=2)	Alpha	0.29
ConvF Z	6.62 $\pm 7\%$ (k=2)	Depth	2.81
Head	1500 MHz	$\epsilon_r = 40.4 \pm 5\%$	$\sigma = 1.23 \pm 10\%$ mho/m
ConvF X	5.94 interpolated	Boundary effect:	
ConvF Y	5.94 interpolated	Alpha	0.41
ConvF Z	5.94 interpolated	Depth	2.46
Head	1800 MHz	$\epsilon_r = 40 \pm 5\%$	$\sigma = 1.40 \pm 10\%$ mho/m
ConvF X	5.60 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	5.60 $\pm 7\%$ (k=2)	Alpha	0.46
ConvF Z	5.60 $\pm 7\%$ (k=2)	Depth	2.29

Sensor Offset


Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.4 $\pm$ 0.2	mm

ET3DV6 SN:1608


Receiving Pattern (ϕ), $\theta = 0^\circ$

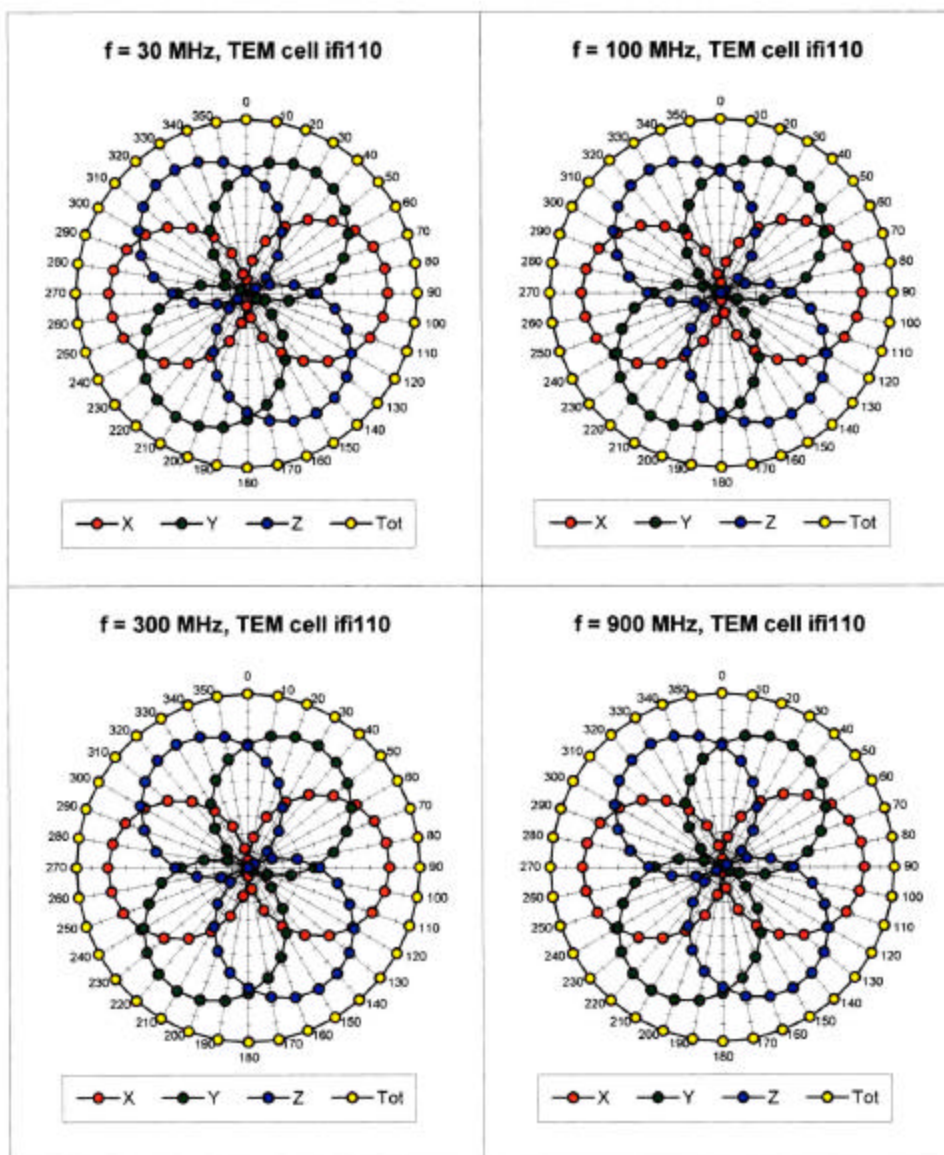

ET3DV6 SN:1608

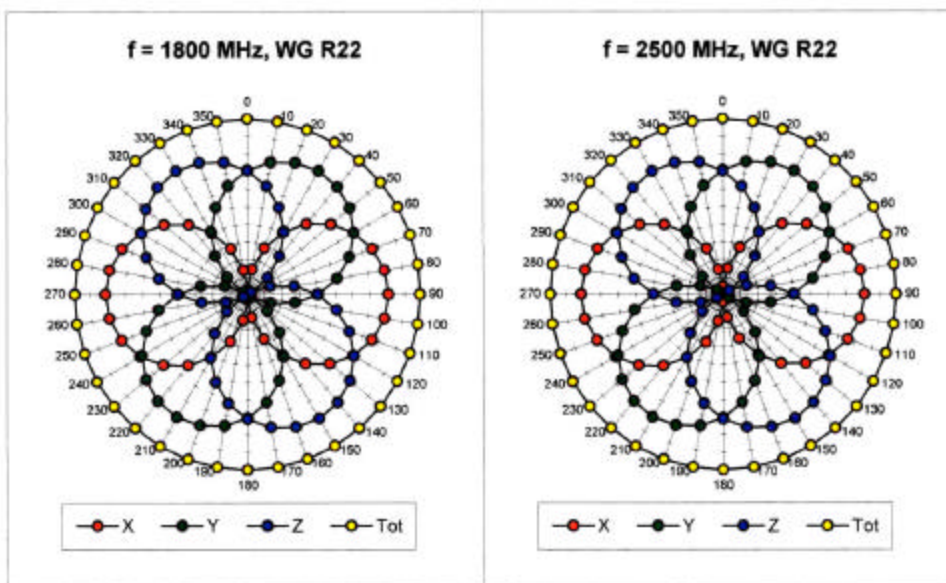


Isotropy Error (ϕ), $\theta = 0^\circ$

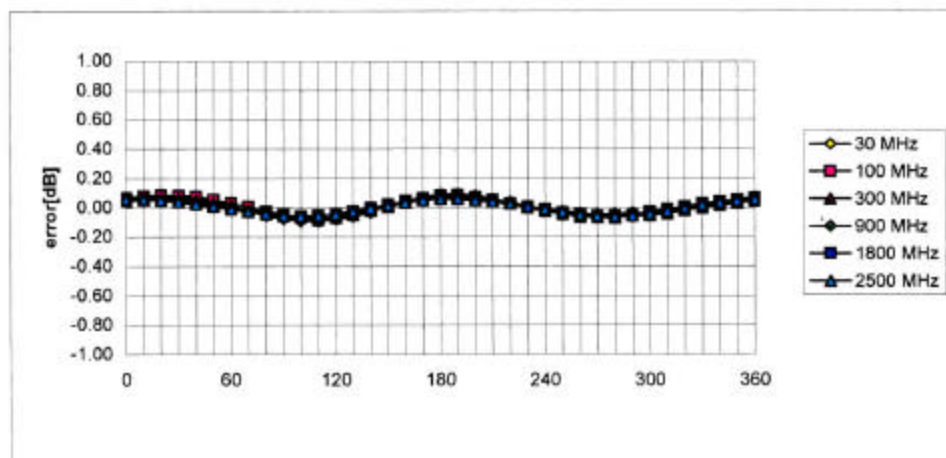

ET3DV6 SN:1608



Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)

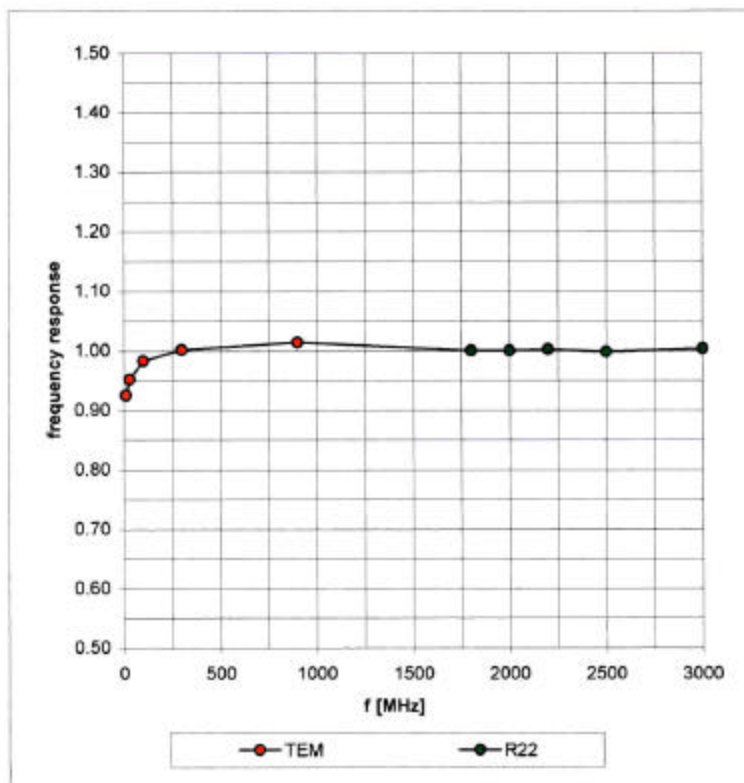


ET3DV6 SN:1608

Dynamic Range f(SAR_{brain}) (Waveguide R22)

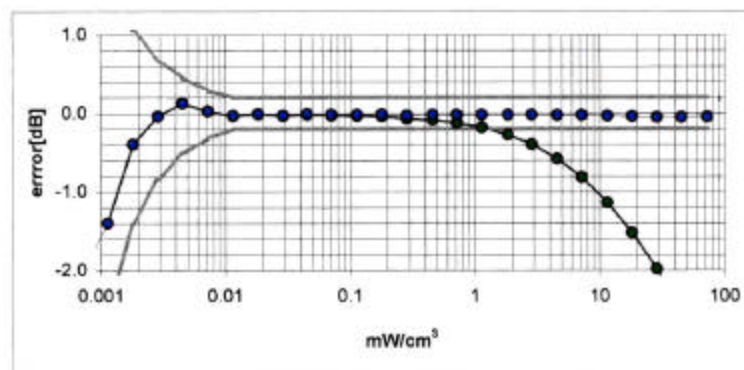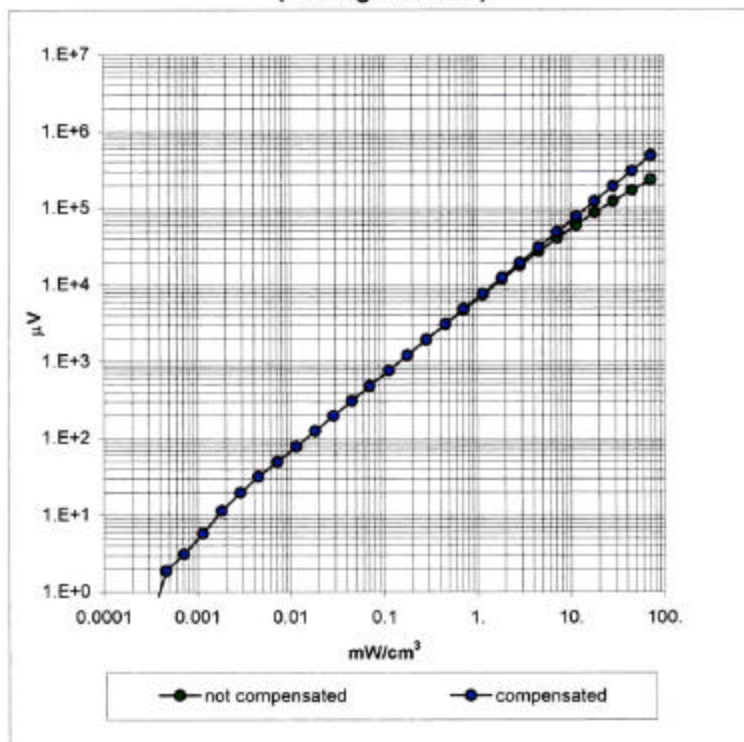

ET3DV6 SN:1608

Conversion Factor Assessment

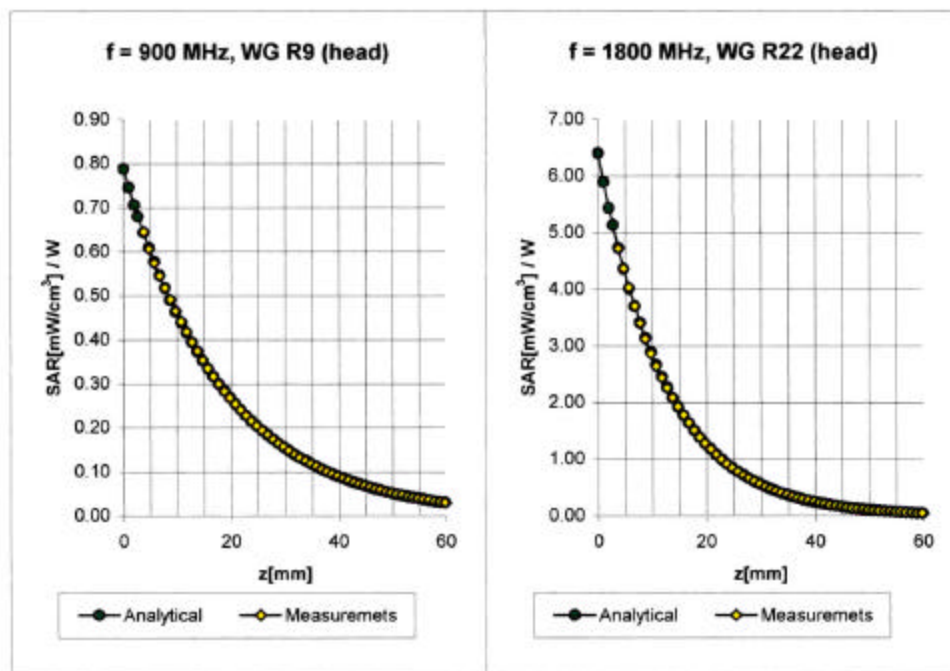

Head 900 MHz $\epsilon_r = 42 \pm 5\%$ $\sigma = 0.97 \pm 10\%$ mho/m


ConvF X	6.62 $\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	6.62 $\pm 7\%$ (k=2)	Alpha 0.29
ConvF Z	6.62 $\pm 7\%$ (k=2)	Depth 2.81

Head 1800 MHz $\epsilon_r = 40 \pm 5\%$ $\sigma = 1.40 \pm 10\%$ mho/m

ConvF X	5.60 $\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	5.60 $\pm 7\%$ (k=2)	Alpha 0.46
ConvF Z	5.60 $\pm 7\%$ (k=2)	Depth 2.29

ET3DV6 SN:1608

Deviation from Isotropy in HSL

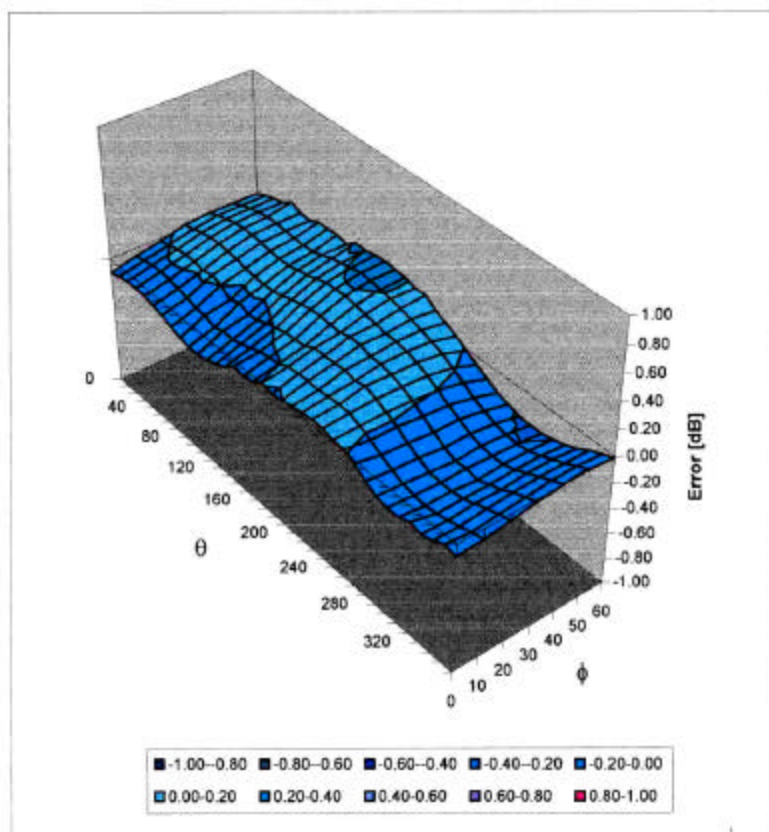Error (θ, ϕ), $f = 900$ MHz

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Additional Conversion Factors for Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1608

Place of Assessment:

Zurich

Date of Assessment:


February 25, 2002

Probe Calibration Date:

August 10, 2001

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



Dosimetric E-Field Probe ET3DV6 SN:1608Conversion factor ($\pm$ standard deviation)**450 MHz** ConvF **$7.7 \pm 8\%$** $\epsilon_r = 56.7$
 $\sigma = 0.94 \text{ mho/m}$
(body tissue)**835 MHz** ConvF **$6.5 \pm 8\%$** $\epsilon_r = 55.2$
 $\sigma = 0.97 \text{ mho/m}$
(body tissue)**1800 MHz** ConvF **$5.2 \pm 8\%$** $\epsilon_r = 53.3$
 $\sigma = 1.52 \text{ mho/m}$
(body tissue)

APPENDIX F – DIPOLE CALIBRATION DATA

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

835 MHz System Validation Dipole

Type:

D835V2

Serial Number:

441

Place of Calibration:

Zurich

Date of Calibration:

August 3, 2001


Calibration Interval:

24 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:



**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

DASY

Dipole Validation Kit

Type: D835V2

Serial: 441

Manufactured: March 9, 2001
Calibrated: August 3, 2001

1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating solution of the following electrical parameters at 835 MHz:

Relative Dielectricity	41.0	± 5%
Conductivity	0.89 mho/m	± 5%

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.27 at 900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

2. SAR Measurement

Standard SAR-measurements were performed with the phantom according to the measurement conditions described in section 1. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm ³ (1 g) of tissue:	10.64 mW/g
averaged over 10 cm ³ (10 g) of tissue:	6.80 mW/g

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well.

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.390 ns** (one direction)
Transmission factor: **0.996** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 835 MHz: $\text{Re}\{Z\} = 50.0 \, \Omega$


$$\text{Im} \{Z\} = -5.4 \, \Omega$$
Return Loss at 835 MHz **-25.4 dB**

4. Handling

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Do not apply excessive force to the dipole arms, because they might bend. If the dipole arms have to be bent back, take care to release stress to the soldered connections near the feedpoint; they might come off.

After prolonged use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

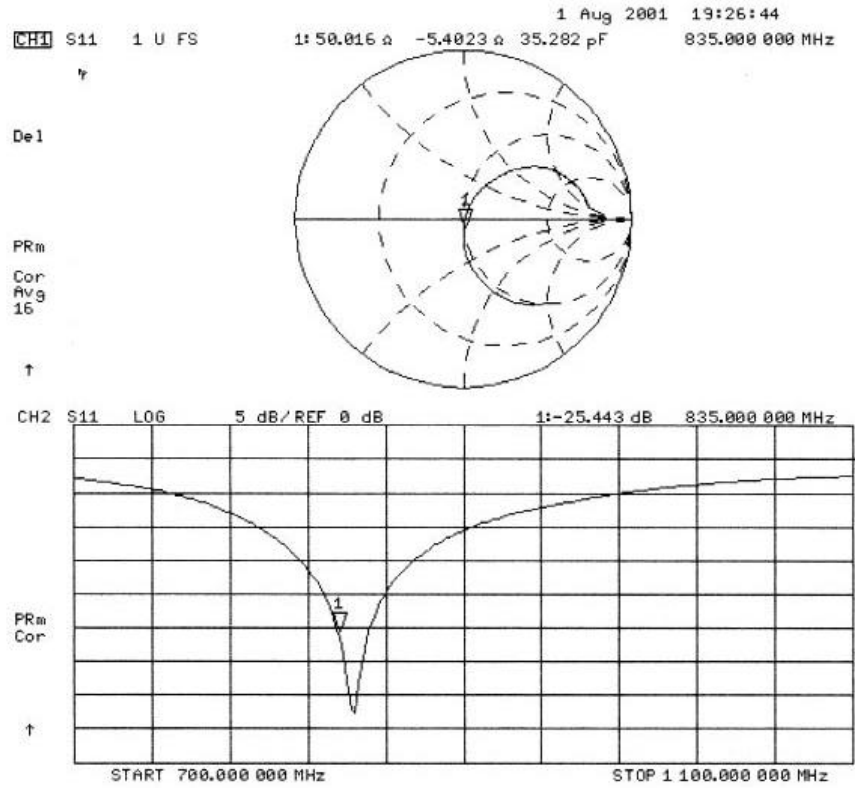

08/01/01

Validation Dipole D835V2 SN:441, d = 15 mm

Frequency: 835 MHz; Antenna Input Power: 250 [mW]
 SAM Phantom; Flat - SAM Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Probe: ET3DV6 - SN1507; ConvF(6,27,6,27) at 900 MHz; IEEE1528 835 MHz; $\sigma = 0.89$ mho/m $\epsilon_r = 41.0$ $\rho = 1.00$ g/cm³
 Cubes (2): Peak: 4.25 mW/g ± 0.03 dB, SAR (1g): 2.66 mW/g ± 0.03 dB, SAR (10g): 1.70 mW/g ± 0.03 dB, (Worst-case extrapolation)
 Penetration depth: 12.0 (10.6, 13.6) [mm]
 Powerdrift: -0.00 dB



Schmid & Partner Engineering AG, Zurich, Switzerland