Shenzhen Xiangboyi Technology Co. Ltd

Antenna Specification

Customer	SunBoBoDigital Co.Ltd
M/N	**E90A12SANT**
Project NO	XBY210643

Date：2023/7/18

Shenzhen Xiangboyi Technology Co. Ltd
Tel: (+86)0755-29369912 Fax: (+86)0755-61624200
R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.
Production Base: 5 / F, building B, Huazhi chuanggu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.

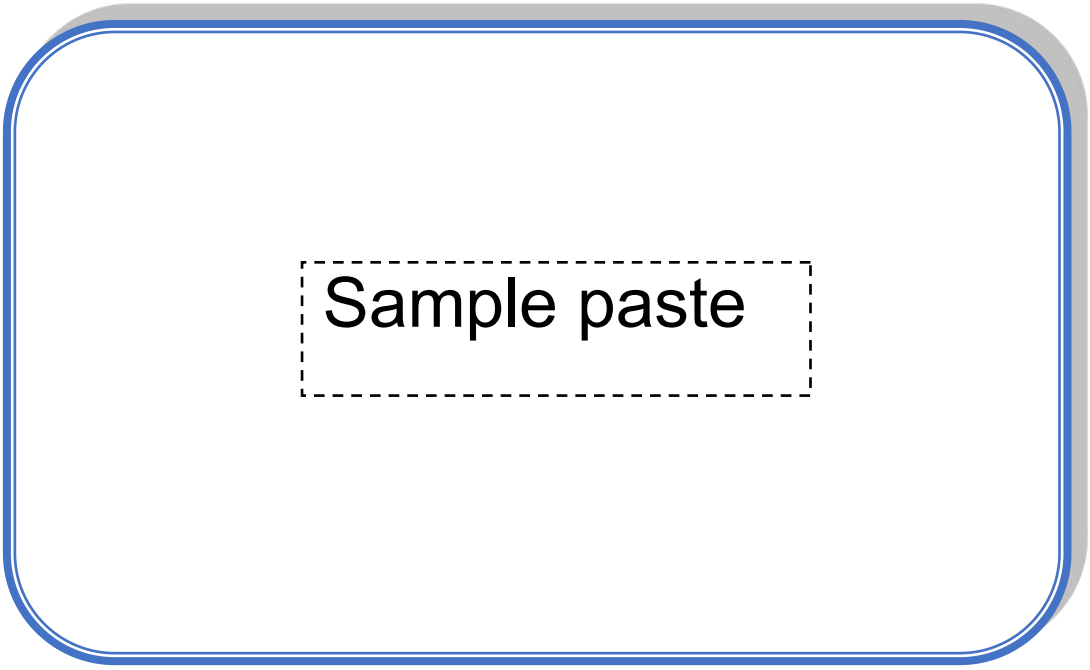

Customer confirmation			
Engineer	**PM**	**Quality**	**Approval**

Supplier confirmation			
ME	**RF**	**Examine**	**Approval**

Shenzhen Xiangboyi Technology Co. Ltd
Tel: (+86)0755-29369912 Fax: (+86)0755-61624200
R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.
Production Base: 5 / F, building B, Huazhi chuanggu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.

Catalogue

Shenzhen Xiangboyi Technology Co. Ltd
Tel: (+86)0755-29369912 Fax: (+86)0755-61624200
R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.
Production Base: 5 / F, building B, Huazhi chuanggu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.

1 Test System and Equipment

	Test items	equipment
1：S parameter	1. Return loss 2. VSWR	Network analyzer: A338/A333/HP8753D
2：Active test	1. Transmitting power 2. Receiving sensitivity	Comprehensive test instrument: Agilent 8960/ CMW500
3： Radiation mode and gain	1. Radiation mode 2. Gain	1. Shielding room： 7x4x3 m (ETS-3D) 2. Network analyzer： HP 8753D

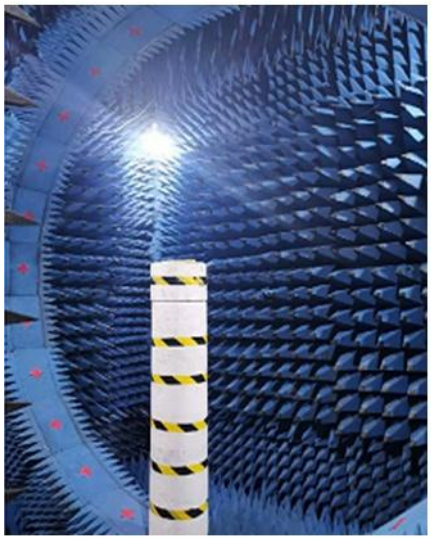
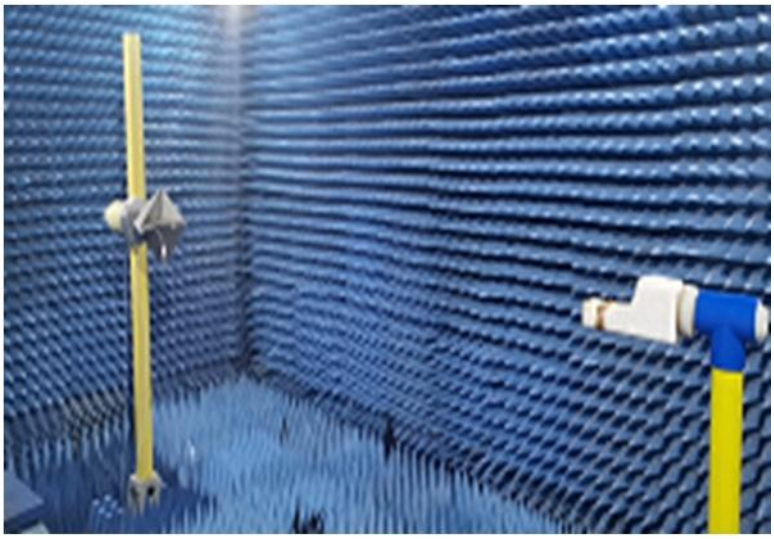


Shenzhen Xiangboyi Technology Co. Ltd
Tel: (+86)0755-29369912 Fax: (+86)0755-61624200
R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.
Production Base: 5 / F, building B, Huazhi chuanggu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.

2 Product Description

Technical requirements	Technical index	Remarks
Band	WIFI:5G	
Range Of Frequency	5180-5850Mhz	
VSWR	5180-5850Mhz<2.0	Center Frequency
Impendance	50Ω	
Polarization	Linear polarization	
operating temperature	-32℃ / +55℃	
storage temperature	-55℃ / +85℃	
Salt Fog	24h(24h alterning wet & dry)	
RoHS Compliant	yes	

3 Device Description

The whole machine photo

Not available

Antenna photo

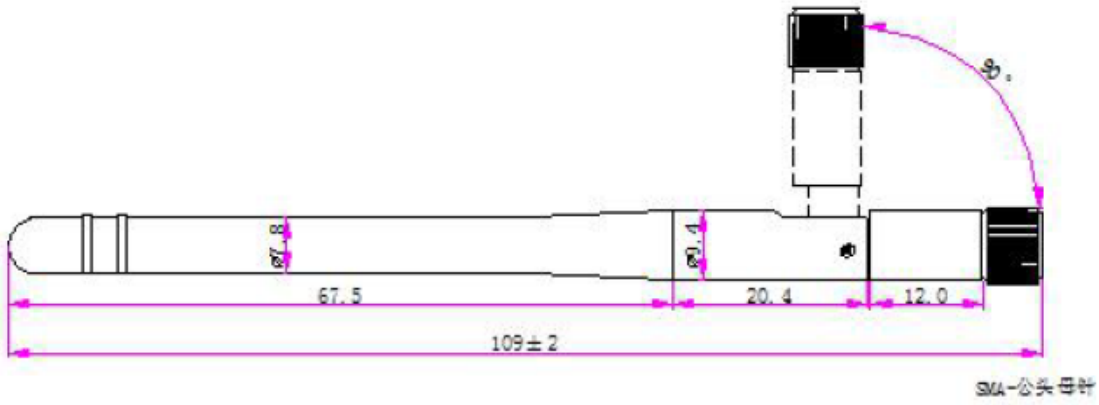

Shenzhen Xiangboyi Technology Co. Ltd
Tel: (+86)0755-29369912 Fax: (+86)0755-61624200
R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.
Production Base: 5 / F, building B, Huazhi chuanggu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.

4 Matching Circuits

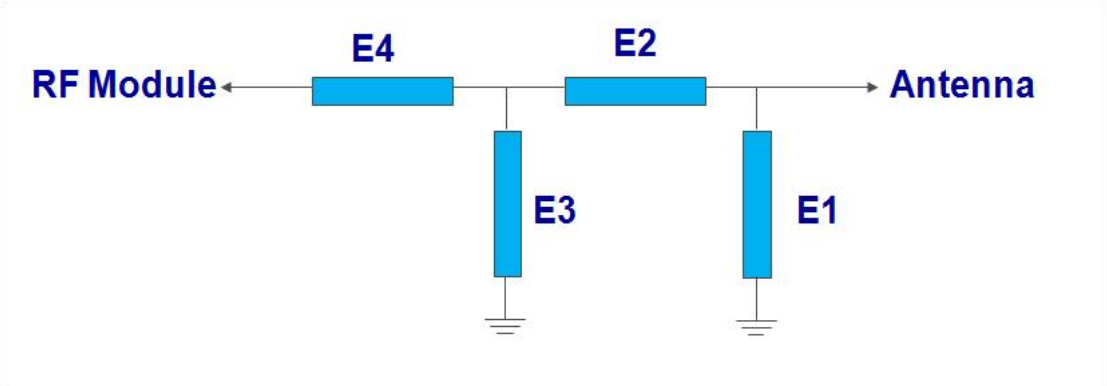

Element	Value	Vender
E1(0402)	NA	
E2(0402)	0Ω	
E3(0402)	NA	
E4(0402)	0Ω	

Original match unchanged.

Shenzhen Xiangboyi Technology Co. Ltd
Tel: (+86)0755-29369912 Fax: (+86)0755-61624200
R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.
Production Base: 5 / F, building B, Huazhi chuanggu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.

- **Radiation Patterns – 5150 MHz**

	xy-plane	yz-plane	xz-plane
horizontal			
vertical			

Pol.	Peak	avg.
h	+2.1	-2.4

Pol.	peak	avg.
h	-2.6	-7.7

Pol.	peak	avg.
h	+1.3	-4.0

Pol.	peak	avg.
v	+0.4	-8.5

Pol.	peak	avg.
v	-0.8	-5.0

Pol.	peak	avg.
v	+1.7	-2.4

- **Radiation Patterns – 5500 MHz**

	xy-plane	yz-plane	xz-plane
horizontal			
	Pol. / Peak / avg. h / +3.1 / -3.6	Pol. / peak / avg. h / -1.6 / -7.3	Pol. / peak / avg. h / +2.6 / -4.0
vertical			
	Pol. / peak / avg. v / -0.1 / -8.9	Pol. / peak / avg. v / -0.6 / -4.1	Pol. / peak / avg. v / -0.1 / -3.1

- **Radiation Patterns – 5850 MHz**

	xy-plane	yz-plane	xz-plane
horizontal			
	Pol. / Peak / avg. h / +1.5 / -2.5	Pol. / peak / avg. h / -2.3 / -7.7	Pol. / peak / avg. h / +3.1 / -3.2
vertical			
	Pol. / peak / avg. v / +2.1 / -7.2	Pol. / peak / avg. v / +0.9 / -2.5	Pol. / peak / avg. v / +2.2 / -1.5

- **Radiation Patterns – 5925 MHz**

	xy-plane	yz-plane	xz-plane
horizontal			
vertical			

Pol.	Peak	avg.
h	+1.5	-2.8

Pol.	peak	avg.
h	-1.6	-6.6

Pol.	peak	avg.
h	+2.9	-3.5

Pol.	peak	avg.
v	+1.3	-7.6

Pol.	peak	avg.
v	+1.0	-1.9

Pol.	peak	avg.
v	+1.4	-1.7

- **Antenna Gain Table**

Frequency (MHz)	Peak gain (dBi)
5150	+2.1
5500	+3.1
5850	+3.1
5925	+2.9