


Page 31 of 70

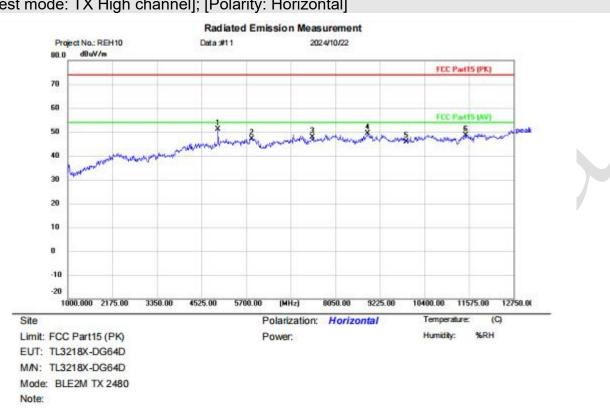

[Test mode: TX High channel]; [Polarity: Horizontal]


| No. | Mk | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | | |
|-----|-----|----------|------------------|-------------------|------------------|--------|--------|----------|---------|--|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment | |
| 1 | • | 4959.750 | 43.79 | 7.41 | 51.20 | 74.00 | -22.80 | peak | | |
| 2 | | 5852.750 | 38.34 | 8.88 | 47.22 | 74.00 | -26.78 | peak | | |
| 3 | - Î | 7440.000 | 36.76 | 11.03 | 47.79 | 74.00 | -26.21 | peak | | |
| 4 | | 8896.000 | 35.90 | 13.48 | 49.38 | 74.00 | -24.62 | peak | | |
| 5 | | 9920.000 | 31.36 | 14.41 | 45.77 | 74.00 | -28.23 | peak | | |
| 6 | - 2 | 11481.00 | 29.27 | 19.37 | 48.64 | 74.00 | -25.36 | peak | | |

Test Result: Pass

Blue Asia of technical Services (Shenzhen) Co., Ltd.



Page 32 of 70

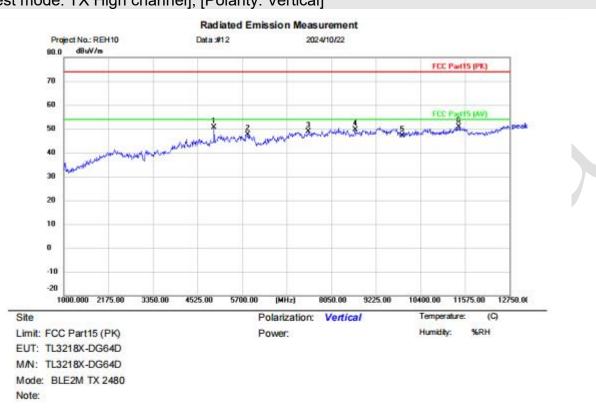

| I | Test mode: | TX Hiah | channel]: | [Polarity | : Verticall |
|---|------------|-----------|-----------|------------|-------------|
| | root modo. | i / tingi | onannoij, | Li Olonity | · voraoaij |

| No. | Mk | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | | |
|-----|------|----------|------------------|-------------------|------------------|--------|--------|----------|---------|--|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment | |
| 1 | 1 | 4959.750 | 43.22 | 7.41 | 50.63 | 74.00 | -23.37 | peak | | |
| 2 | | 5852.750 | 38.64 | 8.88 | 47.52 | 74.00 | -26.48 | peak | | |
| 3 | | 7440.000 | 37.82 | 11.03 | 48.85 | 74.00 | -25.15 | peak | | |
| 4 | - li | 8684.500 | 37.24 | 12.45 | 49.69 | 74.00 | -24.31 | peak | | |
| 5 | | 9920.000 | 32.74 | 14.41 | 47.15 | 74.00 | -26.85 | peak | | |
| 6 | • | 11410.50 | 32.04 | 18.95 | 50.99 | 74.00 | -23.01 | peak | | |

Test Result: Pass

Blue Asia of technical Services (Shenzhen) Co., Ltd.



6.9 Radiated emissions which fall in the restricted bands

| Test Standard | 47 CFR Part 15, Subpart C 15.247 |
|------------------------|-----------------------------------|
| Test Method | ANSI C63.10 (2013) Section 6.10.5 |
| Test Mode (Pre-Scan) | ТХ |
| Test Mode (Final Test) | ТХ |

6.9.1 Limit

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|-------------------------------------|---------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


Blue Asia of Technical Services (Shenzhen) Co., Ltd.



Page 34 of 70

6.9.2 Test setup

Below 1GHz:

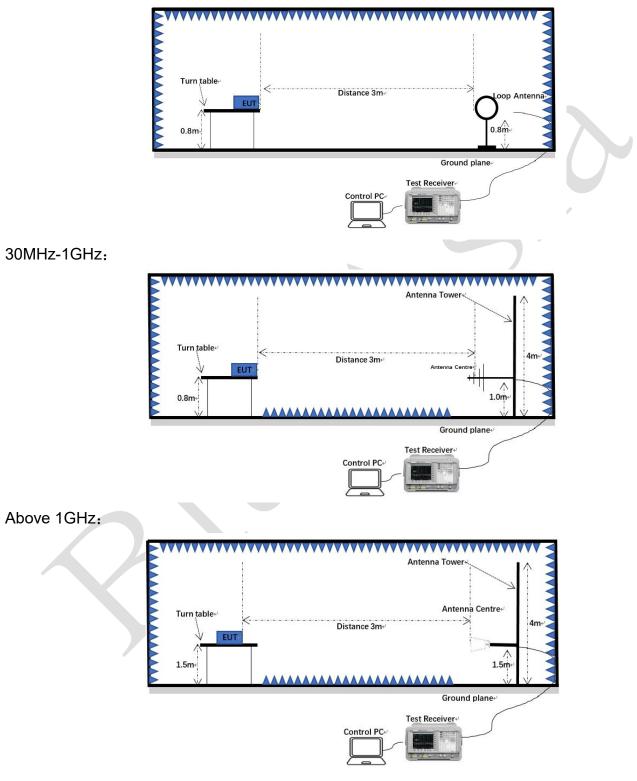

Blue Asia of Technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481 Email: marketing@cblueasia.com www.cblueasia.com



6.9.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Blue Asia of Technical Services (Shenzhen) Co., Ltd.



Page 36 of 70

6.9.4 Test data

Remark: During the test, pre-scan the BLE1M/BLE2M mode, and found the BLE1M mode which it is worse case.

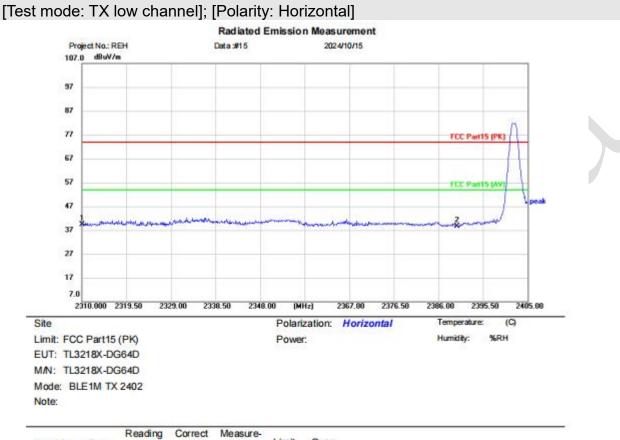


| No. | M | k. Freq. | Level | Factor | ment | Limit | Over | | | |
|-----|---|----------|-------|--------|--------|--------|--------|----------|---------|--|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment | |
| 1 | • | 2310.000 | 42.17 | -2.89 | 39.28 | 74.00 | -34.72 | peak | | |
| 2 | | 2390.000 | 41.33 | -2.70 | 38.63 | 74.00 | -35.37 | peak | | |



Blue Asia of technical Services (Shenzhen) Co., Ltd.



Page 37 of 70

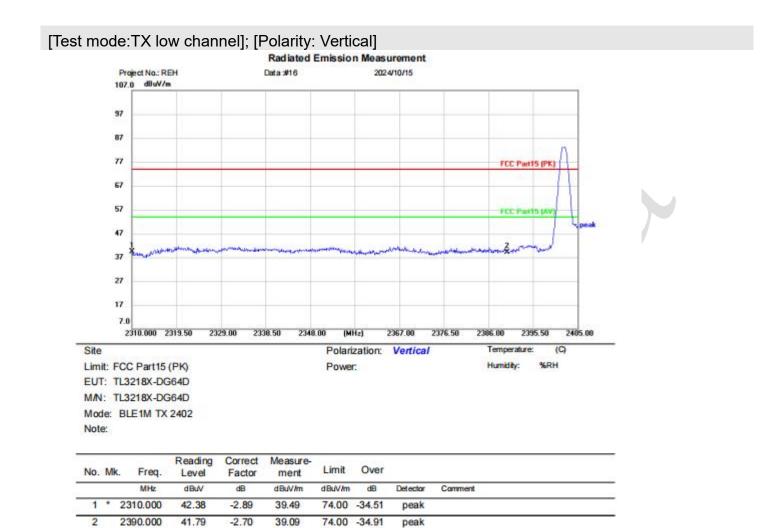


Test Result: Pass

Blue Asia of technical Services (Shenzhen) Co., Ltd.



Page 38 of 70

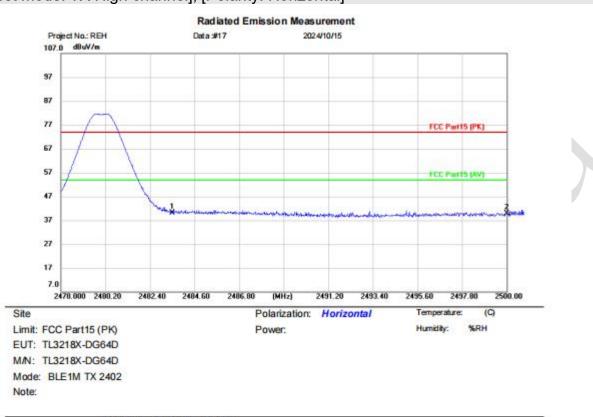

[Test mode: TX High channel]; [Polarity: Horizontal]


| No. | M | c. Freq. | Reading Level | Factor | Measure- ment | Limit | Over | | | |
|-----|---|----------|------------------|--------|------------------|--------|--------|----------|---------|--|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment | |
| 1 | • | 2483.500 | 42.94 | -2.91 | 40.03 | 74.00 | -33.97 | peak | | |
| 2 | | 2500.000 | 42.80 | -3.00 | 39.80 | 74.00 | -34.20 | peak | | |

Test Result: Pass





Page 39 of 70

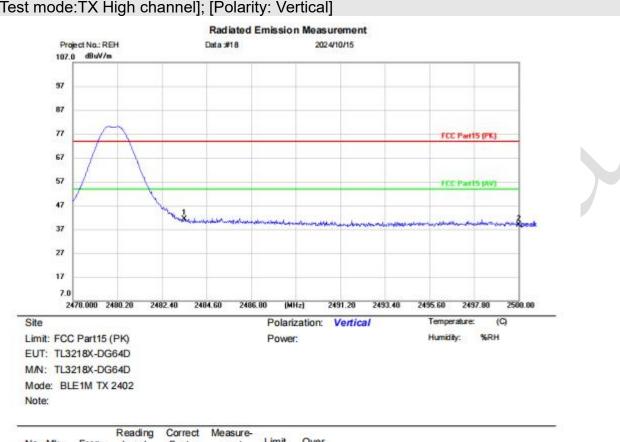

[Test mode:TX High channel]; [Polarity: Vertical]

| No. | M | k. Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | | |
|-----|---|----------|------------------|-------------------|------------------|--------|--------|----------|---------|--|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment | |
| 1 | • | 2483.500 | 44.39 | -2.91 | 41.48 | 74.00 | -32.52 | peak | | |
| 2 | _ | 2500.000 | 41.82 | -3.00 | 38.82 | 74.00 | -35.18 | peak | | |



Test Result: Pass

Blue Asia of Technical Services (Shenzhen) Co., Ltd.




Page 40 of 70

7 Appendix A

Maximum Conducted Output Power

| Condition | Mode | Frequency | Antenna | Conducted Power | Limit | Verdict |
|-----------|--------|-----------|---------|-----------------|-------|---------|
| | | (MHz) | | (dBm) | (dBm) | |
| NVNT | BLE 1M | 2402 | Ant1 | 2.366 | 30 | Pass |
| NVNT | BLE 1M | 2442 | Ant1 | 2.613 | 30 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2.758 | 30 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 2.386 | 30 | Pass |
| NVNT | BLE 2M | 2442 | Ant1 | 2.676 | 30 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 2.839 | 30 | Pass |

Power NVNT BLE 1M 2402MHz Ant1

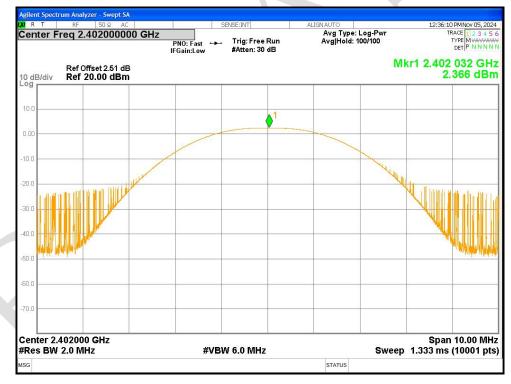


Power NVNT BLE 1M 2442MHz Ant1


Blue Asia of technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481 Email: marketing@cblueasia.com www.cblueasia.com



Page 41 of 70

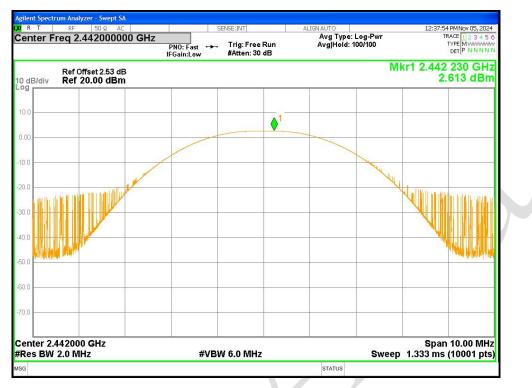

Power NVNT BLE 1M 2480MHz Ant1

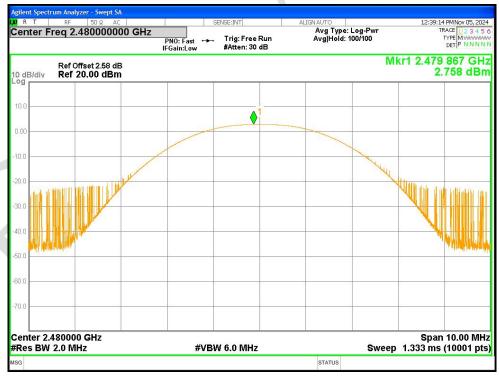


Power NVNT BLE 2M 2402MHz Ant1



Page 42 of 70



Power NVNT BLE 2M 2442MHz Ant1

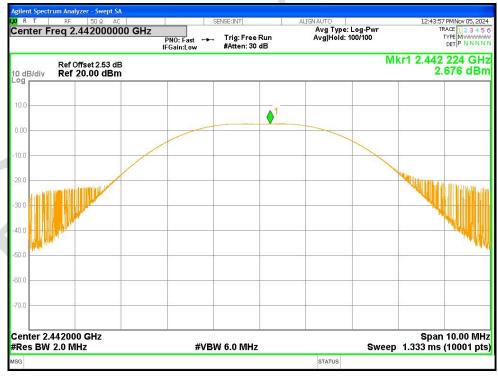

Power NVNT BLE 2M 2480MHz Ant1



Page 43 of 70



Blue Asia of Technical Services (Shenzhen) Co., Ltd.



Page 44 of 70

-6dB Bandwidth

| Condition | Mode | Frequency | Antenna | -6 dB Bandwidth | Limit -6 dB | Verdict |
|-----------|------|-----------|---------|-----------------|-----------------|---------|
| | | (MHz) | | (MHz) | Bandwidth (MHz) | |
| NVNT | BLE | 2402 | Ant1 | 0.659 | 0.5 | Pass |
| | 1M | | | | | |
| NVNT | BLE | 2442 | Ant1 | 0.657 | 0.5 | Pass |
| | 1M | | | | | |
| NVNT | BLE | 2480 | Ant1 | 0.662 | 0.5 | Pass |
| | 1M | | | | | |
| NVNT | BLE | 2402 | Ant1 | 1.122 | 0.5 | Pass |
| | 2M | | | | | |
| NVNT | BLE | 2442 | Ant1 | 1.108 | 0.5 | Pass |
| | 2M | | | | | |
| NVNT | BLE | 2480 | Ant1 | 1.138 | 0.5 | Pass |
| | 2M | | | | | |

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1




-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

Blue Asia of technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481 Email: marketing@cblueasia.com www.cblueasia.com



Page 45 of 70

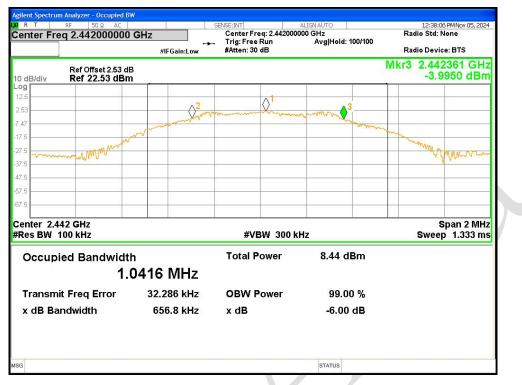

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

Blue Asia of technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481

Email: <u>marketing@cblueasia.com</u> www.cblueasia.com



Page 46 of 70

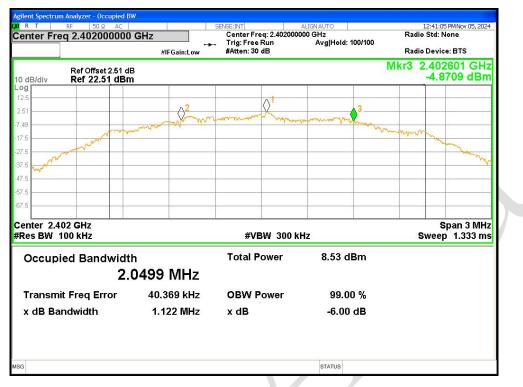

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

Blue Asia of Technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481

Email: <u>marketing@cblueasia.com</u> www.cblueasia.com



Page 47 of 70

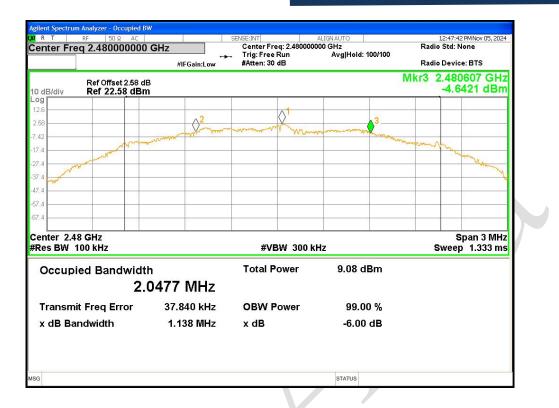

Blue Asia of Technical Services (Shenzhen) Co., Ltd.



Page 48 of 70

Occupied Channel Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|--------|-----------------|---------|---------------|
| NVNT | BLE 1M | 2402 | Ant1 | 1.0391 |
| NVNT | BLE 1M | 2442 | Ant1 | 1.0380 |
| NVNT | BLE 1M | 2480 | Ant1 | 1.0323 |
| NVNT | BLE 2M | 2402 | Ant1 | 2.0475 |
| NVNT | BLE 2M | 2442 | Ant1 | 2.0435 |
| NVNT | BLE 2M | 2480 | Ant1 | 2.0477 |

OBW NVNT BLE 1M 2402MHz Ant1



OBW NVNT BLE 1M 2442MHz Ant1

Blue Asia of Technical Services (Shenzhen) Co., Ltd.



Page 49 of 70



OBW NVNT BLE 1M 2480MHz Ant1



OBW NVNT BLE 2M 2402MHz Ant1

Blue Asia of Technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481


Email: <u>marketing@cblueasia.com</u> www.cblueasia.com



Page 50 of 70



OBW NVNT BLE 2M 2442MHz Ant1

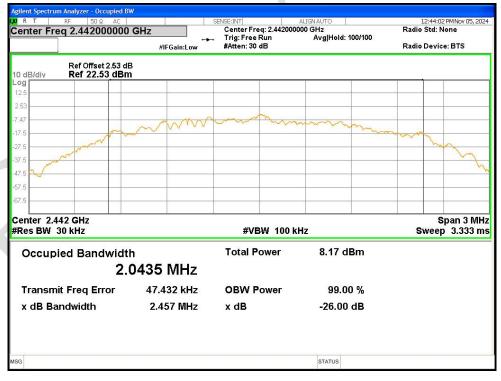


OBW NVNT BLE 2M 2480MHz Ant1

Blue Asia of Technical Services (Shenzhen) Co., Ltd. Tel: +86-755-23059481

Email: <u>marketing@cblueasia.com</u> www.cblueasia.com



Page 51 of 70

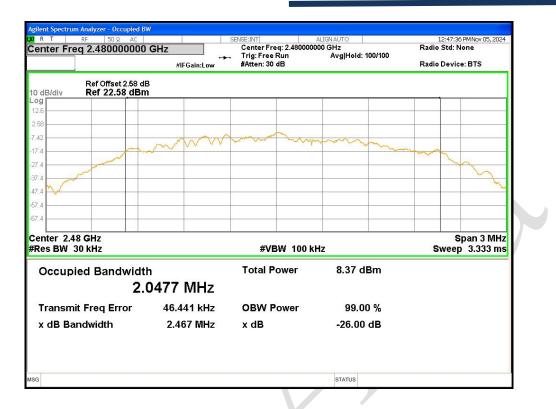

Blue Asia of Technical Services (Shenzhen) Co., Ltd.




Page 52 of 70

Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|--------|-----------------|---------|---------------|-------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | -12.141 | 8 | Pass |
| NVNT | BLE 1M | 2442 | Ant1 | -11.895 | 8 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -11.891 | 8 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -14.876 | 8 | Pass |
| NVNT | BLE 2M | 2442 | Ant1 | -14.679 | 8 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -14.597 | 8 | Pass |
| | | | | | | |

PSD NVNT BLE 1M 2402MHz Ant1

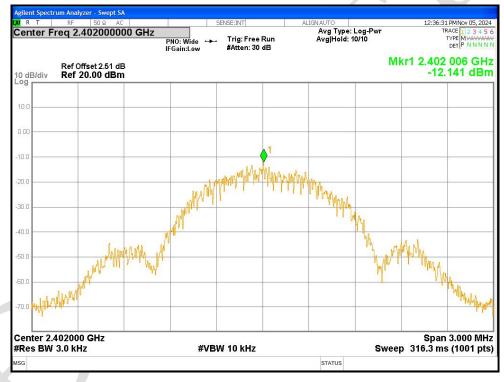


PSD NVNT BLE 1M 2442MHz Ant1


Blue Asia of technical Services (Shenzhen) Co., Ltd.



Page 53 of 70

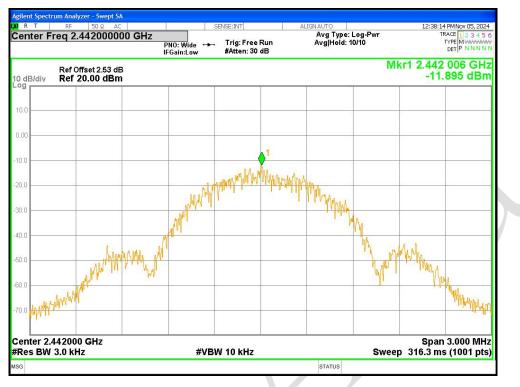


PSD NVNT BLE 1M 2480MHz Ant1

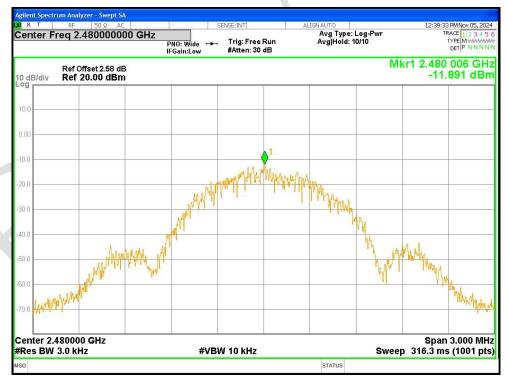


PSD NVNT BLE 2M 2402MHz Ant1



Page 54 of 70

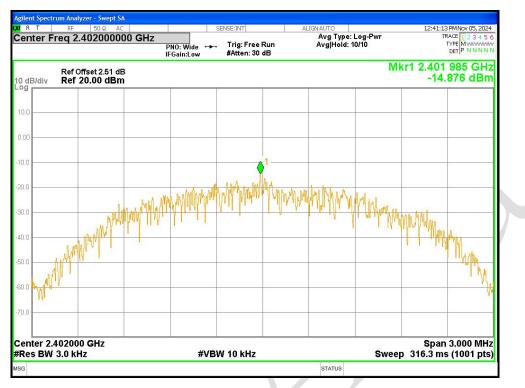

PSD NVNT BLE 2M 2442MHz Ant1

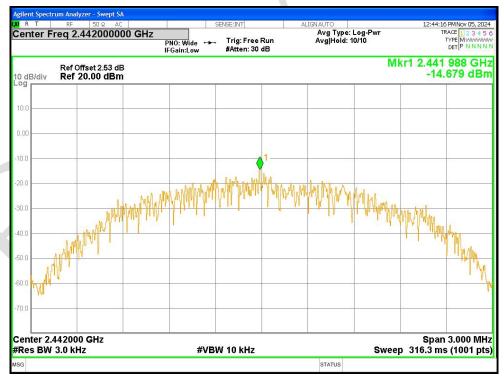

PSD NVNT BLE 2M 2480MHz Ant1



Page 55 of 70



Blue Asia of Technical Services (Shenzhen) Co., Ltd.




Page 56 of 70

Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE 1M | 2402 | Ant1 | -52.13 | -20 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -44.15 | -20 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -52.12 | -20 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -43.8 | -20 | Pass |

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

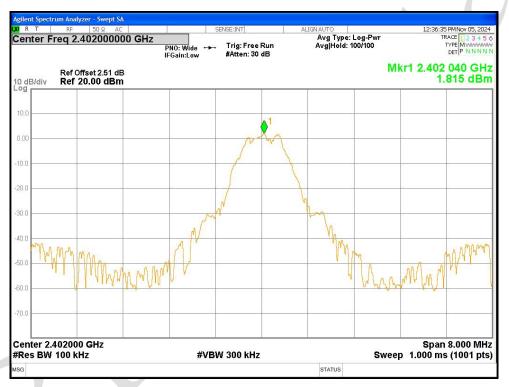


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission


Blue Asia of technical Services (Shenzhen) Co., Ltd.



Page 57 of 70

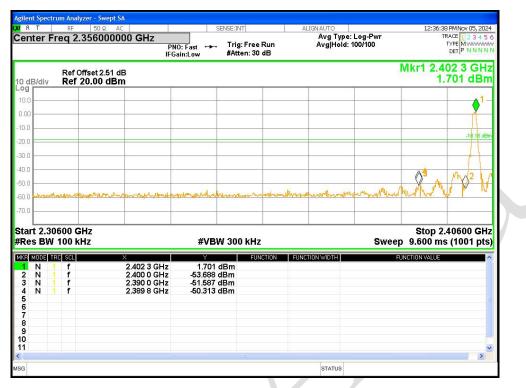


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

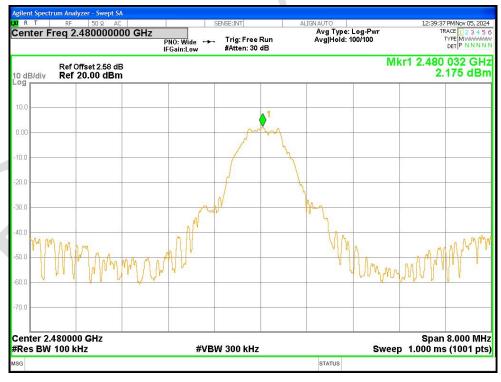

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission



Page 58 of 70

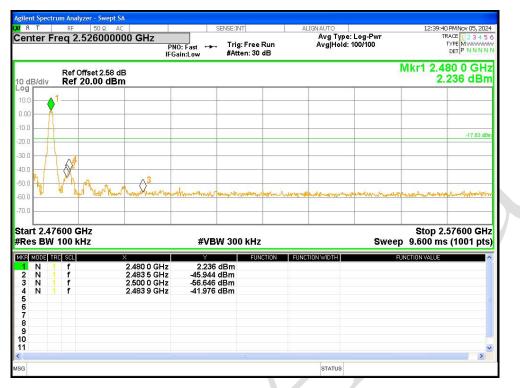

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref



Band Edge NVNT BLE 2M 2402MHz Ant1 Emission



Page 59 of 70

| | | ectrur | | lyzer - Swept SA | | | 18 | | x. | | |
|-----------------------|-------|---------|---------|-----------------------------|---------------|----------------------------|---------------------------|----------------------|-------------------|-----------------------|------------------------------------|
| W R Cer | | Fre | RF | 50 Ω AC | 7 | SENSE:I | NT | ALIGNAUTO Avg Typ | e: Log-Pwr | TF | PMNov 05, 2024 RACE 1 2 3 4 5 6 |
| | co. | | 4- | | PNO | | g: Free Run ten: 30 dB | Avg Hold | : 100/100 | | DET P N N N N N |
| - | | | 19. 200 | anta manager some | Iroa | 1.20 | | | | Mkr1 2.4 | 02.0 GH7 |
| | B/div | | | Offset 2.51 dB 20.00 dBm | | | | | | | 755 dBm |
| .og | | | | | | | | | | | 245 |
| 0.00 | | | | | | | | | | | (|
| 10.00 | | | | | | | | | | | 13 |
| 20.0 | | | Ĩ | | | | | | | | -18.22 dBm |
| 30.0 | | | | | | | | | | | $\langle \rangle^2$ |
| 40.0 | | | | | | | | | | | MY |
| 50.0 | | | | | | | | | | | NV |
| 50.0 | all y | tak-Jhk | inde | unante ana manager | March Marriel | handerstand | montallanders | many porter aformal | unperhouse marked | Multure) | J |
| 70.0 | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | 00 C | | | #VBW 30 | 0 kHz | | Swee | Stop 2. p 9.600 ms | 40600 GHz |
| _ | _ | TRC | _ | × | | ו•=••• | FUNCTION | FUNCTION WIDTH | | UNCTION VALUE | (1001 pto) |
| 1 | Ν | 1 | f | 2.402 | | 1.755 dBm | Tononon | | | | |
| 23 | N | | f | 2.400 2.390 | | -31.240 dBm -51.274 dBm | | | | | |
| 4 | N | | f | 2.389 | | -50.348 dBm | | | | | |
| 5 6 7 8 9 | | | | | | | | | | | |
| 7 | | | | | | | | | | | |
| 9 | | | | | | | | | | | |
| 10 11 | | | | | | | | | | | |
| 11 | | | | | | | | | | | > |
| | | | | | | | | | | | |


Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Band Edge NVNT BLE 2M 2480MHz Ant1 Emission



Page 60 of 70

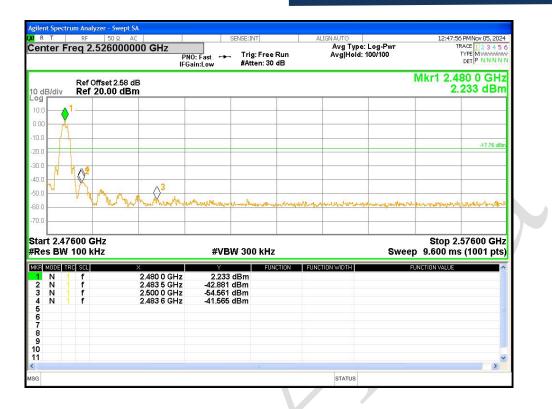

Blue Asia of technical Services (Shenzhen) Co., Ltd.