


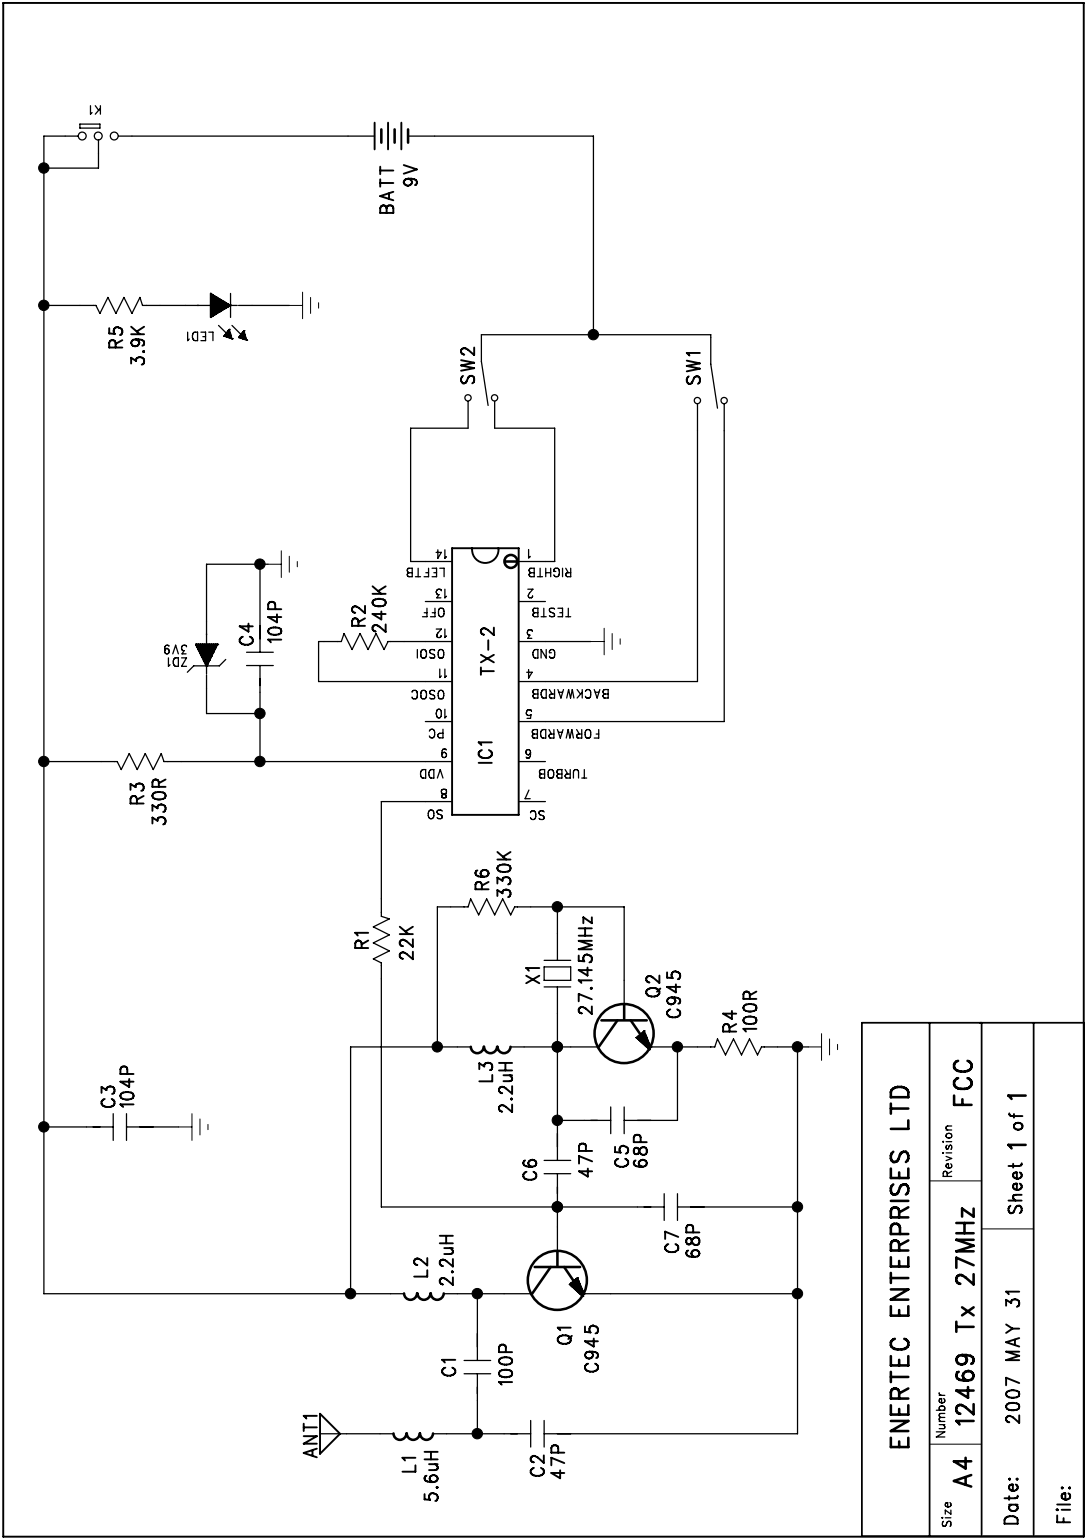

ENERTEC ENTERPRISES LTD			
Size	A4	Number 12469 Tx 27MHz	Revision FCC
Date:	2007 MAY 31		Sheet 1 of 1
File:			

ENERTEC ENTERPRISES LTD
PART LIST

MODEL: 12469 TX 27MHZ

DATE:MAY 31, 2007

SHEET: 1 OF 1

NO.	PART NAME	DESCRIPTION		QTY	REMARK
1	PCB	92×40×1.6mm	94V0	1	TX PCB (LYB176T)
2	IC	TX-2	DIP	1	IC1
3	RESISTOR	22K	OHM ±5%	1	R1
4	RESISTOR	240K	OHM ±5%	1	R2
5	RESISTOR	330	OHM ±5%	1	R3
6	RESISTOR	100	OHM ±5%	1	R4
7	RESISTOR	3.9K	OHM ±5%	1	R5
8	RESISTOR	330K	OHM ±5%	1	R6
9	CAPACITOR	100P	±5% NPO	1	C1
10	CAPACITOR	47P	±5% NPO	2	C2、C6
11	CAPACITOR	104P	±20%	2	C3、C4
12	CAPACITOR	68P	±5% NPO	2	C5、C7
13	TRANSISTOR	C945	NPN T0-92	2	Q1、Q2
14	INDUCTOR	5.6uH	±5%	1	L1
15	INDUCTOR	2.2uH	±5%	2	L2、L3
16	CRYSTAL	27.145MHz	20ppm	1	X1
17	ZENER DIODE	3V9		1	ZD1
18	LED	D5mm		1	LED1
19	SWTCH	1P2T		1	K1
20	COPPER	19×8×0.3mm	ELECTROPLATE	1	SW2
21	COPPER	12×8×0.3mm	ELECTROPLATE	1	SW1

ENERTEC ENTERPRISES LTD

PART LIST

MODEL: 12469 RX 27MHZ

DATE:MAY 31, 2007

SHEET: 1 OF 1

NO.	PART NAME	DESCRIPTION	QTY	REMARK
1	PCB	45×36×1.6mm 94V0	1	RX PCB (LYB96R)
2	PCB	32.5×12.5×1.2mm FR4	1	LED PCB (LYB173)
3	IC	RX-2 DIP	1	IC1
4	RESISTOR	680 OHM ±5%	1	R1
5	RESISTOR	220K OHM ±5%	1	R2
6	RESISTOR	3.9K OHM ±5%	1	R3
7	RESISTOR	220 OHM ±5%	1	R4
8	RESISTOR	1K OHM ±5%	4	R5、R11、R16、R17
9	RESISTOR	39 OHM ±5%	2	R6、R7
10	RESISTOR	2.2K OHM ±5%	3	R10、R14、R21
11	RESISTOR	2.2M OHM ±5%	2	R12、R13
12	RESISTOR	240K OHM ±5%	1	R15
13	RESISTOR	150 OHM ±5%	2	R18、R19
14	RESISTOR	56 OHM ±5%	1	R20
15	CAPACITOR	332P ±10%	1	C1
16	CAPACITOR	10P ±5% NPO	1	C2
17	CAPACITOR	47P ±5% NPO	2	C3、C12
18	CAPACITOR	473P ±20%	1	C5
19	CAPACITOR	104P ±20%	5	C6、C7、C9、C14、C15
20	CAPACITOR	471P ±10%	1	C10
21	CAPACITOR	102P ±10%	1	C11
22	E. CAPACITOR	4.7uF +80% -20%	1	C4
23	E. CAPACITOR	100uF +80% -20%	1	C8
24	TRANSISTOR	C1815 NPN TO-92	1	Q1
25	TRANSISTOR	945 NPN TO-92	4	Q2、Q6、Q8、Q12
26	TRANSISTOR	5609 NPN TO-92	2	Q3、Q7
27	TRANSISTOR	5610 PNP TO-92	2	Q4、Q5
28	TRANSISTOR	8050 NPN TO-92	2	Q9、Q13
29	TRANSISTOR	8550 NPN TO-92	2	Q10、Q11
30	DIODE	4001	1	D1
31	LED	D3mm	4	LED1、LED2、LED3、LED4
32	INDUCTOR	5.6uH ±5%	1	L1
33	COIL	8T	1	T1
34	MOTOR	FA130	1	M2
35	MOTOR	FF360	1	M1
36	SWITCH	1P2T	1	SW1