


Appearance

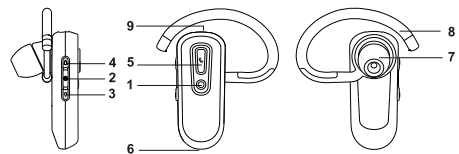

- 1. Headset Indicator light
- 2. Power on/off button
- 3. Volume down button
- 4. Volume up button
- 5. Multi-function button (MFB)
- 6. Microphone location
- 7. Speaker location
- 8. Bendable Ear-hook
- 9. Headset Charging location

Pairing the Headset to Your Phone

- 1.Make sure the headset is power off.
- 2.Press and hold power switch button , after headset is been switch on, continue to hold on to power button for approximately 8 seconds until blue indicator light is always on (no flashing).
- 3.Turn on your phone's Bluetooth function and search for device.
- 4.Select device "BC3100" from the found device listed on the phone screen.

Audio Tones

Headset status	The audio tone
Power on	Single Tone
Power off	Single Tone
Pairing success	1 single high tone
Income call	Melody tone
Long press the MFB	Single high tone
Battery low	5 rapid high tones once per 20 seconds
No network service	2 rapid high tones once per 20 seconds
Microphone muted	1 low tone once per 5 seconds
Connect success	2 tones from low to high
Connect failed	2 tones from high to low
Reached Max./Min. Volumes	1 single high tone

Notice

- 1.It is normal that the battery life will gradually deteriorate, from repeated charging of the headset.
- 2.The headset will be switch off during charging for safety reasons.

Charging

"For optimize battery performance headset must be charge for at least 12 hours for the first time."

Subsequent full charge requires approximately 2.5 hours. (Five short tones warning will be sound, at every 20 seconds interval when battery level is low and immediate charging is required.)

- 5.Enter "0000" as the password and select OK.When your headset is successfully paired, the indicator light changes to rapid blue flashes and at the same time an audio tone can be heard through the speaker.
- 6.If the phone fails to connect to the headset automatically after been paired, tab the MFB once, and the headset will try to connect to phone. Depending on phone, your phone may ask you to confirm the Connection with the headset, please select "Yes". Retry if failed.
- 7.The pairing mode will last 120 seconds, before going into standby mode. If pairing fails or timeout, repeat all over again from step 1.

Declaration of Conformity (法规资讯/法規資訊)




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

- 1.This device may not cause harmful interference.
- 2.This device must accept any interference received, including interference that may cause undesired operation.

15.105 Federal Communications Commission (FCC) Requirements, Part 15

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

How to Charge



- 1.Plug in charger/ USB cable into the charging port. During charging, blue indicator will light up.
- 2.When fully charged blue indicator light goes off.
- 3.Power source for charging is from travel charger adapter (optional) or standard Mini USB cable connected to computer/notebook USB port.

Making & Answering Calls

Function	Device Status		Action	
	Phone	Headset	HF Profile	HS Profile
Making a voice dial call	Standby	Standby	Tab the MFB	None
Redial last call	Standby	Standby	Long press the MFB	None
Receive a call	Ringing	Standby	Tab the MFB	
Reject a call	Ringing	Standby	Long press the MFB	None
End a call	Connected	Connected	Tab the MFB	
Toggle between two active calls	Connected & On hold	Connected	Long press the MFB	None
Answer a second incoming call	Connected & Ringing	Connected	Long press the MFB	None

This equipment generates, uses and can radiate radio frequency energyand, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct theinterference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Regulatory information / Disclaimers

Installation and use of this Bluetooth headset device must be in strict accordance with the instructions included in the user documentation provided with the product. Any changes or modifications (including the antennas) made to this device that are not expressly

Switching On/Off the Headset



<On>Press and hold power switch for more than 4 seconds. Blue indicator light will flash rapidly 4 times and at the same time an audio tone can be heard through the speaker,indicating headset been switch on.



<Off>Press and hold power switch for more than 4 seconds. Blue indicator light will flash rapidly 2 times and at the same time an audio tone can be heard through the speaker, indicating headsets been switch off.

Function	Device Status		Action	
	Phone	Headset	HF Profile	HS Profile
End current call	Connected & On hold	Connected	Tab the MFB	None

Standby : not on call, Ringing : in coming call
Connected: on a call, On hold : 1 call been placed on hold

Indicator Light

Headset status	Action
Power On	4 rapid flashes
Charging & Pairing mode	Always on (no flashing)
Pairing success	10 rapid flashes
Standby	1 Fast flash per 3 seconds
Connected	1 Slow flash per 8 seconds
Battery fully charged	Indicator light turn off
Power off	2 rapid flashes

approved by manufacturer may void the user's authority to operate the equipment. Manufacturer is not responsible for any radio or television Interferencecaused by unauthorized modification of this device, or the substitution of the connecting cables and equipment other than manufacturer specified. It is the responsibility of the user to correct any interference caused by such unauthorized modification, substitution or attachment. Manufacturer and its authorized resellers or distributors will assume no liability for any damage or violation of government regulations arising from failing to comply with these guidelines.



This product comply with the following standards:

- EN 300 328
- EN 301 489-1/-17
- EN 60950